


REVISED EDITION



KENWOOD

SERVICE MANUAL

TR-7625



2m FM TRANSCEIVER

INTRODUCTION/CONTENTS

INTRODUCTION

Your KENWOOD Model TR-7625 is an advanced 2-meter transceiver for amateur mobile, and optional fixed station operation.

The TR-7625 features:

- ☆ Memory channel (simplex and repeater mode).
- ☆ Memory TX and ± 600 kHz repeater TX for repeater operation.
- ☆ 800 channel PLL circuit.
- ☆ Digital frequency display.
- ☆ Dual concentric frequency selector switches.
- ☆ PLL UNLOCK and ON AIR indicators.
- ☆ Subaudible ON/OFF switch (Encoder user installed).
- ☆ Powered tone pad connector with 9V DC on one pin.
- ☆ Pin Mic connector with 9V DC on one pin.
- ☆ TX HI-LOW (Power) switch.
- ☆ Having 25W RF output power.

CONTENTS

GENERAL/CIRCUIT DESCRIPTION	
General.....	3
PLL Circuit.....	3
SPECIAL SEMICONDUCTOR DATA.....	6
OUTSIDE VIEWS.....	8
INSIDE VIEWS.....	9
PC BOARD VIEWS	
TX-RX Unit (X44-1320-10).....	10
TONE Unit (X52-1110-51).....	10
PLL Unit (X50-1580-10).....	11
Control Unit (X54-1440-10), Indicator, Switch PC board.....	12
PARTS LIST	
General.....	13
TX-RX Unit (X44-1320-10).....	14
PLL Unit (X50-1580-10).....	16
Control Unit (X54-1440-10).....	17
Tone Unit (X52-1110-51), (X52-1110-61).....	17
PACKING	
Accessories Supplied.....	17
BRACKET INSTALLATION, EXPLODED VIEWS.....	18
TROUBLESHOOTING.....	19
ADJUSTMENTS	
Test Equipment Required.....	21
PC BOARD ALIGNMENT AND TEST POINT LOCATIONS	
PLL Unit (X50-1580-10).....	27
TX, RX, Unit (X44-1320-10).....	28
LEVEL DIAGRAM.....	30
BLOCK DIAGRAM.....	31
SCHEMATIC DIAGRAM.....	32
SWITCH LOGIC AND TERMINALS.....	33
STATIC AWARENESS.....	34
SPECIFICATIONS.....	BACK COVER

GENERAL/CIRCUIT DESCRIPTION

GENERAL

The TR-7625 is a 25W, multi-channel (800 channels) FM transceiver covering 144 ~ 147.995 MHz. It features a built-in repeater shift circuit and memory circuit, and provision for connection of an optional (micro-processor) remote control.

PLL CIRCUIT

The TR-7625 employs a PLL circuit using SM5111A IC for programmable counter, reference oscillator, frequency divider and phase detector. Frequency division ratio, memory and remote indication functions are all controlled by BCD codes.

PLL CIRCUIT BLOCK DIAGRAM

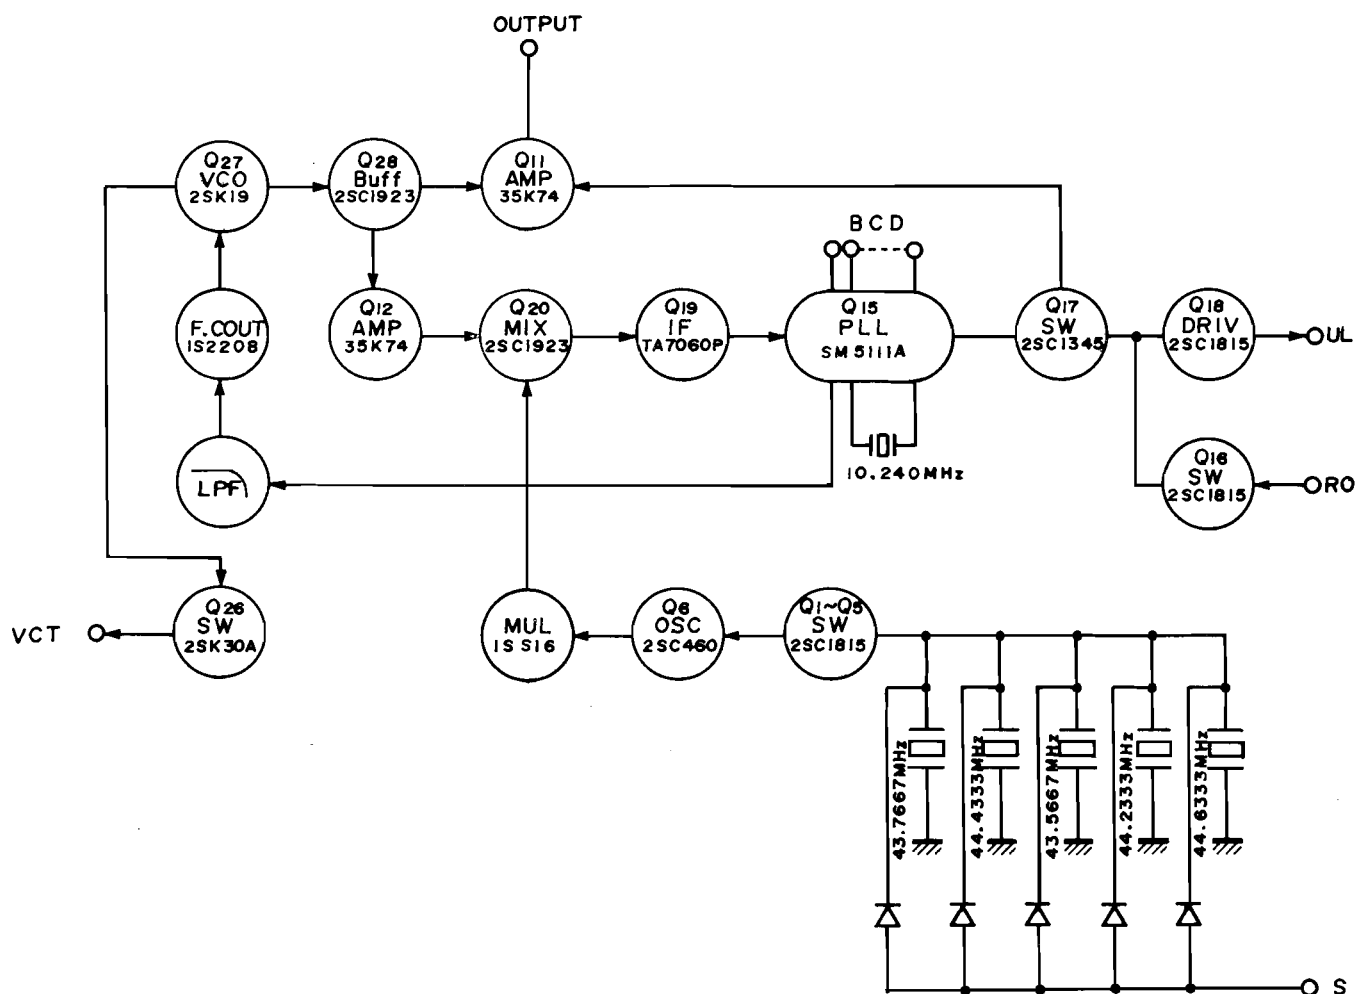


Fig. 1 PLL Circuit

CIRCUIT DESCRIPTION

1. Phase Locked Loop

The 130 MHz signal from Q27 passes through the buffer circuit Q28 and is then divided into a synthesizer output by Q11 and a loop output by Q12 respectively. The output from Q12 is mixed with the local oscillator output, tripled by Q6, D21 and Q20 to obtain IF frequency. The IF output is amplified by Q19 and is fed to Q15 where the output is frequency divided as specified by the BCD code and compared with the 10 kHz reference frequency (1/1024 of 10,240 MHz).

The DC output thus obtained passes through the low-pass filter to control the VCO vari-cap diode 1S2208 D26. The output from Q26 controls the transmit frequency bandwidth. When the signal is unlocked, output is shut off by Q17 and indicated by Q18. Q16 shuts off output when the rotary switch is between channel setting positions.

Rx Tx Freq.	Simplex Output	Division	Osc Xtal Freq.	IF Freq.
144.00 MHz	133.3 MHz	200	43.7667 MHz	2 MHz
145.00 MHz	134.3 MHz	300	43.7667 MHz	3 MHz
145.99 MHz	135.29 MHz	399	43.7667 MHz	3.99 MHz
146.00 MHz	135.3 MHz	200	44.4333 MHz	2 MHz
147.00 MHz	136.3 MHz	300	44.4333 MHz	3 MHz
147.99 MHz	137.29 MHz	399	44.4333 MHz	3.99 MHz

Table 1 Division and Frequency

2. +5 kHz Circuit

In the PLL circuit, the reference frequency is controlled in 10 kHz steps. The +5 kHz signal is controlled by varying the local oscillator crystal frequency vari-cap diode, so the frequency division remains unchanged even when the +5 kHz circuit is operated.

The memory circuit also includes the same bit and functions even when the +5 kHz circuit is operating.

3. Shift Circuit

Transmit frequencies can be shifted by changing the local oscillator crystal frequency, as shown below.

144 and 145 MHz bands:

[—] shift	43.5667 MHz
[S]	43.7667 MHz

The [+] shift is not available for 144 and 145 MHz bands, [S] occurs at the [+] position.

146 and 147 MHz Bands:

[—] shift	44.2333 MHz
[+] shift	44.6333 MHz
[S]	44.4333 MHz

4. Memory Shift Circuit

The memory shift (M) is a circuit to shift to the memory frequency during transmission.

CONTROL UNIT

Frequency settings are accomplished by the MHz, 100 kHz and 10 kHz rotary switches. The relationship between the frequency and frequency division is shown below.

Frequency	Frequency division
144.000 MHz	200
145.000 MHz	300
145.990 MHz	399
146.000 MHz	200
147.000 MHz	300
147.990 MHz	399

The local oscillator kHz order frequency can be (switch) shifted. Frequency division, set by the rotary switch, is stored in the latch IC's 1, 2 and 3 by pressing the memory input switch. The output from the latch circuit is fed through IC's 4, 5 and 6 in the selector circuit to the PLL circuit by pressing the memory call switch. When this switch is not pressed, the output is fed directly to the PLL circuit. Memory function is effected by latching each switch. The information from each switch is stored by pressing the memory switch.

The stored information remains the same unless the memory switch is pressed once again. Selection of memory output and rotary output is accomplished by the selector circuit. A latched output is obtained by pressing the memory output switch.

The signal to the PLL circuit passes through the LED driver circuit and is digitally indicated by LED.

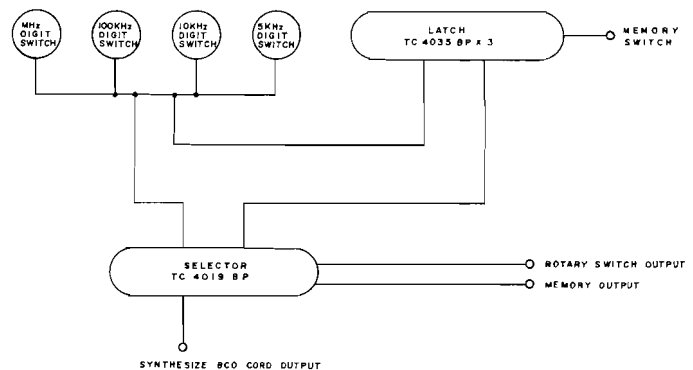


Fig. 2 Block Diagram of Frequency Memory Circuit

CIRCUIT DESCRIPTION

TRANSMITTER UNIT

The microphone signal passes through the limiter amplifier and FM modulates the 10.7 MHz oscillator. This is mixed with the local oscillator signal to obtain 114 ~ 146 MHz signal. The (variable) B.P.F. provides excellent power and spu-

rious characteristics by the use of VCO voltage. The RF power stage uses an M57712H power module manufactured by the Mitsubishi Electric Co., providing high reliability.

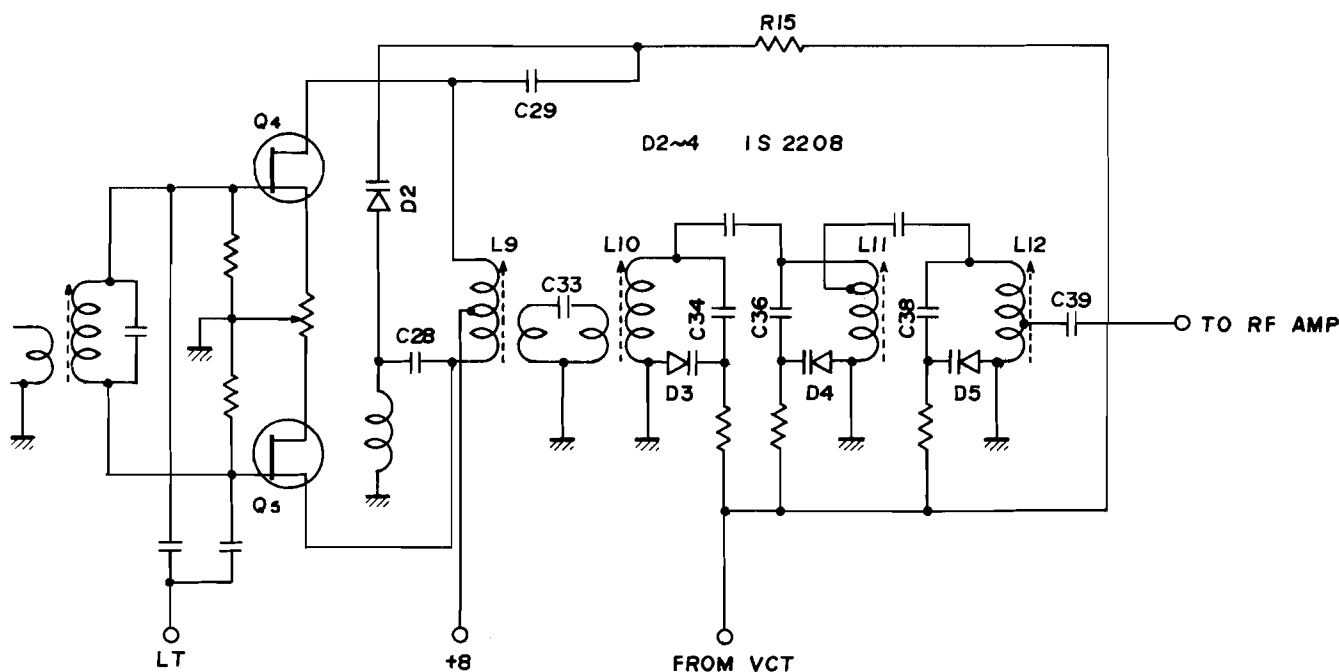


Fig. 3 Variable Transmitter Band Pass Filter Circuit

RECEIVER UNIT

The signal from the transmit/receive matching circuit passes through the diode switch and is fed to the 2-stage antenna tuning circuit, 3-stage herical tuning circuit and (MOS FET) RF amplifier. This signal is further fed to the mixer MOS FET where it is converted to a 10.7 MHz signal. The signal thus converted passes through the 2-stage filter and is fed to the 2nd mixer where it is converted to a 455 kHz signal. The 2nd IF signal from the 455 kHz ceramic filter passes through the limiter circuit where it is converted to an AF signal by the ceramic discriminator. This signal is amplified by the audio power amplifier to drive the speaker. The receiver unit includes a noise amplification type squelch circuit. This circuit picks up the noise component in the squelch signal from the discriminator which is amplified and rectified to control the 1st stage AF amplifier.

The characteristic of the discriminator is opposite that of conventional ones to permit connection of a remote control.

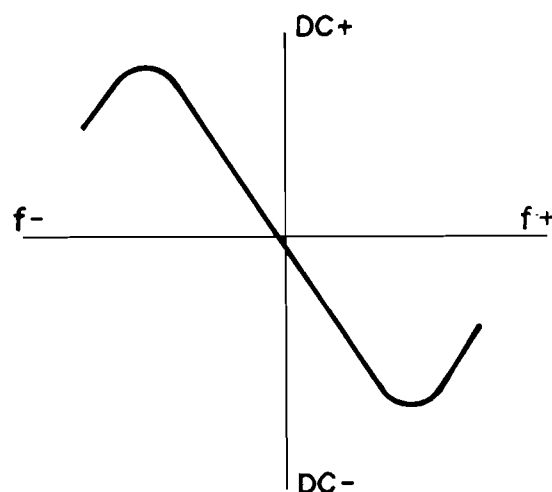


Fig. 4 Discriminator Characteristics

SPECIAL SEMICONDUCTOR DATA

CAUTION

SM5111A

Electrostatic Breakdown Protection

This item contains built-in input protection circuit to prevent a gate breakdown due to normal ambient static presence to protect the input circuit from damage due to high static or, voltage (in excess of permissible circuit limit), the following points must be observed:

- 1. When the product is not in use, keep all terminals in contact with insulating material (this is done at the factory prior to shipment).
- 2. Soldering iron, testing instruments and other tools should be grounded while in use.
- 3. Do not insert or remove IC from the socket without turning off the power.
- 4. Do not apply signal voltage to the input terminal when power is OFF.
- 5. Do not apply a voltage exceeding the power voltage to the input terminal.

OPERATING SYSTEM

This product has been developed with C MOS LSI used for PLL circuit. As shown in the block diagram in Fig. 1, it consists of OSC: reference oscillator circuit, DIVIDER: reference frequency dividing circuit, PC: programmable counter, PD: phase comparator, and INV: inverter. A high accuracy feedback type crystal oscillator circuit can be formed by adding a crystal oscillating element, resistor and capacitor between the Qin and Qout terminals of the reference oscillator circuit. This also permits an external signal to be fed to the Qin terminal.

The oscillator output is applied to the reference frequency dividing circuit where it is divided into the desired frequencies of fr1 (1/2048) and fr2 (1/1024) which are the reference signals for the digital phase comparator in the next stage.

The comparison signal (frequency f1) fed to the input terminal FIN of the AMP is amplified and wave shaped, then fed to the input of the programmable counter. The frequency "f1" is frequency converted (fpc) through the program terminals P01 ... P33 (for example, when P01 ... P33 = 1, the programmable counter output is 1/999), and is fed to the phase comparator where it is compared with the reference signal in phase so that a pulse signal, shown below, proportional to the phase difference between the two signal is fed to the output terminal DO.

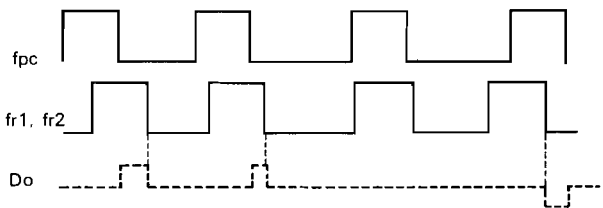


Fig. 5

The table below shows the maximum operation limit and environmental conditions. If any of these values exceeds the given limits, it can be cause of damage to the product or deterioration of quality.

Item	Symbol	Rating	Unit
Power Supply Voltage	VDD -VSS	-0.3 ~ +7.5	V
Input Voltage	VIN	VSS ≤ VIN ≤ VDD	V
Operating Temperature	TA	-30 ~ +70	°C
Storage Temperature	Tstg	-40 ~ +125	°C
Power Consumption	Pd	250	mW
Soldering Temperature		260	°C
Soldering Time		5	sec

Table 2 SM5111A Absolute Maximum Ratings

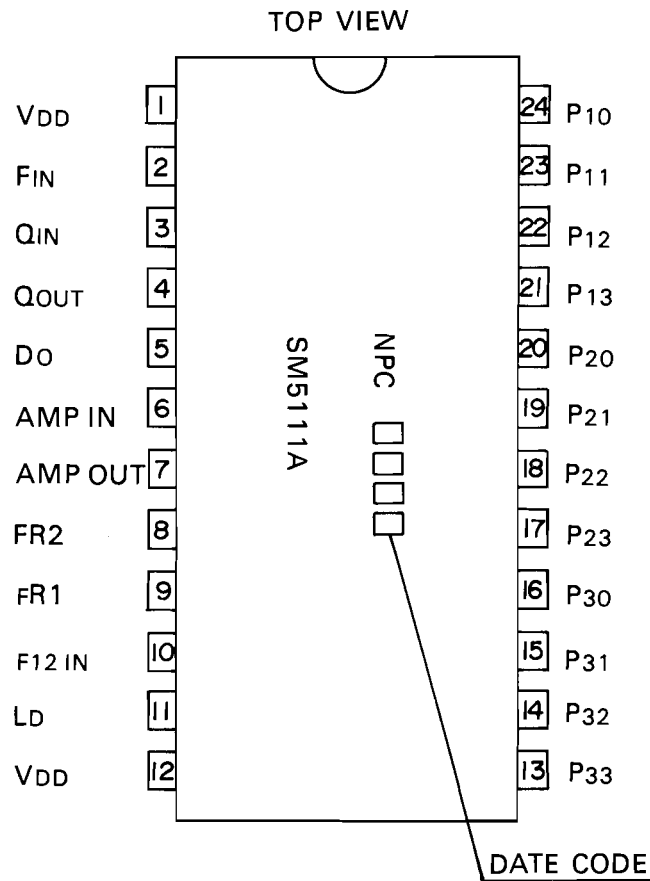


Fig. 6 SM5111A Pin Outline

SPECIAL SEMICONDUCTOR DATA

3SK74

SPECIFICATIONS

Application	VHF RF Amplifier (Mixer)	
Construction	N-Channel • MOS FET (Dual Gate)	
Drain • Source Voltage	V_{DSX}	20V
Gate 1 • Source Voltage	V_{G1S}	$\pm 10V$
Gate 2 • Source Voltage	V_{G2S}	$\pm 10V$
Drain Current	I_D	25 mA
Allowable Loss	P_T	200 mW
Channel Temperature	T_{CH}	125°C
Storage Temperature	T_{STG}	$-55 \sim +125^\circ\text{C}$

Maximum Specifications

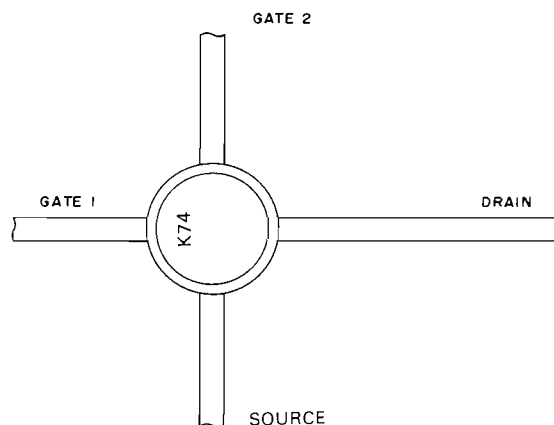


Fig. 7 3SK74 Outline

TEST CONDITION

Item	Code	Condition
Drain • Source Voltage	V_{DSX}	$V_{G1S} = -3V, V_{G2S} = 3V, I_D = 500nA$
Drain Current	I_{DSS}	$V_{DS} = 6V, V_{G1S} = 0, V_{G2S} = 3V$
Cut-Off Voltage (Gate 1)	V_{G1S}	$V_{DS} = 6V, V_{G2S} = 0, I_D = 500nA$
Cut-Off Voltage (Gate 2)	V_{G2S}	$V_{DS} = 6V, V_{G1S} = 0, I_D = 500nA$
Gate Leak Current (Gate 1)	I_{G1SS}	$V_{DS} = 0, V_{G1S} = \pm 10V, V_{G2S} = 0$
Gate Leak Current (Gate 2)	I_{G2SS}	$V_{DS} = 0, V_{G1S} = 0, V_{G2S} = \pm 10V$
Small Signal Transfer Admittance	Y_{fs1}	$V_{DS} = 6V, V_{G2S} = 3V, I_D = 10mA, f = 1.0 \text{ kHz}$
Small Signal Input Capacity	C_{iss}	$V_{DS} = 6V, V_{G2S} = 3V, I_D = 10mA, f = 1.0 \text{ MHz}$
Small Signal Output Capacity	C_{oss}	$V_{DS} = 6V, V_{G2S} = 3V, I_D = 10mA, f = 1.0 \text{ MHz}$
Small Signal Feedback Capacity	C_{rss}	$V_{DS} = 6V, V_{G2S} = 3V, I_D = 10mA, f = 1.0 \text{ MHz}$
Output Power Gain	G_P	$V_{DS} = 10V, I_D = 10mA, f = 200 \text{ MHz}$
Noise Figure	NF	$V_{DS} = 10V, I_D = 10mA, f = 200 \text{ MHz}$

Maximum Rating of M57712H


(TA = 25°C, unless otherwise noted)

Item	Symbol	Condition	Value	Unit
Operating Voltage	V_{CC}		17	V
DC Current	I_{CC}		7	A
Operating Temperature	$T_{C(OP)}$		$-30 \sim +110$	°C
Storage	T_{STG}		$-40 \sim +110$	°C

Electrical Characteristic of M57712H

(TA = 25°C unless otherwise noted)




Item	Symbol	Condition	Value			Unit
			Min.	Std.	Max.	
Output Power	P_O	$f = 144 \sim 148 \text{ MHz}, V_{CC} = 12V$ $P_{in} = 0.15W, Z_G = Z_L = 50\Omega$	30	34		W
Total Efficiency	S_T	$f = 144 \sim 148 \text{ MHz}, V_{CC} = 12V$ $P_{in} = 0.15W, Z_G = Z_L = 50\Omega$	45	50		%
2nd Harmonic Radiation		$f = 144 \sim 148 \text{ MHz}, V_{CC} = 12V$ $P_{in} = 0.15W, Z_G = Z_L = 50\Omega$			-25	dB
Greater than 3rd Harmonic Radiation		$f = 144 \sim 148 \text{ MHz}, V_{CC} = 12V$ $P_{in} = 0.15W, Z_G = Z_L = 50\Omega$			-30	dB
Input VSWR	P_{IN}	$f = 144 \sim 148 \text{ MHz}, V_{CC} = 12V$ $P_{in} = 0.15W, Z_G = Z_L = 50\Omega$		2.0	2.8	
Output VSWR	P_{OUT}	$f = 144 \sim 148 \text{ MHz}, V_{CC} = 12V$ $P_{in} = 0.15W, Z_G = Z_L = 50\Omega$		1.5		
Impedance		Note	$\infty : 1$			

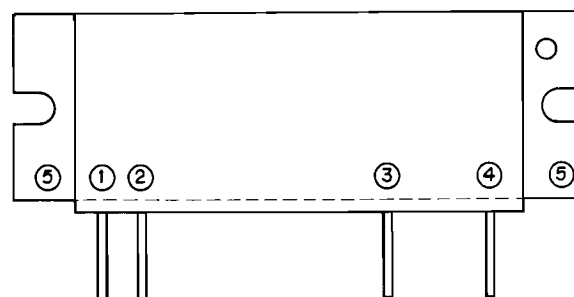

1. Input Terminal (RFI)
2. Power Supply of Drive Stage (DRB)
3. Power Supply of Output Stage (FIB)
4. Output Terminal (RFO)
5. GND


Fig. 8 M57712H Outline

OUTSIDE VIEWS

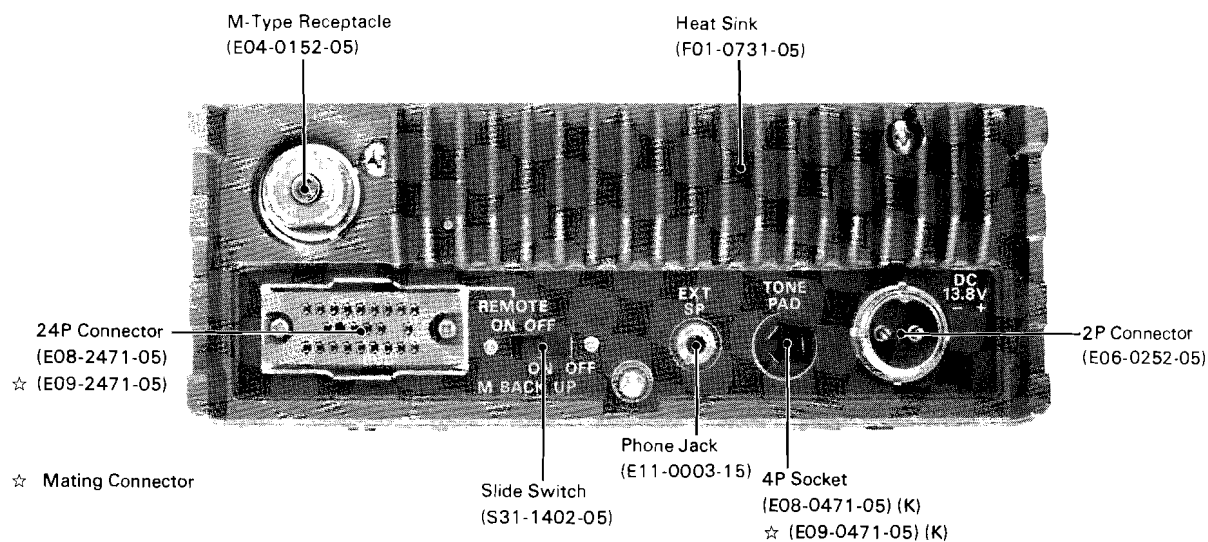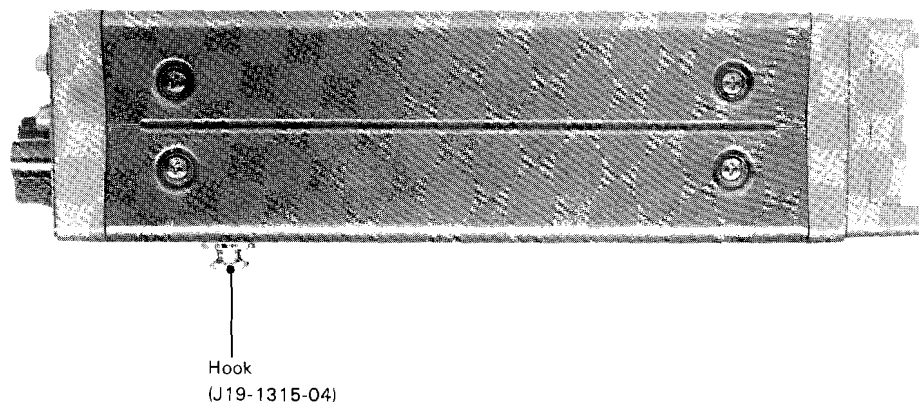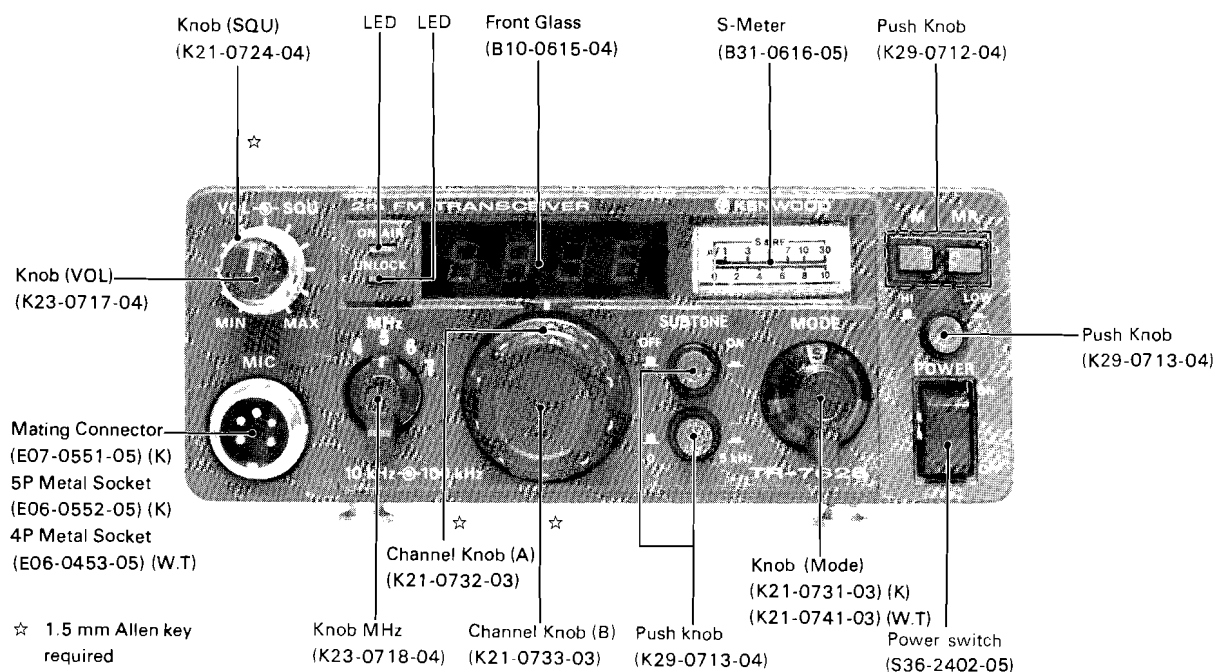


INSIDE VIEWS


TOP VIEW

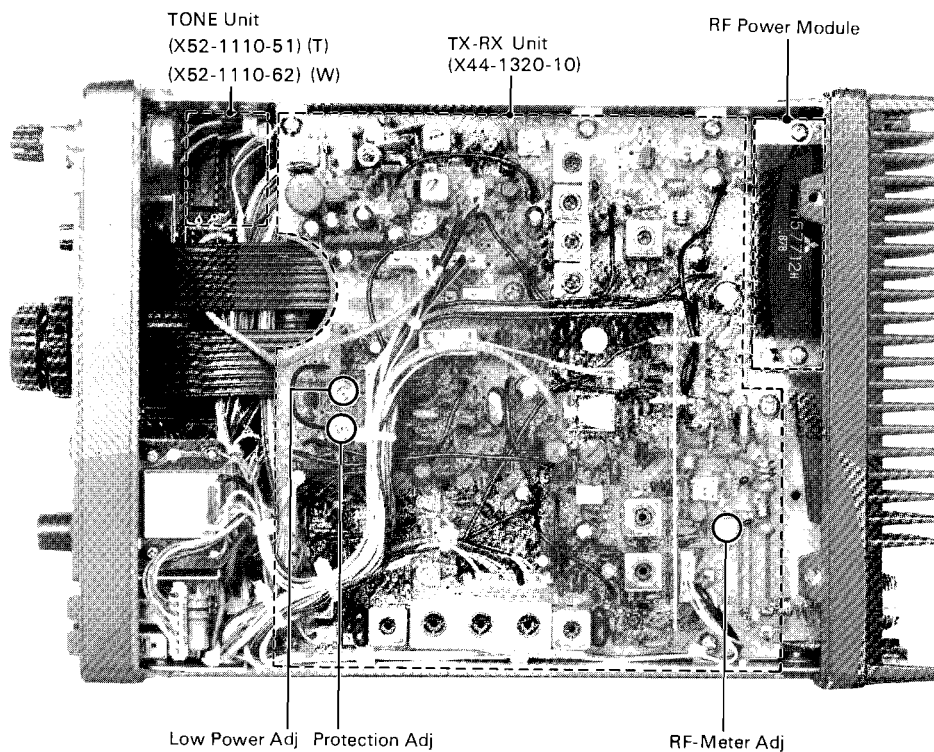


BOTTOM VIEW

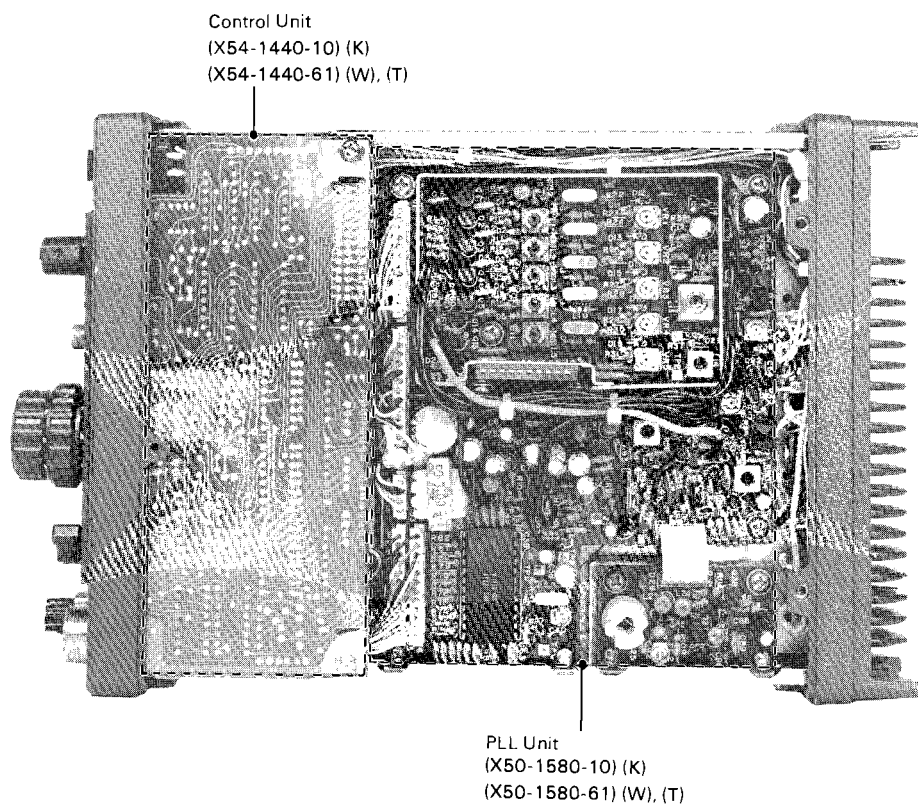



PC BOARD

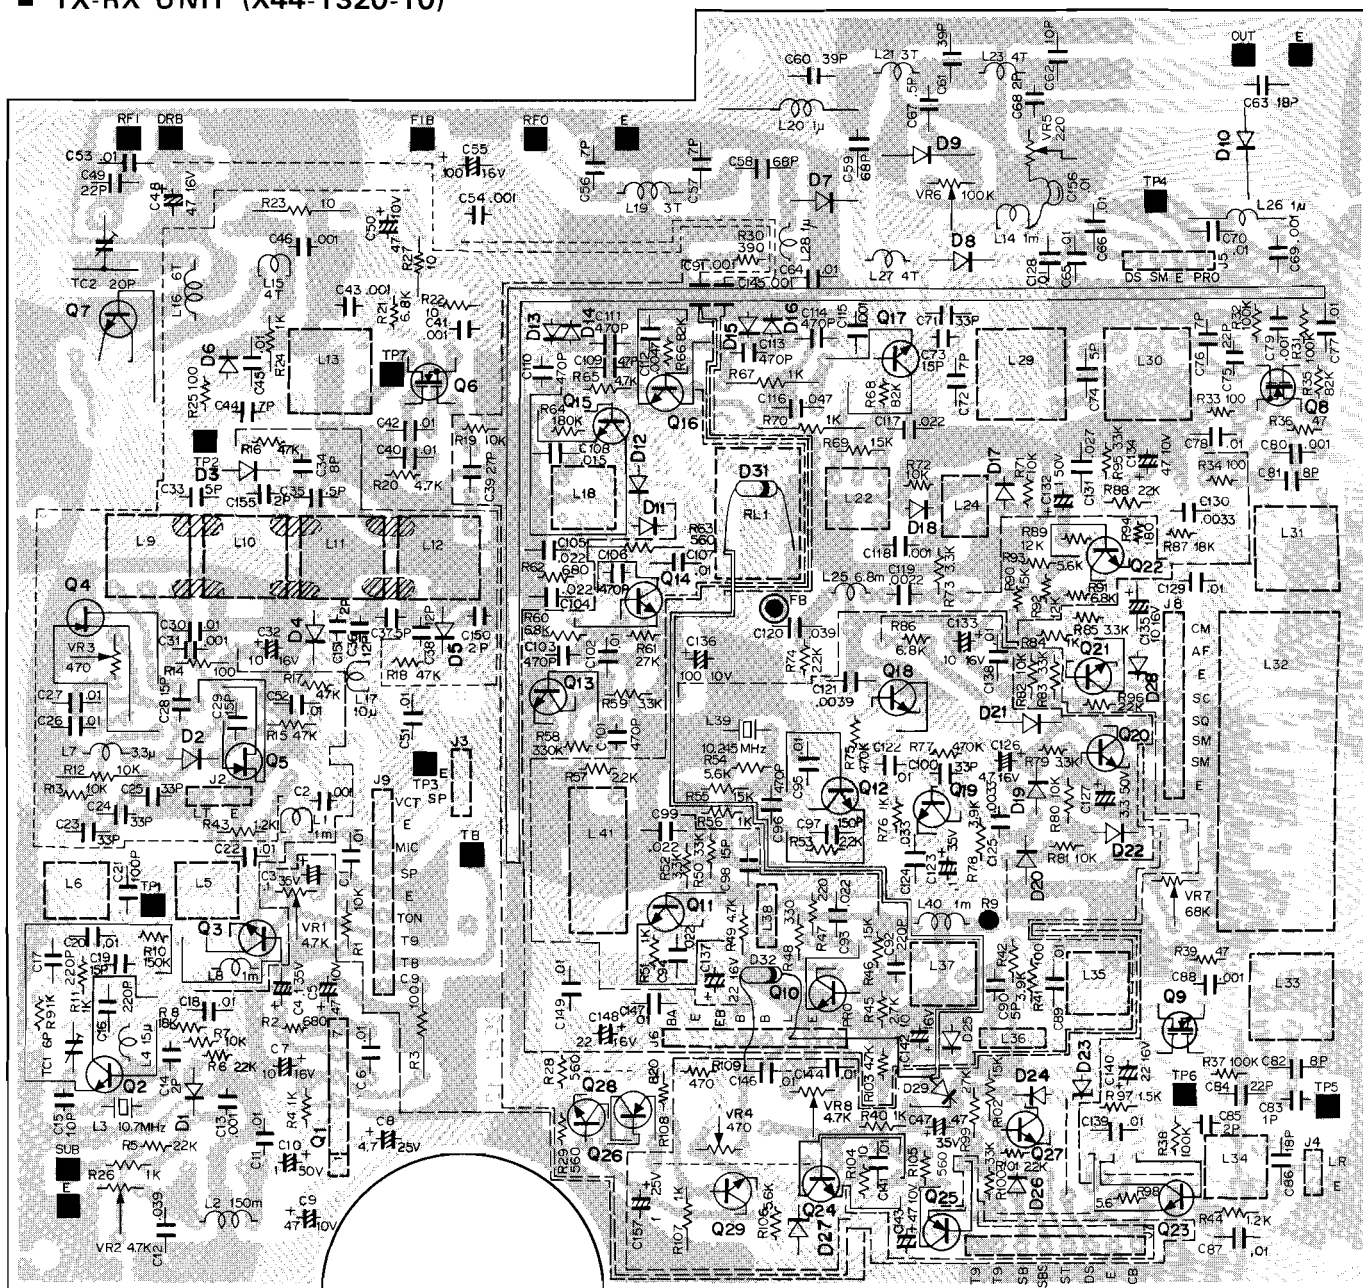

- | | | | |
|------------------------|--------------------|-------------------------------------|------------------|
| Q1 : TA7061AP | Q18~22,26,29 | D1~5, : IS2208 | D23 : XZ-088 |
| Q2,3,10~17 : 2SC460(B) | Q23,24 : 2SC496(Y) | D6,13~16,21,24,26,28,31,32 : IS1555 | D25 : WZ-100 |
| Q4,5 : 2SK19(6R) | Q25 : 2SA1015(Y) | D7 : M1402 | D27 : XZ-064 |
| Q6,8,9 : 3SK74(L) | Q27 : 2SC1959(Y) | D8 : IS2588 | D28 : IS1555 |
| Q7 : 2SC2538 | Q26 : 2SA496(Y) | D9,11,12,17,18,19,20 : 1N60 | D29 : CRO2AM-2.1 |
| | | D22 : IS1212 | D10 : IS516 |


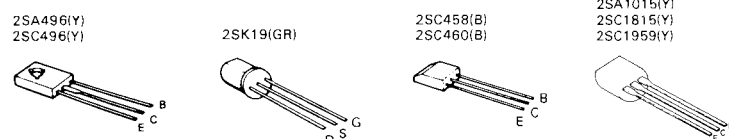


STONE UNIT (X52-1110-51) T TYPE

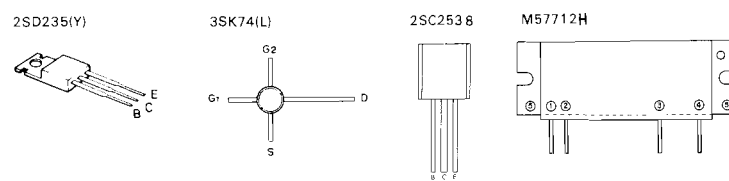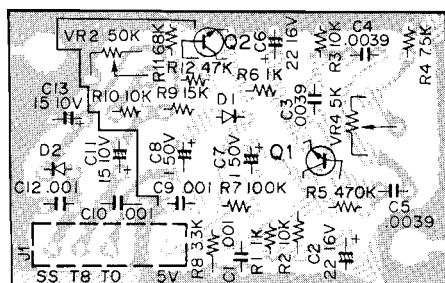

PC BOARD

■ PLL UNIT (X50-1580-10)


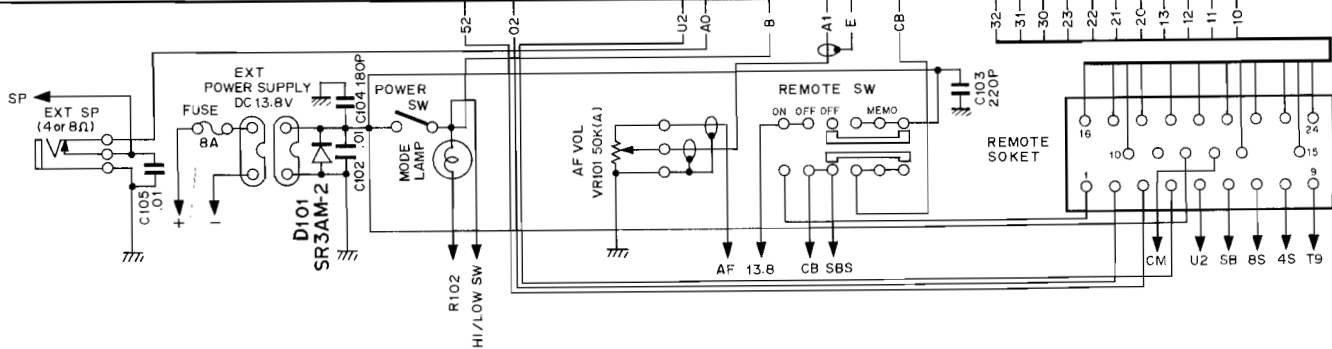
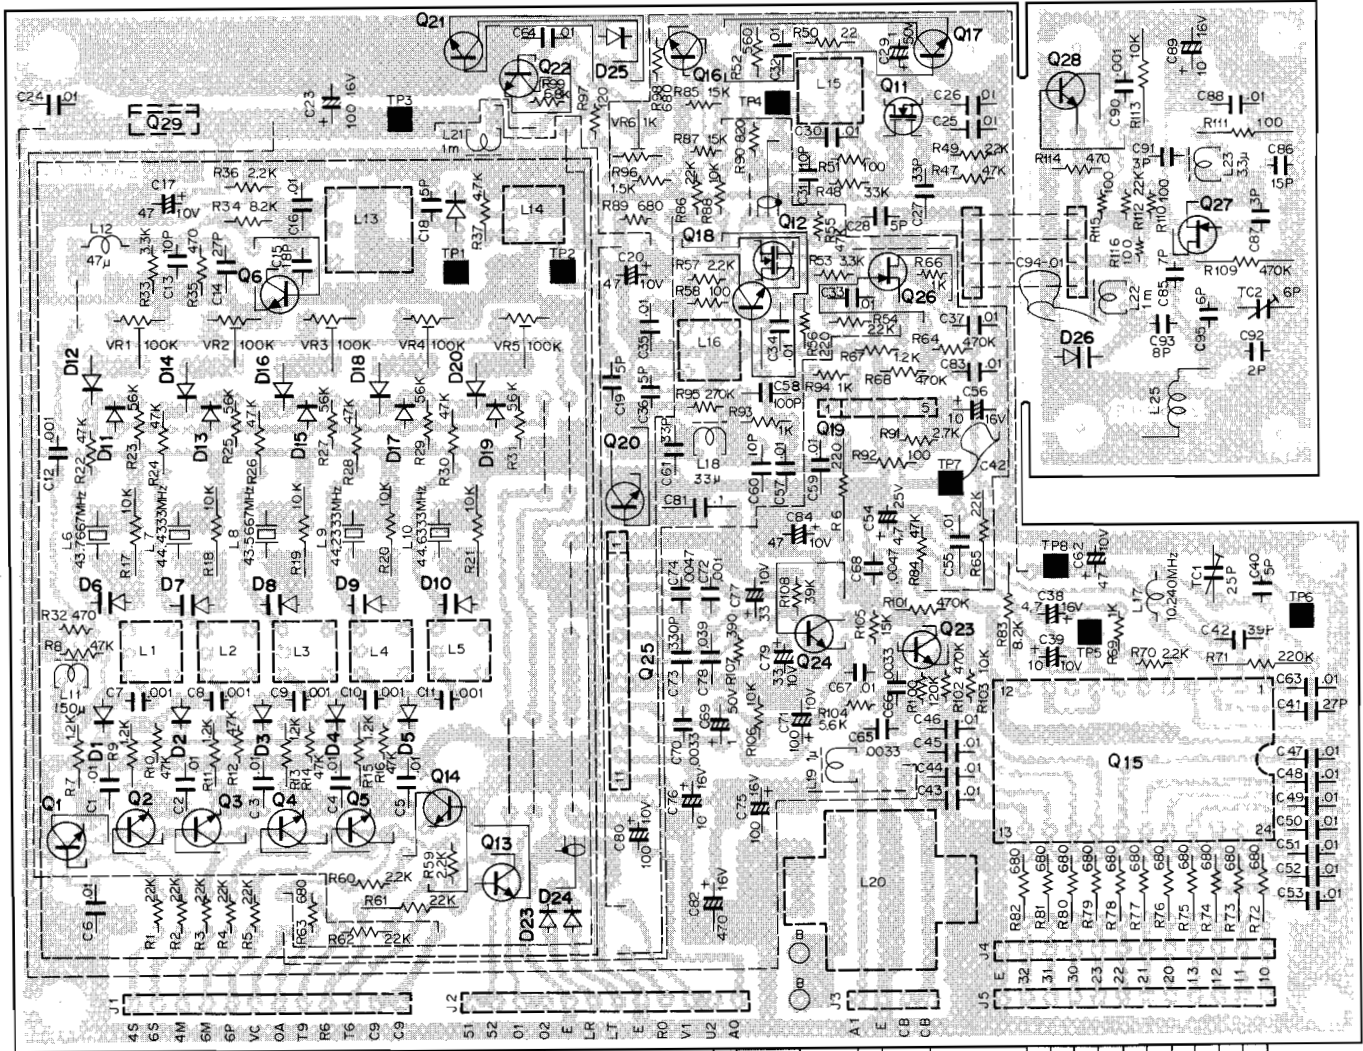


2SK30A(GR)

μPC78L08A

2SK19(GR)

2SC460(B)







2SA1015(Y)
2SC1345(E)
2SC1815(Y)
2SC1923(O)
2SC2240(GR)


3SK74(L)

AN315

TA7060P



SM5111A




Q1~3, 4, 5, 13, 14, 16, 18, 21, 22
: 2SC1815 (Y)
Q6 : 2SC460 (B)
Q11, 12 : 3SK74 (L)
Q15 : SM5111A
Q17 : 2SC1345 (E)
Q19 : TA7060P
Q20, 28 : 2SC1923 (O)
Q23, 24 : 2SC2240 (GR)


Q25 : AN315
Q26 : 2SK30A (GR)
Q27 : 2SK19 (GR)
Q29 : μPC78L08A
D1~5 : 1S2588
D6~10 : 1SV53A
D11~20 : 1S1555
D21 : 1S516
D23~24 : 1S2588
D25 : 1WZ-040
D26 : 1S2208

PC BOARD


■ CONTROL UNIT (X54-1440-10)

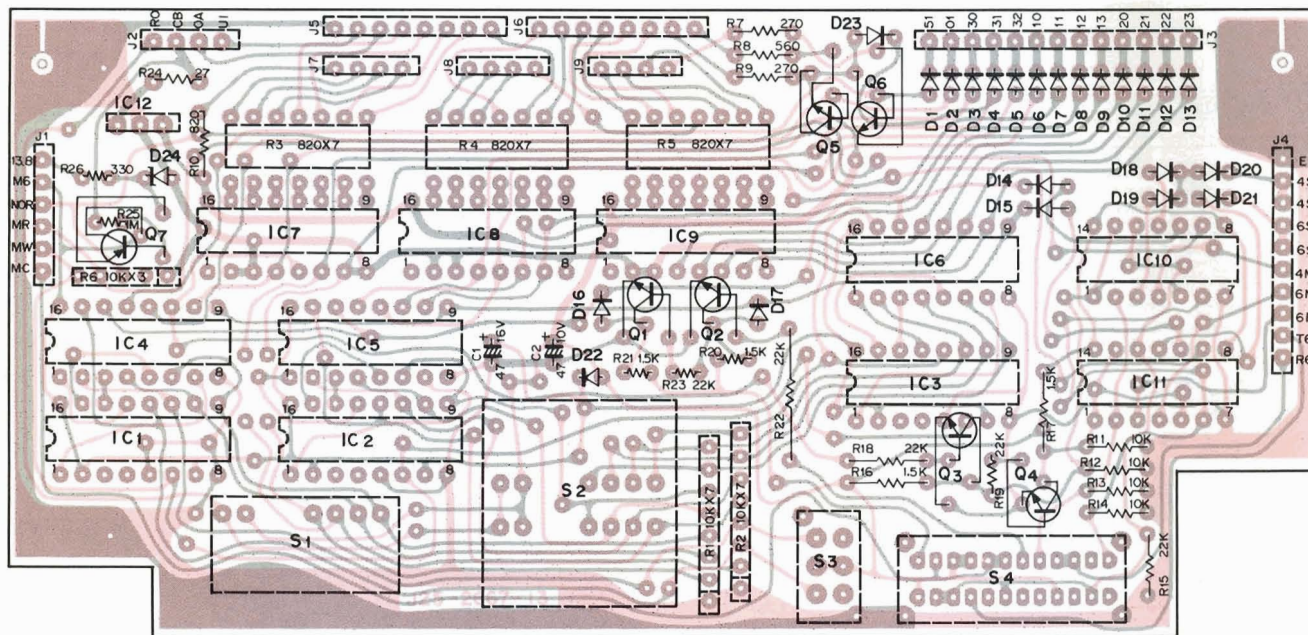


2SA1015(Y)
2SC1815(Y)




FS-7806M



TC4081P




TC5022BP
TC4019BP
TC4035BP




IC1~3	: TC4035BP	Q1~6	: 2SC1815(Y)
IC4~6	: TC4019BP	Q7	: 2SA1015(Y)
IC7~9	: TC5022BP	D1~22	: 1N60
IC10, 11	: TC4081P-3/4	D23	: 1S1555
IC10, 11	: TC4081P-1/4	D24	: WZ-150
IC12	: FS-7806M	D25	: TLR-205
		D26	: TLR-205
		D27~30	: 5130K

J25-2668-04 (Indicator)

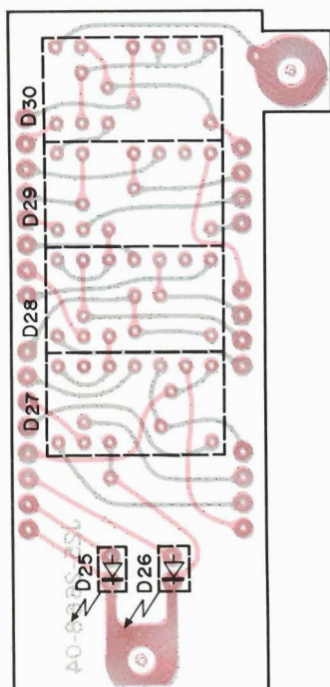

J25-2664-04 (Switch)

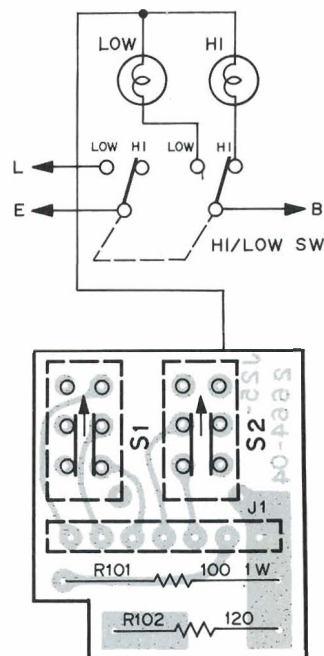

PARTS LIST

NOTE:

Except special types (example' cement, metal film, etc.) resistors are not detailed in the PARTS LIST. Refer to the schematic diagram of the PC board illustration for value. Resistors not otherwise detailed are carbon type (1/4 or 1/8W).

Order carbon resistors according to the following example:

A carbon resistor's part number is RD14BB 2E222J.

1. Type of the carbon resistor



RD14BB




RD14CB

2. Wattage

1/4W → 2E	1/2W → 2H	2W → 3D	4W → 3G
1/8W → 2B	1W → 3A	3W → 3F	5W → 3H

3. Resistance value



Significant figure Multiplier

Example:

221 → 220Ω

222 → 2.2kΩ

223 → 22kΩ

224 → 220kΩ

225 → 2.2MΩ

GENERAL

☆ : New parts

Ref. No.	Parts No.	Description	Re- marks
CAPACITORS			
C101	CC45SL2H100D	Ceramic 10pF ±0.5pF	
C102,105	CK45F1H103Z	Ceramic 0.01μF +80%--20%	
C103	CK45B1H221K	Ceramic 220pF ±10%	
C104	CC45SL1H181J	Ceramic 180pF ±5%	
SEMICONDUCTOR			
Q101	V30-1043-06	Power module M57712H	☆
Q102	V04-0880-16	Transistor 2SD880 (Y)	
D101	V11-0171-05	Diode SR3AM-2	
D102	V11-0076-05	Diode 1S1555	
COIL			
L101	L34-0814-05	Coil 4φ4T	☆
POTENTIOMETER			
VR101	R19-9403-05	10kΩ (A) 50k (B)	
MISCELLANEOUS			
—	A01-0734-13	Case (A)	☆
—	A01-0735-03	Case (B)	☆
—	A20-2345-03	Die cast panel (Front) (K)	☆
—	A20-2347-03	Die cast panel (Front) (W)	☆
—	A20-2346-03	Die cast panel (Front) (T)	☆
—	B05-0707-04	Speaker grill cloth	☆
—	B10-0615-04	Front glass	☆
—	B31-0616-05	Meter	☆
—	B30-0802-05	Pilot lamp (white)	☆
—	B30-0803-05	Pilot lamp (Blue)	☆
—	B30-0106-05	Pilot lamp (Small)	☆
—	B42-1660-04	Sticker (K)	☆
—	B46-0058-00	Warranty card (K)	☆
—	B50-2639-00	Operating manual (K)	☆
—	B50-2641-00	Operating manual (W)	☆
—	B50-2640-00	Operating manual (T)	☆
—	E04-0152-05	M type receptacle	☆
—	E06-0453-05	4P metal socket (MIC) (W) (T)	☆
—	E06-0552-05	5P metal socket (MIC) (K)	☆
—	E07-0451-05	4P metal consent (W) (T)	☆
—	E07-0551-05	5P metal consent (K)	☆

Ref. No.	Parts No.	Description	Re- marks
—	E06-0252-05	2P connector (Jack)	
—	E08-0471-05	4P socket (TONE PAD) (K)	
—	E09-0471-05	4P plug (TONE PAD) (K)	
—	E11-0003-15	Earphone jack	
—	E12-0001-05	Phone plug	
—	E23-0043-04	Antenna ground lug	
—	E23-0015-04	Earth lug	
—	F01-0731-05	Heat sink	☆
—	F05-8021-05	Fuse (8A)	
—	F20-0078-05	Insulating plate	
—	F29-0014-05	Insulating washer	
—	G02-0505-05	"D" spring knob	
—	G11-0054-14	Insulating cushion × 2	
—	G13-0616-14	Cushion (A) × 2	☆
—	G13-0617-04	Cushion (B)	☆
—	G13-0618-04	Cushion × 2 (angle)	
—	H01-2615-03	Carton (K) (W)	☆
—	H01-2616-03	Carton (T)	☆
—	H10-2519-12	Packing fixture	☆
—	H10-2501-03	Styren foam cushion	
—	H20-1408-03	Protective cover	☆
—	H25-0049-03	Accessory bag	
—	H25-0079-04	Polyethylene bag (MIC)	
—	H25-0103-04	Polyethylene bag (Cord)	
—	J21-2607-03	Mount-base	
—	J21-2608-03	C type angle	☆
—	J51-0006-15	Snap-lock × 2	
—	J61-0019-05	Vinyl tie	
—	K21-0724-04	Knob (Outside) SQU	
—	K21-0731-03	Knob (Mode) (K)	☆
—	K21-0732-03	Channel Knob (A)	☆
—	K21-0733-03	Channel Knob (B)	☆
—	K21-0741-03	Knob Mode (W) (T)	☆
—	K23-0717-04	Knob VOL	☆
—	K23-0718-04	Knob MHz	☆
—	K29-0712-04	Push knob (square) × 2 M, MR	☆

PARTS LIST

Ref. No.	Parts No.	Description	Re- marks
—	K29-0713-04	Push knob (circle) × 3	☆
—	N09-0008-04	Screw × 4 (angle)	
—	N14-0009-04	Nut × 4 (angle)	
—	N15-1040-46	Flat washer × 4 (angle)	
—	N15-1060-46	Flat washer × 4 (angle)	
—	N16-0060-46	Spring washer × 4 (angle)	
—	N99-0304-04	Allen head bolt × 4	☆
—	S31-1402-05	Slide switch (remote)	
—	S36-2402-05	Power switch	
—	S40-2409-05	Push switch (M)	☆
—	S40-2404-05	Push switch (MR)	
—	S40-2403-05	Push switch SUB. HI/LOW	
—	S40-2406-05	Push switch TONE (W)	
—	T07-0201-05	Speaker (8Ω)	
—	T91-0310-05	Microphone (K)	
—	T91-0302-05	Microphone (W)	☆
—	T91-0301-05	Microphone (T)	
—	W01-0401-04	Allen key (angle)	
—	X44-1320-10	TX-RX unit	☆
—	X50-1580-10	PLL unit (K)	☆
—	X50-1580-61	PLL unit (W) (T)	☆
—	X52-1110-62	TONE unit (W)	☆
—	X52-1110-51	TONE unit (T)	☆
—	X54-1440-10	CONTROL unit (K)	☆
—	X54-1440-61	CONTROL unit (W) (T)	☆
—	X42-1170-01	DC cord Ass'y	☆

TX-RX Unit (X44-1320-10)

Ref. No.	Parts No.	Description	Re- marks
CAPACITOR			
C1	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C2	CK45B1H102K	Ceramic 0.001μF ±10%	
C3.4	CS15E1V0R1M	Tantalum 0.1μF 35WV	
C5	CE04W1A470	Electrolytic 47μF 10WV	
C6	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C7	CE04W1C100	Electrolytic 10μF 16WV	
C8	CE04W1E4R7	Electrolytic 4.7μF 25WV	
C9	CE04W1A470	Electrolytic 47μF 10WV	
C10	CE04W1H010	Electrolytic 1μF 50WV	
C11	CQ92M1H103K	Mylar 0.01μF ±10%	
C12	CQ92M1H393K	Mylar 0.039μF ±10%	
C13	CK45B1H102K	Ceramic 0.001μF ±10%	
C14	CC45UJ1H020C	Ceramic 2pF ±0.25pF	
C15	CC45TH1H100D	Ceramic 10pF ±0.5pF	
C16.17	CC45SL1H221J	Ceramic 220pF ±10%	
C18	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C19	CC45CH1H150J	Ceramic 15pF ±5%	
C20	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C21	CC45SL1H101J	Ceramic 100pF ±5%	
C22	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C23~25	CC45CH1H330J	Ceramic 33pF ±5%	
C26.27	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C28.29	CC45TH1H150J	Ceramic 15pF ±5%	
C30	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C31	CK45B1H102K	Ceramic 0.001μF ±10%	
C32	CE04W1C100	Electrolytic 10μF 16WV	
C33	CC45CH1H050C	Ceramic 5pF ±0.25pF	
C34	CC45TH1H080D	Ceramic 8pF ±0.5pF	
C35	CC45CH1H0R5C	Ceramic 0.5pF ±0.25pF	
C36	CC45TH1H120J	Ceramic 12pF ±5%	
C37	CC45CH1H0R5C	Ceramic 0.5pF ±0.25pF	

Ref. No.	Parts No.	Description	Re- marks
C38	CC45TH1H120J	Ceramic 12pF ±5%	
C39	CC45CH1H270J	Ceramic 27pF ±5%	
C40	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C41	CK45B1H102K	Ceramic 0.001μF ±10%	
C42	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C43	CK45B1H102K	Ceramic 0.001μF ±10%	
C44	CC45CH1H070D	Ceramic 7pF ±0.5pF	
C45	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C46	CK45B1H102K	Ceramic 0.001μF ±10%	
C47	CS15E1VR47M	Tantalum 0.47μF 35WV	
C48	CE04W1C470	Electrolytic 47μF 16WV	
C49	CC45CH1H220J	Ceramic 22pF ±5%	
C50	CE04W1A470	Electrolytic 47μF 10WV	
C51~53	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C54	CK45B1H102K	Ceramic 0.001μF ±10%	
C55	CE04W1C101Q	Electrolytic 100μF 16WV	
C56.57	CC45SL2H070D	Ceramic 7pF ±0.5pF	
C58.59	CC45SL2H680J	Ceramic 68pF ±5%	
C60.61	CC45SL2H390J	Ceramic 39pF ±5%	
C62	CC45SL2H100J	Ceramic 10pF ±5%	
C63	CC45SL2H180J	Ceramic 18pF ±5%	
C64~66	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C67	CC45CH1H0R5C	Ceramic 0.5pF ±0.25pF	
C68	CC45CH1H020C	Ceramic 2pF ±0.25pF	
C69	CK45B1H102K	Ceramic 0.001μF ±10%	
C70	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C71	CC45CH1H330J	Ceramic 33pF ±5%	
C72	CC45RH1H070D	Ceramic 7pF ±0.5pF	
C73	CC45CH1H150H	Ceramic 15pF ±5%	
C74	CC45CH1H050C	Ceramic 5pF ±0.25pF	
C75	CC45CH1H220J	Ceramic 22pF ±5%	
C76	CC45RH1H070D	Ceramic 7pF ±0.5pF	
C77.78	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C79.80	CK45B1H102K	Ceramic 0.001μF ±10%	
C81.82	CM93F2A080D	Mica 8pF ±0.5pF	
C83	CC45SL1H010C	Ceramic 1pF ±0.25pF	
C84	CC45CH1H220J	Ceramic 22pF ±5%	
C85	CC45CH1H020C	Ceramic 2pF ±0.25pF	
C86	CC45CH1H180J	Ceramic 18pF ±5%	
C87	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C88	CK45B1H102K	Ceramic 0.001μF ±10%	
C89	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C90	CC45CH1H050C	Ceramic 5pF ±0.25pF	
C91	C91-0405-15	Through type cap. 0.001μF	
C92	CK45B1H221K	Ceramic 220pF ±10%	
C93.94	CQ92M1H223K	Mylar 0.022μF ±10%	
C95	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C96	CK45B1H471K	Ceramic 470pF ±10%	
C97	CC45SL1H151J	Ceramic 150pF ±5%	
C98	CC45CH1H150J	Ceramic 15pF ±5%	
C99	CQ92M1H223K	Mylar 0.022μF ±10%	
C100	CC45SL1H330J	Ceramic 33pF ±5%	
C101	CK45B1H471K	Ceramic 470pF ±10%	
C102	CQ92M1H103K	Mylar 0.01μF ±10%	
C103	CK45B1H471K	Ceramic 470pF ±10%	
C104.105	CQ92M1H223K	Mylar 0.022μF ±10%	
C106	CK45B1H471K	Ceramic 470pF ±10%	
C107	CK45F1H103Z	Ceramic 0.01μF +80, -20%	
C108	CQ92M1H153K	Mylar 0.015μF ±10%	
C109	CC45CH1H470J	Ceramic 47pF ±5%	
C110.111	CK45B1H471K	Ceramic 470pF ±10%	
C112	CQ92M1H472K	Mylar 0.0047μF ±10%	
C113.114	CK45B1H471K	Ceramic 470pF ±10%	
C115	CQ92M1H102K	Mylar 0.001μF ±10%	
C116	CQ92M1H473K	Mylar 0.047μF ±10%	

PARTS LIST

Ref. No.	Parts No.	Description	Re- marks
C117	CQ92M1H223K	Mylar 0.022 μ F $\pm$ 10%	
C118	CQ92M1H102K	Mylar 0.001 μ F $\pm$ 10%	
C119	CQ92M1H222K	Mylar 0.0022 μ F $\pm$ 10%	
C120	CQ92M1H393K	Mylar 0.039 μ F $\pm$ 10%	
C121	CQ92M1H392K	Mylar 0.0039 μ F $\pm$ 10%	
C122	CQ92M1H103K	Mylar 0.01 μ F $\pm$ 10%	
C123	CS15E1VOR1M	Tantalum 0.1 μ F 35WV	
C124	CQ92M1H333K	Mylar 0.033 μ F $\pm$ 10%	
C125	CQ92M1H332K	Mylar 0.0033 μ F $\pm$ 10%	
C126	CS15E1C4R7M	Tantalum 4.7 μ F 16WV	
C127	CE04W1H3R3	Electrolytic 3.3 μ F 50WV	
C128	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C129	CQ92M1H103K	Mylar 0.01 μ F $\pm$ 10%	
C130	CQ92M1H332K	Mylar 0.0033 μ F $\pm$ 10%	
C131	CQ92M1H273K	Mylar 0.027 μ F $\pm$ 10%	
C132	CE04W1H010	Electrolytic 1 μ F 50WV	
C133	CE04W1C100	Electrolytic 10 μ F 16WV	
C134	CE04W1A470	Electrolytic 47 μ F 10WV	
C135	CE04W1C100	Electrolytic 10 μ F 16WV	
C136	CE04W1A101	Electrolytic 100 μ F 10WV	
C137	CE04W1C220	Electrolytic 22 μ F 16WV	
C138,139	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C140	CE04W1C220	Electrolytic 22 μ F 16WV	
C141	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C142	CE04W1C100	Electrolytic 10 μ F 16WV	
C143	CE04W1A470	Electrolytic 47 μ F 10WV	
C144	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C145	C91-0405-15	Through type cap. 0.001 μ F	
C146,147	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C148	CE04W1C220	Electrolytic 22 μ F 16WV	
C149	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C150,151	CC45TH1H020C	Ceramic 2pF $\pm$ 0.25pF	
C155	CC45TH1H020C	Ceramic 2pF $\pm$ 0.25pF	
C156,157	CC45F1H103Z	Ceramic 0.01 μ F +80, -20%	
SEMICONDUCTOR			
Q1	V03-0039-05	IC TA7061AP	
Q2,3	V03-0079-05	Transistor 2SC460 (B)	
Q4,5	V09-0012-05	FET 2SK19 (GR)	
Q6	V09-1002-56	FET 3SK74 (L)	
Q7	V03-2538-06	Transistor 2SC2538	
Q8,9	V09-1002-56	FET 3SK74 (L)	
Q10~17	V03-0079-05	Transistor 2SC460 (B)	
Q18~22	V03-1815-06	Transistor 2SC1815 (Y)	
Q23,24	V03-0336-05	Transistor 2SC496 (Y)	
Q25	V01-1015-06	Transistor 2SA1015 (Y)	
Q27	V03-1959-06	Transistor 2SC1959 (Y)	
Q28,29	V03-1815-06	Transistor 2SC1815 (Y)	
Q26	V01-0113-05	Transistor 2SA496 (Y)	
D1~5	V11-0317-05	Varicap diode 1S2208	
D6	V11-0076-05	Diode 1S1555	
D7	V11-5260-16	Diode M1402	
D8	V11-0414-05	Diode 1S2588	
D9,11,12	V11-0051-05	Diode 1N60	
D10	V11-0374-05	Diode 1S16	
D13~16	V11-0076-05	Diode 1S1555	
D17~20	V11-0051-05	Diode 1N60	
D21	V11-0076-05	Diode 1S1555	
D22	V11-1262-06	Varistor 1S1212	
D23	V11-4163-56	Zener diode XZ-088	
D24	V11-0076-05	Diode 1S1555	
D25	V11-0247-05	Zener diode WZ-100	
D26	V11-0076-05	Diode 1S1555	
D27	V11-4161-86	Zener diode XZ-064	☆

Ref. No.	Parts No.	Description	Re- marks
D28	V11-0076-05	Diode 1S1555	
D29	V13-0004-05	SCR CR02AM-2-1	☆
D31,32	V11-0076-05	Diode 1S1555	
POTENTIOMETER			
VR1,2	R12-1404-05	Potentiometer 4.7k Ω	
VR3,4	R12-0406-05	Potentiometer 470 Ω	
VR5	R12-0409-05	Potentiometer 220 Ω	
VR6	R12-5403-05	Potentiometer 100k Ω	
VR7	R12-4404-05	Potentiometer 68k Ω	
VR8	R12-1404-05	Potentiometer 4.7k Ω	
TRIMMER			
TC1	C05-0062-05	Ceramic trimmer 6pF	
TC2	C05-0013-15	Ceramic trimmer 20pF	
COIL/INDUCTOR/CRYSTALQUARTZ			
L1	L40-1021-03	Ferri inductor 1mH	
L2	L40-1545-06	Ferri inductor 150mH	
L3	L77-0710-05	Quartz crystal (10.7 MHz)	
L4	L33-0615-05	Choke coil 15 μ H	
L5	L30-0005-05	IFT	
L6	L31-0313-05	IFT	
L7	L40-3391-03	Ferri inductor 3.3 μ H	
L8	L40-1021-03	Ferri inductor 1 mH	
L9	L31-0344-05	Tuning coil	
L10	L31-0180-05	Tuning coil	
L11,12	L31-0267-05	Tuning coil	
L13	L34-0672-05	Tuning coil	
L14	L40-1021-03	Ferri inductor 1 mH	
L15	L34-0499-05	VHF coil 3 ϕ 4T	
L16	L34-0452-05	VHF coil 3 ϕ 6T	
L17	L40-1001-03	Ferri inductor 10 μ H	
L18	L30-0504-05	IFT	
L19	L34-0823-05	VHF coil 5 ϕ 3T	
L20	L33-0025-05	Choke coil 1 μ H	
L21	L34-0823-05	VHF coil 5 ϕ 3T	
L22	L30-0503-05	IFT	
L23	L34-0499-05	VHF coil 3 ϕ 4T	
L24	L79-0442-05	Ceramic disci 455D	
L25	L40-6825-04	Ferri inductor 6.8 mH	
L26	L33-0026-05	Choke coil 1 μ H	
L27	L34-0818-05	VHF coil 5 ϕ 4T	
L28	L33-0025-05	Choke coil 1 μ H	
L29,30	L34-0694-05	Tuning coil	
L31	L34-0812-05	Tuning coil	
L32	L79-0451-05	Helical block	
L33	L34-0812-05	Tuning coil	
L34	L34-0683-05	Tuning coil	
L35	L30-0289-05	IFT	
L36	L71-0201-05	Monolithic filter 10F15A	
L37	L30-0289-05	IFT	
L38	L72-0014-05	Ceramic filter SFE-10.7 MA5	
L39	L77-0327-06	Quartz crystal (10.245 MHz)	
L40	L40-1021-03	Ferri inductor 1 mH	
L41	L72-0309-05	Ceramic filter CFT-455F2	
MISCELLANEOUS			
RL1	E23-0046-04	Terminal (square) $\times$ 17	
	E23-0401-05	Terminal (circle)	
	S51-1404-05	Relay	

PARTS LIST

PLL Unit (X50-1580-10)

Ref. No.	Parts No.	Description	Re- marks
CAPACITOR			
C1~6	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C7~12	CK45B1H102K	Ceramic 0.001 μ F $\pm$ 10%	
C13	CC45CH1H100D	Ceramic 10pF $\pm$ 0.5pF	
C14	CC45CH1H270J	Ceramic 27pF $\pm$ 0.5%	
C15	CC45UJ1H180J	Ceramic 18pF $\pm$ 5%	
C16	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C17	CE04W1A470	Electrolytic 47 μ F 10WV	
C18,19	CC45CH1H050C	Ceramic 5pF $\pm$ 0.25pF	
C20	CE04W1A470	Electrolytic 47 μ F 10WV	
C23	CE04W1C101Q	Electrolytic 100 μ F 16WV	
C24~26	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C27	CC45CH1H330J	Ceramic 33pF $\pm$ 5%	
C28	CC45CH1H050C	Ceramic 5pF $\pm$ 0.25pF	
C29	CE04W1H010	Electrolytic 1 μ F 50WV	
C30	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C31	CC45CH1H100D	Ceramic 10pF $\pm$ 0.5pF	
C32~35	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C36	CC45CH1H050C	Ceramic 5pF $\pm$ 0.25pF	
C37	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C38	CS15E1C4R7M	Tantalum 4.7 μ F 16WV	
C39	CS15E1A100M	Tantalum 10 μ F 10WV	
C40	CC45CH1H050C	Ceramic 5pF $\pm$ 0.25pF	
C41	CC45CH1H270J	Ceramic 27pF $\pm$ 0.5%	
C42	CC45CH1H390J	Ceramic 39pF $\pm$ 5%	
C43~53	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C54	CE04W1E4R7	Electrolytic 4.7 μ F 25WV	
C55	C90-0246-05	Ceramic 0.01 μ F $\pm$ 10%	
C56	CE04W1C100	Electrolytic 10 μ F 16WV	
C57	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C58	CC45SL1H101J	Ceramic 100pF $\pm$ 5%	
C59	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C60	CC45CH1H100D	Ceramic 10pF $\pm$ 0.5pF	
C61	CC45CH1H330J	Ceramic 33pF $\pm$ 5%	
C62	CE04W1A470	Electrolytic 47 μ F 10WV	
C63,64	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C65,66	CQ92M1H332K	Mylar 0.0033 μ F $\pm$ 10%	
C67	CQ92M1H103K	Mylar 0.01 μ F $\pm$ 10%	
C68	CQ92M1H472K	Mylar 0.0047 μ F $\pm$ 10%	
C69	CE04W1H010	Electrolytic 1 μ F 50WV	
C70	CQ92M1H332K	Mylar 0.0033 μ F $\pm$ 10%	
C71	CE04W1A101Q	Electrolytic 100 μ F 10WV	
C72	CQ92M1H102K	Mylar 0.001 μ F $\pm$ 10%	
C73	CK45B1H331K	Ceramic 330pF $\pm$ 10%	
C74	CQ92M1H472K	Mylar 0.0047 μ F $\pm$ 10%	
C75	CE04W1C101Q	Electrolytic 100 μ F 16WV	
C76	CE04W1C100	Electrolytic 10 μ F 16WV	
C77	CE04W1A330	Electrolytic 33 μ F 10WV	
C78	CQ92M1H393K	Mylar 0.039 μ F $\pm$ 10%	
C79	CE04W1A330	Electrolytic 33 μ F 10WV	
C80	CE04W1A101Q	Electrolytic 100 μ F 10WV	
C81	CQ92M1H104K	Mylar 0.1 μ F $\pm$ 10%	
C82	CE04W1C471Q	Electrolytic 470 μ F 16WV	
C84	CE04W1A470	Electrolytic 47 μ F 10WV	
C85	CC45CH1H070D	Ceramic 7pF $\pm$ 0.5pF	
C86	CC45CH1H150J	Ceramic 15pF $\pm$ 5%	
C87	CC45CH1H030C	Ceramic 3pF $\pm$ 0.25pF	
C88	CK45F1H103Z	Ceramic 0.01 μ F +80, -20%	
C89	CE04W1C100	Electrolytic 10 μ F 16WV	
C90	CK45B1H102K	Ceramic 0.001 μ F $\pm$ 10%	
C91	CC45CH1H030C	Ceramic 3pF $\pm$ 0.25pF	
C92	CC45UJ1H020C	Ceramic 2pF $\pm$ 0.25pF	
C93	CC45CH1H080D	Ceramic 8pF $\pm$ 0.5pF	

Ref. No.	Parts No.	Description	Re- marks
C94	CQ92M1H103K	Mylar 0.01 μ F $\pm$ 10%	
C95	CC45UJ1H060D	Ceramic 6pF $\pm$ 0.5pF	
SEMICONDUCTOR			
Q1~5	V03-1815-06	Transistor 2SC1815 (Y)	
Q6	V03-0079-05	Transistor 2SC460 (B)	
Q11,12	V09-1002-56	FET 3SK74 (L)	
Q13,14	V03-1815-06	Transistor 2SC1815 (Y)	
Q15	V30-1030-46	IC SM5111A	☆
Q16	V03-1815-06	Transistor 2SC1815 (Y)	
Q17	V03-0272-05	Transistor 2SC1345 (E)	
Q18	V03-1815-06	Transistor 2SC1815 (Y)	
Q19	V30-0087-05	IC TA7060P	
Q20	V03-1923-06	Transistor 2SC1923 (O)	☆
Q21,22	V03-1815-06	Transistor 2SC1815 (Y)	
Q23,24	V03-2240-06	Transistor 2SC2240 (GR)	
Q25	V30-0208-05	IC AN315	
Q26	V09-0060-05	FET 2SK30A (GR)	
Q27	V09-1001-16	FET 2SK19 (GR) (T)	
Q28	V03-1923-06	Transistor 2SC1923 (O)	☆
Q29	V30-1030-26	IC μ PC78L08A	
D1~5	V11-0414-05	Diode 1S2588	
D6~10	V11-4161-36	Varicap diode 1SV53A	
D11~20	V11-0076-05	Diode 1S1555	
D21	V11-0374-05	Diode 1SS16	
D23,24	V11-0414-05	Diode 1S2588	
D25	V11-4161-56	Zener diode WZ-040	☆
D26	V11-0317-05	Varicap diode 1S2208	
POTENTIOMETER			
VR1~5	R12-5403-05	Potentiometer 100k Ω	
VR6	R12-1403-05	Potentiometer 1k Ω	☆
TRIMMER			
TC1	C05-0067-05	Ceramic trimmer 25pF	
TC2	C05-0062-05	Ceramic trimmer 6pF	
COIL/INDUCTOR			
L1~5	L34-0437-05	Choke coil	☆
L6	L77-0832-05	Quartz crystal 43.7667 MHz	☆
L7	L77-0833-05	Quartz crystal 44.4333 MHz	☆
L8	L77-0834-05	Quartz crystal 43.5667 MHz	☆
L9	L77-0835-05	Quartz crystal 44.2333 MHz	☆
L10	L77-0836-05	Quartz crystal 44.6333 MHz	☆
L11	L40-1511-03	Ferri-inductor 150 μ H	
L12	L33-0605-05	Choke coil 0.47 μ H	
L13	L32-0002-05	Oscillator coil	
L14	L34-0683-05	Tuning coil	
L15	L34-0820-05	Tuning coil	☆
L16	L34-0683-05	Tuning coil	
L17	L77-0720-05	Quartz crystal 10.240 MHz	
L18	L40-3301-03	Ferri-inductor 33 μ H	
L19	L40-1091-03	Ferri-inductor 1 μ H	
L20	L15-0016-05	Choke coil (Low frequency)	
L21	L40-1021-03	Ferri-inductor 1mH	
L22	L40-1021-25	Ferri-inductor 1mH	
L23	L40-3391-03	Ferri-inductor 3.3 μ H	
L25	L32-0618-05	Oscillator coil	☆
MISCELLANEOUS			
	E23-0046-04	Terminal $\times$ 8 (square)	
	E23-0401-05	Terminal $\times$ 2 (circle)	

PARTS LIST/PACKING

CONTROL UNIT (X54-1440-10)

Ref. No.	Parts No.	Description	Re- marks
CAPACITOR			
C1	CE04W1C470Q	Electrolytic 47 μ F 16WV	
C2	CE04W1A470	Electrolytic 47 μ F 10WV	
R1,2	R90-0514-05	Resistor block 10k $\times$ 7	☆
R3~5	R90-0516-05	Resistor network	☆
R6	R90-0515-05	Resistor block 10k $\times$ 4	☆
Q1~6	V03-1815-06	Transistor 2SC1815 (Y)	
Q7	V01-1015-06	Transistor 2SA1015 (Y)	
IC1~3	V30-1006-46	IC TC4035BP	☆
IC4~6	V30-1049-06	IC TC4019BP	
IC7~9	V30-1054-06	IC TC5022BP	
IC10,11	V30-1006-36	IC TC4081BP	☆
IC12	V30-1025-26	IC FS7806M	☆
D1~22	V11-0051-05	Diode 1N60	
D23	V11-0076-05	Diode 1S1555	
D24	V11-0307-05	Zener diode WZ-150	
D25	V11-3162-86	LED TLG205	☆
D26	V11-3162-96	LED TLR205	☆
D27~30	V11-4161-66	LED 513 OK	☆
S1	S29-1406-05	Rotary switch (1 MHz) (K)	☆
S1	S29-1408-05	Rotary switch (1 MHz) (W)	☆
S2	S29-1405-05	Rotary switch (100 kHz, 10 kHz)	☆
S3	S40-2405-05	Push switch (0k, 5k)	
S4	S29-4402-05	Slide rotary (for shift)	☆

TONE UNIT (X52-1110-50) (T TYPE)
(X52-1110-61) (W TYPE)

Ref. No.	Parts No.	Description	Re- marks
C1	CK45B1H102K	Ceramic 1000pF $\pm$ 10%	
C2	CE04W1C220Q	Electrolytic 22 μ F 16WV	
C3~5	C91-0433-05	Layer-built 0.0039 μ F $\pm$ 5%	☆
C6	CE04W1C220Q	Electrolytic 22 μ F 16WV	
C7,8	CE04W1H010	Electrolytic 1 μ F 50WV	
C9,10	CK45B1H102K	Ceramic 1000pF $\pm$ 10%	
C11	CS15E1A150K	Tantalum 15 μ F $\pm$ 10%	(T)
C12	CK45B1H102K	Ceramic 1000pF $\pm$ 10%	
C13	CS15E1A150K	Tantalum 15 μ F $\pm$ 10%	(T)
RESISTOR			
R1~12	RD14CB2E000J	Carbon 000 Ω $\pm$ 5% 1/4W	
R2,3	R92-0616-05	Metal film 10k Ω $\pm$ 1% 1/4W	
R4	R92-0617-05	Metal film 7.5k Ω $\pm$ 1% 1/4W	☆
R5	RN14BK2E4703F	Metal film 470k Ω $\pm$ 1% 1/4W	☆
R10	RD14CB2E102J	Carbon 15k Ω $\pm$ 5% 1/4W	(T)
SEMICONDUCTOR			
Q1,2	V03-0093-05	Transistor 2SC458 (B)	
D1,2	V11-0076-05	Diode 1S1555	(T)
D1	V11-0076-05	Diode 1S1555	(W)
POTENTIOMETER			
VR1	R12-2405-05	Semi-fixed resistor 5k Ω	☆
VR2	R12-4403-05	Semi-fixed resistor 50k Ω	(T) ☆
MISCELLANEOUS			
—	E40-0464-05	Pin plug 4P	

PACKING

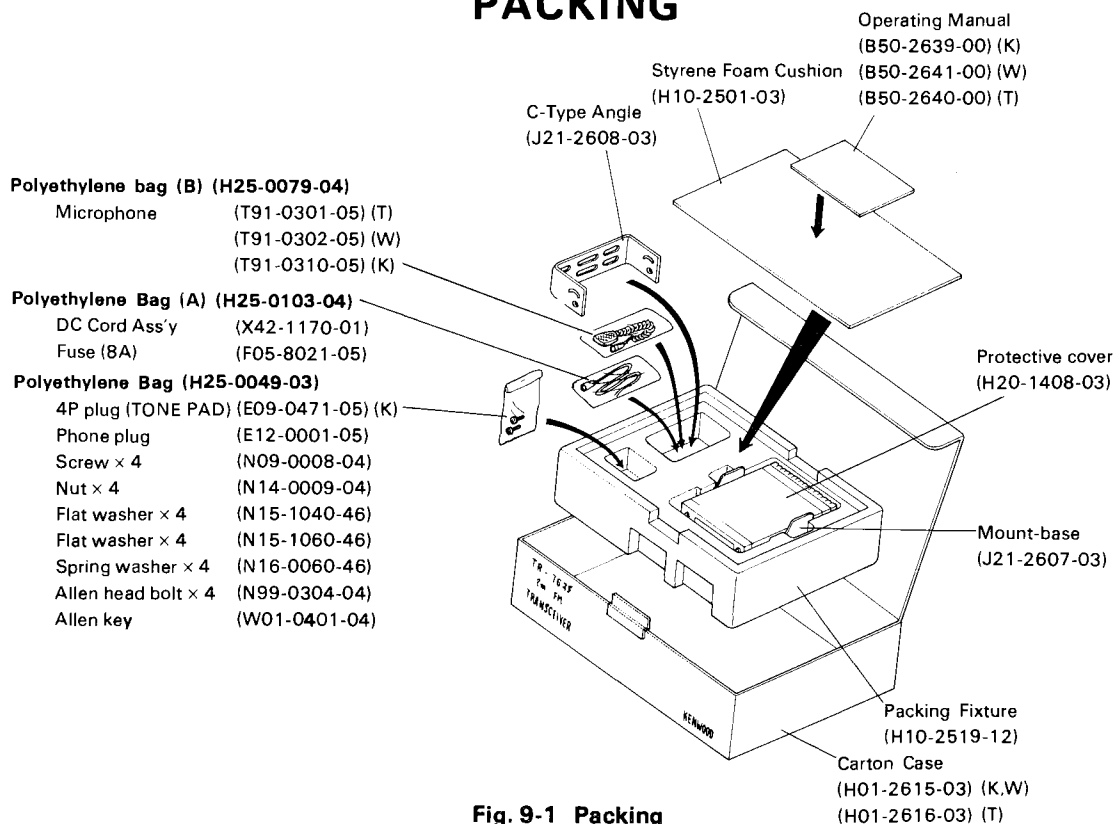


Fig. 9-1 Packing

BRACKET INSTALLATION/EXPLODED VIEWS

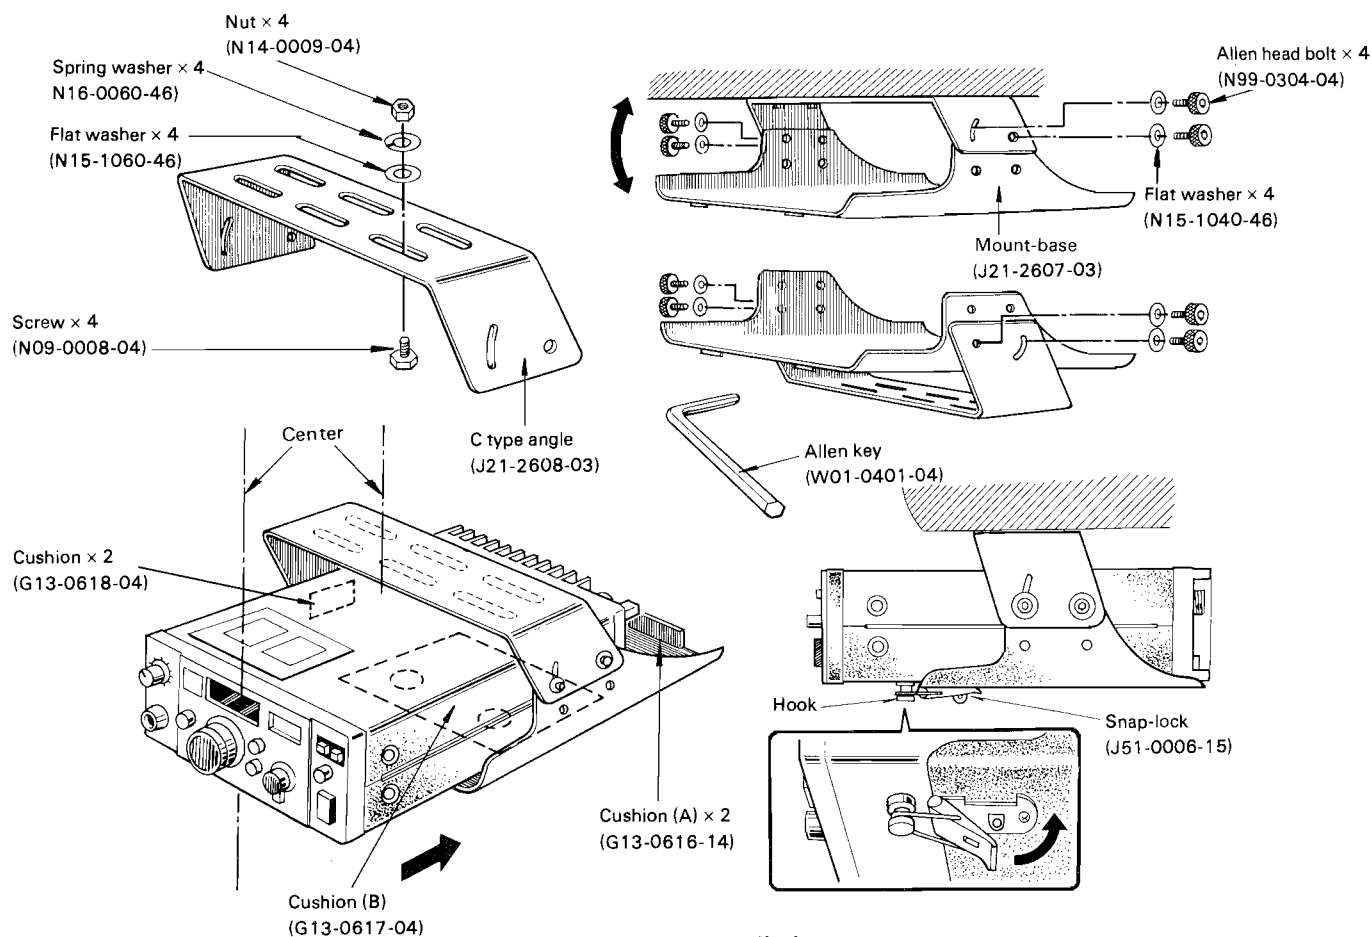


Fig. 9-2 Bracket Installation

EXPLODED VIEW

- I. Case removal
 - (1) Remove the bind screws ① ~ ⑪
 - (2) Remove the upper and lower cases.
- II. Panel removal
 - (1) Remove the knobs.
 - (2) Remove screws A ~ D.

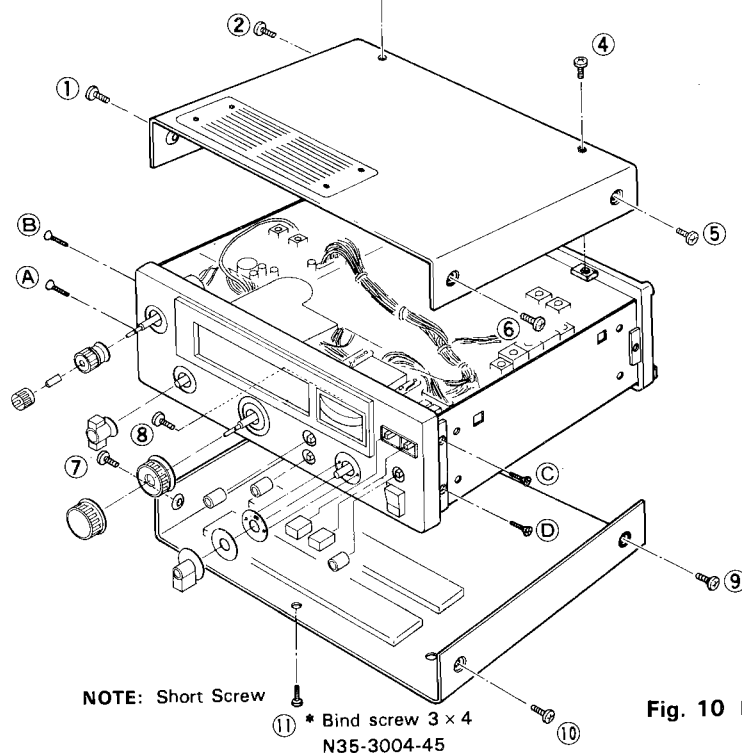


Fig. 10 Panel and Case Removal


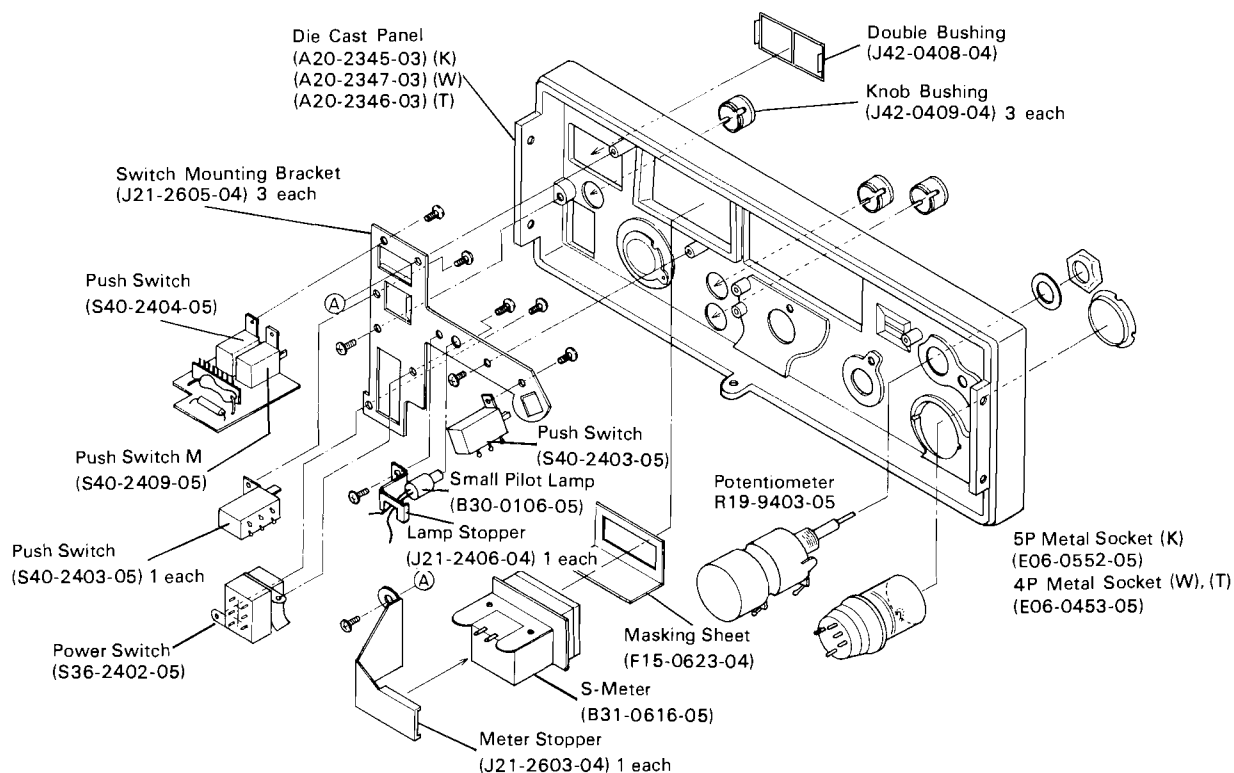


Fig. 11 Disassembly of Front Panel


TROUBLESHOOTING

1. PLL CIRCUIT

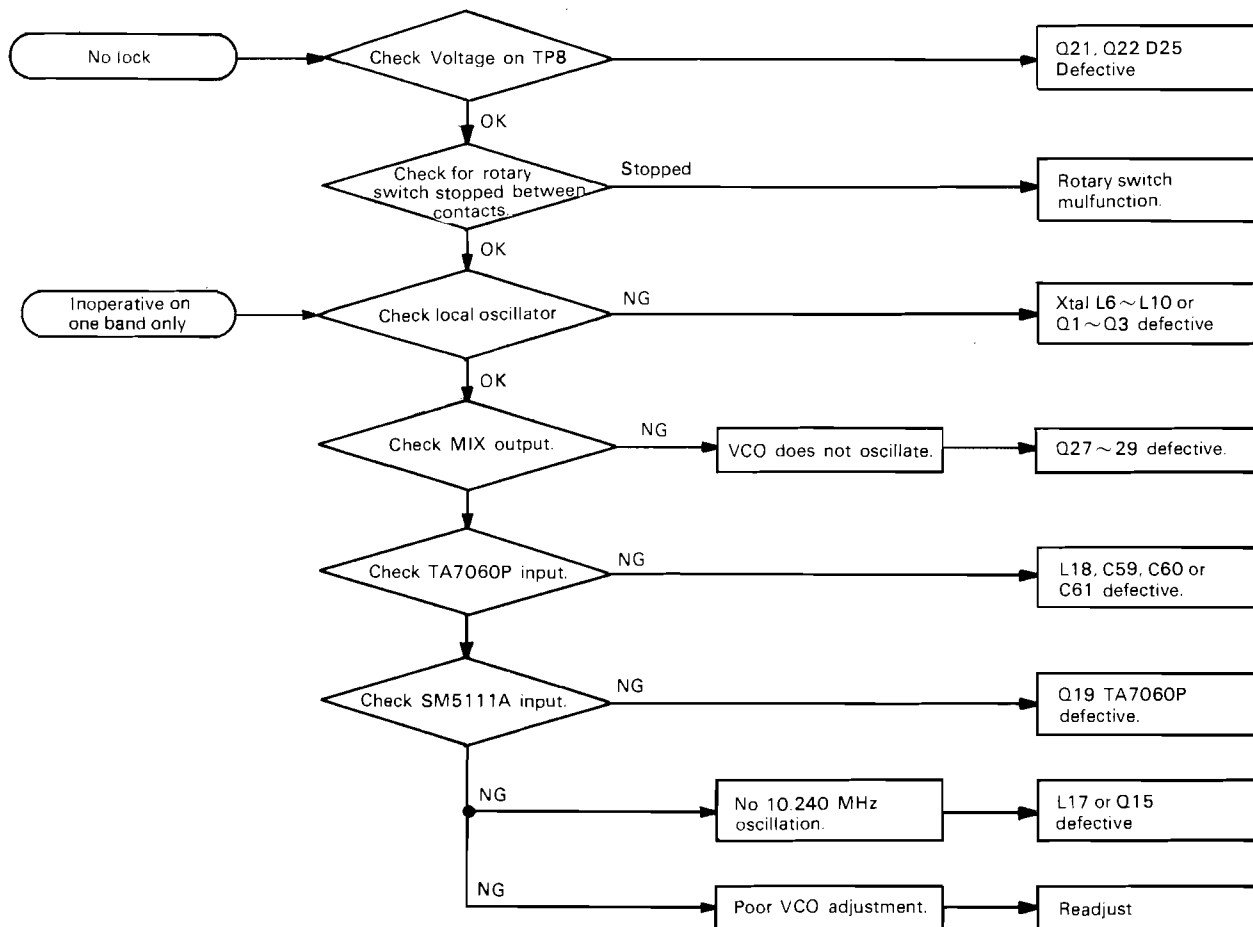


TROUBLESHOOTING

2. TRANSMITTER SECTION

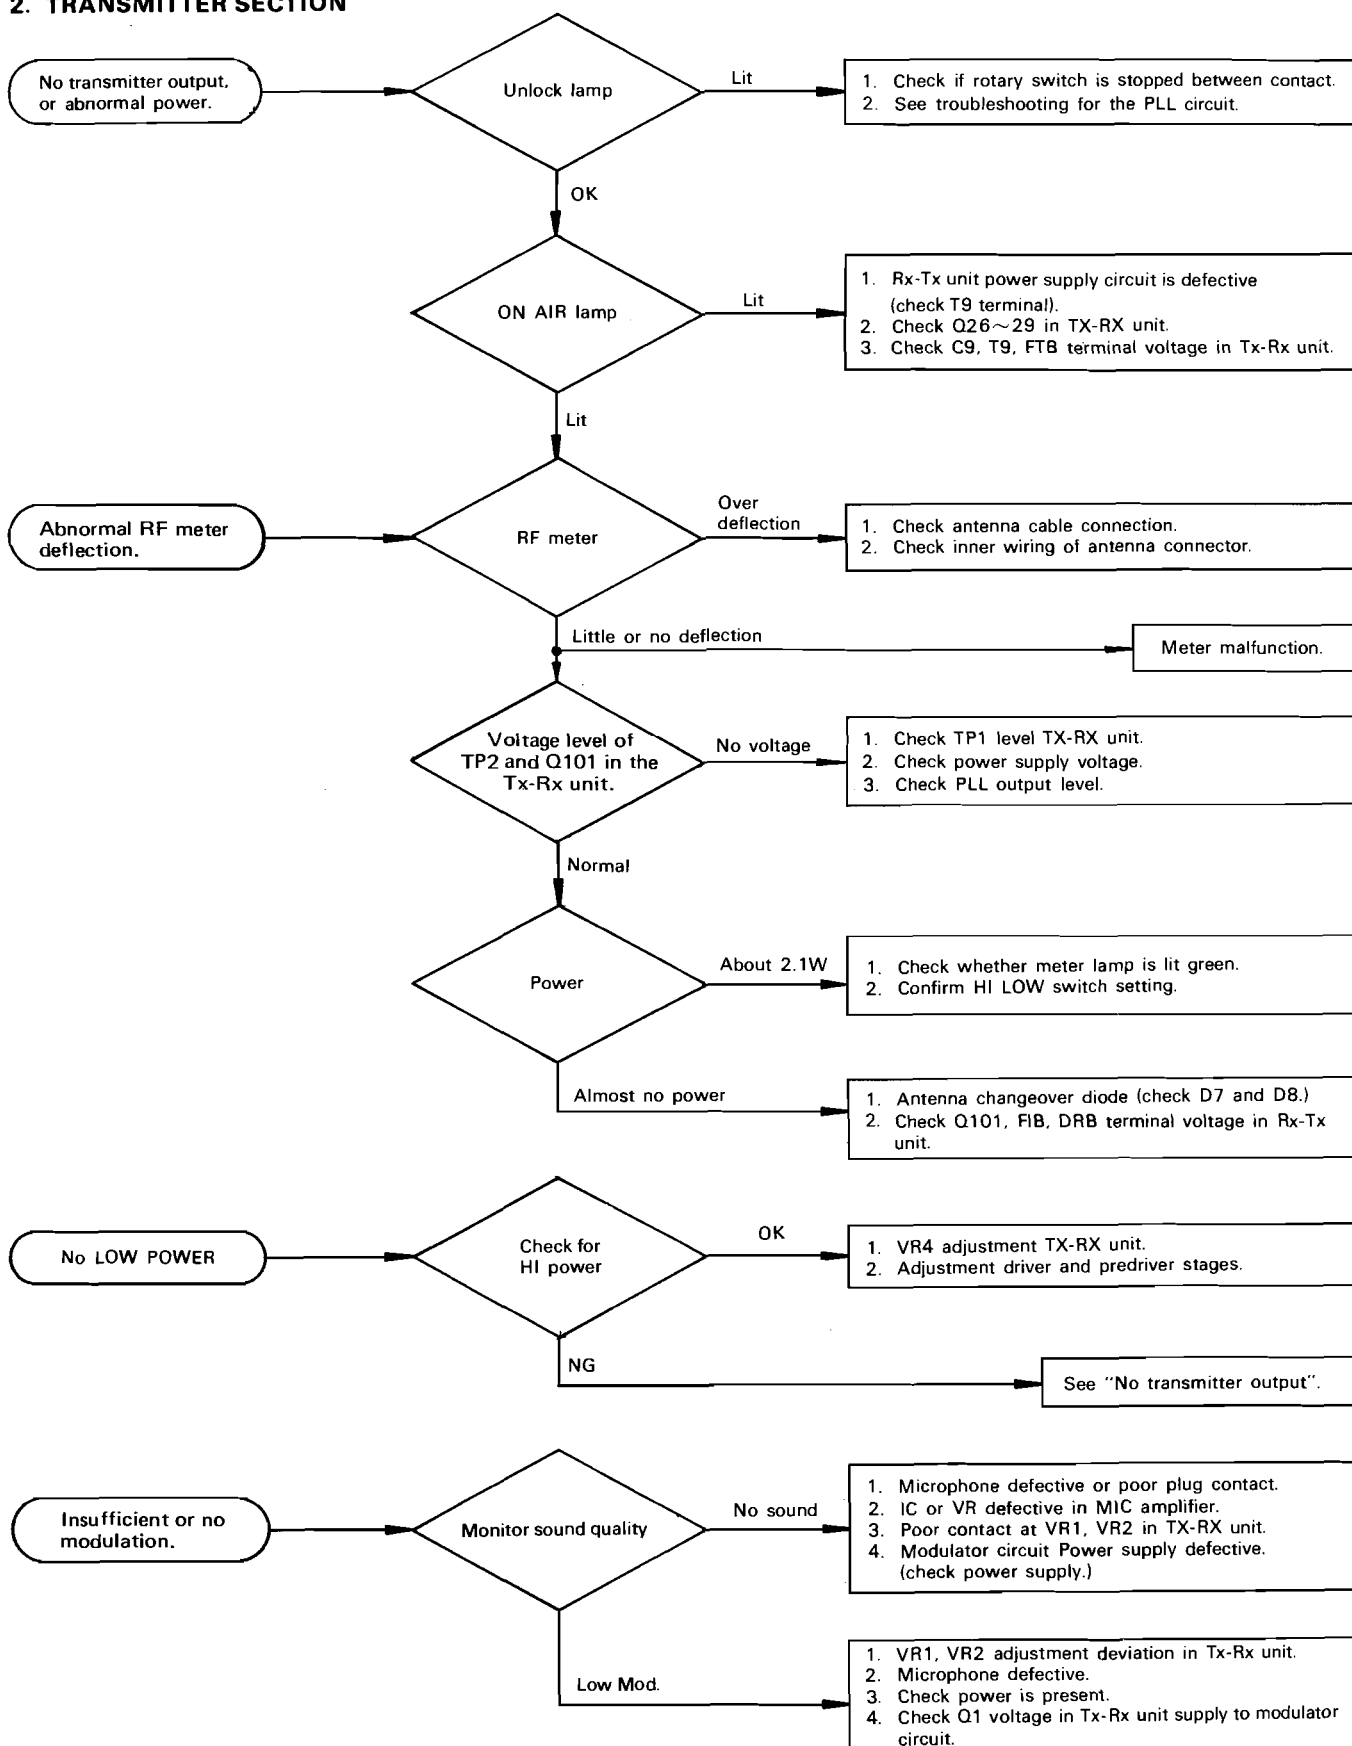

TROUBLESHOOTING/ADJUSTMENTS

3. RECEIVER SECTION

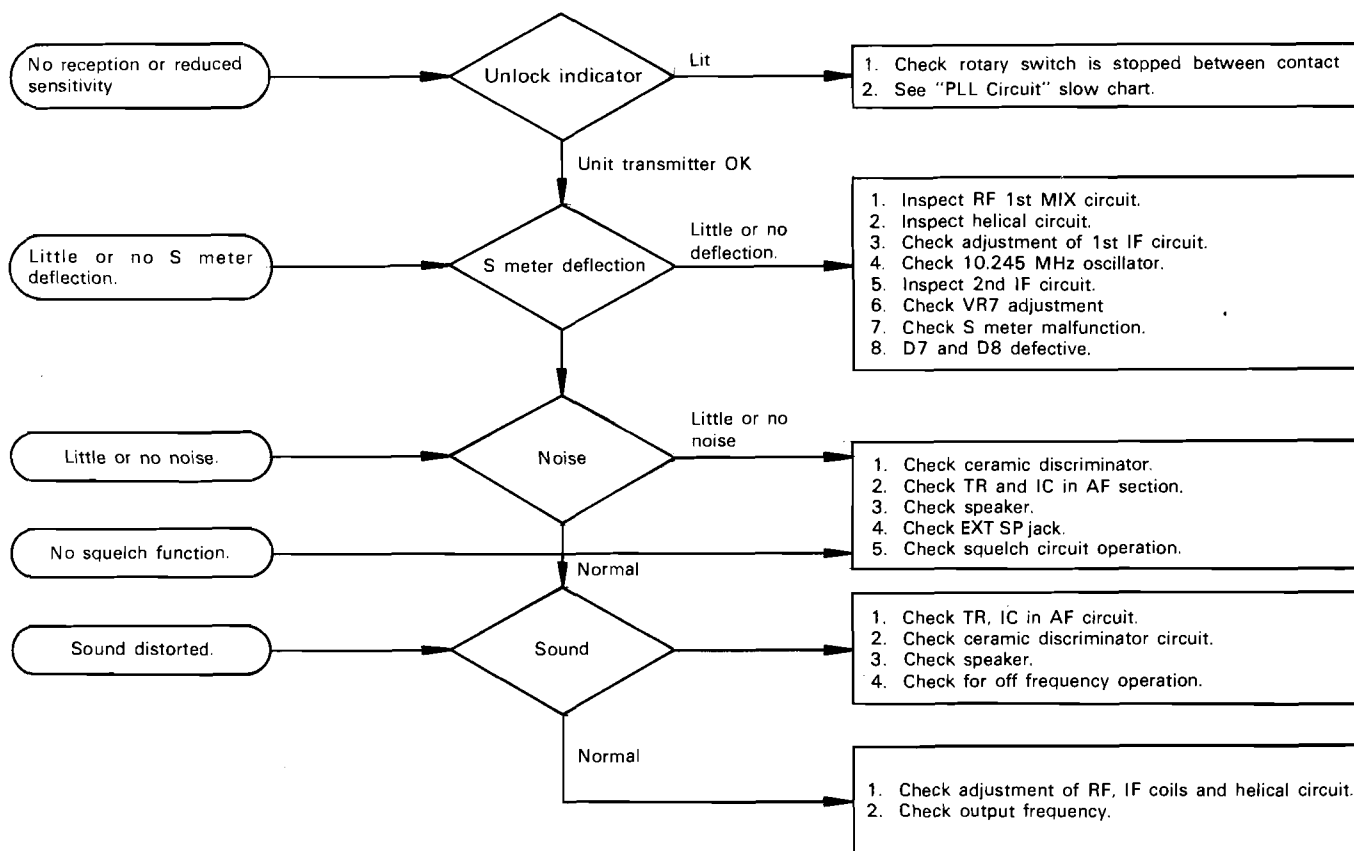

ADJUSTMENTS

TEST EQUIPMENT REQUIRED

1. DC Power Supply

Voltage: Variable from 9 to 16V.
Current: 8A min.

2. DC VTVM or DVM

Voltage range: 10V~16V (min.)
Input impedance: 1 M Ω or better

3. RF VTVM

Voltage range: F.S. 10 mV~300V
Frequency response: 200 MHz min.
Input impedance: 1 M Ω min., 3pF max.

4. Frequency Counter

Frequency response: 150 MHz min.
Min. input sensitivity: about 50 mV
Input impedance: 1 M Ω min.

5. Oscilloscope

With horizontal input and high sensitivity.
Frequency response: 3 MHz min.

6. Power Meter with Dummy Load

Frequency limit: 150 MHz min.
Impedance: 50 Ω
Ranges: 50W, 3W

7. Linear Detector

8. Audio Generator (AG)

Frequency range: 300 Hz~5 kHz
Output: 0.5 mV~1V

9. AF Voltmeter

Frequency range: 50 Hz~10 kHz
Input impedance: 1 M Ω min.
Voltage range: 3 mV~30V

10. Standard Signal Generator (SSG)

Output frequency: Capable of covering 144 MHz
~148 MHz
Modulation: Frequency modulation

11. Sweep Generator

Frequency range: Capable of covering 144 MHz
~148 MHz

12. AF Dummy Load

8 Ω 5W (approx.)

13. Directional Coupler

14. Detector Probe

ADJUSTMENTS

1. PLL Adjustments (See Fig. 1 on page 28 for Set-up)

Item	Condition	Measuring point			Adjust			Reference	Remarks
		Instrument	Unit	Terminal	Unit	Parts	Method		
1. Voltage check and adjustment initial control setting	1) POWER SW: ON HI: LOW SW: HI MR SW: OFF MODE SW: S MHz SW: 6 100 kHz SW: 0 10 kHz SW: 0 SUBTONE SW: 0 5Hz SW: 0 REMOTE SW: OFF SEND/REC. SEND	DC VTVM	PLL	T9 (J1)				8.9V ~ 10.2V	Confirm
			TX/RX	T9				8.9V ~ 10.2V	
				CB				Approx. 12V	
	2) SEND/REC. REC.		TX/RX	R9				7.7V ~ 8.3V	
	3) Same as above.		PLL	TP3	PLL			Approx. 8.0V	
	4) Same as item 2)		PLL	TP8	PLL	VR6	6.0V	±0.2V	
2 PLL	1) 100 kHz SW: 0 10 kHz SW: 0	RF VTVM	PLL	TP1	PLL	L13	Turn the L13 core counter clockwise 180° from oscillation starting point.	0.46V	
				TP7		L14 L16	MAX	1.4V	
	2) MHz SW: 4	DC VTVM	PLL	TP5	PLL	TC2	1.5V	±0.05V	
	3) MHz SW: 7 100 kHz SW: 9 10 kHz SW: 9	DC VTVM	PLL	TP5				Less than 5.5V	Confirm
	4) Same as above	F. Counter	PLL	TP6	PLL	TC1	10.24000 Hz	±100Hz	
	5) MHz SW: 4 100 kHz SW: 0 10 kHz SW: 0 5 kHz SW: 5 kHz	Frequency Counter	PLL	TP4	PLL	L1	133.3050 MHz	±500 Hz	
	6) MHz SW: 6					L2	135.3050 MHz	±500 Hz	
	7) MHz SW: 5 MODE SW: ⊖ SEND/REC SW: SEND					L3	133.7050 MHz	±500 Hz	
	8) MHz SW: 7					L4	135.7050 MHz	±500 Hz	
	9) MODE SW: ⊕					L5	136.9050 MHz	±500 Hz	
	10) MHz SW: 4 5 kHz SW: 0 MODE SW: S SEND/REC. REC.	F.COUNTER	PLL	TP4	PLL	VR1	133.3000 MHz	±500 Hz	
	11) MHz SW: 6					VR2	135.3000 MHz	±500 Hz	
	12) MHz SW: 5 MODE SW: ⊖ SEND/REC. SEND					VR3	133.7000 MHz	±500 Hz	
	13) MHz SW: 7					VR4	135.7000 MHz	±500 Hz	
	14) MODE SW: ⊕ Recheck the frequencies in Item (5) through (9). If they are deviated, readjust L1 through L5 necessary					VR5	136.9000 MHz	±500 Hz	
	15) MHz SW: 5 100 kHz SW: 9 10 kHz SW: 9 MODE SW: S SEND/REC. REC.	F. Counter	PLL	TP4				135.2900 MHz ±500 Hz	
	16) MHz SW: 7							137.2900 MHz ±500 Hz	
	17) MHz SW: 5 MODE SW: ⊖ SEND/REC. SEND							134.6900 MHz ±500 Hz	
	18) MHz SW: 7							136.6900 MHz ±500 Hz	
	19) MHz SW: 4 100 kHz SW: 0 10 kHz SW: 0							132.7000 MHz ±500 Hz	

ADJUSTMENTS

Item	Condition	Measuring point			Adjust			Reference	Remarks
		Instrument	Unit	Terminal	Unit	Parts	Method		
PLL (Cont.)	20) MHz SW: 6	Frequency Counter	PLL	TP4				134 7000 MHz $\pm$ 500 Hz	
	21) MHz SW: 5 SEND/REC. REC.							134 3000 MHz $\pm$ 500 Hz	
	22) MHz SW: 7							136 3000 MHz $\pm$ 500 Hz	
	23) MHz SW: 6 SEND/REC. SW: SEND MODE SW: $\oplus$							135 9000 MHz $\pm$ 500 Hz	
	24) MHz SW: 7 SEND/REC. REC.							136 3000 MHz $\pm$ 500 Hz	
	25) MHz SW: 4 SEND/REC. SW: SEND & REC.							133 3000 MHz $\pm$ 500 Hz	
	26) MHz SW: 5 SEND/REC. SEND & REC.							134 3000 MHz $\pm$ 500 Hz	
	27) MHz SW: 4 $\rightarrow$ 5 $\rightarrow$ 6 $\rightarrow$ 7 $\rightarrow$ 4 MODE SW: S SEND/REC. REC.	F. Counter	PLL	TP4				The frequency should become higher than 133 3000 MHz in 1 MHz steps and should return to the original frequency at the "4" position.	
	28) 100 kHz SW: 0 $\rightarrow$ 1 $\rightarrow$ 9 $\rightarrow$ 0							The frequency should become higher than 133 3000 MHz in 100 kHz steps and should return to the original frequency at the "0" position.	
	29) 10 kHz SW: 0 $\rightarrow$ 1 $\rightarrow$ 9 $\rightarrow$ 0							The frequency should become higher than 133 3000 MHz in 10 kHz steps and should return to the original frequency at the "0" position.	
	30) MHz SW: 6 SEND/REC. SW: SEND	RF VTVM	PLL	TP4	PLL	L15	MAX		
3. Wax seal all coil adjustment	1) L1. L2. L3. L4. L5. L13								

ADJUSTMENTS

2. TX Adjustments (See Fig. 2a-d on page 28, 29 for Set-up)

Item	Condition	Measuring point			Adjust			Reference	Remarks
		Instrument	Unit	Terminal	Unit	Parts	Method		
1 Initial control setting	1) POWER SW: ON HI/LOW SW: HI MR SW: OFF MODE SW: S MHz SW: 4 100 kHz SW: 0 10 kHz SW: 0 5 kHz SW: 0 SUBTONE SW: OFF REMOTE SW: OFF SEND/REC: SEND TC 1: Centered TC 2: Centered VR8: Counter clockwise (CCW)								Key only during actual adjustment period.
2 10.7 MHz		RF VTVM	TX RX	TP1	TX RX	L5, L6	MAX	0.4 V	
		F Counter	TX RX	TP1	TX RX	TC1	10.7000 MHz	±50 Hz	
3 VCT	1) MHz SW: 4 → 5 → 6 → 7	DC VTVM	TX RX	TP3				Check voltage goes up step by step	Confirm
4 B P F DRIVE	1) MHz SW: 6 100 kHz SW: 9 10 kHz SW: 9	RF VTVM	TX RX	gate 1 of Q6	TX RX	L9, L10, L11, VR3	MAX Repeat procedure two or three times.	1.2V (R.M.S.)	Adjust for peak.
	2) MHz SW: 7 100 kHz SW: 9 10 kHz SW: 9		TX RX	TP2	TX RX	L12, L13	MAX Repeat procedure two or three times.		
	3) MHz SW: 4 100 kHz SW: 0 10 kHz SW: 0		TX RX	RFI	TX RX	L13	MAX		
5 RF POWER	1) MHz SW: 4 100 kHz SW: 0 10 kHz SW: 0 POWER SW: ON	DC A M	Rear panel Ant. Term.		TX RX	L13	MAX		
	2) MHz SW: 6 100 kHz SW: 0 10 kHz SW: 0	POWER M DC A M			TX RX	TC2, L21	Adjust TC2, L21 for Max.	Less than 60A More than 25W	If RF output is less than 25W, adjust L21 spacing and TC2 for best efficiency at rated output.
	3) Same as above	POWER M DC A M			TX RX	L101	Adjust L101 to increase to inductance.	Less than 6A	
	4) MHz SW: 4	POWER M DC A M						More than 25W Less than 6A	Confirm
	5) MHz SW: 7 100 kHz SW: 9 10 kHz SW: 9	POWER M DC A M						More than 25W Less than 6A	Confirm
6 RF METER	1) MHz SW: 6 100 kHz SW: 0 10 kHz SW: 0 TX RX unit VR6: Centered	RF METER	front panel		TX RX	VR6	Meter indicates "8".		
7. LOW POWER	1) HI/LOW SW: LOW	POWER M			TX RX	VR4	5.0W	Check that the meter lamp changes from yellow to green in low power	
	2) MHz SW: 4	POWER M						3~7W	
	3) MHz SW: 7 100 kHz SW: 9 10 kHz SW: 9	POWER M	rear panel ANT. Term.					3~7W	Confirm



ADJUSTMENTS

Item	Condition	Measuring point			Adjust			Reference	Remarks
		Instrument	Unit	Terminal	Unit	Parts	Method		
8. RF Output at 11.5V DC input	1) DC Terminal: 11.5 V	POWER METER	rear panel ANT. Term.						Confirm
	2) MHz SW: 6 10 kHz SW: 0 100 kHz SW: 0							Check power output	
	3) MHz SW: 4							More than 15W	
	4) HI/LOW SW: HI								
	5) MHz SW: 6								
	6) MHz SW: 7 100 kHz SW: 9 10 kHz SW: 9								
9. Frequency check	1) DC input: 13.8V 2) MHz SW: 6 100 kHz SW: 0 10 kHz SW: 0	F. Counter			TX.RX	TC1	146.000 MHz	± 200 Hz	
10. Protection	1) Connect the Power Meter to the ANTENNA	DC VTVM	TX.RX	TP4	TX.RX	VR5	MIN (Null) (146.00 MHz)		
	2) Disconnect the Power meter and lead from the ANTENNA TX.RX unit. VR8: VR8: Full counter-clockwise Antenna shorted to ground	DC A.M			TX.RX	VR8	3.0A (144.00 MHz)		In antenna shorted to ground, adjust to relay still turning point.
	3) MHz SW: 4						Approx 3.0A	Confirm	
	4) MHz SW: 7 100 kHz SW: 9 10 kHz SW: 9						Approx 3.0A	Confirm	
	5) Connect the power meter to the ANTENNA	POWER.M	rear panel	ANT. TERM				RF output to spec.	Confirm
11. Deviation	1) MHz SW: 6 100 kHz SW: 0 10 kHz SW: 0 AG OUTPUT: 30 mV/ 1 kHz	Linear Detector			TX.RX	VR2	5.0 kHz DEV.		
	2) AG OUTPUT: 3 mV/ 1 kHz	Linear Detector			TX.RX	VR1	3.5 kHz DEV.		
12. SUBTONE	1) MIC Terminal: OPEN SEND/REC. SEND AG OUTPUT: 300 mV/ 1 kHz SUBTONE SW: ON	Linear Detector		SUB GND > AG TB DC VTVM				1) Check that output waveform from the Linear Detector 2) Confirm that TV Terminal Voltage is approx. 10V	AG output applied to SUB and GND terminal.
13. Abnormal Oscillation	1) Same as above	Linear Detector						Vary the supply voltage from 11.5 to 16 V for each item to check for abnormal oscillation or operation	
	2) HI/LOW SW: LOW								
	3) MHz SW: 4								
	4) HI/LOW SW: HI								
	5) MHz SW: 7 100 kHz SW: 9 10 kHz SW: 9								
	6) HI/LOW SW: LOW								
14. Shift & Memory Shift	1) MHz SW: 5 100 kHz SW: 0 10 kHz SW: 0 5 kHz SW: 0 HI/LOW SW: HI 13.8V DC MODE SW: ⊖ SEND/REC. SW: SEND MR SW: OFF	F. Counter	rear panel	ANT. TERM.				144.400 MHz	Confirm
	2) MODE SW: ⊕							145.000 MHz	Confirm
	3) MHz SW: 7 MODE SW: ⊖							146.400 MHz	Confirm
	4) MODE SW: ⊕							147.600 MHz	Confirm
	5) MODE SW: S M SW (NON-LOCK): ON								

ADJUSTMENTS

Item	Condition	Measuring point			Adjust			Reference	Remarks
		Instrument	Unit	Terminal	Unit	Parts	Method		
Shift and memory shift (cont.)	6) MHz SW: 4 MODE SW: M (green)	F. Counter	rear panel	ANT. TERM.				147.000 MHz Check that LED's indicate "7.000"	Confirm
	7) MODE SW: S							144.000 MHz	Confirm
	8) MR SW: ON							147.000 MHz Check that LED's indicate "7.000"	Confirm
15. Wax seal all coil adjustment	1) L10, L11, L12, L13								

3. RX Adjustment (See Fig. 3a-b on page 29 for Set-up)


Item	Condition	Measuring point			Adjust			Reference	Remarks
		instruments	Unit	Terminal	Unit	Parts	Method		
1. Initial control SETTING	1) POWER SW: ON HI/LOW SW: LOW MR SW: OFF MODE SW: S MHz SW: 5 100 kHz SW: 9 10 kHz SW: 5 5 kHz SW: 0 SUBTONE SW: OFF REMOTE SW: ON SEND/REC. REC. SQUELCH VR: MIN EXT. SP terminal: AF VTVM, 8Ω Oscilloscope								
2. Helical block CAUTION: Do not attempt adjustment without a Sweep Generator	1) ANT terminal: SWEEP GEN. Oscilloscope VERT GAIN: MAX	Oscilloscope (Detector)	TX RX	TP5	TX RX	L29,30 L31 L32 (a,b,c) L33	Adjust for a maximum gain and for a waveform as shown at right. Adjust L29 and L30 for a maximum waveform. Adjust L31, L32 (a,b,c) and L33 for proper bandwidth and optimum waveform	 Readjust L29 and L30 if the waveform is distorted as shown below. 	Repeat
3. IF GAIN	1) REMOTE SW: OFF ANT: SSG (DEV.: 5 kHz MOD.: 1 kHz) SSG OUTPUT: Approx. 10 dB (2μV) AF GAIN: 0.63V/8Ω	AF VTVM					Adjust SSG for correct frequency and optimum waveform.		
	2) SSG OUTPUT: 5 ~ 10 dB	S METER			TX RX	L34,35 L37	MAX. Repeat procedure two or three times.		
4. S METER	1) SSG OUTPUT: 30 dB	S METER			TX RX	VR7	Set scale 30μV	30 dB ± 4 dB	
5. Discriminator	1) SSG OUTPUT: 0 dB (0.5μV)	AF VTVM			TX RX	L22	MAX		

ADJUSTMENTS/PC BOARD ALIGNMENT AND TEST POINT LOCATIONS

Item	Condition	Measuring point			Adjust			Reference	Remarks
		Instrument	Unit	Terminal	Unit	Parts	Method		
6 S/N (Signal to Noise ratio) (-6 dB 0.25μV)	1) SSG OUTPUT: -6 dB	AF VTVM					With a signal received at each channel. Set AF GAIN for 0.63V/8Ω. Next turn the SSG and measure the noise.	S/N 20 dB	Confirm
	2) MHz SW: 4 100 kHz SW: 0 10 kHz SW: 0							S/N 20 dB	Confirm
	3) MHz SW: 7 100 kHz SW: 9 10 kHz SW: 9							S/N 40 dB	Confirm
	4) MHz SW: 5 10 kHz SW: 9 SSG OUTPUT: 40 dB (50μV) (DEV.: 3.5 kHz)								
7 SQUELCH	1) SSG OUTPUT: OFF SQUELCH: threshold on	Oscillo- scope or speaker						Critical point 9.00 ~ 11.00	Confirm
	2) SSG OUTPUT: -6dB (0.25μV) SQUELCH: threshold on							When signal is applied, squelch should open.	Confirm


PC BOARD ALIGNMENT AND TEST POINT LOCATIONS

PLL Unit (X50-1580-10)

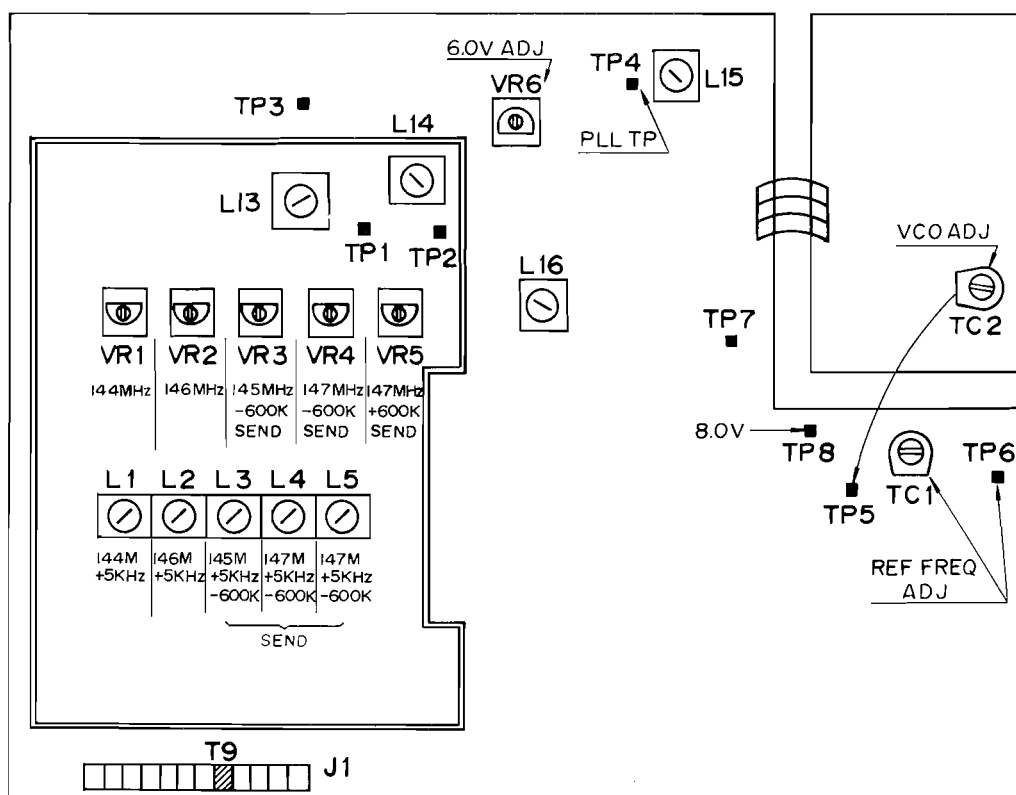

PC BOARD ALIGNMENT AND
TEST POINT LOCATIONS


TX, RX Unit (X44-1320-10)

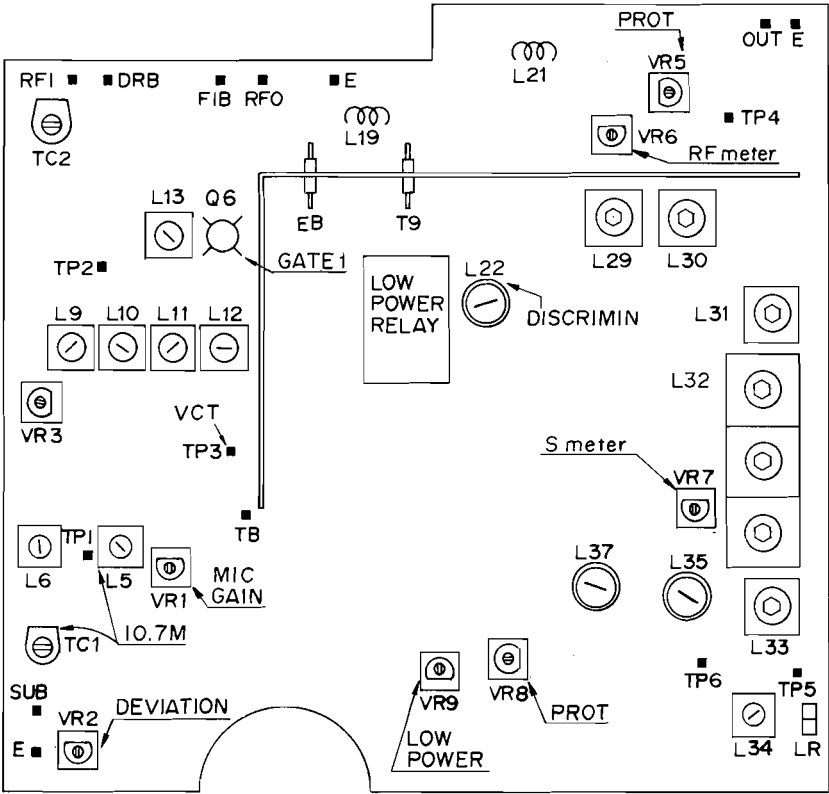

TEST AND ALIGNMENT SET-UPS

1. PLL Adjustments Fig. 1.

Fig. 2a. TX adjustments

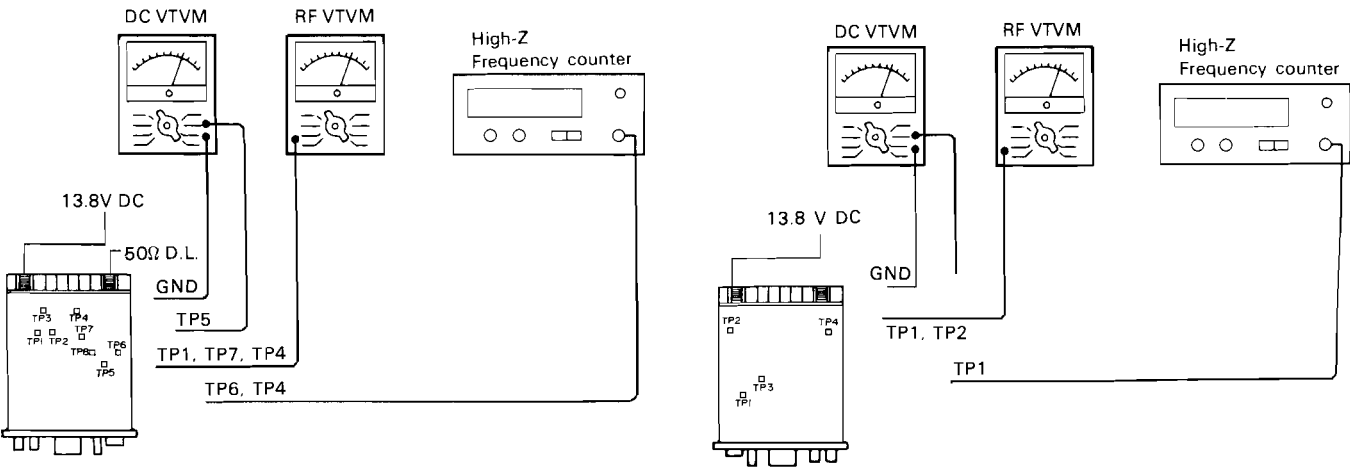

TEST AND ALIGNMENT SET-UPS

Fig. 2b. TX adjustments

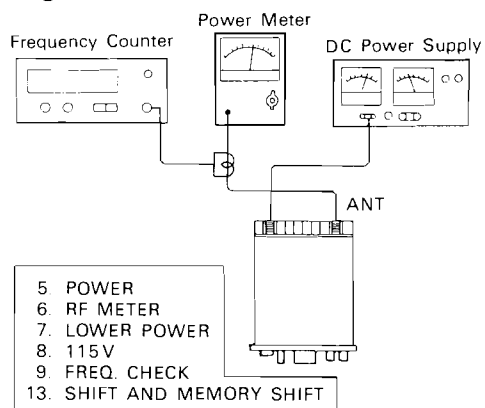


Fig. 2c. TX adjustments

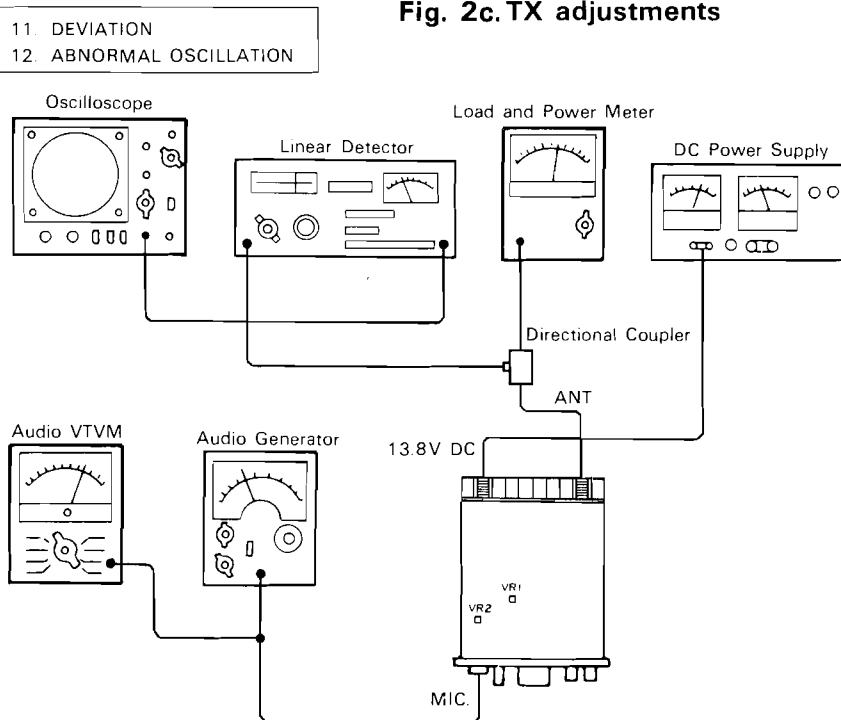


Fig. 2d. TX adjustments

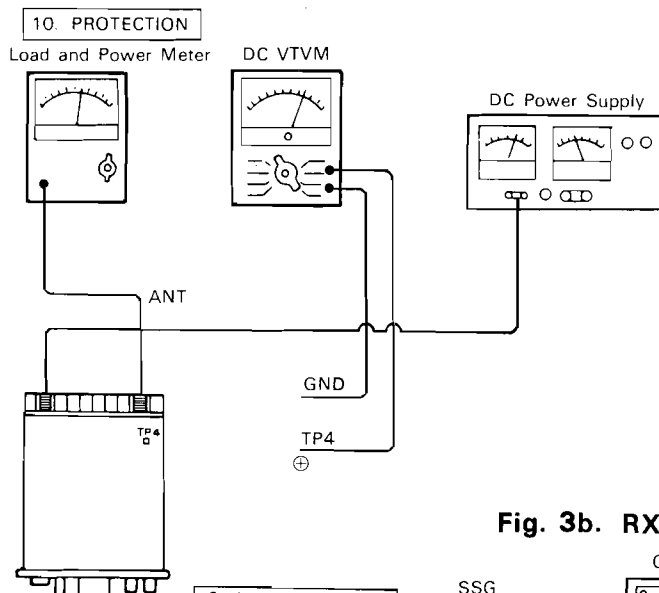


Fig. 3a. RX adjustments




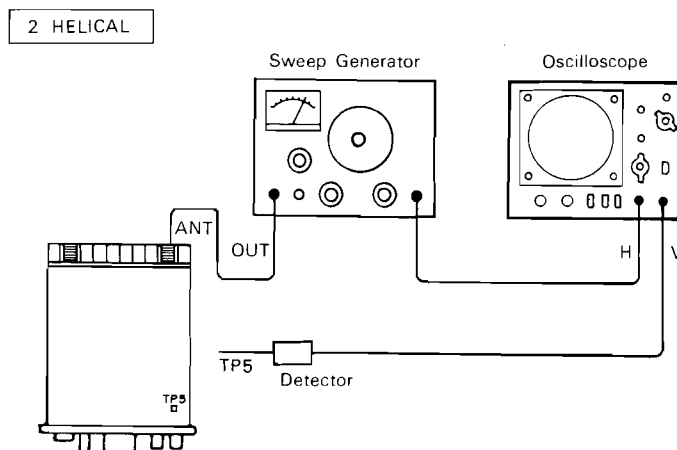


Fig. 3b. RX adjustments

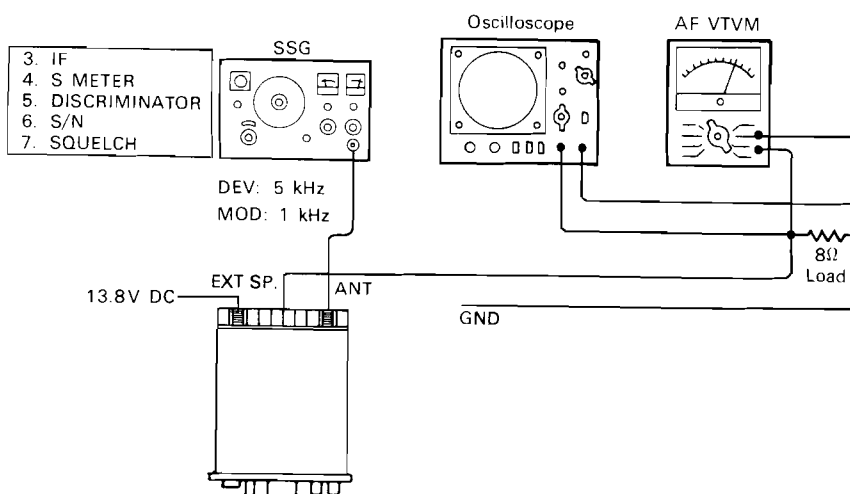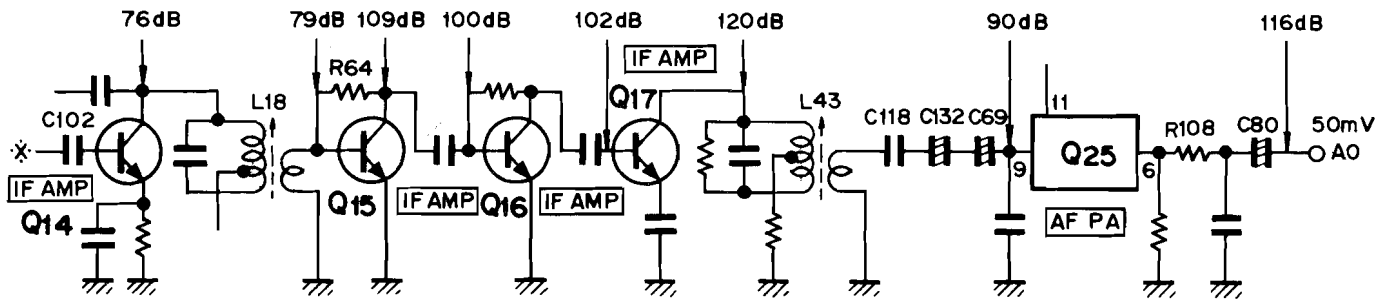


LEVEL DIAGRAM

RECEIVER SECTION

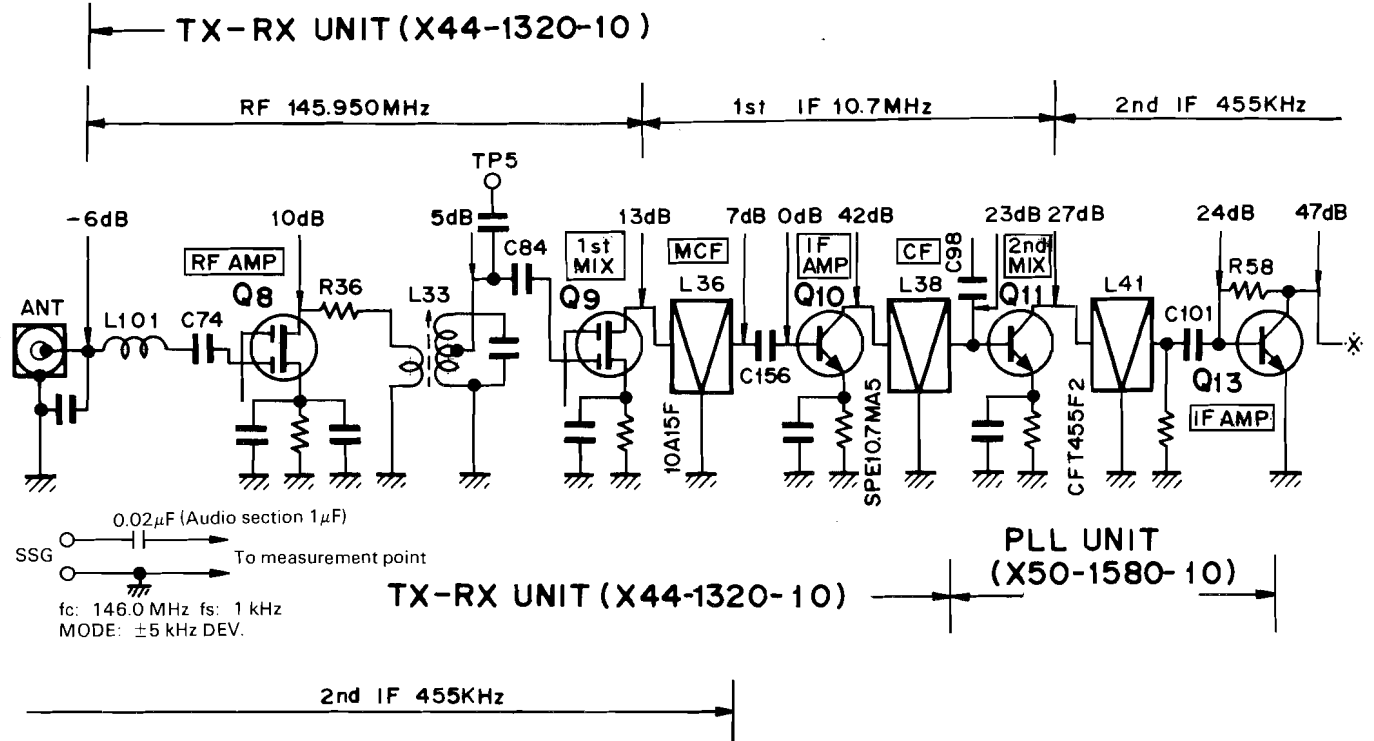

TRANSMITTER SECTION

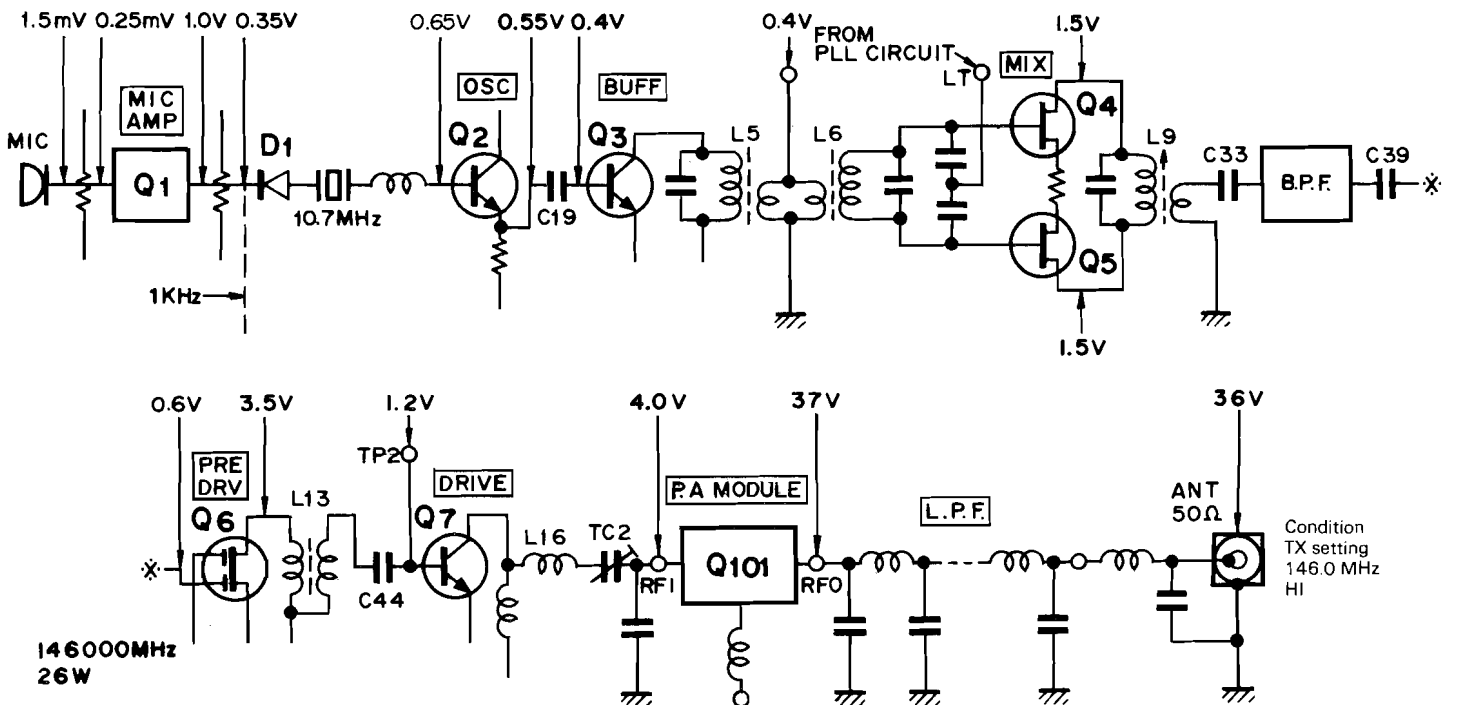

μPC78L08A

25K30A(GR)

25K19(GR)

ZSA1015(Y)
25C1345(E)
25C1815(Y)
25C1923(O)
25C1959(Y)
25C2240(GR)

AN315

SM5111A

V_{DD}
 F_{IN}
 Q_{IN}
 Q_{OUT}
 D_{OUT}
 AMP_{IN}
 AMP_{OUT}
 F_{IN2}
 F_{IN1}
 F_{IN} IN
 L_D
 V_{SS}

TC4081P

25A496(Y)
25C496(Y)



25C458(B)
25C460(B)

25D235(Y)


25C2538

M57



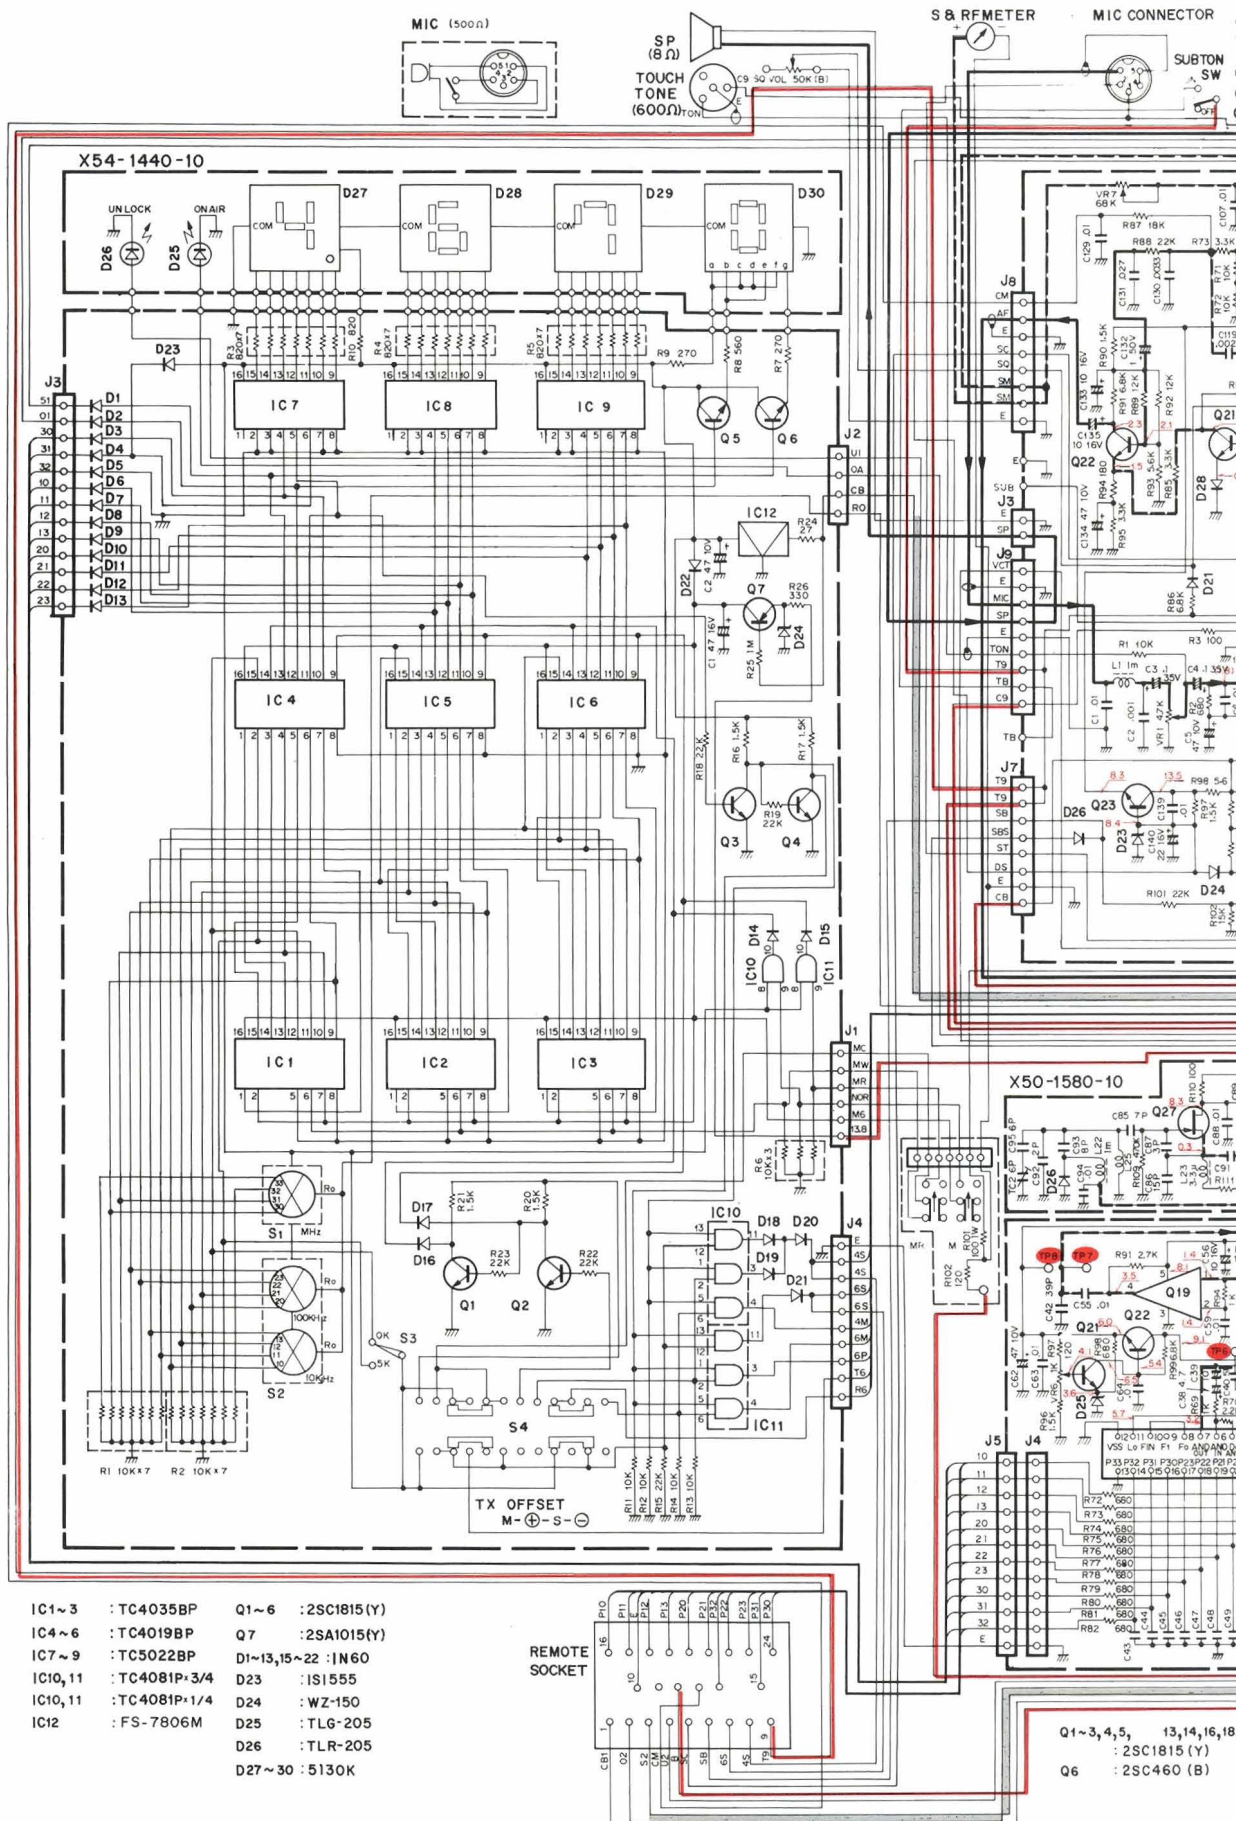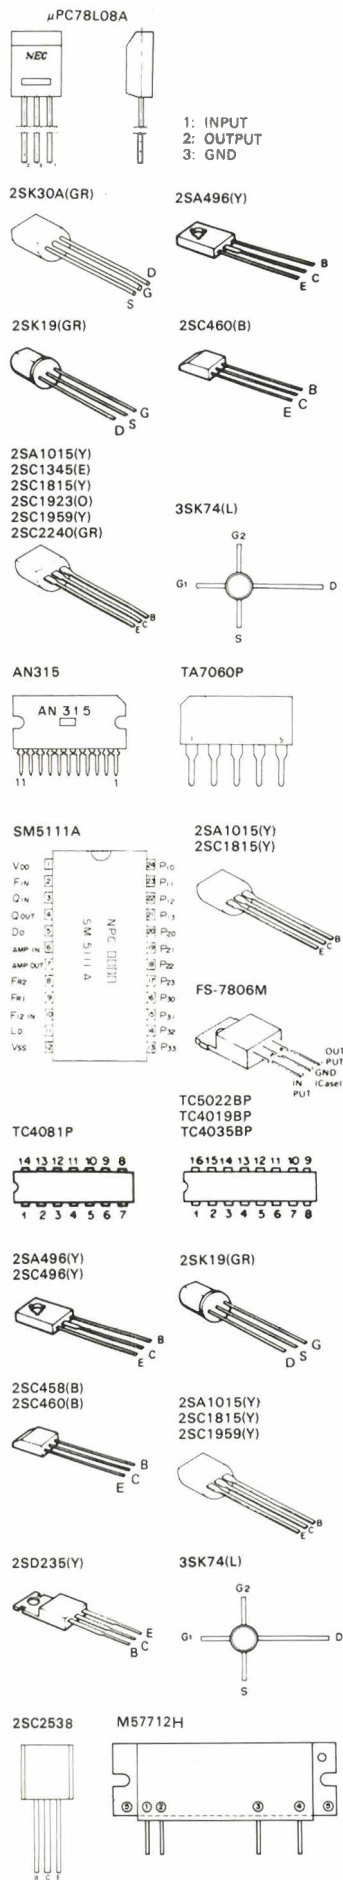

Transmitter section, 50Ω Load HI position
() : Transmitter voltage

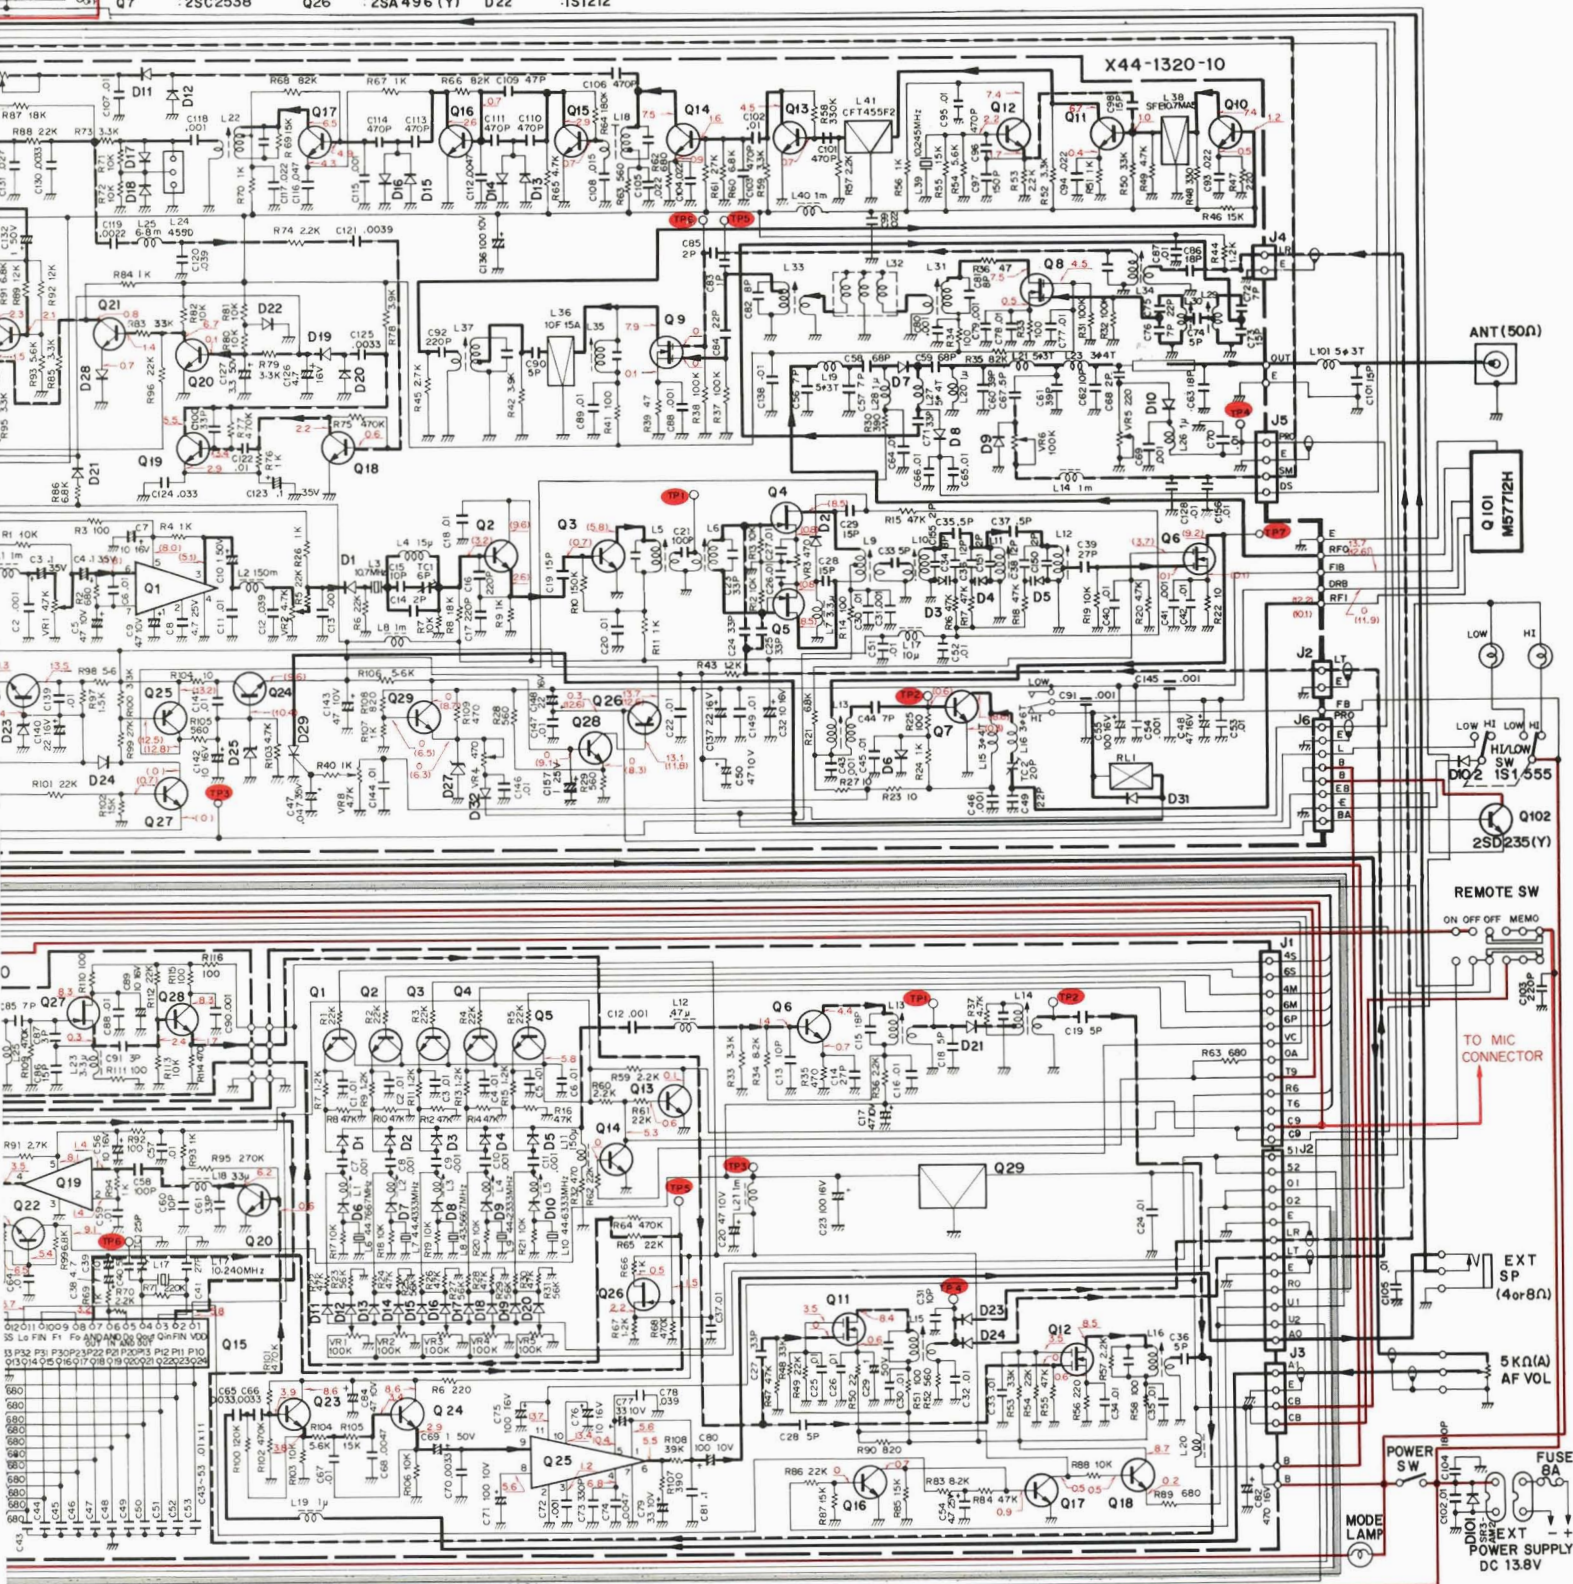


< Switch Logic >

Control Unit (X54-1440-10)

J-3		5 kHz SW.		BCD CODE									
		OFF	ON										
51	◦	I	O										F. order
01	◦	O	I	144MHz	145MHz	146MHz	147MHz						
30	◦			O	I	O	I						
31	◦			I	I	I	I						
32	◦			O	O	O	O						
CH. Knob (A)(B)	→	0	1	2	3	4	5	6	7	8	9	↓	10 kHz
10	◦	O	I	O	I	O	I	O	I	O	I	1	
11	◦	O	O	I	I	O	O	I	I	O	O	2	
12	◦	O	O	O	O	I	I	I	I	O	O	4	
13	◦	O	O	O	O	O	O	O	O	I	I	8	
20	◦	O	I	O	I	O	I	O	I	O	I	1	100 kHz
21	◦	O	O	I	I	O	O	I	I	O	O	2	
22	◦	O	O	O	O	O	O	O	O	I	I	8	
23	◦	O	O	O	O	I	I	I	I	O	O	4	

J-4			144MHz	145MHz	146MHz	147MHz
4S	○					
	○	4 simplex	I	I	O	O
4S	○					
	○	4 simplex	I	I	O	O
6S	○					
	○	6 simplex	O	O	I	I
6S	○					
	○	6 simplex	O	O	I	I
4M	○					
	○	6 minus "TX"	I	I	O	O
6M	○					
	○	6 minus "TX"	O	O	I	I
6P	○					
	○	6 plus "TX"	O	O	I	I
T6	○					
	○					
R6	○					
	○					



To J-1
X50-1580-10
info to switch
on Q1-Q5 and
Q6 Local OSC

< TERMINALS >

51	5 kHz	R6	+ 6 VDC in RX	T9	Transmit + 9 VDC
01	Signal	UI	Unlock indicate	TB	+ 9 VDC when tone switch on
		OA	On Air	SB	
30	Megahertz sig	RO	Rotary Switch Active	SBS	
31		CB	Common B+	ST	PTT Line
32		MC	Memory cancel	DS	Diode switch for antenna
		NR	Normal	LR	Receive HET OSC
10	100 kHz	MR	Memory Read	LT	Transmit HET OSC
11		MW	Memory Write	PRO	Protection signal
12		M6	+ 6 VDC memory on	RFO	RF out
13		13.8	Raw B+	FIB	Final B+
				DRB	Drive B+
20	10 kHz	CM	Center meter	RFI	RF in
21		AF	Audio Freq.	L	Low Power
22		SC	Squelch Control + 6 VDC when	BA	Base Q102
23			SQ active	FB	Emitter of Q102
4S	144 simplex	SQ	Squelch VR		
6S	146 simplex	SM	S meter signal		
4m	144 offset ⊖	E	Earth		
6m	146 offset ⊖	S	Speaker		
		VCT	Vari cap tune		
6P	146 offset ⊕	MIC	MIC		
T6	+ 6 VDC in TX	TON	Tone signal in		

1. MINIM

2. KEEP
READY


3. DISCH
DEVICE

4. HANDI
WARNING

CAUTION

(From: FI


STATIC AWARENESS




Some semiconductors and custom IC's can be damaged by electrostatic discharge during handling. This notice explains how you can minimize the chances of destroying such devices by:

1. Knowing that there is a problem.
2. Learning the guidelines for handling them.
3. Using the procedures, and packaging and bench techniques that are recommended.


The following practice should be followed to minimize damage to S.S. devices.




1. MINIMIZE HANDLING




5. USE ANTI-STATIC CONTAINERS FOR HANDLING AND TRANSPORT




2. KEEP PARTS IN ORIGINAL CONTAINERS UNTIL READY FOR USE.




6. DO NOT SLIDE S.S. DEVICES OVER ANY SURFACE.



3. DISCHARGE PERSONAL STATIC BEFORE HANDLING DEVICE




7. AVOID PLASTIC, VINYL AND STYRAFORM IN WORK AREA.



4. HANDLE S.S. DEVICES BY THE BODY

WARNING: INDICATES USAGE OF MOS DEVICE(S) WHICH MAY BE DAMAGED BY STATIC DISCHARGE USE SPECIAL HANDLING.

CAUTION: SUBJECT TO DAMAGE BY STATIC ELECTRICITY.



8. HANDLE S.S. DEVICES ONLY AT A STATIC-FREE WORK STATION.
9. ONLY GROUNDED TIP SOLDER-SUCKERS SHOULD BE USED.
10. ONLY GROUNDED TIP SOLDERING IRON SHOULD BE USED.

(From: Fluke model 1219A freq. counter manual.)

SPECIFICATIONS [K, W type]

GENERAL

Semiconductors:	Transistors: 48 (K), 47 (W) FETs: 9 ICs: 17 Diodes: 88 (K), 77 (W)
Frequency Range:	144.00 to 147.995 MHz (K), 144.00 to 145.995 MHz (W)
Frequency Synthesizer:	Digital control of phase locked VCO
Synthesizer Stability:	Better than ± 750 Hz at 25°C
Mode:	FM
No. of Channels:	800 (K), 400 (W)
Operating Temperature:	-20 to +50°C
Power Voltage:	11.5V DC to 16.0V DC (13.8V DC standard)
Grounding:	Negative grounding
Antenna Impedance:	50 Ω
DC Current:	Less than 0.5A in receive with no input signal Less than 6A in HI transmit (at 13.8V DC)
Dimensions:	161 mm (6-5/16") wide 61 mm (2-3/8") high 230 mm (9-1/16") deep
Weight:	1.75 kg (3.85 lbs) Approx.

TRANSMITTER SECTION

RF Output Power:	High: 25 watts (min.) Low: 5 watts approx. (adjustable to 25 watts)
Modulation:	Variable reactance direct shift
Max. Frequency Deviation:	± 5 kHz
Spurious Radiation:	Less than -60 dB
Touch Tone Input Impedance:	600 Ω
Microphone:	Dynamic microphone with PTT switch, 500 Ω

RECEIVER SECTION

Circuitry:	Double superheterodyne
Intermediate Frequency:	1st: IF 10.7 MHz 2nd: IF 455 kHz
Sensitivity:	Less than 0.4 μ V for 20 dB quieting (Less than 1 μ V for 30 dB S/N)
Squelch Sensitivity:	Less than 0.25 μ V
Pass Band Width:	Better than 12 kHz at 6 dB down
Selectivity (2 Signal):	Better than 76 dB at 30 kHz (K), 70 dB at 25 kHz (W) of adjacent channel
Image Rejection:	Better than 70 dB
Spurious Interference:	Better than 60 dB
Intermodulation:	Better than 66 dB (K), 60 dB (W)
Audio Output:	More than 1.5 watts across 8 Ω load (10% distortion)

NOTE: The circuit and ratings may change without notice due to developments in technology.

A product of
TRIO-KENWOOD CORPORATION
6-17, 3-chome, Aobadai, Meguro-ku, Tokyo 153, Japan

TRIO-KENWOOD COMMUNICATIONS, INC.
1111 West Walnut Street, Compton, California 90220, U.S.A.
TRIO-KENWOOD COMMUNICATIONS, GmbH
D-6374 Steinbach TS, Industriestrasse 8A, West Germany
TRIO-KENWOOD (AUSTRALIA) PTY. LTD.
30 Whiting Street, Artarmon, Sydney N.S.W. Australia 2064