

aiwa



NSX-AV540

COMPACT DISC STEREO SYSTEM

- BASIC TAPE MECHANISM: 6ZM-3 PR2NM
- BASIC CD MECHANISM: 4ZG-1 Z3RDSHM
- TYPE: EZ,K

SIMPLE MANUAL

- Replace this Service Manual with "Revision Publishing" when it is issued.

S/M Code No. 09-994-401-9T2

MANUAL
SERVICE

ELECTRICAL PARTS LIST-1/7

NOTE: The characters in the suffix column indicate the part usage.

KSTE		XX		C	
EZSTE		XX		D	
EZSTM		XX		E	
		KANRI			
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX	
C	503	87-010-112-040	CAP, E 100-16	AB..E	
C	508	87-010-178-080	CHIP, CAP 1000P	AB..E	
C	502	87-010-186-080	CAP, CHIP 4700P	AB..E	
C	506	87-010-320-080	CHIP, CAP 68P	AB..E	
C	504	87-010-405-040	CAP, E 10-50	AB..E	
C	509	87-010-544-040	CAP, E 0.1-50 SME	AB..E	
C	507	87-010-544-040	CAP, E 0.1-50 SME	AB..E	
C	505	87-010-546-040	CAP, E 0.33-50	AB..E	
C	510	87-018-127-080	CAP, CER 470P-50V	AB..E	
J	501	87-A60-651-010	JACK, 3.5MMONO	AB..E	
Q	504	87-A30-075-080	C-TR, 2SA1235F	AB..E	
Q	505	87-A30-076-080	C-TR, 2SC3052F	AB..E	
Q	501	87-A30-087-080	C-FET, 2SK2158	AB..E	
VR	501	87-NB7-602-010	VR, RTRY 10KAX1 1 V	AB..E	
C	1	87-010-387-080	CAP, E 470-25 SME	AB..CDE	
C	1	87-010-388-080	CAP, ELECT 1000-25V SME	AB..E	
C	9	87-010-917-090	CAP, E 3300-50 M SMG	ABCDE	
C	8	87-010-917-090	CAP, E 3300-50 M SMG	ABCDE	
C	9	87-010-918-090	CAP, E 4700-50		
C	8	87-010-918-090	CAP, E 4700-50		
C	2	87-018-209-010	CAP, 0.1	ABCDE	
C	2	87-A11-148-080	CAP, TC U 0.1-50 Z F	AB..CDE	
C	4	87-A11-148-080	CAP, TC U 0.1-50 Z F	AB..CDE	
C	3	87-A11-148-080	CAP, TC U 0.1-50 Z F	AB..CDE	
C	5	87-A11-148-080	CAP, TC U 0.1-50 Z F	AB..CDE	
C	31	87-010-403-080	CAP, ELECT 3.3-50V	AB..CDE	
CN	1	87-A60-851-010	CONN, 9P V VH	ABCDE	
D	6	87-017-447-010	DIODE, GBU4DL	AB..E	
D	5	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE	
D	2	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE	
D	1	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE	
D	4	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE	
D	3	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE	
D	6	87-A40-548-090	DIODE, D3SBA20	AB..CDE	
D	31	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE	
D	32	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE	
PR	2	87-026-682-080	PROTECTOR, 10A 60V491	AB..CDE	
PR	1	87-026-682-080	PROTECTOR, 10A 60V491	AB..CDE	
PR	2	87-026-691-080	FUSE, 10A 125V 251		
PR	1	87-026-691-080	FUSE, 10A 125V 251		
PR	3	87-A91-276-080	FUSE, 125MA 125V F 251		
PT	2	8Z-NF8-661-010	PT, SUB ZNF-8(U)	A	
PT	2	8Z-NF8-662-010	PT, SUB ZNF-8(E)	AB..CDE	
PT	2	8Z-NF8-663-010	PT, SUB ZNF-8(H)	AB..E	
Q	31	87-026-245-080	TR, DTC114ES	AB..CDE	
Q	32	87-A30-198-080	TR, KTC3199GR	AB..CDE	
RY	2	87-A90-976-010	RELAY, AC12V SDT-S-112LMR	A.CDE	
RY	1	87-A91-281-010	RELAY, AC DC12V OSA-SS-212DM5	AB..E	
S	1	87-A90-165-010	SW, SL 1-2-3 SWS2301		
T	2	87-A60-317-010	TERMINAL, 1P MSC	ABCDE	
T	1	87-A60-317-010	TERMINAL, 1P MSC	ABCDE	
*		88-NF8-205-010	GUIDE, FL	AB..E	
*		8Z-NF8-201-010	GUIDE, OPE	AB..E	
*		8Z-NF8-202-010	GUIDE, FUN	AB..E	
C	201	87-012-156-080	C-CAP, S 220P-50 CH	AB..E	
C	254	87-010-194-080	CAP, CHIP 0.047	AB..E	
C	256	87-015-699-040	CAP, E 10-50 7L	AB..E	
C	259	87-015-699-040	CAP, E 10-50 7L	AB..E	
C	251	87-015-699-040	CAP, E 10-50 7L	AB..E	
C	255	87-A10-586-040	CAP, E 47-35 7L SR	AB..E	
C	255	87-A10-797-040	CAP, E 47-35 M 5L SRM	AB..E	
C	302	87-010-182-080	C-CAP, S 2200P-50 B	AB..E	
C	301	87-010-182-080	C-CAP, S 2200P-50 B	AB..E	
C	314	87-010-194-080	CAP, CHIP 0.047	AB..E	
C	311	87-010-194-080	CAP, CHIP 0.047	AB..E	
C	312	87-010-405-040	CAP, E 10-50	AB..E	
C	324	87-010-194-080	CAP, CHIP 0.047	AB..E	
C	323	87-010-248-040	CAP, E 220-10 SME	AB..E	
C	325	87-010-263-040	CAP, E 100-10	AB..E	
C	322	87-015-694-040	E/CAP 0.47-50	AB..E	
C	323	87-016-459-040	CAP, E 470-10 SMG	AB..E	
C	332	87-010-178-080	CHIP, CAP 1000P		
C	332	87-010-198-080	CAP, CHIP 0.022	AB..E	
C	334	87-010-312-080	C-CAP, S 15P-50 CH	AB..E	
C	335	87-012-140-080	CAP 470P	AB..E	
C	333	87-012-140-080	CAP 470P	AB..E	
C	338	87-012-155-080	C-CAP 180P-50CH	AB..E	
C	339	87-012-156-080	C-CAP, S 220P-50 CH	AB..E	
C	341	87-010-194-080	CAP, CHIP 0.047	AB..E	
C	340	87-010-197-080	CAP, CHIP 0.01 DM	AB..E	
C	351	87-010-382-040	CAP, E 22-25 SME	AB..E	
C	401	87-010-197-080	CAP, CHIP 0.01 DM	AB..E	
C	457	87-010-196-080	CHIP, CAPACITOR, 0.1-25	AB..E	
C	455	87-010-196-080	CHIP, CAPACITOR, 0.1-25	AB..E	

ELECTRICAL PARTS LIST-2/7

C	456	87-012-158-080	C-CAP, S 390P-50 CH	AB..E
C	601	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB..E
C	603	87-010-322-080	C-CAP, S 100P-50 CH	AB..E
C	602	87-010-322-080	C-CAP, S 100P-50 CH	AB..E
C	604	87-010-322-080	C-CAP, S 100P-50 CH	AB..E
C	701	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB..E
CON	102	87-099-015-010	CONN, 13P 6216V	AB..E
CON	101	87-099-720-010	CONN, 30P TYK-B(P)	AB..E
CON	101	88-NF9-658-010	CONN, 30P BLK TYK-B(P)	..E
CON	301	87-099-013-010	CONN, 11P 6216 V	A..E
CON	301	87-099-017-010	CONN, 15P 6216 V	B..E
D	204	87-020-465-080	DIODE, 1SS133 (110MA)	AB..E
D	311	87-A40-509-080	ZENER, MTZJ6.8C	AB..E
D	452	87-017-932-080	ZENER, MTJ6.2B	AB..E
EMI	201	87-008-372-080	FILTER, EMI BL OIRNI	AB..E
EMI	202	87-A50-322-080	C-COIL, S BK2125 LM252	AB..E
FL	401	8Z-NF8-616-010	FL, SVA-11MM22	..E
FL	401	8Z-NH8-603-010	FL, BJ674GNK	AB..E
IC	201	8Z-NF8-602-010	C-IC, UPD780228GF-031-3BA	AB..E
IC	201	8Z-NF8-675-010	C-IC, UPD780228GF-037-3BA	..E
IC	251	87-A20-914-010	IC, SPS-442-1-F	AB..E
IC	251	87-A20-951-010	IC, TSOP1838RF1	..E
IC	451	87-A21-023-040	C-IC, BA3835F	AB..E
IC	601	87-A21-021-040	C-IC, BU2099FV	AB..E
L	331	87-A50-434-010	COIL, CLK 4.19M(TOKO)	AB..E
LED	311	87-A40-317-080	LED, SLR-342VCT31 RED	AB..E
LED	611	87-A40-619-080	LED, SLR-56PT-TE7-W GRN	AB..E
LED	633	87-A40-619-040	LED, SLR-56PT-T31-W GRN	AB..E
LED	634	87-A40-619-040	LED, SLR-56PT-T31-W GRN	AB..E
Q	207	87-A30-087-080	C-FET, 2SK2158	AB..E
Q	251	87-A30-074-080	C-TR, RT1P 141C	AB..E
Q	302	87-A30-067-080	C-TR, 2SA 1298Y	..E
Q	301	87-A30-067-080	C-TR, 2SA 1298Y	..E
Q	301	87-A30-159-080	C-TR, KTA1298Y	AB..E
Q	302	87-A30-159-080	C-TR, KTA1298Y	AB..E
Q	303	87-A30-240-080	TR, CSA1585BC	AB..E
Q	311	87-026-610-080	TR, KTC3198GR	AB..E
Q	312	87-A30-087-080	C-FET, 2SK2158	AB..E
Q	322	87-A30-073-080	C-TR, RT1N 141C	AB..E
Q	323	87-A30-087-080	C-FET, 2SK2158	AB..E
S	434	87-A91-024-080	SW, TACT KSH0611BT	AB..E
SW	252	87-A90-535-010	SW, RTRY EC16B24304	AB..E
SW	253	87-A90-950-010	SW, RTRY EC12E12504 ENCODER	AB..E
C	309	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	302	87-010-318-080	C-CAP, S 47P-50 CH	ABCDE
C	301	87-010-318-080	C-CAP, S 47P-50 CH	ABCDE
C	306	87-012-145-080	CAP, CHIP S 270P CH	ABCDE
C	305	87-012-145-080	CAP, CHIP S 270P CH	ABCDE
C	304	87-012-157-080	C-CAP, S 330P-50 CH	ABCDE
C	303	87-012-157-080	C-CAP, S 330P-50 CH	ABCDE
C	314	87-010-178-080	CHIP CAP 1000P	B..E
C	315	87-010-178-080	CHIP CAP 1000P	B..E
C	316	87-010-178-080	CHIP CAP 1000P	B..E
C	313	87-010-178-080	CHIP CAP 1000P	B..E
C	314	87-010-180-080	C-CER 1500P	A.CDE
C	313	87-010-180-080	C-CER 1500P	A.CDE
C	315	87-010-182-080	C-CAP, S 2200P-50 B	A.CDE
C	316	87-010-182-080	C-CAP, S 2200P-50 B	A.CDE
C	310	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	311	87-010-198-080	CAP, CHIP 0.022	ABCDE
C	312	87-010-198-080	CAP, CHIP 0.022	ABCDE
C	324	87-010-260-080	CAP, ELECT 47-25V	ABCDE
C	325	87-010-370-080	CAP, E 330-6.3 SME	ABCDE
C	327	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	328	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	322	87-016-492-080	C-CAP, S 0.33-16 FZ	ABCDE
C	321	87-016-492-080	C-CAP, S 0.33-16 FZ	ABCDE
C	335	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	336	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	354	87-010-175-080	CAP 560P	ABCDE
C	359	87-010-183-080	C-CAP, S 2700P-50 B	ABCDE
C	358	87-010-183-080	C-CAP, S 2700P-50 B	ABCDE
C	357	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	356	87-010-260-080	CAP, ELECT 47-25V	ABCDE
C	351	87-012-140-080	CAP 470P	ABCDE
C	352	87-012-140-080	CAP 470P	ABCDE
C	355	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE
C	360	87-010-183-080	C-CAP, S 2700P-50 B	ABCDE
C	363	87-A10-772-080	CAP, M 5600P-50 J	ABCDE
C	379	87-010-382-080	CAP, ELECT 22-25V	ABCDE
C	374	87-016-083-080	C-CAP, S 0.15-16 RK	ABCDE
C	373	87-016-083-080	C-CAP, S 0.15-16 RK	ABCDE
C	380	87-010-382-080	CAP, ELECT 22-25V	ABCDE
C	388	87-012-156-080	C-CAP, S 220P-50 CH	ABCDE
C	392	87-010-319-080	C-CAP, S 56P-50 CH	ABCDE
C	393	87-010-319-080	C-CAP, S 56P-50 CH	ABCDE
C	391	87-010-319-080	C-CAP, S 56P-50 CH	ABCDE
C	394	87-010-319-080	C-CAP, S 56P-50 CH	ABCDE
CN	301	87-099-827-010	CONN, 3P S2M-3W	ABCDE
CN	351	87-099-832-010	CONN, 8P S2M-8W	ABCDE
D	352	87-A40-269-080	C-DIODE, MC2836	ABCDE
IC	303	87-A20-783-040	C-IC, BA7762AFS	ABCDE

ELECTRICAL PARTS LIST-3/7

L	302	87-A50-049-010	COIL, TRAP 85K(COI)	ABCDE
L	301	87-A50-049-010	COIL, TRAP 85K(COI)	ABCDE
L	351	87-007-342-010	COIL, OSC 85K BIAS	ABCDE
Q	358	87-026-610-080	TR, KTC3198GR	ABCDE
Q	357	87-026-610-080	TR, KTC3198GR	ABCDE
Q	359	87-026-610-080	TR, KTC3198GR	ABCDE
Q	353	87-A30-087-080	C-FET, 2SK2158	ABCDE
Q	354	87-A30-087-080	C-FET, 2SK2158	ABCDE
Q	351	87-A30-087-080	C-FET, 2SK2158	ABCDE
Q	355	87-A30-105-080	C-TR, RT1P 441C	ABCDE
SFR	351	87-A90-433-080	SFR, 50K H NVZ6TLTA	ABCDE
SFR	352	87-A90-433-080	SFR, 50K H NVZ6TLTA	ABCDE
C	458	87-010-196-080	CHIP CAPACITOR, 0.1-25	A
C	457	87-010-196-080	CHIP CAPACITOR, 0.1-25	A
C	452	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	451	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	459	87-A11-004-080	CAP, M 0.022-50 J DE	A
C	467	87-010-805-080	CAP, S 1-16	ABCDE
C	465	87-A11-004-080	CAP, M 0.022-50 J DE	A
C	460	87-A11-004-080	CAP, M 0.022-50 J DE	A
C	466	87-A11-004-080	CAP, M 0.022-50 J DE	A
IC	451	87-A21-031-040	C-IC, BU4551BF	A
C	9	87-010-917-090	CAP, E 3300-50 M SMG	ABCDE
C	6	87-012-368-080	C-CAP, S 0.1-50 F	ABCDE
C	4	87-012-368-080	C-CAP, S 0.1-50 F	ABCDE
C	5	87-012-368-080	C-CAP, S 0.1-50 F	ABCDE
C	3	87-012-368-080	C-CAP, S 0.1-50 F	ABCDE
C	2	87-012-369-080	C-CAP, S 0.047-50F	ABCDE
C	1	87-012-369-080	C-CAP, S 0.047-50F	ABCDE
C	10	87-010-917-090	CAP, E 3300-50 M SMG	ABCDE
C	29	87-010-247-080	CAP, ELECT 100-50V	ABCDE
C	28	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	22	87-010-385-080	CAP, ELECT 220-25V	AB
C	21	87-010-385-080	CAP, ELECT 220-25V	AB
C	21	87-010-408-080	CAP, ELECT 47-50V	.CDE
C	24	87-010-408-080	CAP, ELECT 47-50V	.CDE
C	22	87-010-408-080	CAP, ELECT 47-50V	.CDE
C	23	87-010-408-080	CAP, ELECT 47-50V	.CDE
C	25	87-010-430-080	CAP, ELECT 100-63	ABCDE
C	27	87-012-140-080	CAP 470P	ABCDE
C	30	87-010-112-080	CAP, ELECT 100-16V	ABCDE
C	31	87-010-235-080	CAP, E 470-16 SME	ABCDE
C	33	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	34	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	61	87-010-260-080	CAP, ELECT 47-25V	ABCDE
C	62	87-010-403-080	CAP, ELECT 3.3-50V	ABCDE
C	92	87-010-248-080	CAP, ELECT 220-10V	A
C	93	87-010-380-080	CAP, ELECT 47-16V	ABCDE
C	91	87-010-401-080	CAP, ELECT 1-50V	ABCDE
CN	1	87-A60-739-010	CONN, 13P JL-BT	A
CN	92	87-A60-109-010	CONN, 2P V S2M-2W	ABCDE
CNA	1	82-NF8-669-010	CONN ASSY, 9P VH	ABCDE
D	1	87-017-654-060	DIODE, GBU6J	AB
D	9	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	8	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	5	87-070-274-080	DIODE, 1N4003 SEM	ABCDE
D	4	87-070-274-080	DIODE, 1N4003 SEM	ABCDE
D	3	87-070-274-080	DIODE, 1N4003 SEM	ABCDE
D	6	87-070-274-080	DIODE, 1N4003 SEM	ABCDE
D	7	87-A40-383-080	ZENER, MTZJ30A	ABCDE
D	1	87-A40-547-090	DIODE, D5SBA20	.CDE
D	10	87-A40-345-080	ZENER, MTZJ10C	ABCDE
D	64	87-070-274-080	DIODE, 1N4003 SEM	ABCDE
D	62	87-A40-269-080	C-DIODE, MC2836	ABCDE
D	61	87-A40-270-080	C-DIODE, MC2838	ABCDE
D	91	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	92	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
JW	16	87-008-372-080	FILTER, EMI BL OIRNI	.BCDE
Q	2	87-026-609-080	TR, KTA1266GR	ABCDE
Q	1	87-026-609-080	TR, KTA1266GR	ABCDE
Q	5	87-026-610-080	TR, KTC3198GR	ABCDE
Q	9	87-A30-196-080	TR, 2SC4115SRS	ABCDE
Q	3	89-213-702-010	TR, 2SB1370 (1.8W)	.BCDE
Q	64	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	66	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	81	87-A30-074-080	C-TR, RT1P 141C	.BCDE
Q	82	87-A30-107-080	C-TR, CMBT5401	
Q	91	87-A30-076-080	C-TR, 2SC3052F	ABCDE
Q	92	87-A30-240-080	TR, CSA1585BC	
R	20	87-A00-261-080	RES, M/F 0.56-1W J	A
WH	1	87-A90-510-010	HLDR, WIRE 2.5-9P	ABCDE
		87-067-703-010	TAPPING SCREW, BVT2+3-10	.BCDE
C	102	87-010-178-080	CHIP CAP 1000P	ABCDE
C	101	87-010-178-080	CHIP CAP 1000P	ABCDE
C	102	87-010-182-080	C-CAP, S 2200P-50 B	.BCDE
C	101	87-010-182-080	C-CAP, S 2200P-50 B	.BCDE
C	105	87-010-186-080	CAP, CHIP 4700P	.BCDE
C	106	87-010-186-080	CAP, CHIP 4700P	.BCDE
C	109	87-010-322-080	C-CAP, S 100P-50 CH	.BCDE
C	107	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	108	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	112	87-010-260-080	CAP, ELECT 47-25V	.BCDE

ELECTRICAL PARTS LIST-4/7

C	111	87-010-260-080	CAP, ELECT 47-25V	.BCDE
C	110	87-010-322-080	C-CAP, S 100P-50 CH	.BCDE
C	117	87-016-247-080	C-CAP, 0.1-50 F	.BCDE
C	118	87-016-247-080	C-CAP, 0.1-50 F	.BCDE
C	113	87-A10-812-080	C-CAP, S 220P-200 J CH	.BCDE
C	114	87-A10-812-080	C-CAP, S 220P-200 J CH	.BCDE
C	123	87-010-176-080	C-CAP, S 680P-50 SL	ABCDE
C	124	87-010-176-080	C-CAP, S 680P-50 SL	ABCDE
C	129	87-010-191-080	C-CAP, S 0.015-50 F	ABCDE
C	130	87-010-191-080	C-CAP, S 0.015-50 F	ABCDE
C	133	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	134	87-010-382-080	CAP, ELECT 22-25V	.CDE
C	136	87-012-368-080	C-CAP, S 0.1-50 F	ABCDE
D	109	87-020-465-080	DIODE, 1SS133 (110MA)	.BCDE
D	108	87-A40-488-080	DIODE, 1SS244	.BCDE
D	107	87-A40-488-080	DIODE, 1SS244	.BCDE
D	110	87-020-465-080	DIODE, 1SS133 (110MA)	.BCDE
D	111	87-A40-270-080	C-DIODE, MC2838	.BCDE
J	203	87-A60-238-010	TERMINAL, SP 4P (MSC)	ABCDE
J	201	87-A60-483-010	JACK, DIA6.3 BLK ST W/S KM	ABCDE
L	102	87-003-383-010	COIL, 1UH-S	ABCDE
L	101	87-003-383-010	COIL, 1UH-S	ABCDE
Q	103	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	105	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	106	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	104	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	108	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	109	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	107	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	101	87-A30-257-080	C-TR, 2SD1306E	ABCDE
Q	102	87-A30-257-080	C-TR, 2SD1306E	ABCDE
Q	110	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	116	87-A30-097-010	TR, FN 1016	.BCDE
Q	115	87-A30-097-010	TR, FN 1016	.BCDE
Q	118	87-A30-098-010	TR, FP 1016	.BCDE
Q	117	87-A30-098-010	TR, FP 1016	.BCDE
Q	112	87-A30-190-080	TR, CC5551	.BCDE
Q	111	87-A30-190-080	TR, CC5551	.BCDE
Q	126	87-A30-075-080	C-TR, 2SA1235F	ABCDE
Q	129	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	128	87-A30-076-080	C-TR, 2SC3052F	.BCDE
Q	124	87-A30-106-070	C-TR, CMBT5551	.BCDE
Q	123	87-A30-106-070	C-TR, CMBT5551	.BCDE
Q	130	87-A30-076-080	C-TR, 2SC3052F	.BCDE
R	131	87-A30-076-080	C-TR, 2SC3052F	.BCDE
R	129	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
R	130	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
R	131	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
R	132	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
R	145	87-A00-439-050	RES, 180-1/2W J RP	A.CDE
R	146	87-A00-439-050	RES, 180-1/2W J RP	A.CDE
R	143	87-A00-439-050	RES, 180-1/2W J RP	A.CDE
R	144	87-A00-439-050	RES, 180-1/2W J RP	A.CDE
R	143	87-A00-440-050	RES, 220-1/2W J RP	.B
R	146	87-A00-440-050	RES, 220-1/2W J RP	.B
R	144	87-A00-440-050	RES, 220-1/2W J RP	.B
R	145	87-A00-440-050	RES, 220-1/2W J RP	.B
R	165	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
R	166	87-A00-257-080	RES, M/F 0.15-1W J	.BCDE
TH	101	87-A91-042-080	C-THMS, 100K 55001	.BCDE
TH	102	87-A91-042-080	C-THMS, 100K 55001	.BCDE
C	204	87-010-177-080	C-CAP, S 820P-50 SL	A
C	203	87-010-177-080	C-CAP, S 820P-50 SL	A
C	209	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	211	87-010-182-080	C-CAP, S 2200P-50 B	.CDE
C	212	87-010-182-080	C-CAP, S 2200P-50 B	.CDE
C	217	87-010-260-080	CAP, ELECT 47-25V	.BCDE
C	218	87-010-260-080	CAP, ELECT 47-25V	.BCDE
C	213	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	210	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	214	87-010-404-080	CAP, ELECT 4.7-50V	.BCDE
C	213	87-010-408-080	CAP, ELECT 47-50V	.B
C	214	87-010-408-080	CAP, ELECT 47-50V	.B
C	219	87-A10-946-080	C-CAP, S 220P-100 J CH	.BCDE
C	227	87-010-186-080	CAP, CHIP 4700P	.BCDE
C	228	87-010-186-080	CAP, CHIP 4700P	.BCDE
C	225	87-010-544-080	CAP, ELECT 0.1-50V	.B
C	226	87-010-544-080	CAP, ELECT 0.1-50V	.B
C	225	87-012-368-080	C-CAP, S 0.1-50 F	.CDE
C	226	87-012-368-080	C-CAP, S 0.1-50 F	.CDE
C	220	87-A10-946-080	C-CAP, S 220P-100 J CH	.BCDE
C	237	87-010-190-080	S CHIP F 0.01	ABCDE
C	232	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	238	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE
C	230	87-010-993-080	C-CAP, S 0.056-25 B	ABCDE
C	252	87-010-183-080	C-CAP, S 2700P-50 B	ABCDE
C	251	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE
C	899	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	898	87-010-993-080	C-CAP, S 0.056-25 B	ABCDE
C	900	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
CN	201	87-A60-739-010	CONN, 13P JL-BT	A
D	208	87-A40-488-080	DIODE, 1SS244	.BCDE

ELECTRICAL PARTS LIST-5/7

D	207	87-A40-488-080	DIODE,1SS244	.BCDE
D	213	87-020-465-080	DIODE,1SS133 (110MA)	.BCDE
D	211	87-A40-270-080	C-DIODE MC2838	.BCDE
J	205	87-A60-751-010	JACK,PIN 2P R/W BLUE	A
J	204	87-A60-752-010	JACK,PIN 4P R/W,O/B	.BCDE
J	206	87-A60-872-010	JACK,PIN 3P W/R/O	A
L	202	87-003-383-010	COIL,1UH-S	ABCDE
L	801	87-003-383-010	COIL,1UH-S	ABCDE
Q	206	87-A30-075-080	C-TR,2SA1235F	.BCDE
Q	205	87-A30-075-080	C-TR,2SA1235F	.BCDE
Q	203	87-A30-075-080	C-TR,2SA1235F	.BCDE
Q	204	87-A30-075-080	C-TR,2SA1235F	.BCDE
Q	209	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	207	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	208	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	210	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	219	87-A30-119-040	C-TR,2SC3906K R	.BCDE
Q	212	87-A30-190-080	TR,CC5551	.BCDE
Q	211	87-A30-190-080	TR,CC5551	.BCDE
Q	218	87-A30-255-010	TR,2SB1342	.BCDE
Q	217	87-A30-255-010	TR,2SB1342	.BCDE
Q	216	87-A30-256-010	TR,2SD1933	.BCDE
Q	215	87-A30-256-010	TR,2SD1933	.BCDE
Q	225	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	226	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	224	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	227	87-A30-076-080	C-TR,2SC3052F	.BCDE
Q	223	87-A30-105-080	C-TR,RT1P 441C	ABCDE
Q	220	87-A30-119-040	C-TR,2SC3906K R	.BCDE
Q	230	87-A30-257-080	C-TR,2SD1306E	ABCDE
R	234	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
R	231	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
R	232	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
R	233	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
R	266	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
R	265	87-A00-258-080	RES,M/F 0.22-1W J	.BCDE
TH	201	87-A91-042-080	C-THMS,100K 55001	
TH	202	87-A91-042-080	C-THMS,100K 55001	
C	802	87-010-176-080	C-CAP,S 680P-50 SL	ABCDE
C	801	87-010-176-080	C-CAP,S 680P-50 SL	ABCDE
C	808	87-010-401-080	CAP,ELECT 1-50V	ABCDE
C	807	87-010-401-080	CAP,ELECT 1-50V	ABCDE
C	805	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABCDE
C	803	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABCDE
C	804	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABCDE
C	806	87-010-958-080	CHIP -CAP,S 0.01-25BJ	ABCDE
C	810	87-010-112-080	CAP,ELECT 100-16V	ABCDE
C	817	87-010-221-080	CAP,ELECT 470-10V	ABCDE
C	813	87-010-400-080	CAP,ELECT 0.47-50V	ABCDE
C	812	87-010-493-080	CAP,E 0.47-50 GAS	ABCDE
C	811	87-010-493-080	CAP,E 0.47-50 GAS	ABCDE
C	814	87-010-494-080	CAP,ELECT GAS 1/50	ABCDE
C	819	87-A10-800-080	C-CAP,S 6800P-16 J B CM	ABCDE
C	818	87-A10-891-080	CAP,E 4.7-25 SME(K)	ABCDE
C	824	87-010-374-080	CAP,ELECT 47-10V	ABCDE
C	820	87-010-374-080	CAP,ELECT 47-10V	ABCDE
C	829	87-010-545-080	CAP,ELECT 0.22-50V	ABCDE
C	822	87-A10-804-080	C-CAP,S 0.1-25 J B	ABCDE
C	839	87-010-805-080	CAP,S 1-16	ABCDE
C	831	87-010-971-080	C-CAP,S 4700P-50 B J	ABCDE
C	837	87-010-971-080	C-CAP,S 4700P-50 B J	ABCDE
C	830	87-012-142-080	CAP,S 0.33-16	ABCDE
C	838	87-012-349-080	C-CAP,S 1000P-50 CH	ABCDE
C	832	87-012-349-080	C-CAP,S 1000P-50 CH	ABCDE
C	835	87-A11-182-080	C-CAP,S 0.27-16 J B	ABCDE
C	834	87-A11-182-080	C-CAP,S 0.27-16 J B	ABCDE
C	836	87-A11-183-080	C-CAP,S 0.12-16 J B	ABCDE
C	833	87-A11-183-080	C-CAP,S 0.12-16 J B	ABCDE
C	840	87-010-401-080	CAP,ELECT 1-50V	ABCDE
C	846	87-010-404-080	CAP,ELECT 4.7-50V	ABCDE
C	847	87-010-404-080	CAP,ELECT 4.7-50V	ABCDE
C	848	87-012-393-080	C-CAP,S 0.22-16 R K	ABCDE
C	849	87-012-393-080	C-CAP,S 0.22-16 R K	ABCDE
C	845	87-012-393-080	C-CAP,S 0.22-16 R K	ABCDE
C	844	87-012-393-080	C-CAP,S 0.22-16 R K	ABCDE
C	843	87-A10-229-080	C-CAP,S 0.68-10 K W5	ABCDE
C	841	87-A10-799-080	C-CAP,S 5600P-16 J B CM	ABCDE
C	842	87-A10-802-080	C-CAP,S 0.047-16 J B CM	ABCDE
C	850	87-016-081-080	C-CAP,S 0.1-16 RK	ABCDE
C	857	87-016-081-080	C-CAP,S 0.1-16 RK	ABCDE
C	853	87-016-081-080	C-CAP,S 0.1-16 RK	ABCDE
C	854	87-016-081-080	C-CAP,S 0.1-16 RK	ABCDE
C	856	87-A10-801-080	C-CAP,S 0.022-16 J B CM	ABCDE
C	855	87-A10-801-080	C-CAP,S 0.022-16 J B CM	ABCDE
C	851	87-A10-802-080	C-CAP,S 0.047-16 J B CM	ABCDE
C	852	87-A10-802-080	C-CAP,S 0.047-16 J B CM	ABCDE
C	899	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDE
C	890	87-010-993-080	C-CAP,S 0.056-25 B	.BCDE
D	802	87-070-136-080	ZENER,MTZJ5.1B	ABCDE
D	801	87-A40-442-080	ZENER,MTZJ9.1A	ABCDE
IC	801	87-A20-853-010	C-IC,M62463FP	ABCDE
L	801	87-003-383-010	COIL,1UH-S	.BCDE

ELECTRICAL PARTS LIST-6/7

R	807	87-022-214-080	C-RES	S100K-1/10WF	ABCDE
C	602	87-010-180-080	C-CER	1500P	ABCDE
C	601	87-010-180-080	C-CER	1500P	ABCDE
C	606	87-010-318-080	C-CAP,S	47P-50 CH	ABCDE
C	605	87-010-318-080	C-CAP,S	47P-50 CH	ABCDE
C	619	87-010-185-080	C-CAP,S	3900P-50 B	ABCDE
C	613	87-016-081-080	C-CAP,S	0.1-16 RK	ABCDE
C	614	87-016-081-080	C-CAP,S	0.1-16 RK	ABCDE
C	617	87-A11-008-080	CAP,M	0.056-50 J DE	ABCDE
C	618	87-A11-008-080	CAP,M	0.056-50 J DE	ABCDE
C	615	87-A11-011-080	CAP,M	0.12-50 J DE	ABCDE
C	616	87-A11-011-080	CAP,M	0.12-50 J DE	ABCDE
C	620	87-010-185-080	C-CAP,S	3900P-50 B	ABCDE
C	627	87-010-196-080	CHIP	CAPACITOR,0.1-25	ABCDE
C	621	87-010-401-080	CAP,	ELECT 1-50V	ABCDE
C	622	87-010-401-080	CAP,	ELECT 1-50V	ABCDE
C	629	87-010-405-080	CAP,	ELECT 10-50V	ABCDE
C	623	87-A10-773-080	CAP,M	0.10-50 J	ABCDE
C	624	87-A10-773-080	CAP,M	0.10-50 J	ABCDE
C	637	87-010-183-080	C-CAP,S	2700P-50 B	ABCDE
C	636	87-010-194-080	CAP,	CHIP 0.047	ABCDE
C	634	87-010-196-080	CHIP	CAPACITOR,0.1-25	ABCDE
C	635	87-010-196-080	CHIP	CAPACITOR,0.1-25	ABCDE
C	630	87-010-213-080	C-CAP,S	0.015-50 B	ABCDE
C	633	87-010-263-080	CAP,	ELECT 100-10V	ABCDE
C	632	87-010-263-080	CAP,	ELECT 100-10V	ABCDE
C	638	87-010-314-080	C-CAP,S	22P-50V	ABCDE
C	639	87-010-314-080	C-CAP,S	22P-50V	ABCDE
C	631	87-010-992-080	C-CAP,S	0.047-25 B	ABCDE
C	641	87-010-196-080	CHIP	CAPACITOR,0.1-25	ABCDE
C	678	87-010-196-080	CHIP	CAPACITOR,0.1-25	ABCDE
C	677	87-010-196-080	CHIP	CAPACITOR,0.1-25	ABCDE
C	680	87-A11-144-080	CAP,TC	U 0.1-50 K B	..CDE
CN	604	87-099-570-010	CONN,	13P TUC-P13P-B1	AB...
CN	601	87-099-719-010	CONN,	30P TYK-B(X)	AB...
CN	602	87-A60-131-010	CONN,	6P V FE	ABCDE
CN	605	87-A60-189-010	CONN,	16P V TUC-P16P-B1	...DE
CN	601	88-NF9-657-010	CONN,	30P H BLK TYK-B(X)	..CDE
D	601	87-A40-002-080	ZENER,	MTZJ5.1C	ABCDE
D	603	87-A40-234-080	ZENER,	MTZJ5.6A	..CDE
D	602	87-A40-438-080	ZENER,	MTZJ4.7A	ABCDE
IC	601	87-A21-011-040	C-IC,	M62445FP-600D	ABCDE
J	602	87-A60-398-010	JACK,	PIN 2P R/W HSP-242V24	ABCDE
JW	604	87-020-465-080	DIODE,	1SS133 (110MA)	A....
Q	601	87-026-609-080	TR,	KTA1266GR	ABCDE
Q	604	87-A30-142-040	C-TR,	DTA123EKA	..CDE
Q	601	89-212-370-080	TR,	2SB1237 TV2	...CDE
C	735	87-010-178-080	CHIP	CAP 1000P	..CDE
C	736	87-010-193-080	CHIP	CAPACITOR,0.033	AB...
C	733	87-010-196-080	CHIP	CAPACITOR,0.1-25	ABCDE
C	732	87-010-196-080	CHIP	CAPACITOR,0.1-25	ABCDE
C	731	87-010-560-080	CAP,E	10-50 GAS	ABCDE
C	734	87-012-157-080	C-CAP,S	330P-50 CH	ABCDE
C	835	87-A11-182-080	C-CAP,S	0.27-16 J B	A....
C	834	87-A11-182-080	C-CAP,S	0.27-16 J B	A....
C	836	87-A11-183-080	C-CAP,S	0.12-16 J B	A....
C	833	87-A11-183-080	C-CAP,S	0.12-16 J B	A....
JR	703	87-012-368-080	C-CAP,S	0.1-50 F	..CDE
Q	732	87-A30-075-080	C-TR,	2SA1235F	ABCDE
Q	731	87-A30-076-080	C-TR,	2SC3052F	ABCDE
C	900	87-010-196-080	CHIP	CAPACITOR,0.1-25	..BCDE
C	101	87-010-405-080	CAP,	ELECT 10-50V	A....
C	102	87-010-405-080	CAP,	ELECT 10-50V	A....
C	199	87-010-197-080	CAP,	CHIP 0.01 DM	A....
C	203	87-010-405-080	CAP,	ELECT 10-50V	A....
C	204	87-010-405-080	CAP,	ELECT 10-50V	A....
C	208	87-010-408-080	CAP,	ELECT 47-50V	A....
C	207	87-010-408-080	CAP,	ELECT 47-50V	A....
C	211	87-010-260-080	CAP,	ELECT 47-25V	A....
C	212	87-010-260-080	CAP,	ELECT 47-25V	A....
C	219	87-012-368-080	C-CAP,S	0.1-50 F	A....
C	219	87-016-247-080	C-CAP,	0.1-50 F	A....
C	214	87-A10-812-080	C-CAP,S	220P-200 J CH	A....
C	213	87-A10-812-080	C-CAP,S	220P-200 J CH	A....
C	214	87-A10-946-080	C-CAP,S	220P-100 J CH	A....
C	213	87-A10-946-080	C-CAP,S	220P-100 J CH	A....
C	221	87-010-178-080	CHIP	CAP 1000P	A....
C	222	87-010-178-080	CHIP	CAP 1000P	A....
C	220	87-012-368-080	C-CAP,S	0.1-50 F	A....
C	220	87-016-247-080	C-CAP,	0.1-50 F	A....
C	306	87-010-181-080	CAP,CHIP	S 1800P	..
C	305	87-010-181-080	CAP,CHIP	S 1800P	..
C	309	87-010-322-080	C-CAP,S	100P-50 CH	A....
C	308	87-010-403-080	CAP,	ELECT 3.3-50V	A....
C	307	87-010-403-080	CAP,	ELECT 3.3-50V	A....
C	303	87-010-404-080	CAP,	ELECT 4.7-50V	A....
C	304	87-010-404-080	CAP,	ELECT 4.7-50V	A....
C	314	87-010-260-080	CAP,	ELECT 47-25V	A....
C	313	87-010-260-080	CAP,	ELECT 47-25V	A....
C	310	87-010-322-080	C-CAP,S	100P-50 CH	A....
C	312	87-A10-946-080	C-CAP,S	220P-100 J CH	A....
C	311	87-A10-946-080	C-CAP,S	220P-100 J CH	A....

ELECTRICAL PARTS LIST-7/7

C	322	87-010-186-080	CAP,CHIP 4700P	A.....
C	321	87-010-186-080	CAP,CHIP 4700P	A.....
C	407	87-010-186-080	CAP,CHIP 4700P	A.....
C	404	87-010-260-080	CAP, ELECT 47-25V	A.....
C	401	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	403	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	400	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	408	87-010-544-080	CAP, ELECT 0.1-50V	A.....
C	405	87-A10-946-080	C-CAP,S 220P-100 J CH	A.....
C	501	87-010-183-080	C-CAP,S 2700P-50 B	A.....
C	509	87-010-186-080	CAP,CHIP 4700P	A.....
C	506	87-010-260-080	CAP, ELECT 47-25V	A.....
C	503	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	505	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	502	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	507	87-A10-946-080	C-CAP,S 220P-100 J CH	A.....
C	510	87-010-544-080	CAP, ELECT 0.1-50V	A.....
C	603	87-010-190-080	S CHIP F 0.01	A.....
C	601	87-010-993-080	C-CAP,S 0.056-25 B	A.....
CN	101	87-A60-727-010	CONN,13P JL-R	A.....
CN	102	87-A60-727-010	CONN,13P JL-R	A.....
CN	502	87-099-043-010	CONN,2P EH	A.....
CN	501	87-099-043-010	CONN,2P EH	A.....
D	197	87-A40-270-080	C-DIODE,MC2838	A.....
D	208	87-A40-488-080	DIODE,1SS244	A.....
D	207	87-A40-488-080	DIODE,1SS244	A.....
D	212	87-A40-270-080	C-DIODE,MC2838	A.....
D	302	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	306	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	305	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	301	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	309	87-A40-488-080	DIODE,1SS244	A.....
D	312	87-A40-270-080	C-DIODE,MC2838	A.....
D	310	87-A40-488-080	DIODE,1SS244	A.....
D	401	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	402	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	404	87-A40-488-080	DIODE,1SS244	A.....
D	412	87-A40-270-080	C-DIODE,MC2838	A.....
D	501	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	502	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	504	87-A40-488-080	DIODE,1SS244	A.....
L	601	87-003-383-010	COIL,1UH-S	A.....
Q	101	89-213-702-010	TR,2SB1370 (1.8W)	A.....
Q	102	89-213-702-010	TR,2SB1370 (1.8W)	A.....
Q	209	87-A30-190-080	TR,CC5551	A.....
Q	210	87-A30-190-080	TR,CC5551	A.....
Q	216	87-A30-214-010	TR,2SB1344	A.....
Q	215	87-A30-214-010	TR,2SB1344	A.....
Q	218	87-A30-215-010	TR,2SD2025	A.....
Q	217	87-A30-215-010	TR,2SD2025	A.....
Q	222	87-A30-106-070	C-TR,CMBT5551	A.....
Q	221	87-A30-106-070	C-TR,CMBT5551	A.....
Q	317	87-A30-106-070	C-TR,CMBT5551	A.....
Q	318	87-A30-106-070	C-TR,CMBT5551	A.....
Q	311	87-A30-190-080	TR,CC5551	A.....
Q	312	87-A30-190-080	TR,CC5551	A.....
Q	314	87-A30-255-010	TR,2SB1342	A.....
Q	313	87-A30-255-010	TR,2SB1342	A.....
Q	315	87-A30-256-010	TR,2SD1933	A.....
Q	316	87-A30-256-010	TR,2SD1933	A.....
Q	403	87-A30-075-080	C-TR,2SA1235F	A.....
Q	407	87-A30-190-080	TR,CC5551	A.....
Q	409	87-A30-255-010	TR,2SB1342	A.....
Q	408	87-A30-256-010	TR,2SD1933	A.....
Q	410	87-A30-119-040	C-TR,2SC3906K R	A.....
Q	504	87-A30-075-080	C-TR,2SA1235F	A.....
Q	502	87-A30-075-080	C-TR,2SA1235F	A.....
Q	506	87-A30-076-080	C-TR,2SC3052F	A.....
Q	503	87-A30-076-080	C-TR,2SC3052F	A.....
Q	507	87-A30-076-080	C-TR,2SC3052F	A.....
Q	505	87-A30-076-080	C-TR,2SC3052F	A.....
Q	508	87-A30-190-080	TR,CC5551	A.....
Q	509	87-A30-256-010	TR,2SD1933	A.....
Q	501	87-A30-257-080	C-TR,2SD1306E	A.....
Q	511	87-A30-119-040	C-TR,2SC3906K R	A.....
Q	510	87-A30-255-010	TR,2SB1342	A.....
R	225	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	227	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	228	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	226	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	239	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	242	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	521	87-A00-258-080	RES,M/F 0.22-1W J	A.....
R	520	87-A00-258-080	RES,M/F 0.22-1W J	A.....

ELECTRICAL MAIN PARTS LIST - 1/3 (TUNER: ZZA-1)

NOTE: The characters in the suffix column indicate the part usage.

ZRDS	REF.NO	PARTS NO.	XX KANRI NO.	DESCRIPTION	SUFFIX
C	701	87-010-381-080	0E	CAP, ELECT 330-16V	ABCDEFGH
C	702	87-010-404-080	0E	CAP, ELECT 4.7-50V	ABCDEFGH
C	711	87-010-260-080	0E	CAP, ELECT 47-25V	ABCD.FGH
C	711	87-010-553-080	0E	CAP, E 47-16	E
C	712	87-010-831-080	0E	C-CAP, U, 0.1-16F	ABCDEFGH
C	718	87-012-179-080	0E	C-CAP, U 20P-50 CH	..BCD
C	727	87-010-196-080	0E	CHIP CAPACITOR, 0.1-25	ABCDEFGH
C	728	87-010-248-080	0E	CAP, ELECT 220-10V	ABCDEFGH
C	721	87-012-176-080	0E	CAP 15P	ABCDEFGH
C	722	87-012-176-080	0E	CAP 15P	ABCDEFGH
C	720	87-012-195-080	0E	C-CAP, U 100P-50CH	ABCDEFGH
C	729	87-012-274-080	0E	CHIP CAP, U 1000P-50B	ABCDEFGH
C	725	87-018-131-080	0E	CAP, CER 1000P-50V	FG
C	805	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH
C	806	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH
CN	701	87-A60-650-010	1A	CONN, 16P H GRY TUC-P16X-C1	F
CN	701	87-A60-700-010	0E	CONN, 13P H GRY TUC-P13X-C1	ABCDE.GH
D	721	87-017-149-080	0E	ZENER, HZS6A2L	..BCDEFGH
D	722	87-020-465-080	0E	DIODE, 1SS133 (110MA)	FG
D	721	87-A40-234-080	0E	ZENER, MTZJ5.6A	A
IC	721	87-070-127-110	1C	IC, LC72131 D	ABCDEFGH
Q	713	87-A30-072-080	0E	C-TR, RT1P 144C	E
Q	712	87-A30-072-080	0E	C-TR, RT1P 144C	E
Q	711	87-A30-196-080	0E	TR, 2SC4115SRS	A
Q	711	87-A30-234-080	0E	TR, CSC4115BC	..BCDEFGH
X	721	87-A70-061-010	1A	VIB, XTAL 4.500MHZ CSA-309	ABCDEFGH
C	872	87-010-400-080	0E	CAP, ELECT 0.47-50V	AB.....H
C	873	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB.....H
C	877	87-012-278-080	0E	C-CAP, U 2200P-50 B	AB.....H
C	878	87-012-278-080	0E	C-CAP, U 2200P-50 B	AB.....H
C	889	87-010-248-080	0E	CAP, ELECT 220-10V	AB.....H
C	884	87-010-260-080	0E	CAP, ELECT 47-25V	AB.....H
C	883	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB.....H
C	885	87-010-545-080	0E	CAP, ELECT 0.22-50V	A.....H
C	886	87-010-545-080	0E	CAP, ELECT 0.22-50V	A.....H
C	888	87-010-787-080	0E	CAP, U 0.022-25	AB.....H
C	881	87-012-141-080	0E	CHIP-CAPACITOR, 0.22-16F	AB.....H
C	882	87-012-172-080	0E	CAPACITOR CHIP, U 10P CH	AB.....H
C	887	87-012-286-080	0E	CAP, U 0.01-25	AB.....H
C	886	87-016-460-080	0E	C-CAP, S 0.22-16 B	..B
C	885	87-016-460-080	0E	C-CAP, S 0.22-16 B	..B
IC	871	87-070-060-040	1F	IC, TA2040AF	AB.....H
X	873	87-026-226-080	0E	CHIP-TR, DTA143EK	AB.....H
X	891	87-030-394-010	1B	VIB, CER CSA3.6MGF228	AB.....H
C	705	87-010-213-080	0E	C-CAP, S 0.015-50 B	
C	706	87-010-213-080	0E	C-CAP, S 0.015-50 B	
C	705	87-A10-592-080	0E	C-CAP, S 0.015-50 J B	..BCDE
C	706	87-A10-592-080	0E	C-CAP, S 0.015-50 J B	..BCDE
C	737	87-010-180-080	0E	C-CER 1500P	
C	734	87-010-180-080	0E	C-CER 1500P	
C	733	87-010-180-080	0E	C-CER 1500P	
C	738	87-010-180-080	0E	C-CER 1500P	
C	735	87-010-213-080	0E	C-CAP, S 0.015-50 B	
C	736	87-010-213-080	0E	C-CAP, S 0.015-50 B	
C	736	87-010-987-080	0E	C-CAP, S 1500P-50 CH	..BCDE
C	734	87-010-987-080	0E	C-CAP, S 1500P-50 CH	..BCDE
C	733	87-010-987-080	0E	C-CAP, S 1500P-50 CH	..BCDE
C	735	87-010-987-080	0E	C-CAP, S 1500P-50 CH	..BCDE
C	733	87-012-280-080	0E	CAP, U 3300P-50	FG
C	734	87-012-280-080	0E	CAP, U 3300P-50	FG
C	737	87-A10-592-080	0E	C-CAP, S 0.015-50 J B	..BCDE
C	738	87-A10-592-080	0E	C-CAP, S 0.015-50 J B	..BCDE
C	752	87-010-220-080	0E	C-CAP, S 0.018-25 B	..B..E
C	751	87-010-220-080	0E	C-CAP, S 0.018-25 B	..B..E
C	758	87-012-167-080	0E	C-CAP, U 5P-50 CH	ABCDEFGH
C	757	87-012-188-080	0E	C-CAP, U 47P-50 CH	ABCDEFGH
C	753	87-012-195-080	0E	C-CAP, U 100P-50CH	FG
C	752	87-012-282-080	0E	CAP, U 4700P-50	FG
C	756	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH
C	752	87-012-365-080	0E	C-CAP, S 0.027-25VBK	..CD
C	751	87-012-365-080	0E	C-CAP, S 0.027-25VBK	..CD
C	766	87-010-197-080	0E	CAP, CHIP 0.01 DM	FG
C	769	87-010-260-080	0E	CAP, ELECT 47-25V	ABCDEFGH
C	765	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH
C	768	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH
C	764	87-012-337-080	0E	C-CAP, U 56P-50 CH	ABCDE..H
C	774	87-010-263-080	0E	CAP, ELECT 100-10V	ABCDEFGH
C	771	87-010-383-080	0E	CAP, ELECT 33-25V	ABCDEFGH
C	777	87-010-400-080	0E	CAP, ELECT 0.47-50V	ABCDE..H
C	775	87-010-404-080	0E	CAP, ELECT 4.7-50V	ABCDEFGH
C	777	87-010-493-040	0E	CAP, E 0.47-50 GAS	FG
C	777	87-010-493-080	0E	CAP, E 0.47-50 GAS	FG
C	770	87-010-829-080	0E	CAP, U 0.047-16	ABCDEFGH
C	780	87-010-196-080	0E	CHIP CAPACITOR, 0.1-25	ABCDEFGH
C	785	87-010-401-080	0E	CAP, ELECT 1-50V	ABCDEFGH
C	786	87-010-401-080	0E	CAP, ELECT 1-50V	ABCDEFGH

ELECTRICAL MAIN PARTS LIST - 2/3 (TUNER: ZZA-1)

C	786	87-010-405-080	0E	CAP, ELECT 10-50V	ABCDEFGH.....
C	785	87-010-405-080	0E	CAP, ELECT 10-50V	ABCDEFGH.....
C	786	87-010-494-080	0E	CAP, ELECT GAS 1/50	E.....
C	785	87-010-494-080	0E	CAP, ELECT GAS 1/50	E.....
C	788	87-012-275-080	0E	C-CAP, U 1200P-50 B	ABCDEFGH.....
C	787	87-012-275-080	0E	C-CAP, U 1200P-50 B	ABCDEFGH.....
C	784	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	796	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCDEFGH.....
C	794	87-010-406-080	0E	CAP, ELECT 22-50	ABCDEFGH.....
C	795	87-010-596-080	0E	CAP, S 0.047-16	CDEFG.....
C	793	87-012-273-080	0E	C-CAP, U 820P-50 B	ABCDEFGH.....
C	797	87-012-276-080	0E	CAP, CHIP SS 1500 PBK	A....FGH.....
C	798	87-012-276-080	0E	CAP, CHIP SS 1500 PBK	A....FGH.....
D	771	87-020-465-080	0E	DIODE, 1SS133 (110MA)	ABCDEFGH.....
D	773	87-A40-291-080	0E	DIODE, 1N4148 (CPT)	ABCDEFGH.....
IC	771	87-A20-913-010	1D	IC, LA1837NL	ABCDEFGH.....
L	771	87-A50-266-010	1A	COIL, FM DET-2N(TOK)	ABCDEFGH.....
L	772	87-A90-052-010	1C	FLTR, CFMT-450A(TOK)	E.....
L	772	87-A90-053-010	1C	FLTR, PCFMT-060(TOK)	AB.....H.....
L	772	87-A90-733-010	1A	FLTR, PCFAZH-450 (TOK)	
L	772	87-A91-110-010	1B	FLTR, PCFJZH-450 (TOK)	..CD.FG.....
L	781	87-005-847-080	0E	COIL, 2.2UH(CECS)	FG.....
L	791	87-A50-027-010	1A	COIL, 1 POLE MPX(TOK)	FG.....
L	792	87-A50-027-010	1A	COIL, 1 POLE MPX(TOK)	FG.....
X	771	87-030-354-010	1A	VIB, CF BFU 450C	E.....
C	859	87-012-286-080	0E	CAP, U 0.01-25	F.....
C	865	87-010-196-080	0E	CHIP CAPACITOR, 0.1-25	F.....
C	866	87-010-405-080	0E	CAP, ELECT 10-50V	F.....
C	864	87-010-405-080	0E	CAP, ELECT 10-50V	F.....
C	869	87-012-180-080	0E	C-CAP, U 22P-50 CH	F.....
C	868	87-012-184-080	0E	C-CAP, U 33P-50 CH	F.....
C	862	87-012-199-080	0E	CAP, 220P	F.....
C	861	87-012-199-080	0E	CAP, 220P	F.....
C	863	87-012-270-080	0E	CAP, U 470P-50	F.....
C	867	87-012-286-080	0E	CAP, U 0.01-25	F.....
IC	851	87-A20-440-040	1H	C-IC, BU1920FS	F.....
L	851	87-005-847-080	0E	COIL, 2.2UH(CECS)	F.....
Q	853	87-A30-076-080	0E	C-TR, 2SC3052F	F.....
X	851	87-A70-091-010	1B	VIB, XTAL 4.332MHZ CSA-309	F.....
C	801	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	809	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	802	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	803	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	804	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	808	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	807	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	810	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	820	87-010-260-080	0E	CAP, ELECT 47-25V	ABCDEFGH.....
C	893	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	894	87-012-286-080	0E	CAP, U 0.01-25	ABCDEFGH.....
C	942	87-012-168-080	0E	C-CAP, U 6P-50 CH	FG.....
C	942	87-012-172-080	0E	CAPACITOR CHIP U 10P CH	
C	941	87-012-180-080	0E	C-CAP, U 22P-50 CH	E.....
C	944	87-014-049-080	0E	CAP, PP 470P-100 J	E.....
C	944	87-014-051-080	0E	CAPACITOR (PP), 560P	E.....
C	949	87-A10-039-080	0E	C-CAP, U 470P-50 J CH	FG.....
C	958	87-010-197-080	0E	CAP, CHIP 0.01 DM	FG.....
C	956	87-010-263-080	0E	CAP, ELECT 100-10V	E.....
C	959	87-010-831-080	0E	C-CAP, U, 0.1-16F	EFG.....
C	954	87-012-358-080	0E	C-CAP, S 0.47-10 F Z	E.....
C	950	87-014-073-080	0E	CAP, PP 4700P-100 J	E.....
C	963	87-010-196-080	0E	CHIP CAPACITOR, 0.1-25	ABCDEFGH.....
C	962	87-010-401-080	0E	CAP, ELECT 1-50V	FG.....
C	964	87-012-170-080	0E	C-CAP, U 8P-50 CH	A.....H.....
C	961	87-012-174-080	0E	CAP CHIP CERA SS 12P CHJ	..BCD.....H.....
C	960	87-012-350-080	0E	C-CAP, 1-25 F	E.....
CF	802	82-785-747-010	1A	CF MS2 GHY R	FG.....
CF	802	87-008-261-010	1A	FILTER, SFE10.7MA5-A	ABCDE..H.....
CF	801	87-008-261-010	1A	FILTER, SFE10.7MA5-A	ABCDE..H.....
CF	801	87-008-423-010	1A	CERAMIC FILTER, SFE10.7	FG.....
D	944	87-020-465-080	0E	DIODE, 1SS133 (110MA)	EFG.....
D	942	87-A40-270-080	0E	C-DIODE, MC2838	FG.....
D	981	87-A40-618-080	1B	VARI-CAP, SVC 348(S/T)	E.....
FFE	801	A8-6ZA-190-030	0E	6ZA-1 FEUNM	
FFE	801	A8-6ZA-191-130	0E	6ZA-1 FEENM	FG.....
FFE	801	A8-6ZA-192-030	2Y	6ZA-1 FEJNM	..B.....
FFE	801	A8-6ZA-193-130	0E	6ZA-1 FEVNM	
FFE	801	A8-6ZA-199-170	0E	6ZA-1 FEENC	
FFE	801	A8-6ZA-19A-070	0E	6ZA-1 FEJNC	
FFE	801	A8-6ZA-19D-070	1H	6ZA-1 YFEJNC	A.....H.....
FFE	801	A8-8ZA-190-030	0E	8ZA-1 FEUNM	..C.E.....
FFE	801	A8-8ZA-192-070	0E	8ZA-1 FEUNC	
FFE	801	A8-8ZA-193-070	1E	8ZA-1 YFEUNC	..D.....
J	801	87-033-241-010	1B	TERMINAL, ANT AJ-2039	FG.....
J	801	87-A60-702-010	1B	TERMINAL, ANT 4P CJ-9036	ABCD..H.....
J	801	87-A60-703-010	1A	TERMINAL, ANT 3P CJ-9037	E.....
J	940	81-754-629-010	0E	CONNECTOR, 2P	E.....
L	832	87-005-847-080	0E	COIL, 2.2UH(CECS)	FG.....
L	943	87-005-372-080	0E	COIL S 1MHM	
L	942	87-A50-019-010	0E	COIL, OSC LW(COI)	FG.....
L	941	87-A50-020-010	0E	COIL, ANT LW(COI)	FG.....
L	941	87-A50-022-010	0E	COIL, ANT SW(COI)	E.....

ELECTRICAL MAIN PARTS LIST - 3/3 (TUNER: ZZA-1)

L	944	87-A50-159-010	0E	COIL, 10MH K C2B	E.....
L	942	87-A50-173-010	0E	COIL, OSC SW-N(COI)	E.....
L	943	87-A50-432-010	0E	COIL, 1MH K CW	E.....
L	981	87-A50-430-010	0E	COIL, ANT MW(3BSW)	E.....
L	982	87-A50-431-010	0E	COIL, OSC MW(3BSW)	E.....
L	981	87-NF4-650-010	1D	COIL, AM PACK 4N(TOK)	A.....
L	981	87-NF4-651-010	1C	COIL, AM PACK2N(TOM)	
L	981	88-NF8-625-110	1D	COIL, AM PACK3N(TOK)	
L	981	8Z-ZA1-664-010	1D	COIL, AM PACK 4(TOK)	.BCD...H.
L	981	8Z-ZA1-665-010	1E	COIL, AM PACK 2(TOK)	FG.
Q	712	87-A30-072-080	0E	C-TR, RT1P 144C	ABCD.FGH.
Q	805	89-327-143-080	0E	TR, 2SC2714 (0.1W)	ABCDEF GH.
Q	942	87-A30-075-080	0E	C-TR, 2SA1235F	E.....
Q	943	87-A30-075-080	0E	C-TR, 2SA1235F	E.....
Q	949	87-A30-076-080	0E	C-TR, 2SC3052F	E.....
Q	945	87-A30-076-080	0E	C-TR, 2SC3052F	E.....
Q	944	87-A30-076-080	0E	C-TR, 2SC3052F	E.....
Q	948	87-A30-086-070	0E	C-TR, CSD1306E	EFG.....
Q	947	89-503-602-080	1A	C-FET, 2SK360E	E.....
Q	947	89-505-434-540	0E	C-FET, 2SK543(4/5)	FG.....
Q	951	87-A30-074-080	0E	C-TR, RT1P 141C	EFG.....
TC	942	87-011-164-010	0E	CAPACITOR, TRIMMER 30P	FG.....
TC	941	87-011-173-010	1A	CERAMIC TRIMMER 20P	
TC	941	87-011-220-080	1A	TRIMMER CAP 20P VTC	E.....
TC	943	87-011-221-080	1A	CAP, TRIMMER 30P	E.....

MECHANICAL PARTS LIST-1/2

NOTE: The characters in the suffix column indicate the part usage.

KSTE		XX		C	
EZSTE		XX		D	
EZSTM		XX		E	
REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX	
	82-NE6-067-010		BADGE, AIWA 30N	ABCDE	
	86-NFZ-001-010		WINDOW, TOP	ABCDE	
	8Z-NB8-011-110		PANEL, LEFT V-2	ABCDE	
	8Z-NF8-003-010		BOX, CASS 1U	A	
	8Z-NF8-004-010		BOX, CASS 2U	A	..E
	8Z-NF8-021-010		WINDOW, CASS 1	AB	..E
	8Z-NF8-022-010		WINDOW, CASS 2	AB	..E
	8Z-NF8-024-010		WINDOW, CD	AB	..E
	8Z-NF8-025-010		PANEL, TRAY U	ABCDE	
	8Z-NF8-037-010		BOX, CASS 1H	.B	..E
	8Z-NF8-038-010		BOX, CASS 2H	.B	
	8Z-NF9-042-010		PANEL, TOP V-2	ABCDE	
	8Z-NF9-043-010		PANEL, RIGHT S V-2	ABCDE	
	8Z-NFV-003-010		WINDOW, DISP U	A	
	8Z-NFV-004-010		WINDOW, DISP H	.B	
	8Z-NFV-005-010		WINDOW, DISP E		..E
	8Z-NFV-006-010		CABI, FR U	A	
	8Z-NFV-011-010		CABI, FR E		..E
	8Z-NFV-013-010		CABI, FR LH	.B	
	8Z-NFV-013-110		CABI, FR LH		
	8Z-NFV-021-010		CABI, REAR USTNM	A	
	8Z-NFV-022-010		CABI, REAR KSTE	..C	
	8Z-NFV-023-010		CABI, REAR EZSTE	..D	
	8Z-NFV-026-010		CABI, REAR LHSTM	.B	
	8Z-NFV-027-010		CABI, REAR EZSTM		..E
	8Z-NF8-005-010		KEY, POWER	AB	
	8Z-NF8-005-110		KEY, POWER		..E
	8Z-NF8-006-010		KEY, CD	AB	..E
	8Z-NF8-007-010		REFLECTOR, ECO	AB	..E
	8Z-NF8-008-010		KEY, TIMER	AB	..E
	8Z-NF8-010-010		KEY, ASSY FUN	AB	..E
	8Z-NF8-013-010		KEY, ASSY PLAY	.B	..E
	8Z-NF8-016-010		KEY, ASSY PAUSE	AB	..E
	8Z-NF8-020-010		KEY, RDS		..E
	8Z-NF8-026-010		KNOB, RTRY JOG	AB	..E
	8Z-NF8-027-010		KNOB, RTRY VOL	AB	..E
	8Z-NF8-028-010		KNOB, RTRY MIC	AB	..E
	8Z-NF8-029-010		REFLECTOR, JOG	AB	..E
	8Z-NF8-030-010		KEY, ASSY PLAY U	A	
	8Z-NF8-050-010		KEY, KARAOKE	AB	..E
	8Z-NFV-001-010		KEY, PRO	.B	
	8Z-NFV-010-010		KEY, PRO U	A	..E
	81-532-080-010		LABEL, CASS. COMPT	AB	..E
	87-NF6-616-010		CONN ASSY, 8P RPB	.B	
	84-ZG1-245-210		CAP, OPTICAL	ABCDE	
	82-NF5-218-010		SPR-T, EJECT 1 (SIN)	ABCDE	
	82-NF5-219-010		SPR-T, EJECT 2 (SIN)	ABCDE	
	82-NF5-229-010		PLATE, LOCK	AB	..E
	86-NF9-224-010		SPR-C, LOCK	AB	..E
	87-NF4-216-010		HLDR, LOCK 1	AB	..E
	87-NF4-217-010		HLDR, LOCK 2	AB	..E
	87-NF4-221-010		HLDR, CABLE	ABCD	
	87-NF8-220-010		DMPR, 150	AB	..E
	88-NF5-208-010		HLDR, PWB-M N	ABCDE	
	8Z-NB8-216-010		HLDR, FAN		
	8Z-NB8-240-010		COVER, PL	ABCDE	
	8Z-NF8-205-010		HLDR, HT-SINK	.B	
	8Z-NF8-205-110		HLDR, HT-SINK	..CDE	
	8Z-NF9-204-010		PLATE, MIC	AB	..E
	8Z-NFV-002-010		PLATE, PRO		..E
	8Z-NFV-203-010		HLDR, HT F	A	
	8Z-NFV-204-010		HLDR, HT R	A	
	87-067-581-010		TAPPING SCREW, BVT2+3-15	.B	..E
	87-067-584-010		TAPPING SCREW, BVT2+3-6		..E
	87-067-641-010		UTT2+3-8(W/O SLOT)BL		..E
	87-067-688-010		BVTT+3-6	ABCDE	
	87-067-703-010		TAPPING SCREW, BVT2+3-10	ABCDE	
	87-067-758-010		BVT2+3-12 W/O SLOT	.B	
	87-067-822-010		BVT2+3-20 W/O SLOT	A.CDE	
	87-067-873-010		BVT2+3-25 W/O SLOT		
	87-078-191-010		S-SCREW, IT+4-10	ABCDE	
	87-721-096-410		QT2+3-10 GLD	ABCDE	
	87-721-097-410		QT2+3-12 GLD	ABCDE	
	87-B10-091-010		UTT2+3-10 W/O BLK	ABCDE	
	87-B10-184-010		BVTT+3-20 W/O SLOT		..E
	87-NF4-224-010		S-SCREW, IT3B+3-8 CU	ABCDE	
	87-050-034-010		AC CORD ASSY, E	..CD	
	87-050-079-010		AC-CORD ASSY, E	.B	..E
	87-085-185-010		BUSHING, AC CORD (E)	.BCDE	
	87-085-189-010		BUSHING, CORD (U)	A	
	87-099-811-010		PLUG, ADPTR CONV(K)	..C	
	87-A80-110-010		AC CORD ASSY, U SPT-2W	A	
	87-A90-796-010		FAN, F614R-12MC-15-300MM	ABCDE	
	88-906-251-110		FF-CABLE, 6P 1.25	ABCDE	

MECHANICAL PARTS LIST-2/2


		88-911-101-110	FF-CABLE, 11P 1.25	A...E.....
		88-913-301-110	FF-CABLE, 13P-1.25	AB..E.....
		88-915-101-110	FF-CABLE, 15P 1.25 100MM	.B.....
		8Z-NFV-604-010	PT, ZNF-28 U	A.....
		8Z-NFV-606-010	PT, ZNF-28 EZ	...DE.....
		8Z-NFV-607-010	PT, ZNF-28 LH	.B.....
		8Z-NFV-608-010	PT, ZNF-28 K	..C.....
C	705	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
		88-NF8-205-010	GUIDE, FL	AB..E.....
WH	1	87-A90-510-010	HLDR, WIRE 2.5-9P	ABCDE.....
		87-067-703-010	TAPPING SCREW, BVT2+3-10	.BCDE.....

ACCESSORIES / PACKAGE LIST-1/1

NOTE: The characters in the suffix column indicate the part usage.


KSTE		XX		C	
EZSTE		XX		D	
EZSTM		XX		E	
REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX	
	8Z-NFV-902-010		IB, LH(ESP)M	.B	
	8Z-NFV-903-010		IB, U(ESF)M	A	
	8Z-NFV-905-010		IB, K(E)E	.C	
	8Z-NFV-906-010		IB, EZ(9L)E	.D	
	8Z-NFV-916-010		IB, EZ(9L)M	.E	
	87-006-225-010		AM LOOP ANT NC2	ABCDE	
	87-043-106-010		WIRE, FM ANT (Z)	.CDE	
	87-043-115-010		ANT, FEEDER FM	AB	
	87-099-789-010		PLUG, ADPTR IR44	.B	
	8Z-NFV-702-010		RC UNIT, RC-ZAS05	AB	
	8Z-NFV-705-010		RC UNIT, RC-ZAS15	.CDE	

SCHEMATIC DIAGRAM – 1 (MAIN)

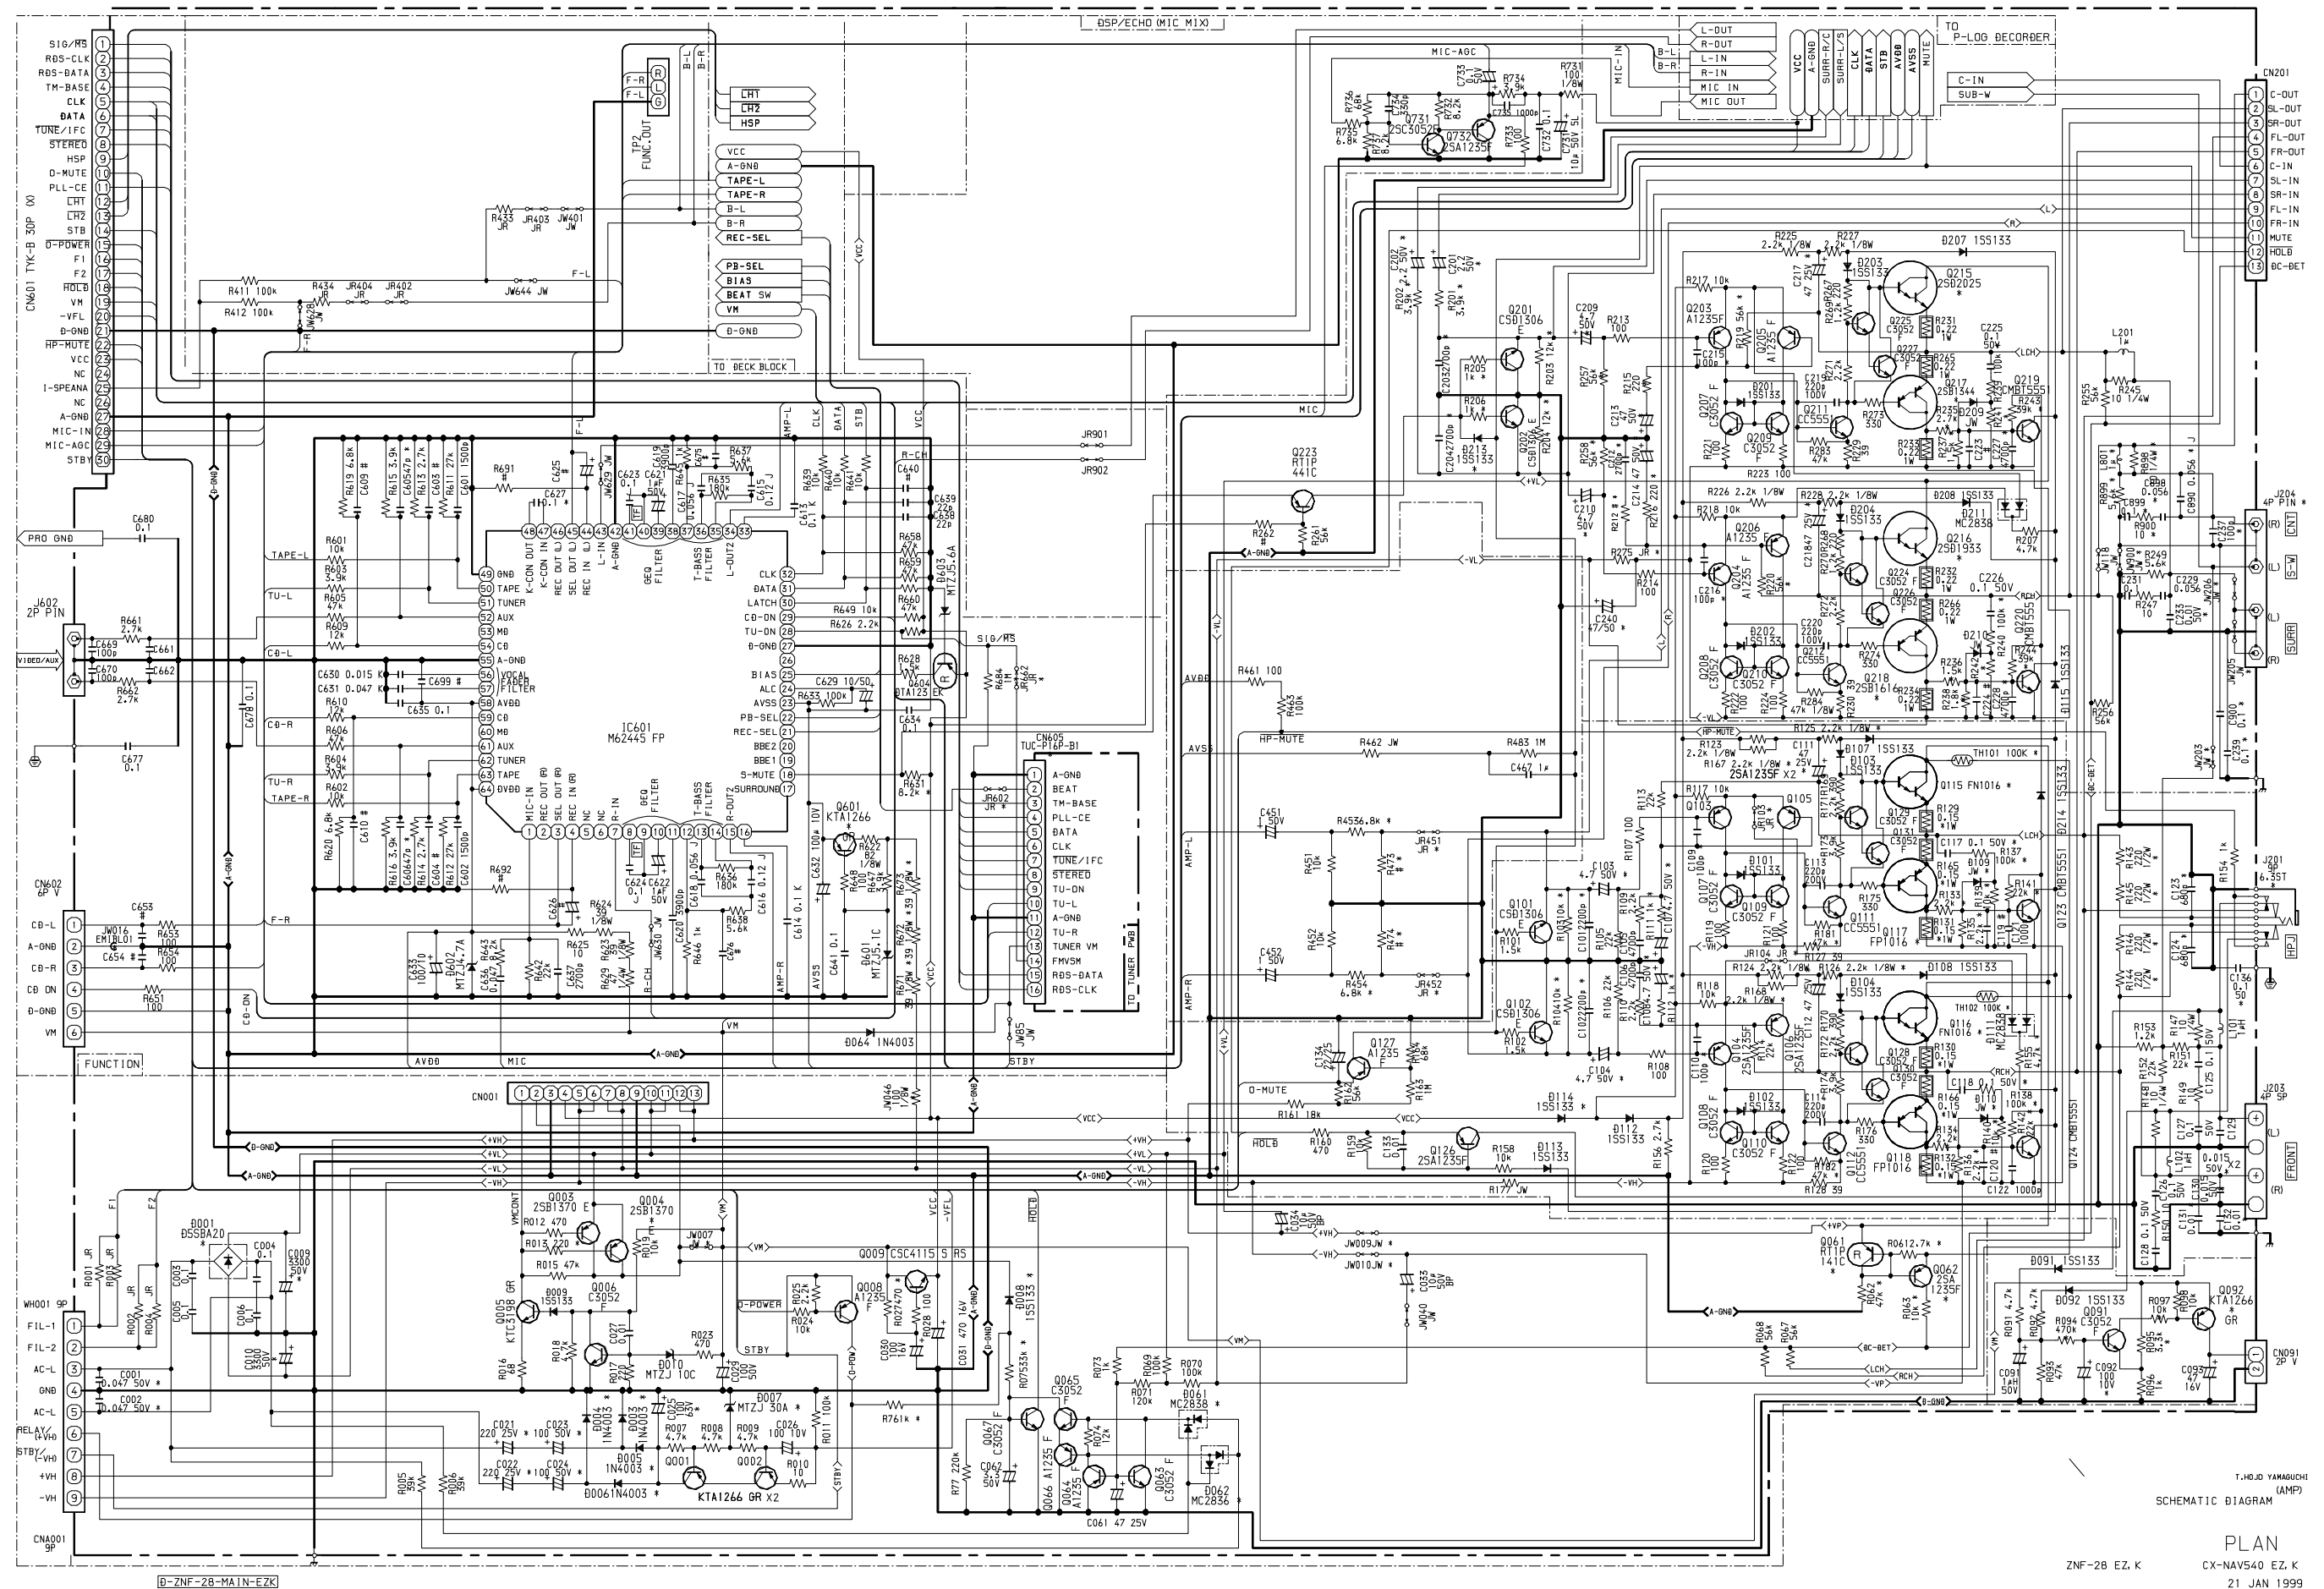

T.HOJO YAMAGUCHI
(AMP)
SCHEMATIC DIAGRAM
PLAN
ZNF-28 EZ, K CX-NAV540 EZ, K
21 JAN 1999

SCHEMATIC DIAGRAM – 2 (MAIN-DECK)

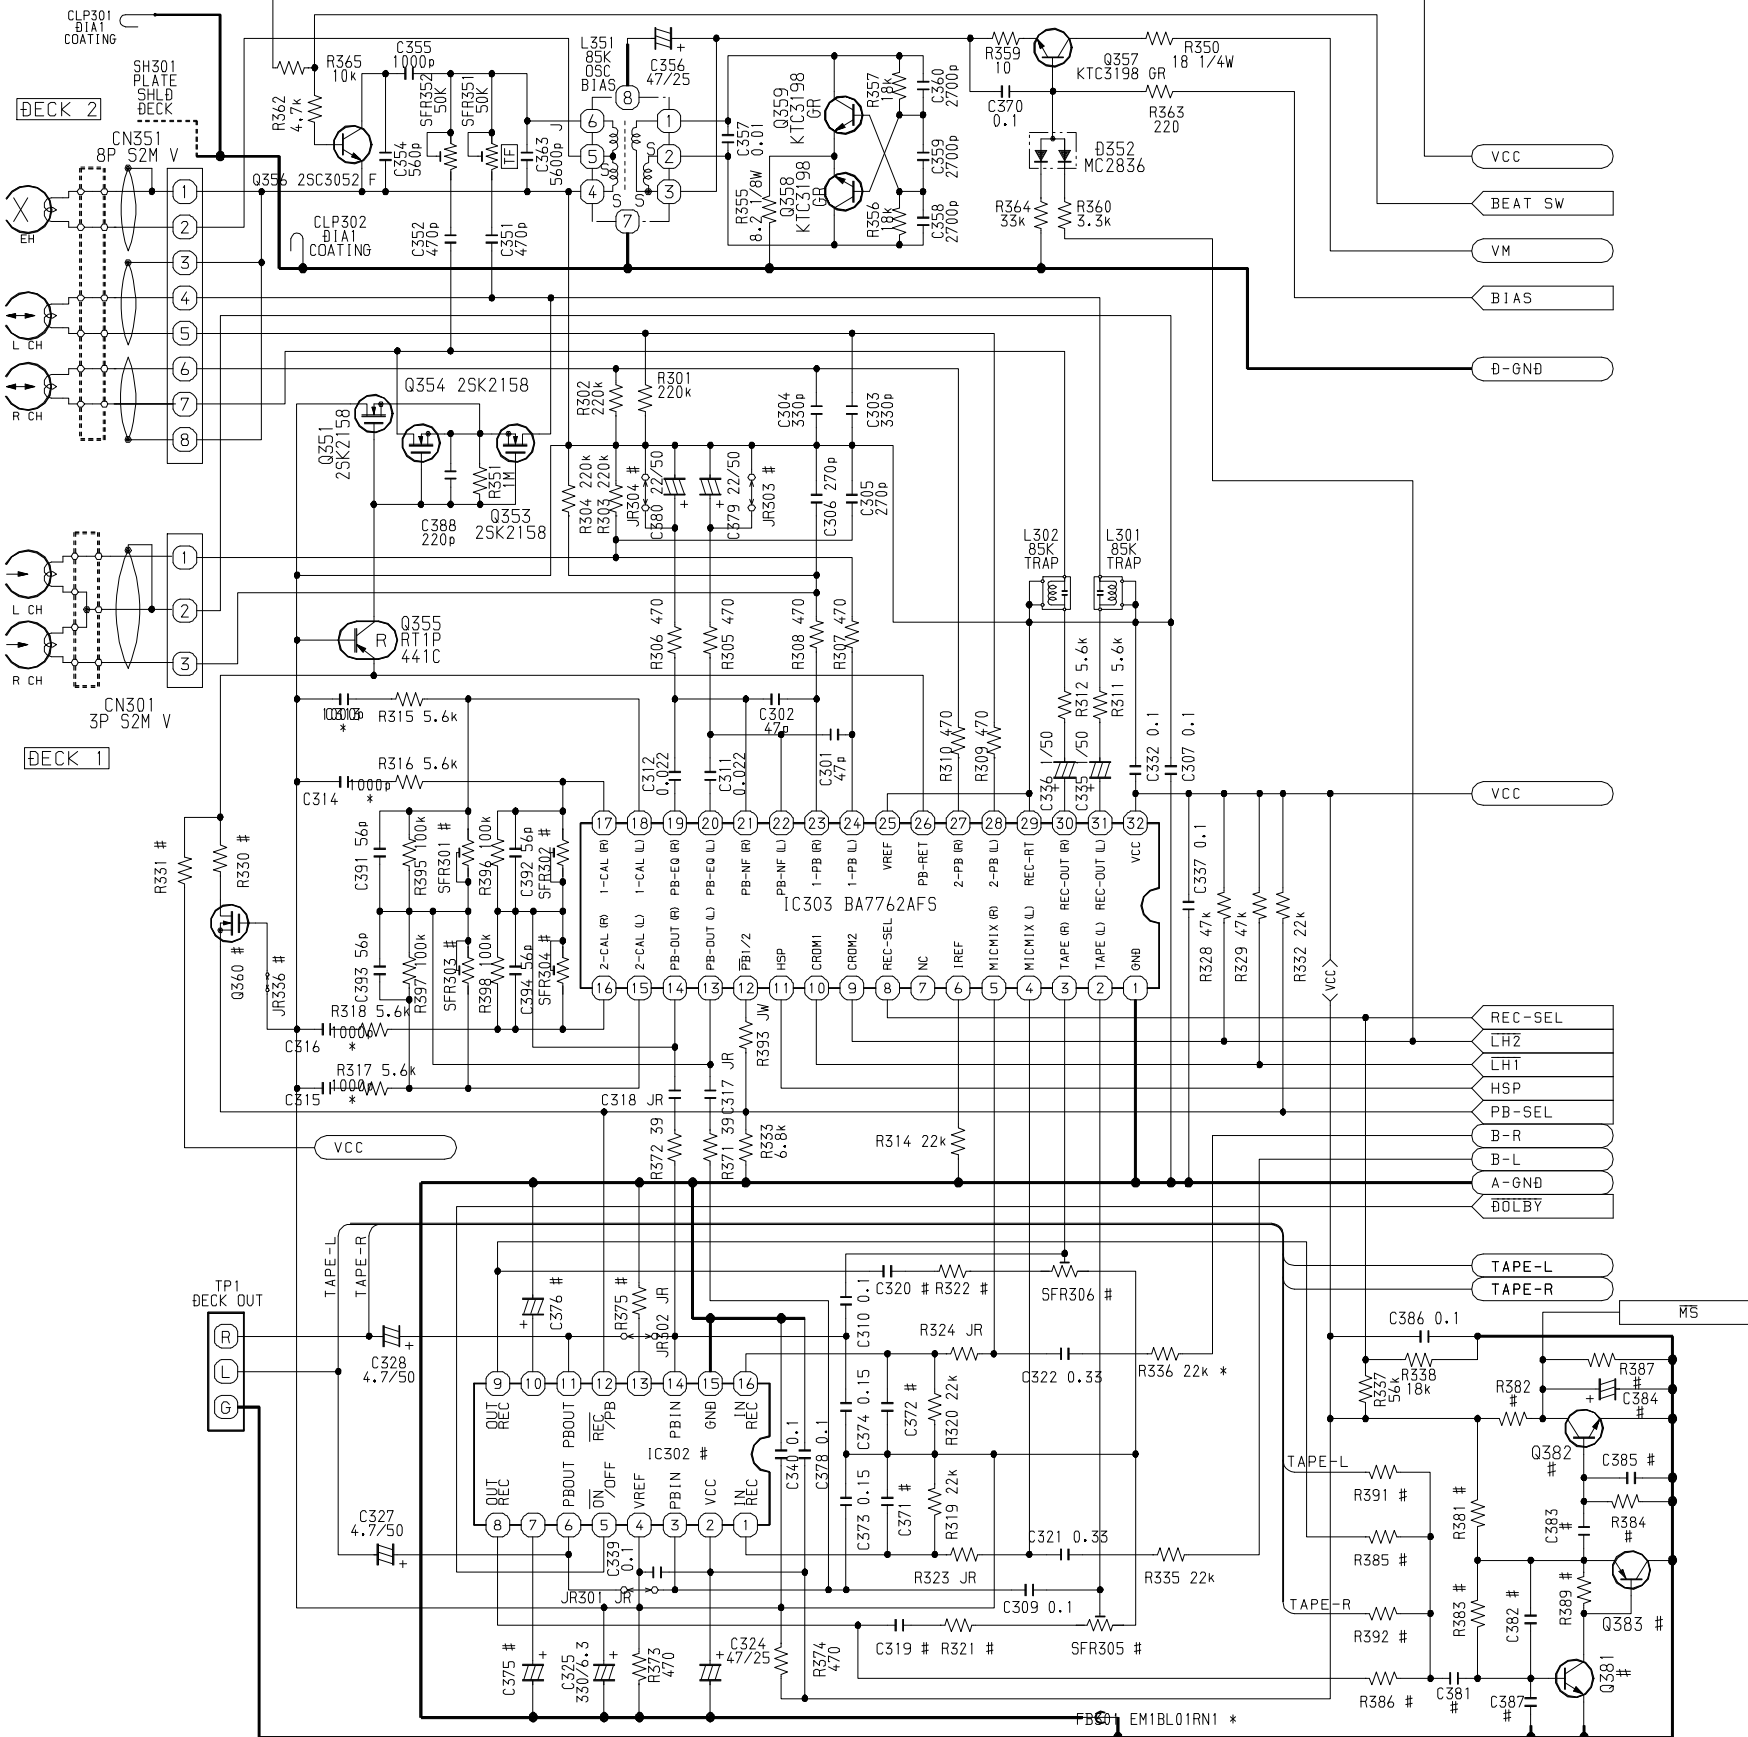

	HR, LH, D	OTHERS
	W/D_DOLBY (R+R)	W/D_DOLBY (R+1_1+1)
JR303	X	X
JR304	X	X
C379	22/25	22/50
C380	22/50	22/50
C313	1000P	1500P
C314	1000P	1500P
R315	5.6K	5.6K
R316	5.6K	5.6K
C315	1000P	2200P
C316	1000P	2200P
R317	5.6K	5.6K
R318	5.6K	5.6K
C391	56P	56P
C392	56P	56P
C393	56P	56P
C394	56P	56P
R395	100K	100K
R396	100K	100K
R397	100K	100K
R398	100K	100K
SFR301	X	X
SFR302	X	X
SFR303	X	X
SFR304	X	X
C317	C-JR	C-JR
C318	C-JR	C-JR
R371	39	39
R372	39	39
C375	X	X
C376	X	X
R375	X	X
JR301	C-JR	C-JR
JR302	C-JR	C-JR


	USE BA7762AFS	USE HA12211
Q360	X	2SK2158
R330	X	C-JR
R331	X	33K
JR336	X	C-JR

	EZ K MODEL	EXCEPT EZ K
Q356	2SC3052F	X
R362	4.7K	X
R365	10K	X

	EZ K MODEL	EXCEPT EZ
FB301	EM1BL01RN1	JW


K.KOMATSU

SCHEMATIC DIAGRAM – 3 (MAIN-PROLOGIC)

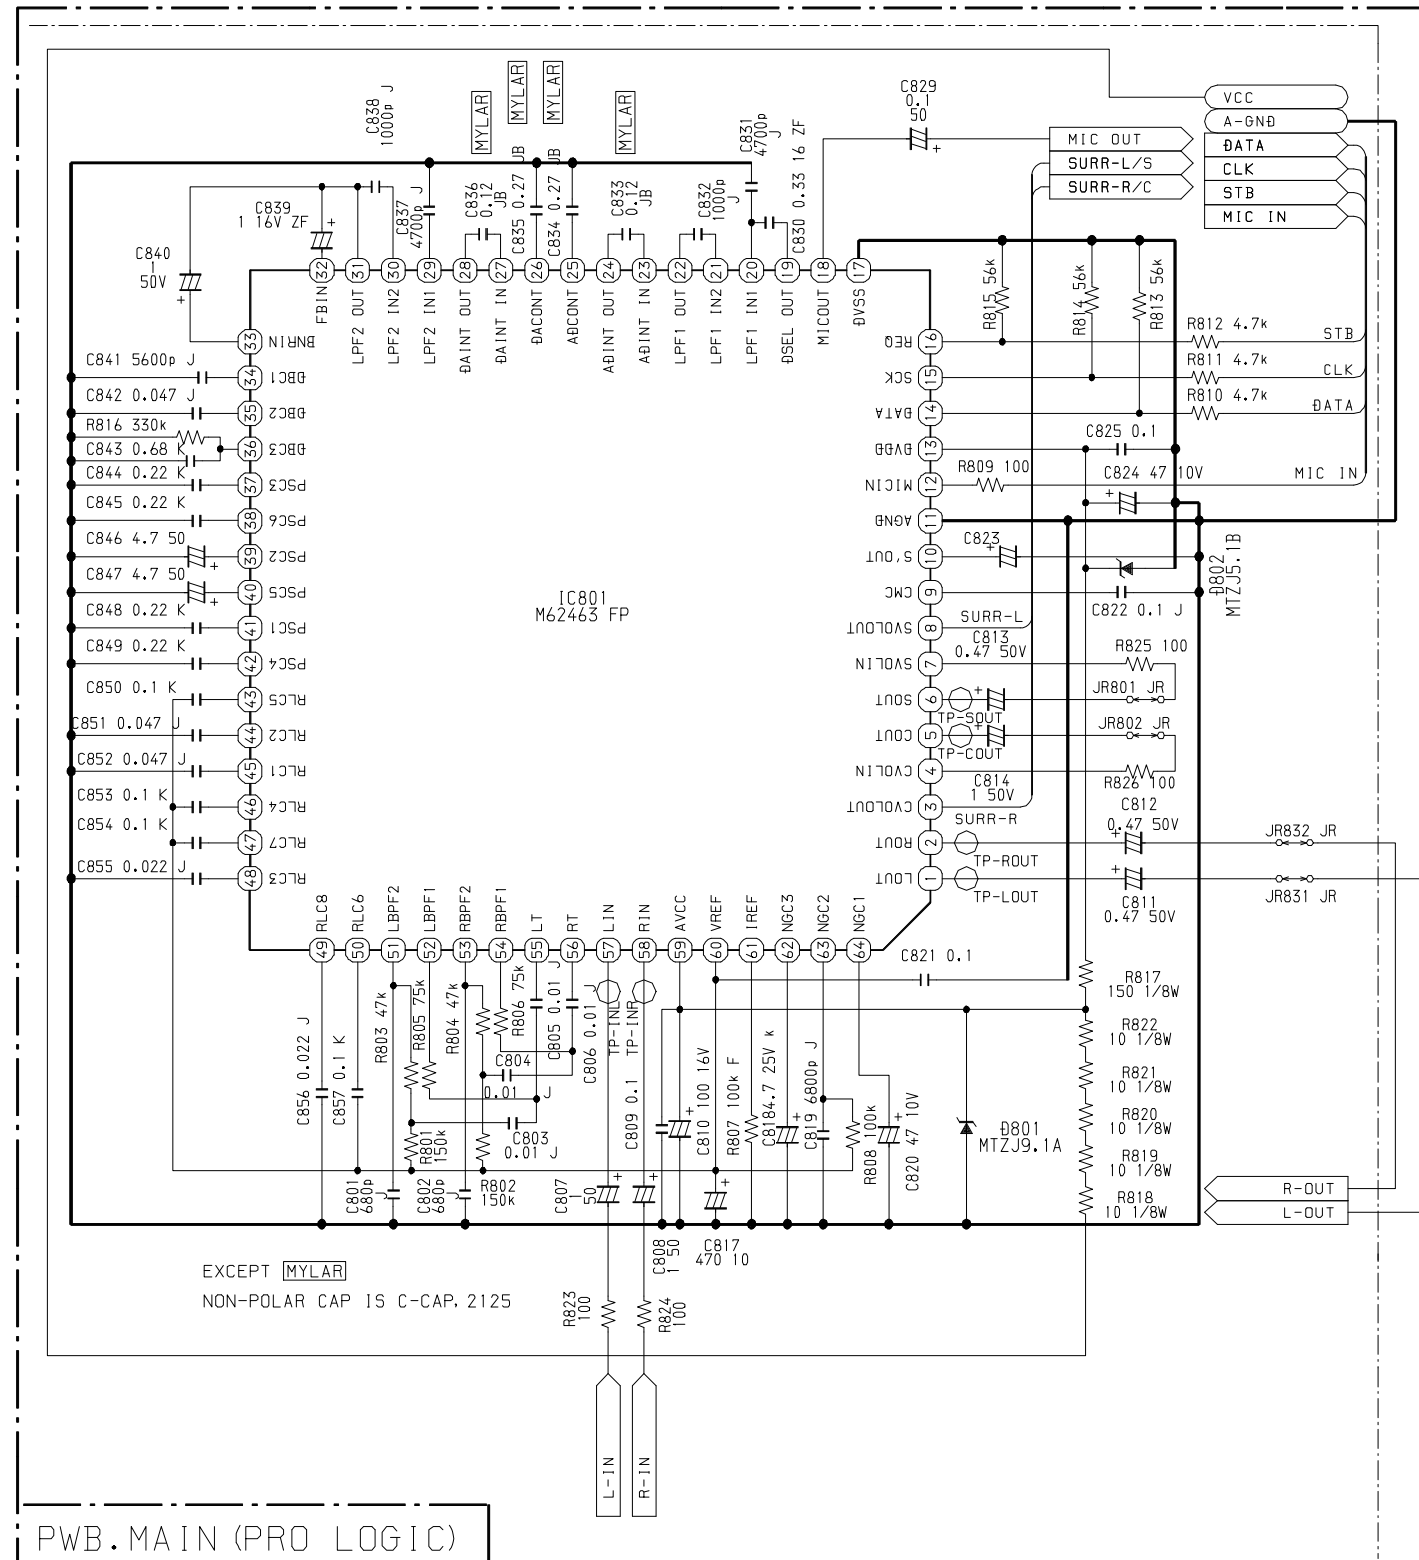


T. SHIMIZU

SCHEMATIC DIAGRAM – 4 (TUNER)

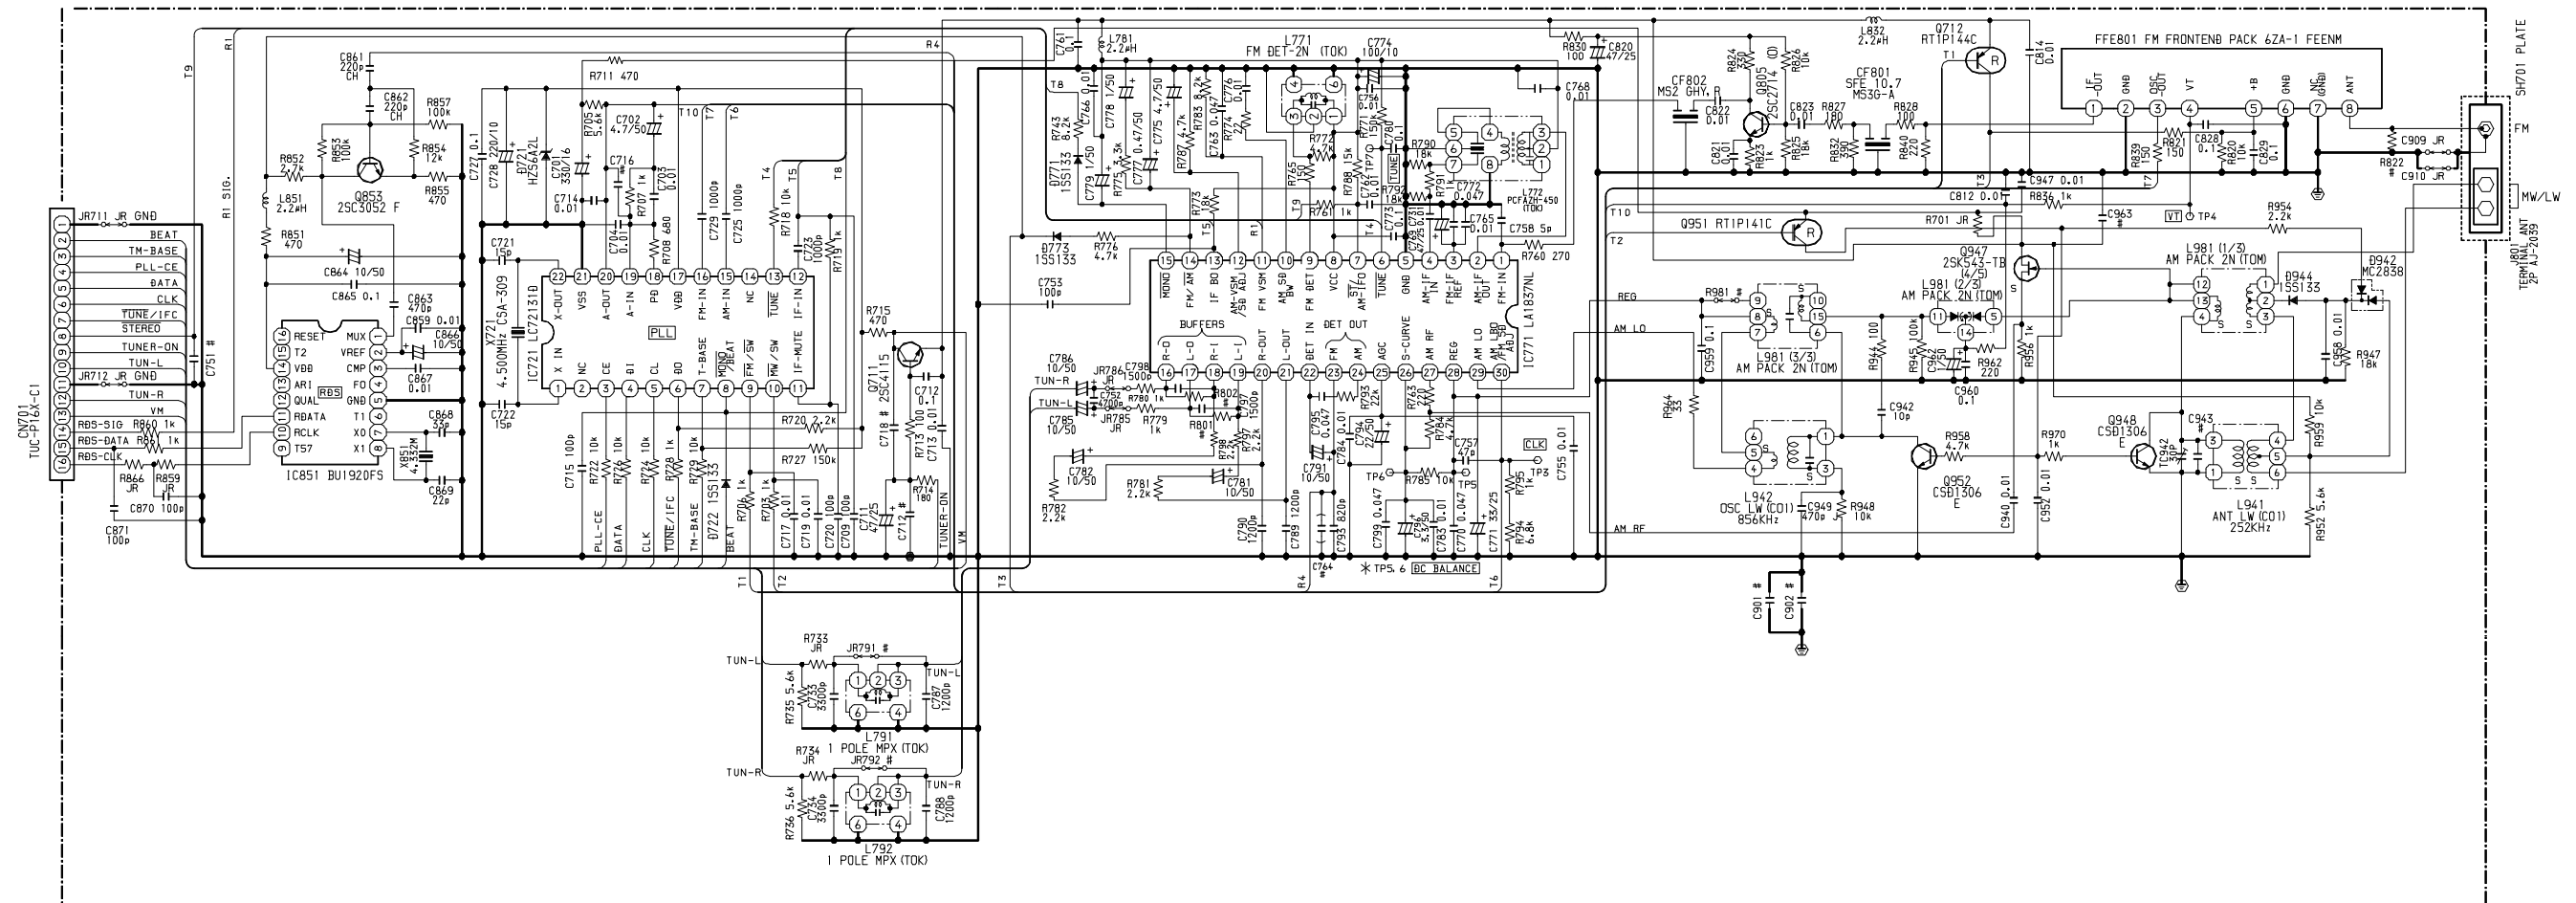

SCHEMATIC DIAGRAM – 5 (FRONT)

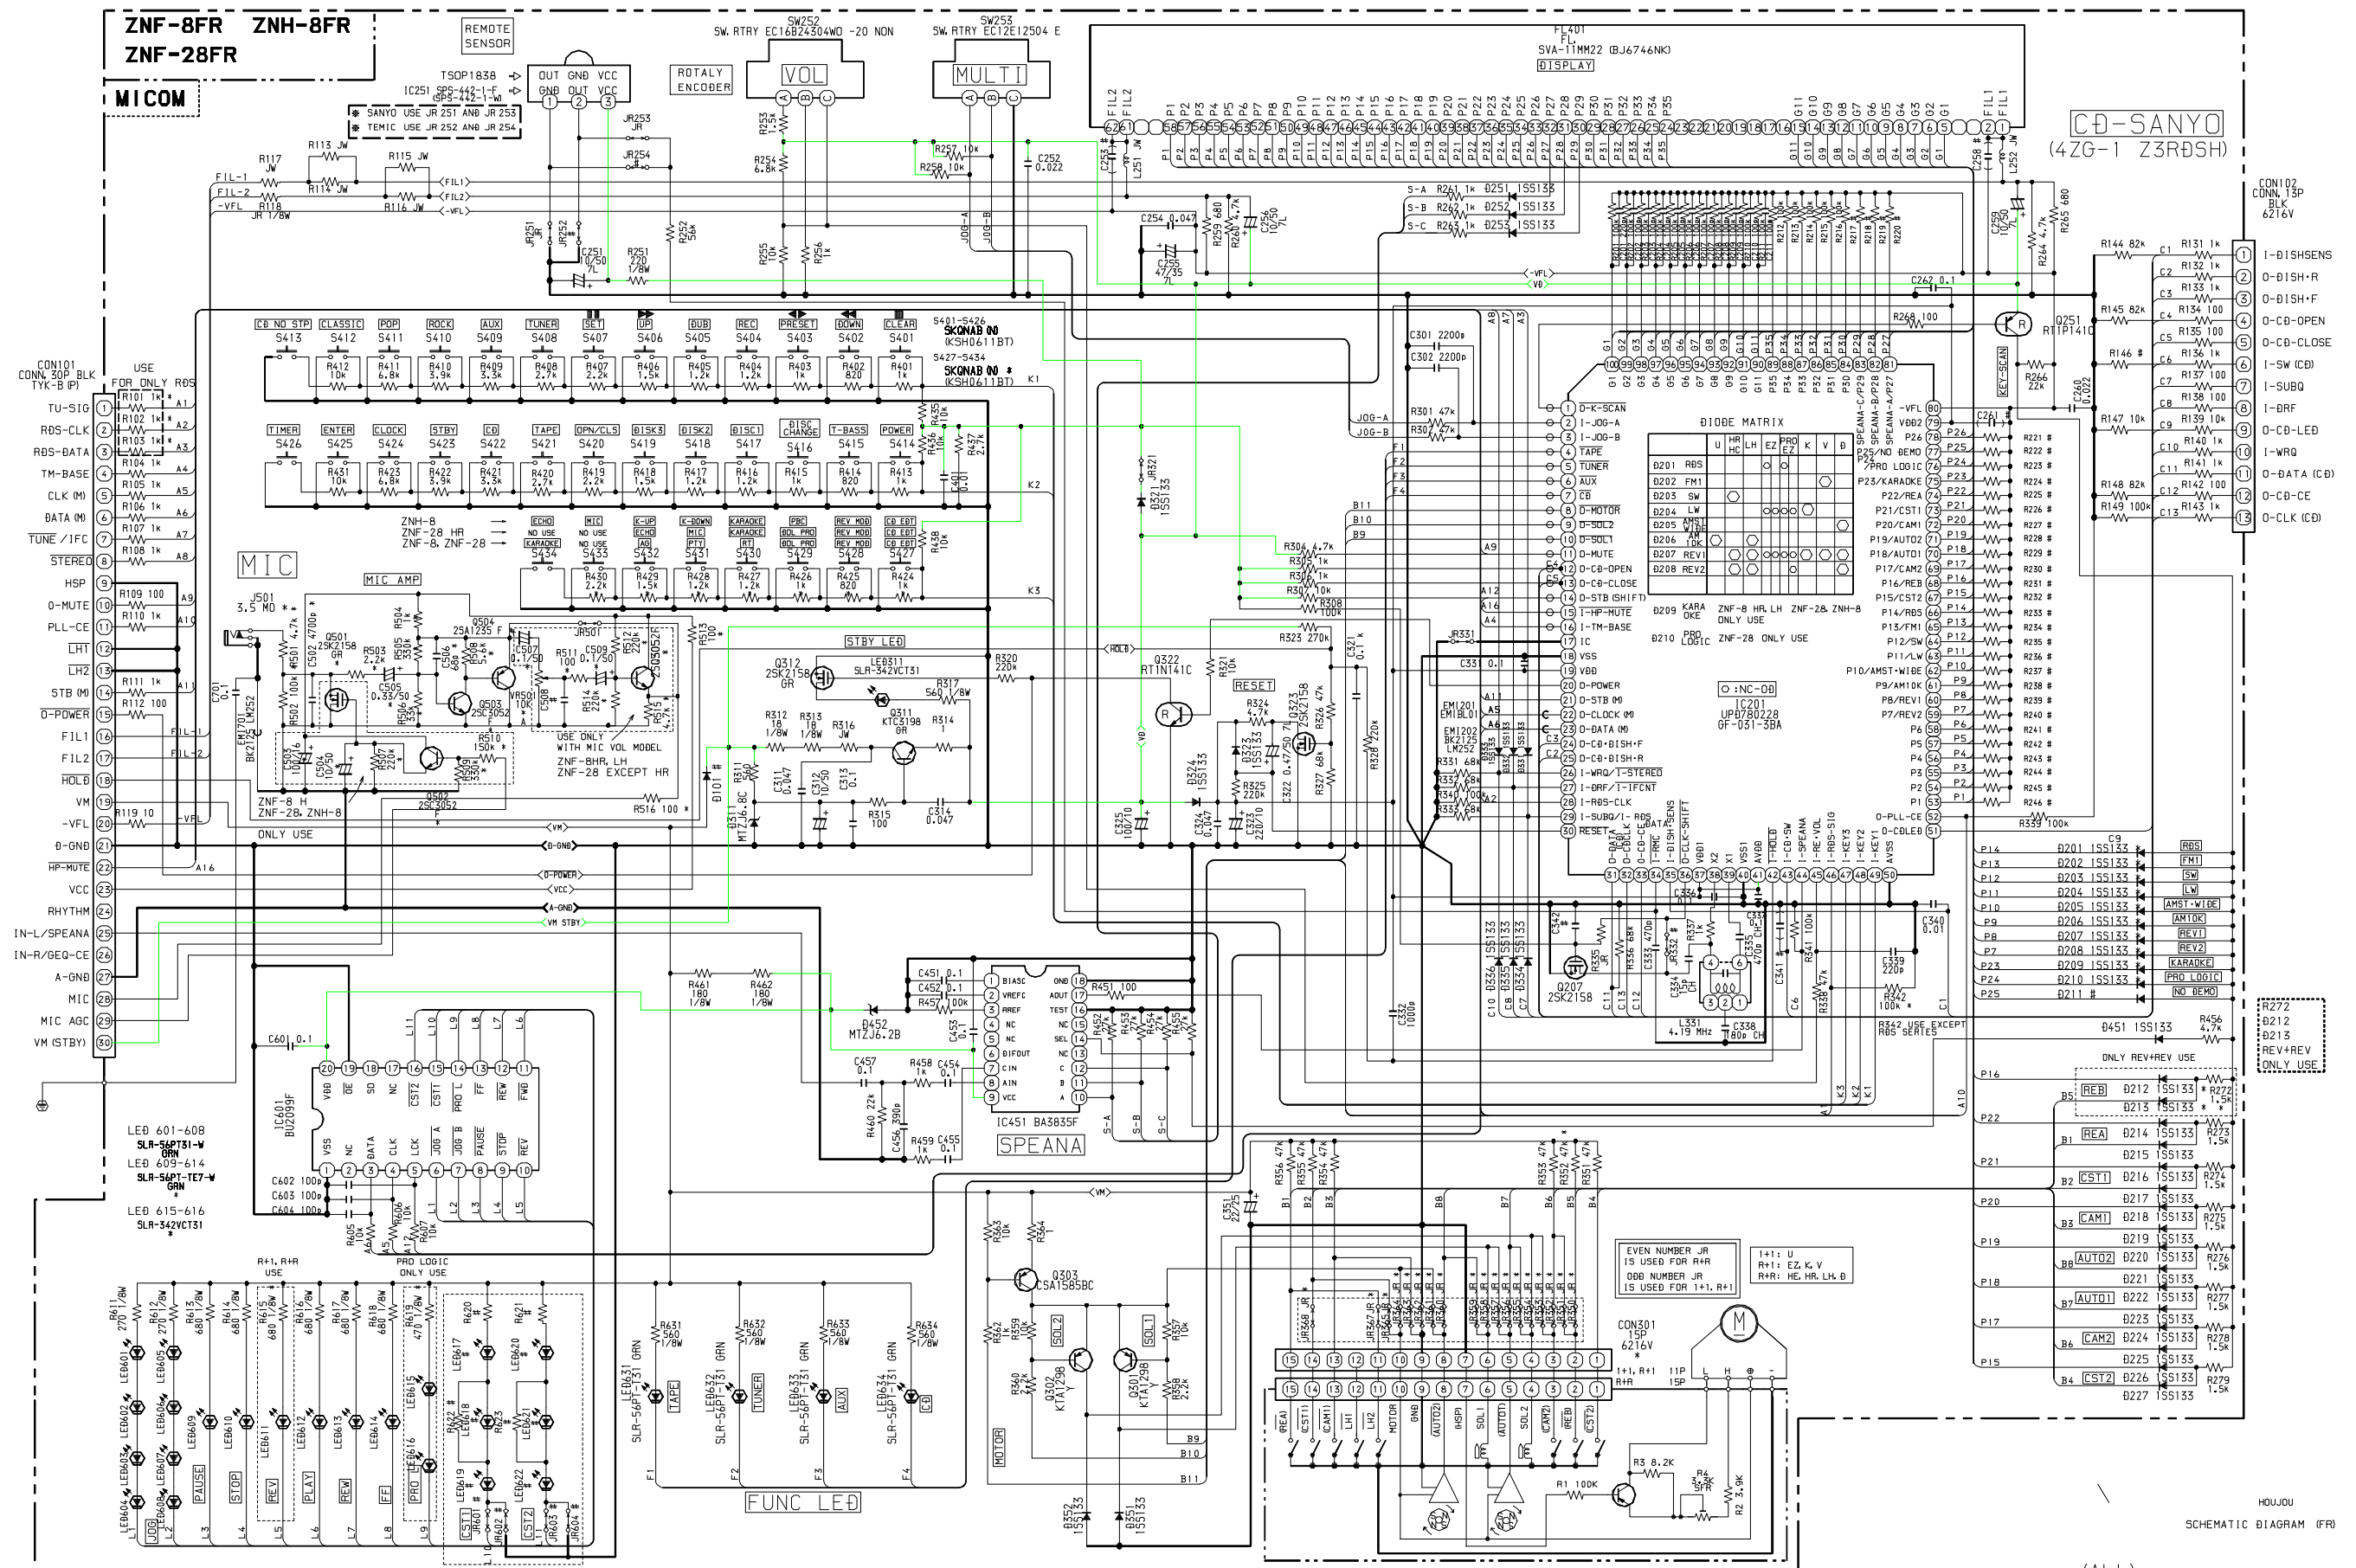


(ALL)
ZNF-8

SCHEMATIC DIAGRAM (FR)

20 OCT 1998

SCHEMATIC DIAGRAM – 6(PS)

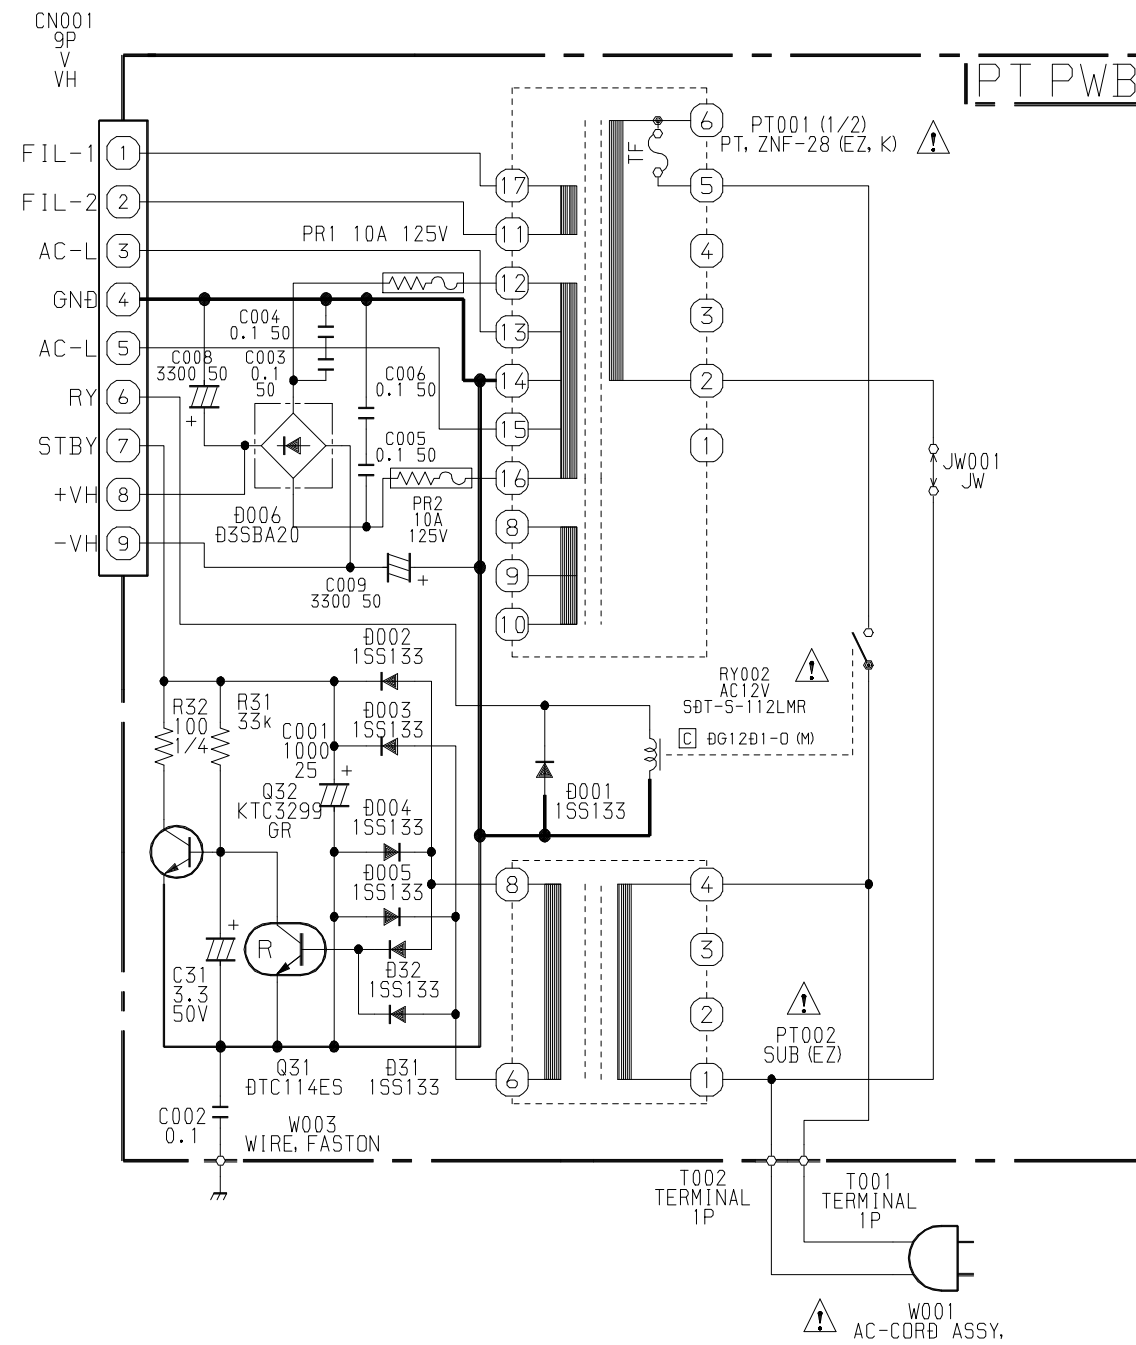

98.12.18
Y.KONDO

SCHEMATIC DIAGRAM (PT)

ZNF-28 EZ/K/V

CX-NAV540EZ/K/V

18 DEC 1998

B-ZNF8-AC-85EZ

サービス技術ニュース	
番号	連絡内容
Gー	ー
Gー	ー
Gー	ー

アイワ株式会社
AIWA CO.,LTD.

9820527

Tokyo Japan