

SERVICE MANUAL

COMPACT DISC STEREO
RADIO CASSETTE RECORDER

BASIC TAPE MECHANISM : 2ZM-3MK2 PR7NM
BASIC CD MECHANISM : AZG-1 ZD3RNDM

- Replace this Service manual with "Revision Publishing" when it is issued.

ELECTRICAL MAIN PARTS LIST - 1/12

NOTE: The characters in the suffix column indicate the part usage.

U	REF.NO	PARTS NO.	XX. KANRI NO.	DESCRIPTION	A SUFFIX
C	606	87-010-112-040		CAP,E 100-16	A
C	608	87-010-178-080		CHIP CAP 1000P	A
C	601	87-010-186-080		CAP,CHIP 4700P	A
C	607	87-010-196-080		CHIP CAPACITOR,0.1-25	A
C	603	87-010-320-080		CHIP CAP 68P	A
C	602	87-010-405-040		CAP,E 10-50	A
C	604	87-010-546-040		CAP,E 0.33-50	A
C	621	87-010-178-080		CHIP CAP 1000P	A
CN	603	87-099-212-010		CONN,5P 6216 V	A
FB	601	87-008-372-080		FILTER, EMI BL OIRNI	A
J	602	87-A61-242-010		JACK,6.3 BLK MONO W/SW V KM	A
J	601	87-A61-242-010		JACK,6.3 BLK MONO W/SW V KM	A
C	1	87-010-387-080		CAP,E 470-25 SME	A
C	6	87-010-917-000		CAP,E 3300-50 M SMG	A
C	7	87-010-917-000		CAP,E 3300-50 M SMG	A
C	8	87-A11-148-080		CAP,TC U 0.1-50 Z F	A
C	4	87-A11-148-080		CAP,TC U 0.1-50 Z F	A
C	5	87-A11-148-080		CAP,TC U 0.1-50 Z F	A
C	9	87-A11-148-080		CAP,TC U 0.1-50 Z F	A
C	16	87-010-403-080		CAP, ELECT 3.3-50V	A
C	13	87-016-520-000		CAP,E 3300-65 M SMG	A
C	12	87-016-520-000		CAP,E 3300-65 M SMG	A
C	13	87-016-657-090		CAP,E 3300-71	.
C	12	87-016-657-090		CAP,E 3300-71	.
C	10	87-A11-148-080		CAP,TC U 0.1-50 Z F	A
C	11	87-A11-148-080		CAP,TC U 0.1-50 Z F	A
CN	2	87-A61-108-010		CONN,5P V TID-A	A
CN	1	87-A61-110-010		CONN,9P V TID-A	A
D	1	87-A40-547-090		DIODE,D5SBA20	.
PT	2	8A-NF8-661-010		PT,SUB ANF-8 (U)	A
PT	2	8A-NF8-662-010		PT,SUB ANF-8 (E)	.
Q	1	87-026-245-080		TR,DTC114ES	A
RY	2	87-A90-976-010		RELAY,AC12V SDT-S-112LMR	A
T	1	87-A60-317-010		TERMINAL, 1P MSC	A
T	2	87-A60-317-010		TERMINAL, 1P MSC	A
C	102	87-010-178-080		CHIP CAP 1000P	A
C	101	87-010-178-080		CHIP CAP 1000P	A
C	103	87-010-405-080		CAP, ELECT 10-50V	A
C	104	87-010-405-080		CAP, ELECT 10-50V	A
C	108	87-010-406-080		CAP, ELECT 22-50	A
C	107	87-010-406-080		CAP, ELECT 22-50	A
C	119	87-010-197-080		CAP, CHIP 0.01 DM	A
C	114	87-010-260-080		CAP, ELECT 47-25V	A
C	113	87-010-260-080		CAP, ELECT 47-25V	A
C	116	87-010-866-080		CAP, ELECT 10-63	A
C	115	87-010-866-080		CAP, ELECT 10-63	A
C	112	87-012-140-080		CAP 470P	.
C	111	87-012-140-080		CAP 470P	.
C	115	87-016-299-080		CAP,E 10-100 SME	.
C	116	87-016-299-080		CAP,E 10-100 SME	.
C	120	87-010-197-080		CAP, CHIP 0.01 DM	A
C	133	87-010-186-080		CAP,CHIP 4700P	A
C	153	87-010-183-080		C-CAP,S 2700P-50 B	A
C	206	87-010-180-080		C-CER 1500P	A
C	205	87-010-180-080		C-CER 1500P	A
C	209	87-010-184-080		CHIP CAPACITOR 3300P(K)	.
C	209	87-010-187-080		CAP CHIP S5600P	A
C	207	87-010-401-080		CAP, ELECT 1-50V	A
C	208	87-010-401-080		CAP, ELECT 1-50V	A
C	203	87-A10-300-080		CAP,M 0.027-50 J	A
C	201	87-A10-300-080		CAP,M 0.027-50 J	A
C	202	87-A10-300-080		CAP,M 0.027-50 J	A
C	204	87-A10-300-080		CAP,M 0.027-50 J	A
C	210	87-010-184-080		CHIP CAPACITOR 3300P(K)	.
C	210	87-010-187-080		CAP CHIP S5600P	A
C	217	87-010-260-080		CAP, ELECT 47-25V	.
C	218	87-010-260-080		CAP, ELECT 47-25V	.

ELECTRICAL MAIN PARTS LIST - 2/12

C	254	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	253	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	259	87-012-368-080	C-CAP,S 0.1-50 F	
C	251	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	252	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	260	87-012-368-080	C-CAP,S 0.1-50 F	
C	401	87-010-260-080	CAP, ELECT 47-25V	A.....
CN	103	87-099-194-010	CONN,6P 6216V	
CN	105	87-099-198-010	CONN,10P 6216 V	A.....
CN	102	87-A61-011-010	CONN,13P H BLK TAC-L13P-A3	A.....
CN	101	87-A61-011-010	CONN,13P H BLK TAC-L13P-A3	A.....
CNA	101	8A-NF6-645-010	CONN ASSY,5P TID-A(530)	A.....
CNA	103	8A-NF8-655-010	CONN ASSY,7P TID-A(150)	A.....
IC	101	87-A21-355-010	IC,STK490-140	
IC	101	87-A21-418-010	IC,STK490-340	A.....
IC	201	87-A21-397-010	IC,STK490-070	A.....
J	202	87-A61-158-010	JACK,PIN 2P R/W/BL H(SEPA) KM	A.....
J	201	87-A61-160-010	JACK,PIN 4P R/W/B/B KM	
L	251	87-003-383-010	COIL,1UH-S	A.....
L	252	87-003-383-010	COIL,1UH-S	A.....
Q	101	87-A30-107-070	C-TR,CMBT5401	A.....
R	129	87-A00-262-080	RES,M/F 0.15-2W J	A.....
R	130	87-A00-262-080	RES,M/F 0.15-2W J	A.....
R	181	87-A00-262-080	RES,M/F 0.15-2W J	
R	182	87-A00-262-080	RES,M/F 0.15-2W J	
R	231	87-A00-258-080	RES,M/F 0.22-1W J	A.....
R	232	87-A00-258-080	RES,M/F 0.22-1W J	A.....
WH	101	87-A90-459-010	HLDR,WIRE 2.5-5P	A.....
WH	102	87-A90-460-010	HLDR,WIRE 2.5-7P	A.....
C	101	87-010-178-080	CHIP CAP 1000P	A.....
C	102	87-010-178-080	CHIP CAP 1000P	A.....
C	108	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	107	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	104	87-010-405-080	CAP, ELECT 10-50V	A.....
C	103	87-010-405-080	CAP, ELECT 10-50V	A.....
C	113	87-010-260-080	CAP, ELECT 47-25V	A.....
C	114	87-010-260-080	CAP, ELECT 47-25V	A.....
C	115	87-010-405-080	CAP, ELECT 10-50V	A.....
C	116	87-010-405-080	CAP, ELECT 10-50V	A.....
C	112	87-012-140-080	CAP 470P	A.....
C	111	87-012-140-080	CAP 470P	A.....
C	122	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	121	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	155	87-010-190-080	S CHIP F 0.01	A.....
C	157	87-010-190-080	S CHIP F 0.01	
C	156	87-010-190-080	S CHIP F 0.01	A.....
C	152	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	151	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	153	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	154	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	158	87-012-368-080	C-CAP,S 0.1-50 F	
C	161	87-010-183-080	C-CAP,S 2700P-50 B	A.....
C	160	87-010-186-080	CAP,CHIP 4700P	A.....
C	201	87-010-178-080	CHIP CAP 1000P	A.....
C	208	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	204	87-010-246-080	CAP, ELECT 47-35V	A.....
C	205	87-010-260-080	CAP, ELECT 47-25V	A.....
C	209	87-010-260-080	CAP, ELECT 47-25V	A.....
C	203	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	202	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	206	87-A10-946-080	C-CAP,S 220P-100 J CH	A.....
C	212	87-010-178-080	CHIP CAP 1000P	A.....
C	211	87-010-178-080	CHIP CAP 1000P	A.....
C	210	87-010-260-080	CAP, ELECT 47-25V	A.....
C	253	87-010-190-080	S CHIP F 0.01	A.....
C	252	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	251	87-012-368-080	C-CAP,S 0.1-50 F	A.....
CN	104	87-099-194-010	CONN,6P 6216V	
CN	102	87-099-198-010	CONN,10P 6216 V	A.....
CN	101	87-A61-109-010	CONN,7P V TID-A	A.....
D	160	87-A40-270-080	C-DIODE,MC2838	A.....
D	209	87-A40-535-080	DIODE,1N5393-GOODARK	A.....
D	212	87-A40-754-080	ZENER,UZ6.8BSC	A.....
J	102	87-A60-573-010	JACK,PIN 1P ORN	
J	101	87-A61-159-010	JACK,PIN 4P R/W/B/O KM	A.....
L	151	87-003-383-010	COIL,1UH-S	A.....
L	152	87-003-383-010	COIL,1UH-S	A.....
L	251	87-003-383-010	COIL,1UH-S	A.....
Q	161	87-A30-106-040	C-TR,CMBT5551	A.....
Q	208	87-A30-076-080	C-TR,2SC3052F	A.....
Q	206	87-A30-190-080	TR,CC5551	A.....
Q	214	87-A30-074-080	C-TR,RT1P 141C	A.....
Q	212	87-A30-255-010	TR,2SB1342	A.....
Q	211	87-A30-256-010	TR,2SD1933	A.....
R	132	87-A00-258-080	RES,M/F 0.22-1W J	A.....
R	218	87-A00-258-080	RES,M/F 0.22-1W J	A.....
TH	201	87-A91-042-080	C-THMS,100K 55001	A.....

ELECTRICAL MAIN PARTS LIST - 3/12

C	109	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	101	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	103	87-010-312-080	C-CAP,S 15P-50 CH	A.....
C	102	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	105	87-010-415-040	CAP,E 10-50 5L	A.....
C	106	87-010-493-040	CAP,E 0.47-50 GAS	A.....
C	104	87-012-157-080	C-CAP,S 330P-50 CH	A.....
C	108	87-A10-189-040	CAP,E 220-10	A.....
C	107	87-A10-189-040	CAP,E 220-10	A.....
C	110	87-010-178-080	CHIP CAP 1000P	A.....
C	116	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	115	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	114	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	113	87-010-596-080	CAP, S 0.047-16	A.....
C	118	87-012-145-080	CAP, CHIP S 270P CH	A.....
C	112	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	181	87-010-178-080	CHIP CAP 1000P	A.....
C	180	87-010-178-080	CHIP CAP 1000P	A.....
C	203	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	205	87-012-156-080	C-CAP,S 220P-50 CH	A.....
C	202	87-012-156-080	C-CAP,S 220P-50 CH	A.....
C	204	87-012-157-080	C-CAP,S 330P-50 CH	A.....
C	216	87-010-177-080	C-CAP,S 820P-50 SL	A.....
C	215	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	214	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	223	87-010-408-040	CAP,E 47-50 SME	A.....
C	221	87-010-421-040	CAP,E 4.7-50 5L	A.....
C	222	87-010-421-040	CAP,E 4.7-50 5L	A.....
C	224	87-012-369-080	C-CAP,S 0.047-50F	A.....
C	315	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	316	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	314	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	312	87-010-498-040	CAP,E 10-16 GAS	A.....
C	321	87-012-393-080	C-CAP,S 0.22-16 R K	A.....
C	387	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	385	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	384	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	383	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	386	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	382	87-010-320-080	CHIP CAP 68P	A.....
C	392	87-010-320-080	CHIP CAP 68P	A.....
C	402	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	403	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	407	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	404	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	406	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	405	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	408	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	462	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	464	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	463	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	461	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	465	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	652	87-010-183-080	C-CAP,S 2700P-50 B	A.....
C	653	87-010-213-080	C-CAP,S 0.015-50 B	A.....
C	701	87-010-406-040	CAP,E 22-50 SME	A.....
CN	104	87-099-017-010	CONN, 15P 6216 V	A.....
CN	101	87-099-720-010	CONN,30P TYK-B(P)	A.....
CN	301	87-099-195-010	CONN,7P 6216 V	A.....
CN	302	87-099-195-010	CONN,7P 6216 V	A.....
CN	604	87-099-210-010	CONN,5P 6216 H	A.....
CN	901	87-A60-161-010	CONN,13P H FE	A.....
D	105	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	108	87-A40-752-080	ZENER,UZ6.2BSC	A.....
D	385	87-A40-802-080	ZENER,UZ5.1BSC	A.....
D	701	87-A40-269-080	C-DIODE,MC2836	A.....
FL	201	8A-NF6-601-010	FL,BJ750GNK 13G-35S ANF-6	A.....
IC	101	8A-NF6-605-010	C-IC,LC876572V-XXX	A.....
IC	251	87-A20-914-010	IC,SPS-442-1-F	A.....
IC	380	87-A21-577-040	C-IC,M61506FP	A.....
IC	402	87-070-289-040	IC,BU 2092F	A.....
IC	401	87-A21-021-040	C-IC,BU2099FV	A.....
L	101	87-A50-333-010	COIL,OSC 9.43MHZ	A.....
LED	401	87-017-756-040	LED,SLR-342DCT31 ORN	A.....
LED	404	87-017-756-040	LED,SLR-342DCT31 ORN	A.....
LED	403	87-017-756-040	LED,SLR-342DCT31 ORN	A.....
LED	402	87-017-756-040	LED,SLR-342DCT31 ORN	A.....
LED	405	87-017-756-040	LED,SLR-342DCT31 ORN	A.....
LED	407	87-A40-496-040	LED,SLR-342MCT31 GRN	A.....
LED	409	87-A40-496-040	LED,SLR-342MCT31 GRN	A.....
LED	408	87-A40-496-040	LED,SLR-342MCT31 GRN	A.....
LED	406	87-A40-496-040	LED,SLR-342MCT31 GRN	A.....
LED	410	87-A40-496-040	LED,SLR-342MCT31 GRN	A.....
LED	419	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A.....
LED	417	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A.....
LED	418	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A.....
LED	416	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A.....

ELECTRICAL MAIN PARTS LIST - 4/12

LED	426	87-A40-496-040	LED,SLR-342MCT31 GRN	A.....
LED	425	87-A40-496-040	LED,SLR-342MCT31 GRN	A.....
LED	421	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A.....
LED	420	87-A40-619-080	LED,SLR-56PT-TE7-W GRN	A.....
LED	432	87-A40-678-010	LED,SELU1E10CXM BLUE-DEF	A.....
LED	431	87-A40-678-010	LED,SELU1E10CXM BLUE-DEF	A.....
LED	433	87-A40-678-010	LED,SELU1E10CXM BLUE-DEF	A.....
LED	440	87-A91-665-010	LED,SELU1E10 CXM-SLF55 BLUE	A.....
LED	441	87-A91-665-010	LED,SELU1E10 CXM-SLF55 BLUE	A.....
LED	451	87-017-756-040	LED,SLR-342DCT31 ORN	A.....
LED	452	87-017-756-040	LED,SLR-342DCT31 ORN	A.....
LED	453	87-017-756-040	LED,SLR-342DCT31 ORN	A.....
LED	456	87-A40-496-040	LED,SLR-342MCT31 GRN	A.....
LED	455	87-A40-496-040	LED,SLR-342MCT31 GRN	A.....
LED	454	87-A40-496-040	LED,SLR-342MCT31 GRN	A.....
LED	499	87-A40-317-080	LED,SLR-342VCT31 RED	A.....
Q	107	87-026-610-080	TR,KTC3198GR	A.....
Q	103	87-A30-468-080	C-TR,KRC102S-RTK	A.....
Q	104	87-A30-484-080	C-TR,KRA102S	A.....
Q	401	87-A30-075-080	C-TR,2SA1235F	A.....
Q	704	87-A30-318-080	TR,CSA952K	A.....
Q	701	87-A30-329-080	TR,CD1585BC	A.....
S	101	87-A91-591-010	SW,RTRY RE0121PVB25FINA24	A.....
S	102	87-A91-664-010	SW,RTRY RE0121PVB30F	A.....
S	307	87-A91-024-180	SW,TACT KSH0611BT	
S	308	87-A91-024-180	SW,TACT KSH0611BT	
S	309	87-A91-024-180	SW,TACT KSH0611BT	
S	303	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	302	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	305	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	301	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	306	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	304	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	310	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	311	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	312	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	313	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	328	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	327	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	322	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	321	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	324	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	326	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	323	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	325	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	333	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	334	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	346	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	341	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	347	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	343	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	348	87-A91-024-180	SW,TACT KSH0611BT	
S	345	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	344	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	342	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	349	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	351	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	355	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	354	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	353	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	350	87-A91-024-180	SW,TACT KSH0611BT	A.....
S	352	87-A91-024-180	SW,TACT KSH0611BT	A.....
C	309	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	307	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	301	87-010-318-080	C-CAP,S 47P-50 CH	A.....
C	302	87-010-318-080	C-CAP,S 47P-50 CH	A.....
C	306	87-012-157-080	C-CAP,S 330P-50 CH	A.....
C	305	87-012-157-080	C-CAP,S 330P-50 CH	A.....
C	304	87-012-157-080	C-CAP,S 330P-50 CH	A.....
C	303	87-012-157-080	C-CAP,S 330P-50 CH	A.....
C	315	87-010-178-080	CHIP CAP 1000P	
C	316	87-010-178-080	CHIP CAP 1000P	
C	315	87-010-179-080	CAP,CHIP S B1200P	A.....
C	316	87-010-179-080	CAP,CHIP S B1200P	A.....
C	314	87-010-179-080	CAP,CHIP S B1200P	A.....
C	313	87-010-179-080	CAP,CHIP S B1200P	A.....
C	310	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	311	87-010-198-080	CAP,CHIP 0.022	A.....
C	312	87-010-198-080	CAP,CHIP 0.022	A.....
C	319	87-012-141-080	CHIP-CAPACITOR,0.22-16F	
C	318	87-A10-201-080	C-CAP,S0.33-16 KB	
C	317	87-A10-201-080	C-CAP,S0.33-16 KB	
C	324	87-010-260-080	CAP,ELECT 47-25V	A.....
C	325	87-010-370-080	CAP,E 330-6.3 SME	A.....
C	328	87-010-404-080	CAP,ELECT 4.7-50V	A.....
C	327	87-010-404-080	CAP,ELECT 4.7-50V	A.....
C	321	87-012-141-080	CHIP-CAPACITOR,0.22-16F	

ELECTRICAL MAIN PARTS LIST - 5/12

C	322	87-012-141-080	CHIP-CAPACITOR,0.22-16F	
C	320	87-012-141-080	CHIP-CAPACITOR,0.22-16F	
C	321	87-012-142-080	CAP, S 0.33-16	A.....
C	322	87-012-142-080	CAP, S 0.33-16	A.....
C	332	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	339	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	337	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	335	87-010-401-080	CAP, ELECT 1-50V	A.....
C	336	87-010-401-080	CAP, ELECT 1-50V	A.....
C	340	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	354	87-010-175-080	CAP 560P	A.....
C	355	87-010-178-080	CHIP CAP 1000P	A.....
C	358	87-010-183-080	C-CAP,S 2700P-50 B	A.....
C	359	87-010-183-080	C-CAP,S 2700P-50 B	A.....
C	357	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	356	87-010-260-080	CAP, ELECT 47-25V	A.....
C	352	87-012-140-080	CAP 470P	A.....
C	351	87-012-140-080	CAP 470P	A.....
C	360	87-010-183-080	C-CAP,S 2700P-50 B	A.....
C	372	87-010-177-080	C-CAP,S 820P-50 SL	
C	371	87-010-177-080	C-CAP,S 820P-50 SL	
C	374	87-010-179-080	CAP,CHIP S B1200P	
C	373	87-010-179-080	CAP,CHIP S B1200P	
C	370	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	378	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	379	87-010-382-080	CAP, ELECT 22-25V	A.....
C	375	87-010-545-080	CAP, ELECT 0.22-50V	
C	376	87-010-545-080	CAP, ELECT 0.22-50V	
C	373	87-016-083-080	C-CAP,S 0.15-16 RK	A.....
C	374	87-016-083-080	C-CAP,S 0.15-16 RK	A.....
C	385	87-010-184-080	CHIP CAPACITOR 3300P(K)	
C	386	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	381	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	383	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	382	87-010-312-080	C-CAP,S 15P-50 CH	A.....
C	382	87-010-318-080	C-CAP,S 47P-50 CH	
C	380	87-010-382-080	CAP, ELECT 22-25V	A.....
C	384	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	387	87-012-145-080	CAP, CHIP S 270P CH	A.....
C	388	87-012-156-080	C-CAP,S 220P-50 CH	A.....
C	393	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	391	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	392	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	394	87-010-319-080	C-CAP,S 56P-50 CH	A.....
C	393	87-012-145-080	CAP, CHIP S 270P CH	
C	394	87-012-145-080	CAP, CHIP S 270P CH	
C	392	87-012-145-080	CAP, CHIP S 270P CH	
C	391	87-012-145-080	CAP, CHIP S 270P CH	
CLP	301	87-A60-884-010	PIN,DIAL COATING-SHS	A.....
CN	301	87-A60-620-010	CONN,3P V 2MM JMT	A.....
CN	351	87-A60-625-010	CONN,8P V 2MM JMT	A.....
FB	301	87-008-372-080	FILTER, EMI BL OIRNI	
IC	302	87-A20-355-010	IC,CXA1553P	
IC	303	87-A20-783-040	C-IC,BA7762AFS	A.....
L	302	87-A50-049-010	COIL,TRAP 85K(COI)	A.....
L	301	87-A50-049-010	COIL,TRAP 85K(COI)	A.....
L	351	87-007-342-010	COIL,OSC 85K BIAS	A.....
Q	355	87-A30-063-080	C-TR,KRA104S	A.....
SFR	306	87-A90-433-080	SFR,50K H NVZ6TLTA	
SFR	305	87-A90-433-080	SFR,50K H NVZ6TLTA	
SFR	304	87-A90-557-080	SFR,33K H HOKU	
SFR	303	87-A90-557-080	SFR,33K H HOKU	
SFR	302	87-A90-557-080	SFR,33K H HOKU	
SFR	301	87-A90-557-080	SFR,33K H HOKU	
SFR	352	87-A90-433-080	SFR,50K H NVZ6TLTA	A.....
SH	301	87-MA6-202-010	PLATE,SHLD DECK	A.....
C	105	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	104	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	113	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	112	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	111	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	114	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	116	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	115	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	121	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	122	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	161	87-010-176-080	C-CAP,S 680P-50 SL	
C	162	87-010-176-080	C-CAP,S 680P-50 SL	
C	177	87-010-190-080	S CHIP F 0.01	
C	178	87-010-190-080	S CHIP F 0.01	
C	176	87-010-191-080	C-CAP,S 0.015-50 F	
C	175	87-010-191-080	C-CAP,S 0.015-50 F	
C	171	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	173	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	174	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	172	87-012-368-080	C-CAP,S 0.1-50 F	A.....
CN	101	87-A60-996-010	CONN,13P V BLK TAC-L13X-A3	A.....

ELECTRICAL MAIN PARTS LIST - 6/12

J	102	87-A60-238-010	TERMINAL,SP 4P (MSC)	A.....
J	103	87-A60-929-010	JACK,DIA6.3 BLK ST W/S TAI	A.....
L	101	87-A50-610-010	COIL,1UH K(MDEC)	A.....
L	102	87-A50-610-010	COIL,1UH K(MDEC)	A.....
R	162	87-A00-441-050	RES,270-1/2W J RP	A.....
R	161	87-A00-441-050	RES,270-1/2W J RP	A.....
R	163	87-A00-441-050	RES,270-1/2W J RP	A.....
R	164	87-A00-441-050	RES,270-1/2W J RP	A.....
C	973	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	974	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	979	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	971	87-010-381-080	CAP, ELECT 330-16V	A.....
C	972	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	982	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	984	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	983	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	987	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	989	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	981	87-010-260-080	CAP, ELECT 47-25V	A.....
C	985	87-010-322-080	C-CAP,S 100P-50 CH	A.....
C	993	87-010-178-080	CHIP CAP 1000P	A.....
C	995	87-010-178-080	CHIP CAP 1000P	A.....
C	997	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	998	87-010-260-080	CAP, ELECT 47-25V	A.....
C	992	87-010-312-080	C-CAP,S 15P-50 CH	A.....
C	991	87-010-312-080	C-CAP,S 15P-50 CH	A.....
C	999	87-A11-155-080	CAP,TC U 0.01-16 Z F	A.....
D	991	87-017-149-080	ZENER,HZS6A2L	A.....
IC	991	87-070-127-110	IC,LC72131 D	A.....
Q	981	87-A30-234-080	TR,CSC4115BC	A.....
R	991	87-010-322-080	C-CAP,S 100P-50 CH	A.....
R	993	87-010-322-080	C-CAP,S 100P-50 CH	A.....
R	995	87-010-322-080	C-CAP,S 100P-50 CH	A.....
X	991	87-A70-061-010	VIB,XTAL 4.500MHZ CSA-309	A.....
C	774	87-010-184-080	CHIP CAPACITOR 3300P(K)	A.....
C	773	87-010-184-080	CHIP CAPACITOR 3300P(K)	A.....
C	772	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	771	87-010-263-080	CAP, ELECT 100-10V	A.....
C	779	87-A10-679-080	C-CAP,S 3300P-50 JR	A.....
C	788	87-010-149-080	C-CAP,S 5P-50 CH	A.....
C	783	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	786	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	782	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	785	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	784	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	789	87-A10-592-080	C-CAP,S 0.015-50 J B	A.....
C	780	87-A10-679-080	C-CAP,S 3300P-50 JR	A.....
C	791	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	795	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	796	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	792	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	798	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	793	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	797	87-010-405-080	CAP, ELECT 10-50V	A.....
C	799	87-010-407-080	CAP, ELECT 33-50V	A.....
C	790	87-A10-592-080	C-CAP,S 0.015-50 J B	A.....
C	803	87-010-198-080	CAP, CHIP 0.022	A.....
C	804	87-010-263-080	CAP, ELECT 100-10V	A.....
C	807	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	808	87-010-401-080	CAP, ELECT 1-50V	A.....
C	809	87-010-401-080	CAP, ELECT 1-50V	A.....
C	801	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	802	87-012-369-080	C-CAP,S 0.047-50F	A.....
C	800	87-012-369-080	C-CAP,S 0.047-50F	A.....
C	819	87-010-179-080	CAP,CHIP S B1200P	A.....
C	810	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	814	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	815	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	816	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	812	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	811	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	823	87-010-177-080	C-CAP,S 820P-50 SL	A.....
C	820	87-010-179-080	CAP,CHIP S B1200P	A.....
C	821	87-010-405-080	CAP, ELECT 10-50V	A.....
C	824	87-010-405-080	CAP, ELECT 10-50V	A.....
C	825	87-010-596-080	CAP, S 0.047-16	A.....
C	823	87-012-349-080	C-CAP,S 1000P-50 CH	A.....
IC	801	87-A21-560-010	IC,LA1844L-A	A.....
L	801	87-A50-608-010	COIL,FM DET-N(TOK)	A.....
L	802	87-A91-551-010	FLTR,PCFJZH-450 L(TOK)	A.....
L	811	87-005-847-080	COIL,2.2UH(CECS)	A.....
L	821	87-A50-027-010	COIL,1 POLE MPX(TOK)	A.....
L	822	87-A50-027-010	COIL,1 POLE MPX(TOK)	A.....
L	822	87-A50-209-010	COIL,1POLE MPX(MIT)	A.....
L	821	87-A50-209-010	COIL,1POLE MPX(MIT)	A.....
R	790	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	869	87-010-197-080	CAP, CHIP 0.01 DM	A.....

ELECTRICAL MAIN PARTS LIST - 7/12

C	875	87-010-196-080	CHIP CAPACITOR,0.1-25	
C	877	87-010-197-080	CAP, CHIP 0.01 DM	
C	879	87-010-314-080	C-CAP,S 22P-50V	
C	878	87-010-316-080	C-CAP,S 33P-50 CH	
C	876	87-010-405-080	CAP, ELECT 10-50V	
C	874	87-010-405-080	CAP, ELECT 10-50V	
C	873	87-012-140-080	CAP 470P	
C	871	87-012-156-080	C-CAP,S 220P-50 CH	
C	872	87-012-156-080	C-CAP,S 220P-50 CH	
IC	861	87-A20-440-040	C-IC,BU1920FS	
L	861	87-005-847-080	COIL,2.2UH(CECS)	
X	861	87-A70-091-010	VIB,XTAL 4.332MHZ CSA-309	
C	818	87-010-180-080	C-CER 1500P	
C	831	87-010-406-080	CAP, ELECT 22-50	
C	846	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	849	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	843	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	844	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	848	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	847	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	845	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	842	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	859	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	858	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	851	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	853	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	852	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	850	87-010-260-080	CAP, ELECT 47-25V	A.....
C	860	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	942	87-010-149-080	C-CAP,S 5P-50 CH	
C	940	87-010-197-080	CAP, CHIP 0.01 DM	
C	947	87-010-197-080	CAP, CHIP 0.01 DM	
C	948	87-012-140-080	CAP 470P	
C	959	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	958	87-010-197-080	CAP, CHIP 0.01 DM	
C	952	87-010-197-080	CAP, CHIP 0.01 DM	
C	957	87-010-311-080	CAP 12P	
C	961	87-010-152-080	C-CAP,S 8P-50 CH	A.....
C	960	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	962	87-010-401-080	CAP, ELECT 1-50V	
C	963	87-015-785-080	CHIP CAPACITOR, 0.1FZ-25Z	A.....
CF	832	82-785-747-010	CF MS2 GHY R	
CF	832	87-008-261-010	FILTER, SFE10.7MA5-A	A.....
CF	831	87-008-261-010	FILTER, SFE10.7MA5-A	A.....
CF	831	87-008-423-010	CERAMIC FILTER, SFE10.7	
FFE	831	A8-6ZA-19C-170	6ZA-1 YFEENC	
FFE	831	A8-8ZA-190-030	8ZA-1 FEUNM	A.....
J	831	87-A60-202-010	TERMINAL,ANT 4P MSP-154V-02	A.....
J	832	87-A60-403-010	TERMINAL,ANT PAL 2P HSP-312V05	
L	832	87-005-847-080	COIL,2.2UH(CECS)	A.....
L	942	87-A50-019-010	COIL,OSC LW(COI)	
L	941	87-A50-020-010	COIL,ANT LW(COI)	
L	951	8A-NF8-667-010	COIL,AM PACK 4(TOK)	A.....
L	951	8A-NF8-668-010	COIL,AM PACK 2(TOK)	
Q	836	87-A30-489-080	C-TR,KRA107S	A.....
Q	835	89-327-143-080	TR,2SC2714 (0.1W)	A.....
Q	953	89-503-602-080	C-FET,2SK360E	
SH	831	87-A90-023-010	SHLD-PLATE,ANT	A.....
TC	942	87-011-253-080	TRIMER,30P LAR	
C	3	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	4	87-012-368-080	C-CAP,S 0.1-50 F	A.....
C	26	87-010-382-080	CAP, ELECT 22-25V	A.....
C	28	87-010-382-080	CAP, ELECT 22-25V	A.....
C	27	87-010-382-080	CAP, ELECT 22-25V	A.....
C	25	87-010-382-080	CAP, ELECT 22-25V	A.....
C	22	87-016-658-000	CAP,E 4700-35 M SMG	A.....
C	21	87-016-658-000	CAP,E 4700-35 M SMG	A.....
C	32	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	34	87-010-247-080	CAP, ELECT 100-50V	A.....
C	35	87-010-260-080	CAP, ELECT 47-25V	A.....
C	33	87-010-263-080	CAP, ELECT 100-10V	A.....
C	31	87-010-263-080	CAP, ELECT 100-10V	A.....
C	36	87-010-381-080	CAP, ELECT 330-16V	A.....
C	38	87-010-384-080	CAP, ELECT 100-25V	A.....
C	39	87-010-384-080	CAP, ELECT 100-25V	A.....
C	40	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	60	87-010-403-080	CAP, ELECT 3.3-50V	A.....
C	82	87-010-260-080	CAP, ELECT 47-25V	A.....
C	81	87-010-374-080	CAP, ELECT 47-10V	A.....
C	80	87-010-401-080	CAP, ELECT 1-50V	A.....
CN	1	87-A60-996-010	CONN,13P V BLK TAC-L13X-A3	A.....
CN	91	87-A60-109-010	CONN,2P V S2M-2W	A.....
CNA	2	8A-NF6-640-010	CONN ASSY,3P (VM) ANF-6	A.....
CNA	1	8A-NF6-646-010	CONN ASSY,9P TID-A(460)	A.....
D	1	87-A40-673-090	DIODE,D10XB20	A.....
D	25	87-A40-553-080	DIODE,1N4003 LES	A.....
D	29	87-A40-784-080	ZENER,UZ39BSB	A.....

ELECTRICAL MAIN PARTS LIST - 8/12

D	31	87-A40-764-080	ZENER,UZ10BSC	A.....
D	61	87-A40-313-080	C-DIODE,MC 2840	A.....
D	65	87-A40-768-080	ZENER,UZ16BSA	A.....
Q	1	87-026-609-080	TR,KTA1266GR	A.....
Q	14	89-213-702-010	TR,2SB1370 (1.8W)	A.....
WH	1	87-A90-510-010	HLDR,WIRE 2.5-9P	A.....
C	401	87-010-176-080	C-CAP,S 680P-50 SL	A.....
C	402	87-010-176-080	C-CAP,S 680P-50 SL	A.....
C	409	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	407	87-010-401-080	CAP, ELECT 1-50V	A.....
C	408	87-010-401-080	CAP, ELECT 1-50V	A.....
C	403	87-010-958-080	CHIP -CAP,S 0.01-25BJ	A.....
C	406	87-010-958-080	CHIP -CAP,S 0.01-25BJ	A.....
C	405	87-010-958-080	CHIP -CAP,S 0.01-25BJ	A.....
C	404	87-010-958-080	CHIP -CAP,S 0.01-25BJ	A.....
C	417	87-010-221-080	CAP, ELECT 470-10V	A.....
C	410	87-010-384-080	CAP, ELECT 100-25V	A.....
C	413	87-010-401-080	CAP, ELECT 1-50V	A.....
C	414	87-010-401-080	CAP, ELECT 1-50V	A.....
C	412	87-010-401-080	CAP, ELECT 1-50V	A.....
C	411	87-010-401-080	CAP, ELECT 1-50V	A.....
C	411	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	412	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	415	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	416	87-010-546-080	CAP, ELECT 0.33-50V	A.....
C	419	87-A10-800-080	C-CAP,S 6800P-16 J B CM	A.....
C	418	87-A10-891-080	CAP,E 4.7-25 SME(K)	A.....
C	425	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	421	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	420	87-010-374-080	CAP, ELECT 47-10V	A.....
C	424	87-010-374-080	CAP, ELECT 47-10V	A.....
C	429	87-010-545-080	CAP, ELECT 0.22-50V	A.....
C	422	87-A10-804-080	C-CAP,S 0.1-25 J B	A.....
C	439	87-010-805-080	CAP, S 1-16	A.....
C	431	87-010-971-080	C-CAP,S 4700P-50 B J	A.....
C	437	87-010-971-080	C-CAP,S 4700P-50 B J	A.....
C	430	87-012-142-080	CAP, S 0.33-16	A.....
C	432	87-012-349-080	C-CAP,S 1000P-50 CH	A.....
C	438	87-012-349-080	C-CAP,S 1000P-50 CH	A.....
C	434	87-A11-182-080	C-CAP,S 0.27-16 J B	A.....
C	435	87-A11-182-080	C-CAP,S 0.27-16 J B	A.....
C	436	87-A11-183-080	C-CAP,S 0.12-16 J B	A.....
C	433	87-A11-183-080	C-CAP,S 0.12-16 J B	A.....
C	440	87-010-401-080	CAP, ELECT 1-50V	A.....
C	447	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	446	87-010-404-080	CAP, ELECT 4.7-50V	A.....
C	444	87-012-393-080	C-CAP,S 0.22-16 R K	A.....
C	449	87-012-393-080	C-CAP,S 0.22-16 R K	A.....
C	448	87-012-393-080	C-CAP,S 0.22-16 R K	A.....
C	445	87-012-393-080	C-CAP,S 0.22-16 R K	A.....
C	443	87-A10-229-080	C-CAP,S 0.68-10 K W5	A.....
C	441	87-A10-799-080	C-CAP,S 5600P-16 J B CM	A.....
C	442	87-A10-802-080	C-CAP,S 0.047-16 J B CM	A.....
C	450	87-016-669-080	C-CAP,S 0.1-25 K B	A.....
C	454	87-016-669-080	C-CAP,S 0.1-25 K B	A.....
C	457	87-016-669-080	C-CAP,S 0.1-25 K B	A.....
C	453	87-016-669-080	C-CAP,S 0.1-25 K B	A.....
C	455	87-A10-801-080	C-CAP,S 0.022-16 J B CM	A.....
C	456	87-A10-801-080	C-CAP,S 0.022-16 J B CM	A.....
C	451	87-A10-802-080	C-CAP,S 0.047-16 J B CM	A.....
C	452	87-A10-802-080	C-CAP,S 0.047-16 J B CM	A.....
C	466	87-010-194-080	CAP, CHIP 0.047	A.....
C	463	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	461	87-010-196-080	CHIP CAPACITOR,0.1-25	A.....
C	465	87-016-552-080	C-CAP,S 0.082-16 B K	A.....
C	468	87-A10-060-080	C-CAP,S 0.18-16 K B	A.....
C	467	87-A10-201-080	C-CAP,S0.33-16 KB	A.....
C	479	87-010-179-080	CAP,CHIP S B1200P	A.....
C	478	87-010-265-080	CAP, ELECT 33-16V	A.....
C	478	87-010-401-080	CAP, ELECT 1-50V	A.....
C	472	87-012-140-080	CAP 470P	A.....
C	474	87-012-140-080	CAP 470P	A.....
C	476	87-012-140-080	CAP 470P	A.....
C	475	87-012-140-080	CAP 470P	A.....
C	477	87-012-140-080	CAP 470P	A.....
C	473	87-012-140-080	CAP 470P	A.....
C	482	87-010-179-080	CAP,CHIP S B1200P	A.....
C	481	87-010-179-080	CAP,CHIP S B1200P	A.....
C	480	87-010-179-080	CAP,CHIP S B1200P	A.....
C	483	87-010-265-080	CAP, ELECT 33-16V	A.....
C	489	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	491	87-010-402-080	CAP, ELECT 2.2-50V	A.....
C	492	87-010-402-080	CAP, ELECT 2.2-50V	A.....
D	402	87-A40-747-080	ZENER,UZ5.1BSB	A.....
D	401	87-A40-760-080	ZENER,UZ9.1BSA	A.....
IC	401	87-A21-097-040	C-IC,M62463AFP	A.....
IC	431	87-A21-015-040	C-IC,M62491FP	A.....

ELECTRICAL MAIN PARTS LIST - 9/12

J	431	87-A61-069-010	JACK, PIN 6P R/W, R/W, O/B MSC	A.....
R	407	87-022-214-080	C-RES S100K-1/10WF	A.....
R	445	87-010-195-080	C-CAP, S 0.068-25 F	A.....
C	609	87-010-181-080	CAP, CHIP S 1800P	A.....
C	610	87-010-181-080	CAP, CHIP S 1800P	A.....
C	616	87-010-184-080	CHIP CAPACITOR 3300P(K)	A.....
C	619	87-010-263-080	CAP, ELECT 100-10V	A.....
C	618	87-010-401-080	CAP, ELECT 1-50V	A.....
C	611	87-010-956-080	CHIP-CAP, S 0.068-25B	A.....
C	617	87-012-369-080	C-CAP, S 0.047-50F	A.....
C	612	87-016-369-080	C-CAP, S 0.033-25 B K	A.....
C	614	87-016-669-080	C-CAP, S 0.1-25 K B	A.....
C	613	87-A11-567-080	C-CAP, S 0.01-50 K B	A.....
C	628	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	627	87-010-400-080	CAP, ELECT 0.47-50V	A.....
C	624	87-010-401-080	CAP, ELECT 1-50V	A.....
C	623	87-010-401-080	CAP, ELECT 1-50V	A.....
C	620	87-016-669-080	C-CAP, S 0.1-25 K B	A.....
C	621	87-A11-567-080	C-CAP, S 0.01-50 K B	A.....
C	626	87-A11-590-080	C-CAP, S 0.047-16 K B	A.....
C	629	87-A11-590-080	C-CAP, S 0.047-16 K B	A.....
C	631	87-010-185-080	C-CAP, S 3900P-50 B	A.....
C	632	87-010-185-080	C-CAP, S 3900P-50 B	A.....
C	634	87-010-196-080	CHIP CAPACITOR, 0.1-25	A.....
C	630	87-010-383-080	CAP, ELECT 33-25V	A.....
C	639	87-010-405-080	CAP, ELECT 10-50V	A.....
C	637	87-A10-307-080	CAP, M 0.1-50 J	A.....
C	636	87-A10-307-080	CAP, M 0.1-50 J	A.....
C	638	87-A10-307-080	CAP, M 0.1-50 J	A.....
C	635	87-A10-307-080	CAP, M 0.1-50 J	A.....
C	643	87-010-196-080	CHIP CAPACITOR, 0.1-25	A.....
C	644	87-010-401-080	CAP, ELECT 1-50V	A.....
C	642	87-010-401-080	CAP, ELECT 1-50V	A.....
C	641	87-010-401-080	CAP, ELECT 1-50V	A.....
C	679	87-010-196-080	CHIP CAPACITOR, 0.1-25	A.....
C	673	87-010-197-080	CAP, CHIP 0.01 DM	A.....
C	671	87-010-322-080	C-CAP, S 100P-50 CH	A.....
C	672	87-010-322-080	C-CAP, S 100P-50 CH	A.....
C	682	87-010-196-080	CHIP CAPACITOR, 0.1-25	A.....
C	680	87-010-197-080	CAP, CHIP 0.01 DM	A.....
CN	602	87-099-194-010	CONN, 6P 6216V	A.....
CN	601	87-099-719-010	CONN, 30P TYK-B(X)	A.....
D	602	87-A40-745-080	ZENER, UZ4.7BSA	A.....
IC	601	87-A21-452-030	C-IC, BD3876KS2	A.....
Q	605	87-A30-086-070	C-TR, CSD1306E	A.....
Q	603	87-A30-087-080	C-FET, 2SK2158	
Q	602	87-A30-269-040	C-FET, 2SJ461-T1	
C	535	87-010-178-080	CHIP CAP 1000P	A.....
C	533	87-010-196-080	CHIP CAPACITOR, 0.1-25	A.....
C	532	87-010-196-080	CHIP CAPACITOR, 0.1-25	A.....
C	536	87-010-196-080	CHIP CAPACITOR, 0.1-25	A.....
C	531	87-010-405-080	CAP, ELECT 10-50V	A.....
C	534	87-012-156-080	C-CAP, S 220P-50 CH	A.....
C	541	87-010-178-080	CHIP CAP 1000P	A.....
LED	405	87-017-756-040	LED, SLR-342DCT31 ORN	A.....
LED	402	87-017-756-040	LED, SLR-342DCT31 ORN	A.....
LED	403	87-017-756-040	LED, SLR-342DCT31 ORN	A.....
LED	404	87-017-756-040	LED, SLR-342DCT31 ORN	A.....
LED	401	87-017-756-040	LED, SLR-342DCT31 ORN	A.....
LED	406	87-A40-496-040	LED, SLR-342MCT31 GRN	A.....
LED	407	87-A40-496-040	LED, SLR-342MCT31 GRN	A.....
LED	409	87-A40-496-040	LED, SLR-342MCT31 GRN	A.....
LED	408	87-A40-496-040	LED, SLR-342MCT31 GRN	A.....
LED	410	87-A40-496-040	LED, SLR-342MCT31 GRN	A.....
LED	416	87-A40-619-080	LED, SLR-56PT-TE7-W GRN	A.....
LED	426	87-A40-496-040	LED, SLR-342MCT31 GRN	A.....
LED	425	87-A40-496-040	LED, SLR-342MCT31 GRN	A.....
LED	451	87-017-756-040	LED, SLR-342DCT31 ORN	A.....
LED	453	87-017-756-040	LED, SLR-342DCT31 ORN	A.....
LED	452	87-017-756-040	LED, SLR-342DCT31 ORN	A.....
LED	454	87-A40-496-040	LED, SLR-342MCT31 GRN	A.....
LED	455	87-A40-496-040	LED, SLR-342MCT31 GRN	A.....
LED	456	87-A40-496-040	LED, SLR-342MCT31 GRN	A.....
LED	499	87-A40-317-080	LED, SLR-342VCT31 RED	A.....
R	407	87-022-214-080	C-RES S100K-1/10WF	A.....
Q	604	87-A30-075-080	C-TR, 2SA1235F	A.....
Q	602	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	603	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	601	87-A30-087-080	C-FET, 2SK2158	A.....
D	8	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	5	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	4	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	7	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	9	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	6	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	1	87-A40-547-090	DIODE, D5SBA20	
D	1	87-A40-673-090	DIODE, D10XB20	A.....

ELECTRICAL MAIN PARTS LIST - 10/12

D	2	87-A40-673-090	DIODE,D10XB20	A.....
D	12	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	16	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	13	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	10	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	18	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	17	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	15	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	11	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	14	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	19	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	21	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	20	87-020-465-080	DIODE,1SS133 (110MA)	A.....
PT	2	8A-NF8-661-010	PT,SUB ANF-8 (U)	A.....
Q	1	87-026-245-080	TR,DTC114ES	A.....
Q	2	87-026-610-080	TR,KTC3198GR	A.....
D	101	87-A40-269-080	C-DIODE,MC2836	A.....
D	103	87-A40-313-080	C-DIODE,MC 2840	A.....
D	150	87-A40-270-080	C-DIODE,MC2838	A.....
D	204	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	201	87-A40-269-080	C-DIODE,MC2836	A.....
D	203	87-A40-313-080	C-DIODE,MC 2840	A.....
D	401	87-A40-270-080	C-DIODE,MC2838	A.....
D	403	87-A40-553-080	DIODE,1N4003 LES	A.....
D	402	87-A40-553-080	DIODE,1N4003 LES	A.....
IC	101	87-A21-355-010	IC,STK490-140	A.....
IC	101	87-A21-418-010	IC,STK490-340	A.....
IC	201	87-A21-397-010	IC,STK490-070	A.....
Q	101	87-A30-107-070	C-TR,CMBT5401	A.....
Q	102	87-A30-107-070	C-TR,CMBT5401	A.....
Q	151	87-A30-106-040	C-TR,CMBT5551	A.....
Q	150	87-A30-107-070	C-TR,CMBT5401	A.....
Q	203	87-A30-075-080	C-TR,2SA1235F	A.....
Q	204	87-A30-075-080	C-TR,2SA1235F	A.....
Q	202	87-A30-107-070	C-TR,CMBT5401	A.....
Q	201	87-A30-107-070	C-TR,CMBT5401	A.....
Q	401	87-A30-075-080	C-TR,2SA1235F	A.....
Q	402	87-A30-075-080	C-TR,2SA1235F	A.....
D	101	87-A40-269-080	C-DIODE,MC2836	A.....
D	103	87-A40-313-080	C-DIODE,MC 2840	A.....
D	160	87-A40-270-080	C-DIODE,MC2838	A.....
D	205	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	208	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	207	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	201	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	204	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	202	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	203	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	209	87-A40-535-080	DIODE,1N5393-GOODARK	A.....
D	216	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	214	87-A40-313-080	C-DIODE,MC 2840	A.....
D	210	87-A40-535-080	DIODE,1N5393-GOODARK	A.....
D	219	87-A40-535-080	DIODE,1N5393-GOODARK	A.....
D	218	87-A40-535-080	DIODE,1N5393-GOODARK	A.....
D	211	87-A40-754-080	ZENER,UZ6.8BSC	A.....
D	212	87-A40-754-080	ZENER,UZ6.8BSC	A.....
IC	101	87-A21-397-010	IC,STK490-070	A.....
Q	101	87-A30-107-070	C-TR,CMBT5401	A.....
Q	102	87-A30-107-070	C-TR,CMBT5401	A.....
Q	161	87-A30-106-040	C-TR,CMBT5551	A.....
Q	160	87-A30-107-070	C-TR,CMBT5401	A.....
Q	203	87-A30-075-080	C-TR,2SA1235F	A.....
Q	201	87-A30-075-080	C-TR,2SA1235F	A.....
Q	207	87-A30-076-080	C-TR,2SC3052F	A.....
Q	204	87-A30-076-080	C-TR,2SC3052F	A.....
Q	202	87-A30-076-080	C-TR,2SC3052F	A.....
Q	208	87-A30-076-080	C-TR,2SC3052F	A.....
Q	206	87-A30-190-080	TR,CC5551	A.....
Q	209	87-A30-256-010	TR,2SD1933	A.....
Q	214	87-A30-074-080	C-TR,RT1P 141C	A.....
Q	217	87-A30-075-080	C-TR,2SA1235F	A.....
Q	215	87-A30-075-080	C-TR,2SA1235F	A.....
Q	213	87-A30-107-070	C-TR,CMBT5401	A.....
Q	212	87-A30-255-010	TR,2SB1342	A.....
Q	210	87-A30-255-010	TR,2SB1342	A.....
Q	211	87-A30-256-010	TR,2SD1933	A.....
D	106	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	105	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	107	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	101	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	108	87-A40-752-080	ZENER,UZ6.2BSC	A.....
D	306	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	309	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	307	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	303	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	301	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	305	87-020-465-080	DIODE,1SS133 (110MA)	A.....

ELECTRICAL MAIN PARTS LIST - 11/12

D	304	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	302	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	308	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	312	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	316	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	311	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	318	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	314	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	313	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	315	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	310	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	320	87-020-465-080	DIODE, 1SS133 (110MA)	
D	326	87-020-465-080	DIODE, 1SS133 (110MA)	
D	328	87-020-465-080	DIODE, 1SS133 (110MA)	
D	322	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	330	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	383	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	382	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	381	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	384	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	385	87-A40-802-080	ZENER, UZ5.1BSC	A.....
D	401	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	701	87-A40-269-080	C-DIODE, MC2836	A.....
D	901	87-020-465-080	DIODE, 1SS133 (110MA)	
IC	251	87-A20-914-010	IC, SPS-442-1-F	A.....
IC	380	87-A21-577-040	C-IC, M61506FP	A.....
IC	402	87-070-289-040	IC, BU 2092F	A.....
IC	401	87-A21-021-040	C-IC, BU2099FV	A.....
Q	107	87-026-610-080	TR, KTC3198GR	A.....
Q	102	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	101	87-A30-087-080	C-FET, 2SK2158	A.....
Q	103	87-A30-468-080	C-TR, KRC102S-RTK	A.....
Q	104	87-A30-484-080	C-TR, KRA102S	A.....
Q	108	87-A30-484-080	C-TR, KRA102S	A.....
Q	105	87-A30-484-080	C-TR, KRA102S	A.....
Q	401	87-A30-075-080	C-TR, 2SA1235F	A.....
Q	704	87-A30-318-080	TR, CSA952K	A.....
Q	705	87-A30-318-080	TR, CSA952K	A.....
Q	701	87-A30-329-080	TR, CD1585BC	A.....
D	353	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	352	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
IC	303	87-A20-783-040	C-IC, BA7762AFS	A.....
Q	357	87-026-609-080	TR, KTA1266GR	A.....
Q	358	87-026-610-080	TR, KTC3198GR	A.....
Q	359	87-026-610-080	TR, KTC3198GR	A.....
Q	355	87-A30-063-080	C-TR, KRA104S	A.....
Q	356	87-A30-076-080	C-TR, 2SC3052F	
Q	351	87-A30-087-080	C-FET, 2SK2158	A.....
Q	354	87-A30-087-080	C-FET, 2SK2158	A.....
Q	353	87-A30-087-080	C-FET, 2SK2158	A.....
Q	361	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	383	87-A30-075-080	C-TR, 2SA1235F	A.....
Q	381	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	382	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	102	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	103	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	109	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	104	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	101	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	108	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	107	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	106	87-A30-269-040	C-FET, 2SJ461-T1	A.....
Q	105	87-A30-269-040	C-FET, 2SJ461-T1	A.....
Q	113	87-A30-075-080	C-TR, 2SA1235F	A.....
Q	110	87-A30-076-080	C-TR, 2SC3052F	A.....
D	804	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
D	992	87-020-465-080	DIODE, 1SS133 (110MA)	
IC	991	87-070-127-110	IC, LC72131 D	A.....
Q	981	87-A30-234-080	TR, CSC4115BC	A.....
D	801	87-020-465-080	DIODE, 1SS133 (110MA)	
D	803	87-020-465-080	DIODE, 1SS133 (110MA)	A.....
IC	801	87-A21-560-010	IC, LA1844L-A	A.....
Q	802	87-A30-076-080	C-TR, 2SC3052F	A.....
Q	801	87-A30-076-080	C-TR, 2SC3052F	A.....
IC	861	87-A20-440-040	C-IC, BU1920FS	
Q	863	87-A30-076-080	C-TR, 2SC3052F	
Q	861	87-A30-076-080	C-TR, 2SC3052F	
D	944	87-020-465-080	DIODE, 1SS133 (110MA)	
D	942	87-A40-270-080	C-DIODE, MC2838	
Q	836	87-A30-489-080	C-TR, KRA107S	A.....
Q	835	89-327-143-080	TR, 2SC2714 (0.1W)	A.....
Q	948	87-A30-086-070	C-TR, CSD1306E	
Q	952	87-A30-086-070	C-TR, CSD1306E	
Q	951	87-A30-484-080	C-TR, KRA102S	
Q	953	89-503-602-080	C-FET, 2SK360E	
D	1	87-A40-673-090	DIODE, D10XB20	A.....
D	28	87-A40-553-080	DIODE, 1N4003 LES	A.....

ELECTRICAL MAIN PARTS LIST - 12/12

D	26	87-A40-553-080	DIODE,1N4003 LES	A.....
D	25	87-A40-553-080	DIODE,1N4003 LES	A.....
D	27	87-A40-553-080	DIODE,1N4003 LES	A.....
D	29	87-A40-784-080	ZENER,UZ39BSB	A.....
D	34	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	30	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	32	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	33	87-A40-553-080	DIODE,1N4003 LES	A.....
D	31	87-A40-764-080	ZENER,UZ10BSC	A.....
D	60	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	64	87-A40-269-080	C-DIODE,MC2836	A.....
D	63	87-A40-270-080	C-DIODE,MC2838	A.....
D	61	87-A40-313-080	C-DIODE,MC 2840	A.....
D	62	87-A40-313-080	C-DIODE,MC 2840	A.....
D	65	87-A40-768-080	ZENER,UZ16BSA	A.....
D	84	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	85	87-020-465-080	DIODE,1SS133 (110MA)	A.....
Q	2	87-026-609-080	TR,KTA1266GR	A.....
Q	1	87-026-609-080	TR,KTA1266GR	A.....
Q	5	87-026-610-080	TR,KTC3198GR	A.....
Q	7	87-A30-075-080	C-TR,2SA1235F	A.....
Q	8	87-A30-075-080	C-TR,2SA1235F	A.....
Q	6	87-A30-076-080	C-TR,2SC3052F	A.....
Q	9	87-A30-318-080	TR,CSA952K	A.....
Q	10	87-A30-076-080	C-TR,2SC3052F	A.....
Q	14	89-213-702-010	TR,2SB1370 (1.8W)	A.....
Q	61	87-A30-075-080	C-TR,2SA1235F	A.....
Q	63	87-A30-075-080	C-TR,2SA1235F	A.....
Q	64	87-A30-076-080	C-TR,2SC3052F	A.....
Q	60	87-A30-076-080	C-TR,2SC3052F	A.....
Q	62	87-A30-076-080	C-TR,2SC3052F	A.....
Q	84	87-026-609-080	TR,KTA1266GR	A.....
Q	82	87-026-610-080	TR,KTC3198GR	A.....
Q	81	87-A30-076-080	C-TR,2SC3052F	A.....
D	402	87-A40-747-080	ZENER,UZ5.1BSB	A.....
D	401	87-A40-760-080	ZENER,UZ9.1BSA	A.....
IC	401	87-A21-097-040	C-IC,M62463AFP	A.....
IC	431	87-A21-015-040	C-IC,M62491FP	A.....
Q	403	87-A30-075-080	C-TR,2SA1235F	A.....
Q	401	87-A30-086-070	C-TR,CSD1306E	A.....
Q	404	87-A30-086-070	C-TR,CSD1306E	A.....
Q	402	87-A30-086-070	C-TR,CSD1306E	A.....
Q	431	87-A30-086-070	C-TR,CSD1306E	A.....
D	603	87-020-465-080	DIODE,1SS133 (110MA)	A.....
D	602	87-A40-745-080	ZENER,UZ4.7BSA	A.....
IC	601	87-A21-452-030	C-IC,BD3876KS2	A.....
Q	601	87-026-610-080	TR,KTC3198GR	A.....
Q	608	87-A30-075-080	C-TR,2SA1235F	A.....
Q	607	87-A30-075-080	C-TR,2SA1235F	A.....
Q	609	87-A30-075-080	C-TR,2SA1235F	A.....
Q	606	87-A30-086-070	C-TR,CSD1306E	A.....
Q	605	87-A30-086-070	C-TR,CSD1306E	A.....
Q	603	87-A30-087-080	C-FET,2SK2158	
Q	602	87-A30-269-040	C-FET,2SJ461-T1	
Q	532	87-A30-075-080	C-TR,2SA1235F	A.....
Q	531	87-A30-076-080	C-TR,2SC3052F	A.....

MECHANICAL PARTS LIST - 1/2

NOTE: The characters in the suffix column indicate the part usage.

U		XX.....	A.....
		KANRI	
REF.NO	PARTS NO.	NO.	SUFFIX
	8A-NF6-003-010	CABI,BOTTOM	A.....
	8A-NF6-004-010	CABI,STEEL	A.....
	8A-NF6-005-010	PANEL, TOP	A.....
	8A-NF6-006-010	BOX,CASS 1	A.....
	8A-NF6-007-010	BOX,CASS 2	A.....
	8A-NF6-008-010	PANEL,TRAY	A.....
	8A-NF6-009-010	PANEL,CD	A.....
	8A-NF6-010-010	PANEL,DIRECT	A.....
	8A-NF6-018-010	WINDOW,CASS 1	A.....
	8A-NF6-019-010	WINDOW,CASS 2	A.....
	8A-NF6-041-010	RING,VOL	A.....
	8A-NFT-003-010	WINDOW,DISPLAY U	A.....
	8A-NFT-004-010	WINDOW,DISPLAY EZ	
	8A-NFT-011-010	PANEL,REAR U	A.....
	8A-NFT-012-010	PANEL,REAR EZ	
	8A-NFT-016-010	PANEL,FR U 7CH	A.....
	8A-NFT-017-010	PANEL,FR EZ 5CH	
	8A-NFT-022-010	COVER, REAR USM	A.....
	8A-NFT-024-010	COVER, REAR US	
	8A-NFT-025-010	COVER, REAR EZSM 85	
*	8A-NFT-001-010	CABI,FR U	A.....
	8A-NF6-022-010	KEY,ECHO	A.....
	8A-NF6-023-010	KEY,ASSY FUN	A.....
	8A-NF6-026-010	KEY,ASSY OPE	A.....
	8A-NF6-029-010	KEY,GEQ	A.....
	8A-NF6-030-010	KNOB,RTRY JOG	A.....
	8A-NF6-035-010	KEY,CD DIRECT	A.....
	8A-NF6-036-010	KEY,CD EDIT	A.....
	8A-NF6-037-010	KEY,CD OPEN	A.....
	8A-NF6-045-010	KEY,ASSY POWER	A.....
	8A-NF6-046-010	KEY,T-BASS EZ	
	8A-NF6-047-010	KEY,T-BASS U	A.....
	8A-NFT-007-010	KEY,ASSY PRO	A.....
	81-532-080-010	LABEL, CASS. COMPT	A.....
	8A-NF6-038-010	REFLECTOR,FL	A.....
	8A-NF6-039-010	REFLECTOR,DECK	A.....
	8A-NF6-040-010	REFLECTOR,VOL	A.....
	8A-NF6-042-010	REFLECTOR,ECO	A.....
	8A-NF6-044-010	REFLECTOR,CD	A.....
	87-NF6-615-010	CONN ASSY,3P PB	A.....
	87-NF6-616-010	CONN ASSY,8P RPB	A.....
	84-ZG1-245-210	CAP,OPTICAL	A.....
	82-NF5-218-010	SPR-T,EJECT 1 (SIN)	A.....
	82-NF5-219-010	SPR-T,EJECT 2 (SIN)	A.....
	82-NF5-229-010	PLATE,LOCK	A.....
	86-NF9-224-010	SPR-C,LOCK	A.....
	87-064-185-010	HLDR,WIRE	A.....
	87-084-077-010	NYLON RIVET, 3.5-4.5	A.....
	87-NF4-216-010	HLDR,LOCK 1	A.....
	87-NF4-217-110	HLDR,LOCK 2	A.....
	87-NF4-221-010	HLDR,CABLE	A.....
	8A-NF6-210-010	HLDR,IC6	A.....
	8A-NF6-228-010	HLDR,PWB PT 96-75	A.....
	8A-NF7-226-010	HLDR,IC2-T2	A.....
	8Z-NF6-210-010	DMPR,150 N	A.....
	8A-NF6-205-010	GUIDE,CD	A.....
*	8A-NF6-213-010	HLDR,HT-SINK L	A.....
*	8A-NF6-214-010	HLDR,HT-SINK R	A.....
*	8A-NF6-219-010	HLDR,FAN	A.....
*	8A-NF7-209-010	HLDR,PWB-M BTM	A.....
*	8A-NF8-206-010	HLDR,PWB M	A.....
	87-067-579-010	TAPPING SCREW, BVT2+3-8	A.....
	87-067-581-010	TAPPING SCREW, BVT2+3-15	A.....
	87-067-688-010	BVTT+3-6	A.....
	87-067-703-010	TAPPING SCREW, BVT2+3-10	A.....
	87-067-758-010	BVT2+3-12 W/O SLOT	A.....
	87-067-975-010	S-SCREW,IT+4-8	A.....
	87-591-094-410	TAPPING SCREW, QIT+3-6	A.....
	87-591-095-410	TAPPING SCREW, QIT+3-8 (GLD)	A.....
	87-721-097-410	QT2+3-12 GLD	A.....
	87-723-096-410	QT2+3-10W/O SLOT BL	A.....
	87-B10-091-010	UTT2+3-10 W/O BLK	A.....
	87-NF4-224-010	S-SCREW,IT3B+3-8 CU	A.....
	8A-NF6-201-010	GUIDE,FL	A.....
	8A-NF6-203-010	GUIDE,OPE	A.....
	8A-NF6-204-010	GUIDE,DECK	A.....
	87-067-703-010	TAPPING SCREW, BVT2+3-10	A.....
*	87-067-001-010	FW,3.1-5.4-1	
	87-085-185-010	BUSHING, AC CORD (E)	
	87-085-189-010	BUSHING, CORD (U)	A.....
	87-A91-711-010	FAN, 3110GL-B4W-B34-H02 -400MM	A.....

MECHANICAL PARTS LIST - 2/2


		88-905-281-110	FF-CABLE, 5P 1.25 280MM	A.....
		88-906-151-110	FF-CABLE,6P 1.25	
		88-906-621-110	FF-CABLE,6P 1.25 620MM	A.....
		88-907-421-110	FF-CABLE,7P 1.25 420MM	A.....
		88-910-151-110	FF-CABLE, 10P 1.25 150MM	A.....
		88-913-521-110	FF-CABLE,13P 1.25 520MM	A.....
		88-915-111-110	FF-CABLE,15P 1.25	A.....
PT	101	8A-NFT-621-010	PT,U EI96-60 ANF-T	A.....
PT	101	8A-NFT-625-010	PT,E EI96-75 ANF-T	
W	101	87-A80-092-010	AC CORD ASSY,E BLK SUN FAI	
W	101	87-A80-110-010	AC CORD ASSY,U SPT-2W	A.....
WH	101	87-A90-459-010	HLDR,WIRE 2.5-5P	A.....
WH	102	87-A90-460-010	HLDR,WIRE 2.5-7P	A.....
WH	1	87-A90-510-010	HLDR,WIRE 2.5-9P	A.....

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

U	XX.....	A.....
	KANRI	
REF.NO	PARTS NO.	NO.
		DESCRIPTION
		SUFFIX
	8A-NFT-903-010	IB,U(ESF)M
	8A-NFT-906-010	IB,EZ(9L)M
	8A-NFT-913-010	IB,U(ESF)I
	87-006-225-010	AM LOOP ANT NC2
	87-043-115-010	ANT,FEEDER FM
	87-A90-118-010	ANT,WIRE FM (Z)
	8Z-NFV-702-010	RC UNIT,RC-ZAS05

SCHEMATIC DIAGRAM – 1 (MAIN 1/4 : AMP SECTION)

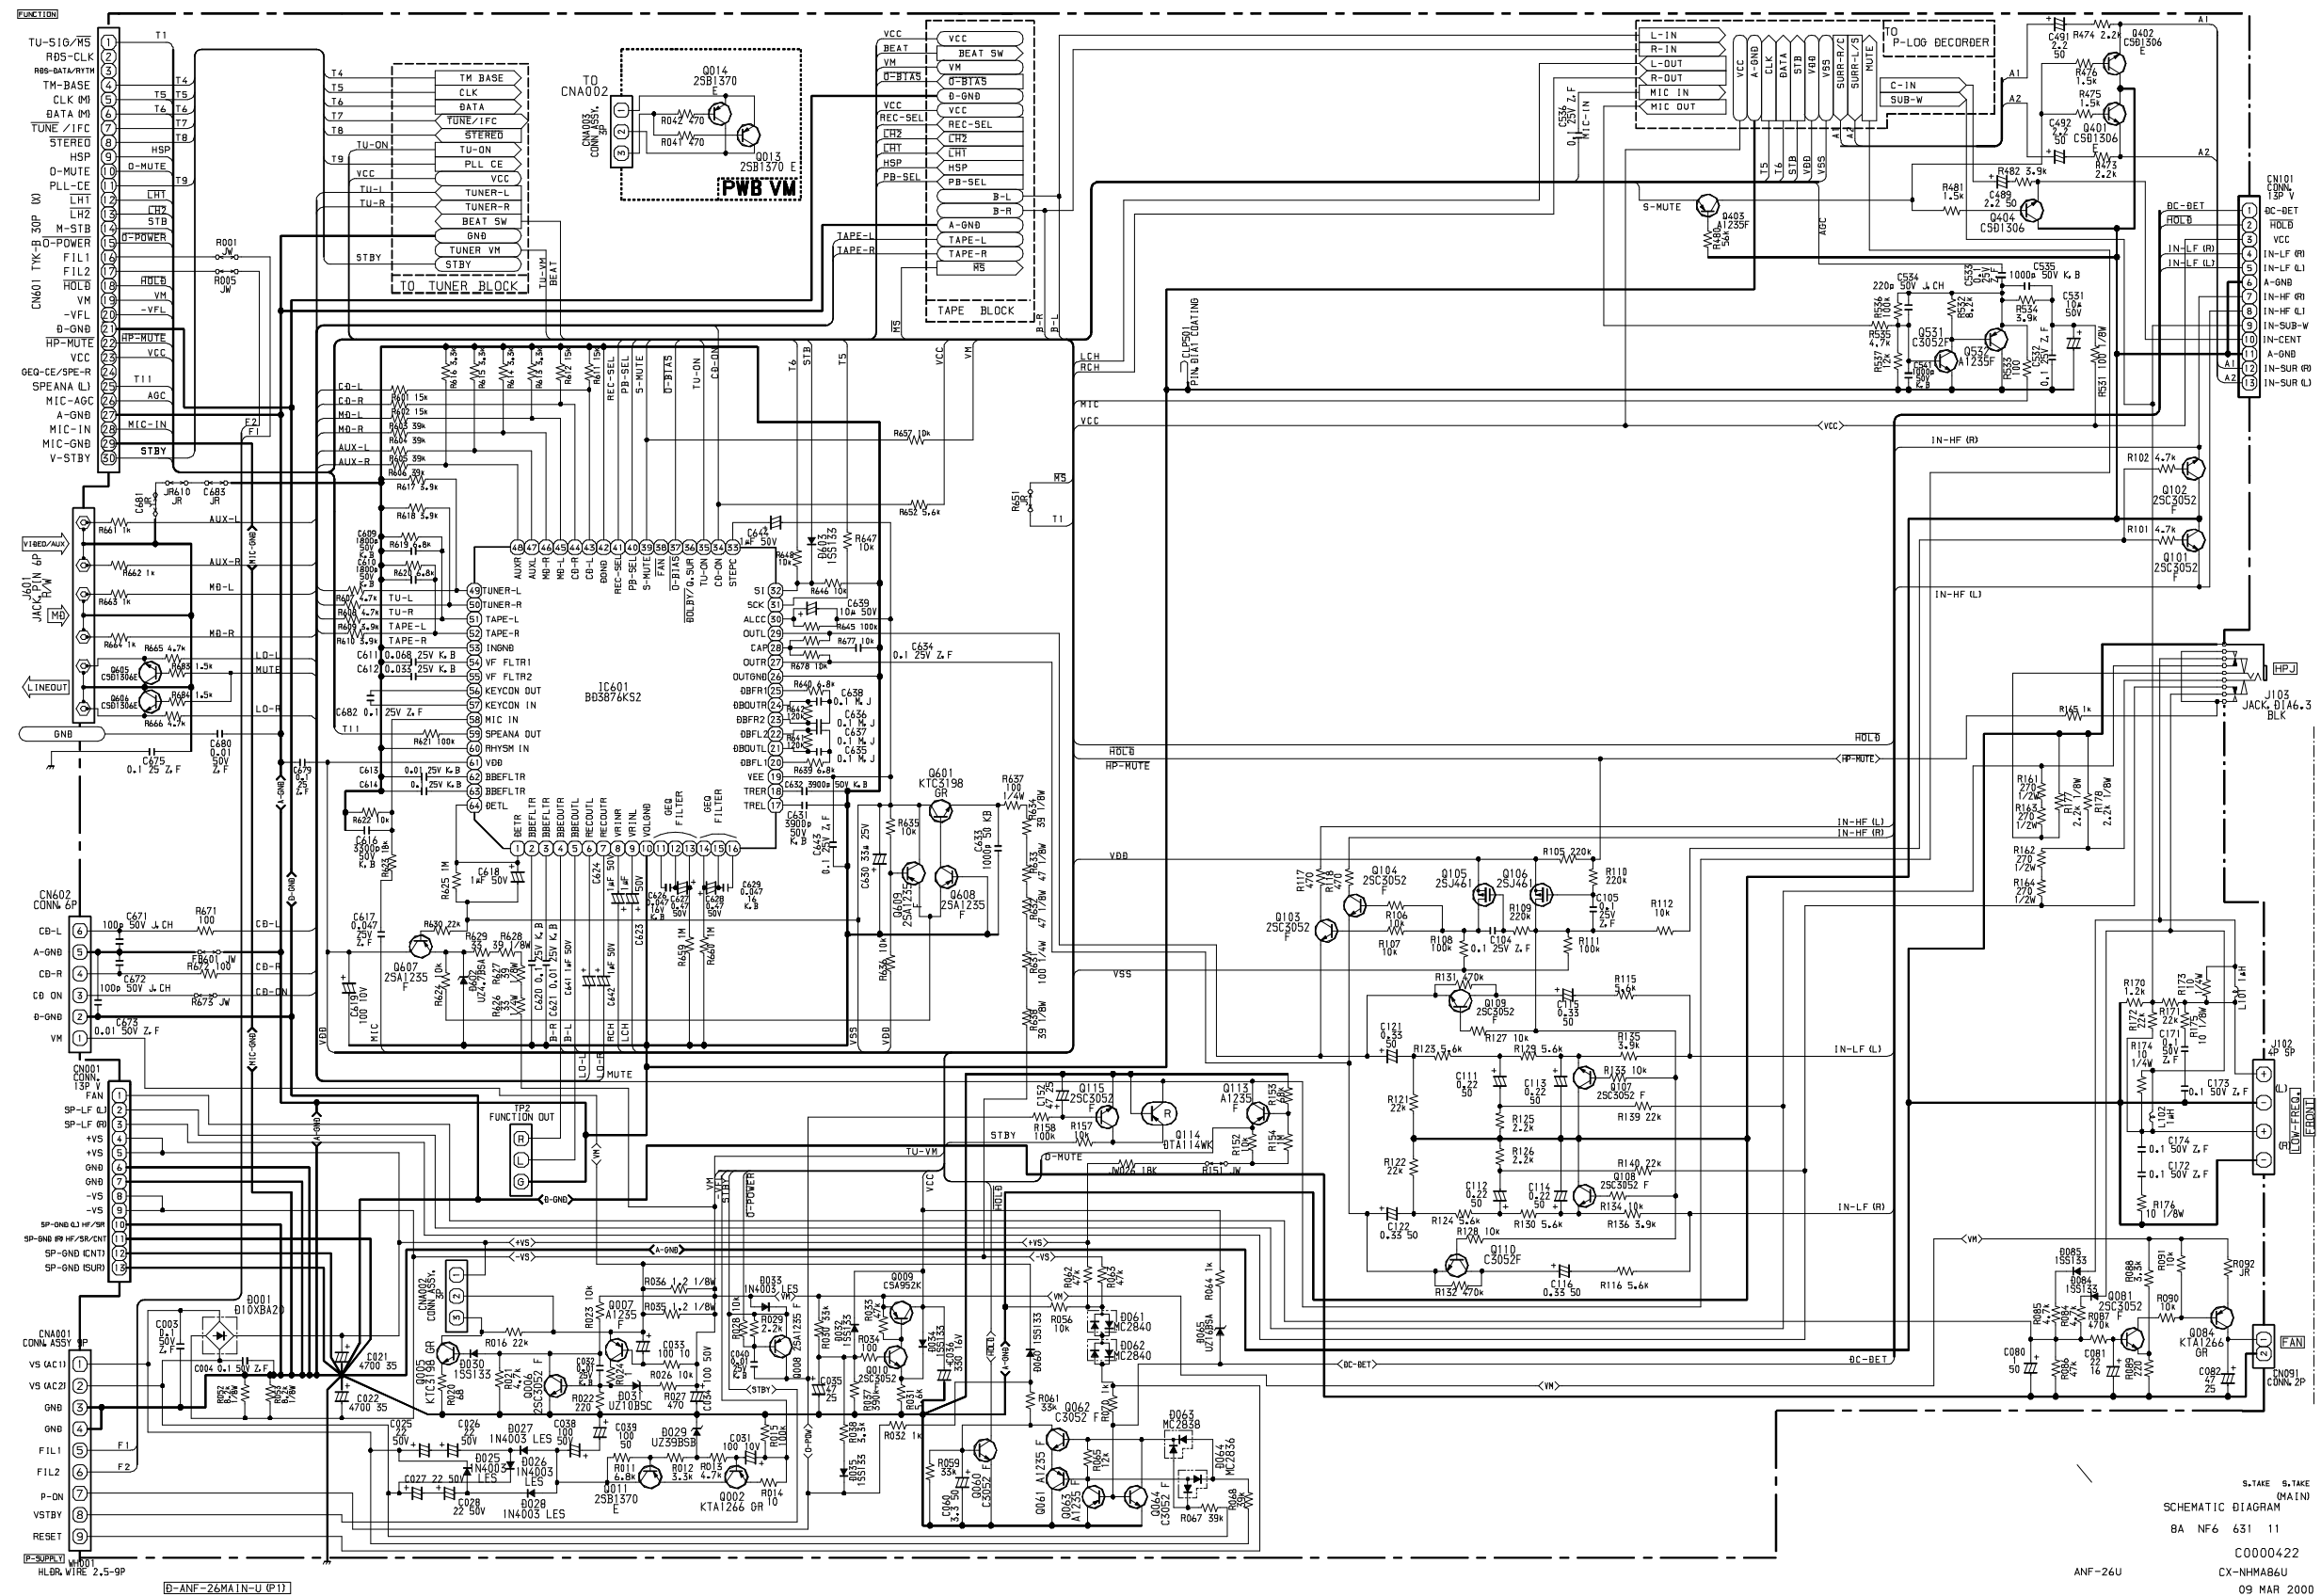


AM PACK

	PARTS NO. / PARTS CODE		
	U/LH, EZ, K, G, V	HE/HR/HC	D/HD
1ST	87-A91-551-01 FLTR, PCFJZH-450 L (TOK)	87-A91-552-01 FLTR, CFMT-450AL (TOK)	87-A91-553-01 FLTR, PCFMT-060L (TOK)
2ND			
3RD			

	PARTS NO./ PARTS CODE	
	U/LH, B/HB, V	EZ, K, G
1ST	BA-NF8-667-01 COIL, AM PACK4 (TOK)	BA-NF8-668-01 COIL, AM PACK (TOK)
2ND		
3RD		

*EXCEPT SW BAND MODEL (HE/HR/HC)

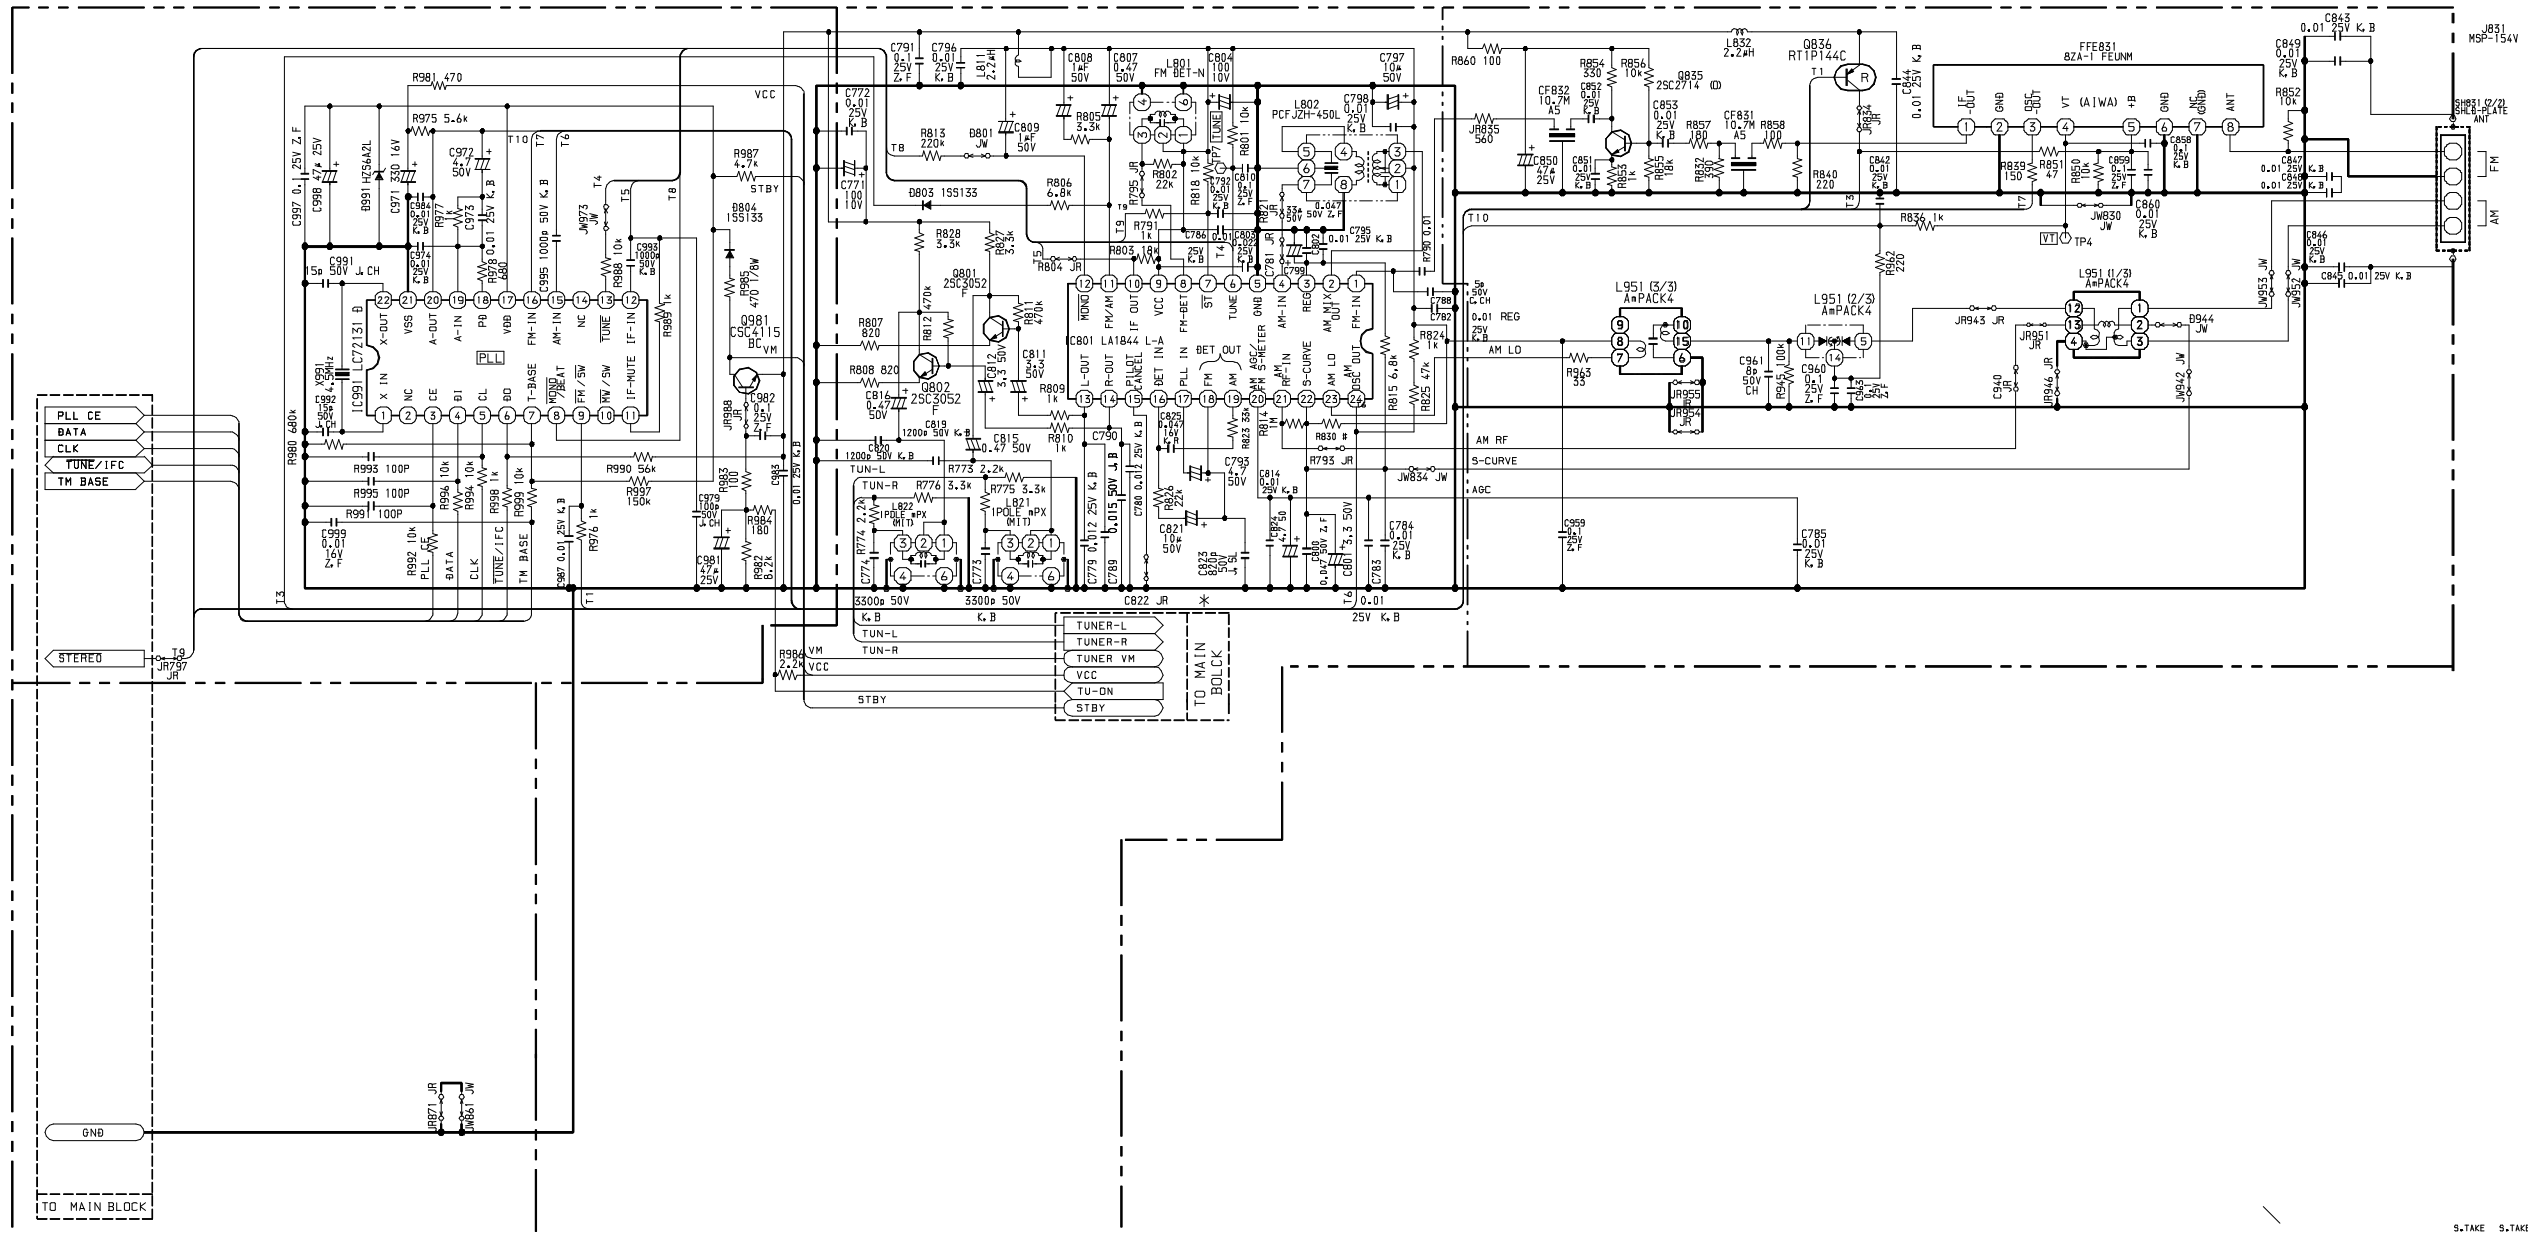


S.TAKE S.TAKE
(TUNER)
SCHEMATIC DIAGRAM
8A NF6 631 11
C0000422
CX-NHMA86U
09 MAR 2000


Ø-ANF-26MA [N-U (P7)

ANF-26 U


SCHEMATIC DIAGRAM – 4 (MAIN 4/4 : 5.1CH SECTION)

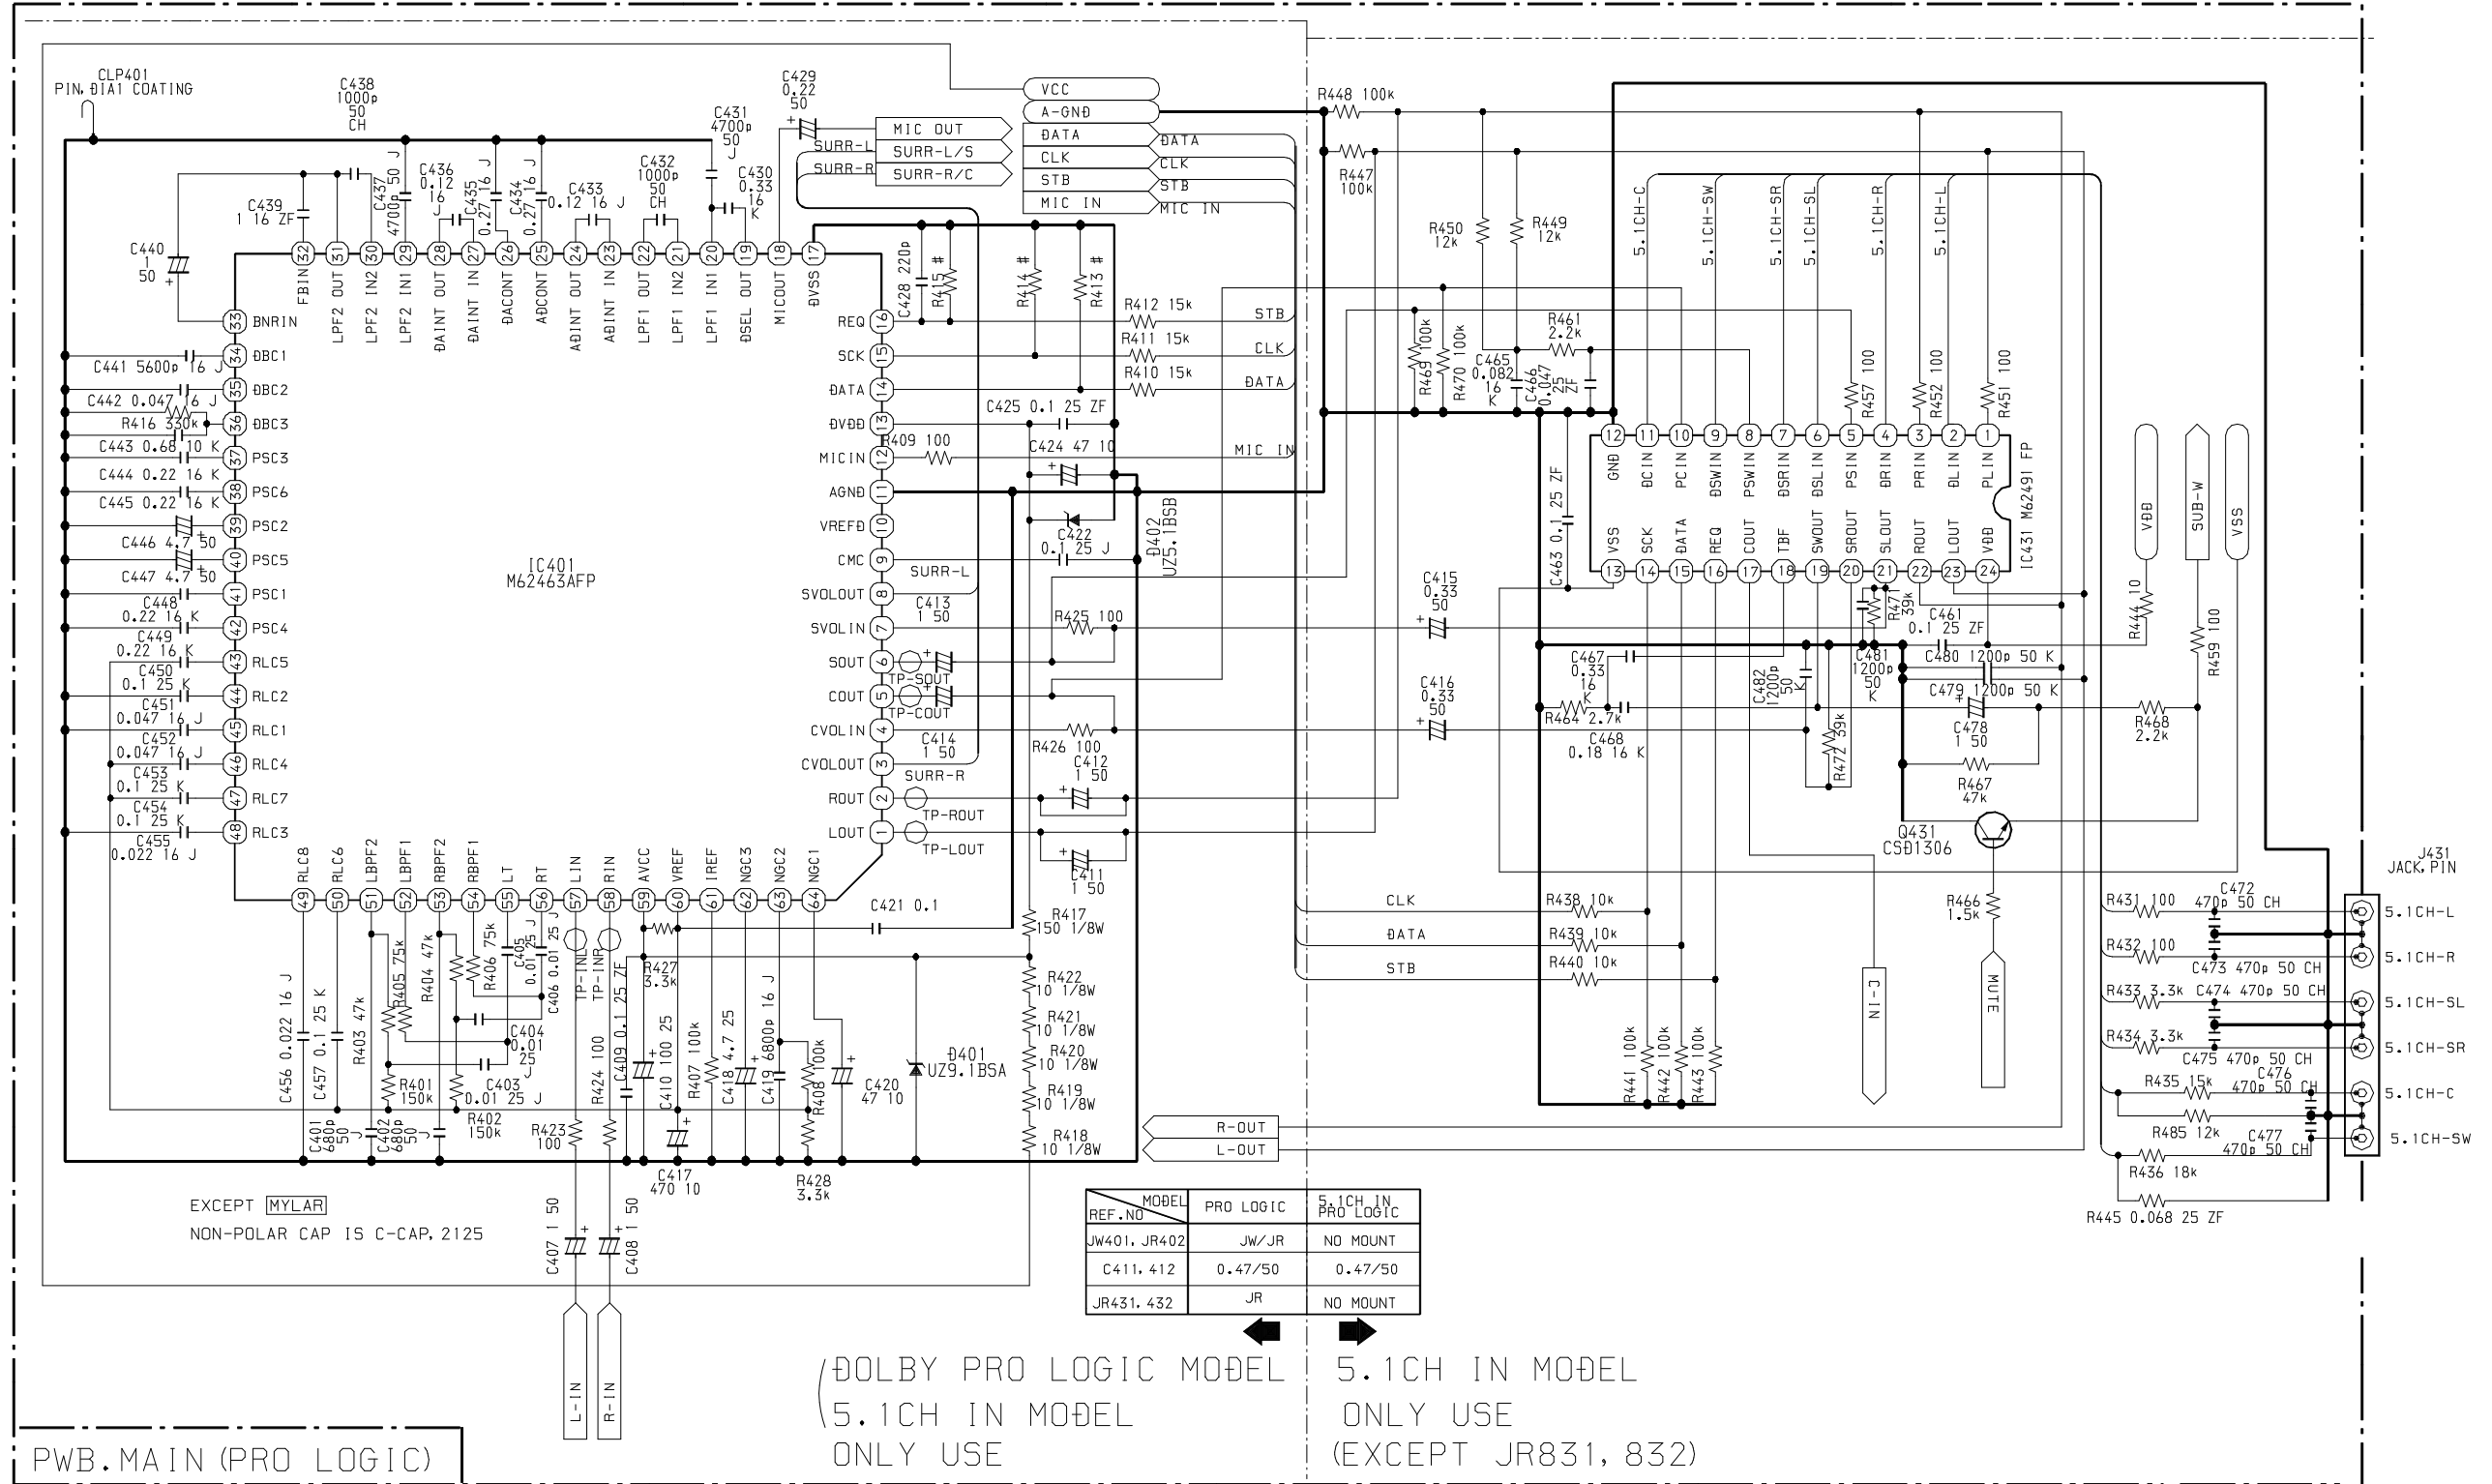

SCHEMATIC DIAGRAM – 5 (FRONT)

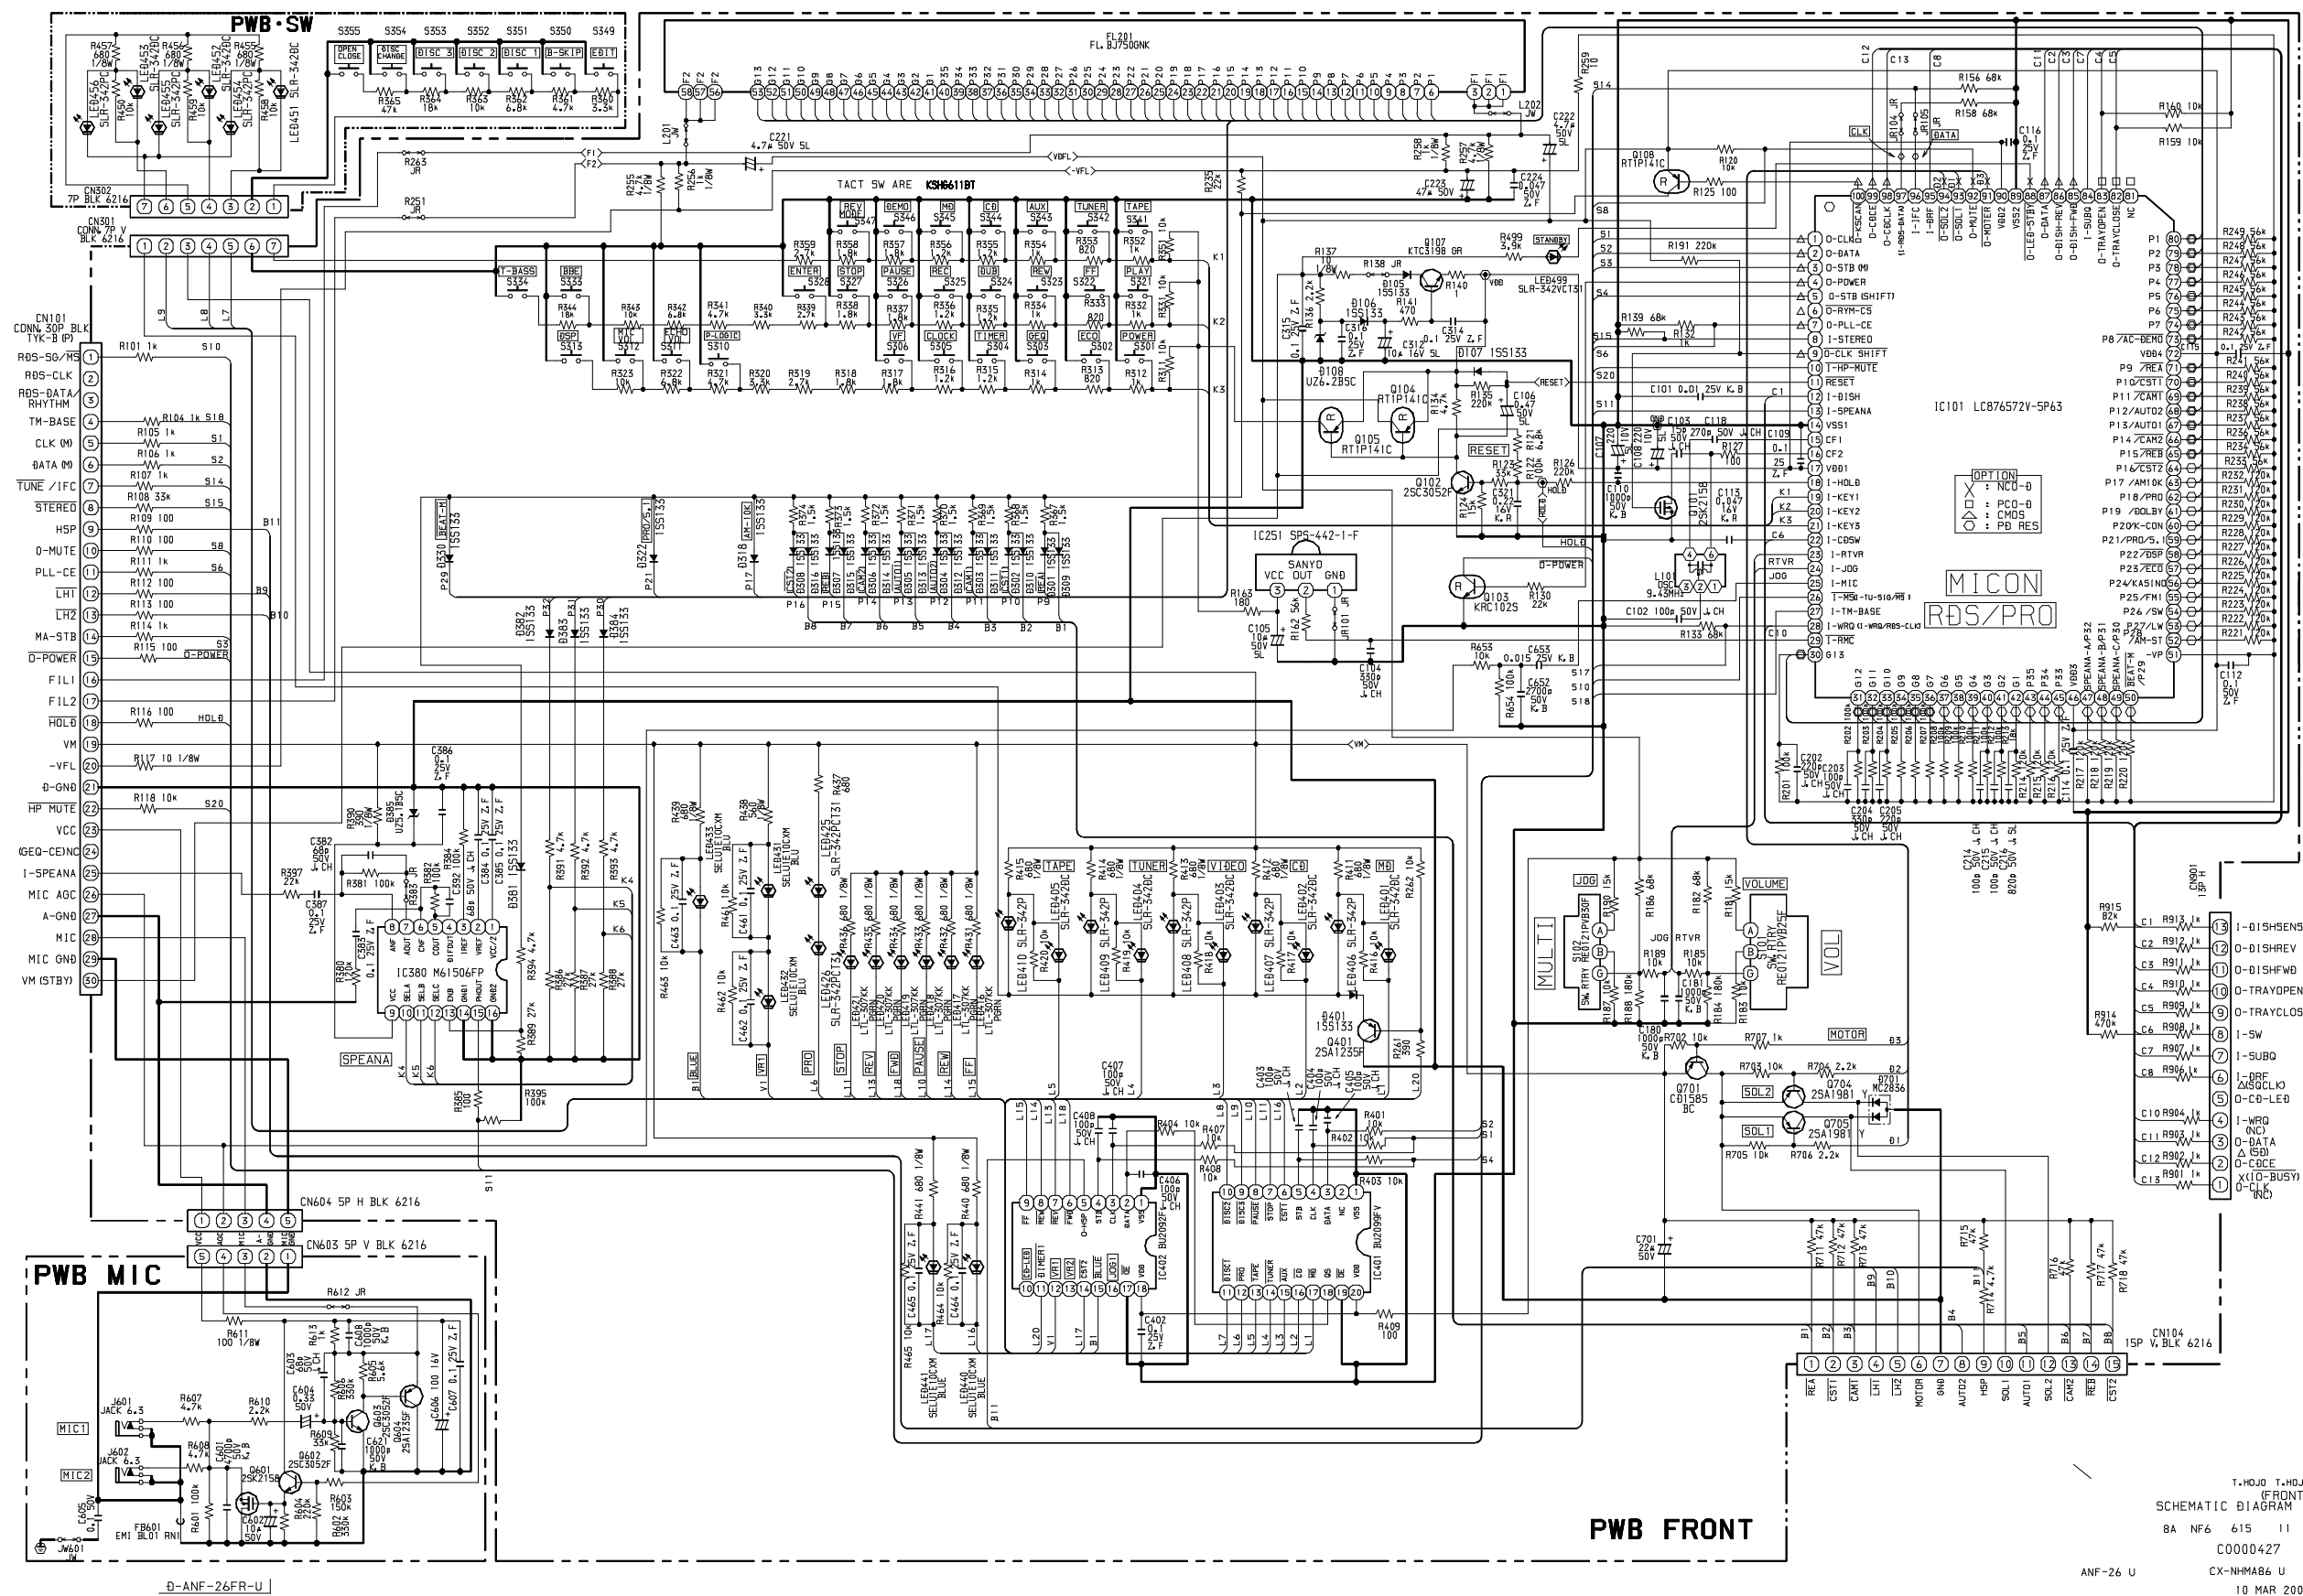


SCHEMATIC DIAGRAM – 6 (AMP 1F)

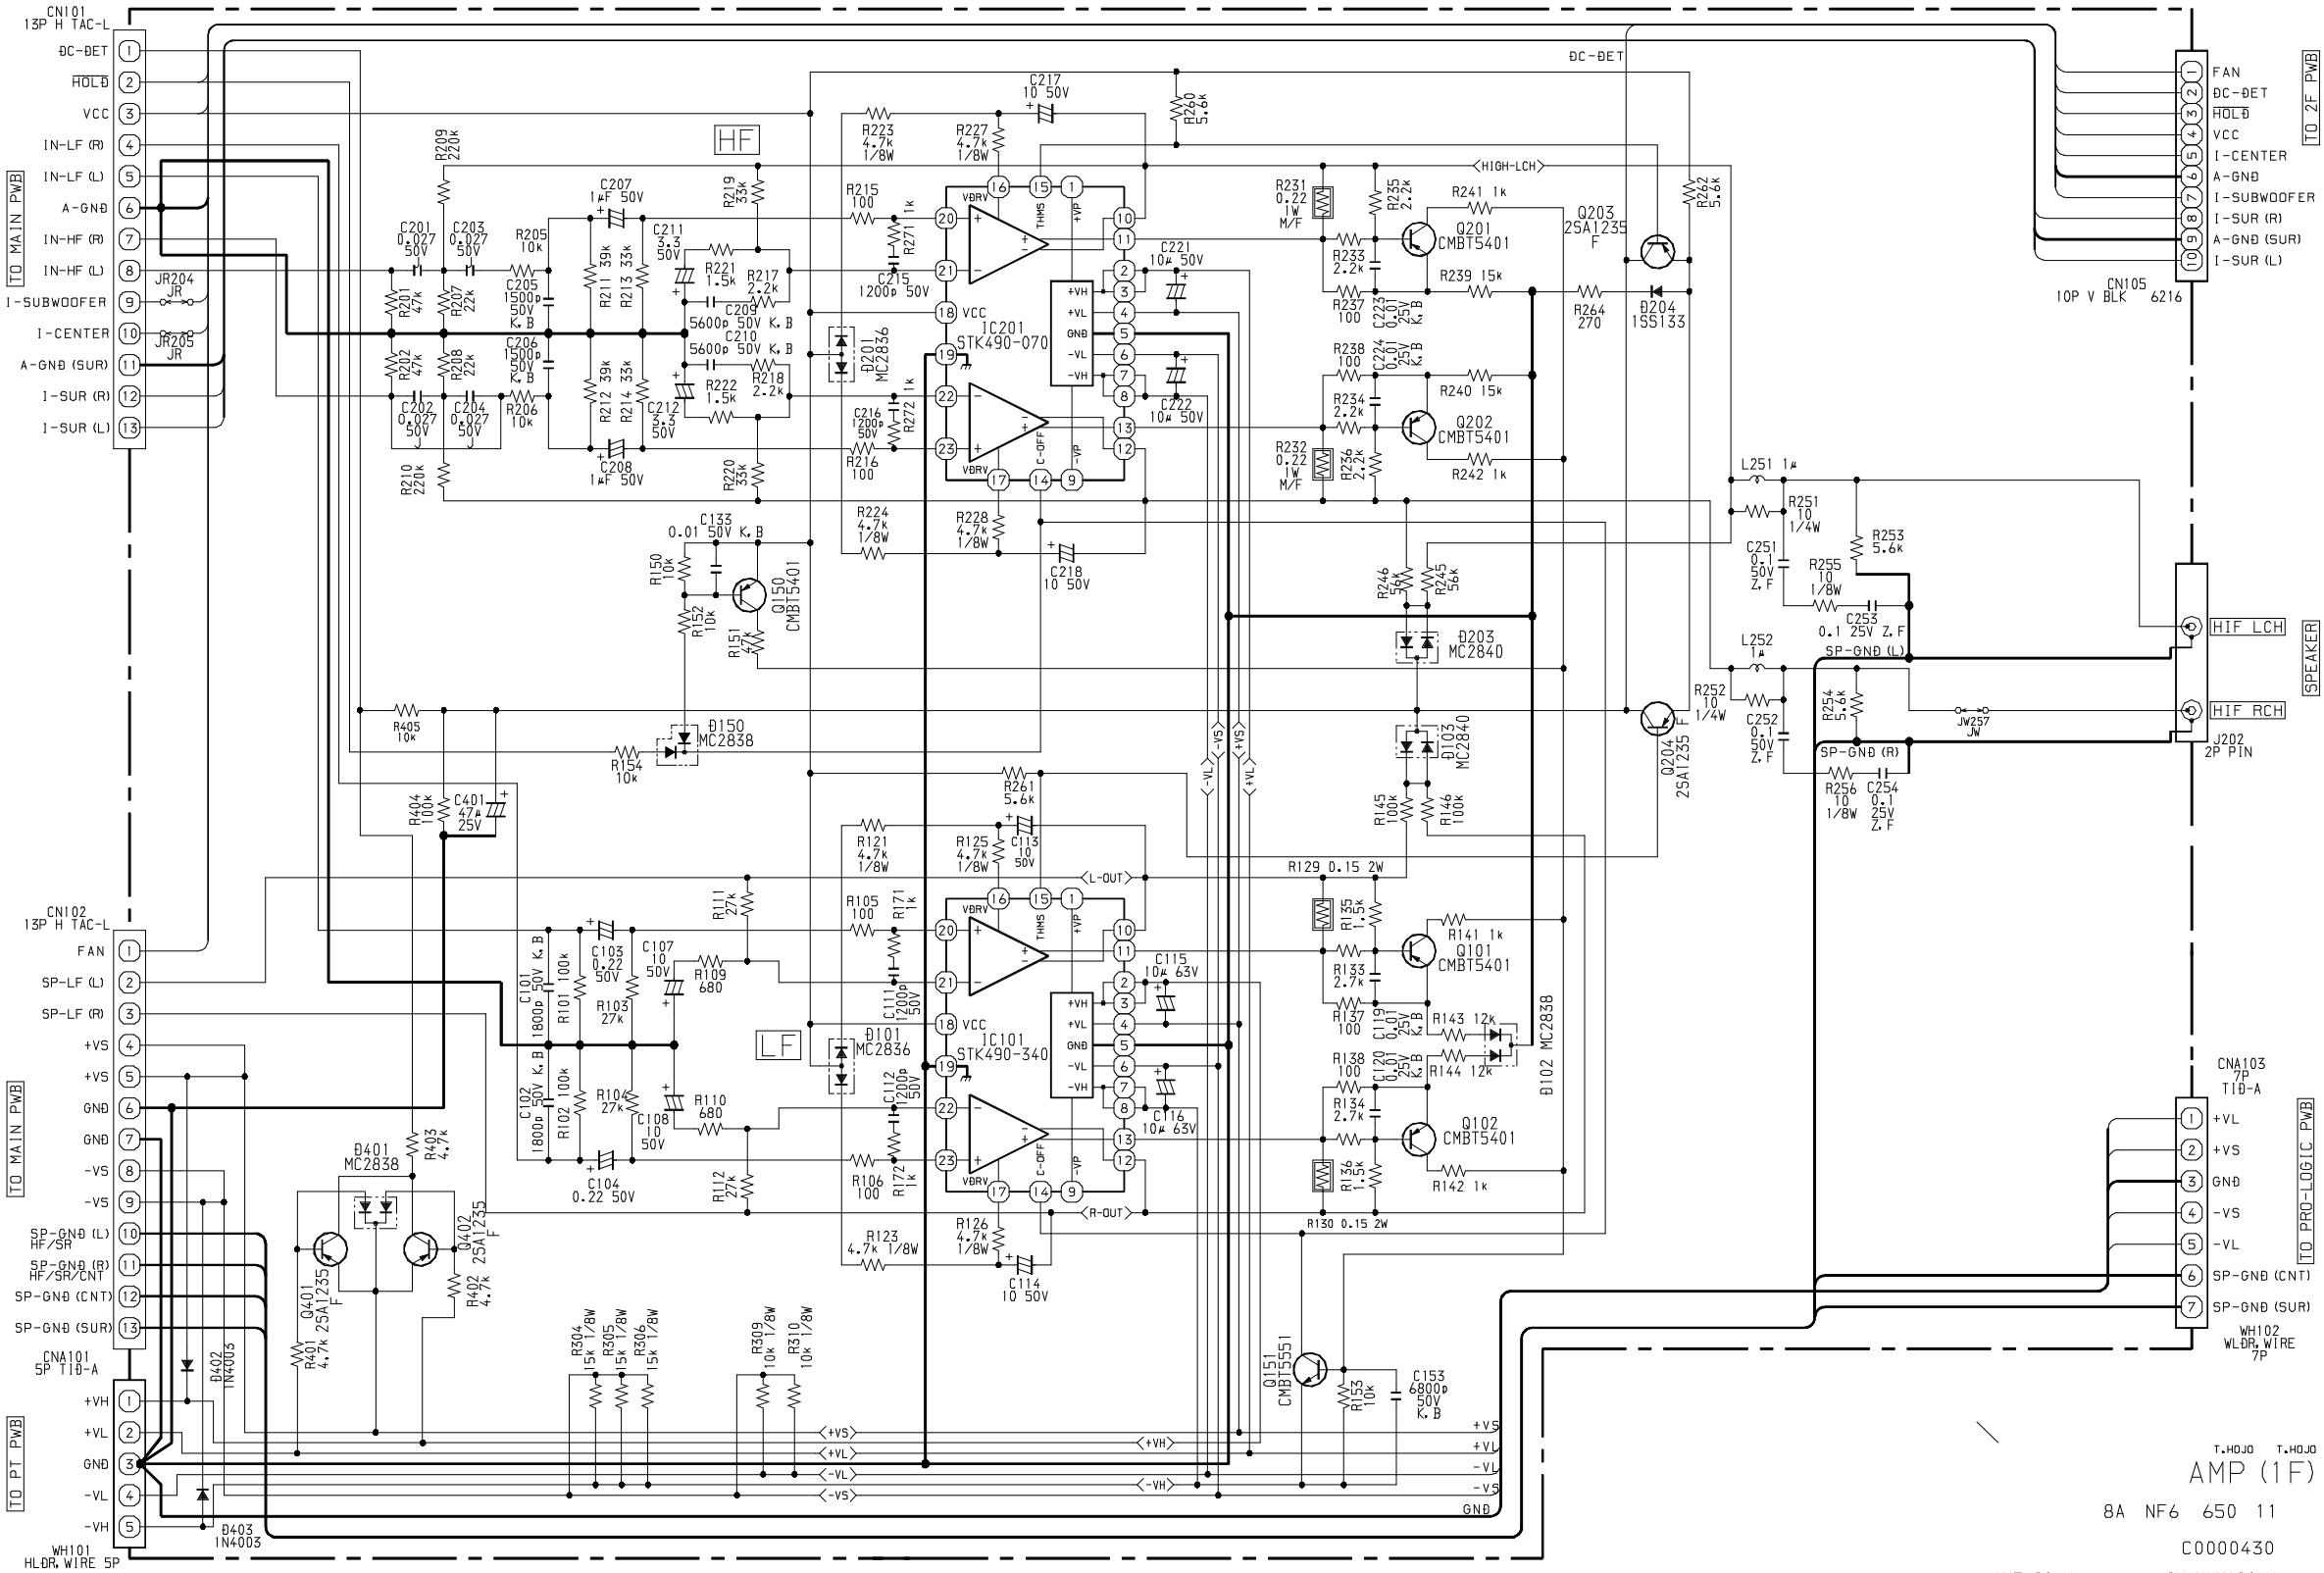


T. HQJO T. HQJO
 AMP (1F)
 8A NF6 650 11
 C0000430
 ANF-26 U CX-NHMA86 U
 10 MAR 2000

SCHEMATIC DIAGRAM – 7 (AMP PROLOGIC)

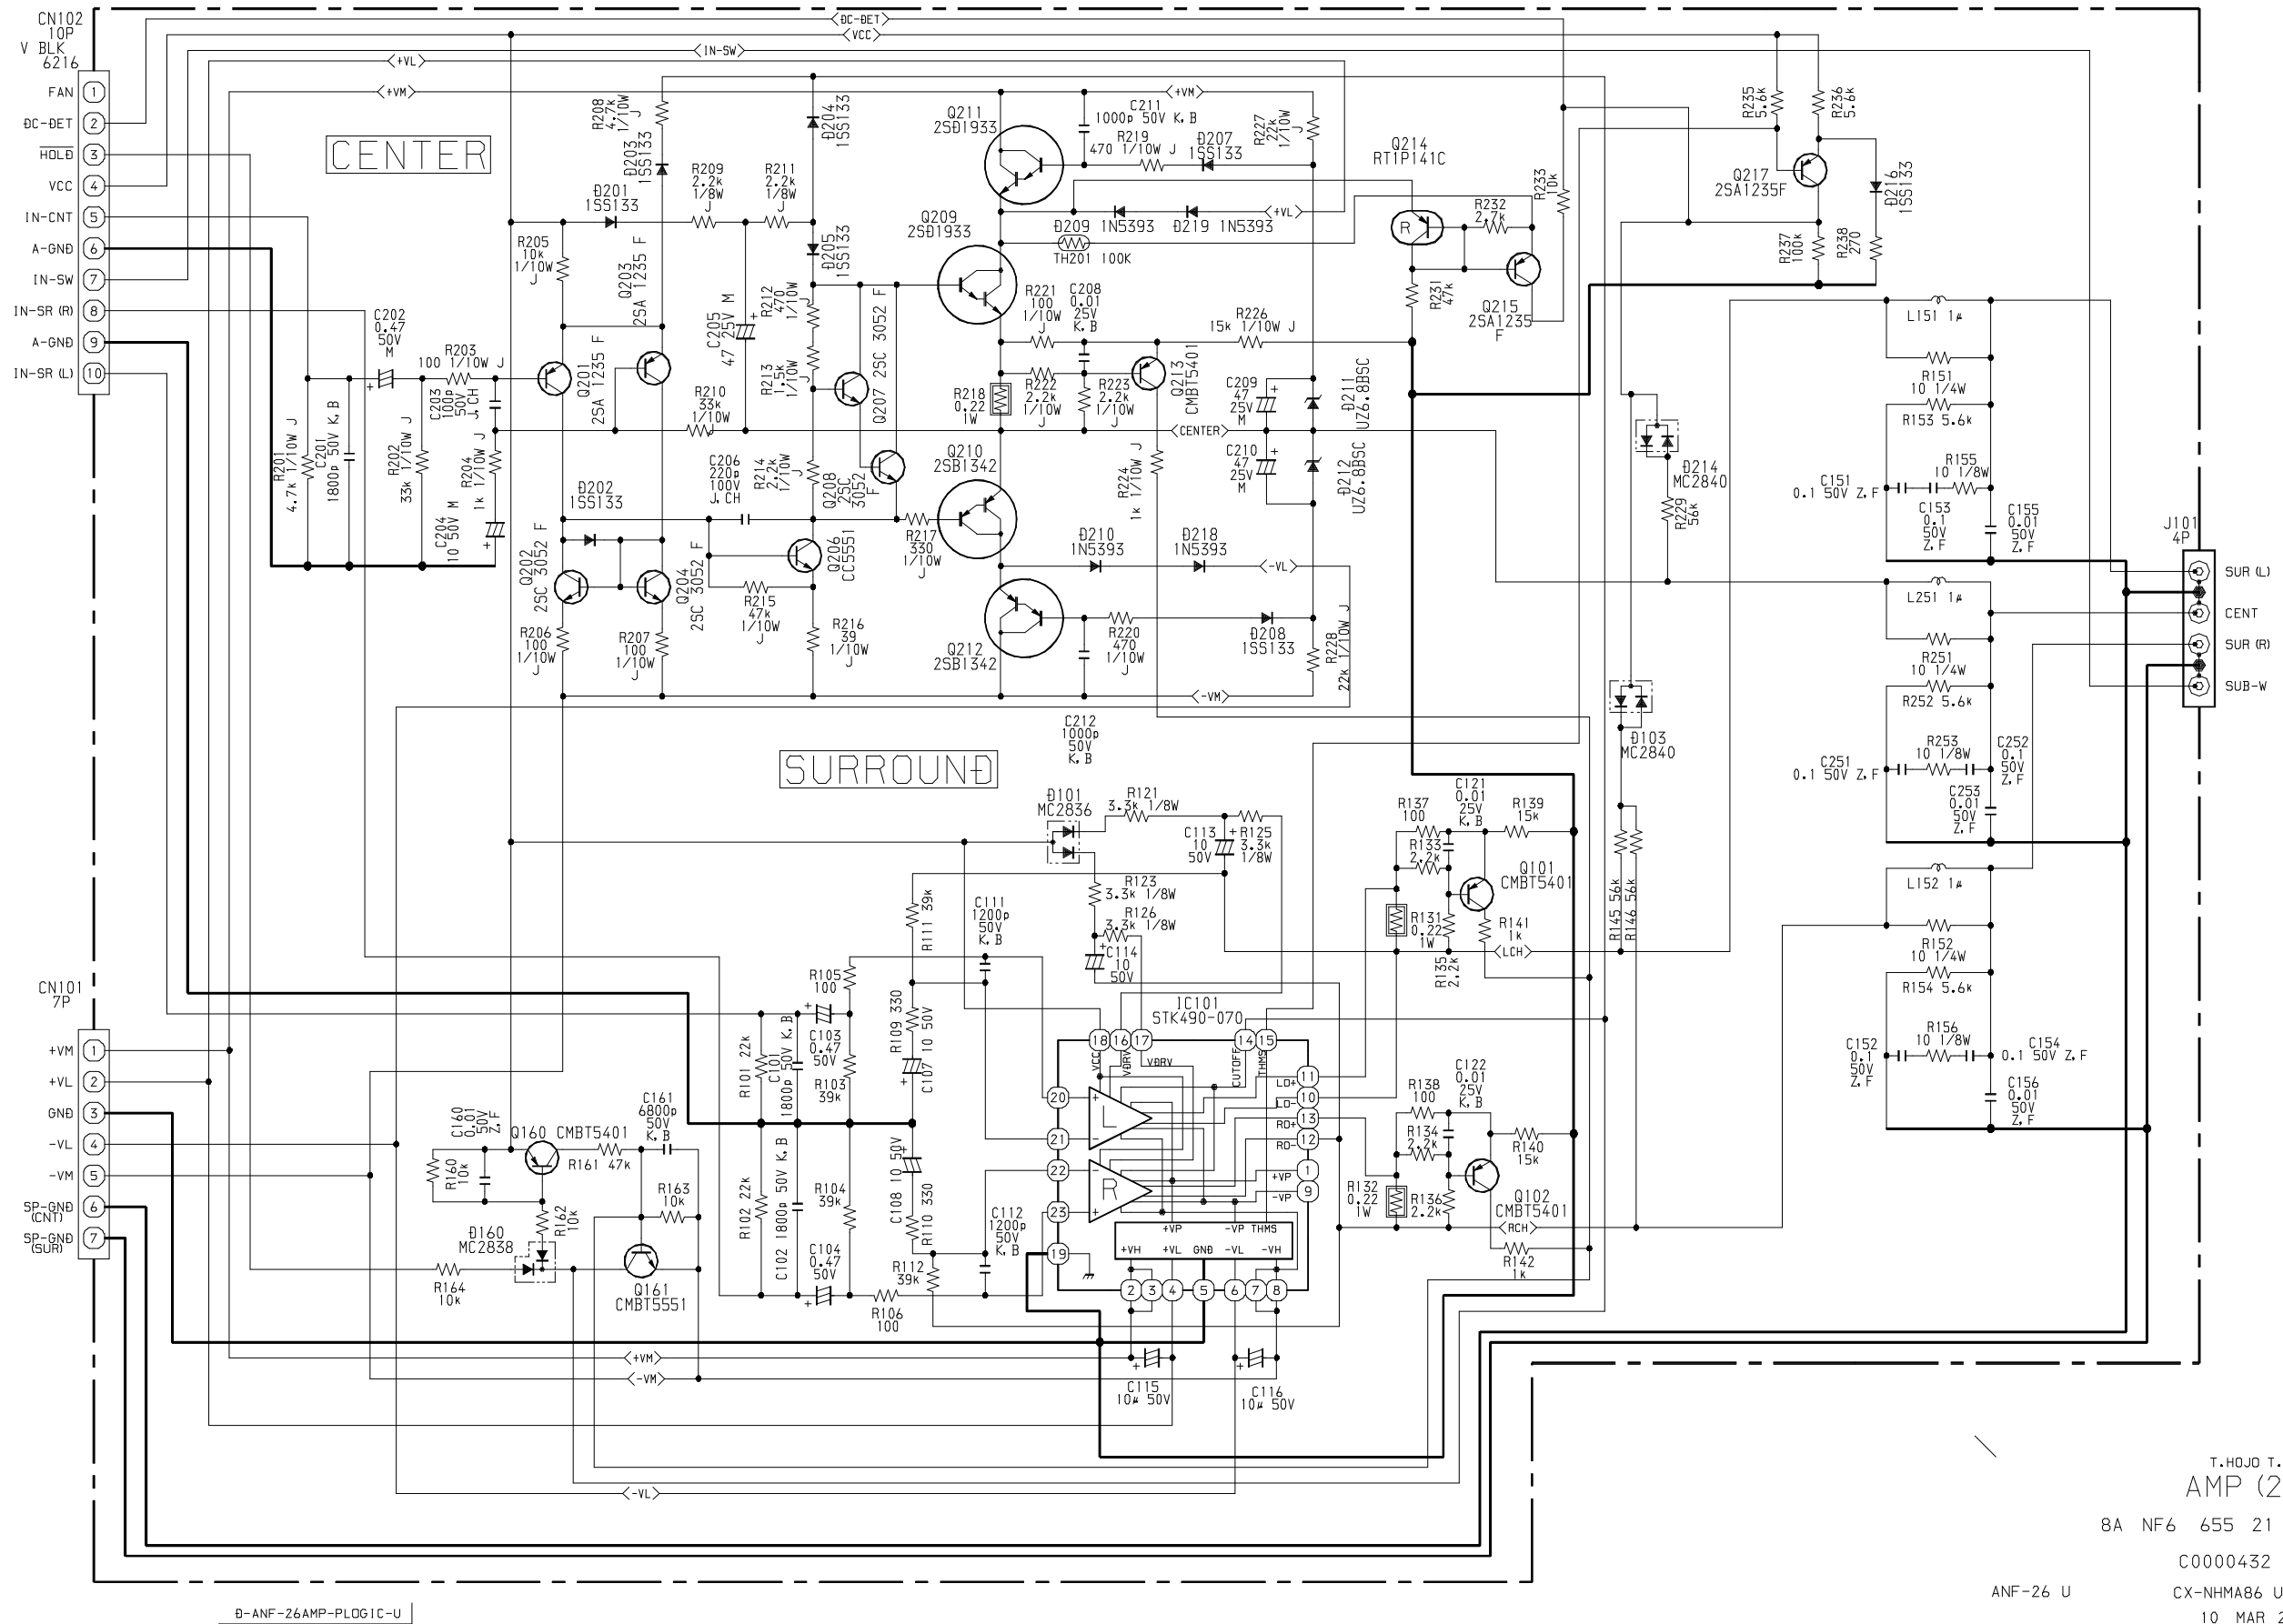

SCHEMATIC DIAGRAM – 8 (PT)

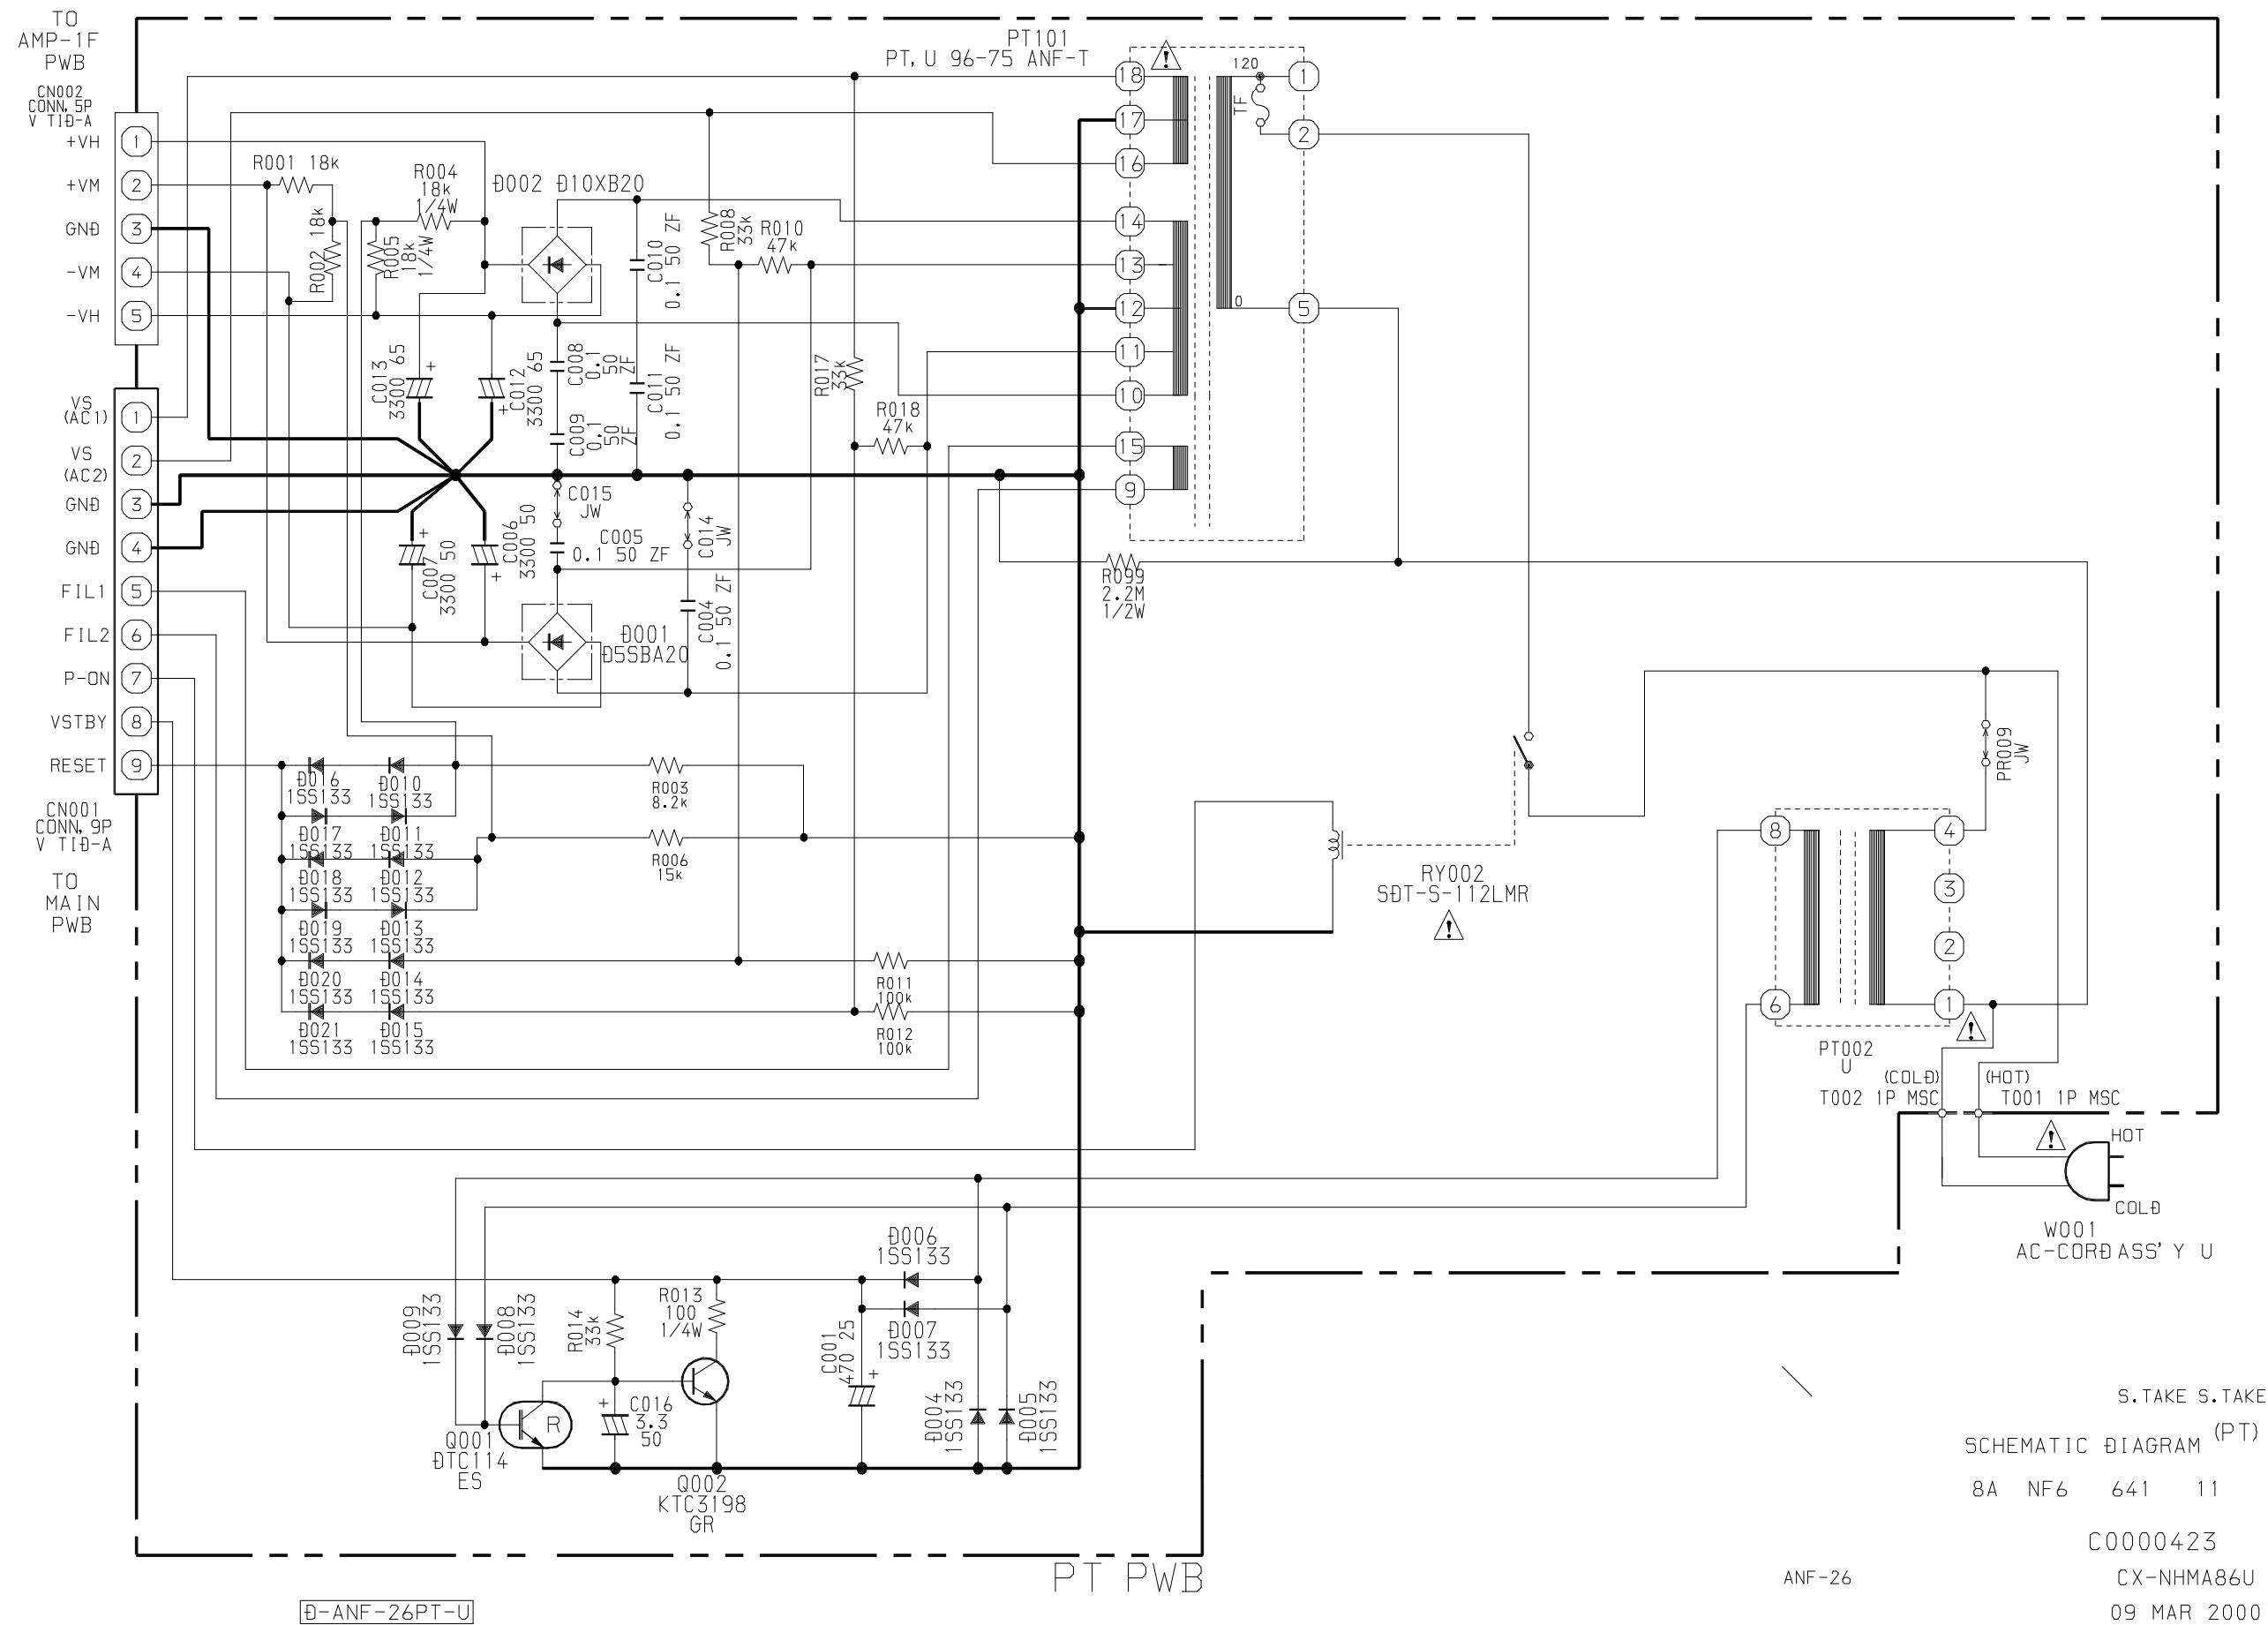

アイワ株式会社 〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)
AIWA CO.,LTD. 2-11, IKENOHATA 1-CHOME, TAITO-KU, TOKYO 110, JAPAN TEL:03 (3827) 3111