

aiwa



NSX-S111
NSX-S112
NSX-S116
NSX-S16
XG-S111
XG-S125
XG-S126
XG-S128

COMPACT DISC /
STEREO CASSETTE RECEIVER

• TYPE: HR,HC,EZ,K,G,V,HS,D

SIMPLE MANUAL

• Replace this Service Manual with "Revision Publishing" when it is issued.

S/M Code No. 09-995-404-3T3

MANUAL
SERVICE

SYSTEM	TYPE	CD-CASSEIVER	SPEAKER
1. NSX-S111	HR	CX-NS111	SX-NS112
2. NSX-S116	HC	CX-NS116	SX-NS116
3.NSX-S111	HS	CX-NS111	SX-NS112
4. NSX-S111	V	CX-NS111	SX-NS112
5. NSX-S111	G	CX-NS111	SX-NS112
6. NSX-S111	K	CX-NS111	SX-NS112
7. NSX-S111	EZ	CX-NS111	SX-NS112
8. NSX-S16	EZ	CX-NS16	SX-NS112
9. NSX-S111	HR	CX-NS111	SX-NS112
10. NSX-S116	EZ	CX-NS116	SX-NS116
11. NSX-S112	EZ	CX-NS112	SX-NS112
12. NSX-S111	HR	CX-NS111	SX-NS112
13. XG-S111	D	CX-SNS111	SX-SNS112
14. XG-S125	D	CX-SNS125	SX-SNS112
15. XG-S126	D	CX-SNS126	SX-SNS112
16. XG-S128	D	CX-SNS128	SX-SNS112

ELECTRICAL MAIN PARTS LIST - 1/15

NOTE: The characters in the suffix column indicate the part usage.

CX-NS111	HR	XX	G	
CX-NS111	K	XX	H	
CX-NS116	EZ	XX	I	
CX-NS111	EZ	XX	J	
CX-NS112	EZ	XX	K	
CX-SNS111	D	00	L	
CX-SNS125	D	00	M	
KANRI				
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
*	8Z-NFA-204-010	0E	GUIDE,FL 100-25	ABCDEFGHIJKLM.....
C	104	87-010-246-040	0E CAP,E 47-35 SME	ABCDEFGHIJKLM.....
C	103	87-015-699-040	0E CAP,E 10-50 7L	ABCDEFGHIJKLM.....
C	101	87-A11-147-080	0E CAP,TC U 0.047-50 Z F	ABCDEFGHIJKLM.....
C	102	87-A11-147-080	0E CAP,TC U 0.047-50 Z F	ABCDEFGHIJKLM.....
C	119	87-010-401-040	0E CAP,E 1-50 SME	ABCDEFGHIJKLM.....
C	116	87-018-128-080	0E CAP, CERA-SOL SS 560P	ABCDEFGHIJKLM.....
C	117	87-018-131-080	0E CAP, CER 1000P-50V	ABCDEFGHIJKLM.....
C	112	87-018-131-080	0E CAP, CER 1000P-50V	ABCDEFGHIJKLM.....
C	118	87-018-147-080	0E CAP,TC-U 10P-50 CH	ABCDEFGHIJKLM.....
C	115	87-018-205-080	0E CAP, CERA-SOL 0.022	ABCDEFGHIJKLM.....
C	114	87-018-205-080	0E CAP, CERA-SOL 0.022	ABCDEFGHIJKLM.....
C	113	87-018-205-080	0E CAP, CERA-SOL 0.022	ABCDEFGHIJKLM.....
C	110	87-018-205-080	0E CAP, CERA-SOL 0.022	ABCDEFGHIJKLM.....
C	111	87-A11-155-080	0E CAP,TC U 0.01-16 Z F	ABCDEFGHIJKLM.....
C	121	87-010-248-040	0E CAP,E 220-10 SME	ABCDEFGHIJKLM.....
C	122	87-010-378-040	0E CAP,E 10-16	ABCDEFGHIJKLM.....
C	120	87-018-205-080	0E CAP, CERA-SOL 0.022	ABCDEFGHIJKLM.....
C	123	87-A11-147-080	0E CAP,TC U 0.047-50 Z F	ABCDEFGHIJKLM.....
C	124	87-A11-152-080	0E CAP,TC U 1000P-50 Z F	ABCDEFGHIJKLM.....
C	205	87-018-117-080	0E CAP,TC-U 68P-50 SL	ABCDEFGHIJKLM.....
C	202	87-018-117-080	0E CAP,TC-U 68P-50 SL	ABCDEFGHIJKLM.....
C	209	87-018-117-080	0E CAP,TC-U 68P-50 SL	ABCDEFGHIJKLM.....
C	208	87-018-117-080	0E CAP,TC-U 68P-50 SL	ABCDEFGHIJKLM.....
C	201	87-018-118-080	0E CAP,TC-U 82P-50 B	ABCDEFGHIJKLM.....
C	214	87-010-404-040	0E CAP,E 4.7-50 SME	ABCDEFGHIJKLM.....
C	213	87-010-421-040	0E CAP,E 4.7-50 5L	ABCDEFGHIJKLM.....
C	210	87-018-117-080	0E CAP,TC-U 68P-50 SL	ABCDEFGHIJKLM.....
C	211	87-A11-147-080	0E CAP,TC U 0.047-50 Z F	ABCDEFGHIJKLM.....
C	301	87-A11-148-080	0E CAP,TC U 0.1-50 Z F	...D.FG.....
C	701	87-010-384-040	0E CAP,E 100-25 SME	ABCDEFGHIJKLM.....
C	702	87-A11-155-080	0E CAP,TC U 0.01-16 Z F	ABCDEFGHIJKLM.....
C	801	87-018-131-080	0E CAP, CER 1000P-50V	ABCDEFGHIJKLM.....
CN	101	88-NF9-658-010	1A CONN,30P BLK TYK-B(P)	ABCDEFGHIJKLM.....
CN	701	87-A60-674-010	0E CONN,10P H 2MM JMT	ABCDEFGHIJKLM.....
CN	801	87-099-015-010	0E CONN,13P 6216V	ABCDEFGHIJKLM.....
D	103	87-017-932-080	0E ZENER,MTJ6.2B	ABCDEFGHIJKLM.....
D	104	87-A40-291-080	0E DIODE,1N4148 (CPT)	AB..E.....
D	108	87-A40-291-080	0E DIODE,1N4148 (CPT)	AB..E.....
D	102	87-A40-291-080	0E DIODE,1N4148 (CPT)	AB..E.....
D	107	87-A40-291-080	0E DIODE,1N4148 (CPT)	AB..E.....
D	105	87-A40-291-080	0E DIODE,1N4148 (CPT)	AB..E.....
D	303	87-020-465-080	0E DIODE,1SS133 (110MA)	...CD.FGHIJKLM.....
D	803	87-A40-291-080	0E DIODE,1N4148 (CPT)	AB..E.....
D	802	87-A40-291-080	0E DIODE,1N4148 (CPT)	AB..E.....
FL	201	88-NF9-630-010	2A FL,10-BT-207GK	ABCDEF.....
FL	201	8Z-NFA-630-010	FL,10-BT-207GAK	GHIJKLM.....
IC	102	87-A21-218-010	1B IC,NJL64H380A	ABCDEFGHIJKLM.....
IC	101	8Z-NFA-631-010	2A C-IC,M38B59MFH-P109FP	ABCDEF.....
IC	101	8Z-NFA-661-010	C-IC,M38B59MFH-P113FP	GHIJKLM.....
L	101	87-A50-050-010	0E COIL,CLK 4.19M(COI)	ABCDEFGHIJKLM.....
Q	101	87-026-610-080	0E TR,KTC3198GR	ABCDEFGHIJKLM.....
Q	102	87-A30-090-080	0E FET,2SK2541	ABCDEFGHIJKLM.....
Q	701	87-A30-234-080	0E TR,CSC4115BC	ABCDEFGHIJKLM.....
S	101	87-A90-535-010	1B SW,RTRY EC16B24304	ABCDEFGHIJKLM.....
S	328	87-A90-164-080	0E SW,TACT SKQAB(N)	ABCDEFGHIJKLM.....
S	322	87-A90-164-080	0E SW,TACT SKQAB(N)	ABCDEFGHIJKLM.....
S	329	87-A90-164-080	0E SW,TACT SKQAB(N)	ABCDEFGHIJKLM.....
S	323	87-A90-164-080	0E SW,TACT SKQAB(N)	ABCDEFGHIJKLM.....
S	325	87-A90-164-080	0E SW,TACT SKQAB(N)	ABCDEFGHIJKLM.....
S	326	87-A90-164-080	0E SW,TACT SKQAB(N)	ABCDEFGHIJKLM.....
S	327	87-A90-164-080	0E SW,TACT SKQAB(N)	ABCDEFGHIJKLM.....
S	324	87-A90-164-080	0E SW,TACT SKQAB(N)	ABCDEFGHIJKLM.....
S	330	87-A90-164-080	0E SW,TACT SKQAB(N)	ABCDEFGHIJKLM.....
SFR	701	87-024-350-080	0E SFR 2.2K DIA 6H	ABCDEFGHIJKLM.....
C	402	87-010-060-040	0E CAP,E 100-16	...D.FG.....
C	409	87-010-265-040	0E CAP,E 33-16 SME	...D.....
C	409	87-010-378-040	0E CAP,E 10-16	...D.FG.....
C	405	87-015-692-040	0E E/CAP 0.22-50V TAPG	...D.FG.....
C	403	87-015-692-040	0E E/CAP 0.22-50V TAPG	...D.FG.....
C	408	87-018-119-080	0E CAP, CER 100P-50V	...D.FG.....
C	404	87-018-119-080	0E CAP, CER 100P-50V	...D.FG.....
C	406	87-A11-148-080	0E CAP,TC U 0.1-50 Z F	...D.FG.....
C	401	87-A11-154-080	0E CAP,TC U 4700P-16 Z F	...D.FG.....
C	413	87-A11-110-080	0E CAP,TC U 820P-50 J CH	...D.FG.....
C	410	87-A11-147-080	0E CAP,TC U 0.047-50 Z F	...D.FG.....
EMI	401	87-008-372-080	0E FILTER,EMI BL OIRNI	...D.FG.....
J	401	87-A60-651-010	0E JACK,3.5MONO	...D.FG.....
Q	404	87-026-609-080	0E TR,KTA1266GR	...D.FG.....
Q	402	87-026-609-080	0E TR,KTA1266GR	...D.FG.....

ELECTRICAL MAIN PARTS LIST - 2/15

Q	403	87-026-610-080	0E	TR,KTC3198GR	...D.FG.....
Q	401	87-026-610-080	0E	TR,KTC3198GR	...D.FG.....
VR	401	87-NB7-602-010	1A	VR,RTRY 10KAX1 1 V	...D.FG.....
FC	2	87-033-213-080	0E	CLAMP, FUSE	A.C....HIJKLM.....
FC	1	87-033-213-080	0E	CLAMP, FUSE	A.C....HIJKLM.....
T	2	87-A60-317-010	0E	TERMINAL, 1P MSC	A.C....HIJKLM.....
T	1	87-A60-317-010	0E	TERMINAL, 1P MSC	A.C....HIJKLM.....
WH	101	87-A90-459-010	0E	HLDR,WIRE 2.5-5P	ABCDEFGHIJKLM.....
C	106	87-010-246-080	0E	CAP, ELECT 47-35V	...E.....
C	106	87-010-260-080	0E	CAP, ELECT 47-25V	ABCD.FGHIJKLM.....
C	108	87-010-381-080	0E	CAP, ELECT 330-16V	ABCDEFGHIJKLM.....
C	103	87-016-051-090	1B	CAP,E 2200-35 SMG	..BC.E..HIJK.....
C	101	87-016-495-090	1B	CAP,E 3300-25 SMG	AB.DEFGHIJKLM.....
C	105	87-018-127-080	0E	CAP, CER 47P-50V	ABCDEFGHIJKLM.....
C	104	87-A10-011-090	2A	CAP,E 2200-25 SMG	A..D.FG....LM.....
C	101	87-A10-520-090	1B	CAP,E 3300-35 M SMG	...C.....
C	111	87-010-247-080	0E	CAP, ELECT 100-50V	ABCDEFGHIJKLM.....
C	110	87-010-263-080	0E	CAP, ELECT 100-10V	ABCDEFGHIJKLM.....
C	114	87-010-374-080	0E	CAP, ELECT 47-10V	ABCDEFGHIJKLM.....
C	113	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCDEFGHIJKLM.....
C	115	87-A10-303-080	0E	CAP,M 0.047-50 J	ABCDEFGHIJKLM.....
C	116	87-A10-303-080	0E	CAP,M 0.047-50 J	ABCDEFGHIJKLM.....
C	123	87-010-384-080	0E	CAP, ELECT 100-25V	ABCDEFGHIJKLM.....
C	122	87-010-384-080	0E	CAP, ELECT 100-25V	ABCDEFGHIJKLM.....
C	123	87-010-408-080	0E	CAP, ELECT 47-50V	...C.....
C	122	87-010-408-080	0E	CAP, ELECT 47-50V	...C.....
C	124	87-A11-132-080	0E	CAP,TC U 0.01-50 K B	GHIJKLM.....
C	130	87-018-131-080	0E	CAP, CER 1000P-50V	HIJKLM.....
C	130	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	HIJKLM.....
C	152	87-010-387-080	1A	CAP,E 470-25 SME	FG.....
C	152	87-010-388-010	1A	CAP, ELECT 25-1000SME	...E.....
C	152	87-010-396-080		CAP,E 470-35 SME	...CD.FGHIJKLM.....
D	108	87-020-465-080	0E	DIODE,1SS133 (110MA)	...CD.FGHIJKLM.....
D	109	87-020-465-080	0E	DIODE,1SS133 (110MA)	...CD.FGHIJKLM.....
D	109	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB..E.....
D	108	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB..E.....
D	107	87-A40-336-080	0E	ZENER,MTZJ27D T-72	ABCDEFGHIJKLM.....
D	104	87-A40-393-090	0E	DIODE,1N5402GW(F20)	AB.DEFGHIJKLM.....
D	103	87-A40-393-090	0E	DIODE,1N5402GW(F20)	AB.DEFGHIJKLM.....
D	101	87-A40-393-090	0E	DIODE,1N5402GW(F20)	AB.DEFGHIJKLM.....
D	102	87-A40-393-090	0E	DIODE,1N5402GW(F20)	AB.DEFGHIJKLM.....
D	113	87-020-465-080	0E	DIODE,1SS133 (110MA)	...CD.FGHIJKLM.....
D	113	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB..E.....
D	110	87-A40-345-080	0E	ZENER,MTZJ10C	ABCDEFGHIJKLM.....
D	117	87-A40-553-080	0E	DIODE,1N4003 LES	ABCDEFGHIJKLM.....
D	116	87-A40-553-080	0E	DIODE,1N4003 LES	ABCDEFGHIJKLM.....
D	122	87-A40-455-080	0E	DIODE,RL203 GW	...C.....
D	123	87-A40-455-080	0E	DIODE,RL203 GW	...C.....
D	124	87-A40-455-080	0E	DIODE,RL203 GW	...C.....
D	121	87-A40-455-080	0E	DIODE,RL203 GW	...C.....
D	115	87-008-372-080	0E	FILTER, EMI BL OIRNI	...HIJK.....
Q	106	87-026-610-080	0E	TR,KTC3198GR	ABCDEFGHIJKLM.....
Q	102	87-026-610-080	0E	TR,KTC3198GR	ABCDEFGHIJKLM.....
Q	103	87-026-610-080	0E	TR,KTC3198GR	ABCDEFGHIJKLM.....
Q	107	87-026-610-080	0E	TR,KTC3198GR	ABCDEFGHIJKLM.....
Q	109	87-026-610-080	0E	TR,KTC3198GR	ABCDEFGHIJKLM.....
Q	104	87-A30-234-080	0E	TR,CSC4115BC	ABCDEFGHIJKLM.....
Q	115	87-026-219-080	0E	TR,DTA144ES (0.3W)	ABCDEFGHIJKLM.....
Q	112	87-026-269-080	0E	TR,DTA114ES	ABCDEFGHIJKLM.....
Q	113	87-026-609-080	0E	TR,KTA1266GR	ABCDEFGHIJKLM.....
Q	111	89-213-702-010	1A	TR,2SB1370 (1.8W)	ABCDEFGHIJKLM.....
R	124	87-A00-261-080	0E	RES,M/F 0.56-1W J	A.C....LM.....
RY	101	87-045-389-010	1C	RELAY,OSA-SS-212DM5	ABCDEFGHIJKLM.....
W	101	83-NE2-618-110	1B	F-CABEL, 5P-2.5	ABCDEFGHIJKLM.....
WH	102	87-A90-459-010	0E	HLDR,WIRE 2.5-5P	ABCDEFGHIJKLM.....
		87-067-703-010	0E	TAPPING SCREW, BVT2+3-10	ABCDEFGHIJKLM.....
C	208	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCDEFGHIJKLM.....
C	207	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCDEFGHIJKLM.....
C	209	87-A11-154-080	0E	CAP,TC U 4700P-16 Z F	ABCDEFGHIJKLM.....
C	213	87-010-260-080	0E	CAP, ELECT 47-25V	ABCDEFGHIJKLM.....
C	214	87-010-260-080	0E	CAP, ELECT 47-25V	ABCDEFGHIJKLM.....
C	212	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCDEFGHIJKLM.....
C	211	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCDEFGHIJKLM.....
C	219	87-010-544-080	0E	CAP, ELECT 0.1-50V	ABCDEFGHIJKLM.....
C	217	87-A10-304-080	0E	CAP,M 0.056-50 J	ABCDEFGHIJKLM.....
C	218	87-A10-304-080	0E	CAP,M 0.056-50 J	ABCDEFGHIJKLM.....
C	210	87-A11-154-080	0E	CAP,TC U 4700P-16 Z F	ABCDEFGHIJKLM.....
C	220	87-010-544-080	0E	CAP, ELECT 0.1-50V	ABCDEFGHIJKLM.....
C	229	87-018-123-080	0E	CAP, CER 220P-50V	ABCDEFGHIJKLM.....
C	222	87-018-211-080	0E	CAP, CER 0.01-50	HIJK.....
C	221	87-018-211-080	0E	CAP, CER 0.01-50	HIJK.....
C	230	87-018-123-080	0E	CAP, CER 220P-50V	ABCDEFGHIJKLM.....
C	235	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	...DEFGHIJKLM.....
C	236	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	...DEFGHIJKLM.....
C	237	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCDEFGHIJKLM.....
C	256	87-018-115-080	0E	CAP, CER 47P-50V	HIJK.....
C	255	87-018-115-080	0E	CAP, CER 47P-50V	HIJK.....
C	258	87-018-119-080	0E	CAP, CER 100P-50V	HIJK.....
C	254	87-018-131-080	0E	CAP, CER 1000P-50V	HIJK.....
C	253	87-018-131-080	0E	CAP, CER 1000P-50V	HIJK.....
D	219	87-020-465-080	0E	DIODE,1SS133 (110MA)	...CD.FGHIJKLM.....
D	218	87-020-465-080	0E	DIODE,1SS133 (110MA)	...CD.FGHIJKLM.....

ELECTRICAL MAIN PARTS LIST - 3/15

D	218	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB..E.....
D	219	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB..E.....
D	221	87-020-465-080	0E	DIODE,1SS133 (110MA)	..CD.FGHIJKLM.....
D	220	87-020-465-080	0E	DIODE,1SS133 (110MA)	..CD.FGHIJKLM.....
D	222	87-020-465-080	0E	DIODE,1SS133 (110MA)	..CD.FGHIJKLM.....
D	221	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB..E.....
D	220	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB..E.....
D	222	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB..E.....
J	202	87-A60-238-010	1A	TERMINAL,SP 4P (MSC)	ABCEFGHIJKLM.....
J	201	87-A60-602-010	1A	JACK,DIA6.3 BLK ST W/SW TC	ABCEFGHIJKLM.....
L	202	87-003-383-010	1A	COIL,1UH-S	ABCEFGHIJKLM.....
L	201	87-003-383-010	1A	COIL,1UH-S	ABCEFGHIJKLM.....
Q	203	87-026-609-080	0E	TR,KTA1266GR	ABCEFGHIJKLM.....
Q	204	87-026-609-080	0E	TR,KTA1266GR	ABCEFGHIJKLM.....
Q	202	87-026-609-080	0E	TR,KTA1266GR	ABCEFGHIJKLM.....
Q	201	87-026-609-080	0E	TR,KTA1266GR	ABCEFGHIJKLM.....
Q	207	87-026-610-080	0E	TR,KTC3198GR	ABCEFGHIJKLM.....
Q	205	87-026-610-080	0E	TR,KTC3198GR	ABCEFGHIJKLM.....
Q	206	87-026-610-080	0E	TR,KTC3198GR	ABCEFGHIJKLM.....
Q	208	87-026-610-080	0E	TR,KTC3198GR	ABCEFGHIJKLM.....
Q	218	87-026-609-080	0E	TR,KTA1266GR	ABCEFGHIJKLM.....
Q	215	87-A30-190-080	0E	TR,CC5551	..C.....
Q	216	87-A30-190-080	0E	TR,CC5551	..C.....
Q	213	88-NF9-622-010	1A	TR,2SB1616	ABCEFGHIJKLM.....
Q	214	88-NF9-622-010	1A	TR,2SB1616	ABCEFGHIJKLM.....
Q	212	88-NF9-623-010	1A	TR,2SD2478	ABCEFGHIJKLM.....
Q	211	88-NF9-623-010	1A	TR,2SD2478	ABCEFGHIJKLM.....
R	223	87-A00-258-080	0E	RES,M/F 0.22-1W J	ABCEFGHIJKLM.....
R	224	87-A00-258-080	0E	RES,M/F 0.22-1W J	ABCEFGHIJKLM.....
C	307	87-010-263-080	0E	CAP, ELECT 100-10V	ABCEFGHIJKLM.....
C	308	87-010-263-080	0E	CAP, ELECT 100-10V	ABCEFGHIJKLM.....
C	309	87-018-115-080	0E	CAP, CER 47P-50V	HIJK.....
C	301	87-018-129-080	0E	CAP, CER 680P-50V	LM.....
C	302	87-018-129-080	0E	CAP, CER 680P-50V	LM.....
C	303	87-018-195-080	0E	CAP, CER 1200P-16V	ABCEFGHIJKLM.....
C	304	87-018-195-080	0E	CAP, CER 1200P-16V	ABCEFGHIJKLM.....
C	315	87-010-374-080	0E	CAP, ELECT 47-10V	ABCEFGHIJKLM.....
C	317	87-010-546-080	0E	CAP, ELECT 0.33-50V	ABCEFGHIJKLM.....
C	318	87-010-546-080	0E	CAP, ELECT 0.33-50V	ABCEFGHIJKLM.....
C	310	87-018-115-080	0E	CAP, CER 47P-50V	HIJK.....
C	312	87-A10-307-080	0E	CAP,M 0.1-50 J	ABCEFGHIJKLM.....
C	311	87-A10-307-080	0E	CAP,M 0.1-50 J	ABCEFGHIJKLM.....
C	326	87-018-205-080	0E	CAP, CERA-SOL 0.022	ABCEFGHIJKLM.....
C	327	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	...DEFGHIJKLM.....
C	361	87-010-374-080	0E	CAP, ELECT 47-10V	ABCEFGHIJKLM.....
C	360	87-010-401-080	0E	CAP, ELECT 1-50V	ABCEFGHIJKLM.....
C	399	87-018-127-080	0E	CAP, CER 470P-50V	ABCEFGHIJKLM.....
C	402	87-010-545-080	0E	CAP, ELECT 0.22-50V	...DEFGHIJKLM.....
C	401	87-010-545-080	0E	CAP, ELECT 0.22-50V	...DEFGHIJKLM.....
C	403	87-018-118-080	0E	CAP,TC-U 82P-50 B	ABCEFGHIJKLM.....
C	404	87-018-118-080	0E	CAP,TC-U 82P-50 B	ABCEFGHIJKLM.....
C	412	87-010-405-080	0E	CAP, ELECT 10-50V	ABCEFGHIJKLM.....
C	411	87-010-405-080	0E	CAP, ELECT 10-50V	ABCEFGHIJKLM.....
C	452	87-010-382-080	0E	CAP, ELECT 22-25V	ABCEFGHIJKLM.....
C	459	87-018-128-080	0E	CAP, CERA-SOL SS 560P	ABCEFGHIJKLM.....
C	458	87-018-131-080	0E	CAP, CER 1000P-50V	ABCEFGHIJKLM.....
C	457	87-A10-292-080		CAP,M 5600P-50 J	ABC.....
C	462	87-018-126-080	0E	CAP,TC-U 390P-50 B	ABCEFGHIJKLM.....
C	461	87-018-126-080	0E	CAP,TC-U 390P-50 B	ABCEFGHIJKLM.....
CN	301	87-A60-620-010	0E	CONN,3P V 2MM JMT	ABCEFGHIJKLM.....
CN	351	87-A60-625-010	0E	CONN,8P V 2MM JMT	ABCEFGHIJKLM.....
D	401	87-020-465-080	0E	DIODE,1SS133 (110MA)	..CD.FGHIJKLM.....
D	401	87-A40-291-080	0E	DIODE,1N4148 (CPT)	AB..E.....
IC	301	87-017-889-010	1A	IC,NJM4558LD	ABCEFGHIJKLM.....
IC	401	87-017-889-010	1A	IC,NJM4558LD	ABCEFGHIJKLM.....
L	451	87-007-342-010	0E	COIL,OSC 85K BIAS	ABCEFGHIJKLM.....
Q	306	87-026-218-080	0E	TR,DTC144ES (0.2W)	ABCEFGHIJKLM.....
Q	309	87-026-609-080	0E	TR,KTA1266GR	ABCEFGHIJKLM.....
Q	303	87-A30-090-080	0E	FET,2SK2541	ABCEFGHIJKLM.....
Q	304	87-A30-090-080	0E	FET,2SK2541	ABCEFGHIJKLM.....
Q	305	87-A30-091-080	1E	FET,2SJ460	ABCEFGHIJKLM.....
Q	301	87-A30-091-080	1E	FET,2SJ460	ABCEFGHIJKLM.....
Q	308	87-A30-091-080	1E	FET,2SJ460	ABCEFGHIJKLM.....
Q	302	87-A30-091-080	1E	FET,2SJ460	ABCEFGHIJKLM.....
Q	307	87-A30-091-080	1E	FET,2SJ460	ABCEFGHIJKLM.....
Q	310	87-026-609-080	0E	TR,KTA1266GR	ABCEFGHIJKLM.....
Q	454	87-026-610-080	0E	TR,KTC3198GR	ABCEFGHIJKLM.....
Q	451	87-026-610-080	0E	TR,KTC3198GR	ABCEFGHIJKLM.....
Q	453	87-026-610-080	0E	TR,KTC3198GR	ABCEFGHIJKLM.....
C	601	87-018-195-080	0E	CAP, CER 1200P-16V	ABCEFGHIJKLM.....
C	602	87-018-195-080	0E	CAP, CER 1200P-16V	ABCEFGHIJKLM.....
C	616	87-010-260-080	0E	CAP, ELECT 47-25V	ABCEFGHIJKLM.....
C	617	87-010-260-080	0E	CAP, ELECT 47-25V	ABCEFGHIJKLM.....
C	613	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCEFGHIJKLM.....
C	611	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCEFGHIJKLM.....
C	614	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCEFGHIJKLM.....
C	612	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCEFGHIJKLM.....
C	615	87-018-104-080	0E	CAP,TC-U 10P-50 SL	ABCEFGHIJKLM.....
CN	602	87-099-194-010	0E	CONN,6P 6216V	ABCEFGHIJKLM.....
CN	601	88-NF9-657-010	1A	CONN,30P H BLK TYK-B(X)	ABCEFGHIJKLM.....
D	601	87-A40-466-080	0E	ZENER,MTZJ2.7A	ABCEFGHIJKLM.....
D	602	87-A40-466-080	0E	ZENER,MTZJ2.7A	ABCEFGHIJKLM.....

ELECTRICAL MAIN PARTS LIST - 4/15

FB	602	87-008-372-080	0E	FILTER, EMI BL OIRNI	A.C....HIJK.....
IC	601	87-A20-715-010	1C	IC, M62439SP	ABCDEFGHIJKL.....
J	601	87-A60-881-010	0E	JACK, PIN 2P MSP 242V05 PBSN	ABCDEFGHIJKL.....
C	707	87-010-112-080	0E	CAP, ELECT 100-16V	ABCDEFGHIJKL.....
C	709	87-010-248-080	0E	CAP, ELECT 220-10V	ABCDEFGHIJKL.....
C	701	87-010-404-080	0E	CAP, ELECT 4.7-50V	ABCDEFGHIJKL.....
C	705	87-018-131-080	0E	CAP, CER 1000P-50V	ABCDEFGHIJKL.....
C	704	87-018-131-080	0E	CAP, CER 1000P-50V	ABCDEFGHIJKL.....
C	706	87-018-131-080	0E	CAP, CER 1000P-50V	ABCDEFGHIJKL.....
C	708	87-A11-144-080	0E	CAP, TC U 0.1-50 K B	ABCDEFGHIJKL.....
C	703	87-A11-155-080	0E	CAP, TC U 0.01-16 Z F	ABCDEFGHIJKL.....
C	702	87-A11-155-080	0E	CAP, TC U 0.01-16 Z F	ABCDEFGHIJKL.....
C	710	87-010-112-080	0E	CAP, ELECT 100-16V	ABCDEFGHIJKL.....
C	714	87-010-112-080	0E	CAP, ELECT 100-16V	ABCDEFGHIJKL.....
C	715	87-018-119-080	0E	CAP, CER 100P-50V	ABCDEFGHIJKL.....
C	713	87-018-149-080	0E	CAP, TC-U 15P-50 CH	ABCDEFGHIJKL.....
C	712	87-018-149-080	0E	CAP, TC-U 15P-50 CH	ABCDEFGHIJKL.....
D	701	87-017-931-080	0E	ZENER, MTZJ5.6B	ABCDEFGHIJKL.....
D	702	87-020-465-080	0E	DIODE, 1SS133 (110MA)	HIJK.....
IC	701	87-070-127-110	1C	IC, LC72131 D	ABCDEFGHIJKL.....
JW	706	87-005-849-080	0E	COIL, 10UH(CECS)	G.....
L	701	87-005-847-080	0E	COIL, 2.2UH(CECS)	ABCDEFGHIJKL.....
Q	701	87-A30-234-080	0E	TR, CSC4115BC	ABCDEFGHIJKL.....
X	701	87-A70-061-010	1A	VIB, XTAL 4.500MHZ CSA-309	ABCDEFGHIJKL.....
C	738	87-010-260-080	0E	CAP, ELECT 47-25V	LM.....
C	732	87-010-404-080	0E	CAP, ELECT 4.7-50V	LM.....
C	734	87-010-545-080	0E	CAP, ELECT 0.22-50V	LM.....
C	731	87-010-545-080	0E	CAP, ELECT 0.22-50V	LM.....
C	733	87-010-545-080	0E	CAP, ELECT 0.22-50V	LM.....
C	735	87-018-132-080	0E	CAP, CER 2200P-16V	LM.....
C	736	87-018-132-080	0E	CAP, CER 2200P-16V	LM.....
C	737	87-A11-155-080	0E	CAP, TC U 0.01-16 Z F	ABCDEFGHIJKL.....
C	743	87-010-101-080	0E	CAP, ELECT 220-16	LM.....
C	742	87-010-400-080	0E	CAP, ELECT 0.47-50V	LM.....
C	741	87-010-404-080	0E	CAP, ELECT 4.7-50V	LM.....
C	740	87-018-127-080	0E	CAP, CER 470P-50V	LM.....
C	747	87-A11-144-080	0E	CAP, TC U 0.1-50 K B	LM.....
D	731	87-020-465-080	0E	DIODE, 1SS133 (110MA)	LM.....
IC	731	87-A20-716-010	1E	IC, TA2040AP	LM.....
Q	731	87-026-269-080	0E	TR, DTA114ES	LM.....
X	731	87-030-394-010	1B	VIB, CER CSA3.6MGF228	LM.....
C	758	87-010-112-080	0E	CAP, ELECT 100-16V	ABCDEFGHIJKL.....
C	753	87-010-408-080	0E	CAP, ELECT 47-50V	ABCDEFGHIJKL.....
C	752	87-018-143-080	0E	CAP, TC-U 4.7P-50 CH	HIJKL.....
C	751	87-A11-112-080	0E	CAP, TC U 1000P-50 J CH	ABC.....
C	755	87-A11-144-080	0E	CAP, TC U 0.1-50 K B	ABCDEFGHIJKL.....
C	762	87-010-400-080	0E	CAP, ELECT 0.47-50V	ABCDEFGHIJKL.....
C	763	87-010-401-080	0E	CAP, ELECT 1-50V	ABCDEFGHIJKL.....
C	764	87-010-401-080	0E	CAP, ELECT 1-50V	ABCDEFGHIJKL.....
C	769	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCDEFGHIJKL.....
C	761	87-010-404-080	0E	CAP, ELECT 4.7-50V	ABCDEFGHIJKL.....
C	766	87-010-407-080	0E	CAP, ELECT 33-50V	ABCDEFGHIJKL.....
C	765	87-018-115-080	0E	CAP, CER 47P-50V	ABCDEFGHIJKL.....
C	768	87-A11-147-080	0E	CAP, TC U 0.047-50 Z F	ABCDEFGHIJKL.....
C	774	87-010-405-080	0E	CAP, ELECT 10-50V	ABCDEFGHIJKL.....
C	771	87-010-406-080	0E	CAP, ELECT 22-50	ABCDEFGHIJKL.....
C	773	87-018-131-080	0E	CAP, CER 1000P-50V	ABCDEF.....LM.....
C	772	87-A11-155-080	0E	CAP, TC U 0.01-16 Z F	ABCDEFGHIJKL.....
C	789	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCDEFGHIJKL.....
C	785	87-010-405-080	0E	CAP, ELECT 10-50V	ABCDEFGHIJKL.....
C	786	87-010-405-080	0E	CAP, ELECT 10-50V	ABCDEFGHIJKL.....
C	782	87-018-195-080	0E	CAP, CER 1200P-16V	KLM.....
C	788	87-018-195-080	0E	CAP, CER 1200P-16V	KLM.....
C	787	87-018-195-080	0E	CAP, CER 1200P-16V	KLM.....
C	781	87-018-195-080	0E	CAP, CER 1200P-16V	KLM.....
C	788	87-018-196-080	0E	CAP, CER 1500P-16V	...D.FGHIJK.....
C	787	87-018-196-080	0E	CAP, CER 1500P-16V	...D.FGHIJK.....
C	783	87-018-199-080	0E	CAP, CER 3300P	ABCDEF.....LM.....
C	784	87-018-199-080	0E	CAP, CER 3300P	ABCDEF.....LM.....
C	784	87-018-202-080	0E	CAP, CERAM.6800PF	HIJK.....
C	783	87-018-202-080	0E	CAP, CERAM.6800PF	HIJK.....
C	788	87-A11-153-080	0E	CAP, TC U 2200P-16 Z F	ABC.E.....
C	787	87-A11-153-080	0E	CAP, TC U 2200P-16 Z F	ABC.E.....
C	790	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCDEFGHIJKL.....
D	752	87-020-465-080	0E	DIODE, 1SS133 (110MA)	...CD.FGHIJKL.....
D	751	87-A40-291-080	0E	DIODE, 1N4148 (CPT)	AB...E.....
IC	751	87-A20-913-010	1D	IC, LA1837NL	ABCDEFGHIJKL.....
JW	766	87-005-849-080	0E	COIL, 10UH(CECS)	G.....
L	771	87-A50-266-010	1A	COIL, FM DET-2N(TOK)	ABCDEFGHIJKL.....
L	772	87-A90-052-010	1C	FLTR, CFMT-450A(TOK)	...D.FG.....
L	772	87-A90-053-010	1C	FLTR, PCFMT-060(TOK)	LM.....
L	772	87-A91-110-010	1B	FLTR, PCFJZH-450 (TOK)	ABC.E...HIJK.....
X	751	87-030-354-010	1A	VIB, CF BFU 450C	...D.FG.....
C	856	87-010-405-080	0E	CAP, ELECT 10-50V	K.....
C	855	87-010-405-080	0E	CAP, ELECT 10-50V	K.....
C	859	87-018-109-080	0E	CAP, CER 22P-50V	K.....
C	858	87-018-109-080	0E	CAP, CER 22P-50V	K.....
C	851	87-018-123-080	0E	CAP, CER 220P-50V	K.....
C	852	87-018-123-080	0E	CAP, CER 220P-50V	K.....
C	853	87-018-127-080	0E	CAP, CER 470P-50V	K.....
C	857	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	K.....
C	854	87-A11-144-080	0E	CAP, TC U 0.1-50 K B	K.....

ELECTRICAL MAIN PARTS LIST - 5/15

C	860	87-018-134-080	0E	CAPACITOR,TC-U 0.01-16	K.....
IC	851	87-A20-502-010	1H	IC,BU1920	K.....
JW	855	87-005-847-080	0E	COIL,2.2UH(CECS)	E....K.....
JW	855	87-005-849-080	0E	COIL,10UH(CECS)	K.....
Q	851	87-026-610-080	0E	TR,KTC3198GR	K.....
X	851	87-A70-091-010	1B	VIB,XTAL 4.332MHZ CSA-309	K.....
C	807	87-A11-144-080	0E	CAP,TC U 0.1-50 K B	ABCDEFGHIJKLM.....
C	805	87-A11-144-080	0E	CAP,TC U 0.1-50 K B	ABCDEFGHIJKLM.....
C	812	87-010-408-080	0E	CAP, ELECT 47-50V	HIJKLM.....
C	813	87-018-131-080	0E	CAP, CER 1000P-50V	ABCDEFGHIJKLM.....
C	901	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	ABCDEF.HIJKLM.....
C	901	87-A11-149-080	0E	CAP,TC U 0.22-50 Z F	G.....
C	924	87-014-049-080	0E	CAP,PP 470P-100 J	HIJK.....
C	922	87-018-099-080	0E	CAP,CERA 3.9P-50	HIJK.....
C	923	87-018-102-080	0E	CAP,TC-U 6.8P-50 SL	HIJK.....
C	931	87-010-263-080	0E	CAP, ELECT 100-10V	...D.FG.....
C	932	87-010-400-080	0E	CAP, ELECT 0.47-50V	...D.FG.....
C	939	87-014-073-080	0E	CAP,PP 4700P-100 J	...D.FG.....
C	934	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCDEFGHIJKLM.....
C	935	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCDEFGHIJKLM.....
C	936	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCDEFGHIJKLM.....
C	940	87-014-051-080	0E	CAPACITOR (PP) 560P	...D.FG.....
C	944	87-018-104-080	0E	CAP,TC-U 10P-50 SL	ABC.E.....LM.....
C	941	87-018-109-080	0E	CAP, CER 22P-50V	...D.FG.....
C	943	87-A11-144-080	0E	CAP,TC U 0.1-50 K B	ABCDEFGHIJKLM.....
CF	802	82-785-747-010	1A	CF MS2 GHY R	HIJK.....
CF	802	87-008-261-010	1A	FILTER, SFE10.7MA5-A	ABCDEF.....LM.....
CF	801	87-008-423-010	1A	CERAMIC FILTER, SFE10.7	HIJK.....
D	941	87-020-465-080	0E	DIODE,1SS133 (110MA)	...D.FGHIJK.....
D	981	87-A40-618-080	1B	VARI-CAP,SVC 348(S/T)	FG.....
FFE	801	A8-6ZA-191-130		6ZA-1 FEENM	HIJK.....
FFE	801	A8-6ZA-192-030	2Y	6ZA-1 FEJNM	M.....
FFE	801	A8-6ZA-193-030		6ZA-1 FEVNM	L.....
FFE	801	A8-6ZA-19D-070	1H	6ZA-1 YFEJNC	L.....
FFE	801	A8-8ZA-190-030		8ZA-1 FEUNM	...CD.FG.....
FFE	801	A8-8ZA-191-030	1E	8ZA-1 YFEUNM	AB..E.....
FFE	801	A8-8ZA-193-070	1E	8ZA-1 YFEUNC	AB..E.....
J	801	87-A60-202-010	1A	TERMINAL,ANT 4P MSP-154V-02	ABCDEF.....LM.....
J	802	87-A60-403-010		TERMINAL,ANT PAL 2P HSP-312V05	HIJK.....
J	931	81-754-629-010	0E	CONNECTOR, 2P	...D.FG.....
JW	813	87-008-372-080	0E	FILTER, EMI BL OIRNI	...DEF.....
JW	957	87-005-849-080	0E	COIL,10UH(CECS)	G.....
L	801	87-005-847-080	0E	COIL,2.2UH(CECS)	ABCDEFGHIJKLM.....
L	934	87-005-372-080	0E	COIL S 1MHM	...D.FG.....
L	933	87-A50-159-010	0E	COIL,10MH K C2B	...D.FG.....
L	942	87-A50-019-010	0E	COIL,OSC LW(COI)	HIJK.....
L	941	87-A50-020-010	0E	COIL,ANT LW(COI)	HIJK.....
L	941	87-A50-022-010	0E	COIL,ANT SW(COI)	...D.FG.....
L	942	87-A50-173-010	0E	COIL,OSC SW-N(COI)	...D.FG.....
L	983	87-A50-430-010	0E	COIL,ANT MW(3BSW)	...FG.....
L	982	87-A50-431-010	0E	COIL,OSC MW(3BSW)	...FG.....
L	981	8Z-ZA1-664-010	1D	COIL,AM PACK 4(TOK)	ABC.E.....LM.....
L	981	8Z-ZA1-665-010	1E	COIL,AM PACK 2(TOK)	HIJK.....
Q	802	87-026-214-080	0E	TR,DTA114YS (0.3W)	ABCDEFGHIJKLM.....
Q	803	89-305-352-380	0E	TR,2SC535(B/C)	HIJKLM.....
Q	938	87-026-609-080	0E	TR,KTA1266GR	...D.FG.....
Q	939	87-026-609-080	0E	TR,KTA1266GR	...D.FG.....
Q	937	87-026-610-080	0E	TR,KTC3198GR	...D.FG.....
Q	934	87-026-610-080	0E	TR,KTC3198GR	...D.FG.....
Q	932	87-026-610-080	0E	TR,KTC3198GR	...D.FG.....
Q	935	87-A30-092-080	0E	FET,2SK439E/F	...D.FGHIJK.....
Q	931	87-A30-164-080	0E	TR,CSC2001K	...D.FGHIJK.....
Q	933	87-A30-164-080	0E	TR,CSC2001K	...D.FGHIJK.....
Q	936	87-A30-164-080	0E	TR,CSC2001K	...D.FGHIJK.....
Q	940	87-026-269-080	0E	TR,DTA114ES	...D.FGHIJK.....
TC	941	87-011-220-080	1A	TRIMMER CAP 20P VTC	...D.FG.....
TC	943	87-011-221-080	1A	CAP, TRIMMER 30P	...D.FGHIJK.....
FC	102	87-033-147-010	0E	FUSE CLAMP	.B.DEFG.....
FC	101	87-033-147-010	0E	FUSE CLAMP	.B.DEFG.....
SW	101	87-A90-165-010	1A	SW,SL 1-2-3 SWS2301	.B.DEFG.....
T	102	87-A60-317-010	0E	TERMINAL, 1P MSC	.B.DEFG.....
T	101	87-A60-317-010	0E	TERMINAL, 1P MSC	.B.DEFG.....

ELECTRICAL MAIN PARTS LIST - 6/15

NOTE: The characters in the suffix column indicate the part usage.

CX-NS111	V	XX.....	A.....	
CX-SNS111	D	00.....	B.....	
CX-SNS128	D	00.....	C.....	
CX-SNS126	D	00.....	D.....	
KANRI				
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
*	8Z-NFA-204-010	0E	GUIDE,FL 100-25	ABCD.....
C	104 87-010-246-040	0E	CAP,E 47-35 SME	ABCD.....
C	103 87-015-699-040	0E	CAP,E 10-50 7L	ABCD.....
C	101 87-A11-147-080	0E	CAP,TC U 0.047-50 Z F	ABCD.....
C	102 87-A11-147-080	0E	CAP,TC U 0.047-50 Z F	ABCD.....
C	119 87-010-401-040	0E	CAP,E 1-50 SME	ABCD.....
C	116 87-018-128-080	0E	CAP, CERA-SOL SS 560P	ABCD.....
C	112 87-018-131-080	0E	CAP, CER 1000P-50V	ABCD.....
C	117 87-018-131-080	0E	CAP, CER 1000P-50V	ABCD.....
C	118 87-018-147-080	0E	CAP,TC-U 10P-50 CH	ABCD.....
C	113 87-018-205-080	0E	CAP, CERA-SOL 0.022	ABCD.....
C	114 87-018-205-080	0E	CAP, CERA-SOL 0.022	ABCD.....
C	115 87-018-205-080	0E	CAP, CERA-SOL 0.022	ABCD.....
C	110 87-018-205-080	0E	CAP, CERA-SOL 0.022	ABCD.....
C	111 87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCD.....
C	121 87-010-248-040	0E	CAP,E 220-10 SME	ABCD.....
C	122 87-010-378-040	0E	CAP,E 10-16	ABCD.....
C	120 87-018-205-080	0E	CAP, CERA-SOL 0.022	ABCD.....
C	123 87-A11-147-080	0E	CAP,TC U 0.047-50 Z F	ABCD.....
C	124 87-A11-152-080	0E	CAP,TC U 1000P-50 Z F	ABCD.....
C	208 87-018-117-080	0E	CAP,TC-U 68P-50 SL	ABCD.....
C	202 87-018-117-080	0E	CAP,TC-U 68P-50 SL	ABCD.....
C	205 87-018-117-080	0E	CAP,TC-U 68P-50 SL	ABCD.....
C	209 87-018-117-080	0E	CAP,TC-U 68P-50 SL	ABCD.....
C	201 87-018-118-080	0E	CAP,TC-U 82P-50 B	ABCD.....
C	214 87-010-404-040	0E	CAP,E 4.7-50 SME	ABCD.....
C	213 87-010-421-040	0E	CAP,E 4.7-50 5L	ABCD.....
C	210 87-018-117-080	0E	CAP,TC-U 68P-50 SL	ABCD.....
C	211 87-A11-147-080	0E	CAP,TC U 0.047-50 Z F	ABCD.....
C	301 87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	ABCD.....
C	701 87-010-384-040	0E	CAP,E 100-25 SME	ABCD.....
C	702 87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCD.....
C	801 87-018-131-080	0E	CAP, CER 1000P-50V	ABCD.....
CN	101 88-NF9-658-010	1A	CONN,30P BLK TYK-B(P)	ABCD.....
CN	701 87-A60-674-010	0E	CONN,10P H 2MM JMT	ABCD.....
CN	801 87-099-015-010	0E	CONN,13P 6216V	ABCD.....
D	103 87-017-932-080	0E	ZENER,MTJ6.2B	ABCD.....
D	102 87-A40-291-080	0E	DIODE,1N4148 (CPT)	
D	108 87-A40-291-080	0E	DIODE,1N4148 (CPT)	
D	107 87-A40-291-080	0E	DIODE,1N4148 (CPT)	
D	104 87-A40-291-080	0E	DIODE,1N4148 (CPT)	
D	105 87-A40-291-080	0E	DIODE,1N4148 (CPT)	
D	303 87-020-465-080	0E	DIODE,1SS133 (110MA)	ABCD.....
D	803 87-A40-291-080	0E	DIODE,1N4148 (CPT)	
D	802 87-A40-291-080	0E	DIODE,1N4148 (CPT)	
FL	201 8Z-NFA-630-010		FL,10-BT-207GAK	ABCD.....
IC	102 87-A21-218-010	1B	IC,NJL64H380A	ABCD.....
IC	101 8Z-NFA-661-010		C-IC,M38B59MFH-P113FP	ABCD.....
L	101 87-A50-050-010	0E	COIL,CLK 4.19M(COI)	ABCD.....
Q	101 87-026-610-080	0E	TR,KTC3198GR	ABCD.....
Q	102 87-A30-090-080	0E	FET,2SK2541	ABCD.....
Q	701 87-A30-234-080	0E	TR,CSC4115BC	ABCD.....
S	101 87-A90-535-010	1B	SW,RTRY EC16B24304	ABCD.....
S	323 87-A90-164-080	0E	SW,TACT SKQAB(N)	ABCD.....
S	326 87-A90-164-080	0E	SW,TACT SKQAB(N)	ABCD.....
S	327 87-A90-164-080	0E	SW,TACT SKQAB(N)	ABCD.....
S	325 87-A90-164-080	0E	SW,TACT SKQAB(N)	ABCD.....
S	329 87-A90-164-080	0E	SW,TACT SKQAB(N)	ABCD.....
S	322 87-A90-164-080	0E	SW,TACT SKQAB(N)	ABCD.....
S	328 87-A90-164-080	0E	SW,TACT SKQAB(N)	ABCD.....
S	324 87-A90-164-080	0E	SW,TACT SKQAB(N)	ABCD.....
S	330 87-A90-164-080	0E	SW,TACT SKQAB(N)	ABCD.....
SFR	701 87-024-350-080	0E	SFR 2.2K DIA 6H	ABCD.....
C	402 87-010-060-040	0E	CAP,E 100-16	
C	409 87-010-378-040	0E	CAP,E 10-16	
C	405 87-015-692-040	0E	E/CAP 0.22-50V TAPG	
C	403 87-015-692-040	0E	E/CAP 0.22-50V TAPG	
C	408 87-018-119-080	0E	CAP, CER 100P-50V	
C	404 87-018-119-080	0E	CAP, CER 100P-50V	
C	406 87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	
C	401 87-A11-154-080	0E	CAP,TC U 4700P-16 Z F	
C	413 87-A11-110-080	0E	CAP,TC U 820P-50 J CH	
C	410 87-A11-147-080	0E	CAP,TC U 0.047-50 Z F	
EMI	401 87-008-372-080	0E	FILTER, EMI BL OIRNI	
J	401 87-A60-651-010	0E	JACK,3.5MONO	
Q	404 87-026-609-080	0E	TR,KTA1266GR	
Q	402 87-026-609-080	0E	TR,KTA1266GR	
Q	401 87-026-610-080	0E	TR,KTC3198GR	
Q	403 87-026-610-080	0E	TR,KTC3198GR	
VR	401 87-NB7-602-010	1A	VR,RTRY 10KAX1 1 V	
FC	2 87-033-213-080	0E	CLAMP, FUSE	ABCD.....
FC	1 87-033-213-080	0E	CLAMP, FUSE	ABCD.....
T	1 87-A60-317-010	0E	TERMINAL, 1P MSC	ABCD.....

ELECTRICAL MAIN PARTS LIST - 7/15

T	2	87-A60-317-010	0E	TERMINAL, 1P MSC	ABCD.....
WH	101	87-A90-459-010	0E	HLDR, WIRE 2.5-5P	ABCD.....
C	106	87-010-246-080	0E	CAP, ELECT 47-35V	
C	106	87-010-260-080	0E	CAP, ELECT 47-25V	ABCD.....
C	108	87-010-381-080	0E	CAP, ELECT 330-16V	ABCD.....
C	103	87-016-051-000	1B	CAP, E 2200-35 M SMG	A.....
C	101	87-016-495-000	1B	CAP, E 3300-25 M SMG	ABCD.....
C	105	87-018-127-080	0E	CAP, CER 470P-50V	ABCD.....
C	104	87-A10-011-090	2A	CAP, E 2200-25 SMG	.BCD.....
C	101	87-A10-520-000	1B	CAP, E 3300-35 M SMG	
C	111	87-010-247-080	0E	CAP, ELECT 100-50V	ABCD.....
C	110	87-010-263-080	0E	CAP, ELECT 100-10V	ABCD.....
C	114	87-010-374-080	0E	CAP, ELECT 47-10V	ABCD.....
C	113	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCD.....
C	115	87-A10-303-080	0E	CAP, M 0.047-50 J	ABCD.....
C	116	87-A10-303-080	0E	CAP, M 0.047-50 J	ABCD.....
C	123	87-010-384-080	0E	CAP, ELECT 100-25V	ABCD.....
C	122	87-010-384-080	0E	CAP, ELECT 100-25V	ABCD.....
C	123	87-010-408-080	0E	CAP, ELECT 47-50V	
C	122	87-010-408-080	0E	CAP, ELECT 47-50V	
C	124	87-A11-132-080	0E	CAP, TC U 0.01-50 K B	ABCD.....
C	130	87-018-131-080	0E	CAP, CER 1000P-50V	A.....
C	130	87-A11-155-080	0E	CAP, TC U 0.01-16 Z F	ABCD.....
C	152	87-010-387-080	1A	CAP, E 470-25 SME	
C	152	87-010-388-010	1A	CAP, ELECT 25-1000SME	
D	109	87-020-465-080	0E	DIODE, 1SS133 (110MA)	ABCD.....
D	108	87-020-465-080	0E	DIODE, 1SS133 (110MA)	ABCD.....
D	108	87-A40-291-080	0E	DIODE, 1N4148 (CPT)	
D	109	87-A40-291-080	0E	DIODE, 1N4148 (CPT)	
D	107	87-A40-336-080	0E	ZENER, MTZJ27D T-72	ABCD.....
D	101	87-A40-393-090	0E	DIODE, 1N5402GW(F20)	ABCD.....
D	104	87-A40-393-090	0E	DIODE, 1N5402GW(F20)	ABCD.....
D	103	87-A40-393-090	0E	DIODE, 1N5402GW(F20)	ABCD.....
D	102	87-A40-393-090	0E	DIODE, 1N5402GW(F20)	ABCD.....
D	113	87-020-465-080	0E	DIODE, 1SS133 (110MA)	ABCD.....
D	113	87-A40-291-080	0E	DIODE, 1N4148 (CPT)	
D	110	87-A40-345-080	0E	ZENER, MTZJ10C	ABCD.....
D	117	87-A40-553-080	0E	DIODE, 1N4003 LES	ABCD.....
D	116	87-A40-553-080	0E	DIODE, 1N4003 LES	ABCD.....
D	121	87-A40-455-080	0E	DIODE, RL203 GW	
D	122	87-A40-455-080	0E	DIODE, RL203 GW	
D	123	87-A40-455-080	0E	DIODE, RL203 GW	
D	124	87-A40-455-080	0E	DIODE, RL203 GW	
JW	115	87-008-372-080	0E	FILTER, EMI BL OIRNI	A.....
Q	109	87-026-610-080	0E	TR, KTC3198GR	ABCD.....
Q	106	87-026-610-080	0E	TR, KTC3198GR	ABCD.....
Q	102	87-026-610-080	0E	TR, KTC3198GR	ABCD.....
Q	107	87-026-610-080	0E	TR, KTC3198GR	ABCD.....
Q	103	87-026-610-080	0E	TR, KTC3198GR	ABCD.....
Q	104	87-A30-234-080	0E	TR, CSC4115BC	ABCD.....
Q	115	87-026-219-080	0E	TR, DTA144ES (0.3W)	ABCD.....
Q	112	87-026-269-080	0E	TR, DTA114ES	ABCD.....
Q	113	87-026-609-080	0E	TR, KTA1266GR	ABCD.....
Q	111	89-213-702-010	1A	TR, 2SB1370 (1.8W)	ABCD.....
R	124	87-A00-261-080	0E	RES, M/F 0.56-1W J	.BCD.....
RY	101	87-045-389-010	1C	RELAY, OSA-SS-212DM5	ABCD.....
W	101	83-NE2-618-110	1B	F-CABEL, 5P-2.5	ABCD.....
WH	102	87-A90-459-010	0E	HLDR, WIRE 2.5-5P	ABCD.....
		87-067-703-010	0E	TAPPING SCREW, BVT2+3-10	A, CD.....
C	207	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCD.....
C	208	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCD.....
C	209	87-A11-154-080	0E	CAP, TC U 4700P-16 Z F	ABCD.....
C	213	87-010-260-080	0E	CAP, ELECT 47-25V	ABCD.....
C	214	87-010-260-080	0E	CAP, ELECT 47-25V	ABCD.....
C	211	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCD.....
C	212	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCD.....
C	219	87-010-544-080	0E	CAP, ELECT 0.1-50V	ABCD.....
C	217	87-A10-304-080	0E	CAP, M 0.056-50 J	ABCD.....
C	218	87-A10-304-080	0E	CAP, M 0.056-50 J	ABCD.....
C	210	87-A11-154-080	0E	CAP, TC U 4700P-16 Z F	ABCD.....
C	220	87-010-544-080	0E	CAP, ELECT 0.1-50V	ABCD.....
C	229	87-018-123-080	0E	CAP, CER 220P-50V	ABCD.....
C	222	87-018-211-080	0E	CAP, CER 0.01-50	A.....
C	221	87-018-211-080	0E	CAP, CER 0.01-50	A.....
C	230	87-018-123-080	0E	CAP, CER 220P-50V	ABCD.....
C	235	87-A11-148-080	0E	CAP, TC U 0.1-50 Z F	ABCD.....
C	236	87-A11-148-080	0E	CAP, TC U 0.1-50 Z F	ABCD.....
C	237	87-A11-155-080	0E	CAP, TC U 0.01-16 Z F	ABCD.....
C	256	87-018-115-080	0E	CAP, CER 47P-50V	A.....
C	255	87-018-115-080	0E	CAP, CER 47P-50V	A.....
C	258	87-018-119-080	0E	CAP, CER 100P-50V	A.....
C	254	87-018-131-080	0E	CAP, CER 1000P-50V	A.....
C	253	87-018-131-080	0E	CAP, CER 1000P-50V	A.....
D	218	87-020-465-080	0E	DIODE, 1SS133 (110MA)	ABCD.....
D	219	87-020-465-080	0E	DIODE, 1SS133 (110MA)	ABCD.....
D	219	87-A40-291-080	0E	DIODE, 1N4148 (CPT)	
D	218	87-A40-291-080	0E	DIODE, 1N4148 (CPT)	
D	222	87-020-465-080	0E	DIODE, 1SS133 (110MA)	ABCD.....
D	220	87-020-465-080	0E	DIODE, 1SS133 (110MA)	ABCD.....
D	221	87-020-465-080	0E	DIODE, 1SS133 (110MA)	ABCD.....
D	221	87-A40-291-080	0E	DIODE, 1N4148 (CPT)	
D	222	87-A40-291-080	0E	DIODE, 1N4148 (CPT)	

ELECTRICAL MAIN PARTS LIST - 8/15

D	220	87-A40-291-080	0E	DIODE,1N4148 (CPT)	
J	202	87-A60-238-010	1A	TERMINAL,SP 4P (MSC)	ABCD.....
J	201	87-A60-602-010	1A	JACK,DIA6.3 BLK ST W/SW TC	ABCD.....
L	201	87-003-383-010	1A	COIL,1UH-S	ABCD.....
L	202	87-003-383-010	1A	COIL,1UH-S	ABCD.....
Q	204	87-026-609-080	0E	TR,KTA1266GR	ABCD.....
Q	201	87-026-609-080	0E	TR,KTA1266GR	ABCD.....
Q	202	87-026-609-080	0E	TR,KTA1266GR	ABCD.....
Q	203	87-026-609-080	0E	TR,KTA1266GR	ABCD.....
Q	205	87-026-610-080	0E	TR,KTC3198GR	ABCD.....
Q	207	87-026-610-080	0E	TR,KTC3198GR	ABCD.....
Q	206	87-026-610-080	0E	TR,KTC3198GR	ABCD.....
Q	208	87-026-610-080	0E	TR,KTC3198GR	ABCD.....
Q	218	87-026-609-080	0E	TR,KTA1266GR	ABCD.....
Q	214	87-A30-126-010	1A	TR,2SB1616	.B.....
Q	213	87-A30-126-010	1A	TR,2SB1616	.B.....
Q	211	87-A30-127-010	1A	TR,2SD2478	.B.....
Q	212	87-A30-127-010	1A	TR,2SD2478	.B.....
Q	216	87-A30-190-080	0E	TR,CC5551	
Q	215	87-A30-190-080	0E	TR,CC5551	
Q	214	88-NF9-622-010	1A	TR,2SB1616	A.CD.....
Q	213	88-NF9-622-010	1A	TR,2SB1616	A.CD.....
Q	211	88-NF9-623-010	1A	TR,2SD2478	A.CD.....
Q	212	88-NF9-623-010	1A	TR,2SD2478	A.CD.....
R	224	87-A00-258-080	0E	RES,M/F 0.22-1W J	ABCD.....
R	223	87-A00-258-080	0E	RES,M/F 0.22-1W J	ABCD.....
C	307	87-010-263-080	0E	CAP, ELECT 100-10V	ABCD.....
C	308	87-010-263-080	0E	CAP, ELECT 100-10V	ABCD.....
C	309	87-018-115-080	0E	CAP, CER 47P-50V	A.....
C	302	87-018-129-080	0E	CAP, CER 680P-50V	.BCD.....
C	301	87-018-129-080	0E	CAP, CER 680P-50V	.BCD.....
C	304	87-018-195-080	0E	CAP, CER 1200P-16V	ABCD.....
C	303	87-018-195-080	0E	CAP, CER 1200P-16V	ABCD.....
C	315	87-010-374-080	0E	CAP, ELECT 47-10V	ABCD.....
C	318	87-010-546-080	0E	CAP, ELECT 0.33-50V	ABCD.....
C	317	87-010-546-080	0E	CAP, ELECT 0.33-50V	ABCD.....
C	310	87-018-115-080	0E	CAP, CER 47P-50V	A.....
C	312	87-A10-307-080	0E	CAP,M 0.1-50 J	ABCD.....
C	311	87-A10-307-080	0E	CAP,M 0.1-50 J	ABCD.....
C	326	87-018-205-080	0E	CAP, CERA-SOL 0.022	ABCD.....
C	327	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	ABCD.....
C	361	87-010-374-080	0E	CAP, ELECT 47-10V	ABCD.....
C	360	87-010-401-080	0E	CAP, ELECT 1-50V	ABCD.....
C	399	87-018-127-080	0E	CAP, CER 470P-50V	ABCD.....
C	402	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCD.....
C	401	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCD.....
C	403	87-018-118-080	0E	CAP,TC-U 82P-50 B	ABCD.....
C	404	87-018-118-080	0E	CAP,TC-U 82P-50 B	ABCD.....
C	412	87-010-405-080	0E	CAP, ELECT 10-50V	ABCD.....
C	411	87-010-405-080	0E	CAP, ELECT 10-50V	ABCD.....
C	452	87-010-382-080	0E	CAP, ELECT 22-25V	ABCD.....
C	459	87-018-128-080	0E	CAP, CERA-SOL SS 560P	ABCD.....
C	458	87-018-131-080	0E	CAP, CER 1000P-50V	ABCD.....
C	462	87-018-126-080	0E	CAP,TC-U 390P-50 B	ABCD.....
C	461	87-018-126-080	0E	CAP,TC-U 390P-50 B	ABCD.....
CN	301	87-A60-620-010	0E	CONN,3P V 2MM JMT	ABCD.....
CN	351	87-A60-625-010	0E	CONN,8P V 2MM JMT	ABCD.....
D	401	87-020-465-080	0E	DIODE,1SS133 (110MA)	ABCD.....
D	401	87-A40-291-080	0E	DIODE,1N4148 (CPT)	
IC	301	87-017-889-010	1A	IC,NJM4558LD	ABCD.....
IC	401	87-017-889-010	1A	IC,NJM4558LD	ABCD.....
L	451	87-007-342-010	0E	COIL,OSC 85K BIAS	ABCD.....
Q	306	87-026-218-080	0E	TR,DTC144ES (0.2W)	ABCD.....
Q	309	87-026-609-080	0E	TR,KTA1266GR	ABCD.....
Q	303	87-A30-090-080	0E	FET,2SK2541	ABCD.....
Q	304	87-A30-090-080	0E	FET,2SK2541	ABCD.....
Q	308	87-A30-091-080	1E	FET,2SJ460	ABCD.....
Q	302	87-A30-091-080	1E	FET,2SJ460	ABCD.....
Q	301	87-A30-091-080	1E	FET,2SJ460	ABCD.....
Q	305	87-A30-091-080	1E	FET,2SJ460	ABCD.....
Q	307	87-A30-091-080	1E	FET,2SJ460	ABCD.....
Q	310	87-026-609-080	0E	TR,KTA1266GR	ABCD.....
Q	454	87-026-610-080	0E	TR,KTC3198GR	ABCD.....
Q	453	87-026-610-080	0E	TR,KTC3198GR	ABCD.....
Q	451	87-026-610-080	0E	TR,KTC3198GR	ABCD.....
C	602	87-018-195-080	0E	CAP, CER 1200P-16V	ABCD.....
C	601	87-018-195-080	0E	CAP, CER 1200P-16V	ABCD.....
C	616	87-010-260-080	0E	CAP, ELECT 47-25V	ABCD.....
C	617	87-010-260-080	0E	CAP, ELECT 47-25V	ABCD.....
C	611	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCD.....
C	614	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCD.....
C	612	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCD.....
C	613	87-010-545-080	0E	CAP, ELECT 0.22-50V	ABCD.....
C	615	87-018-104-080	0E	CAP,TC-U 10P-50 SL	ABCD.....
CN	602	87-099-194-010	0E	CONN,6P 6216V	ABCD.....
CN	601	88-NF9-657-010	1A	CONN,30P H BLK TYK-B(X)	ABCD.....
D	602	87-A40-466-080	0E	ZENER,MTZJ2.7A	ABCD.....
D	601	87-A40-466-080	0E	ZENER,MTZJ2.7A	ABCD.....
FB	602	87-008-372-080	0E	FILTER, EMI BL OIRNI	A.....
IC	601	87-A20-715-010	1C	IC,M62439SP	ABCD.....
J	601	87-A60-881-010	0E	JACK,PIN 2P MSP 242V05 PBSN	ABCD.....
C	707	87-010-112-080	0E	CAP, ELECT 100-16V	ABCD.....

ELECTRICAL MAIN PARTS LIST - 9/15

C	709	87-010-248-080	0E	CAP, ELECT 220-10V	ABCD.....
C	701	87-010-404-080	0E	CAP, ELECT 4.7-50V	ABCD.....
C	705	87-018-131-080	0E	CAP, CER 1000P-50V	ABCD.....
C	704	87-018-131-080	0E	CAP, CER 1000P-50V	ABCD.....
C	706	87-018-131-080	0E	CAP, CER 1000P-50V	ABCD.....
C	708	87-A11-144-080	0E	CAP,TC U 0.1-50 K B	ABCD.....
C	702	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCD.....
C	703	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCD.....
C	714	87-010-112-080	0E	CAP, ELECT 100-16V	ABCD.....
C	710	87-010-112-080	0E	CAP, ELECT 100-16V	ABCD.....
C	715	87-018-119-080	0E	CAP, CER 100P-50V	ABCD.....
C	712	87-018-149-080	0E	CAP,TC-U 15P-50 CH	ABCD.....
C	713	87-018-149-080	0E	CAP,TC-U 15P-50 CH	ABCD.....
D	701	87-017-931-080	0E	ZENER,MTZJ5.6B	ABCD.....
D	702	87-020-465-080	0E	DIODE,1SS133 (110MA)	
IC	701	87-070-127-110	1C	IC,LC72131 D	ABCD.....
JW	706	87-005-849-080	0E	COIL,10UH(CECS)	
L	701	87-005-847-080	0E	COIL,2.2UH(CECS)	ABCD.....
Q	701	87-A30-234-080	0E	TR,CSC4115BC	ABCD.....
X	701	87-A70-061-010	1A	VIB,XTAL 4.500MHZ CSA-309	ABCD.....
C	738	87-010-260-080	0E	CAP, ELECT 47-25V	.BCD.....
C	732	87-010-404-080	0E	CAP, ELECT 4.7-50V	.BCD.....
C	731	87-010-545-080	0E	CAP, ELECT 0.22-50V	.BCD.....
C	733	87-010-545-080	0E	CAP, ELECT 0.22-50V	.BCD.....
C	734	87-010-545-080	0E	CAP, ELECT 0.22-50V	.BCD.....
C	735	87-018-132-080	0E	CAP, CER 2200P-16V	.BCD.....
C	736	87-018-132-080	0E	CAP, CER 2200P-16V	.BCD.....
C	737	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCD.....
C	743	87-010-101-080	0E	CAP, ELECT 220-16	.BCD.....
C	742	87-010-400-080	0E	CAP, ELECT 0.47-50V	.BCD.....
C	741	87-010-404-080	0E	CAP, ELECT 4.7-50V	.BCD.....
C	740	87-018-127-080	0E	CAP, CER 470P-50V	.BCD.....
C	747	87-A11-144-080	0E	CAP,TC U 0.1-50 K B	.BCD.....
D	731	87-020-465-080	0E	DIODE,1SS133 (110MA)	.BCD.....
IC	731	87-A20-716-010	1E	IC,TA2040AP	.BCD.....
Q	731	87-026-269-080	0E	TR,DTA114ES	.BCD.....
X	731	87-030-394-010	1B	VIB,CER CSA3.6MGF228	.BCD.....
C	758	87-010-112-080	0E	CAP, ELECT 100-16V	ABCD.....
C	753	87-010-408-080	0E	CAP, ELECT 47-50V	ABCD.....
C	752	87-018-143-080	0E	CAP,TC-U 4.7P-50 CH	ABCD.....
C	755	87-A11-144-080	0E	CAP,TC U 0.1-50 K B	ABCD.....
C	762	87-010-400-080	0E	CAP, ELECT 0.47-50V	ABCD.....
C	763	87-010-401-080	0E	CAP, ELECT 1-50V	ABCD.....
C	764	87-010-401-080	0E	CAP, ELECT 1-50V	ABCD.....
C	769	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCD.....
C	761	87-010-404-080	0E	CAP, ELECT 4.7-50V	ABCD.....
C	766	87-010-407-080	0E	CAP, ELECT 33-50V	ABCD.....
C	765	87-018-115-080	0E	CAP, CER 47P-50V	ABCD.....
C	768	87-A11-147-080	0E	CAP,TC U 0.047-50 Z F	ABCD.....
C	774	87-010-405-080	0E	CAP, ELECT 10-50V	ABCD.....
C	771	87-010-406-080	0E	CAP, ELECT 22-50	ABCD.....
C	773	87-018-130-080	0E	CAP,TC-U 820P-50 B	.BCD.....
C	773	87-018-131-080	0E	CAP, CER 1000P-50V	A.....
C	772	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCD.....
C	789	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCD.....
C	786	87-010-405-080	0E	CAP, ELECT 10-50V	ABCD.....
C	785	87-010-405-080	0E	CAP, ELECT 10-50V	ABCD.....
C	781	87-018-195-080	0E	CAP, CER 1200P-16V	.BCD.....
C	788	87-018-195-080	0E	CAP, CER 1200P-16V	.BCD.....
C	787	87-018-195-080	0E	CAP, CER 1200P-16V	.BCD.....
C	782	87-018-195-080	0E	CAP, CER 1200P-16V	.BCD.....
C	788	87-018-196-080	0E	CAP, CER 1500P-16V	A.....
C	787	87-018-196-080	0E	CAP, CER 1500P-16V	A.....
C	784	87-018-199-080	0E	CAP, CER 3300P	ABCD.....
C	783	87-018-199-080	0E	CAP, CER 3300P	ABCD.....
C	784	87-018-202-080	0E	CAP.CERAM.6800PF	
C	783	87-018-202-080	0E	CAP.CERAM.6800PF	
C	788	87-A11-153-080	0E	CAP,TC U 2200P-16 Z F	
C	787	87-A11-153-080	0E	CAP,TC U 2200P-16 Z F	
C	790	87-010-403-080	0E	CAP, ELECT 3.3-50V	ABCD.....
D	752	87-020-465-080	0E	DIODE,1SS133 (110MA)	ABCD.....
D	751	87-A40-291-080	0E	DIODE,1N4148 (CPT)	
IC	751	87-A20-913-010	1D	IC,LA1837NL	ABCD.....
JW	766	87-005-849-080	0E	COIL,10UH(CECS)	
L	771	87-A50-266-010	1A	COIL,FM DET-2N(TOK)	ABCD.....
L	772	87-A90-052-010	1C	FLTR,CFMT-450A(TOK)	
L	772	87-A90-053-010	1C	FLTR,PCFMT-060(TOK)	.BCD.....
L	772	87-A91-110-010	1B	FLTR,PCFJZH-450 (TOK)	A.....
X	751	87-030-354-010	1A	VIB,CF BFU 450C	
C	855	87-010-405-080	0E	CAP, ELECT 10-50V	
C	856	87-010-405-080	0E	CAP, ELECT 10-50V	
C	859	87-018-109-080	0E	CAP, CER 22P-50V	
C	858	87-018-109-080	0E	CAP, CER 22P-50V	
C	851	87-018-123-080	0E	CAP, CER 220P-50V	
C	852	87-018-123-080	0E	CAP, CER 220P-50V	
C	853	87-018-127-080	0E	CAP, CER 470P-50V	
C	857	87-018-134-080	0E	CAPACITOR,TC-U 0.01-16	
C	854	87-A11-144-080	0E	CAP,TC U 0.1-50 K B	
C	860	87-018-134-080	0E	CAPACITOR,TC-U 0.01-16	
IC	851	87-A20-502-010	1H	IC,BU1920	
JW	855	87-005-847-080	0E	COIL,2.2UH(CECS)	
JW	855	87-005-849-080	0E	COIL,10UH(CECS)	A.....

ELECTRICAL MAIN PARTS LIST - 10/15

Q	851	87-026-610-080	0E	TR,KTC3198GR	
X	851	87-A70-091-010	1B	VIB,XTAL 4.332MHZ CSA-309	
C	805	87-A11-144-080	0E	CAP,TC U 0.1-50 K B	ABCD.....
C	807	87-A11-144-080	0E	CAP,TC U 0.1-50 K B	ABCD.....
C	812	87-010-408-080	0E	CAP, ELECT 47-50V	ABCD.....
C	813	87-018-131-080	0E	CAP, CER 1000P-50V	ABCD.....
C	901	87-A11-148-080	0E	CAP,TC U 0.1-50 Z F	ABCD.....
C	901	87-A11-149-080	0E	CAP,TC U 0.22-50 Z F	
C	924	87-014-049-080	0E	CAP,PP 470P-100 J	
C	922	87-018-099-080	0E	CAP,CERA 3.9P-50	
C	923	87-018-102-080	0E	CAP,TC-U 6.8P-50 SL	
C	931	87-010-263-080	0E	CAP, ELECT 100-10V	
C	932	87-010-400-080	0E	CAP, ELECT 0.47-50V	
C	939	87-014-073-080	0E	CAP,PP 4700P-100 J	
C	936	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCD.....
C	935	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCD.....
C	934	87-A11-155-080	0E	CAP,TC U 0.01-16 Z F	ABCD.....
C	940	87-014-051-080	0E	CAPACITOR (PP), 560P	
C	944	87-018-104-080	0E	CAP,TC-U 10P-50 SL	ABCD.....
C	941	87-018-109-080	0E	CAP, CER 22P-50V	
C	943	87-A11-144-080	0E	CAP,TC U 0.1-50 K B	ABCD.....
CF	802	82-785-747-010	1A	CF MS2 GHY R	
CF	802	87-008-261-010	1A	FILTER, SFE10.7MA5-A	ABCD.....
CF	801	87-008-423-010	1A	CERAMIC FILTER, SFE10.7	
D	941	87-020-465-080	0E	DIODE,1SS133 (110MA)	
D	981	87-A40-618-080	1B	VARI-CAP,SVC 348(S/T)	
FFE	801	A8-6ZA-191-130		6ZA-1 FEENM	
FFE	801	A8-6ZA-192-030	2Y	6ZA-1 FEJNM	.CD.....
FFE	801	A8-6ZA-193-030		6ZA-1 FEVNM	A.....
FFE	801	A8-6ZA-19D-070	1H	6ZA-1 YFEJNC	.B.....
FFE	801	A8-8ZA-190-030		8ZA-1 FEUNM	
FFE	801	A8-8ZA-191-030	1E	8ZA-1 YFEUNM	
FFE	801	A8-8ZA-193-070	1E	8ZA-1 YFEUNC	
J	801	87-A60-202-010	1A	TERMINAL,ANT 4P MSP-154V-02	ABCD.....
J	802	87-A60-403-010		TERMINAL,ANT PAL 2P HSP-312V05	
J	931	81-754-629-010	0E	CONNECTOR, 2P	
JW	957	87-005-849-080	0E	COIL,10UH(CECS)	A.....
L	801	87-005-847-080	0E	COIL,2.2UH(CECS)	ABCD.....
L	934	87-005-372-080	0E	COIL S 1MHM	
L	933	87-A50-159-010	0E	COIL,10MH K C2B	
L	942	87-A50-019-010	0E	COIL,OSC LW(COI)	
L	941	87-A50-020-010	0E	COIL,ANT LW(COI)	
L	941	87-A50-022-010	0E	COIL,ANT SW(COI)	
L	942	87-A50-173-010	0E	COIL,OSC SW-N(COI)	
L	983	87-A50-430-010	0E	COIL,ANT MW(3BSW)	
L	982	87-A50-431-010	0E	COIL,OSC MW(3BSW)	
L	981	8Z-ZA1-664-010	1D	COIL,AM PACK 4(TOK)	ABCD.....
L	981	8Z-ZA1-665-010	1E	COIL,AM PACK 2(TOK)	
Q	802	87-026-214-080	0E	TR,DTA114YS (0.3W)	ABCD.....
Q	803	89-305-352-380	0E	TR,2SC535(B/C)	ABCD.....
Q	939	87-026-609-080	0E	TR,KTA1266GR	
Q	938	87-026-609-080	0E	TR,KTA1266GR	
Q	934	87-026-610-080	0E	TR,KTC3198GR	
Q	937	87-026-610-080	0E	TR,KTC3198GR	
Q	932	87-026-610-080	0E	TR,KTC3198GR	
Q	935	87-A30-092-080	0E	FET,2SK439E/F	
Q	931	87-A30-164-080	0E	TR,CSC2001K	
Q	933	87-A30-164-080	0E	TR,CSC2001K	
Q	936	87-A30-164-080	0E	TR,CSC2001K	
Q	940	87-026-269-080	0E	TR,DTA114ES	
TC	941	87-011-220-080	1A	TRIMMER CAP 20P VTC	
TC	943	87-011-221-080	1A	CAP, TRIMMER 30P	
FC	101	87-033-147-010	0E	FUSE CLAMP	
FC	102	87-033-147-010	0E	FUSE CLAMP	
SW	101	87-A90-165-010	1A	SW,SL 1-2-3 SWS2301	
T	102	87-A60-317-010	0E	TERMINAL, 1P MSC	
T	101	87-A60-317-010	0E	TERMINAL, 1P MSC	

ELECTRICAL MAIN PARTS LIST - 11/15

NOTE: The characters in the suffix column indicate the part usage.

HS	XX.....	A.....		
G	XX.....	B.....		
HC	XX.....	C.....		
	KANRI			
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
*	8Z-NFA-204-010		GUIDE,FL 100-25	ABC.....
C	104	87-010-246-040	CAP,E 47-35 SME	ABC.....
C	103	87-015-699-040	CAP,E 10-50 7L	ABC.....
C	102	87-A11-147-080	CAP,TC U 0.047-50 Z F	ABC.....
C	101	87-A11-147-080	CAP,TC U 0.047-50 Z F	ABC.....
C	119	87-010-401-040	CAP,E 1-50 SME	ABC.....
C	116	87-018-128-080	CAP, CERA-SOL SS 560P	ABC.....
C	112	87-018-131-080	CAP, CER 1000P-50V	ABC.....
C	117	87-018-131-080	CAP, CER 1000P-50V	ABC.....
C	118	87-018-147-080	CAP,TC-U 10P-50 CH	ABC.....
C	113	87-018-205-080	CAP, CERA-SOL 0.022	ABC.....
C	114	87-018-205-080	CAP, CERA-SOL 0.022	ABC.....
C	115	87-018-205-080	CAP, CERA-SOL 0.022	ABC.....
C	110	87-018-205-080	CAP, CERA-SOL 0.022	ABC.....
C	111	87-A11-155-080	CAP,TC U 0.01-16 Z F	ABC.....
C	121	87-010-248-040	CAP,E 220-10 SME	ABC.....
C	122	87-010-378-040	CAP,E 10-16	ABC.....
C	120	87-018-205-080	CAP, CERA-SOL 0.022	ABC.....
C	123	87-A11-147-080	CAP,TC U 0.047-50 Z F	ABC.....
C	124	87-A11-152-080	CAP,TC U 1000P-50 Z F	ABC.....
C	208	87-018-117-080	CAP,TC-U 68P-50 SL	ABC.....
C	202	87-018-117-080	CAP,TC-U 68P-50 SL	ABC.....
C	205	87-018-117-080	CAP,TC-U 68P-50 SL	ABC.....
C	209	87-018-117-080	CAP,TC-U 68P-50 SL	ABC.....
C	201	87-018-118-080	CAP,TC-U 82P-50 B	ABC.....
C	214	87-010-404-040	CAP,E 4.7-50 SME	ABC.....
C	213	87-010-421-040	CAP,E 4.7-50 5L	ABC.....
C	210	87-018-117-080	CAP,TC-U 68P-50 SL	ABC.....
C	211	87-A11-147-080	CAP,TC U 0.047-50 Z F	ABC.....
C	301	87-A11-148-080	CAP,TC U 0.1-50 Z F	..C.....
C	701	87-010-384-040	CAP,E 100-25 SME	ABC.....
C	702	87-A11-155-080	CAP,TC U 0.01-16 Z F	ABC.....
C	801	87-018-131-080	CAP, CER 1000P-50V	ABC.....
CN	101	88-NF9-658-010	CONN,30P BLK TYK-B(P)	ABC.....
CN	701	87-A60-674-010	CONN,10P H 2MM JMT	ABC.....
CN	801	87-099-015-010	CONN,13P 6216V	ABC.....
D	103	87-017-932-080	ZENER,MTJ6.2B	ABC.....
D	303	87-020-465-080	DIODE,1SS133 (110MA)	AB.....
D	302	87-A40-291-080	DIODE,1N4148 (CPT)	..C.....
FL	201	8Z-NFA-630-010	FL,10-BT-207GAK	ABC.....
IC	102	87-A21-218-010	IC,NJL64H380A	ABC.....
IC	101	8Z-NFA-661-010	C-IC,M38B59MFH-P113FP	ABC.....
L	101	87-A50-050-010	COIL,CLK 4.19M(COI)	ABC.....
Q	101	87-026-610-080	TR,KTC3198GR	ABC.....
Q	102	87-A30-090-080	FET,2SK2541	ABC.....
Q	701	87-A30-234-080	TR,CSC4115BC	ABC.....
S	101	87-A90-535-010	SW,RTRY EC16B24304	ABC.....
S	323	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
S	324	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
S	326	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
S	328	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
S	325	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
S	322	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
S	327	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
S	329	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
S	330	87-A90-164-080	SW,TACT SKQAB(N)	ABC.....
SFR	701	87-024-350-080	SFR 2.2K DIA 6H	ABC.....
C	402	87-010-060-040	CAP,E 100-16	..C.....
C	409	87-010-378-040	CAP,E 10-16	..C.....
C	403	87-015-692-040	E/CAP 0.22-50V TAPG	..C.....
C	405	87-015-692-040	E/CAP 0.22-50V TAPG	..C.....
C	404	87-018-119-080	CAP, CER 100P-50V	..C.....
C	408	87-018-119-080	CAP, CER 100P-50V	..C.....
C	406	87-A11-148-080	CAP,TC U 0.1-50 Z F	..C.....
C	401	87-A11-154-080	CAP,TC U 4700P-16 Z F	..C.....
C	413	87-A11-110-080	CAP,TC U 820P-50 J CH	..C.....
C	410	87-A11-147-080	CAP,TC U 0.047-50 Z F	..C.....
EMI	401	87-008-372-080	FILTER, EMI BL OIRNI	..C.....
J	401	87-A60-651-010	JACK,3.5MONO	..C.....
Q	404	87-026-609-080	TR,KTA1266GR	..C.....
Q	402	87-026-609-080	TR,KTA1266GR	..C.....
Q	403	87-026-610-080	TR,KTC3198GR	..C.....
Q	401	87-026-610-080	TR,KTC3198GR	..C.....
VR	401	87-NB7-602-010	VR,RTRY 10KAX1 1 V	..C.....
FC	2	87-033-213-080	CLAMP, FUSE	AB.....
FC	1	87-033-213-080	CLAMP, FUSE	AB.....
T	1	87-A60-317-010	TERMINAL, 1P MSC	AB.....
T	2	87-A60-317-010	TERMINAL, 1P MSC	AB.....
WH	101	87-A90-459-010	HLDR,WIRE 2.5-5P	ABC.....
C	106	87-010-246-080	CAP, ELECT 47-35V	
C	106	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	108	87-010-381-080	CAP, ELECT 330-16V	ABC.....
C	103	87-016-051-000	CAP,E 2200-35 M SMG	AB.....
C	101	87-016-495-000	CAP,E 3300-25 M SMG	ABC.....

ELECTRICAL MAIN PARTS LIST - 12/15

C	105	87-018-127-080	CAP, CER 470P-50V	ABC.....
C	104	87-A10-011-090	CAP, E 2200-25 SMG	..C.....
C	101	87-A10-520-000	CAP, E 3300-35 M SMG	
C	110	87-010-263-080	CAP, ELECT 100-10V	ABC.....
C	114	87-010-374-080	CAP, ELECT 47-10V	ABC.....
C	113	87-010-403-080	CAP, ELECT 3.3-50V	ABC.....
C	115	87-A10-303-080	CAP, M 0.047-50 J	ABC.....
C	116	87-A10-303-080	CAP, M 0.047-50 J	ABC.....
C	122	87-010-247-080	CAP, ELECT 100-50V	ABC.....
C	123	87-010-384-080	CAP, ELECT 100-25V	ABC.....
C	122	87-010-384-080	CAP, ELECT 100-25V	ABC.....
C	123	87-010-408-080	CAP, ELECT 47-50V	
C	122	87-010-408-080	CAP, ELECT 47-50V	
C	124	87-A11-132-080	CAP, TC U 0.01-50 K B	ABC.....
C	130	87-018-131-080	CAP, CER 1000P-50V	
C	130	87-A11-155-080	CAP, TC U 0.01-16 Z F	AB.....
C	152	87-010-387-080	CAP, E 470-25 SME	
C	152	87-010-388-010	CAP, ELECT 25-1000SME	..C.....
D	108	87-020-465-080	DIODE, 1SS133 (110MA)	AB.....
D	109	87-020-465-080	DIODE, 1SS133 (110MA)	AB.....
D	109	87-A40-291-080	DIODE, 1N4148 (CPT)	..C.....
D	108	87-A40-291-080	DIODE, 1N4148 (CPT)	..C.....
D	107	87-A40-336-080	ZENER, MTZJ27D T-72	ABC.....
D	101	87-A40-393-090	DIODE, 1N5402GW(F20)	ABC.....
D	104	87-A40-393-090	DIODE, 1N5402GW(F20)	ABC.....
D	102	87-A40-393-090	DIODE, 1N5402GW(F20)	ABC.....
D	103	87-A40-393-090	DIODE, 1N5402GW(F20)	ABC.....
D	113	87-020-465-080	DIODE, 1SS133 (110MA)	AB.....
D	113	87-A40-291-080	DIODE, 1N4148 (CPT)	..C.....
D	110	87-A40-345-080	ZENER, MTZJ10C	ABC.....
D	117	87-A40-553-080	DIODE, 1N4003 LES	ABC.....
D	116	87-A40-553-080	DIODE, 1N4003 LES	ABC.....
D	123	87-A40-455-080	DIODE, RL203 GW	
D	121	87-A40-455-080	DIODE, RL203 GW	
D	124	87-A40-455-080	DIODE, RL203 GW	
D	122	87-A40-455-080	DIODE, RL203 GW	
JW	115	87-008-372-080	FILTER, EMI BL OIRNI	AB.....
Q	109	87-026-610-080	TR, KTC3198GR	ABC.....
Q	106	87-026-610-080	TR, KTC3198GR	ABC.....
Q	102	87-026-610-080	TR, KTC3198GR	ABC.....
Q	107	87-026-610-080	TR, KTC3198GR	ABC.....
Q	103	87-026-610-080	TR, KTC3198GR	ABC.....
Q	104	87-A30-234-080	TR, CSC4115BC	ABC.....
Q	115	87-026-219-080	TR, DTA144ES (0.3W)	ABC.....
Q	112	87-026-269-080	TR, DTA114ES	ABC.....
Q	113	87-026-609-080	TR, KTA1266GR	ABC.....
Q	111	89-213-702-010	TR, 2SB1370 (1.8W)	ABC.....
R	124	87-A00-261-080	RES, M/F 0.56-1W J	
RY	101	87-045-389-010	RELAY, OSA-SS-212DM5	ABC.....
W	101	83-NE2-618-110	F-CABEL, 5P-2.5	ABC.....
WH	102	87-A90-459-010	HLDR, WIRE 2.5-5P	ABC.....
		87-067-001-010	FW, 3.1-5.4-1	..C.....
		87-067-703-010	TAPPING SCREW, BVT2+3-10	AB.....
C	207	87-010-545-080	CAP, ELECT 0.22-50V	ABC.....
C	208	87-010-545-080	CAP, ELECT 0.22-50V	ABC.....
C	209	87-A11-154-080	CAP, TC U 4700P-16 Z F	ABC.....
C	213	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	214	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	212	87-010-403-080	CAP, ELECT 3.3-50V	ABC.....
C	211	87-010-403-080	CAP, ELECT 3.3-50V	ABC.....
C	219	87-010-544-080	CAP, ELECT 0.1-50V	ABC.....
C	218	87-A10-304-080	CAP, M 0.056-50 J	ABC.....
C	217	87-A10-304-080	CAP, M 0.056-50 J	ABC.....
C	210	87-A11-154-080	CAP, TC U 4700P-16 Z F	ABC.....
C	220	87-010-544-080	CAP, ELECT 0.1-50V	ABC.....
C	229	87-018-123-080	CAP, CER 220P-50V	ABC.....
C	222	87-018-211-080	CAP, CER 0.01-50	AB.....
C	221	87-018-211-080	CAP, CER 0.01-50	AB.....
C	230	87-018-123-080	CAP, CER 220P-50V	ABC.....
C	236	87-A11-148-080	CAP, TC U 0.1-50 Z F	ABC.....
C	235	87-A11-148-080	CAP, TC U 0.1-50 Z F	ABC.....
C	237	87-A11-155-080	CAP, TC U 0.01-16 Z F	ABC.....
C	255	87-018-115-080	CAP, CER 47P-50V	AB.....
C	256	87-018-115-080	CAP, CER 47P-50V	AB.....
C	258	87-018-119-080	CAP, CER 100P-50V	AB.....
C	253	87-018-131-080	CAP, CER 1000P-50V	AB.....
C	254	87-018-131-080	CAP, CER 1000P-50V	AB.....
D	219	87-020-465-080	DIODE, 1SS133 (110MA)	AB.....
D	218	87-020-465-080	DIODE, 1SS133 (110MA)	AB.....
D	219	87-A40-291-080	DIODE, 1N4148 (CPT)	..C.....
D	218	87-A40-291-080	DIODE, 1N4148 (CPT)	..C.....
D	221	87-020-465-080	DIODE, 1SS133 (110MA)	AB.....
D	222	87-020-465-080	DIODE, 1SS133 (110MA)	AB.....
D	220	87-020-465-080	DIODE, 1SS133 (110MA)	AB.....
D	221	87-A40-291-080	DIODE, 1N4148 (CPT)	..C.....
D	222	87-A40-291-080	DIODE, 1N4148 (CPT)	..C.....
D	220	87-A40-291-080	DIODE, 1N4148 (CPT)	..C.....
J	202	87-A60-238-010	TERMINAL, SP 4P (MSC)	ABC.....
J	201	87-A60-602-010	JACK, DIA6.3 BLK ST W/SW TC	ABC.....
L	202	87-003-383-010	COIL, 1UH-S	ABC.....
L	201	87-003-383-010	COIL, 1UH-S	ABC.....
Q	202	87-026-609-080	TR, KTA1266GR	ABC.....

ELECTRICAL MAIN PARTS LIST - 13/15

Q	203	87-026-609-080	TR, KTA1266GR	ABC.....
Q	204	87-026-609-080	TR, KTA1266GR	ABC.....
Q	201	87-026-609-080	TR, KTA1266GR	ABC.....
Q	208	87-026-610-080	TR, KTC3198GR	ABC.....
Q	206	87-026-610-080	TR, KTC3198GR	ABC.....
Q	207	87-026-610-080	TR, KTC3198GR	ABC.....
Q	205	87-026-610-080	TR, KTC3198GR	ABC.....
Q	218	87-026-609-080	TR, KTA1266GR	ABC.....
Q	213	87-A30-126-010	TR, 2SB1616	ABC.....
Q	214	87-A30-126-010	TR, 2SB1616	ABC.....
Q	211	87-A30-127-010	TR, 2SD2478	ABC.....
Q	212	87-A30-127-010	TR, 2SD2478	ABC.....
Q	215	87-A30-190-080	TR, CC5551	
Q	216	87-A30-190-080	TR, CC5551	
R	223	87-A00-258-080	RES, M/F 0.22-1W J	ABC.....
R	224	87-A00-258-080	RES, M/F 0.22-1W J	ABC.....
C	308	87-010-263-080	CAP, ELECT 100-10V	ABC.....
C	307	87-010-263-080	CAP, ELECT 100-10V	ABC.....
C	309	87-018-115-080	CAP, CER 47P-50V	AB.....
C	302	87-018-129-080	CAP, CER 680P-50V	
C	301	87-018-129-080	CAP, CER 680P-50V	
C	303	87-018-195-080	CAP, CER 1200P-16V	ABC.....
C	304	87-018-195-080	CAP, CER 1200P-16V	ABC.....
C	315	87-010-374-080	CAP, ELECT 47-10V	ABC.....
C	318	87-010-546-080	CAP, ELECT 0.33-50V	ABC.....
C	317	87-010-546-080	CAP, ELECT 0.33-50V	ABC.....
C	310	87-018-115-080	CAP, CER 47P-50V	AB.....
C	312	87-A10-307-080	CAP, M 0.1-50 J	ABC.....
C	311	87-A10-307-080	CAP, M 0.1-50 J	ABC.....
C	326	87-018-205-080	CAP, CERA-SOL 0.022	ABC.....
C	327	87-A11-148-080	CAP, TC U 0.1-50 Z F	ABC.....
C	361	87-010-374-080	CAP, ELECT 47-10V	ABC.....
C	360	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	399	87-018-127-080	CAP, CER 470P-50V	ABC.....
C	401	87-010-545-080	CAP, ELECT 0.22-50V	ABC.....
C	402	87-010-545-080	CAP, ELECT 0.22-50V	ABC.....
C	404	87-018-118-080	CAP, TC-U 82P-50 B	ABC.....
C	403	87-018-118-080	CAP, TC-U 82P-50 B	ABC.....
C	411	87-010-405-080	CAP, ELECT 10-50V	ABC.....
C	412	87-010-405-080	CAP, ELECT 10-50V	ABC.....
C	452	87-010-382-080	CAP, ELECT 22-25V	ABC.....
C	459	87-018-128-080	CAP, CERA-SOL SS 560P	ABC.....
C	458	87-018-131-080	CAP, CER 1000P-50V	ABC.....
C	462	87-018-126-080	CAP, TC-U 390P-50 B	ABC.....
C	461	87-018-126-080	CAP, TC-U 390P-50 B	ABC.....
CN	301	87-A60-620-010	CONN, 3P V 2MM JMT	ABC.....
CN	351	87-A60-625-010	CONN, 8P V 2MM JMT	ABC.....
D	401	87-020-465-080	DIODE, 1SS133 (110MA)	AB.....
D	401	87-A40-291-080	DIODE, 1N4148 (CPT)	..C.....
IC	301	87-017-889-010	IC, NJM4558LD	ABC.....
IC	401	87-017-889-010	IC, NJM4558LD	ABC.....
L	451	87-007-342-010	COIL, OSC 85K BIAS	ABC.....
Q	306	87-026-218-080	TR, DTC144ES (0.2W)	ABC.....
Q	309	87-026-609-080	TR, KTA1266GR	ABC.....
Q	304	87-A30-090-080	FET, 2SK2541	ABC.....
Q	303	87-A30-090-080	FET, 2SK2541	ABC.....
Q	307	87-A30-091-080	FET, 2SJ460	ABC.....
Q	308	87-A30-091-080	FET, 2SJ460	ABC.....
Q	302	87-A30-091-080	FET, 2SJ460	ABC.....
Q	305	87-A30-091-080	FET, 2SJ460	ABC.....
Q	301	87-A30-091-080	FET, 2SJ460	ABC.....
Q	310	87-026-609-080	TR, KTA1266GR	ABC.....
Q	455	87-026-610-080	TR, KTC3198GR	ABC.....
C	601	87-018-195-080	CAP, CER 1200P-16V	ABC.....
C	602	87-018-195-080	CAP, CER 1200P-16V	ABC.....
C	617	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	616	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	611	87-010-545-080	CAP, ELECT 0.22-50V	ABC.....
C	613	87-010-545-080	CAP, ELECT 0.22-50V	ABC.....
C	612	87-010-545-080	CAP, ELECT 0.22-50V	ABC.....
C	614	87-010-545-080	CAP, ELECT 0.22-50V	ABC.....
C	615	87-018-104-080	CAP, TC-U 10P-50 SL	ABC.....
CN	602	87-099-194-010	CONN, 6P 6216V	ABC.....
CN	601	88-NF9-657-010	CONN, 30P H BLK TYK-B(X)	ABC.....
D	602	87-A40-466-080	ZENER, MTZJ2.7A	ABC.....
D	601	87-A40-466-080	ZENER, MTZJ2.7A	ABC.....
FB	602	87-008-372-080	FILTER, EMI BL OIRNI	AB.....
IC	601	87-A20-715-010	IC, M62439SP	ABC.....
J	601	87-A60-881-010	JACK, PIN 2P MSP 242V05 PBSN	ABC.....
C	707	87-010-112-080	CAP, ELECT 100-16V	ABC.....
C	709	87-010-248-080	CAP, ELECT 220-10V	ABC.....
C	701	87-010-404-080	CAP, ELECT 4.7-50V	ABC.....
C	704	87-018-131-080	CAP, CER 1000P-50V	ABC.....
C	705	87-018-131-080	CAP, CER 1000P-50V	ABC.....
C	706	87-018-131-080	CAP, CER 1000P-50V	ABC.....
C	708	87-A11-144-080	CAP, TC U 0.1-50 K B	ABC.....
C	703	87-A11-155-080	CAP, TC U 0.01-16 Z F	ABC.....
C	702	87-A11-155-080	CAP, TC U 0.01-16 Z F	ABC.....
C	710	87-010-112-080	CAP, ELECT 100-16V	ABC.....
C	714	87-010-112-080	CAP, ELECT 100-16V	ABC.....
C	715	87-018-119-080	CAP, CER 100P-50V	ABC.....
C	713	87-018-149-080	CAP, TC-U 15P-50 CH	ABC.....

ELECTRICAL MAIN PARTS LIST - 14/15

C	712	87-018-149-080	CAP,TC-U 15P-50 CH	ABC.....
D	701	87-017-931-080	ZENER,MTZJ5.6B	ABC.....
D	702	87-020-465-080	DIODE,1SS133 (110MA)	AB.....
IC	701	87-070-127-110	IC,LC72131 D	ABC.....
JW	706	87-005-849-080	COIL,10UH(CECS)	..C.....
L	701	87-005-847-080	COIL,2.2UH(CECS)	ABC.....
Q	701	87-A30-234-080	TR,CSC4115BC	ABC.....
X	701	87-A70-061-010	VIB,XTAL 4.500MHZ CSA-309	ABC.....
C	737	87-A11-155-080	CAP,TC U 0.01-16 Z F	ABC.....
C	758	87-010-112-080	CAP, ELECT 100-16V	ABC.....
C	753	87-010-408-080	CAP, ELECT 47-50V	ABC.....
C	752	87-018-143-080	CAP,TC-U 4.7P-50 CH	AB.....
C	755	87-A11-144-080	CAP,TC U 0.1-50 K B	ABC.....
C	762	87-010-400-080	CAP, ELECT 0.47-50V	ABC.....
C	763	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	764	87-010-401-080	CAP, ELECT 1-50V	ABC.....
C	769	87-010-403-080	CAP, ELECT 3.3-50V	ABC.....
C	761	87-010-404-080	CAP, ELECT 4.7-50V	ABC.....
C	766	87-010-407-080	CAP, ELECT 33-50V	ABC.....
C	765	87-018-115-080	CAP, CER 47P-50V	ABC.....
C	768	87-A11-147-080	CAP,TC U 0.047-50 Z F	ABC.....
C	774	87-010-405-080	CAP, ELECT 10-50V	ABC.....
C	771	87-010-406-080	CAP, ELECT 22-50	ABC.....
C	773	87-018-130-080	CAP,TC-U 820P-50 B	..C.....
C	773	87-018-196-080	CAP, CER 1500P-16V	ABC.....
C	772	87-A11-155-080	CAP,TC U 0.01-16 Z F	ABC.....
C	785	87-010-405-080	CAP, ELECT 10-50V	ABC.....
C	786	87-010-405-080	CAP, ELECT 10-50V	ABC.....
C	789	87-010-546-080	CAP, ELECT 0.33-50V	AB.....
C	784	87-018-199-080	CAP, CER 3300P	..C.....
C	783	87-018-199-080	CAP, CER 3300P	..C.....
C	783	87-018-202-080	CAP.CERAM.6800PF	AB.....
C	784	87-018-202-080	CAP.CERAM.6800PF	AB.....
C	790	87-010-546-080	CAP, ELECT 0.33-50V	AB.....
D	752	87-020-465-080	DIODE,1SS133 (110MA)	AB.....
D	751	87-A40-291-080	DIODE,1N4148 (CPT)	..C.....
IC	751	87-A20-913-010	IC,LA1837NL	ABC.....
JW	766	87-005-849-080	COIL,10UH(CECS)	..C.....
L	771	87-A50-266-010	COIL,FM DET-2N(TOK)	ABC.....
L	772	87-A90-052-010	FLTR,CFMT-450A(TOK)	..C.....
L	772	87-A91-110-010	FLTR,PCFJZH-450 (TOK)	AB.....
X	751	87-030-354-010	VIB,CF BFU 450C	..C.....
C	807	87-A11-144-080	CAP,TC U 0.1-50 K B	ABC.....
C	805	87-A11-144-080	CAP,TC U 0.1-50 K B	ABC.....
C	812	87-010-408-080	CAP, ELECT 47-50V	AB.....
C	813	87-018-131-080	CAP, CER 1000P-50V	ABC.....
C	901	87-A11-148-080	CAP,TC U 0.1-50 Z F	AB.....
C	901	87-A11-149-080	CAP,TC U 0.22-50 Z F	..C.....
C	924	87-014-049-080	CAP,PP 470P-100 J	AB.....
C	922	87-018-099-080	CAP CERA 3.9P-50	AB.....
C	923	87-018-101-080	CAP,TC-U 5.6P-50 SL	AB.....
C	931	87-010-263-080	CAP, ELECT 100-10V	..C.....
C	932	87-010-400-080	CAP, ELECT 0.47-50V	..C.....
C	939	87-014-073-080	CAP,PP 4700P-100 J	..C.....
C	935	87-A11-155-080	CAP,TC U 0.01-16 Z F	ABC.....
C	936	87-A11-155-080	CAP,TC U 0.01-16 Z F	ABC.....
C	934	87-A11-155-080	CAP,TC U 0.01-16 Z F	ABC.....
C	940	87-014-051-080	CAPACITOR (PP), 560P	..C.....
C	944	87-018-104-080	CAP,TC-U 10P-50 SL	..C.....
C	941	87-018-109-080	CAP, CER 22P-50V	..C.....
C	943	87-A11-144-080	CAP,TC U 0.1-50 K B	ABC.....
CF	802	82-785-747-010	CF MS2 GHY R	AB.....
CF	802	87-008-261-010	FILTER, SFE10.7MA5-A	..C.....
CF	801	87-008-423-010	CERAMIC FILTER, SFE10.7	AB.....
D	941	87-020-465-080	DIODE,1SS133 (110MA)	AB.....
D	941	87-A40-291-080	DIODE,1N4148 (CPT)	..C.....
D	981	87-A40-618-080	VARI-CAP,SVC 348(S/T)	..C.....
FFE	801	A8-6ZA-191-130	6ZA-1 FEENM	AB.....
FFE	801	A8-8ZA-192-070	8ZA-1 FEUNC	..C.....
J	801	87-A60-202-010	TERMINAL,ANT 4P MSP-154V-02	..C.....
J	802	87-A60-403-010	TERMINAL,ANT PAL 2P HSP-312V05	AB.....
J	931	81-754-629-010	CONNECTOR, 2P	..C.....
JW	818	87-008-372-080	FILTER, EMI BL OIRNI	AB.....
JW	957	87-005-849-080	COIL,10UH(CECS)	..C.....
L	801	87-005-847-080	COIL,2.2UH(CECS)	ABC.....
L	934	87-005-372-080	COIL S 1MHM	..C.....
L	933	87-A50-159-010	COIL,10MH K C2B	..C.....
L	942	87-A50-019-010	COIL,OSC LW(COI)	AB.....
L	941	87-A50-020-010	COIL,ANT LW(COI)	AB.....
L	941	87-A50-022-010	COIL,ANT SW(COI)	..C.....
L	942	87-A50-173-010	COIL,OSC SW-N(COI)	..C.....
L	983	87-A50-430-010	COIL,ANT MW(3BSW)	..C.....
L	982	87-A50-431-010	COIL,OSC MW(3BSW)	..C.....
L	981	8Z-NFA-665-010	COIL,AMPAK 2L(TOK)	AB.....
Q	802	87-026-214-080	TR,DTA114YS (0.3W)	ABC.....
Q	803	89-305-352-380	TR,2SC535(B/C)	AB.....
Q	939	87-026-609-080	TR,KTA1266GR	..C.....
Q	938	87-026-609-080	TR,KTA1266GR	..C.....
Q	937	87-026-610-080	TR,KTC3198GR	..C.....
Q	934	87-026-610-080	TR,KTC3198GR	..C.....
Q	932	87-026-610-080	TR,KTC3198GR	..C.....
Q	935	87-A30-092-080	FET,2SK439E/F	ABC.....

ELECTRICAL MAIN PARTS LIST - 15/15

Q	933	87-A30-164-080	TR, CSC2001K	ABC.....
Q	936	87-A30-164-080	TR, CSC2001K	ABC.....
Q	931	87-A30-164-080	TR, CSC2001K	ABC.....
Q	940	87-026-269-080	TR, DTA114ES	ABC.....
TC	941	87-011-220-080	TRIMMER CAP 20P VTC	..C.....
TC	943	87-011-221-080	CAP, TRIMMER 30P	ABC.....
FC	101	87-033-147-010	FUSE CLAMP	..C.....
FC	102	87-033-147-010	FUSE CLAMP	..C.....
SW	101	87-A90-165-010	SW, SL 1-2-3 SWS2301	..C.....
T	101	87-A60-317-010	TERMINAL, 1P MSC	..C.....
T	102	87-A60-317-010	TERMINAL, 1P MSC	..C.....

MECHANICAL PARTS LIST - 1/4

NOTE: The characters in the suffix column indicate the part usage.

CX-NS111	HR	XX	G
CX-NS111	K	XX	H
CX-NS116	EZ	XX	I
CX-NS111	EZ	XX	J
CX-NS112	EZ	XX	K
CX-SNS111	D	00	L
CX-SNS125	D	00	M
KANRI			
REF.NO	PARTS NO.	NO.	SUFFIX
	82-NE6-067-010	0E	BADGE, AIWA 30N
	8Z-NFA-001-010	1F	CABI, FR U
	8Z-NFA-002-010	1F	CABI, FR H
	8Z-NFA-003-010	1B	BOX, CASS 1
	8Z-NFA-004-010	1B	BOX, CASS 2
	8Z-NFA-005-010	1C	PANEL, TOP
	8Z-NFA-005-110	1C	PANEL, TOP
	8Z-NFA-006-010	1B	PANEL, TRAY
	8Z-NFA-018-010	1C	PANEL, LEFT V-2
	8Z-NFA-019-010	1C	PANEL, RIGHT M V-2
	8Z-NFA-020-010	1C	PANEL, RIGHT S V-2
	8Z-NFA-020-110	1C	PANEL, RIGHT S V-2
	8Z-NFA-021-010	1F	CABI, FR EZ
	8Z-NFA-026-010	1C	BOX, CASS 1 D
	8Z-NFA-027-010	1C	BOX, CASS 2R D
	8Z-NFA-030-010	1F	CABI, FR BLK
	8Z-NFA-031-010	1C	BOX, CASS 1 BLK
	8Z-NFA-032-010	1B	BOX, CASS 2P BLK
	8Z-NFA-033-010	1C	PANEL, TOP BLK
	8Z-NFA-033-110	1C	PANEL, TOP BLK
	8Z-NFA-034-010	1C	PANEL, TRAY BLK
	8Z-NFA-035-010	1D	PANEL, LEFT V-2 B
	8Z-NFA-036-010	1C	PANEL, RIGHT S V-2 B
	8Z-NFA-054-010		CABI, FR KS
	8Z-NFA-055-010		BOX, CASS 1 KS
	8Z-NFA-056-010		BOX, CASS 2R KS
	8Z-NFA-057-010		PANEL, TRAY KS
	8Z-NFA-062-110	1C	CABI, REAR HRJSTM
	8Z-NFA-064-110	1C	CABI, REAR KSTM
	8Z-NFA-065-110	1C	CABI, REAR EZSTM
	8Z-NFA-068-010		CABI, REAR USTNC
	8Z-NFA-070-010		CABI, REAR LHSTC
	8Z-NFA-073-010	1C	CABI, REAR STC
	8Z-NFA-075-010		CABI, REAR USTM115
	8Z-NFA-076-110	1C	CABI, REAR EZSTM112
	8Z-NFA-080-110	1C	CABI, REAR HEJSTM
	8Z-NFA-082-110	1C	CABI, REAR EZBM116
	8Z-NFA-083-110	1E	CABI, REAR HASTC
	8Z-NFA-086-010		CABI, REAR STM125
	87-NB8-017-010	0E	KNOB, RTRY MIC
	8Z-NFA-010-010	1A	KEY, FUN
	8Z-NFA-011-010	1A	KEY, OPE
	8Z-NFA-012-010	1A	KEY, CD
	8Z-NFA-013-010	1A	KEY, CASS 1
	8Z-NFA-014-010	1A	KEY, CASS 2P
	8Z-NFA-016-010	1A	KEY, RDS
	8Z-NFA-017-010	0E	KNOB, RTRY VOL
	8Z-NFA-037-010	1D	KEY, CASS 1 BLK
	8Z-NFA-038-010	1C	KEY, CASS 2 BLK
	8Z-NFA-041-010		KEY, FUN BLK
	8Z-NFA-042-010		KEY, OPE BLK
	8Z-NFA-051-010		KEY, CASS 1 MT-83
	8Z-NFA-052-010		KEY, CASS 2P MT-83
	8Z-NFA-053-010		KEY, CASS 2R MT-83
	8Z-NFA-007-010	1B	WINDOW, DISP U
	8Z-NFA-008-010	0E	WINDOW, CASS 1
	8Z-NFA-009-010	0E	WINDOW, CASS 2
	8Z-NFA-023-010	1B	WINDOW, DISP H
	8Z-NFA-024-010	1D	WINDOW, DISP EZ112
	8Z-NFA-025-010	1D	WINDOW, DISP D
	8Z-NFA-028-010	1C	WINDOW, DISP U115
	8Z-NFA-029-010	1B	WINDOW, DISP EZ
	8Z-NFA-040-010		WINDOW, DISP EZ116
	8Z-NFA-044-010		WINDOW, DISP H119
	8Z-NFA-047-010		WINDOW, DISP D125
	8Z-NFA-048-010		WINDOW, DISP D128
	88-NF9-634-010	1A	CONN ASSY, 8P RPB
	88-NF9-635-010	1A	CONN ASSY, 10P MECHA
	88-NF9-636-010	1A	CONN ASSY, 10P MECHA-R
	89-935-140-110	0E	WIRE UB5-14-3
	84-ZG1-245-210	0E	CAP, OPTICAL
	82-NF7-218-010	0E	SPR-T, CASS
	86-NFZ-231-010	1A	DMPR, 70
	87-NF4-221-010	0E	HLDR, CABLE
	88-NF9-203-010		BUSHING, CORD-U
	88-NF9-213-010	0E	HLDR, PWB MAIN
	8Z-NB8-240-010	0E	COVER, PL
	87-067-584-010	0E	TAPPING SCREW, BVT2+3-6
	87-067-641-010	0E	UTT2+3-8(W/O SLOT)BL
	87-067-688-010	0E	BVTT+3-6

MECHANICAL PARTS LIST - 2/4

		87-067-703-010	0E	TAPPING SCREW, BVT2+3-10	ABCDEFGHIJKLM.....
		87-067-758-010	0E	BVT2+3-12 W/O SLOT	A.....
		87-078-019-010	0E	S-SCREW, IT+4-6	.BCDEFGHIJKLM.....
		87-078-191-010	0E	S-SCREW, IT+4-10	...DEFGHIJKLM.....
		87-721-096-410	0E	QT2+3-10 GLD	...C.....
		87-721-097-410	0E	QT2+3-12 GLD	ABCDEFGHIJKLM.....
		87-741-172-410	0E	UT2+4-12 W/O SLOT	A.....
		87-NF4-224-010	0E	S-SCREW, IT3B+3-8 CU	...C.....
		87-008-372-080	0E	FILTER, EMI BL OIRNI	HIJK.....
		87-085-184-010	0E	BUSHING, AC CORD (D)	LM.....
		87-085-185-010	0E	BUSHING, AC CORD (E)	.BCDEFGHIJK.....
		87-085-189-010	0E	BUSHING, CORD (U)	
		87-099-811-010	1E	PLUG, ADPTR CONV(K)	H.....
		88-906-251-110	1A	FF-CABLE, 6P 1.25	ABCDEFGHIJKLM.....
		88-913-221-110	1A	FF-CABLE, 13P 1.25 220MM	ABCDEFGHIJKLM.....
		88-NF9-203-010	0E	BUSHING, CORD-U	
F	101	87-035-359-010	1A	FUSE 0.5A	HIJK.....
F	101	87-A91-208-010	0E	FUSE, 400MA 250V T 50T	...D.FG.....
F	101	87-A91-209-010	0E	FUSE, 500MA 250V T 50T	.B..E.....
F	101	87-A91-212-010	0E	FUSE, 1A 250V T 50T	LM.....
F	101	87-A91-224-010	0E	FUSE, 1.25A 125V T 51S	A.....
F	101	87-A91-265-010	0E	FUSE, 2A 125V F 51NM	...C.....
FB	101	87-003-317-010	1C	F-BEAD, F0H2515-LG7	HIJK.....
PT	101	8Z-NFA-621-010	2M	PT, U EI57-35 ZNF-A	A.....
PT	101	8Z-NFA-622-010	2M	PT, LH EI57-35 ZNF-A	.B..E.....
PT	101	8Z-NFA-623-010	2P	PT, HR EI57-35 ZNF-A	...D.F.....
PT	101	8Z-NFA-623-110	2P	PT, HR EI57-35 ZNF-A	G.....
PT	101	8Z-NFA-624-010	2M	PT, D EI57-35 ZNF-A	LM.....
PT	101	8Z-NFA-625-010	2M	PT, E EI57-35 ZNF-A	
PT	101	8Z-NFA-625-110	2M	PT, E EI57-35 ZNF-A	HIJK.....
PT	101	8Z-NFA-626-010	2A	PT, U1 EI66-35 ZNF-A	...C.....
W	1	87-050-079-010	1C	AC-CORD ASSY, E	.B.D.FGHIJK.....
W	1	87-050-098-010	1B	AC CODE ASSY, D	LM.....
W	1	87-A80-105-010	1C	AC CORD ASSY, AZ	...E.....
W	1	87-A80-110-010	1B	AC CORD ASSY, U SPT-2W	A.C.....
WH	101	87-A90-459-010	0E	HLDR, WIRE 2.5-5P	ABCDEFGHIJKLM.....
W	101	83-NE2-618-110	1B	F-CABEL, 5P-2.5	ABCDEFGHIJKLM.....
WH	102	87-A90-459-010	0E	HLDR, WIRE 2.5-5P	ABCDEFGHIJKLM.....
		87-067-703-010	0E	TAPPING SCREW, BVT2+3-10	ABCDEFGHIJKLM.M.....

MECHANICAL PARTS LIST - 3/4

NOTE: The characters in the suffix column indicate the part usage.

		CX-NS111	V	XX.....	A.....
		CX-SNS128	D	00.....	B.....
		CX-SNS128	D	00.....	C.....
		CX-SNS126	D	00.....	D.....
		KANRI			
REF.NO		PARTS NO.	NO.	DESCRIPTION	SUFFIX
		82-NE6-067-010	0E	BADGE,AIWA 30N	ABCD.....
		8Z-NFA-001-010	1F	CABI,FR U	AB.D.....
		8Z-NFA-002-010	1F	CABI,FR H	
		8Z-NFA-003-010	1B	BOX,CASS 1	A.....
		8Z-NFA-004-010	1B	BOX,CASS 2	A.....
		8Z-NFA-005-110	1C	PANEL,TOP	ABCD.....
		8Z-NFA-006-010	1B	PANEL,TRAY	AB.D.....
		8Z-NFA-018-110	1C	PANEL,LEFT V-2	ABCD.....
		8Z-NFA-019-010	1C	PANEL,RIGHT M V-2	
		8Z-NFA-020-110	1C	PANEL,RIGHT S V-2	ABCD.....
		8Z-NFA-021-010	1F	CABI,FR EZ	
		8Z-NFA-026-010	1C	BOX,CASS 1 D	.B.D.....
		8Z-NFA-027-010	1C	BOX,CASS 2R D	.B.D.....
		8Z-NFA-049-010		CABI,FR BEST	.C.....
		8Z-NFA-050-010		PANEL,TRAY BEST	.C.....
		8Z-NFA-058-010		BOX,CASS 1 BEST	.C.....
		8Z-NFA-059-010		BOX,CASS 2R BEST	.C.....
		8Z-NFA-066-110		CABI,REAR VJSTM	A.....
		8Z-NFA-073-010	1C	CABI,REAR STC	.B.....
		8Z-NFA-087-010		CABI,REAR SM128	.C.....
		8Z-NFA-088-010		CABI,REAR STM126	.D.....
		8Z-NFA-010-010	1A	KEY,FUN	ABCD.....
		8Z-NFA-011-010	1A	KEY,OPE	ABCD.....
		8Z-NFA-012-010	1A	KEY,CD	ABCD.....
		8Z-NFA-013-010	1A	KEY,CASS 1	.D.....
		8Z-NFA-015-010		KEY,CASS 2R	.D.....
		8Z-NFA-017-010	0E	KNOB,RTRY VOL	ABCD.....
		8Z-NFA-051-010		KEY,CASS 1 MT-83	ABC.....
		8Z-NFA-052-010		KEY,CASS 2P MT-83	A.....
		8Z-NFA-053-010		KEY,CASS 2R MT-83	.BC.....
		8Z-NFA-008-010	0E	WINDOW,CASS 1	ABCD.....
		8Z-NFA-009-010	0E	WINDOW,CASS 2	ABCD.....
		8Z-NFA-025-010	1D	WINDOW,DISP D	.B.....
		8Z-NFA-029-010	1B	WINDOW,DISP EZ	A.....
		8Z-NFA-048-010		WINDOW,DISP D128	.C.....
		8Z-NFA-060-010		WINDOW,DISP D126	.D.....
		88-NF9-634-010	1A	CONN ASSY,8P RPB	.B.....
		88-NF9-636-010	1A	CONN ASSY,10P MECHA-R	.B.....
		89-935-140-110	0E	WIRE UB5-14-3	.B.....
		84-ZG1-245-210	0E	CAP,OPTICAL	ABCD.....
		82-NF7-218-010	0E	SPR-T,CASS	ABCD.....
		86-NFZ-231-010	1A	DMPR,70	ABCD.....
		87-NF4-221-010	0E	HLDR,CABLE	ABCD.....
		88-NF9-213-010	0E	HLDR,PWB MAIN	ABCD.....
		8Z-NB8-240-010	0E	COVER, PL	ABCD.....
		87-067-584-010	0E	TAPPING SCREW, BVT2+3-6	ABCD.....
		87-067-641-010	0E	UTT2+3-8(W/O SLOT)BL	ABCD.....
		87-067-688-010	0E	BVTT+3-6	ABCD.....
		87-067-703-010	0E	TAPPING SCREW, BVT2+3-10	ABCD.....
		87-067-758-010	0E	BVT2+3-12 W/O SLOT	
		87-078-191-010	0E	S-SCREW,IT+4-10	ABCD.....
		87-721-096-410	0E	QT2+3-10 GLD	
		87-721-097-410	0E	QT2+3-12 GLD	ABCD.....
		87-008-372-080	0E	FILTER, EMI BL OIRNI	A.....
		87-085-184-010	0E	BUSHING, AC CORD (D)	.BCD.....
		87-085-185-010	0E	BUSHING, AC CORD (E)	A.....
		88-906-251-110	1A	FF-CABLE,6P 1.25	ABCD.....
		88-913-221-110	1A	FF-CABLE, 13P 1.25 220MM	ABCD.....
F	101	87-035-359-010	1A	FUSE 0.5A	A.....
F	101	87-A91-212-010	0E	FUSE,1A 250V T 50T	.BCD.....
FB	101	87-003-317-010	1C	F-BEAD,F0H2515-LG7	A.....
PT	101	8Z-NFA-624-010	2M	PT,D EI57-35 ZNF-A	.BCD.....
PT	101	8Z-NFA-625-110	2M	PT,E EI57-35 ZNF-A	A.....
PT	101	8Z-NFA-626-010	2A	PT,U1 EI66-35 ZNF-A	
W	1	87-050-079-010	1C	AC-CORD ASSY,E	A.....
W	1	87-050-098-010	1B	AC CODE ASSY,D	.BCD.....
WH	101	87-A90-459-010	0E	HLDR,WIRE 2.5-5P	ABCD.....
W	101	83-NE2-618-110	1B	F-CABEL,5P-2.5	ABCD.....
WH	102	87-A90-459-010	0E	HLDR,WIRE 2.5-5P	ABCD.....
		87-067-703-010	0E	TAPPING SCREW, BVT2+3-10	A.CD.....

MECHANICAL PARTS LIST - 3/4

NOTE: The characters in the suffix column indicate the part usage.

HS	XX.....	A.....		
G	XX.....	B.....		
HC	XX.....	C.....		
	KANRI			
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	82-NE6-067-010		BADGE, AIWA 30N	ABC.....
	8Z-NFA-001-110		CABI, FR U	AB.....
	8Z-NFA-003-010		BOX, CASS 1	AB.....
	8Z-NFA-004-010		BOX, CASS 2	AB.....
	8Z-NFA-005-110		PANEL, TOP	AB.....
	8Z-NFA-006-010		PANEL, TRAY	AB.....
	8Z-NFA-018-110		PANEL, LEFT V-2	AB.....
	8Z-NFA-020-110		PANEL, RIGHT S V-2	AB.....
	8Z-NFA-031-010		BOX, CASS 1 BLK	..C.....
	8Z-NFA-032-010		BOX, CASS 2P BLK	..C.....
	8Z-NFA-033-110		PANEL, TOP BLK	..C.....
	8Z-NFA-034-010		PANEL, TRAY BLK	..C.....
	8Z-NFA-035-110		PANEL, LEFT V-2 B	..C.....
	8Z-NFA-036-010		PANEL, RIGHT S V-2 B	..C.....
	8Z-NFA-089-110		CABI, REAR EZ W/O SPC	A.....
	8Z-NFA-091-010		CABI, REAR GSTM	..B.....
	8Z-NFA-093-010		CABI, REAR HCBC116	..C.....
	8Z-NFA-103-010		CABI, FR H BLK	..C.....
	8Z-NFA-010-010		KEY, FUN	AB.....
	8Z-NFA-011-010		KEY, OPE	AB.....
	8Z-NFA-012-010		KEY, CD	ABC.....
	8Z-NFA-013-010		KEY, CASS 1	AB.....
	8Z-NFA-014-010		KEY, CASS 2P	AB.....
	8Z-NFA-017-010		KNOB, RTRY VOL	ABC.....
	8Z-NFA-037-010		KEY, CASS 1 BLK	..C.....
	8Z-NFA-038-010		KEY, CASS 2 BLK	..C.....
	8Z-NFA-041-010		KEY, FUN BLK	..C.....
	8Z-NFA-042-010		KEY, OPE BLK	..C.....
	8Z-NFA-105-010		COVER, MIC BLK	..C.....
	8Z-NFA-107-010		KNOB, RTRY MIC BLK	..C.....
	8Z-NFA-008-010		WINDOW, CASS 1	ABC.....
	8Z-NFA-009-010		WINDOW, CASS 2	ABC.....
	8Z-NFA-029-010		WINDOW, DISP EZ	AB.....
	8Z-NFA-104-010		WINDOW, DISP H116	..C.....
	88-NF9-633-010		CONN ASSY, 3P (PH)	..C.....
	88-NF9-634-010		CONN ASSY, 8P RPB	..C.....
	88-NF9-635-010		CONN ASSY, 10P MECHA	..C.....
	84-ZG1-245-210		CAP, OPTICAL	ABC.....
	82-NF7-218-010		SPR-T, CASS	ABC.....
	85-NF7-599-010		PVC W 3.2-8-0.3	ABC.....
	86-NFZ-231-010		DMPR, 70	ABC.....
	87-NF4-221-010		HLDR, CABLE	ABC.....
	88-NF9-213-010		HLDR, PWB MAIN	ABC.....
	8Z-NB8-240-010		COVER, PL	ABC.....
	87-067-584-010		TAPPING SCREW, BVT2+3-6	ABC.....
	87-067-641-010		UTT2+3-8(W/O SLOT)BL	ABC.....
	87-067-688-010		BVTT+3-6	ABC.....
	87-067-703-010		TAPPING SCREW, BVT2+3-10	ABC.....
	87-078-191-010		S-SCREW, IT+4-10	ABC.....
	87-721-097-410		QT2+3-12 GLD	ABC.....
	87-085-185-010		BUSHING, AC CORD (E)	ABC.....
	88-906-251-110		FF-CABLE, 6P 1.25	ABC.....
	88-913-221-110		FF-CABLE, 13P 1.25 220MM	ABC.....
F	101	87-035-359-010	FUSE 0.5A	AB.....
F	101	87-A91-208-010	FUSE, 400MA 250V T 50T	..C.....
FB	101	87-003-317-010	F-BEAD, F0H2515-LG7	AB.....
PT	101	8Z-NFA-623-110	PT, HR EI57-35 ZNF-A	..C.....
PT	101	8Z-NFA-625-110	PT, E EI57-35 ZNF-A	AB.....
W	1	87-050-081-110	AC CORD ASSY, G	..B.....
W	1	87-A80-006-010	AC CORD ASSY, HS	A.....
W	1	87-A80-083-010	AC CORD, HC BLK	..C.....
WH	101	87-A90-459-010	HLDR, WIRE 2.5-5P	ABC.....
W	101	83-NE2-618-110	F-CABEL, 5P-2.5	ABC.....
WH	102	87-A90-459-010	HLDR, WIRE 2.5-5P	ABC.....
		87-067-001-010	FW, 3.1-5.4-1	..C.....
		87-067-703-010	TAPPING SCREW, BVT2+3-10	AB.....

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

CX-NS111	HR	XX	G	
CX-NS111	K	XX	H	
CX-NS116	EZ	XX	I	
CX-NS111	EZ	XX	J	
CX-NS112	EZ	XX	K	
CX-SNS111	D	00	L	
CX-SNS125	D	00	M	
KANRI				
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	8Z-NFA-901-010	1B	IB,H(ECA)M	...D.FG.....
	8Z-NFA-904-010		IB,U(ESF)M -115	...C.....
	8Z-NFA-905-010	1B	IB,K(E)M	H.....
	8Z-NFA-906-010	1E	IB,EZ(9L)M	IJ.....
	8Z-NFA-912-010		IB,LH(ESP)S	...E.....
	8Z-NFA-914-010		IB,U(ESF)S	A.....
	8Z-NFA-916-010	1F	IB,EZ(9L)M -112	K.....
	8Z-NFA-922-010		IB,LH(ESP)A	.B.....
	8Z-NFA-925-010		IB,D(J)M -125	M.....
	8Z-NFA-928-010		IB,D(J)S	L.....
	87-006-225-010	1D	AM LOOP ANT NC2	ABC.....L.....
	87-043-106-010	1A	WIRE, FM ANT (Z)	HIJK.....
	87-043-115-010	1A	ANT,FEEDER FM	ABCDEFG.....LM.....
	87-A90-030-010	1B	ANT,LOOP AM-NC C	...E...HIJK.M.....
	87-A90-054-010	1B	ANT,LOOP AM-CON C	...D.FG.....
	87-A91-017-010	1A	PLUG,CONVERSION JT-0476	.B.D.FG.....
	8Z-NF9-701-110	1H	RC UNIT,ZAS02	...CD.FGH.JK.M.....
	8Z-NF9-702-010	1H	RC UNIT,ZAS02	AB...E.....L.....
	8Z-NF9-703-010	1H	RC UNIT,ZAS17	I.....


NOTE: The characters in the suffix column indicate the part usage.

CX-NS111	V	XX.....	A.....	
CX-SNS128	D	00.....	B.....	
CX-SNS128	D	00.....	C.....	
CX-SNS126	D	00.....	D.....	
KANRI				
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	8Z-NFA-907-010		IB,V(ER)M	A.....
	8Z-NFA-910-010		IB,D(J)M -128	..C.....
	8Z-NFA-928-110		IB,D(J)S	.B.....
	8Z-NFA-933-010		IB,D(J)M -126	...D.....
	87-043-115-010	1A	ANT,FEEDER FM	ABCD.....
	87-A90-030-010	1B	ANT,LOOP AM-NC C	ABCD.....
	8Z-NF9-701-110	1H	RC UNIT,ZAS02	A.CD.....
	8Z-NF9-702-010	1H	RC UNIT,ZAS02	.B.....

NOTE: The characters in the suffix column indicate the part usage.

HS	XX	A		
G	XX	B		
HC	XX	C		
KANRI				
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	8Z-NFA-906-110		IB,EZ(9L)M	A.....
	8Z-NFA-915-010		IB,G(E)M	.B.....
	8Z-NFA-935-010		IB,H(EC-K)S	...C.....
	87-043-106-010		WIRE, FM ANT (Z)	AB.....
	87-043-115-010		ANT,FEEDER FM	...C.....
	87-A90-030-010		ANT,LOOP AM-NC C	AB.....
	87-A90-054-010		ANT,LOOP AM-CON C	...C.....
	87-A90-119-010		ANT,WIRE SW(5M)	...C.....
	87-A91-015-010		PLUG,CONVERSION JT-0475A	...C.....
	8Z-NF9-701-210		RC UNIT,ZAS02	AB.....
	8Z-NF9-703-110		RC UNIT,ZAS17	...C.....


SCHEMATIC DIAGRAM – 1 (MAIN : HR, HC) <CX-NS111>

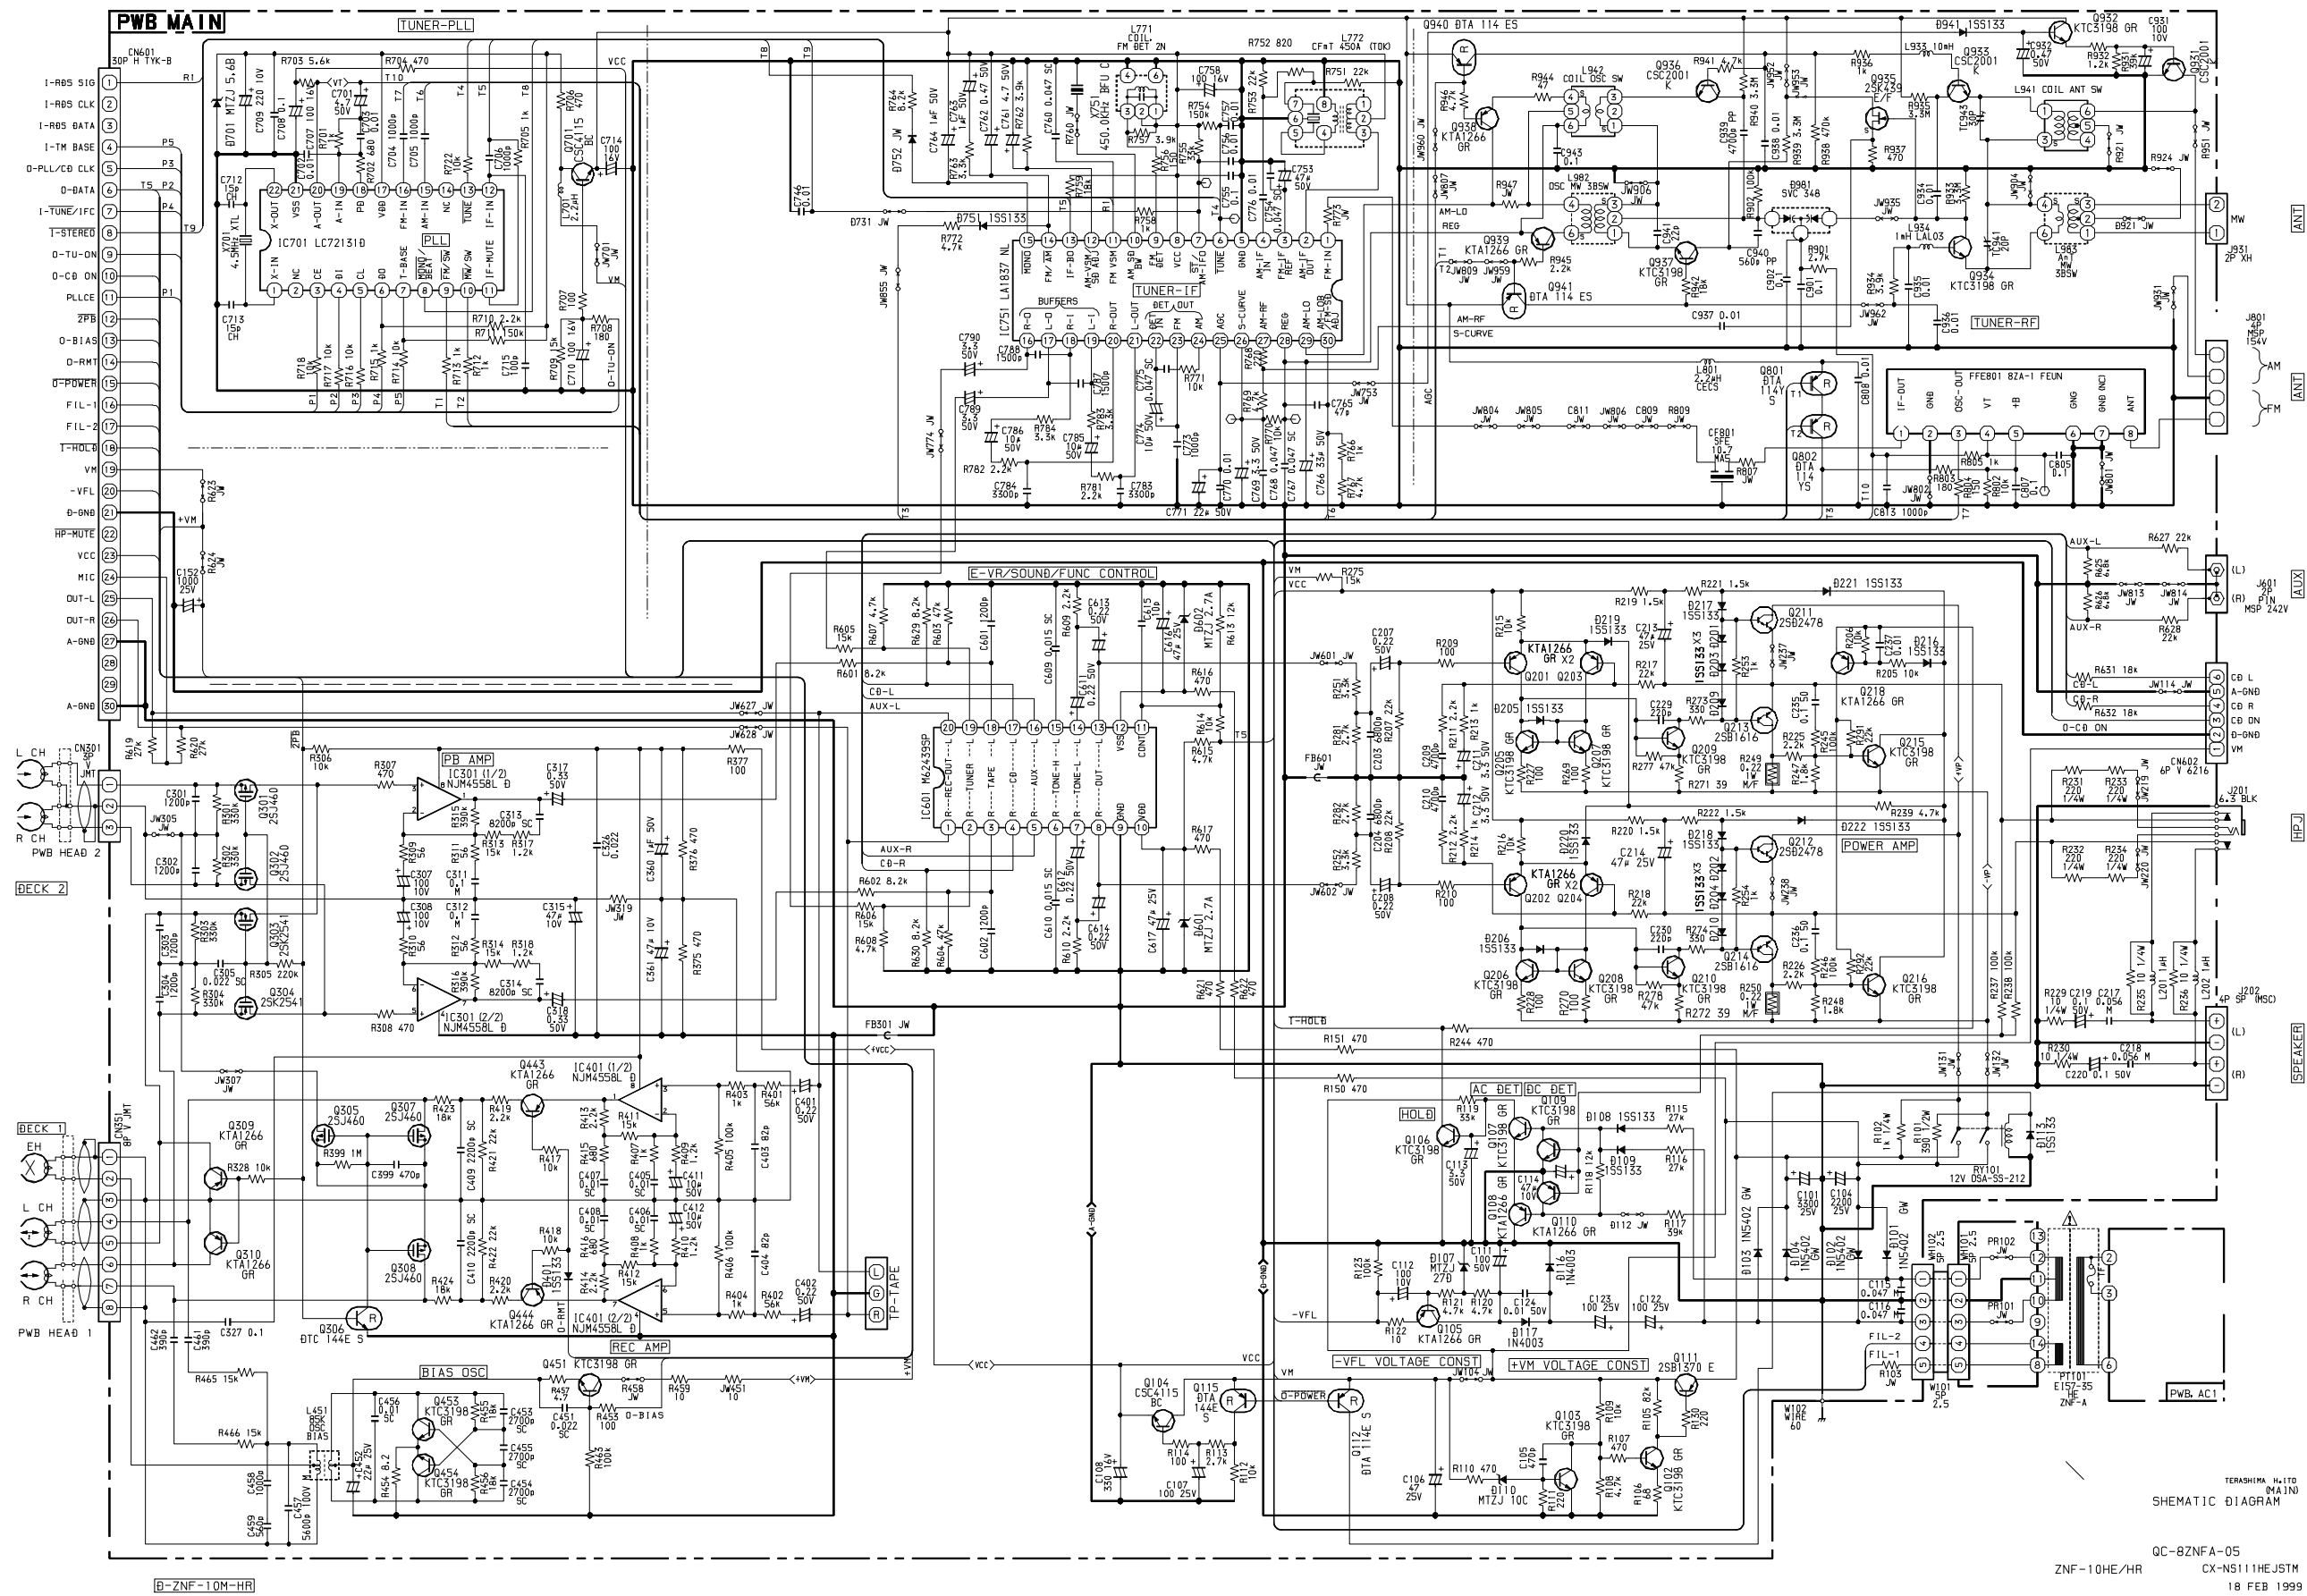


TERASHIMA H110 84110
SCHEMATIC DIAGRAM

QC-8ZNF-A-05
ZNF-10HE/HR CX-NS111HE/JSTM
18 FEB 1999

SCHEMATIC DIAGRAM - 2 (MAIN · CX-NS111 F7/K/G/H/S CX-NS116 F7 CX-NS16 F7)

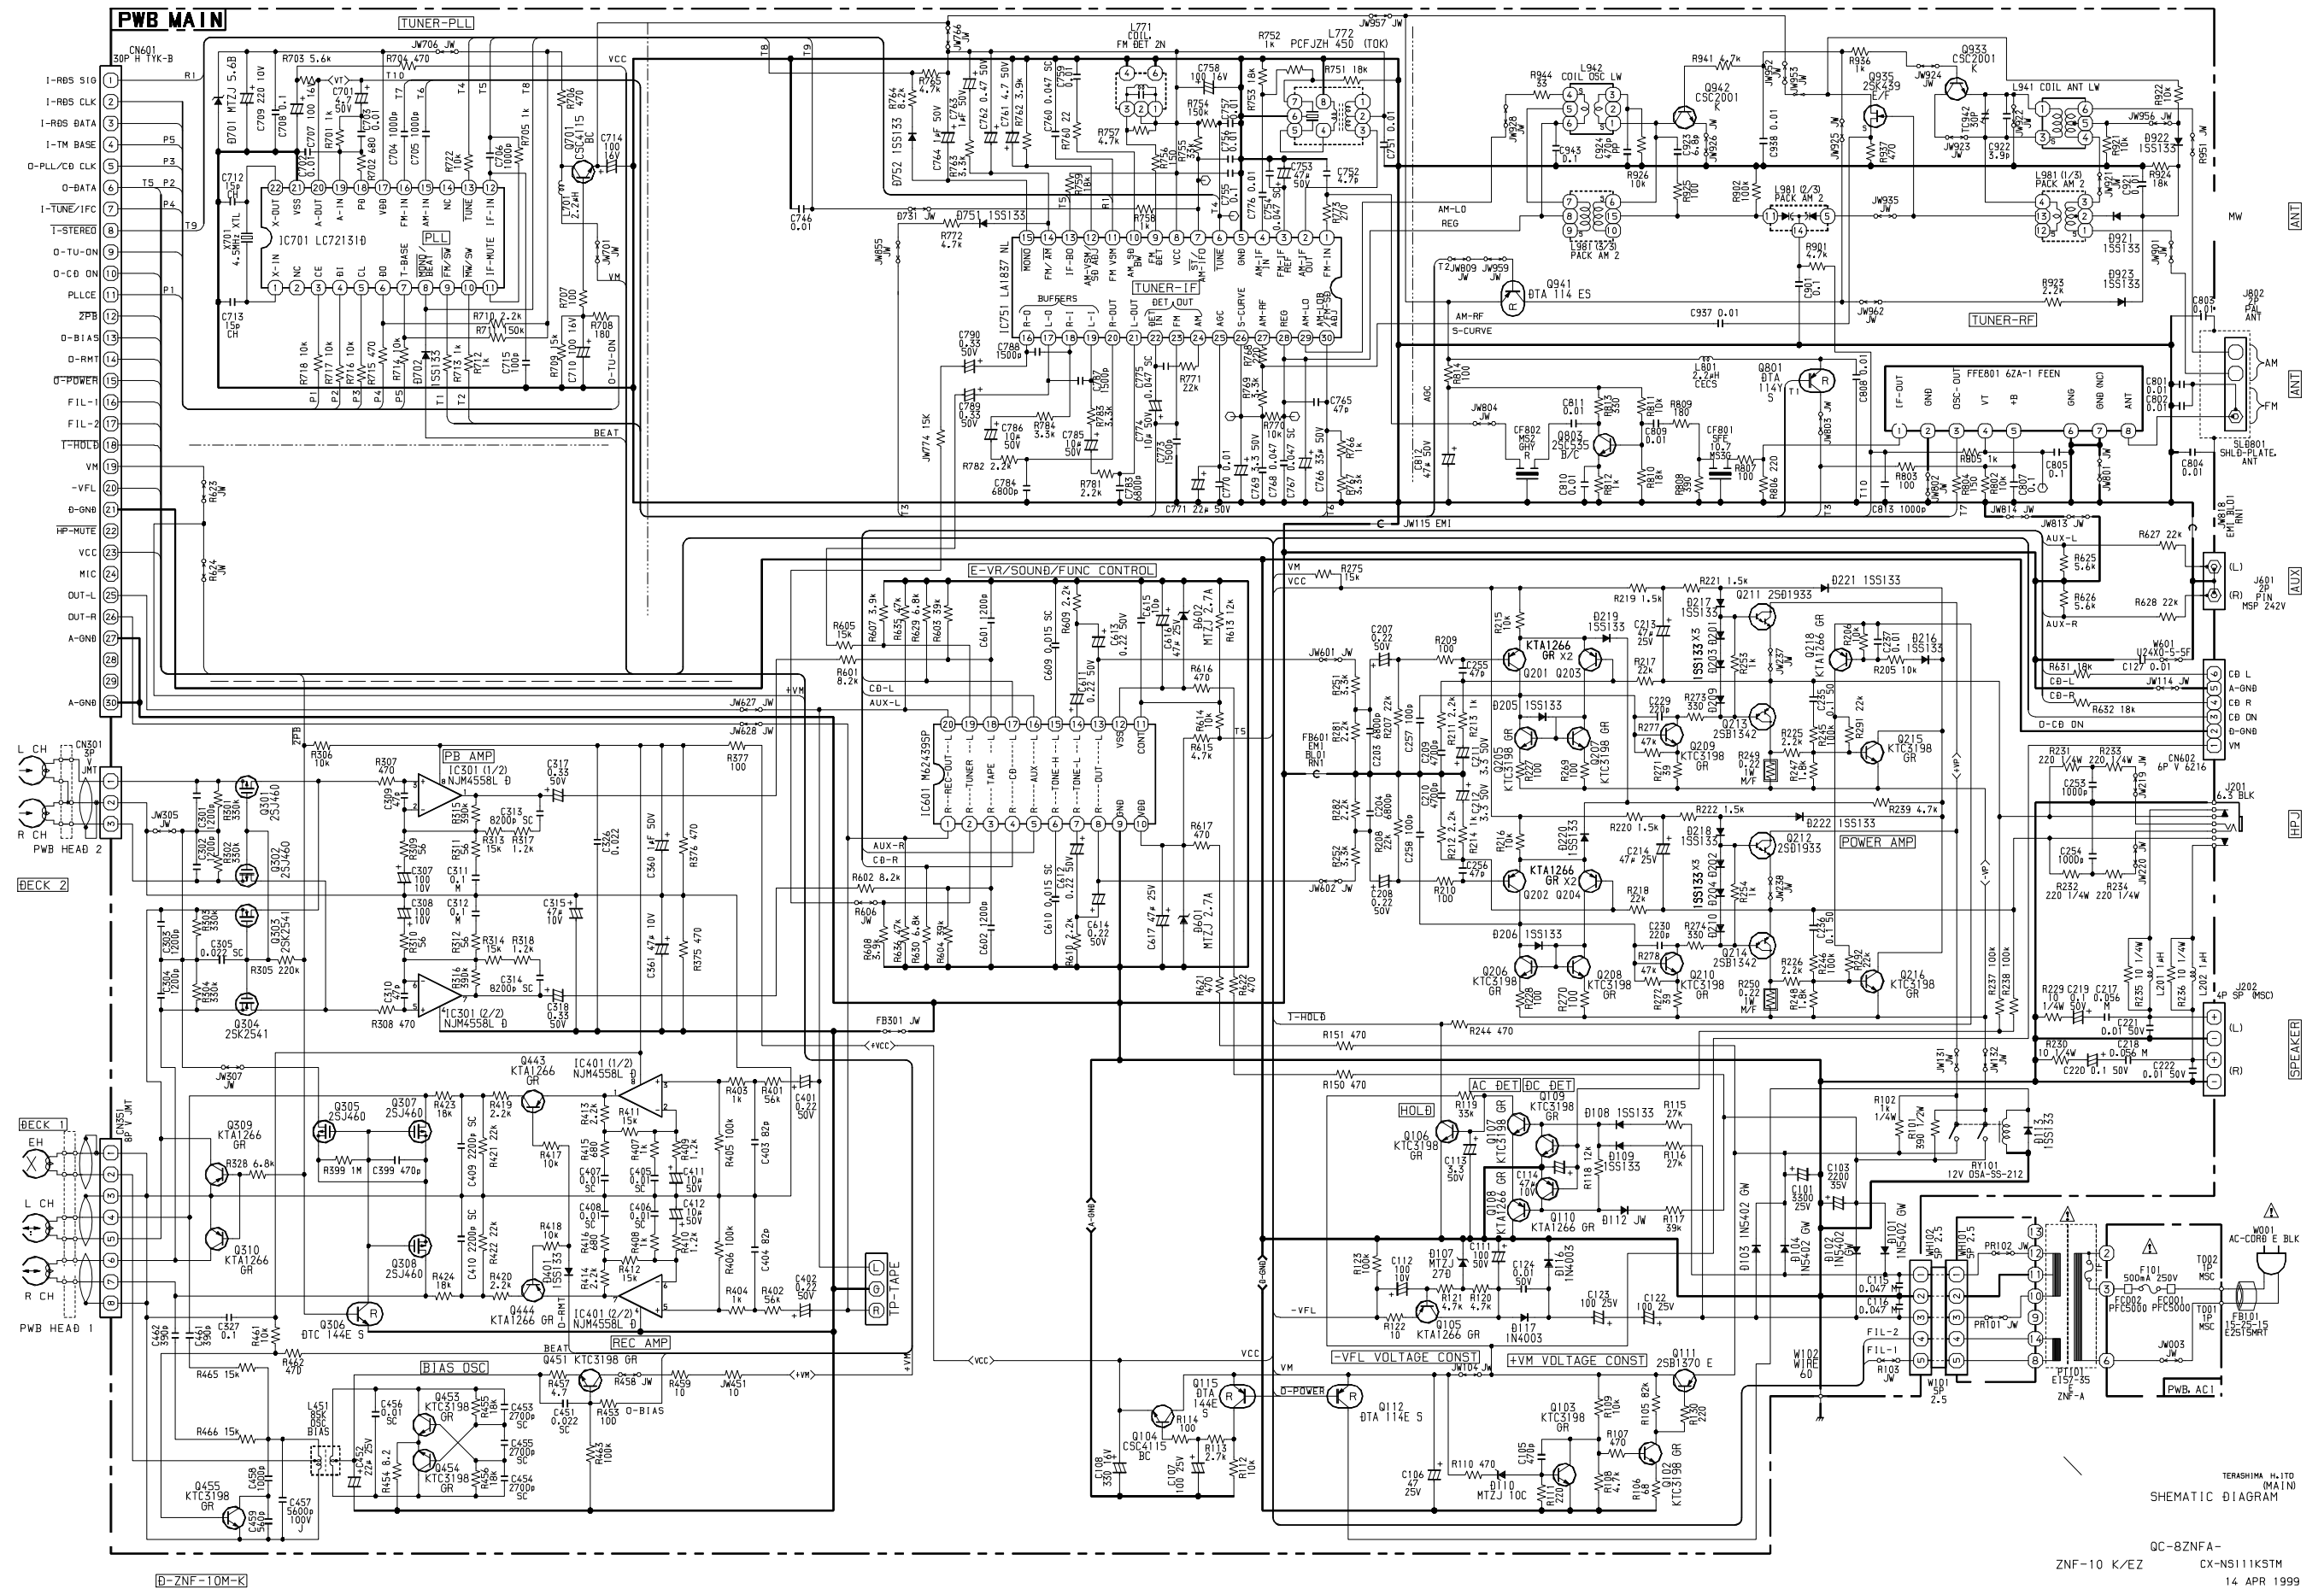


SCHEMATIC DIAGRAM – 3 (MAIN : EZ) <CX-NS112>

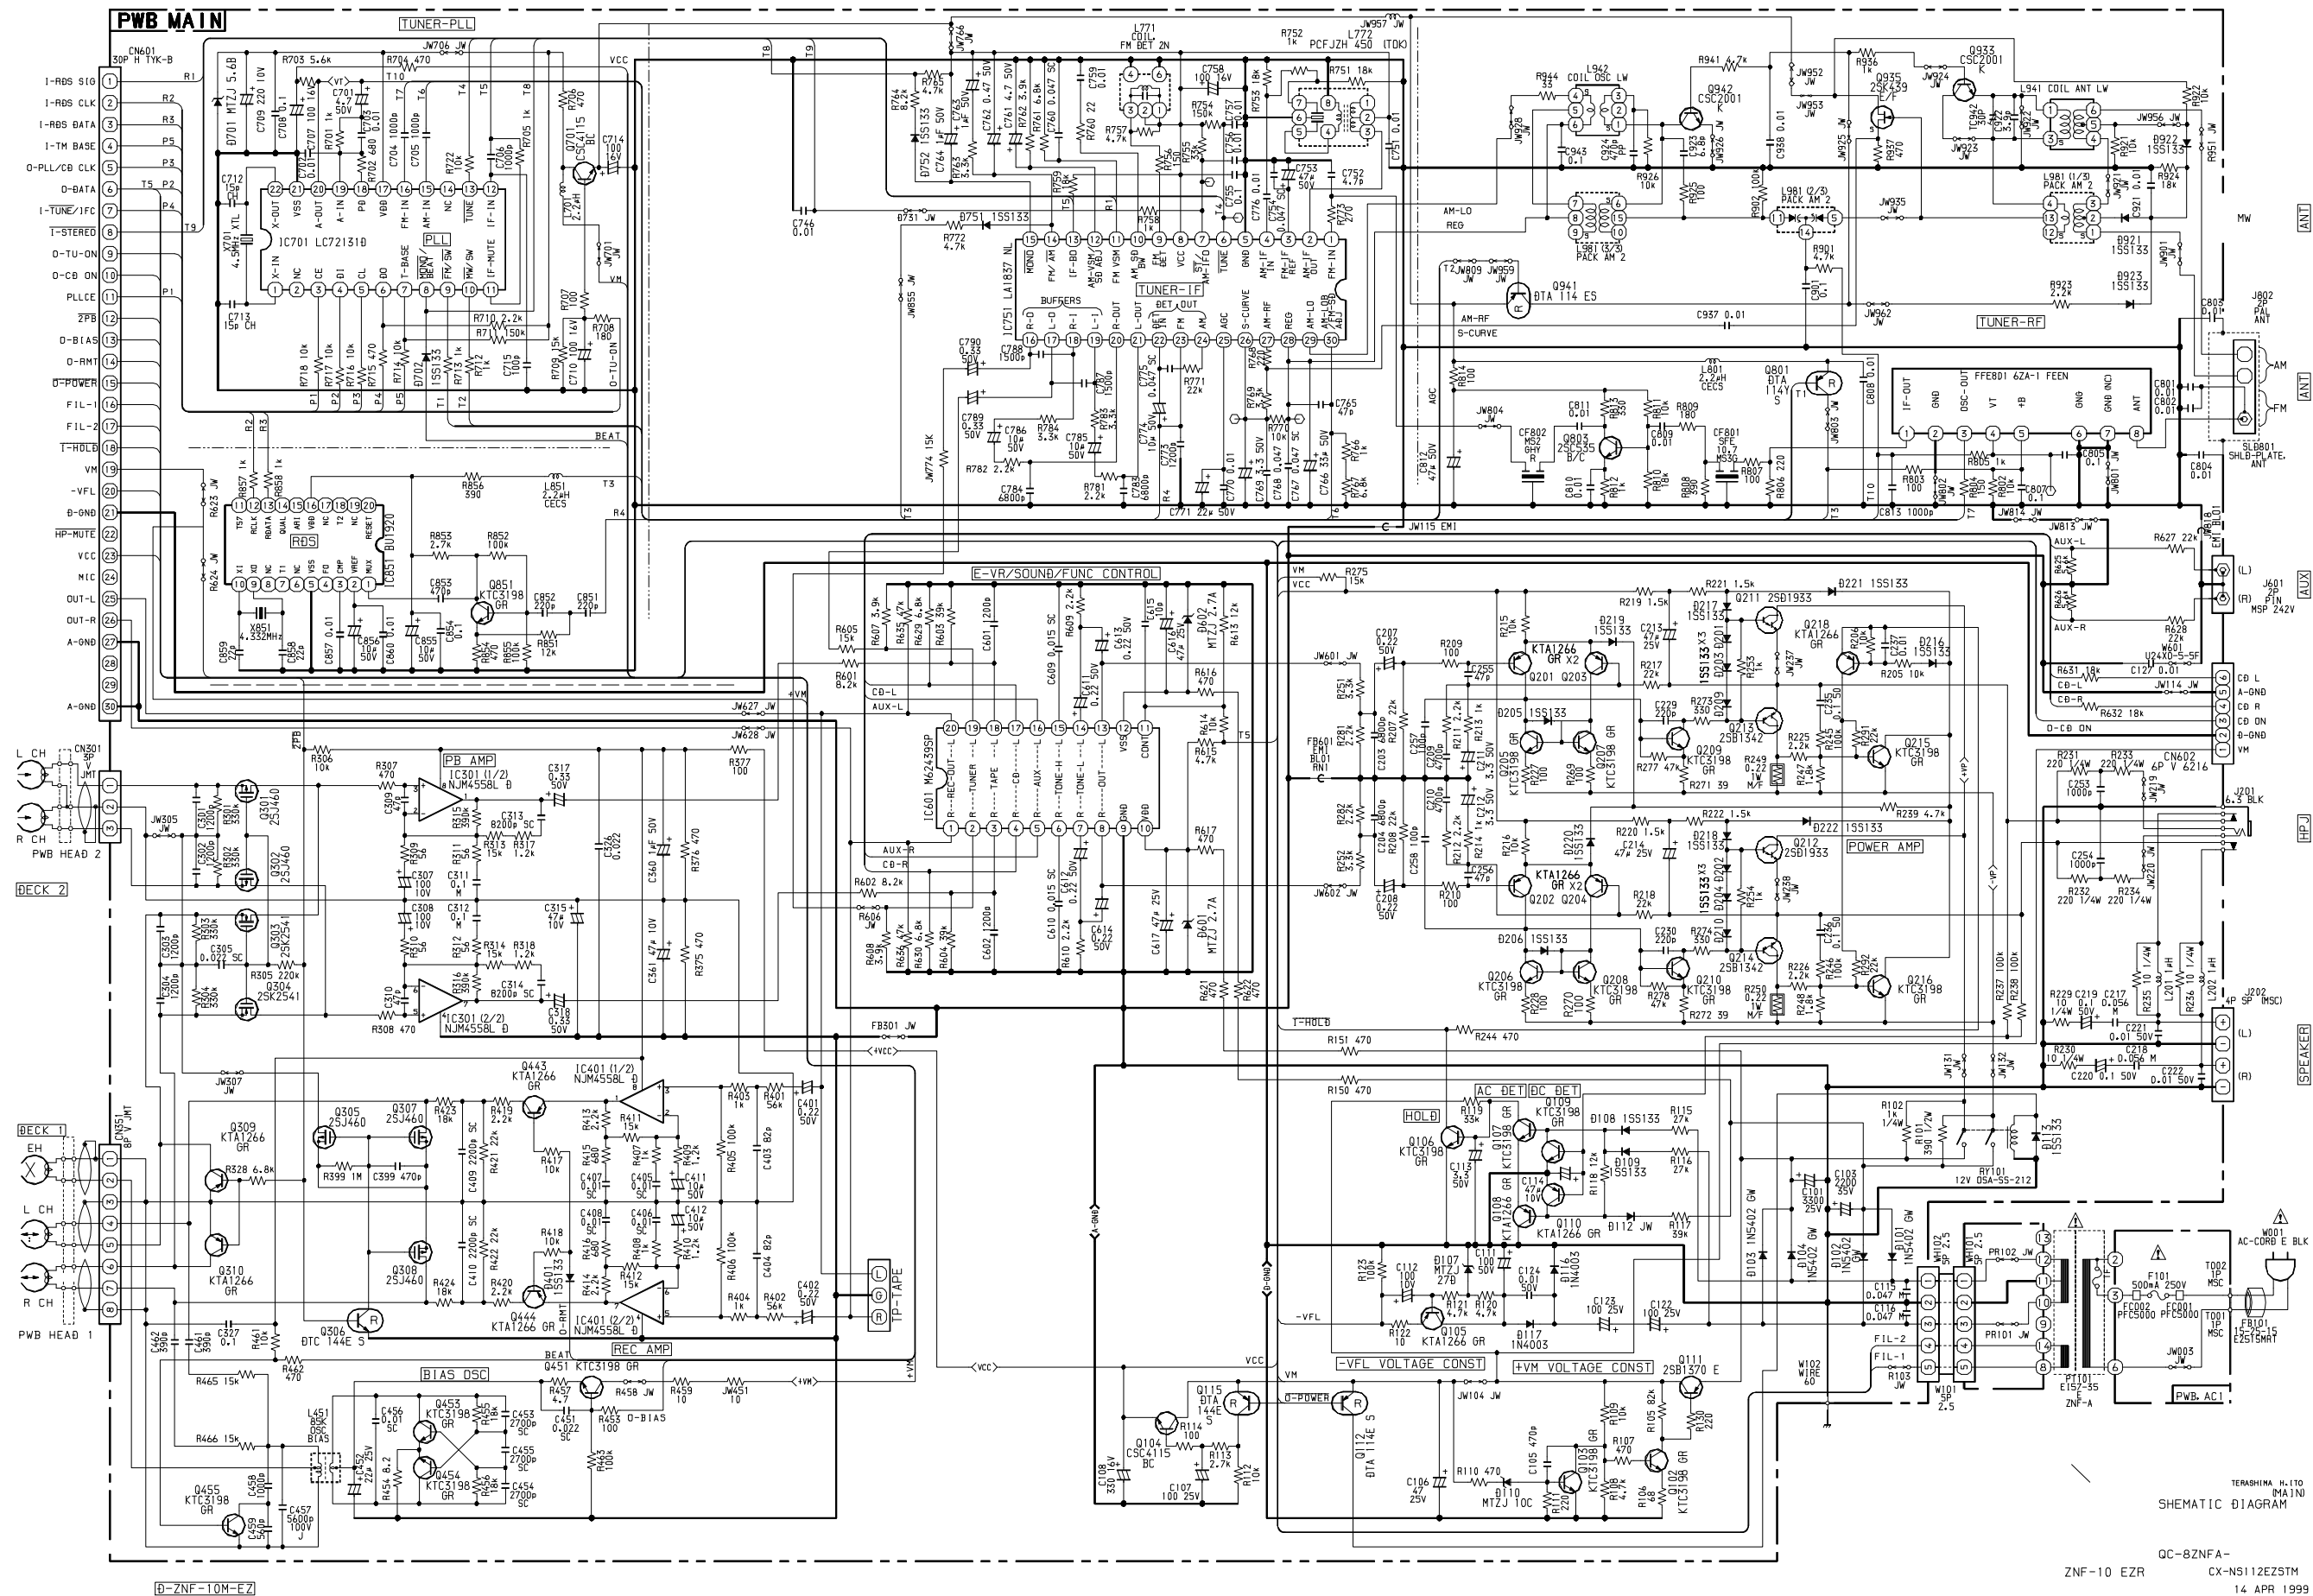


TERASHIMA H-110
SCHEMATIC DIAGRAM


SCHEMATIC DIAGRAM – 4 (MAIN : V) <CX-NS111>

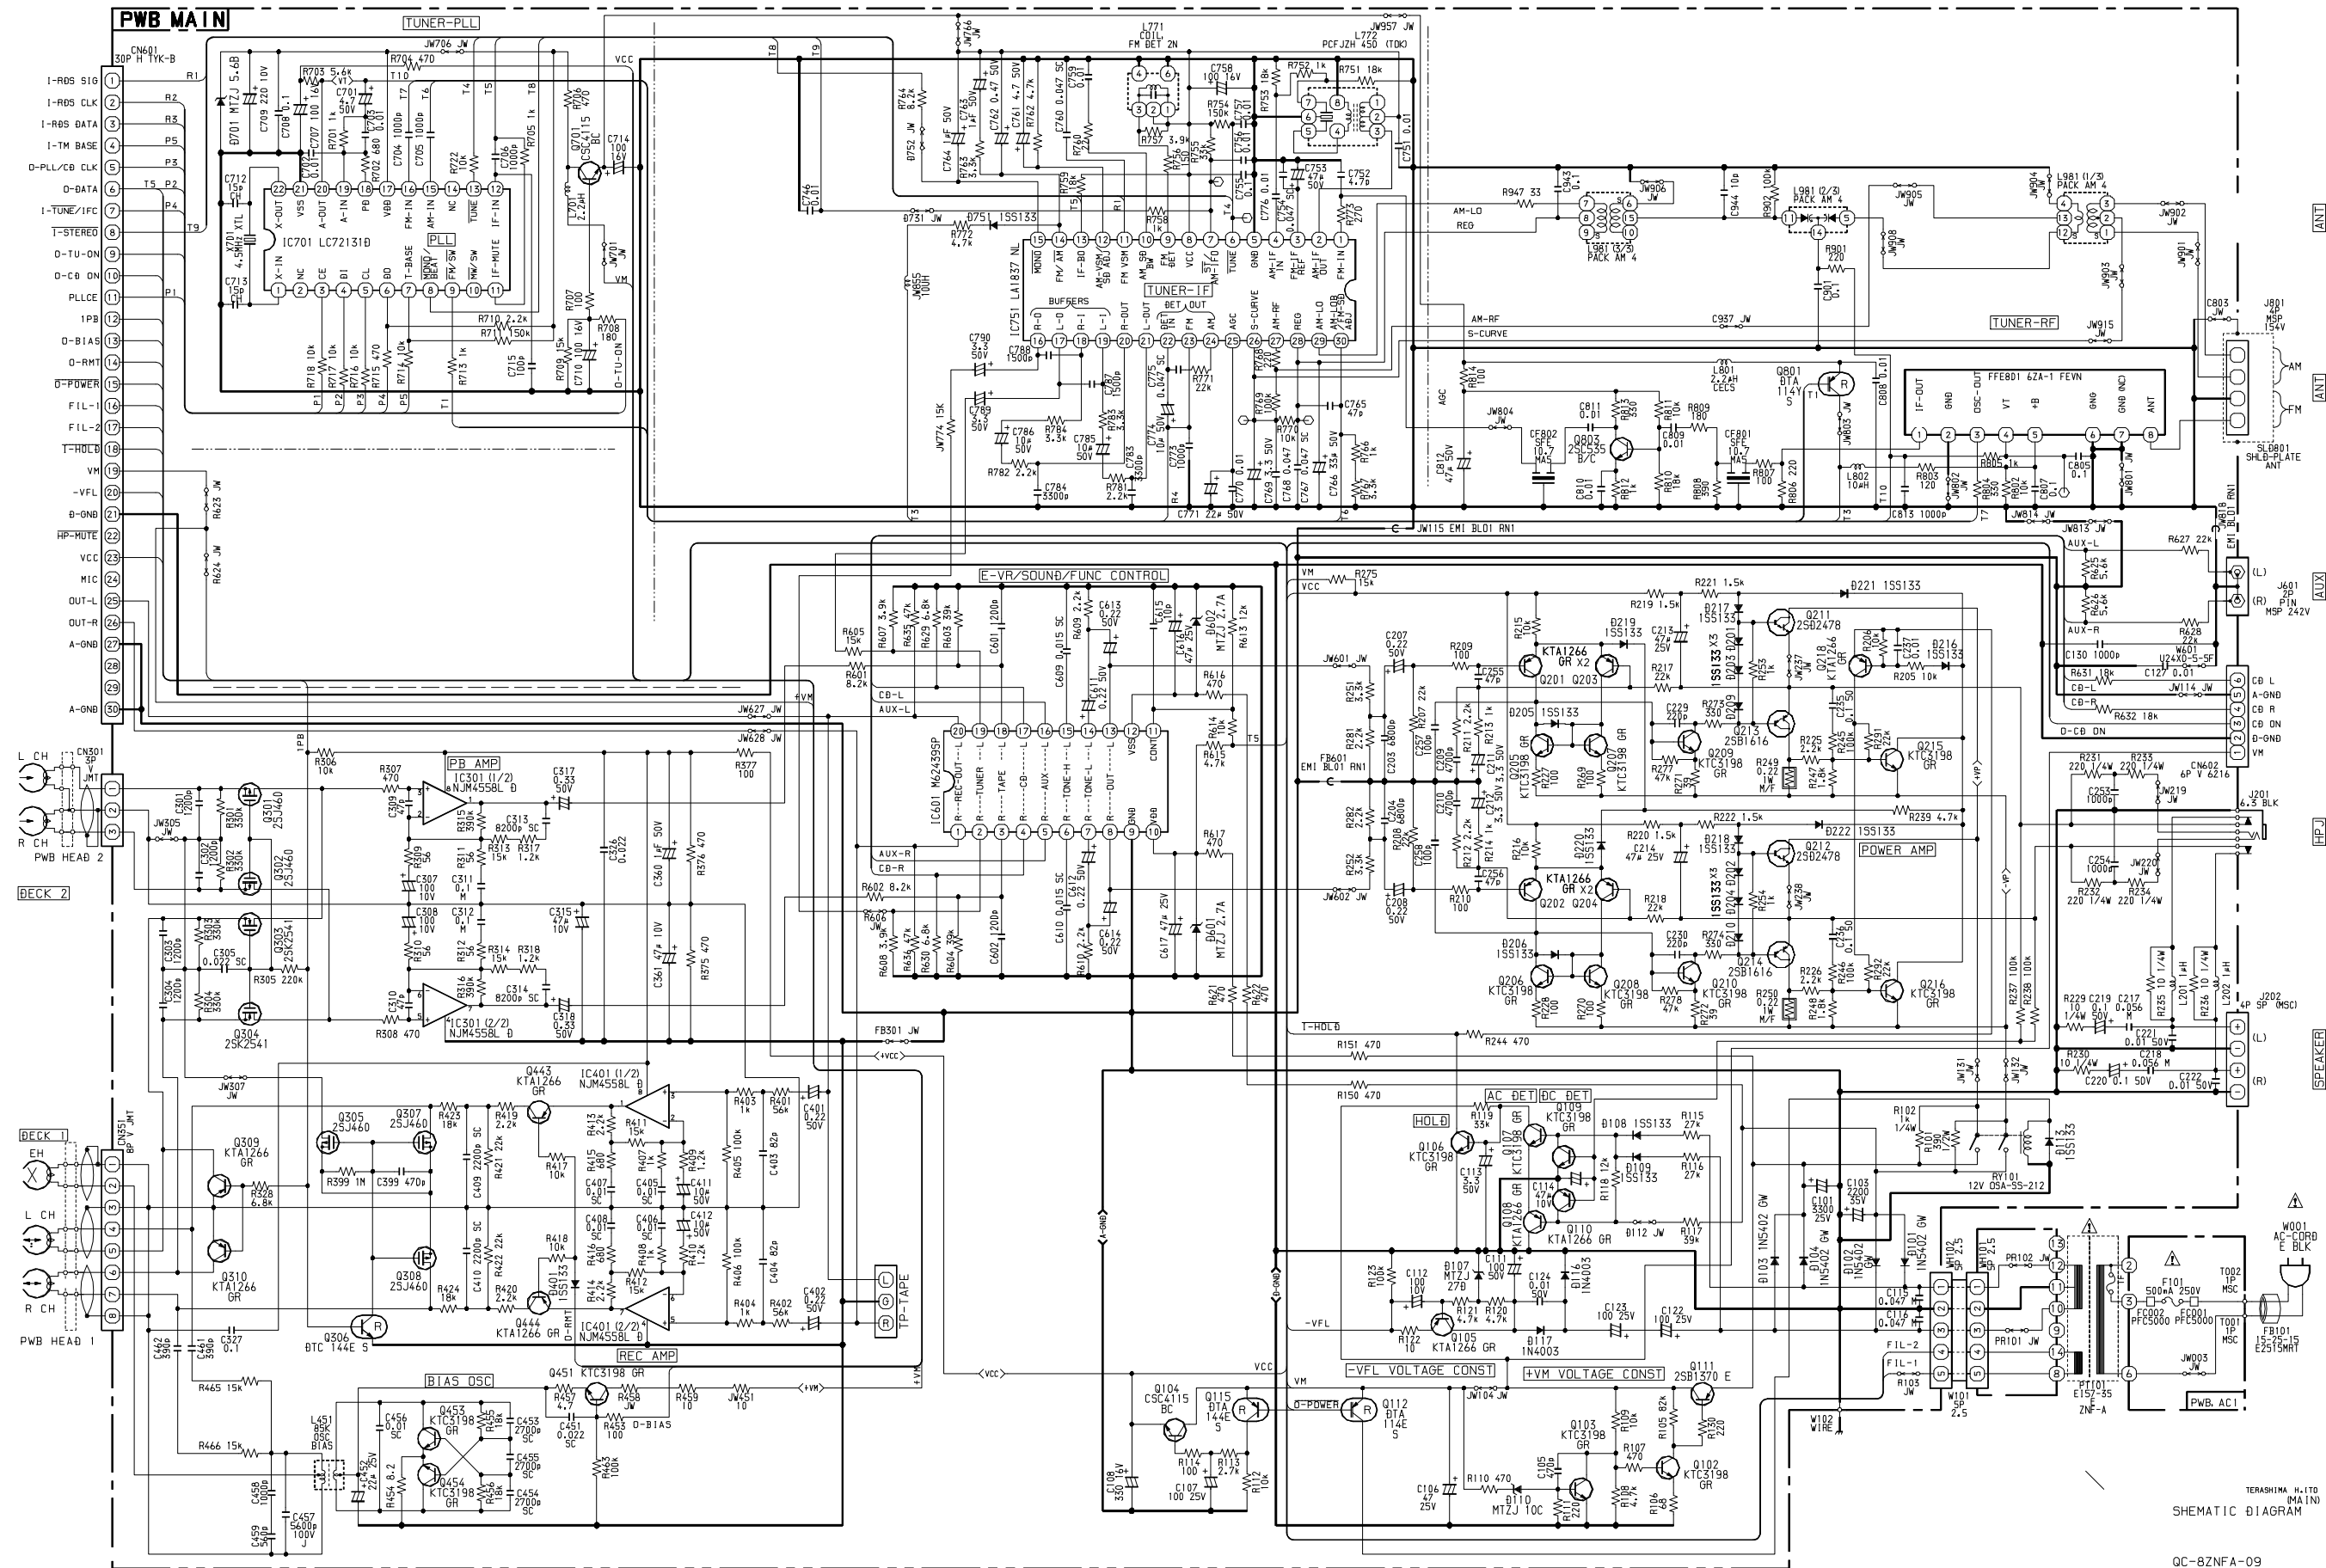

SCHEMATIC DIAGRAM – 5 (MAIN : D) <CX-SNS111 . CX-SNS125. CX-SNS126. CX-SNS128>

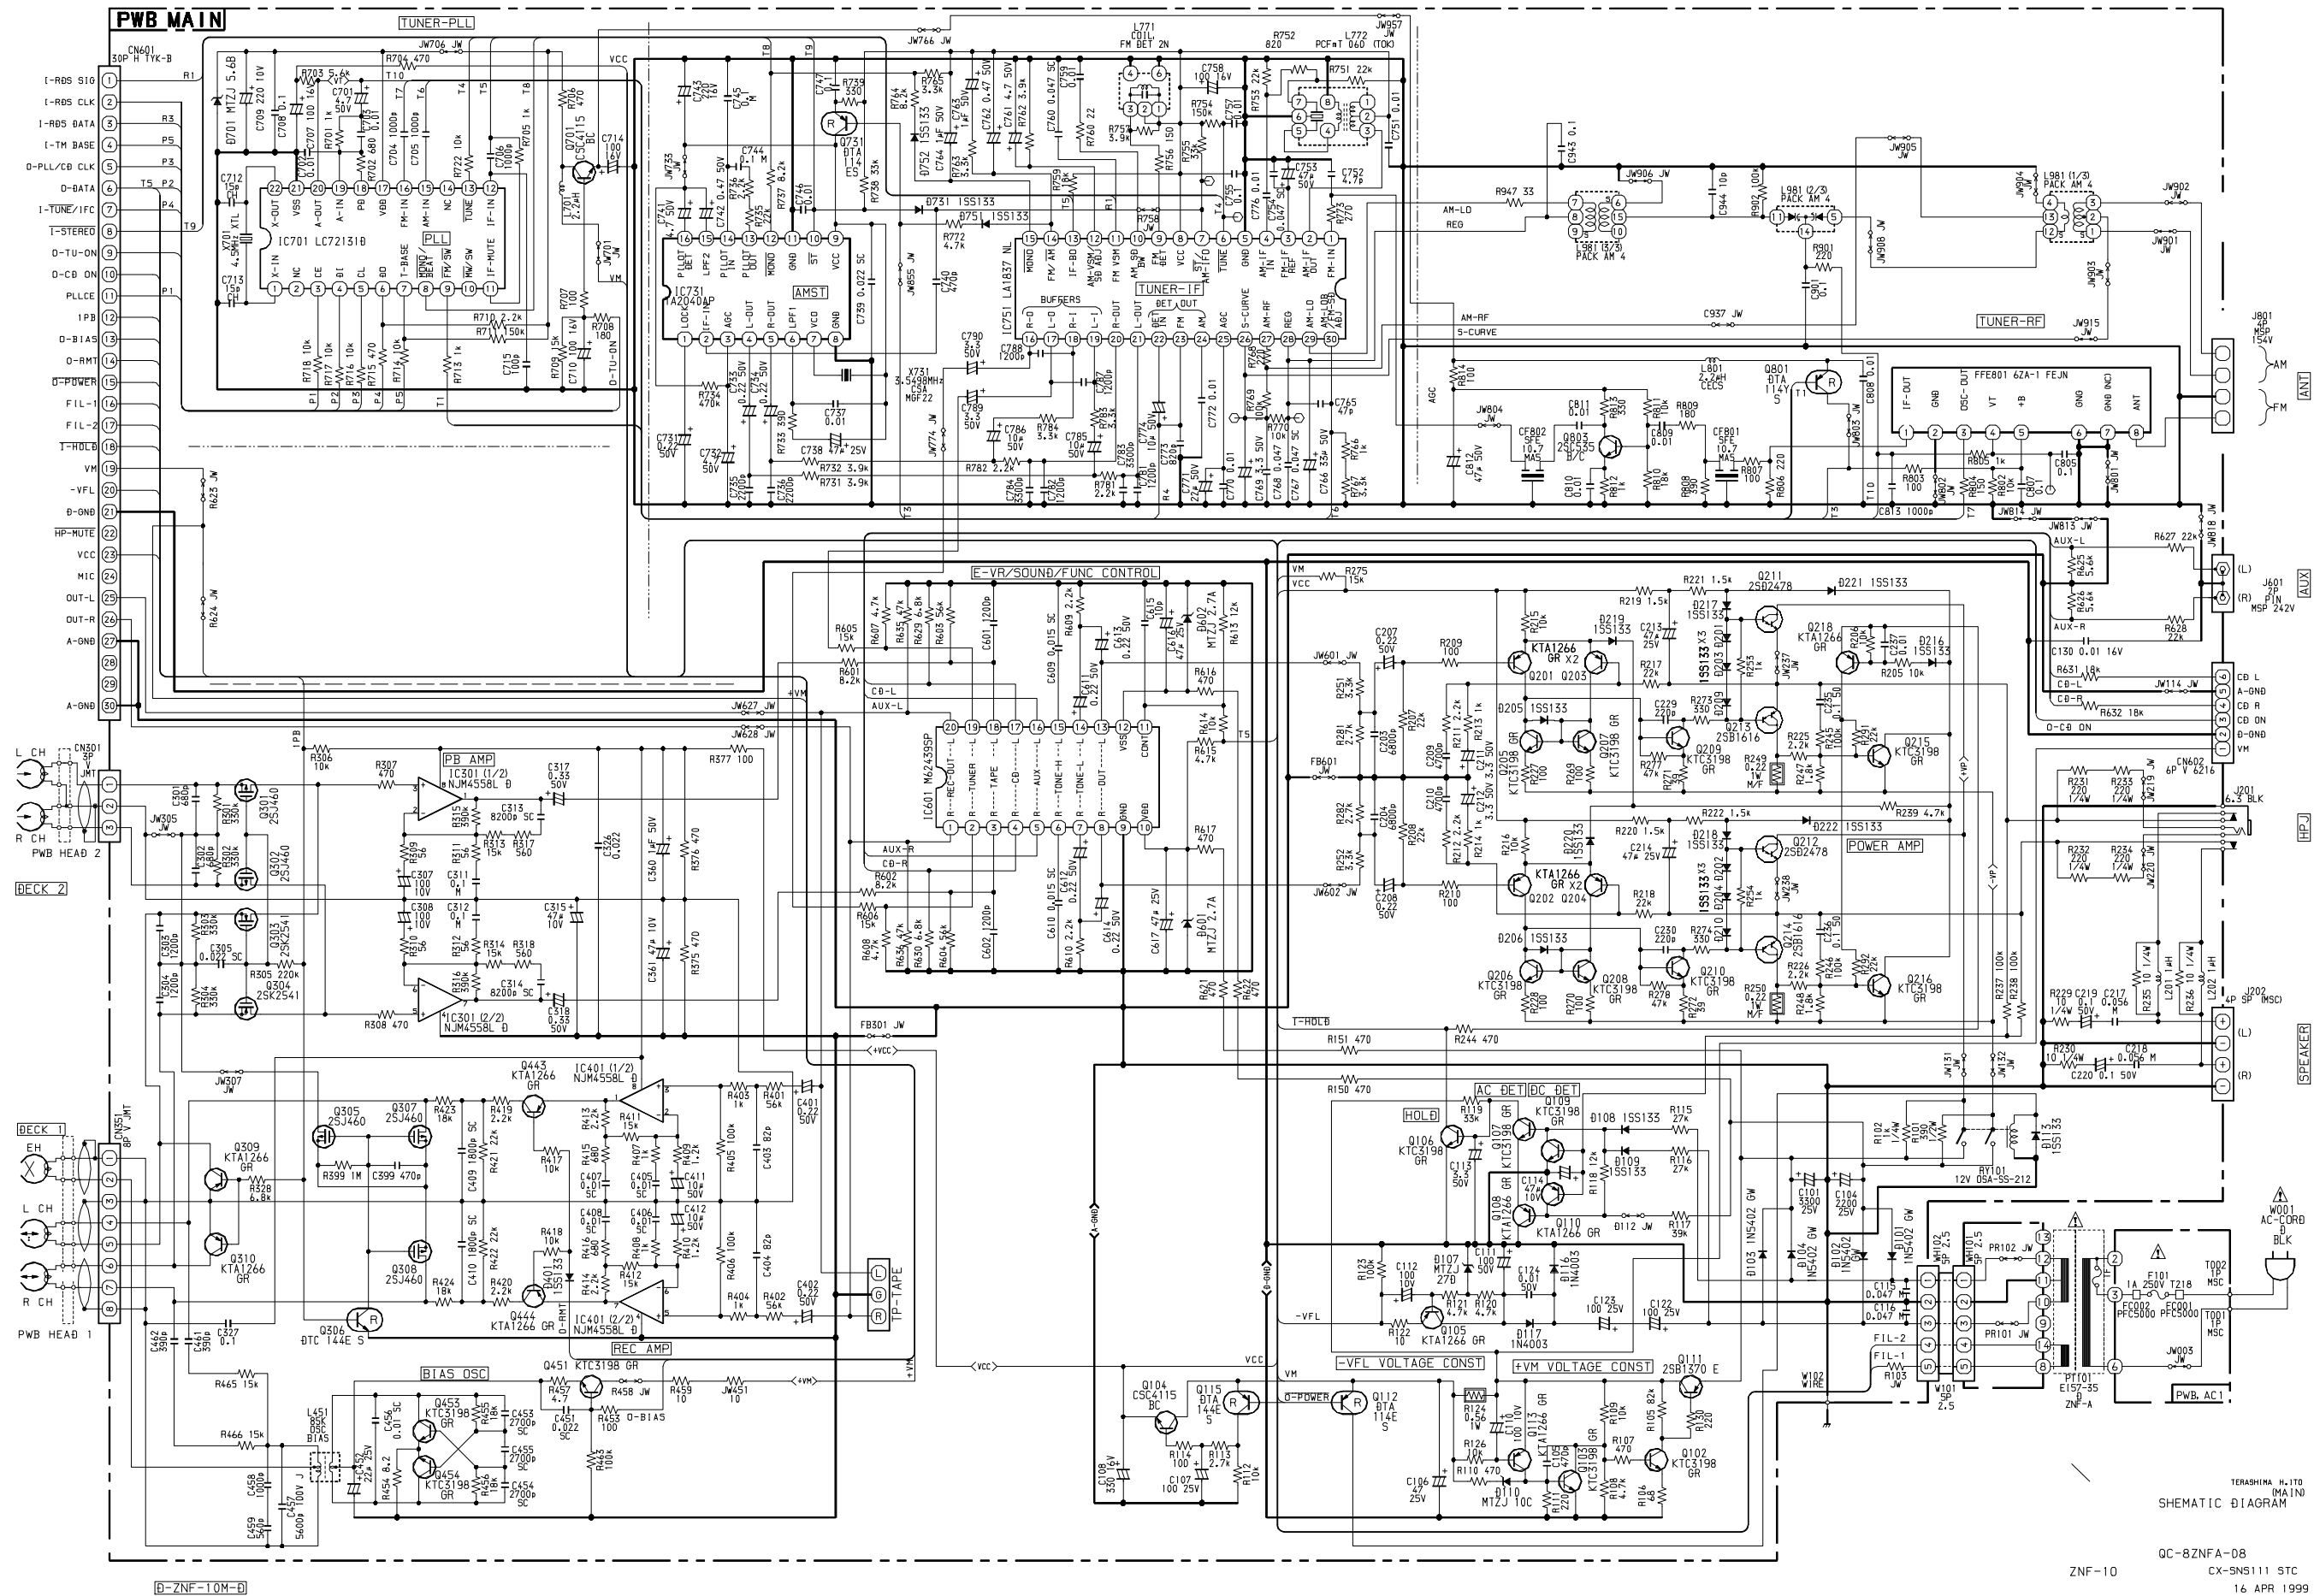

SCHEMATIC DIAGRAM – 6 (AC-SW : HR,HC)

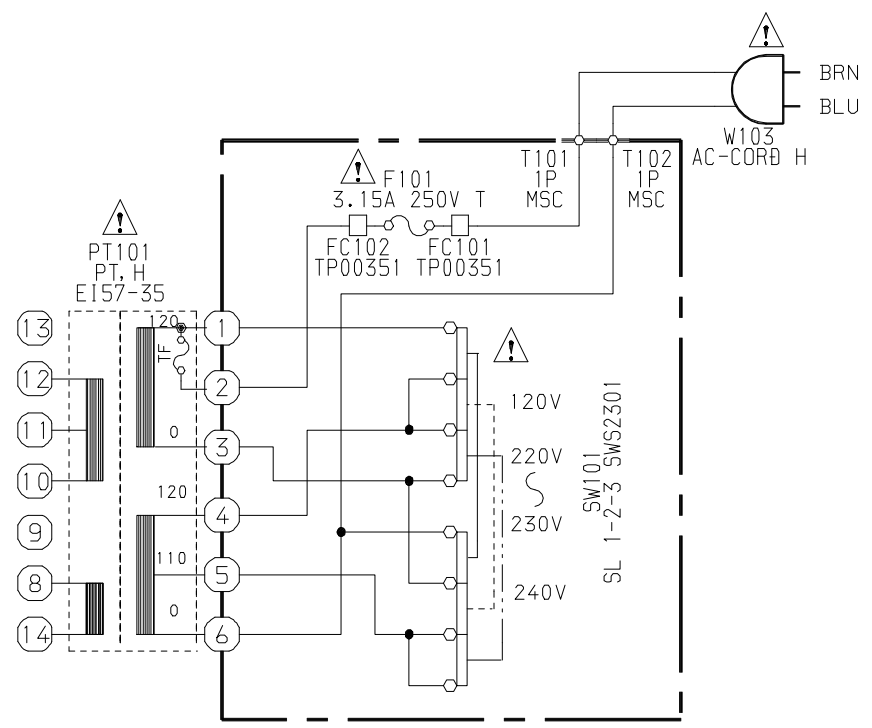


WH CAI WH CAI
(AC SW)
SCHEMATIC DIAGRAM
8Z NFA
QC-88NFA-10-
CX-NS111 LHJSTC1
13 JAN 1999

B-ZNF-10PT

ZNF-10 LH

SCHEMATIC DIAGRAM – 7 (FRONT)

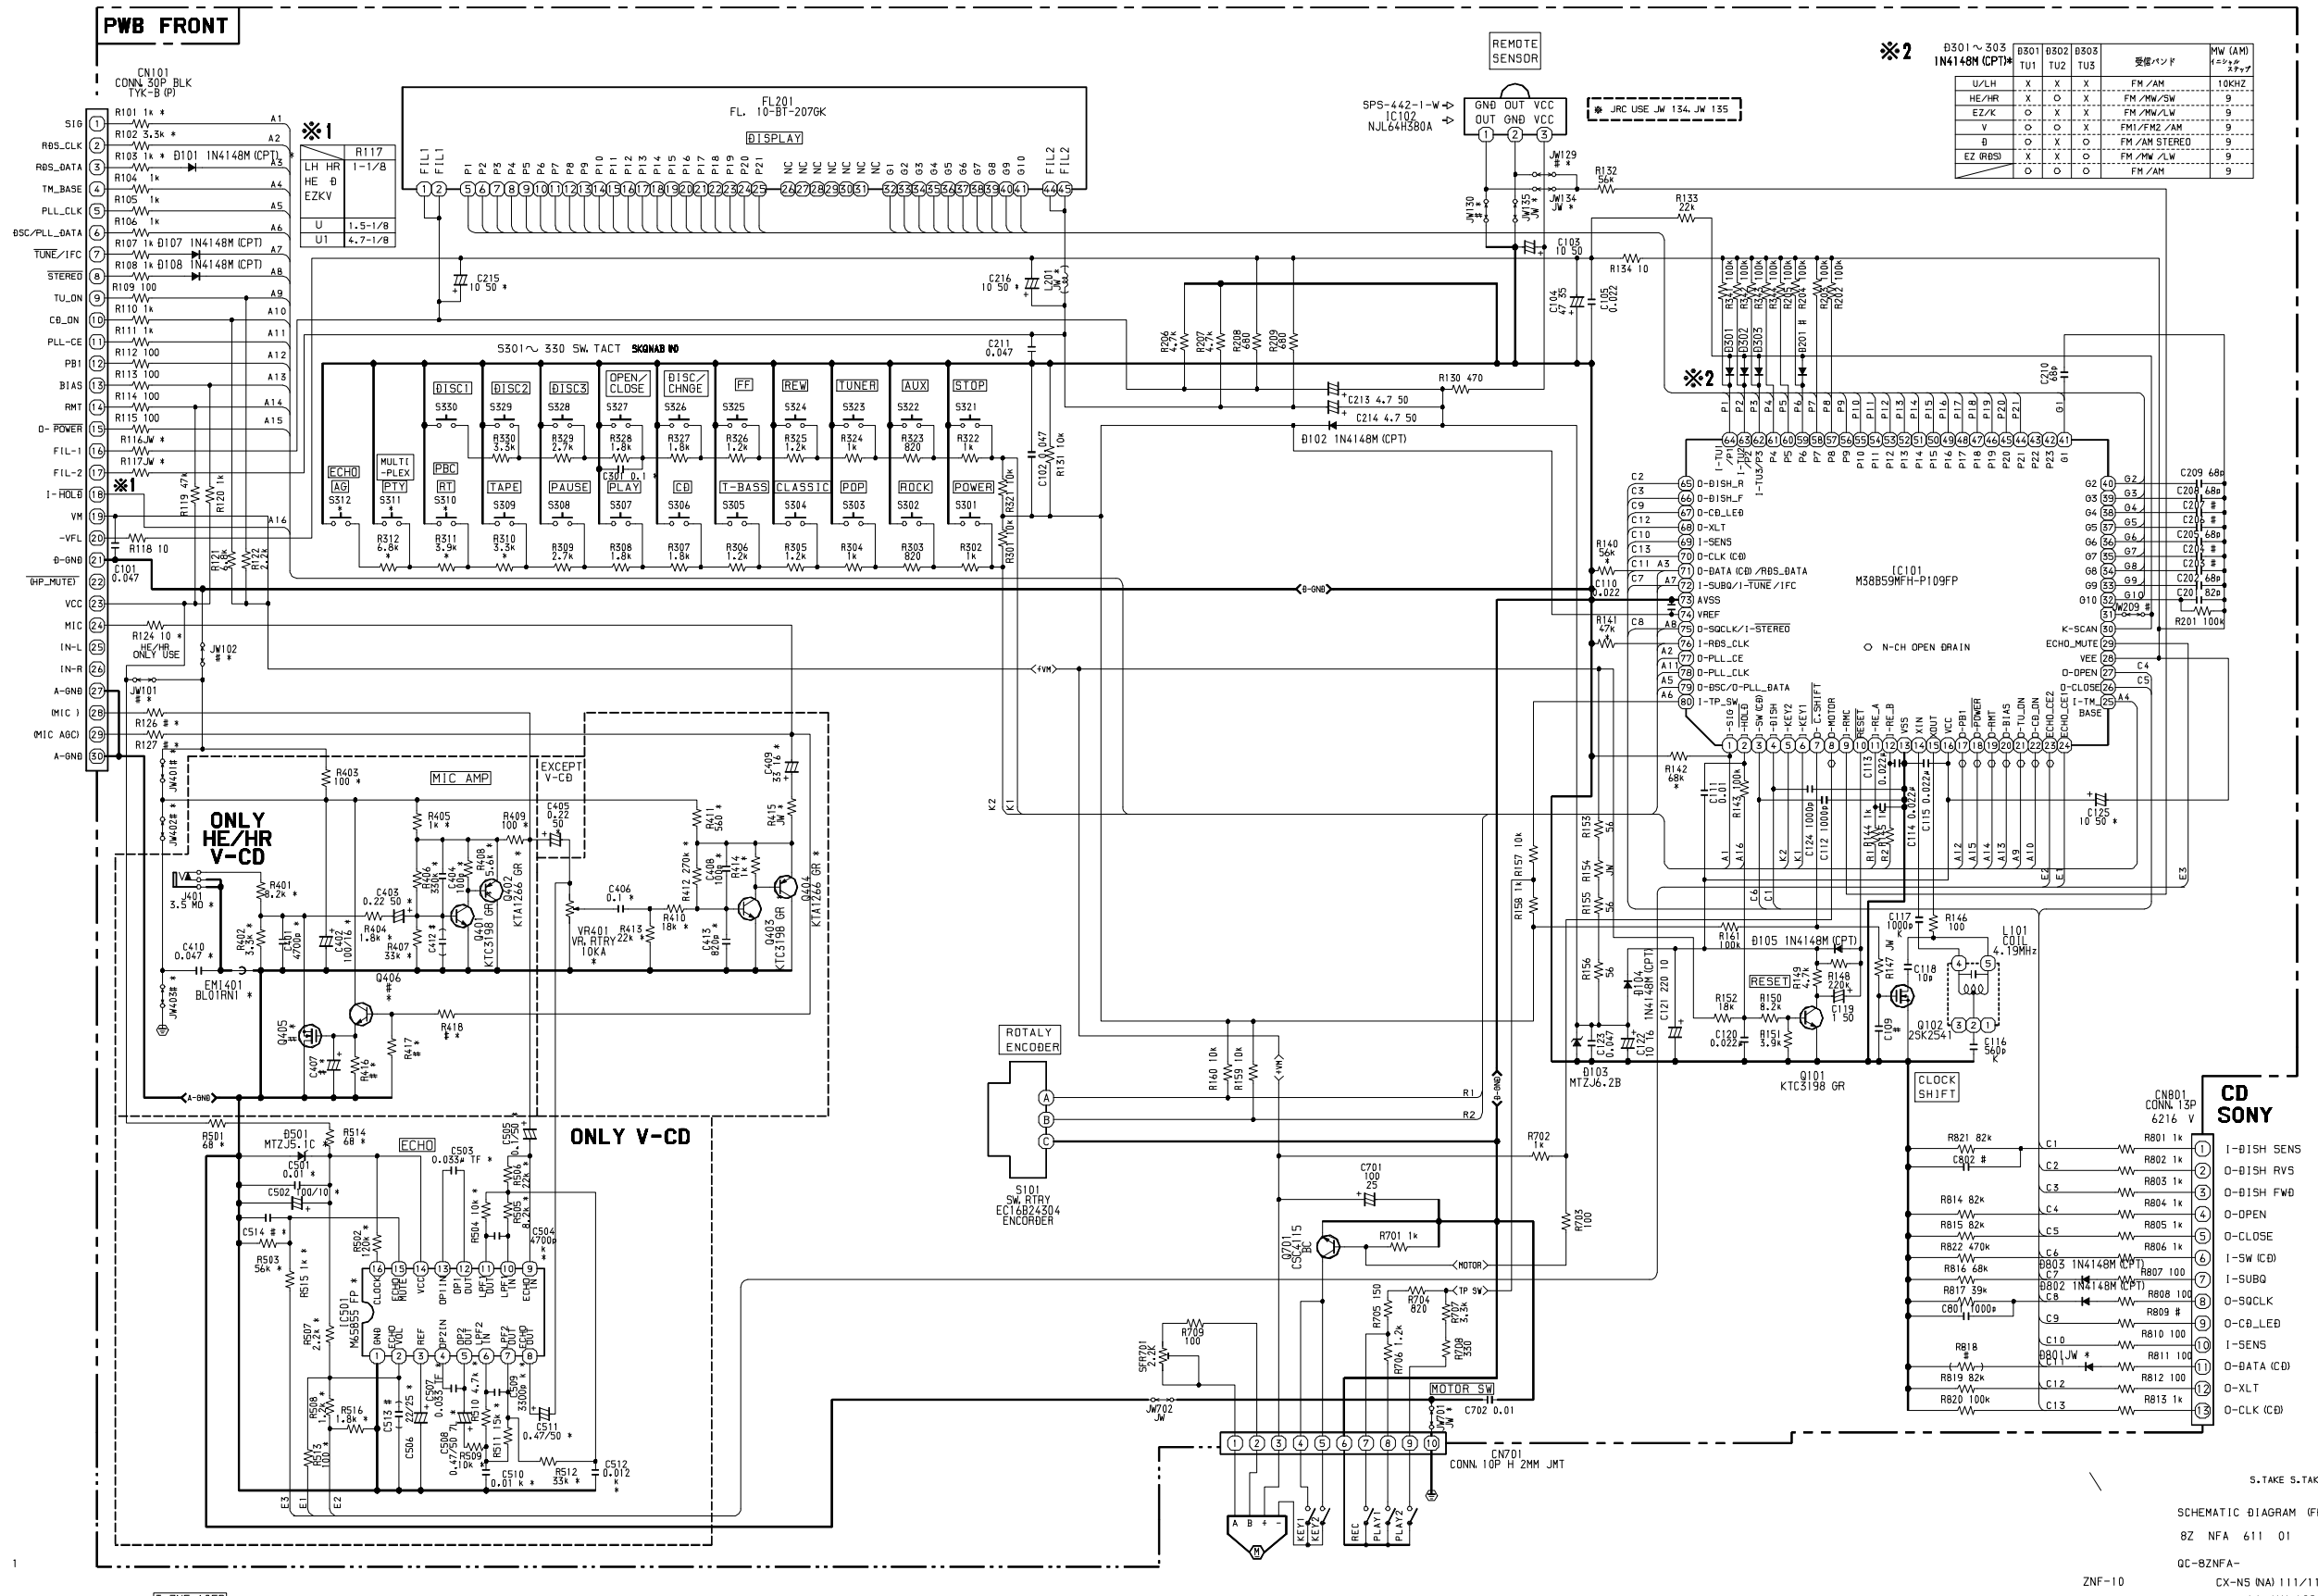

サービス技術ニュース	
番号	連絡内容
Gー ー	
Gー ー	
Gー ー	

アイワ株式会社
AIWA CO.,LTD.

9301896

Tokyo Japan