

aiwa



XR-M1000 XR-H1000

STEREO SYSTEM

- BASIC TAPE MECHANISM: 2ZM-3MK2 YPR4N
- BASIC CD MECHANISM: 4ZG-1 Z3DSHNM
- TYPE: U(M1000),LH(H1000)

SIMPLE MANUAL

TYPE	AMPLIFIER	CASSETTE DECK	GRAPHIC EQUALIZER	CD PLAYER	SPEAKERS	REMOTE CONTROL
U	MX-NM1000	FX-NM1000	GE-NM1000	DX-NM1000	SX-NMT1000	RC-7AS08
LH	MX-NH1000	FX-NH1000	GE-NH1000	DX-NH1000	SX-NAVH1000	

- Replace this Service Manual with "Revision Publishing" when it is issued.
- If requiring information about the CD mechanism, see Service Manual of 4ZG-1, S/M Code No. 09-983-249-30T.

ELECTRICAL MAIN PARTS LIST - 1/6 (MX-NM1000/NH1000)

NOTE: The characters in the suffix column indicate the part usage.

U	XX	A		
LH	XX	B		
REF.NO	PARTS NO.	DESCRIPTION	SUFFIX	
C	209	87-010-071-040	CAP, E 1-50 5L	AB
C	201	87-010-192-080	C-CAP, S 0.022-50 F	AB
C	205	87-010-194-080	CAP, CHIP 0.047	AB
C	207	87-010-194-080	CAP, CHIP 0.047	AB
C	202	87-010-264-040	CAP, E 100-10 5L	AB
C	206	87-010-405-040	CAP, E 10-50	AB
C	203	87-010-490-040	CAP, ELECT 0.1-50	AB
C	208	87-A10-189-040	CAP, E 220-10	AB
C	204	87-A10-586-040	CAP, E 47-35 7L SR	AB
C	211	87-012-140-080	CAP, 470P	AB
C	222	87-010-401-040	CAP, E 1-50 SME	AB
C	220	87-016-669-080	C-CAP, S 0.1-25 K B	AB
C	221	87-016-669-080	C-CAP, S 0.1-25 K B	AB
C	241	87-010-178-080	CHIP CAP 1000P	AB
C	248	87-010-192-080	C-CAP, S 0.022-50 F	AB
C	243	87-010-312-080	C-CAP, S 15P-50 CH	AB
C	244	87-010-316-080	C-CAP, S 33P-50 CH	AB
C	242	87-010-318-080	C-CAP, S 47P-50 CH	AB
C	247	87-016-669-080	C-CAP, S 0.1-25 K B	AB
D	201	87-017-931-080	ZENER, MTZJ5.6B	AB
D	202	87-A40-468-080	C-DIODE, HSM2836CTR	AB
D	203	87-A40-470-080	DIODE, 1SS254	AB
D	205	87-A40-470-080	DIODE, 1SS254	AB
D	240	87-A40-470-080	DIODE, 1SS254	AB
D	241	87-A40-470-080	DIODE, 1SS254	AB
IC	202	87-A20-914-010	IC, SPS-442-1-F	AB
IC	201	88-SP1-609-010	IC, UPD780228-XXXX	AB
Q	201	87-A30-087-080	C-FET, 2SK2158	AB
Q	220	87-A30-071-080	C-TR, RT1N 144C	AB
Q	241	87-026-263-080	C-TR, RN1410	AB
Q	240	87-A30-074-080	C-TR, RT1P 141C	AB
SW	201	87-A90-535-010	SW, RTRY EC16B24304	AB
X	201	87-A70-075-080	VIB, CER 4.19MHZ CRHF	AB
C	608	87-010-166-080	C-CAP, S 100P-50 SL	AB
C	604	87-010-166-080	C-CAP, S 100P-50 SL	AB
C	602	87-010-176-080	C-CAP, S 680P-50 SL	AB
C	603	87-010-186-080	CAP, CHIP 4700P	AB
C	605	87-010-321-080	CHIP CAPACITOR, 82P(J)	AB
C	601	87-010-405-040	CAP, E 10-50	AB
C	606	87-010-544-040	CAP, E 0.1-50 SME	AB
C	609	87-010-545-040	CAP, E 0.22-50 SME	AB
C	610	87-010-177-080	C-CAP, S 820P-50 SL	AB
C	614	87-010-248-040	CAP, E 220-10 SME	AB
C	615	87-010-378-040	CAP, E 10-16	AB
C	611	87-010-406-040	CAP, E 22-50 SME	AB
C	619	87-016-526-080	C-CAP, S 0.47-16 BK	AB
C	905	87-010-180-080	C-CER, 1500P	AB
C	909	87-010-181-080	CAP, CHIP S 1800P	AB
C	908	87-010-188-080	CAP, CHIP 6800P	AB
C	904	87-010-188-080	CAP, CHIP 6800P	AB
C	907	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	906	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	902	87-016-669-080	C-CAP, S 0.1-25 K B	AB
C	901	87-016-669-080	C-CAP, S 0.1-25 K B	AB
C	903	87-A10-712-080	C-CAP, S 0.22-50 Z F	AB
C	916	87-010-184-080	CHIP CAPACITOR 3300P(K)	AB
C	915	87-010-184-080	CHIP CAPACITOR 3300P(K)	AB
C	910	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	918	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	917	87-010-260-040	CAP, E 47-25 SME	AB
C	919	87-010-264-040	CAP, E 100-10 5L	AB
C	914	87-010-401-040	CAP, E 1-50 SME	AB
C	913	87-010-401-040	CAP, E 1-50 SME	AB
C	912	87-016-526-080	C-CAP, S 0.47-16 BK	AB
C	921	87-010-318-080	C-CAP, S 47P-50 CH	AB
C	920	87-010-318-080	C-CAP, S 47P-50 CH	AB
C	922	87-010-318-080	C-CAP, S 47P-50 CH	AB
CN	901	87-099-195-010	CONN, 7P 6216 V	AB
D	600	87-A40-470-080	DIODE, 1SS254	AB
FB	901	87-070-136-080	ZENER, MTZJ5.1B	AB
IC	601	87-008-372-080	FILTER, EMI BL OIRNI	AB
IC	601	87-017-888-080	IC, NJM4558MD	AB
J	901	87-A20-560-040	C-IC, M65849BFP	AB
J	601	87-A60-284-010	JACK, 3.5M0 (MSC)	AB
J	602	87-A60-284-010	JACK, 3.5M0 (MSC)	AB
Q	600	87-A30-087-080	C-FET, 2SK2158	AB
C	805	87-010-159-080	C-CAP, S 27P-50 SL	AB
C	804	87-010-159-080	C-CAP, S 27P-50 SL	AB
C	802	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	801	87-010-263-040	CAP, E 100-10	AB
C	803	87-010-405-040	CAP, E 10-50	AB
C	806	87-016-526-080	C-CAP, S 0.47-16 BK	AB
D	801	87-070-136-080	ZENER, MTZJ5.1B	AB
D	802	87-A40-470-080	DIODE, 1SS254	AB
IC	801	88-NF5-615-040	C-IC, MSM6654A-521GS-KR1	AB
X	801	87-A70-075-080	VIB, CER 4.19MHZ CRHF	AB
C	503	87-010-180-080	C-CER 1500P	AB
C	504	87-010-180-080	C-CER 1500P	AB
C	513	87-010-404-080	CAP, ELECT 4.7-50V	AB

ELECTRICAL MAIN PARTS LIST - 2/6 (MX-NM1000/NH1000)

C	514	87-010-404-080	CAP, ELECT 4.7-50V	AB
C	511	87-010-405-080	CAP, ELECT 10-50V	AB
C	512	87-010-405-080	CAP, ELECT 10-50V	AB
C	519	87-012-142-080	CAP, S 0.33-16	AB
C	522	87-010-183-080	C-CAP, S 2700P-50 B	AB
C	521	87-010-194-080	CAP, CHIP 0.047	AB
C	523	87-016-669-080	C-CAP, S 0.1-25 K B	AB
C	520	87-016-669-080	C-CAP, S 0.1-25 K B	AB
C	535	87-010-195-080	C-CAP, S 0.068-25 F	AB
C	537	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	532	87-010-260-080	CAP, ELECT 47-25V	AB
C	534	87-010-263-080	CAP, ELECT 100-10V	AB
C	533	87-010-263-080	CAP, ELECT 100-10V	AB
C	539	87-010-404-080	CAP, ELECT 4.7-50V	AB
C	538	87-010-404-080	CAP, ELECT 4.7-50V	AB
C	531	87-010-405-080	CAP, ELECT 10-50V	AB
C	536	87-012-142-080	CAP, S 0.33-16	AB
C	545	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	540	87-010-314-080	C-CAP, S 22P-50V	AB
C	542	87-010-314-080	C-CAP, S 22P-50V	AB
C	541	87-010-314-080	C-CAP, S 22P-50V	AB
D	532	87-A40-002-080	ZENER, MTZJ5.1C	AB
D	531	87-A40-438-080	ZENER, MTZJ4.7A	AB
IC	501	87-A20-954-040	C-IC, M62445FP-601	AB
IC	501	87-026-609-080	TR, KTA1266GR	AB
C	109	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	108	87-012-368-080	C-CAP, S 0.1-50 F	AB
C	106	87-012-368-080	C-CAP, S 0.1-50 F	AB
C	107	87-012-368-080	C-CAP, S 0.1-50 F	AB
C	105	87-012-368-080	C-CAP, S 0.1-50 F	AB
C	102	87-016-520-090	CAP, E 3300-65	AB
C	101	87-016-520-090	CAP, E 3300-65	AB
C	104	87-016-658-090	CAP, E 4700-35 SMG	AB
C	103	87-016-658-090	CAP, E 4700-35 SMG	AB
C	110	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	111	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	112	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	113	87-010-247-080	CAP, ELECT 100-50V	AB
C	116	87-010-247-080	CAP, ELECT 100-50V	AB
C	119	87-010-260-080	CAP, ELECT 47-25V	AB
C	118	87-010-263-080	CAP, ELECT 100-10V	AB
C	114	87-010-385-080	CAP, ELECT 220-25V	AB
C	115	87-010-385-080	CAP, ELECT 220-25V	AB
C	117	87-010-430-080	CAP, ELECT 100-63	AB
C	124	87-010-112-080	CAP, ELECT 100-16V	AB
C	121	87-010-174-080	CAP, CHIP SL470P (K)	AB
C	125	87-010-235-080	CAP, E 470-16 SME	AB
C	123	87-010-247-080	CAP, ELECT 100-50V	AB
C	122	87-010-263-080	CAP, ELECT 100-10V	A
C	120	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	908	87-010-190-080	S CHIP F 0.01	AB
C	907	87-010-190-080	S CHIP F 0.01	AB
C	906	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	905	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	904	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	903	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	909	87-012-368-080	C-CAP, S 0.1-50 F	AB
C	910	87-012-368-080	C-CAP, S 0.1-50 F	AB
C	920	87-012-157-080	C-CAP, S 330P-50 CH	AB
C	921	87-012-157-080	C-CAP, S 330P-50 CH	AB
C	922	87-012-157-080	C-CAP, S 330P-50 CH	AB
C	923	87-012-157-080	C-CAP, S 330P-50 CH	AB
CN	905	87-099-196-010	CONN, 8P 6216 V	AB
D	102	87-017-447-010	DIODE, GBU4DL	AB
D	107	87-070-274-080	DIODE, 1N4003 SEM	AB
D	108	87-070-274-080	DIODE, 1N4003 SEM	AB
D	109	87-070-274-080	DIODE, 1N4003 SEM	AB
D	106	87-070-274-080	DIODE, 1N4003 SEM	AB
D	104	87-A40-468-080	C-DIODE, HSM2836CTR	AB
D	105	87-A40-469-080	C-DIODE, HSM2838CTR	AB
D	103	87-A40-470-080	DIODE, 1SS254	AB
D	115	87-A40-004-080	ZENER, MTZJ16A	AB
D	110	87-A40-341-080	ZENER, MTZJ 36 A	AB
D	112	87-A40-345-080	ZENER, MTZJ10C	AB
D	111	87-A40-468-080	C-DIODE, HSM2836CTR	AB
D	901	87-A40-470-080	DIODE, 1SS254	AB
FC	101	87-033-213-080	CLAMP, FUSE	AB
FC	102	87-033-213-080	CLAMP, FUSE	AB
J	901	87-A60-488-010	JACK, DIA6.3 BLK ST W/SW KM16AT	AB
J	902	87-A60-617-010	TERMINAL, SP 4P (MSC)	AB
J	903	87-A60-653-010	JACK, PIN 4P BLK/BLK	AB
J	905	87-A60-658-010	JACK, PIN 6P WHITE/RED	AB
L	902	87-003-383-010	COIL, 1UH-S	AB
L	901	87-003-383-010	COIL, 1UH-S	AB
PR	103	87-026-682-080	PROTECTOR, 10A 60V491	.B
PR	104	87-026-682-080	PROTECTOR, 10A 60V491	.B
PR	104	87-026-691-080	FUSE, 10A 125V 251	A
PR	103	87-026-691-080	FUSE, 10A 125V 251	A
PR	101	87-A90-195-080	PROTECTOR 7A 125V 49	.B
PR	102	87-A90-195-080	PROTECTOR 7A 125V 49	.B
PR	102	87-A90-210-080	FUSE, 7A 125V 251	A
PR	101	87-A90-210-080	FUSE, 7A 125V 251	A
Q	103	87-026-610-080	TR, KTC3198GR	AB
Q	107	87-A30-075-080	C-TR, 2SA1235F	AB
Q	109	87-A30-075-080	C-TR, 2SA1235F	AB
Q	108	87-A30-076-080	C-TR, 2SC3052F	AB

ELECTRICAL MAIN PARTS LIST - 3/6 (MX-NM1000/NH1000)

Q	104	87-A30-076-080	C-TR, 2SC3052F	AB
Q	106	87-A30-076-080	C-TR, 2SC3052F	AB
Q	105	87-A30-083-080	TR, CSD1489B	AB
Q	102	89-213-702-010	TR, 2SB1370 (1.8W)	AB
Q	101	89-213-702-010	TR, 2SB1370 (1.8W)	AB
Q	112	87-026-609-080	TR, KTA1266GR	AB
Q	111	87-026-609-080	TR, KTA1266GR	AB
Q	115	87-A30-075-080	C-TR, 2SA1235F	AB
Q	114	87-A30-075-080	C-TR, 2SA1235F	AB
Q	110	87-A30-076-080	C-TR, 2SC3052F	AB
Q	901	87-A30-073-080	C-TR, RT1N 141C	AB
Q	123	87-022-200-080	RESISTOR, METAL 0.56 1W	AB
R	909	87-A00-126-080	RES M/F 220-1/WJ VIP	AB
R	912	87-A00-126-080	RES M/F 220-1/WJ VIP	AB
R	911	87-A00-126-080	RES M/F 220-1/WJ VIP	AB
R	910	87-A00-126-080	RES M/F 220-1/WJ VIP	AB
R	101	87-045-389-010	RELAY, OSA-SS-212DM5	AB
RY	901	87-A90-713-010	RELAY, 12V DQ12D1-0S(M)	AB
S	101	87-036-173-010	SW, SL 2-2-4 SDKG(*)	AB
T	102	87-A60-317-010	TERMINAL, 1P MSC	AB
T	101	87-A60-317-010	TERMINAL, 1P MSC	AB
T	101	85-NF5-628-010	F-CABLE 7P-2.5	AB
W	201	87-010-322-080	C-CAP, S 100P-50 CH	AB
C	202	87-010-322-080	C-CAP, S 100P-50 CH	AB
C	209	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	213	87-010-186-080	CAP, CHIP 4700P	AB
C	214	87-010-186-080	CAP, CHIP 4700P	AB
C	212	87-010-187-080	CAP, CHIP S5600P	AB
C	211	87-010-187-080	CAP, CHIP S5600P	AB
C	217	87-010-260-080	CAP, ELECT 47-25V	AB
C	218	87-010-260-080	CAP, ELECT 47-25V	AB
C	210	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	215	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	216	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	219	87-A10-516-080	C-CAP, S 100P-200 J CH	AB
C	223	87-010-405-080	CAP, ELECT 10-50V	AB
C	227	87-010-407-080	CAP, ELECT 33-50V	AB
C	221	87-016-462-080	C-CAP, S 1-16 F	AB
C	222	87-016-462-080	C-CAP, S 1-16 F	AB
C	220	87-A10-516-080	C-CAP, S 100P-200 J CH	AB
C	232	87-010-186-080	CAP, CHIP 4700P	AB
C	231	87-010-186-080	CAP, CHIP 4700P	AB
C	235	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	234	87-010-401-080	CAP, ELECT 1-50V	AB
C	233	87-010-401-080	CAP, ELECT 1-50V	AB
D	201	87-A40-470-080	DIODE, 1SS254	AB
D	207	87-A40-470-080	DIODE, 1SS254	AB
D	208	87-A40-470-080	DIODE, 1SS254	AB
D	203	87-A40-470-080	DIODE, 1SS254	AB
D	209	87-A40-470-080	DIODE, 1SS254	AB
D	205	87-A40-470-080	DIODE, 1SS254	AB
D	202	87-A40-470-080	DIODE, 1SS254	AB
D	204	87-A40-470-080	DIODE, 1SS254	AB
D	206	87-A40-470-080	DIODE, 1SS254	AB
D	214	87-070-136-080	ZENER, MTZJ5.1B	AB
D	213	87-070-136-080	ZENER, MTZJ5.1B	AB
D	212	87-A40-370-090	DIODE, RK46-P20	AB
D	211	87-A40-370-090	DIODE, RK46-P20	AB
D	217	87-A40-470-080	DIODE, 1SS254	AB
D	218	87-A40-470-080	DIODE, 1SS254	AB
D	219	87-A40-470-080	DIODE, 1SS254	AB
D	216	87-A40-470-080	DIODE, 1SS254	AB
D	215	87-A40-470-080	DIODE, 1SS254	AB
D	210	87-A40-470-080	DIODE, 1SS254	AB
D	220	87-A40-345-080	ZENER, MTZJ10C	AB
D	222	87-A40-470-080	DIODE, 1SS254	AB
D	225	87-A40-470-080	DIODE, 1SS254	AB
D	226	87-A40-470-080	DIODE, 1SS254	AB
D	227	87-A40-470-080	DIODE, 1SS254	AB
D	221	87-A40-470-080	DIODE, 1SS254	AB
D	223	87-A40-488-080	DIODE, 1SS244	AB
D	224	87-A40-488-080	DIODE, 1SS244	AB
D	296	87-A40-470-080	DIODE, 1SS254	AB
D	295	87-A40-470-080	DIODE, 1SS254	AB
Q	204	87-A30-075-080	C-TR, 2SA1235F	AB
Q	202	87-A30-086-040	C-TR, CSD1306E	AB
Q	201	87-A30-086-040	C-TR, CSD1306E	AB
Q	207	87-A30-107-080	C-TR, CMBT5401	AB
Q	208	87-A30-107-080	C-TR, CMBT5401	AB
Q	209	87-A30-107-080	C-TR, CMBT5401	AB
Q	214	87-A30-076-080	C-TR, 2SC3052F	AB
Q	211	87-A30-076-080	C-TR, 2SC3052F	AB
Q	212	87-A30-076-080	C-TR, 2SC3052F	AB
Q	213	87-A30-076-080	C-TR, 2SC3052F	AB
Q	218	87-A30-097-010	TR, FN 1016	AB
Q	217	87-A30-097-010	TR, FN 1016	AB
Q	219	87-A30-098-010	TR, FP 1016	AB
Q	210	87-A30-107-080	C-TR, CMBT5401	AB
Q	215	87-A30-190-080	TR, CC5551	AB
Q	216	87-A30-190-080	TR, CC5551	AB
Q	227	87-A30-072-080	C-TR, RT1P 144C	AB
Q	228	87-A30-073-080	C-TR, RT1N 141C	AB
Q	226	87-A30-075-080	C-TR, 2SA1235F	AB
Q	225	87-A30-076-080	C-TR, 2SC3052F	AB
Q	220	87-A30-098-010	TR, FP 1016	AB
Q	222	87-A30-106-080	C-TR, CMBT5551	AB

ELECTRICAL MAIN PARTS LIST - 4/6 (MX-NM1000/NH1000)

O	221	87-A30-106-080	C-TR, CMBT5551	AB
Q	229	87-A30-107-080	C-TR, CMBT5401	AB
Q	223	87-A30-162-010	FET, 2SK2937	AB
Q	224	87-A30-162-010	FET, 2SK2937	AB
Q	291	87-A30-074-080	C-TR, RT1P 141C	AB
Q	295	87-A30-106-080	C-TR, CMBT5551	AB
Q	290	87-A30-107-080	C-TR, CMBT5401	AB
R	239	87-A00-262-080	RES, M/F 0.15-2W J	AB
R	238	87-A00-262-080	RES, M/F 0.15-2W J	AB
R	237	87-A00-262-080	RES, M/F 0.15-2W J	AB
R	240	87-A00-262-080	RES, M/F 0.15-2W J	AB
TH	201	87-A90-221-080	C-THMS, 100K	AB
TH	202	87-A90-221-080	C-THMS, 100K	AB
		88-SP1-211-010	GUIDE, FUN	AB
		88-SX1-203-010	GUIDE, FL	AB
C	101	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	302	87-010-404-040	CAP, E 4.7-50 SME	AB
C	301	87-010-404-040	CAP, E 4.7-50 SME	AB
D	304	87-A40-470-080	DIODE, 1SS254	AB
D	305	87-A40-470-080	DIODE, 1SS254	AB
D	302	87-A40-470-080	DIODE, 1SS254	AB
D	301	87-A40-470-080	DIODE, 1SS254	AB
D	303	87-A40-470-080	DIODE, 1SS254	AB
FL	301	88-SP1-610-010	FL, 10-BT-208GK	AB
LED	305	87-A40-497-080	LED, SML11516C	AB
LED	301	87-A40-497-080	LED, SML11516C	AB
LED	302	87-A40-497-080	LED, SML11516C	AB
LED	304	87-A40-497-080	LED, SML11516C	AB
LED	303	87-A40-497-080	LED, SML11516C	AB
O	307	87-026-226-080	CHIP-TR, DTA143EK	AB
Q	303	87-A30-071-080	C-TR, RT1N 144C	AB
Q	305	87-A30-071-080	C-TR, RT1N 144C	AB
Q	304	87-A30-071-080	C-TR, RT1N 144C	AB
Q	301	87-A30-071-080	C-TR, RT1N 144C	AB
Q	302	87-A30-071-080	C-TR, RT1N 144C	AB
Q	306	89-112-965-080	TR, 2SA1296 (0.75W)	AB
S	308	87-A90-809-080	SW, TACT TSTA-2	AB
S	306	87-A90-809-080	SW, TACT TSTA-2	AB
S	307	87-A90-809-080	SW, TACT TSTA-2	AB
S	303	87-A90-809-080	SW, TACT TSTA-2	AB
S	301	87-A90-809-080	SW, TACT TSTA-2	AB
S	305	87-A90-809-080	SW, TACT TSTA-2	AB
S	304	87-A90-809-080	SW, TACT TSTA-2	AB
S	302	87-A90-809-080	SW, TACT TSTA-2	AB
S	309	87-A90-809-080	SW, TACT TSTA-2	AB
S	311	87-A90-809-080	SW, TACT TSTA-2	AB
S	310	87-A90-809-080	SW, TACT TSTA-2	AB
S	315	87-A90-809-080	SW, TACT TSTA-2	AB
S	312	87-A90-809-080	SW, TACT TSTA-2	AB
S	313	87-A90-809-080	SW, TACT TSTA-2	AB
S	314	87-A90-809-080	SW, TACT TSTA-2	AB
C	603	87-010-182-080	C-CAP, S 2200P-50 B	AB
C	604	87-010-182-080	C-CAP, S 2200P-50 B	AB
C	605	87-010-369-080	C-CAP, S 0.033-25 K B	AB
C	606	87-010-369-080	C-CAP, S 0.033-25 K B	AB
C	609	87-010-374-080	CAP, ELECT 47-10V	AB
C	608	87-010-402-080	CAP, ELECT 2.2-50V	AB
C	607	87-010-402-080	CAP, ELECT 2.2-50V	AB
C	601	87-010-545-080	CAP, ELECT 0.22-50V	AB
C	602	87-010-545-080	CAP, ELECT 0.22-50V	AB
C	612	87-010-112-080	CAP, ELECT 100-16V	AB
C	614	87-010-184-080	CHIP CAPACITOR 3300P(K)	AB
C	613	87-010-184-080	CHIP CAPACITOR 3300P(K)	AB
C	610	87-010-374-080	CAP, ELECT 47-10V	AB
C	611	87-010-405-080	CAP, ELECT 10-50V	AB
CN	601	87-099-195-010	CONN, 7P 6216 V	AB
IC	601	87-A20-804-040	C-IC, NJM2152M	AB
C	701	87-010-402-080	CAP, ELECT 2.2-50V	AB
C	702	87-010-402-080	CAP, ELECT 2.2-50V	AB
C	709	87-010-956-080	CHIP-CAP, S 0.068-25B	AB
C	708	87-012-365-080	C-CAP, S 0.027-25VBK	AB
C	707	87-012-365-080	C-CAP, S 0.027-25VBK	AB
C	706	87-016-460-080	C-CAP, S 0.22-16 B	AB
C	705	87-016-460-080	C-CAP, S 0.22-16 B	AB
C	703	87-016-669-080	C-CAP, S 0.1-25 K B	AB
C	704	87-016-669-080	C-CAP, S 0.1-25 K B	AB
C	719	87-010-178-080	CHIP CAP 1000P	AB
C	715	87-010-183-080	C-CAP, S 2700P-50 B	AB
C	716	87-010-183-080	C-CAP, S 2700P-50 B	AB
C	718	87-010-188-080	CAP, CHIP 6800P	AB
C	717	87-010-188-080	CAP, CHIP 6800P	AB
C	711	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	712	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	713	87-010-787-080	CAP, U 0.022-25	AB
C	714	87-010-787-080	CAP, U 0.022-25	AB
C	710	87-010-956-080	CHIP-CAP, S 0.068-25B	AB
C	720	87-010-178-080	CHIP CAP 1000P	AB
C	721	87-010-182-080	C-CAP, S 2200P-50 B	AB
C	722	87-010-182-080	C-CAP, S 2200P-50 B	AB
C	723	87-010-544-080	CAP, ELECT 0.1-50V	AB
C	724	87-010-544-080	CAP, ELECT 0.1-50V	AB
C	731	87-010-112-080	CAP, ELECT 100-16V	AB
C	738	87-010-196-080	CHIP CAPACITOR 0.1-25	AB
C	735	87-010-322-080	C-CAP, S 100P-50 CH	AB
C	736	87-010-322-080	C-CAP, S 100P-50 CH	AB
C	737	87-010-322-080	C-CAP, S 100P-50 CH	AB


ELECTRICAL MAIN PARTS LIST - 5/6 (MX-NM1000/NH1000)

C	730	87-010-404-080	CAP, ELECT 4.7-50V	AB
IC	701	87-A20-869-040	C-IC, M62449FP	AB
C	701	87-010-260-080	CAP, ELECT 47-25V	AB
C	702	87-010-404-080	CAP, ELECT 4.7-50V	AB
C	709	87-012-195-080	C-CAP, U 100P-50CH	AB
C	704	87-012-286-080	CAP, U 0.01-25	AB
C	703	87-012-286-080	CAP, U 0.01-25	AB
C	712	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	711	87-010-263-080	CAP, ELECT 100-10V	AB
C	715	87-010-322-080	C-CAP, S 100P-50 CH	AB
C	715	87-012-195-080	C-CAP, U 100P-50CH	AB
C	714	87-012-286-080	CAP, U 0.01-25	AB
C	719	87-012-286-080	CAP, U 0.01-25	AB
C	717	87-012-286-080	CAP, U 0.01-25	AB
C	713	87-012-286-080	CAP, U 0.01-25	AB
C	727	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	728	87-010-248-080	CAP, ELECT 220-10V	AB
C	721	87-012-176-080	CAP, 15P	AB
C	722	87-012-176-080	CAP, 15P	AB
C	720	87-012-195-080	C-CAP, U 100P-50CH	AB
C	725	87-012-274-080	CHIP CAP, U 1000P-50B	AB
C	723	87-012-274-080	CHIP CAP, U 1000P-50B	AB
CN	601	87-099-028-010	CONN, 11P, 6216 H	AB
D	710	87-A40-470-080	DIODE, 1SS254	AB
D	721	87-A40-234-080	ZENER, MTZJ5.6A	AB
IC	721	86-NFZ-655-010	IC, LC72131D(Z)	AB
X	711	87-A30-196-080	TR, 2SC4115SRS	AB
C	721	87-A70-061-010	VIB, XTAL 4.500MHZ CSA-309	AB
C	758	87-012-167-080	C-CAP, U 5P-50 CH	AB
C	757	87-012-188-080	C-CAP, U 47P-50 CH	AB
C	755	87-012-286-080	CAP, U 0.01-25	AB
C	756	87-012-286-080	CAP, U 0.01-25	AB
C	761	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	769	87-010-260-080	CAP, ELECT 47-25V	AB
C	769	87-010-408-080	CAP, ELECT 47-50V	AB
C	763	87-010-757-080	C-CAP, U 0.047-25F	AB
C	766	87-012-286-080	CAP, U 0.01-25	AB
C	765	87-012-286-080	CAP, U 0.01-25	AB
C	764	87-012-337-080	C-CAP, U 56P-50 CH	AB
C	773	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	774	87-010-263-080	CAP, ELECT 100-10V	AB
C	771	87-010-383-080	CAP, ELECT 33-25V	AB
C	777	87-010-400-080	CAP, ELECT 0.47-50V	AB
C	779	87-010-401-080	CAP, ELECT 1-50V	AB
C	778	87-010-401-080	CAP, ELECT 1-50V	AB
C	775	87-010-404-080	CAP, ELECT 4.7-50V	AB
C	771	87-010-407-080	CAP, ELECT 33-50V	AB
C	772	87-010-757-080	C-CAP, U 0.047-25F	AB
C	770	87-010-829-080	CAP, U 0.047-16	AB
C	776	87-012-286-080	CAP, U 0.01-25	AB
C	780	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	782	87-010-405-080	CAP, ELECT 10-50V	AB
C	781	87-010-405-080	CAP, ELECT 10-50V	AB
C	789	87-012-275-080	C-CAP, U 1200P-50 B	AB
C	787	87-012-280-080	CAP, U 3300P-50	AB
C	788	87-012-280-080	CAP, U 3300P-50	AB
C	784	87-012-286-080	CAP, U 0.01-25	AB
C	783	87-012-286-080	CAP, U 0.01-25	AB
C	796	87-010-403-080	CAP, ELECT 3.3-50V	AB
C	791	87-010-405-080	CAP, ELECT 10-50V	AB
C	794	87-010-406-080	CAP, ELECT 22-50	AB
C	795	87-010-596-080	CAP, S 0.047-16	AB
C	799	87-010-757-080	C-CAP, U 0.047-25F	AB
C	793	87-012-273-080	C-CAP, U 820P-50 B	AB
C	790	87-012-275-080	C-CAP, U 1200P-50 B	AB
C	797	87-012-276-080	CAP, CHIP SS 1500 PBK	AB
C	798	87-012-276-080	CAP, CHIP SS 1500 PBK	AB
C	798	87-012-278-080	C-CAP, U 2200P-50 B	AB
C	797	87-012-278-080	C-CAP, U 2200P-50 B	AB
D	773	87-A40-470-080	DIODE, 1SS254	AB
D	771	87-A40-470-080	DIODE, 1SS254	AB
IC	771	87-A20-438-010	IC, LA1837	AB
IC	771	87-A20-913-010	IC, LA1837NL	AB
L	771	87-A50-266-010	COIL, FM DET-2N(TOK)	AB
L	772	87-A90-052-010	FLTR, CFMT-450A(TOK)	AB
L	772	87-A90-733-010	FLTR, PCFAZH-450 (TOK)	AB
L	781	87-005-847-080	COIL, 2.2UH(CECS)	AB
L	792	87-A50-027-010	COIL, 1 POLE MPX(TOK)	AB
L	791	87-A50-027-010	COIL, 1 POLE MPX(TOK)	AB
L	791	87-A50-209-010	COIL, 1POLE MPX(MIT)	AB
L	792	87-A50-209-010	COIL, 1POLE MPX(MIT)	AB
X	771	87-030-354-010	VIB, CF BFM 450C	AB
	0801	87-033-241-010	TERMINAL, ANT AJ-2039	AB
C	813	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	819	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	818	87-010-197-080	CAP, CHIP 0.01 DM	AB
C	812	87-012-286-080	CAP, U 0.01-25	AB
C	814	87-012-286-080	CAP, U 0.01-25	AB
C	828	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	829	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB
C	820	87-010-260-080	CAP, ELECT 47-25V	AB
C	820	87-010-408-080	CAP, ELECT 47-50V	AB
C	821	87-012-286-080	CAP, U 0.01-25	AB
C	823	87-012-286-080	CAP, U 0.01-25	AB
C	822	87-012-286-080	CAP, U 0.01-25	AB
C	944	87-010-575-080	C-CAP, S 560P-50 UJ	AB


ELECTRICAL MAIN PARTS LIST - 6/6 (MX-NM1000/NH1000)

C	942	87-012-172-080	CAPACITOR CHIP U 10P CH	
C	941	87-012-180-080	C-CAP, U 22P-50 CH	
C	943	87-012-286-080	CAP, U 0.01-25	
C	940	87-012-286-080	CAP, U 0.01-25	
C	945	87-012-286-080	CAP, U 0.01-25	
C	947	87-012-286-080	CAP, U 0.01-25	
C	949	87-A10-039-080	C-CAP, U 470P-50 J CH	
C	959	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB.....
C	956	87-010-263-080	CAP, ELECT 100-10V	
C	957	87-010-311-080	CAP, 12P	
C	954	87-010-400-080	CAP, ELECT 0.47-50V	
C	953	87-012-286-080	CAP, U 0.01-25	
C	952	87-012-286-080	CAP, U 0.01-25	
C	958	87-012-286-080	CAP, U 0.01-25	
C	950	87-A10-913-080	C-CAP, 4700P-50 J CH	
C	960	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB.....
C	962	87-010-401-080	CAP, ELECT 1-50V	
C	961	87-012-170-080	C-CAP, U 8P-50 CH	AB.....
CF	802	82-785-747-010	CF MS2 GHY R	
CF	802	87-008-261-010	FILTER, SFE10.7MA5-A	AB.....
CF	801	87-008-261-010	FILTER, SFE10.7MA5-A	AB.....
CF	801	87-008-423-010	CERAMIC FILTER, SFE10.7	
D	942	87-A40-270-080	C-DIODE, MC2838	
D	941	87-A40-470-080	DIODE, 1SS254	
D	944	87-A40-470-080	DIODE, 1SS254	
FFE	801	A8-6ZA-191-130	6ZA-1 FEENM	
FFE	801	A8-6ZA-195-130	6ZA-1 FEENM	
FFE	801	A8-8ZA-190-030	8ZA-1 FEUNM	
FFE	801	A8-8ZA-191-030	8ZA-1 YFEUNM	AB.....
J	801	87-A60-657-010	TERMINAL, 4P HSP-154V5-02	AB.....
L	832	87-005-847-080	COIL, 2.2UH(CECS)	AB.....
L	943	87-005-372-080	COIL S 1MHM	
L	942	87-A50-019-010	COIL, OSC LW(COI)	
L	941	87-A50-020-010	COIL, ANT LW(COI)	
L	945	87-A50-022-010	COIL, ANT SW(COI)	
L	944	87-A50-159-010	COIL, 10MH K C2B	
L	946	87-A50-173-010	COIL, OSC SW-N(COI)	
L	983	86-NF4-666-010	AM PACK 3(TOK)	
L	981	87-NF4-650-010	COIL, AM PACK 4N(TOK)	AB.....
L	981	87-NF4-651-010	COIL, AM PACK2N(TOM)	
Q	807	87-A30-072-080	C-TR, RT1P 144C	
Q	806	87-A30-072-080	C-TR, RT1P 144C	AB.....
Q	805	89-327-143-080	TR, 2SC2714 (0.1W)	AB.....
Q	941	87-A30-074-080	C-TR, RT1P 141C	
Q	943	87-A30-075-080	C-TR, 2SA1235F	
Q	942	87-A30-075-080	C-TR, 2SA1235F	
Q	945	87-A30-076-080	C-TR, 2SC3052F	
Q	944	87-A30-076-080	C-TR, 2SC3052F	
Q	949	87-A30-076-080	C-TR, 2SC3052F	
Q	948	87-A30-086-070	C-TR, CSD1306E	
Q	946	87-A30-086-070	C-TR, CSD1306E	
Q	947	89-503-602-080	C-FET, 2SK360E	
Q	951	87-A30-074-080	C-TR, RT1P 141C	
Q	952	87-A30-086-070	C-TR, CSD1306E	
Q	950	87-A30-086-070	C-TR, CSD1306E	
TC	943	87-011-164-010	CAPACITOR, TRIMMER 30P	
TC	942	87-011-164-010	CAPACITOR, TRIMMER 30P	
TC	941	87-011-173-010	CERAMIC TRIMMER 20P	
C	952	87-010-263-080	CAP, ELECT 100-10V	AB.....
C	953	87-010-380-080	CAP, ELECT 47-16V	AB.....
C	951	87-010-401-080	CAP, ELECT 1-50V	AB.....
D	952	87-A40-470-080	DIODE, 1SS254	AB.....
D	951	87-A40-470-080	DIODE, 1SS254	AB.....
Q	952	87-026-609-080	TR, KTA1266GR	AB.....
Q	951	87-A30-076-080	C-TR, 2SC3052F	AB.....


SCHEMATIC DIAGRAM – 1 (MX-NM1000/NH1000: MAIN)

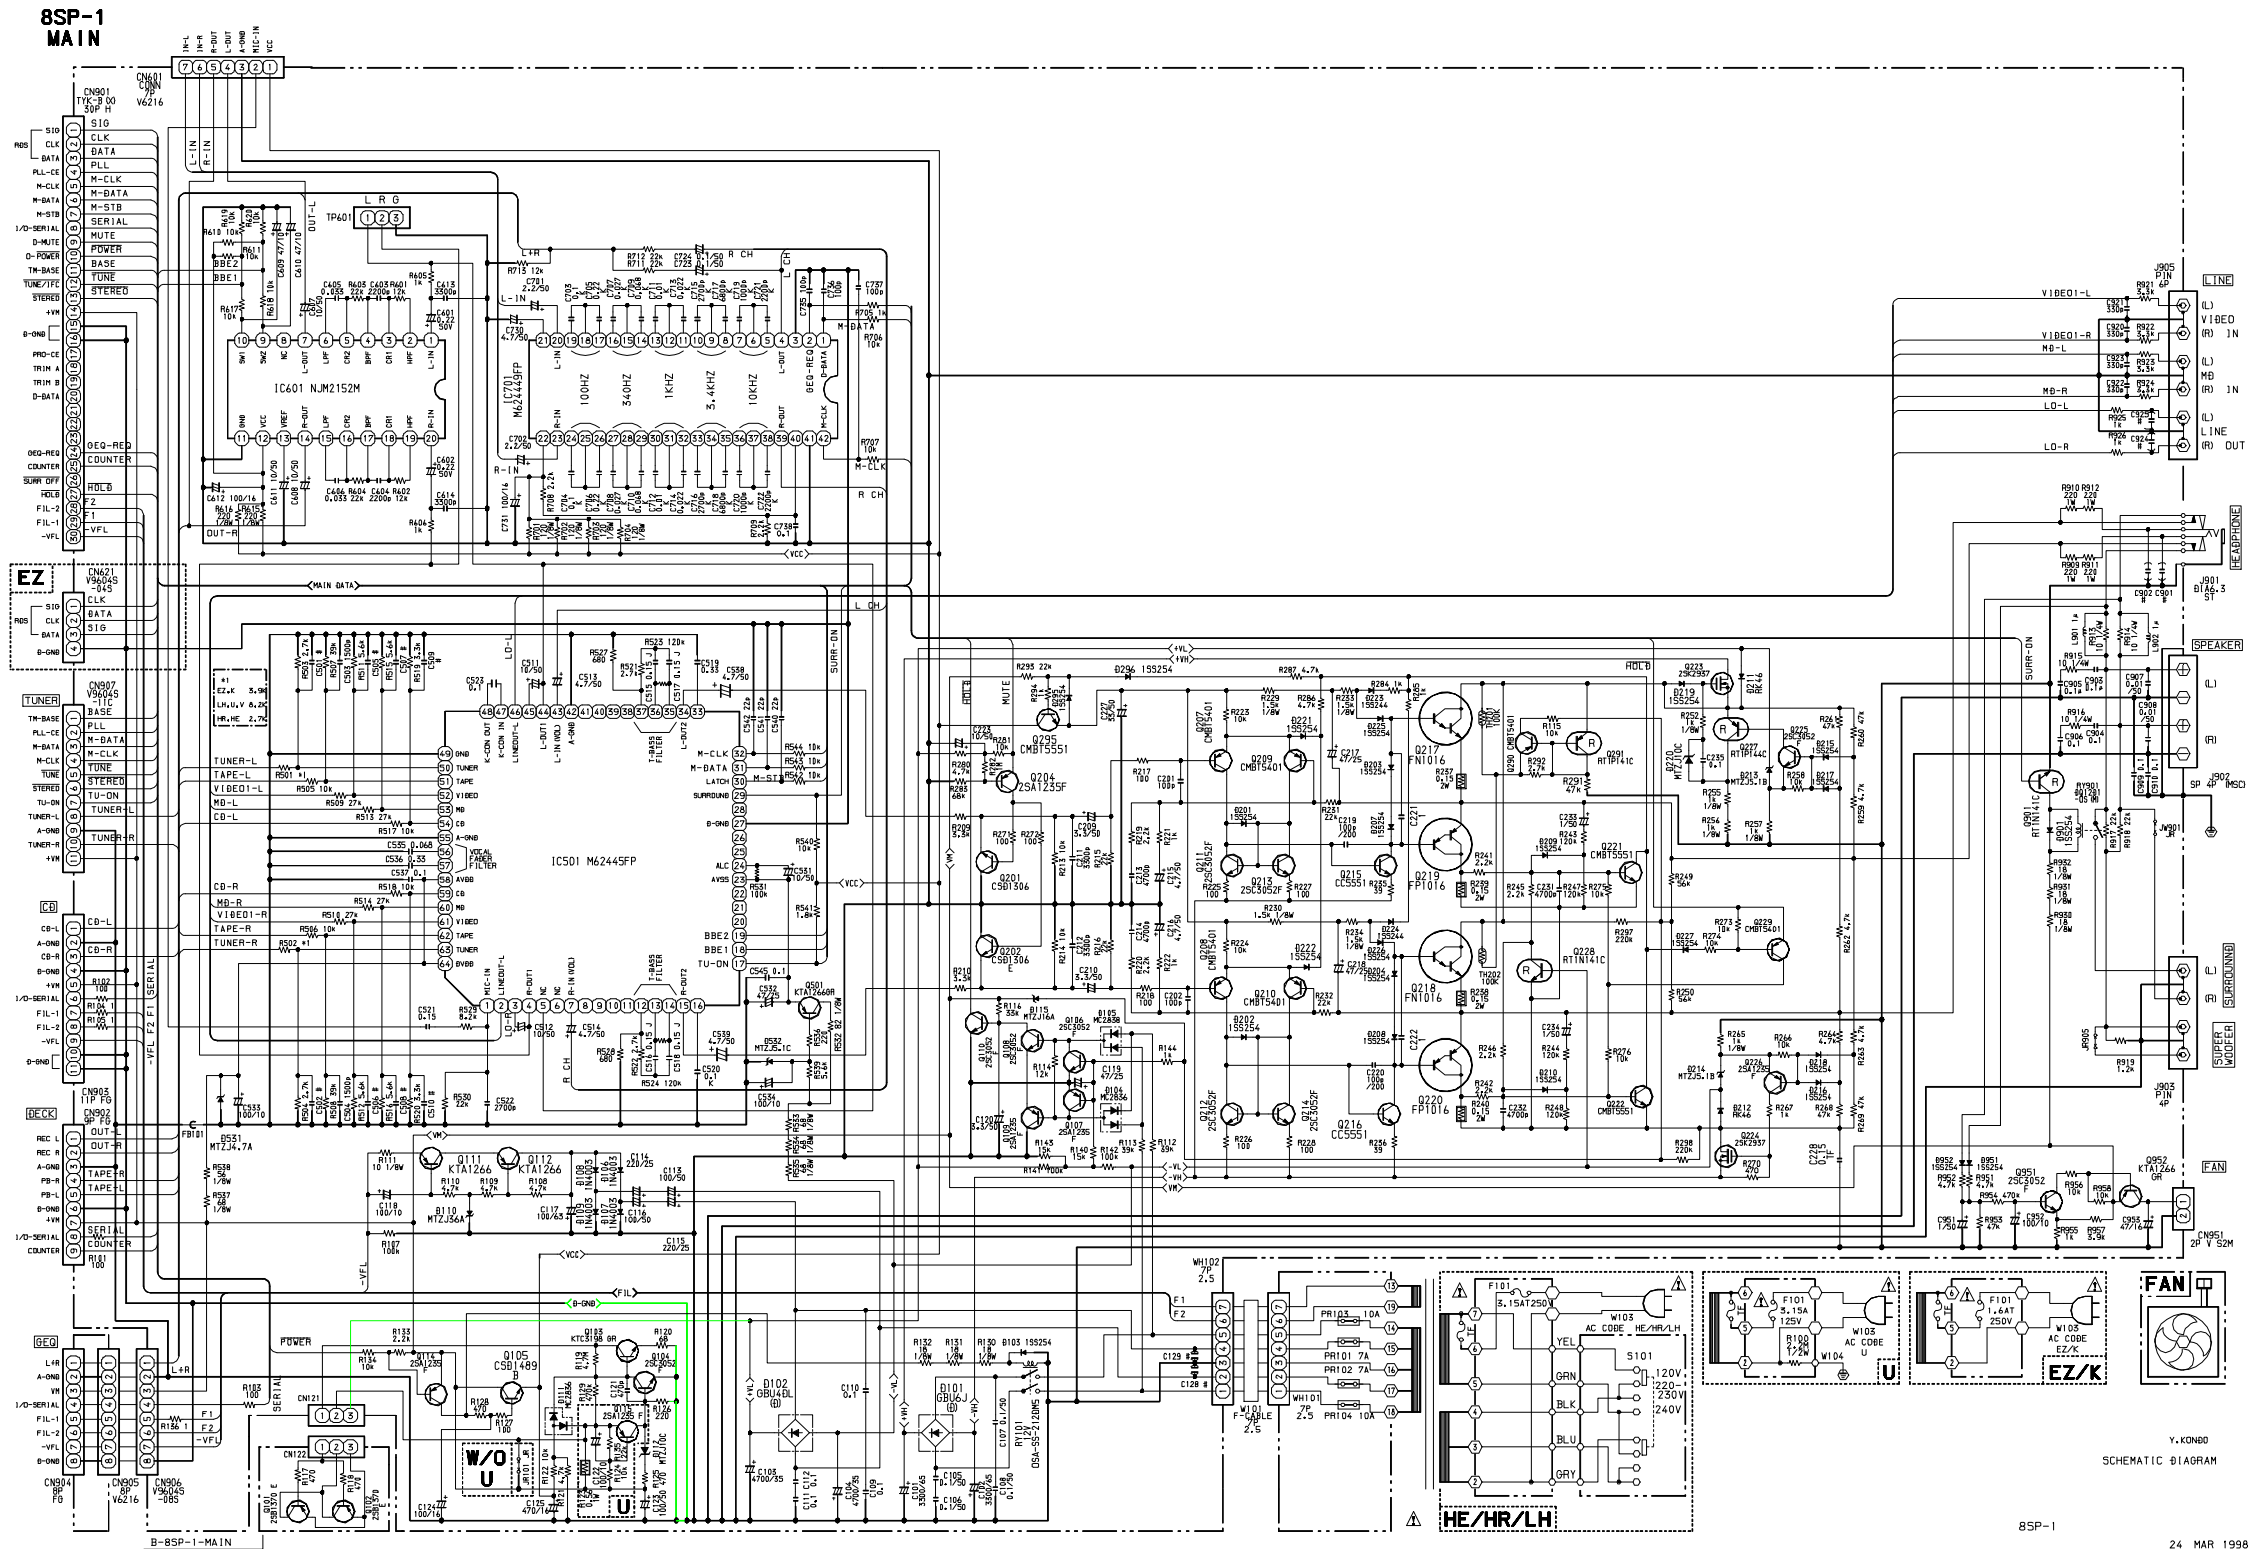

SCHEMATIC DIAGRAM – 2 (MX-NM1000/NH1000: FRONT)

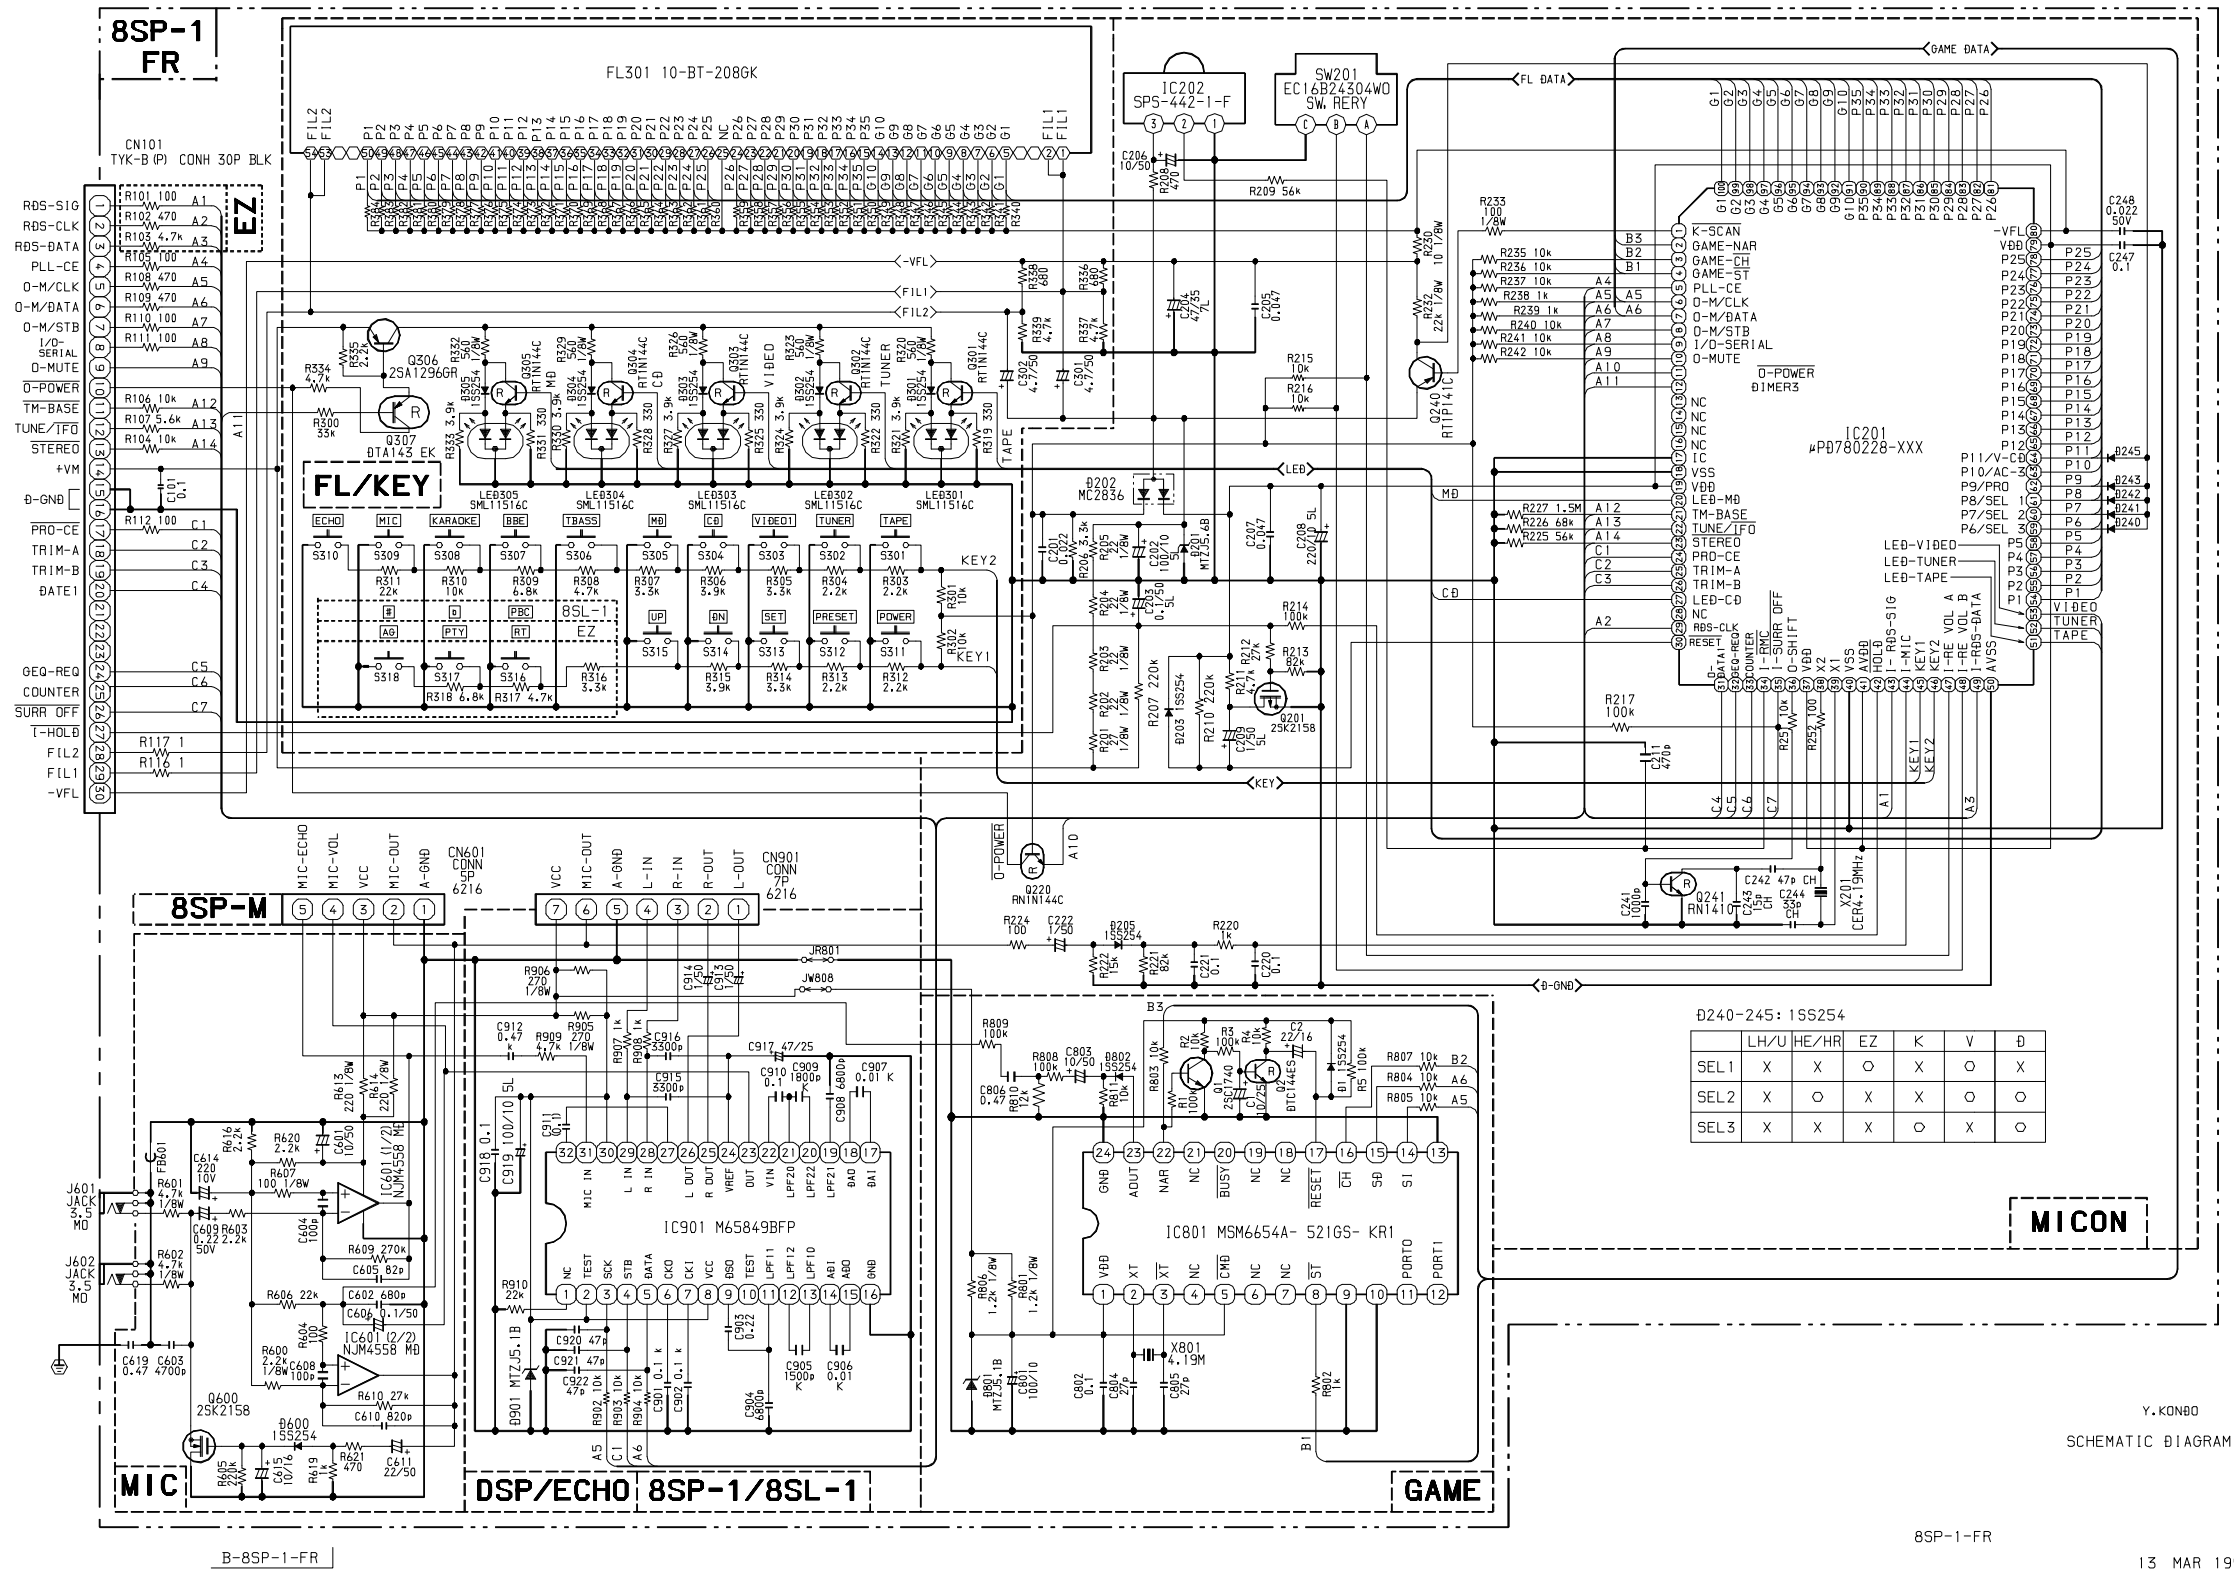


SCHEMATIC DIAGRAM – 3 (MX-NM1000/NH1000: TUNER)

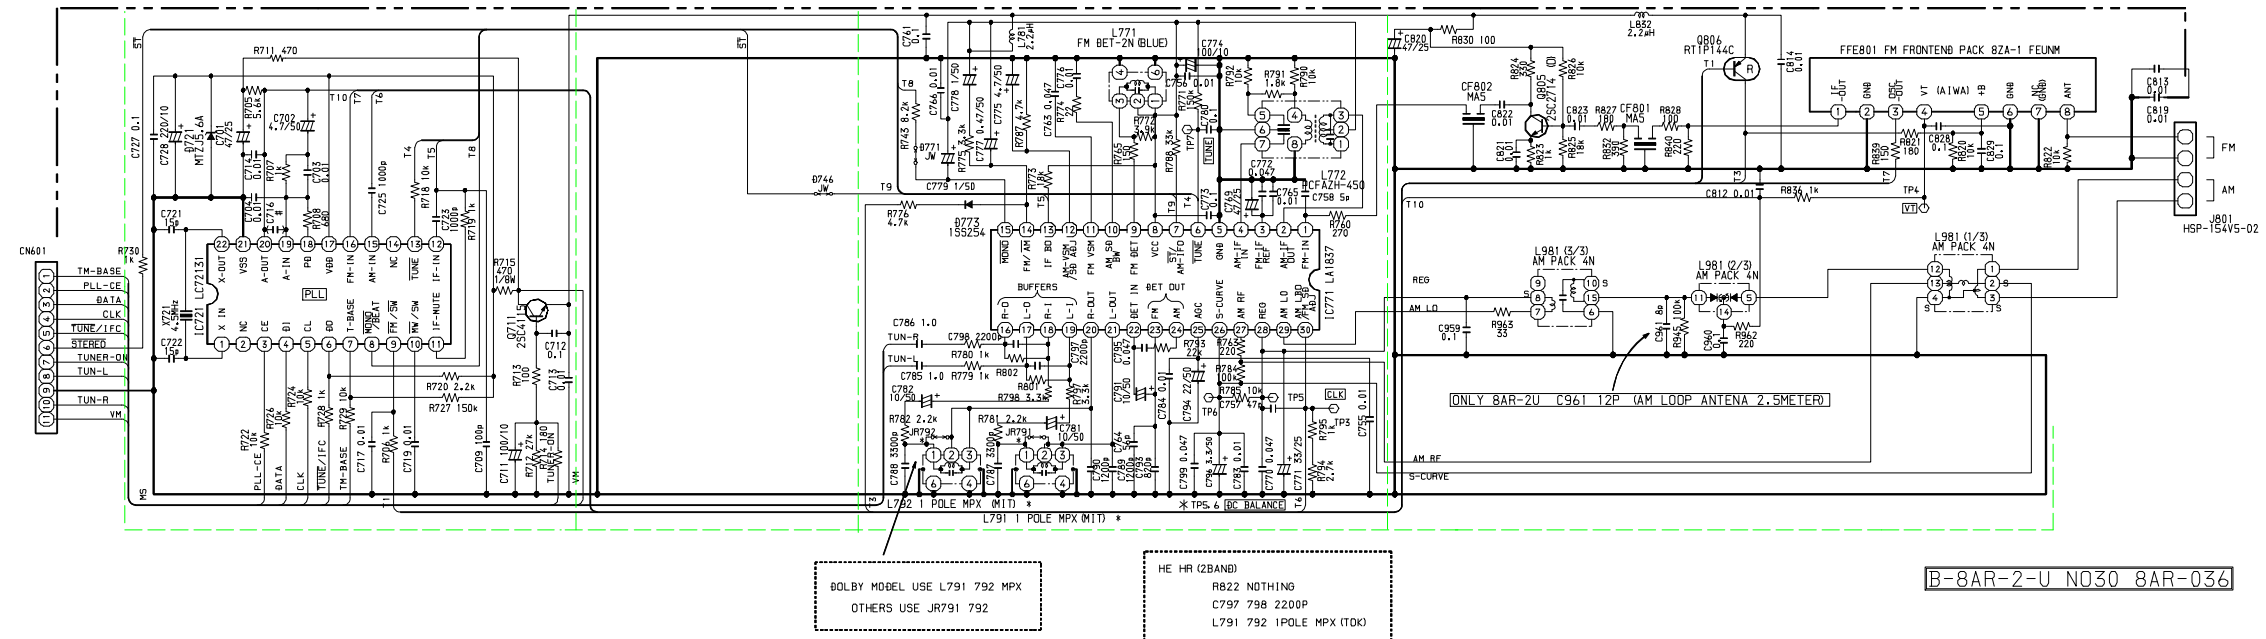

B-8AR-2-U

SCHEMATIC DIAGRAM – 4 (MX-NM1000/NH1000: TUNER FRONT END)

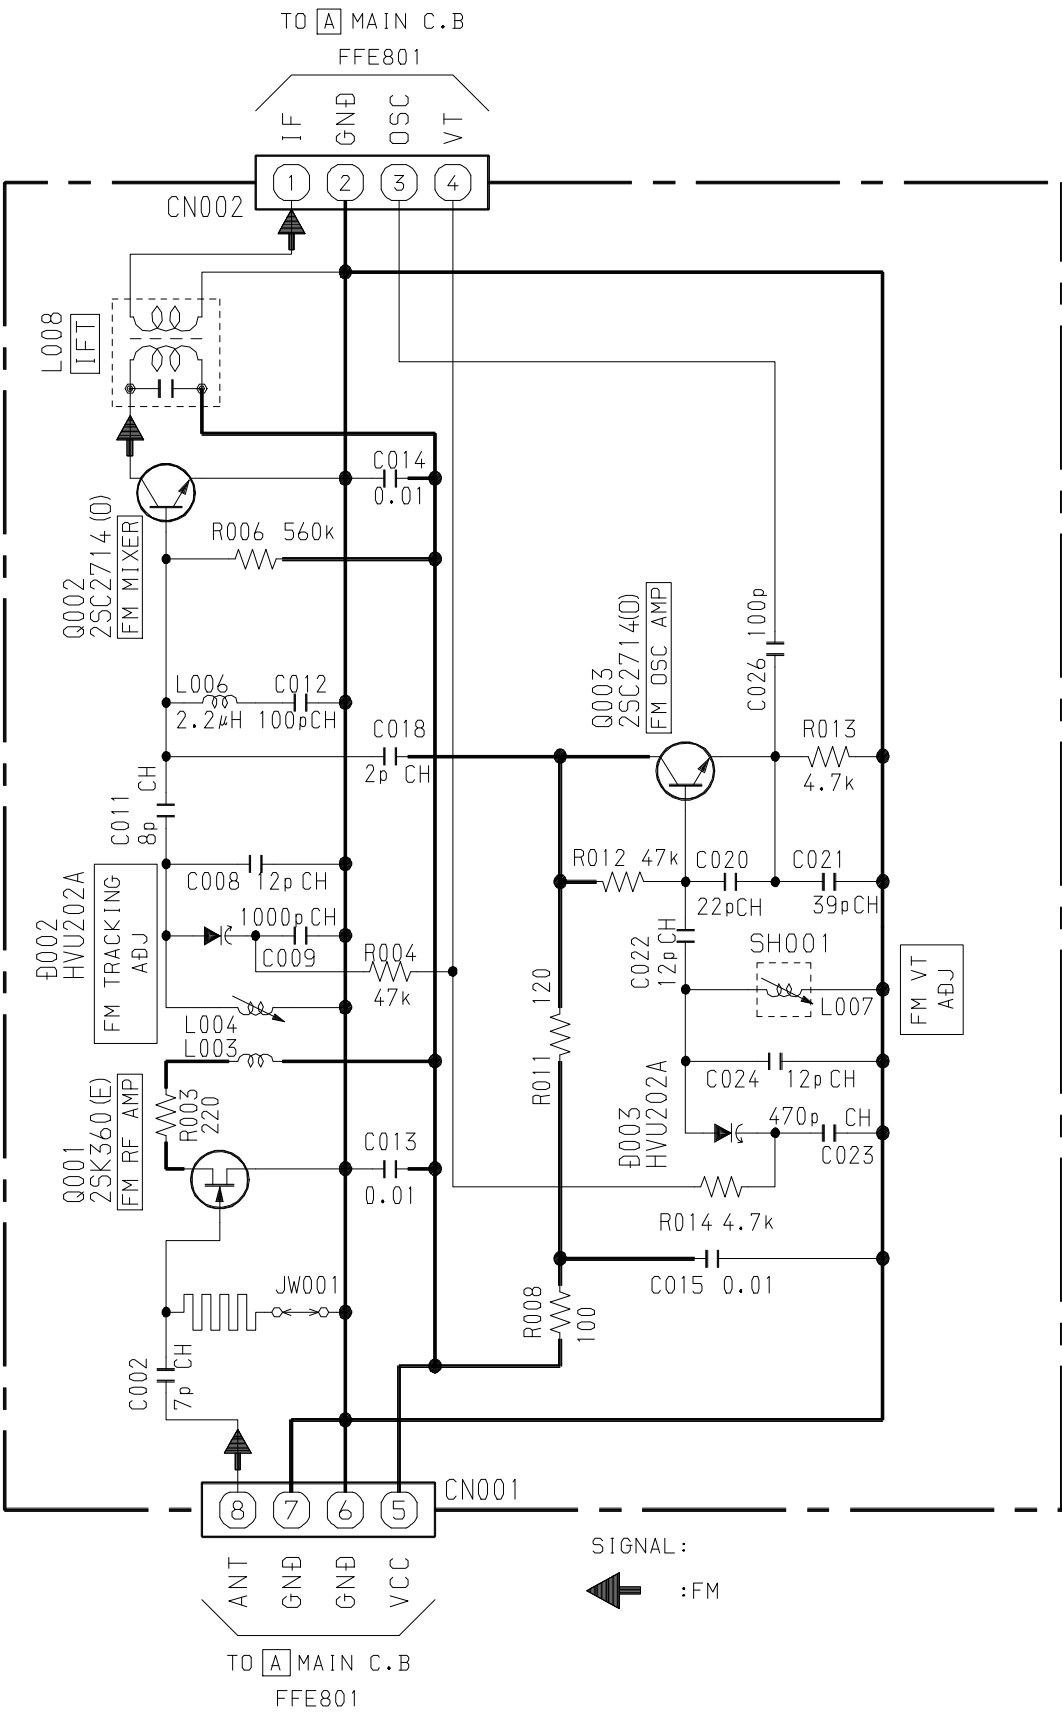

MECHANICAL PART LIST - 1 (MX-NM1000/NH1000)

NOTE: The characters in the suffix column indicate the part usage.

UXX.....A.....
LHXX.....B.....

REF.NO	PARTS NO.	DESCRIPTION	SUFFIX	
	87-B00-002-010	BADGE, AIWA 30 ABS SIL	AB.....	
	88-SP1-001-010	CABI, FR	.B.....	
	88-SP1-002-010	CABI, STEEL	AB.....	
	88-SP1-003-010	PANEL, REAR USNM		
	88-SP1-017-010	CABI, FR U	A.....	
	88-SP1-021-010	PANEL, REAR HEJSNM		
	88-SP1-023-010	PANEL, REAR LHSNM		
	88-SP1-024-010	PANEL, REAR KSNM		
	88-SP1-030-010	PANEL, REAR USN	A.....	
	88-SP1-033-010	PANEL, REAR LHSN	.B.....	
	88-SP1-034-010	PANEL, REAR KSN		
	88-SU1-014-010	RING, FOOT	AB.....	
	88-SP1-005-010	KEY, FUN	AB.....	
	88-SP1-006-010	KEY, POWER	AB.....	
	88-SP1-007-010	KEY, BBE	AB.....	
	88-SP1-008-010	KEY, KARAOKE	AB.....	
	88-SP1-010-010	KNOB, RTRY VOL	AB.....	
	88-SP1-011-010	RING, VOL	AB.....	
	88-SP1-012-010	KEY, TUNING	AB.....	
	88-SP1-014-010	REFLECTOR, FUN	AB.....	
	88-SP1-015-010	KEY, ASSY FUN	AB.....	
	88-SP1-016-010	LENS, SENSOR		
	88-SP1-004-010	WINDOW, DISPLAY	AB.....	
	88-SP1-031-010	LBL, CPA		
	87-085-213-010	FOOT, H12.5	AB.....	
	88-AR1-203-010	HLDR, TU	AB.....	
	88-SP1-202-010	HT-SINK, ASSY	AB.....	
	88-SP1-208-010	COVER, FAN	AB.....	
	87-067-641-010	UTT2+3-8(W/O SLOT)BL	AB.....	
	87-067-688-010	BVTT+3-6	AB.....	
	87-067-703-010	TAPPING SCREW, BVT2+3-10	AB.....	
	87-067-822-010	BVT2+3-20 W/O SLOT	AB.....	
	87-078-019-010	S-SCREW, IT+4-6	AB.....	
	87-591-094-410	TAPPING SCREW, QIT+3-6	AB.....	
	87-591-095-410	TAPPING SCREW, QIT+3-8 (GLD)	AB.....	
	87-085-185-010	BUSHING, AC CORD (E)	.B.....	
	87-085-189-010	BUSHING, CORD (U)	A.....	
	88-907-281-110	FF-CABLE, 7P 1.25	AB.....	
	88-908-071-110	FF-CABLE, 8P 1.25 70MM	AB.....	
	88-911-121-110	FF-CABLE, 11P 1.25	AB.....	
0103	87-050-079-010	AC-CORD ASSY, E	.B.....	
0103	87-A80-007-110	AC CORD ASSY, K BLK		
0101	87-A90-796-010	FAN, F614R-12MC-15-300MM	AB.....	
F	101	87-035-364-010	FUSE, 1.6A 250V	
F	101	87-035-367-010	FUSE, 3.15A 250V	.B.....
F	101	87-035-488-010	FUSE, 3.15A 125V D UL	A.....
PT	101	88-SP1-601-010	PT, U	A.....
PT	101	88-SP1-602-010	PT, HE	
PT	101	88-SP1-603-010	PT, LH	.B.....
PT	101	88-SP1-606-010	PT, K	
W	103	87-050-053-010	AC CORD ASSY, U-2	A.....
W	0	88-SP1-625-010	WIRE ASSY, 1P (GRN)	.B.....
W	0	88-SP1-626-010	WIRE ASSY, 1P (YEL)	.B.....
W	0	88-SP1-627-010	WIRE ASSY, 1P (BLU)	.B.....
W	0	88-SP1-628-010	WIRE ASSY, 1P (BLK)	.B.....
W	0	88-SP1-629-010	WIRE ASSY, 1P (WHT)	.B.....
W	101	85-NF5-628-010	F-CABLE 7P-2.5	AB.....
		88-SP1-211-010	GUIDE, FUN	AB.....
		88-SX1-203-010	GUIDE, FL	AB.....


ELECTRICAL MAIN PARTS LIST - 1 (DX-NM1000/NH1000)

NOTE: The characters in the suffix column indicate the part usage.

YUXX.....A.....
 YLXX.....B.....

REF.NO	PARTS NO.	DESCRIPTION	SUFFIX
	88-SX1-202-010	GUIDE, LED OPE	AB.....
CN 101	87-099-194-010	CONN, 6P 6216V	AB.....
LED 105	87-A40-521-040	LED, SEL6513C TP5 PGRN	AB.....
LED 106	87-A40-521-040	LED, SEL6513C TP5 PGRN	AB.....
LED 101	87-A40-521-040	LED, SEL6513C TP5 PGRN	AB.....
LED 104	87-A40-521-040	LED, SEL6513C TP5 PGRN	AB.....
LED 103	87-A40-521-040	LED, SEL6513C TP5 PGRN	AB.....
LED 102	87-A40-521-040	LED, SEL6513C TP5 PGRN	AB.....
S 102	87-A90-809-080	SW, TACT TSTA-2	AB.....
S 104	87-A90-809-080	SW, TACT TSTA-2	AB.....
S 103	87-A90-809-080	SW, TACT TSTA-2	AB.....
S 101	87-A90-809-080	SW, TACT TSTA-2	AB.....
S 105	87-A90-809-080	SW, TACT TSTA-2	AB.....
	88-SX1-203-010	GUIDE, FL	AB.....
	88-SX1-610-010	CORD, FG 11P	AB.....
C 5	87-010-190-080	S CHIP F 0.01	AB.....
C 6	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB.....
C 7	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB.....
C 4	87-010-197-080	CAP, CHIP 0.01 DM	AB.....
C 1	87-010-263-040	CAP, E 100-10	AB.....
C 8	87-010-312-080	C-CAP, S 15P-50 CH	AB.....
C 9	87-010-320-080	CHIP CAP 68P	AB.....
C 2	87-010-494-040	CAP, E 1-50 GAS	AB.....
C 3	87-010-496-040	CAP, E 3.3-50 GAS	AB.....
C 12	87-010-197-080	CAP, CHIP 0.01 DM	AB.....
C 13	87-010-246-040	CAP, E 47-35 SME	AB.....
C 10	87-010-316-080	C-CAP, S 33P-50 CH	AB.....
C 11	87-018-134-080	CAPACITOR, TC-U 0.01-16	AB.....
C 251	87-010-178-080	CHIP CAP 1000P	AB.....
C 255	87-010-178-080	CHIP CAP 1000P	AB.....
C 256	87-010-178-080	CHIP CAP 1000P	AB.....
C 253	87-010-178-080	CHIP CAP 1000P	AB.....
C 252	87-010-178-080	CHIP CAP 1000P	AB.....
C 254	87-010-178-080	CHIP CAP 1000P	AB.....
C 257	87-010-196-080	CHIP CAPACITOR, 0.1-25	AB.....
CN 3	87-099-194-010	CONN, 6P 6216V	AB.....
CN 303	87-099-015-010	CONN, 13P 6216V	AB.....
CN 302	87-099-194-010	CONN, 6P 6216V	AB.....
D 2	87-070-136-080	ZENER, MTZJ5.1B	AB.....
D 1	87-A40-470-080	DIODE, 1SS254	AB.....
FB 304	87-008-474-080	F-BEAD, EMI BL02RN1	AB.....
FB 306	87-008-474-080	F-BEAD, EMI BL02RN1	AB.....
FB 307	87-008-474-080	F-BEAD, EMI BL02RN1	AB.....
FB 303	87-008-474-080	F-BEAD, EMI BL02RN1	AB.....
FB 305	87-008-474-080	F-BEAD, EMI BL02RN1	AB.....
FB 302	87-008-474-080	F-BEAD, EMI BL02RN1	AB.....
FB 301	87-008-474-080	F-BEAD, EMI BL02RN1	AB.....
FL 201	88-SX1-609-010	FL, 6-BT-293GK	AB.....
IC 1	88-SX1-606-010	IC, UPD78045H-XXXX	AB.....
L 3	87-005-152-080	COIL, 10UH	AB.....
L 2	87-005-152-080	COIL, 10UH	AB.....
L 1	87-005-152-080	COIL, 10UH	AB.....
L 5	87-005-152-080	COIL, 10UH	AB.....
L 301	87-005-152-080	COIL, 10UH	AB.....
LED 203	87-A40-446-040	LED, SLP-7131F-81H-S-T1 P-GRN	AB.....
LED 202	87-A40-446-040	LED, SLP-7131F-81H-S-T1 P-GRN	AB.....
LED 201	87-A40-446-040	LED, SLP-7131F-81H-S-T1 P-GRN	AB.....
LED 204	87-A40-446-040	LED, SLP-7131F-81H-S-T1 P-GRN	AB.....
Q 2	87-026-263-080	C-TR, RN1410	AB.....
Q 3	87-A30-074-080	C-TR, RT1P 141C	AB.....
Q 1	89-324-123-080	C-TR, 2SC2412K S	AB.....
Q 302	87-A30-076-080	C-TR, 2SC3052F	AB.....
Q 301	87-A30-076-080	C-TR, 2SC3052F	AB.....
S 201	87-A90-809-080	SW, TACT TSTA-2	AB.....
S 202	87-A90-809-080	SW, TACT TSTA-2	AB.....
S 203	87-A90-809-080	SW, TACT TSTA-2	AB.....
S 204	87-A90-809-080	SW, TACT TSTA-2	AB.....
X 1	87-A70-075-080	VIB, CER 4.19MHZ CRHF	AB.....

SCHEMATIC DIAGRAM – 1 (DX-NM1000/NH1000: MAIN / FRONT / KEY)

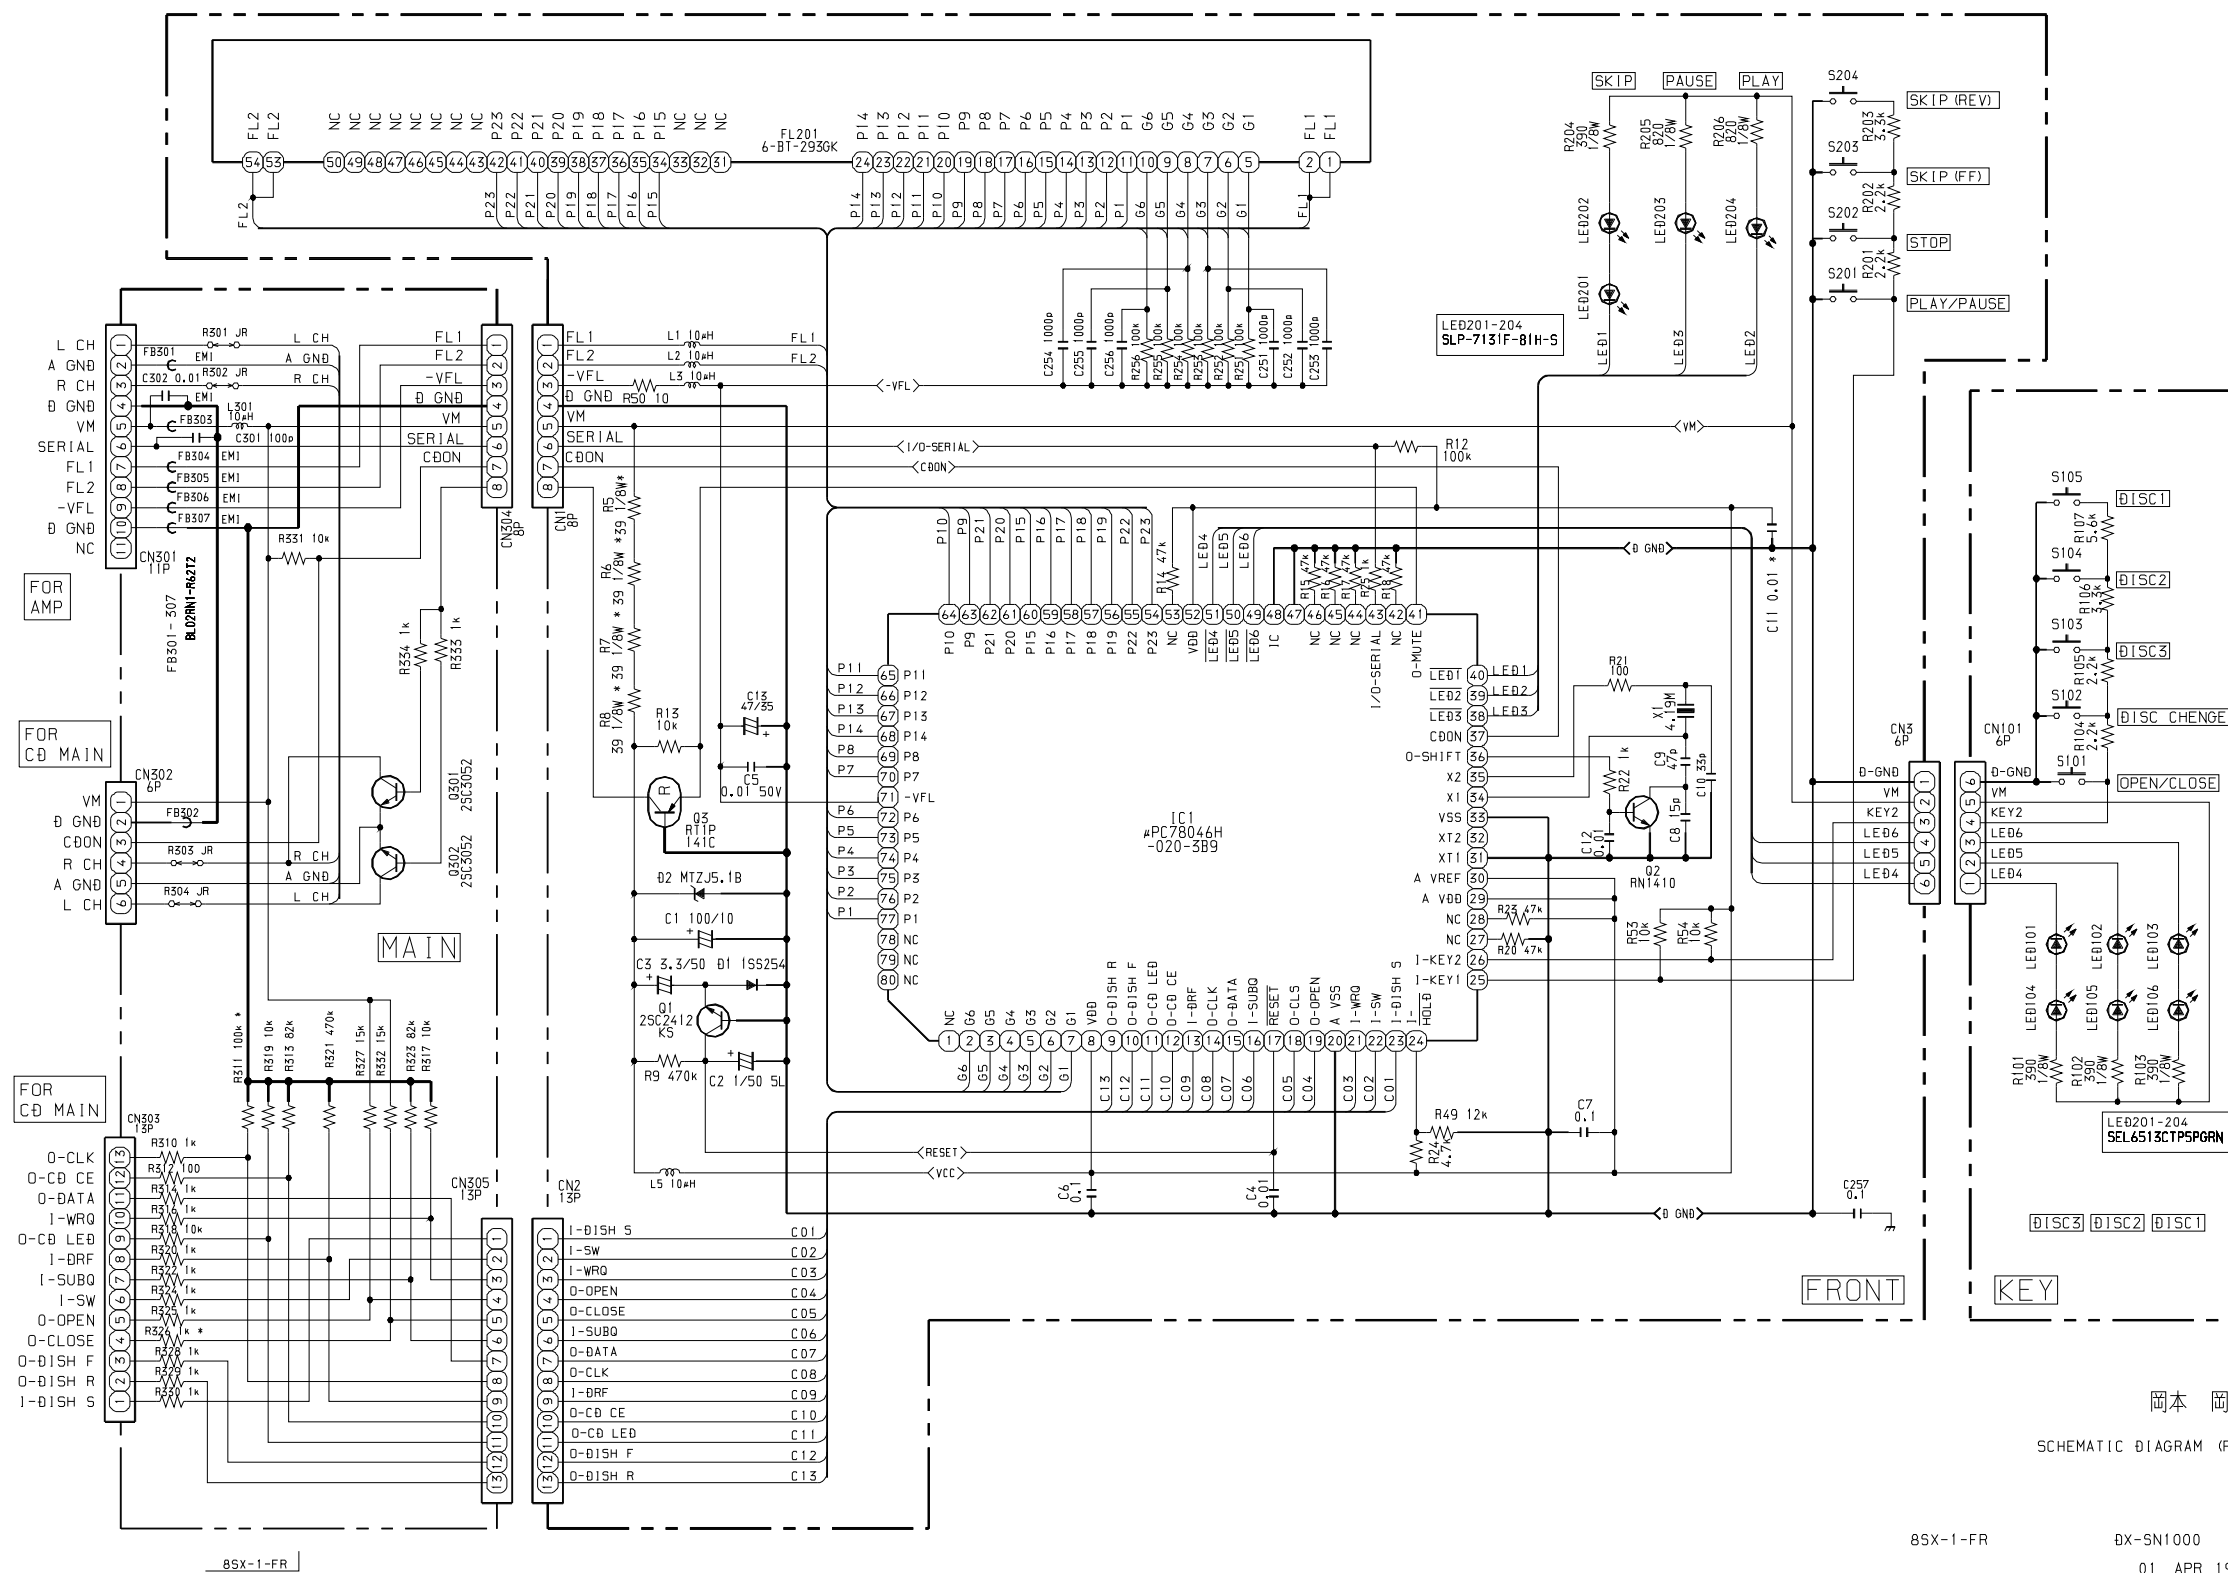

岡本 岡本

SCHEMATIC DIAGRAM (FR)

8SX-1-FR

BX-SN1000

01 APR 1998

MECHANICAL PARTS LIST - 1 (DX-NM1000/NH1000)

NOTE: The characters in the suffix column indicate the part usage.

YUXX.....A.....
 YLXX.....B.....

REF.NO	PARTS NO.	DESCRIPTION	SUFFIX
	87-B00-002-010	BADGE, AIWA 30 ABS SIL	AB.....
	88-SU1-014-010	RING, FOOT	AB.....
	88-SX1-001-010	CABI, FR	.B.....
	88-SX1-002-010	CABI, STEEL	AB.....
	88-SX1-016-010	CABI, REAR YSNM	
	88-SX1-017-010	CABI, REAR YJSNM	
	88-SX1-018-010	CABI, REAR YUSNM	
	88-SX1-019-010	CABI, FR U	A.....
	88-SX1-020-010	CABI, REAR YLSNM	
	88-SX1-021-010	CABI, REAR YS	
	88-SX1-022-010	CABI, REAR YLSN	.B.....
	88-SX1-023-010	CABI, REAR YUSN	A.....
	88-SX1-024-010	CABI, REAR YSN	
	88-SX1-005-010	KEY, OPEN	AB.....
	88-SX1-006-010	KEY, OPE	AB.....
	88-SX1-007-010	BTN, DISC 1	AB.....
	88-SX1-008-010	BTN, DISC 2	AB.....
	88-SX1-009-010	BTN, DISC 3	AB.....
	88-SX1-010-010	KEY, ASSY DISC	AB.....
	88-SX1-012-010	REFLECTOR, PLAY	AB.....
	88-SX1-013-010	REFLECTOR, FF	AB.....
	88-SX1-014-010	REFLECTOR, REW	AB.....
	88-SX1-015-010	KEY, ASSY OPE	AB.....
	88-SX1-201-010	GUIDE, LED DISC	AB.....
	86-NF6-007-010	WINDOW, TOP	.B.....
	86-NF6-101-010	WINDOW, TOP UL	A.....
	88-SX1-003-010	PANEL, TRAY	AB.....
	88-SX1-004-010	WINDOW, DISPLAY	AB.....
	84-ZG1-245-210	CAP, OPTICAL	AB.....
	87-067-703-010	TAPPING SCREW, BVT2+3-10	AB.....
	87-591-094-410	TAPPING SCREW, QIT+3-6	AB.....
	88-906-201-110	FF-CABLE, 6P 1.25	AB.....
	88-906-481-110	FF-CABLE, 6P 1.25 480MM	AB.....
	88-913-121-110	FF-CABLE, P1.25	AB.....
	88-SX1-202-010	GUIDE, LED OPE	AB.....
	88-SX1-203-010	GUIDE, FL	AB.....
	88-SX1-610-010	CORD, FG 11P	AB.....

0003
 W 2
 W 1

ELECTRICAL MAIN PARTS LIST - 1/2 (FX-NM1000/NH1000)

NOTE: The characters in the suffix column indicate the part usage.


MUSNXX.....A.....
 SLSNXX.....B.....

REF.NO	PARTS NO.	DESCRIPTION	SUFFIX
	88-SW1-201-010	GUIDE, LED OPE	AB.....
D	702	LED, SEL 6215S RED	AB.....
D	712	LED, SLP7118C-51-S-T1	AB.....
D	711	LED, SLP7118C-51-S-T1	AB.....
D	713	LED, SLP7118C-51-S-T1	AB.....
S	701	SW, TACT TSTA-2	AB.....
S	704	SW, TACT TSTA-2	AB.....
S	703	SW, TACT TSTA-2	AB.....
S	702	SW, TACT TSTA-2	AB.....
S	714	SW, TACT TSTA-2	AB.....
S	711	SW, TACT TSTA-2	AB.....
S	715	SW, TACT TSTA-2	AB.....
S	712	SW, TACT TSTA-2	AB.....
S	713	SW, TACT TSTA-2	AB.....
C	603	CAP, ELECT 220-16	AB.....
C	609	CHIP CAPACITOR, 0.1-25	AB.....
C	605	CAP, CHIP 0.022	AB.....
C	604	CAP, ELECT 1000-16V	AB.....
C	607	CAP, ELECT 100-10V	AB.....
C	602	CAP, ELECT 330-16V	AB.....
C	606	CAP, ELECT 0.33-50V	AB.....
C	601	CAP, ELECT 2200UF-16V	AB.....
C	614	CAP, CHIP 0.01 DM	AB.....
C	611	C-CAP, S 15P-50 CH	AB.....
C	612	C-CAP, S 33P-50 CH	AB.....
C	610	CHIP CAP 68P	AB.....
C	613	CAP, ELECT 4.7-50V	AB.....
D	603	ZENER, MTZJ5.6B	AB.....
D	602	ZENER, MTZJ5.6B	AB.....
D	604	DIODE, 1SS254	AB.....
FB	301	FILTER, EMI BL OIRNI	AB.....
FB	603	FILTER, EMI BL OIRNI	AB.....
FB	602	FILTER, EMI BL OIRNI	AB.....
FB	601	FILTER, EMI BL OIRNI	AB.....
IC	601	IC, M38503M2	AB.....
L	601	COIL, 10UH	AB.....
L	603	COIL, 10UH	AB.....
Q	603	C-TR, RN1410	AB.....
Q	609	C-TR, RT1N 144C	AB.....
Q	605	C-TR, RT1N 141C	AB.....
Q	604	C-TR, RT1N 141C	AB.....
Q	606	C-TR, RT1P 141C	AB.....
Q	608	C-TR, 2SC3052F	AB.....
Q	607	C-TR, 2SC3052F	AB.....
Q	602	TR, 2SC1815 (0.4W)	AB.....
Q	601	TR, 2SC1815 (0.4W)	AB.....
Q	610	C-TR, 2SC3052F	AB.....
W	601	CORD, FG9P	AB.....
X	601	VIB, 8.00MHZ	AB.....
C	307	CHIP CAPACITOR, 0.1-25	AB.....
C	302	C-CAP, S 47P-50 CH	AB.....
C	301	C-CAP, S 47P-50 CH	AB.....
C	306	CAP, CHIP S 270P CH	AB.....
C	305	CAP, CHIP S 270P CH	AB.....
C	303	C-CAP, S 330P-50 CH	AB.....
C	304	C-CAP, S 330P-50 CH	AB.....
C	316	CHIP CAP 1000P	AB.....
C	315	CHIP CAP 1000P	AB.....
C	314	C-CER 1500P	AB.....
C	313	C-CER 1500P	AB.....
C	311	CAP, CHIP 0.022	AB.....
C	312	CAP, CHIP 0.022	AB.....
C	319	CHIP-CAPACITOR, 0.22-16F	AB.....
C	317	CAP, S 0.33-16	AB.....
C	318	CAP, S 0.33-16	AB.....
C	324	CAP, ELECT 47-25V	AB.....
C	325	CAP, E 330-6.3 SME	AB.....
C	328	CAP, ELECT 4.7-50V	AB.....
C	327	CAP, ELECT 4.7-50V	AB.....
C	322	CHIP-CAPACITOR, 0.22-16F	AB.....
C	321	CHIP-CAPACITOR, 0.22-16F	AB.....
C	320	CHIP-CAPACITOR, 0.22-16F	AB.....
C	339	CHIP CAPACITOR, 0.1-25	AB.....
C	337	CHIP CAPACITOR, 0.1-25	AB.....
C	332	CHIP CAPACITOR, 0.1-25	AB.....
C	335	CAP, ELECT 1-50V	AB.....
C	336	CAP, ELECT 1-50V	AB.....
C	340	CHIP CAPACITOR, 0.1-25	AB.....
C	359	C-CAP, S 2700P-50 B	AB.....
C	358	C-CAP, S 2700P-50 B	AB.....
C	357	CAP, CHIP 0.01 DM	AB.....
C	356	CAP, ELECT 47-25V	AB.....
C	351	CAP 470P	AB.....
C	352	CAP 470P	AB.....
C	360	C-CAP, S 2700P-50 B	AB.....

ELECTRICAL MAIN PARTS LIST - 2/2 (FX-NM1000/NH1000)

C	371	87-010-179-080	CAP,CHIP S B1200P	AB.....
C	373	87-010-179-080	CAP,CHIP S B1200P	AB.....
C	372	87-010-179-080	CAP,CHIP S B1200P	AB.....
C	374	87-010-179-080	CAP,CHIP S B1200P	AB.....
C	378	87-010-196-080	CHIP CAPACITOR,0.1-25	AB.....
C	370	87-010-196-080	CHIP CAPACITOR,0.1-25	AB.....
C	376	87-010-545-080	CAP, ELECT 0.22-50V	AB.....
C	375	87-010-545-080	CAP, ELECT 0.22-50V	AB.....
C	388	87-010-154-080	CAP,CHIP 10P	AB.....
C	385	87-010-184-080	CHIP CAPACITOR 3300P(K)	AB.....
C	386	87-010-196-080	CHIP CAPACITOR,0.1-25	AB.....
C	381	87-010-197-080	CAP, CHIP 0.01 DM	AB.....
C	383	87-010-197-080	CAP, CHIP 0.01 DM	AB.....
C	382	87-010-318-080	C-CAP, S 47P-50 CH	AB.....
C	384	87-010-402-080	CAP, ELECT 2.2-50V	AB.....
D	352	87-A40-269-080	C-DIODE, MC2836	AB.....
D	351	87-A40-470-080	DIODE, 1SS254	AB.....
IC	302	87-A20-355-010	IC, CXA1553P	AB.....
IC	301	87-A20-455-010	IC, HA12211	AB.....
L	302	87-A50-049-010	COIL, TRAP 85K(COI)	AB.....
L	301	87-A50-049-010	COIL, TRAP 85K(COI)	AB.....
L	351	87-007-342-010	COIL, OSC 85K BIAS	AB.....
Q	358	87-026-610-080	TR, KTC3198GR	AB.....
Q	357	87-026-610-080	TR, KTC3198GR	AB.....
Q	359	87-026-610-080	TR, KTC3198GR	AB.....
Q	355	87-A30-074-080	C-TR, RT1P 141C	AB.....
Q	354	87-A30-087-080	C-FET, 2SK2158	AB.....
Q	353	87-A30-087-080	C-FET, 2SK2158	AB.....
Q	351	87-A30-087-080	C-FET, 2SK2158	AB.....
Q	360	87-A30-073-080	C-TR, RT1N 141C	AB.....
Q	382	87-A30-076-080	C-TR, 2SC3052F	AB.....
Q	381	87-A30-076-080	C-TR, 2SC3052F	AB.....
SFR	302	87-A90-636-080	SFR, 33K H RH0638C LG	AB.....
SFR	303	87-A90-636-080	SFR, 33K H RH0638C LG	AB.....
SFR	301	87-A90-636-080	SFR, 33K H RH0638C LG	AB.....
SFR	304	87-A90-636-080	SFR, 33K H RH0638C LG	AB.....
SFR	306	87-A90-637-080	SFR, 47K H RH0638C LG	AB.....
SFR	305	87-A90-637-080	SFR, 47K H RH0638C LG	AB.....
SFR	351	87-A90-637-080	SFR, 47K H RH0638C LG	AB.....
SFR	352	87-A90-637-080	SFR, 47K H RH0638C LG	AB.....
D	501	87-A40-269-080	C-DIODE, MC2836	AB.....
Q	506	87-A30-073-080	C-TR, RT1N 141C	AB.....
Q	504	87-A30-073-080	C-TR, RT1N 141C	AB.....
Q	502	87-A30-085-070	C-TR, CSA1362GR	AB.....
Q	503	87-A30-085-070	C-TR, CSA1362GR	AB.....
Q	501	89-112-965-080	TR, 2SA1296 (0.75W)	AB.....

SCHEMATIC DIAGRAM – 1 (FX-NM1000/NH1000: MAIN / FRONT)

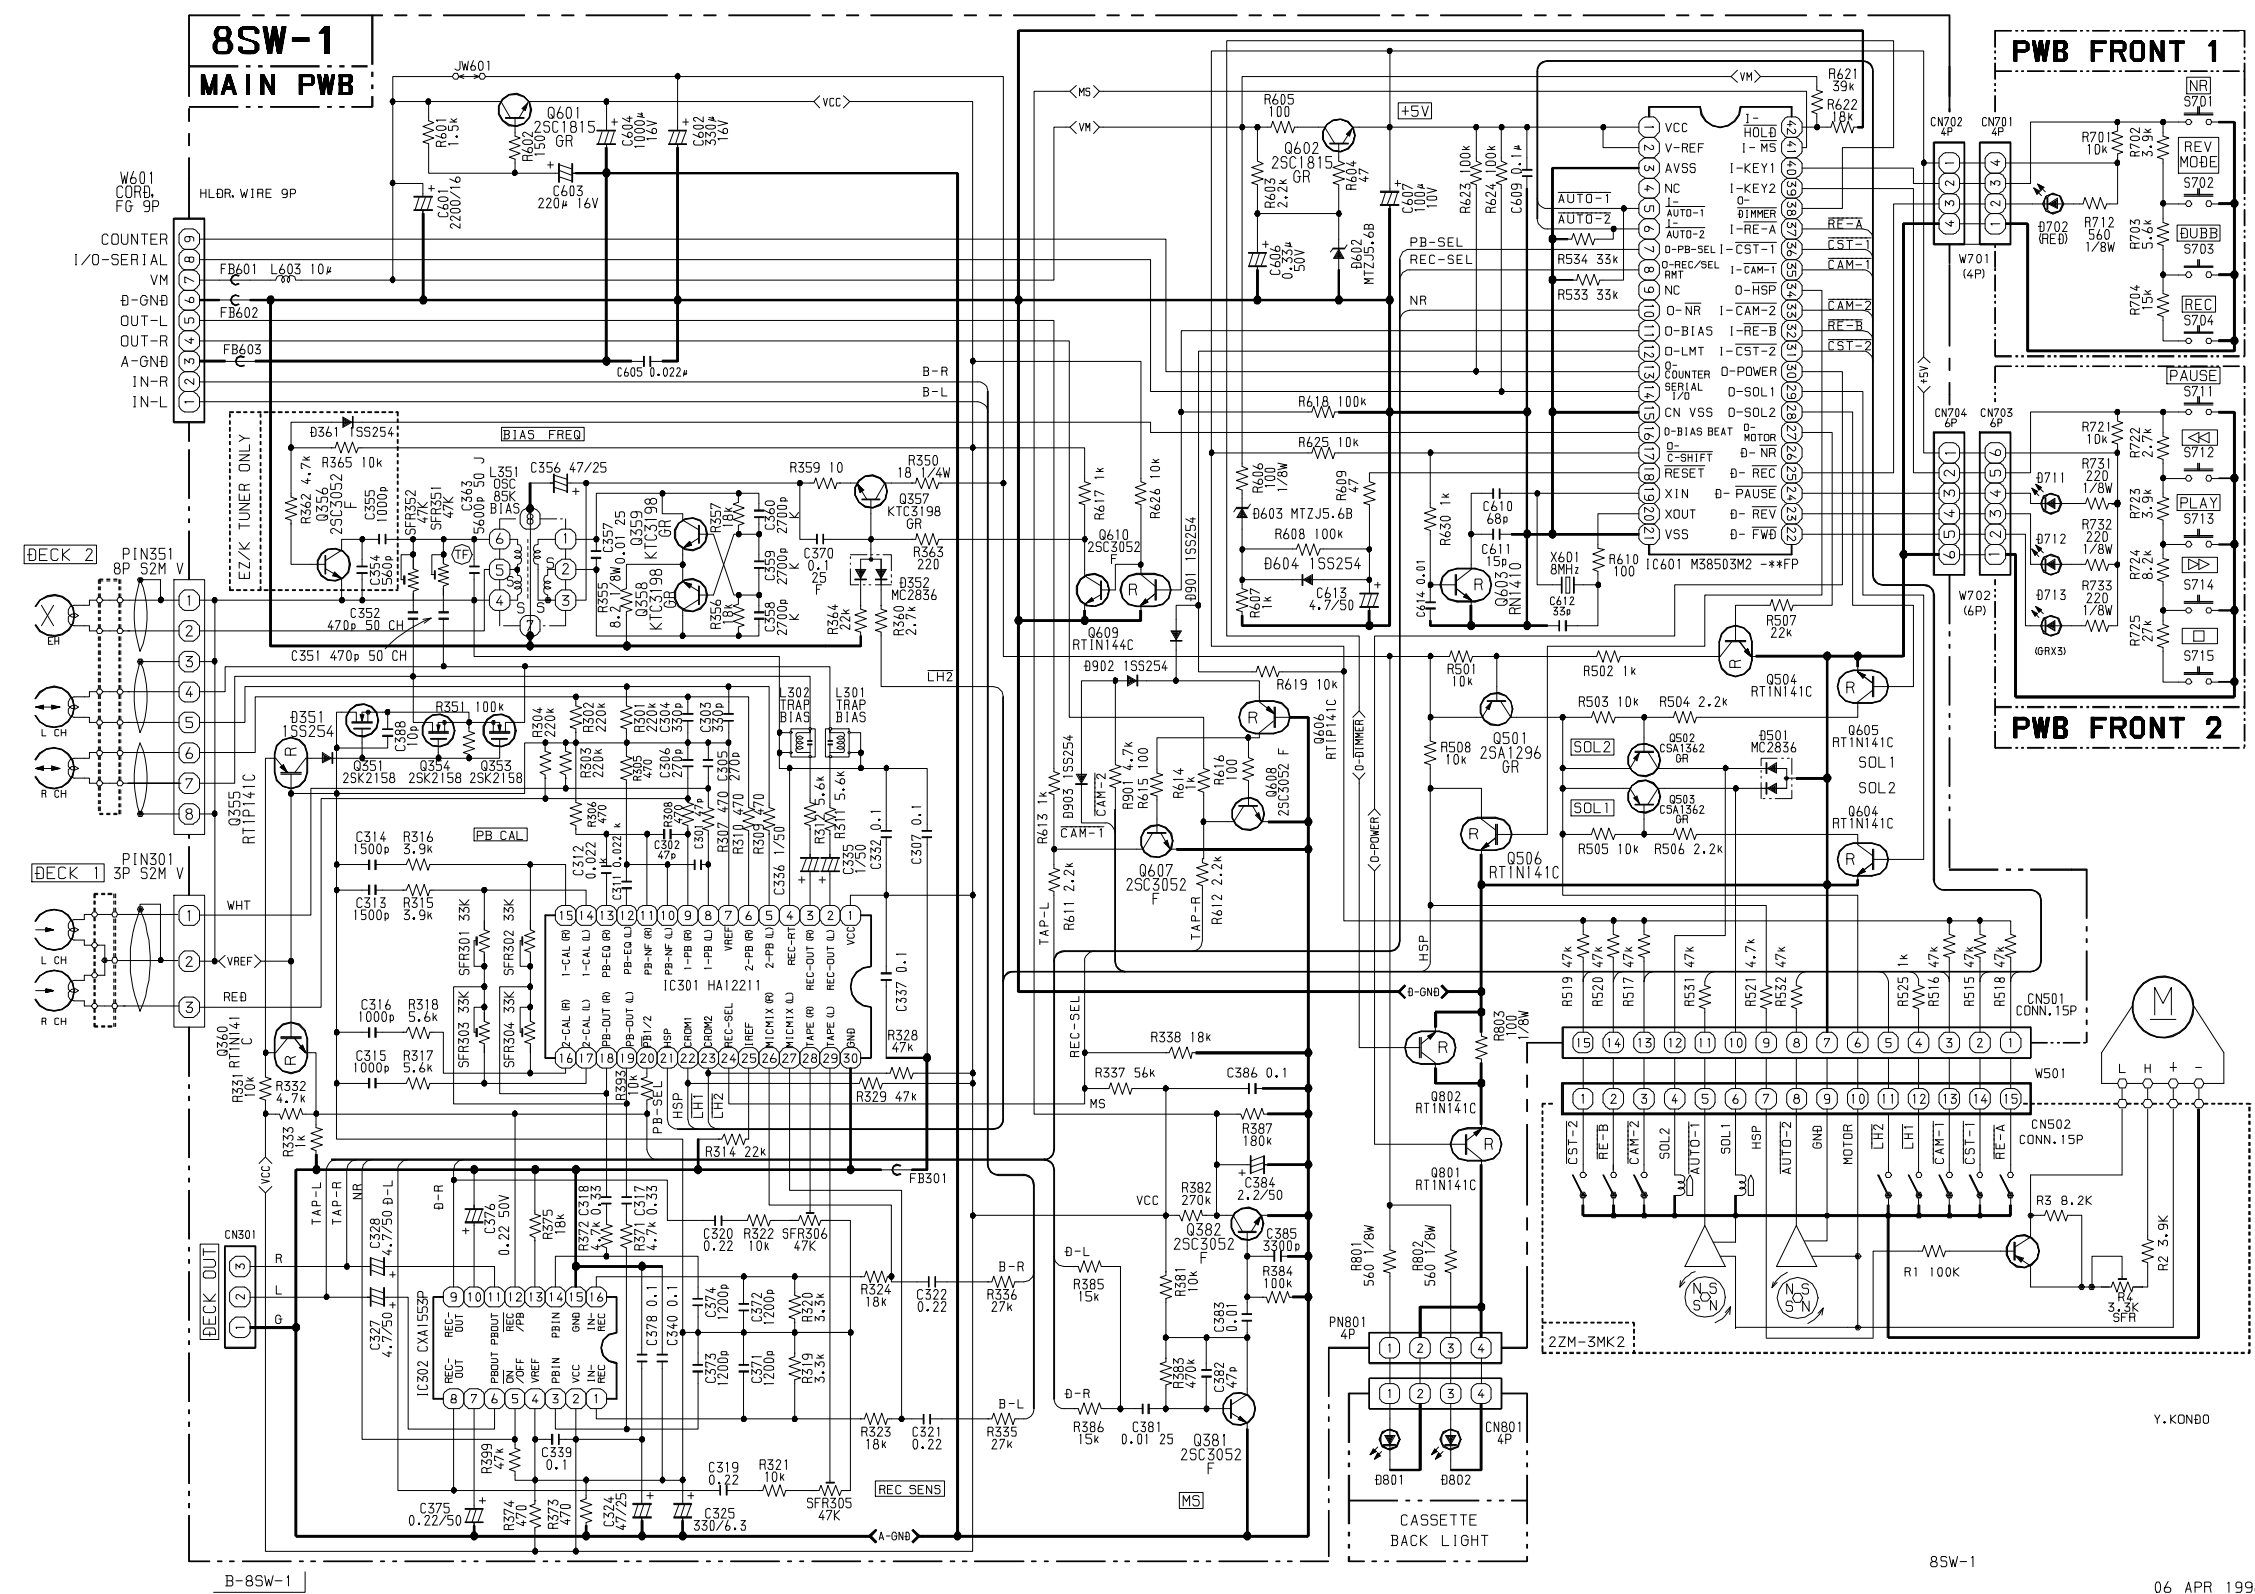

Y.KON80

8SW-1

06 APR 1998

MECHANICAL PARTS LIST - 1 (FX-NM1000/NH1000)

NOTE: The characters in the suffix column indicate the part usage.

MUSNXX.....A.....
SLSNXX.....B.....

REF.NO	PARTS NO.	DESCRIPTION	SUFFIX	
	87-B00-002-010	BADGE, AIWA 30 ABS SIL	AB.....	
	88-SU1-014-010	RING, FOOT	AB.....	
	88-SW1-001-010	CABI, FR	.B.....	
	88-SW1-002-010	CABI, STEEL	AB.....	
	88-SW1-003-010	BOX, CASS 1	.B.....	
	88-SW1-004-010	BOX, CASS 2	AB.....	
	88-SW1-007-010	CABI, REAR YSNM		
	88-SW1-016-010	CABI, REAR YJSNM		
	88-SW1-017-010	CABI, REAR YUSNM		
	88-SW1-018-010	CABI, FR U	A.....	
	88-SW1-021-010	CABI, REAR YLSNM		
	88-SW1-022-010	BOX, CASS 1 U	A.....	
	88-SW1-023-010	CABI, REAR YS	.B.....	
	88-SW1-024-010	CABI, REAR YLSN	.B.....	
	88-SW1-025-010	CABI, REAR YUSN	A.....	
	88-SW1-026-010	CABI, REAR YSN		
	88-SW1-008-010	KEY, OPE	AB.....	
	88-SW1-009-010	KEY, REC	AB.....	
	88-SW1-010-010	REFLECTOR, PLAY	AB.....	
	88-SW1-012-010	REFLECTOR, PAUSE	AB.....	
	88-SW1-013-010	REFLECTOR, REC	AB.....	
	88-SW1-014-010	KEY, ASSY OPE	AB.....	
	88-SW1-015-010	KEY, ASSY REC	AB.....	
	81-532-080-010	LABEL, CASS. COMPT	AB.....	
	88-SW1-005-010	WINDOW, CASS 1	AB.....	
	88-SW1-006-010	WINDOW, CASS 2	AB.....	
	88-SW1-019-010	PLATE, CASS 1	AB.....	
	88-SW1-020-010	PLATE, CASS 2	AB.....	
	86-NF5-618-110	CONN ASSY, 8P RPB	AB.....	
	82-NF5-218-010	SPR-T, EJECT 1 (SIN)	AB.....	
	82-NF5-219-010	SPR-T, EJECT 2 (SIN)	AB.....	
	82-NF5-229-010	PLATE, LOCK	AB.....	
	86-NF9-224-010	SPR-C, LOCK	AB.....	
	87-NF4-216-010	HLDR, LOCK 1	AB.....	
	87-NF4-217-010	HLDR, LOCK 2	AB.....	
	87-NF8-220-010	DMPR, 150	AB.....	
	87-067-641-010	UTT2+3-8(W/O SLOT)BL	AB.....	
	87-067-703-010	TAPPING SCREW, BVT2+3-10	AB.....	
W	501	88-915-161-110	FF-CABLE, 15P 1.25	AB.....
W	701	88-904-331-110	FF-CABLE, 4P 1.25 330MM	AB.....
W	702	88-906-301-110	FF-CABLE, 6P-1.25	AB.....
		88-SW1-201-010	GUIDE, LED OPE	AB.....
W	601	88-SW1-607-010	CORD, FG9P	AB.....

TAPE MECHANISM PARTS LIST - 1 (FX-NM1000/NH1000)

REF.NO.	PARTNO.	KANRI NO	DESCRIPTION	REF.NO.	PARTNO.	KANRI NO	DESCRIPTION
1	82-ZM3-301-519		CHAS ASSY, M2	36	82-ZM1-236-019		CAPSTAN N 2-41.5
2	82-ZM1-258-110		SPR-T, PINCH L	37	82-ZM1-239-019		CAPSTAN N 2.2-41.7
3	82-ZM1-341-110		LVR ASSY, PINCH L2	38	82-ZM1-322-019		SPR-T, FR60
4	82-ZM1-333-010		PLATE, LINK 2	39	82-ZM1-220-219		GEAR, IDLER
5	82-ZM1-266-11K		LVR, DIR	40	82-ZM3-616-019		RING MAGNET 4
6	82-ZM1-214-010		SPR-T, DIR	41	82-ZM1-216-31K		GEAR, REEL
7	82-ZM1-206-81K		CHAS, HEAD	42	87-A90-319-010		HEAD, PH HADKH2 FPC
8	82-ZM3-307-019		CUSH-G, DIA3.7-8-3.2	42	87-A90-320-010		HEAD, RPH HADKH5 FPC
9	82-ZM1-269-219		SPR-T, BRG	43	82-ZM1-225-21K		GEAR, FR
10	82-ZM1-219-119		SPR-T, LINK	44	82-ZM1-226-019		GEAR, REW
11	82-ZM1-210-119		GEAR, H T	45	82-ZM3-333-310		SLIP DISK ASSY 2
12	82-ZM1-213-019		SPR-T, HEAD	46	82-ZM1-338-010		BELT FR4
13	82-ZM1-207-619		GUIDE, TAPE	47	82-ZM1-349-110		FLY-WHL, R W(DECK 2)
14	86-ZM4-206-010		S-SCREW, AZIMUTH	47	82-ZM3-338-110		FLY-WHL, R3 W(DECK 1)
15	82-ZM1-314-119		PLATE, HEAD	48	82-ZM1-348-010		FLY-WHL, L W(DECK 2)
16	82-ZM1-208-119		HLDR, HEAD	48	82-ZM1-348-010		FLY-WHL, L W(DECK 1)
17	82-ZM1-218-019		SPR-E, HB	49	82-ZM3-329-210		BELT, SBU R2
18	82-ZM1-263-110		LVR, EJECT L (DECK 1)	50	82-ZM1-245-210		HLDR, IC
18	82-ZM1-264-010		LVR, EJECT R (DECK 2)	51	87-045-347-019		MOT, SHU2L 70(M1)
19	82-ZM1-222-21K		LVR, PLAY	52	82-ZM3-221-010		PULLEY, MOT 2M
20	82-ZM1-217-319		REEL TABLE	53	82-ZM1-288-019		SH, 1.63-3.2-0.5 SLT
21	82-ZM1-244-510		SPR-C, BT	54	80-ZM6-243-019		SH, 1.75-3.6-0.5 SLT
22	82-ZM1-285-310		SPR-C, BT L	55	82-ZM3-335-210		PULLEY, COUPLER M3(DECK 1)
23	82-ZM1-257-019		SPR-T, CAS	56	82-ZM3-337-010		BELT, SBU MOT 2
24	82-ZM1-241-319		LVR, MC	57	82-ZM3-339-010		SHAFT, COUPLER N3(DECK 1)
25	82-ZM1-242-019		LVR, CAS	58	86-ZM1-206-010		BELT, MAIN L
26	82-ZM1-243-019		LVR, STOP	59	82-ZM3-340-010		SH, BELT D2
27	82-ZM1-344-110		LVR ASSY, PINCH R2	A	85-ZM3-202-010		S-SCREW, TG
28	82-ZM1-259-110		SPR-T, PINCH R	B	80-ZM6-207-019		V+1.6-7
29	82-ZM1-240-11K		LVR, REC (DECK 2)	C	82-ZM3-318-019		S-SCRW MOTOR M2
31	82-ZM1-255-319		SPR-E, LVR DIR	D	87-B10-043-010		W-P, 0.99-4-0.25 SLT
32	82-ZM3-305-01K		GEAR, CAM M2	E	82-ZM3-334-010		PW, 2.16-6-0.4
33	82-ZM1-227-21K		LVR, TRIG				
34	82-ZM3-306-11K		LVR, FR M2				
35	82-ZM1-265-119		SPR-E, TRIG				


ELECTRICAL MAIN PARTS LIST - 1 (GE-NM1000/NH1000)

NOTE: The characters in the suffix column indicate the part usage.

MUSNXX.....A.....
 SLSNXX.....B.....

REF.NO	PARTS NO.	DESCRIPTION	SUFFIX
C	301	87-010-196-080	CHIP CAPACITOR, 0.1-25
S	301	87-A90-095-080	SW, TACT EVQ11G04M
S	308	87-A90-095-080	SW, TACT EVQ11G04M
S	302	87-A90-095-080	SW, TACT EVQ11G04M
S	309	87-A90-095-080	SW, TACT EVQ11G04M
S	304	87-A90-095-080	SW, TACT EVQ11G04M
S	305	87-A90-095-080	SW, TACT EVQ11G04M
S	307	87-A90-095-080	SW, TACT EVQ11G04M
S	306	87-A90-095-080	SW, TACT EVQ11G04M
S	303	87-A90-792-010	SW, RTRY EC12E12244
S	310	87-A90-095-080	SW, TACT EVQ11G04M
S	311	87-A90-095-080	SW, TACT EVQ11G04M
S	312	87-A90-095-080	SW, TACT EVQ11G04M
C	108	87-010-196-080	CHIP CAPACITOR, 0.1-25
C	109	87-010-196-080	CHIP CAPACITOR, 0.1-25
C	105	87-010-312-080	C-CAP, S 15P-50 CH
C	107	87-010-316-080	C-CAP, S 33P-50 CH
C	106	87-010-320-080	CHIP CAP 68P
C	103	87-010-497-040	CAP, E 4.7-35 GAS
C	101	87-010-550-040	CAP, E 100-6.3 GAS
C	110	87-012-368-080	C-CAP, S 0.1-50 F
C	120	87-010-196-080	CHIP CAPACITOR, 0.1-25
D	101	87-070-136-080	ZENER, MTZJ5.1B
D	102	87-A40-337-080	ZENER, MTZJ 6.8B
D	103	87-A40-470-080	DIODE, 1SS254
FB	101	87-008-372-080	FILTER, EMI BL OIRNI
IC	101	88-SU1-603-010	IC, LC866448W-
L	102	87-005-130-080	COIL, 10UH
L	103	87-005-130-080	COIL, 10UH
L	101	87-005-152-080	COIL, 10UH
L	104	87-005-152-080	COIL, 10UH
Q	101	87-026-263-080	C-TR, RN1410
W	101	88-SU1-608-010	CORD, FG 8P
X	101	87-A70-070-080	VIB, CER 5.76MHZ CRHF
		88-SU1-201-010	GUIDE, FL
C	203	87-010-497-040	CAP, E 4.7-35 GAS
C	204	87-012-369-080	C-CAP, S 0.047-50F
FL	201	88-SU1-605-010	FL, BJ624GK
LED	203	87-017-350-080	LED, SEL1550CM
LED	206	87-017-350-080	LED, SEL1550CM
LED	207	87-017-350-080	LED, SEL1550CM
LED	201	87-017-350-080	LED, SEL1550CM
LED	208	87-017-350-080	LED, SEL1550CM
LED	205	87-017-350-080	LED, SEL1550CM
LED	204	87-017-350-080	LED, SEL1550CM
LED	202	87-017-350-080	LED, SEL1550CM
LED	209	87-017-350-080	LED, SEL1550CM
LED	212	87-017-350-080	LED, SEL1550CM
LED	211	87-017-350-080	LED, SEL1550CM
LED	210	87-017-350-080	LED, SEL1550CM
C	403	87-010-196-080	CHIP CAPACITOR, 0.1-25
C	405	87-010-196-080	CHIP CAPACITOR, 0.1-25
C	402	87-010-196-080	CHIP CAPACITOR, 0.1-25
C	404	87-010-196-080	CHIP CAPACITOR, 0.1-25
C	401	87-010-196-080	CHIP CAPACITOR, 0.1-25
C	406	87-010-196-080	CHIP CAPACITOR, 0.1-25
C	407	87-012-158-080	C-CAP, S 390P-50 CH
IC	401	87-A20-083-010	IC, BA3835S

SCHEMATIC DIAGRAM – 1 (GE-NM1000/NH1000: MAIN)

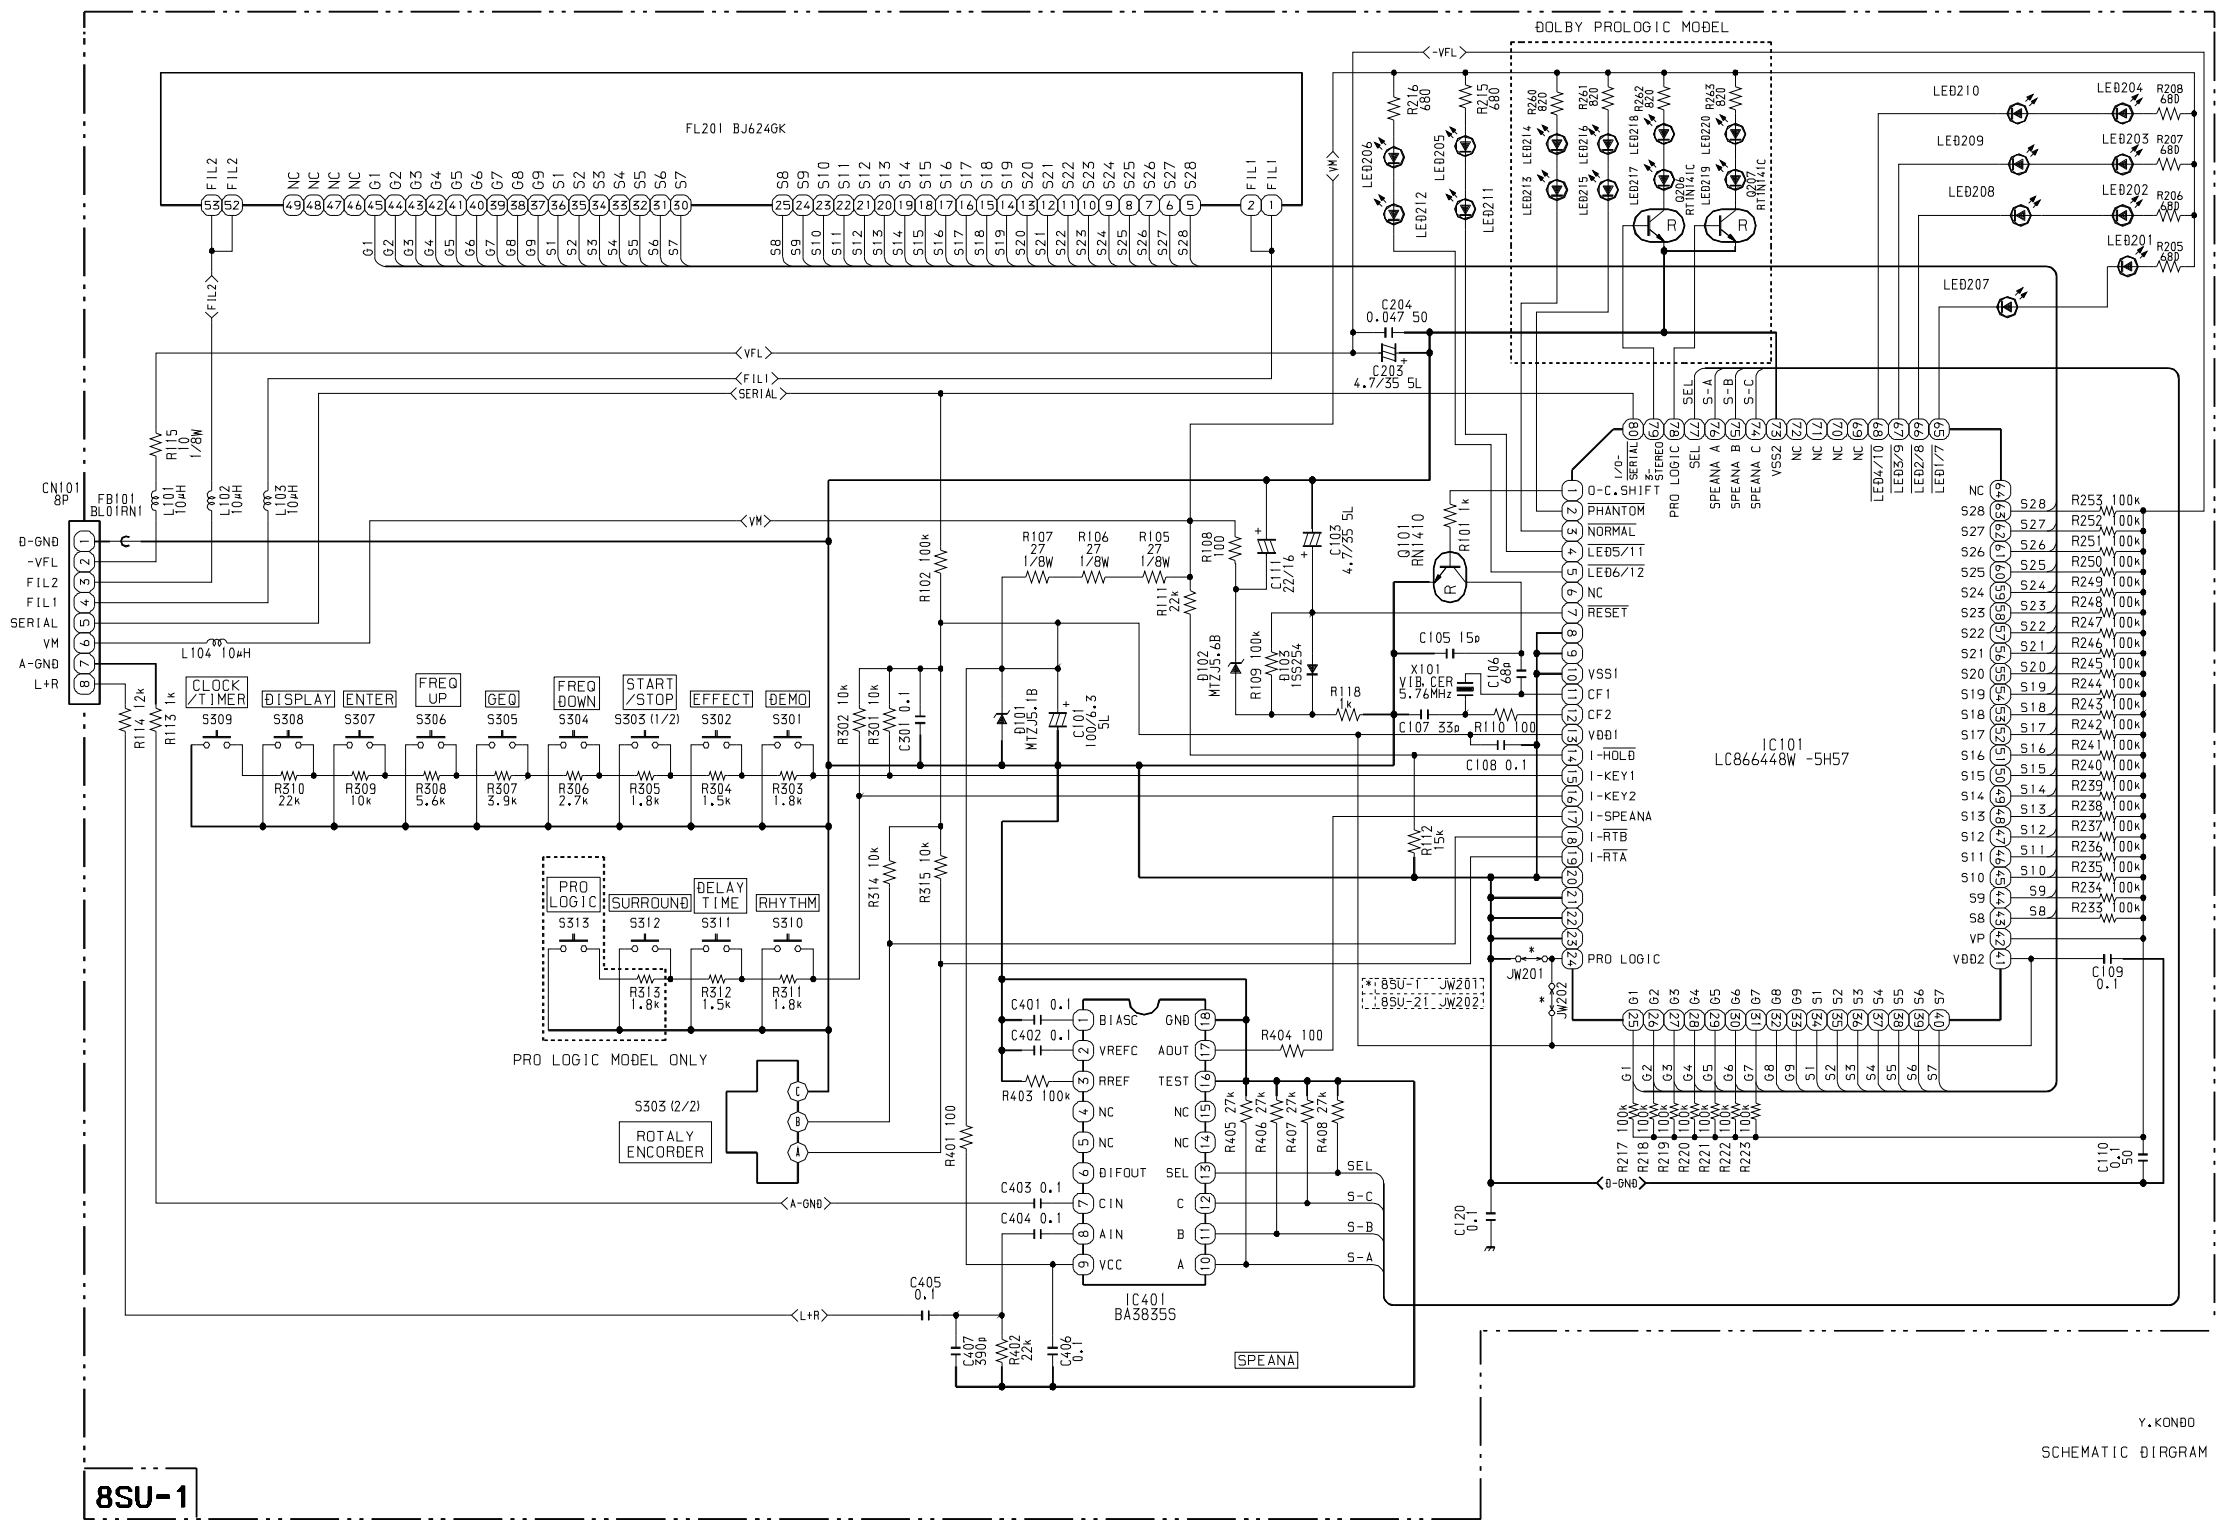

B-8SU-1-FR

8SU-1

GE-NH1000
24 MAR 1998

MECHANICAL PARTS LIST - 1 (GE-NM1000/NH1000)

NOTE: The characters in the suffix column indicate the part usage.

MUSNXX.....A.....
SLSNXX.....B.....

REF.NO	PARTS NO.	DESCRIPTION	SUFFIX
	87-B00-002-010	BADGE, AIWA 30 ABS SIL	AB.....
	88-SU1-001-010	CABI, FR	.B.....
	88-SU1-002-010	CABI, STEEL	AB.....
	88-SU1-003-010	CABI, REAR YSNM	
	88-SU1-005-010	REFLECTOR, JOG	AB.....
	88-SU1-006-010	PANEL, JOG	AB.....
	88-SU1-014-010	RING, FOOT	AB.....
	88-SU1-017-010	CABI, FR U	A.....
	88-SU1-021-010	CABI, REAR YJSNM	
	88-SU1-022-010	CABI, REAR YUSNM	
	88-SU1-023-010	CABI, REAR YLSNM	
	88-SU1-025-010	CABI, REAR YLSN	.B.....
	88-SU1-026-010	CABI, REAR YUSN	A.....
	88-SU1-027-010	CABI, REAR YSN	
	88-SU1-007-010	KNOB, RTRY JOG	AB.....
	88-SU1-008-010	KEY, GEO	AB.....
	88-SU1-009-010	KEY, TIMER	AB.....
	88-SU1-010-010	KEY, ENTER	AB.....
	88-SU1-012-010	KEY, DEMO	AB.....
	88-SU1-004-010	WINDOW, DISPLAY	AB.....
	88-SU1-201-010	GUIDE, FL	
	87-067-641-010	UTT2+3-8(W/O SLOT)BL	AB.....
	87-067-703-010	TAPPING SCREW, BVT2+3-10	AB.....
W 101	88-SU1-608-010	CORD, FG 8P	AB.....
	88-SU1-201-010	GUIDE, FL	AB.....

ACCESSORIES / PACKAGE LIST - 1

NOTE: The characters in the suffix column indicate the part usage.

U	XX.....	A.....	
LH	XX.....	B.....	
REF.NO	PARTS NO.	DESCRIPTION	SUFFIX
	88-SP1-901-010	IB, H(ECA)M	
	88-SP1-902-010	IB, LH(ESP)M	.B.....
	88-SP1-903-010	IB, U(ESF)M	A.....
	88-SP1-905-010	IB, K(E)M	
	87-006-225-010	AM LOOP ANT NC2	AB.....
	87-043-095-010	WIRE ANTENNA	
	87-043-106-010	WIRE FM ANT (Z)	
	87-043-115-010	ANT, FEEDER FM	AB.....
	87-A90-312-010	PLUG, CONVERSION WTN-1157R1	.B.....
	87-NF4-655-010	RC UNIT, RC-7AS08	AB.....
ANT 0	87-006-269-010	AM LOOP ANT (UN)	

サービス技術ニュース	
番号	連絡内容
Gー ー	
Gー ー	
Gー ー	

アイワ株式会社
AIWA CO.,LTD.

9420208,9630472,9630466

Tokyo Japan