


KENWOOD

HIGH SPEED DC INTEGRATED AMPLIFIER

(KA-6011) KA-601

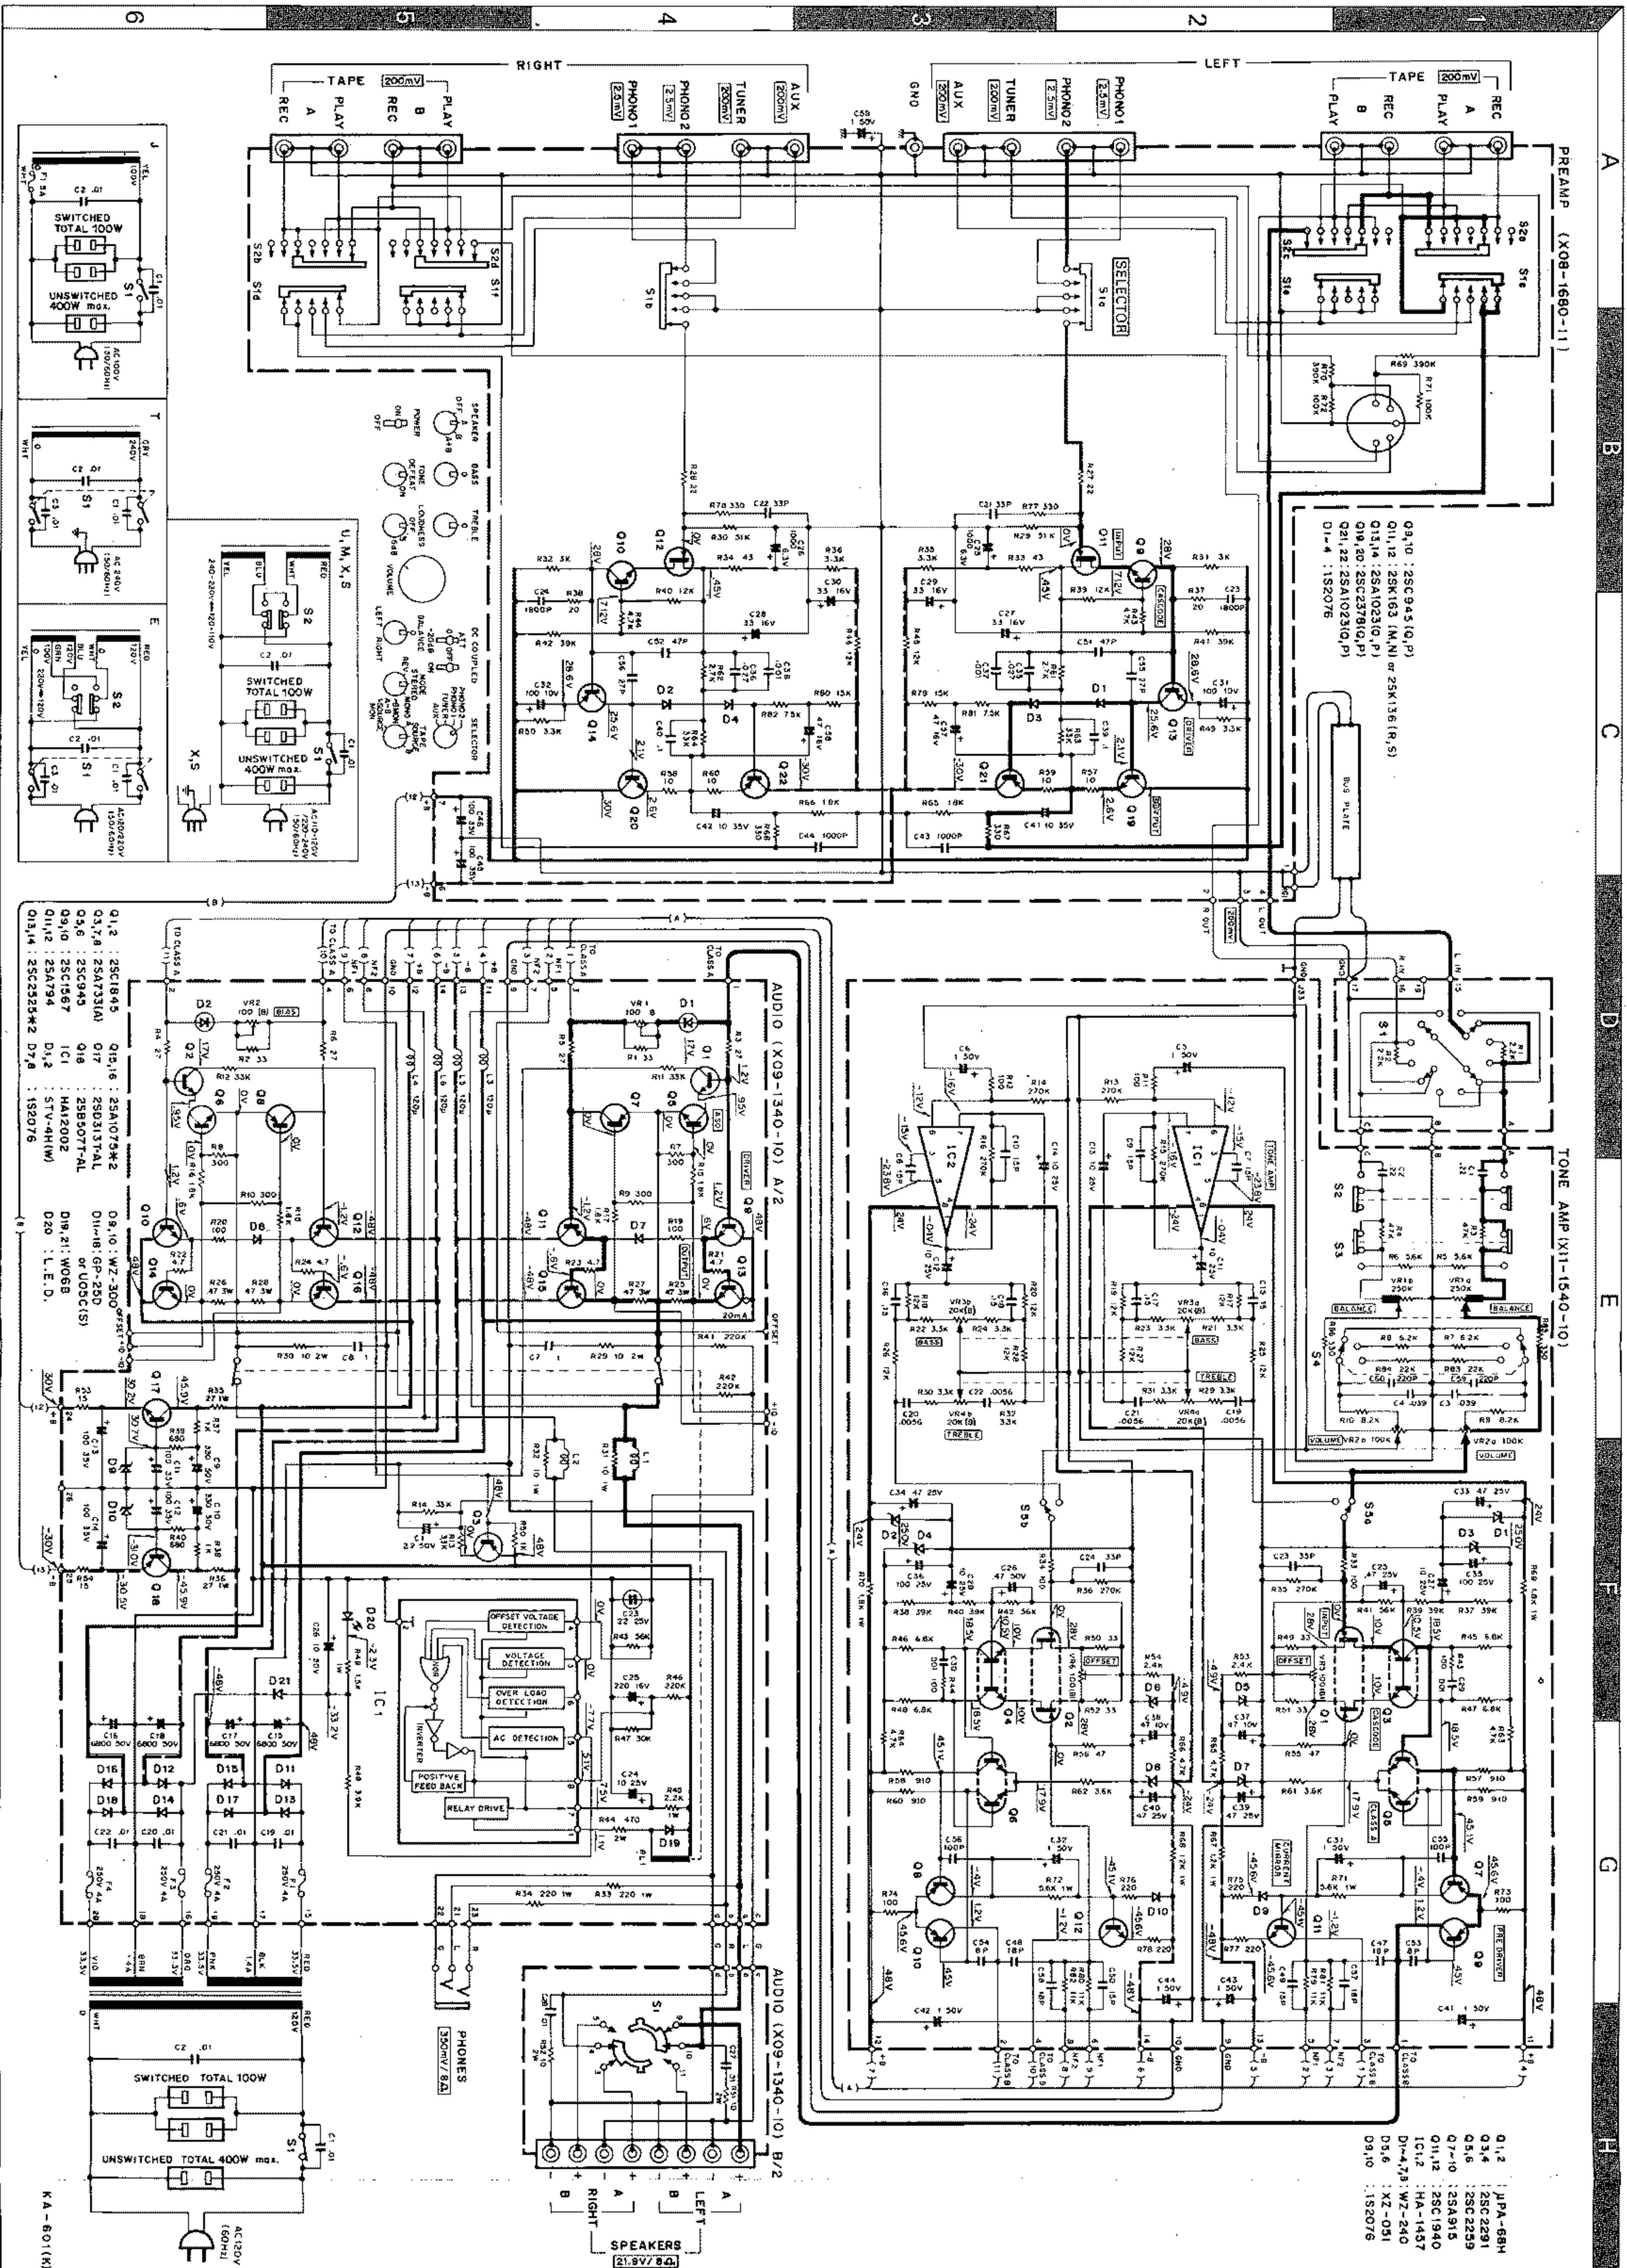

AUDIO SECTION

Rated Output Power (FTC)	8 ohms at 20 Hz to 20 kHz	60 W + 60 W
Maximum Output Power (DIN)	1% THD with 4 ohms loads, 1 kHz	90 W + 90 W
Total Harmonic Distortion	Rated Output Power into 8 ohms	0.02%
Intermodulation Distortion		0.004%
Power Bandwidth (at 0.03% THD)		5 Hz ~ 40 kHz
Frequency Response		DC ~ 400 kHz
		+0 dB, -3 dB

S/N Weighted: Rated Output Power (IEC-A)

() = Unweighted, at 50 mW, (DIN)

Phono	87 dB (60 dB)
Tuner, Aux, Tape	105 dB (60 dB)
Damping Factor	100
Input Sensitivity/Impedance	2.5 mV/50 kohms
Phono	200 mV/50 kohms
Tuner, Aux, Tape	± 7.5 dB
Tone Control	± 7.5 dB
Bass 100 Hz	± 7.5 dB
Treble 10 kHz	± 7.5 dB
Loudness Control (-30 dB)	100 Hz + 3 dB
	100 Hz + 6 dB

GENERAL

Power Consumption	550 W
Dimensions	W 440 mm
	H 153 mm
	D 407 mm
Weight (Net)	11.5 kg

Note: Kenwood follows a policy of continuous advancements in developments. For this reason specifications may be changed without notice.