


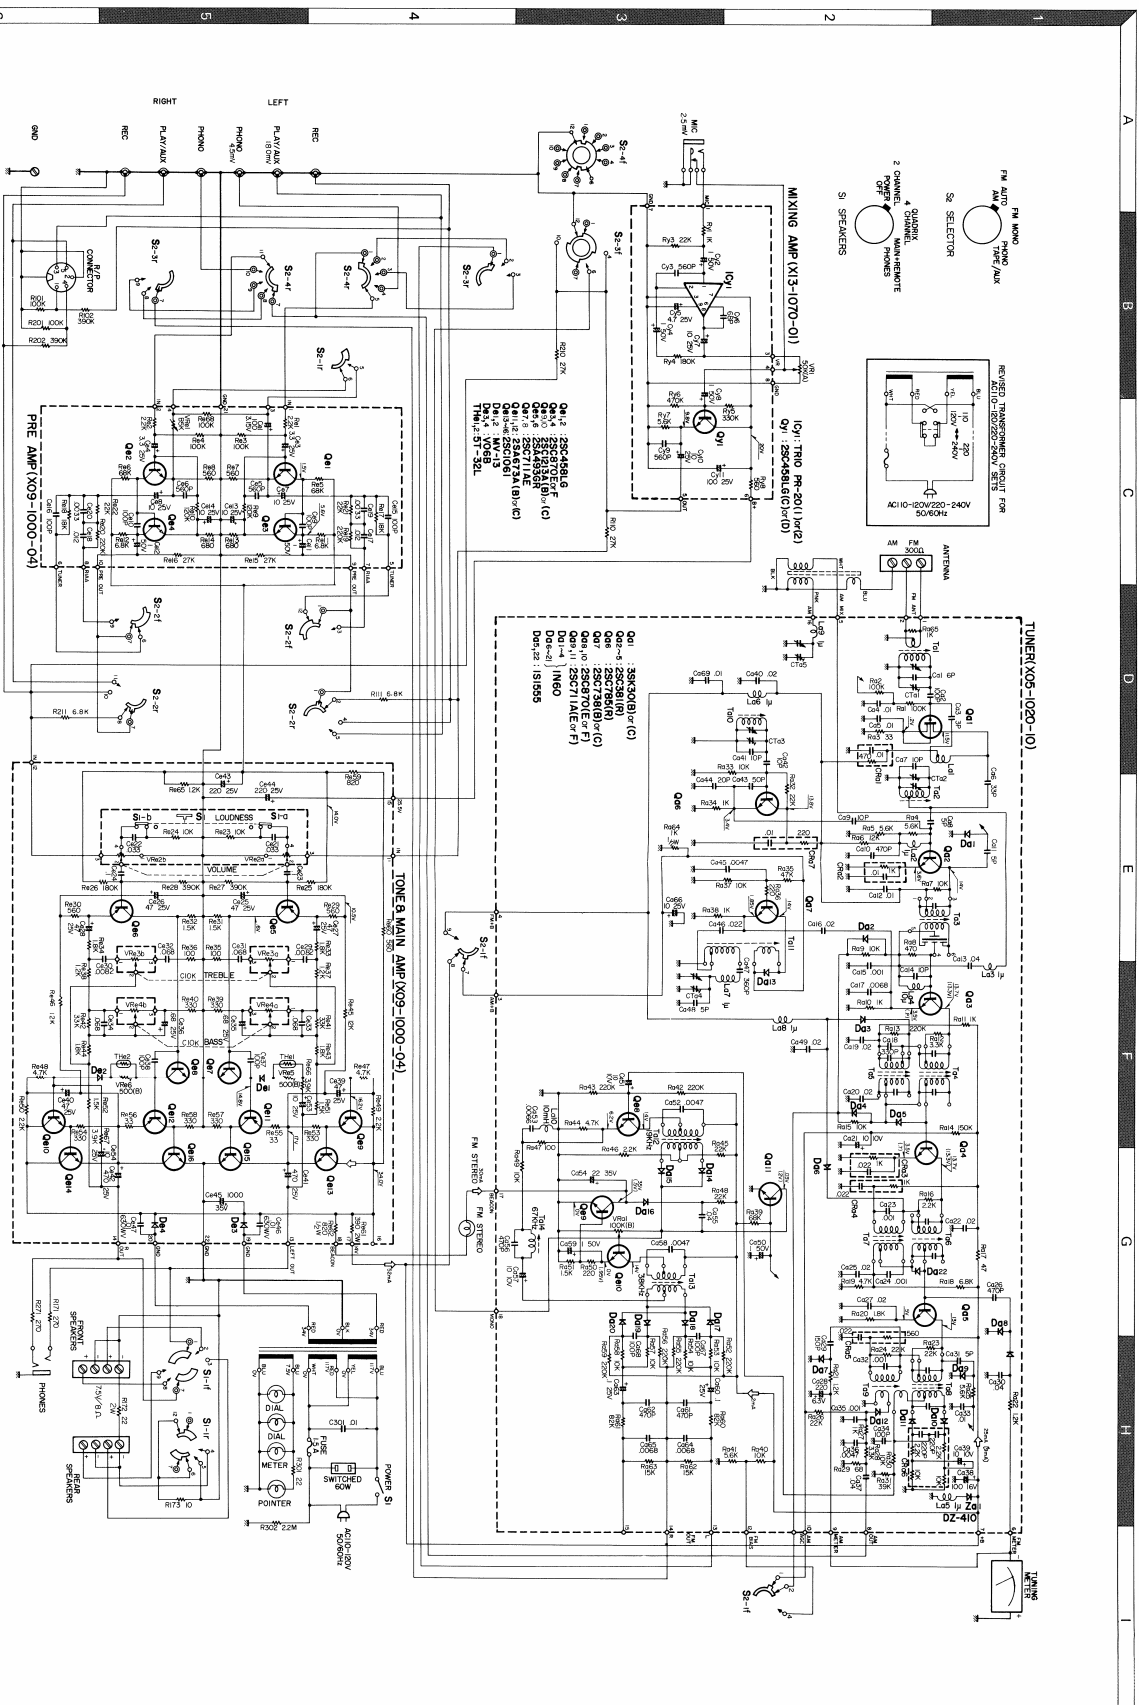

SPECIFICATIONS

AMPLIFIER SECTION

DYNAMIC POWER OUTPUT (1MHz):
 30 watts both channels at 4 ohms
 20 watts both channels at 8 ohms
 20 watts both channels at 16 ohms

CONTINUOUS POWER OUTPUT:
 Both Channels Driven: 8.5/8.5 watts at 4 ohms
 Both Channels Driven: 10/10 watts at 8 ohms

INTERMODULATION DISTORTION:
 Less than 0.5% at rated output

FREQUENCY RESPONSE:
 20 Hz to 20,000 Hz ± 2 dB

INPUT SENSITIVITY (for rated output):
 PHONO: 3.5 mV
 AUXILIARY PLAY: 180 mV
 FM AND AM: 100 μ V

FM AND AM:
 PHONO: 60 dB
 PHONO: 60 dB

PHONO, AUXILIARY PLAY, MICROPHONE:
 8 - 16 ohms

BASS CONTROL:
 20 dB at 100 Hz
 20 dB at 10,000 Hz

LOUDNESS CONTROL (at 30 dB):
 20 dB at 100 Hz
 20 dB at 10,000 Hz

SPEAKER OUTPUTS:
 2 x 16 ohm Speaker or 4 ohm Speaker
 1 x 16 ohm Speaker or 4 ohm Speaker

OUTPUT SWITCH:
 POWER OFF, 2 CHANNEL, MONITOR, MUTE, REVERSE, PHONES

TUNER SECTION

FM:
 ANTENNA IMPEDANCE: 300 ohms balanced
 HF SENSITIVITY: 25 μ V
 SNR RATIO (1kHz): 10 dB
 CAPTURE RATIO: 4.0 dB
 SELECTIVITY (1MHz): 40 dB
 REJECTION: 40 dB
 I/F REJECTION: 95 dB
 AM SUPPRESSION: 45 dB
 STEREO SEPARATION: 30 dB at 1,000 Hz

AM:
 ANTENNA: Built-in ferrite loopstick
 SENSITIVITY (1MHz): 25 μ V
 SELECTIVITY (1MHz): 25 dB
 REJECTION: 40 dB
 I/F REJECTION: 95 dB

AC OUTPUT:
 1 switched
 SEMICONDUCTOR: 1TET, 28T, 27D, 27D

POWER SUPPLY:
 180 watts at full power (16 ohms)
 50 watts at full power (4 ohms)

DIMENSIONS:
 17.6" (W) x 5.5" (H) x 15.9" (D)
 17.6" (W) x 5.5" (H) x 15.9" (D)

WEIGHT:
 13.4 lbs (6.1 kg)