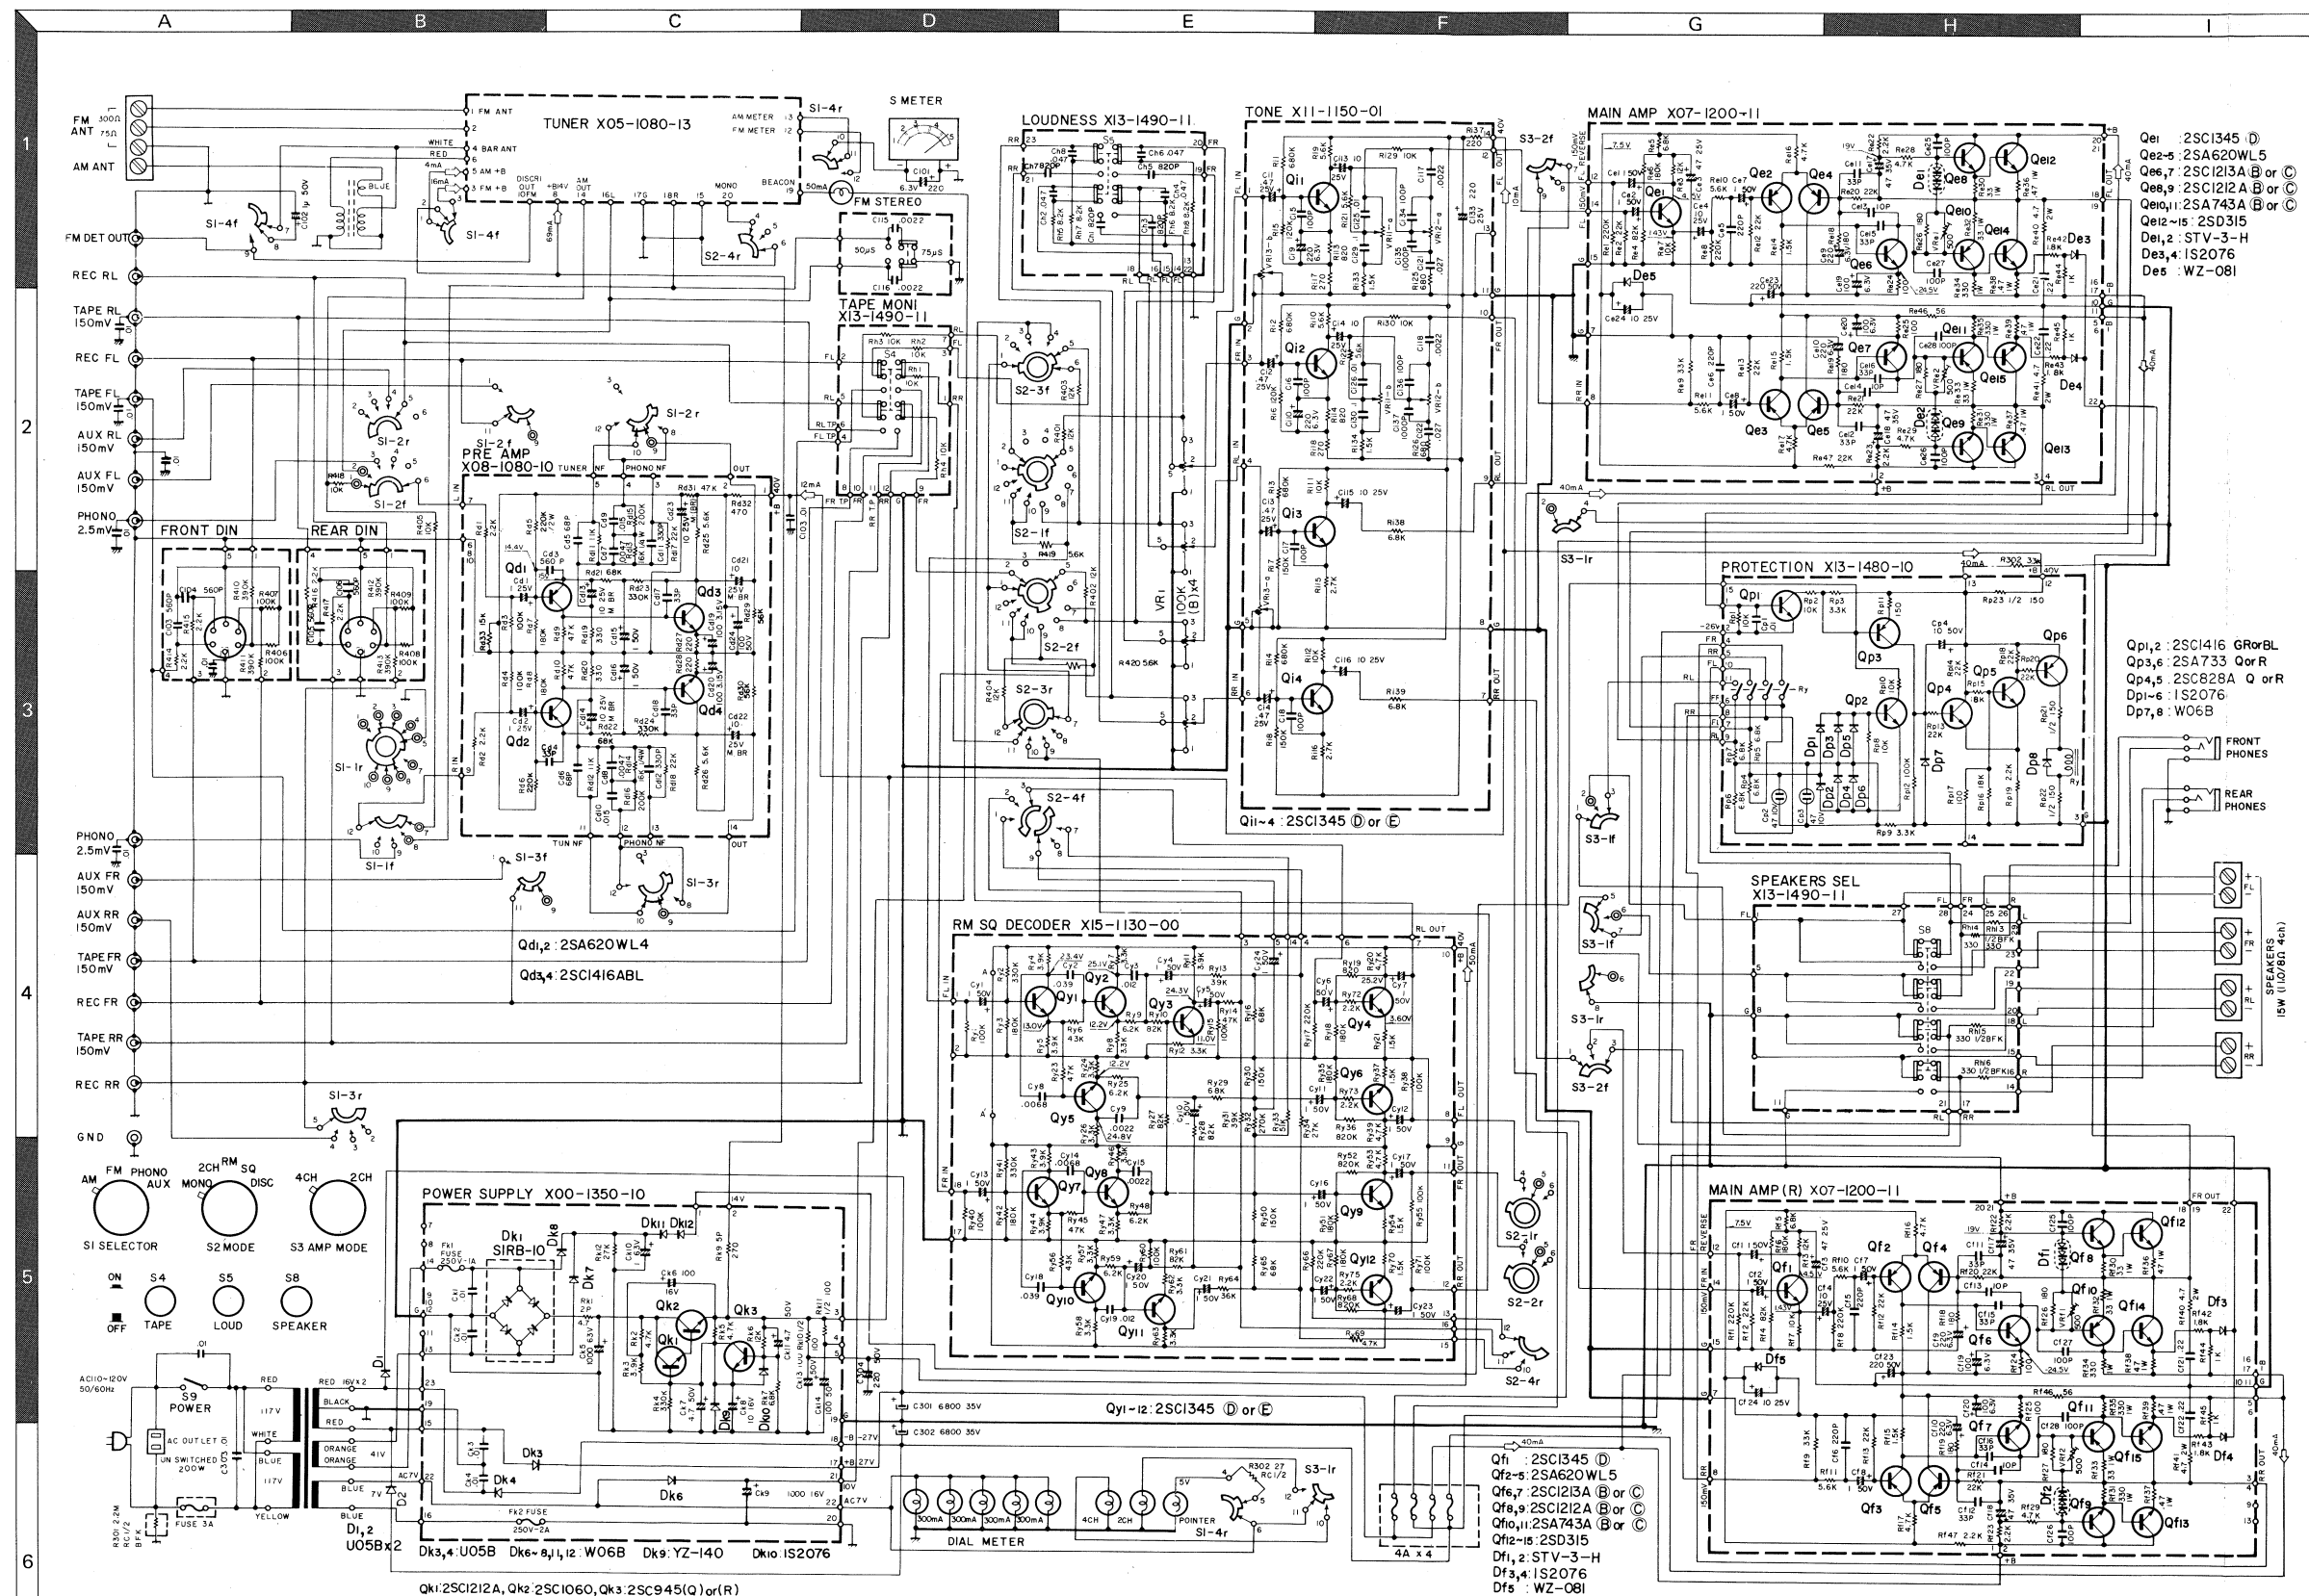


### SPECIFICATIONS

#### FM TUNER SECTION

Usable Sensitivity (IHF)  
Frequency Response  
Harmonic Distortion

2.0  $\mu$ V  
20 Hz - 15,000 Hz  $\pm 1.2$  dB  
0.5% Mono (at 400 Hz 100% modulation)  
0.8% Stereo (at 400 Hz 100% modulation)  
63 dB at 1mV input  
60 dB  
Image Rejection  
Selectivity (IHF ALT. channel)  
IF Rejection  
Spurious Signal Rejection  
AM Suppression  
Capture Ratio  
Stereo Separation  
Sub Carrier Suppression  
Antenna Impedance

#### AM TUNER SECTION

Usable Sensitivity (IHF)  
Signal to Noise Ratio  
Image Rejection  
Selectivity (IHF)  
IF Rejection  
Antenna

25  $\mu$ V  
45 dB at 1mV input  
45 dB  
30 dB  
35 dB  
Built-in ferrite bar antenna, External antenna terminals

#### MAIN-AMPLIFIER SECTION

RMS Power Output

Full channel driven  
into 8 ohms at 20 Hz - 20,000 Hz  
into 8 ohms at 1,000 Hz  
into 4 ohms at 1,000 Hz

Dynamic Power Output

into 8 ohms  
into 4 ohms  
Total Harmonic Distortion

Intermodulation Distortion

0.8% at rated power into 8 ohms  
0.3% at 1/2 rated power into 8 ohms  
0.3% at 1/2 rated power into 4 ohms  
20 Hz - 40,000 Hz  
Damping Factor  
Speaker Impedance

#### PREAMPLIFIER SECTION

Input Sensitivity and Impedance

Phono  
AUX  
Tape Play  
Maximum Input Voltage (rms)

Signal to Noise Ratio

Phono  
AUX  
Tape Play  
Output Voltage and Impedance

Frequency Response

Phono  
Tuner, AUX, Tape Play  
Tone Controls

Power Consumption

Dimensions  
Weight

Dimensions

Weight

#### GENERAL

Switches

Speaker Selector

Input Selector

Mode

Tape Monitor

Others

AC Outlet

Power Consumption

Dimensions

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

Weight

