


75

The Harman Kardon Model Citation22

STEREO POWER AMPLIFIER

Manual 113A

Technical Manual

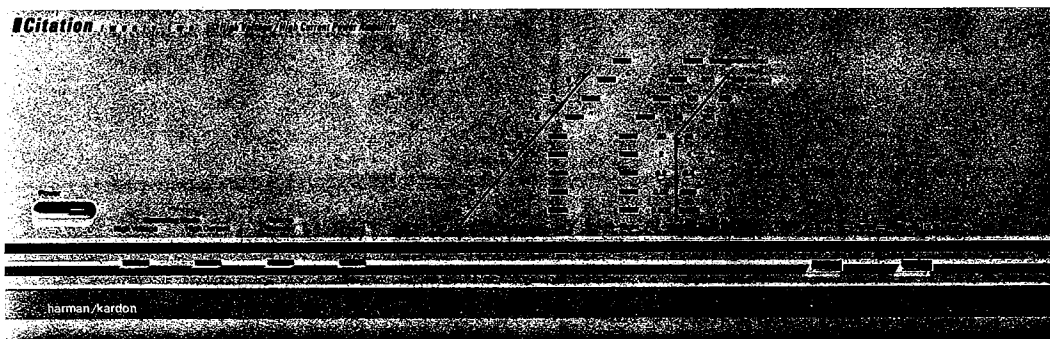

The following marks found in the parts list of this manual identify the models as follows.

- JA : North America area model
- G : General model
- N : Japan model

harman/kardon

240 Crossways Park West, Woodbury, N.Y. 11797
1112-3152113A7 P-088706 1500 Printed in Japan

SPECIFICATIONS

	Nominal	Limit
Input Sensitivity	1.0V ± 0.15V	
Input Impedance at 1kHz	22kΩ ± 2kΩ	
Frequency Response	0.07Hz ~ 578kHz	
Signal to Noise Ratio	100.3dB ≥ 90dB	
Channel Separation at 10kHz	92dB ≥ 75dB	
Total Harmonic Distortion		
20Hz	0.01% ≤ 0.08%	
1kHz	0.006% ≤ 0.08%	
20kHz	0.01% ≤ 0.08%	
RMS Output Power		
8Ω, 1kHz, THD 0.08%/ch.	224W ≥ 200W	
4Ω, 1kHz, THD 0.08%/ch.	228W ≥ 200W	

	Nominal	Limit
Power Bandwidth (1/2 rated power)	10Hz ~ 100kHz	
IM Distortion Ratio at 1W	0.01% ≤ 0.08	
Damping Factor at 1kHz	139 ≥ 100	
DC Balance	0mV ± 60mV	
Idling Current	16mV ± 2mV (32mV ± 3mV)	
Dimensions (W × H × D)	17-3/8" × 6-1/8" × 15-11/16" (443 × 155 × 398mm)	
Weight	45 lbs. (20.5kg)	
Power Supply		
North America area model	AC 120V, 60Hz	
General model	AC 220V/240V, 50/60Hz	
Japan model	AC 100V, 50/60Hz	
Power Consumption	610W	


This specification is the target of servicing.
But, there is a case that the specification is not applicable to the measurement condition and instrument.

Specifications and components subject to change without notice. Overall performance will be maintained or improved.

LEAKAGE TEST (FOR SERVICE ENGINEERS IN THE U.S.A.)

Before returning the unit to the user, perform the following safety checks:

1. Inspect all lead dress to make certain that leads are not pinched or that hardware is not lodged between the chassis and other metal parts in the unit.
2. Be sure that any protective devices such as nonmetallic control knobs, insulating fishpapers, cabinet backs, adjustment and compartment covers or shields, isolation resistor-capacity networks, mechanical insulators, etc. which were removed for servicing are properly reinstalled.
3. Be sure that no shock hazard exists; check for leakage current using Simpson Model 229 Leakage Tester, standard equipment item No. 21641, RCA Model WT540A or use alternate method as follows:
Plug the power cord directly into a 120-volt AC receptacle (do not use an Isolation Transformer for this test). Using two clip leads, connect a 1500 Ohm, 10-watt resistor paralleled by a 0.15 μF capacitor, in series with all exposed metal cabinet parts and a known earth ground, such as a water pipe or conduit. Use a VTVM or VOM with 1000 Ohms per volt, or higher sensitivity to measure the AC voltage drop across the resistor. (See Diagram.) Move the resistor connection to each exposed metal part having a return path to the chassis (antenna, metal, cabinet, screw heads, knobs and control shafts, escutcheon, etc.) and measure the AC voltage drop across the resistor. (This test should be performed with the power switch in both the On and Off positions.)
A reading of 0.35 volt RMS or more is excessive and indicates a potential shock hazard which must be corrected before returning the unit to the owner.

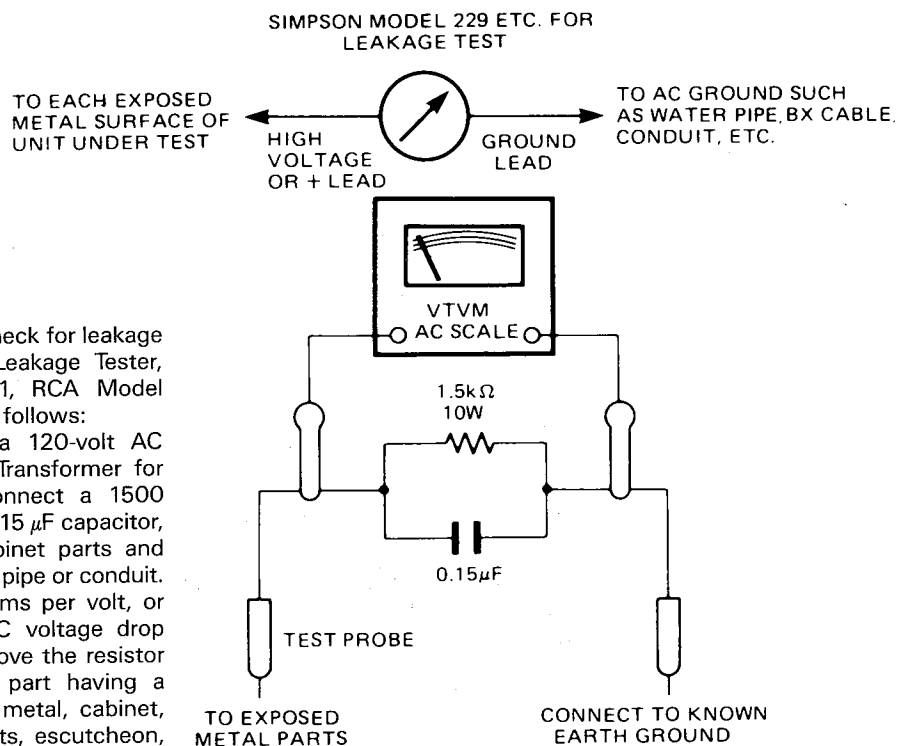

DISASSEMBLY PROCEDURES (REFER TO PAGES 5 THROUGH 10 AND 24)

① CABINET TOP (131) REMOVAL

Remove 10 screws (A) and then remove the Cabinet Top (131).

② FRONT PANEL ASS'Y REMOVAL

1. Remove the Cabinet Top (131), referring to the previous step ①.
2. Remove 5 screws (B) and then remove the Front Panel Ass'y (AA).

③ CABINET BOTTOM (133) REMOVAL

1. Remove 10 screws (C) and then remove the Cabinet Bottom (133).

④ MAIN P. C. BOARD (PCB-1) REMOVAL

1. Remove the Front Panel Ass'y (AA), referring to the previous step ②.
2. Open the lid of connectors (CN1 and CN2) on the Main P. C. Board (PCB-1) and then disconnect the lead wires.
3. Open the lid of connector (CN5) on the Power Level Indicators P. C. Board (PCB-9) and then disconnect the lead wire.
4. Unsolder the lead wires connected to the Main P. C. Board (PCB-1), Power Level Indicators P. C. Board (PCB-9) and Pre Driver P. C. Board (PCB-10).
5. Remove 11 screws (D) and then remove the Main P. C. Board (PCB-1) with Heat Sinks (179, 180 and 181) and Pre Driver P. C. Board (PCB-10).

6. Remove 2 screws (E) and unsolder the connectors (CN10, CN11, CN12, CN13 and CN14) and then remove the Pre Driver P. C. Board (PCB-10) from Main P. C. Board (PCB-1).
7. Unsolder the lead wires from PT1, PT2, D409 and D410.
8. Unsolder the transistors (Q437~Q456) and remove 6 screws (F) and then remove the Heat Sinks (179, 180 and 181) with transistors, PT1, PT2, D409 and D410.

⑤ RELAY P. C. BOARD (PCB-12) REMOVAL


1. Remove the Front Panel Ass'y (AA), referring to the previous step ②.
2. Remove 3 screws (G) and then remove the Relay P. C. Board (PCB-12).
If necessary, unsolder the lead wires connected to the PCB-12.

⑥ POWER LEVEL INDICATORS P. C. BOARD (PCB-9) REMOVAL

1. Remove the Relay P. C. Board (PCB-12), referring to the previous step ⑤.
2. Remove 12 screws (H) and then remove the Chassis (161) with the Power Level Indicators P. C. Board (PCB-9), LED P. C. Board (PCB-13) and Power Switch P. C. Board (PCB-14).
3. Unbend 4 catches fixing the Power Level Indicators P. C. Board (PCB-9) and remove it.
If necessary, unsolder the lead wires connected to the PCB-9.

POWER CORD REPLACEMENT (FOR SERVICE ENGINEERS OTHER THAN NORTH AMERICA)

In order to prevent fire or shock hazard when replacing the power cord, follow the procedure below to replace the parts with the standard supply parts.

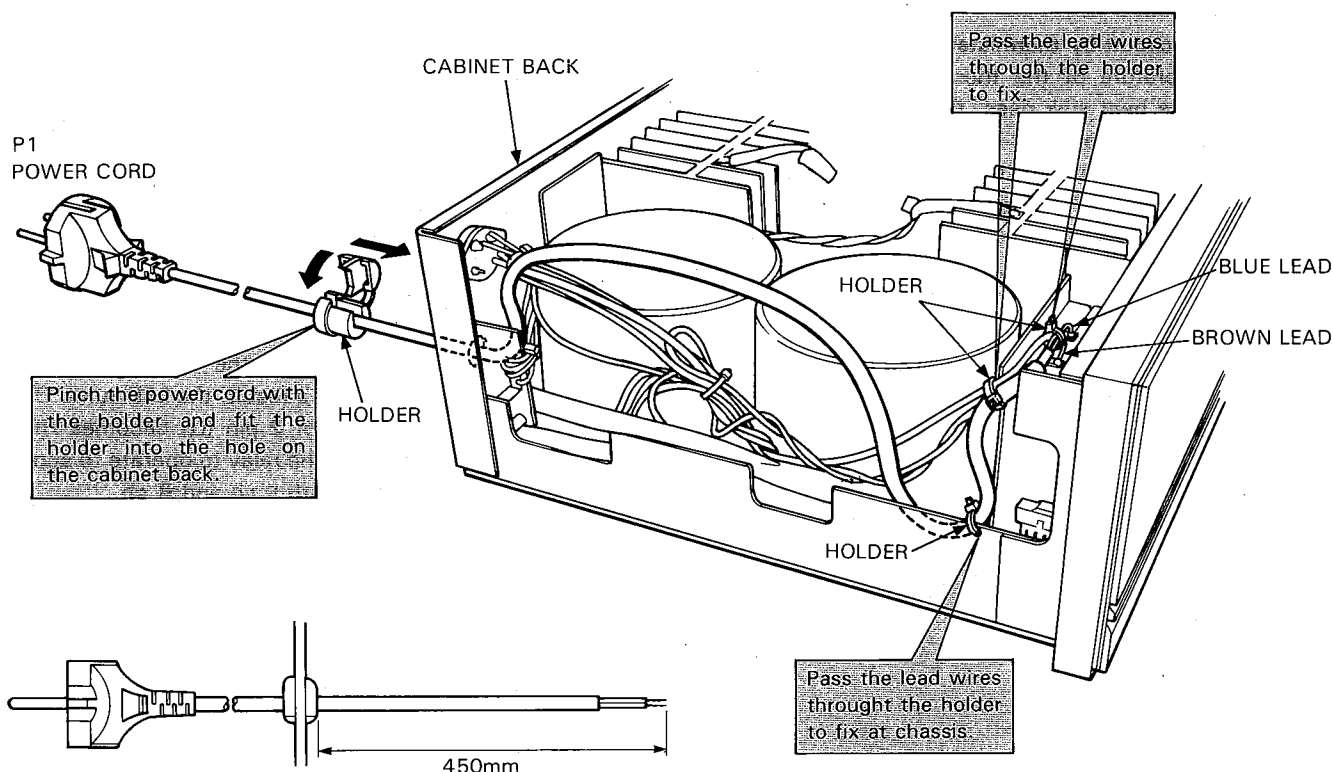


ALIGNMENT PROCEDURES (REFER TO PAGES 11 THROUGH 15 AND 23)

1. DC BALANCE ADJUSTMENT

- Set the Speaker Operating Mode switch for both L and R channels to the 4Ω position.
- Allow 20 minutes' aging.
- Connect a Digital Voltmeter to the speaker terminal and adjust VR401 (L ch) and VR402 (R ch) so that $\pm 0\text{mV}$ DC voltage is obtained.
- Set the Speaker Operating Mode switch for both L and R channels to the 8Ω position.
- Allow 10 minutes' aging.
- Connect a Digital Voltmeter to the speaker terminal and check to make sure that DC voltage is $\pm 60\text{mV}$.

2. IDLING CURRENT ADJUSTMENT

- Connect a 100Ω resistance as shown in the figure and adjust VR403 (L ch) and VR404 (R ch) so that TP1-to-TP2 voltage and TP3-to-TP4 voltage add up to $16\text{mV} \pm 2\text{mV}$.
- After adjusting the idling current, check again to ensure that the DC balance is properly maintained.

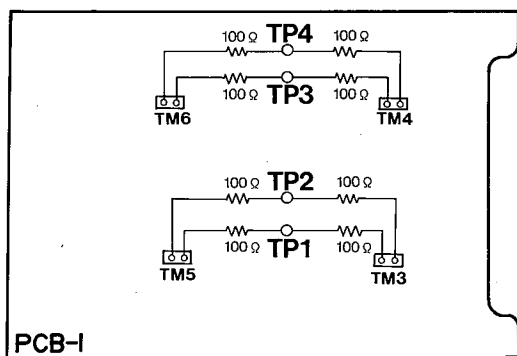

3. POWER LEVEL METER ADJUSTMENT

- Turn on the Display switch and set the sensitivity select switch to the 8Ω position.
- Apply a 1kHz signal so that the output becomes 100W (28.3V).
- Adjust VR101 (L ch) and VR102 (R ch) so that the third (100W) LED from the top lights.
- Adjust the input so that 0.69V output is obtained, then adjust VR103 (L ch) and VR104 (R ch) so that the second (0.02W) LED from the bottom lights.
- Adjust the input so that 100W (28.3V) output is obtained, then check to make sure that the third (100W) LED from the top lights.
- Check that the third (100W) LED from the top goes off when the input is decreased by 1dB.

CIRCUIT DESCRIPTION

• Protection circuit by thermistors PT1 and PT2


As the temperature of the thermistors (PT1 and PT2) installed to the heat sink rises, their resistance reduces. Then Q8 turns OFF followed by Q7, Q6 and Q1 which all turn OFF, while Q2 and Q3 turn ON. As the level of Q3 collector becomes LOW in this state, Q401, Q417 (L ch) and Q402, Q418 (R ch) turn ON to mute the input signal. When in the monaural mode, the R ch is muted by Q87 and Q418.

• Remote power ON/OFF

During stand-by, the input of the remote power is kept at LOW level, so HIGH level input is entered into 7 pin (SET) of Flip-Flop IC201 and LOW level input into 4 pin (RESET), making the level of 1 pin (Q) HIGH. And this causes Q202 to turn ON and LED's D204 and D205 to light.

When HIGH level input is entered into the input of the remote power in this state, Q201 turns ON, the level of 7 pin (SET) becomes LOW and that of 4 pin (RESET) becomes HIGH. This then makes the level of 1 pin (Q) LOW and Q202 turn OFF. As a result, the LED turns OFF. As the same time the level of 2 pin (Q) becomes HIGH and Q204 turns ON, making the relay to operate to supply power to the amplifiers of both L ch and R ch.

GENERAL UNIT
EXPLODED VIEW

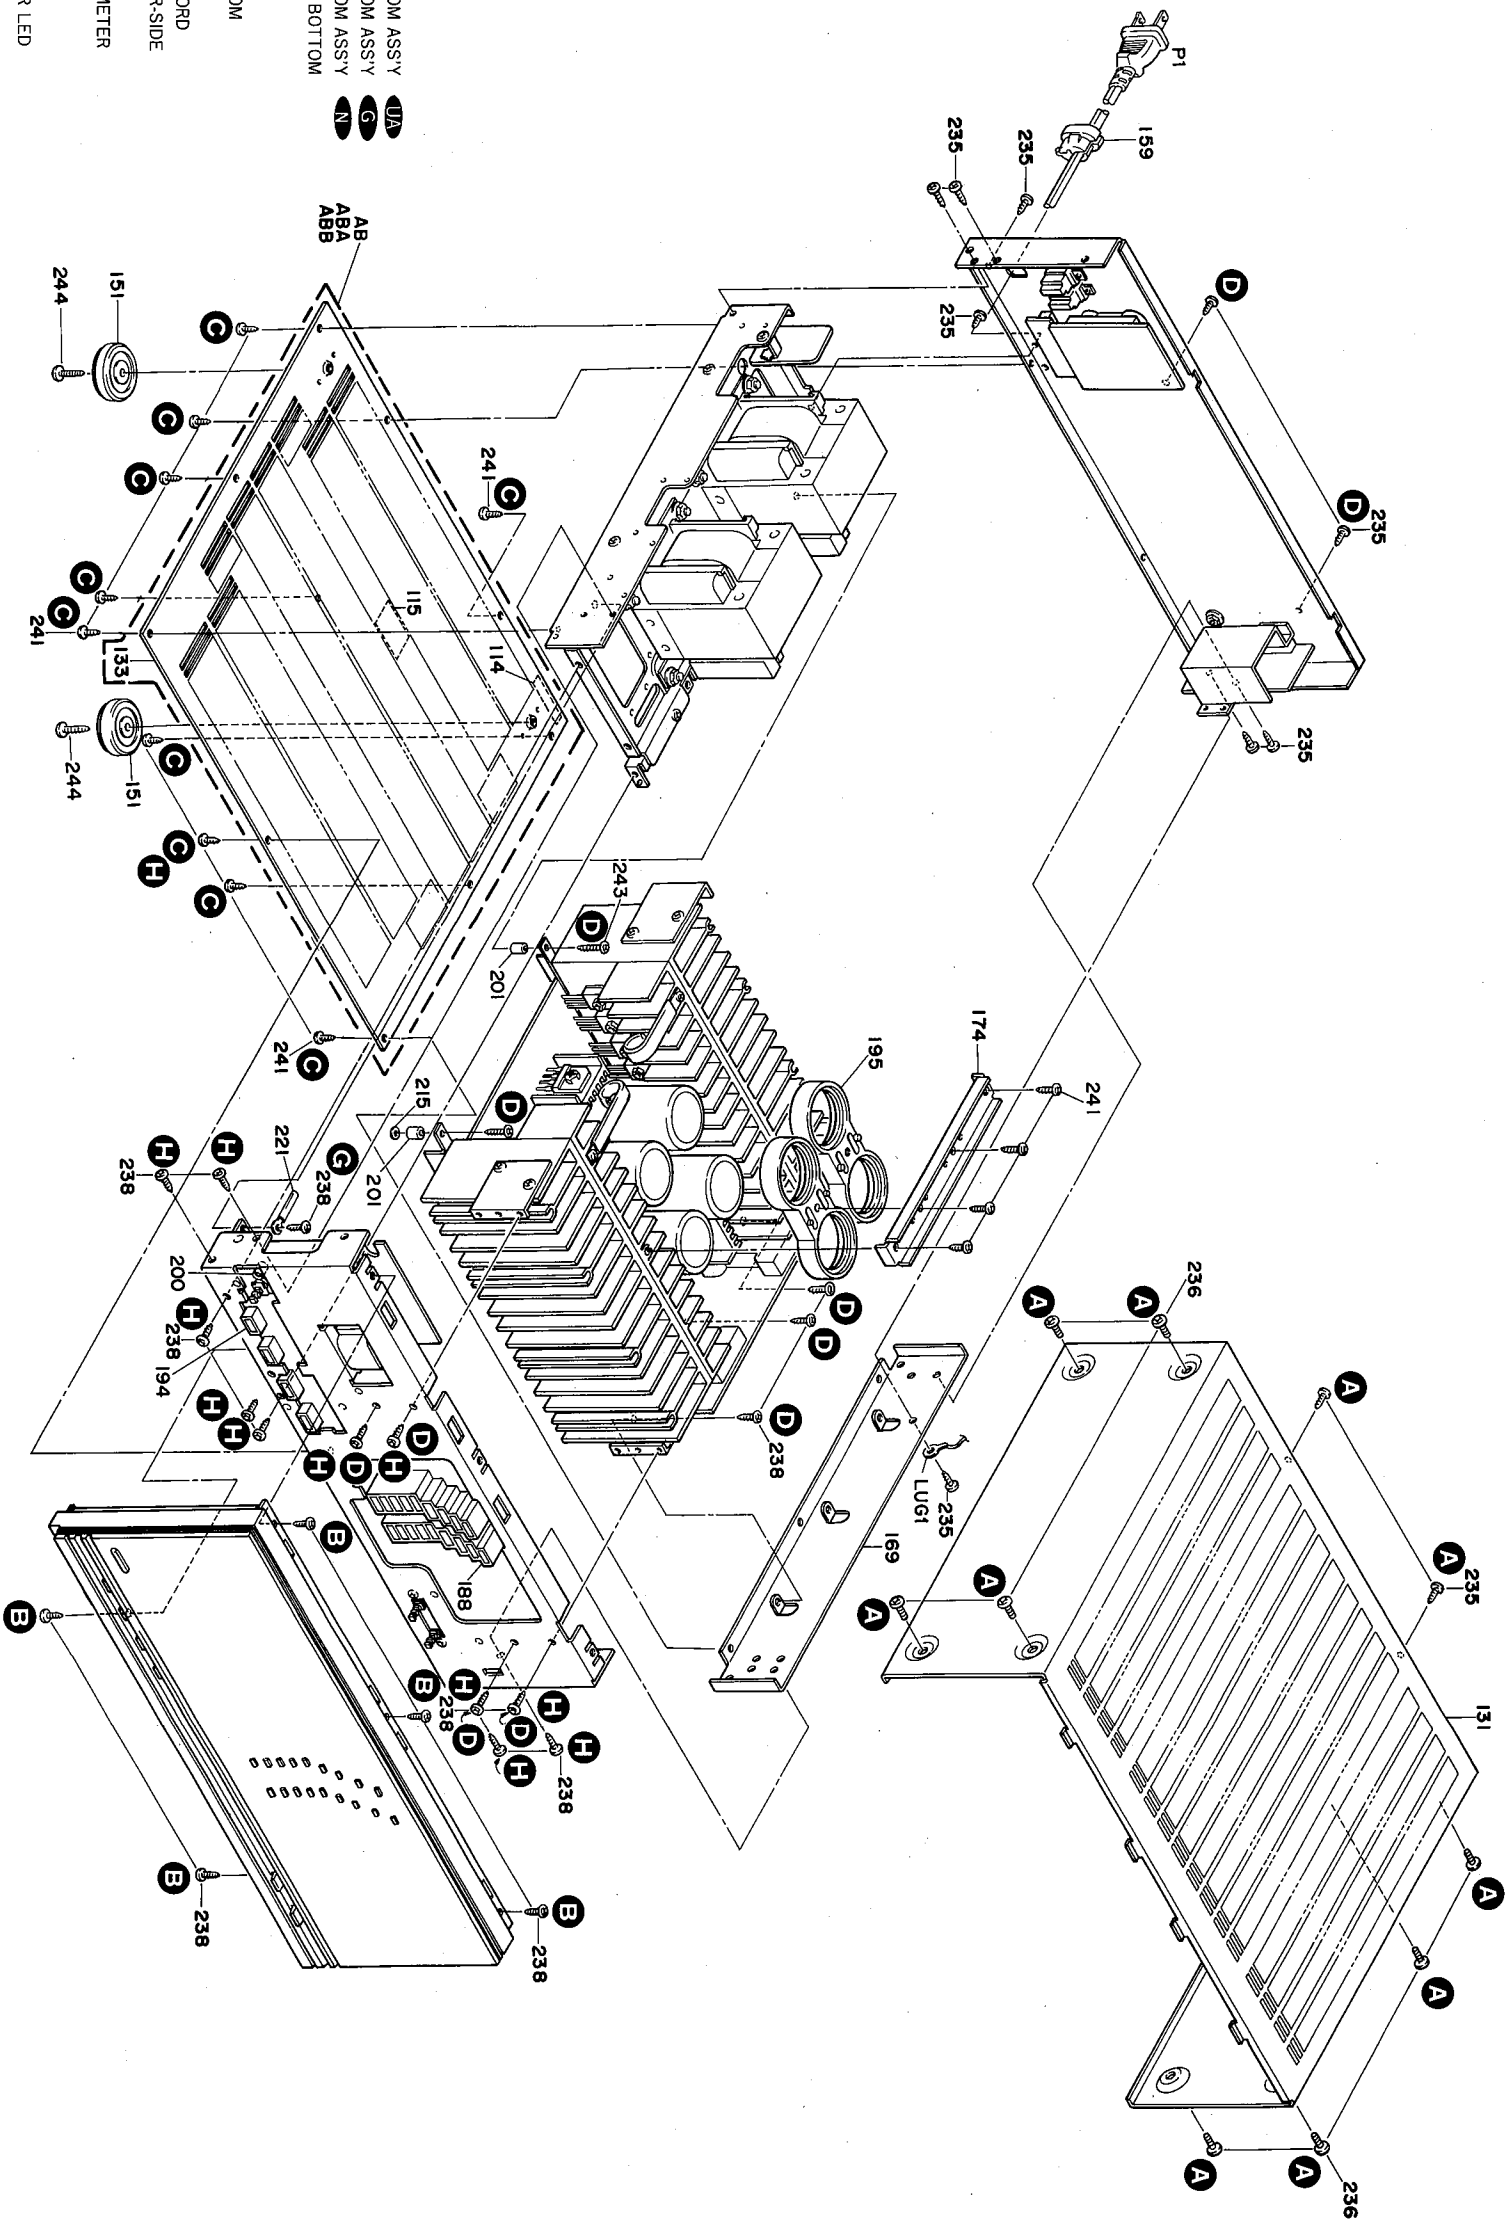

PARTS LIST

Ref. No.	Part No.	Description
AB	AA23-H200A	CABINET BOTTOM ASS'Y
ABA	AA23-H200B	CABINET BOTTOM ASS'Y
ABB	AA23-H200C	CABINET BOTTOM ASS'Y
114	1117-78	SERIAL LABEL, BOTTOM
115	1751-01018	LABEL UA
131	1414-09201	CABINET TOP
133	1423-02901	CABINET BOTTOM
151	1319-7181	LEG
159	2114-71246	BUSHING, AC CORD
169	2219-8143	METAL FITTG, R-SIDE
174	2219-8177	METAL FITTG
188	2240-7288	HOLDER, LED METER
194	2240-7299	HOLDER, LED
195	2240-7314	HOLDER, CAP
200	2132-7119	SPACER, POWER LED
201	2132-01702	SPACER
215	2402-0374	PLASTIC WASHER
221	2218-7001	BRACKET, WIRING
235	2340-7003	SPECIAL SCREW
236	2340-7008	SPECIAL SCREW, TOP COVER
238	2347-R0130064	SCREW
241	2347-R0130084	SCREW
243	2347-R0130164	SCREW
244	2347-R0140124	SCREW, LEG
LUGI	4211-5005	LUG, GND UA N
P1	4161-71154	CORD W/PLUG, POWER UA
P2	4161-71150	CORD W/PLUG, POWER G
P3	4161-72145	CORD W/PLUG, POWER N


GENERAL UNIT

EXPLODED VIEW (HEAT SINK)

PARTS LIST

Ref. No.	Part No.	Description
170	2219-8144	METAL FITTG. PCB-1
171	2219-8145	METAL FITTG. HEAT SINK
172	2219-8146	METAL FITTG. PCB-10
177	2222-7106	HEAT SINK DC BALANCE
178	2222-7221	HEAT SINK DC BALANCE
179	2222-7211	HEAT SINK L-CHAN
180	2222-7212	HEAT SINK R-CHAN
181	2222-7213	HEAT SINK L/R SUB
182	2222-7225	HEAT SINK PCB-10
183	2222-7215	HEAT SINK SCR. DRIVER
184	2222-7216	HEAT SINK DISPLAY
185	2222-7226	HEAT SINK PCB-10
203	2132-7153	SPACER BOTTOM
210	2440-7016	NUT, SPE
214	2402-0374	WASHER, PLSTC. PCB-1
222	2218-7011	BRACKET, FIX WIRING
225	2320-34	SCREW, SPE+
230	2327-R0130104	SCREW, BND+
238	2347-R0130064	SCREW, BND T+
240	2347-R0130084	SCREW, BND T+
Q101	5613-2603(E)or(F)	XISTOR, NPN R
Q102	5611-1142(P)	XISTOR, PNP R
Q421	5613-2603(E)or(F)	XISTOR, NPN R
Q422	5611-1142(P)	XISTOR, PNP R
Q423	5613-2682(P)	XISTOR, NPN R
Q424	5613-2682(P)	XISTOR, NPN R
Q425	5611-1142(P)	XISTOR, PNP R
Q426	5611-1142(P)	XISTOR, PNP R
Q427	5613-2682(P)	XISTOR, NPN R
Q428	5613-2682(P)	XISTOR, NPN R
Q429	5613-3423(O)or(Y)	XISTOR, NPN R
Q430	5613-3423(O)or(Y)	XISTOR, NPN R
Q433	5613-2682(P)	XISTOR, NPN R
Q434	5613-2682(P)	XISTOR, NPN R
Q435	5611-1142(P)	XISTOR, PNP R
Q436	5611-1142(P)	XISTOR, PNP R
Q437	5611-1306A(Y)	XISTOR, PNP R
Q438	5611-1306A(Y)	XISTOR, PNP R
Q439	5613-3298A(Y)	XISTOR, NPN R
Q440	5613-3298A(Y)	XISTOR, NPN R
Q441	5613-3907(O)or(R)	XISTOR, NPN R
Q442	5613-3907(O)or(R)	XISTOR, NPN R
Q443	5613-3907(O)or(R)	XISTOR, NPN R
Q444	5613-3907(O)or(R)	XISTOR, NPN R
Q445	5613-3907(O)or(R)	XISTOR, NPN R
Q446	5613-3907(O)or(R)	XISTOR, NPN R
Q447	5613-3907(O)or(R)	XISTOR, NPN R
Q448	5613-3907(O)or(R)	XISTOR, NPN R
Q449	5611-1516(O)or(R)	XISTOR, PNP R
Q450	5611-1516(O)or(R)	XISTOR, PNP R
Q451	5611-1516(O)or(R)	XISTOR, PNP R
Q452	5611-1516(O)or(R)	XISTOR, PNP R
Q453	5611-1516(O)or(R)	XISTOR, PNP R
Q454	5611-1516(O)or(R)	XISTOR, PNP R
Q455	5611-1516(O)or(R)	XISTOR, PNP R
Q456	5611-1516(O)or(R)	XISTOR, PNP R
D1	5685-D5SB40	SILICON, BRIG
D2	5685-D5SB40	SILICON, BRIG
D409	5641-MV12YM	VARISTOR
D410	5641-MV12YM	VARISTOR
PT1	5192-100TS1	POSISTOR
PT7	5102-100TS1	POSISTOR


GENERAL UNIT EXPLODED VIEW (FRONT PANEL ASS'Y)

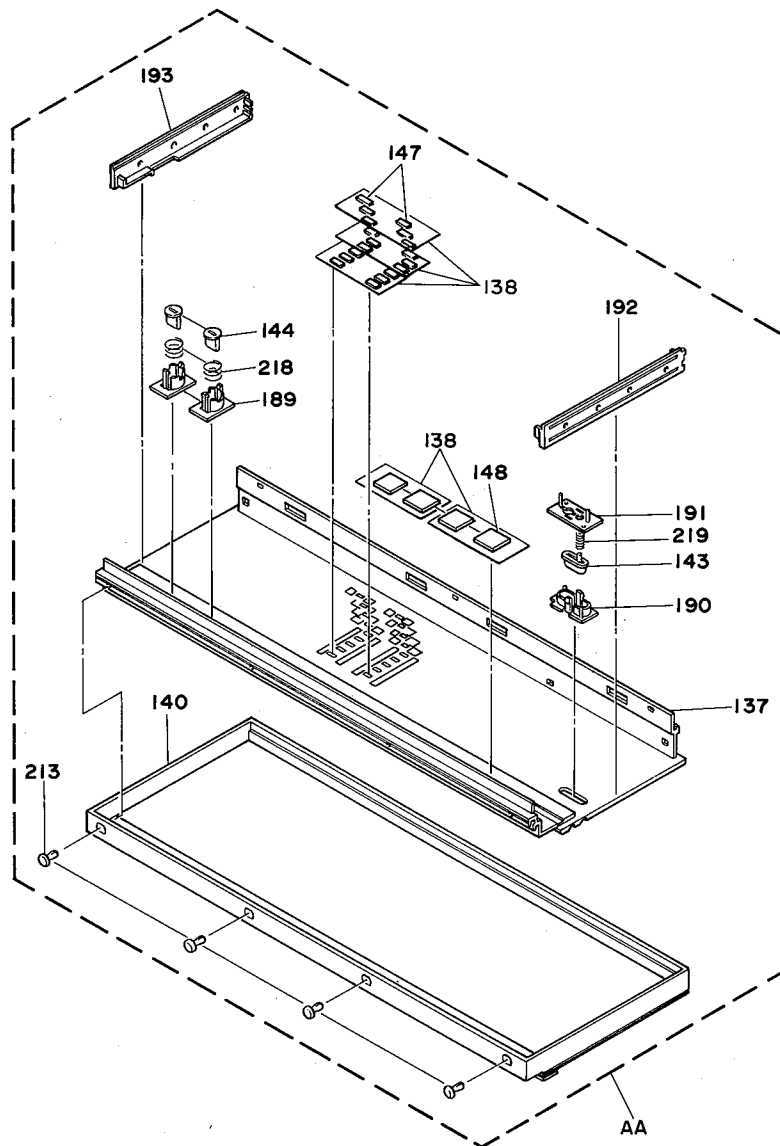

PARTS LIST

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
AA	A443-H200A	FRONT PANEL ASS'Y	189	2240-7289	HOLDER
137	1443-10601	PANEL	190	2240-7290	HOLDER, POWER
138	1223-11749	SOFT SHEET	191	2240-7291	HOLDER, POWER
140	1562-05401	FRAME	192	2240-7292	HOLDER, L-SIDE
143	1662-30401	PUSH BUTTON, POWER	193	2240-7293	HOLDER, R-SIDE
144	1662-30501	PUSH BUTTON	213	2459-3005511	PLASTIC RIVET, FRAME
147	1732-03601	INDICATOR	218	2651-2101726	SPRING
148	1732-03701	INDICATOR	219	2651-2101727	SPRING, POWER

GENERAL UNIT EXPLODED VIEW (FRONT CHASSIS)

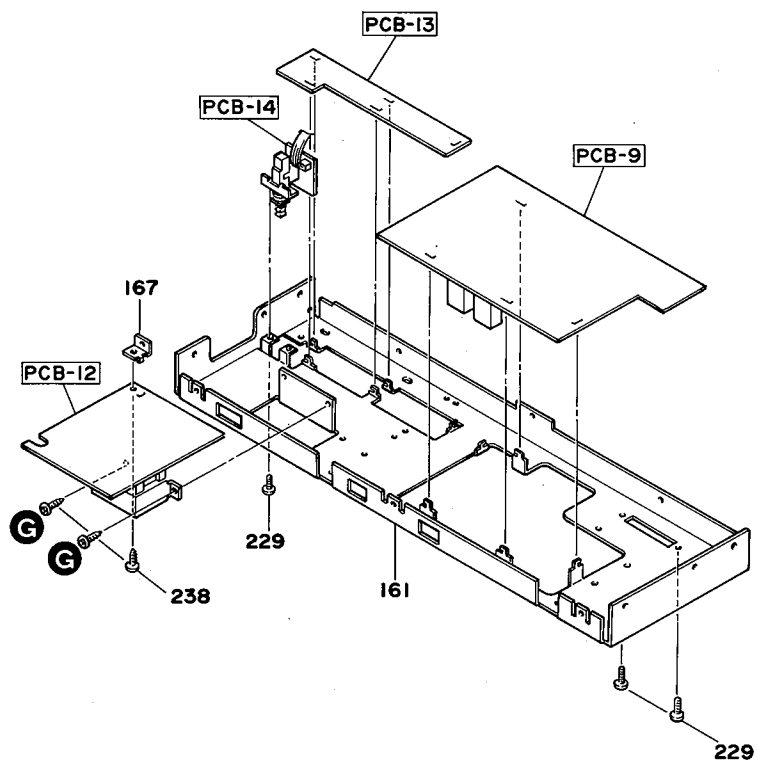


PARTS LIST

Ref. No.	Part No.	Description
161	2211-7286	CHASSIS
167	2219-8019	METAL FITTG, PCB-12
229	2327-R0130064	SCREW
238	2347-R0130064	SCREW

GENERAL UNIT

EXPLODED VIEW (POWER TRANSFORMER CHASSIS)

General and Japan models


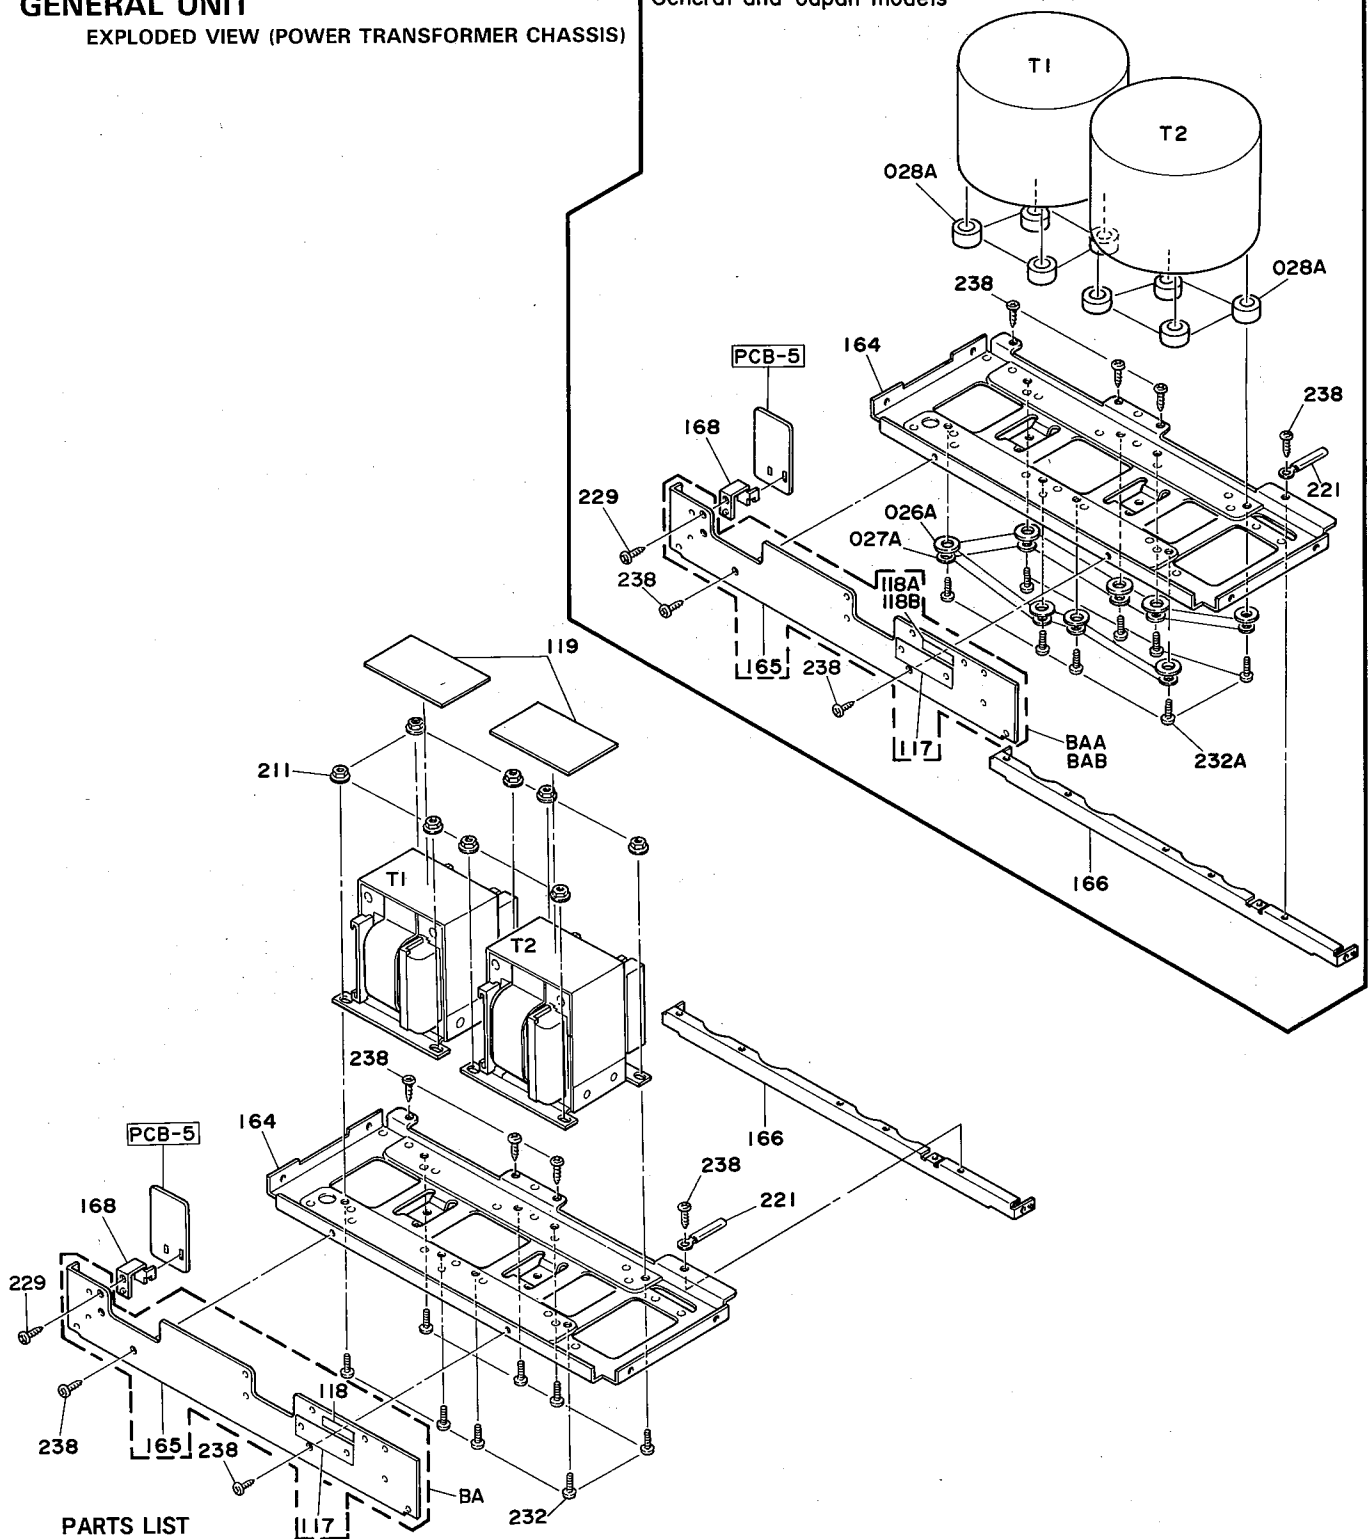


PARTS LIST

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
BA	B219-H200A	L-SIDE METAL FITTG ASS'Y UA	168	2219-8035	METAL FITTG
BAA	B219-H200B	L-SIDE METAL FITTG ASS'Y G	211	2440-7019	SPECIAL NUT UA
BAB	B219-H200C	L-SIDE METAL FITTG ASS'Y N	221	2218-7001	BRACKET, WIRING
026A	2401-0571	WASHER, TRANS G N	229	2327-R0130064	SCREW
027A	2412-5042	SPRING WASHER, TRANS G N	232	2327-R0140104	SCREW, TRANS UA
028A	2132-7150	SPACER, TRANS G N	232A	2327-R0150124	SCREW, TRANS G N
117	1756-05910	LABEL	238	2347-R0130064	SCREW
118	1756-01450	LABEL, FUSE UA	T1	5584-701555	XFORMER, POWER UA
118A	1756-01405	LABEL, FUSE G	T1	5584-701556	XFORMER, POWER G
118B	1756-01440	LABEL N	T1	5584-702556	XFORMER, POWER N
119	1756-06901	LABEL, TRANS	T2	5584-701555	XFORMER, POWER UA
164	2219-8007	METAL FITTG, TRANS	T2	5584-701556	XFORMER, POWER G
165	2219-8010	METAL FITTG L-SIDE	T2	5584-702556	XFORMER, POWER N

GENERAL UNIT


EXPLODED VIEW (CABINET BACK ASS'Y)

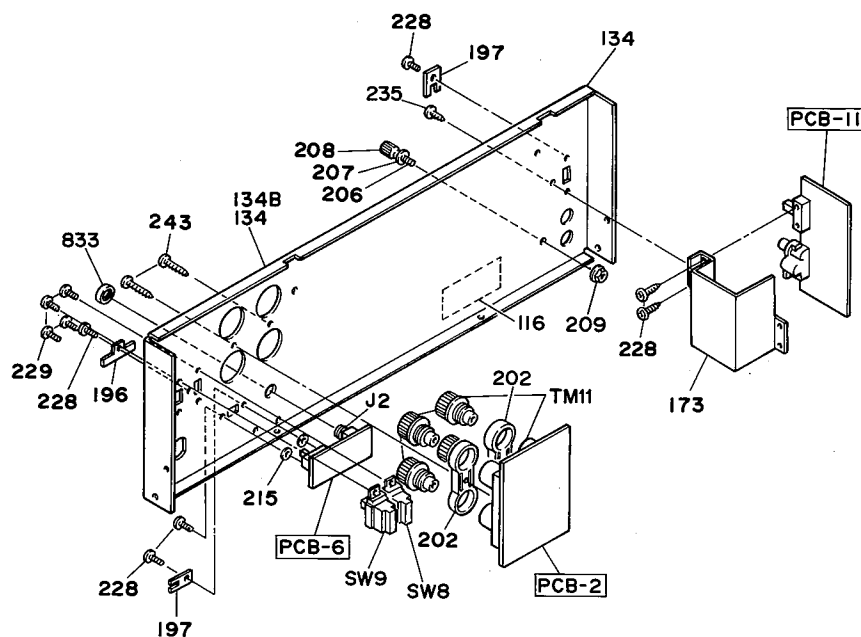

PARTS LIST


Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
029A	2132-01406	SPACER, VOLT SELECT G	208	2440-7027	SPECIAL NUT, GND
030A	2327-R0130164	SCREW, VOLT SELECT G	209	2440-7016	SPECIAL NUT, GND
031A	2440-7016	SPECIAL NUT, VOLT SELECT G	215	2402-0374	PLASTIC WASHER
116	1756-CSA	LABEL, CSA UA	228	2327-260549	SCREW, SLIDE SW
134	1424-21301	CABINET BACK, REAR UA	229	2327-R0130064	SCREW
134A	1424-21303	CABINET BACK, REAR G	235	2340-7003	SPECIAL SCREW
134B	1424-21302	CABINET BACK, REAR N	243	2347-R0130164	SCREW
173	2219-8147	METAL FITTG, PCB-11	833	2440-7028	SPECIAL NUT
196	2240-7311	HOLDER, SW8/SW9	J2	4451-00177	JACK, IP
197	2240-7233	HOLDER	SW2	4411-1047112	SWITCH, ROTARY G
202	2132-7151	SPACER	SW8	4421-0227230	SWITCH, SLIDE
206	2310-7036	SPECIAL SCREW, GND	SW9	4421-0227230	SWITCH, SLIDE
207	2410-7018	SPECIAL WASHER, GND			

PCB-1 Main P. C. Board

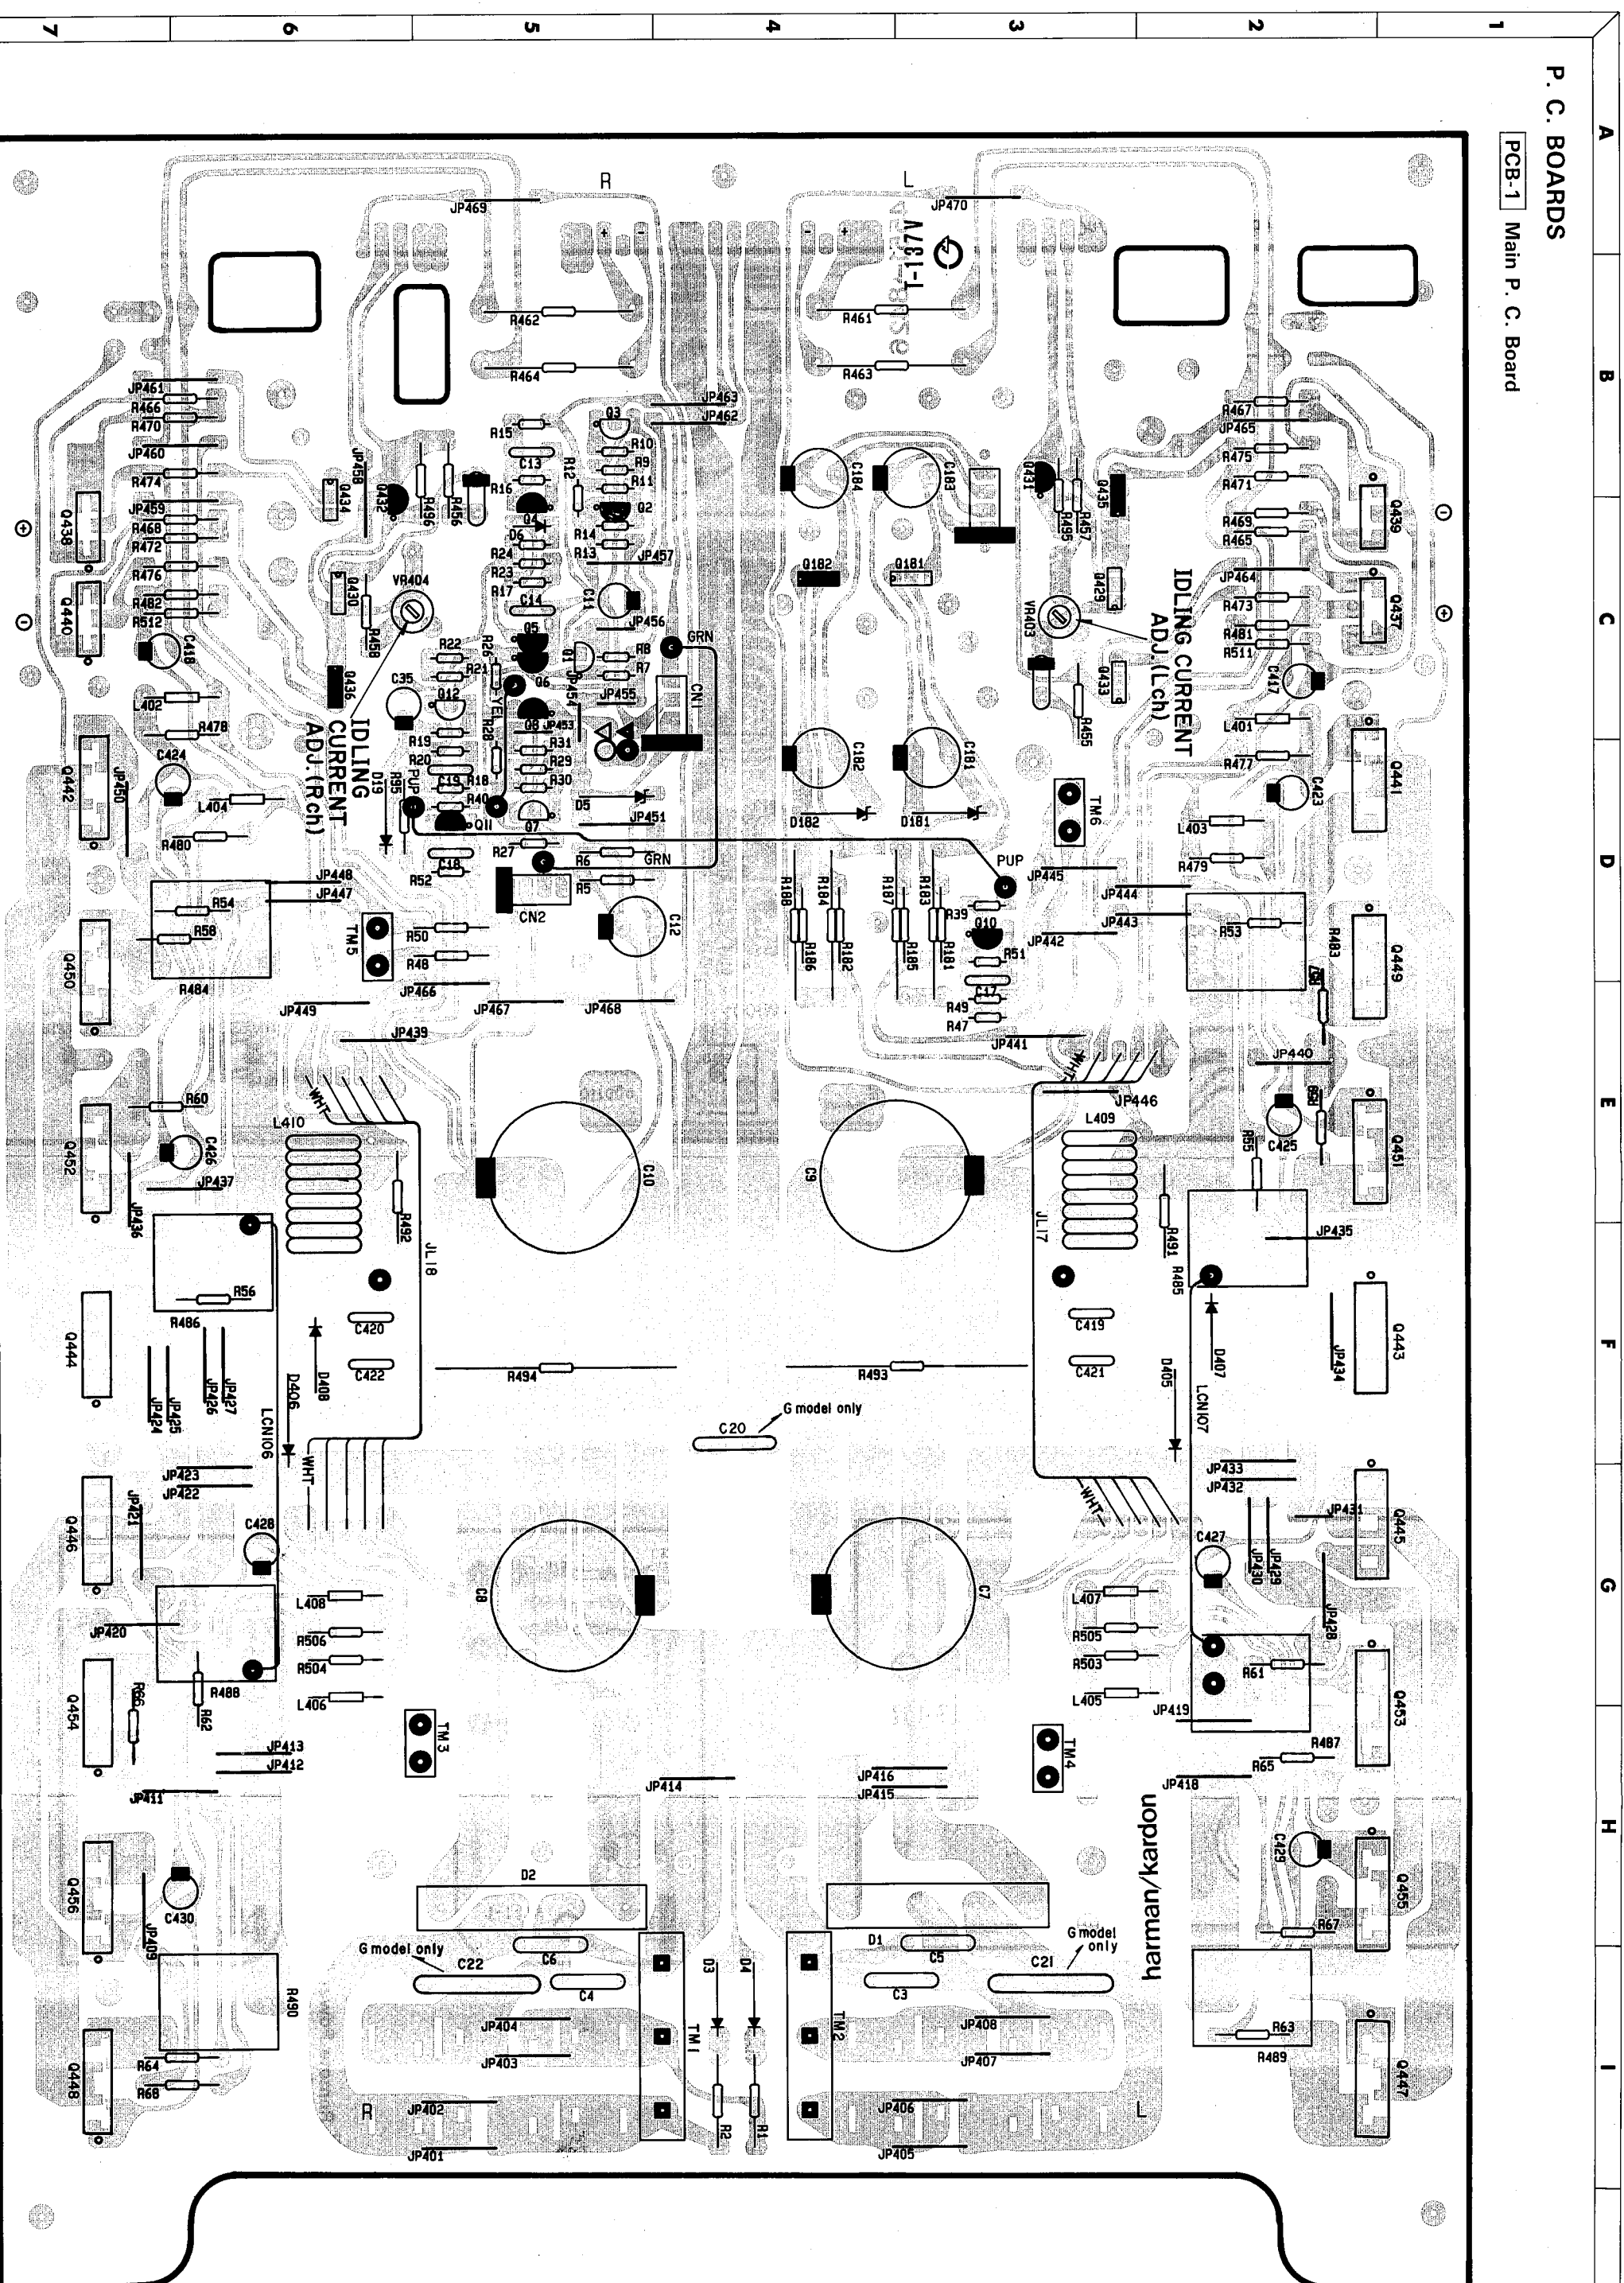


P. C. BOARDS


PCB-2 Speaker Terminal P. C. Board

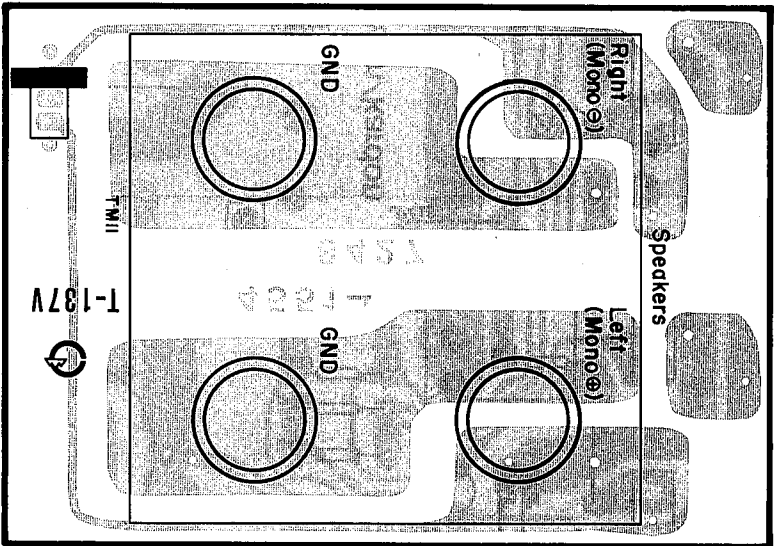


PCB-5 Protection P. C. Board

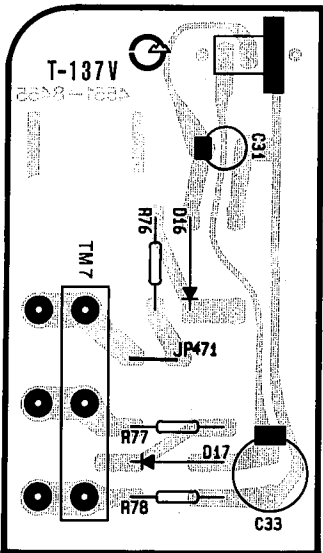

PCB-6 Remote Power P. C. Board

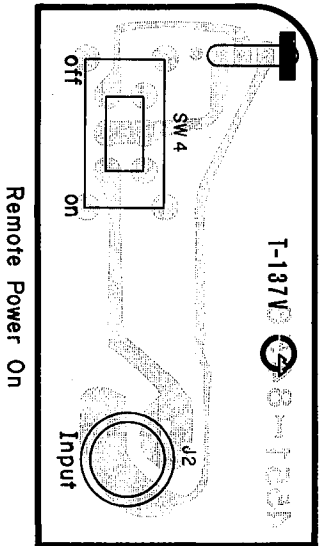

PCB-9 Power Level Indicators P. C. Board

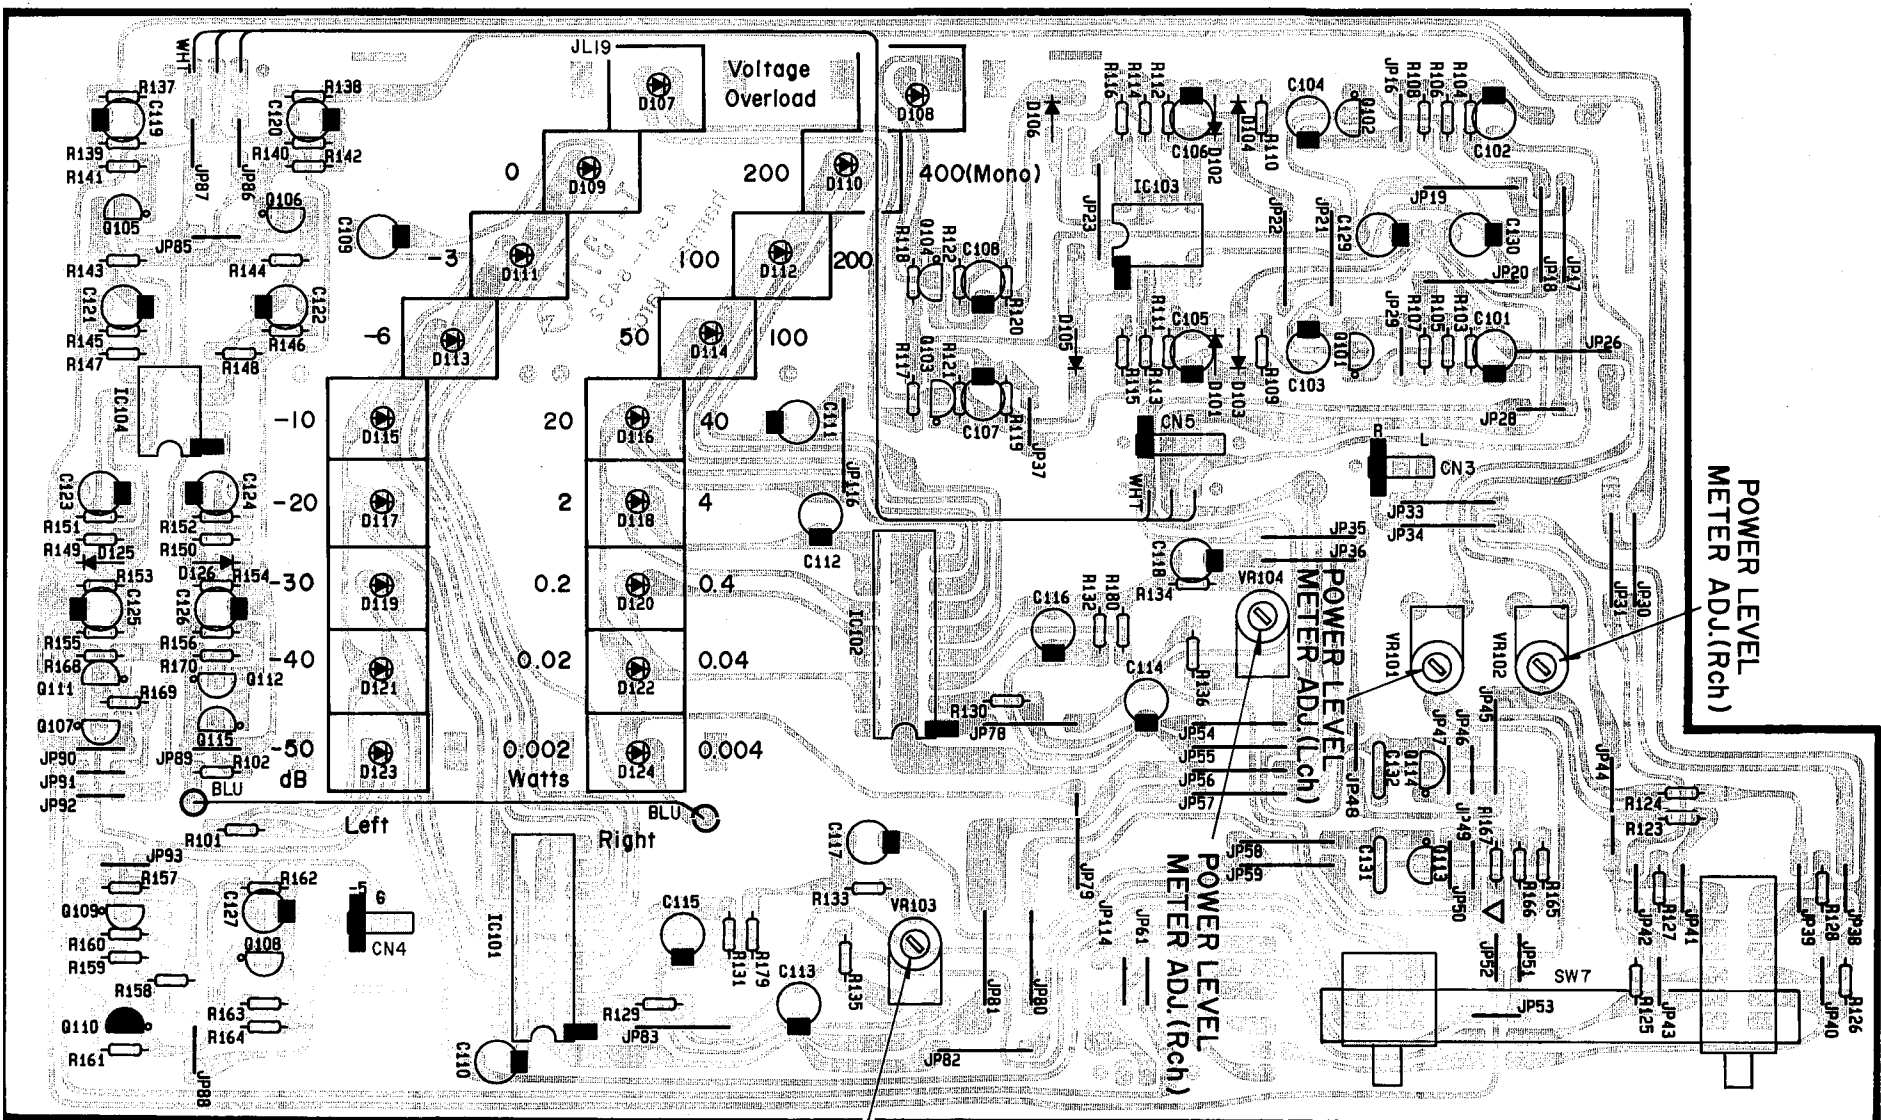


On/Off — Display — 8Ω/4Ω (Mono)

POWER LEVEL
METER ADJ.
(Lch)


P. C. BOARDS

PCB-10 Pre Driver P. C. Board

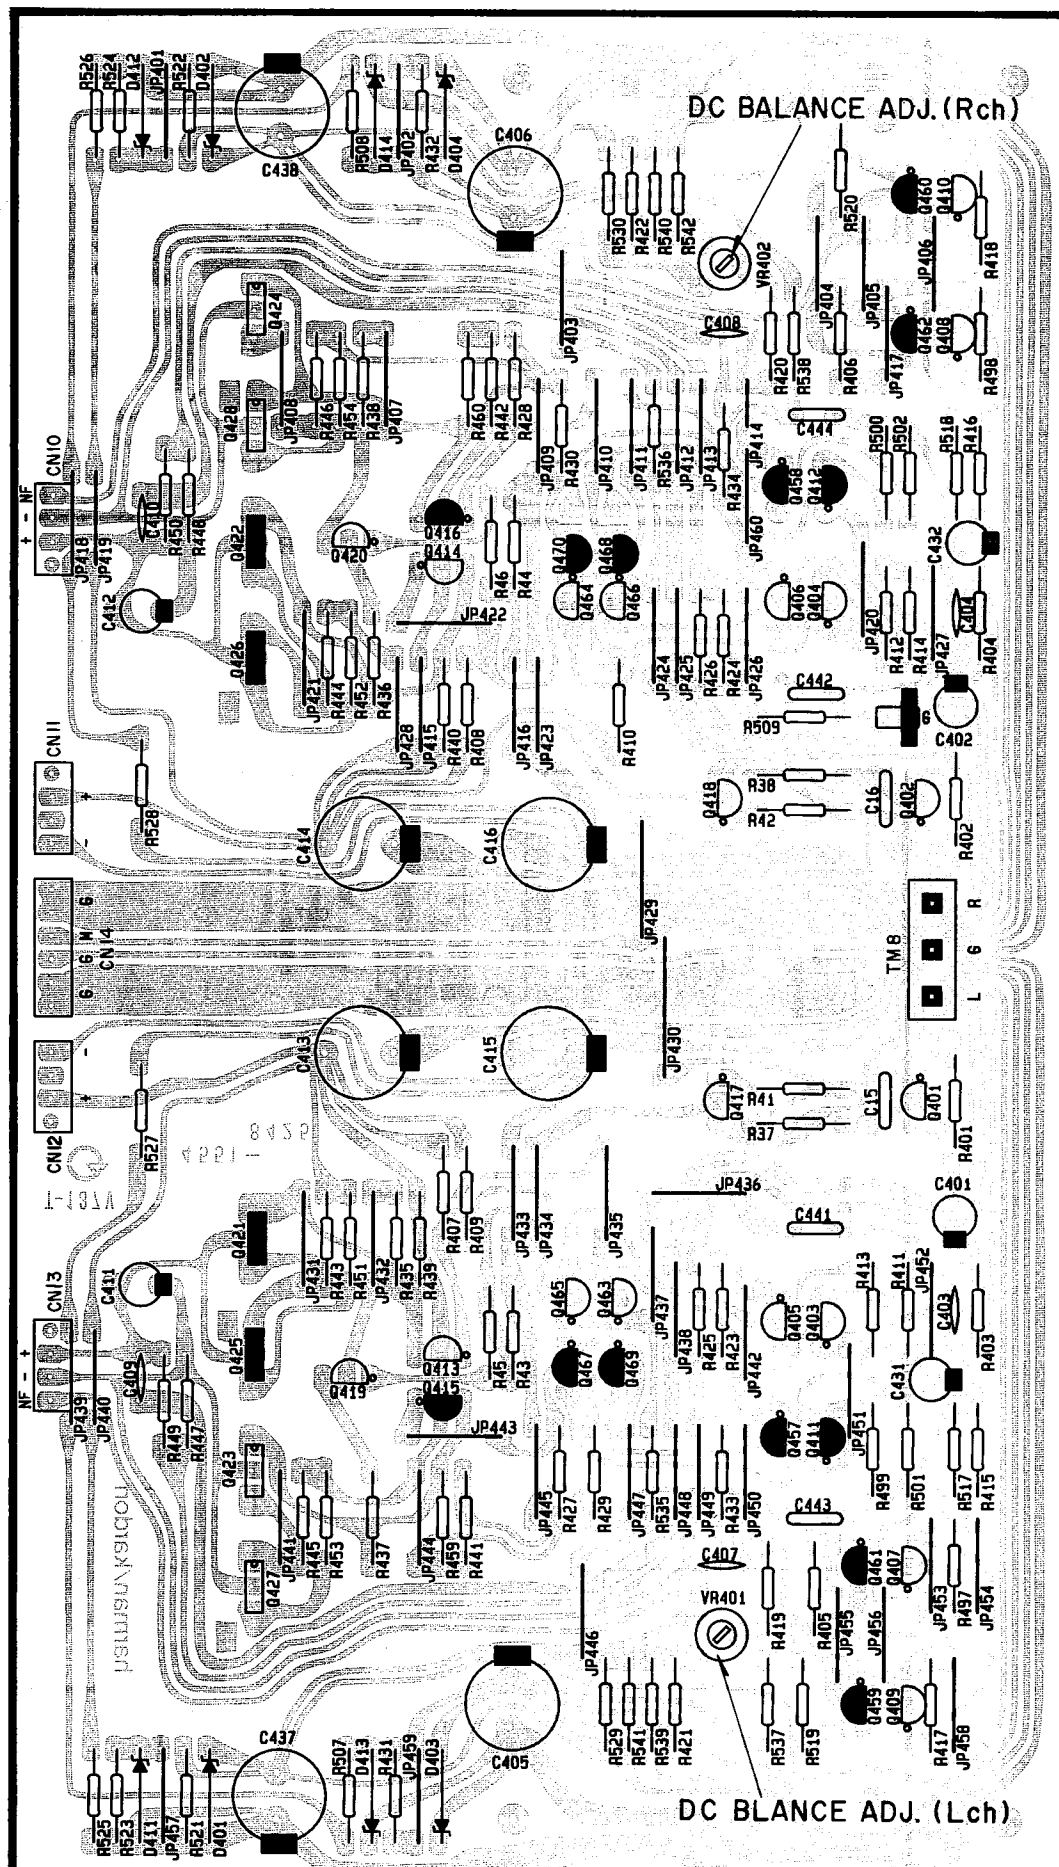


P. C. BOARDS

PCB-13 LED P. C. Board

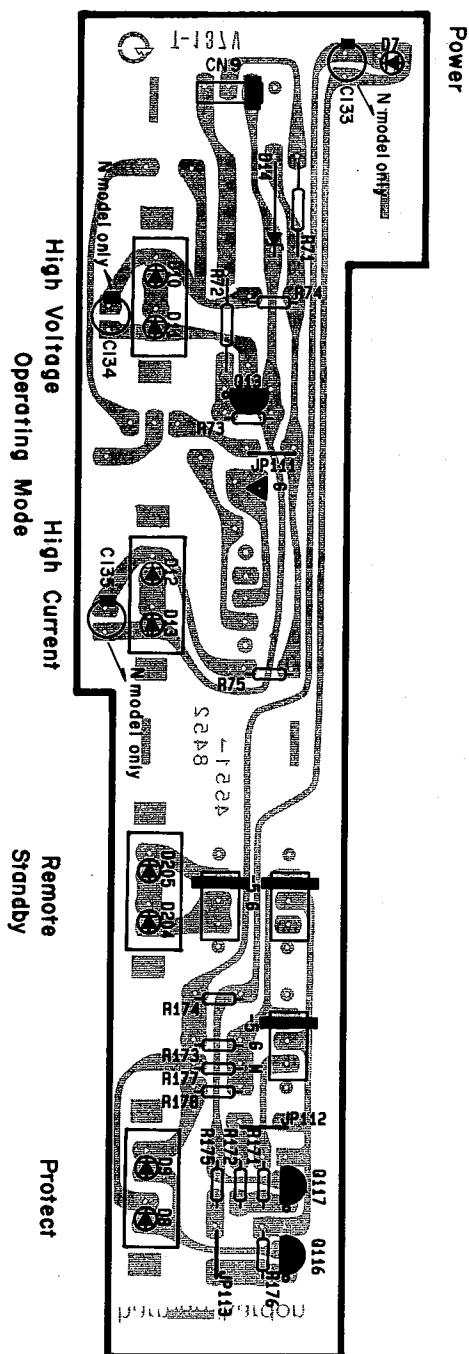

PCB-14 Power Switch P. C. Board



ELECTRICAL PARTS LIST

Ser. No. Ref. No. Part No. Description

PCB-1 MAIN P.C.BOARD

CAPACITORS

583	C3	5352-1041957	CAP, MTL .1μ	
583	C4	5352-1041957	CAP, MTL .1μ	
583	C5	5352-1041957	CAP, MTL .1μ	
583	C6	5352-1041957	CAP, MTL .1μ	
798	C7	5341-109J0966	CAP, ELE 10000μ/100V	UA G
798B	C7	5341-109J0285	CAP, ELE 10000μ/100V	N
798	C8	5341-109J0966	CAP, ELE 10000μ/100V	UA G
798B	C8	5341-109J0285	CAP, ELE 10000μ/100V	N
798	C9	5341-109J0966	CAP, ELE 10000μ/100V	UA G
798B	C9	5341-109J0285	CAP, ELE 10000μ/100V	N
798	C10	5341-109J0966	CAP, ELE 10000μ/100V	UA G
798B	C10	5341-109J0285	CAP, ELE 10000μ/100V	N
693	C11	5345-336B0951	CAP, MINI ELE 33μ/10V	
694	C12	5345-336F041	CAP, MINI ELE 33μ/50V	
697	C13	5354-334593	CAP, MYL .33μ	
697	C14	5354-334593	CAP, MYL .33μ	
698	C17	5354-104593	CAP, MYL .1μ	
698	C18	5354-104593	CAP, MYL .1μ	
700	C19	5354-683K1HM	CAP, MYL .068μ	
052A	C20	5361-6820423	CAP, CER 6800p	G
051A	C21	5352-1040962	CAP, MTL .1μ	G
051A	C22	5352-1040962	CAP, MTL .1μ	G
692	C35	5345-105J0962	CAP, MINI ELE 1μ/100V	
674	C181	5345-337C041	CAP, MINI ELE 330μ/16V	
674	C182	5345-337C041	CAP, MINI ELE 330μ/16V	
674	C183	5345-337C041	CAP, MINI ELE 330μ/16V	
674	C184	5345-337C041	CAP, MINI ELE 330μ/16V	
535	C417	5345-106C041	CAP, MINI ELE 10μ/16V	
535	C418	5345-106C041	CAP, MINI ELE 10μ/16V	
539	C419	5352-4731960	CAP, MTL .047μ	
539	C420	5352-4731960	CAP, MTL .047μ	
539	C421	5352-4731960	CAP, MTL .047μ	
539	C422	5352-4731960	CAP, MTL .047μ	
535	C423	5345-106C041	CAP, MINI ELE 10μ/16V	
535	C424	5345-106C041	CAP, MINI ELE 10μ/16V	
535	C425	5345-106C041	CAP, MINI ELE 10μ/16V	
535	C426	5345-106C041	CAP, MINI ELE 10μ/16V	
535	C427	5345-106C041	CAP, MINI ELE 10μ/16V	
535	C428	5345-106C041	CAP, MINI ELE 10μ/16V	
535	C429	5345-106C041	CAP, MINI ELE 10μ/16V	
535	C430	5345-106C041	CAP, MINI ELE 10μ/16V	

RESISTORS

701	R1	5171-561572	RES, MTL 1P 560	
702	R2	5171-561572	RES, MTL 1P 560	
703	R5	5135-103522	RES, CBN 1/2P 10K	
702	R6	5135-221522	RES, CBN 1/2P 220	
706	R7	5232-472J16P	RES, CBN 1/6P 4.7K	
707	R8	5232-334J16P	RES, CBN 1/6P 330K	
708	R9	5232-104J16P	RES, CBN 1/6P 100K	
708	R10	5232-104J16P	RES, CBN 1/6P 100K	
705	R11	5232-103J16P	RES, CBN 1/6P 10K	
709	R12	5232-225J16P	RES, CBN 1/6P 2.2M	
710	R13	5232-684J16P	RES, CBN 1/6P 680K	
711	R14	5232-184J16P	RES, CBN 1/6P 180K	
708	R15	5232-104J16P	RES, CBN 1/6P 100K	
712	R16	5232-473J16P	RES, CBN 1/6P 47K	
713	R17	5232-223J16P	RES, CBN 1/6P 22K	
712	R18	5232-473J16P	RES, CBN 1/6P 47K	
714	R19	5232-152J16P	RES, CBN 1/6P 1.5K	
713	R20	5232-223J16P	RES, CBN 1/6P 22K	
715	R21	5232-393J16P	RES, CBN 1/6P 39K	
705	R22	5232-103J16P	RES, CBN 1/6P 10K	
713	R23	5232-223J16P	RES, CBN 1/6P 22K	
712	R24	5232-473J16P	RES, CBN 1/6P 47K	
724	R26	5232-102J16P	RES, CBN 1/6P 1K	
705	R27	5232-103J16P	RES, CBN 1/6P 10K	
725	R28	5232-153J16P	RES, CBN 1/6P 15K	
708	R29	5232-104J16P	RES, CBN 1/6P 100K	
708	R30	5232-104J16P	RES, CBN 1/6P 100K	
726	R31	5232-823J16P	RES, CBN 1/6P 82K	

706	R40	5232-472J16P	RES, CBN 1/6P 4.7K
721	R47	5232-562J16P	RES, CBN 1/6P 5.6K
727	R48	5135-562522	RES, CBN 1/2P 5.6K
721	R49	5232-562J16P	RES, CBN 1/6P 5.6K
727	R50	5135-562522	RES, CBN 1/2P 5.6K
722	R51	5232-272J16P	RES, CBN 1/6P 2.7K
722	R52	5232-272J16P	RES, CBN 1/6P 2.7K
728	R53	5135-101522	RES, CBN 1/2P 100
728	R54	5135-101522	RES, CBN 1/2P 100
728	R55	5135-101522	RES, CBN 1/2P 100
728	R56	5135-101522	RES, CBN 1/2P 100
728	R57	5135-101522	RES, CBN 1/2P 100
728	R58	5135-101522	RES, CBN 1/2P 100
728	R59	5135-101522	RES, CBN 1/2P 100
728	R60	5135-101522	RES, CBN 1/2P 100
728	R61	5135-101522	RES, CBN 1/2P 100
728	R62	5135-101522	RES, CBN 1/2P 100
728	R63	5135-101522	RES, CBN 1/2P 100
728	R64	5135-101522	RES, CBN 1/2P 100
728	R65	5135-101522	RES, CBN 1/2P 100
728	R66	5135-101522	RES, CBN 1/2P 100
728	R67	5135-101522	RES, CBN 1/2P 100
728	R68	5135-101522	RES, CBN 1/2P 100
696	ΔR95	5102-1014715	RES, FUSE 100
677	R181	5135-223522	RES, CBN 1/2P 22K
677	R182	5135-223522	RES, CBN 1/2P 22K
678	R183	5173-101583	RES, MTL 2P 100
678	R184	5173-101583	RES, MTL 2P 100
680	ΔR185	5102-1804713	RES, FUSE 18
680	ΔR186	5102-1804713	RES, FUSE 18
678	R187	5173-101583	RES, MTL 2P 100
678	R188	5173-101583	RES, MTL 2P 100
570	R455	5135-391522	RES, CBN 1/2P 390
570	R456	5135-391522	RES, CBN 1/2P 390
560	R457	5174-2215Y8	RES, MTL 1/4P 220
560	R458	5174-2215Y8	RES, MTL 1/4P 220
551	ΔR461	5102-1005711	RES, FUSE 10
551	ΔR462	5102-1005711	RES, FUSE 10
551	ΔR463	5102-1005711	RES, FUSE 10
551	ΔR464	5102-1005711	RES, FUSE 10
550	ΔR465	5102-1014715	RES, FUSE 100
550	ΔR466	5102-1014715	RES, FUSE 100
550	ΔR467	5102-1014715	RES, FUSE 100
550	ΔR468	5102-1014715	RES, FUSE 100
549	ΔR469	5102-3R35116	RES, FUSE 3.3
549	ΔR470	5102-3R35116	RES, FUSE 3.3
549	ΔR471	5102-3R35116	RES, FUSE 3.3
549	ΔR472	5102-3R35116	RES, FUSE 3.3
571	R473	5135-150522	RES, CBN 1/2P 15
571	R474	5135-150522	RES, CBN 1/2P 15
571	R475	5135-150522	RES, CBN 1/2P 15
571	R476	5135-150522	RES, CBN 1/2P 15
572	R477	5135-100522	RES, CBN 1/2P 10
572	R478	5135-100522	RES, CBN 1/2P 10
572	R479	5135-100522	RES, CBN 1/2P 10
572	R480	5135-100522	RES, CBN 1/2P 10
559	R481	5174-270381	RES, MTL 1/4P 27
559	R482	5174-270381	RES, MTL 1/4P 27
541	R483	5275-R27671	RES, CEM 5P .27
541	R484	5275-R27671	RES, CEM 5P .27
541	R485	5275-R27671	RES, CEM 5P .27
541	R486	5275-R27671	RES, CEM 5P .27
541	R487	5275-R27671	RES, CEM 5P .27
541	R488	5275-R27671	RES, CEM 5P .27
541	R489	5275-R27671	RES, CEM 5P .27
541	R490	5275-R27671	RES, CEM 5P .27
543	R491	5171-100572	RES, MTL 1P 10
543	R492	5171-100572	RES, MTL 1P 10
542	R493	5175-100571	RES, MTL 3P 10
542	R494	5175-100571	RES, MTL 3P 10
573	R495	5135-221522	RES, CBN 1/2P 220
573	R496	5135-221522	RES, CBN 1/2P 220
572	R503	5135-100522	RES, CBN 1/2P 10
572	R504	5135-100522	RES, CBN 1/2P 10

Ser. No.	Ref. No.	Part No.	Description
572	R506	5135-100522	RES, CBN 1/2P 10
559	R511	5174-270381	RES, MTL 1/4P 27
559	R512	5174-270381	RES, MTL 1/4P 27

TRANSISTORS

681	Q1	5613-2603(E)or(F)	XISTOR, NPN R
682	Q2	5611-1115(E)or(F)	XISTOR, PNP R
681	Q3	5613-2603(E)or(F)	XISTOR, NPN R
682	Q4	5611-1115(E)or(F)	XISTOR, PNP R
682	Q5	5611-1115(E)or(F)	XISTOR, PNP R
682	Q6	5611-1115(E)or(F)	XISTOR, PNP R
681	Q7	5613-2603(E)or(F)	XISTOR, NPN R
682	Q8	5611-1115(E)or(F)	XISTOR, PNP R
683	Q10	5611-970(BL)	XISTOR, PNP R
683	Q11	5611-970(BL)	XISTOR, PNP R
684	Q12	5613-2240(BL)	XISTOR, NPN R
668	Q181	5614-669(C)	XISTOR, NPN A
670	Q182	5612-649(C)	XISTOR, PNP A
524	Q429	5613-3423(O)or(Y)	XISTOR, NPN R
524	Q430	5613-3423(O)or(Y)	XISTOR, NPN R
520	Q431	5611-970(BL)	XISTOR, PNP R
520	Q432	5611-970(BL)	XISTOR, PNP R
510	Q433	5613-2682(P)	XISTOR, NPN R
510	Q434	5613-2682(P)	XISTOR, NPN R
512	Q435	5611-1142(P)	XISTOR, PNP R
512	Q436	5611-1142(P)	XISTOR, PNP R
514	Q437	5611-1306A(Y)	XISTOR, PNP R
514	Q438	5611-1306A(Y)	XISTOR, PNP R
515	Q439	5613-3298A(Y)	XISTOR, NPN R
515	Q440	5613-3298A(Y)	XISTOR, NPN R
516	Q441	5613-3907(O)or(R)	XISTOR, NPN R
516	Q442	5613-3907(O)or(R)	XISTOR, NPN R
516	Q443	5613-3907(O)or(R)	XISTOR, NPN R
516	Q444	5613-3907(O)or(R)	XISTOR, NPN R
516	Q445	5613-3907(O)or(R)	XISTOR, NPN R
516	Q446	5613-3907(O)or(R)	XISTOR, NPN R
516	Q447	5613-3907(O)or(R)	XISTOR, NPN R
516	Q448	5613-3907(O)or(R)	XISTOR, NPN R
518	Q449	5611-1516(O)or(R)	XISTOR, PNP R
518	Q450	5611-1516(O)or(R)	XISTOR, PNP R
518	Q451	5611-1516(O)or(R)	XISTOR, PNP R
518	Q452	5611-1516(O)or(R)	XISTOR, PNP R
518	Q453	5611-1516(O)or(R)	XISTOR, PNP R
518	Q454	5611-1516(O)or(R)	XISTOR, PNP R
518	Q455	5611-1516(O)or(R)	XISTOR, PNP R
518	Q456	5611-1516(O)or(R)	XISTOR, PNP R

DIODES

764	ΔD1	5685-D5SB40	SILICON, BRIDGE
764	ΔD2	5685-D5SB40	SILICON, BRIDGE
687	D3	5632-S5566B	DIODE, RECT
687	D4	5632-S5566B	DIODE, RECT
689	D5	5635-HZ6A-2L	DIODE, ZENER
690	D6	5631-ISS133	DIODE, DET
687	D19	5632-S5566B	DIODE, RECT
672	D181	5635-HZ12B2L	DIODE, ZENER
672	D182	5635-HZ12B2L	DIODE, ZENER
527	D405	5632-10DF2	DIODE, RECT
527	D406	5632-10DF2	DIODE, RECT
527	D407	5632-10DF2	DIODE, RECT
527	D408	5632-10DF2	DIODE, RECT
528	D409	5641-MV12YM	VARISTOR
529	D410	5641-MV12YM	VARISTOR

COILS

530	L401	5597-45502	CORE, BEADS
530	L402	5597-45502	CORE, BEADS
530	L403	5597-45502	CORE, BEADS
530	L404	5597-45502	CORE, BEADS
530	L405	5597-45502	CORE, BEADS
530	L406	5597-45502	CORE, BEADS
530	L407	5597-45502	CORE, BEADS
530	L408	5597-45502	CORE, BEADS
540	L409	5991-7175	SPRING COIL
540	L410	5991-7175	SPRING COIL

Ser. No.	Ref. No.	Part No.	Description
CONTROLS			
562	VR403	5101-3317674	RES, SEMI FIX 330
562	VR404	5101-3317674	RES, SEMI FIX 330

MISCELLANEOUS

861	CN1	4443-030185	CONNECTOR
861	CN2	4443-030185	CONNECTOR
844	JL5	4242-R0404351	JUMPER LEAD
851	JL17	4242-R0105101	JUMPER LEAD
851	JL18	4242-R0105101	JUMPER LEAD
686	PT1	5192-100TS1	POSISTOR
686	PT2	5192-100TS1	POSISTOR
855	TM1	4214-11034	TERMINAL
855	TM2	4214-11034	TERMINAL
856	TM3	4214-11021	TERMINAL
856	TM4	4214-11021	TERMINAL
856	TM5	4214-11021	TERMINAL
856	TM6	4214-11021	TERMINAL
816	LCN101	4163-0145024	CONNECTOR W/W
817	LCN102	4163-0145025	CONNECTOR W/W
818	LCN103	4163-0145026	CONNECTOR W/W
819	LCN104	4163-0145027	CONNECTOR W/W
821	LCN106	4163-0110024	CONNECTOR W/W
821	LCN107	4163-0110024	CONNECTOR W/W
057A	Δ	4472-7122	HOLDER, FUSE G

PCB-2 SPEAKER TERMINAL P.C.BOARD

847	JL3	4242-R0403651	JUMPER LEAD
838	TM11	4214-184	TERMINAL

PCB-5 PROTECTION P.C.BOARD

CAPACITORS

761	C31	5345-107D041	CAP, MINI ELE 100μ/25V
762	C33	5345-476C041	CAP, MINI ELE 47μ/16V

RESISTORS

758	ΔR76	5102-5604715	RES, FUSE 56
759	ΔR77	5102-2204715	RES, FUSE 22
760	ΔR78	5102-5R64715	RES, FUSE 5.6

DIODES

757	D16	5632-S5566B	DIODE, RECT
757	D17	5632-S5566B	DIODE, RECT

MISCELLANEOUS

850	JL9	4242-R0403501	JUMPER LEAD
857	TM7	4214-11034	TERMINAL
822	LCN108	4163-0110022	CONNECTOR W/W
823	LCN109	4163-0110021	CONNECTOR W/W
824	LCN110	4163-0110023	CONNECTOR W/W

PCB-6 REMOTE POWER P.C.BOARD

832	J2	4451-00177	JACK, IP
852	JL6	4242-R0404451	JUMPER LEAD
834	SW4	4421-0227142	SWITCH, SLIDE

PCB-9 POWER LEVEL INDICATORS P.C.BOARD

CAPACITORS

631	C101	5345-106C041	CAP, MINI ELE 10μ/16V
631	C102	5345-106C041	CAP, MINI ELE 10μ/16V
631	C103	5345-106C041	CAP, MINI ELE 10μ/16V
631	C104	5345-106C041	CAP, MINI ELE 10μ/16V
634	C105	5345-225F041	CAP, MINI ELE 2.2μ/50V
634	C106	5345-225F041	CAP, MINI ELE 2.2μ/50V
635	C107	5345-336C041	CAP, MINI ELE 33μ/16V
635	C108	5345-336C041	CAP, MINI ELE 33μ/16V
633	C109	5345-336B0951	CAP, MINI ELE 33μ/10V
633	C110	5345-336B0951	CAP, MINI ELE 33μ/10V
633	C111	5345-336B0951	CAP, MINI ELE 33μ/10V

Ser. No.	Ref. No.	Part No.	Description	Ser. No.	Ref. No.	Part No.	Description
631	C113	5345-106C041	CAP, MINI ELE 10 μ /16V	649	R155	5232-222J16P	RES, CBN 1/6P 2.2K
631	C114	5345-106C041	CAP, MINI ELE 10 μ /16V	649	R156	5232-222J16P	RES, CBN 1/6P 2.2K
628	C115	5345-104F041	CAP, MINI ELE .1 μ /50V	645	R157	5232-103J16P	RES, CBN 1/6P 10K
628	C116	5345-104F041	CAP, MINI ELE .1 μ /50V	656	R158	5232-225J16P	RES, CBN 1/6P 2.2M
634	C117	5345-225F041	CAP, MINI ELE 2.2 μ /50V	657	R159	5232-104J16P	RES, CBN 1/6P 100K
634	C118	5345-225F041	CAP, MINI ELE 2.2 μ /50V	657	R160	5232-104J16P	RES, CBN 1/6P 100K
630	C119	5345-474F041	CAP, MINI ELE .47 μ /50V	658	R161	5232-184J16P	RES, CBN 1/6P 180K
630	C120	5345-474F041	CAP, MINI ELE .47 μ /50V	659	R162	5232-564J16P	RES, CBN 1/6P 560K
631	C121	5345-106C041	CAP, MINI ELE 10 μ /16V	660	R163	5232-394J16P	RES, CBN 1/6P 390K
631	C122	5345-106C041	CAP, MINI ELE 10 μ /16V	653	R164	5232-472J16P	RES, CBN 1/6P 4.7K
631	C123	5345-106C041	CAP, MINI ELE 10 μ /16V	655	R165	5232-105J16P	RES, CBN 1/6P 1M
631	C124	5345-106C041	CAP, MINI ELE 10 μ /16V	655	R166	5232-105J16P	RES, CBN 1/6P 1M
632	C125	5345-226C041	CAP, MINI ELE 22 μ /16V	645	R167	5232-103J16P	RES, CBN 1/6P 10K
632	C126	5345-226C041	CAP, MINI ELE 22 μ /16V	655	R168	5232-105J16P	RES, CBN 1/6P 1M
636	C127	5345-336B041	CAP, MINI ELE 33 μ /10V	666	R169	5135-562522	RES, CBN 1/2P 5.6K
631	C129	5345-106C041	CAP, MINI ELE 10 μ /16V	655	R170	5232-105J16P	RES, CBN 1/6P 1M
631	C130	5345-106C041	CAP, MINI ELE 10 μ /16V	665	R179	5232-331J16P	RES, CBN 1/6P 330
639	C131	5354-104593	CAP, MYL .1 μ	665	R180	5232-331J16P	RES, CBN 1/6P 330
639	C132	5354-104593	CAP, MYL .1 μ				
RESISTORS				INTEGRATED CIRCUITS			
641	R101	5232-122J16P	RES, CBN 1/6P 1.2K	621	IC101	5653-BA681A	IC, LINEAR
641	R102	5232-122J16P	RES, CBN 1/6P 1.2K	621	IC102	5653-BA681A	IC, LINEAR
642	R103	5232-473J16P	RES, CBN 1/6P 47K	622	IC103	5653-TA75558P	IC, LINEAR
642	R104	5232-473J16P	RES, CBN 1/6P 47K	622	IC104	5653-TA75558P	IC, LINEAR
643	R105	5232-102J16P	RES, CBN 1/6P 1K				
643	R106	5232-102J16P	RES, CBN 1/6P 1K	TRANSISTORS			
640	R107	5232-123J16P	RES, CBN 1/6P 12K	624	Q101	5613-2603(E)or(F)	XISTOR, NPN R
640	R108	5232-123J16P	RES, CBN 1/6P 12K	624	Q102	5613-2603(E)or(F)	XISTOR, NPN R
644	R109	5232-101J16P	RES, CBN 1/6P 100	624	Q103	5613-2603(E)or(F)	XISTOR, NPN R
644	R110	5232-101J16P	RES, CBN 1/6P 100	624	Q104	5613-2603(E)or(F)	XISTOR, NPN R
645	R111	5232-103J16P	RES, CBN 1/6P 10K	624	Q105	5613-2603(E)or(F)	XISTOR, NPN R
645	R112	5232-103J16P	RES, CBN 1/6P 10K	624	Q106	5613-2603(E)or(F)	XISTOR, NPN R
646	R113	5232-820J16P	RES, CBN 1/6P 82	624	Q107	5613-2603(E)or(F)	XISTOR, NPN R
646	R114	5232-820J16P	RES, CBN 1/6P 82	624	Q108	5613-2603(E)or(F)	XISTOR, NPN R
645	R115	5232-103J16P	RES, CBN 1/6P 10K	624	Q109	5613-2603(E)or(F)	XISTOR, NPN R
645	R116	5232-103J16P	RES, CBN 1/6P 10K	625	Q110	5611-1115(E)or(F)	XISTOR, PNP R
647	R117	5232-152J16P	RES, CBN 1/6P 1.5K	626	Q111	5616-2SK364(V)or(BL)	FET, N-CH
647	R118	5232-152J16P	RES, CBN 1/6P 1.5K	626	Q112	5616-2SK364(V)or(BL)	FET, N-CH
648	R119	5232-333J16P	RES, CBN 1/6P 33K	626	Q113	5616-2SK364(V)or(BL)	FET, N-CH
648	R120	5232-333J16P	RES, CBN 1/6P 33K	626	Q114	5616-2SK364(V)or(BL)	FET, N-CH
649	R121	5232-222J16P	RES, CBN 1/6P 2.2K	624	Q115	5613-2603(E)or(F)	XISTOR, NPN R
649	R122	5232-222J16P	RES, CBN 1/6P 2.2K				
667	R123	5174-474381	RES, MTL 1/4P 470K	DIODES			
667	R124	5174-474381	RES, MTL 1/4P 470K	629	D101	5631-ISS133	DIODE, DET
664	R125	5232-563J16P	RES, CBN 1/6P 56K	629	D102	5631-ISS133	DIODE, DET
664	R126	5232-563J16P	RES, CBN 1/6P 56K	629	D103	5631-ISS133	DIODE, DET
663	R127	5232-124J16P	RES, CBN 1/6P 120K	629	D104	5631-ISS133	DIODE, DET
663	R128	5232-124J16P	RES, CBN 1/6P 120K	629	D105	5631-ISS133	DIODE, DET
651	R129	5232-563J16P	RES, CBN 1/6P 56K	629	D106	5631-ISS133	DIODE, DET
651	R130	5232-563J16P	RES, CBN 1/6P 56K	805	D107	5637-GL5HD10	LED
655	R131	5232-105J16P	RES, CBN 1/6P 1M	805	D108	5637-GL5HD10	LED
655	R132	5232-105J16P	RES, CBN 1/6P 1M	807	D109	5637-GL5HY10	LED
645	R133	5232-103J16P	RES, CBN 1/6P 10K	807	D110	5637-GL5HY10	LED
645	R134	5232-103J16P	RES, CBN 1/6P 10K	807	D111	5637-GL5HY10	LED
652	R135	5232-224J16P	RES, CBN 1/6P 220K	807	D112	5637-GL5HY10	LED
652	R136	5232-224J16P	RES, CBN 1/6P 220K	807	D113	5637-GL5HY10	LED
661	R137	5232-154J16P	RES, CBN 1/6P 150K	807	D114	5637-GL5HY10	LED
661	R138	5232-154J16P	RES, CBN 1/6P 150K	806	D115	5637-GL5EG21	LED
642	R139	5232-473J16P	RES, CBN 1/6P 47K	806	D116	5637-GL5EG21	LED
642	R140	5232-473J16P	RES, CBN 1/6P 47K	806	D117	5637-GL5EG21	LED
643	R141	5232-102J16P	RES, CBN 1/6P 1K	806	D118	5637-GL5EG21	LED
643	R142	5232-102J16P	RES, CBN 1/6P 1K	806	D119	5637-GL5EG21	LED
640	R143	5232-123J16P	RES, CBN 1/6P 12K	806	D120	5637-GL5EG21	LED
640	R144	5232-123J16P	RES, CBN 1/6P 12K	806	D121	5637-GL5EG21	LED
644	R145	5232-101J16P	RES, CBN 1/6P 100	806	D122	5637-GL5EG21	LED
644	R146	5232-101J16P	RES, CBN 1/6P 100	806	D123	5637-GL5EG21	LED
662	R147	5232-223J16P	RES, CBN 1/6P 22K	806	D124	5637-GL5EG21	LED
662	R148	5232-223J16P	RES, CBN 1/6P 22K	629	D125	5631-ISS133	DIODE, DET
662	R149	5232-223J16P	RES, CBN 1/6P 22K	629	D126	5631-ISS133	DIODE, DET
662	R150	5232-223J16P	RES, CBN 1/6P 22K				
654	R151	5232-561J16P	RES, CBN 1/6P 560	CONTROLS			
654	R152	5232-561J16P	RES, CBN 1/6P 560	638	VR101	5101-30401933300K	RES, SEMI FIX
648	R153	5232-333J16P	RES, CBN 1/6P 33K	638	VR102	5101-30401933300K	RES, SEMI FIX
648	R154	5232-333J16P	RES, CBN 1/6P 33K	637	VR103	5101-50171920500	RES, SEMI FIX
				637	VR104	5101-50171920500	RES, SEMI FIX
				MISCELLANEOUS			

Ser. No.	Ref. No.	Part No.	Description
863	CN5	4443-040185	CONNECTOR
853	JL19	4242-R0103251	JUMPER LEAD
810	SW7	4431-02067179	SWITCH, PUSH

PCB-10 PRE DRIVER P.C.BOARD

CAPACITORS

699	C15	5354-104593	CAP, MYL .1μ
699	C16	5354-104593	CAP, MYL .1μ
531	C401	5345-107B0951	CAP, MINI ELE 100μ/10V
531	C402	5345-107B0951	CAP, MINI ELE 100μ/10V
536	C403	5353-680534	CAP, MCA 68p UA N
055A	C403	5359-5615851	CAP, PPP 560p G
536	C404	5353-680534	CAP, MCA 68p UA N
055A	C404	5359-5615851	CAP, PPP 560p G
532	C405	5345-337C041	CAP, MINI ELE 330μ/16V
532	C406	5345-337C041	CAP, MINI ELE 330μ/16V
537	C407	5353-040934	CAP, MCA 4p
537	C408	5353-040934	CAP, MCA 4p
536	C409	5353-680534	CAP, MCA 68p
536	C410	5353-680534	CAP, MCA 68p
538	C411	5345-476B0951	CAP, MINI ELE 47μ/10V
538	C412	5345-476B0951	CAP, MINI ELE 47μ/10V
534	C413	5345-477J0962	CAP, MINI ELE 470μ/100V UA G
534B	C413	5345-477J0266	CAP, MINI ELE 470μ/100V N
534	C414	5345-477J0962	CAP, MINI ELE 470μ/100V UA G
534B	C414	5345-477J0266	CAP, MINI ELE 470μ/100V N
534	C415	5345-477J0962	CAP, MINI ELE 470μ/100V UA G
534B	C415	5345-477J0266	CAP, MINI ELE 470μ/100V N
534	C416	5345-477J0962	CAP, MINI ELE 470μ/100V UA G
534B	C416	5345-477J0266	CAP, MINI ELE 470μ/100V N
533	C431	5345-106C041	CAP, MINI ELE 10μ/16V
533	C432	5345-106C041	CAP, MINI ELE 10μ/16V
532	C437	5345-337C041	CAP, MINI ELE 330μ/16V
532	C438	5345-337C041	CAP, MINI ELE 330μ/16V
544	C441	5354-103KIHM	CAP, MYL .01μ
544	C442	5354-103KIHM	CAP, MYL .01μ
544	C443	5354-103KIHM	CAP, MYL .01μ
544	C444	5354-103KIHM	CAP, MYL .01μ

RESISTORS

575	R37	5135-105522	RES, CBN 1/2P 1M
575	R38	5135-105522	RES, CBN 1/2P 1M
574	R41	5135-223522	RES, CBN 1/2P 22K
574	R42	5135-223522	RES, CBN 1/2P 22K
577	R43	5135-473522	RES, CBN 1/2P 47K
577	R44	5135-473522	RES, CBN 1/2P 47K
578	R45	5135-104522	RES, CBN 1/2P 100K
578	R46	5135-104522	RES, CBN 1/2P 100K
563	R401	5135-102522	RES, CBN 1/2P 1K UA N
566A	R401	5135-222522	RES, CBN 1/2P 2.2K G
563	R402	5135-102522	RES, CBN 1/2P 1K UA N
566A	R402	5135-222522	RES, CBN 1/2P 2.2K G
556	R403	5174-223381	RES, MTL 1/4P 22K
556	R404	5174-223381	RES, MTL 1/4P 22K
564	R405	5135-223522	RES, CBN 1/2P 22K
564	R406	5135-223522	RES, CBN 1/2P 22K
547	ΔR407	5102-1024715	RES, FUSE 1K
547	ΔR408	5102-1024715	RES, FUSE 1K
547	ΔR409	5102-1024715	RES, FUSE 1K
547	ΔR410	5102-1024715	RES, FUSE 1K
565	R411	5135-221522	RES, CBN 1/2P 220
565	R412	5135-221522	RES, CBN 1/2P 220
565	R413	5135-221522	RES, CBN 1/2P 220
565	R414	5135-221522	RES, CBN 1/2P 220
566	R415	5135-222522	RES, CBN 1/2P 2.2K
566	R416	5135-222522	RES, CBN 1/2P 2.2K
552	R417	5174-241381	RES, MTL 1/4P 240 UA N
563A	R417	5135-331522	RES, CBN 1/2P 330 G
552	R418	5174-241381	RES, MTL 1/4P 240 UA N
563A	R418	5135-331522	RES, CBN 1/2P 330 G
567	R419	5135-563522	RES, CBN 1/2P 56K
567	R420	5135-563522	RES, CBN 1/2P 56K
564	R421	5135-223522	RES, CBN 1/2P 22K

554	R423	5174-431381	RES, MTL 1/4P 430
554	R424	5174-431381	RES, MTL 1/4P 430
555	R425	5174-220381	RES, MTL 1/4P 22
555	R426	5174-220381	RES, MTL 1/4P 22
547	ΔR427	5102-1024715	RES, FUSE 1K
547	ΔR428	5102-1024715	RES, FUSE 1K
547	ΔR429	5102-1024715	RES, FUSE 1K
547	ΔR430	5102-1024715	RES, FUSE 1K
566	R431	5135-222522	RES, CBN 1/2P 2.2K
566	R432	5135-222522	RES, CBN 1/2P 2.2K
556	R433	5174-223381	RES, MTL 1/4P 22K
556	R434	5174-223381	RES, MTL 1/4P 22K
568	R435	5135-273522	RES, CBN 1/2P 27K
568	R436	5135-273522	RES, CBN 1/2P 27K
564	R437	5135-223522	RES, CBN 1/2P 22K
564	R438	5135-223522	RES, CBN 1/2P 22K
557	R439	5174-222381	RES, MTL 1/4P 2.2K
557	R440	5174-222381	RES, MTL 1/4P 2.2K
557	R441	5174-222381	RES, MTL 1/4P 2.2K
557	R442	5174-222381	RES, MTL 1/4P 2.2K
548	ΔR443	5102-1214715	RES, FUSE 120
548	ΔR444	5102-1214715	RES, FUSE 120
548	ΔR445	5102-1214715	RES, FUSE 120
548	ΔR446	5102-1214715	RES, FUSE 120
569	R447	5135-123522	RES, CBN 1/2P 12K
569	R448	5135-123522	RES, CBN 1/2P 12K
569	R449	5135-123522	RES, CBN 1/2P 12K
569	R450	5135-123522	RES, CBN 1/2P 12K
548	ΔR451	5102-1214715	RES, FUSE 120
548	ΔR452	5102-1214715	RES, FUSE 120
548	ΔR453	5102-1214715	RES, FUSE 120
548	ΔR454	5102-1214715	RES, FUSE 120
558	R459	5174-131381	RES, MTL 1/4P 130
558	R460	5174-131381	RES, MTL 1/4P 130
564	R497	5135-223522	RES, CBN 1/2P 22K
564	R498	5135-223522	RES, CBN 1/2P 22K
565	R499	5135-221522	RES, CBN 1/2P 220
565	R500	5135-221522	RES, CBN 1/2P 220
565	R501	5135-221522	RES, CBN 1/2P 220
565	R502	5135-221522	RES, CBN 1/2P 220
566	R507	5135-222522	RES, CBN 1/2P 2.2K
566	R508	5135-222522	RES, CBN 1/2P 2.2K
553	R509	5174-181381	RES, MTL 1/4P 180
566	R517	5135-222522	RES, CBN 1/2P 2.2K
566	R518	5135-222522	RES, CBN 1/2P 2.2K
552	R519	5174-241381	RES, MTL 1/4P 240 UA N
563A	R519	5135-331522	RES, CBN 1/2P 330 G
552	R520	5174-241381	RES, MTL 1/4P 240 UA N
563A	R520	5135-331522	RES, CBN 1/2P 330 G
566	R521	5135-222522	RES, CBN 1/2P 2.2K
566	R522	5135-222522	RES, CBN 1/2P 2.2K
566	R523	5135-222522	RES, CBN 1/2P 2.2K
566	R524	5135-222522	RES, CBN 1/2P 2.2K
566	R525	5135-222522	RES, CBN 1/2P 2.2K
566	R526	5135-222522	RES, CBN 1/2P 2.2K
566	R527	5135-222522	RES, CBN 1/2P 2.2K
566	R528	5135-222522	RES, CBN 1/2P 2.2K
564	R529	5135-223522	RES, CBN 1/2P 22K
564	R530	5135-223522	RES, CBN 1/2P 22K
576	R535	5135-103522	RES, CBN 1/2P 10K
576	R536	5135-103522	RES, CBN 1/2P 10K
576	R537	5135-103522	RES, CBN 1/2P 10K
576	R538	5135-103522	RES, CBN 1/2P 10K
574	R539	5135-223522	RES, CBN 1/2P 22K
574	R540	5135-223522	RES, CBN 1/2P 22K
574	R541	5135-223522	RES, CBN 1/2P 22K
574	R542	5135-223522	RES, CBN 1/2P 22K

TRANSISTORS

501	Q401	5616-2SK364(V)or(BL)	FET, N-CH
501	Q402	5616-2SK364(V)or(BL)	FET, N-CH
502	Q403	5613-2240(BL)	XISTOR, NPN R
502	Q404	5613-2240(BL)	XISTOR, NPN R
502	Q405	5613-2240(BL)	XISTOR, NPN R
502	Q406	5613-2240(BL)	XISTOR, NPN R

Ser. No.	Ref. No.	Part No.	Description
503	Q408	5613-2603(E)or(F)	XISTOR, NPN R
503	Q409	5613-2603(E)or(F)	XISTOR, NPN R
503	Q410	5613-2603(E)or(F)	XISTOR, NPN R
508	Q411	5611-970(BL)	XISTOR, PNP R
508	Q412	5611-970(BL)	XISTOR, PNP R
506	Q413	5613-2320L(F)	XISTOR, NPN R
506	Q414	5613-2320L(F)	XISTOR, NPN R
507	Q415	5611-999L(F)	XISTOR, PNP R
507	Q416	5611-999L(F)	XISTOR, PNP R
508	Q417	5611-970(BL)	XISTOR, PNP R
508	Q418	5611-970(BL)	XISTOR, PNP R
509	Q419	5613-3334	XISTOR, NPN R
509	Q420	5613-3334	XISTOR, NPN R
504	Q421	5611-1142(P)	XISTOR, PNP R
504	Q422	5611-1142(P)	XISTOR, PNP R
522	Q423	5613-2682(P)	XISTOR, NPN R
522	Q424	5613-2682(P)	XISTOR, NPN R
504	Q425	5611-1142(P)	XISTOR, PNP R
504	Q426	5611-1142(P)	XISTOR, PNP R
522	Q427	5613-2682(P)	XISTOR, NPN R
522	Q428	5613-2682(P)	XISTOR, NPN R
508	Q457	5611-970(BL)	XISTOR, PNP R
508	Q458	5611-970(BL)	XISTOR, PNP R
521	Q459	5611-1115(E)or(F)	XISTOR, PNP R
521	Q460	5611-1115(E)or(F)	XISTOR, PNP R
521	Q461	5611-1115(E)or(F)	XISTOR, PNP R
521	Q462	5611-1115(E)or(F)	XISTOR, PNP R
502	Q463	5613-2240(BL)	XISTOR, NPN R
502	Q464	5613-2240(BL)	XISTOR, NPN R
502	Q465	5613-2240(BL)	XISTOR, NPN R
502	Q466	5613-2240(BL)	XISTOR, NPN R
508	Q467	5611-970(BL)	XISTOR, PNP R
508	Q468	5611-970(BL)	XISTOR, PNP R
508	Q469	5611-970(BL)	XISTOR, PNP R
508	Q470	5611-970(BL)	XISTOR, PNP R

DIODES

526	D401	5635-HZ12B2L	DIODE, ZENER
526	D402	5635-HZ12B2L	DIODE, ZENER
526	D403	5635-HZ12B2L	DIODE, ZENER
526	D404	5635-HZ12B2L	DIODE, ZENER
525	D411	5635-HZ22-2L	DIODE, ZENER
525	D412	5635-HZ22-2L	DIODE, ZENER
525	D413	5635-HZ22-2L	DIODE, ZENER
525	D414	5635-HZ22-2L	DIODE, ZENER

CONTROLS

561	VR401	5101-4738775 47K	RES, SEMI FIX
561	VR402	5101-4738775 47K	RES, SEMI FIX

MISCELLANEOUS

879	CN10	4443-047175	CONNECTOR
879	CN11	4443-047175	CONNECTOR
879	CN12	4443-047175	CONNECTOR
879	CN13	4443-047175	CONNECTOR
880	CN14	4443-067175	CONNECTOR
858	TM8	4214-11031	TERMINAL

PCB-11 INPUT JACK P.C.BOARD

CAPACITORS

599	C81	5345-107B0951	CAP, MINI ELE 100μ/10V
598	C82	5353-680534	CAP, MCA 68p UA N
598A	C82	5359-1025851	CAP, PPP 1000p G
600	C83	5345-228A0952	CAP, MINI ELE 2200μ/6.3V
600	C84	5345-228A0952	CAP, MINI ELE 2200μ/6.3V
613	C85	5345-337C041	CAP, MINI ELE 330μ/16V
613	C86	5345-337C041	CAP, MINI ELE 330μ/16V
613	C87	5345-337C041	CAP, MINI ELE 330μ/16V
613	C88	5345-337C041	CAP, MINI ELE 330μ/16V
597	C89	5354-104593	CAP, MYL .1μ
053A	C90	5359-4715851	CAP, PPP 470p G
053A	C91	5359-4715851	CAP, PPP 470p G

RESISTORS

602	R81	5232-331J16P	RES, CBN 1/6P 330 UA N
-----	-----	--------------	------------------------

Ser. No.	Ref. No.	Part No.	Description
603	R82	5232-224J16P	RES, CBN 1/6P 220K
604	R83	5232-471J16P	RES, CBN 1/6P 470
604	R84	5232-471J16P	RES, CBN 1/6P 470
605	R85	5232-104J16P	RES, CBN 1/6P 100K
606	R86	5232-105J16P	RES, CBN 1/6P 1M
607	R88	5232-221J16P	RES, CBN 1/6P 220
615	ΔR89	5102-1024715	RES, FUSE 1K
615	ΔR90	5102-1024715	RES, FUSE 1K
617	R91	5135-223522	RES, CBN 1/2P 22K
617	R92	5135-223522	RES, CBN 1/2P 22K
608	R93	5232-472J16P	RES, CBN 1/6P 4.7K
608	R94	5232-472J16P	RES, CBN 1/6P 4.7K

TRANSISTORS

591	Q81	5611-970(BL)	XISTOR, PNP R
592	Q82	5613-2240(BL)	XISTOR, NPN R
609	Q85	5614-667(C)	XISTOR, NPN A
610	Q86	5612-647(C)	XISTOR, PNP A
595	Q87	5616-2SK364(V)or(BL)	FET, N-CH

DIODES

611	D81	5635-HZ15-1L	DIODE, ZENER
611	D82	5635-HZ15-1L	DIODE, ZENER

MISCELLANEOUS

831	J1	4482-7135	PIN JACK, 2P
846	JL2	4242-R0403251	JUMPER LEAD
835	SW6	4421-0427226	SWITCH, SLIDE
859	TM9	4214-11031	TERMINAL
820	LCN105	4163-0125020	CONNECTOR W/W

PCB-12 RELAY P.C.BOARD

CAPACITORS

789	C1	5352-1030961	CAP, MTL .01μ UA N
789A	C1	5352-1030958	CAP, MTL .01μ G
789	C2	5352-1030961	CAP, MTL .01μ UA N
789A	C2	5352-1030958	CAP, MTL .01μ G
782	C201	5345-477D041	CAP, MINI ELE 470μ/25V
783	C202	5345-227B041	CAP, MINI ELE 220μ/10V
783	C203	5345-227B041	CAP, MINI ELE 220μ/10V

RESISTORS

791	R201	5232-102J16P	RES, CBN 1/6P 1K
785	ΔR202	5102-1004715	RES, FUSE 10
792	R203	5232-472J16P	RES, CBN 1/6P 4.7K
793	R204	5232-470J16P	RES, CBN 1/6P 47
794	R205	5232-561J16P	RES, CBN 1/6P 560
784	R206	5135-223522	RES, CBN 1/2P 22K
795	R207	5232-223J16P	RES, CBN 1/6P 22K
795	R208	5232-223J16P	RES, CBN 1/6P 22K
786	ΔR209	5102-3R35116	RES, FUSE 3.3
797	R210	5232-104J16P	RES, CBN 1/6P 100K

INTEGRATED CIRCUITS

771	IC201	5654-TC4027BP	IC, DIGITAL
-----	-------	---------------	-------------

TRANSISTORS

773	Q201	5613-2603(E)or(F)	XISTOR, NPN R
773	Q202	5613-2603(E)or(F)	XISTOR, NPN R
774	Q203	5614-667(C)	XISTOR, NPN A
774	Q204	5614-667(C)	XISTOR, NPN A

DIODES

777	D201	5632-S5566B	DIODE, RECT
778	D202	5631-IS2473	DIODE, DET
780	D203	5635-HZ9C-2L	DIODE, ZENER

MISCELLANEOUS

790	ΔT3	5584-702550	XFORMER, POWER UA
790A	ΔT3	5584-701550	XFORMER, POWER G
790B	ΔT3	5584-703550	XFORMER, POWER N
864	CN6	4443-030185	CONNECTOR
866	CN7	4443-040185	CONNECTOR
864	CN8	4443-030185	CONNECTOR
788	RL1	4331-20120138	RELAY, DC
796	TM12	4214-122	TERMINAL
796	TM13	4214-122	TERMINAL

Pr. No.	Ref. No.	Part No.	Description
796	TM15	4214-122	TERMINAL
800	△	4472-7113	HOLDER, FUSE UA N
800A	△	4472-7122	HOLDER, FUSE G

PCB-13 LED P.C.BOARD

CAPACITORS			
051B	C133	5345-106C0951	CAP, MINI ELE 10μ/16V N
051B	C134	5345-106C0951	CAP, MINI ELE 10μ/16V N
051B	C135	5345-106C0951	CAP, MINI ELE 10μ/16V N
RESISTORS			
752	R71	5135-271522	RES, CBN 1/2P 270
753	R72	5135-153522	RES, CBN 1/2P 15K
748	R73	5232-332J16P	RES, CBN 1/6P 3.3K
749	R74	5232-391J16P	RES, CBN 1/6P 390
749	R75	5232-391J16P	RES, CBN 1/6P 390
733	R171	5232-103J16P	RES, CBN 1/6P 10K
734	R172	5232-332J16P	RES, CBN 1/6P 3.3K
738	R173	5232-271J16P	RES, CBN 1/6P 270
736	R174	5232-102J16P	RES, CBN 1/6P 1K
737	R175	5232-472J16P	RES, CBN 1/6P 4.7K
739	R176	5232-122J16P	RES, CBN 1/6P 1.2K
735	R177	5232-391J16P	RES, CBN 1/6P 390
735	R178	5232-391J16P	RES, CBN 1/6P 390
TRANSISTORS			
741	Q13	5611-1115(E)or(F)	XISTOR, PNP R
729	Q116	5611-1115(E)or(F)	XISTOR, PNP R
729	Q117	5611-1115(E)or(F)	XISTOR, PNP R
DIODES			
801	D7	5637-GL5EG21	LED
802	D8	5637-GL5HD10	LED
802	D9	5637-GL5HD10	LED
802	D10	5637-GL5HD10	LED
802	D11	5637-GL5HD10	LED
802	D12	5637-GL5HD10	LED
802	D13	5637-GL5HD10	LED
744	D14	5635-HZ7B-2L	DIODE, ZENER
804	D204	5637-GL5HY10	LED
804	D205	5637-GL5HY10	LED
MISCELLANEOUS			
865	CN9	4443-040185	CONNECTOR
845	JL4	4242-R0403551	JUMPER LEAD
848	JL8	4242-R0403101	JUMPER LEAD
849	JL16	4242-R0403181	JUMPER LEAD

PCB-14 POWER SWITCH P.C.BOARD

843	JL7	4242-R0404101	JUMPER LEAD
811	△SW1	4431-A027170	SWITCH, PUSH

CHASSIS MISCELLANEOUS

799	△F1	5732-502028	FUSE UA
799A	△F1	5732-252030	FUSE G
799B	△F1	5732-602056	FUSE N
799	△F2	5732-502028	FUSE UA
799A	△F2	5732-252030	FUSE G
799B	△F2	5732-602056	FUSE N
056A	△F3	5732-632030	FUSE G
056A	△F4	5732-632030	FUSE G
056A	△F5	5732-632030	FUSE G
056A	△F6	5732-632030	FUSE G
787	△T1	5584-701555	XFORMER, POWER UA
787A	△T1	5584-701556	XFORMER, POWER G
787B	△T1	5584-702556	XFORMER, POWER N
787	△T2	5584-701555	XFORMER, POWER UA
787A	△T2	5584-701556	XFORMER, POWER G
787B	△T2	5584-702556	XFORMER, POWER N
052A	△SW2	4411-1047112	SWITCH, ROTARY G
836	SW8	4421-0227230	SWITCH, SLIDE
836	SW9	4421-0227230	SWITCH, SLIDE
841	△PI	4161-71154	CORD W/PLUG, POWER UA
841A	△PI	4161-71150	CORD W/PI IIG POWER G

Ser. No.	Ref. No.	Part No.	Description
841B	△PI	4161-72145	CORD W/PLUG, POWER N
249	LUG1	4211-5005	LUG, GND UA N
839		4442-14	PIN PLUG, SHORT PIN
905		4161-71174	CORD W/PLUG, CONNECT
187		2240-385	HOLDER, WIRING

PACKAGE PARTS LIST

021A	1756-03108	LABEL, INT G
021B	1756-03113	LABEL N
022A	1756-06303	LABEL, 220V/50Hz G
023A	1756-01443	LABEL G
025A	1119-026	ATTACH SHEET, FTZ SHEET G
105	1111-J90195	OWNER GUIDE, UL UA
106	1111-J30257	OWNER GUIDE, OG UA
106A	1111-J30256	OWNER GUIDE, OG G
106B	1111-J2034	OWNER GUIDE, OG N
107	1113-717005	OWNER CARD, REPLY CARD UA
107B	1113-OC	OWNER CARD, REPLY CARD N
108	1119-057	ATTACH SHEET, WARRANTY UA
108B	1116-GC	ATTACH SHEET, WARRANTY N
109	1119-0137	ATTACH SHEET
111	1241-C12732	POLYETHY BAG, OG UA G
111B	1241-C12729	POLYETHY BAG, OG N
122	1221-717198	CARTON BOX
123	1222-7307	CUSHION, R
124	1222-7308	CUSHION, L
125	1223-11747	SOFT SHEET, SET
126	1223-11115	SOFT SHEET, AC CORD
127	1241-C1494	POLYETHY BAG, SET

ABBREVIATIONS IN PARTS LIST

CAPACITORS

CAP, MINI ELE	: Electrolytic
CAP, CER	: Ceramic
CAP, PPP	: Polypropylene
CAP, MYL	: Mylar
CAP, MCA	: Mica
CAP, MINI BP	: Bipolar
CAP, ELE BP	: Electrolytic Bipolar
470μ	: 470μF
6800p	: 6800pF
.047μ	: 0.047μF

RESISTORS

RES, CBN 1/6P	: Carbon 1/6W
RES, FUSE	: Fuse
RES, CEM 5P	: Cement 5W
RES, MTL 1P	: Metal 1W
2.2K	: 2.2kΩ
220	: 220Ω

TRANSISTORS

XISTOR	: Transistor
FET	: Field Effect Transistor

CONTROLS

RES, V CBN	: Variable Carbon Resistor
------------	----------------------------


NOTE




SAFETY RELATED COMPONENT. USE ONLY EXACT REPLACEMENT PART AS SPECIFIED.

IC BLOCK DIAGRAM


BA681A : IC101, 102

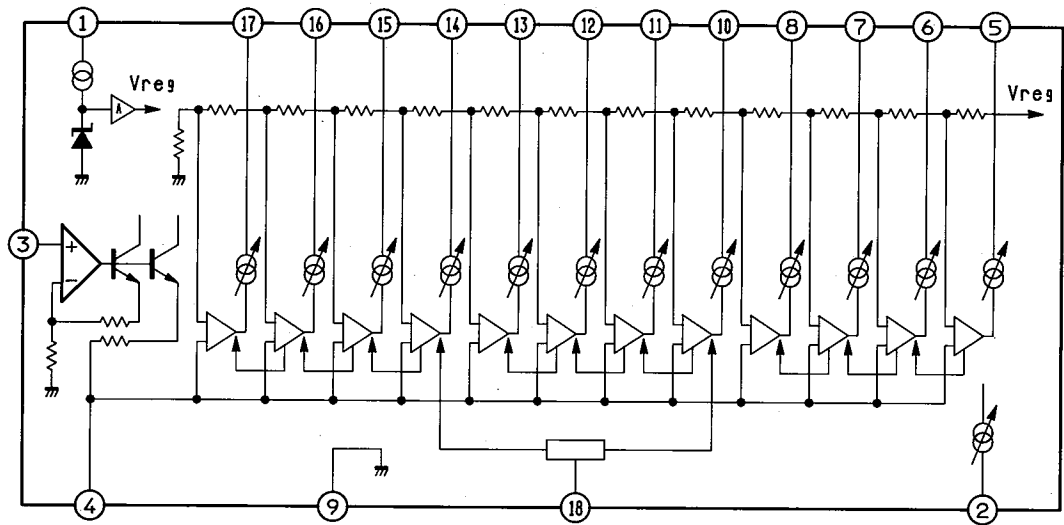


TA75558P : IC103, 104

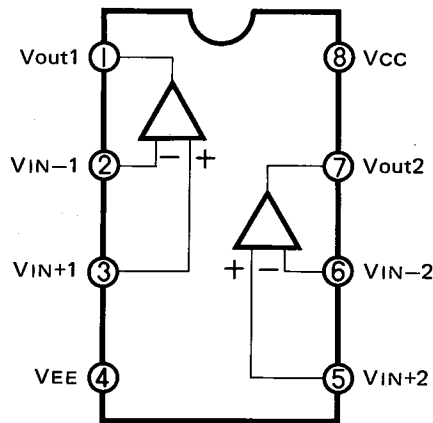

TC4027BP : IC201

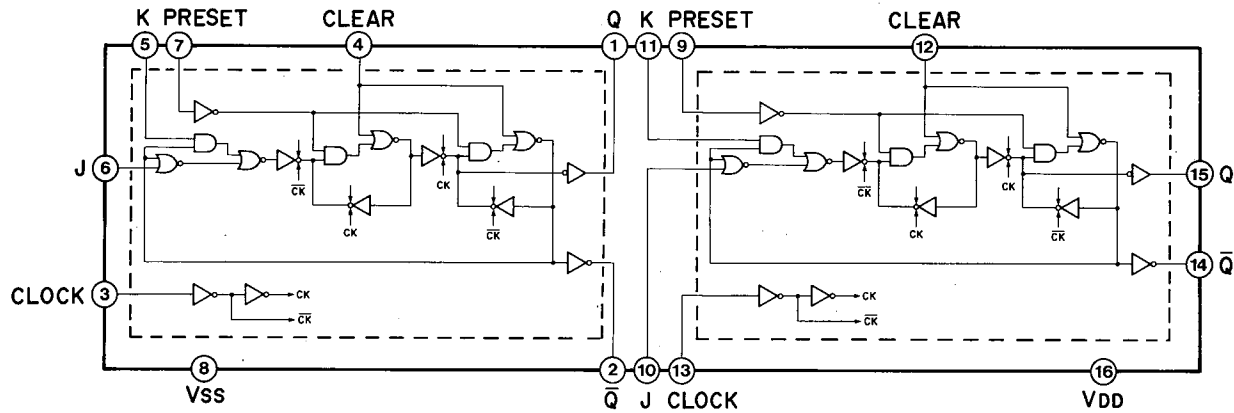


SCHEMATIC DIAGRAM


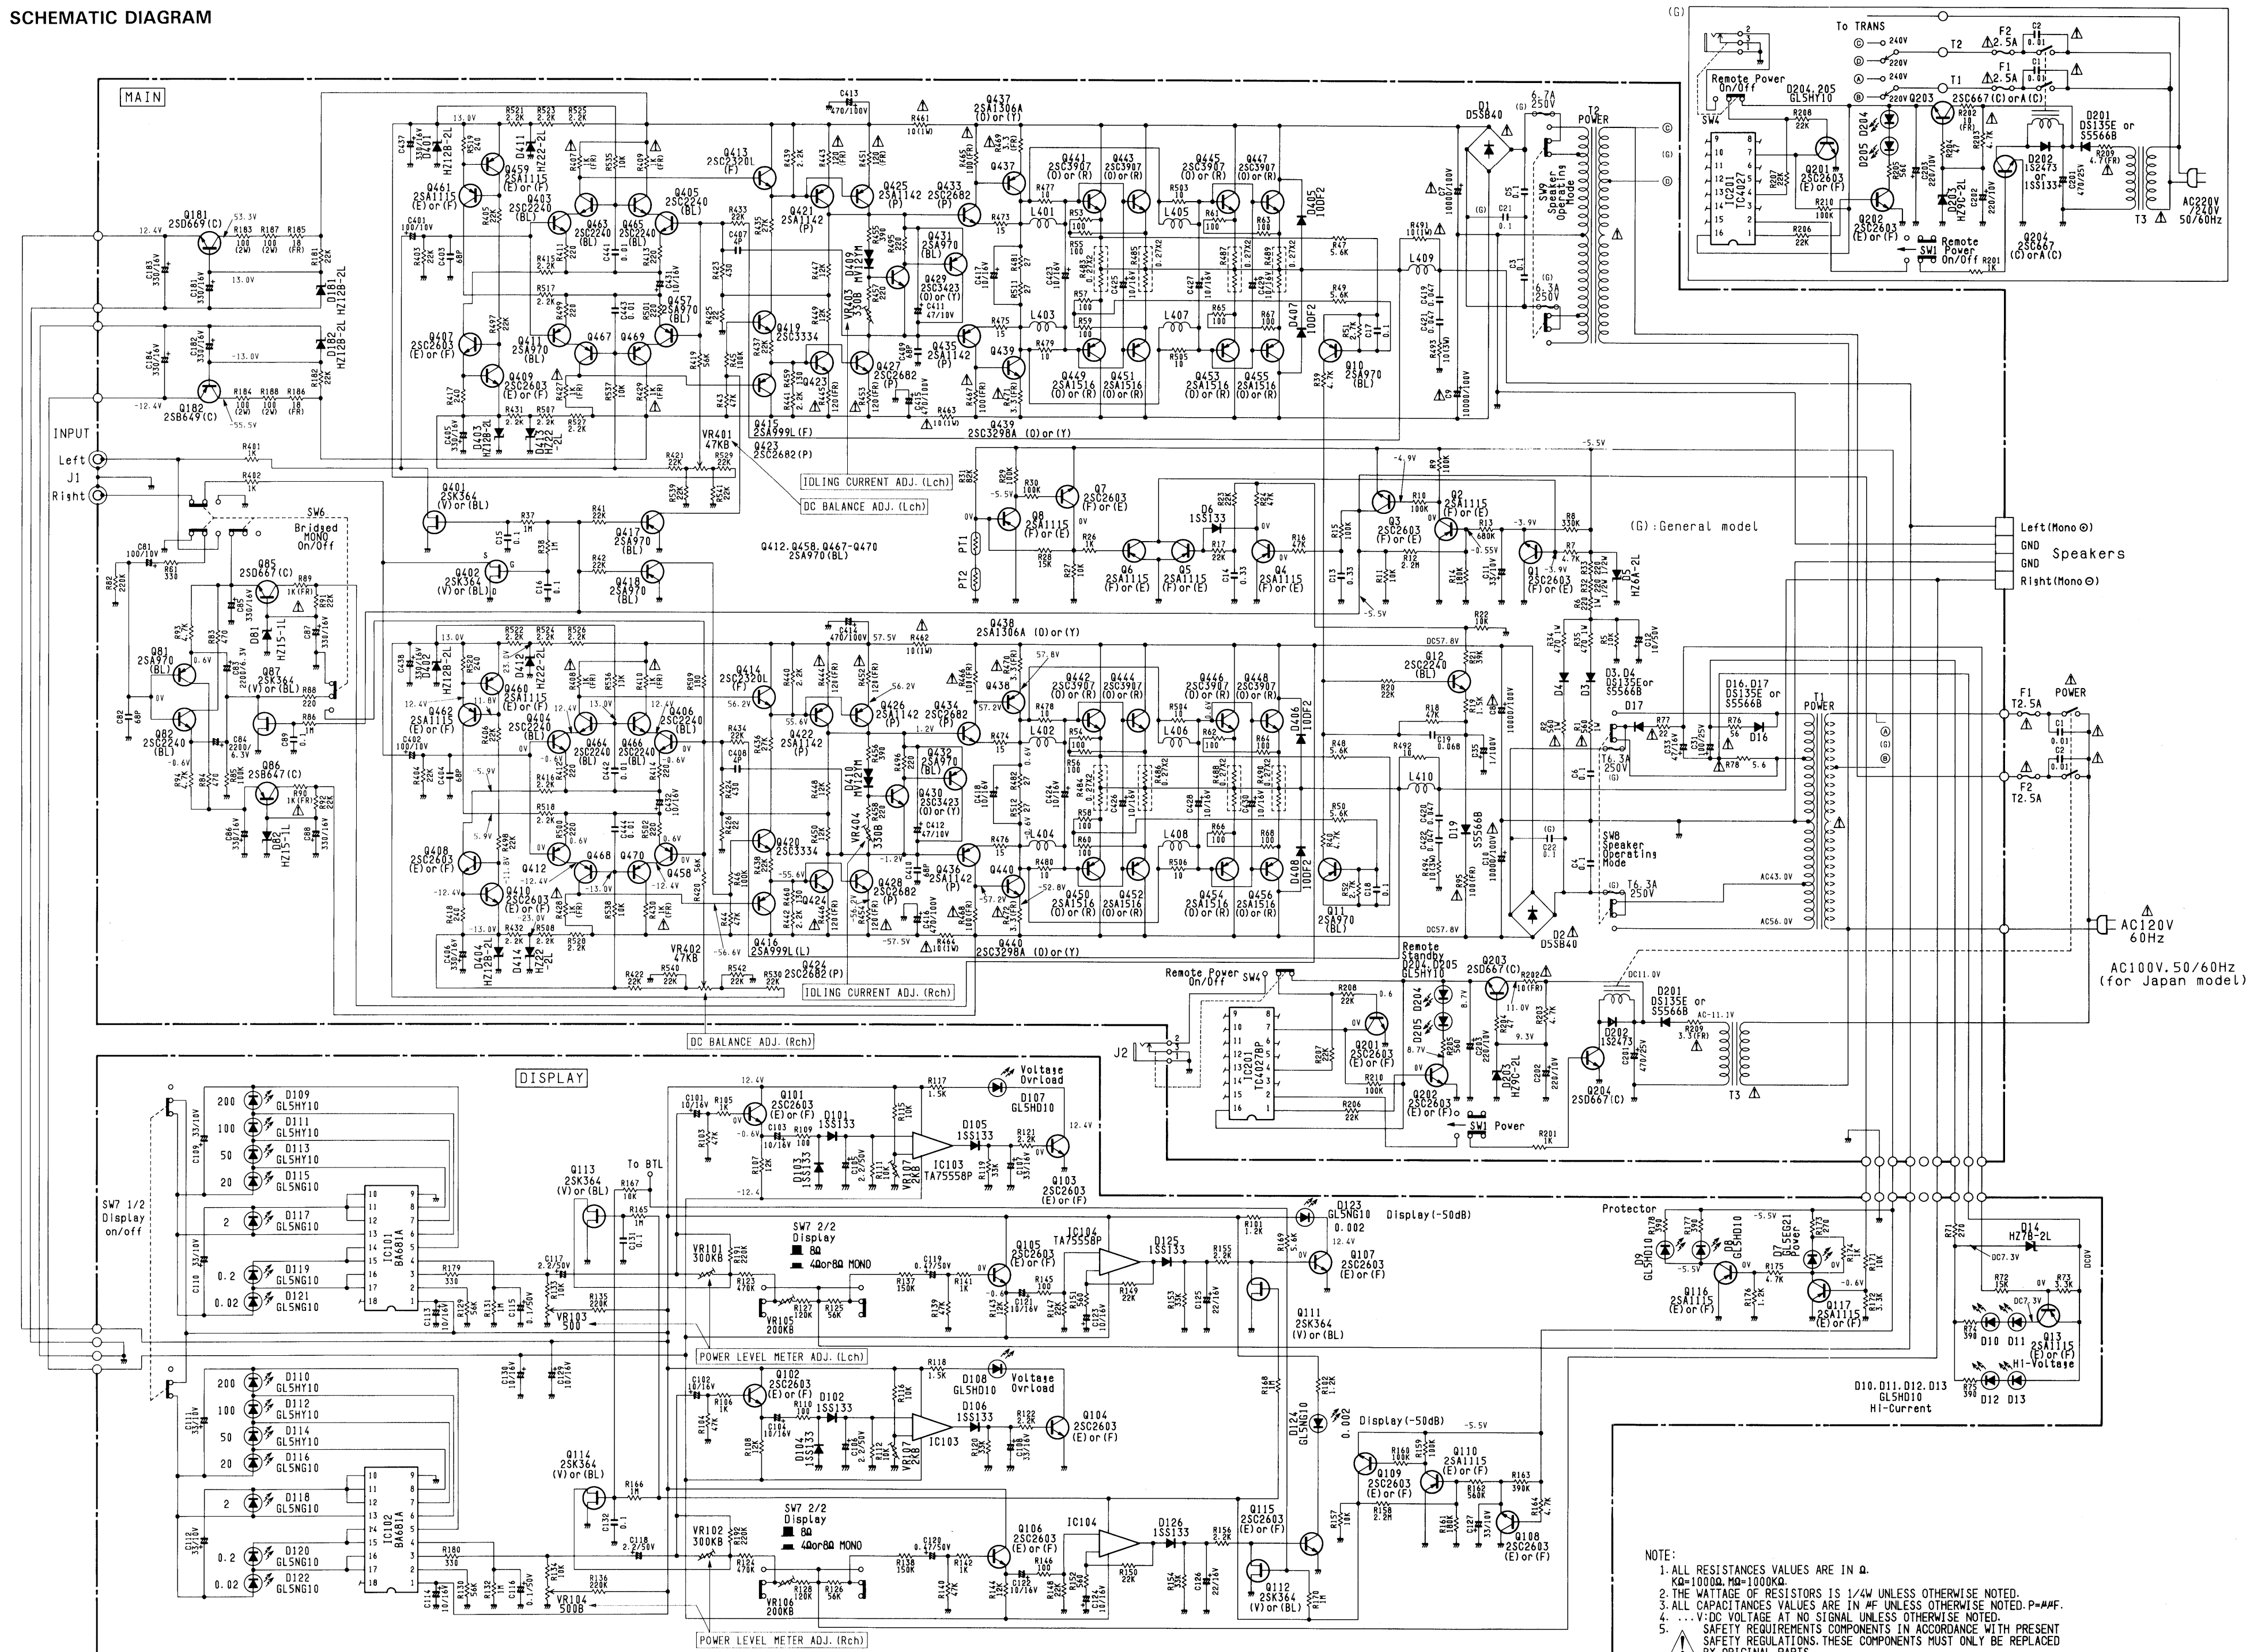


WIRING DIAGRAM

General model

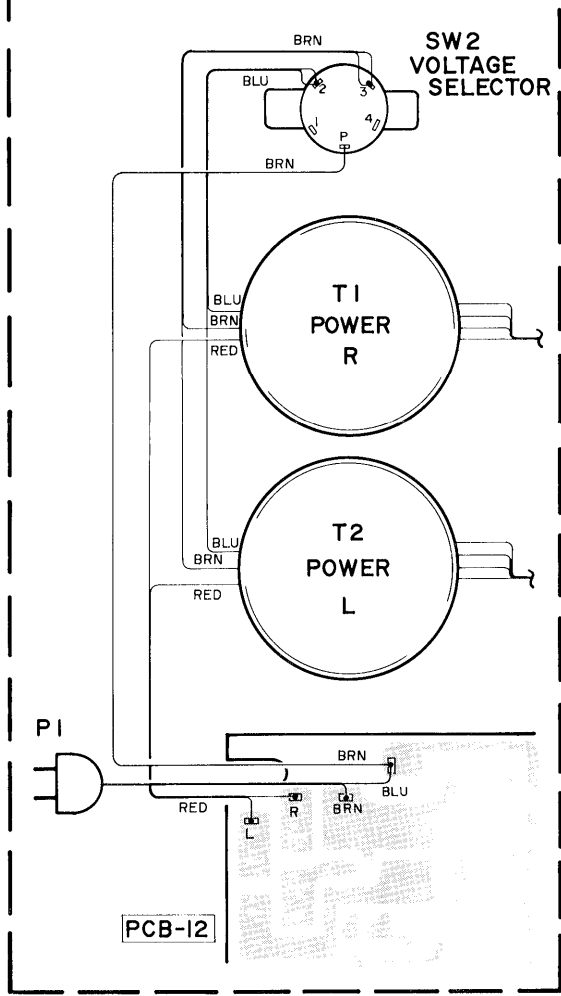

Japan model

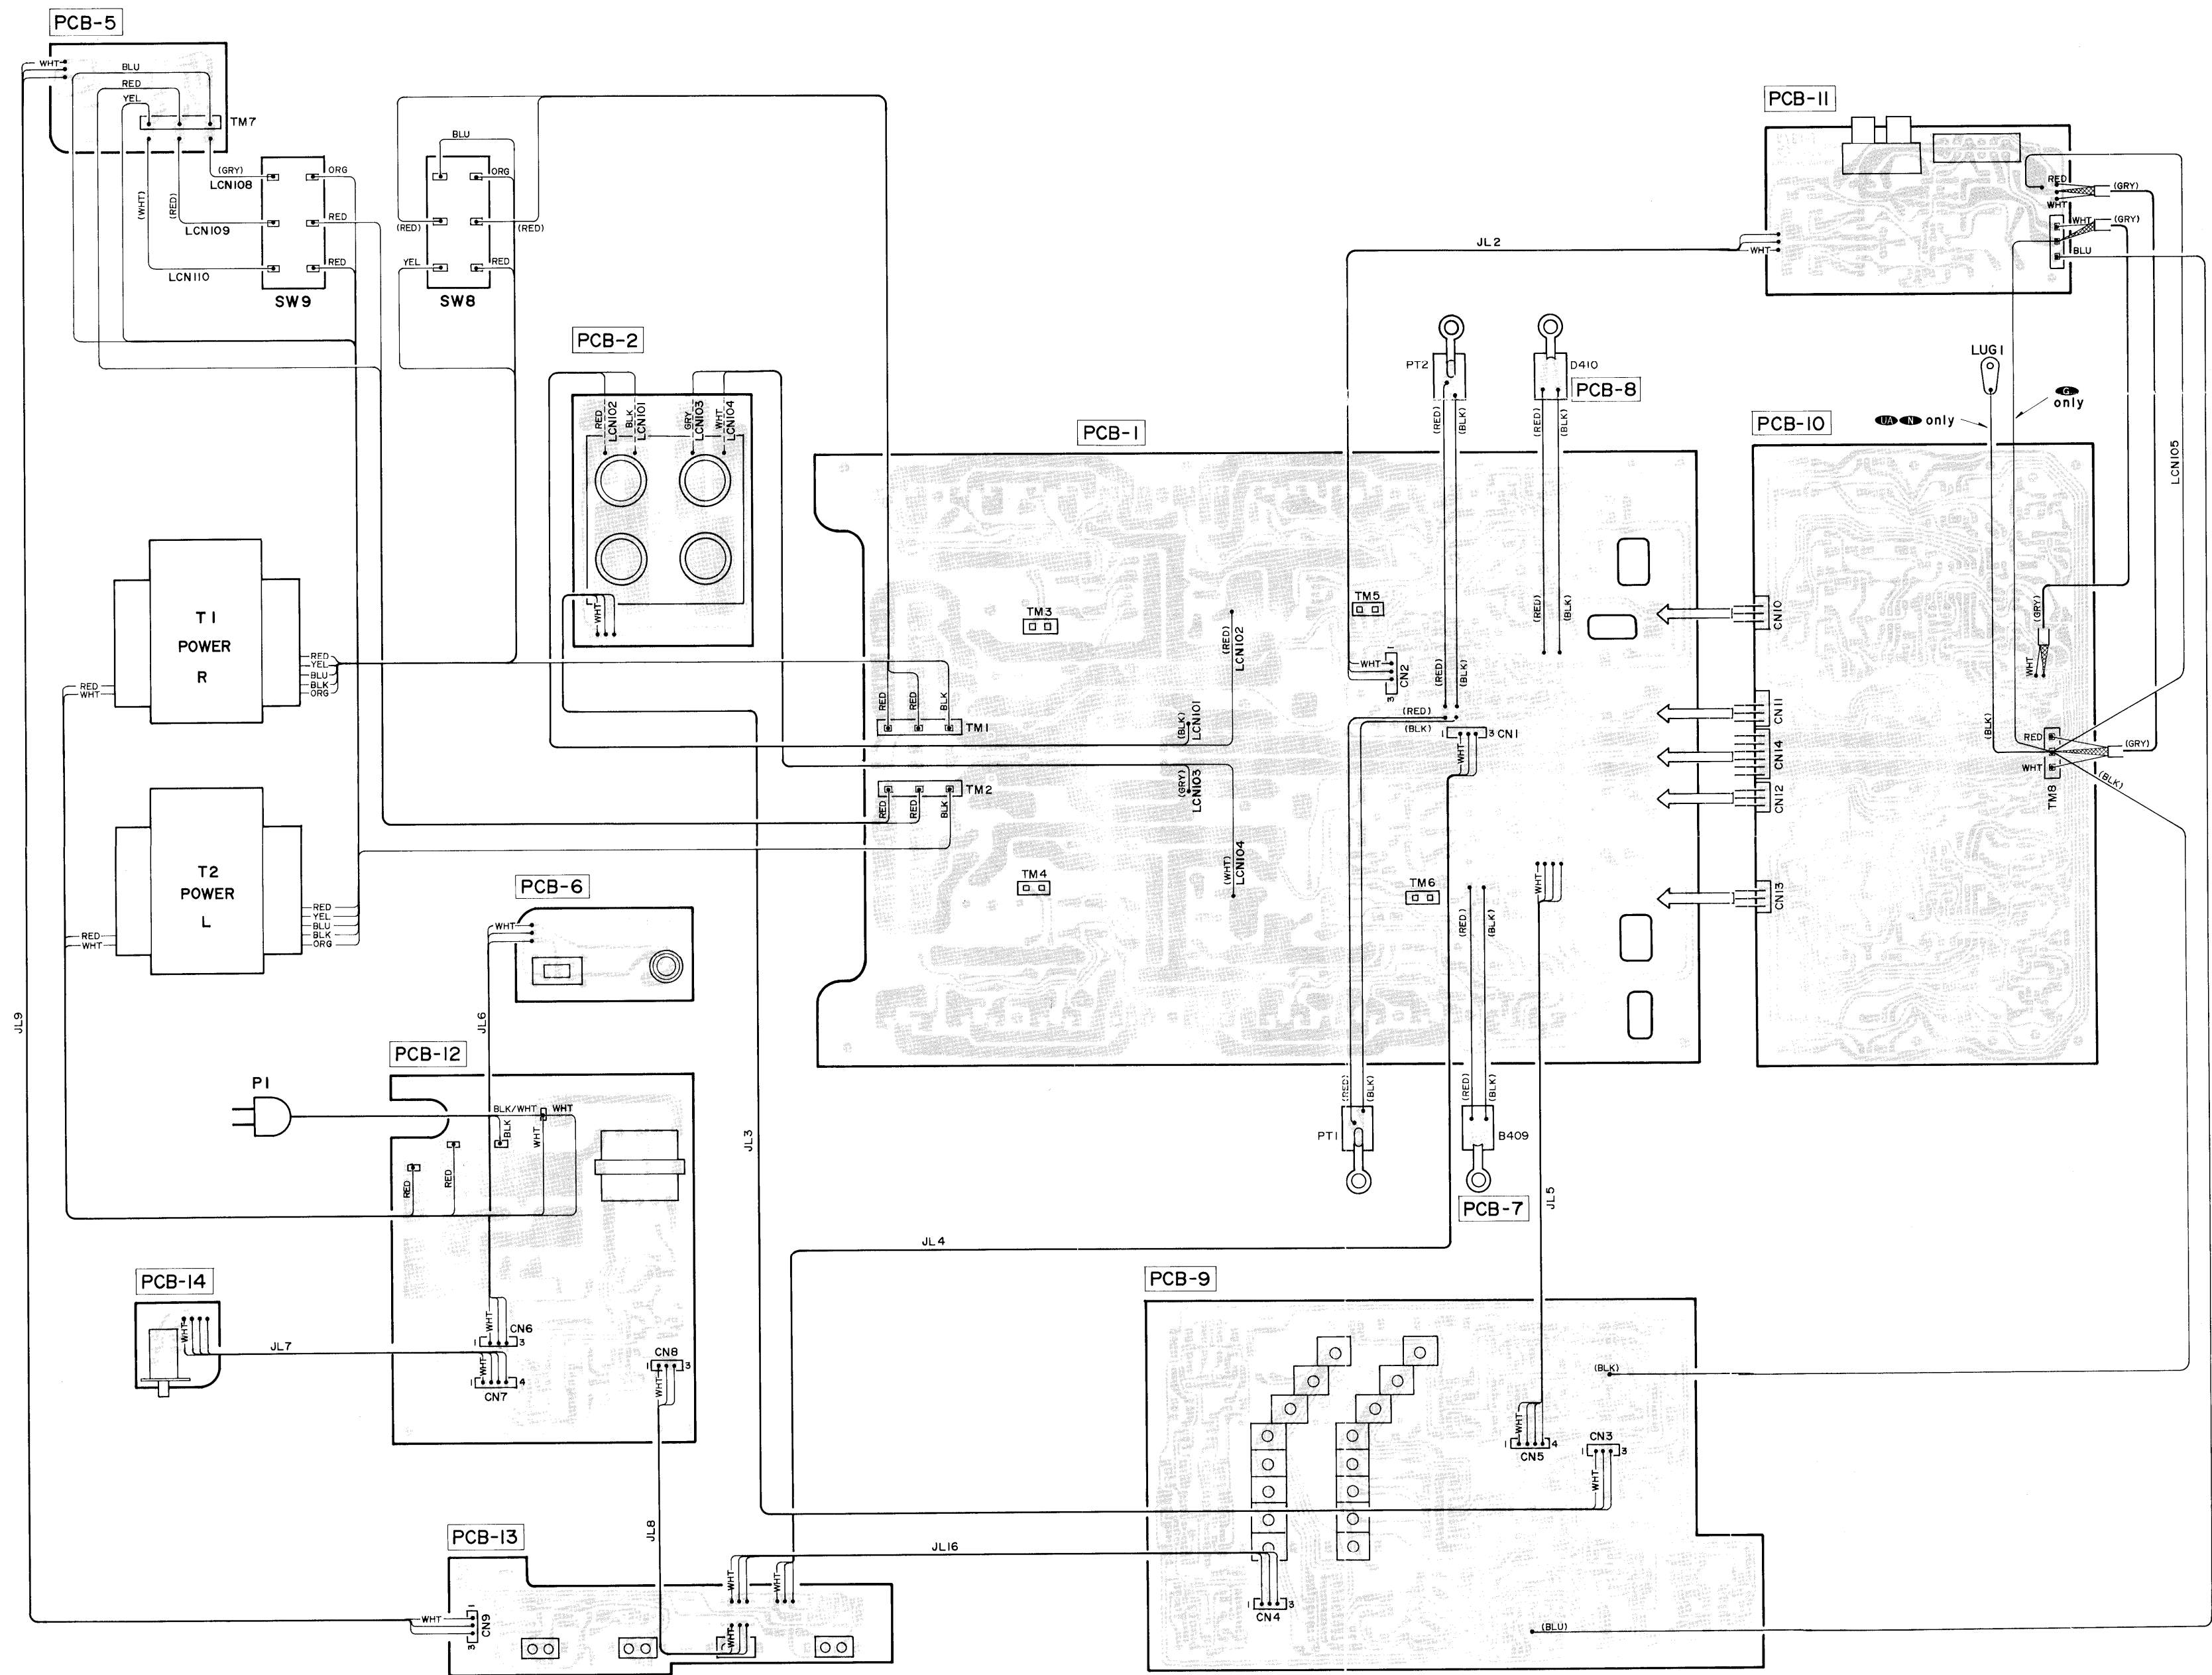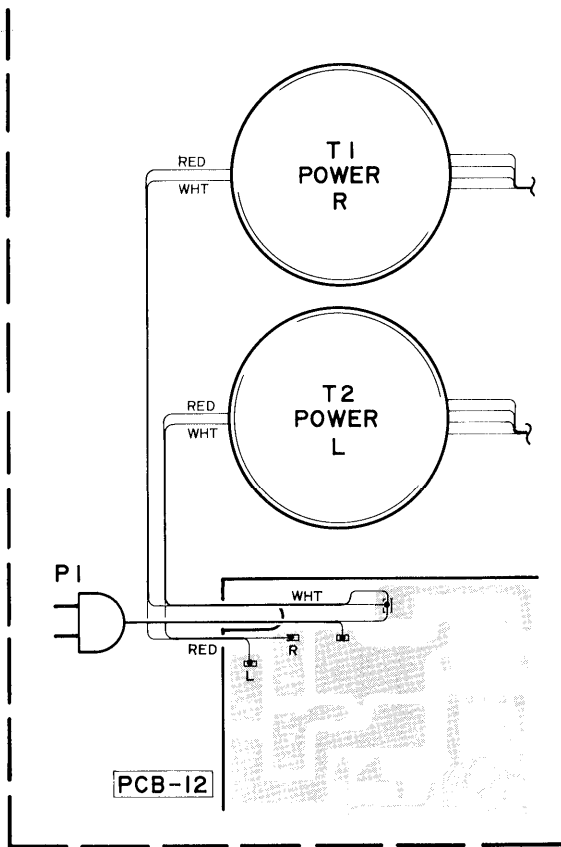

- WIRE COLOR ABBREVIATIONS
- RED : Red
- YEL : Yellow
- ORG : Orange
- BLU : Blue
- WHT : White
- GRN : Green
- BRN : Brown
- BLK : Black
- PUP : Purple
- PIK : Pink
- GRY : Gray