



COMPUTERIZED STEREO RECEIVER

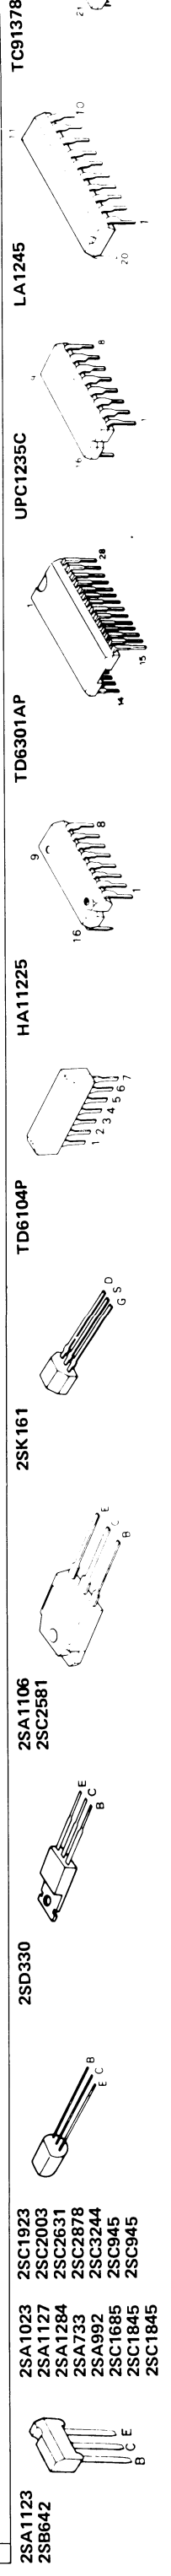

COMPUTERIZED STEREO RECEIVER

KR-930B

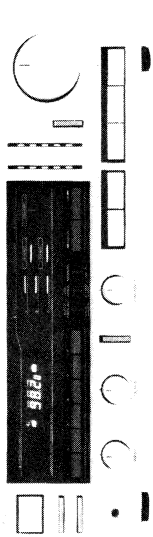

SPECIFICATIONS

Audio Section	
Rated Power Output	4 ohms at 60 Hz to 12.5 kHz
no more than 0.7% T.H.D. (IEC)	
Total Harmonic Distortion	1 kHz, 40 kHz Dev.
1 watt power into 8 ohms	1 mV input
Intermodulation Distortion	40 kHz Dev., 1 mV input
Rated power into 8 ohms	1 mV input
Slew Rate	1 mV input
Frequency Response	20 Hz - 20 kHz
1 kHz	±1.5 dB
6.3 kHz	±1.5 dB
Image Rejection Ratio	1 kHz, 40 kHz Dev.
IF Rejection Ratio	1 kHz, 40 kHz Dev.
AM Suppression Ratio	1 kHz, 40 kHz Dev.
Spurious Rejection Ratio	1 kHz, 40 kHz Dev.
Capture Ratio	1 kHz, 40 kHz Dev.
AM Tuner Section	
Sensitivity S/N 20 dB	10 μV
S/N Ratio, 1 mV input	27 dB
Image Rejection Ratio	40 dB
General	
Power Consumption	380W
IEC	33W
No signal	W 440 mm
Dimensions	H 133 mm
	D 295 mm
Weight (net)	6.8 kg

Kenwood follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

Kenwood poursuit une politique de progrès constants en ce qui concerne le développement. Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

Kenwood strebt ständige, Verbesserungen in der Entwicklung an. Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

CAUTION: FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS (REFER TO PARTS LIST).

⚠ INDICATES SAFETY CRITICAL COMPONENT(S).

TO REDUCE THE RISK OF ELECTRIC SHOCK, LEAKAGE CURRENT OR RESISTANCE MEASUREMENTS SHALL BE CARRIED OUT (EXPOSED PARTS ARE ACCEPTABLE IN ISULATED FROM THE SUPPLY CIRCUIT) BEFORE THE APPLIANCE IS RETURNED TO THE CUSTOMER.

