

TH-42A/AT/E

SERVICE MANUAL

© 1993-11 PRINTED IN JAPAN
B51-8241-00 (B) 1108

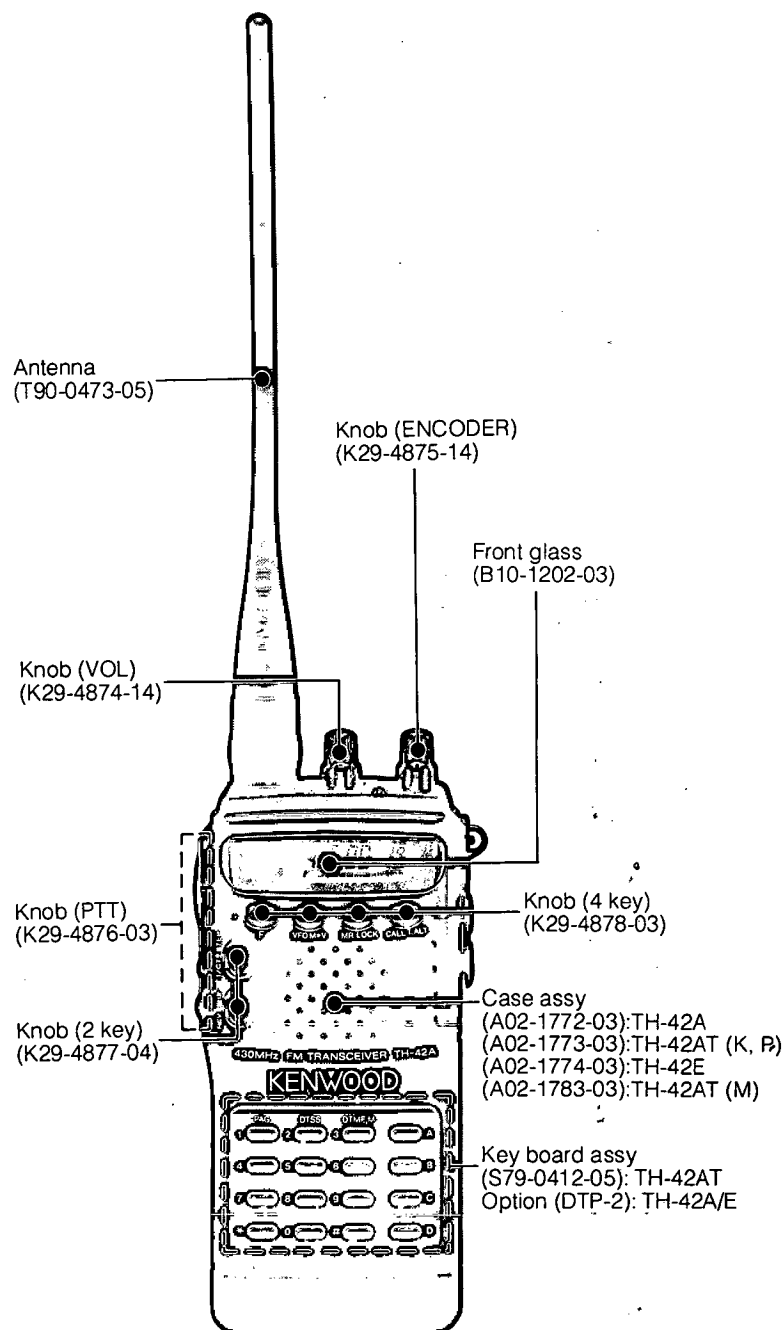


PHOTO is TH-42A (WITH DTP-2)

CONTENTS

DESTINATION LIST	2
DISASSEMBLY FOR REPAIR	3
CIRCUIT DESCRIPTION	5
SEMICONDUCTOR DATA	15
DESCRIPTION OF COMPONENTS	22
PARTS LIST	24
EXPLODED VIEW	36
PACKING	37
TERMINAL FUNCTION	38
ADJUSTMENT	40
PC BOARD VIEWS	
VCO UNIT (X58-4100-00)	44
TX-RX UNIT (X57-438X-XX) (C/4)	45
TX-RX UNIT (X57-438X-XX) (D/4)	46
TX-RX UNIT (X57-438X-XX) (A/4)	47
TX-RX UNIT (X57-438X-XX) (B/4)	51
SCHEMATIC DIAGRAM	55
BLOCK DIAGRAM	59
LEVEL DIAGRAM	61
DTP-2 (DTMF KEYPAD)	62
BC-17 (WALL CHARGER)	62
BT-9 (BATTERY CASE)	62
PB-30, 32 (STANDARD BATTERY PACK)	62
PB-33 (LONG LIFE BATTERY PACK)	63
PB-34 (HIGH POWER BATTERY PACK)	63
SC-37, 38, 39, 40 (SOFT CASE)	63
SPECIFICATIONS	BACK COVER

TH-42A/AT/E

DESTINATION LIST


Type		Unit	Freq. range (Guaranteed specification)	Supplied battery (DC)	Supplied charger (AC)	16-key pad (DTP-2)
TH-42AT	K	X57-4380-11	438 to 450 MHz	6V 600mAh	120V	Installed
TH-42E	T	X57-4382-71	430 to 440 MHz	6V 600mAh	240V	Option
TH-42AT	P	X57-4380-11	438 to 450 MHz	6V 600mAh	120V	Installed
TH-42E	E1	X57-4382-71	430 to 440 MHz	6V 600mAh	230V	Option
TH-42E	E2	X57-4382-72	430 to 440 MHz	6V 600mAh	230V	Option
TH-42E	E3	X57-4382-71	430 to 440 MHz	6V 600mAh	230V	Option
TH-42E	E9	X57-4382-71	430 to 440 MHz	6V 600mAh	230V	Option
TH-42A	M1	X57-4380-21	430 to 440 MHz	6V 600mAh	120/230V	Option
TH-42A	M2	X57-4380-22	430 to 440 MHz	6V 600mAh	120/230V	Option
TH-42A	M3	X57-4380-22	430 to 440 MHz	9.6V 600mAh	120/230V	Option
TH-42A	M4	X57-4380-22	430 to 440 MHz	Battery case (BT-9)	–	Option
TH-42AT	M1	X57-4380-21	430 to 440 MHz	6V 600mAh	120/230V	Installed
TH-42AT	M2	X57-4380-22	430 to 440 MHz	6V 600mAh	120/230V	Installed
TH-42AT	M3	X57-4380-22	430 to 440 MHz	9.6V 600mAh	120/230V	Installed
TH-42AT	M4	X57-4380-22	430 to 440 MHz	Battery case (BT-9)	–	Installed

TH-42A/AT/E

DISASSEMBLY FOR REPAIR


Removing the case

1. Remove the two long screws (①) of the rear case.
Then pull out the two knobs (②) and remove the rubber panel (③).

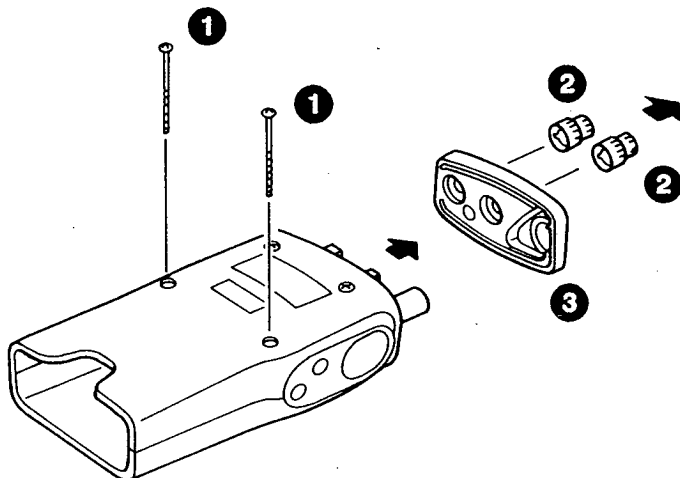

2. Press on the part of the case with a claw (④) and take apart the upper and lower cases (⑤).

Note: As the cases are connected with an FFC cable, take care not to cut the cable when taking apart the cases.

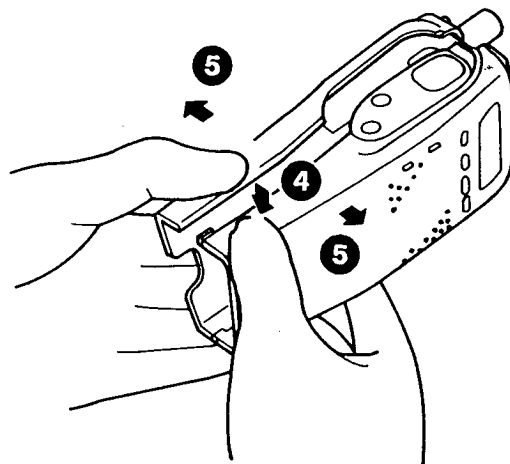


Removing the units

1. Remove the shielding plate after having removed the five screws (②) that are holding the plate (①) and the two solders (③).
Then, remove the screw (④) that are holding the TX-RX unit (A/4).

2. Remove the BNC receptacle after having removed the two screws (⑤) and the solder of the terminal.

3. Remove the two nuts (⑥) and lift up the unit (⑦) to remove it from the case.

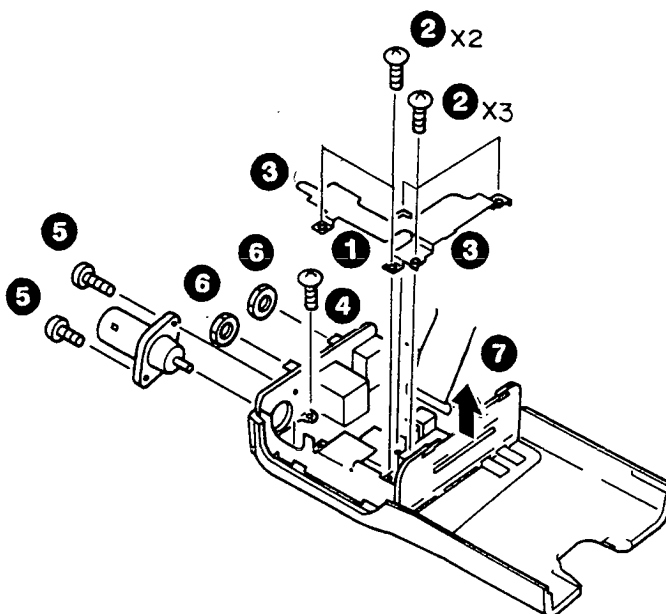


TH-42A/AT/E

DISASSEMBLY FOR REPAIR

Removing the circuit board

1. Pull out the holder (❶) from the frame (❸) without bending the power supply terminal (❷).
2. Remove the solder from the four soldered points (❹) and (❺) of the circuit board and the frame.
3. Take care so that the ANT terminal of the circuit board is not caught on the frame (❻), and then carefully lift up the circuit board (❷) from the frame.

Note: Take care not to touch the power module with your fingers.

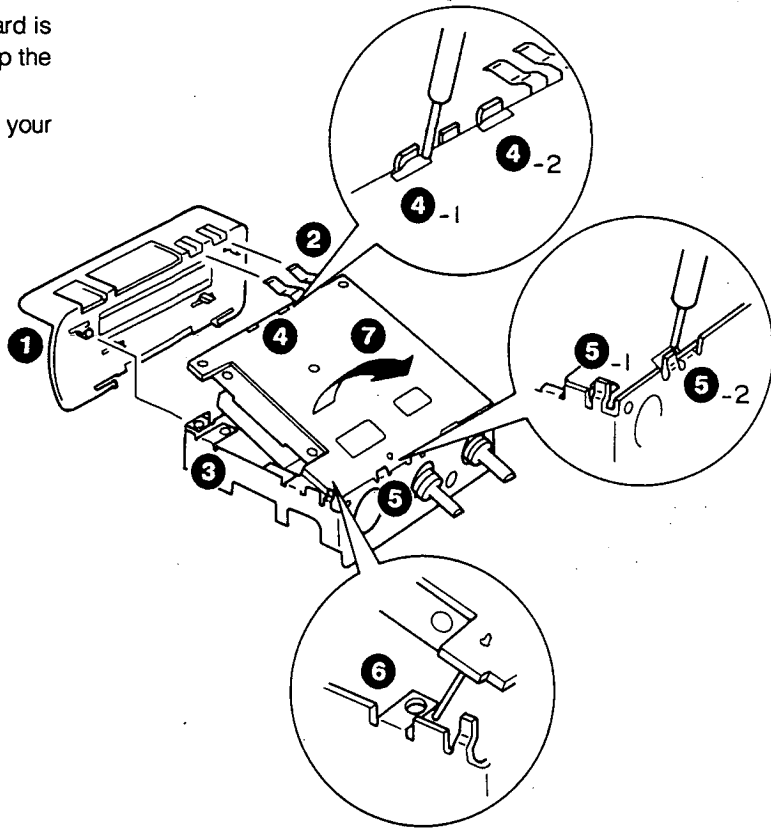


CIRCUIT DESCRIPTION

FREQUENCY CONFIGURATION

The frequency configuration is shown in Figure 1 and Table 1.

- (1) 438.000 to 449.995 MHz (K, P)
430.000 to 439.995 MHz (M, T, E)
- (2) 392.950 to 404.945 MHz (K, P)
384.950 to 394.945 MHz (M, T, E)

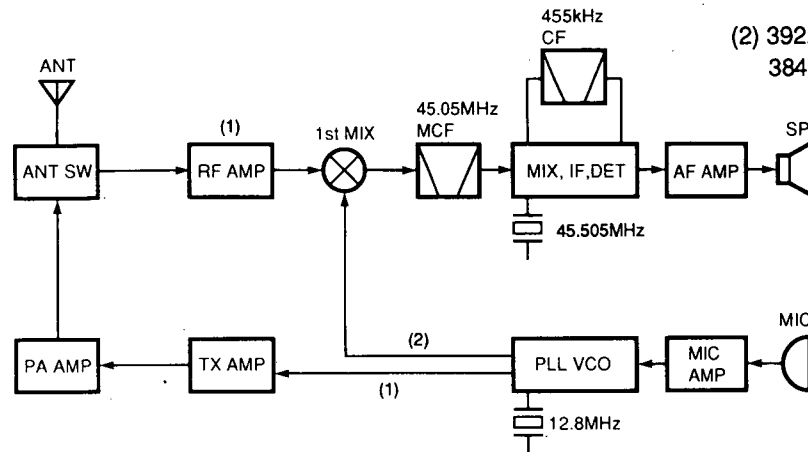

Receiving system	Double superheterodyne system	
	First IF	45.05 MHz
	Second IF	455 kHz
Transmitting system	Direct conversion oscillating amplification system	
Modulation system	Variable reactance phase modulation	

Table 1 Basic configuration

Fig. 1 Frequency configuration

RECEIVER SYSTEM

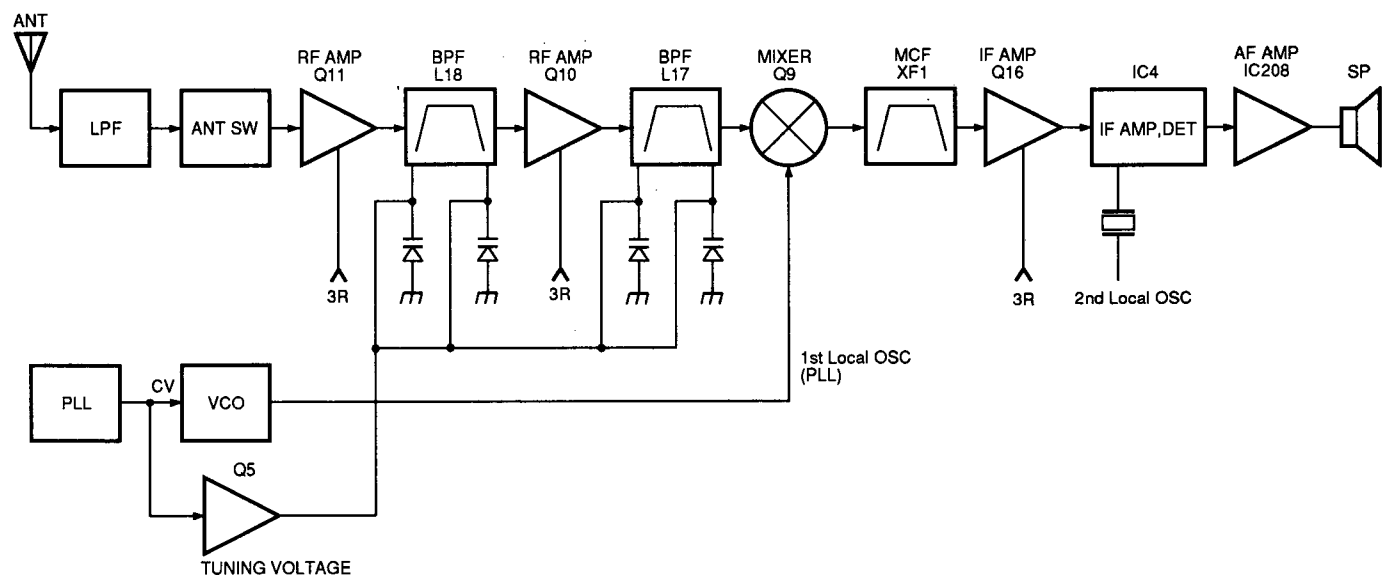


Fig. 2 Receiver section configuration

• RF amplifier

The signal from the antenna is passed through a low-pass filter and the transmission/reception selector circuit, and input to the RF amplifier. The input signal is amplified by Q11. The unwanted frequency band of the signal is then eliminated by a band-pass filter.

This band-pass filter is a variable filter using a varicap, and operates so that it tunes to the receive frequency with the tuning voltage that is in proportion to the PLL lock voltage.

• First-stage mixer

The input signal is mixed with the first local oscillator signal from the PLL circuit by the first-stage mixer Q9, producing a first IF signal. The unwanted frequency band of the

first IF signal is eliminated by a two-stage monolithic crystal filters (MCF).

Item	Rating
Nominal center frequency (fo)	45.05 MHz
Passband width	±7.5 kHz or more at 3 dB
Attenuation band width	±22 kHz or less at 25 dB
Guaranteed attenuation	80 dB or more at ±910 kHz Spurious: 40 dB or more within ±1 MHz
Ripple	1 dB or less
Insertion loss	4 dB or less
Terminating impedance	800 Ω/2 PF

Table 2 MCF (L71-0409-05) characteristics (TX-RX unit XF1)

CIRCUIT DESCRIPTION

• IF amplifier

The first IF signal is amplified by Q16 and enters IC4 (FM signal processing IC), where it is mixed with the second local oscillator signal and so converted into the second IF signal. The unwanted frequency band of the second IF signal is eliminated by ceramic filter CF1. The resulting signal is then amplified and detected.

Item	Rating
Center frequency of 6dB bandwidth (fo)	Within 455 kHz $\pm$ 1.5 kHz
6dB bandwidth	$\pm$ 7.5 kHz or more
40dB bandwidth	$\pm$ 15 kHz or less
Passband ripple	1.5 dB or less (within 455 $\pm$ 1.5 kHz)
Guaranteed attenuation	27 dB or more (within $\pm$ 100 kHz)
Insertion loss	6 dB or less
Input/output impedance	1.5 k Ω

Table 3 Ceramic filter (L72-0362-05) characteristics (TX-RX unit CF1)

• AF amplifier

The frequency characteristics of the audio signal output by the FM detector are corrected by the Q12 active high-pass filter and deemphasis circuit consisting of R80 and C79. The audio signal is then passed through an AF variable resistor and amplified by power amplifier IC208 to obtain the desired output.

• Squelch and mute circuits

The output detected by IC4 is amplified by Q15, wave-form shaped by D21 and C87, and the direct current is input to the microprocessor analog port (pin 5). The voltage input to the microprocessor is digitized, and the microprocessor controls the MUTE, AFC0, and AFC1, thus controlling the audio signal. This port has hysteresis. The microprocessor also controls the MUTE, AFC0, and AFC1 during the T. ALT, CTCSS and DTSS operations, thus controlling the audio signal.

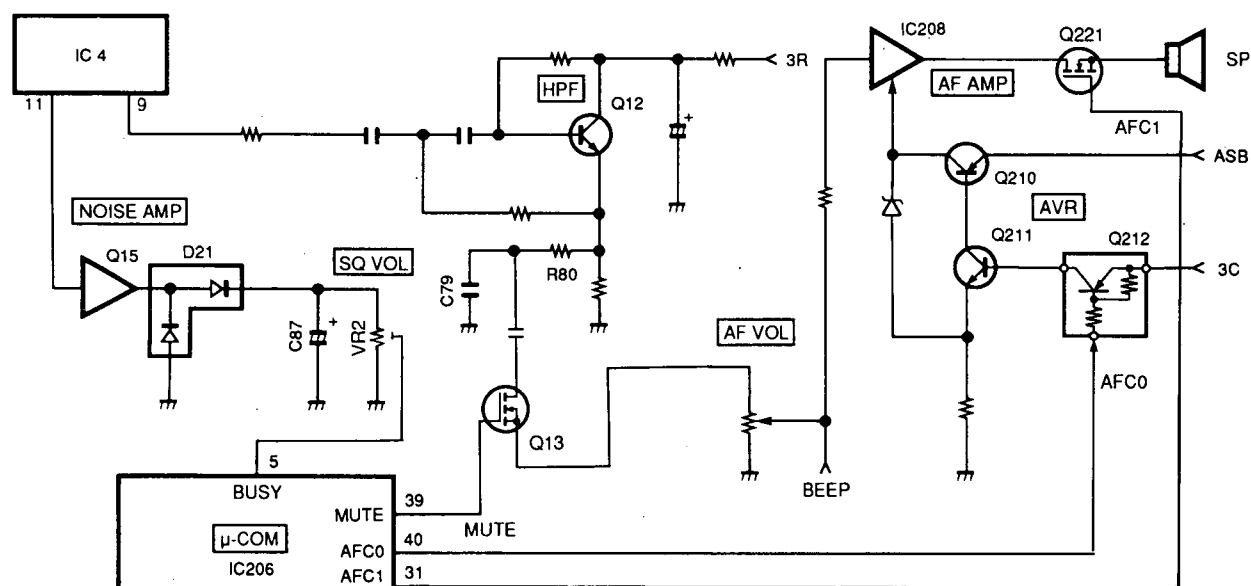


Fig. 3 AF amplifier, squelch, and mute circuits

Condition			MUTE	AFC0	AFC1
Transmission			L	H	L
Reception	Normal operation	Squelch on	L	H	L
		Squelch off	H	L	H
	Bell operation	Standby	L	H	L
		Receive (Bell operation)	L	L	H

MUTE: Muted when low
AFC0: Muted when high
AFC1: Muted when low

Table 4 Muting conditions

TH-42A/AT/E

CIRCUIT DESCRIPTION

• S meter

The S-meter signal is output from pin 13 of IC4 as a direct current corresponding to the input signal, converted to a voltage by R96, then input to pin 3 of the microprocessor. The DC voltage is digitized to control the LCD S-meter display. The S-meter display level is written into the EEPROM of each unit during adjustment in the factory. Thus there is little variation in the product level.

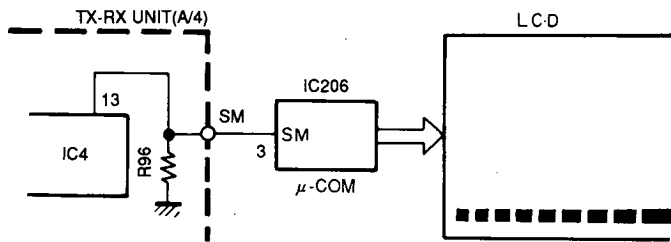


Fig. 4 S meter

TRANSMITTING SYSTEM

• Microphone amplifier

The audio band of the signal from the microphone is corrected by the 6dB/oct preemphasis circuit consisting of C235 and R244. The 18dB/oct tone frequency is eliminated by the low-pass filter consisting of C236, R245, C239 and R239 and the preemphasis circuit. The signal is amplified and limited by IC207 (1/2). Distortion components exceeding the audio band of the resulting signal are then eliminated by 18dB/oct frequency correction by a splatter filter consisting of IC207 (2/2) and R235 and C230.

• Modulation circuit

The signal from the microphone amplifier passes through the modulation adjustment variable resistor VR202, is applied to VCO varicap diode D4, and modulated by variable reactance. TH201 does modulation adjustment by the temperature.

• Drive and Final Circuit

The desired signal is produced by the VCO, and amplified to about 290 mVrms by the buffer amplifier. It is then amplified to about 1.7 Vrms by the drive. The amplified signal is input to power module IC3.

The power module consists of a two-stage FET amplifier, and increases the power to about 5 W.

• Transmission/reception selector circuit

The transmission output is passed through the transmission/reception selector circuit and low-pass filter to the antenna.

The transmission/reception selector circuit, which consists of D12, D13, and D14, is turned on during transmission and off during reception to switch the signal.

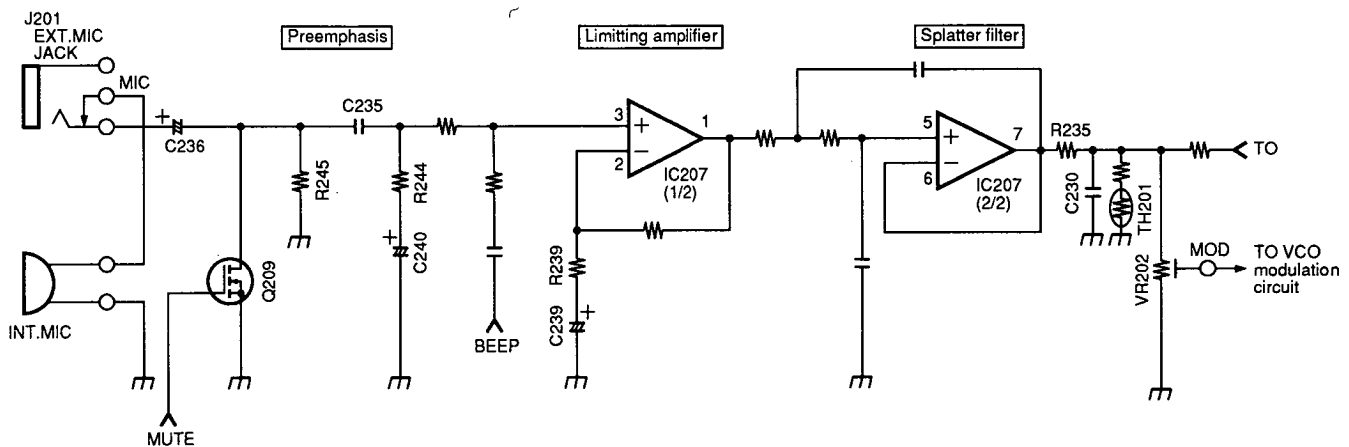


Fig. 5 Microphone amplifier

TH-42A/AT/E

CIRCUIT DESCRIPTION

• APC and transmission output selector circuits

The automatic power control (APC) circuit is used to obtain a stable transmission current. This circuit detects the drain current in the final stage of the power module and controls the transmission output.

To differential DC amplifier IC204, two voltages are applied: the reference voltage produced by dividing the voltage of constant-current zener diode D202 by variable resistors VR201, R211, and R212 for transmission output adjustment, and the detection voltage generated across R74, R76 and R77 in proportion to the drain voltage in the final stage.

The voltage, proportional to the difference between the reference voltage and the detection voltage, is obtained at the output pin (pin 6) of IC204. This voltage is reversed by Q203 to provide the APC voltage.

This APC voltage controls the power control pin of the power module and stabilizes the transmission output. When transmission is turned off, Q18 turns off and Q19 turns on, the APC voltage is discharged quickly, and the power module is turned off stably.

When transmission output is changed, each switch is changed as shown in the table below. The reference voltage is changed, and the transmission output is fixed at about 5 W (high), 0.5 W (low), or 50 mW (EL).

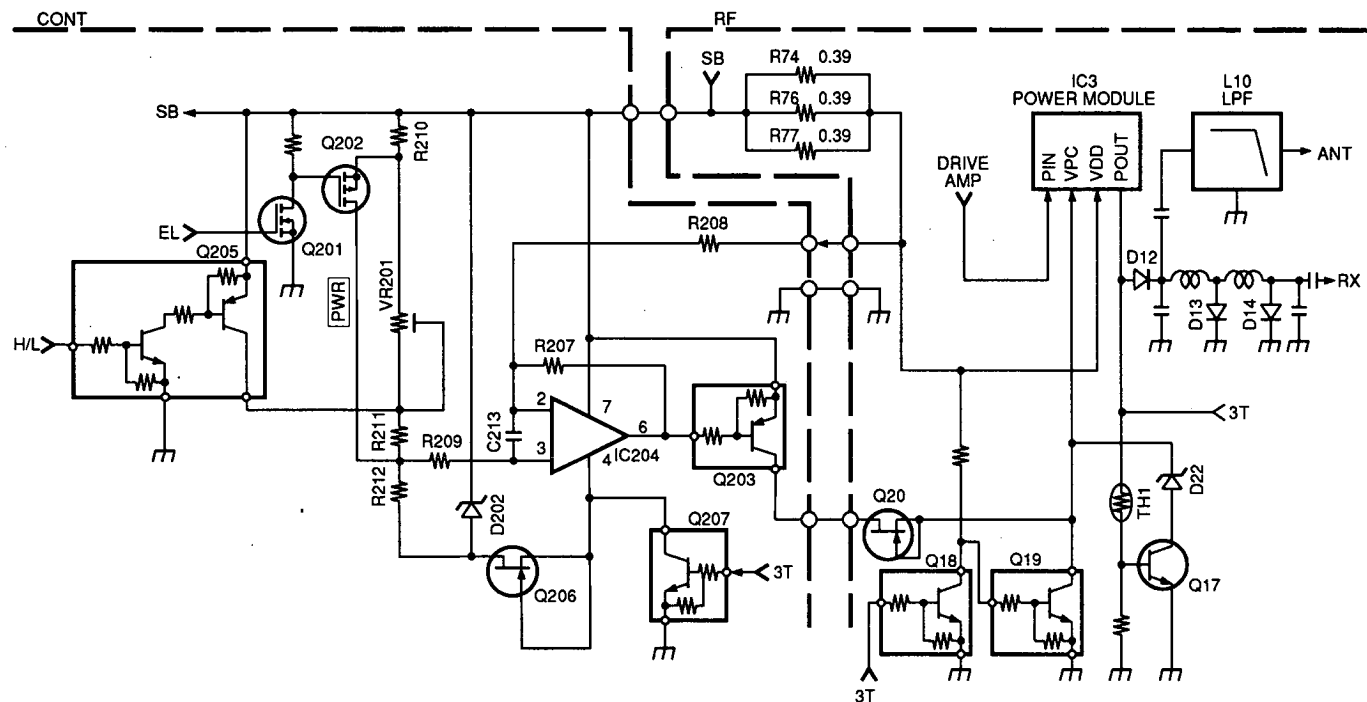


Fig. 6 APC and transmission output selector circuits

H/L and EL are control signals from the microprocessor unit. The logical relationship is shown in the table below.

Transmission output selection	Transmission		Reception	
	H/L	EL	H/L	EL
HI	L	L	L	H
L	H	L	L	H
EL	L	H	L	H

Table 5 Transmission output selector

• Temperature protection circuit

When the thermistor detects about 100°C, the temperature protection circuit turns Q15 on, sets the APC voltage equal to the D22 zener voltage, and reduces the APC voltage to prevent thermal damage to the power module.

TH-42A/AT/E

CIRCUIT DESCRIPTION

PLL CIRCUIT

• PLL

The output from the 12.8 MHz reference oscillator consisting of X1 is divided by IC1 to produce a 5 kHz or 6.25 kHz reference frequency. The comparison frequency is obtained by amplifying the VCO output by Q2 and dividing it by the PLL IC (IC1).

5, 10, 12.5, 15, 20, and 25kHz PLL synthesizer is implemented by phase-comparing the reference frequency and comparison frequency obtained when X1 is divided.

The pulse output from pins 18 and 20 of IC1 according to the difference between the reference frequency and the comparison frequency is passed through the charge pump (Q3, Q4), and is removed the ripple by a low-pass filter to produce the lock voltage.

The power supply of the charge pump is raised from 3M by the DC-DC converter to increase to about 7 V.

• VCO (X58-4100-00)

The desired frequency is directly produced by the Colpitts oscillator configured around Q2. The lock voltage is applied to varicap diodes D1 and D2 to change the oscillator frequency. The TX pin is made high during transmission. Q1 and D3 are then turned on to change over the oscillation frequency.

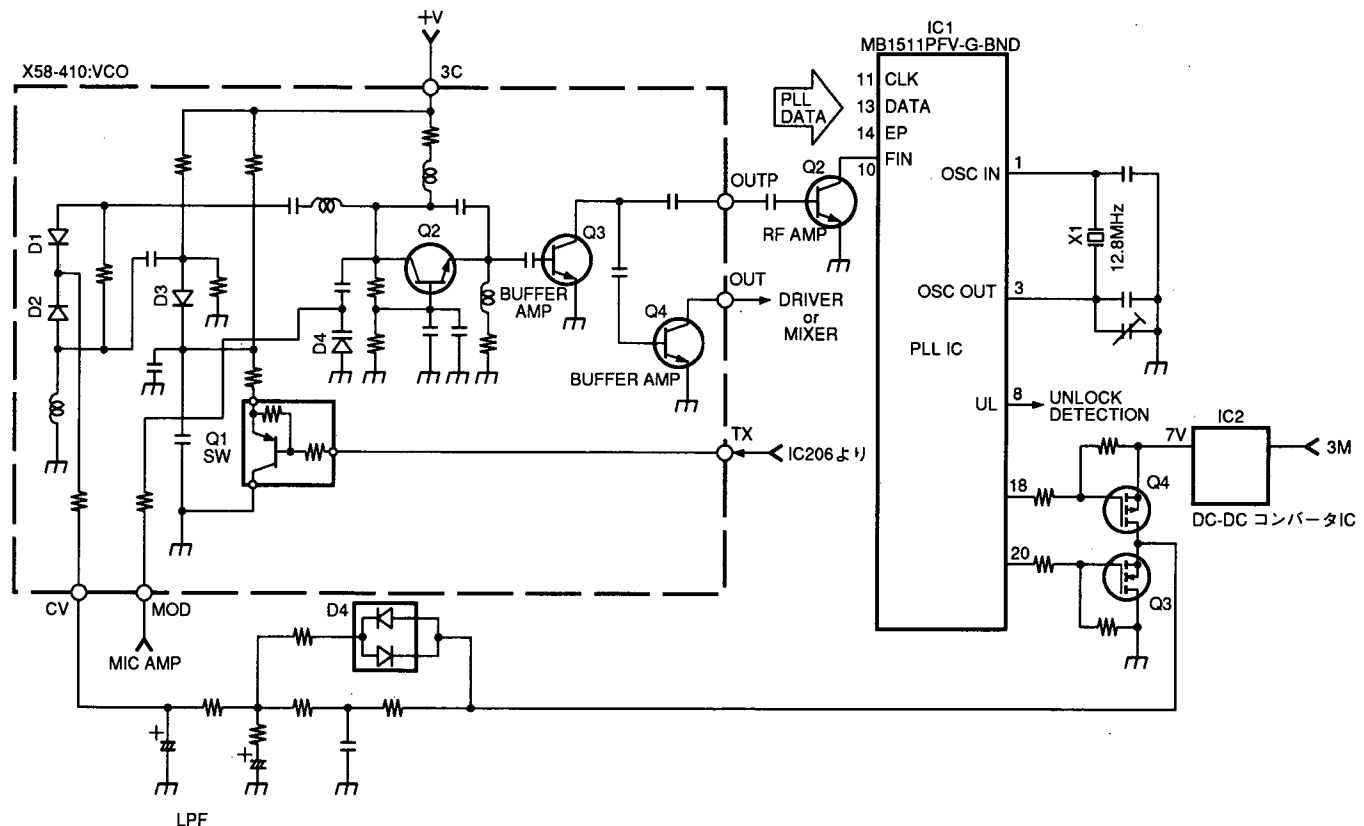


Fig. 7 PLL and VCO circuits

• Unlock detection circuit

When the PLL is in the unlock state, the pulse that is output to the UL pin (pin 8) of IC1 is waveform shaped by D2, C11, R10, and C12. The UL pin is then made high. The voltage at the UL pin is monitored by the microprocessor to control the transmission or reception selection timing.

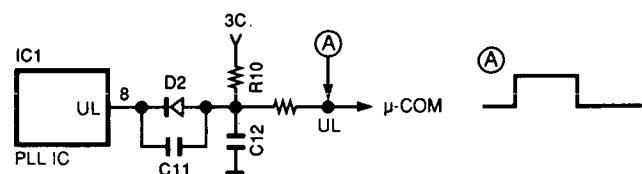


Fig. 8 Unlock detection circuit

TH-42A/AT/E

CIRCUIT DESCRIPTION

DIGITAL CONTROL CIRCUIT

- **Keys and rotary encoder circuit**

The signal from keys and rotary encoder input to micro-processor directly as shown in Figure 9.

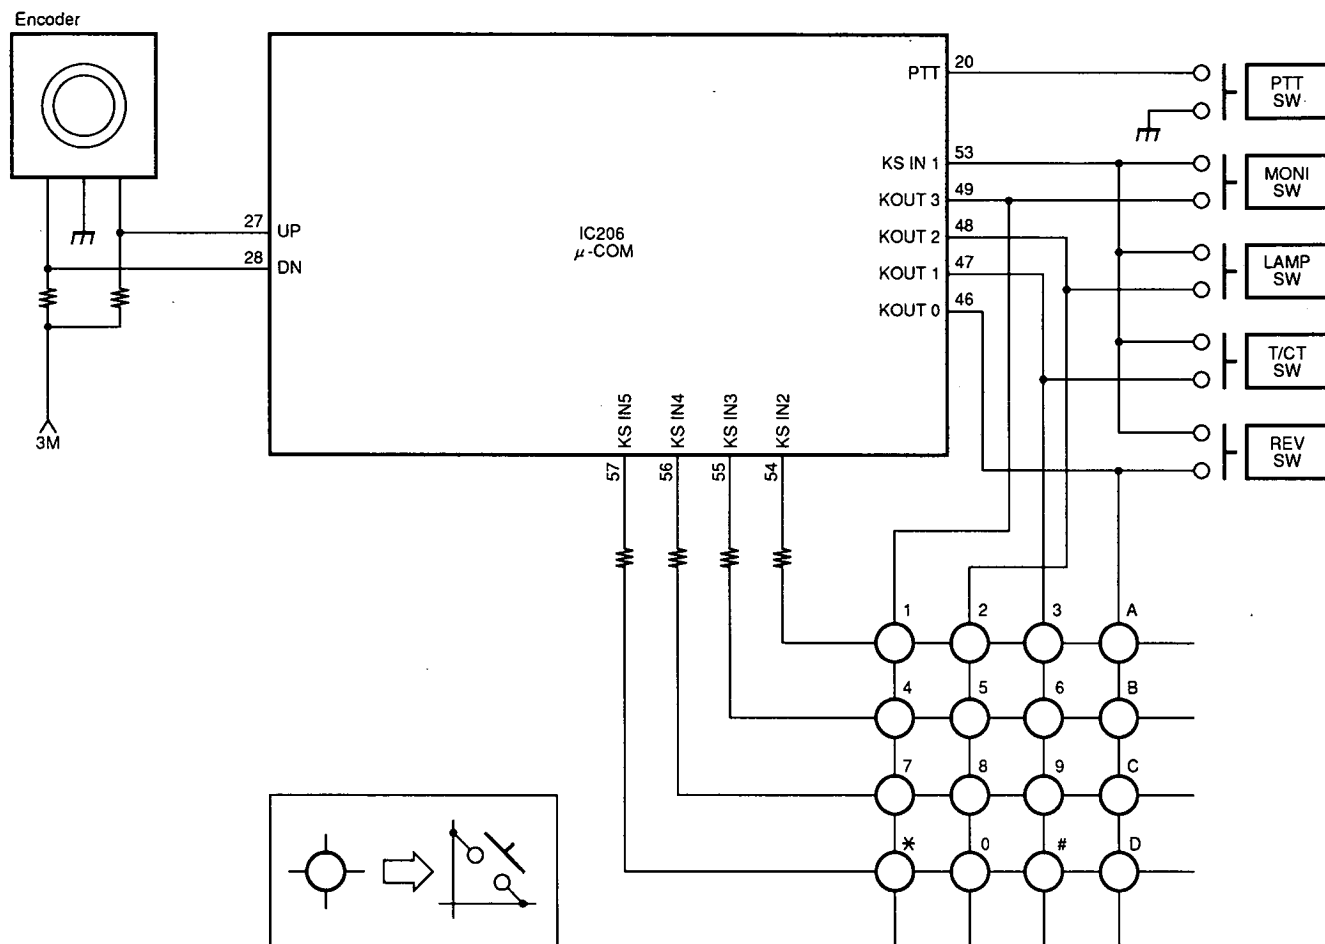


Fig. 9 Keys and rotary encoder circuit

CIRCUIT DESCRIPTION

• Reset and backup circuits

When the SB is turned on, a high-level pulse of about 1.5 ms duration is output from the reset circuit consisting of C267, R287, and Q220 to reset microprocessor IC206. If the SB is turned off, the voltage detection IC IC205 detects a 3M voltage drop, and outputs a low signal. When the INT4 microprocessor port goes low, it outputs data to IC202 (EEPROM) and enters backup mode.

The EEPROM receives data while C208 is discharging, and the data is written internally. The delay circuit consisting of R213 and C265 prevents the microprocessor from resetting during writing, and IC209 (AND IC) speeds rising of the reset pulse.


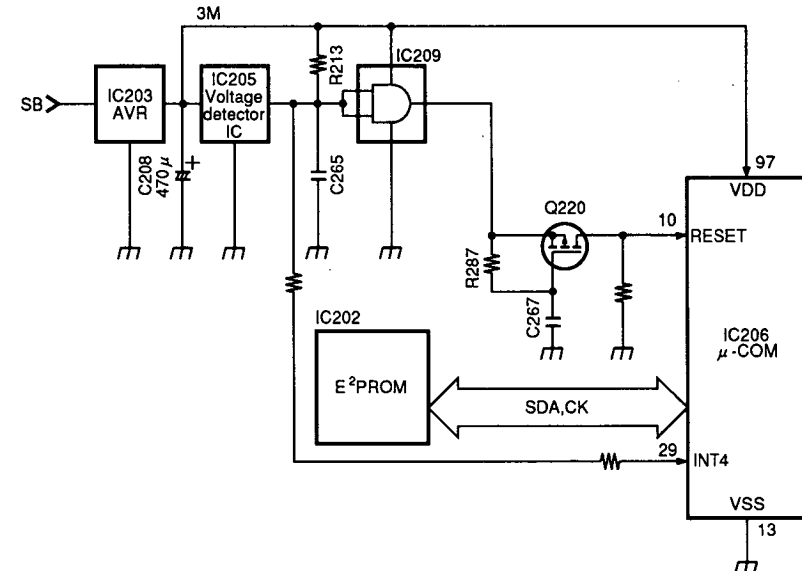


Fig. 10 Reset and backup circuits

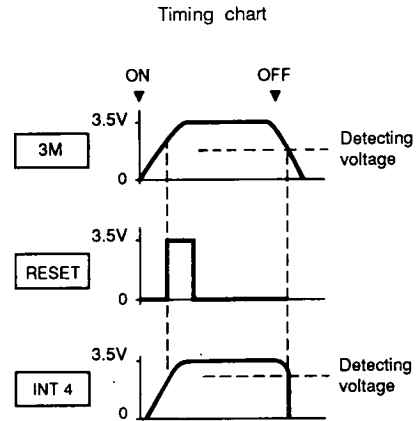

• Battery voltage detector circuit

The supply voltage (SB) is divided and input to the analog port (pin 2) of the microprocessor. The voltage input to the microprocessor during transmission is digitized to drive the LCD battery display.

• Lamp circuit

The LED is turned on or off by directly flowing current to the microprocessor ports.

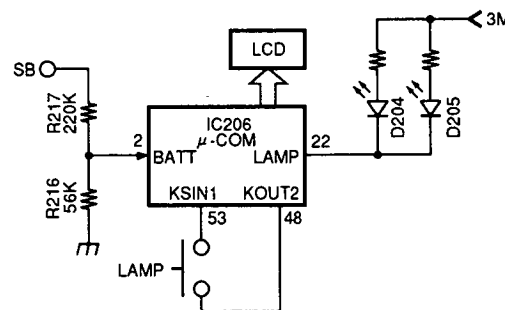


Fig. 11 Battery voltage detector and lamp circuits

CIRCUIT DESCRIPTION

POWER SUPPLY CIRCUIT

• Nickel-cadmium battery charging circuit

The constant current circuit consisting of Q14 and D20 supplies constant current (about 70 mA) to the Nickel cadmium battery from the external power supply connected to the DC IN pin. The constant current circuit does not work if there is no external power supply connected to the DC IN pin.

• Power selector circuit

The power circuit configuration is shown in Figure 12. The power circuit branches are as follows:

RB	Power module power supply voltage
3C	VCO V _{DD} and IC208 AVR reference voltage
3R	IC1 (PLL IC) V _{DD}
3T	Receive stage V _{DD} , IC4 (FMIC) V _{DD}
SB	Transmission LED, IC204 V _{DD} switch, drive stage V _{DD} , protection circuit bias voltage, D12, D13, D14 switch (transmission/reception selector switch)
3M	IC206 (microprocessor) V _{DD} , IC2 (DC-DC comparator) V _{DD} , CTCSS V _{DD} , IC201 (DTMF decoder IC) V _{DD} , IC202 (EEPROM) V _{DD} , LAMP, 3T, 3C, 3R reference voltage
ASB	IC208 (AF amplifier) V _{DD}

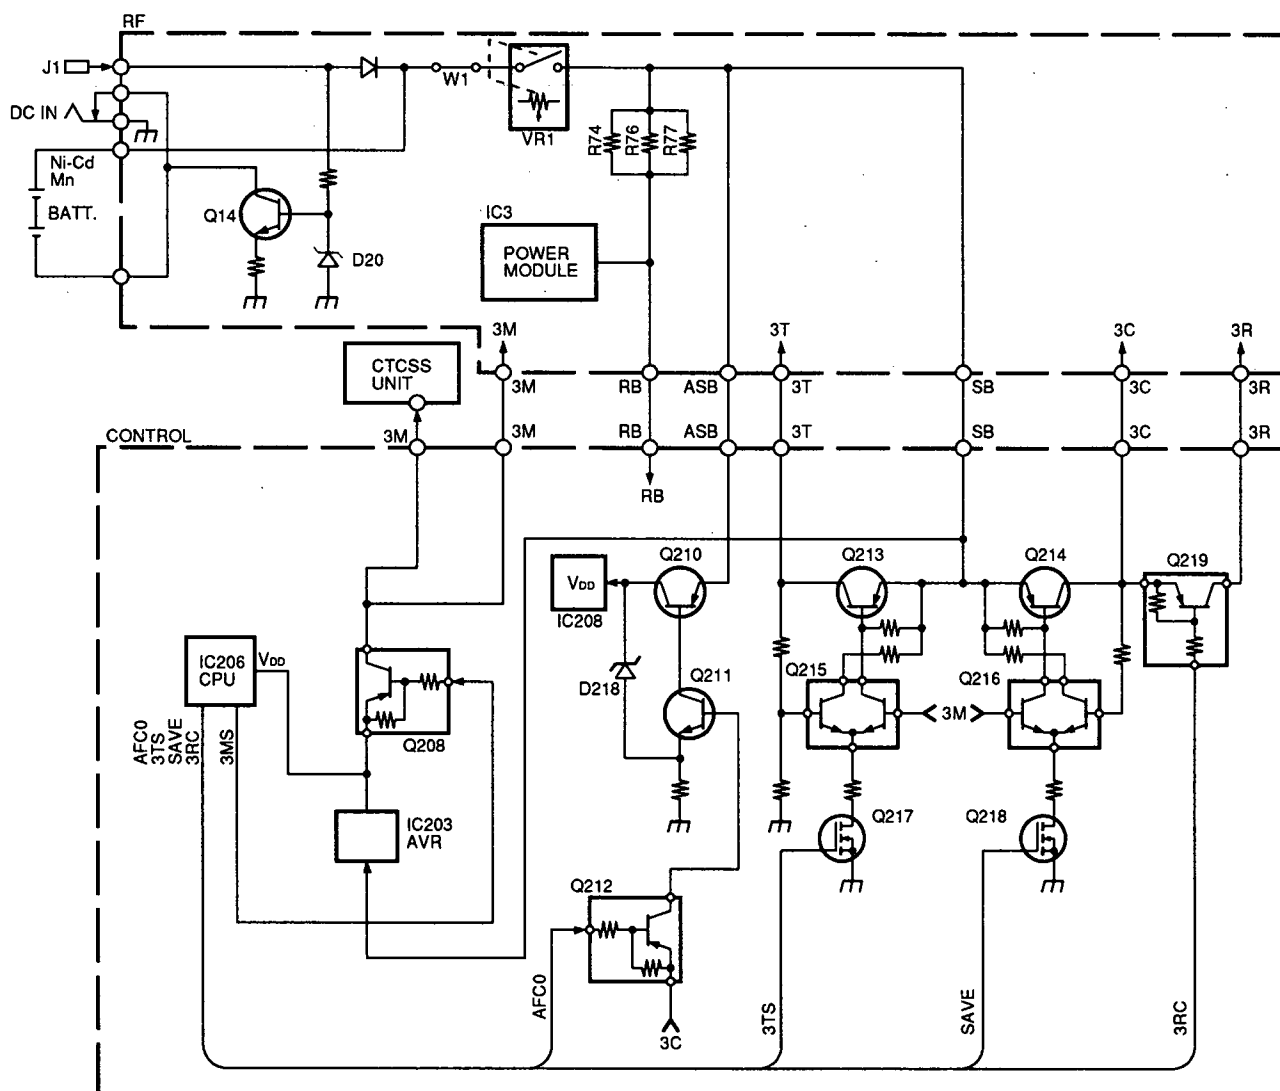


Fig. 12 Power supply circuit

CIRCUIT DESCRIPTION

• Battery save circuit

The squelch is switched in during receive (SCAN OFF). The power circuit enters battery save mode if no key has been pressed for five seconds.

Q218 is turned on or off in a 200 ms : 800 ms cycle (200 ms : 125 ms if the DTSS or paging function has been turned on) by the signal output to the SAVE pin of the microprocessor.

As a result, the power consumption in the standby state is reduced by controlling the 3C AVR circuit consisting of Q214 and Q216, turning 3C and 3R on or off.


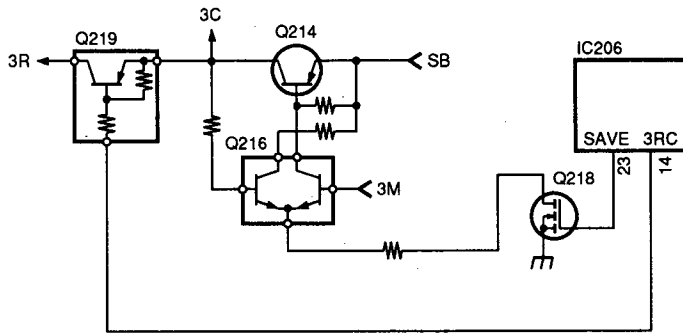


Fig. 13 Battery save circuit

• Remote control circuit

A quantized voltage is applied to the REM (remote) pin of the microprocessor, which invokes appropriate functions according to the voltage level.

The voltage at the REM pin is normally about 3.5 V as a result of R273. When a remote control microphone button is pressed, this voltage is divided by the resistor connected in series with the button switch and by R273. The resulting voltage indicates which button was pressed.

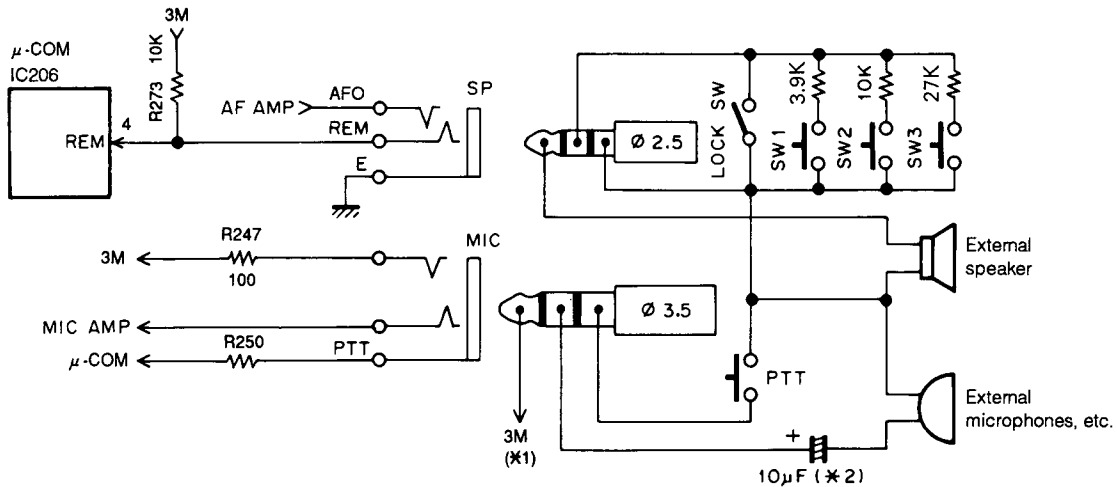

*1: Voltage appears from the internal 3M line (3.5 V) via R247. It is about 3 V when 5 mA flows.

*2: In the following case, the capacitor is not required; connect directly.
When a capacitor to cut DC voltage is connected to the external device.
When a two-terminal capacitor microphone is used as the external microphone.

Fig. 14 Speaker, Microphone jack and Remote control circuits

CIRCUIT DESCRIPTION

SUPPLIED CIRCUIT

• CTCSS

The tone frequency is set by the serial data from the microprocessor (IC206). The audio input signal is the detection output input from the CI pin.

The SDO pin is made low when the tone frequency coincides. The microprocessor determines the SDO pin state and controls the MUTE, AFC0, AFC1 pins.

When the CTCSS signal is transmitted, the CTCSS is passed through a low-pass filter, and is output from the microprocessor (pin 32) and modulated.

• DTSS

A DTMF code is input or output as serial data of microprocessor. The audio input signal is input from the CI pin in the same way as in CTCSS. The data is sent to the microprocessor when a DTMF signal is detected. The microprocessor determines the coincidence of the code and controls the MUTE, AFC0, and AFC1 pins.

The DTMF signal is output from the microprocessor (pin 98, 99) during DTMF signal transmission. The DTMF signal is modulated through the microphone amplifier. During DTMF signal transmission, the MUTE pin is made low. AFC0 and AFC1 are then turned on, and the DTMF signal can be monitored with the speaker.

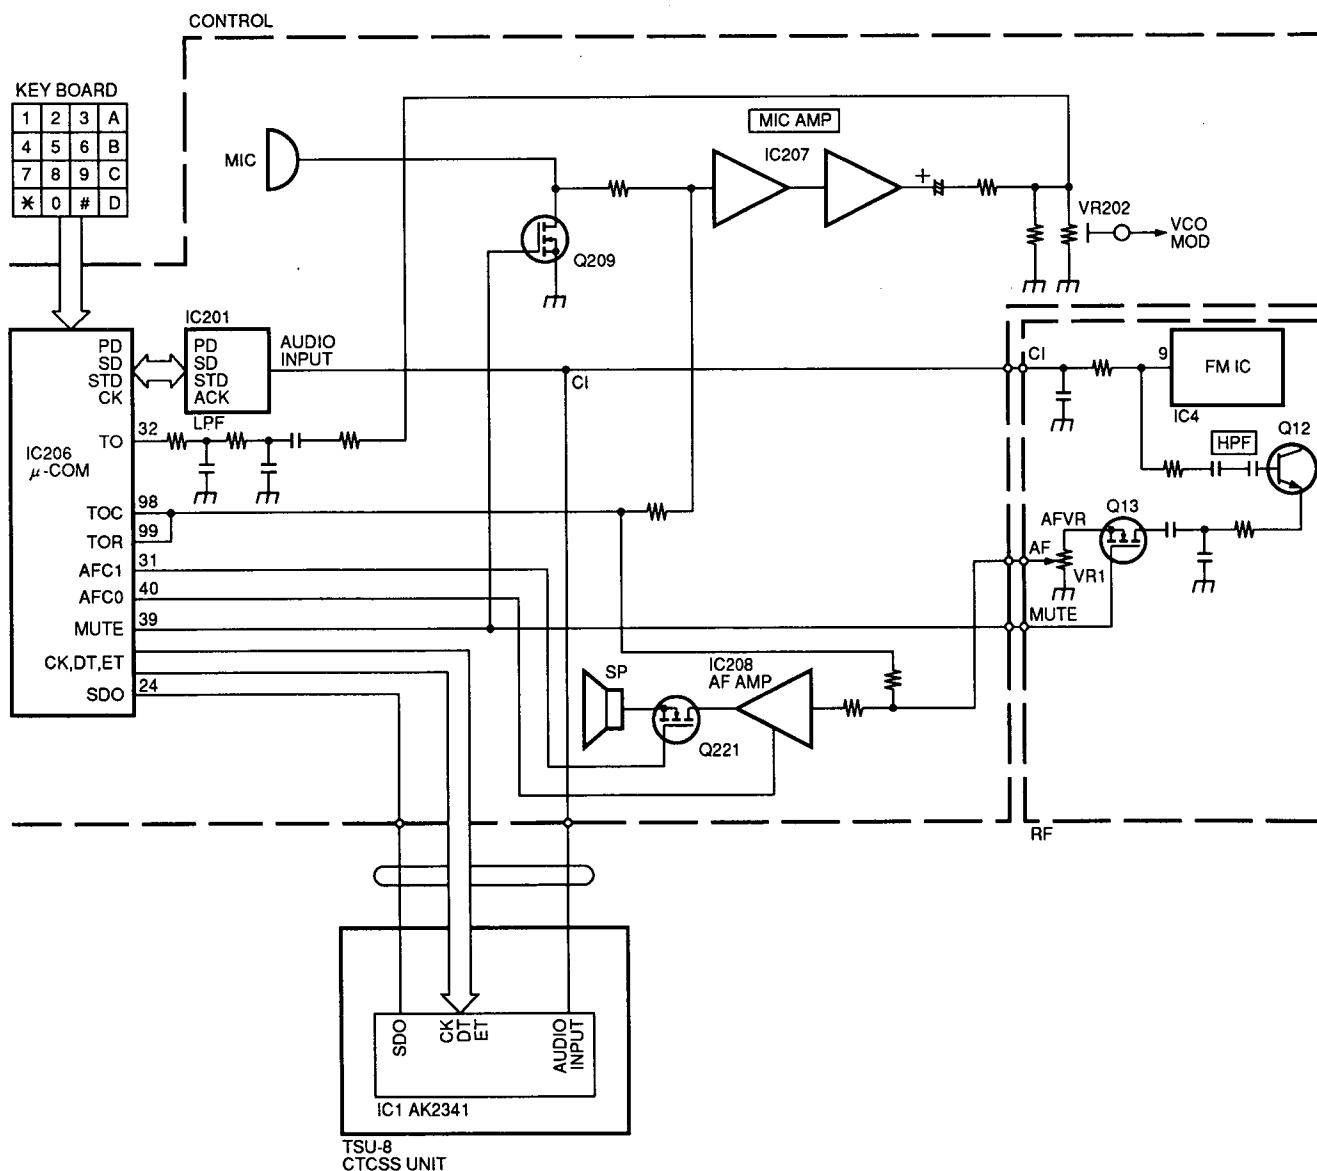



Fig. 15 Supplied circuits connection diagram (DTMF, CTCSS, BEEP, TONE)

TH-42A/AT/E

SEMICONDUCTOR DATA

Microprocessor : HD404629B17TF control unit (IC206)

• Pin connection diagram

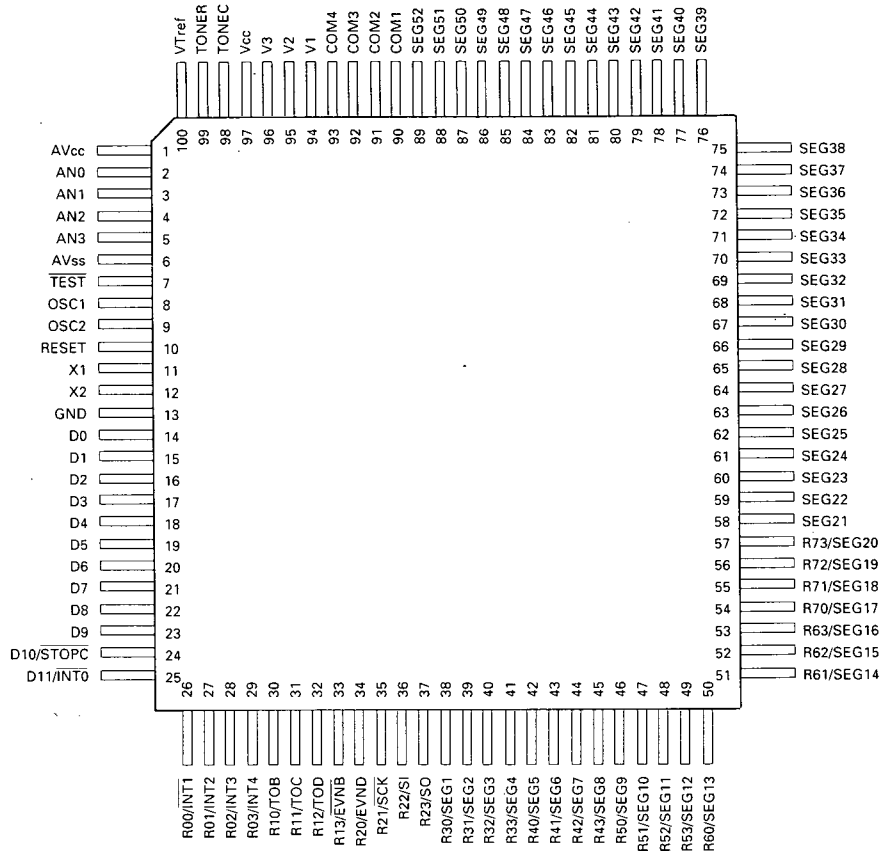

• Pin function

Pin No.	Pin name	Port name	I/O	Function
1	AVcc	AVCC		A/D converter power supply.
2	AN0	BATT	I	Battery check during transmission.
3	AN1	SM	I	S-meter voltage check.
4	AN2	REM	I	Remote control switch voltage check.
5	AN3	BUSY	I	BUSY port voltage check.
6	AVss	AVSS		AVcc ground.
7	TEST	TEST	I	Connect to Vcc.
8	OSC1	OSC1	I	Internal oscillator input.
9	OSC2	OSC2	O	Internal oscillator output pin.
10	RESET	RESET	I	MCU reset. (↑ edge)
11	X1	X1	I	Connect to Vcc.
12	X2	X2		Release.
13	GND	VSS		GND
14	D0	3RC	O	Receive VCO power supply control output.
15	D1	CK	O	Clock output to PLL, CTCSS, EEPROM, DTMF decoder.
16	D2	DT	O	Data output to PLL, CTCSS, DTMF decoder.

SEMICONDUCTOR DATA


Pin No.	Pin name	Port name	I/O	Function
17	D3	SDA	I/O	EEPROM IC data input/output.
18	D4	CHOFF	I	CH display mode release input.
19	D5	UL	I	PLL IC unlock signal input.
20	D6	PTT	I	PTT SW input.
21	D7	SD	I	DTMF IC data (SD) input.
22	D8	LAMP	O	Lamp control output.
23	D9	SAVE	O	Save power supply control output.
24	D10/STOPC	SD0	I	CTCSS IC tone match signal (DET) input.
25	D11/INT0	NC		Release.
26	R00/INT1	STD	I	DTMF IC data detection (STD) input.
27	R01/INT2	UP	I	Encoder data input.
28	R02/INT3	DN	I	Encoder interrupt input. (↑↓ edge)
29	R03/INT4	INT4	I	Power supply detection port. (↑↓ edge)
30	R10/TOB	BEEP	O	Beep tone, 1750Hz output.
31	R11/TOC	AFC1	O	Audio control output.
32	R12/TOD	TO	O	Subtone output. (PWM)
33	R13/EVNB	NC		Release.
34	R20/EVND	TX	O	VCO oscillation frequency selector output
35	R21/SCK	3MS	O	Power supply control output (except microprocessor and EEPROM).
36	R22/SI	EL	O	Economic low power control output.
37	R23/SO	H/L	O	Transmission output switching control output.
38	R30/SEG1	3TS	O	TX stage power supply control output.
39	R31/SEG2	MUTE	O	Audio mute/microphone mute control output.
40	R32/SEG3	AFC0	O	Audio amplifier power supply control output.
41	R33/SEG4	PD	O	DTMF receiver PD pin control output.
42	R40/SEG5	MRWT	O	Production-time automatic frequency write mode. (↓ edge)
43	R41/SEG6	SMCALL	O	S-meter adjustment mode. (↓ edge)
44	R42/SEG7	ET	O	CTCSS IC chip select output.
45	R43/SEG8	EP	O	PLL IC chip select output.
46	R50/SEG9	KOUT0	O	Key scan output 0
47	R51/SEG10	KOUT1	O	Key scan output 1
48	R52/SEG11	KOUT2	O	Key scan output 2
49	R53/SEG12	KOUT3	O	Key scan output 3
50	R60/SEG13	SIN0	I	Destination input 0 (internal pull-up)
51	R61/SEG14	SIN1	I	Destination input 1 (internal pull-up)
52	R62/SEG15	KSIN0	I	Key scan input 0 (internal pull-up)
53	R63/SEG16	KSIN1	I	Key scan input 1 (internal pull-up)
54	R70/SEG17	KSIN2	I	Key scan input 2 (internal pull-up)
55	R71/SEG18	KSIN3	I	Key scan input 3 (internal pull-up)
56	R72/SEG19	KSIN4	I	Key scan input 4 (internal pull-up)
57	R73/SEG20	KSIN5	I	Key scan input 5 (internal pull-up)
58-89	SEG21-52	SEG21, 52	O	LCD display segment signal output (Segments 48-52: release)
90-93	COM1-4	COM1-4	O	LCD display common signal output (COM4: release)
94-96	V1, V2, V3	V1, V2, V3		Release LCD driver power supply.
97	Vcc	VDD		Power supply voltage.
98	TONEC	TOC	O	DTMF signal column side output.
99	TONER	TOR	O	DTMF signal row side output.
100	VTref	VTREF		DTMF output reference level power supply.

TH-42A/AT/E

SEMICONDUCTOR DATA

DTMF receiver : LC7387M-L (IC201)


• Pin connection diagram

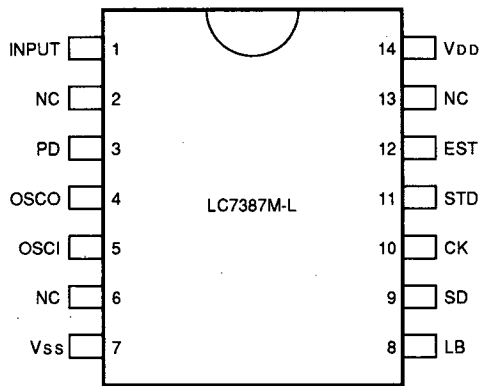

• Pin description

Pin No.	Pin name	I/O	Function
1	INPUT	I	An input coupling capacitor is required. It is biased to VDD/2 internally.
2	NC		
3	PD	I	Powerdown mode is entered by making this pin high.
4	OSC0	O	Connect the 4.194304MHz crystal to these pins to form an oscillator.
5	OSC1	I	
6	NC		
7	Vss		Power supply pin. Normally 0 V
8	LB	I	Release
9	SD	O	The decoded DTMF output is output as 4-bit serial data beginning with the LSB.
10	CK	I	The CK pin shifts out data to the SD pin.
11	STD	O	High: The DTMF signal is present.
12	EST	O	Release
13	NC		
14	VDD		Power supply pin. Normally 3.3 to 5.5 V

• Block diagram

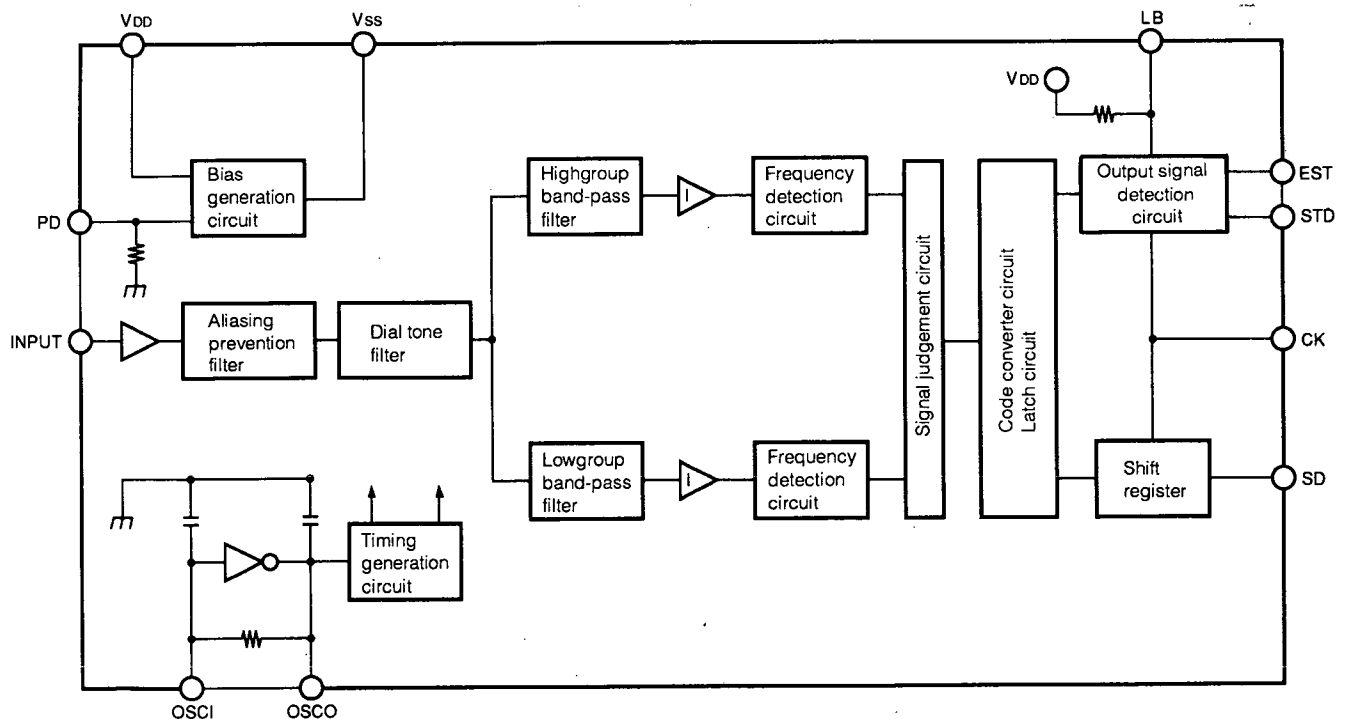


TH-42A/AT/E

SEMICONDUCTOR DATA

EEPROM for memory : AT24C04N10SI2.5 (IC202)

• Pin connection diagram

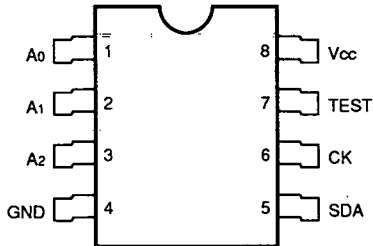


• Pin function

Pin name	Function
A0-A1	Address input
SDA	Serial data
CK	Serial clock
Test	Test input → GND
NC	No connection


AF power amplifier : NJM2070M (IC208)

• Block and pin connection diagram

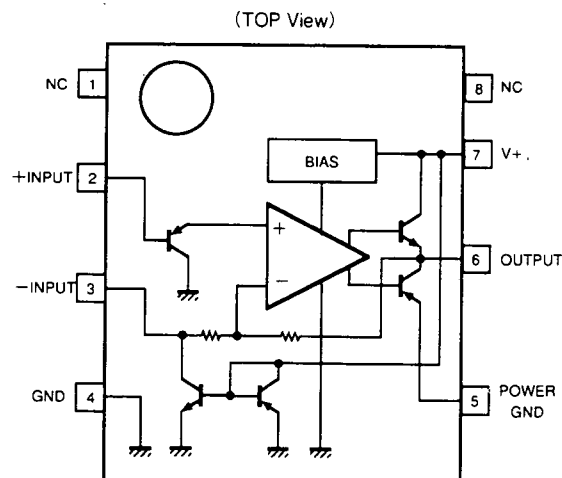


Microphone amplifier : TA75W558FU (IC207)

• Pin connection diagram

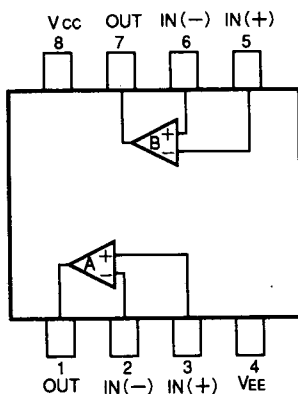

• Equivalent circuit

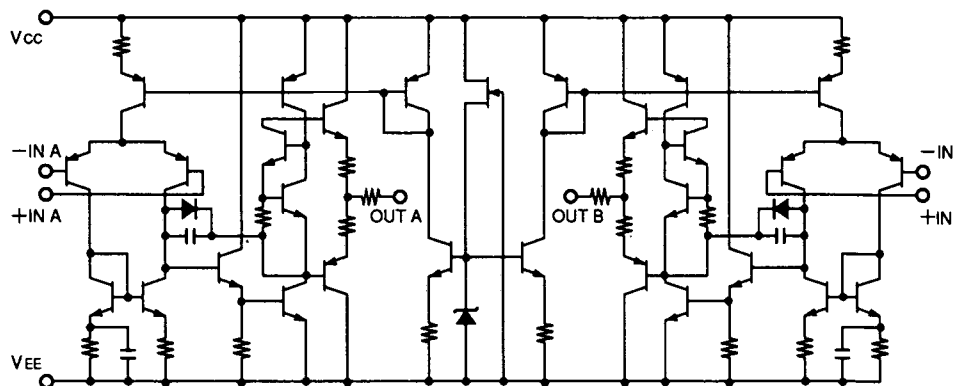


TH-42A/AT/E

SEMICONDUCTOR DATA

PLL IC: MB1511PFV-G-BND (IC1)


• Pin connection diagram

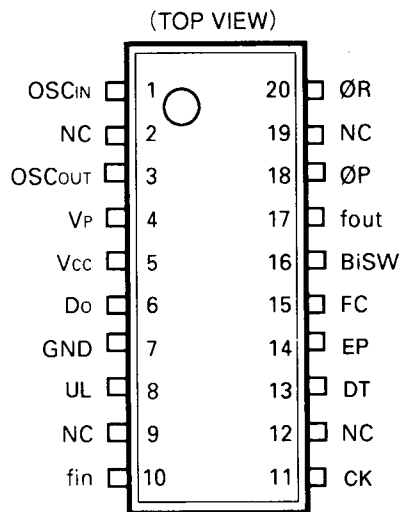

• Operating conditions

Item	Code	Standard value			Unit
		Minimum	Standard	Maximum	
Power supply voltage	Vcc	2.7	3.0	5.5	V
	Vp	Vcc	–	8.0	V
Input voltage	Vin	GND	–	Vcc	V
Operating temperature	Ta	–40	–	+85	°C

• Block diagram

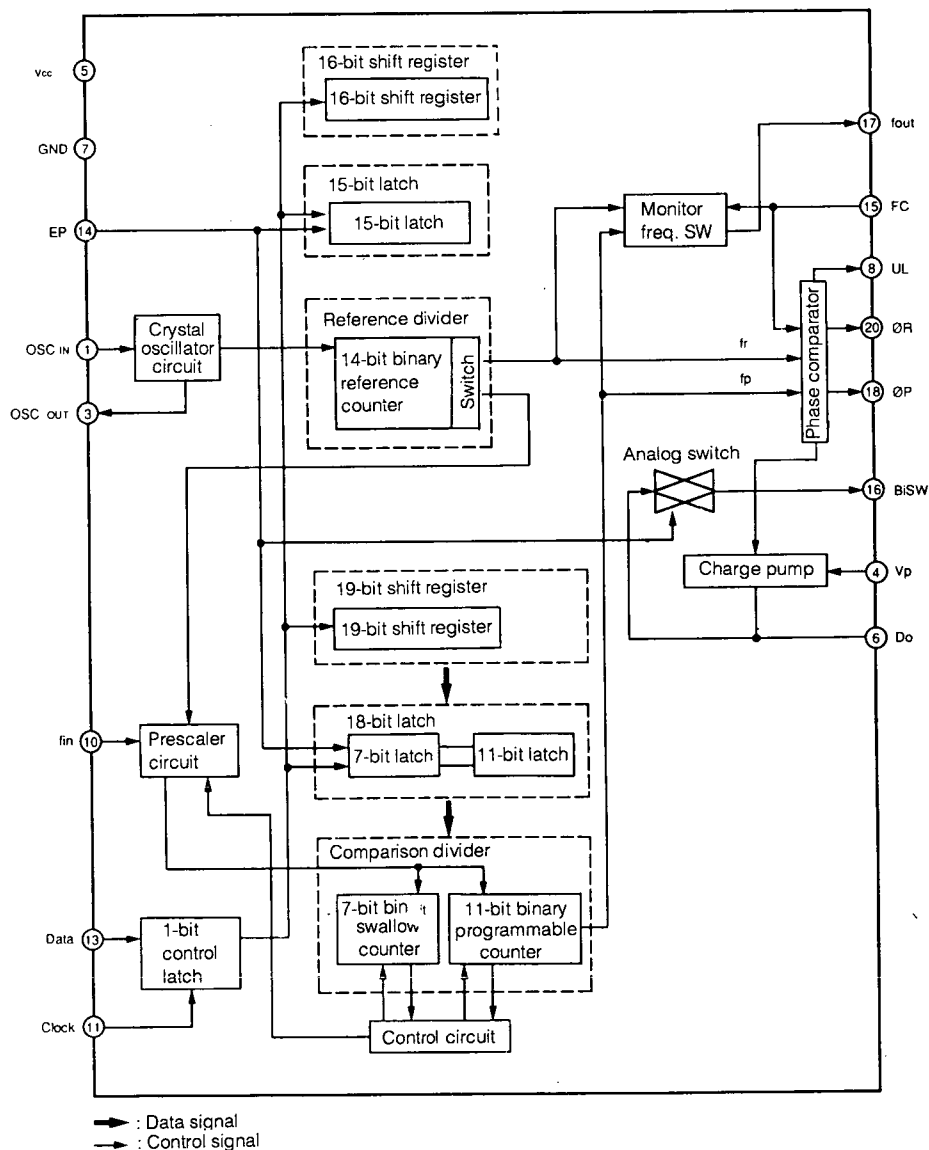

SEMICONDUCTOR DATA

• Functions of pins


Pin No.	Pin code	I/O	Function						
1	OSCIN	I	Crystal oscillator connection pin and reference divider input pin (OSCIN= Oscillator circuit input pin, OSCOUT= Oscillator circuit output pin)						
3	OSCOUT	O							
4	VP	–	Power supply pin for charge pump and analog switch output						
5	Vcc	–	Power supply pin						
6	Do	O	Built-in charge pump output pin						
7	GND	–	GND pin						
8	UL	O	Phase comparator output pin. Normally UL is high. UL is low in the period corresponding to the phase difference between fr and fp.						
10	fin	I	Prescaler input pin. AC connection						
11	CK	I	Clock input pin for 19 and 16-bit shift registers. Data is read on the rising edge of the clock pulse.						
13	DT	I	Binary code serial data input pin. The last data bit is a control bit. <table><tr><td>Control data</td><td>Serial data destination</td></tr><tr><td>H</td><td>15 bit latches</td></tr><tr><td>L</td><td>18 bit latches</td></tr></table>	Control data	Serial data destination	H	15 bit latches	L	18 bit latches
Control data	Serial data destination								
H	15 bit latches								
L	18 bit latches								
14	EP	I	Load enable signal input pin (with pull-up resistor). When EP is high or open, the shift register contents are sent to the latch together with the serial data control bit. The built-in analog switch turns on, and the output signal from the built-in charge pump is sent to the BiSW pin.						
15	FC	I	Phase comparator phase switching pin (with pull-up resistor). This reverses the polarity of the phase comparator output according to the polarity of the externally connected LPF and VCO. When FC is low, the characteristics of the charge pump and phase comparator are reversed. It also switches between fout pin (test pin) outputs fr and fp.						
16	BiSW	O	Analog switch output pin. Normally high impedance. Only when the switch is on (EP: high), the built-in charge pump state is output.						
17	fout	O	Phase comparator input monitor pin. Either the reference divider output (fr) or comparison divider output (fp) signal is output according to the FC pin input level. <table><tr><td>FC</td><td>Output signal</td></tr><tr><td>H</td><td>fr output</td></tr><tr><td>L</td><td>fp output</td></tr></table>	FC	Output signal	H	fr output	L	fp output
FC	Output signal								
H	fr output								
L	fp output								
18	φP	O	Phase comparator external charge pump output pin. The phase characteristics are reversed by the FC pin setting. The φP pin is Nch. open drain output.						
20	φR	O							
2, 9, 12, 19	NC	–	No connection						

TH-42A/AT/E


SEMICONDUCTOR DATA

DC-DC convertor : TC7660MEOA (IC2)

• Pin connection diagram

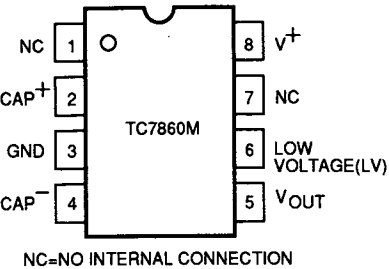


• Block diagram

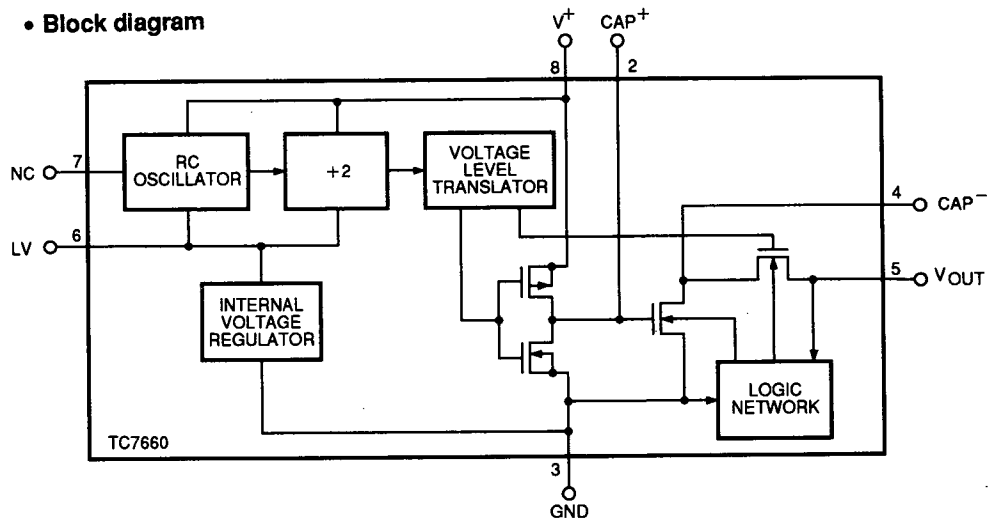


HI-PRECISION VOLTAGE DETECTOR : S-80719AN-DG(IC501)

Pin connection diagram




Block diagram

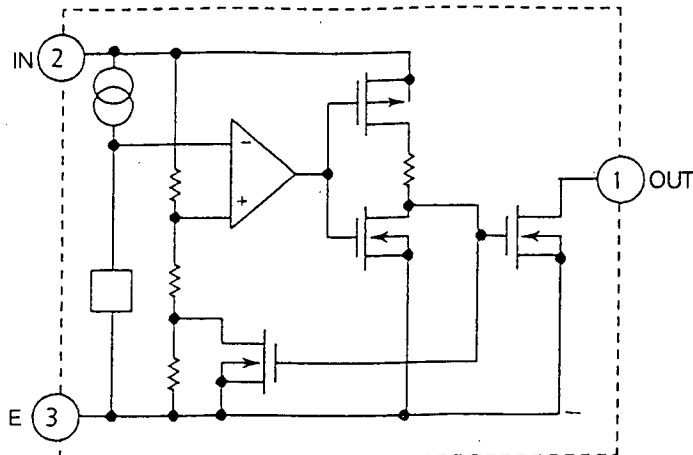

Power module: S-AU57 (IC3)

• External view

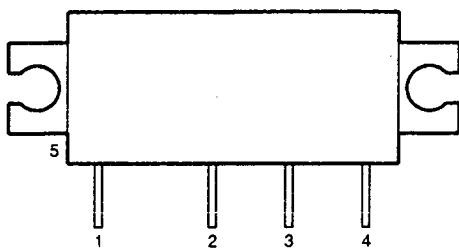

Pin assignment

- 1 : Pin
- 2 : Vpc
- 3 : Vdd
- 4 : Pout
- 5 : GND(flange)

TH-42A/AT/E

DESCRIPTION OF COMPONENTS

TX-RX unit (X57-438X-XX)

0-11: K, P 0-21: M1 0-22: M2, M3, M4 2-71: E1, E3, E9, T 2-72: E2

Ref. No.	Use/Function	Operation/Condition/Compatibility
IC1	PLL IC	
IC2	DC-DC converter	About twice the input voltage (3.5 V) is output.
IC3	Transmission power amplifier	
IC4	FM IC	Second mixer, quadrature detector, AF output, noise amplifier output, S-meter output
IC201	DTMF receiver	
IC202	EEPROM	
IC203	3.5V AVR	
IC204	APC comparator	
IC205	Voltage detection	
IC206	Microprocessor	
IC207	Microphone amplifier	Limiter amplifier, active low-pass filter
IC208	AF power amplifier	
IC209	Reset circuit comparator	
Q1	Ripple filter	
Q2	RF amplifier	PLL IC 8-pin IN (fin amplifier)
Q3, Q4	Charge pump	
Q5	DC buffer amplifier	
Q6	RF power amplifier	First stage of driver
Q7	RF power amplifier	Second stage of driver
Q8	RF power amplifier	Final stage of driver
Q9	First mixer	430MHz band → 45.05MHz band
Q10	RF amplifier	430MHz second stage
Q11	RF amplifier	430MHz first stage
Q12	Active high-pass filter	
Q13	Mute switch	Mute switch; "H": Receive audio signal On
Q14	Constant-current circuit	
Q15	Noise amplifier	
Q16	IF amplifier	
Q17	Power module changeover switch	
Q18, Q19	Quick discharge	
Q201	Transmission power changeover switch	See the circuit description of the APC circuit and transmission changeover circuit.
Q202	DC SW	APC circuit reference voltage equals SB voltage when EL is On.
Q203	APC voltage control circuit	
Q205	Transmission power changeover switch	See the circuit description of the APC circuit and transmission changeover circuit.
Q206	Constant-current circuit	
Q207	APC circuit power supply switch	
Q208	3M SW	3M SW; "L": ON
Q209	Mute switch	Mute switch, "H": Transmission audio signal Off
Q210	AVR	AF amplifier power supply
Q211	Error amplifier	Q13 bias control
Q212	AF amplifier power supply switch	AF amplifier power supply switch, "L": On

TH-42A/AT/E

DESCRIPTION OF COMPONENTS

Ref. No.	Use/Function	Operation/Condition/Compatibility
Q213	AVR	3T
Q214	AVR	3C
Q215	Differential DC amplifier	Q213 output control
Q216	Differential DC amplifier	Q214 output control
Q217	3T SW	
Q218	3C SW	
Q219	3R SW	3R output control
Q220	Reset circuit	
Q221	Mute switch	Mute switch, "H": Receive audio signal On
D1	Quick charge	3C ripple filter
D2	Waveform shaping	
D4	Speedup diode	
D5	Speedup diode	
D9	RF SW	On in transmit mode
D10	ATT	
D11	Power module protection diode	
D12, D13, D14	Transmission/reception changeover switch	
D15, D16, D17, D18	Receive shift	
D19	Reverse-flow prevention	
D20	Constant-voltage circuit	
D21	Noise rectification	
D22	Constant-voltage circuit	
D202	Constant-voltage circuit	
D204, D205	LED	LAMP
D206-D216	Reverse-flow prevention	
D217	LED	ON AIR
D218	Constant-voltage circuit	AF amplifier power supply
D220	Quick discharge	

VCO unit (X58-4100-00)

Ref. No.	Use/Function	Operation/Condition/Compatibility
Q1	Transmission/reception changeover switch	Transmission/reception changeover switch, "H": Receive frequency
Q2	Oscillation amplifier	
Q3, Q4	Buffer amplifier	
D1, D2	VCO frequency control	
D3	Frequency shift	
D4	Modulation	

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TH-42A/AT/E

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
TH-42A/AT/E						
1	3B	*	A01-2081-02	CASE ASSY (REAR)		
2	1B	*	A02-1772-03	CASE ASSY (TH-42A)	M1M2M3	
2	1B	*	A02-1772-03	CASE ASSY (TH-42A)	M4	
3	1B	*	A02-1773-03	CASE ASSY (TH-42AT)	KP	
4	1B	*	A02-1774-03	CASE ASSY (TH-42E)	TE1E2	
4	1B	*	A02-1774-03	CASE ASSY (TH-42E)	E3E9	
5	1B	*	A02-1783-03	CASE ASSY (TH-42AT)	M1M2M3	
5	1B	*	A02-1783-03	CASE ASSY (TH-42AT)	M4	
6	2B	*	A02-1784-03	BT-9 CASE (FRONT)	M4	
7	3B	*	A02-1785-02	BT-9 CASE (REAR)	M4	
8	3A	*	A62-0277-02	PANEL		
9	-	*	B09-0335-14	CAP (MIC/SP) ;ACCY		
10	3A	*	B09-0336-14	CAP (DC IN)		
11	1A	*	B10-1202-03	FRONT GLASS		
12	3A	*	B11-1092-04	FILTER (ON AIR)		
13	1B		B42-3343-04	S/NQ LABEL		
-			B42-3394-14	FCC PLATE LABEL	K	
-		*	B42-5074-04	LABEL	K	
-			B42-5526-04	FACE PLATE	K	
17	-		B46-0310-03	WARRANTY CARD	E1E2E3	
17	-		B46-0310-03	WARRNTY CARD	E9	
18	-		B46-0410-30	WARRNTY CARD	K	
19	-		B46-0422-00	WARRNTY CARD	P	
20	-	*	B62-0364-00	INSTRUCTION MANUAL		
21	-	*	B62-0365-00	INSTRUCTION MANUAL	E1E2	
22	-	*	B62-0366-00	INSTRUCTION MANUAL	M1M2M3	
22	-	*	B62-0366-00	INSTRUCTION MANUAL	M4E3E9	
22	-	*	B62-0366-00	INSTRUCTION MANUAL	P	
23	3B	*	B72-0560-04	MODEL NAME PLATE (TH-42AT FCC)	KP	
24	3B	*	B72-0561-04	MODEL NAME PLATE (TH-42A)	M1M2M3	
24	3B	*	B72-0561-04	MODEL NAME PLATE (TH-42A)	M4	
25	3B	*	B72-0562-04	MODEL NAME PLATE (TH-42AT)	M1M2M3	
25	3B	*	B72-0562-04	MODEL NAME PLATE (TH-42AT)	M4	
26	3B	*	B72-0563-04	MODEL NAME PLATE (TH-42E)	TE1E2	
26	3B	*	B72-0563-04	MODEL NAME PLATE (TH-42E)	E3	
27	2B	*	B72-0572-14	MODEL NAME PLATE (BT-9 CASE)	M4	
28	3B		B72-0651-04	MODEL NAME PLATE (FRANCE TA)	E9	
29	3A		E04-0181-05	RF COAXIAL CABLE RECEPTACLE		
30	-		E19-0254-05	AC PLUG ;ACCY	M1M2M3	
-		*	E23-0944-04	TERMINAL (BT-9 CASE)	M4	
-		*	E23-0945-04	TERMINAL (BT-9 CASE)	M4	
33	2B	*	E23-0946-04	TERMINAL (BT-9 CASE)	M4	
-		*	E23-0947-04	TERMINAL (BT-9 CASE)	M4	
35	3B	*	E23-0948-04	TERMINAL (BT-9 CASE)	M4	
-		*	E23-0949-04	TERMINAL (BT-9 CASE)	M4	
37	1B	*	E37-0429-05	CONNECTING WIRE		
38	1B	*	F07-1371-13	COVER (DTMF)	M1M2M3	
38	1B	*	F07-1371-13	COVER (DTMF)	M4TE1	
38	1B	*	F07-1371-13	COVER (DTMF)	E2E3E9	
39	2B	*	F10-2095-04	SHIELDING PLATE		
40	3A	*	F20-1143-14	INSULATING BOARD (DC IN)		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P

TH-42E : E1,E2,E3,E9,T

△ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TH-42A/AT/E

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
41	3A		F29-0435-05	INSULATOR (BELT HOOK)		
-			G11-0701-04	SHEET	E9	
43	3B	*	G13-1375-04	CUSION (BT-9 CASE)	M4	
44	-	*	H10-2775-02	POLYSTYRENE FOAMED FIXTURE		
45	-		H11-0808-14	POLYSTYRENE FOAMED BOARD	KT	
48	-		H25-0077-03	PROTECTION BAG (10×12:BT-9)	M4	
49	-		H25-0085-04	PROTECTION BAG (10×20)		
50	-	*	H52-0447-04	ITEM CARTON BOX (TH-42A)	M1M2M3	
50	-	*	H52-0447-04	ITEM CARTON BOX (TH-42A)	M4	
51	-	*	H52-0448-14	ITEM CARTON BOX (TH-42AT)	KP	
52	-	*	H52-0449-04	ITEM CARTON BOX (TH-42E)	TE1E2	
52	-	*	H52-0449-04	ITEM CARTON BOX (TH-42E)	E3E9	
53	-	*	H52-0458-04	ITEM CARTON BOX (TH-42AT)	M1M2M3	
53	-	*	H52-0458-04	ITEM CARTON BOX (TH-42AT)	M4	
54	-		J29-0465-04	HOOK (BELT HOOK)		
55	1A		J39-0441-04	SPACER (MIC)		
56	-	*	J61-0422-05	BAND : ACCY		
57	-		J69-0327-04	HAND STRAP : ACCY		
58	3A	*	K29-4874-14	KNOB (VOL)		
59	3A	*	K29-4875-14	KNOB (ENCODER)		
60	2B	*	K29-4876-03	KNOB (PTT)		
61	1B	*	K29-4877-04	KNOB (2 KEY)		
62	1A	*	K29-4878-03	KNOB (4 KEY)		
A	3A		N09-2028-05	SCREW (M3×4:BELT HOOK)		
B	2A		N30-2003-41	PAN HEAD MACHIN SCREW (COVER)		
C	2B		N30-2605-46	PAN HEAD MACHIN SCREW		
D	3A		N30-2606-45	PAN HEAD MACHIN SCREW (BNC)		
E	3B	*	N80-2022-45	PAN HEAD MACHIN SCREW (CASE)		
F	2A		N83-2004-46	PAN HEAD MACHIN SCREW (PCP)		
63	1B	*	S79-0412-05	KEY BORD ASSY(DTMF:TH-42AT)	KM1M2	
63	1B	*	S79-0412-05	KEY BORD ASSY(DTMF:TH-42AT)	M3M4P	
SP	1B		T07-0257-05	LOUDSPEAKER (8 ohm 0.5w)		
64	-	*	T90-0473-05	ANTENNA : ACCY		
MIC	1A	*	T91-0539-05	MICROPHONE		
-			ERB83-004	DIORD (BT-9 CASE)	M4	
65	-	*	W08-0437-05	BATTERY CHARGER (120V) : ACCY	KP	
66	-	*	W08-0438-05	BATTERY CHARGER (240V) : ACCY	T	
67	-	*	W08-0440-05	BATTERY CHARGER (230V) : ACCY	E1E2E3	
67	-	*	W08-0440-05	BATTERY CHARGER (230V) : ACCY	E9	
68	-	*	W08-0441-05	BATTERY PACK (120/230V):ACCY	M1M2M3	
69	-	*	W09-0825-05	BATTERY PACK (PB-34:9.6V):ACCY	M3	
70	-	*	W09-0826-05	BATTERY PACK (PB-32:6.0V):ACCY	KPM1M2	
70	-	*	W09-0826-05	BATTERY PACK (PB-32:6.0V):ACCY	TE9	
70	-	*	W09-0826-05	BATTERY PACK (PB-32:6.0V):ACCY	E1E2E3	
71	-	*	BT-9	BATTERY CASE (OPTION)	M4	
-		*	X57-4380-11	TX-RX UNIT	KP	
-		*	X57-4380-21	TX-RX UNIT	M1	
-		*	X57-4380-22	TX-RX UNIT	M2M3M4	
-		*	X57-4382-71	TX-RX UNIT	TE1E3	
-		*	X57-4382-71	TX-RX UNIT	E9	
-		*	X57-4382-72	TX-RX UNIT	E2	

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P

TH-42E : E1,E2,E3,E9,T

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-438X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
TX-RX UNIT (X57-438X-XX) 0-11: K,P 0-21: M1 0-22: M2,M3,M4 2-71: E1,E3,E9,T 2-72: E2						
100	2A	*	A13-1606-13	FRAME (LCD)		
101	2A	*	B11-1093-13	FILTER (LCD)		
102	2A	*	B11-1094-14	FILTER (LCD)		
C1			CK73GB1H471K	CHIP C 470PF K		
C2			C92-0507-05	CHIP TAN 4.7UF 6.3WV		
C3			CC73GCH1H390J	CHIP C 39PF K		
C4			CC73GCH1H470J	CHIP C 47PF J		
C5			CK73GR1C473K	CHIP C 0.047UF K		
C6			CC73GCH1H060D	CHIP C 6PF D		
C7			CC73GCH1H220J	CHIP C 22PF J		
C8			CC73GCH1H070D	CHIP C 7PF D		
C9			CK73FB1E104K	CHIP C 0.10UF K		
C10			CK73GB1H471K	CHIP C 470PF K		
C11			CC73GCH1H101J	CHIP C 100PF J		
C12 ,13			CK73FB1E104K	CHIP C 0.10UF K		
C14		*	C92-0585-05	TANTAL 4.7UF 16WV		
C15			CK73GB1H471K	CHIP C 470PF K		
C16			CC73GCH1H101J	CHIP C 100PF J		
C17			C92-0502-05	ELECTR0 0.33UF 35WV		
C18 ,19		*	C92-0565-05	TANTAL 6.8UF 10WV		
C20 ,21			CK73GB1H103K	CHIP C 0.01UF K		
C22			CK73GB1H471K	CHIP C 470PF K		
C24			CK73GB1H471K	CHIP C 470PF K		
C26			CC73GCH1H070D	CHIP C 7PF D		
C27 ,28			CK73GB1H471K	CHIP C 470PF K		
C29			CC73GCH1H070D	CHIP C 7PF D		
C30 -32			CK73GB1H471K	CHIP C 470PF K		
C33			CC73GCH1H070D	CHIP C 7PF D		
C34			CK73GB1H471K	CHIP C 470PF K		
C36			CK73GB1H471K	CHIP C 470PF K		
C37			CK73GB1H103K	CHIP C 0.01UF K		
C38			CK73FB1E104K	CHIP C 0.10UF K		
C39			CK73GB1H471K	CHIP C 470PF K		
C40			CK73GB1H103K	CHIP C 0.01UF K		
C41			CK73FB1E104K	CHIP C 0.10UF K		
C42 ,43			CK73GB1H471K	CHIP C 470PF K		
C44			CC73GCH1H030C	CHIP C 3.0PF C		
C45			CC73GCH1H020C	CHIP C 2.0PF C		
C46			CK73GB1H471K	CHIP C 470PF K		
C47			CC73GCH1H030C	CHIP C 3PF C		
C48			CK73GB1H471K	CHIP C 470PF K		
C49			CC73GCH1H030C	CHIP C 3PF C		
C50			CK73GB1H103K	CHIP C 0.01UF K		
C51			CC73GCH1H220J	CHIP C 22PF J		
C52			CK73GB1H102K	CHIP C 1000PF K		
C53			CC73GCH1H0R5C	CHIP C 0.5PF C		
C54			CK73GB1H471K	CHIP C 470PF K		
C56			CK73GB1H471K	CHIP C 470PF K		
C57			CC73GCH1H270J	CHIP C 27PF J	KP	
C57 ,58			CC73GCH1H220J	CHIP C 22PF J		
C59			CK73GB1H471K	CHIP C 470PF K		
C60			CC73GCH1H030C	CHIP C 3PF C		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P

TH-42E : E1,E2,E3,E9,T

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-438X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
C61			CK73GB1H471K	CHIP C 470PF K		
C62			CC73GCH1H470J	CHIP C 47PF J		
C63 , 64			CC73GCH1H220J	CHIP C 22PF J		
C66			CK73GB1H471K	CHIP C 470PF K		
C67			CC73GCH1H070D	CHIP C 7PF D		
C68			CK73GB1H471K	CHIP C 470PF K		
C70			CC73GCH1H010C	CHIP C 1PF C		
C71 , 72			CK73GB1H471K	CHIP C 470PF K		
C73			CC73GCH1H180J	CHIP C 18PF J		
C74			CC73GCH1H030C	CHIP C 3PF C		
C76			CC73GCH1H200J	CHIP C 20PF J		
C77 , 78			CK73GB1H103K	CHIP C 0.01UF K		
C79			CK73FB1E104K	CHIP C 0.10UF K		
C80		*	C92-0587-05	CHIP TAN 2.2UF 6.3WV		
C81			CK73GB1H471K	CHIP C 470PF K		
C82			CK73GB1H332K	CHIP C 3300PF K		
C83 , 84		*	CK73GB1E123K	CHIP C 0.012UF K		
C85			CK73FB1H393K	CHIP C 0.039UF Z		
C87		*	C92-0587-05	TANTAL 2.2UF 4WV		
C88			CK73GB1H471K	CHIP C 470PF K		
C89			CK73FB1H473K	CHIP C 0.047UF K		
C90			CK73GB1H472K	CHIP C 4700PF K		
C91			CK73GB1H102K	CHIP C 1000PF K		
C92			CK73GR1C333K	CHIP C 0.033UF K		
C93 , 94			CK73GB1H471K	CHIP C 470PF K		
C96			CK73GB1H102K	CHIP C 1000PF K		
C97			CK73FB1E104K	CHIP C 0.10UF K		
C98			CC73GCH1H080D	CHIP C 8PF D		
C100			CK73GB1H103K	CHIP C 0.01UF K		
C101			CC73GCH1H270J	CHIP C 27PF J		
C102			CC73GCH1H150J	CHIP C 15PF J		
C103			CK73GB1H103K	CHIP C 0.01UF K		
C104			CK73FB1E104K	CHIP C 0.10UF K		
C105			CK73GB1H103K	CHIP C 0.01UF K		
C106			CC73GCH1H270J	CHIP C 27PF J		
C107			CK73FB1E104K	CHIP C 0.10UF K		
C108			CK73GB1H103K	CHIP C 0.01UF K		
C109			CK73FB1E104K	CHIP C 0.10UF K		
C110			CK73GB1H471K	CHIP C 470PF K		
C111			C92-0501-05	CHIP TAN 1.5UF 10WV		
C112			CC73GCH1H06D	CHIP C 6PF D		
C113		*	C92-0565-05	TANTAL 6.8UF 10WV		
C114			CK73GR1C473K	CHIP C 0.047UF K		
C115			CK73GB1H471K	CHIP C 470PF K		
C116		*	C92-0585-05	TANTAL 4.7UF 16WV		
C117, 118			CK73GB1H471K	CHIP C 470PF K		
C201			CK73GR1C473K	CHIP C 0.047F K		
C202, 203			CC73GCH1H390J	CHIP C 39PF J		
C204		*	C92-0561-05	ELECTRO 22UF 16WV		
C205-207			CK73GB1H471K	CHIP C 470PF K		
C208		*	C90-4017-05	ELECTRO 470UF 4WV		
C209			CK73FB1E104K	CHIP C 0.10UF K		
C210, 211			CK73GB1H471K	CHIP C 470PF K		
C212			CC73GCH1H151J	CHIP C 150PF J		
C213-217			CK73GB1H471K	CHIP C 470PF K		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P

TH-42E : E1,E2,E3,E9,T

 indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-438X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
C219			CK73GR1C473K	CHIP C 0.047UF K		
C220			CK73GB1H103K	CHIP C 0.01UF K		
C221			CC73GCH1H430J	CHIP C 43PF J		
C222			CC73GCH1H390J	CHIP C 39PF J		
C223, 224			CK73FB1E104K	CHIP C 0.10UF K		
C225			CK73GB1E183K	CHIP C 0.018UF K		
C226			CK73GB1H103K	CHIP C 0.01UF K		
C227			CK73GB1H682K	CHIP C 6800PF K		
C228			CK73GB1H471K	CHIP C 470PF K		
C229			C92-0507-05	CHIP TAN 4.7UF 6.3WV		
C230			CK73GB1H103K	CHIP C 0.01UF K		
C231, 232			CK73GB1H471K	CHIP C 470PF K		
C233			CC73GCH1H151J	CHIP C 150PF J		
C234			CK73GB1H182K	CHIP C 1800PF K		
C235			CK73GB1E223K	CHIP C 0.022UF K	KP	
C236			C92-0002-05	CHIP TAN 0.22UF 35WV	KP	
C237, 238			CK73GB1H103K	CHIP C 0.01UF K		
C239, 240		*	C92-0587-05	TANTAL 2.2UF 4WV		
C241			C92-0507-05	CHIP TAN 4.7UF 6.3WV		
C242			CK73FB1H102K	CHIP C 1000PF K		
C243		*	C92-0593-05	ELECTRØ 33UF 10WV		
C244			CK73GB1H102K	CHIP C 1000PF K		
C245			C92-0567-05	TANTAL 68UF 6.3WV		
C246			CK73GR1C473K	CHIP C 0.047UF K		
C247		*	C92-0566-05	TANTAL 10UF 6.3WV		
C248			CK73GB1E223K	CHIP C 0.022UF K		
C249			CK73GB1H102K	CHIP C 1000PF K		
C250		*	C92-0587-05	TANTAL 2.2UF 4WV		
C251			CK73GB1H471K	CHIP C 470PF K		
C252		*	C92-0564-05	ELECTRØ 22UF 6.3WV		
C253		*	C92-0587-05	TANTAL 22UF 4WV		
C254, 255			CK73GB1H471K	CHIP C 470PF K		
C256		*	C92-0564-05	ELECTRØ 22UF 6.3WV		
C257			CK73GB1H471K	CHIP C 470PF K		
C258		*	C92-0576-05	TANTAL 1UF 6.3WV		
C259			CK73GB1H471K	CHIP C 470PF K		
C265			CK73FB1E104K	CHIP C 0.10UF K		
C267			CK73GR1C333K	CHIP C 0.033UF K		
C268		*	C92-0576-05	TANTAL 1UF 6.3WV		
C270			CK73GB1H103K	CHIP C 0.01UF K		
C271-276			CK73GB1H471K	CHIP C 470PF K		
TC1		*	C05-0380-05	TRIMMER CAPACITOR 10PF		
-		*	E23-0943-04	DC TERMINAL		
104	2A	*	E29-1118-04	CONNECTOR		
105	2A	*	E29-1119-24	CONNECTOR		
106	2A	*	E37-0395-05	FLAT CABLE		
A7		*	E23-0950-04	GND TERMINAL		
CN1		*	E40-5651-05	FLAT CABLE CONNECTOR (23P)		
CN2		*	E23-0950-04	TERMINAL		
CN3			E23-0603-05	TERMINAL		
CN201		*	E40-5629-05	PIN CONNECTOR (6P)		
CN202		*	E40-5644-05	PIN CONNECTOR (8P:10 KEY)		
CN203		*	E40-5651-05	FLAT CABLE CONNECTOR (23P)		
CN204		*	E40-5618-05	CONNECTOR (8P:CTCSS)		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P

TH-42E : E1,E2,E3,E9,T

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-438X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
CN301		*	E40-5630-05	PIN CONNECTOR (6P)		
J1			E03-0170-05	DC JACK		
J201		*	E11-0457-05	PHONE JACK		
107	2B	*	G11-0707-04	SHEETR (VCO)		
-			G13-1303-04	CUSION (X' TAL)		
109	2B	*	J19-1546-03	HOLDER		
110	1A	*	J21-4443-13	HARDWARE FIXTURE (LCD)		
A4 -6			J30-0545-05	SPACER		
CD1			L79-1013-05	CRYSTAL DISC		
CF1			L72-0362-05	CERAMIC FILTER (455KHz)		
L1		*	L92-0138-05	CHIP CORE		
L2 ,3		*	L40-1871-36	SMALL FIXED INDUCTOR(18NH)		
L6		*	L40-2271-36	SMALL FIXED INDUCTOR(22NH)		
L7		*	L92-0137-05	CHIP CORE		
L8			L40-1095-34	SMALL FIXED INDUCTOR(1UH)		
L9		*	L33-0762-05	CHOKE COIL		
L10		*	L79-1075-05	FILTER(LPF)		
L11		*	L33-0762-05	CHOKE COIL		
L12			L40-1092-81	SMALL FIXED INDUCTOR		
L13			L40-0672-35	SMALL FIXED INDUCTOR(6.8NH)		
L14			L40-6885-34	SMALL FIXED INDUCTOR(680NH)		
L16		*	L40-2271-36	SMALL FIXED INDUCTOR(22NH)		
L17 ,18		*	L79-1124-05	RESONATOR		
L19		*	L40-1871-36	SMALL FIXED INDUCTOR(18NH)		
L20			L40-3972-35	SMALL FIXED INDUCTOR		
L21			L40-0672-35	SMALL FIXED INDUCTOR(6.8NH)		
L22			L40-4772-35	SMALL FIXED INDUCTOR		
L23 ,24			L40-2272-35	SMALL FIXED INDUCTOR		
L26 -29		*	L92-0138-05	CHIP CORE		
L30		*	L92-0137-05	CHIP CORE		
L31			L40-1092-34	SMALL FIXED INDUCTOR		
L32 ,33		*	L92-0140-05	CHIP CORE		
L34		*	L40-2271-36	SMALL FIXED INDUCTOR(22NH)		
L201,203		*	L92-0138-05	CHIP CORE		
L204			L33-0737-05	CHOKE COIL		
L205-207		*	L92-0138-05	CHIP CORE		
L208			L92-0131-05	CHIP CORE		
L209		*	L92-0140-05	CHIP CORE		
X1		*	L77-1528-05	CRYSTAL RESONATOR(12.8MHz)		
X2			L77-1438-05	CRYSTAL RESONATOR(45.505MHz)		
X201		*	L78-0326-05	RESONATOR (4.19MHz)		
X202		*	L78-0325-05	RESONATOR (2.00MHz)		
XF1			L71-0409-05	MCF (45.050MHz)		
CP1			R90-0714-05	MULTI-COMP 10Kx4		
CP2			R90-0723-05	MULTI-COMP 47Kx2		
CP201			R90-0720-05	MULTI-COMP 100K		
CP202			R90-0724-05	MULTI-COMP 1Kx4		
CP203			R90-0725-05	MULTI-COMP 1Kx2		
CP204			R90-0724-05	MULTI-COMP 1Kx4		
CP205			R90-0725-05	MULTI-COMP 1Kx2		
CP206			R90-0724-05	MULTI-COMP 1Kx4		
CP207,208			R90-0722-05	MULTI-COMP		
R1			RK73GB1J472J	CHIP R 4.7K J 1/16W		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P

TH-42E : E1,E2,E3,E9,T

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnes dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-438X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
R2			RK73GB1J391J	CHIP R 390 J 1/16W		
R3			RK73GB1J473J	CHIP R 47K J 1/16W		
R4			R92-1252-05	CHIP R 0 ohm J 1/16W		
R5			RK73GB1J103J	CHIP R 10K J 1/16W		
R6			RK73GB1J473J	CHIP R 47K J 1/16W		
R7			RK73GB1J820J	CHIP R 82 J 1/16W		
R8			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R10			RK73GB1J274J	CHIP R 270K J 1/16W		
R11			RK73GB1J473J	CHIP R 47K J 1/16W		
R12			RK73GB1J562J	CHIP R 5.6K J 1/16W		
R13			RK73GB1J103J	CHIP R 10K J 1/16W		
R14			RK73GB1J223J	CHIP R 22K J 1/16W		
R16			RK73GB1J332J	CHIP R 3.3K J 1/16W		
R17			RK73GB1J222J	CHIP R 2.2K J 1/16W		
R18			RK73GB1J123J	CHIP R 12K J 1/16W		
R19			RK73GB1J222J	CHIP R 2.2K J 1/16W		
R20			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R21			RK73GB1J104J	CHIP R 100K J 1/16W		
R22			RK73GB1J101J	CHIP R 100 J 1/16W		
R23			RK73GB1J104J	CHIP R 100K J 1/16W		
R24			RK73GB1J101J	CHIP R 100 J 1/16W		
R25			R92-1252-05	CHIP R 0 OHM		
R26			RK73GB1J105J	CHIP R 1.0M J 1/16W		
R27			RK73GB1J103J	CHIP R 10K J 1/16W		
R28			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R29			RK73GB1J562J	CHIP R 5.6K J 1/16W		
R30			RK73GB1J820J	CHIP R 82 J 1/16W		
R31			RK73GB1J271J	CHIP R 270 J 1/16W		
R32			RK73GB1J681J	CHIP R 680 J 1/16W		
R33			RK73GB1J392J	CHIP R 3.9K J 1/16W		
R34 , 35			RK73GB1J820J	CHIP R 82 J 1/16W		
R36			RK73GB1J331J	CHIP R 330 J 1/16W		
R37			RK73GB1J270J	CHIP R 27 J 1/16W		
R38			RK73GB1J181J	CHIP R 180 J 1/16W		
R39			RK73GB1J152J	CHIP R 1.5K J 1/16W		
R40			RK73GB1J681J	CHIP R 680 J 1/16W		
R41			RK73GB1J220J	CHIP R 22 J 1/16W		
R42			RK73GB1J561J	CHIP R 560 J 1/16W		
R43			RK73GB1J220J	CHIP R 22 J 1/16W		
R44			RK73GB1J821J	CHIP R 820 J 1/16W		
R45			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R46			RK73GB1J821J	CHIP R 820 J 1/16W		
R48			RK73FB2A820J	CHIP R 82 J 1/10W		
R49			RK73GB1J330J	CHIP R 33 J 1/16W		
R50			RK73GB1J681J	CHIP R 680 J 1/16W		
R51			RK73GB1J331J	CHIP R 330 J 1/16W		
R52			RK73GB1J563J	CHIP R 56K J 1/16W		
R53			RK73GB1J103J	CHIP R 10K J 1/16W		
R54			RK73GB1J123J	CHIP R 12K J 1/16W		
R55			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R56 , 57			RK73GB1J104J	CHIP R 100K J 1/16W		
R58			RK73GB1J150J	CHIP R 15 J 1/16W		
R59			RK73GB1J331J	CHIP R 330 J 1/16W		
R60			RK73GB1J223J	CHIP R 22K J 1/16W		
R61			RK73GB1J103J	CHIP R 10K J 1/16W		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P

TH-42E : E1,E2,E3,E9,T

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-438X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
R62 ,63 R64 R67 R68 R69			RK73GB1J104J RK73GB1J101J RK73GB1J222J RK73GB1J271J RK73GB1J103J	CHIP R 100K J 1/16W CHIP R 100 J 1/16W CHIP R 2.2K J 1/16W CHIP R 270 J 1/16W CHIP R 10K J 1/16W		
R70 R71 R72 R73 R74			RK73GB1J223J RK73GB1J333J RK73FB2A150J RK73GB1J103J * RK73EB2ER39K	CHIP R 22K J 1/16W CHIP R 33K J 1/16W CHIP R 15 J 1/10W CHIP R 10K J 1/16W CHIP R 0.39 K 1/4W		
R75 R76 ,77 R78 R79 R80		*	R92-1252-05 RK73EB2ER39K RK73GB1J471J RK73GB1J274J RK73GB1J562J	CHIP R 0 0HM CHIP R 0.39 K 1/4W CHIP R 470 J 1/16W CHIP R 270K J 1/16W CHIP R 5.6K J 1/16W		
R81 R82 R83 R84 R86			RK73GB1J392J RK73GB1J472J RK73GB1J103J RK73GB1J472J RK73GB1J331J	CHIP R 3.9K J 1/16W CHIP R 4.7K J 1/16W CHIP R 10K J 1/16W CHIP R 4.7K J 1/16W CHIP R 330 J 1/16W		
R88 R89 R90 R91 R92			RK73GB1J222J RK73GB1J274J RK73GB1J561J RK73GB1J224J RK73GB1J122J	CHIP R 2.2K J 1/16W CHIP R 270K J 1/16W CHIP R 560 J 1/16W CHIP R 220K J 1/16W CHIP R 1.2K J 1/16W		
R93 R94 R95 R96 R97			RK73GB1J681J RK73GB1J472J R92-1252-05 RK73GB1J563J RK73GB1J681J	CHIP R 680 J 1/16W CHIP R 4.7K J 1/16W CHIP R 0 0HM CHIP R 56K J 1/16W CHIP R 680 J 1/16W		
R98 R99 R100 R101,102 R103			RK73GB1J124J RK73GB1J102J RK73GB1J103J RK73GB1J222J RK73GB1J473J	CHIP R 120K J 1/16W CHIP R 1.0K J 1/16W CHIP R 10K J 1/16W CHIP R 2.2K J 1/16W CHIP R 47K J 1/16W		
R104 R106 R107 R108 R110,111			RK73GB1J472J RK73GB1J101J RK73GB1J471J R92-1252-05 RK73GB1J102J	CHIP R 4.7K J 1/16W CHIP R 100 J 1/16W CHIP R 470 J 1/16W CHIP R 0 0HM CHIP R 1.0K J 1/16W		
R112 R113 R201 R202 R203			RK73GB1J103J RK73GB1J4R7J RK73GB1J104J RK73GB1J103J RK73GB1J331J	CHIP R 10K J 1/16W CHIP R 4.7 J 1/16W CHIP R 100K J 1/16W CHIP R 10K J 1/16W CHIP R 330 J 1/16W		
R204,205 R206 R207 R208 R209			RK73GB1J100J RK73GB1J102J RK73GB1J224J RK73GB1J222J RK73GB1J102J	CHIP R 10 J 1/16W CHIP R 1.0K J 1/16W CHIP R 220K J 1/16W CHIP R 2.2K J 1/16W CHIP R 1.0K J 1/16W		
R210 R211 R212 R213 R215			RK73GB1J180J RK73GB1J821J RK73GB1J682J RK73GB1J105J RK73GB1J223J	CHIP R 18 J 1/16W CHIP R 820 J 1/16W CHIP R 6.8K J 1/16W CHIP R 1M J 1/16W CHIP R 22K J 1/16W		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P

TH-42E : E1,E2,E3,E9,T

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-438X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R216		*	RK73GB1J563G	CHIP R 56K G 1/16W		
R217		*	RK73GB1J224G	CHIP R 220K G 1/16W		
R218			RK73GB1J105J	CHIP R 1.0M J 1/16W		
R219			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R220			R92-1252-05	CHIP R 0 ohm J 1/16W		
R221			RK73GB1J100J	CHIP R 10 J 1/16W		
R222			RK73GB1J103J	CHIP R 10K J 1/16W		
R223			RK73GB1J100J	CHIP R 10 J 1/16W		
R224			RK73GB1J103J	CHIP R 10K J 1/16W		
R225, 226			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R228			RK73GB1J683J	CHIP R 68K J 1/16W		
R229			RK73GB1J153J	CHIP R 15K J 1/16W		
R230			RK73GB1J104J	CHIP R 100K J 1/16W		
R231			RK73GB1J393J	CHIP R 39K J 1/16W		
R232			RK73GB1J224J	CHIP R 220K J 1/16W		
R234			RK73GB1J822J	CHIP R 8.2K J 1/16W		
R235			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R236, 237			RK73GB1J104J	CHIP R 100K J 1/16W		
R238			RK73GB1J823J	CHIP R 82K J 1/16W		
R239			RK73GB1J391J	CHIP R 390 J 1/16W		
R240			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R241			RK73GB1J223J	CHIP R 22K J 1/16W		
R242			RK73GB1J563J	CHIP R 56K J 1/16W		
R243			RK73GB1J473J	CHIP R 47K J 1/16W		
R244			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R245			RK73GB1J122J	CHIP R 1.2K J 1/16W		
R246			RK73GB1J100J	CHIP R 10 J 1/16W		
R247			RK73GB1J101J	CHIP R 100 J 1/16W		
R248			RK73GB1J471J	CHIP R 470 J 1/16W		
R249			RK73GB1J182J	CHIP R 1.8K J 1/16W		
R250			RK73FB2A101J	CHIP R 100 J 1/10W		
R251			RK73GB1J101J	CHIP R 100 J 1/16W		
R252			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R253			RK73GB1J331J	CHIP R 330 J 1/16W		
R254			RK73GB1J182J	CHIP R 1.8K J 1/16W		
R255			RK73GB1J103J	CHIP R 10K J 1/16W		
R256			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R257			RK73GB1J103J	CHIP R 10K J 1/16W		
R258			RK73GB1J153J	CHIP R 15K J 1/16W		
R259			RK73GB1J100J	CHIP R 10 J 1/16W		
R260			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R261			RK73GB1J332J	CHIP R 3.3K J 1/16W		
R262			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R263			RK73GB1J683J	CHIP R 68K J 1/16W		
R264			RK73GB1J272J	CHIP R 2.7K J 1/16W		
R265			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R266			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R267			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R268			RK73GB1J332J	CHIP R 3.3K J 1/16W		
R269			RK73GB1J102J	CHIP R 1.0K J 1/16W		
R270, 271			RK73GB1J472J	CHIP R 4.7K J 1/16W		
R272			RK73GB1J473J	CHIP R 47K J 1/16W		
R273			RK73GB1J103J	CHIP R 10K J 1/16W		
R274			RK73GB1J473J	CHIP R 47K J 1/16W		
R275			RK73GB1J273J	CHIP R 27K J 1/16W		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P

TH-42E : E1,E2,E3,E9,T

⚠ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-438X-XX)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
R276 R277 R278, 279 R280 R287			RK73GB1J103J RK73GB1J102J RK73GB1J104J RK73GB1J100J RK73GB1J473J	CHIP R 10K J 1/16W CHIP R 1.0K J 1/16W CHIP R 100K J 1/16W CHIP R 10 J 1/16W CHIP R 47K J 1/16W		
R289 R290 R293 R294 R296			RK73GB1J474J RK73GB1J100J RK73GB1J104J RK73GB1J103J RK73GB1J473J	CHIP R 470K J 1/16W CHIP R 10 J 1/16W CHIP R 100K J 1/16W CHIP R 10K J 1/16W CHIP R 47K J 1/16W		
R297, 298 R402 VR1 VR2 VR201			RK73GB1J102J RK73GB1J222J R05-3469-05 R12-6717-05 R12-7478-05	CHIP R 1.0K J 1/16W CHIP R 2.2K J 1/16W POTENTIOMETER 10K TRIMMING POT. 47K TRIMMING POT. 470		
VR202		*	R12-7486-05	TRIMMING POT. 10K		
S301			S40-1117-05	TACT SWITCH		
LCD D1, 2 D4 D5 D9	2A	*	B38-0703-05 MA110 DA221 MA728 MA77	DISPLAY DIODE DIODE DIODE DIODE		
D10 D11 D12 D13, 14 D15 -18			DA221 MA8062 MI809 MA77 MA377	DIODE DIODE DIODE DIODE DIODE		
D19 D20 D21 D22 D201 D202 D204, 205 D206, 207 D208 D208, 209 D208, 209		*	SFPB-72VL HZU2.0 MA742 HZU2.0 1S373 MA8039 B30-2116-05 MA110 MA110 MA110 MA110	DIODE DIODE DIODE DIODE DIODE DIODE LED DIODE DIODE DIODE DIODE		
D210 D212, 213 D212, 213 D213 D213			MA110 MA110 MA110 MA110 MA110	DIODE DIODE DIODE DIODE DIODE	(TH-42AT)	M1 KPE1E2 E3E9T
D215 D216 D217 D218 D220		*	HN2D01FU MA2S111 B30-2115-05 DTZ3.9(B) MA2S111	DIODE DIODE LED DIODE DIODE		
IC1 IC2 IC3 IC4 IC201		*	MB1511PFV-G-8ND TC7660ME0A S-AU57 MC3372V LC7387M-L	IC(PLL FREQUENCY SYNTHESIZER) IC IC(POWER MODULE) IC IC		
IC202		*	AT24C04N10SI2.5	IC		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P

TH-42E : E1,E2,E3,E9,T

△ indicates safety critical components.

PARTS LIST

× New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

TX-RX UNIT (X57-438X-XX)

VCO UNIT (X57-4100-00)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕 向	Re- marks 備考
IC203		*	S-81235PG-PI	IC		
IC204			LM301AD	IC(OP AMP)		
IC205		*	S-80730SN-DT	IC		
IC206		*	HD404629B17TF	IC (MPU)		
IC207		*	TA75W558FU	IC		
IC208			NJM2070M	IC(AF AMP)		
IC209		*	TC7S08FU	IC		
Q1			2SC4738(GR)	TRANSISTOR		
Q2		*	2SC5066(O)	TRANSISTOR		
Q3			2SK1824	FET		
Q4			2SJ243	FET		
Q5			2SK879(Y)	FET		
Q6		*	2SC5066(O)	TRANSISTOR		
Q7			2SC4226(R24)	TRANSISTOR		
Q8			2SC3356	TRANSISTOR		
Q9 , 10		*	2SC5066(O)	TRANSISTOR		
Q11		*	3SK274	FET		
Q12			2SC4738(GR)	TRANSISTOR		
Q13			2SK1824	FET		
Q14		*	2SD1483	TRANSISTOR		
Q15			2SC4738(GR)	TRANSISTOR		
Q16			2SC4619	TRANSISTOR		
Q17			2SC4738(GR)	TRANSISTOR		
Q18			DTA114EE	DIGITAL TRANSISTOR		
Q19		*	DTA114TE	DIGITAL TRANSISTOR		
Q20			2SK879(GR)	FET		
Q201			2SK1824	FET		
Q202			2SJ243	FET		
Q203			DTA114EU	DIGITAL TRANSISTOR		
Q205			UMC4	DIGITAL TRANSISTOR		
Q206			2SK879(Y)	FET		
Q207			DTA114YE	DIGITAL TRANSISTOR		
Q208			DTA143ZE	DIGITAL TRANSISTOR		
Q209			2SK1824	FET		
Q210			2SB766(R,S)	TRANSISTOR		
Q211			2SC4738(GR)	TRANSISTOR		
Q212			DTA144EE	DIGITAL TRANSISTOR		
Q213, 214			2SB766(R,S)	TRANSISTOR		
Q215, 216			UMW1	DIGITAL TRANSISTOR		
Q217, 218			2SK1824	FET		
Q219			DTA143ZE	DIGITAL TRANSISTOR		
Q220			2SJ243	FET		
Q221			2SK1588	FET		
TH1		*	157-502-65001	THERMISTOR		
TH201		*	157-503-65001	THERMISTOR		
A1		*	X58-4100-00	SUB UNIT (VCO)		
S1		*	W02-1795-05	ENCODER		
VCO UNIT (X57-4100-00)						
C1 -4		*	CK73HB1E471K	CHIP C 470PF K		
C6		*	CK73HB1E471K	CHIP C 470PF K		
C7		*	CC73GUJ1H1R5C	CHIP C 1.5PF C		
C8		*	C93-0539-05	CHIP C 15PF		
C9		*	C93-0537-05	CHIP C 7PF		
C10		*	CC73HCH1E0R5C	CHIP C 5PF C		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P

TH-42E : E1,E2,E3,E9,T

⚠ indicates safety critical components.

PARTS LIST

* New Parts

Parts without Parts No. are not supplied.

Les articles non mentionnés dans le Parts No. ne sont pas fournis.

Teile ohne Parts No. werden nicht geliefert.

VCO UNIT (X57-4100-00)

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名 / 規格	Desti- nation 仕向	Re- marks 備考
C11 C12 ,13 C15 C16 C17		*	CK73HB1E471K CC73HCH1E100D CK73HB1E471K CK73GR1C473K CC73HCH1E080D	CHIP C 470PF K CHIP C 10PF D CHIP C 470P K CHIP C 0.047UF K CHIP C 8PF D		
C18		*	CK73HB1E471K	CHIP C 470PF K		
CN1 ,2		*	E40-5622-05	PIN CONNECTOR(3P)		
L1 L2 L3 ,4 L5		*	L33-0783-05 L33-0784-05 L40-1092-34 L40-2271-36	CHOKE COIL (11NH) CHOKE COIL (24NH) SMALL FIXED INDUCTOR (1UH) SMALL FIXED INDUCTOR (22NH)		
R1 ,2 R3 R4 R5 R6		*	RK73HB1J332J RK73HB1J473J RK73HB1J472J RK73HB1J104J RK73HB1J220J	CHIP R 3.3K J 1/16W CHIP R 47K J 1/16W CHIP R 4.7K J 1/16W CHIP R 100K J 1/16W CHIP R 22 J 1/16W		
R7 R8 R9 R10 R11		*	RK73HB1J271J RK73HB1J104J RK73HB1J221J RK73HB1J104J RK73HB1J221J	CHIP R 270 J 1/16W CHIP R 100K J 1/16W CHIP R 220 J 1/16W CHIP R 100K J 1/16W CHIP R 220 J 1/16W		
R12 R13 ,14 R16		*	RK73HB1J472J RK73HB1J103J RK73HB1J222J	CHIP R 4.7K J 1/16W CHIP R 10K J 1/16W CHIP R 2.2K J 1/16W		
D1 ,2 D3 D4 Q1 Q2 -4		*	MA360*J MA77 MA360 DTC144EE 2SC5066(0)	DIODE DIODE DIODE DIGITAL TRANSISTOR TRANSISTOR		
SUB UNIT (X58-4180-00)						
C501 C502-504 R501 R502 D501 IC501		*	C92-0544-05 CK73GB1H471K RK73GB1J334J RK73GB1J100J MA728 S-80719AN-DG	TANTAL 10uF 4WV CHIP C 470PF K CHIP R 330K J 1/16W CHIP R 10 J 1/16W DIODE IC		

L:Scandinavia

K:USA

P:Canada

Y:PX(Far East, Hawaii)

T:England

E:Europe

Y:AAFES(Europe)

X:Australia

M:Other Areas

TH-42A : M1,M2,M3,M4

TH-42AT : K,M1,M2,M3,M4,P


TH-42E : E1,E2,E3,E9,T



indicates safety critical components.


TH-42A/AT/E

EXPLODED VIEW

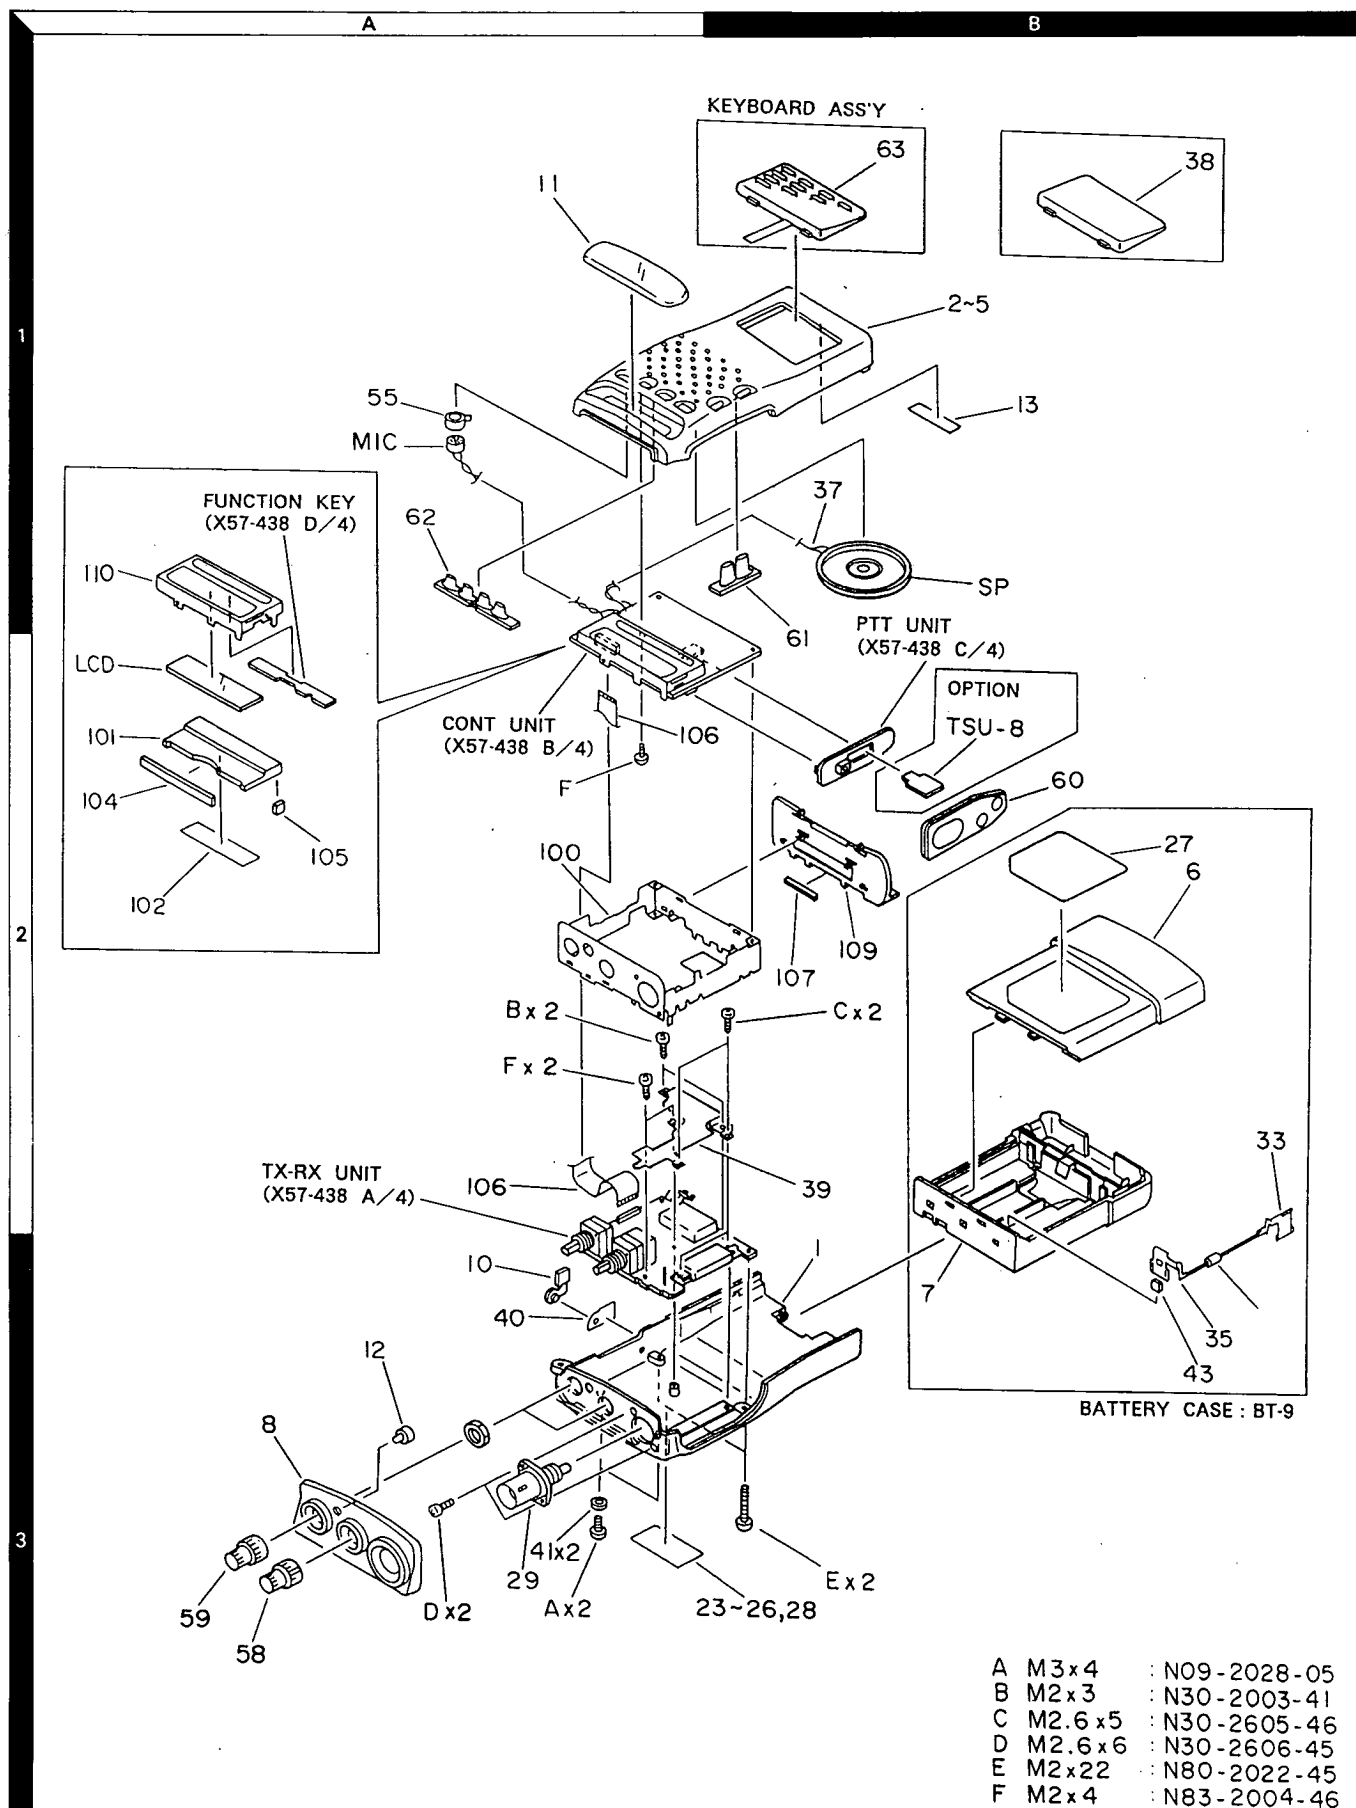

A	M3x4	: N09-2028-05
B	M2x3	: N30-2003-41
C	M2.6x5	: N30-2605-46
D	M2.6x6	: N30-2606-45
E	M2x22	: N80-2022-45
F	M2x4	: N83-2004-46

PACKING

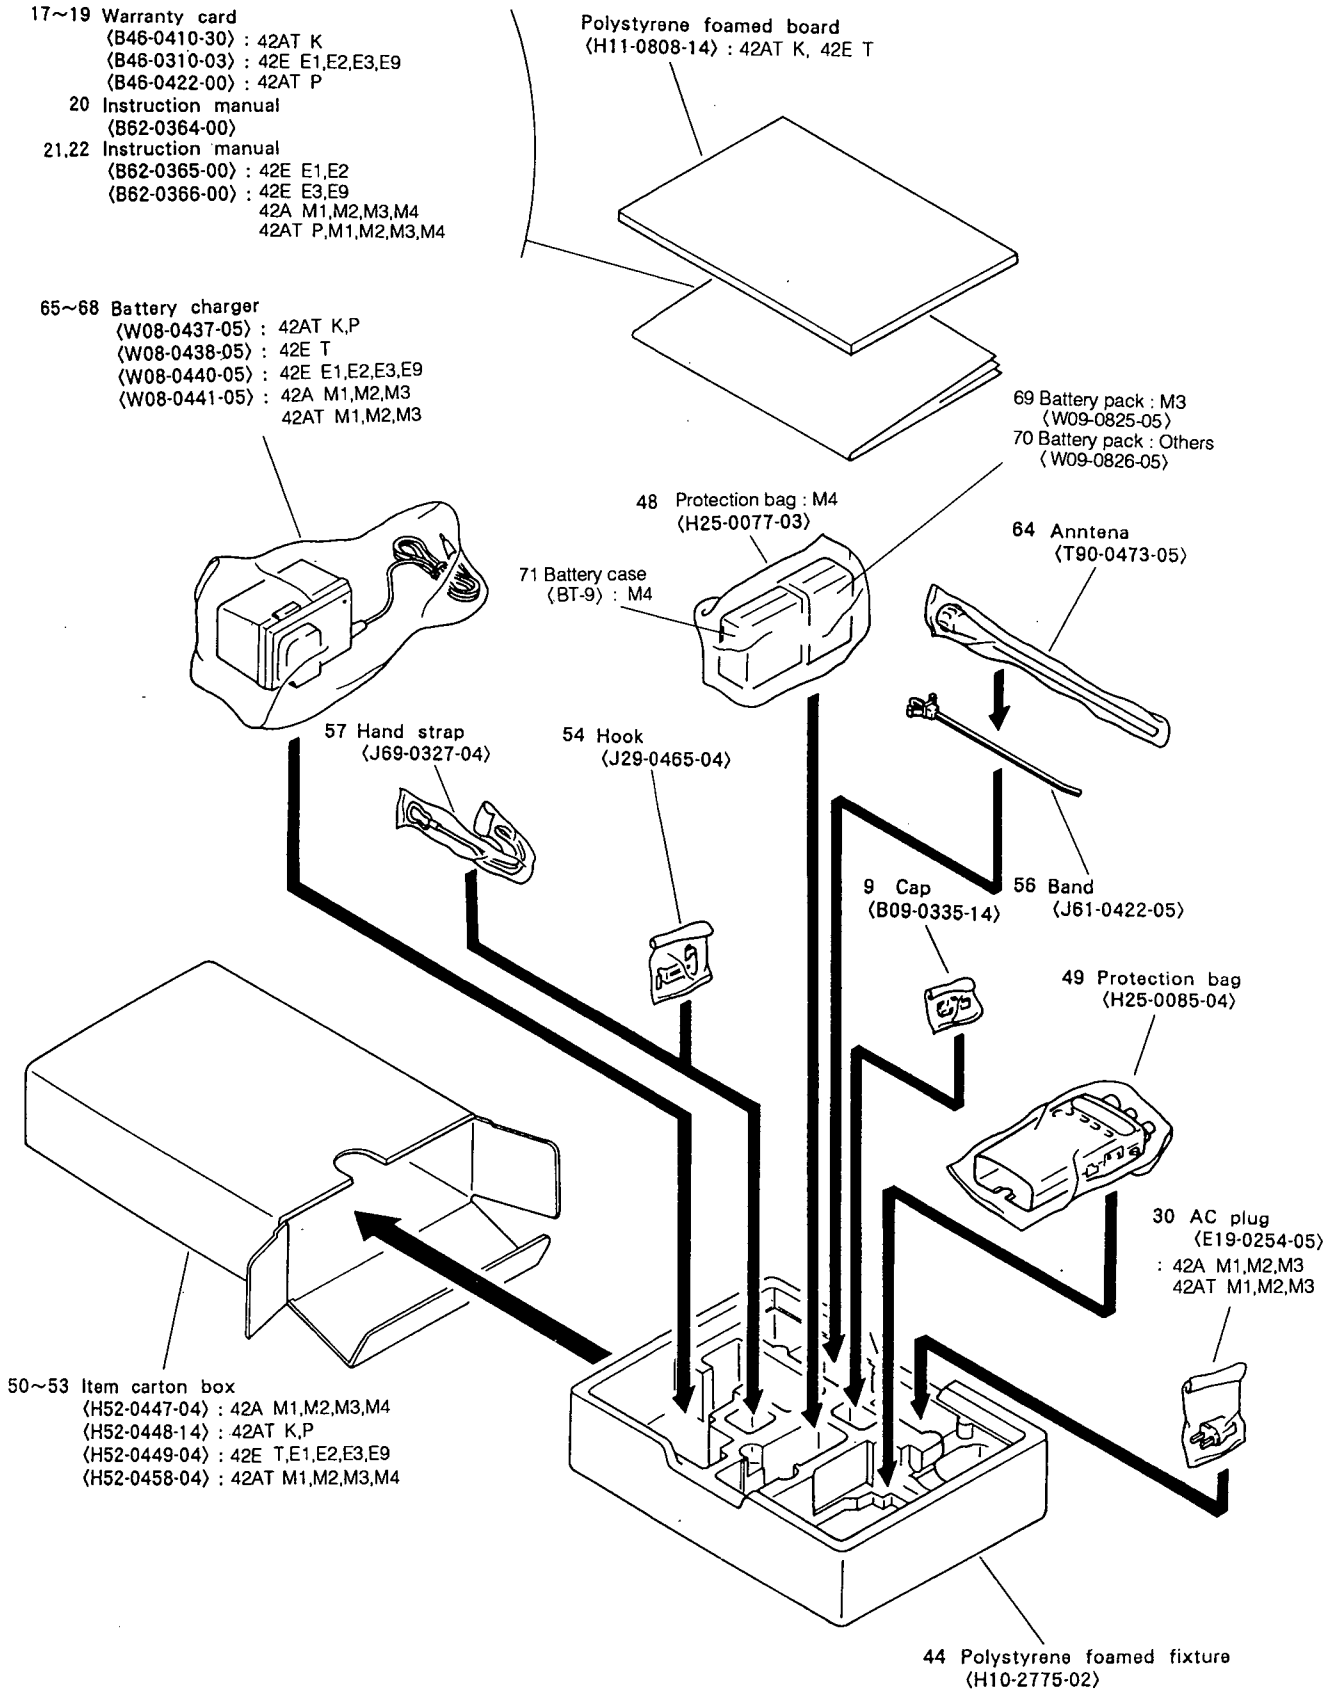

TH-42A/AT/E

TERMINAL FUNCTION

TX-RX unit (A/4): TX-RX $\longleftrightarrow$ TX-RX unit (B/4): CONTROL

Connector No.	Pin No.	Pin name	Function
CN1, 203	1	MUTE	Audio mute signal (TX-RX line)
	2	SB	Power supply
	3	NC	
	4	BUSY	Squelch control signal
	5	AF	RX audio
	6	SM	S-meter level
	7	CI	Signalling AF signal
	8	UP	Encoder up signal
	9	3M	Reference power supply voltage 3.5 V
	10	DN	Encoder down signal
	11	APC	APC voltage
	12	RB	Power module power supply voltage
	13	EP	PLL IC enable signal
	14	ASB	AF power amplifier AVR input voltage
	15	DT	Serial data signal
	16	E	GND
	17	UL	PLL unlock signal
	18	3R	Receiver power supply
	19	CK	Clock signal
	20	3C	PLL IC, VCO power supply
	21	TX	VCO oscillation frequency switching signal
	22	3T	Transmitter power supply
	23	MOD	Modulation signal

TX-RX unit (A/4): TX-RX $\longleftrightarrow$ VCO unit

Connector No.	Pin No.	Pin name	Function
CN1, 2		CV	Lock voltage
		MOD	Modulation signal
		3C	VCO power supply voltage
		TX	VCO oscillation frequency switching signal
		OUTP	fin VCO output
		OUT	RF output

TX-RX unit (B/4): CONTROL $\longleftrightarrow$ PTT

Connector No.	Pin No.	Pin name	Function
CN201 CN301	1	COM	Key matrix input
	2	MONI	Key matrix output, Monitor switch
	3	LAMP	Key matrix output, Lamp switch
	4	PTT	PTT switch signal, "L": TX; "H": RX
	5	E	GND
	6	E	GND

TH-42A/AT/E

TERMINAL FUNCTION

TX-RX unit (B/4): CONTROL $\longleftrightarrow$ FUNCTION

Connector No.	Pin No.	Pin name	Function
A4		KSIN0	Key matrix input
		KOUT3	Key matrix output, Function switch
		KOUT2	Key matrix output, VFO SW
		KOUT1	Key matrix output, MR SW
		KOUT0	Key matrix output, CALL SW

TX-RX unit (B/4): CONTROL $\longleftrightarrow$ KEYPAD

Connector No.	Pin No.	Pin name	Function
CN202	1	KOUT0	Key matrix output
	2	KOUT1	Key matrix output
	3	KOUT2	Key matrix output
	4	KOUT3	Key matrix output
	5	KSIN2	Key matrix input
	6	KSIN3	Key matrix input
	7	KSIN4	Key matrix input
	8	KSIN5	Key matrix input

TX-RX unit (B/4): CONTROL $\longleftrightarrow$ TSU-8 (option)

Connector No.	Pin No.	Pin name	Function
CN204	1	CK	Clock signal
	2	DT	Serial data signal
	3	ET	TSU-8 enable signal
	4	NC	
	5	SDO	Tone signal match identification signal
	6	E	GND
	7	3M	TSU-8 power supply
	8	CI	Signalling AF signal

ADJUSTMENT

Required Test Equipment

1. Stabilized Power Supply

- 1) The supply voltage can be changed between 5V and 18V, and the current is 3A or more.
- 2) The standard voltage is 13.8V.

2. DC Ammeter

- 1) Class 1 ammeter (17 ranges and other features).
- 2) The full scale can be set to either 300mA or 3A.
- 3) A cable of less internal loss must be used.

3. Frequency Counter (f. counter)

- 1) Frequencies of up to 1GHz or so can be measured.
- 2) The sensitivity can be changed to 250MHz or below, and measurements are highly stable and accurate (0.2ppm or so).

4. Power Meter

- 1) Measurable frequency: Up to 500MHz.
- 2) Impedance: 50 Ω , unbalanced.
- 3) Measuring range: Full scale of 10W or so.
- 4) A standard cable (5D2W 1m) must be used.

5. RF VTVM (RF V.M)

- 1) Measurable frequency: Up to 500MHz or so.

6. Linear Detector

- 1) Measurable frequency: Up to 500MHz.
- 2) Characteristics are flat, and CN is 60dB or more.

7. Digital Voltmeter

- 1) Voltage range: FS = 18V or so.
- 2) Input resistance: 1M Ω or more.

8. Oscilloscope

- 1) Measuring range: DC to 30MHz
- 2) Provides highly accurate measurements for 5 to 25MHz.

9. AF Voltmeter (AF V.M)

- 1) Measurable frequency: 50Hz to 1MHz.
- 2) Maximum sensitivity: 1mV or more.

10. Spectrum Analyzer

- 1) Measuring range: DC to 1GHz or more.

11. Standard Signal Generator (SSG)

- 1) Maximum frequency: 500MHz or more.
- 2) Output: 0.05 μ V/-133dBm to 0.1V/-7dBm.
- 3) Output impedance: 50 Ω

12. Tracking Generator

- 1) Center frequency: 50kHz to 500MHz.
- 2) Frequency deviation: $\pm$ 35MHz.
- 3) Output voltage: 100mV or more.

13. Dummy Load

- 1) 8 Ω , 3W or more.

14. Distortion Meter

- 1) Measurable frequency: 30Hz to 100kHz.
- 2) Input level: 50mV to 10Vrms.

ADJUSTMENT

TX/RX Common Adjustment

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. Setting	1) Power supply DC IN terminal: 6.3V 							Note) BATT terminal: 6.0V
2. Reset	1) While pressing the F key down, set the POWER: ON.				Display check.			All segments on.
	2) F key: Release				Check the Reset frequency.			440.00MHz: K, P 430.00MHz: Others

PLL Adjustment

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. VCO voltage	1) Frequency: 444.00MHz: K, P 435.00MHz: Others Receive.	Digital Voltmeter	TX-RX	CV			Check	3.0 to 4.4 V: K, P 2.3 to 3.8 V: Others
	2) Transmit (PTT: ON).							3.1 to 4.5 V: K, P 2.5 to 3.9 V: Others

TX Adjustment

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. Transmit Frequency	1) Frequency: 439.975MHz PTT: ON	f.counter Power meter	TX-RX	ANT	RF/IF	TC1	439.975 MHz	± 500 Hz or less.
2. Power output	1) Max. power DC IN terminal voltage: 10.6V Frequency: 444.00MHz: K, P 435.00MHz: Others Power select: HI PTT: ON	Power meter Ammeter	TX-RX	ANT	CON-TROL	VR201	Check.	5.5W or more.
	2) HI power PTT: ON						Adjust to 5.0W	±0.1W (Current consumption 2.0A or less.)
	3) LOW power DC IN terminal voltage: 7.0V Power select: LO PTT: ON						Check	0.3 to 1.0W. (Current consumption 0.8A or less.)
	4) EL power Power select: EL PTT: ON						Check	10 to 180mW (Current consumption 0.3A or less.)
	5) HI power Power select: HI PTT: ON						Check	2W or more.
	6) Frequency: 438.00MHz and 449.975MHz: K, P 430.00MHz and 439.975MHz: Others PTT: ON						Check	2W or more.
3. Modulation	1) Frequency: 438.00MHz: K, P 430.00MHz: Others AG output: 1kHz/50mV PTT: ON	Power Meter Linear detector Oscilloscope AG AF V.M	TX-RX	ANT MIC	CON-TROL	VR202	Adjust to ±4.2kHz at large deflect of ±. Check detection waveform.	±0.1kHz Must be normal.
	2) AG Output: 1kHz/5mV (20dB down) PTT: ON						Check DEV	2.2 to 3.5kHz

ADJUSTMENT

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
4. DTMF deviation (KEY type only)	1) AG output: OFF Frequency: 439.975MHz D key: Push PTT: ON	Power Meter Linear detector	TX-RX	ANT MIC			Check DEV	2.7 to 4.0 kHz
5. TONE deviation (88.5 Hz)	1) Frequency: 439.975MHz T/CT key: Push PTT: ON	Oscilloscope AG AF V.M					Check Display Check DEV	Display "T" on. DEV: 0.5 to 1.25kHz

RX Adjustment

Item	Condition	Measurement			Adjustment			Specifications/Remarks
		Test-equipment	Unit	Terminal	Unit	Parts	Method	
1. BPF	1) Frequency: 439.975MHz Tracking generator output -40dBm Connect the spectrum analyzer to TP.	Tracking generator Spectrum analyzer	TX-RX	ANT TP1	RF/IF	L17 L18	Align to set the waveform of spectrum analyzer to Fig. 2.	
2. Sensitivity	1) Frequency: 438.0MHz: K, P 430.0MHz: Others SSG output: -121dBm (0.2 μ V) MOD: 1kHz DEV: $\pm$ 3kHz AF VR: 0.63V/8 Ω	SSG Oscilloscope AF V.M Distortion meter	TX-RX	ANT SP			Check	SINAD 12dB or more.
	2) Frequency: 449.95MHz: K, P 439.95MHz: Others							
3. Squelch	1) Push F key, then push MONI key. Turn the encoder to display "SqL3".	SSG Oscilloscope AF V.M	TX-RX	ANT SP	RF/IF		Check	
	2) Frequency: 439.975MHz SSG output: -132dBm (0.06 μ V) MOD: 1kHz DEV: $\pm$ 3kHz AF VR: 0.63V/8 Ω					VR2	Adjust where noise disappear point.	
	3) SSG output: -127dBm (0.1 μ V)						Check	Squelch should be open.
4. S-meter level	1) Frequency: 439.975MHz While shorting the SM terminal of the control section, set the POWER: ON.	SSG	TX-RX	ANT SP			Check (After POWER is ON, remove the short)	Display "AbCdE"
	2) SSG output: -121dBm (0.2 μ V)						Push MONI key.	Beep sounds.
	3) SSG output: -111dBm (0.63 μ V)						Push LAMP key.	Beep sounds.
	4) Power: OFF							
	5) Power: ON MONI SW: ON SSG output: -120dBm $\pm$ 3dBm (0.23 μ V)						Check S-meter	One segment is turned on. ■ ■
	6) SSG output: -111dBm $\pm$ 3dBm (0.63 μ V)							All segments are turned on. ■■■■■■■■■■

ADJUSTMENT

Adjustment Points

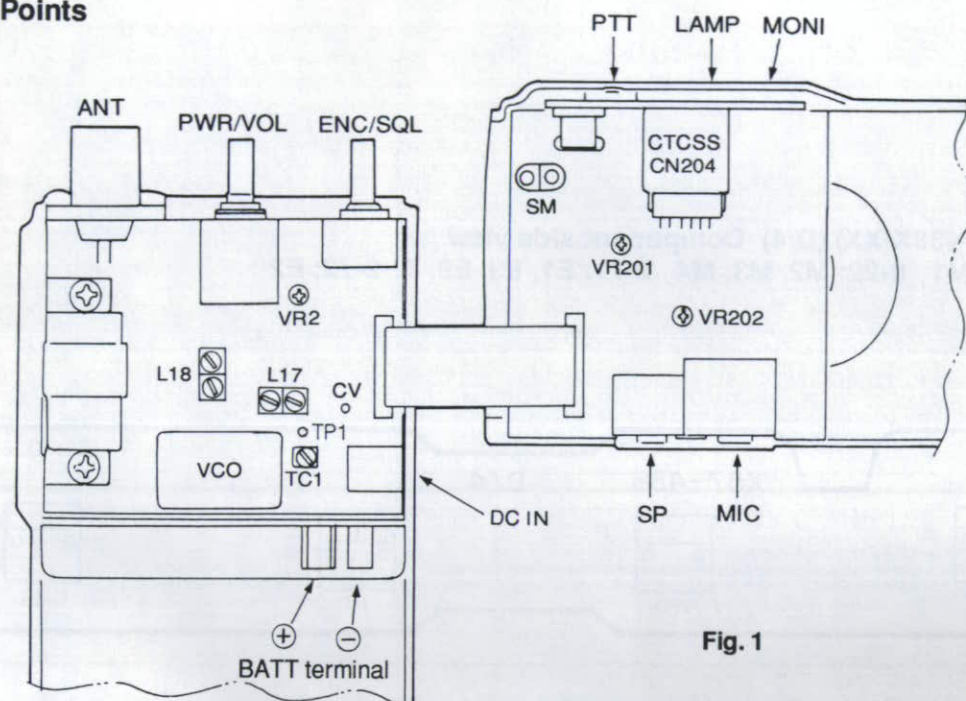


Fig. 1

TX-RX UNIT

RF-IF section
 TC1: Transmit frequency
 L17, 18: BPF
 VR2: Squelch
 CV terminal: VCO voltage
 TP1 terminal: BPF output (Spectrum analyzer)

CONTROL section

VR201: HI power
 VR202: DEV
 SM terminal: S-meter level
 (Short when turn the POWER ON.)


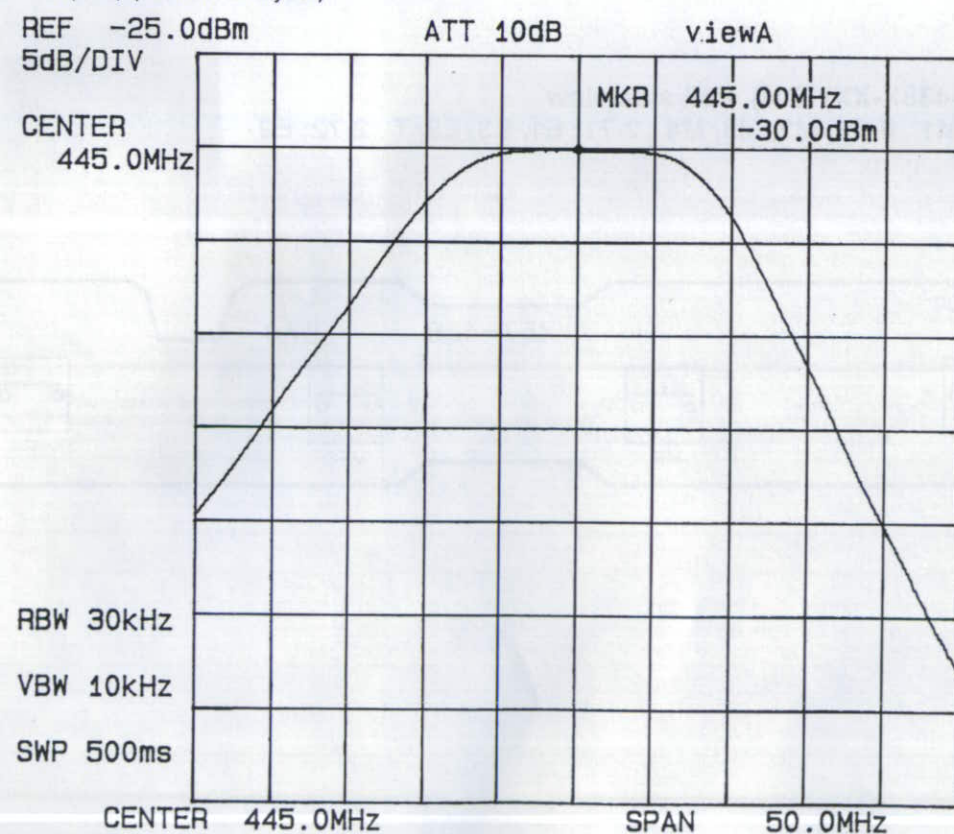


Fig. 2 BPF waveform


PC BOARD VIEWS TH-42A/AT/E

VCO UNIT (X58-4100-00) Component side view

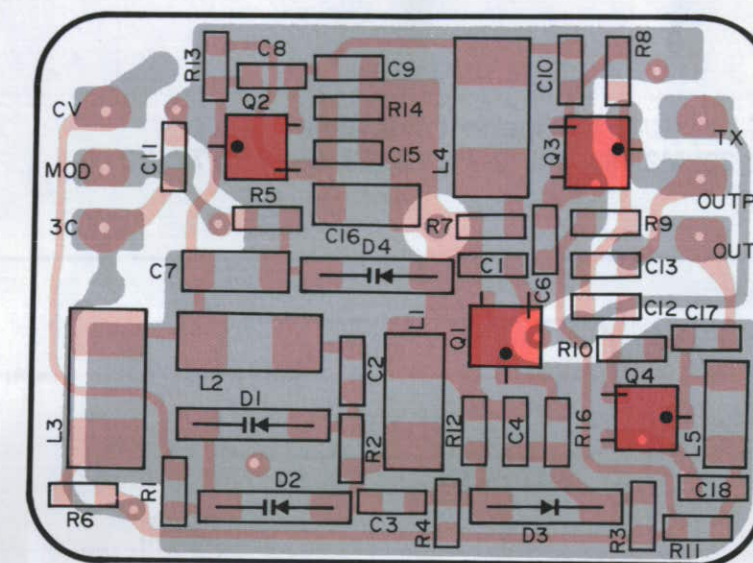

A pattern
 B pattern


VCO UNIT (X58-4100-00) Foil side view

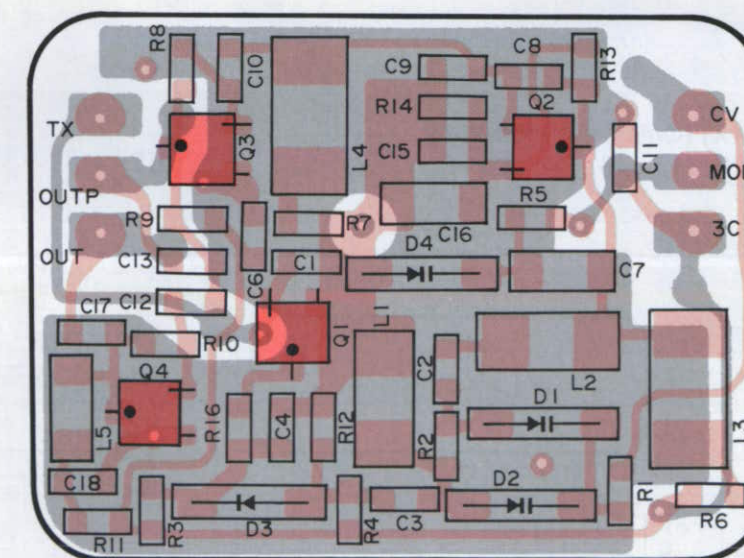

DTC144EE
 2SC5066




2SK238




TH-42A/AT/E PC BOARD VIEWS

TX-RX UNIT (X57-438X-XX) (C/4) Component side view
0-11: K, P 0-21: M1 0-22: M2, M3, M4 2-71: E1, E3, E9, T 2-72: E2

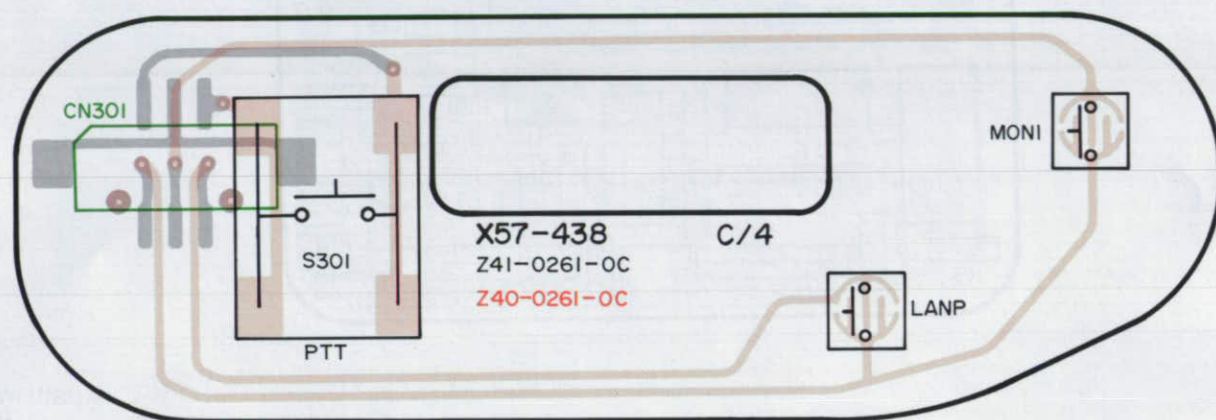


A pattern
B pattern

TX-RX UNIT (X57-438X-XX) (C/4) Foil side view
0-11: K, P 0-21: M1 0-22: M2, M3, M4 2-71: E1, E3, E9, T 2-72: E2

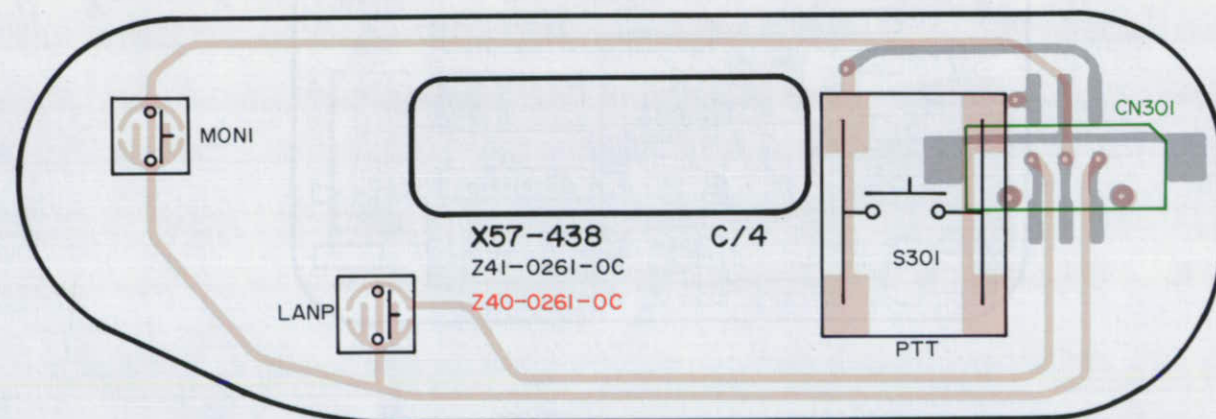


TX-RX UNIT (X57-438X-XX) (D/4) Component side view
0-11: K, P 0-21: M1 0-22: M2, M3, M4 2-71: E1, E3, E9, T 2-72: E2

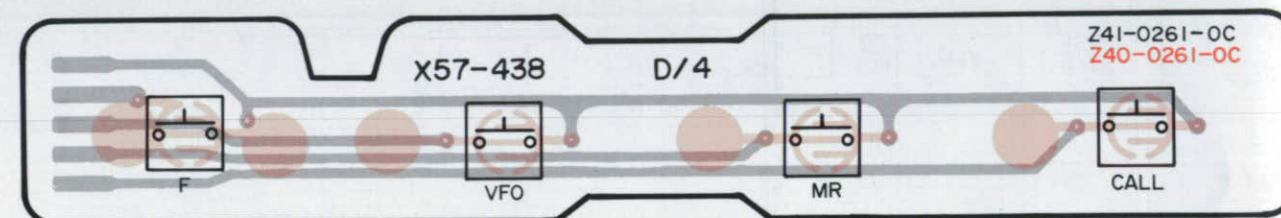


A pattern
B pattern

TX-RX UNIT (X57-438X-XX) (D/4) Foil side view
0-11: K, P 0-21: M1 0-22: M2, M3, M4 2-71: E1, E3, E9, T 2-72: E2

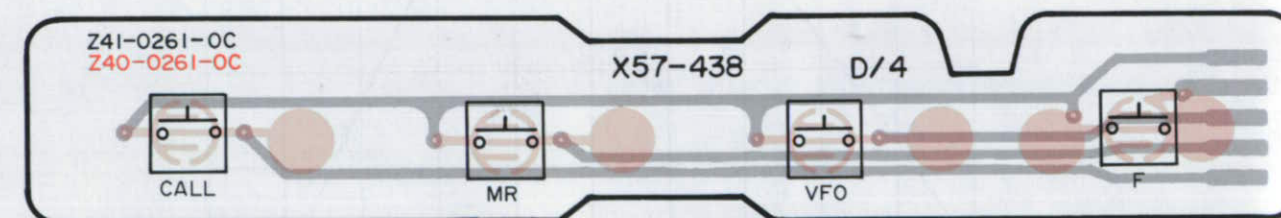


TH-42A/AT/E PC BOARD VIEWS


TX-RX UNIT (X57-438X-XX) (B/4) Component side view
0-11: K, P 0-21: M1 0-22: M2, M3, M4 2-71: E1, E3, E9, T 2-72: E2

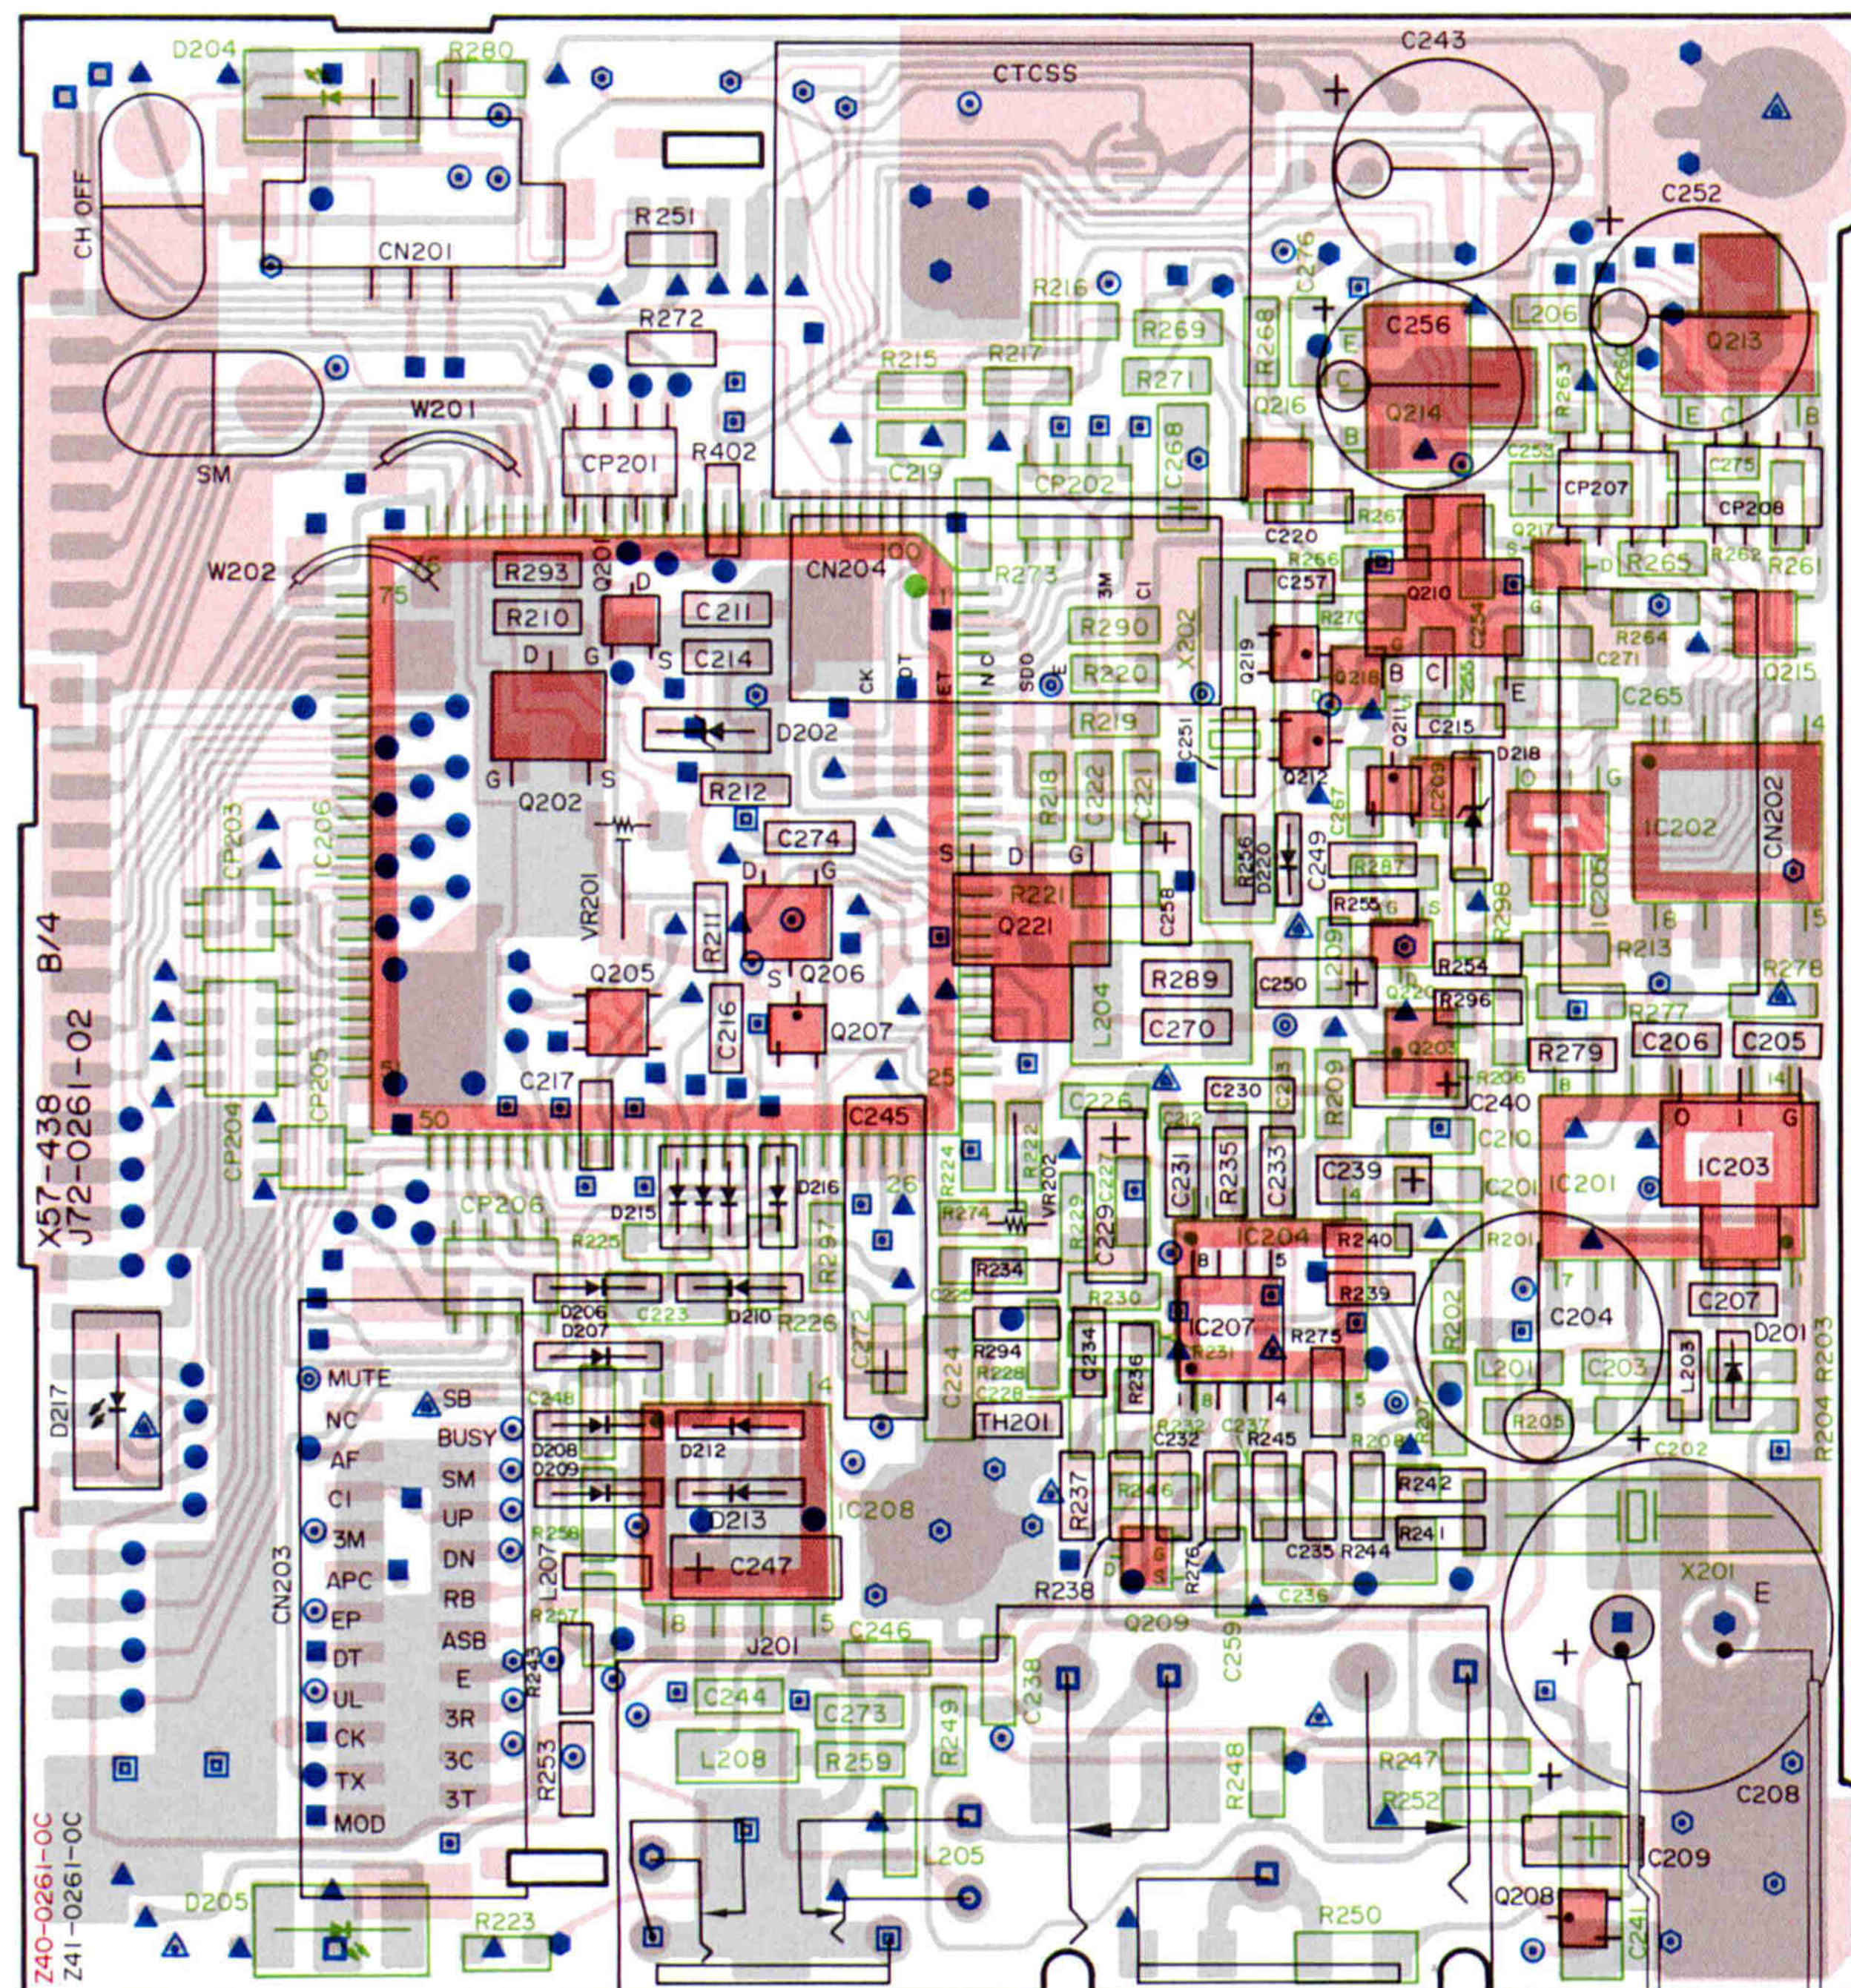

A pattern
B pattern

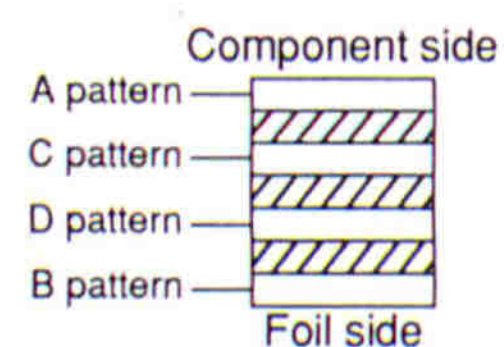


SUB UNIT (X58-4180-00)

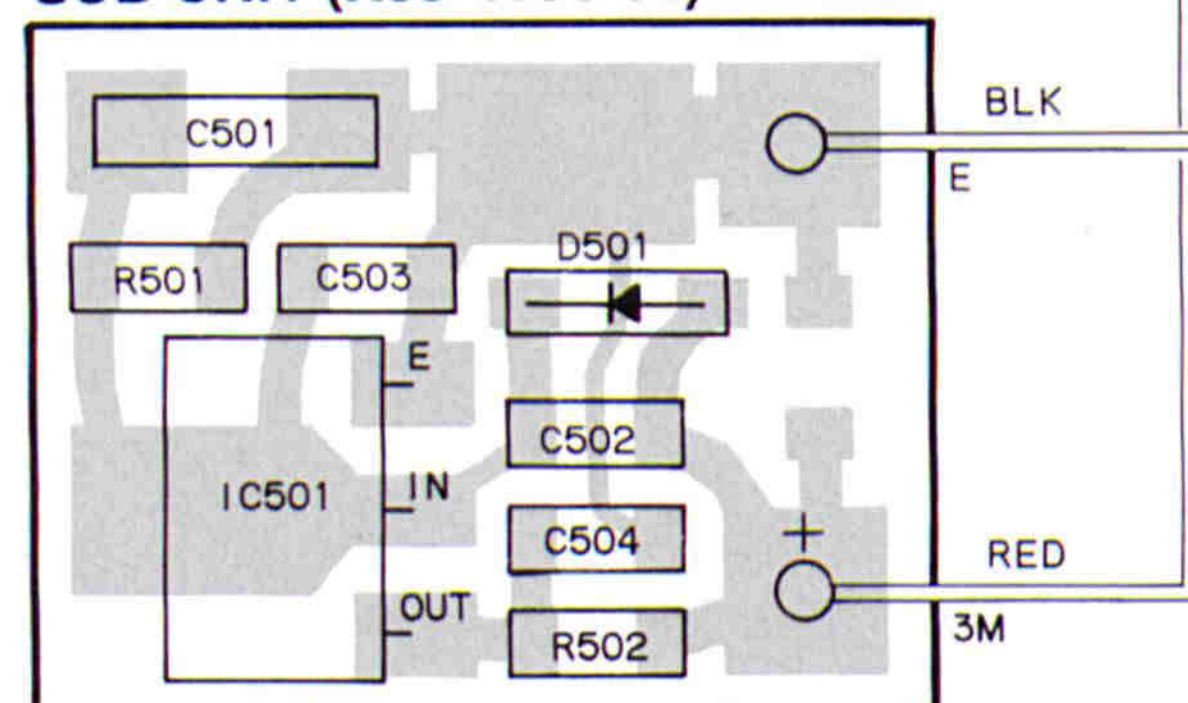

- A and B connected
- A and C connected
- A and D connected
- B and C connected
- ▲ B and D connected

- △ C and D connected
- A, C and B connected
- A, D and B connected
- A, C and D connected
- C, D and B connected

- △ A, C, D and B connected
- B only
- D only
- No mark is not connected

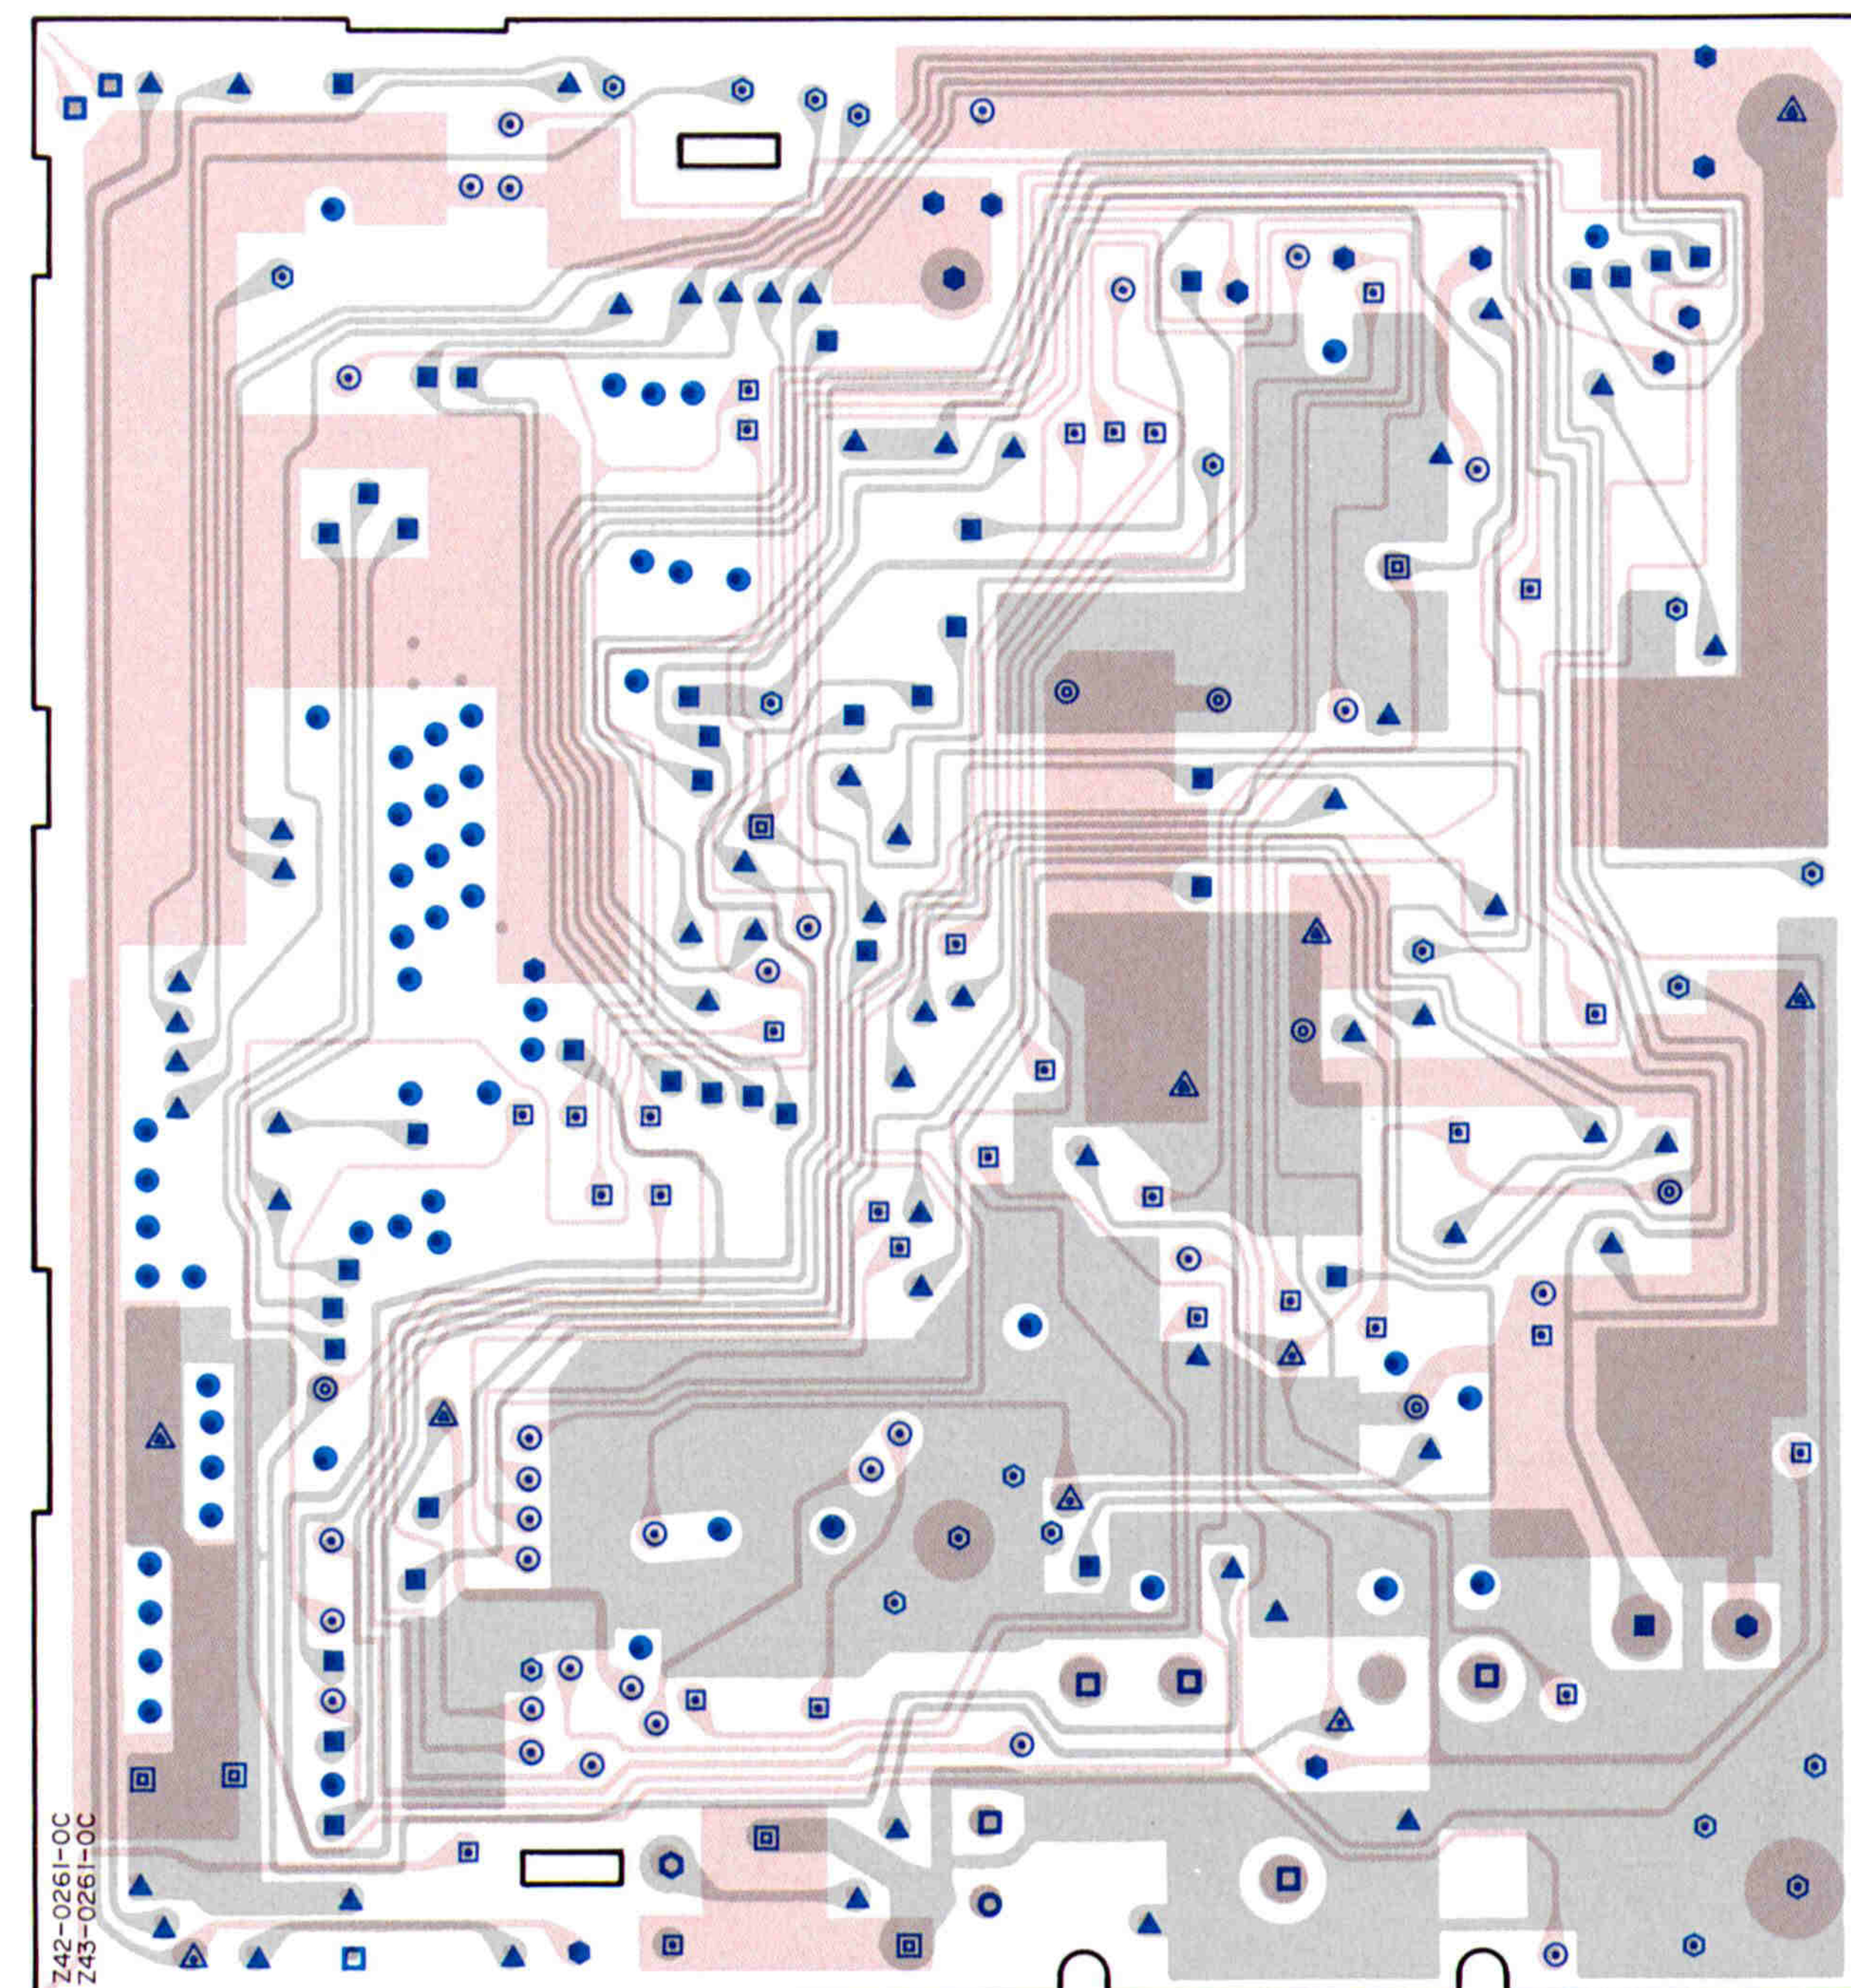

C pattern
D pattern

2SC4738
DTA143ZE
DTA144EE
DTC114YE
DTA114EU


2SK1824
2SJ243

2SK879


UMW1

2SB766


LM301AD

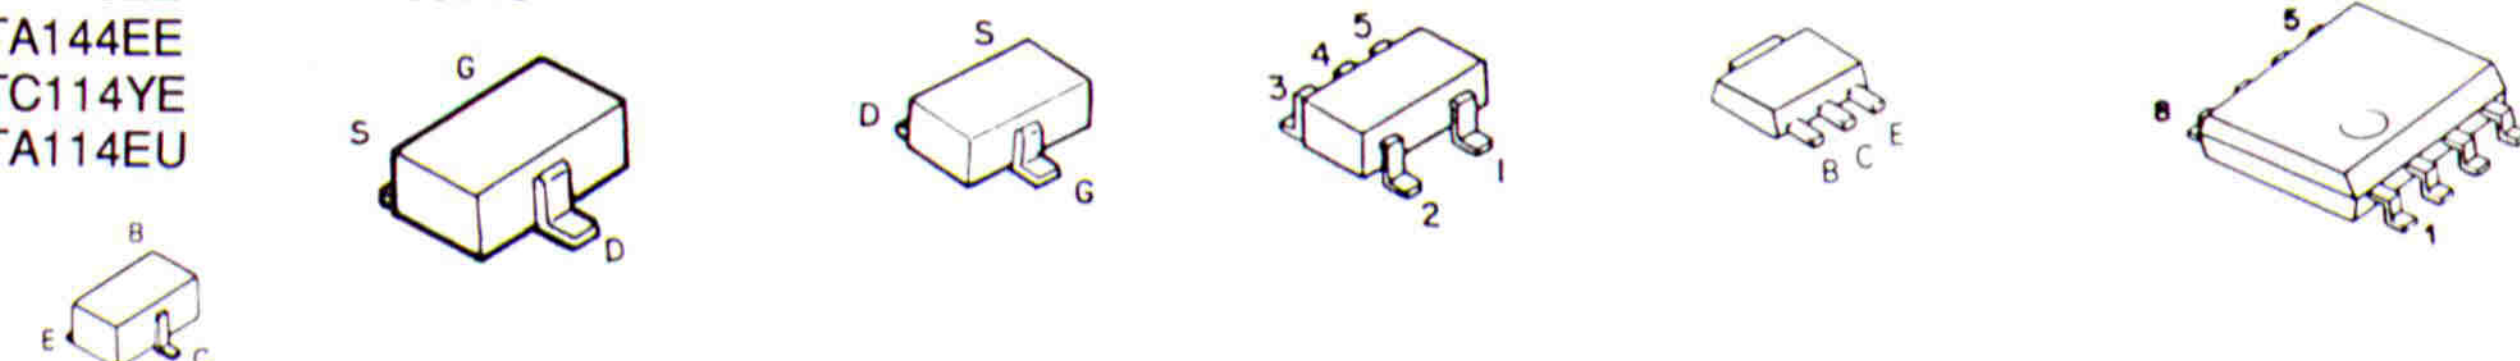


TX-RX UNIT (X57-438X-XX) (A/4) Component side view
0-11: K, P 0-21: M1 0-22: M2, M3, M4 2-71: E1, E3, E9, T 2-72: E2

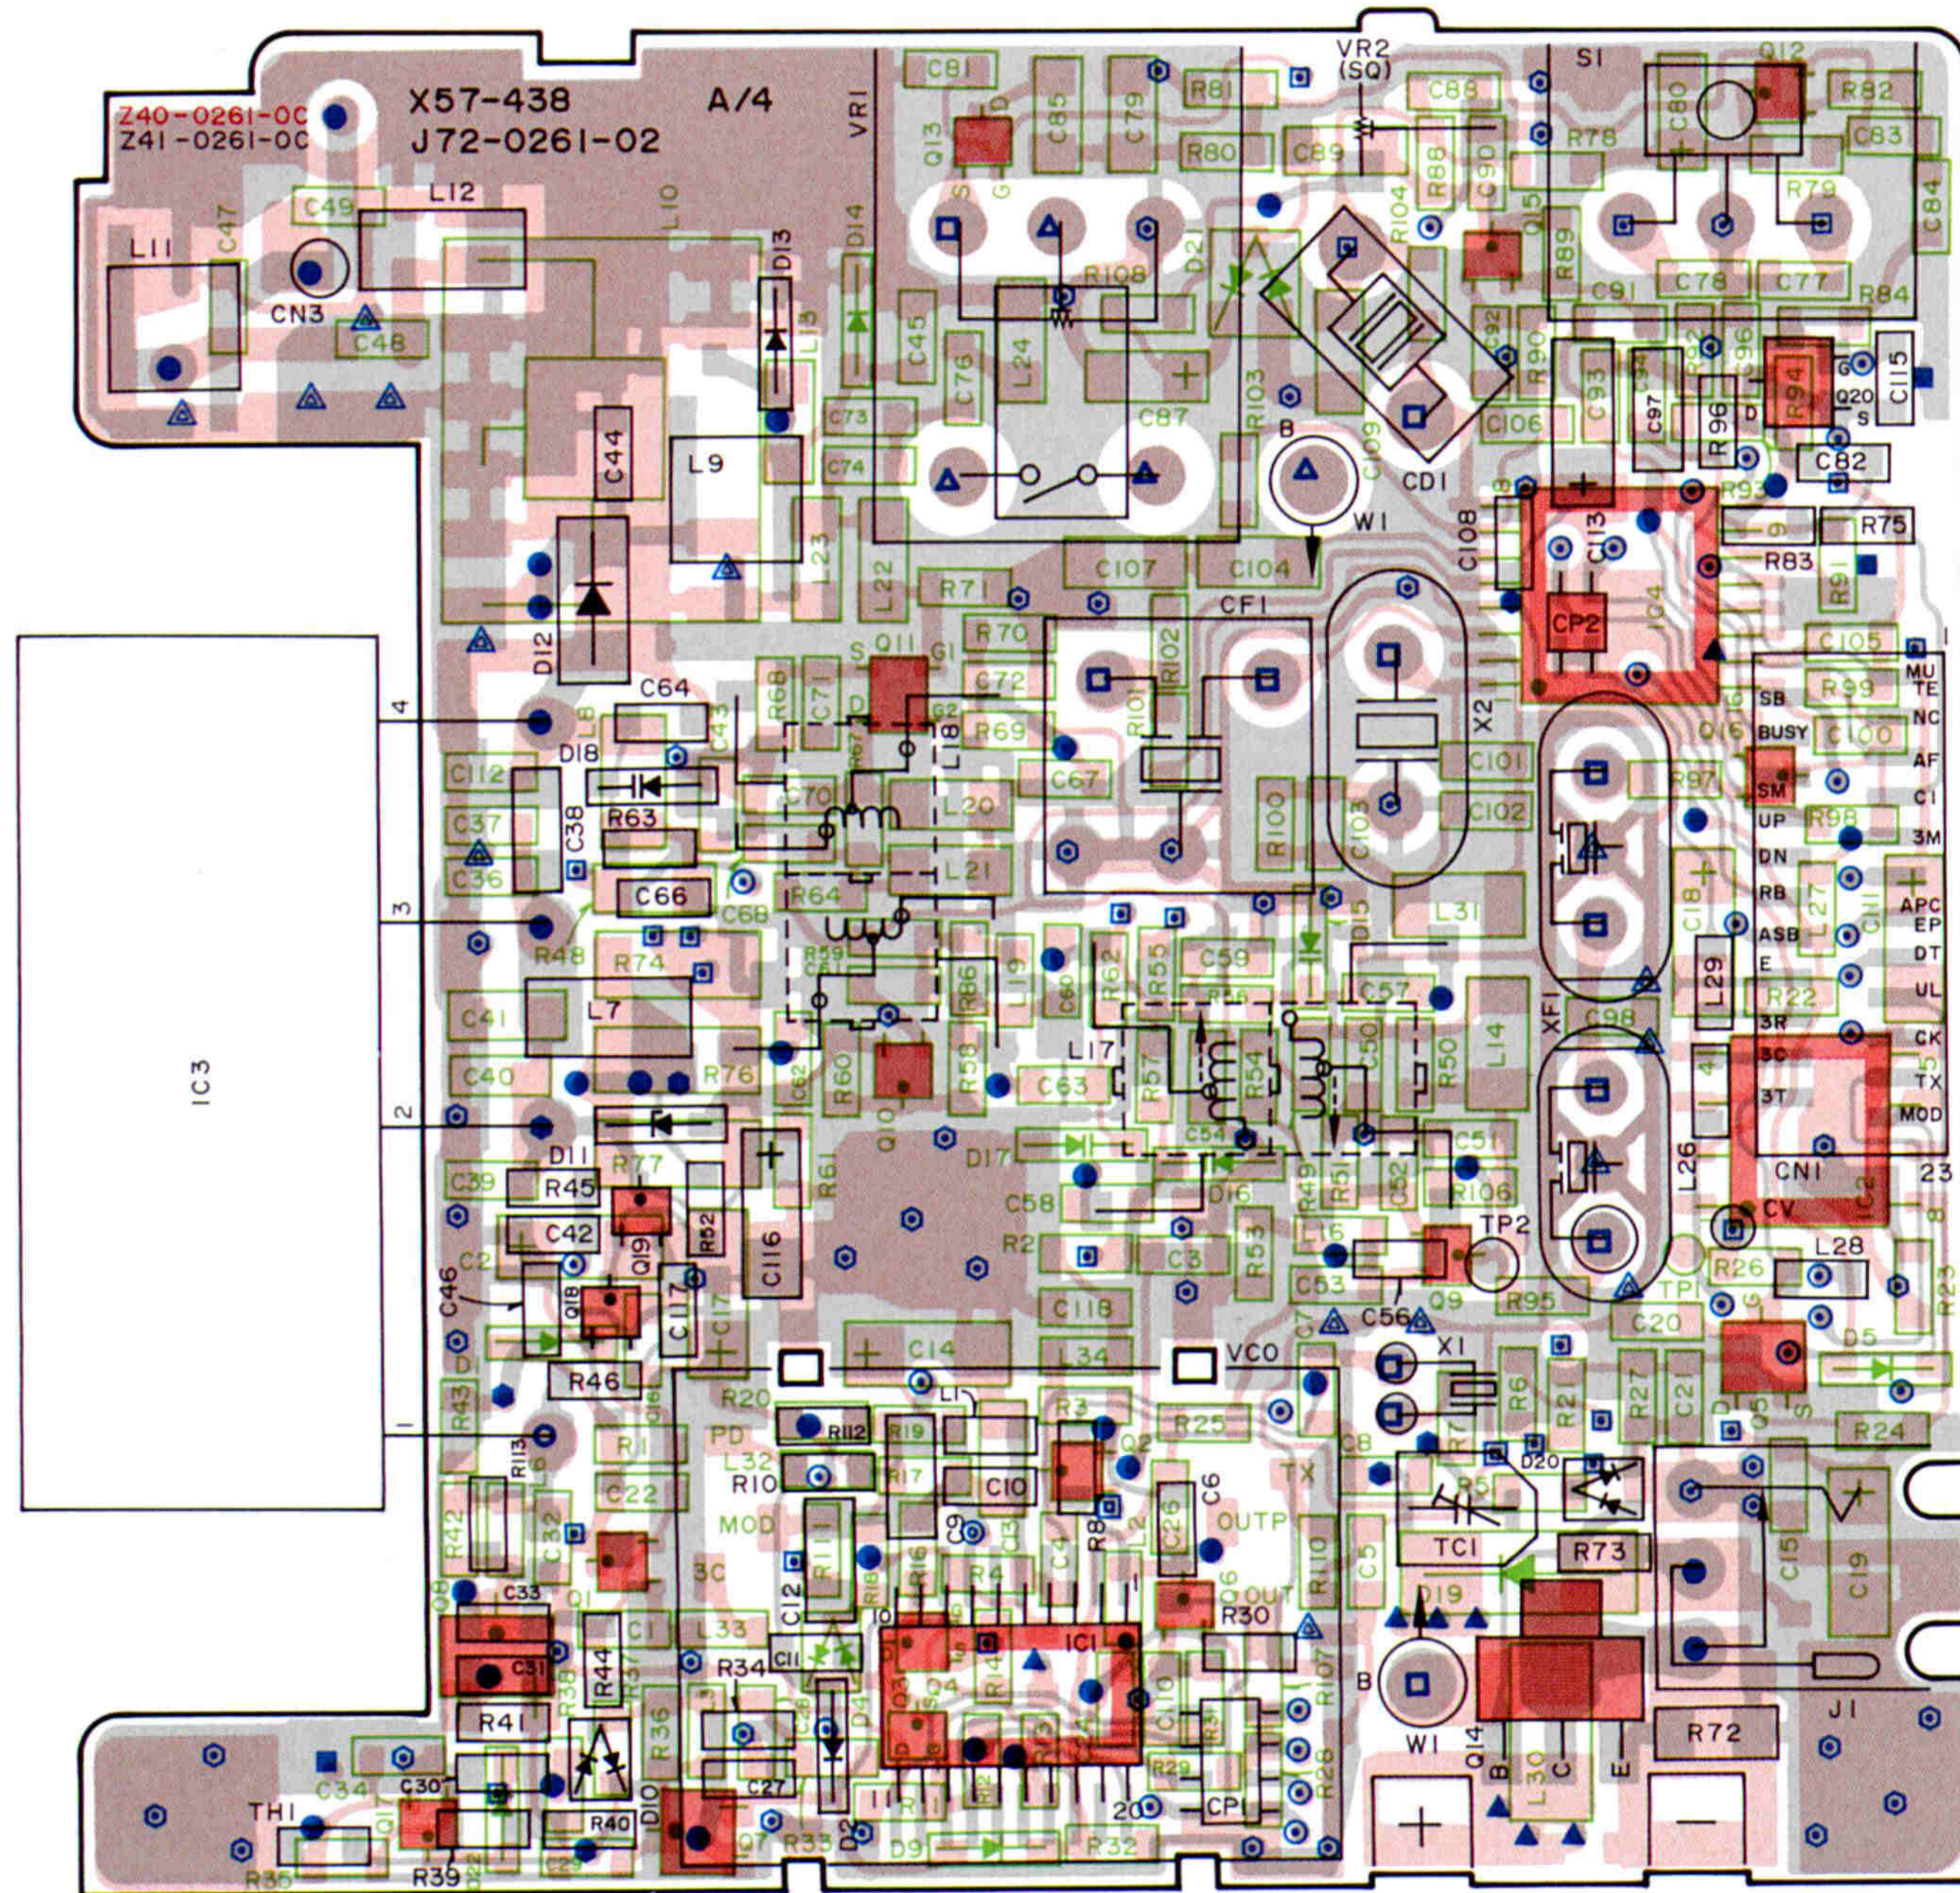

A pattern
B pattern

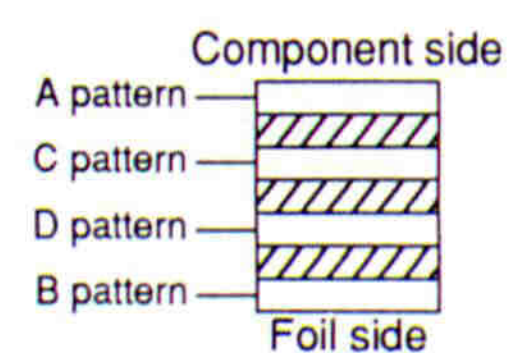

- A and B connected
- A and C connected
- A and D connected
- B and C connected
- ▲ B and D connected
- A, C and B connected
- A, D and B connected
- ⊙ A, C and D connected
- ⊠ C, D and B connected
- ▲ A, C, D and B connected
- A only
- B only
- △ C only
- No mark is not connected

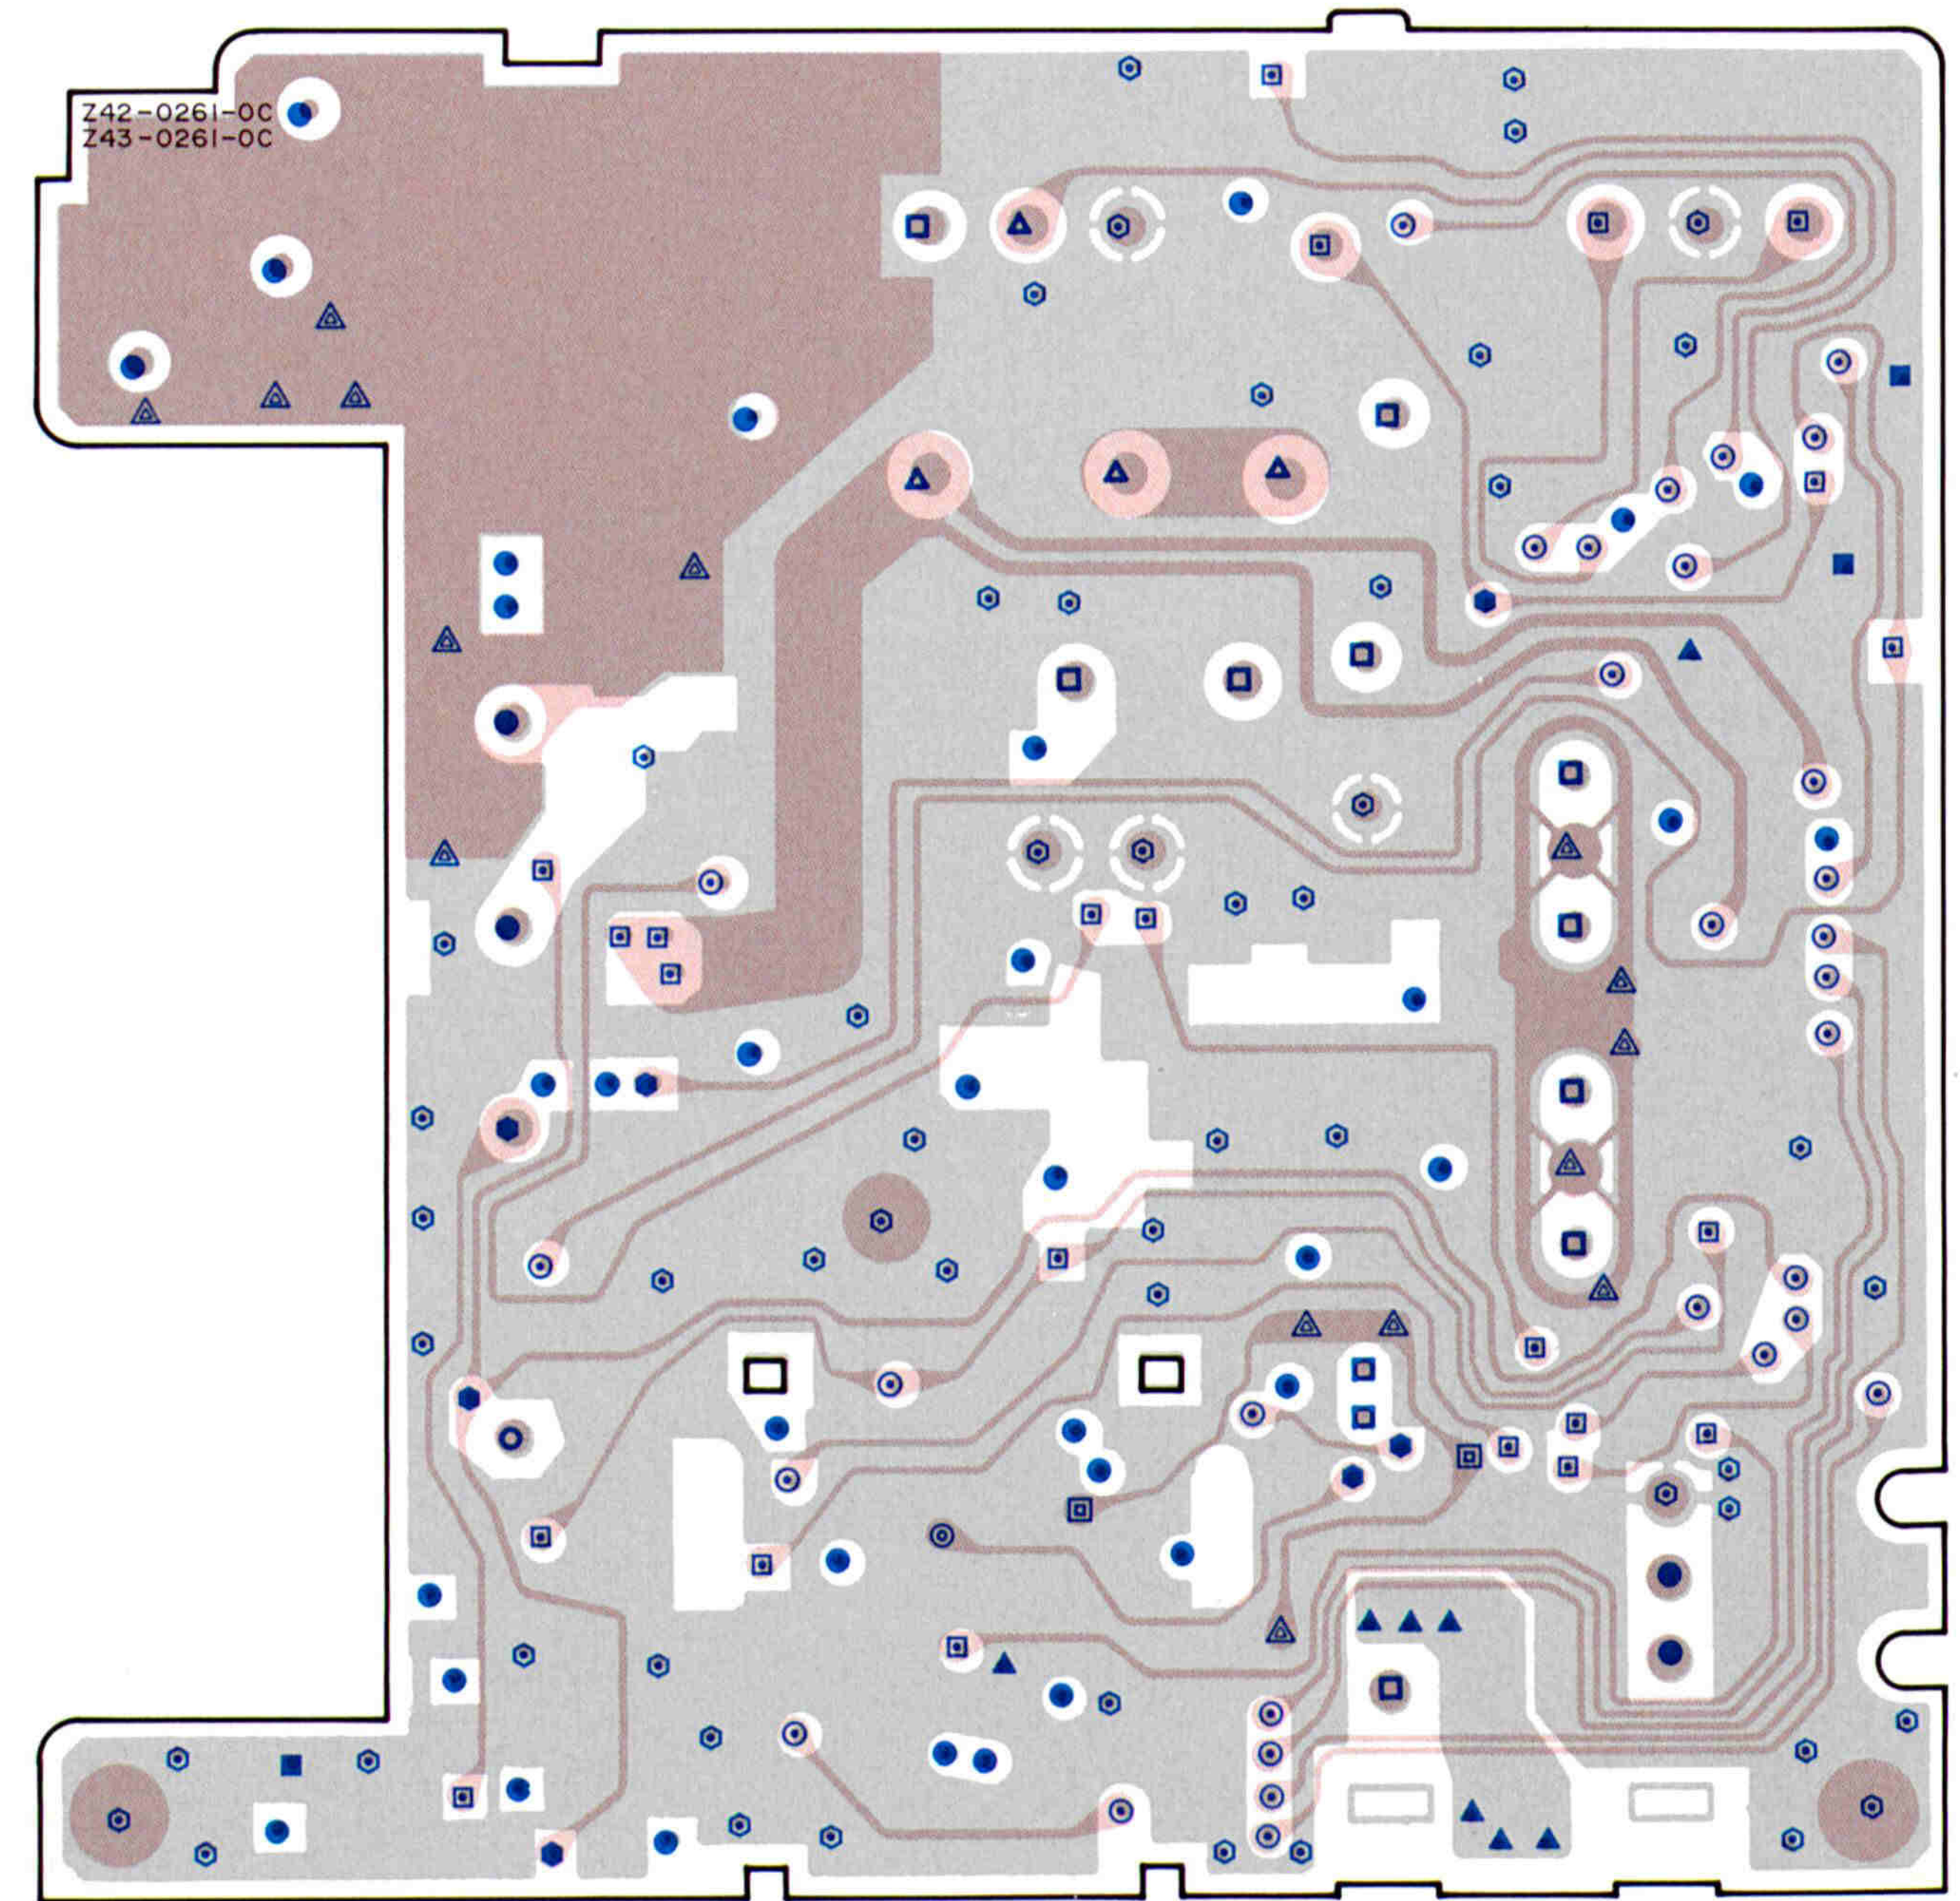


C pattern
D pattern


- 2SC4619
- 2SC4738
- 2SC5066
- 2SC4226
- 2SC3356
- DTC114EE
- DTC114TE
- 2SJ243
- 2SK1824
- 2SK879
- 3SK274
- MB1511PFV-G-BND

TX-RX UNIT (X57-438X-XX) (A/4) Foil side view


0-11: K, P 0-21: M1 0-22: M2, M3, M4 2-71: E1, E3, E9, T 2-72: E2

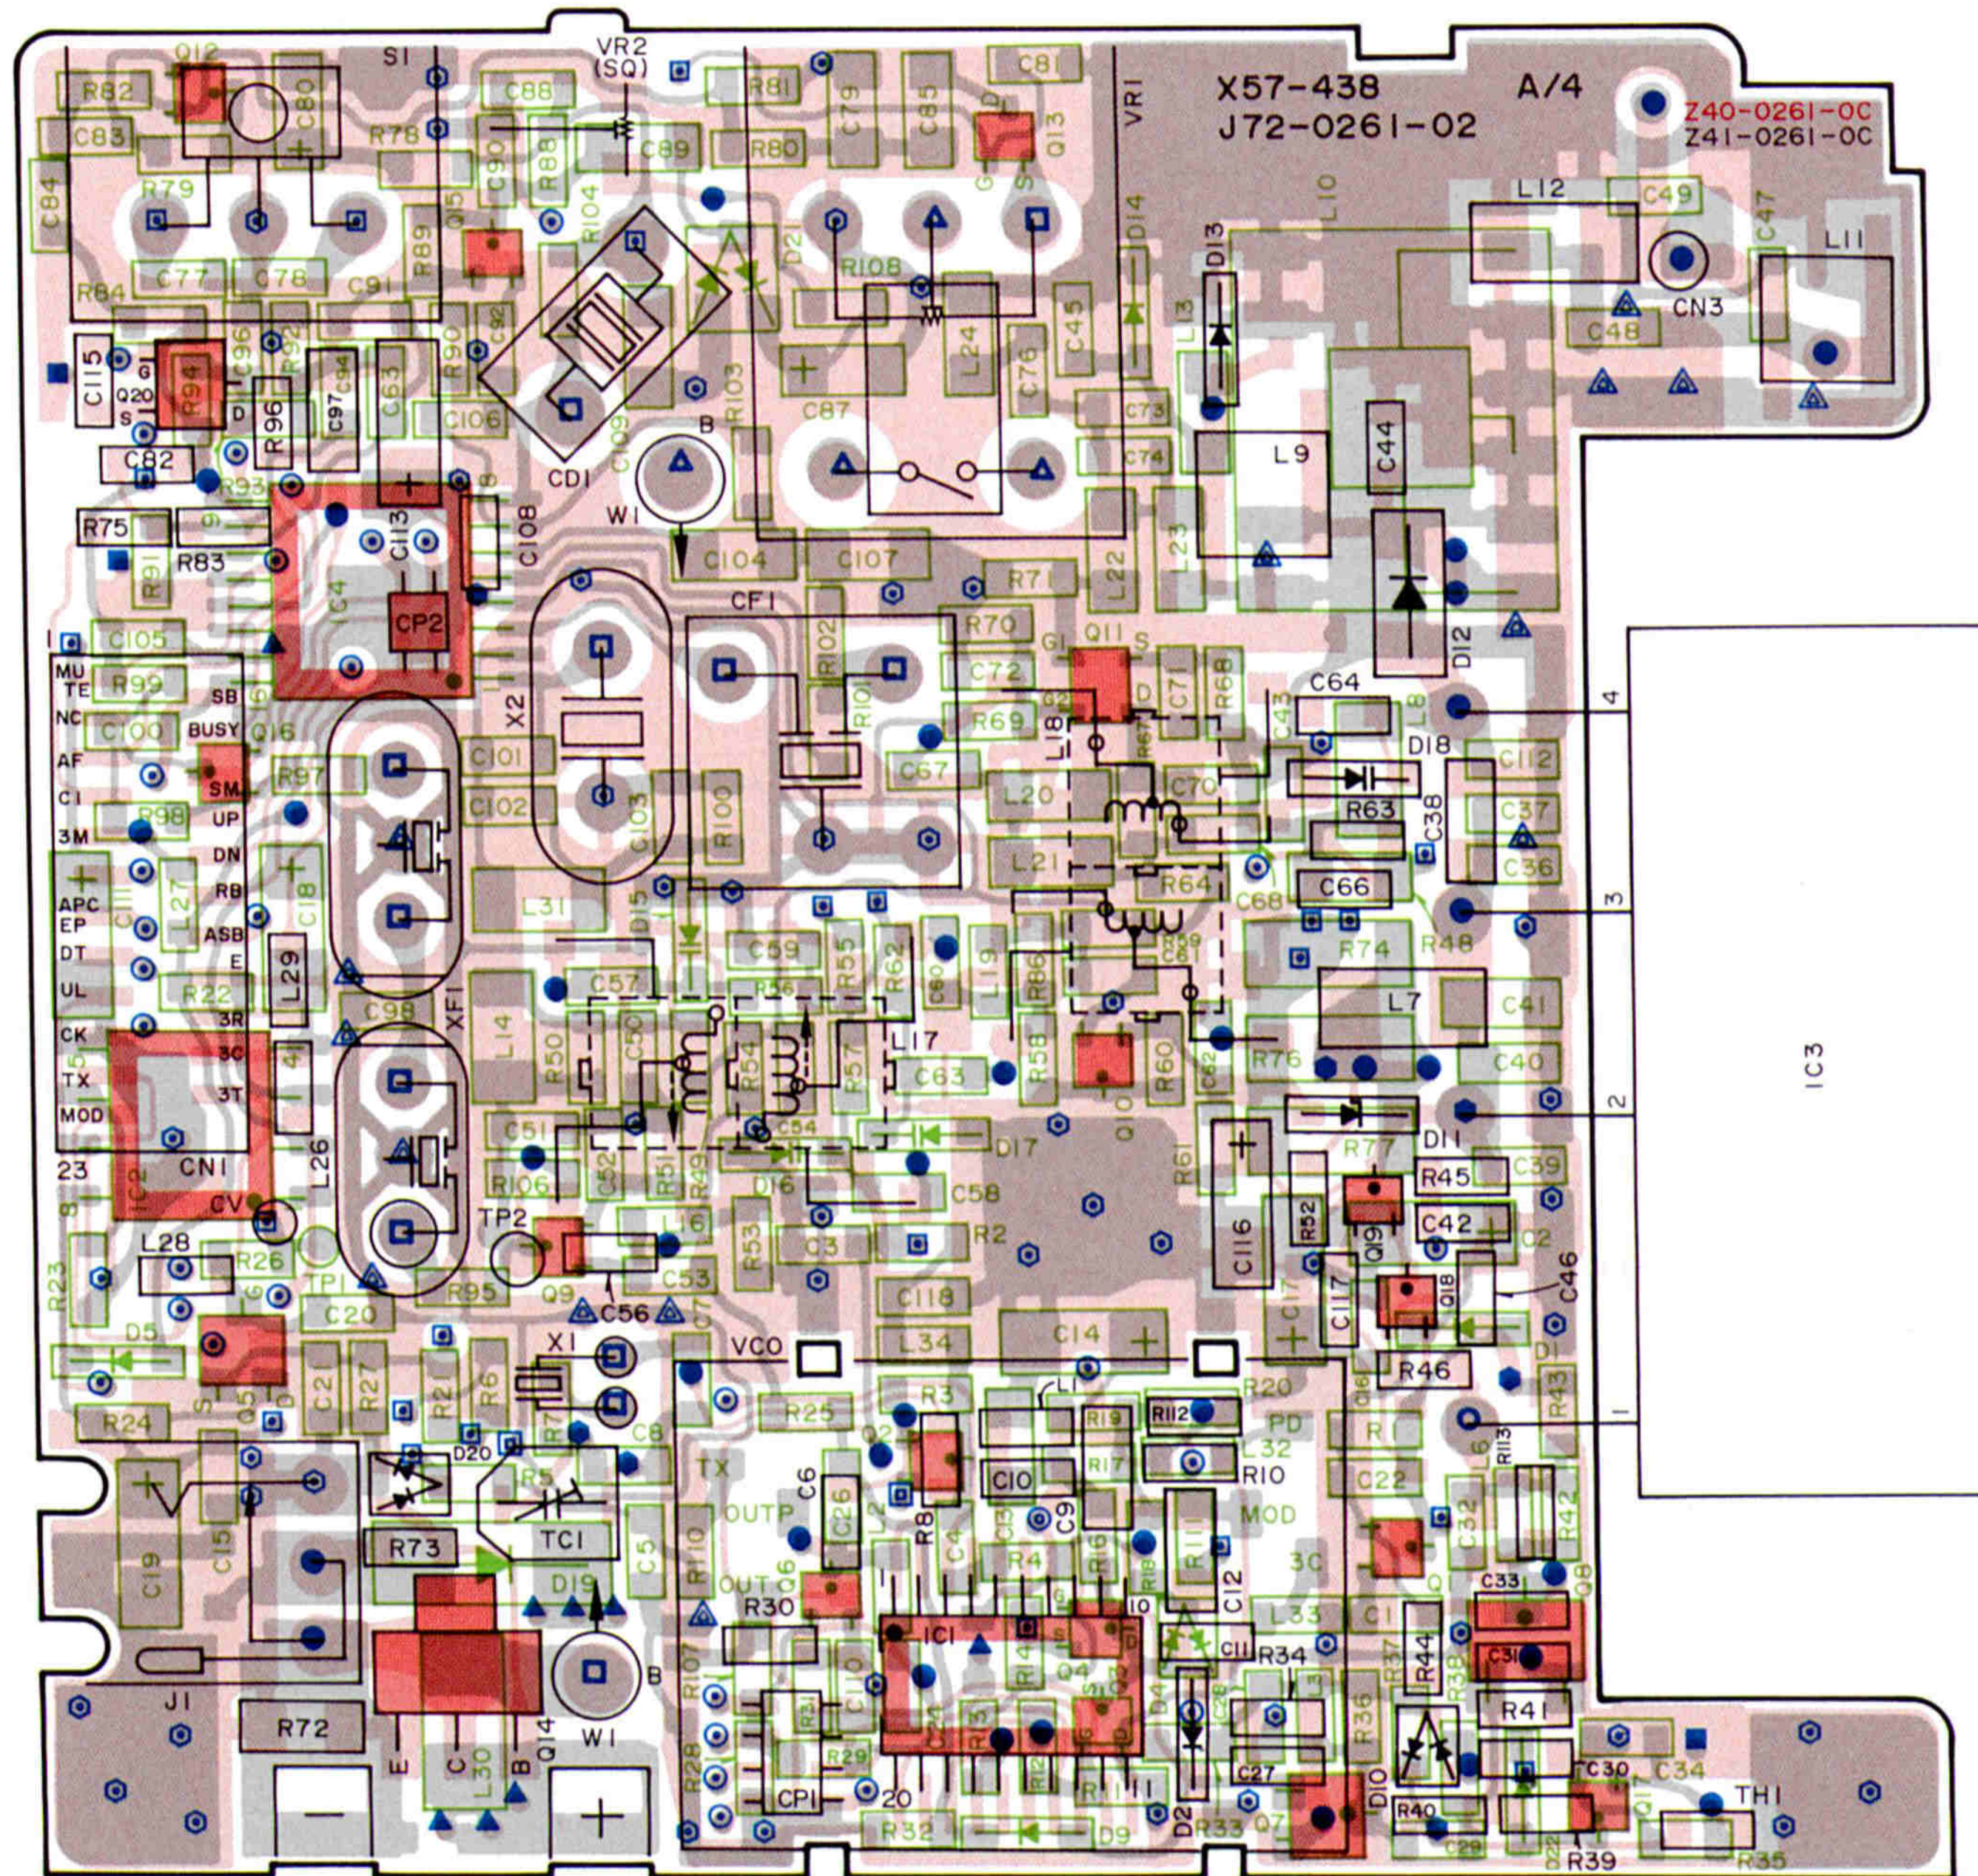

A pattern
 B pattern

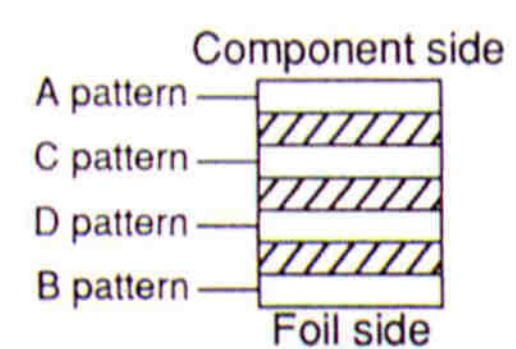


- A and B connected
- A and C connected
- A and D connected
- B and C connected
- ▲ B and D connected
- A, C and B connected
- A, D and B connected
- ⊙ A, C and D connected
- C, D and B connected
- ▲ A, C, D and B connected
- A only
- B only
- ▲ C only
- No mark is not connected

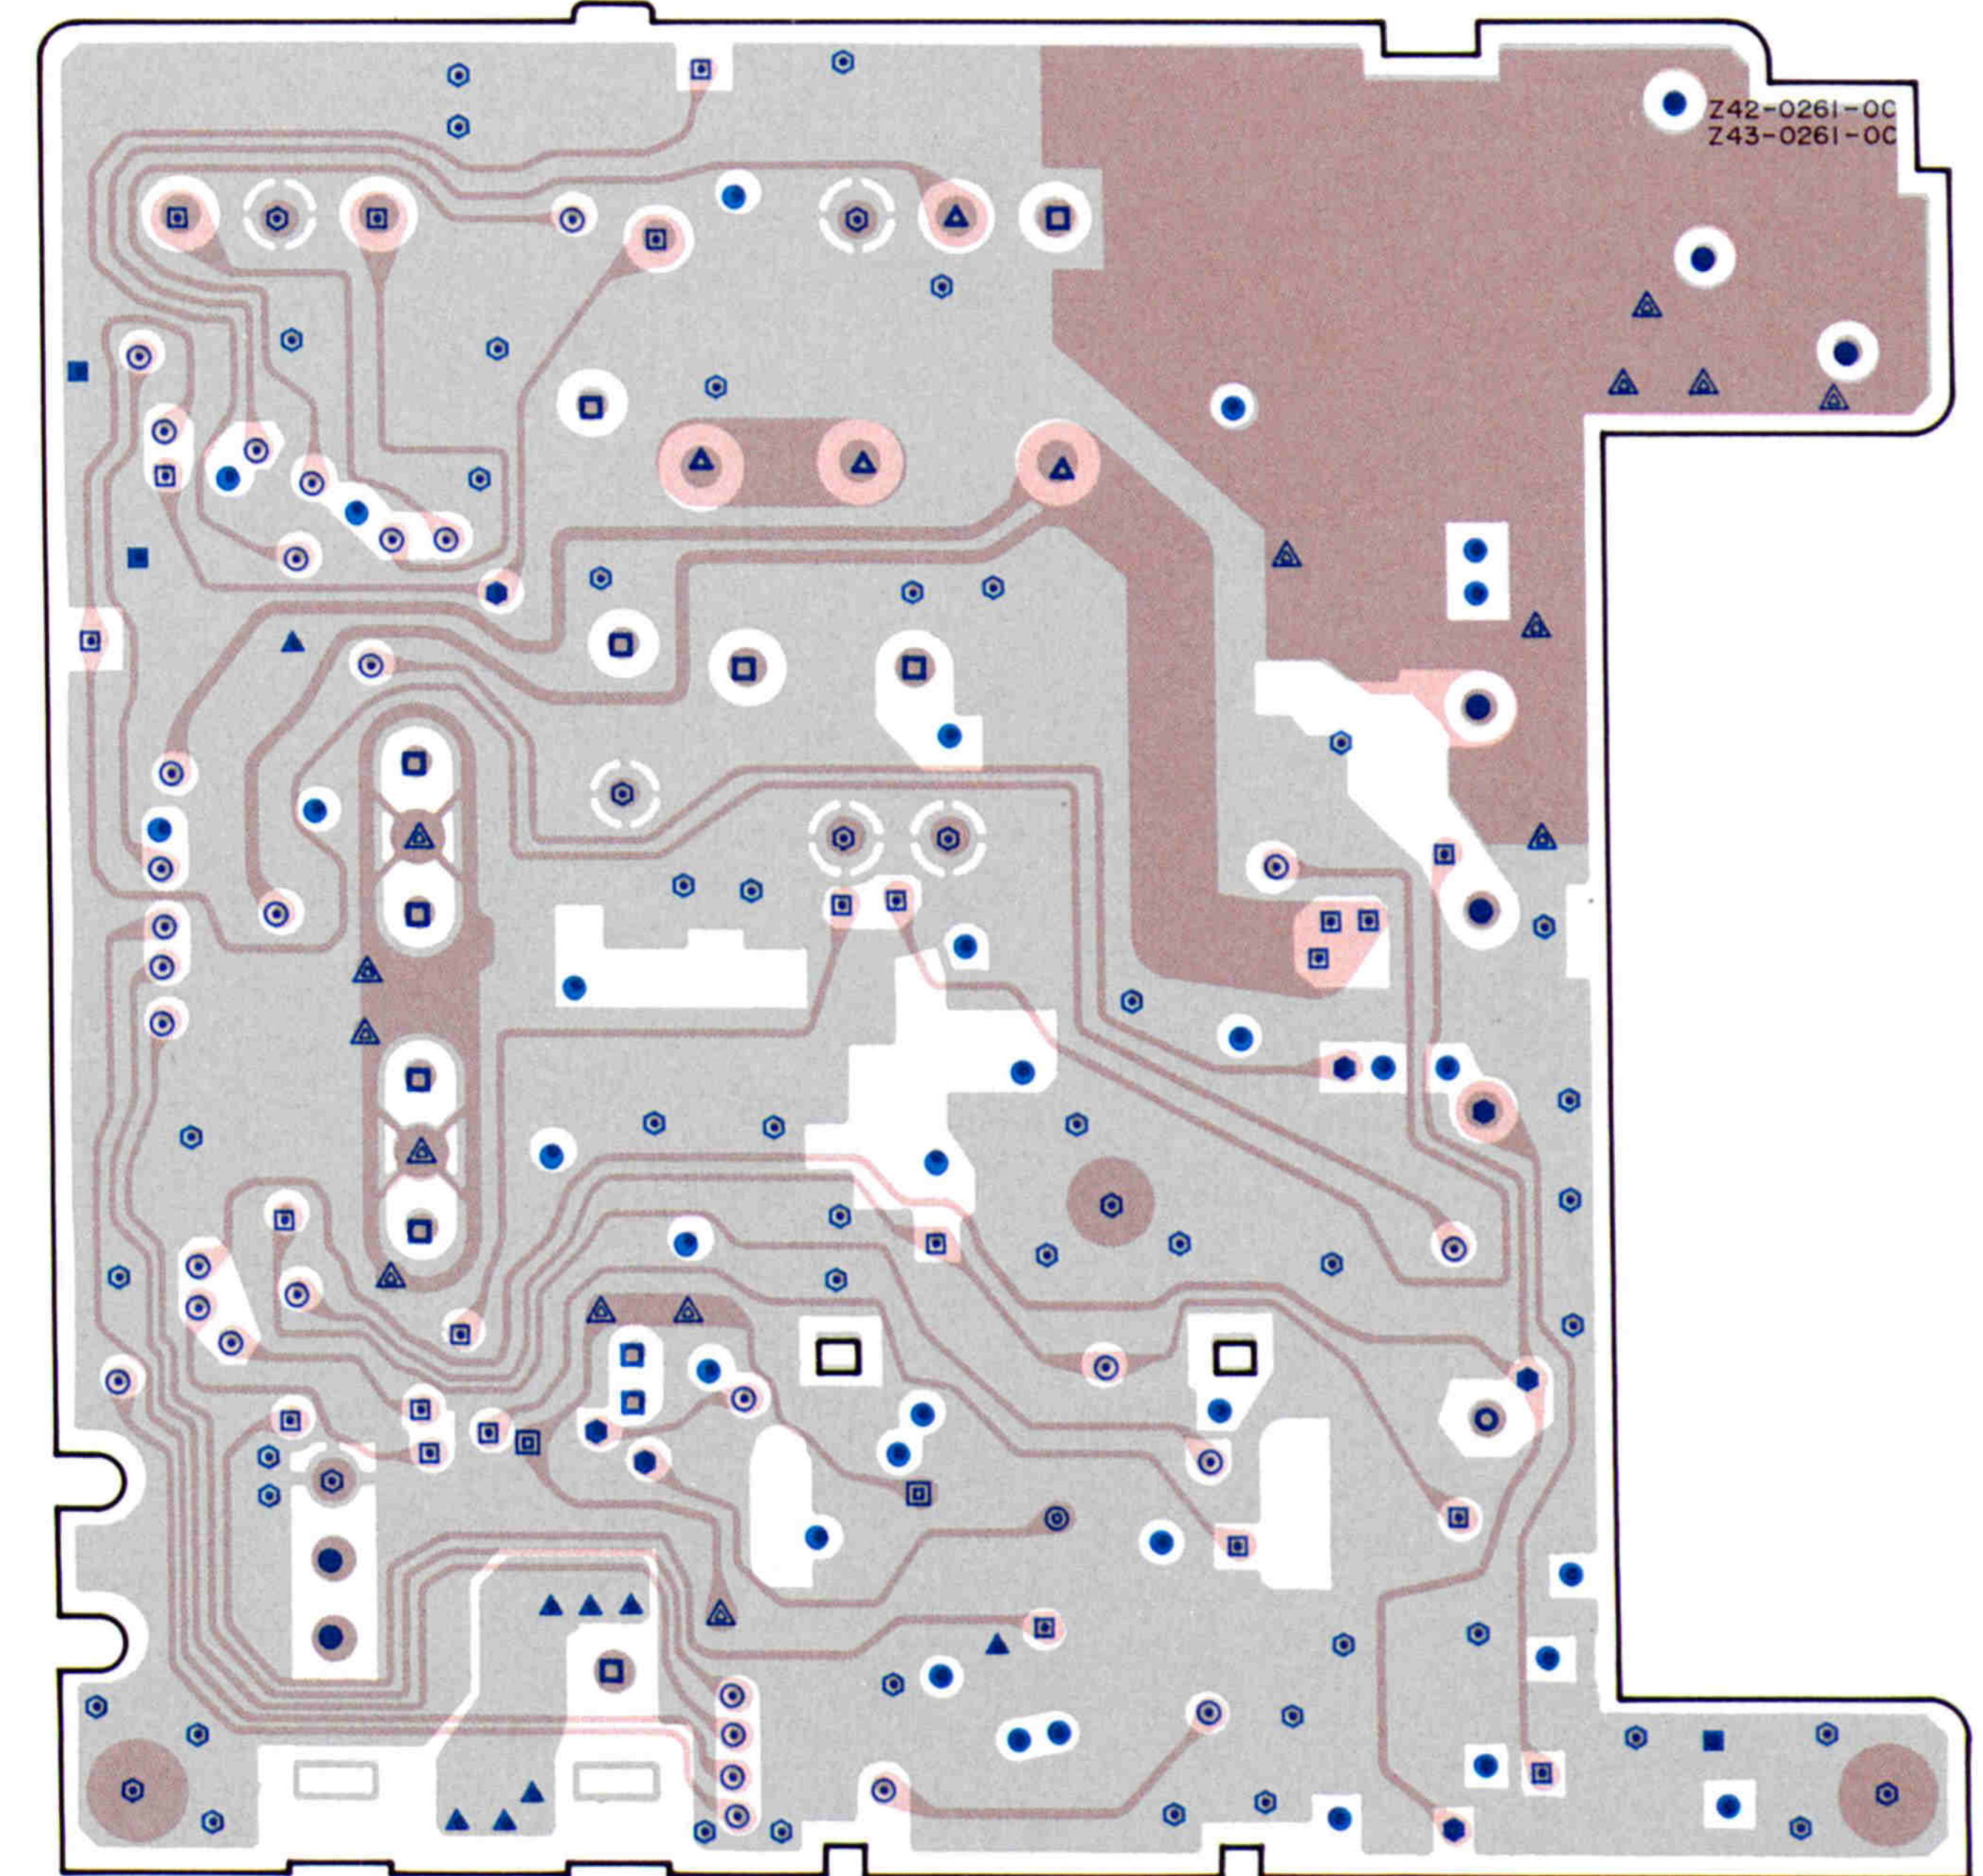


C pattern
 D pattern


S-AU57

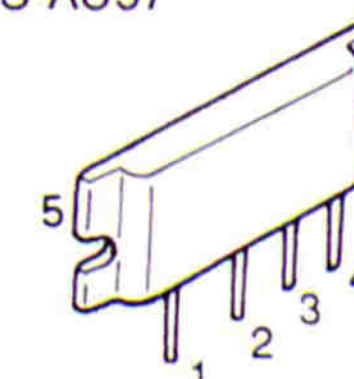


MC3372V

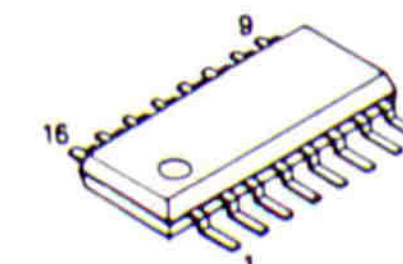



TC7660MEOA

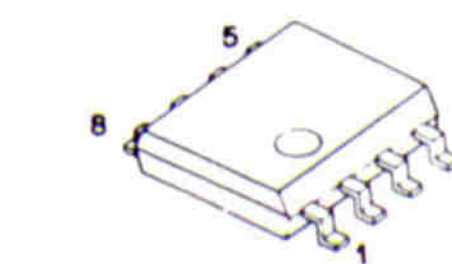

2SD1483



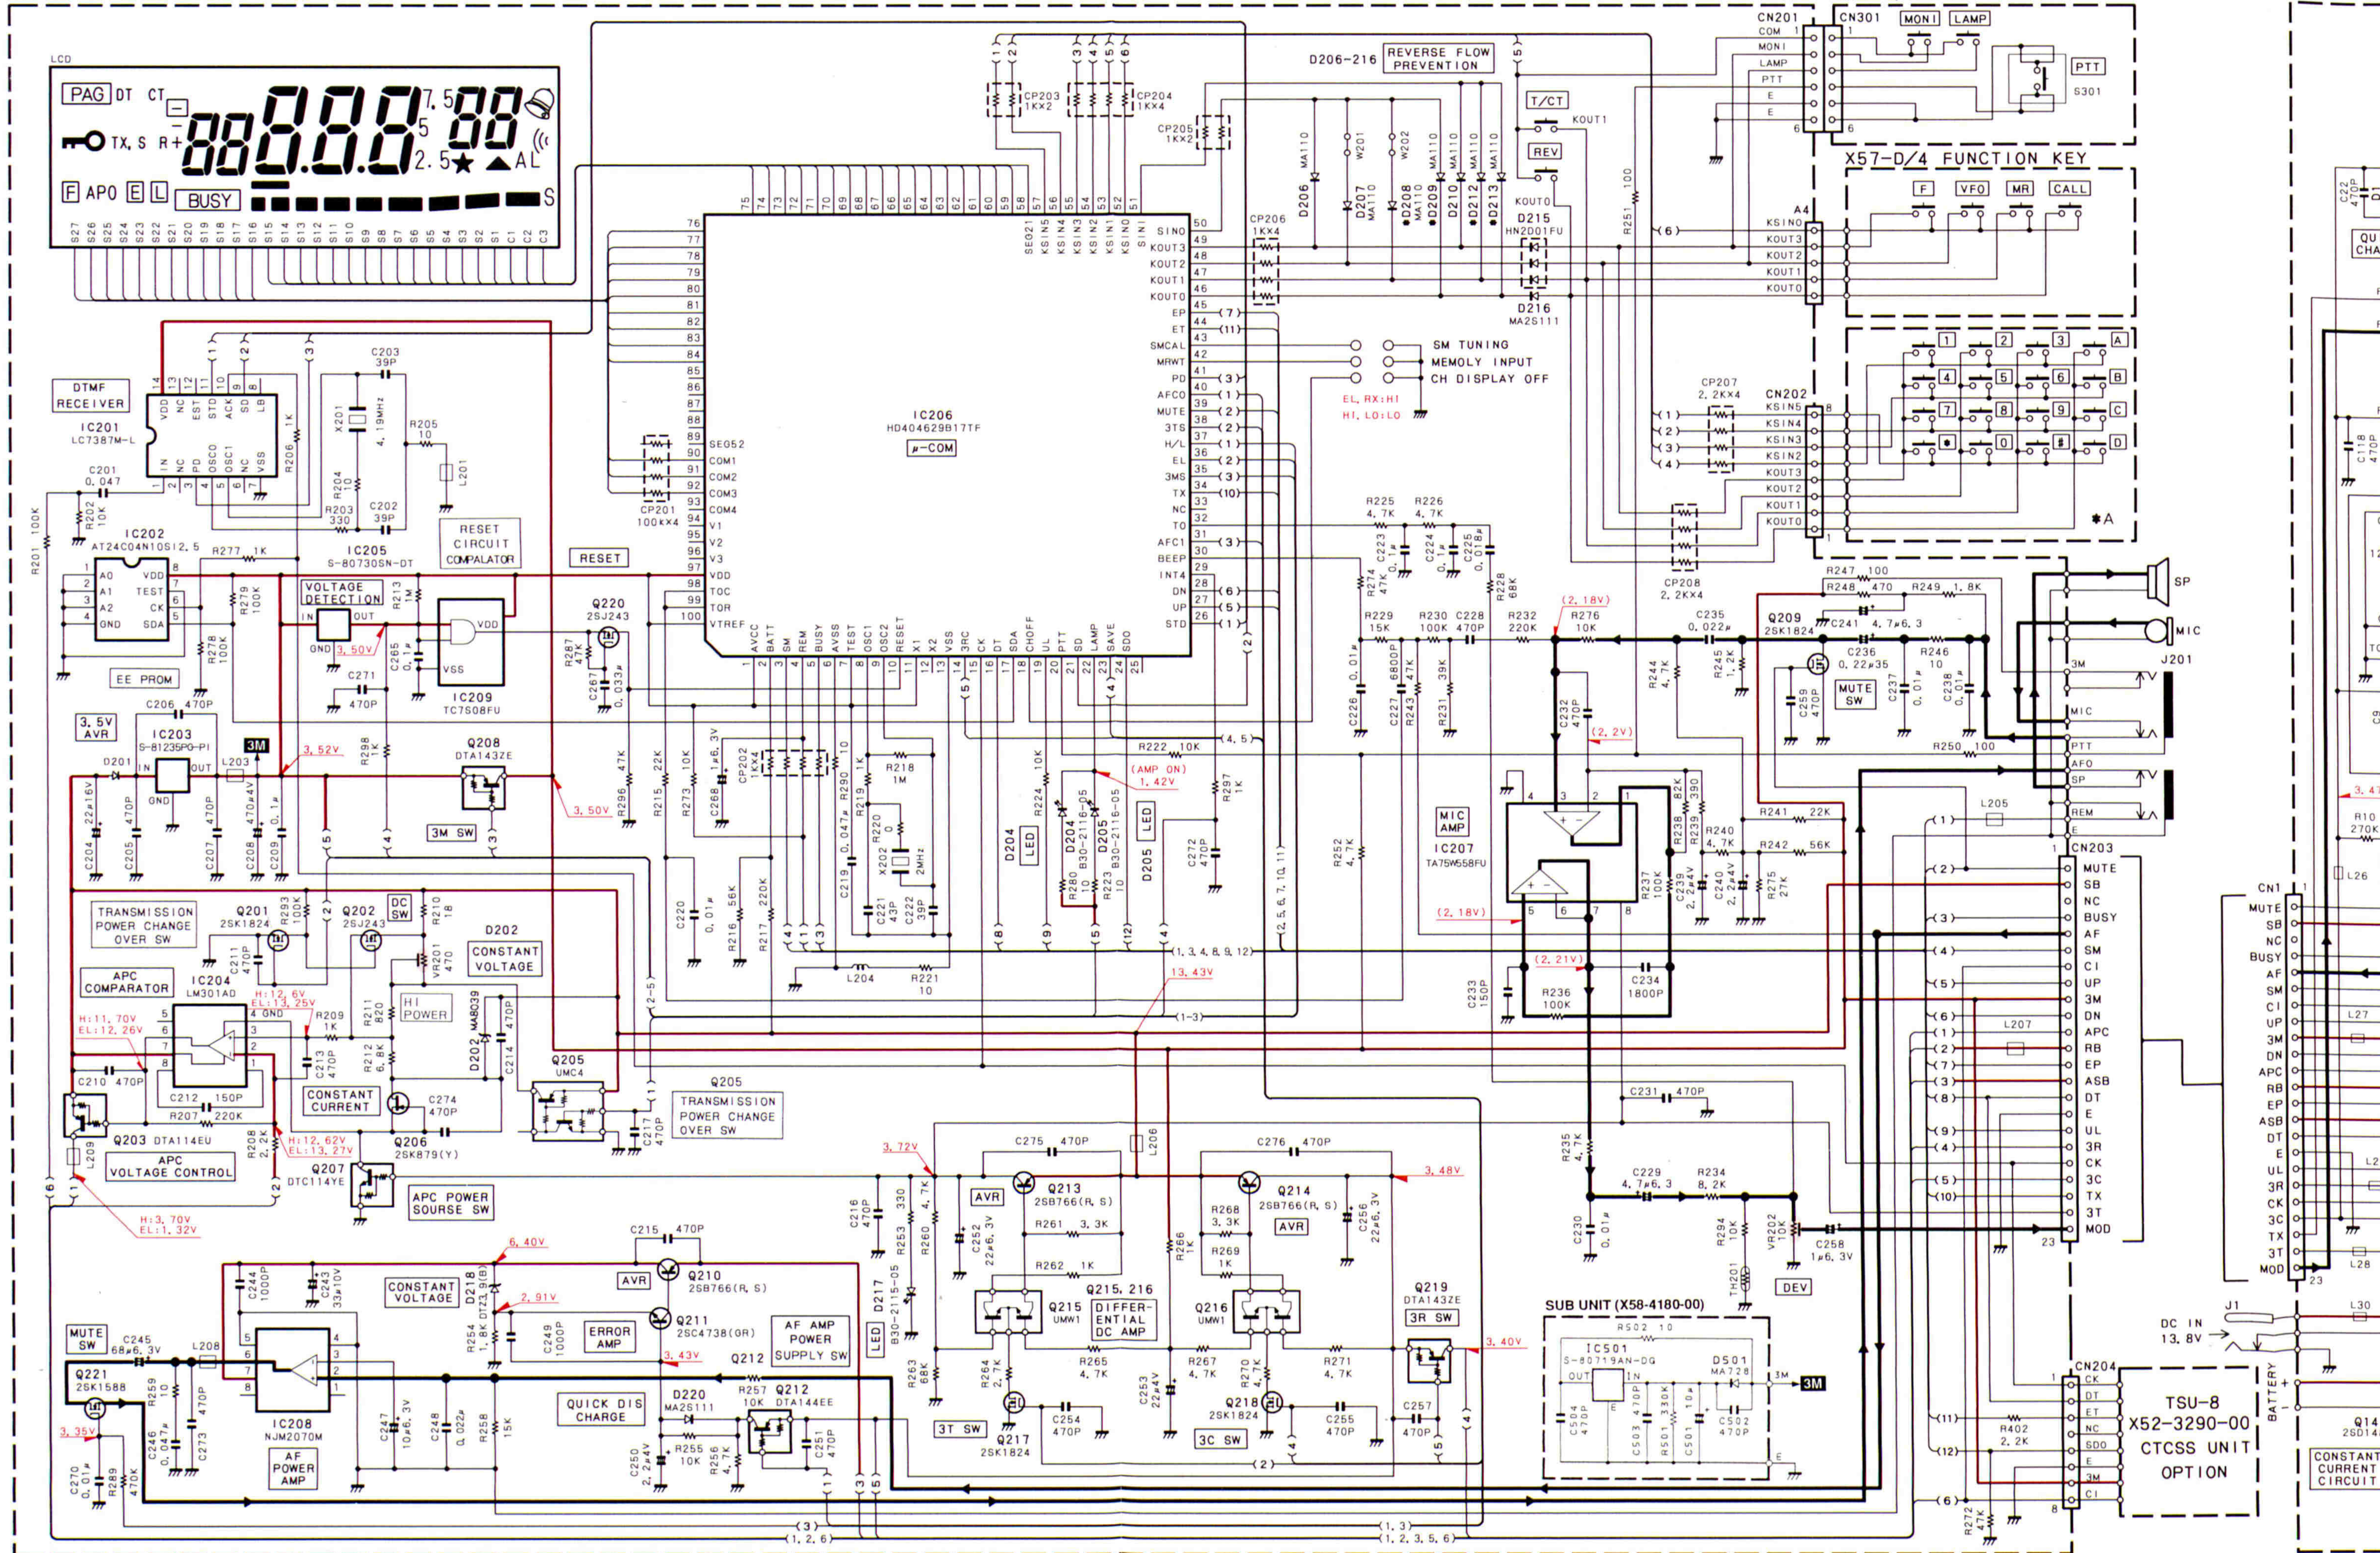

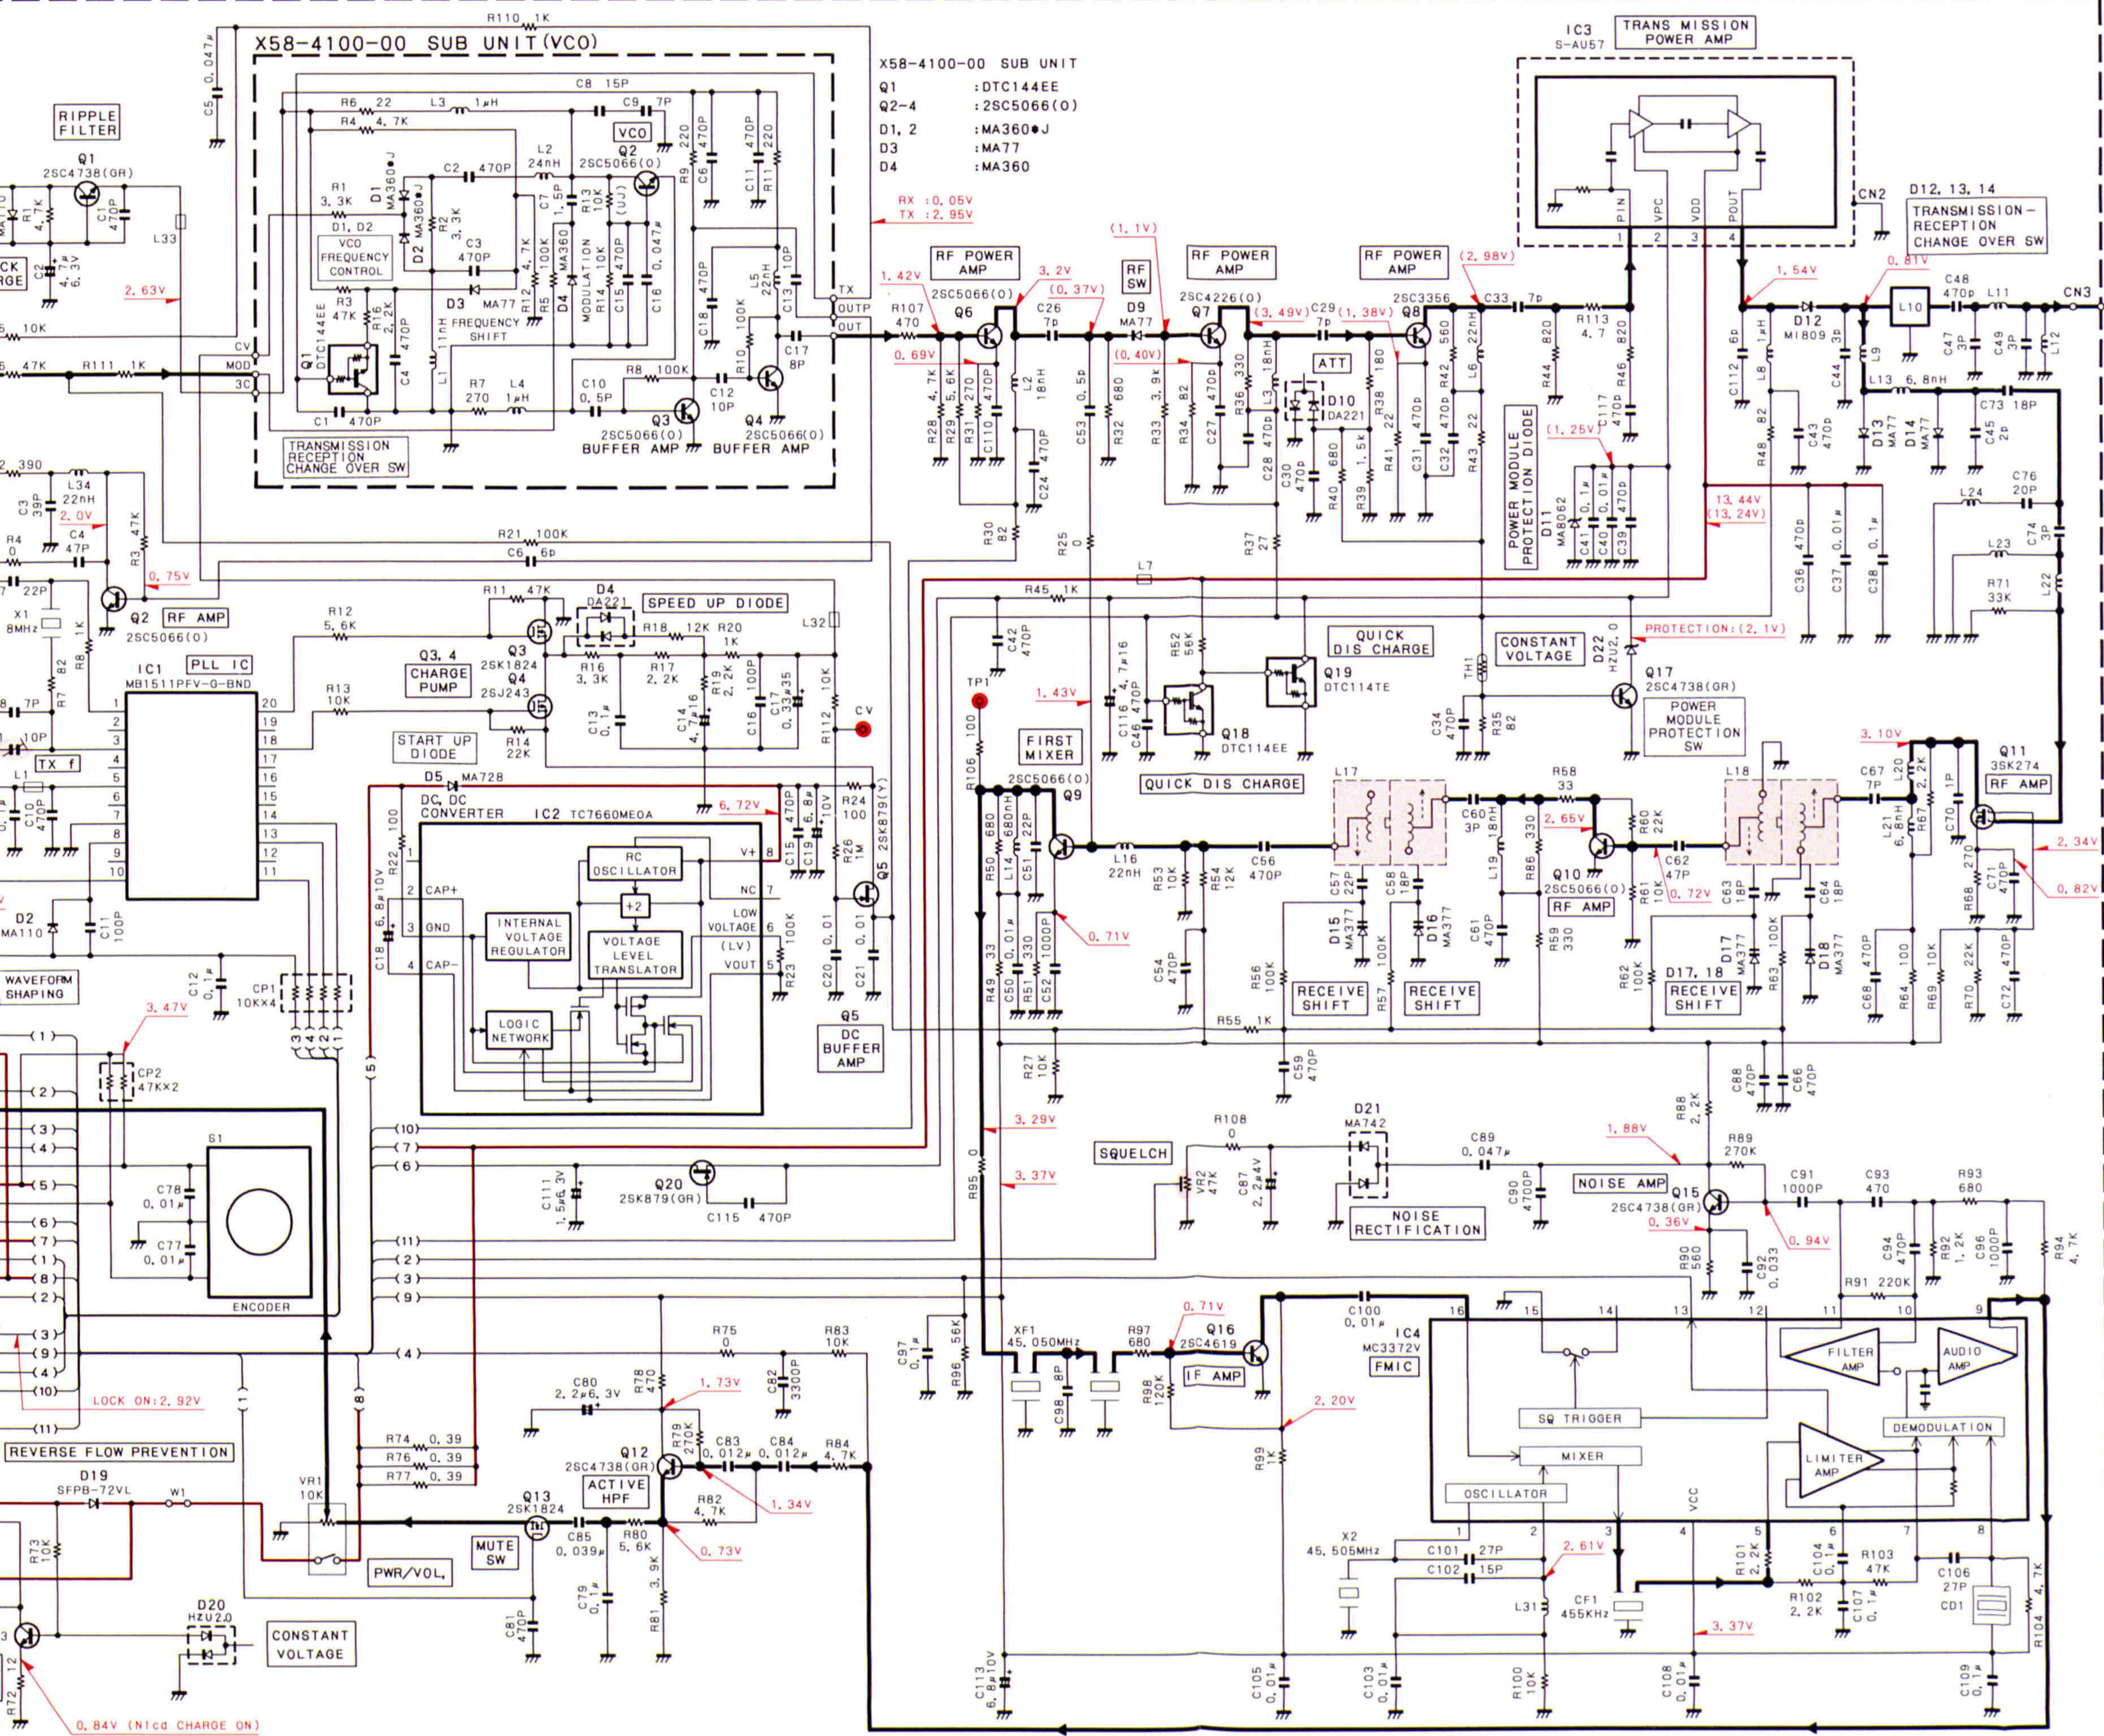

X57-438X-XX B/4

	X-XX	D208	D209	D212	D213	* A
TH-42AT	K	0-11	YES	YES	NO	YES
TH-42AT	P	0-11	YES	YES	NO	YES
TH-42AT	M1	0-21	YES	NO	YES	YES
TH-42AT	M2	0-22	NO	NO	YES	YES
TH-42AT	M3	0-22	NO	NO	YES	YES
TH-42AT	M4	0-22	NO	NO	YES	YES
TH-42A	M1	0-21	YES	NO	YES	OPTION
TH-42A	M2	0-22	NO	NO	YES	OPTION
TH-42A	M3	0-22	NO	NO	YES	OPTION
TH-42A	M4	0-22	NO	NO	YES	OPTION
TH-42E	T	2-71	YES	YES	YES	OPTION
TH-42E	E1	2-71	YES	YES	YES	OPTION
TH-42E	E2	2-72	NO	YES	YES	OPTION
TH-42E	E3	2-71	YES	YES	YES	OPTION
TH-42E	E9	2-71	YES	YES	YES	OPTION

(A/4)
 IC1 : MB1511PFV-G-BND
 IC2 : TC7660MEA
 IC3 : S-AU57
 IC4 : MC3372V

Q1, 12, 15, 17 : 2SC4738(OR)
 Q2, 6, 9, 10 : 2SC5066(O)
 Q3, 13 : 2SK1824
 Q4 : 2SJ243
 Q5 : 2SK879(Y)
 Q7 : 2SC4226(O)
 Q8 : 2SC3356
 Q11 : 3SK274
 Q14 : 2SD1483
 Q16 : 2SC4619
 Q18 : DTC114EE
 Q19 : DTC114TE
 Q20 : 2SK879(OR)

D1, 2 : MA110
 D4, 10 : DA221
 D5 : MA728
 D9, 13, 14 : MA77
 D11 : MA8062
 D12 : M1809
 D15-18 : MA377
 D19 : SFPB-72VL
 D21 : MA742
 D22, 20 : HZU2, 0


(B/4)
 IC201 : LC7387M-L
 IC202 : AT24C04N10S12, 5
 IC203 : S-81235PG-PI
 IC204 : LM301AD
 IC205 : S-8073SN-DT
 IC206 : HD404629B17TF
 IC207 : TA75W58FU
 IC208 : NJM2070M
 IC209 : TC7S08FU

Q201, 209, 217, 218 : 2SK1824
 Q202, 220 : 2SJ243
 Q203 : DTA114EU
 Q205 : UMC4
 Q206 : 2SK879(Y)
 Q207 : DTC114YE
 Q208, 219 : DTA143ZE
 Q210, 213, 214 : 2SB766(R, S)
 Q211 : 2SC4738(OR)
 Q212 : DTA144EE
 Q215, 216 : UMW1
 Q221 : 2SK1588

D201 : 1S373
 D202 : MA8039
 D204, D205 : B30-2116-05
 D206-210, 212, 213 : MA110
 D215 : HN2D01FU
 D216, 220 : MA2S111
 D217 : B30-2115-05
 D218 : DT23, 9(B)

TH-42A/AT/E TH-42A/AT/E

BLOCK DIAGRAM

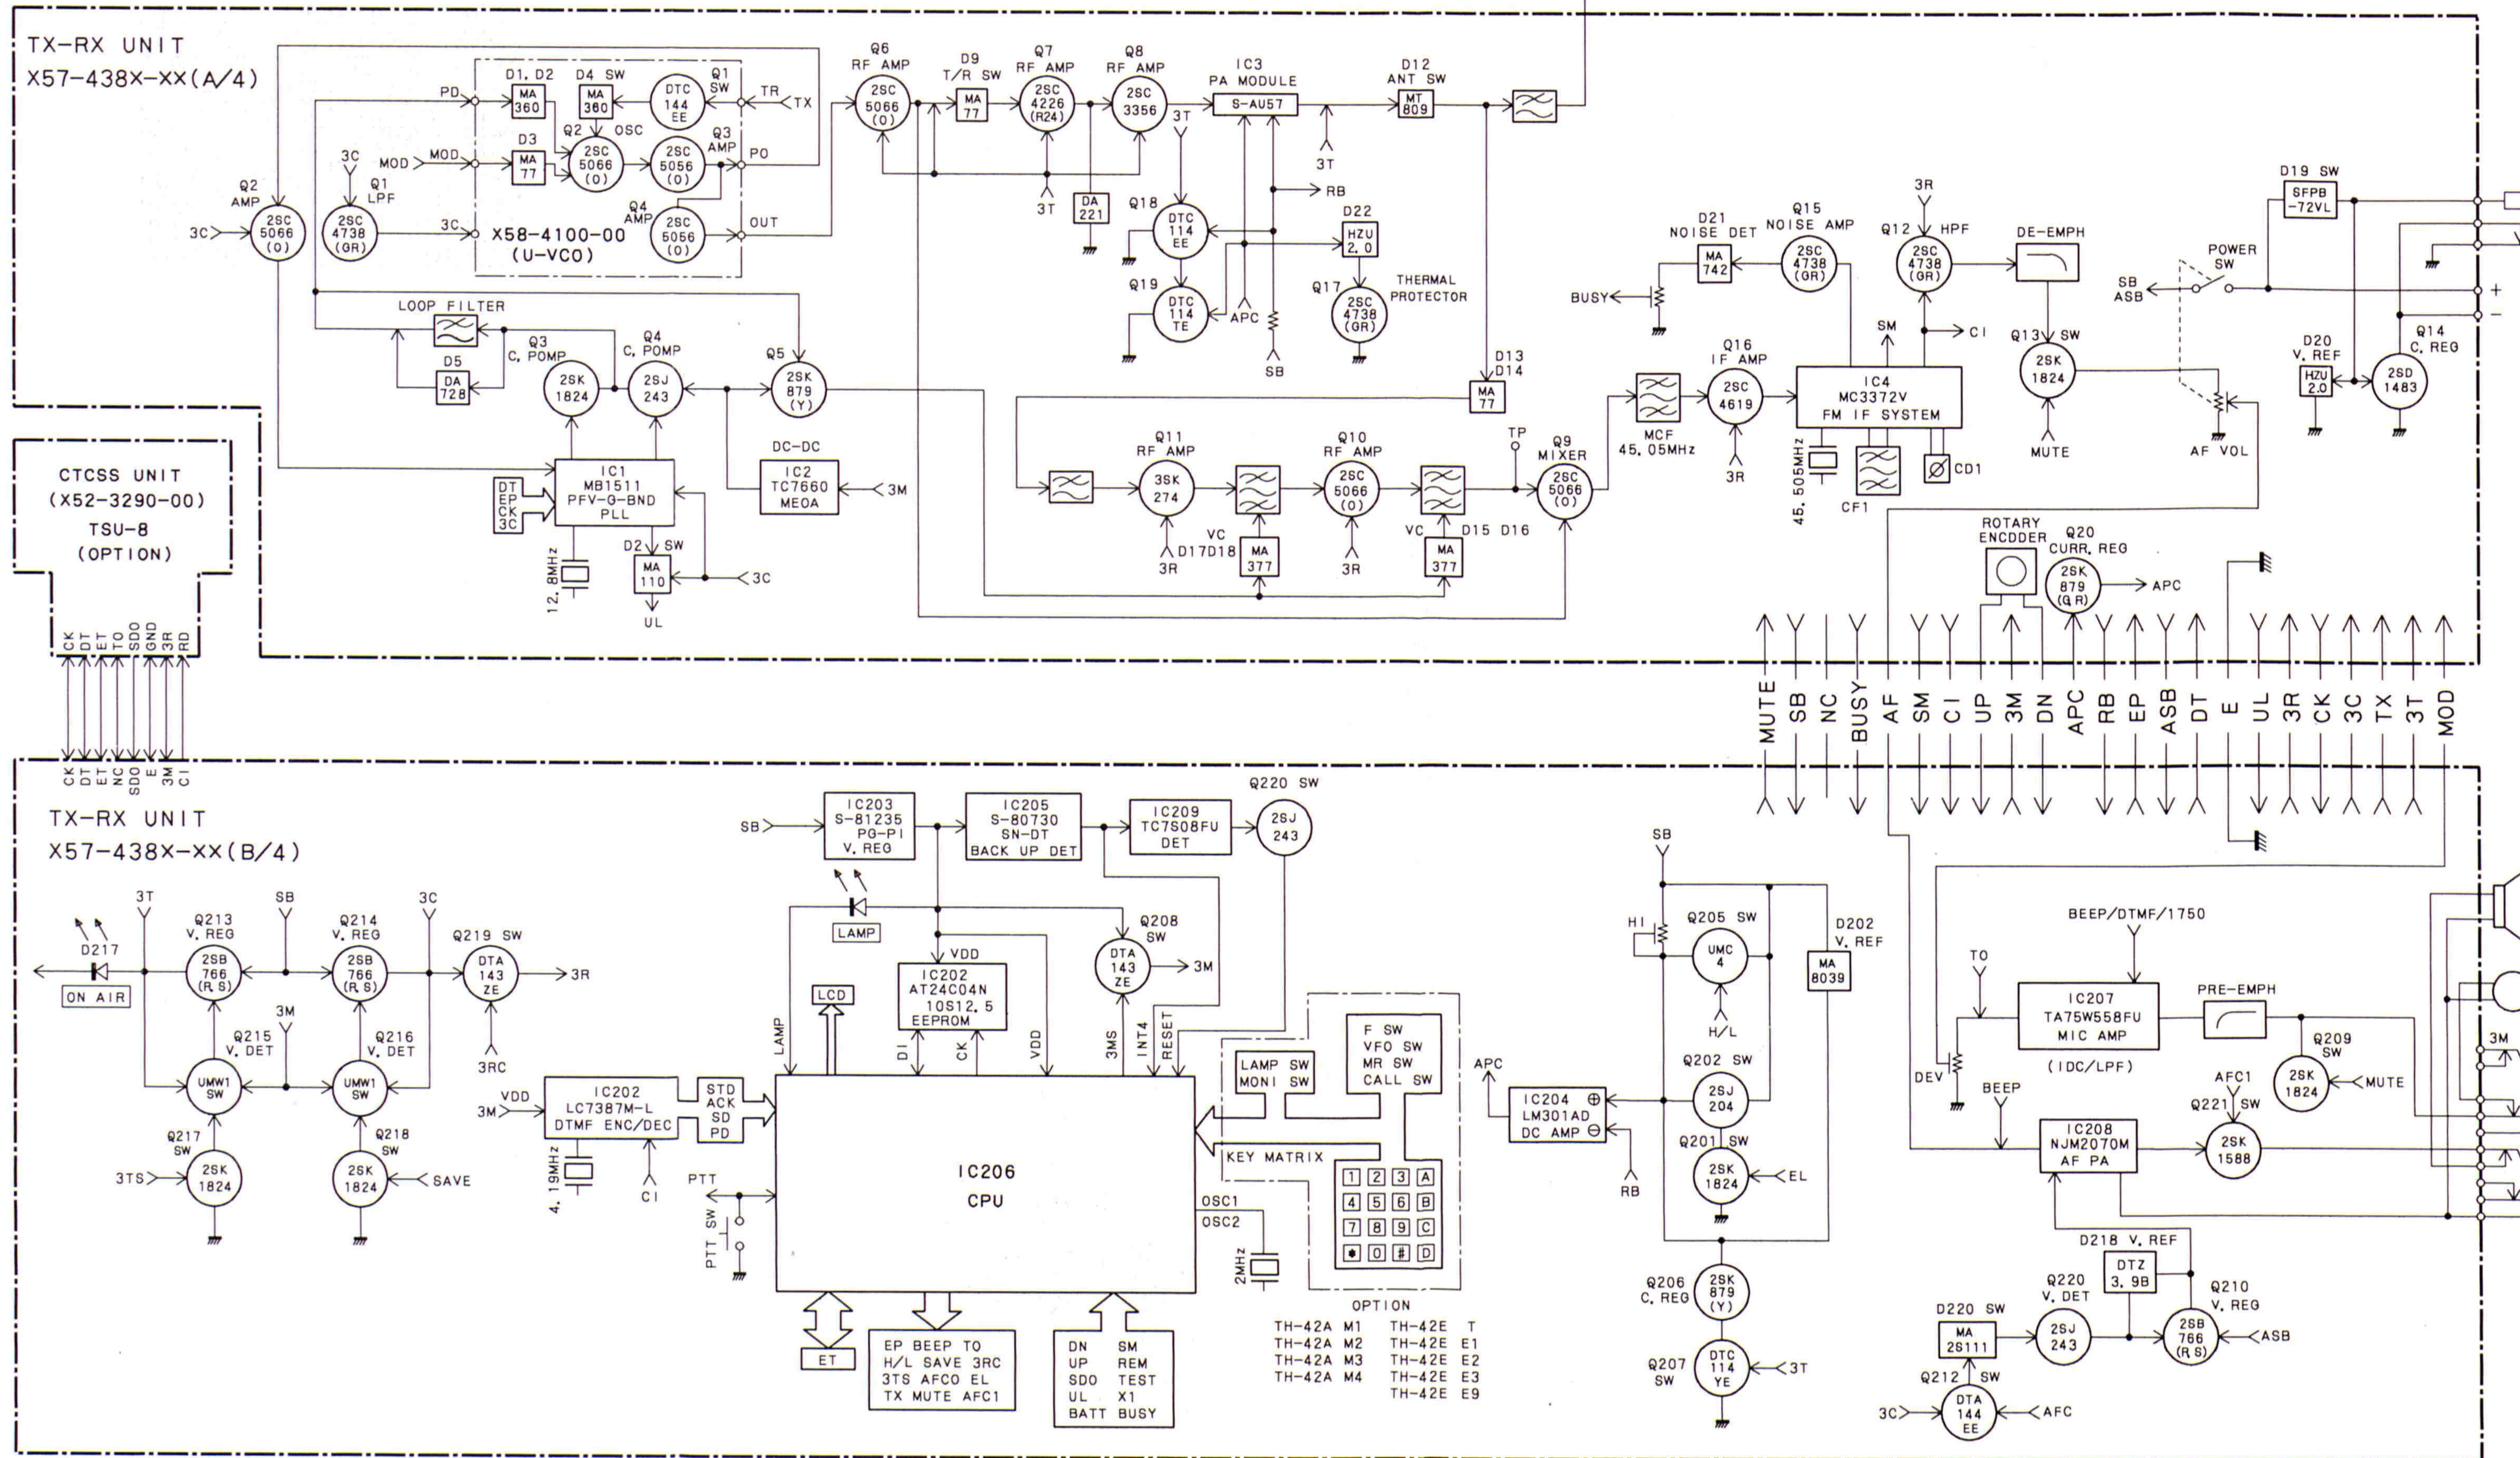

LEVEL DIAGRAM

DTP-2 (DTMF KEY PAD) / BC-17 (WALL CHARGER) /
BT-9 (BATTERY CASE) / PB-30,32 (STANDARD BATTERY PACK)

DTP-2 DTMF Key pad External View



BC-17 Electrical Characteristics

Charging System	0.1C normal charging (Charging through main unit)
Voltage	DC 13.5V
Capacity	75 mA
Charging time	Approx. 15 hours (PB-30/32/34) Approx. 30 hours (PB-33)

BC-17 External View



BT-9 External View



PB-30 External View




4.8V 600mAh

PB-32 External View



6V 600mAh


RX Section

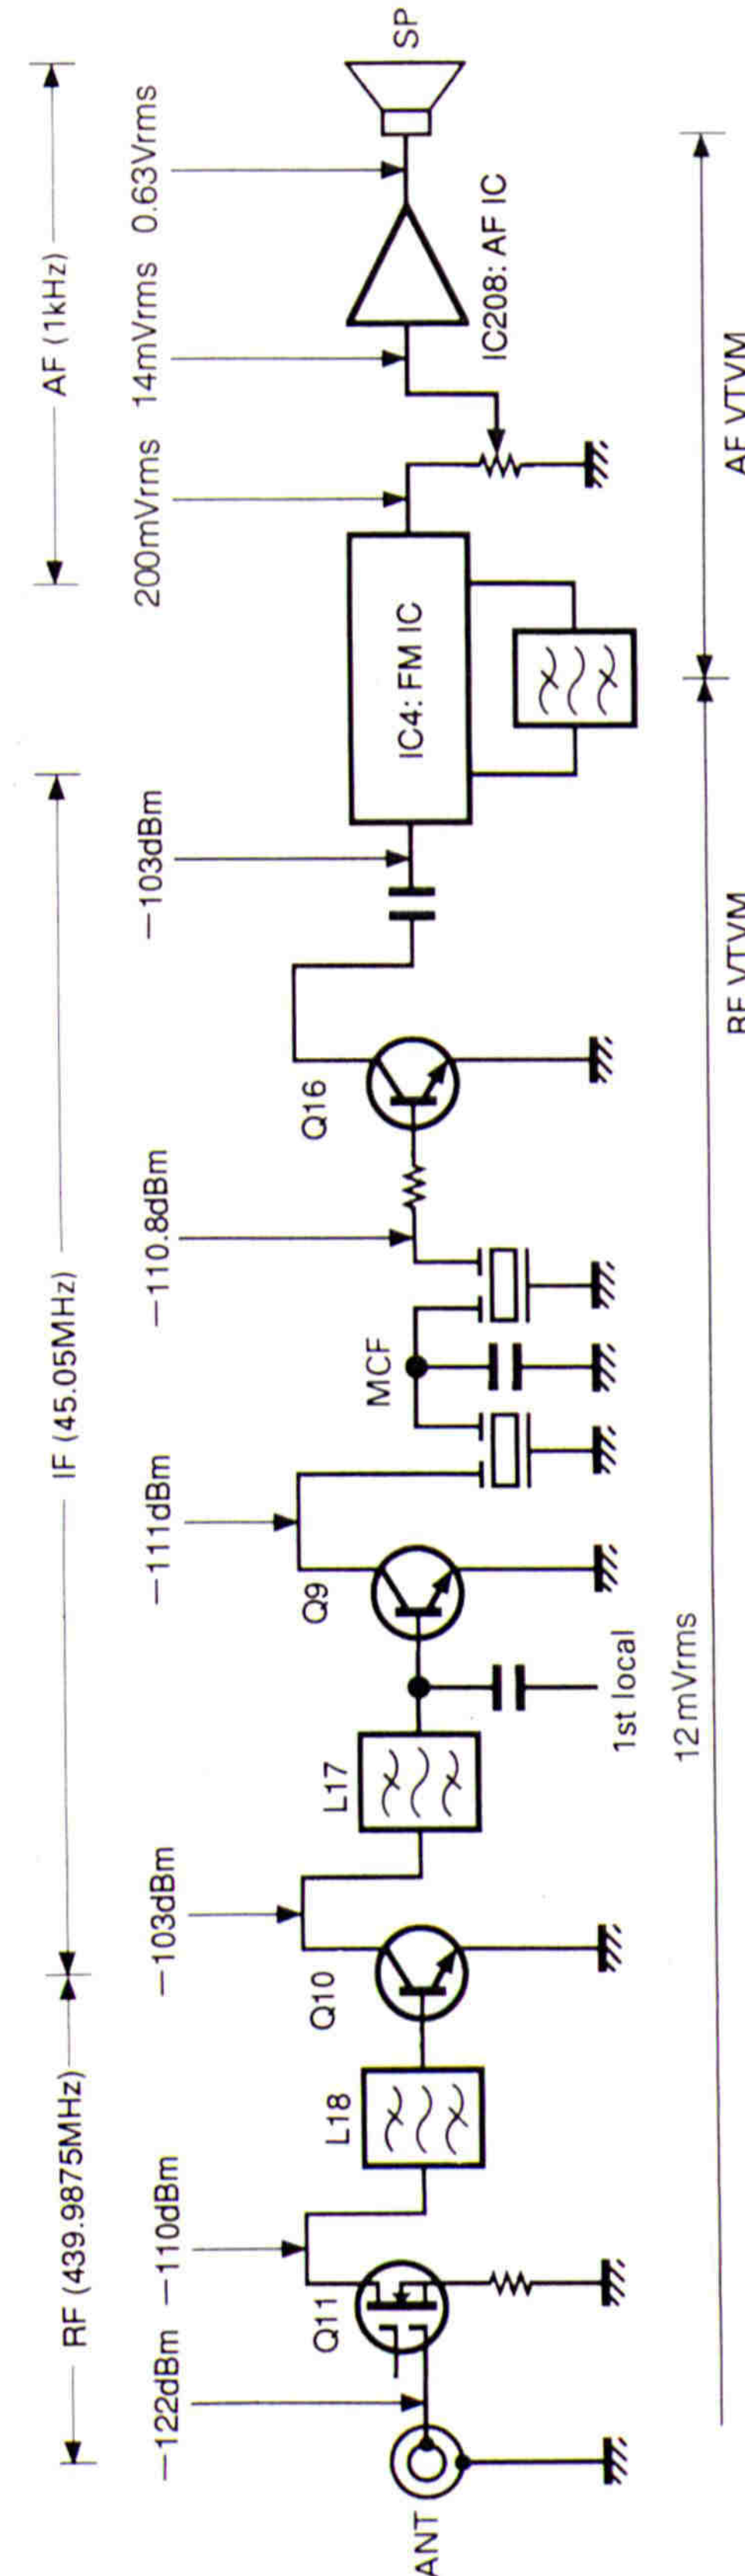

The AF level is the value measured by an AF VTVM when an SSG signal of -53dBm modulated with a 1kHz MOD and ± 3 kHz DEV. is received and the AF output is adjusted to 0.63V (8 Ω) using the AF volume control.

Each of the levels plotted from RF to the first IF is the level that can provide a 12 dB SINAD for an SSG signal through a 0.001 μ F capacitor. The first local level is the value measured by an RF VTVM.

TX Section

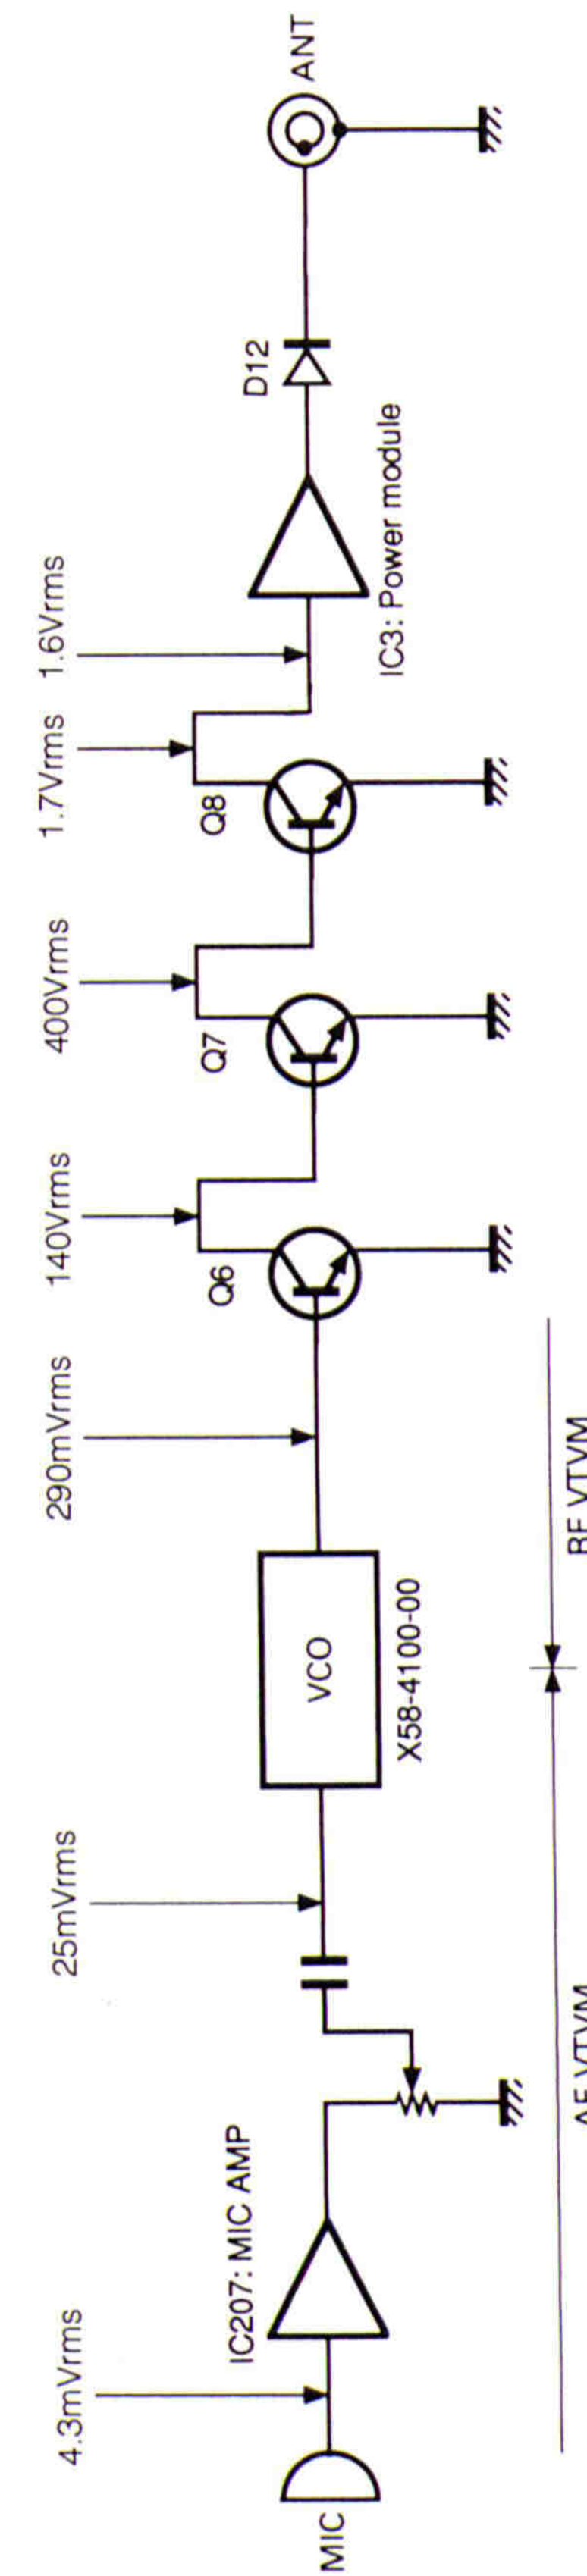

Measured values are at the EL power mode.

ANT output
EL : Approx. 50mW (power meter)
LO : 0.5W (power meter)
HI : 5W (power meter)

The AF level is measured by an AF VTVM. The RF level is measured by an RF VTVM. Each of levels measured at high impedance. The supply voltage from the DC IN terminal is 13.8V. The transmitting frequency is 439.9875MHz. The audio generator is controlled so that the input signal at the MIC pin has a deviation of ± 3 kHz for a modulation frequency of 1kHz.


TH-42A/AT/E

PB-33 (LONG LIFE BATTERY PACK)/

PB-34 (HIGH POWER BATTERY PACK) /


SC-37, 38, 39, 40 (SOFT CASE)

SC-37 External View

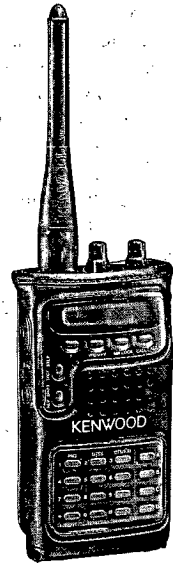


Size S

PB-33 External View




6V 1200mAh

PB-34 External View



9.6V 600mAh

SC-38 External View

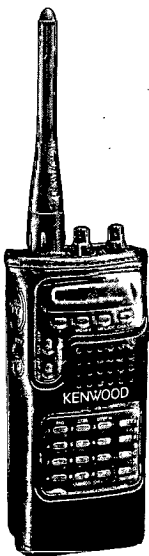

Size M

SC-39 External View



Size L

SC-40 External View



Size General

TH-42A/AT/E

SPECIFICATIONS

GENERAL

Frequency range (MHz)	
U.S./Canada	438 to 450
Europe	430 to 440
General market	430 to 440
Mode	F2, F3 (FM)
Usable temperature range	-20°C to +60°C (-4°F to +140°F)
Rated voltage	
* External power supply (DC IN)	5.0 to 16.0 V DC (13.8 V DC)
Battery terminals	4.0 to 15.0 V DC (6.0V DC)
Current drain (Approx.)	
Receive with no signal (Average)	45 mA
Battery Saver ON	15 mA
Transmit with H, 13.8V DC (Ext. power supply)	1.8 A
Transmit with H, 6.0V DC (Battery)	1.6 A
Transmit with L, 6.0V DC (Battery)	0.5 A
Transmit with EL, 6.0V DC (Battery)	250 mA
Grounding method	Negative ground
Dimensions (WxHxD)	56 x 116.5 x 24.5 mm
Dimensions (projections included)	65 x 130.5 x 29.8 mm
Weight ¹ (Approx.)	290 g
Microphone impedance	2 k Ω
Antenna impedance	50 Ω

TRANSMITTER

Power output (Approx.)	
H, 13.8 V	5 W
H, 6.0 V	2.5 W
L, 6.0 V	0.5 W
EL, 6.0 V	30 mW
Modulation	Reactance
Maximum frequency deviation	± 3.5 kHz to ± 5 kHz
Spurious emissions	-60 dB or less

RECEIVER

Circuitry	Double-conversion superheterodyne
1st intermediate frequency	45.05 MHz
2nd intermediate frequency	455 kHz
Sensitivity (12 dB SINAD)	-15 dB μ 0.18 μ V or less
Squelch sensitivity	-20 dB μ (0.1 μ V) or less
Selectivity	
-6 dB	12 kHz or more
-40 dB	28 kHz or less
Audio output (10 % distortion)	200 mW or higher (8 Ω load)

¹ Antenna, hand strap, belt hook, and PB-32 included.

Specifications are subject to change without notice due to developments in technology, and are guaranteed within Amateur bands only.

KENWOOD CORPORATION

Alive Mitake, 2-5, Shibuya 1-chome, Shibuya-ku, Tokyo 150, Japan

KENWOOD SERVICE CORPORATION

P.O. BOX 22745, 2201 East Dominguez Street, Long Beach, CA 90801-5745, U.S.A.

KENWOOD ELECTRONICS DEUTSCHLAND GMBH

Rembrücker Str. 15, 6056 Heusenstamm, Germany

KENWOOD ELECTRONICS BENELUX N.V.

Mechelsesteenweg 418 B-1930 Zaventem, Belgium

TRIO-KENWOOD FRANCE S.A.

13, Boulevard Ney, 75018 Paris, France

TRIO-KENWOOD U.K. LIMITED

KENWOOD House, Dwight Road, Watford, Herts., WD1 8EB United Kingdom

KENWOOD ELECTRONICS NEDERLAND B.V.

Amsterdamseweg 35, 1422 AC Uithoorn, The Netherlands

KENWOOD ELECTRONICS ITALIA S.p.A.

Via G. Sirtori, 7/9 20129 Milano, Italy

KENWOOD ESPAÑA S.A.

Bolivia, 239-08020 Barcelona, Spain

KENWOOD ELECTRONICS AUSTRALIA PTY. LTD.

(A.C.N. 001 499 074)

P.O. Box 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia

KENWOOD & LEE ELECTRONICS, LTD.

Unit 3712-3724, Level 37, Tower one Metroplaza, 223 Hing Fong Road, Kwai Fong, N.T., Hong Kong

KENWOOD ELECTRONICS CANADA INC.

6070 Keswile Road, Mississauga, Ontario, Canada L5T 1S8