

ONKYO SERVICE MANUAL

6.1ch SPEAKER SYSTEM for HT-S760

MODEL **SKS-HT200**

SKW-200 / SKF-200F / SKC-200C / SKM-200S/SKB-200



DD	120V AC, 60Hz
----	---------------

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

SPECIFICATION

SKW-200

Type	Bass-reflex with built-in power amplifier
Frequency response	27 Hz-150 Hz
Output power	150 W Dynamic
Input sensitivity	220 mV
Input impedance	15 k Ω
Woofers	8-inch cone type
Power supply	AC 120 V, 60 Hz
Power consumption	75 W
Dimensions (W×H×D)	10-13/16" × 20-3/8" × 16-3/16" / 275 × 518 × 411 mm
Weight	30.0 lbs. / 13.6 kg

Specifications and appearance may subject to change for improvement without prior notice.

SPECIFICATION

Model	SKF-200F
Type	2 way Bass-reflex front speaker
Impedance	8 Ω
Maximum input power	100 W
Output sound pressure level	86 dB/W/m
Frequency response	55 Hz-35,000 Hz
Woofers	5-1/4-inch cone type $\times$ 2
Tweeter	1-inch balanced dome type
Dimensions (W $\times$ H $\times$ D)	7-7/16" $\times$ 16-1/2" $\times$ 9-1/4" / 189 $\times$ 419 $\times$ 235 mm
Weight	11.7 lbs. / 5.3 kg
Others	Magnetic shielding Removable grille
Model	SKC-200C
Type	2 way Bass-reflex center speaker
Impedance	8 Ω
Maximum input power	100 W
Output sound pressure level	85 dB/W/m
Frequency response	65 Hz-35,000 Hz
Woofers	4-inch cone type $\times$ 2
Tweeter	1-inch balanced dome type
Dimensions (W $\times$ H $\times$ D)	15-1/4" $\times$ 6-3/16" $\times$ 7-13/16" / 387 $\times$ 157 $\times$ 199 mm
Weight	7.9 lbs. / 3.6 kg
Others	Magnetic shielding
Model	SKM-200S
Type	2 way Bass-reflex surround speaker
Impedance	8 Ω
Maximum input power	100 W
Output sound pressure level	82 dB/W/m
Frequency response	65 Hz-35,000 Hz
Woofers	4-inch cone type
Tweeter	1-inch balanced dome type
Dimensions (W $\times$ H $\times$ D)	6-15/16" $\times$ 10-7/16" $\times$ 4-15/16" / 175 $\times$ 265 $\times$ 125 mm
Weight	4.0 lbs. / 1.8 kg
Model	SKB-200
Type	2 way Bass-reflex surround back speaker
Impedance	8 Ω
Maximum input power	100 W
Output sound pressure level	82 dB/W/m
Frequency response	65 Hz-35,000 Hz
Woofers	4-inch cone type
Tweeter	1-inch balanced dome type
Dimensions (W $\times$ H $\times$ D)	6-15/16" $\times$ 10-7/16" $\times$ 4-15/16" / 175 $\times$ 265 $\times$ 125 mm
Weight	4.0 lbs. / 1.8 kg

Specifications and appearance may subject to change for improvement without prior notice.

A

B

C

D

EXPLODED VIEW
SKW-150



1

2

3




4

5

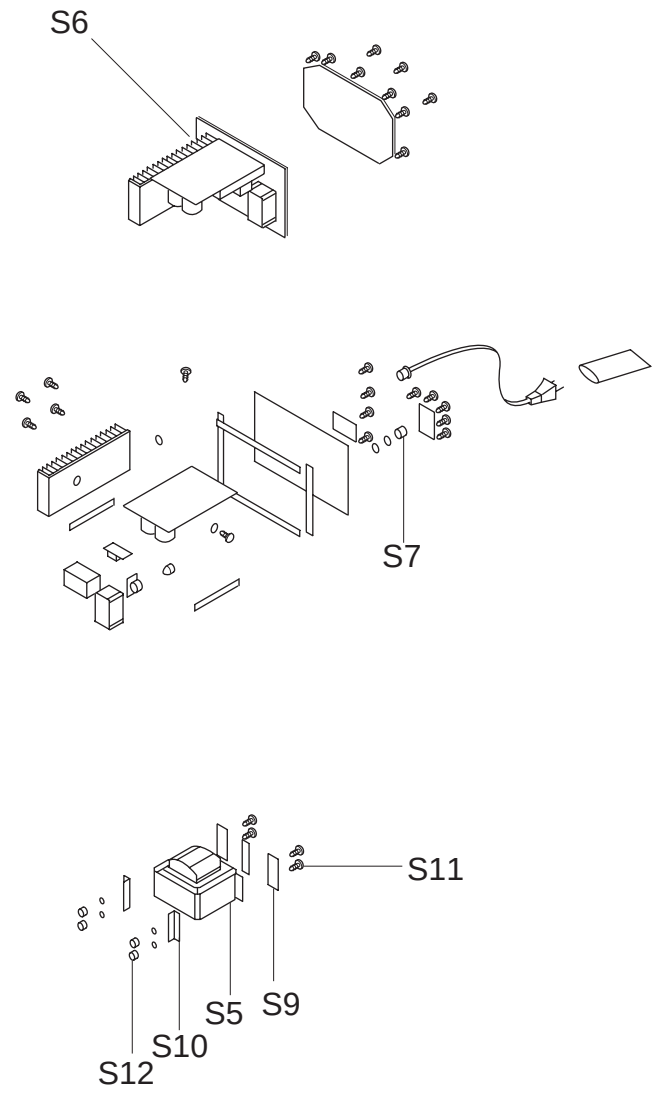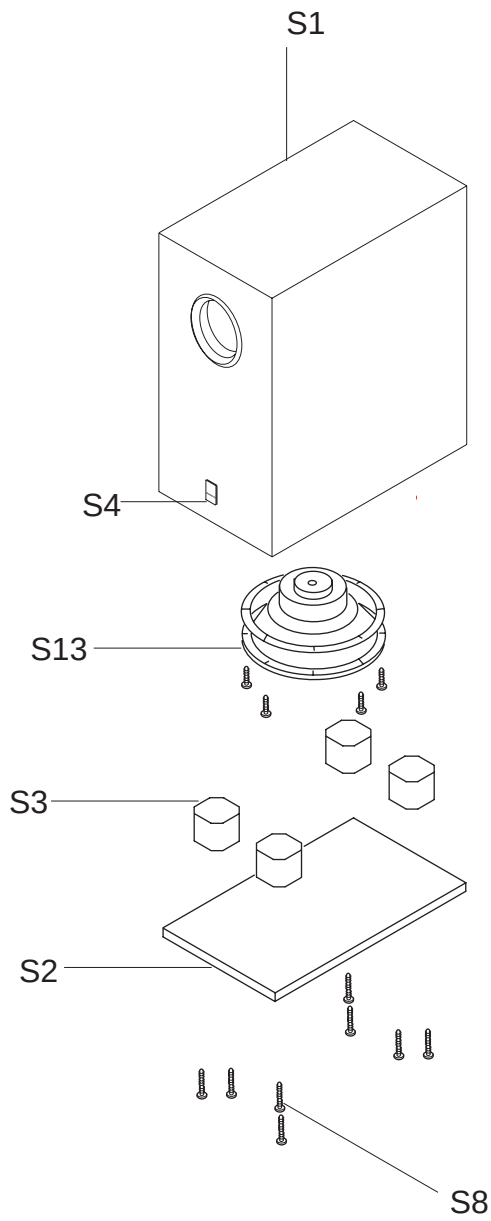


SCHEMATIC DIAGRAM


U1 MAIN PC BOARD (LVM0199C011)

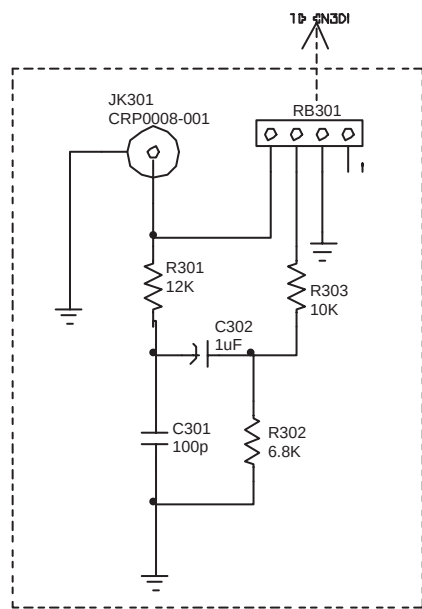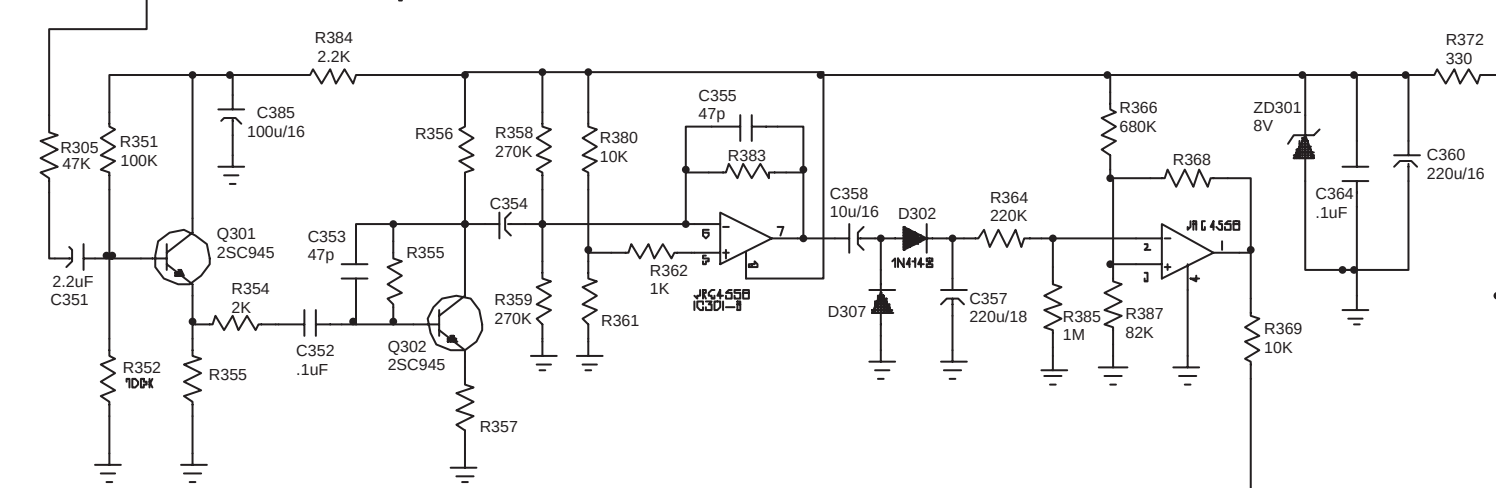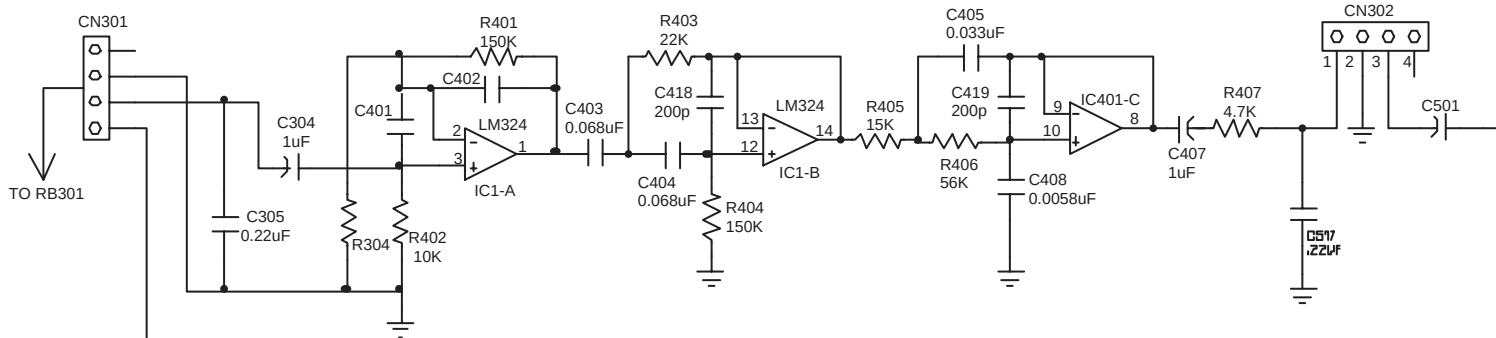


U3 JACK PC BOARD (LVM0199C21)

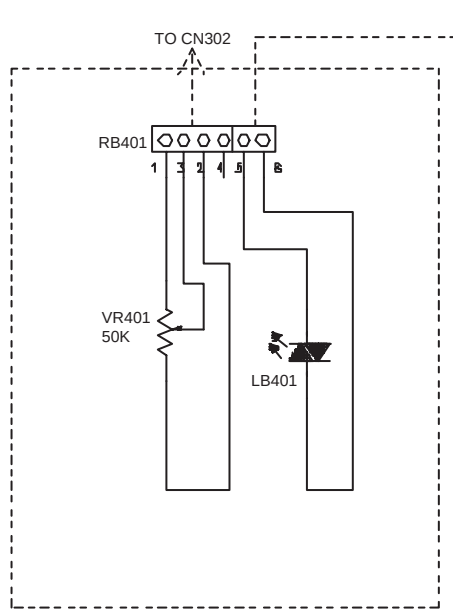


U2 VOLUME PC BOARD (LVA0222C001)

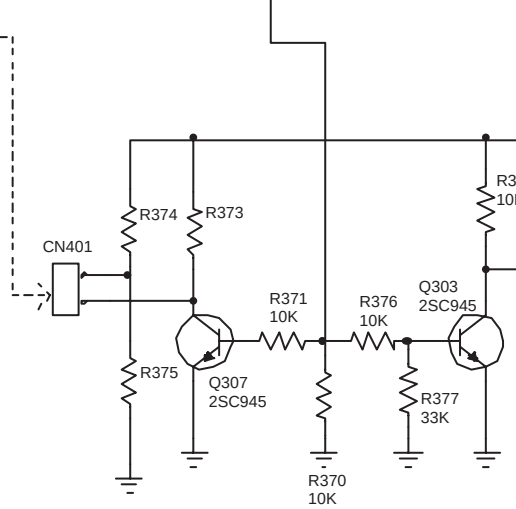

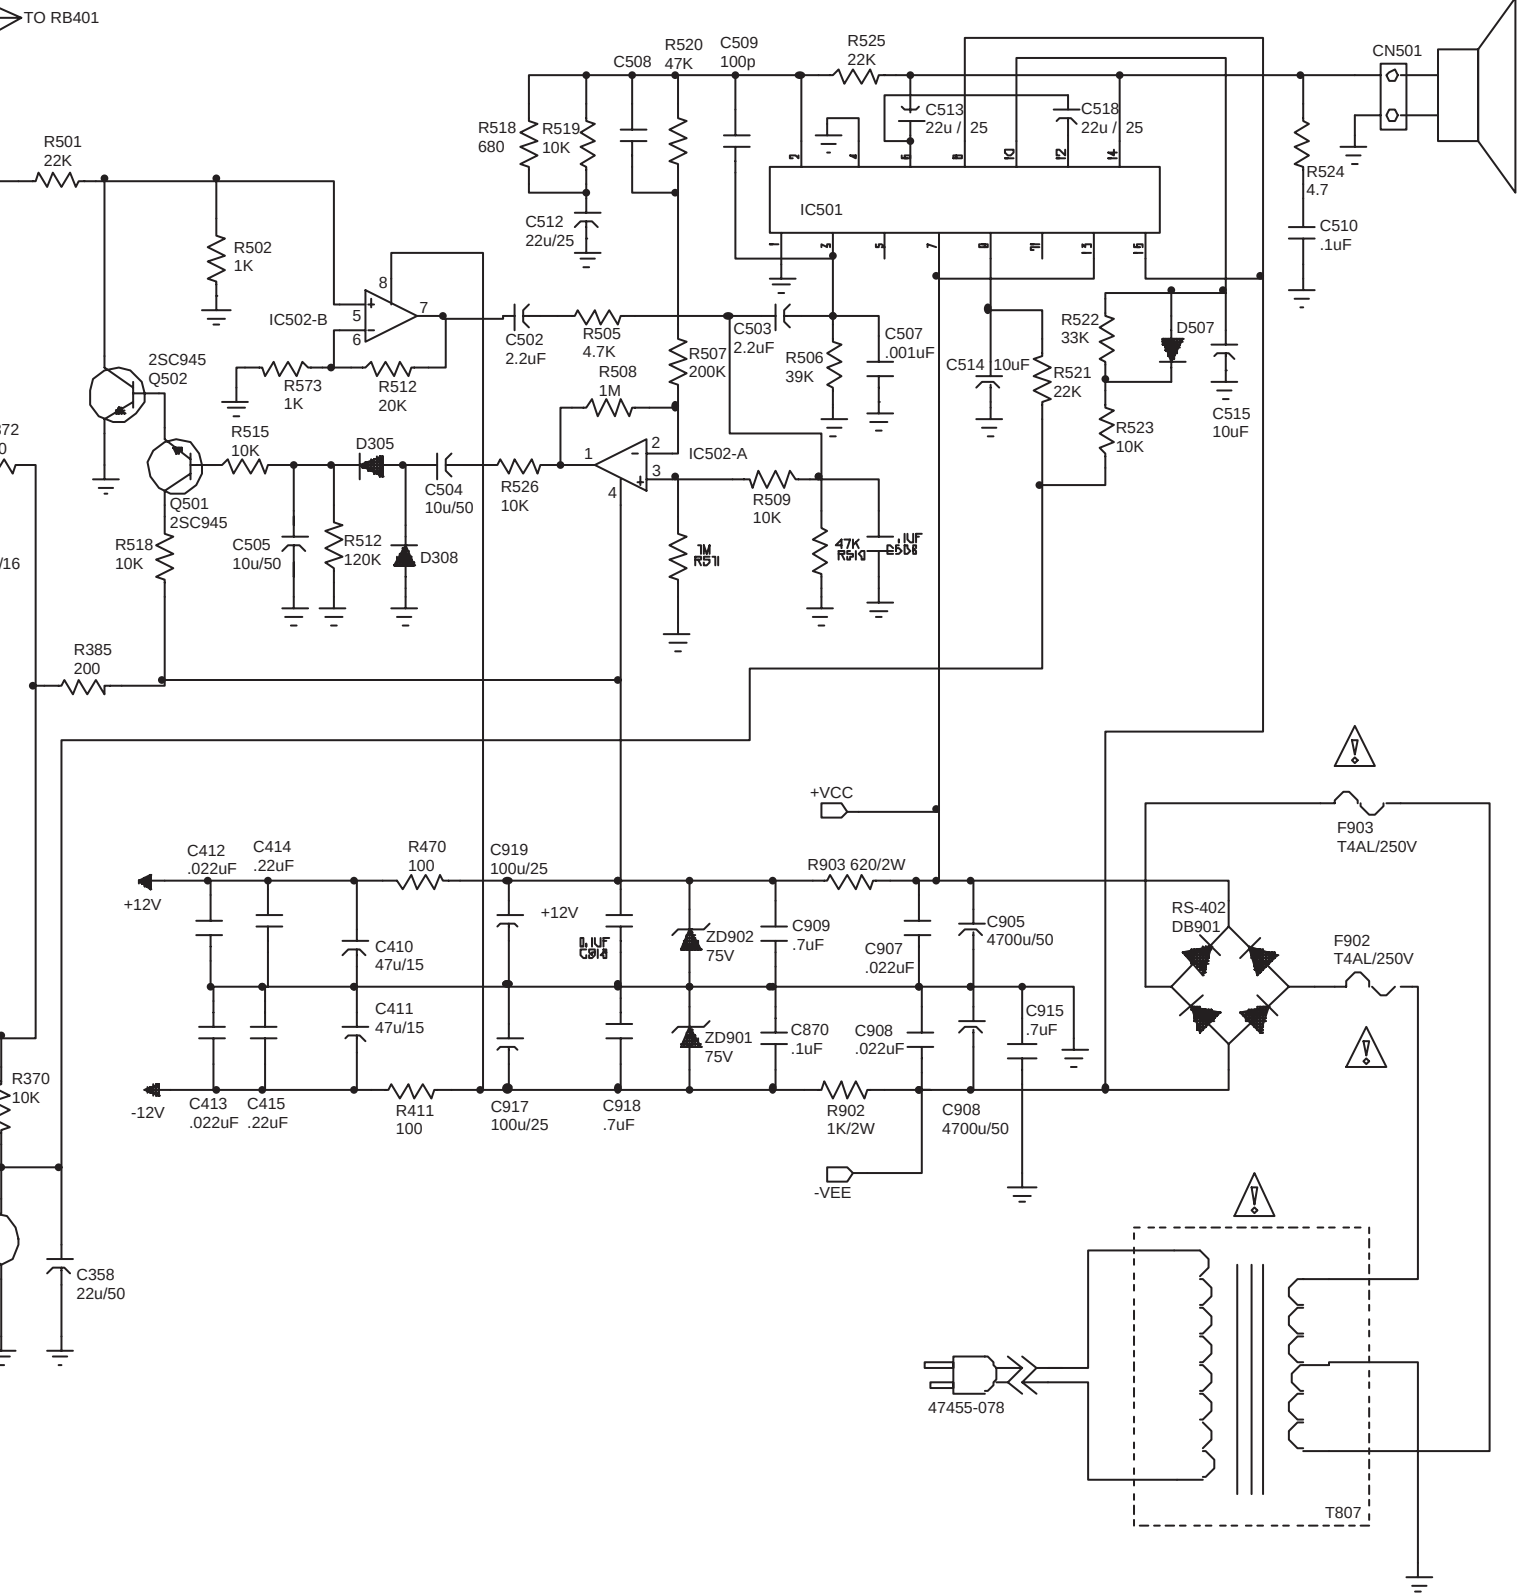

	A	
SCHEMATIC DIAGRAM		

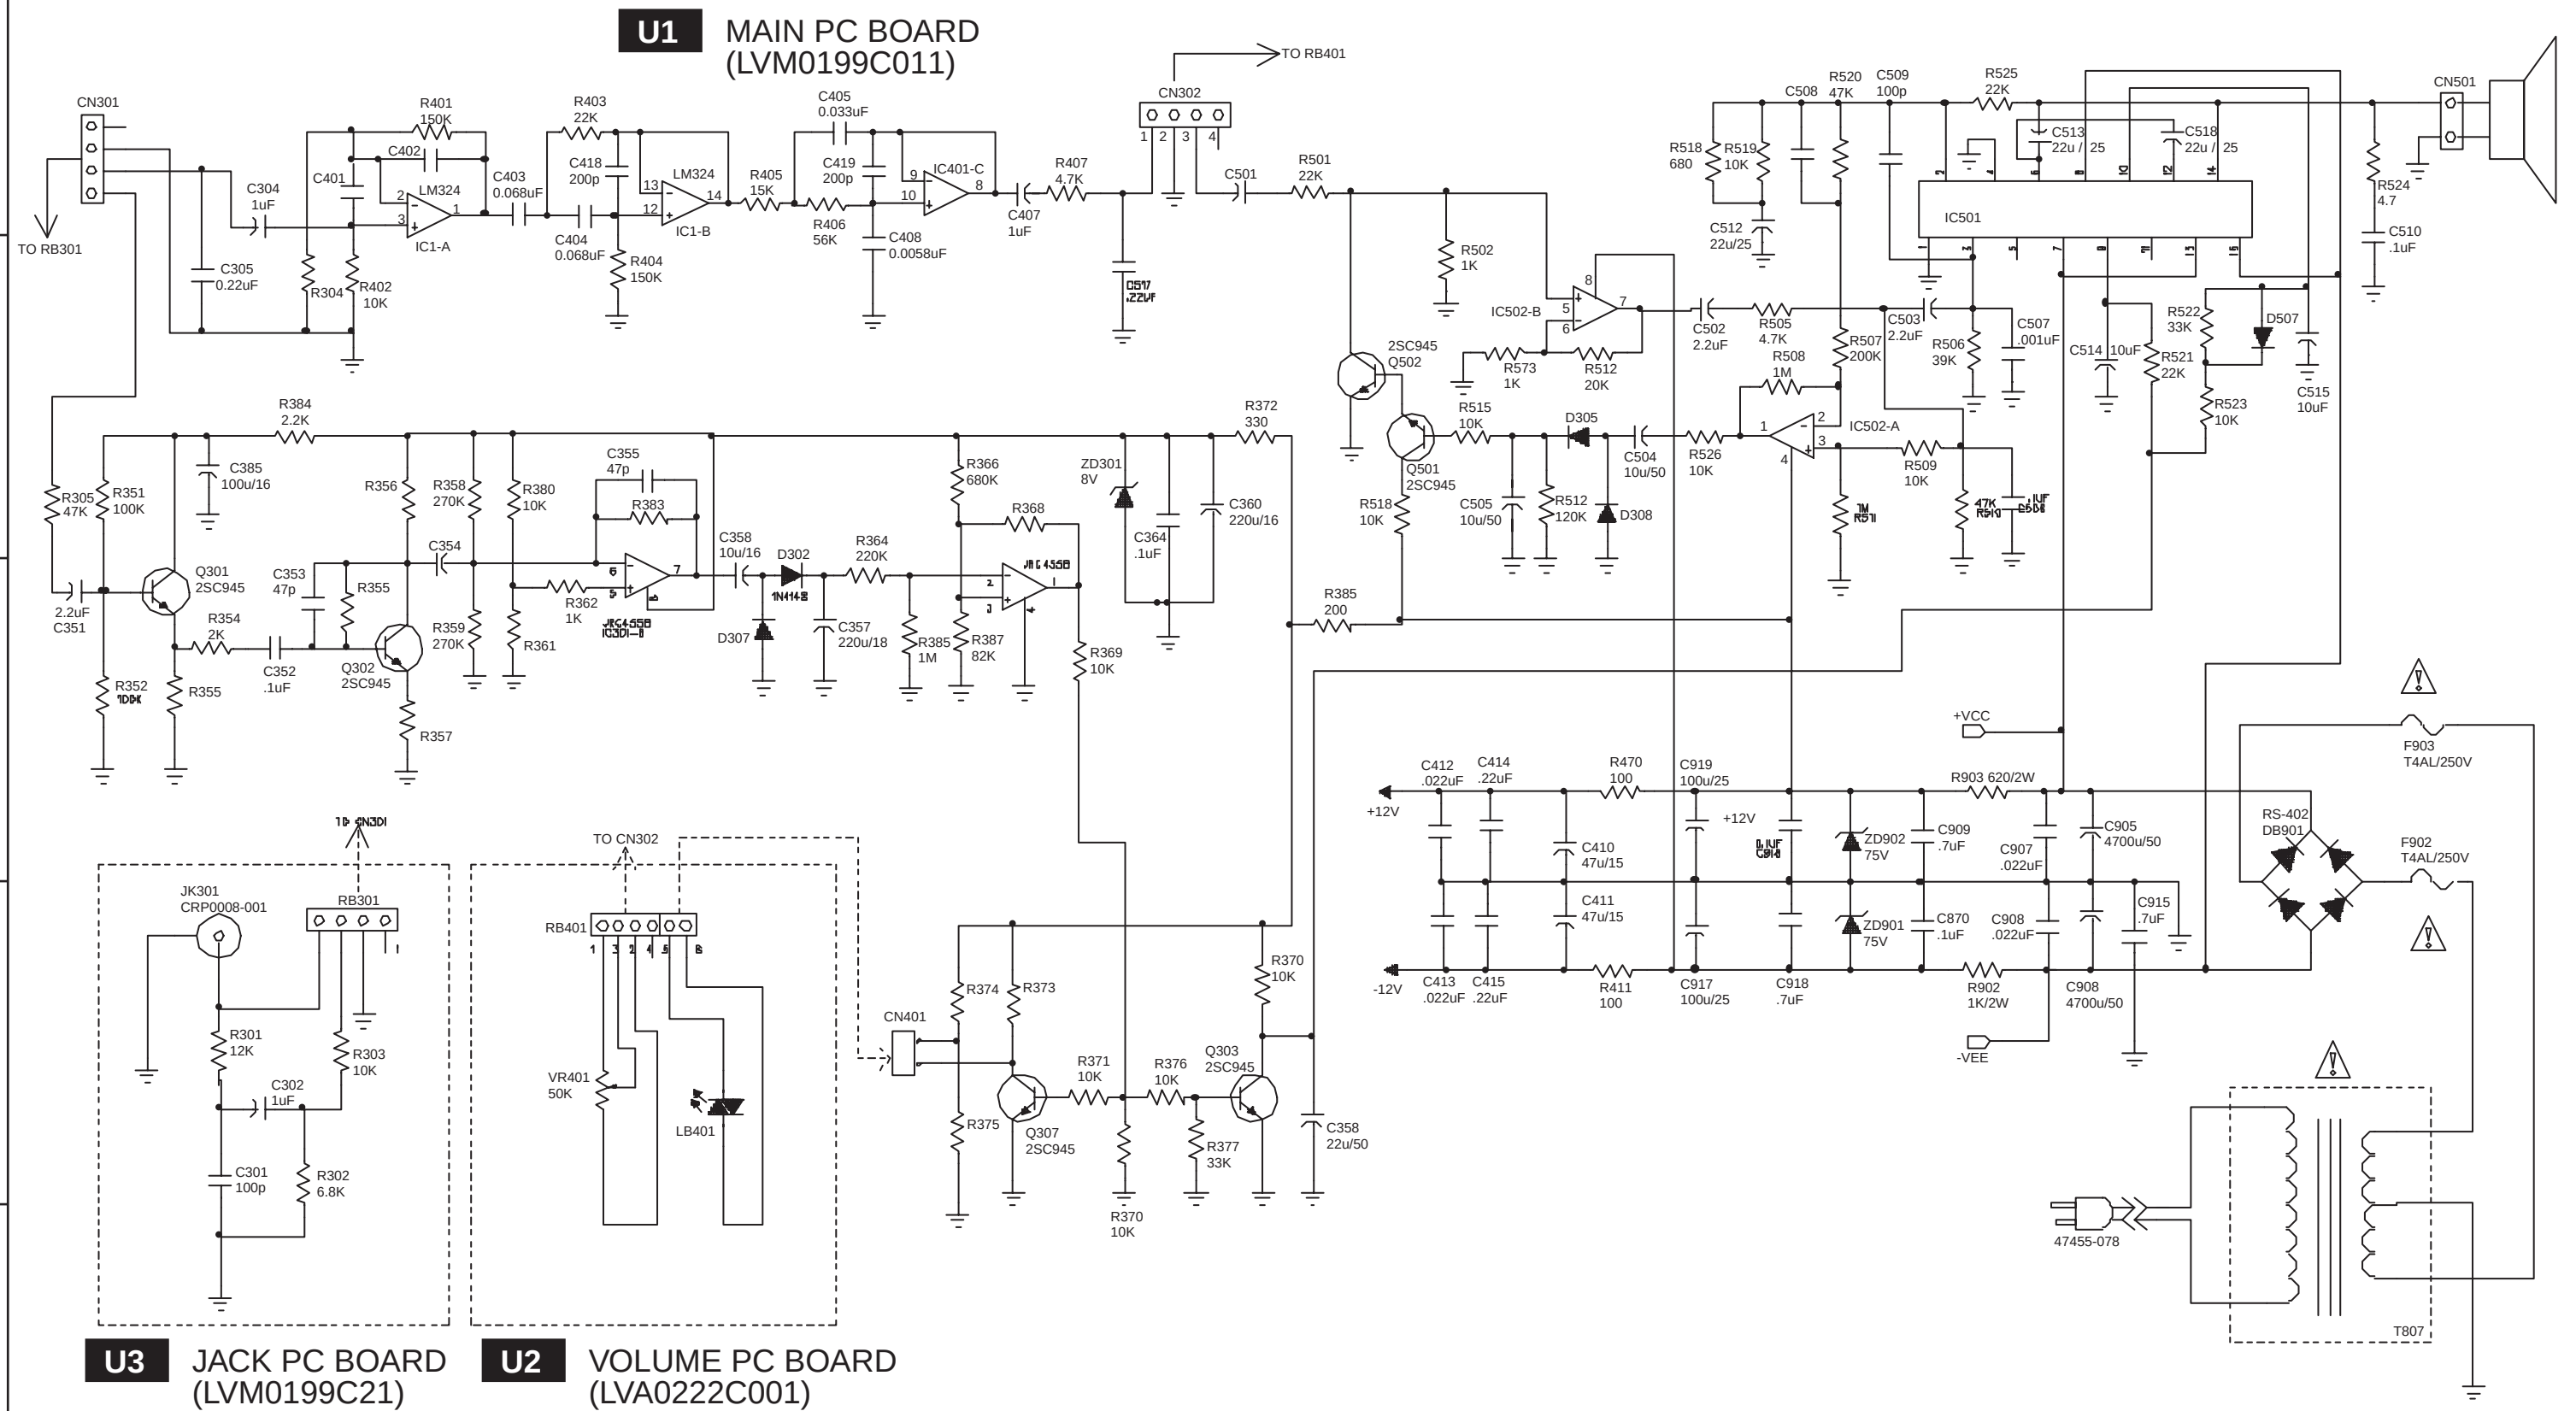

SKS-HT200 Parts list

Ref. No.	Description	Specification		Part No.
Packing view				
P1	Speaker cord	AWG #22 L=4.5m	White / Brack	VWS330122-4500
P2	Speaker cord	AWG #22 L=4.5m	Red / Brack	VWS331022-4500
P3	Speaker cord	AWG #22 L=3.0m	Green / Brack	VWS330922-3000
P4	Speaker cord	AWG #22 L=9.0m	Blue / Brack	VWS330522-9000
P5	Speaker cord	AWG #22 L=9.0m	Gray / Brack	VWS330722-9000
P6	Speaker cord	AWG #22 L=9.0m	Brown / Brack	VWS330622-9000
P7	Pin cable	3m MONO Black		VCR000001-0042
P10	Polyfoam	Top		ITF8302750001
P11	Polyfoam	Center		ITF8302760001
P12	Polyfoam	Bottom		ITF8302770001
P13	Carton		HT-R760(B)	ICC802095-BM10
P14	POLYFOAM BLOCK A	17x513x256mm		ICF830000-0250
P15	POLYFOAM BLOCK B	43x525x256mm		ICF830000-0251
	H.M. BAG	POLY BAG L1000xW720xT0.025	SKW-200	IVA8032010133
	H.M. BAG	POLY BAG L710xW460xT0.025	SKF-200F	IVA8032010049
	H.M. BAG	POLY BAG L640xW380xT0.025	SKC-200C	IVA8032010050
	H.M. BAG	POLY BAG L465xW355xT0.025	SKM-200S	IVA8032010025
Satellite speaker				
	Bacl label	L	SKF-200FL	YLB810002FL10
	Bacl label	R	SKF-200FR	YLB810002FR10
	Bacl label	C	SKC-200C	YLB810002C010
	Bacl label	L	SKM-200SL	YLB810002SL10
	Bacl label	R	SKM-200SR	YLB810002SR10
	Bacl label		SKM-200SR	YLB810002SC10
	METAL CRAMP	HANGER PLATE	SKM-200S	DCA5000020001
Sub woofer				
S1	CABINET AS	with DUCT and ACOUSTIC FELT		ANK802M95-BM10
S2	STAND BOARD			EVT81003515W0
S3	PLASTIC FOOT			BPE8000040001
S4	Logo Badge	FRONT PLATE		BPL8001230001
S5	PWR TRANS			TT11120010120
S6	AMPLIFIER	with LED CORD ASSY and AC CORD		ABNSKW200-CV01
S7	KNOB	Include in AMPLIFIER		-
S8	SCREW	4x75 for PLASTIC FOOT		NST8550514750
S9	RUBBER PAD	for PWR TRANS		ICH0800270001
S10	BRACKET	for PWR TRANS		GSE0001100003
S11	SCREW	4x25 for PWR TRANS		HSD0431033250
S12	NUT	M4 for PWR TRANS		HNT8116801300
S13	WOOFER UNIT			FSB82AC800401

For IC's and Transistor parts, please see SKW-100 parts list.

ONKYO CORPORATION

Sales & Product Planning Div. : 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN
Tel: 072-831-8111 Fax: 072-833-5222

ONKYO U.S.A. CORPORATION

18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.
Tel: 201-785-2600 Fax: 201-785-2650 E-mail: onkyo@onkyousa.com