


ONKYO SERVICE MANUAL

SYNTHESIZED FM STEREO/AM TUNER MODEL T-4087

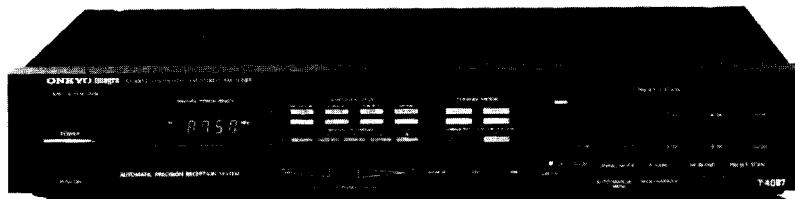

Silver and black models

UD, UDN, BUD, BUDN	120V AC, 60Hz
UG, BUG	220V AC, 50Hz
UW, BUW	120 or 220V AC, 50/60Hz
UQA, UQB	240V AC, 50Hz

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK Δ ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

TABLE OF CONTENTS

Specifications	2
Service procedures	2
Block diagram	3
Exploded view	4
Parts list	5
Microcomputer operation	6
Adjustment procedures	8
IC block diagram	11
Printed circuit board view	15
Schematic diagram	17
Pc board-parts list	19
Packing view	24

ONKYO
AUDIO COMPONENTS

SPECIFICATIONS

FM:

Tuning Range:	87.9 – 107.5 MHz (200kHz steps) (D) 87.50 – 108.00 MHz (50kHz steps) (G/W)
Usable Sensitivity:	Mono: 10.3dBf, 0.9µV, IHF (75Ω) Stereo: 17.2dBf, 2.0µV
50dB Quieting Sensitivity:	Mono: 16.0dBf, 1.7µV Stereo: 36.0dBf, 17µV
Capture Ratio:	1.0dB
Image Rejection Ratio:	100dB
IF Rejection Ratio:	100dB
Signal-to-Noise Ratio:	Mono: 85dB Stereo: 77dB
Alternate Channel Attenuation:	80dB IHF (±400kHz) (Narrow) (D)
Selectivity:	80dB DIN (Narrow) (±300kHz, 40kHz Dev.) (G)
AM Suppression Ratio:	55dB
Total Harmonic Distortion:	Mono: 0.03% Stereo: 0.07% (wide)
Frequency Response:	30 – 15,000Hz +0.5dB/ –1.5dB
Stereo Separation:	45dB at 1kHz 33dB at 70 – 10,000Hz
Output Voltage:	0 ~ 1.5V
Muting Level:	17.2dBf, 4.0µV

AM:

Tuning Range:	522 – 1611kHz (9kHz steps) (G) 530 – 1610kHz (10kHz steps) (D)
Usable Sensitivity:	25µV
Image Rejection Ratio:	40dB
IF Rejection Ratio:	40dB
Signal-to-Noise Ratio:	40dB
Total Harmonic Distortion:	0.7%
Output Voltage:	0 ~ 400mV

General

Antennas:	FM: coaxial terminal AM: built-in loop antenna and external terminal
Semiconductors:	FETs: 8 TR: 39 ICs: 20 Diodes: 96 LEDs: 31
Dimensions (WxHxD):	435 x 77 x 372mm (17-18" x 3" x 14-5/8")
Weight:	4.4kg., 9.7lbs. (G)
Dimensions (WxHxD): (with side panels)	465 x 77 x 372mm (18-3/8" x 3" x 14-5/8")
Weight: (with side panels)	5.1kg., 11.2lbs (D)

Specifications and features are subject to change without notice.

SERVICE PROCEDURES

1. Replacement of lamp

This unit is used two lamps listed below.

Circuit no.	Part no.	Description
PL001	210149	PL14V0.06AW-3.0, Power indicator
PL902	210064A	PL6.3V, 250mA, Dial plate illumination

2. Safety-check output

(Only U.S.A. model)

After correcting the original service problem, perform the following safety check before releasing the set to the customer. Connect the insulating-resistance tester between the plug of power supply cord and nickel screw on the back panel.

Specifications: 3.3Mohm ± 10% at 500V.

3. Change of band step/de-emphasis

Universal models are equipped with a band step/de-emphasis switch on the back panel. This switch is set to following position.

	Emphasis	AM step
set position	50µsec.	9 kHz
other	75µsec.	10 kHz

4. Change of voltage


Universal models are equipped with a voltage selector to conform with local power supplies. This switch is located on the back panel. Be sure to set this switch to match the voltage of the power supply in your area before tuning the power switch on.

This switch is set to 220V at the factory. Voltage is changed by sliding the groove in the switch with the screwdriver to the right or left. Confirm that the switch has been moved all the way to the right or left before turning the power switch on.

5. Memory preservation

This unit does not require memory preservation batteries. A built-in memory power back-up system preserves contents of the memory during power failures and even when the unit is unplugged. The unit must be plugged in and the power switch turned on and off once in order to charge the super capacitor of C409. Note that since this is not a permanent memory, the power switch must be turned on and off a few times each month to keep the back-up system operable. The period of time during which memory contents are preserved after power has last been turned off varies depending on climate and the location and placement of the unit. On the average, memory contents are protected over a period of 2 weeks after the last time power has been turned off. This period is shorter when the unit exposed to very high humidity or used in an area with an extremely humid climate.

BLOCK DIAGRAM

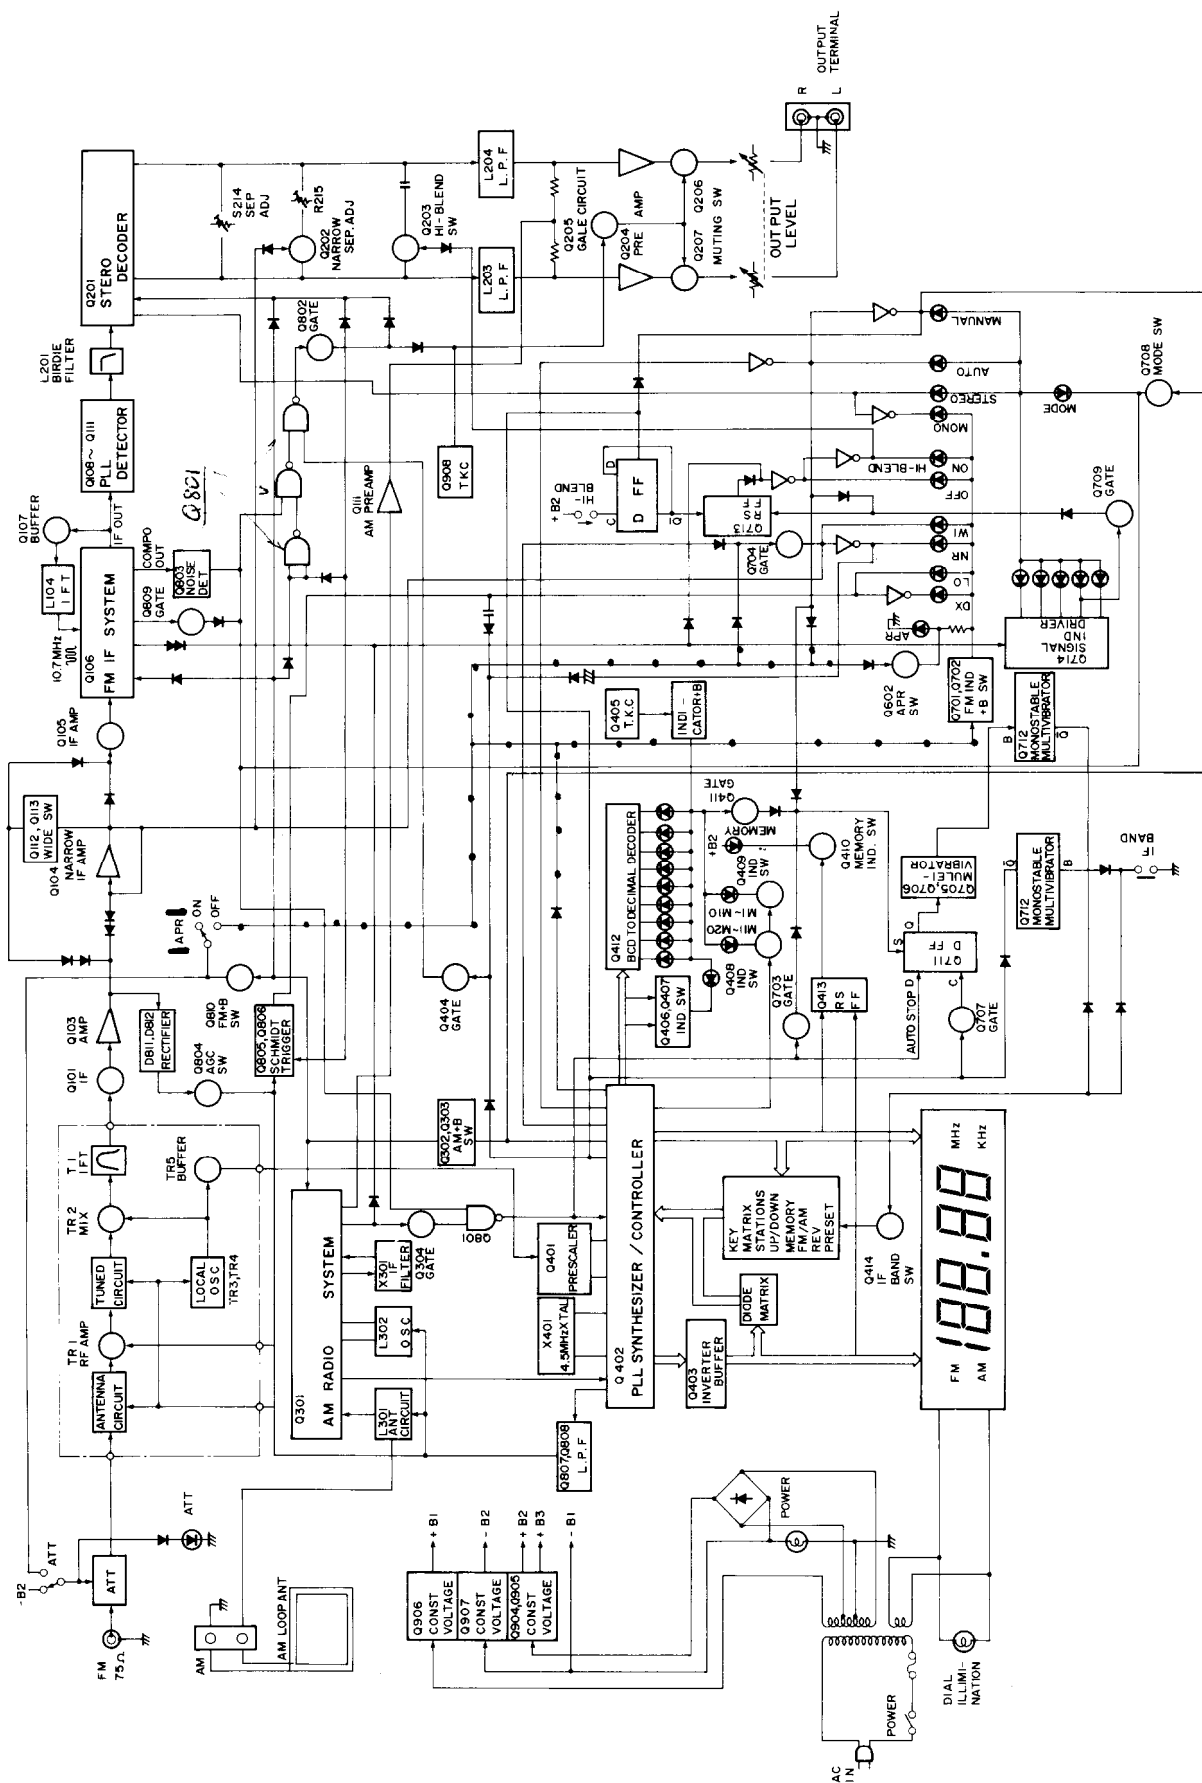

1400




PARTS LIST

REF. NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION	REF. NO.	PART NO.	DESCRIPTION
A1	27110242-1B	Front bracket	A351	28184188	Top cover <S>	U1	18568516	NARF-2416-1, Main circuit pc board ass'y <D>
A2	27115014G	Side bracket		28184183	Top cover 			
A4	27130406	Bracket F	A352	28140020	4x10x40, Cushion		18564516A	NARF-2416-1A, Main circuit pc board ass'y <G>
A5	27130407A	Bracket C	A353	838440089	4TTB+8C (BC), Tapping screw		18560516-1B	NARF-2416-1B, Main circuit pc board ass'y <W>
A7	27141029	Bracket, pc board	A354	28185250	Side panel L <DN>	U2	18568517	NASW-2417-1, Power switch pc board ass'y <D>
A9	27190351A	Holder, power	A355	28185251	Side panel R <DN>		18564517A	NASW-2417-1A, Power switch pc board ass'y <G/W>
A10	27190356	Holder, lid	A356	836440303	4STV+30CQ (BC), Special screw <DN>		18568518	NASW-2418-1, APR/Att. switch pc board ass'y
A11	27190405A	Holder ass'y				U3	18560519-1	NASW-2419-1, Band/Emphasis switch pc ass'y <W>
A12	28133145	Back plate	A357	870086	4x12BS (BC), Special washer <DN>	U6	18568520	NADG-2420-1, Digital circuit pc board ass'y <D>
A13	28130231	Dial plate					18564520A	NADG-2420-1A, Digital circuit pc board ass'y <G>
A14	27190353	Holder, dial plate	A501	18568121	Front panel ass'y <S>	U7	18568521	NADG-2421-1, Display circuit pc board ass'y
A15	27190198B	Holder, lamp		18578121	Front panel ass'y 	U8	18568522	NASW-2422-1, Memory switch pc board ass'y
A16	27273030C	Joint L		18579121	Front panel ass'y <DN>	U9	18564523	NAPL-2423-1, Lamp pc board ass'y
A18	27120761	Back panel <D>	A601	27170156-1 A	Bottom board	W901	253112	AS-UC-4 #18, Power supply cord <D>
	27120762	Back panel <G>	A602	27175009A	Leg		253130 or 253128	AS-CEE, Power supply cord <G/W>
	27120764	Back panel <W>	A603	834430068	3TTS+6B (BC), Tapping screw			
A19	27300750	Strainrelief	A604	834430108	3TTS+10B (BC), Tapping screw			
A21	28140613	Cushion	A605	831130088	3TTW+8B (BC), Tapping screw			
A24	838440089	4TTB+8C (BC), Tapping screw	A801	28321904	Knob, power <S>			
A25	8344430068	3TTS+6B (BC), Tapping screw		28321905	Knob, power 			
A26	831430088	3TTW+8B (BC), Tapping screw	A802	28322259	Knob A <S>			
A27	833430080	3TTP+8P (BC), Tapping screw		28322260	Knob A 			
A28	8344430108	3TTS+10B (BC), Tapping screw	A803	28320540	Knob L			
A29	86414010	FWN4x10FN, Flange nut	PL001	210149	PL14V0.06AW-3.0, Lamp			
A30	834230108	3TTS+10B (Ni), Nickel screw	S002	25065123	NSS-1258P, Voltage selector switch <W>			
A31	82143006	3P+6FN (BC), Pan head screw						
A32	831430100	3TTW+10P (BC), Tapping screw	T001	232098	NMA-3040, AM loop antenna			
A33	838430068	3TTB+6B (BC), Tapping screw	T001a	27190129	Holder, antenna			
A51	82143006	3P+6FN (BC), Pan head screw <W>	T901	2300026	NPT-893D, Power transformer <D>			
		2.6P+4F (BC), Pan head screw <W>						
A52	82142604			2300027	NPT-893G, Power transformer <G>			
				2300028	NPT-893DG, Power transformer <W>			

NOTE: <D>: Only 120V model
 <DN>: Only U. S. A. model
 <G>: Only 220V model
 <W>: Only Universal model
 <S>: Only silver model
 : Only black model

NOTE: THE COMPONENTS IDENTIFIED BY MARK  ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PARTS NUMBER SPECIFIED.

MICROCOMPUTER OPERATION

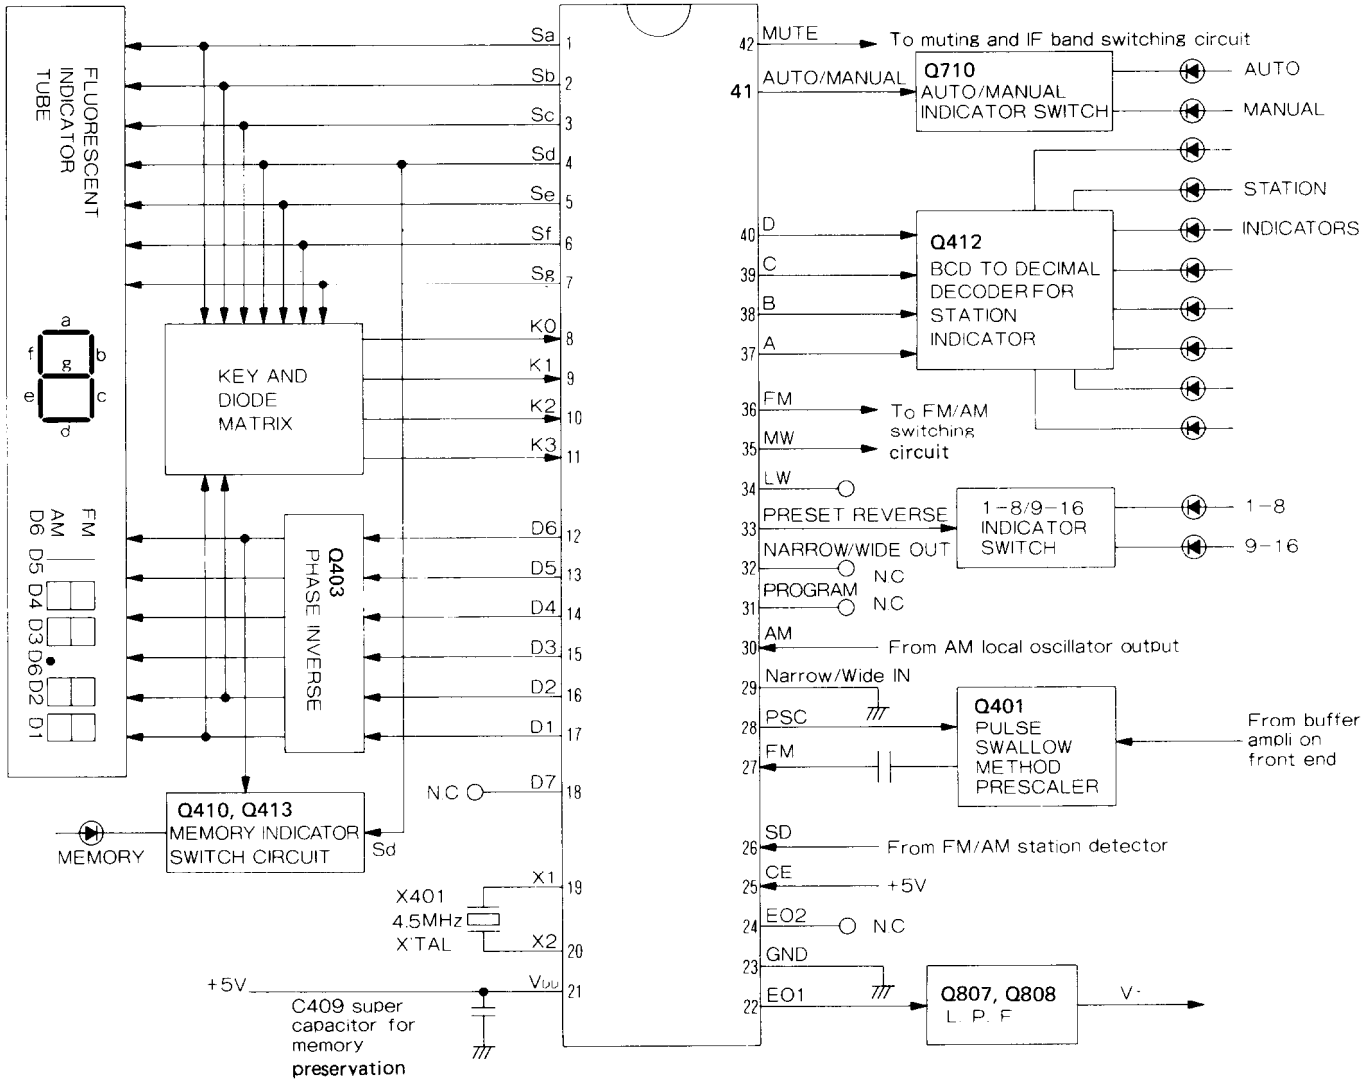

Pin No.	Symbol	Terminal	Description
1 – 7	Sa – Sg	Segment outputs	Display tube signal terminal output and key return signal source terminals; active high. Since these terminals can handle 30V, they are connected directly to the segment terminals of the fluorescent display tube.
8 – 11	K0 – K3	Key return signal inputs	Terminals for input of the key return signals from external matrix circuit.
12 – 18	D1 – D7	Digit outputs	Display tube digit output signal terminals; active low. D1 and D2 are used the key return signal source.
19, 20	X1, X2	X'tal	Connect to the 4.5MHz crystal oscillator.
21	V _{DD}	Power source input	Device power source terminal; supplies 5V during normal operation and 2.5V from the super capacitor C409 for memory preservation.

Pin No.	Symbol	Terminal	Description
22, 24	E01, E02	Error outputs	Charge pump output of the phase detector with constitutes the PLL. High level is output when the divided oscillation frequency is higher than the reference frequency. In the opposite case, low level is output. Floating occurs when the frequencies match. The output is applied to the variable capacitor diode in the front end through the low pass filter Q807 and Q808. The output from both terminals is same, but only E01 is used.
23	GND	Ground	
25	CE	Chip enable	Device selection signal input terminal. High level ... Normal operation Low level ... Memory preservation
26	SD	Station detector signal input	Input terminal for detecting whether or not a broadcast signal is being received during auto-tuning. Stopped by the high level.
27	FM	FM local oscillator signal input	Input terminal for FM local oscillator is divided by 1/16 or 1/17 by prescaler Q401.
28	PSC	Pulse swallow control output	This terminal outputs a signal that switches the prescaler division ratio of Q401 to 1/16 or 1/17 when the pulse swallow method is used for division. (FM only)
29	NARROW/ Wide out	IF band width output	Terminal for switching narrow and wide of IF band width. Not used.
30	AM	AM local oscillator signal input	Terminal for input of the AM local oscillator signal.
31	PROGRAM	Program selection signal output	Terminal for indicator output whether or not the program mode. Not used.
32	NARROW/ Wide out	IF band width switching output	Terminal for specifications output of IF band width. Not used.
33	Preset Reverse	Preset reverse indication output	Terminal for indication output whether M1 – M8 or M9 – M16 the preset key.
34	LW	Band switching signal outputs	Terminals for signal output switching of each band. High level is output from terminal of FM (pin no. 36) and low level is output from other terminals (pin no. 34 & 35) during FM reception. LW is not used with T-4087.
35	MW		
36	FM		
37 38 39 40	A B C D	Preset station indication outputs	Terminals for BCD code output of preset station indicator.
41	AUTO/ MANUAL	Auto/Manual indication output	Terminal for indication output whether or auto the tuning mode. This terminal becomes high during auto mode and low during manual mode.
42	MUTE	Muting output	Output terminal which mutes the shock noise occurring when the PLL is released; active high. The muting signal is output as shown below. UP/DOWN of manual/auto mode, preset memory is recalled, band switching and preset scan.

ADJUSTMENT PROCEDURES


FM SECTION

Item	Step	Connection of instrument	FM SG output	Stereo modulator output	Tuned Frequency	Output indicator	Adjustment point	Adjust	Remarks
Front End	1	Fig. 1	107.9MHz, 1kHz 75kHz devi. (108.0MHz) (G)		87.9MHz (D) 87.50MHz (G)	Digital DC voltmeter	T2	2.8 ± 0.4V	Usually not necessary to adjust. Repeat the steps 1 & 2 until no further adjustment is necessary.
	2				107.9MHz (D) 108.00MHz (G)	AC voltmeter	TC5	22.1 ± 0.4V	
	3						TC1 to TC4	Maximum	
FM IF	1	Fig. 2	99.1MHz, 65dBf 1kHz, 75kHz devi.		99.1MHz	DC voltmeter 1	L104	0V	Set the output volume on back panel to maximum position. IF Band Wide
	AC voltmeter					L106	Maximum & 0V		
								DC voltmeter 2	
Signal indicator		Fig. 2	99.1MHz, 25dBf 1kHz, 75kHz devi.		99.1MHz	First L.E.D. of signal indicator	L102	Light on	
V.C.O		Fig. 3	99.1MHz, 65dBf No modulation		99.1MHz	Frequency counter	R205	76kHz ± 50Hz	
Stereo Distortion		Fig. 4	99.1MHz, 65dBf Ext. modulation	1kHz Lch Pilot signal 7.5kHz devi.	99.1MHz	Distortion analyzer	T1 on front end	Minimum	
Stereo Separation		Fig. 4	99.1MHz, 65dBf Ext. modulation	Lch.	99.1MHz	Rch. output	R214	Minimum	IF band: Wide Same and maximum separation
				Rch.		Lch. output		Minimum	
				Lch.	99.1MHz	Rch. output	R215	Minimum	IF band: Narrow Same and maximum separation
						Rch.		Lch. output	
Pilot Canceller		Fig. 4	99.1MHz, 65dBf Ext. modulation	Only pilot Signal 7.5kHz devi.	99.1MHz	AC voltmeter	R212	Minimum	
Muting level		Fig. 2	99.1MHz, 17.2dBf		99.1MHz	Oscilloscope	R127	Singal	
			99.1MHz, 16.2dBf					No signal	

AM Section

10kHz step model


Step	AM SG output	Tuned frequency	Output indicator	Adjust. point	Adjust for	Remarks
1		530 kHz	Digital DC voltmeter	L302	$2.0 \pm 0.1V$	Repeat the steps 1 and 2 until no further adjustment is necessary.
2		1620 kHz		TC302	$20 \pm 0.1V$	
3	600 kHz, 400 Hz 30% mod. 60 dB/m	600 kHz	AC voltmeter	L301	Maximum	Repeat the steps 3 and 4 until no further adjustment is necessary.
4	1400 kHz, 400 Hz 30% mod. 60 dB/m	1400 kHz		TC301	Maximum	
5	1000 kHz, 400 Hz 30% mod. 60 dB/m	1000 kHz	AC voltmeter	X301	Maximum	

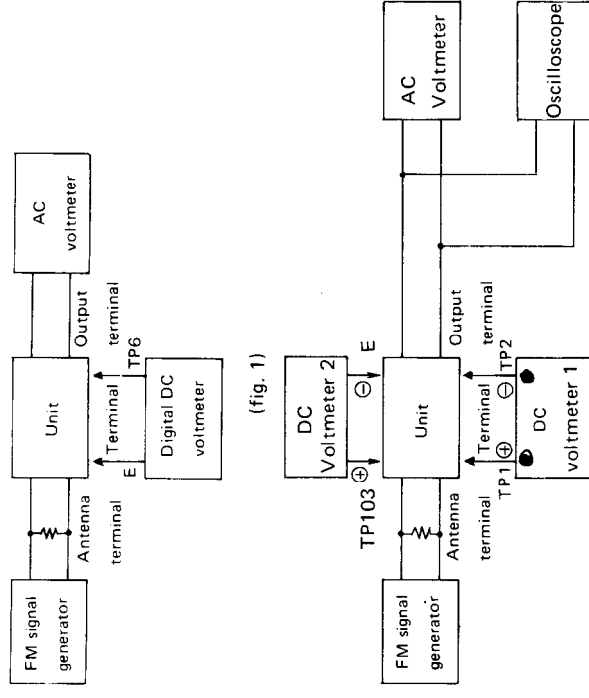


9kHz step models

Step	AM SG output	Tuned frequency	Output indicator	Adjust. point	Adjust for	Remarks
1		522 kHz	Digital DC voltmeter	L302	$1.8 \pm 0.1V$	Repeat the steps 1 and 2 until no further adjustment is necessary.
2		1611 kHz		TC302	$20 \pm 0.1V$	
3	603 kHz, 400 Hz 30% mod. 60 dB/m	603 kHz	AC voltmeter	L301	Maximum	Repeat the steps 3 and 4 until no further adjustment is necessary.
4	1404 kHz, 400 Hz 30% mod. 60 dB/m	1404 kHz		TC301	Maximum	
5	999 kHz, 400 Hz 30% mod. 60 dB/m	999 kHz	AC voltmeter	X301	Maximum	



(fig. 2)

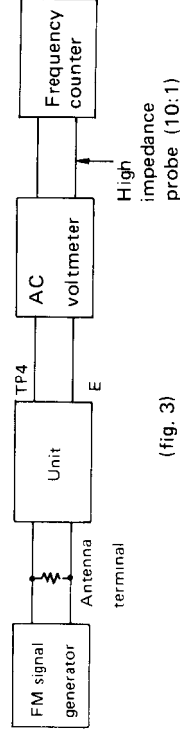

(fig. 3)

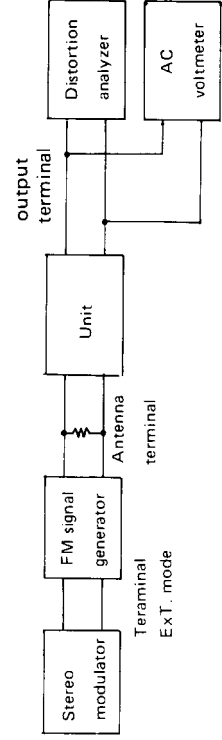


(fig. 4)

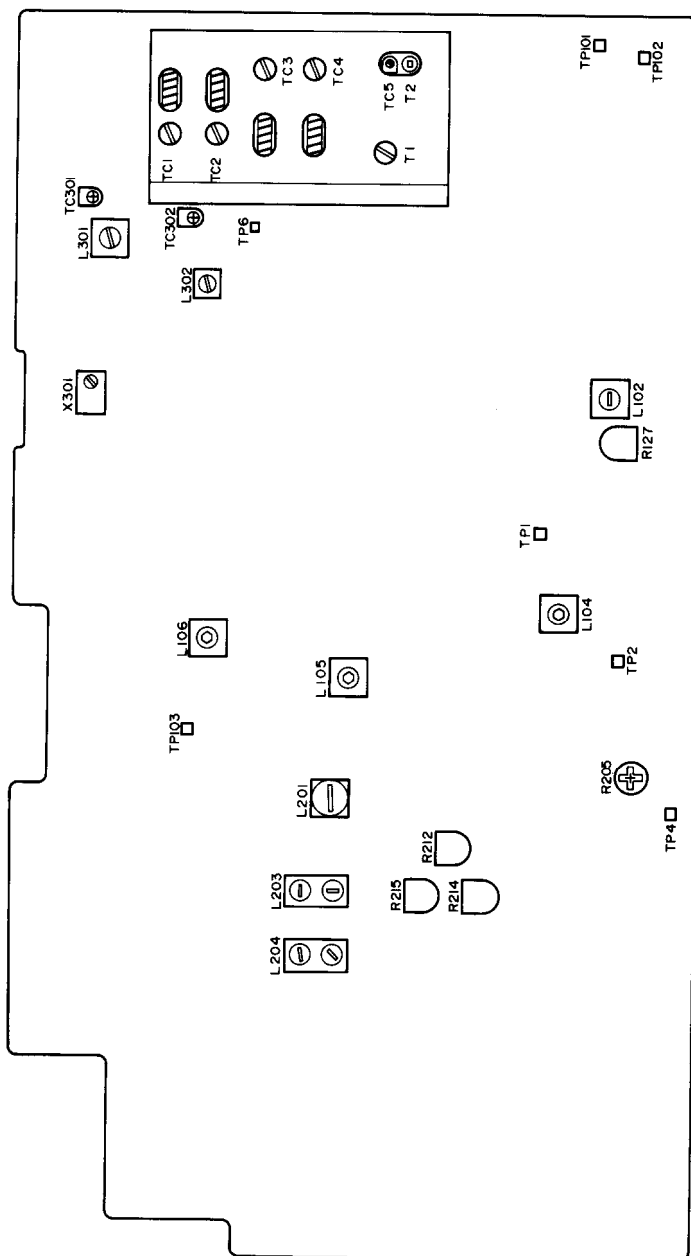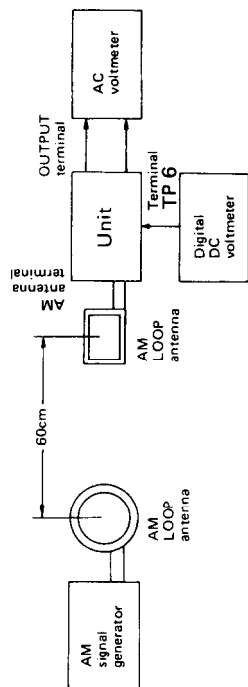


IC BLOCK DIAGRAM

μ PC1163H (FM IF amp.)

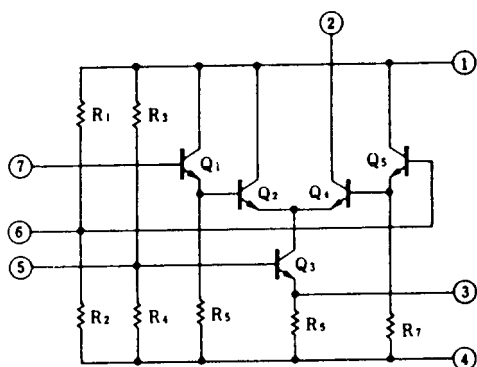

Terminal No.	Operation
1	Vcc
2	OUTPUT
3	BYPASS
4	GND
5	BYPASS
6	INPUT BIAS
7	INPUT


HA-11225(FM IF system)

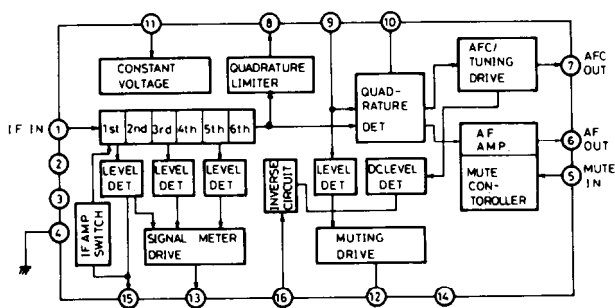

1. IF signal input
2. IF amplifier switch input
H level: Off
5. Muting switch input
6. Composite signal output
7. AFC output
8. IF amplifier output
9. 10.7MHz input
10. Reference voltage
11. Power supply
12. Muting output
Tuned: L level
13. Signal strength output
15. AGC out put
16. Muting level


4011B (Nand gate)

LOGIC DIAGRAM




VDD = Pin 14
VSS = Pin 7

NJM-4558DX/NJM4560D
(Operation amplifier)

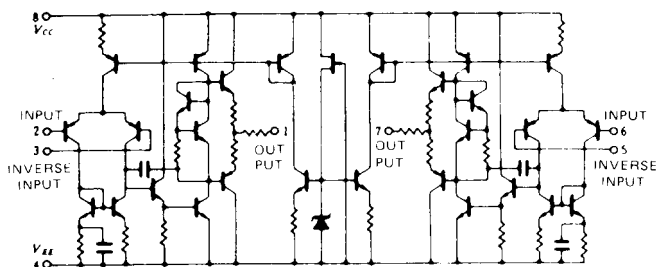


CIRCUIT SCHEMATICS
(1/4 of Device Shown)

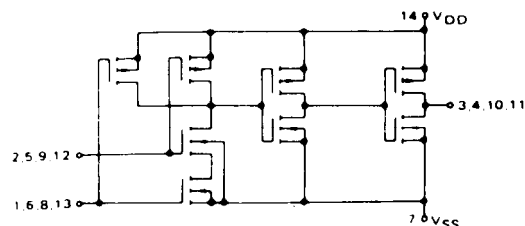


μ PC1223C (Stereo decoder)

Block diagram

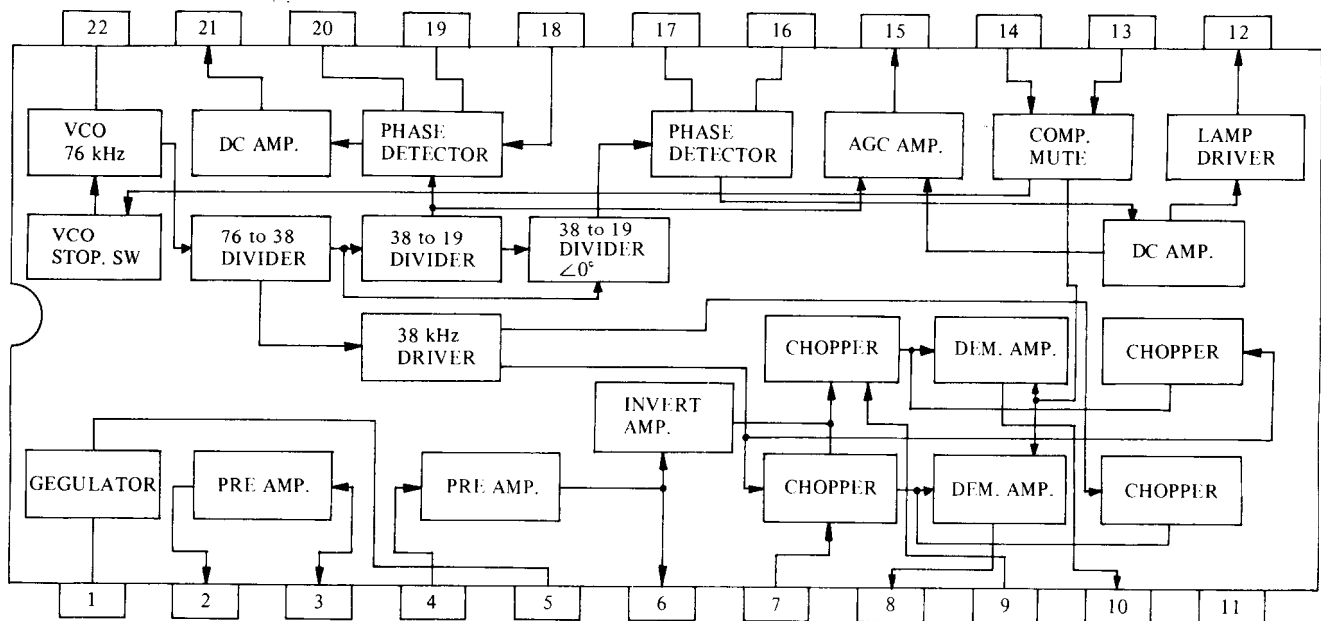


Terminal No.	Connection	Terminal No.	Connection
1	V _{cc}	12	ST. LAMP INDICATOR
2	PRE AMP. OUTPUT 1	13	ST-MONO SW & VCO STOP
3	PRE AMP. INPUT 1	14	MUTING SWS
4	PRE AMP. INPUT 2	15	19kHz CANCEL
5	BYPASS	16	LPF
6	PRE AMP. OUTPUT 2	17	LPF
7	POST AMP. INPUT	18	FILTER INPUT
8	L-ch OUTPUT	19	LPF
9	POST AMP. INPUT	20	LPF
10	R-ch OUTPUT	21	LPF
11	GND	22	OSC RC NETWORK

LB1403 (Signal strength indicator driver)

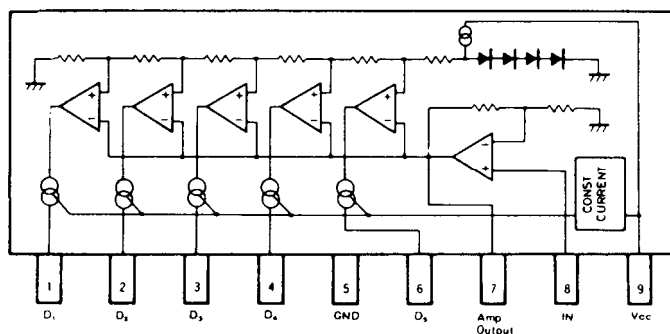


μ PB553AC (Prescaler)

Pin Connection




1. Pin 1 (Vcc)..... + 5 volts Supply
2. Pin 2 (IN)..... FM local oscillator signal input
3. Pin 3 (CHK)..... Check terminal
4. Pin 4 (GND)..... Ground terminal
5. Pin 5 (OUT)..... Prescaler terminal
6. Pin 6 (PSC)..... Prescaler control terminal
7. Pin 7,8..... Not connected


Block Diagram

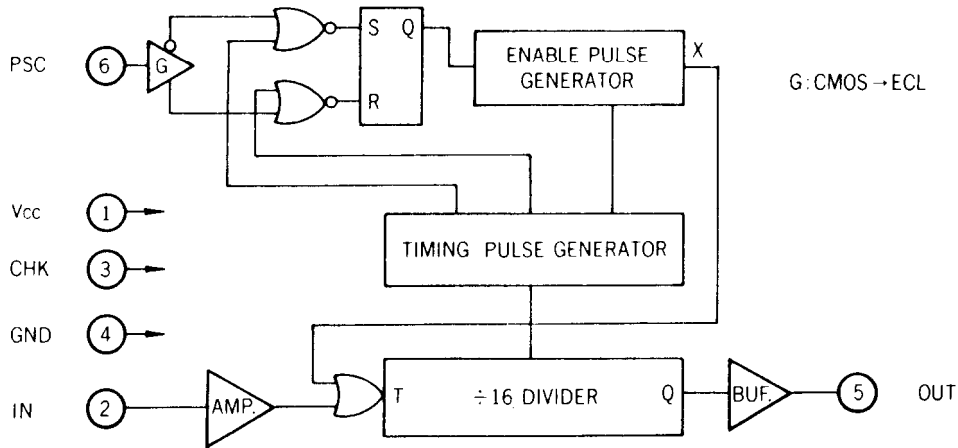


Timing Chart

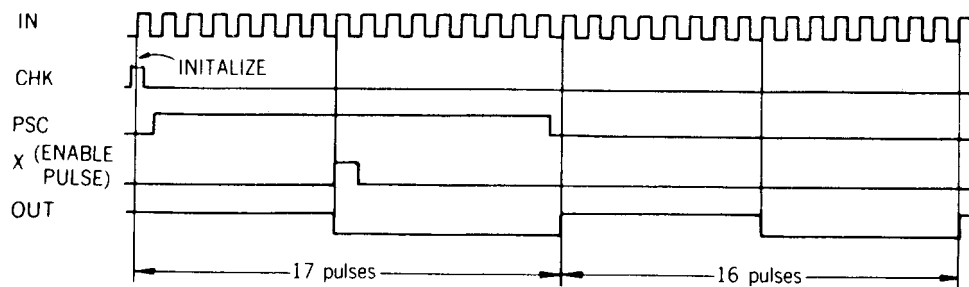


μ PA81C (Indicator drive)

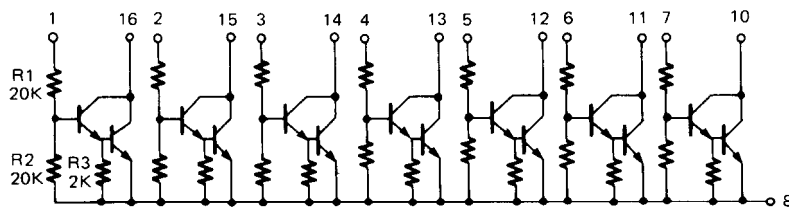


LA-1245 (AM radio system)

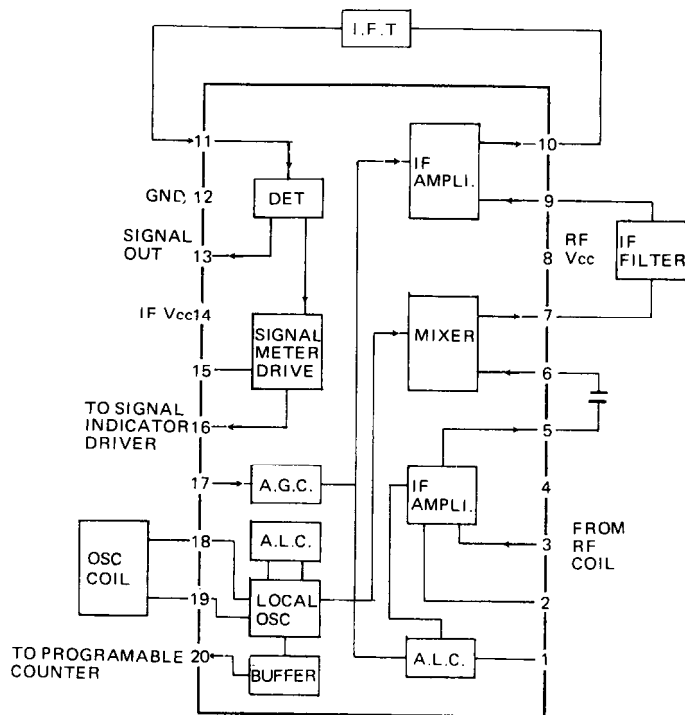

74LS42 (BCD to decimal decoder)

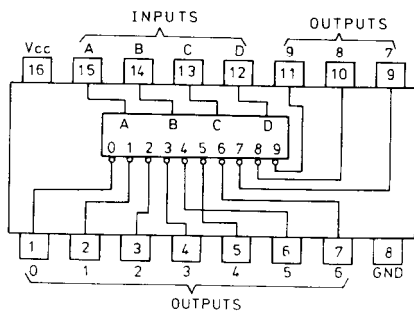


4013 (Dual D Flip-Flop with set/Reset capability)

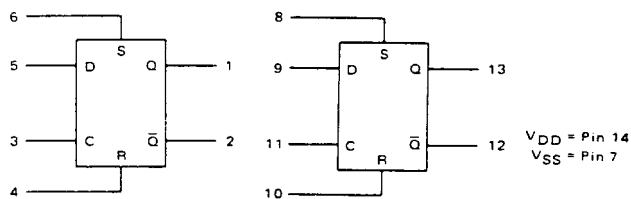

INPUTS				OUTPUTS	
CLOCK [†]	DATA	RESET	SET	Q	$\bar{Q}$
	0	0	0	0	1
	1	0	0	1	0
	X	0	0	Q	$\bar{Q}$
X	X	1	0	0	1
X	X	0	1	1	0
X	X	1	1	1	1

4538B (Dual precision retriggerable/resettable monostable multivibrator)

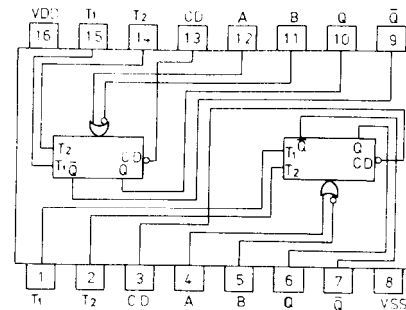


Truth Table

Input			Output	
A	B	CD	Q	$\bar{Q}$
	H	H		
	L	H	Q	$\bar{Q}$
H		H	Q	$\bar{Q}$
L		H		
X	X	L	L	H

X: H or L

B.

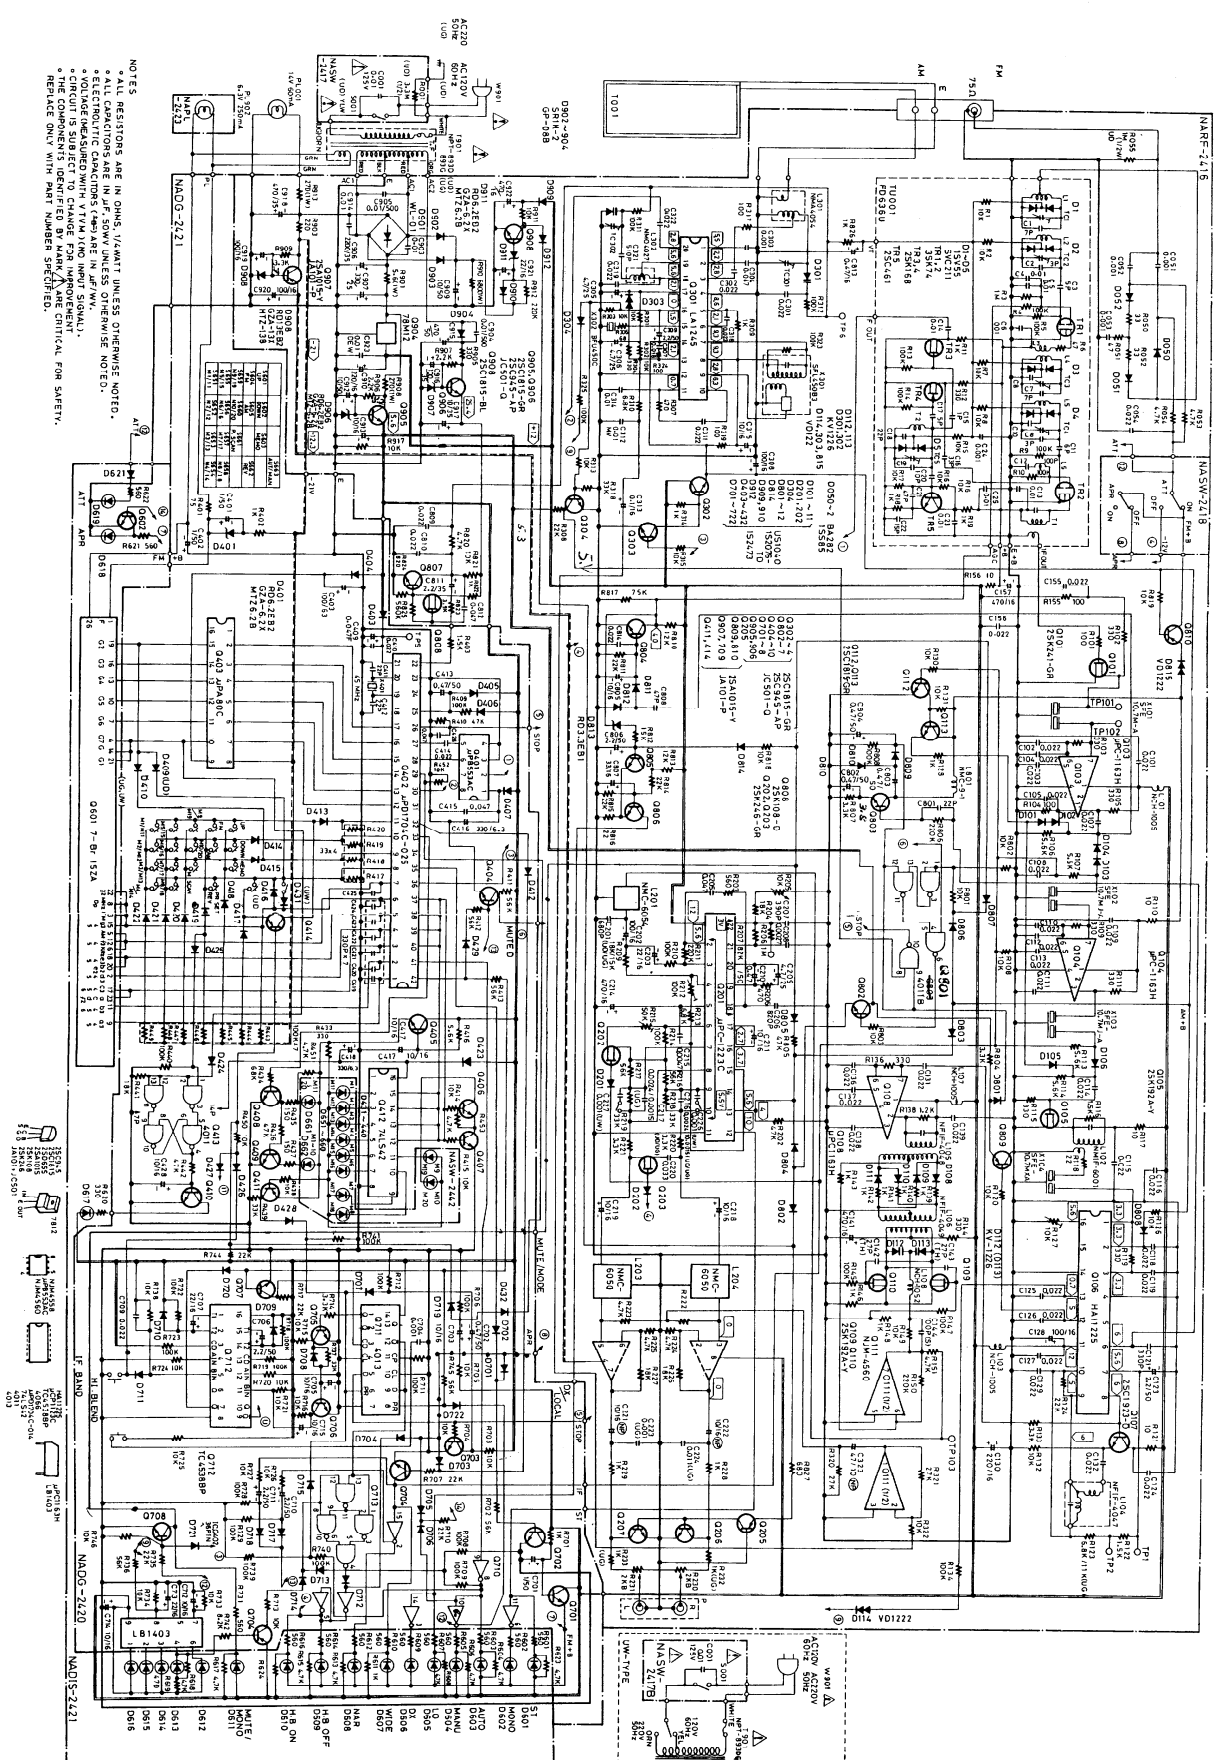

NOTES

- * ALL RESISTORS ARE IN OHMS, 1/4WATT UNLESS OTHERWISE NOTED.
- * ALL CAPACITORS ARE IN μ F, 50V UNLESS OTHERWISE NOTED.
- * ELECTROLYTIC CAPACITORS (E) ARE IN μ F/50V.
- * VOLTAGE MEASURED WITH VTVM (V) ON INPUT SIGNAL.
- * CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.
- * THE COMPONENTS IDENTIFIED BY MARK (A) ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.

75C65
75C67
75C68
75C69
75C70
75C71
75C72
75C73
75C74
75C75
75C76
75C77
75C78
75C79
75C80
75C81
75C82
75C83
75C84
75C85
75C86
75C87
75C88
75C89
75C90
75C91
75C92
75C93
75C94
75C95
75C96
75C97
75C98
75C99
75C100
75C101
75C102
75C103
75C104
75C105
75C106
75C107
75C108
75C109
75C110
75C111
75C112
75C113
75C114
75C115
75C116
75C117
75C118
75C119
75C120
75C121
75C122
75C123
75C124
75C125
75C126
75C127
75C128
75C129
75C130
75C131
75C132
75C133
75C134
75C135
75C136
75C137
75C138
75C139
75C140
75C141
75C142
75C143
75C144
75C145
75C146
75C147
75C148
75C149
75C150
75C151
75C152
75C153
75C154
75C155
75C156
75C157
75C158
75C159
75C160
75C161
75C162
75C163
75C164
75C165
75C166
75C167
75C168
75C169
75C170
75C171
75C172
75C173
75C174
75C175
75C176
75C177
75C178
75C179
75C180
75C181
75C182
75C183
75C184
75C185
75C186
75C187
75C188
75C189
75C190
75C191
75C192
75C193
75C194
75C195
75C196
75C197
75C198
75C199
75C200
75C201
75C202
75C203
75C204
75C205
75C206
75C207
75C208
75C209
75C210
75C211
75C212
75C213
75C214
75C215
75C216
75C217
75C218
75C219
75C220
75C221
75C222
75C223
75C224
75C225
75C226
75C227
75C228
75C229
75C230
75C231
75C232
75C233
75C234
75C235
75C236
75C237
75C238
75C239
75C240
75C241
75C242
75C243
75C244
75C245
75C246
75C247
75C248
75C249
75C250
75C251
75C252
75C253
75C254
75C255
75C256
75C257
75C258
75C259
75C260
75C261
75C262
75C263
75C264
75C265
75C266
75C267
75C268
75C269
75C270
75C271
75C272
75C273
75C274
75C275
75C276
75C277
75C278
75C279
75C280
75C281
75C282
75C283
75C284
75C285
75C286
75C287
75C288
75C289
75C290
75C291
75C292
75C293
75C294
75C295
75C296
75C297
75C298
75C299
75C300
75C301
75C302
75C303
75C304
75C305
75C306
75C307
75C308
75C309
75C310
75C311
75C312
75C313
75C314
75C315
75C316
75C317
75C318
75C319
75C320
75C321
75C322
75C323
75C324
75C325
75C326
75C327
75C328
75C329
75C330
75C331
75C332
75C333
75C334
75C335
75C336
75C337
75C338
75C339
75C340
75C341
75C342
75C343
75C344
75C345
75C346
75C347
75C348
75C349
75C350
75C351
75C352
75C353
75C354
75C355
75C356
75C357
75C358
75C359
75C360
75C361
75C362
75C363
75C364
75C365
75C366
75C367
75C368
75C369
75C370
75C371
75C372
75C373
75C374
75C375
75C376
75C377
75C378
75C379
75C380
75C381
75C382
75C383
75C384
75C385
75C386
75C387
75C388
75C389
75C390
75C391
75C392
75C393
75C394
75C395
75C396
75C397
75C398
75C399
75C400
75C401
75C402
75C403
75C404
75C405
75C406
75C407
75C408
75C409
75C410
75C411
75C412
75C413
75C414
75C415
75C416
75C417
75C418
75C419
75C420
75C421
75C422
75C423
75C424
75C425
75C426
75C427
75C428
75C429
75C430
75C431
75C432
75C433
75C434
75C435
75C436
75C437
75C438
75C439
75C440
75C441
75C442
75C443
75C444
75C445
75C446
75C447
75C448
75C449
75C450
75C451
75C452
75C453
75C454
75C455
75C456
75C457
75C458
75C459
75C460
75C461
75C462
75C463
75C464
75C465
75C466
75C467
75C468
75C469
75C470
75C471
75C472
75C473
75C474
75C475
75C476
75C477
75C478
75C479
75C480
75C481
75C482
75C483
75C484
75C485
75C486
75C487
75C488
75C489
75C490
75C491
75C492
75C493
75C494
75C495
75C496
75C497
75C498
75C499
75C500
75C501
75C502
75C503
75C504
75C505
75C506
75C507
75C508
75C509
75C510
75C511
75C512
75C513
75C514
75C515
75C516
75C517
75C518
75C519
75C520
75C521
75C522
75C523
75C524
75C525
75C526
75C527
75C528
75C529
75C530
75C531
75C532
75C533
75C534
75C535
75C536
75C537
75C538
75C539
75C540
75C541
75C542
75C543
75C544
75C545
75C546
75C547
75C548
75C549
75C550
75C551
75C552
75C553
75C554
75C555
75C556
75C557
75C558
75C559
75C560
75C561
75C562
75C563
75C564
75C565
75C566
75C567
75C568
75C569
75C570
75C571
75C572
75C573
75C574
75C575
75C576
75C577
75C578
75C579
75C580
75C581

ONKYO CORPORATION

CHANGE OF PARTS

12, Nov., 8

MODEL T-4087

ONKYO CORP.
SERVICE DIVISION

TYPE	CIRCUIT NO.	DESCRIPTION	AFTER CHANGE SPECIFICATIONS	PART NO.	BEFORE CHANGE SPECIFICATIONS	PART NO.	CHANGE DESCRIPTION	APPLICATION
NARF-2416	R055	Solid resistor	1MΩ, 1/2W	431521055	Add between Ant. terminal & ground.		CSA	
		Label LA		29360168	Add			
NADG-2420	D413 JC701	Elect. capacitor Socket Socket	4.7 μF, 25V NSCT-3P-395 NSCT-8P-100	352750479 25050267 25050272	0.47 μF, 50V NJPS-3P-72 NJPS-8P-77	352784799 25050244 25050249	To stability initialize. Improvement of reliance.	2271-
NADG-2420		Socket	NSCT-4P-96	25050268		25050245		
		Label CSA		29360117	Add			1601-

PRINTED CIRCUIT BOARD-PARTS LIST

MAIN CIRCUIT PC BOARD (NARF-2416-1/1A/1B)

CIRCUIT NO.	PART NO.	DESCRIPTION			
TU001	Front end		L107	233105	NCH-1005
			L108	233241	NCH-1052
	240062	BFD636U12	L201	233350	NMC-6054
			L203, L204	233320	NMC-6050
	ICs		L301	232120	NMA-4054
Q103, Q104	222474	μPC1163H	L302	232110	NMO-4027
Q106	222540	HA-11225	L801	233031	NMC-9-1
Q108	222474	μPC1163H			
Q111	222579	NJM4560D			Transformers
Q201	222732	μPC1223C	L102	233096	NFIF-6001
Q204	222502	NJM4558DX	L104	233295	NFIF-4047
Q301	222701	LA1245	L105	233296	NFIF-4048
Q801	222513 or	TC4011BP or	L106	233297	NFIF-4049
	222840111	4011BP			
Q904	222780122	78M12			Ceramic filters
	Transistors		X101	3010043	SFE-10.7MM-A
Q101	2212194 or	2SK241 (Y) or	X102, X103	3010087	SFE-10.7MJ-A
	2212195	2SK241 (GR)	X104	3010041	SFE-10.7MX-A
Q105	2212274	2SK192A (Y)	X301	3010075	SFL450B3
Q107	2211722 or	2SC1923 (R) or	X302	3010076	BFU450C
	2211723	2SC1923 (O)			Capacitors
Q109, Q110	2212274	2SK192A (Y)	C123	352780229	2.2μF, 50V, Elect.
Q112, Q113	2211255,	2SC1815 (GR),	C128	352741019	100μF, 16V, Elect.
Q302-Q304	2210746 or	2SC945A (P) or	C130	352742219	220μF, 16V, Elect.
Q802-Q807	2212485	JC501 (Q)	C141	352744719	470μF, 16V, Elect.
Q202, Q203	2211944 or	2SK246 (Y) or	C144	372521014	100pF ± 5%, 50V, Styrole
	2211945	2SK246 (GR)	C202	352741019	100μF, 16V, Elect.
Q205, Q809	2211454 or	2SA1015 (Y) or	C203	352742209	22μF, 16V, Elect.
Q810, Q907	2212494	JA101 (P)	C206	370138214	820pF ± 5%, 100V, APS
Q206, Q207	2211704,	2SD655 (D),	C207	370133914	390pF ± 5%, 100V, APS
	2211705 or	2SD655 (E) or	C209	352750479	4.7μF, 25V, Elect.
	2211706	2SD655 (F)	C210	352784799	0.47μF, 50V, Elect.
Q808	2212294	2SK108 (D)	C211	352741009	10μF, 16V, Elect.
Q905, Q906	2211255,	2SC1815 (GR),	C214	352744719	470μF, 16V, Elect.
	2210746 or	2SC945A (P) or	C216, C217	379122424	2,400pF ± 5%, 50V, DEW
	2212485	JC501 (Q)			<D>
Q908	2211256	2SC1815 (BL)		379121524	1,500pF ± 5%, 50V, DEW
	Diodes				<G/W>
D050-D052	223165 or	BA282 or	C218, C219	352741009	10μF, 16V, Elect.
	223149	1SS85	C221, C222	352941006	10μF, 16V, Non-polar elect.
D101-D106	223150,	US1040,	C223, C224	379121025	1,000pF ± 20%, 50V, DEW
D108-D111	223145 or	1S2076TD or	C226, C227	379121024	1,000pF ± 5%, 50V, DEW
D201, D202	223124	1S2473			<W>
D112, D113	223136	KV1226	TC301, TC302	3060010	NTC-20P09, Trimmer
D114, D815	4000068	VD1222	C305, C306	352750479	4.7μF, 25V, Elect.
D301, D302	223136	KV1226	C308	352741019	100μF, 16V, Elect.
D303	4000068	VD1222	C309	352780229	2.2μF, 50V, Elect.
D304, D814	223150,	US1040,	C313	352781099	0.1μF, 50V, Elect.
D801-D812	223145 or	1S2076TD or	C315	352741009	10μF, 16V, Elect.
	223124	1S2473	C321	370135114	510pF ± 5%, 100V, APS
D813	2241291	RD3.3EB1	C323	352944706	47μF, 16V, Non-polar elect.
D901	223862	WL-01	C802-C804	352784799	0.47μF, 50V, Elect.
D902-D904	223804 or	SR1K-2 or	C805	352741009	10μF, 16V, Elect.
	223848	GP08B	C806	352780229	2.2μF, 50V, Elect.
D906, D911	2239492,	RD6.2EB2,	C807	352743309	33μF, 16V, Elect.
	2240971 or	GZA-6.2X or	C811	395160227	2.2μF, 35V, Tantalum
	2243162	MTZ6.2B	C813	352784799	0.47μF, 50V, Elect.
D907	2239792	RD27EB2	C905	384171037	0.01μF, 630V, DT
D908	2239652,	RD13EB2,	C906	352762229	2,200μF, 35V, Elect.
	2241131 or	GZA-13X or	C907	352753319	330μF, 25V, Elect.
	2243242	MTZ-13B	C909	352781009	10μF, 50V, Elect.
D909, D910	223150,	US1040,	C910	352742219	220μF, 16V, Elect.
D912	223145 or	1S2076TD or	C912, C913	352741009	10μF, 16V, Elect.
	223124	1S2473	C915	352784719	470μF, 50V, Elect.
			C916	352761019	100μF, 35V, Elect.
			C917	352761009	10μF, 35V, Elect.
			C918	352764719	470μF, 35V, Elect.

C919	352751019	100 μ F, 25V, Elect.
C920	352741019	100 μ F, 16V, Elect.
C921	352742209	22 μ F, 16V, Elect.
C922	352744719	470 μ F, 16V, Elect.
C923	379121045	0.1 μ F $\pm$ 10%, 50V, DEW

Resistors

R127	5215045	N08HR10KBC, Semi-fixed
R205	5225015	N10HR10KBD, Semi-fixed
R212	5215047	N08HR100KBC, Semi-fixed
R214	5215047	N08HR100KBC, Semi-fixed
R215	5215046	N08HR50KBC, Semi-fixed
R230	5146046	N16RGL2KB15, Output level variable
R901	441620564	5.6 Ω , 1W, Metal oxide film
R908	441622714	270 Ω , 1W, Metal oxide film
R910	441626814	680 Ω , 1W, Metal oxide film
R913	441622714	270 Ω , 1W, Metal oxide film

Terminals

25060087	NT-2PDMN31, Antenna
25045141	NPJ-2PDBL54, Output

Radiator

27160179	RAD-057
----------	---------

Screw

82143006	3P+6FN (BC), Pan head
----------	-----------------------

POWER SWITCH PC BOARD (NASW-2417-1/1A)



CIRCUIT NO.	PART NO.	DESCRIPTION
C001	Δ 3500065A	DE7150FZ103PAC400V/125V, Capacitor 1S
R001	Δ 431523355	3.3M Ω , 1/2W, Resistor, solid <D>
S001	Δ 25035295	NPS-111-L261P, Power switch

APR/ATT. SWITCH PC BOARD (NASW-2418-1)

CIRCUIT NO.	PART NO.	DESCRIPTION
S004, S005	25035494	NPS-222-L456, Push switches


**BAND/EMPHASIS SWITCH PC BOARD (NASW-2419-1)
<Only Universal model>**

CIRCUIT NO.	PART NO.	DESCRIPTION
S003	25065240	NSS-42102, Slide switch

**POWER SWITCH PC BOARD****APR/ATT. SWITCH PC BOARD****BAND/EMPHASIS SWITCH PC BOARD**

NOTE: THE COMPONENTS IDENTIFIED BY MARK Δ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PARTS NUMBER SPECIFIED.


PRINTED CIRCUIT BOARD VIEW FROM BOTTOM SIDE

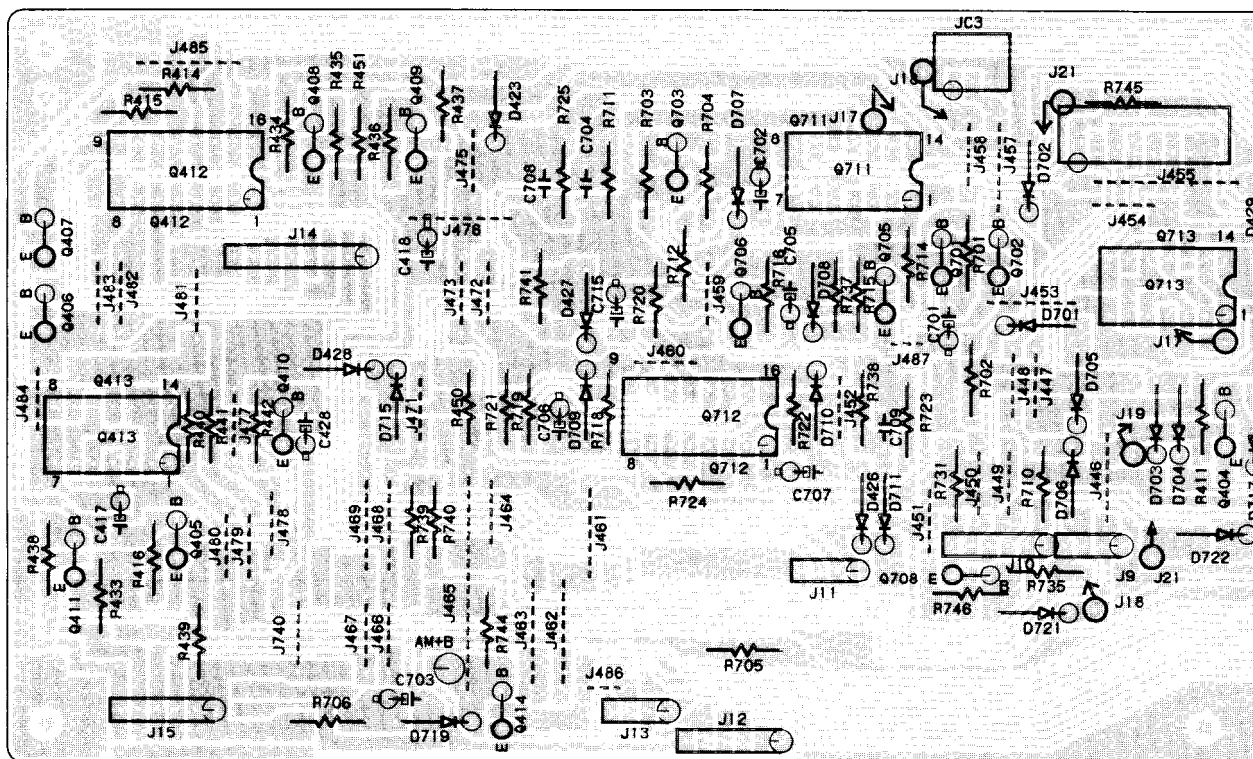


DIGITAL CIRCUIT PC BOARD (NADG-2420-1/1A/1B)

CIRCUIT NO.	PART NO.	DESCRIPTION
ICs		
Q401	222619	μ PB553AC
Q402	222763	μ PD1704C-025
Q403	222801	μ PA80C
Q412	222740421	74LS42
Q413, Q713	222513 or 222840111	μ PD4011BP or 4011BP
Q710	222807	μ PA81C
Q711	222840131	4013B
Q712	222850381	4538B
Q714	222670 or 222666	BA6124 or LB1403
Transistors		
Q404-Q410	2211255,	2SC1815 (GR),
Q701-Q708	2210746 or 2212485	2SC945A (P) or JC501 (Q)
Q414, Q710	2211454 or	2SA1015 (Y) or
Q411, Q709	2212494	JA101 (P)
Diodes		
D401	2240971 or 2239492	GZA-6.2X or RD6.2EB2
D403-D407	223150,	US1040,
D412-D415	223145 or	1S2076TD or
D417-D429	223124	1S2473
D409, D416	223150,	US1040,
	223145 or	1S2076TD or
	223124	1S2473 <D>
D410	223150,	US1040,
	223145 or	1S2076TD or
	223124	1S2473 <G>

D430, D431	223150,	US1040,
	223145 or	1S2076TD or
	223124	1S2473 <W>
D432, D722	223150,	US1040,
D701-D715	223145 or	1S2076TD or
D717-D720	223124	1S2473
D721	223132	1K60
X' tal		
X401	3010091	XTL-4.5M
Capacitors		
C401, C402	352780109	1 μ F, 50V, Elect.
C403	352721019	100 μ F, 6.3V, Elect.
C409	3020018	0.047F, 5V, Super
C416	352723319	330 μ F, 6.3V, Elect.
C417	352741009	10 μ F, 16V, Elect.
C418	352723319	330 μ F, 6.3V, Elect.
C419-C424	3020024	B8xC0116-32N, Block
C428	352741009	10 μ F, 16V, Elect.
C701	352780109	1 μ F, 50V, Elect.
C702	352784799	0.47 μ F, 50V, Elect.
C703, C705	352741009	10 μ F, 16V, Elect.
C706	352780229	2.2 μ F, 50V, Elect.
C707	352742209	22 μ F, 16V, Elect.
C710, C711	352780229	2.2 μ F, 50V, Elect.
C712	352741009	10 μ F, 16V, Elect.
C713	352742209	22 μ F, 16V, Elect.
C714, C715	352741009	10 μ F, 16V, Elect.
Resistors		
R417-R420	49121333504	33k Ω x4, 1/8W, Network
R443-R449	49121104507	100k Ω x7, 1/8W, Network
Sockets		
JC701	25050244	NJPS-3P-72
JC702	25050249	NJPS-8P-77
	25050245	NJPS-4P-73 (W)

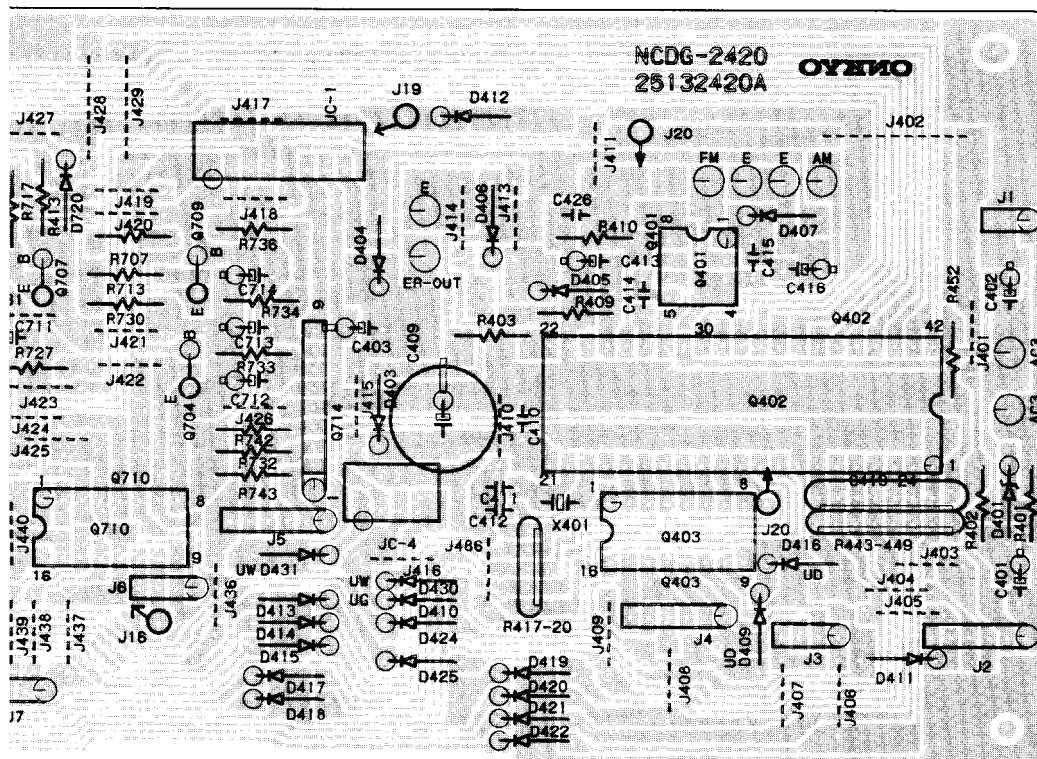

DIGITAL CIRCUIT PC BOARD

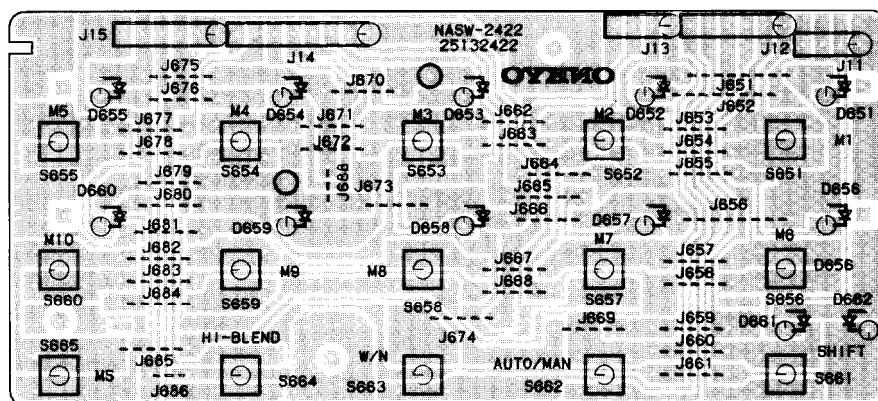

MEMORY SWITCH PC BOARD


MEMORY SWITCH PC BOARD (NASW-2422-1)

CIRCUIT NO.	PART NO.	DESCRIPTION
	L. E. Ds	
D651-D660	225141	SEL2213C
D661	225137CG,	SEL2413E-CG,
	225137DG or	SEL2413E-DG or
	225137DY	SEL2413E-DY
D662	225142	SEL2913K
	Switches	
S651-S665	20535389	NPS-111-S353
	Holders	
	27190355A	LED 5
	27190249	LED

LAMP PC BOARD (NAPL-2423-1)

CIRCUIT NO.	PART NO.	DESCRIPTION
PL902	210064A	PL6.3V, 250mA

PRINTED CIRCUIT BOARD VIEW FROM BOTTOM SIDE

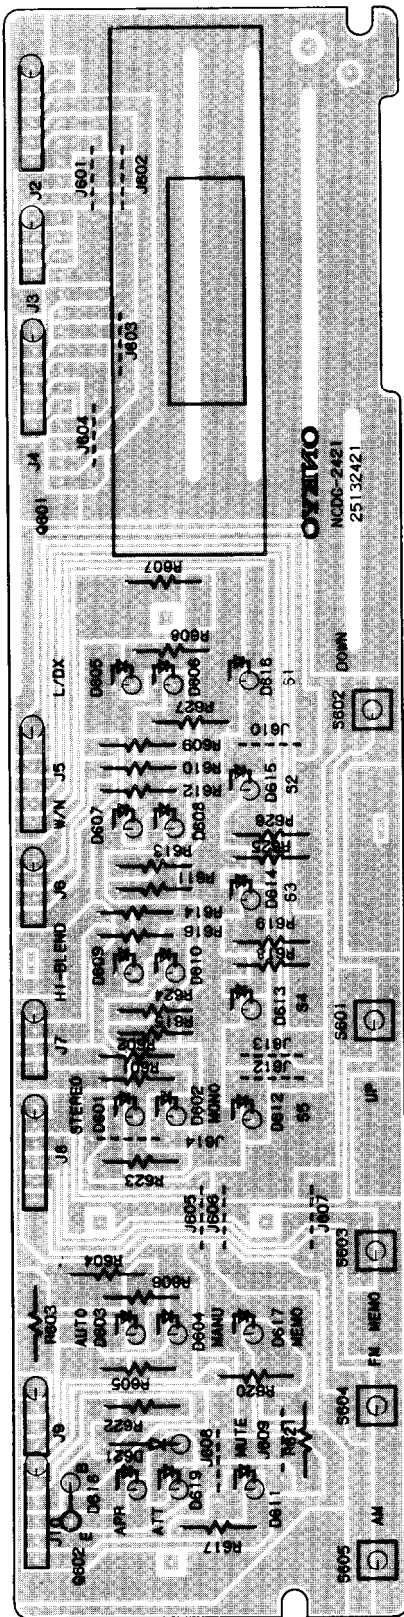


DISPLAY CIRCUIT
PC BOARD

DISPLAY CIRCUIT PC BOARD (NADG-2421-1)

CIRCUIT NO.	PART NO.	DESCRIPTION
Fluorescent indicator tube		
Q601	212018	7-BT-15ZA
Transistor		
Q602	2211255, 2210746 or 2212485	2SC1815 (GR), 2SC945A (P) or JC501 (Q)
L. E. Ds		
D601, D617	225141	SEL2213C
D602, D606	225142	SEL2913K
D608, D610	225142	SLE2913K
D619, D604	225142	SEL2913K
D603, D605	225137CG,	SEL2413E-CG,
D607, D609	225137DG or	SEL2413E-DG or
D611-D616	225137DY	SEL2413E-DY
D618		
Diode		
D621	223150, 223145 or 223124	US1040, 1S2076TD or 1S2473
Switches		
S601-S605	25035389	NPS-111-S353
Holder		
	27190404	L. E. D
Cushion		
	28140597	1.5 x 10 x 40mm

PACKING VIEW

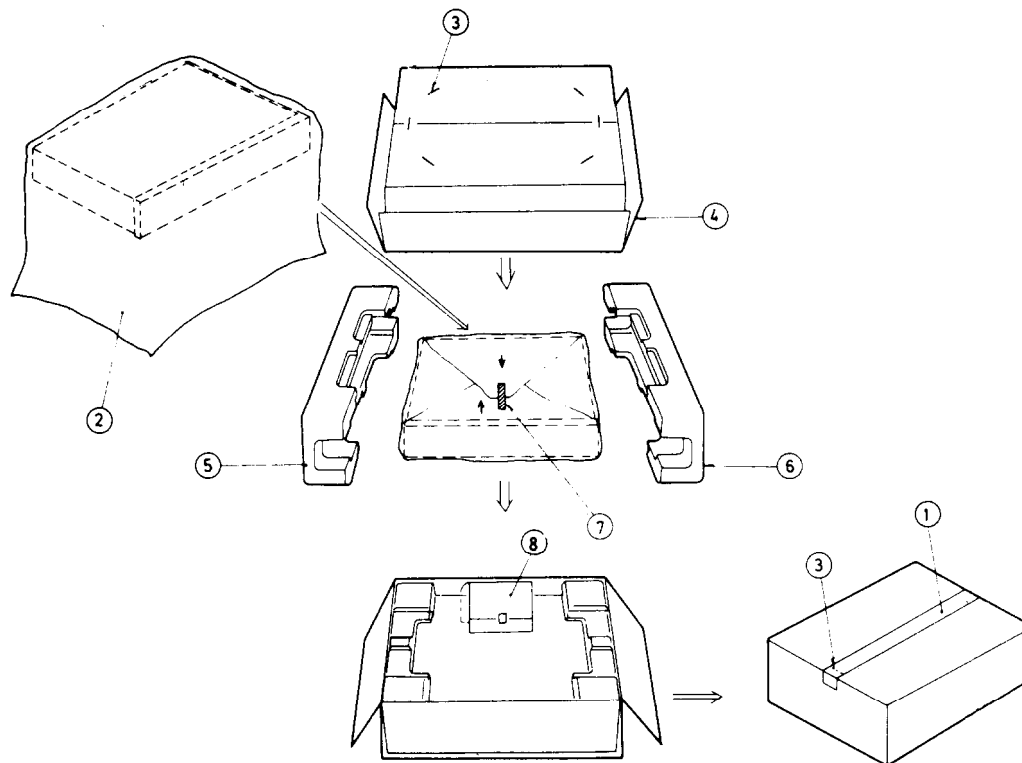

REF. NO.	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
1	29095012-1	500x800mm, Protection sheet	120V model	
	29095318	500x800mm, Protection sheet (U.S.A model)	292092	FM antenna
2	29100036A	550x850mm, Poly-vinyl bag	2010095	Connection cable
3	282301	Sealing hook	25060088	FM adaptor
4	29051200	Master carton box	29340932	Instruction manual
	29051201	Master carton box (black model)	220V model	
	29051243	Master carton box (U.S.A. model)	292092	FM antenna
5	29090772A	Pad R	2010095	Connection cable
6	29090771A	Pad L	25060088	FM adaptor
7	29110032	Adhesive tape	29340933	Instruction manual
8	260012	50x700mm, Damplon tape	120/220V model	
	Accessory bag complete		292092	FM antenna
	U. S. A. model		2010095	Connection cable
	292092	FM antenna	25060088	FM adaptor
	29340932	Instruction manual	29340933	Instruction manual
	2010095	Connection cable	25055040	CV-K-2, Conversion plug
	25060088	FM adaptor		
	29365006-7	Warranty card		
	29358002C	Service station list		

ONKYO CORPORATION

International Division: No.24 Mori Bldg., 23-4, 3-chome, Nishi-Shinbashi, Minato-ku, Tokyo, Japan.
Telex: 2423551 ONKYO J. Phone: 03-432-6981

ONKYO U.S.A. CORPORATION

200 Williams Drive, Ramsey, N.J. 07446 Tel. 201-825-7950

Printed in Japan A510