


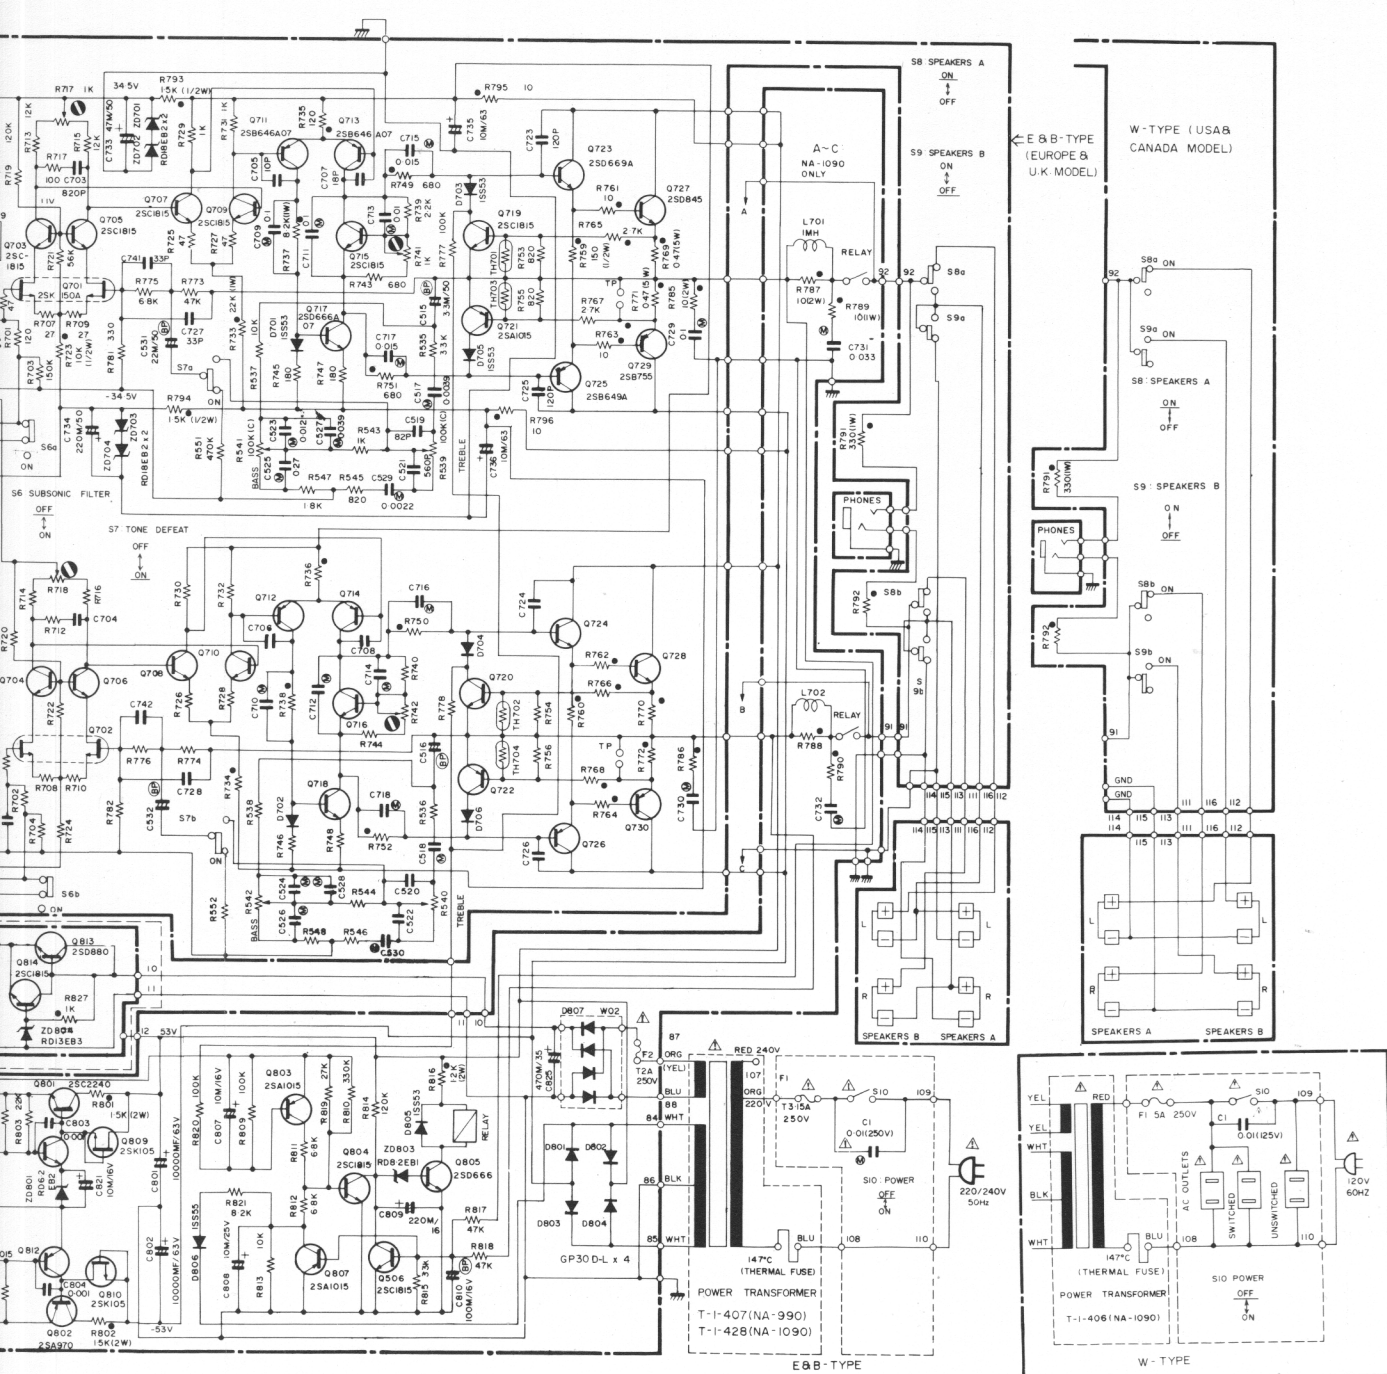

ES:
SCHEMATIC IS SUBJECT TO CHANGE
WITHOUT NOTICE.
LESS OTHERWISE SPECIFIED:

RESISTANCE VALUES ARE IN OHMS.
K = 1,000; M = 1,000,000

CAPACITANCE VALUES 1.0 AND ABOVE
ARE IN UF OR UF (P = pF, M = μF). LESS
THAN 1.0 ARE IN pF. (ELECTROLYTIC
CAPACITANCE VALUES ARE IN μF(VV).
VOLTAGES ARE MEASURED TO CHASSIS
GROUND WITH A "DC VOLT-METER".
RESISTORS R511 - R514 AND DIN CONN-
ECTOR ARE DELETED FOR W-TYPE.

SCHEMATIC SYMBOLS:

- ⬢ POLYESTER FILM CAPACITOR
- ⬢ BIPOLEAR CAPACITOR
- NONFLAMMABLE RESISTOR

WARNING:

⚠ INDICATES SAFETY CRITICAL COMPONENTS.
FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS
ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.

SEMICONDUCTORS

