NIKKO AMPLIFIER

NA-790

INTEGRATED AMPLIFIER

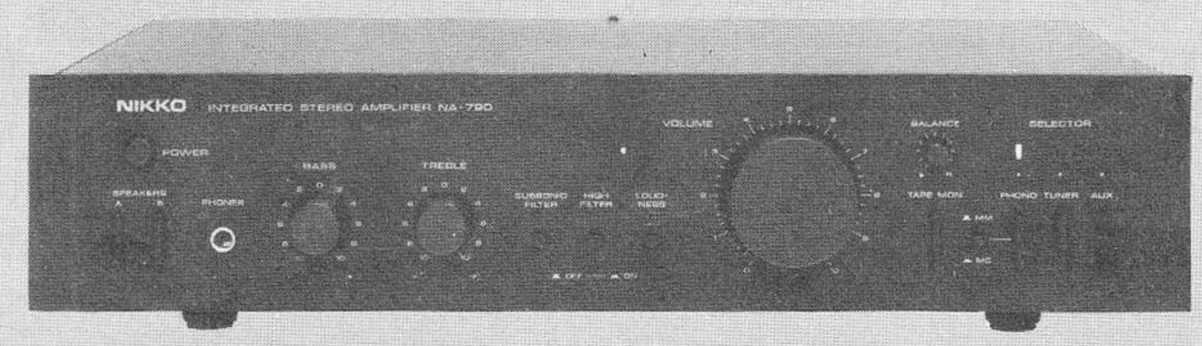

TYPE AND VOLTAGE

W-TYPE	UL and CSA type	120V AC
E-TYPE	NK-STD type	220/240V AC
N-TYPE	DEMKO and SEMKO type	
D-TYPE	DIN type	

SERVICE MANUAL

www.hifiengine.com

SCHEMATIC DIAGRAM

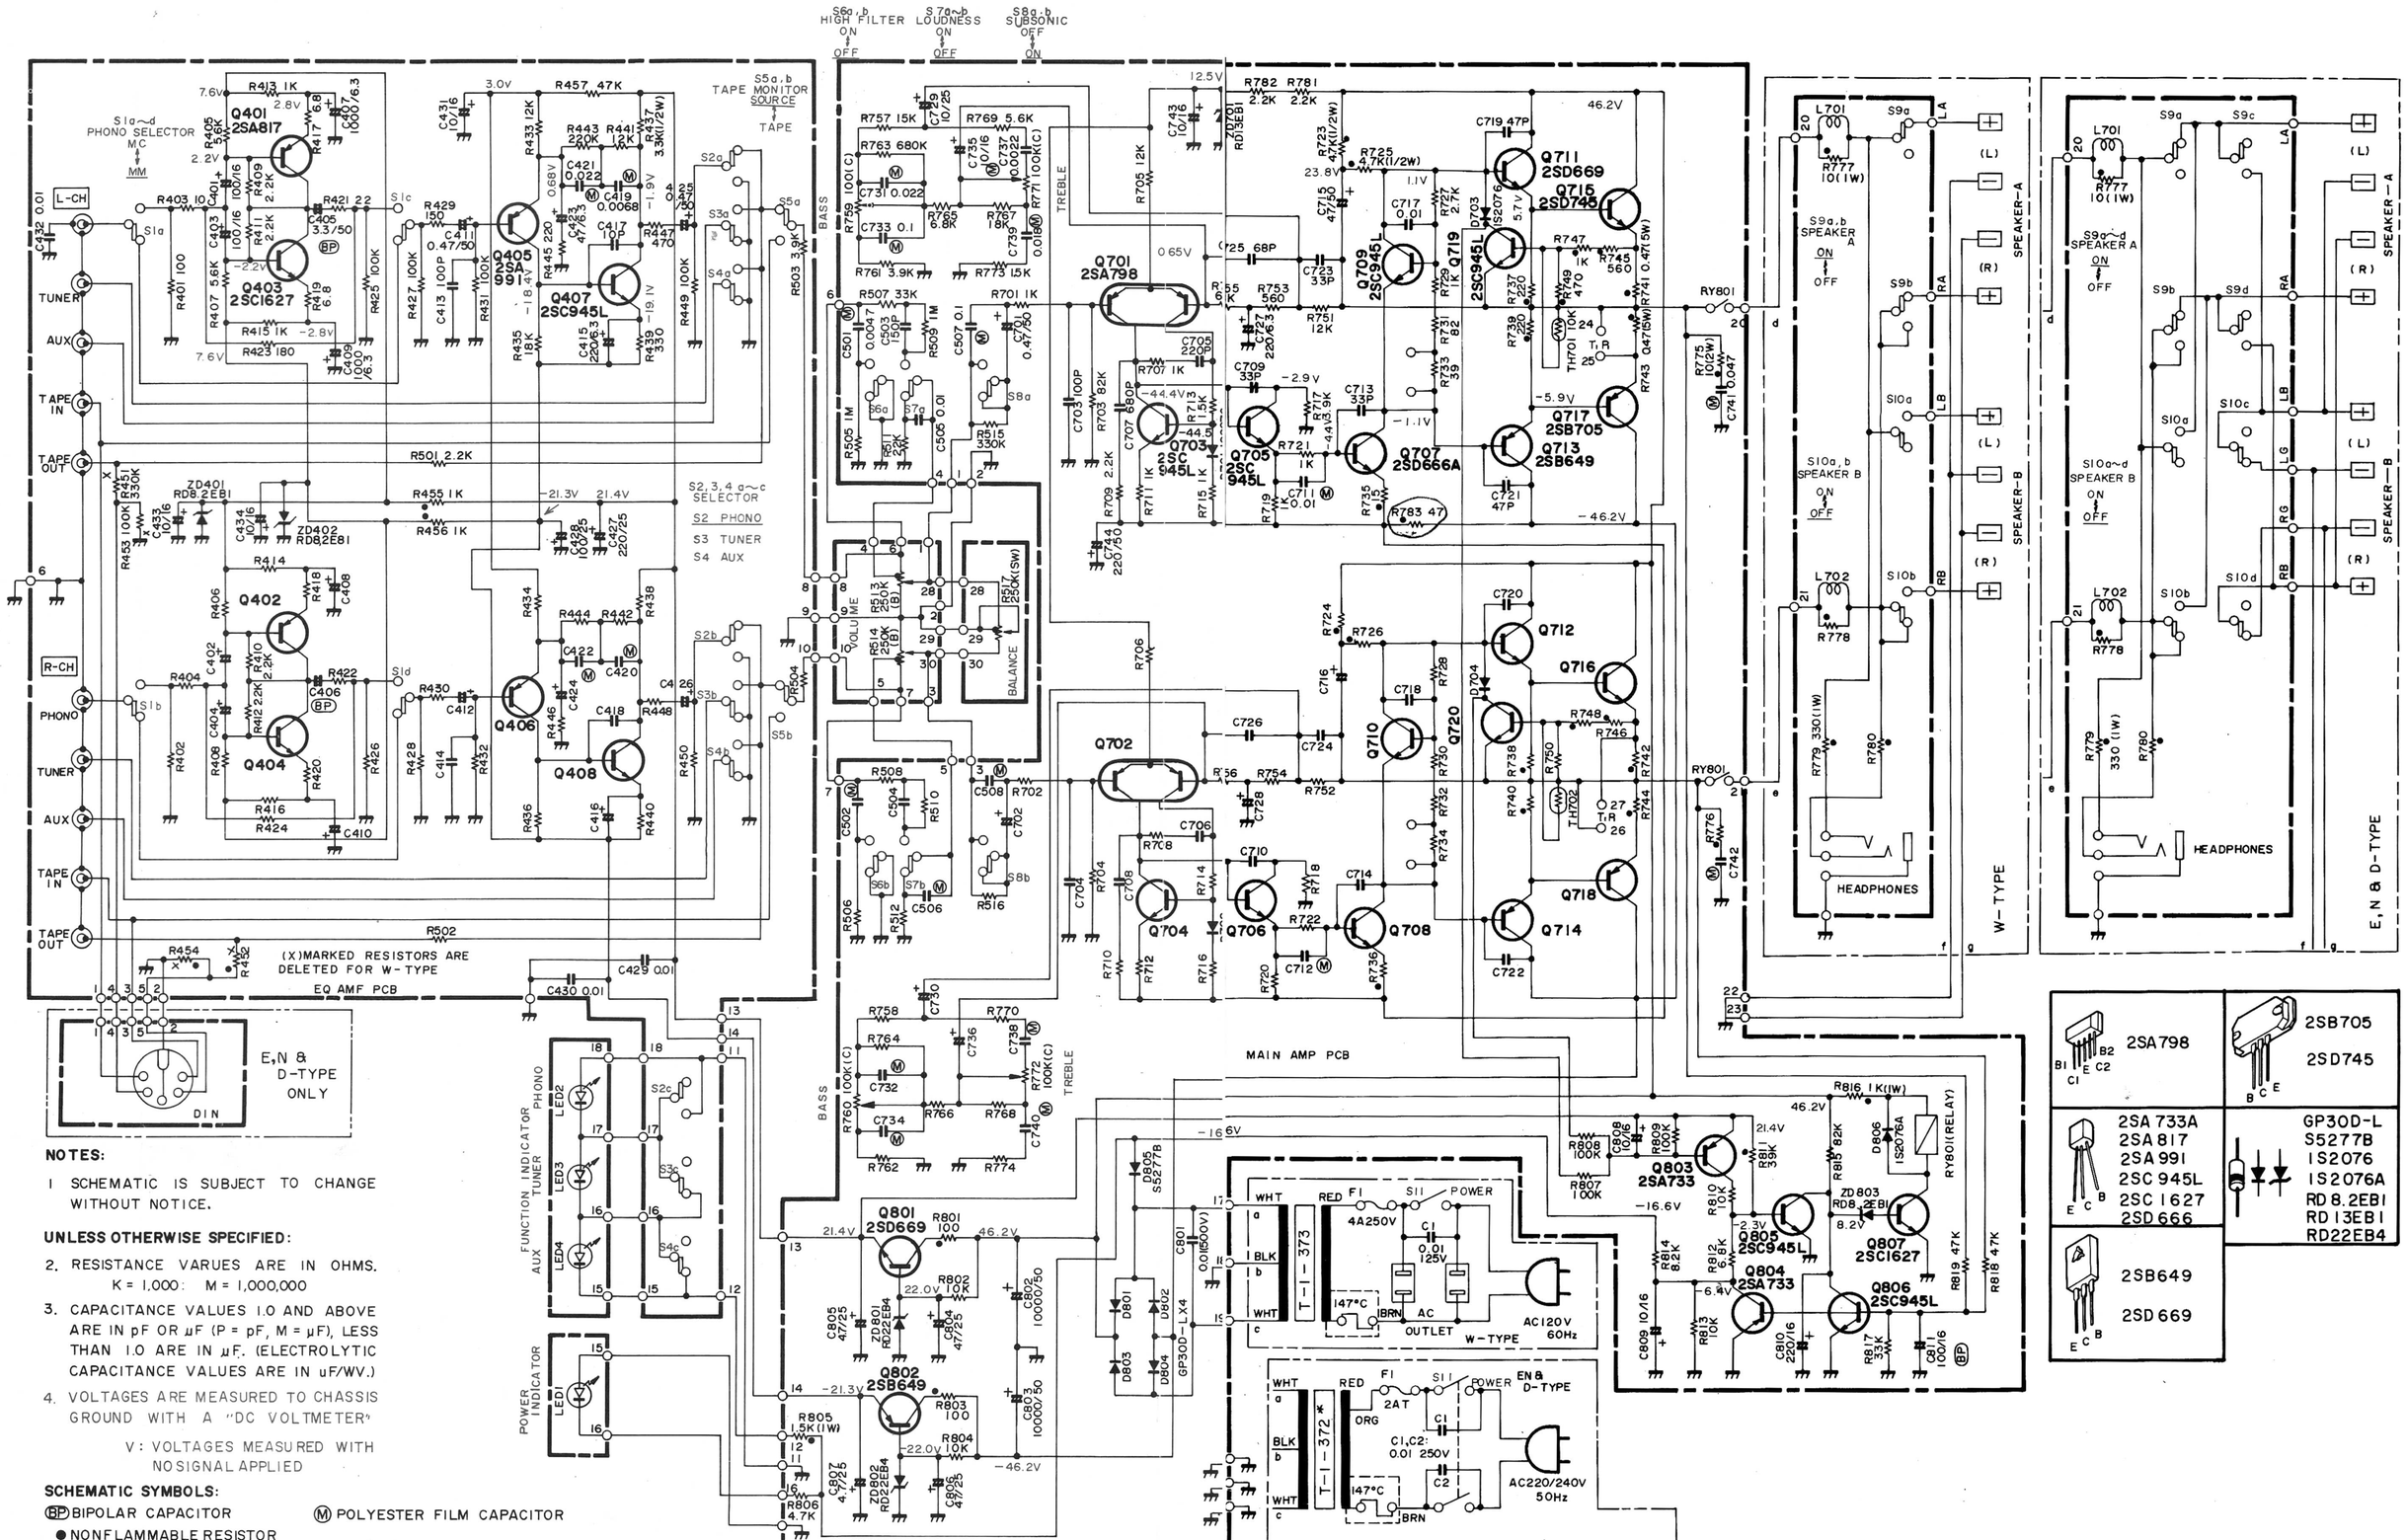

NOTES:

1 SCHEMATIC IS SUBJECT TO CHANGE WITHOUT NOTICE.

UNLESS OTHERWISE SPECIFIED:

2. RESISTANCE VARUES ARE IN OHMS. K = 1,000: M = 1,000,000
3. CAPACITANCE VALUES 1.0 AND ABOVE ARE IN pF OR μF (P = pF, M = μF), LESS THAN 1.0 ARE IN μF. (ELECTROLYTIC CAPACITANCE VALUES ARE IN uF/WV.)
4. VOLTAGES ARE MEASURED TO CHASSIS GROUND WITH A "DC VOLTMETER"

V: VOLTAGES MEASURED WITH NO SIGNAL APPLIED

SCHEMATIC SYMBOLS:

(BP) BIPOLAR CAPACITOR
● NONFLAMMABLE RESISTOR
(M) POLYESTER FILM CAPACITOR