

Integra® SERVICE MANUAL

June. 2000

**AV RECEIVER
DTR-9.1****Black model**

BUD

120V AC, 60Hz

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK Δ ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

TABLE OF CONTENTS

Specifications.....	2
Service procedures.....	3
Panel views.....	4
Front panel.....	4
Remote controller.....	5
Rear panel.....	6
Example of how to connect equipment.....	8
Disassembling procedures.....	10
Assembling procedures.....	11
Adjustment and confirmation.....	27
Main microprocessor terminal descriptions.....	29
Main microprocessor connection diagram.....	31
Sub microprocessor connection diagram.....	33
Sub microprocessor connection diagram.....	35
FL tube view.....	36
PCB connection view.....	37
Wiring view.....	39
Block diagram.....	41
PCB view, parts list, and schematic diagram.....	43
Main microprocessor, Power supply.....	43
Display, Sub microprocessor.....	51
Audio 1.....	57
Audio 2.....	61
Power amplifier 1, Power supply.....	65
Power amplifier 2.....	70
Video.....	76
Component video.....	81
Multi channel.....	83
DSP.....	85
Exploded view.....	90
Parts list.....	92
Front panel exploded view.....	93
Packing view.....	95

SPECIFICATIONS

AMPLIFIER SECTION

Continuous Average Power output (FTC)	
All channels:	130 watts per channel min. RMS at 8 ohms, 2 channels driven from 20 Hz to 20 kHz with no more than 0.05 % total harmonic distortion.
	170 watts min. RMS at 6 ohms, 2 channels driven from 1 kHz with no more than 0.1 % total harmonic distortion.
Continuous Power output (DIN)	160 watts at 6 ohms
Maximum Power output (EIAJ)	200 watts at 6 ohms
Dynamic Power Output (Stereo)	2 ×300 watts at 3 ohms 2 ×230 watts at 4 ohms 2 ×150 watts at 8 ohms
Total Harmonic Distortion:	0.05% at rated power 0.05% at 1 Watt output
IM Distortion:	0.05% at rated power 0.05% at 1 Watt output
Damping Factor:	60 at 8 ohms
Input Sensitivity and Impedance	
PHONO:	2.5 mV, 50 kohms
LINE (CD, TAPE 1-2, DVD, VIDEO 1-5):	200 mV, 50 kohms
MULTICHANNEL INPUT (FRONT L/C/R, SURROUND L/R, SURROUND BACK L/R):	200 mV, 50 kohms
(SUBWOOFER):	36 mV, 50 kohms
AMP IN (FRONT L/C/R) :	1 V, 50 kohms
COAXIAL 1-5 (DIGITAL):	0.5 Vp-p, 75 ohms
DVD, VIDEO1-5:	1 Vp-p, 75 ohms 1 Vp-p, 75 ohms (Y) 0.28 Vp-p, 75 ohms (C)
COMPONENT VIDEO 1-3:	1 Vp-p, 75 ohms (Y) 0.5 Vp-p, 75 ohms (Pb, Pr)
Output Level and Impedance	
Rec out (TAPE 1-2, VIDEO 1-2):	200 mV, 2.2 kohms
Pre out:	1 V, 470 ohms
ZONE 2 OUT:	100mV, 470 ohms
VIDEO (VIDEO 1-2, MONITOR OUT, ZONE 2 OUT):	1 Vp-p, 75 ohms 1 Vp-p, 75 ohms (Y) 0.28 p-p, 75 ohms (C)
COMPONENT VIDEO OUT:	1 Vp-p, 75 ohms (Y) 0.5 Vp-p, 75 ohms (Pb, Pr)
Phono Overload:	110 mV RMS at 1 kHz, 0.5% T.H.D.
Frequency Response:	20 Hz to 30 kHz : ±1dB (CD in Direct mode) 5 Hz to 100 kHz : +1dB,-3dB (CD in Direct mode)
RIAA Deviation:	20 to 20 kHz : ±0.8 dB
Tone Control	
Bass:	±10 dB at 100 Hz
Treble:	±10 dB at 10 kHz
Signal-to-Noise Ratio (Stereo)	
Phono:	80 dB (IHF A, 5 mV input)
CD/Tape:	100 dB (IHF A, 0.5 V input)

TUNER SECTION

FM	
Tuning Range:	87.5 ~ 108.0 MHz (50 kHz steps)
Usable Sensitivity	
Mono:	11.2 dBf, 1.0 μV (75 ohms IHF) 0.9 μV (75 ohms DIN)
Stereo:	17.2 dBf, 2.0 μV (75 ohms IHF) 23 μV (75 ohms DIN)
50 dB Quieting Sensitivity	
Mono:	17.2 dBf, 2.0 μV (75 ohms)
Stereo:	37.2 dBf, 20 μV (75 ohms)
Capture Ratio:	2.0 dB
Image Rejection Ratio	40 dB
IF Rejection Ratio:	
Signal-to-Noise Ratio	90 dB
Mono:	76 dB
Stereo:	70 dB
Alternate Channel Attenuation:	55 dB
Selectivity:	50 dB (DIN)
AM Suppression Ratio:	50 dB
Total Harmonic Distortion	
Mono:	0.2%
Stereo:	0.3%
Frequency Response:	30 Hz ~ 15 kHz, ±1.0 dB
Stereo Separation:	
	45 dB at 1 kHz 30 dB at 100 Hz ~ 10 kHz
AM	
Tuning Range:	530 ~1,710 kHz (10 kHz steps)
Usable Sensitivity:	30 μV
Image Rejection Ratio:	40 dB
IF Rejection Ratio:	40 dB
Signal-to-Noise Ratio:	40 dB
Total Harmonic Distortion:	0.7%
GENERAL	
Power Supply:	AC 120 V, 60 Hz
Power Consumption:	11 A
Dimensions (W × H ×D):	17-1/8" × 7-11/16" × 18"
Weight:	49.4 lbs.
REMOTE CONTROLLER	
Transmitter:	Infrared
Signal range:	Approx. 5 meters, 16 ft.
Power supply:	Two "AA" batteries (1.5 V × 2)

Specifications and features are subject to change without notice.

SERVICE PROCEDURES

1. Replacing the fuses

 This symbol located near the fuses indicates that the fuse used is fast operating type. For continued protection against fire hazard, replace with same type fuse. For fuse rating refer to the marking adjacent to the symbol.

 Ce symbole indique que le fusible utilise est a rapide. Pour une protection permanente, n'utiliser que fusibles de meme type. Ce dernier est la qu le present symbol est appse.

CIRCUIT NO.	PART NO.	DESCRIPTION
F9001	252196	12A-UL, Primary

2. To initialize the unit

This device employs a microprocessor to perform various functions and operations. If interference generated by an external power supply, radio wave, or other electrical source results in accident which causes the specified operations and functions to operate abnormally.

To perform a result, please follow the procedure below.

- 1.Turn the Power switch to on.
- 2.Press and hold down the VIDEO-1 button, then press the STANDBY/ON button.
- 3.After "clear" is displayed, the preset memory and each mode stored in the memory, such as surround, are initialized and will return to the factory setting.
- 4.Disconnect the power supply cord.

3. Safety-check out

After correcting the original service problem, perform the following safety check before releasing the set to the customer. Connect the insulating-resistance tester between the plug of power supply cord and screw on the back panel.

Specifications: 3.3Mohm±10% at 500V.

4. Memory Preservation



This unit does not require memory preservation batteries. A built-in memory power back-up system preserves the contents of the memory during power failures and even when the unit is unplugged. The unit must be plugged in order to charge the back-up system.

The memory preservation period after the unit has been unplugged varies depending on climate and placement of the unit. On the average, memory contents are protected over a period of a few weeks after the last time the unit has been unplugged. This period is shorter when the unit is exposed to a highly humid climate.

5. Changing the AM band step


When you change the band step, change the parts as shown below.

	To 10kHz	To 9kHz
R7091	Short	Open
R7191	Open	10kohm
R7276	Short	Open
R7277	Short	Open
R7376	Open	10kohm
R7377	Open	10kohm

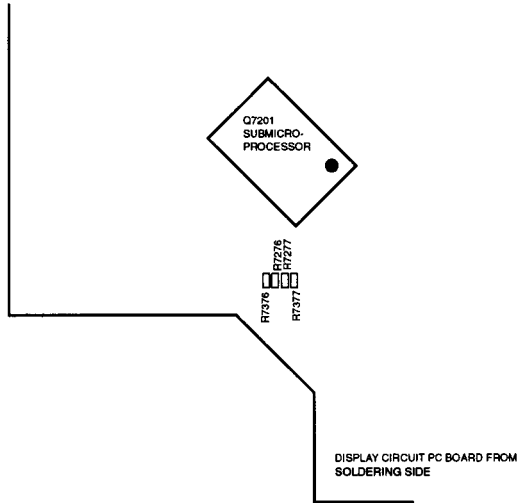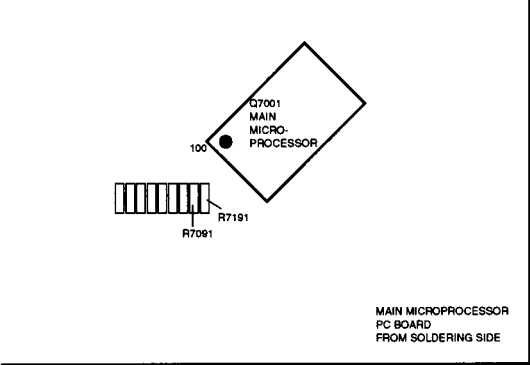

6. Connection of computer


When you change the program of microprocessor or control the unit by the computer, connect the cable RS232C of straight type between a computer and terminal RS232 on the rear panel.

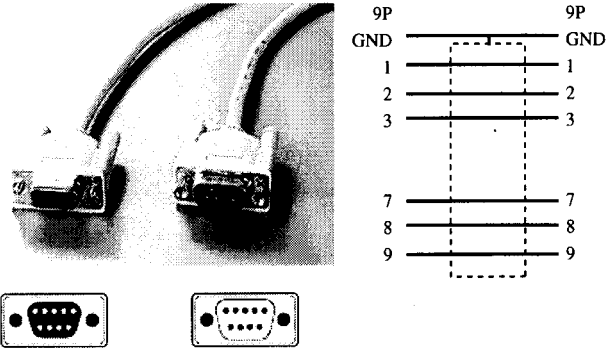

DISASSEMBLING PROCEDURES


1. Top cover

Remove two screws A holding the top cover and bracket.
Remove six screws B holding the top cover and chassis.
Remove two screws C holding the top cover and the rear panel.
Lift up the top cover and remove it.

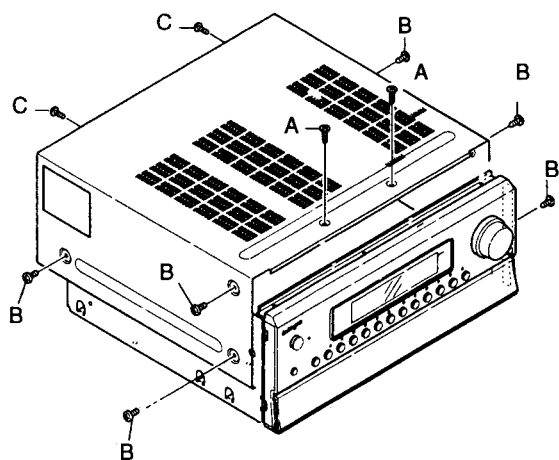


2. Front panel assembly

Remove the top cover.
Disconnect two FFCs on the sockets of P7201B and P7202A.
Remove three screws D holding the front panel and chassis from the top side.
Remove six screws D holding the front panel and chassis from the bottom side.

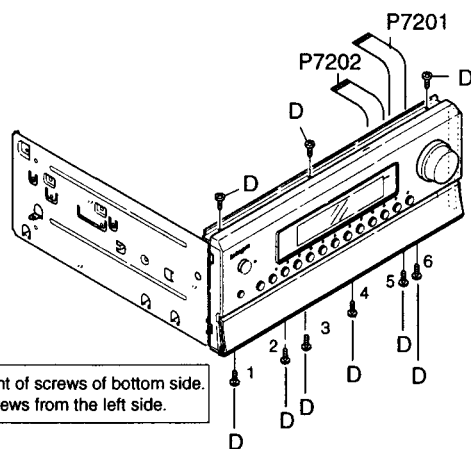



3. Bottom board

Remove four screws E holding the leg and chassis.
Remove ten screws F holding the bottom panel and chassis.

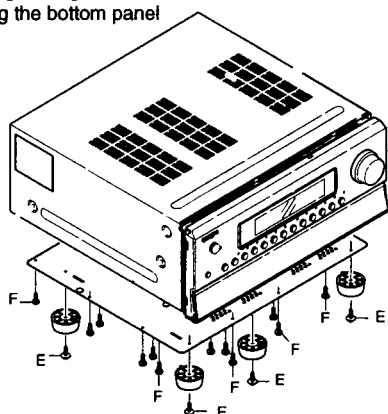

4. Power amplifier PC board block


Remove the top cover.
Remove the rear panel. (Refer to the item of rear panel)
Cut the binder G of the left side on the bracket PT.
Remove a screw H.(UD model only)
Remove a screw J holding the holder K and remove the holder J.
Remove the five screws L holding the PC board assembly M.
(When the screw driver touches the PC board N, press it to the arrow mark.)
Remove the four screws O holding the brackets and chassis.
Lifter up the power amplifier PC board block.

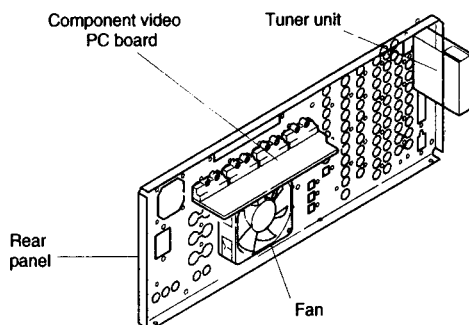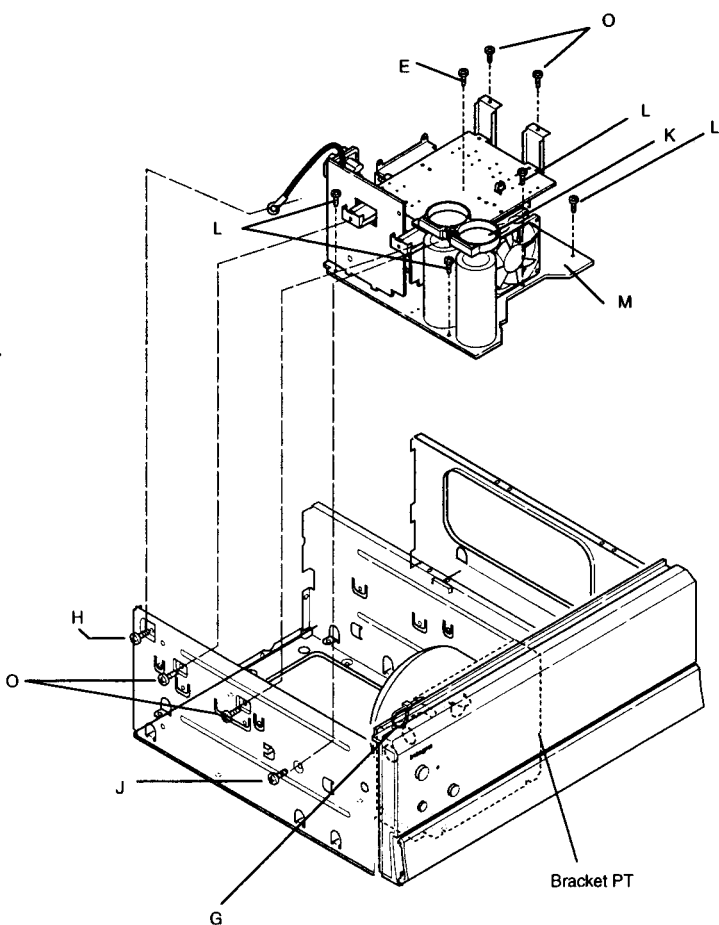

Note: When you remove the rear panel, you are not necessary to remove the parts above.

5. Rear panel

When PC board assembly are removed, remove the rear panel.
Remove the 12 screws A holding the rear panel and the chassis.
Remove the four special screws C.
Remove the 32 screws D to K.
Remove the two screws L.


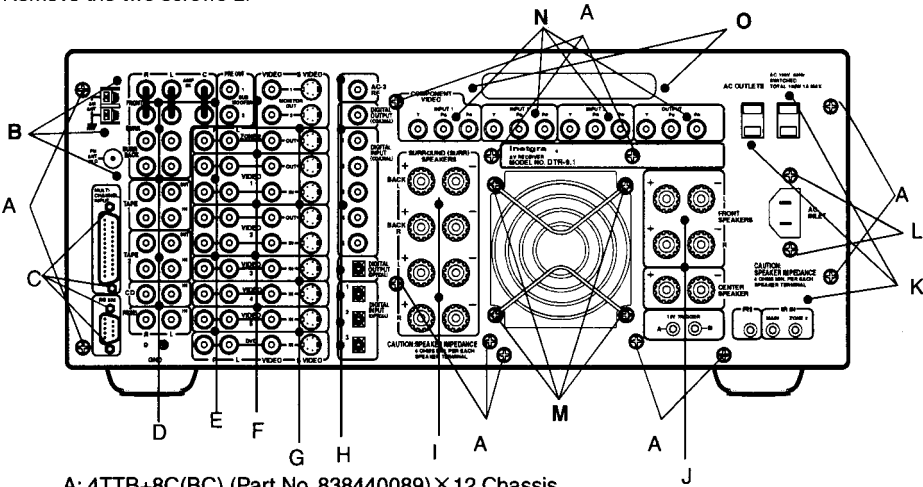


- A: 4TTB+8C(BC) (Part No. 838440089)×12 Chassis
- B: 3TTB+6B(BC) (Part No. 838430068)×3 Tuner unit
- C: Special screw (This screw is included to Terminal)×4 Multi channel input PC board
- D: 3TTB+8B(BC) (Part No. 838430088)×5 Main circuit PC board
- E:3TTB+8B(BC) (Part No. 838430088)×4 Input/output terminal PC board
- F:3TTB+8B(BC) (Part No. 838430088)×5 Video terminal PC board
- G:3TTB+8B(BC) (Part No. 838430088)×4 S video terminal PC board
- H:3TTB+8B(BC) (Part No. 838430088)×7 DSP circuit PC board
- I:3TTB+8B(BC) (Part No. 838430088)×2 Speaker terminal PC board
- J:3TTB+8B(BC) (Part No. 838430088)×2 Speaker terminal PC board
- K:3TTB+8B(BC) (Part No. 838430088)×3 Primary circuit PC board
- L: 4TTB+8C(BC) (Part No. 838440089)×2 Primary circuit PC board
- M:5STP+10BQ(BC) (Part No. 833450102)×4 Fan
- N:3TTB+8B(BC) (Part No. 838430088)×4 Component video PC board
- O:3TTB+8B(BC) (Part No. 838430088)×2 Cover

ASSEMBLING PROCEDURES


1. Attachment of door knob

When you replace the door knob assembly of left side, cut the two knobs below.

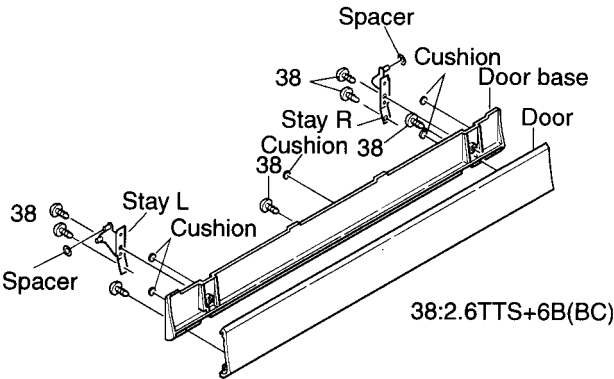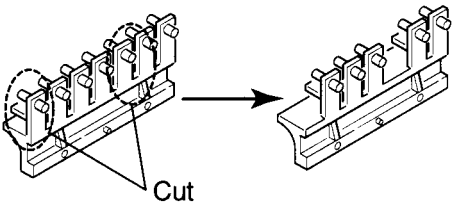

2. Attachment of door


Put the cushions according to the center of rib.

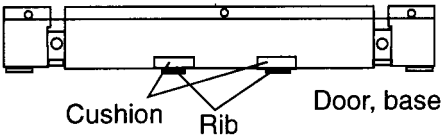

Inley the door base to the door.
Put the five cushions on the door base.
Attach the stay L and the stay R.
Put the spacers on the stay L and the stay R.

3. Attachment of holders


Apply the floil G-902S (Part No. 260447) on the lever L and the lever R.




DTR-9.1

4.Attachment of shaft assembly


Apply Floil on the groove of holders.

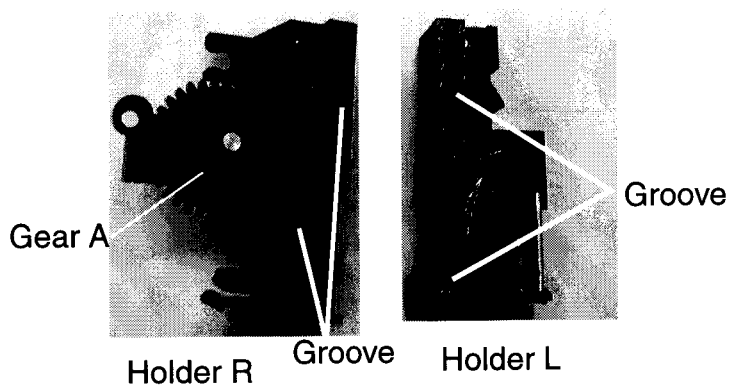


Hang the spring from the down side of lever. Attach the gear A to the holder R, and insert the shaft A to fix the gear A.

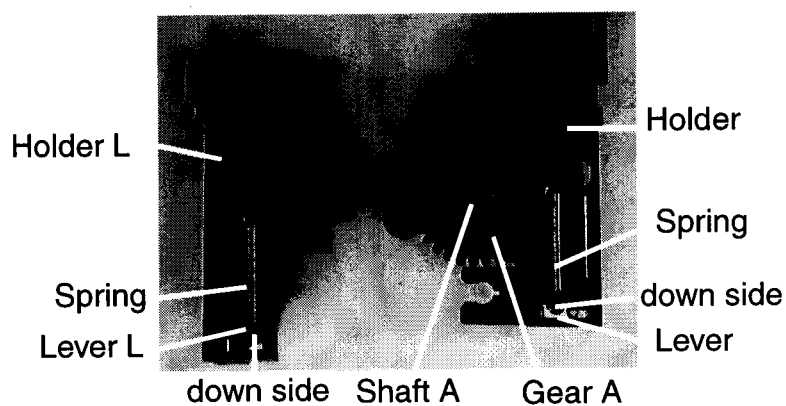

Insert the shaft to the shaft L and the shaft R.


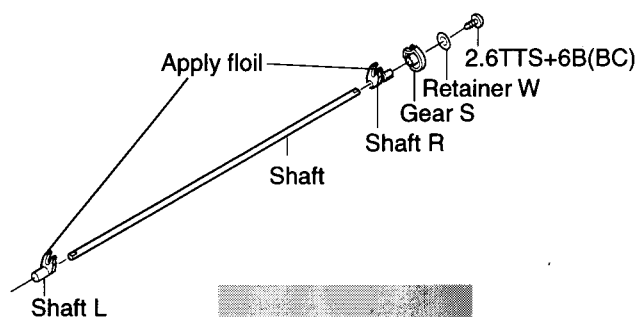


Turn Gear A counter clockwise fully.

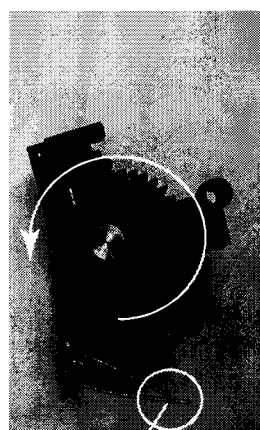


Cross

Attach the gear S as shown below.

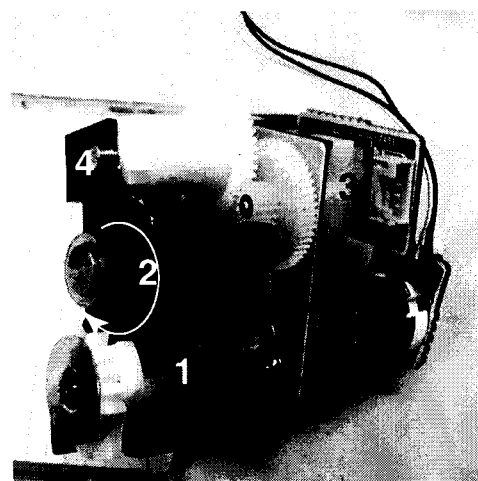

- 1.Insert the retainer S.
- 2.Turn the gear A clockwise fully.
- 3.Insert the headphone jack to the hole of front panel.
- 4.Attach the motor assembly.
- 5.Attach the part above on the front panel.

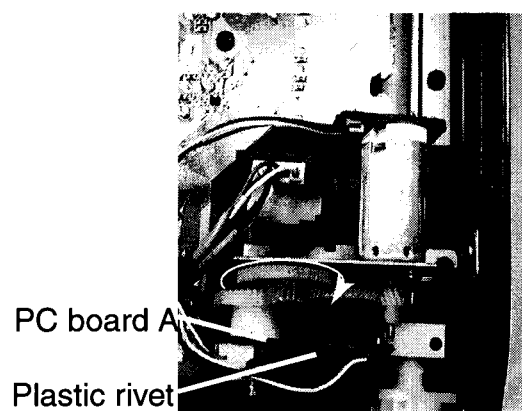


Turn the gear clockwise fully and insert the PC board A. Fix the PC board by the plastic rivet.

ADJUSTMENT AND CONFIRMATION

1. Idling current adjustment

Before Idling adjustment, turn the trimming resistors R5340 to R5346 to counter clockwise.
 Connect the DC voltmeter to sockets P5110 to P5116.
 After turn POWER to ON, adjust the trimming resistors R5340 to R5346 so that the reading of voltmeter becomes 1.0 mV.
 After adjustment, attach the top cover.
 Confirm the voltage of points above after five minutes.
 When less than 3 mV: Readjust the trimming resistors above so that the voltage becomes 3.5 ± 0.5 mV.
 When 3 mV to 5 mV: It is not necessary to adjust.
 When more than 5 mV: Readjust the trimming resistors above so that the voltage becomes 4.5 ± 0.5 mV.
 Note: No load and No signal

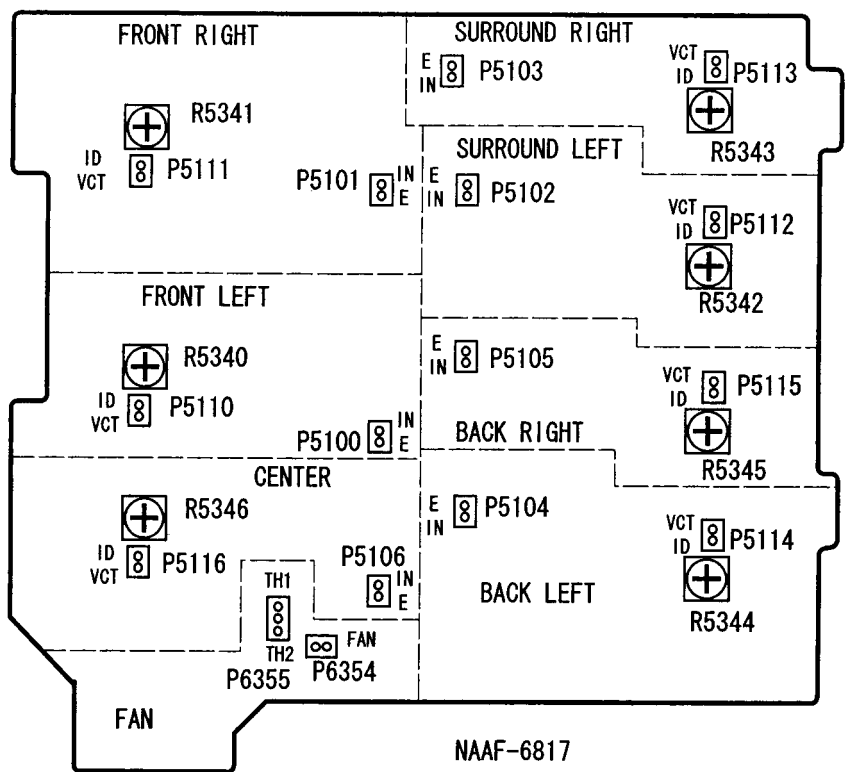

Confirmation of protection circuit


- Confirmation of operation of speaker relay

Confirm that the speaker relay turns ON approximate 5 seconds after the power switch is turned ON.
 Confirm that the speaker relay turns OFF immediately after the power switch is turned OFF.
- Confirmation of DC detection circuit

Press and hold down CD button, then press DISPLAY and STANDBY buttons at the same time.
 During "Test-1 00" on the FL tube light on, press VIDEO 1 button to set the unit to "Test-1 00" mode.
 Apply DC 1.5~3V to the MULTI CHANNEL INPUT terminal of each channel with no load.
 Confirm that the speaker relay turns OFF.
 Apply DC -1.5~-3V to MULTI CHANNEL INPUT terminal of each channel with no load.
 Confirm that the speaker relay turns OFF and it turns ON after a second.
 Note: Don't apply DC more than 1 second.
 When the speaker relay does not turn OFF, repeat the operation above several times.
- Confirmation of Current detection circuit

Set the unit to "Test-1 00" mode.
 Connect Differentiator and apply the 200Hz square signal to the MULTI CHANNEL INPUT of each channel.
 Adjust the attenuator or Volume so that the output level becomes 70 V p-p.
 Confirm that the speaker relay turns OFF when a 1.5 ohm load is connected.

DTR-9.1

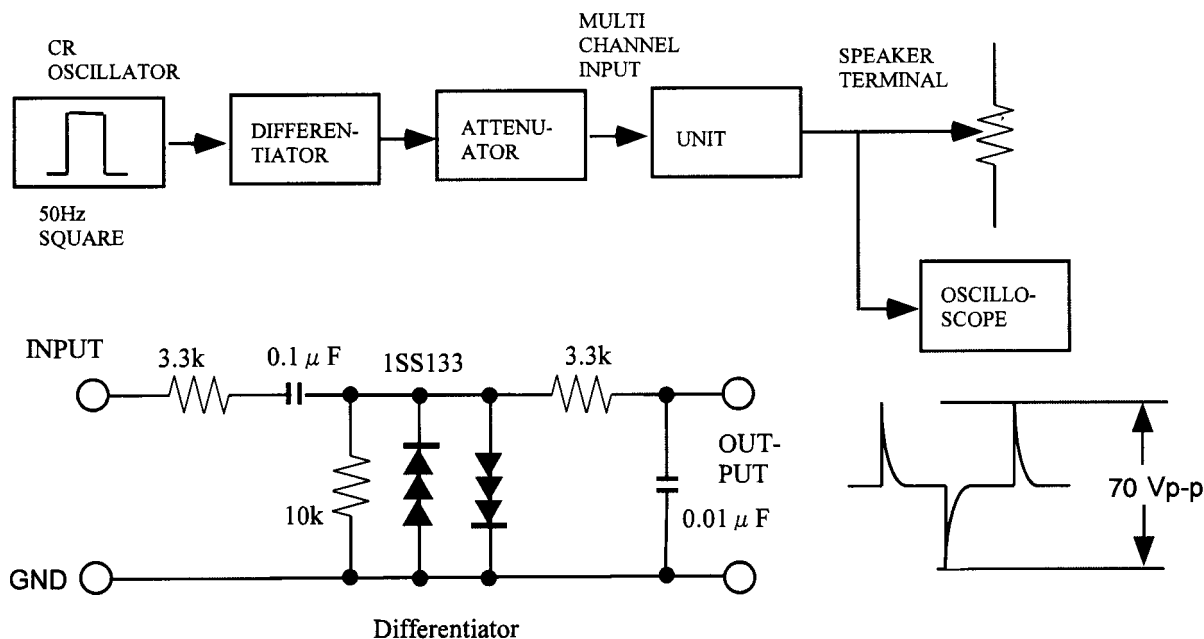

Confirmation of headphone operation

When the headphones are plugged in, confirm that the listening mode automatically changes to STEREO and output to the speakers is stopped.

Confirmation of fan operation


Set the unit to the test mode "TEST1-00".
Apply the signal (1kHz, -30dB) to MULTI CHANNEL terminal except SUBWOOFER terminal with no load.
Confirm that the fan operates after a few seconds.

Confirmation of thermal protect operation

Set the unit to the test mode "TEST1-00".
Connect the metal oxide film resistor 2.7 kohm 1W between terminals of +22V and TH2 on the test point P6355.
Confirm that "Thermal Protect" is displayed on the FL tube.

Confirmation of reading and writing operation of flash memory

Press and hold down CD button, then press DISPLAY and POWER buttons at the same time.
During "TEST1-00" on the FL tube light on and off, press VIDEO 4 button to set the unit to the confirmation mode of this item.
Confirm the display on FL tube.

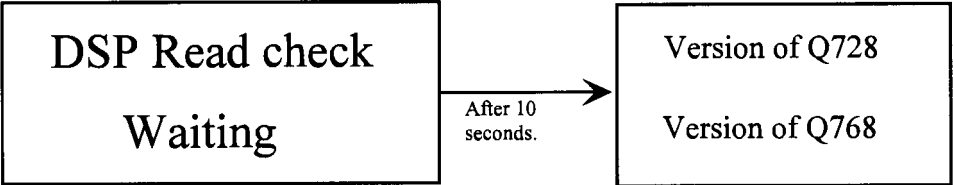

FL tube



After confirmation, turn the POWER switch to OFF to reset the unit.

Test Mode

- 1. Turn POWER button on.
- 2. Press and hold down CD button, then press DISPLAY and STANDBY buttons at the same time.
- 3. During "Test-1 00" on the FL tube lights on, press CD, VIDEO 1, VIDEO 2, or VIDEO 3 button to set the unit to the test mode shown below.
- 4. Press ZONE 2 or REC button to select the test item.

Button Operation in the Test Mode

Button Operation	Test Mode	Test	Item
CD	FL tube		
VIDEO 1	Protect/Tuner	Test -1	00,01
VIDEO 2	Audio	Test -2	00 to 25
VIDEO 3	Audio	Test -3	00 to 13
ZONE 2	UP of item		
REC	DOWN of item		

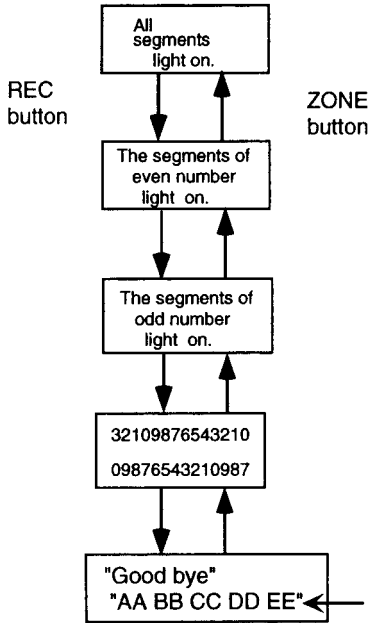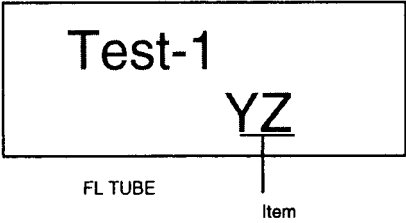

AA: Power amplifier function : "AM" with Power amplifier, " " without Power amplifier
BB: Video mode: "PL" PAL available, "NS" NTSC
CC: 12V trigger function: "TR" Available, " " No available
DD: RDS function: "RD" Available, " " No available
EE: Region: "EU" Europe, "SA" Asia, "US" U.S.A., "JP" Japan


This model : AM NS TR US

MAIN MICROPROCESSOR TERMINAL DESCRIPTION


No.	Function	I/O	Act	Description
1	FDATA	O	H	Serial data output terminal of function switch for input and configuration.
2	FCLK	O	CLK	Serial clock output terminal of function switch for input and configuration.
3	CFSTB	O	H	Serial clock output terminal of function switch for configuration.
4	TDATA	O	H	Serial data output terminal of tone control IC.
5	TCLK	O	CLK	Serial clock output terminal of tone control IC.
6	~TCS1	O	L	Chip select output terminal of tone control IC for front channel.
7	~TCS2	O	L	Serial data output terminal of tone control IC for center and sub woofer.
8	VSS	I		Input terminal to switch the bus width of external data. Connect to the ground.
9	VSS	I		Input terminal to switch processor mode. Connect to the ground.
10	VPDATA	O	H	Serial data output terminal of electrical volume and PLL ICs.
11	VPCLK	O	CLK	Serial clock output terminal of electrical volume and PLL ICs.
12	~RESET	I		System reset input terminal.
13	XOUT	O		Oscillator circuit output terminal of main clock.
14	VSS	I		Power supply terminal. Connect to the ground.
15	XIN	I		Oscillator circuit input terminal of main clock.
16	VCC	I		Power supply terminal. Connect to +5V.
18	VSTB	O	H	Strobe output terminal of electrical volume.
19	~RDSSCK	I	CLK	Not used.
20	~POFF	I	L	Input terminal for power failure detection.
21	PLLCE	O	H	Strobe output terminal of PLL IC.
22	RDSDATA	I	H	Not used.
23	RDSSIG	I	H	Not used.
24	~STEREO	I	L	FM stereo broadcast detection terminal.
25	~SD	I	L	Signal strength detection terminal of tuner.
26	DIGSO	O	H	Serial data output terminal to DSP ICs.
27	DIGSI	I	H	Serial data input terminal from DSP and DIR ICs.
28	DIGSCK	O	CLK	Serial clock output terminal to DSP ICs.
29	~INTRQ1	I	L	INTRQ input terminal from DSP2.
30	~INTRQ2	I	L	INTRQ input terminal from DSP1.

DTR-9.1


No.	Function	I/O	Act	Description
31	2NDPLLCS	O	H	Serial chip select output terminal of second PLL IC.
32	2NDPLLLOCK	I	H	Lock detection input terminal from second PLL IC
33	~AD/DIR	O	H	ADC/DIR select output terminal
34	~SUBREQ	I	L	Request input terminal from sub microprocessor
35	MAINSO	O	H	Serial data output terminal of sub microprocessor
36	MAINSI	I	H	Serial data input terminal from sub microprocessor
37	MAINSCK	O	CLK	Serial clock output terminal of sub microprocessor
38	~MAINREQ	O	L	Request output terminal from sub microprocessor
39	XSTATE	I	H	Source clock change monitor input terminal (DIR)
40	ERROR	I	H	Flag input terminal for PLL lock error or data error.
41				Port of flash memory rewriting (DIR)
42	CSFLAG	I	H	Update flag input terminal of head 40 bits of channel status
43	~RFDIRST	O	L	DIR/AC-3 RF RESET output terminal (common)
44	RFSYNC	I	H	Synchronizing input terminal for AC-3 RF
45	~DARST	O	L	Reset signal output terminal for DAC
46				Port of flash memory rewriting (DIR)
47	~ADRST	O	L	Reset signal output terminal for ADC
48	DFS	O	H	Sampling frequency control output terminal for ADC/DAC
49	APGLOCK	I	H	Not used.
50	F0	O	H	Not used.
51	F1	O	H	Not used.
52	F2	O	H	Not used.
53	TUMUT	O	H	Muting control output terminal for tuner section
54	MRMUT	O	H	Muting control output terminal for zone 2.
55	HPMUT	O	H	Muting control output terminal for headphone
56	AMUT	O	H	Muting control output terminal for analog section
57	SPRL	O	H	Speaker relay control output terminal
58	POWERL	O	H	Power relay control output terminal
59	~TRG12A	O	L	12V trigger output terminal.
60	~TRG12B	O	L	12v trigger output terminal.
61	~PRTCTTHM	I	L	Thermal protection detection input terminal
62	VCC	I		Power supply terminal. +5V.
63	PRTCTV	I	H	Current/Voltage detection input terminal of protection circuit
64	VSS	I		Power supply terminal. Connect to the ground.
65	ADR2916	O	H	Control output terminal for address 16 of flash memory IC Q728
66	ADR2917	O	H	Control output terminal for address 17 of flash memory IC Q728
67	ADR2918	O	H	Control output terminal for address 18 of flash memory IC Q728
68	ADR3017	O	H	Control output terminal for address 17 of flash memory IC Q768
69	ADR3015	O	H	Control output terminal for address 15 of flash memory IC Q768
70	ADR3016	O	H	Control output terminal for address 16 of flash memory IC Q768
71	~DSPCS2	O	L	Chip select output terminal to DSP IC 2
72	~DSPCS1	O	L	Chip select output terminal to DSP IC 1
73	2NDPLLCLK	O	CLK	Serial clock output terminal to second PLL IC
74	~DIRCS	O	L	Chip select output terminal to DIR IC
75	~DACCS	O	L	Chip select output terminal to DAC
76	~DSPRST2	O	L	Reset output terminal to DSP IC 2
77	~DSPRST1	O	L	Reset output terminal to DSP IC 1
78	IEEEMOD1	O	H	IEEE mode select output terminal. High level when clock of two lines and data of a line.
79	IEEEMOD2	O	H	IEEE mode select output terminal. High level when clock of two lines and data of four lines.
80	DSPMOD	O	H	High level when DSP 1.
81	IEEEMOD1CLK	O	H	Select output terminal of clock master or slave.
82	~CSFLASH	O	L	Chip select output terminal of flash memory ICs.
83	~CSSRAM	O	L	Chip select output terminal of SRAM ICs
84	~AUDIO	I	L	Audio detect input terminal of DIR IC
85	AUTO	I	H	Auto detect input terminal of DIR IC
86	DIGCS	O	H	Chip select output terminal of digital input switch
87	MPOWER	O	L	Initializing of power amplifier.
88	ADR2915	O	H	Address 15 control output terminal of flash memory
91	9k~10k	I	H	Initializing input terminal for band step of AM
92	MSPORT4	O	H	Not used.
93	~SUBPOFF	O	L	Signal control output terminal for power off of sub microprocessor
94	MSPORT2	O	H	Not used.
95	MSPORT1	O	H	Not used.
96	VSS	I		Power supply terminal for AD converter
97	~SUBRESET	O	L	Reset control terminal for sub microprocessor
98	VREF	I		Reference voltage input terminal for A/D converter
99	VCC	I		Power supply terminal for A/D converter. Connect to 5V.
100	IPSTB	O	H	Strobe output terminal for function switch

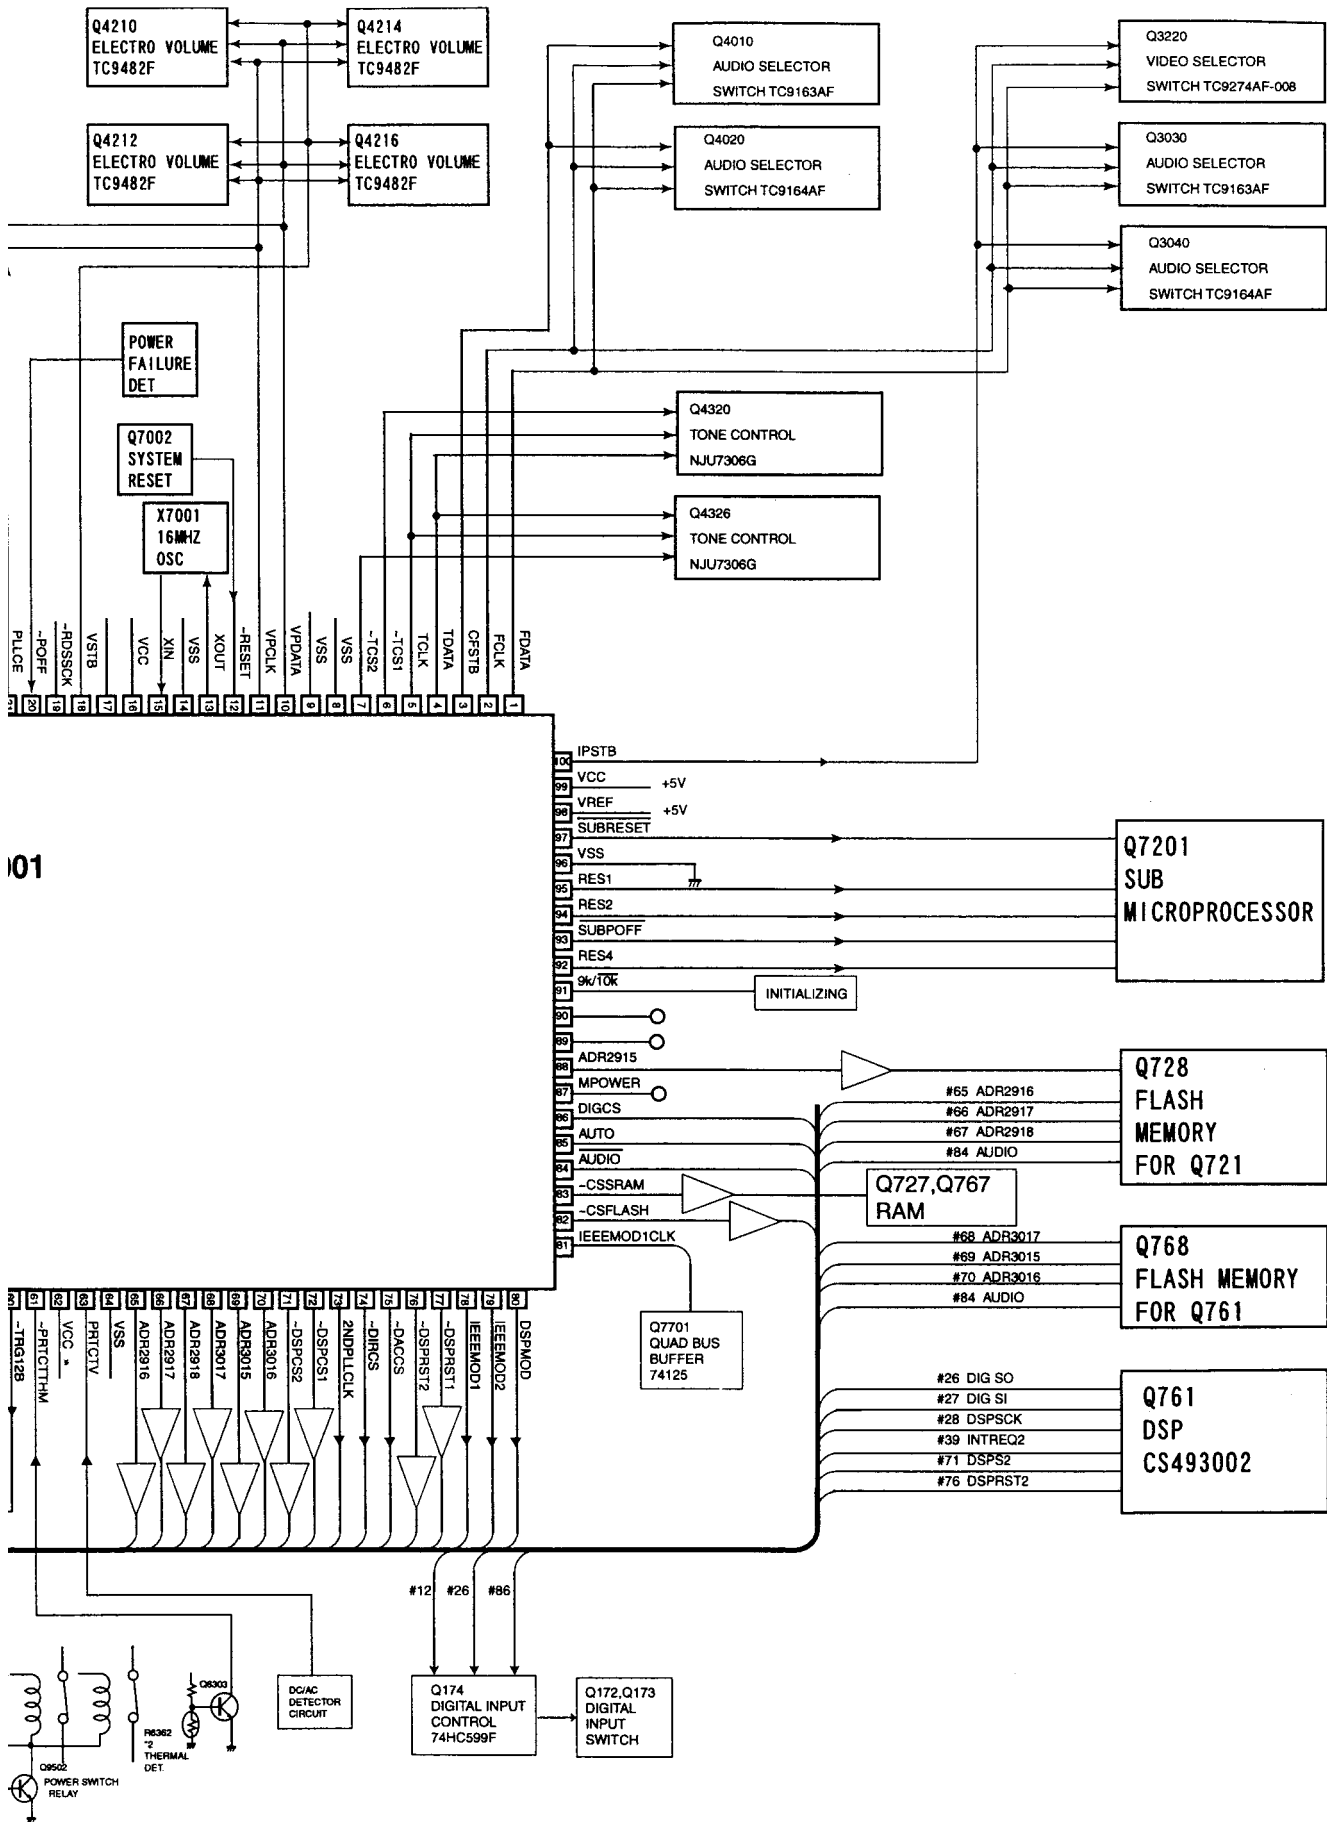


MAIN MICROPROCESSOR CONNECTION DIAGRAM

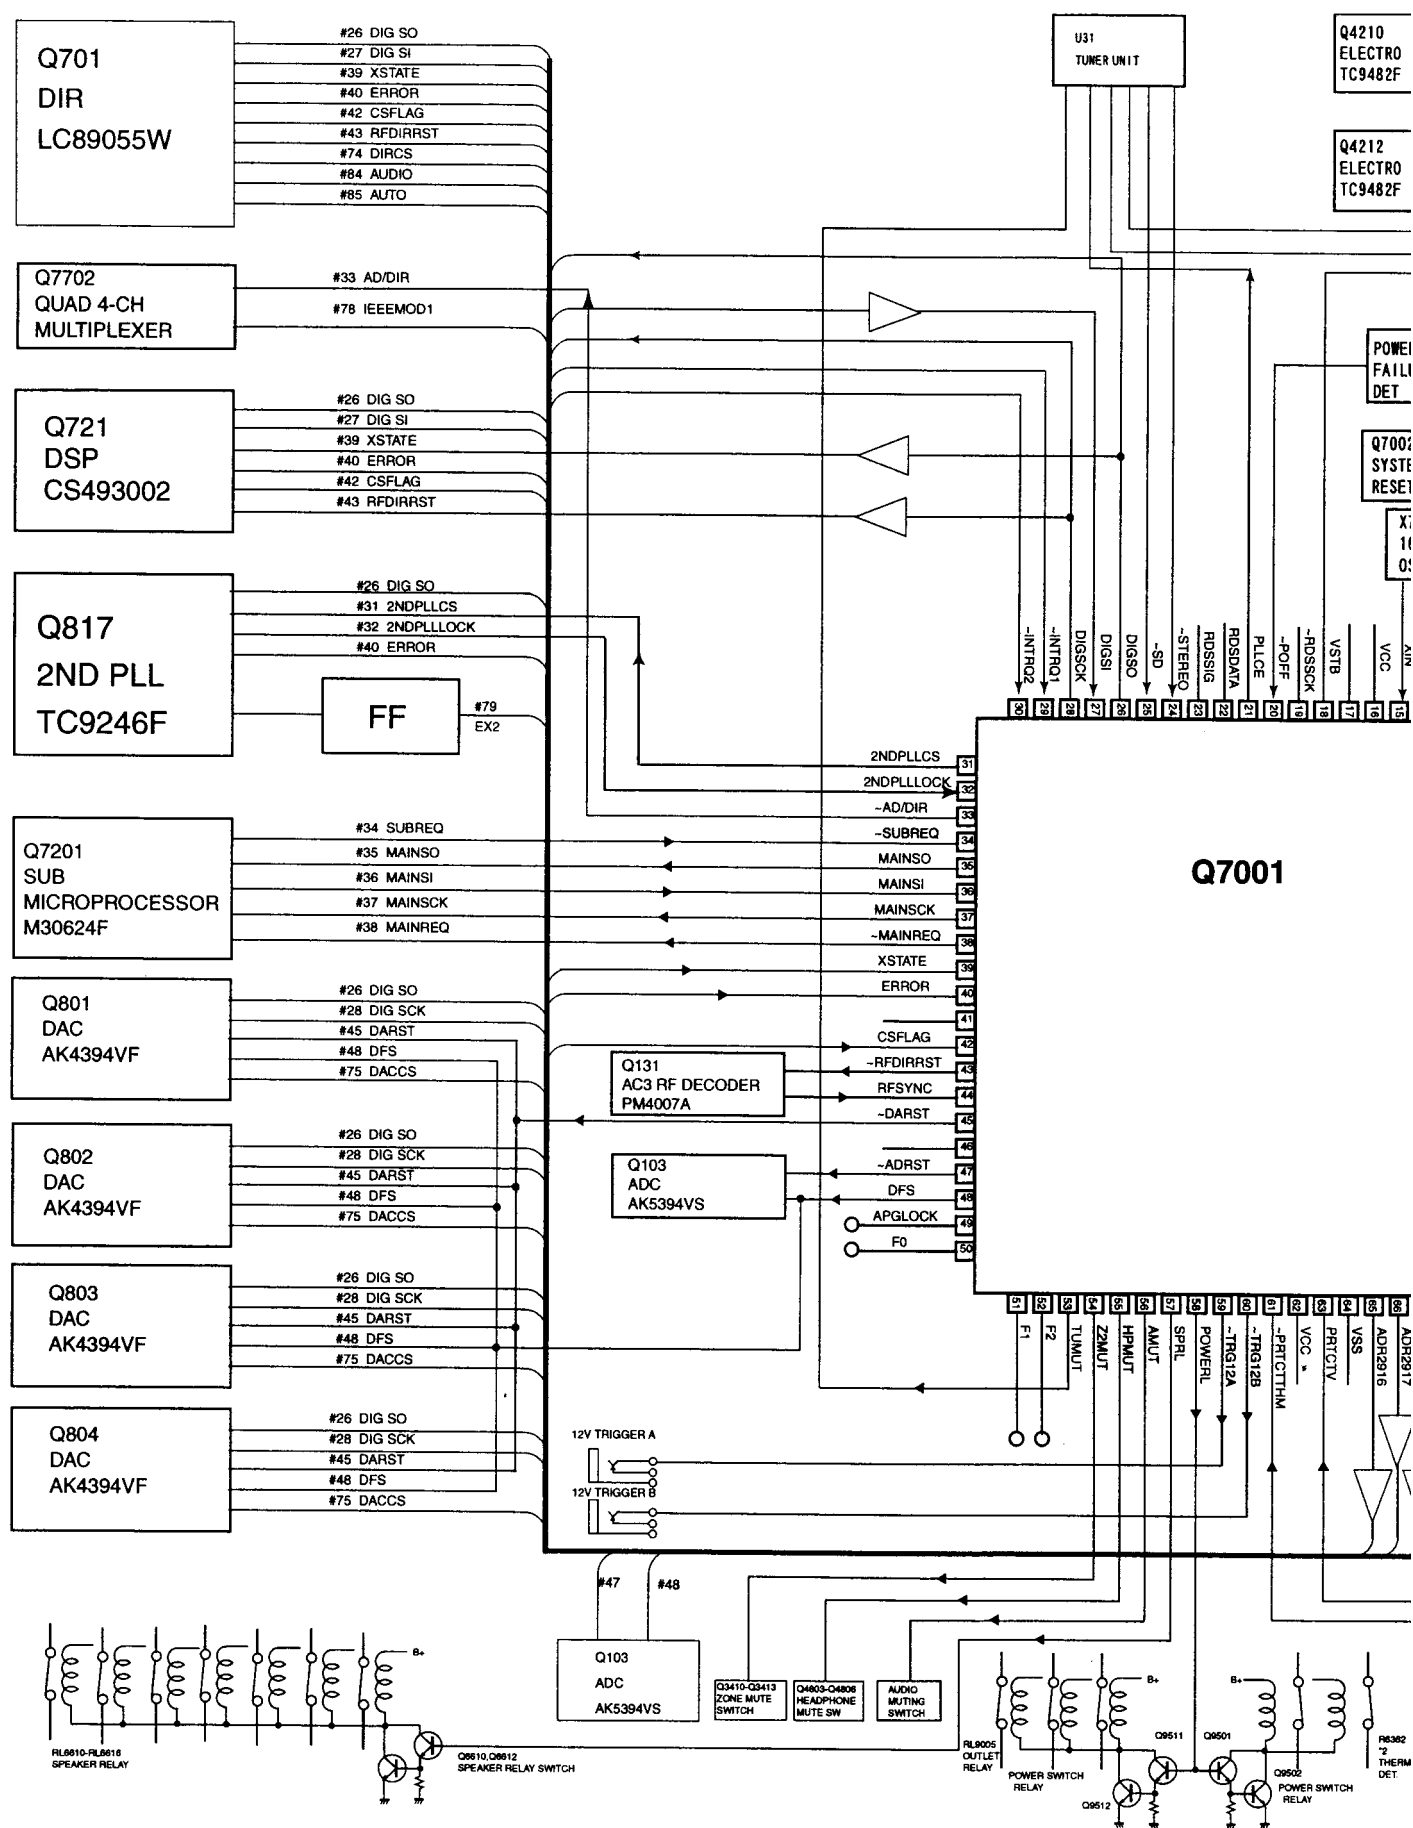

SUB MICROPROCESSOR
CONNECTION DIAGRAM

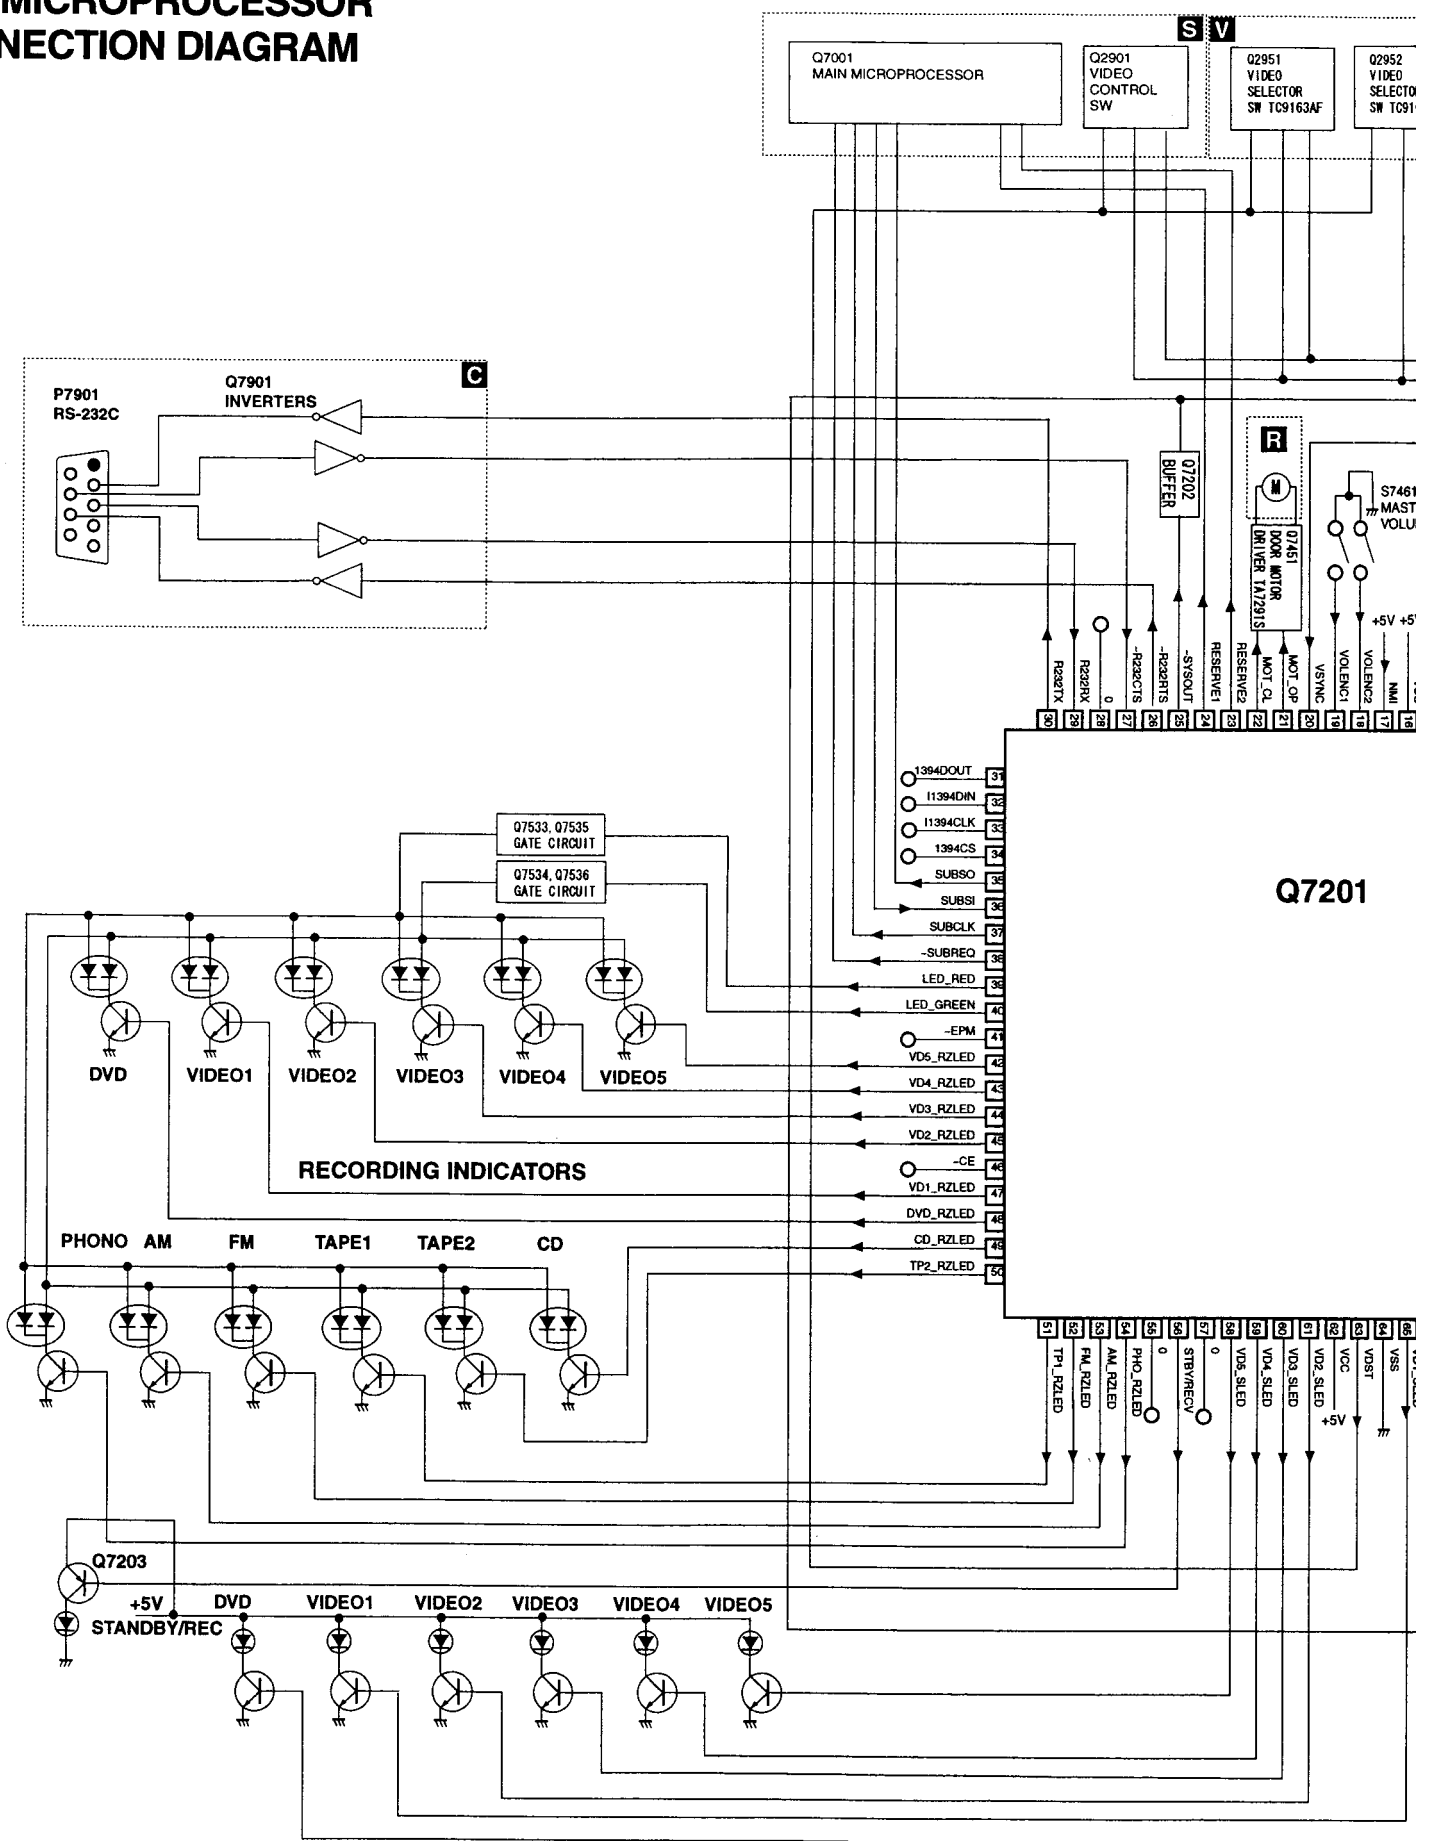



.1 DTR-9.1



SUB MICROPROCESSOR TERMINAL DESCRIPTION


No.	Function	I/O	Act.	Description	No.	Function	I/O	Act.	Description
1	FLS0/OSDSO	O	0	Serial data output terminal for FL tube driver and on-screen ICs.	51	TP1_RZLED	O	H	Control output terminal for Tape 1 recording or Zone 2 LED.
2	FLSCK/OSDSCK	O	CLK	Serial clock output terminal for FL tube driver and on-screen ICs.	52	FM_RZLED	O	H	Control output terminal for FM recording or Zone 2 LED.
3	FLCS2	O	H	Chip selection output for FL tube driver IC 2.	53	AM_RZLED	O	H	Control output terminal for AM recording or Zone 2 LED.
4	FLCS1	O	H	Chip selection output for FL tube driver IC 1.	54	PHO_RZLED	O	H	Control output terminal for Phono recording or Zone 2 LED.
5	OSDCS	O	H	Chip selection output for on-screen IC.	55		O	0	Not used.
6	-REMIN	I	L	Signal input terminal from remote control	56	STBY/RECV	O	L	Control output terminal for Standby/Received indicator.
7	-ZRIN	I	L	Signal input terminal from remote control for zone 2	57		O	0	Not used.
8	VSS			Switch input terminal for external data bus. Connect to ground terminal.	58	VD5_SLED	O	H	Control output pin for Video 5 indicator.
9	VSS			Switch input terminal for processor mode. Connect to ground terminal.	59	VD4_SLED	O	H	Control output terminal for Video 4 indicator.
10	VDSO	O		Serial data output terminal for video function switch IC.	60	VD3_SLED	O	H	Control output terminal for Video 3 indicator.
11	VDCLK	O	CLK	Serial clock output terminal for video function switch IC.	61	VD2_SLED	O	H	Control output terminal for Video 2 indicator.
12	-RESET			Reset input terminal of microprocessor	62	VCC			Power supply terminal. Connect to 5V.
13	XOUT			Oscillator output terminal of main clock.	63	VDST	O		Chip selection output terminal for video function switch.
14	VSS			Power supply terminal. Connect to ground terminal.	64	VSS			Ground terminal.
15	XIN			Oscillator input terminal of main clock.	65	VD1_SLED	O	H	Control output terminal for Video 1 indicator.
16	VCC			Power supply terminal. Connect to +5V.	66	DVD_SLED	O	H	Control output terminal for DVD indicator.
17	NMI	I	0	Connect to 5V.	67	CD_SLED	O	H	Control output terminal for CD indicator.
18	VOLENC2	I	H	Input B terminal from rotary encoder for main volume.	68	TP2_SLED	O	H	Control output terminal for Tape 2 indicator.
19	VOLENC1	I	H	Input A terminal from rotary encoder for main volume.	69	TP1_SLED	O	H	Control output terminal for Tape 1 indicator.
20	VSYN	I	H	Video vertical synchronizing signal input terminal to judge synchronizing	70	FM_SLED	O	H	Control output terminal for Video -1 indicator.
21	MOT_OP	O	H	Control output terminal to open the door.	71	AM_SLED	O	H	Control output terminal for Video -1 indicator.
22	MOT_CL	O	H	Control output terminal to close the door.	72	PHO_SLED	O	H	Control output terminal for Video -1 indicator.
23	RESERVE2	O	H	Transfer request output terminal for main microprocessor.	73		O		Not used.
24	RESERVE1	O	H	Transfer request output terminal for main microprocessor.	74		O		Not used.
25	-SYSOUT	O	L	RI code output terminal	75	SYSIN	I		Input terminal for RI code.
26	-R232RTS	O	L	Transfer request output terminal for RS232C.	76	AREA1	I		Initializing input terminal for tuner band
27	-R232CTS	I	L	Transfer data output terminal for RS232C.	77	AREA2	I		Initializing input terminal for tuner band
28		O	0	Not used.	78	RESERVE4	I		Transfer request input terminal for main microprocessor.
29	R232RX	I	H	Receiving input terminal for RS232C	79	-TEIDEN	I		Detection input terminal of power failure from main microprocessor.
30	R232TX	O	H	Transfer output terminal for RS232C.	80	-MAINREQ	I		transfer request input terminal for main microprocessor.
31	I1394DOUT	O	0	Serial data output terminal for main microprocessor.	81	HPIN	I	H	It is impression KEY input terminal (A/D input of 0) as for 0V.
32	I1394DIN	I		Serial data input terminal for main microprocessor.	82	SYNCDDET	I	H	External synchronizing signal input terminal for On-screen IC.
33	I1394CLK	O	CLK	Serial clock output terminal for main microprocessor.	83	RZSVDET	I	H	S video signal detection input terminal for recording signal.
34		O	0	Not used.	84	ISVDET	I	H	S video signal detection input terminal for input signal.
35	SUBSO	O	L	Serial data output terminal to main microprocessor.	85	PWR_LED	O	H	Control output terminal for Power LED.
36	SUBSI	I	L	Serial data input terminal from main microprocessor.	86	FLRST	O	L	Reset terminal for FL tube driver IC
37	SUBCLK	O	CLK	Serial clock input terminal from main microprocessor	87	DOOR_OP	I	L	Detection input terminal to open the door.
38	-SUBREQ	O	L	Request signal output terminal to main microprocessor.	88	DOOR_CL	I	L	Detection input terminal to close the door.
39	LED_RED	O	H	Output terminal to light up the red LED.	89	SEL_RDS	I	H	Initializing input terminal for RDS broadcast
40	LED_GREEN	O	H	Output terminal to light up green LED.	90	SEL_AMP	I	H	Initializing input terminal for main amplifier
41	-EPM	O	L	EPM input terminal to write program.	91	SEL_12V	I	H	Initializing input terminal for 12V trigger
42	VD5_RZLED	O	H	Control output terminal for Video 5 recording or Zone 2 LED.	92	SEL_NTSC	I	H	Initializing input terminal for NTSC.
43	VD4_RZLED	O	H	Control output terminal for Video 4 recording or Zone 2 LED.	93	KEY3	I		Operation key connection input terminal
44	VD3_RZLED	O	H	Control output terminal for Video 3 recording or Zone 2 LED.	94	KEY2	I		Operation key connection input terminal
45	VD2_RZLED	O	H	Control output terminal for Video 2 recording or Zone 2 LED.	95	KEY1	I		Operation key connection input terminal
46	-CE	O	L	Chip enable input terminal to write program.	96	VSS			Power supply terminal for AD converter. Connect to ground terminal.
47	VD1_RZLED	O	H	Control output terminal for Video 1 recording or Zone 2 LED.	97	KEY0	I		Operation key connection input terminal
48	DVD_RZLED	O	H	Control output terminal for DVD recording or Zone 2 LED.	98	VREF			Reference voltage input terminal for AD converter.
49	CD_RZLED	O	H	Control output terminal for CD recording or Zone 2 LED.	99	VCC			Power supply terminal for AD converter.
50	TP2_RZLED	O	H	Control output terminal for Tape 2 recording or Zone 2 LED.	100		O	0	Not used.


FL TUBE VIEW

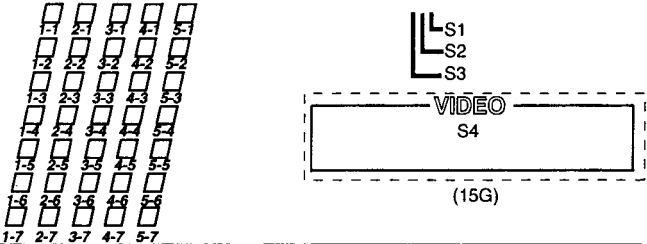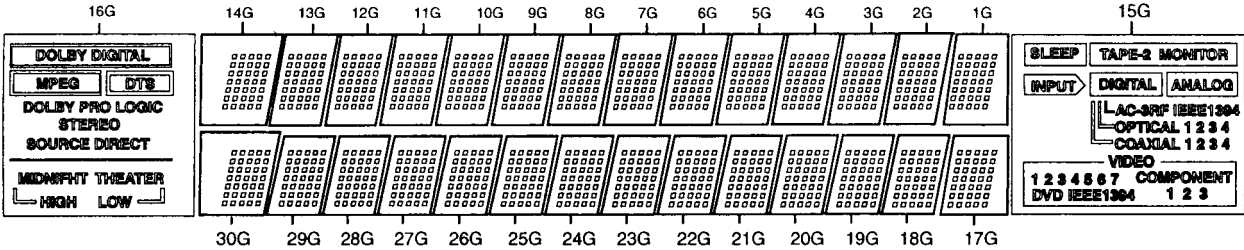

	30G~17G	16G	15G	14G~1G		30G~17G	16G	15G	14G~1G
P1	---	---	SLEEP	1-1	P36	1-1	---	---	---
P2	---	---	TAPE-2 MONITOR	2-1	P37	2-1	---	---	---
P3	---	---	INPUT	3-1	P38	3-1	---	---	---
P4	---	---	DIGITAL	4-1	P39	4-1	---	---	---
P5	---	---	ANALOG	5-1	P40	5-1	---	---	---
P6	---	---	---	1-2	P41	1-2	---	---	---
P7	---	---	S1	2-2	P42	2-2	---	---	---
P8	---	---	AC-3RF	3-2	P43	3-2	---	---	---
P9	---	---	IEEE1394	4-2	P44	4-2	---	---	---
P10	---	---	S2	5-2	P45	5-2	---	---	---
P11	---	---	OPTICAL	1-3	P46	1-3	---	---	---
P12	---	---	1 (OPTICAL)	2-3	P47	2-3	---	---	---
P13	---	---	2 (OPTICAL)	3-3	P48	3-3	---	---	---
P14	---	---	3 (OPTICAL)	4-3	P49	4-3	---	---	---
P15	---	---	4 (OPTICAL)	5-3	P50	5-3	---	---	---
P16	---	---	S3	1-4	P51	1-4	---	---	---
P17	---	---	COAXIAL	2-4	P52	2-4	---	---	---
P18	---	---	1 (COAXIAL)	3-4	P53	3-4	---	---	---
P19	---	---	2 (COAXIAL)	4-4	P54	4-4	---	---	---
P20	---	---	3 (COAXIAL)	5-4	P55	5-4	---	---	---
P21	---	---	4 (COAXIAL)	1-5	P56	1-5	---	---	---
P22	---	---	S4	2-5	P57	2-5	---	---	---
P23	---	DOLBY DIGITAL	1 (VIDEO)	3-5	P58	3-5	---	---	---
P24	---	(DOLBY DIGITAL)	2 (VIDEO)	4-5	P59	4-5	---	---	---
P25	---	MPEG	3 (VIDEO)	5-5	P60	5-5	---	---	---
P26	---	(MPEG)	4 (VIDEO)	1-6	P61	1-6	---	---	---
P27	---	DTS	5 (VIDEO)	2-6	P62	2-6	---	---	---
P28	---	(DTS)	6 (VIDEO)	3-6	P63	3-6	---	---	---
P29	---	DOLBY PRO LOGIC	7 (VIDEO)	4-6	P64	4-6	---	---	---
P30	---	STEREO	DVD	5-6	P65	5-6	---	---	---
P31	---	SOURCE DIRECT	IEEE1394	1-7	P66	1-7	---	---	---
P32	---	---	COMPONENT	2-7	P67	2-7	---	---	---
P33	---	MIDNIGHT THEATER	1 (COMPONENT)	3-7	P68	3-7	---	---	---
P34	---	HIGH	2 (COMPONENT)	4-7	P69	4-7	---	---	---
P35	---	LOW	3 (COMPONENT)	5-7	P70	5-7	---	---	---

PC BOARD CONNECTION VIEW

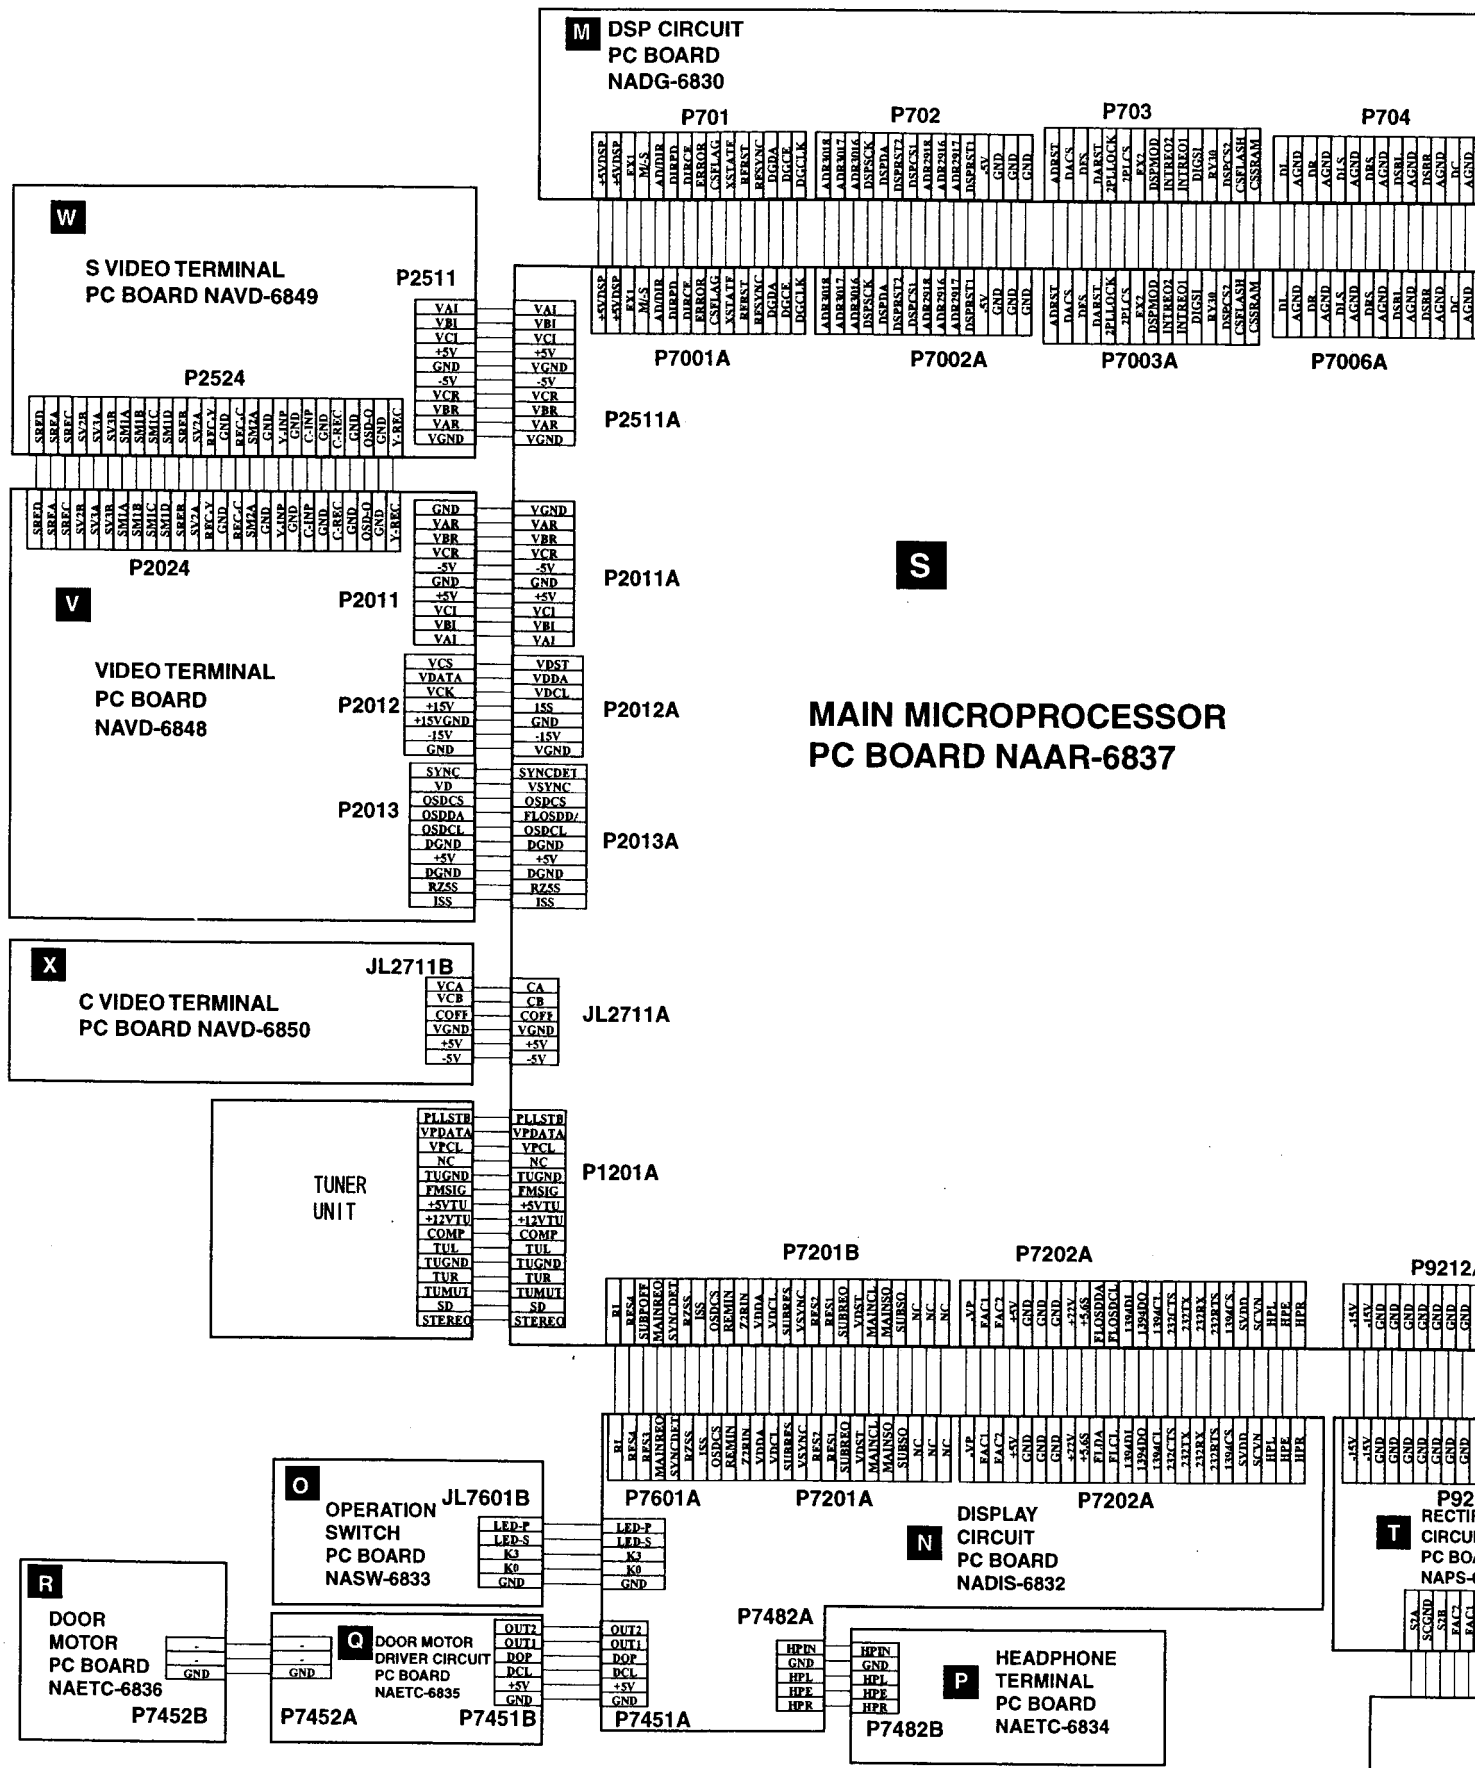

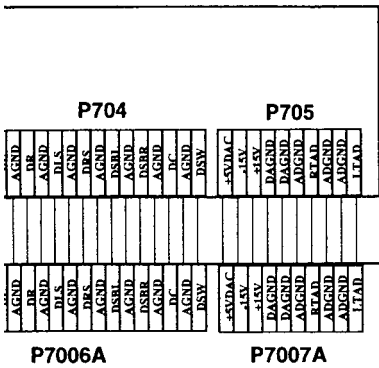

A

B

C


D

E

F

G

BLOCK DIAGRAM

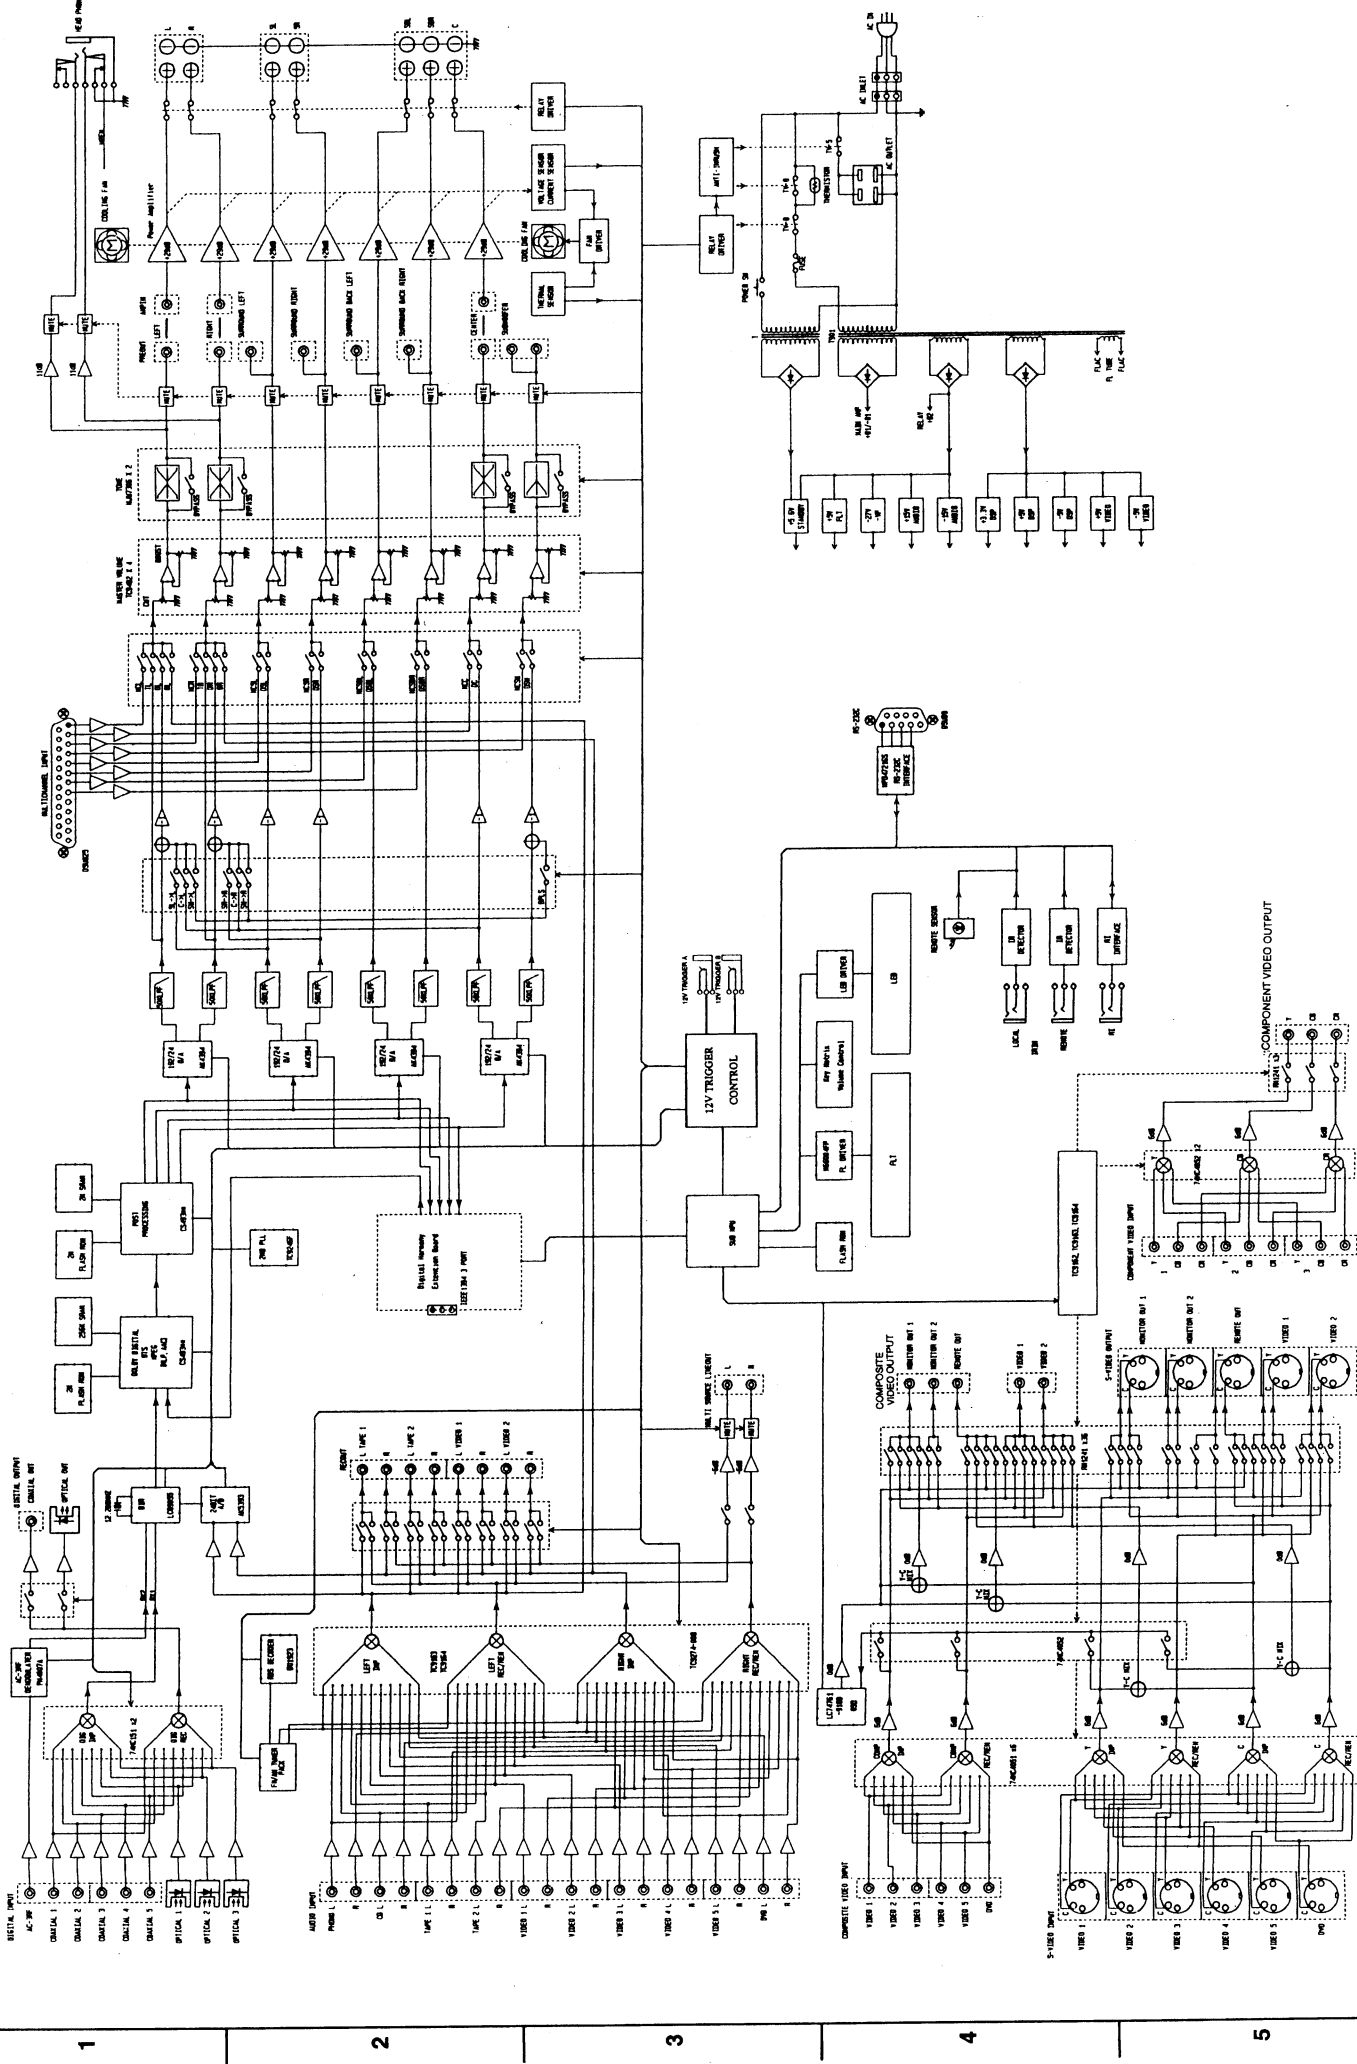

PRINTED CIRCUIT BOARD-PARTS LIST

MAIN MICROPROCESSOR CIRCUIT PC BOARD (NAAR-6837-1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
ICs		
Q1701	222780125JRCW	NJM78M12FA
Q1702	222780053JRC	NJM78L05A
Q2901	22240981R2	TC9162AF
Q4801	22241383R2	NJM4565M-D
Q4821	22241449R2 or	NJM5532M-D or
	22241409R2	BA15532F
Q7001	22241363M989 or	M30624FGFP or
	22241512M989	M30624FGAFP
Q9203	222780155MI	M5F78M15L
Q9231	222780565JRC	NJM78M56FA
Q9232	222780055JRC	NJM78M05FA
Q9323	222780055JRC	NJM78M05FA
Transistors		
Q4803-Q4806	2215410R2	RN1441
Q7002	2214490R2	RN1404
Q7101	2214530R2	RN2402
Q7102,Q7104	2213143R2	2SC2712-O
Q7103,Q7105	2214530R2	RN2402
Q7106	2213143R2	2SC2712-O
Q9221	2211644 or	2SA965-Y or
	2211643	2SA965-O
Diodes		
D7001,D7002	223234R2	1SS352
D7004-D7006	223234R2	1SS352
D7003	224490620R2	UDZ6.2B
D9221,D9222	22380260 or	RL1N4003 or
D9211-D9233	22380035	GP104003E
D9223	224493300R2	UDZ33B
D9251-D9254	223234R2	1SS352
Coil		
L7001	231237M022R2	NCH-1471
Crystal		
X7001	3010322	CST16.00MXW0C1
Capacitors		
C1512,C7025	354780339	3.3 μ F,50V, Elect.
C1521,C1702	354741009	10 μ F,16V, Elect.
C1704	354741009	10 μ F,16V, Elect.
C4801-C4808	354741009	10 μ F,16V, Elect.
C7001,C7002	354721019	100 μ F,6.3V, Elect.
C7012	354721019	100 μ F,6.3V, Elect.
C7007	354780109	1 μ F,50V, Elect.
C7101-C1703	354741009	10 μ F,16V, Elect.
C9213,C9216	353741009	10 μ F,16V, Elect.
C9221,C9222	354781019	100 μ F,50V, Elect.
C9223,C9224	354780229	2.2 μ F,50V, Elect.
C9234,C9235	354741019	100 μ F,16V, Elect.
C9251	354741019	100 μ F,16V, Elect.
C9326	353780229	2.2 μ F,50V, Elect.
C7010	375524744	0.47 μ F $\pm$ 5%,50V,Plastic
C7009	3000078	DX-5R5L104,Super
C9231	354751029	1000 μ F,25V, Elect.
Resistors		
R2904	49163103406	RM1/10J-10K*6
R9203	452730394F	3.9 Ω $\pm$ 5%,2W, Metal
R9207	452730394F	3.9 Ω $\pm$ 5%,2W, Metal
R9222	453530824	8.2 Ω $\pm$ 5%,1/2W, Metal
R9232	443522204	22 Ω $\pm$ 5%,1/2W, Metal oxide
R9233	443522204	22 Ω $\pm$ 5%,1/2W, Metal oxide
R9321	452730394F	3.9 Ω $\pm$ 5%,2W, Metal
Sockets		
JL2711A	25051090	NSCT-6P877
P1201A	25052211	NSCT-15P2108
P7201B,P7202A	25052220	NSCT-24P2117

CIRCUIT NO.	PART NO.	DESCRIPTION
Plugs		
JL9221B	25055626	NPLG-5P588
JL9222B	25055631	NPLG-10P593
P2011A	25055412	NPLG-10P394
P2012A	25055409	NPLG-7P391
P2013A	25055412	NPLG-10P394
P2511A-P2513A	25055412	NPLG-10P394
P3001A,P3002A	25055409	NPLG-7P391
P4001A-P4003A	25055412	NPLG-10P394
P4004A	25055417	NPLG-15P399
P7001A-P7003A	25055417	NPLG-15P399
P7006A	25055417	NPLG-15P399
P7007A	25055412	NPLG-10P394
P7101A,P7102A	25055704	NPLG-8P660
P7921A	25055409	NPLG-7P391
P9212A,P9312A	25055417	NPLG-15P399
Heat sinks		
Q9203A	27160466	RAD-136
Q9231A	27160357	(S3)
Q9323A	27160209	RAD-67
Screws		
Q9203B,Q9323B	82143010	3P+10FN(BC)
Q9231B,Q9232B	838430088	3TTB+8B(BC)

RECTIFIER CIRCUIT PC BOARD (NAPS-6838-1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
IC		
Q9202	222790155MI	M5F79M15L
Diode		
D9201	22380022F or	RBV402 or
	22380285F	RS403M
Capacitors		
C9205-C9211	394062227	2200 μ F,35V, Elect.
C9211	394062227	2200 μ F,35V, Elect.
C9214	353780229	2.2 μ F,50V, Elect.
Thermistors		
R9201,R9202	4000197	RUE700
Resistors		
R9208,R9210	452730394F	3.9 Ω $\pm$ 5%,2W, Metal
R9211,R9231	453532294	0.22 Ω $\pm$ 5%,1/2W, Metal
R9221	453530824	8.2 Ω $\pm$ 5%,1/2W, Metal
R9401	453530224	2.2 Ω $\pm$ 5%,1/2W, Metal
Socket		
P9212	25050683	NSCT-15P487
Plug		
P9211A	25055177	NPLG-5P161


CONSTANT VOLTAGE CIRCUIT PC BOARD (NAPS-6839-1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
ICs		
Q9302	222780053JRC	NJM78L05A
Q9303,Q9322	222790055JRC	NJM79M05FA
Q9304	222780055JRC	NJM78M05FA
Transistor		
Q9301	2202176	2SB1370-F
Diode		
D9301	22380022F or	RBV402 or
	22380285F	RS403M
Capacitors		
C9305-C9309	394043327	3300 μ F,16V, Elect.
C9311,C9314	353741009	10 μ F,16V, Elect.
C9312,C9323	353780229	2.2 μ F,50V, Elect.
C9316,C9325	353741009	10 μ F,16V, Elect.
Thermistors		
R9301,R9302	4000197	RUE700

DTR-9.1

CIRCUIT NO.	PART NO.	DESCRIPTION
Resistors		
R9303,R9306	452730394F	3.9Ω±5%,2W, Metal
R9305	453530474	4.7Ω±5%,1/2W, Metal
R9307,R9309	453532294	0.22Ω±5%,1/2W, Metal
R9322	452730394F	3.9Ω±5%,2W, Metal
R9324	453532294	0.22Ω±5%,1/2W, Metal
Socket		
P9312	25050683	NSCT-15P487
Plug		
P9311A	25055175	NPLG-3P159

TC9162AF (Analog Switch)

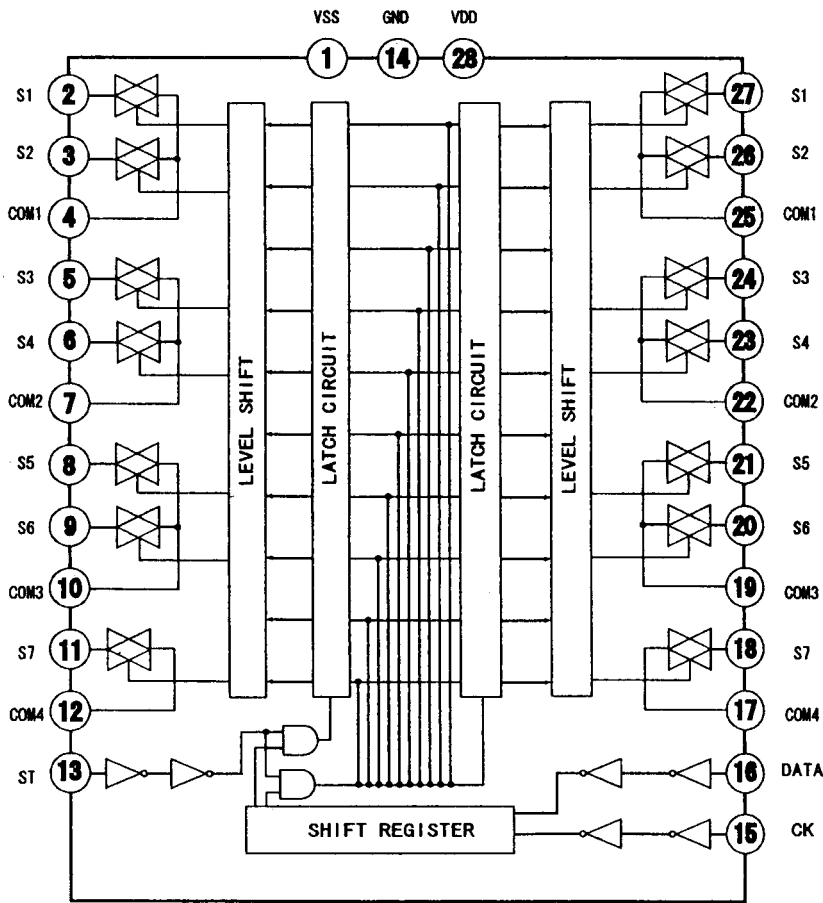


Pin No.	Symbol	Function
1	Vss	Negative power supply
14	GND	Ground
28	VDD	Positive power supply
2, 3, 5, 6, 8, 9, 11	S1~S7	Input/output terminals
27, 26, 24, 23, 21, 20, 18	S1~S7	Input/output terminals
4, 7, 10, 12	COM1~COM4	Common terminals
25, 22, 19, 17	COM1~COM4	Common terminals
13	ST	Strobe input terminal for data reading
15	CK	Clock input terminal for data transfer
16	DATA	Data input terminal for switch

A B C D E F G

SCHEMATIC DIAGRAM

Display, Sub microprocessor

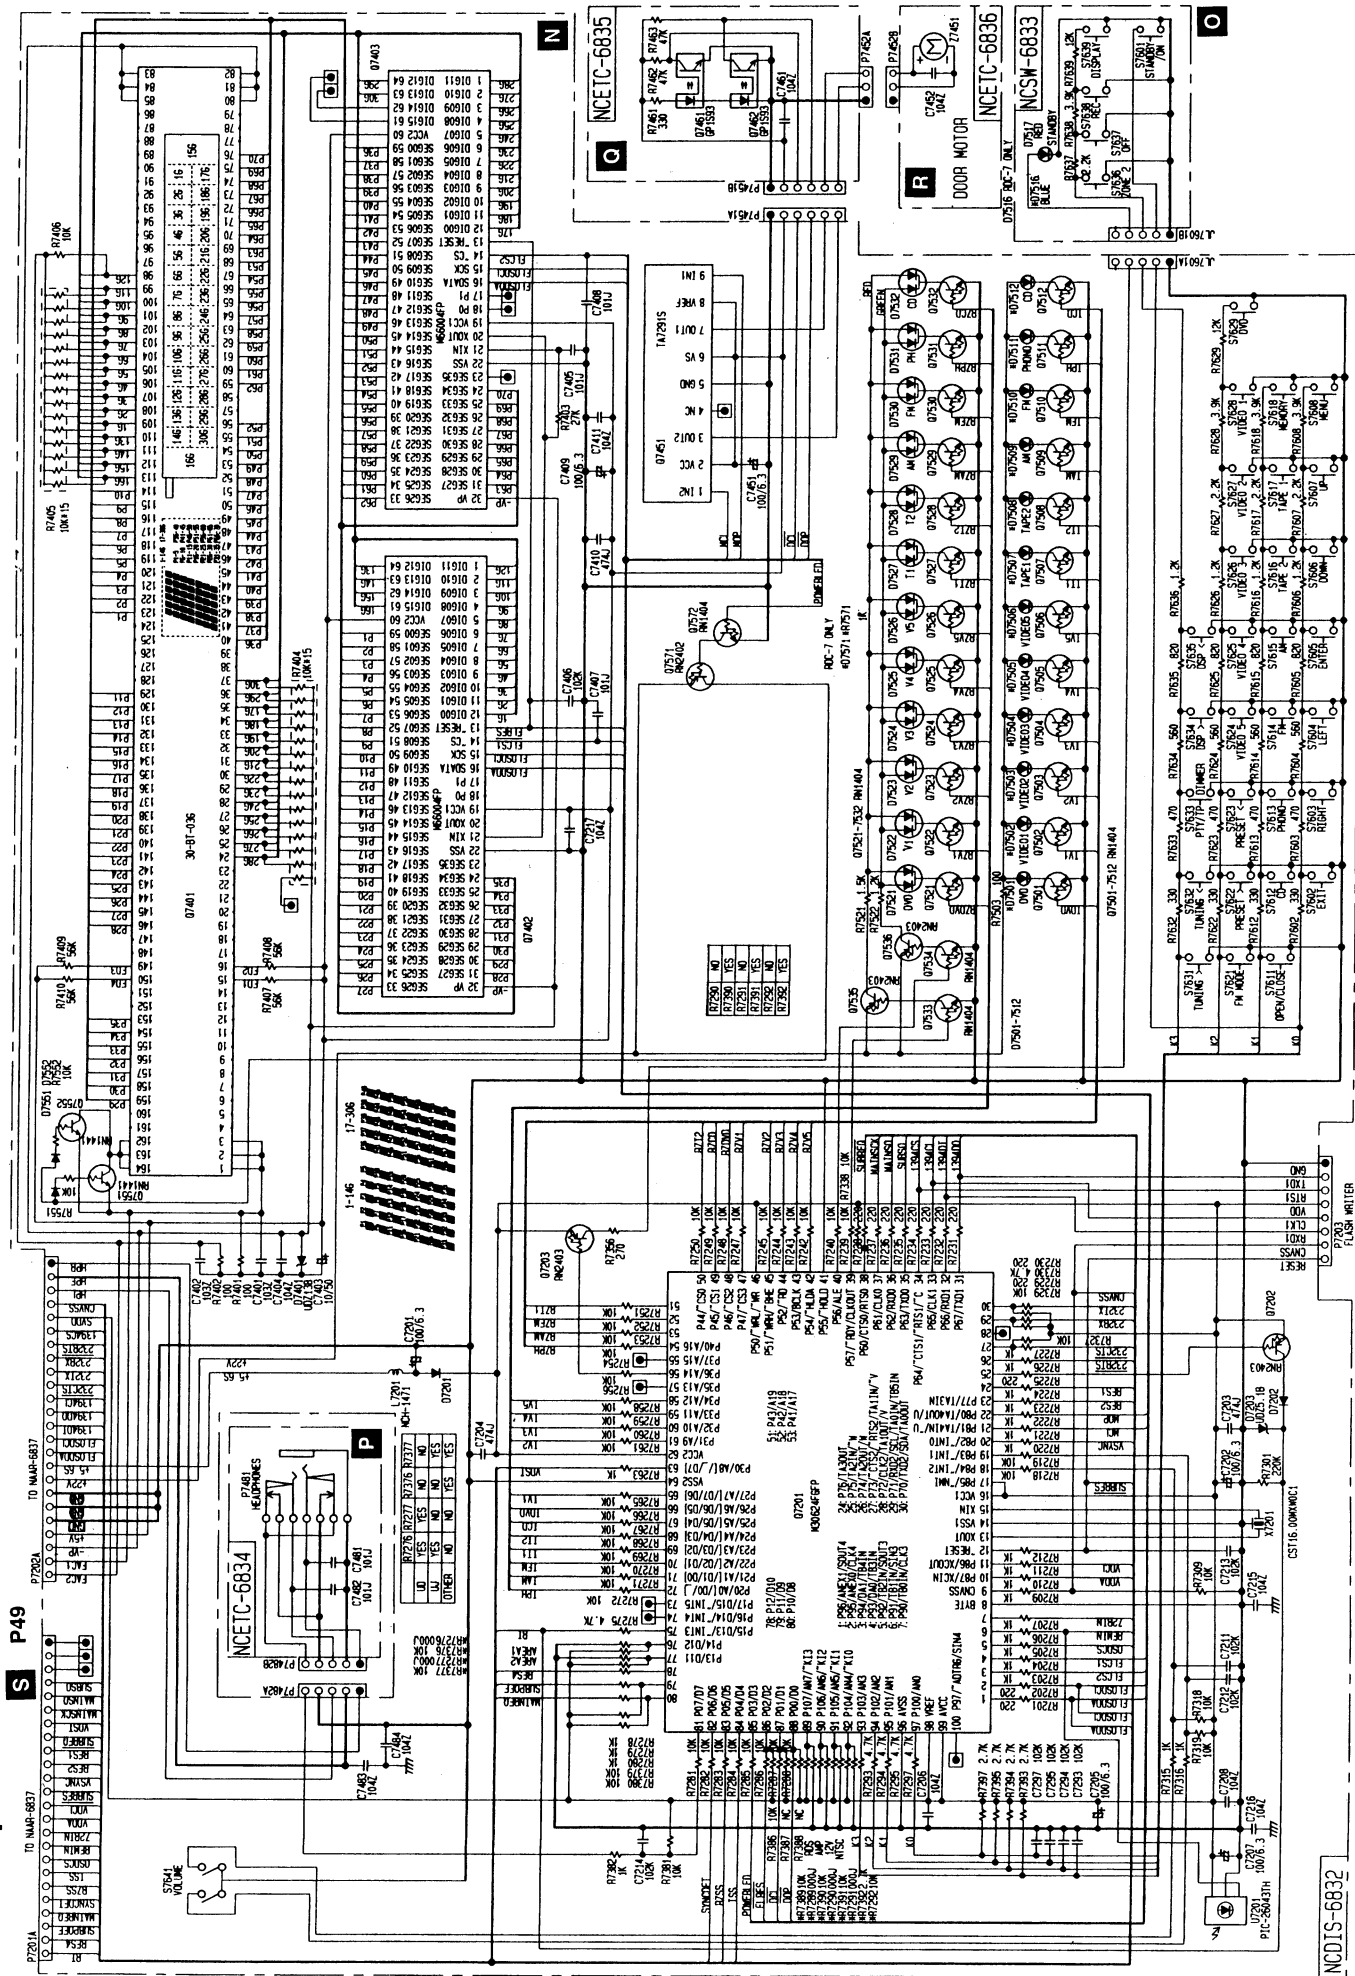

NCDIS-6832

PRINTED CIRCUIT BOARD-PARTS LIST

DISPLAY CIRCUIT PC BOARD (NADIS-6832-1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
	FL tube	
Q7401	212208	30-BT-03G
	Remote sensor	
U7201	241329	PIC-26043TH2
	ICs	
Q7201	22241363S989 or	M30624FGFP or
	22241512S989	M30624FGAFP
Q7402,Q7403	22240685R9	M66004FP
Q7451	22240239	TA7291S
	Transistors	
Q7202,Q7203	2214540R2	RN2403
Q7501-Q7512	2214470R2	RN1402
Q7521-Q7532	2214470R2	RN1402
Q7533,Q7534	2214490R2	RN1404
Q7535,Q7536	2214540R2	RN2403
Q7551,Q7552	2215410R2	RN1441
Q7571,Q7572	2214540R2	RN2403
	Diodes	
D7201,D7202	223234R2	1SS352
D7203	224490510R2	UDZ5.1B
D7401	224491300R2	UDZ13B
D7501-D7512	225206DT	SEL2910D-D
D7521-D7532	225375	SML1216C
D7551,D7552	223234R2	1SS352
	Coils	
L7201	231237M022R2	NCH-1471
R7201,R7202	230921R2	BLM21B222SPT
	Capacitors	
C7201,C7202	355721019	100 μ F,6.3V, Elect.
C7203,C7204	375524744	0.47 μ F $\pm$ 5%,50V,Plastic
C7205,C7207	355721019	100 μ F,6.3V, Elect.
C7403	355781009	10 μ F,50V, Elect.
C7409,C7451	355721019	100 μ F,6.3V, Elect.
C7410	375524744	0.47 μ F $\pm$ 5%,50V,Plastic
	Resistors	
R7404	49163103415	RM1/101J-10K*15
R7405	49163103415	RM1/101J-10K*15
	Rotary encoder	
S7641	25065595	EC16B3625
	Switches	
S7602-S7608	25035699	NPS-111-S662
S7611-S7618	25035699	NPS-111-S662
S7621-S7629	25035699	NPS-111-S662
S7631-S7635	25035699	NPS-111-S662
	Sockets	
P7201,P7202	25052220	NSCT-24P2117
P7451A	2002E391215	NSAS-12P0796
P7482A	2009990587UL	NSAS-10P0798
JL7601A	25051089	NSCT-5P876
	Holder	
Q7401A	27190987	(FL)

OPERATION SWITCH PC BOARD (NASW-6833-1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
JL7601B	25051089	NSCT-5P876,Socket
S7601	25035699	NPS-111-S662,Push switch
S7636-S7639	25035699	NPS-111-S662,Push switch

HEADPHONE TERMINAL PC BOARD (NAETC-6834-1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
P7481	25045385	YKB26-5153,Terminal
P7482B	25055369	NPLG-5P352,Plug


DOOR MOTOR DRIVE CIRCUIT PC BOARD (NAETC-6835-1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
P7451B	25055370	NPLG-6P353,Plug
Q7461,Q7462	24120081	GP1S93,Photo coupler

DOOR MOTOR PC BOARD (NAETC-6836-1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
P7452	200EE390615	NSAS-6P0795, Socket

TA7291S (Motor Driver)

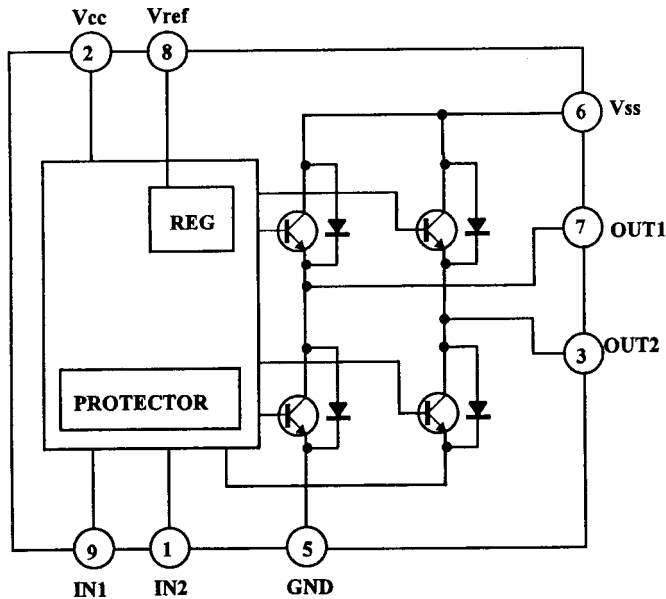

INPUT		OUTPUT		MODE
IN1	IN2	OUT1	OUT2	
0	0	∞	∞	STOP
1	0	H	L	CW/CCW
0	1	L	H	CCW/CW
1	1	L	L	BRAKE

CCW:Counter-clockwise direction
CW:Clockwise direction

PRINTED CIRCUIT BOARD-PARTS LIST

MAIN CIRCUIT PC BOARD (NAAF-6813-1A)

CIRCUIT NO.	PART NO.	DESCRIPTION
	ICs	
Q3000,Q3020	22241448R2	NJM4580M-D
Q3022,Q3024	22241448R2	NJM4580M-D
Q3030,Q4010	22240943R2	TC9163AF
Q3040,Q4020	22241221R2	TC9164AF
Q4000,Q4006	22241472R2	NJM2114M-D
Q4002	22241448R2	NJM4580M-D
Q4200,Q4202	22241449R2 or	NJM5532M-D or
Q4204,Q4206	22241409R2	BA15532F
Q4210,Q4212	22241444R2	TC9482F
Q4214,Q4216	22241444R2	TC9482F
Q4300,Q4306	22241450R2	NJM2082M-D
Q4310,Q4316	22241449R2 or	NJM5532M-D or
	22241409R2	BA15532F
Q4320,Q4326	22241451R9	NJU7306G
	Transistors	
Q4500-Q4507	2213631 or	RN1241-A or
Q4510-Q4517	2213632	RN1241-B
	Diode	
D4700	224490510R2	UDZ5.1B
	Capacitors	
C3000,C3001	374721015	100pF±10%,50V,Plastic
C3002,C3003	393384707	47 μ F,50V, Elect.
C3006,C3007	393381017	100 μ F,50V, Elect.
C3008,C3009	374726824	6800pF±5%,50V,Plastic
C3010,C3011	374721824	1800pF±5%,50V,Plastic
C3012,C3013	393384707	47 μ F,50V, Elect.
C3020-C3025	374721015	100pF±10%,50V,Plastic
C3026,C3027	393884707	47 μ F,50V, Elect.
C3028-C3031	393384707	47 μ F,50V, Elect.
C3110-C3113	393344707	47 μ F,16V, Elect.
C3116,C3117	393344717	470 μ F,16V, Elect.
C4000-C4003	363153304	33pF±5%,500V,Plastic
C4006,C4350	363153304	33pF±5%,500V,Plastic
C4007,C4357	374721024	1000pF±5%,50V,Plastic
C4100,C4101	393884707	47 μ F,50V, Elect.
C4110,C4111	355744709	47 μ F,16V, Elect.
C4114,C4115	355744709	47 μ F,16V, Elect.
C4120,C4121	393384707	47 μ F,50V, Elect.
C4122,C4123	355744709	47 μ F,16V, Elect.
C4126,C4127	393384707	47 μ F,50V, Elect.
C4200,C4201	393884707	47 μ F,50V, Elect.
C4203-C4205	393384707	47 μ F,50V, Elect.
C4206,C4207	393884707	47 μ F,50V, Elect.
C4210,C4211	393884707	47 μ F,50V, Elect.
C4212-C4215	393384707	47 μ F,50V, Elect.
C4216,C4217	393884707	47 μ F,50V, Elect.
C4220,C4221	393880227	2.2 μ F,50V, Elect.
C4222-C4225	393380227	2.2 μ F,50V, Elect.
C4226,C4227	393880227	2.2 μ F,50V, Elect.
C4230,C4231	393884707	47 μ F,50V, Elect.
C4232-C4235	393384707	47 μ F,50V, Elect.
C4236,C4237	393884707	47 μ F,50V, Elect.
C4240-C4246	363151002	10pF±0.5pF,500V,Plastic
C4247	374722224	2200pF±5%,50V,Plastic
C4300,C4301	393884707	47 μ F,50V, Elect.
C4306,C4307	393884707	47 μ F,50V, Elect.
C4351,C4356	363153304	33pF±5%,500V,Plastic
C4360,C4361	393341007	10 μ F,16V, Elect.
C4366	393341007	10 μ F,16V, Elect.
C4370,C4371	374721044	0.1 μ F±5%,50V,Plastic
C4376	374721044	0.1 μ F±5%,50V,Plastic
C4380,C4381	374724724	4700pF±5%,50V,Plastic
C4386	374724724	4700pF±5%,50V,Plastic


CIRCUIT NO.	PART NO.	DESCRIPTION
	Capacitors	
C4500,C4501	393884707	47 μ F,50V, Elect.
C4502-C4505	393384707	47 μ F,50V, Elect.
C4506,C4507	393884707	47 μ F,50V, Elect.
C4510-C4515	374723324	3300pF±5%,50V,Plastic
C4520,C4521	374721015	100pF±10%,50V,Plastic
C4608	393362217	220 μ F,35V, Elect.
C4700	354721019	100 μ F,6.3V, Elect.
	Terminals	
P3001	25045615	NPJ-4PDRW422,CD/PHONO
P3002	25045618 or	NPJ-6PDRW425 or
	25045318	NPJ-6PDBL175,TAPE2
P3003	25045616 or	NPJ-4PDRW423 or
	25045491	NPJ-4PDBL308
P3004	25045623	NPJ-6PDRW430
	Sockets	
J3015B	25051096	NSCT-12P883
J4711B	25050282	NSCT-5P110
P3011B-P3013B	25050678	NSCT-10P482
P3014B	25050683	NSCT-15P487
P4721	2009990605	NSAS-26P0819
	Bars	
P3031,P4032	27141754	BBL60
P4031,P4033	27141753	BBL50
P4034	27141754	BBL60
P4035	27141753	BBL50

INPUT/OUTPUT TERMINAL PC BOARD (NAAF-6814-1A)

CIRCUIT NO.	PART NO.	DESCRIPTION
	ICs	
Q3200,Q3202	22241448R2	NJM4580M-D
Q3204,Q3206	22241448R2	NJM4580M-D
Q3208,Q3210	22241448R2	NJM4580M-D
Q3220	22240829	TC9274N-008
Q3400	22241448R2	NJM4580M-D
	Transistors	
Q3410-Q3413	2213631 or	RN1241-A or
	2213632	RN1241-B
	Capacitors	
C3200-C3211	374721015	100pF±10%,50V,Plastic
C3212,C3213	393884707	47 μ F,50V, Elect.
C3214-C3223	393384707	47 μ F,50V, Elect.
C3310,C3311	393344707	47 μ F,16V, Elect.
C3314,C3315	393344707	47 μ F,16V, Elect.
C3400-C3403	393384707	47 μ F,50V, Elect.
C3404,C3405	374721024	1000pF±5%,50V,Plastic
C4516	374723324	3300pF±5%,50V,Plastic
C4517	374721044	0.1 μ F±5%,50V,Plastic
C4526	374721015	100pF±10%,50V,Plastic
	Terminals	
P3201-P3203	25045618 or	NPJ-6PDRW425 or
	25045318	NPJ-6PDBL175
P3204	25045613 or	NPJ-4PDB420 or
	25045614	NPJ-4PDB421
	Sockets	
J4711A	25051109	NSCT-5P896
P3061B,P3062B	25050675	NSCT-7P479



SCHEMATIC DIAGRAM
Power Amplifier 1

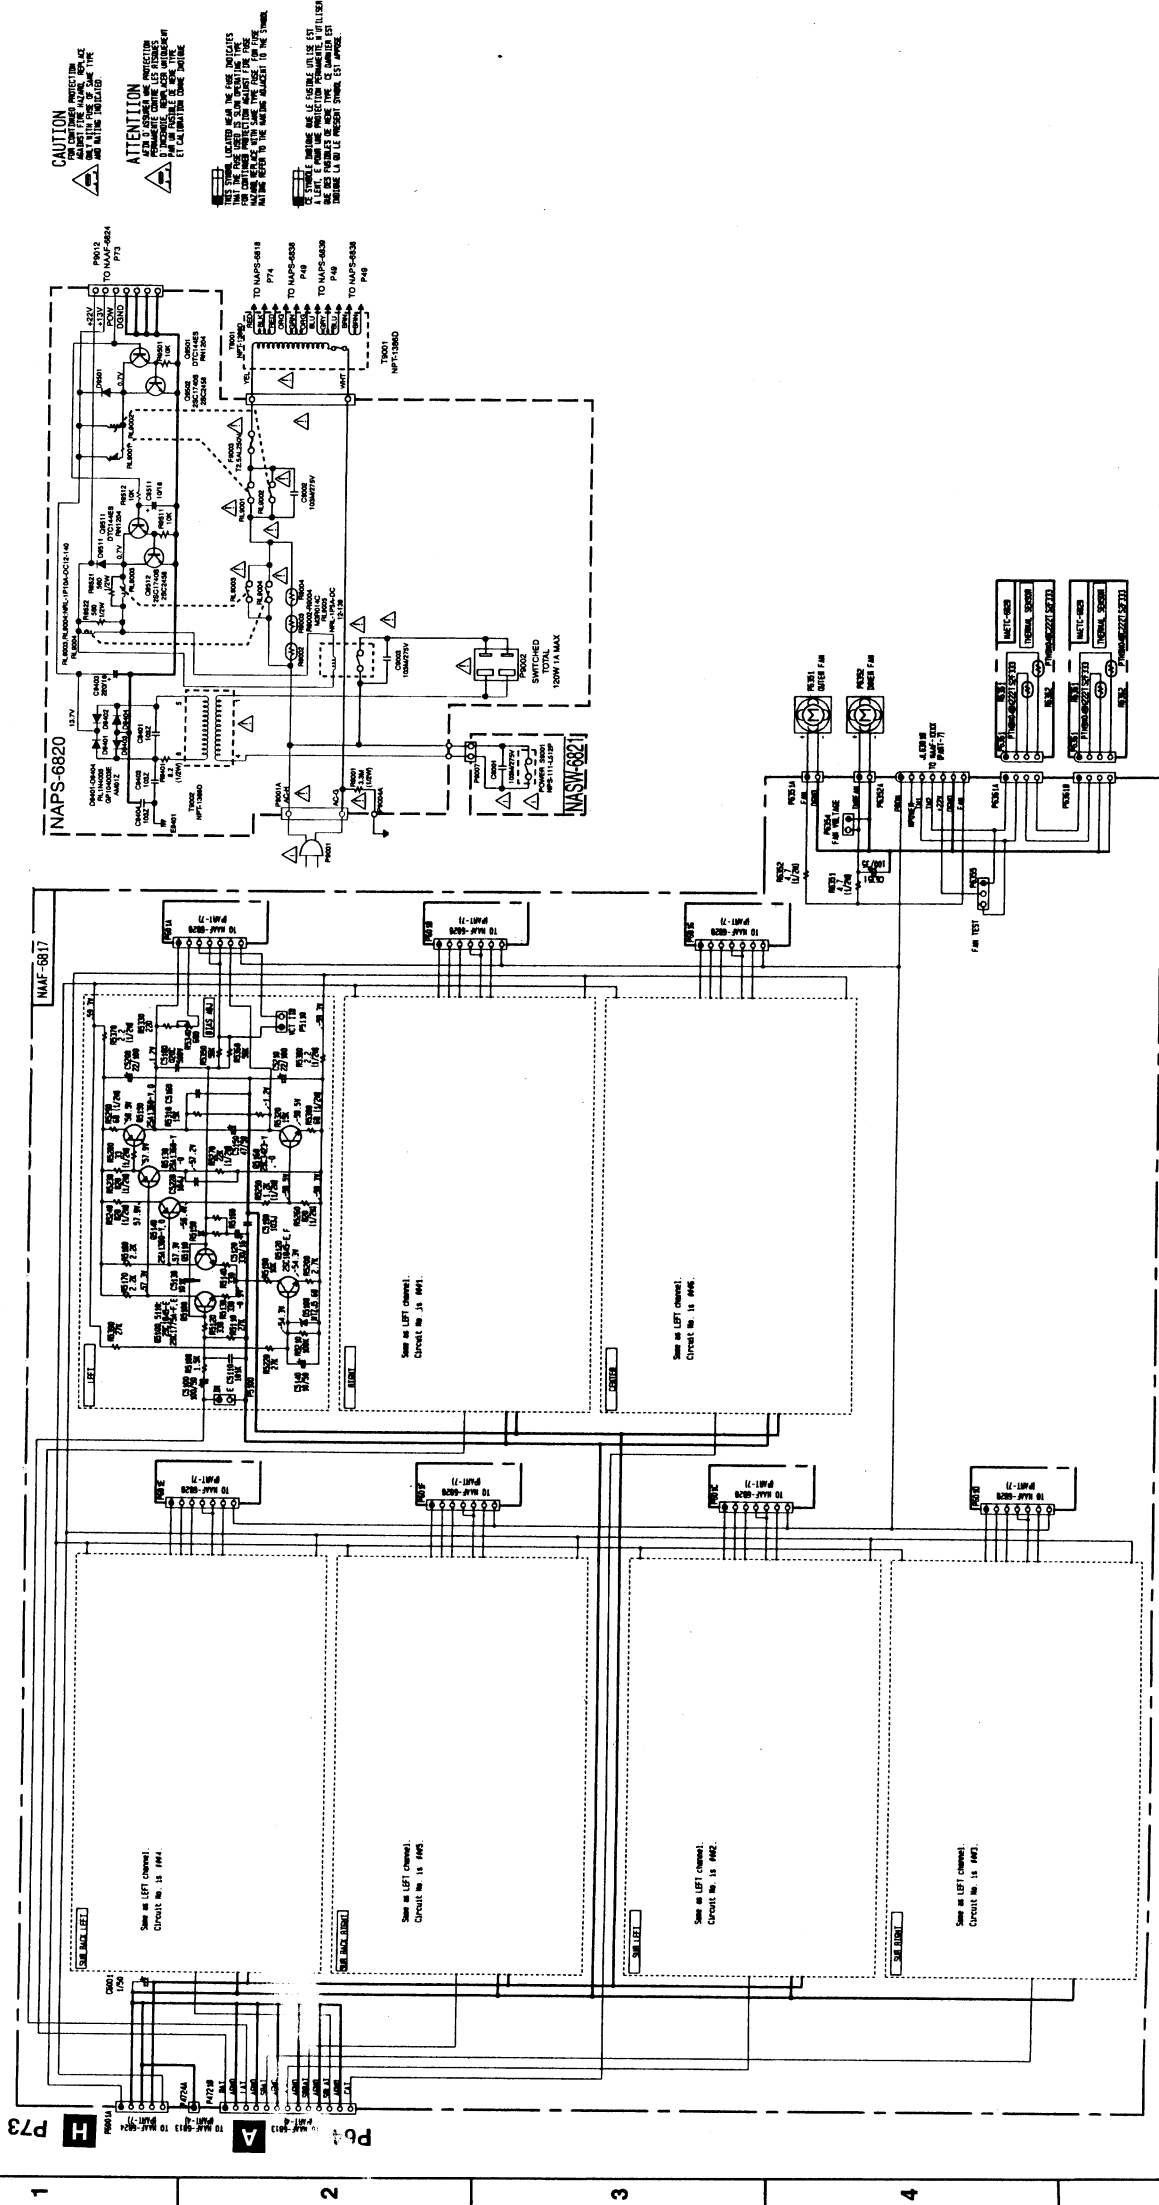

CAUTION
FOR SAFETY, THE POWER SUPPLY
MUST BE TURNED OFF BEFORE
ANY WORK IS DONE ON THE
CIRCUIT.

ATTENTION
THE POWER SUPPLY MUST BE
TURNED OFF BEFORE ANY
WORK IS DONE ON THE
CIRCUIT.

WARNING
THE POWER SUPPLY MUST BE
TURNED OFF BEFORE ANY
WORK IS DONE ON THE
CIRCUIT.

PRINTED CIRCUIT BOARD-PARTS LIST

POWER AMPLIFIER DRIVER CIRCUIT PC BOARD (NAAF-6817-1A)

CIRCUIT NO.	PART NO.	DESCRIPTION
Transistors		
Q5100-Q5106	2211733,	* 2SC1845-E,
	2210755 or	* 2SC1775A-E or
	2210756	* 2SC1775A-F
Q5110-Q5116	2211733,	* 2SC1845-E,
	2210755 or	* 2SC1775A-E or
	2210756	* 2SC1775A-F
Q5120-Q5126	2211733 or	2SC1845-E or
	2211732	2SC1845-F
Q5130-Q5136	2202094 or	2SA1360-Y or
Q5140-Q5146	2202093	2SA1360-O
Q5150-Q5156	2202094 or	2SA1360-Y or
	2202093	2SA1360-O
Q5160-Q5166	2202104 or	2SC3423-Y or
	2202103	2SC3423-O
Diodes		
D5100-D5106	224470562	MTZJ5.6B
Capacitors		
C5100-C5106	393881017	100 μ F, 50V, Elect.
C5110-C5116	374721015	100pF $\pm$ 10%, 50V, Plastic
C5120-C5126	393843317	330 μ F, 16V, Elect.
C5140-C5146	393381007	10 μ F, 50V, Elect.
C5150-C5156	393384707	47 μ F, 50V, Elect.
C5180-C5186	363150202	2pF $\pm$ 0.5pF, 500V, Plastic
C5190-C5196	374721034	0.01 μ F $\pm$ 5%, 50V, Plastic
C5200-C5206	393392207	22 μ F, 100V, Elect.
C5210-C5216	393392207	22 μ F, 100V, Elect.
C5220-C5226	374723344	0.33 μ F $\pm$ 5%, 50V, Plastic
C6001	393380107	1 μ F, 50V, Elect.
C6351	393361017	100 μ F, 35V, Elect.
Resistors		
R5230-R5236	443528214	820 Ω $\pm$ 5%, 1/2W, Metal oxide
R5240-R5246	443528214	820 Ω $\pm$ 5%, 1/2W, Metal oxide
R5250-R5256	443533224	3.3k Ω $\pm$ 5%, 1/2W, Metal oxide
R5260-R5266	443528214	820 Ω $\pm$ 5%, 1/2W, Metal oxide
R5270-R5276	443522234	22k Ω $\pm$ 5%, 1/2W, Metal oxide
R5280-R5286	443523304	33 Ω $\pm$ 5%, 1/2W, Metal oxide
R5290-R5296	443526804	68 Ω $\pm$ 5%, 1/2W, Metal oxide
R5300-R5306	443526804	68 Ω $\pm$ 5%, 1/2W, Metal oxide
R5340-R5346	5200365	N06HR680BE, Trimming
R5370-R5376	453530224	2.2 Ω $\pm$ 5%, 1/2W, Metal
R5380-R5386	453530224	2.2 Ω $\pm$ 5%, 1/2W, Metal
R6351, R6352	453530474	4.7 Ω $\pm$ 5%, 1/2W, Metal
Plugs		
JL6301B	25055628	NPLG-7P590
P4721A	25055143	NPLG-13P127
P5100-P5106	25055038	NPLG-2P29
P5110-P5116	25055038	NPLG-2P29
P6001A	25055177	NPLG-5P161
P601A-P601G	25055137	NPLG-7P121
P6351A, P6352A	25055099	NPLG-2P83
P6354	25055038	NPLG-2P29
P6355	25055042	NPLG-3P32
P6361A, P6361B	25055148	NPLG-4P132
Clamps		
P5071	27190541	WS-1NS
P6356	27190540-1	Holder
Radiators		
Q5150A-Q5156A	27160315	RAD-95(B)
Q5160A-Q5166A	27160315	RAD-95(B)
Tapping screws		
Q5150B-Q5156E	838430107	3TTB+10S(BC)
Q5160B-Q5166E	838430107	3TTB+10S(BC)

PRIMARY CIRCUIT PC BOARD (NAPS-6820-1A/1B)

CIRCUIT NO.	PART NO.	DESCRIPTION
Transistors		
Q9501, Q9511	221282 or	DTC114ES or
	2213560	RN1204
Q9502, Q9512	2213284,	2SC1740S-R,
	2212115 or	2SC2458-GR or
	2213285	2SC1740S-S
Diodes		
D9401-D9404	22380035 or	GP104003E or
	22380260	RL1N4003
D9501, D9511	223163 or	1SS133 or
	223205	1SS270A
Power transformer		
T9002	2300670A	$\triangle$ NPT-1111D
Capacitors		
C9002, C9003	3500196S	$\triangle$ RE275V-103M
C9403	393342217	220 μ F, 16V, Elect.
C9511	393341007	10 μ F, 16V, Elect.
Thermistors		
R9002-R9004	4000148	M3R014C
Resistors		
R9001	431533355	$\triangle$ 3.3M Ω , 1/2W, Solid
R9401	453530824	8.2 Ω $\pm$ 5%, 1/2W, Metal
R9521	443525614	560 Ω $\pm$ 5%, 1/2W, Metal oxide
Relays		
RL9001, RL9002	25065599	$\triangle$ NRL-1P5A-DC12-149
RL9003, RL9004	25065599	$\triangle$ NRL-1P5A-DC12-149
RL9005	25065583	$\triangle$ NRL-1P5A-DC12-139
Fuse holders		
F9001A	250113	$\triangle$ SN5051
AC inlet		
P9001A	25055960	$\triangle$ NPLG-2P913
Sockets		
P9002	25051126	NSCT-4P913
P9007	2009990606	NSAS-4P0820
P9012	25050675	NSCT-7P479
Plug		
P9011A	25055675	NPLG-2P631

POWER SWITCH PC BOARD (NASW-6821-1A)

CIRCUIT NO.	PART NO.	DESCRIPTION
C9001	3500196S	$\triangle$ RE275V-103M, Capacitor IS
S9001	25035550	$\triangle$ NPS-111-L512P, Power switch
P9007C	25055676	NPLG-2P632, Plug

THERMAL SENSOR CIRCUIT PC BOARD (NAETC-6829-1A)

CIRCUIT NO.	PART NO.	DESCRIPTION
P6361	2006320815	NSAS-08P0292, Socket
R6361	4000155	PTH9M04BH222TS2F333, Thermistor
R6362	4000150	PTH9M04BC222TS2F333, Thermistor

NOTE: THE COMPONENTS IDENTIFIED BY MARK $\triangle$ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

Replacement for transistor of mark * , if necessary must be made from the same beta group (HFE) as the original type.

PRINTED CIRCUIT BOARD-PARTS LIST

NOTE: THE COMPONENTS IDENTIFIED BY MARK  ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

SPEAKER RELAY CIRCUIT PC BOARD (NAAF-6824-1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
Photo interrupters		
Q6201,Q6211	24120080 or	PC817X or
	24120043	ON3131
Transistors		
Q6202,Q6203	2213290 or	DTC114ES or
Q6212,Q6213	2214230	RN1202
Q6231,Q6232	2212855 or	2SB1068-U or
	2212853	2SB1068-K
Q6241	2213290 or	DTC114ES or
Q6242	2214230	RN1202
Q6301	2212445	2SK365-GR
Q6302-Q6304	2213284 or	2SC1740S-R or
Q6700,Q6702	2212115	2SC2458-GR
Q6305,Q6306	221282 or	DTC114ES or
Q6611	2213560	RN1204
Q6307	2202116 or	2SD2061-F or
	2202115	2SD2061-E
Q6612	2211164	2SC2120-Y
Q6704,Q6706	2213284 or	2SC1740S-R or
Q6710,Q6712	2212115	2SC2458-GR
Q6707	2213354 or	2SA933S-R or
	2212125	2SA1048-GR
Q6714,Q6716	2213284 or	2SC1740S-R or
	2212115	2SC2458-GR
Q6718	2211793 or	2SA992-E or
	2211792	2SA992-F
Diodes		
D6201	223163,	1SS133,
D6301-D6307	223205 or	1SS270A or
D6610-D6616	223222	WG713A
D6308	224471303	MTZJ13C
D6309,D6310	22380035,	GP104003E,
D6914,D6915	22380046 or	AM01Z or
D6921,D6922	22380260	RL1N4003
D6731	224470512	MTZJ5.1B
D6931,D6932	22380035,	GP104003E,
	22380046 or	AM01Z or
	22380260	RL1N4003
Capacitors		
C6201,C6211	374722234	0.022 μ F $\pm$ 5%,50V,Plastic
C6202	393321017	100 μ F,6.3V, Elect.
C6231,C6241	393380107	1 μ F,50V, Elect.
C6301-C6303	393361017	100 μ F,35V, Elect.
C6510-C6516	393391007	10 μ F,100V, Elect.
C6520-C6526	393391007	10 μ F,100V, Elect.
C6530-C6536	374734734	0.047 μ F $\pm$ 5%,100V,Plastic
C6700,C6702	393322217	220 μ F,6.3V, Elect.
C6704,C6706	393322217	220 μ F,6.3V, Elect.
C6731	393380107	1 μ F,50V, Elect.
Thermistors		
R6233,R6243	4000195	RXE030
Resistors		
R6310	443621224	1.2k Ω $\pm$ 5%,1W, Metal oxide
R6510-R6516	453532294	0.22 Ω $\pm$ 5%,1/2W, Metal
R6520-R6526	453532294	0.22 Ω $\pm$ 5%,1/2W, Metal
R6530	443621804	18 Ω $\pm$ 5%,1W, Metal oxide
R6531-R6536	443621804	18 Ω $\pm$ 5%,1W, Metal oxide
R6540-R6546	443621804	18 Ω $\pm$ 5%,1W, Metal oxide
R6550-R6556	443621804	18 Ω $\pm$ 5%,1W, Metal oxide
R6914,R6915	443621834	18k Ω $\pm$ 5%,1W, Metal oxide

CIRCUIT NO.	PART NO.	DESCRIPTION
Terminals		
P6201,P6211	25045204	HSJ0847-01-010
P6221	25045204	HSJ0847-01-010
P6231,P6241	25045204	HSJ0847-01-010
P6632	25060298	NTM-4PDMN229
Relays		
RL6610-RL6616	25065574	NRL-1P5A-DC24-134
Sockets		
JL6301A	25051091	NSCT-7P878
JL6624A	25051092	NSCT-8P879
JL9221A	25051089	NSCT-5P876
JL9222A	25051094	NSCT-10P881
P5950	2009990583	NSAS-8P0792
P5952	2009990584	NSAS-8P0793
P6001	2009990581	NSAS-10P0790
P602A-P602G	2009990406	NSAS-6P0543
Plugs		
P6620B	25055678	NPLG-8P634
P6912B	25055661	NPLG-10P617
P9012A	25055409	NPLG-7P391
P6801	27300833	WS-2NS
Clamp		
P6802	27190608-1	UA-0 V0
Heat sink		
Q6307A	27160461	RAD-132
Tapping screw		
Q6307B	838430107	3TTB+10S(BC)

SPEAKER TERMINAL L/R/C PC BOARD (NAETC-6825-1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
Capacitors		
P6620A	25051127	NSCT-8P914,Socket
P6630	25060297	NTM-6PDMN228,Spekaer terminal

SPEAKER TERMINAL PC BOARD (NAETC-6826-1E)


CIRCUIT NO.	PART NO.	DESCRIPTION
JL6624B	25055629	NPLG-8P591,Plug
P6634	25060298	NTM-4PDMN229,Speaker terminal

BRIDGE CIRCUIT PC BOARD (NAETC-6818-1A)

CIRCUIT NO.	PART NO.	DESCRIPTION
Diode		
D6910	22380303,	RBV-2506,
	22380304 or	D25XB60 or
	22380305	RS2505M
Capacitors		
C6912,C6913	374731044	0.1 μ F $\pm$ 5%,100V,Plastic
Resistors		
R6912,R6913	453532294	0.22 Ω $\pm$ 5%,1/2W, Metal
Socket		
P6912A	25051050	NSCT-10P837
Plugs		
P6911A	25055676	NPLG-2P632
P6913A	25055881	NPLG-2P837

SCHEMATIC DIAGRAM

Power amplifier 2

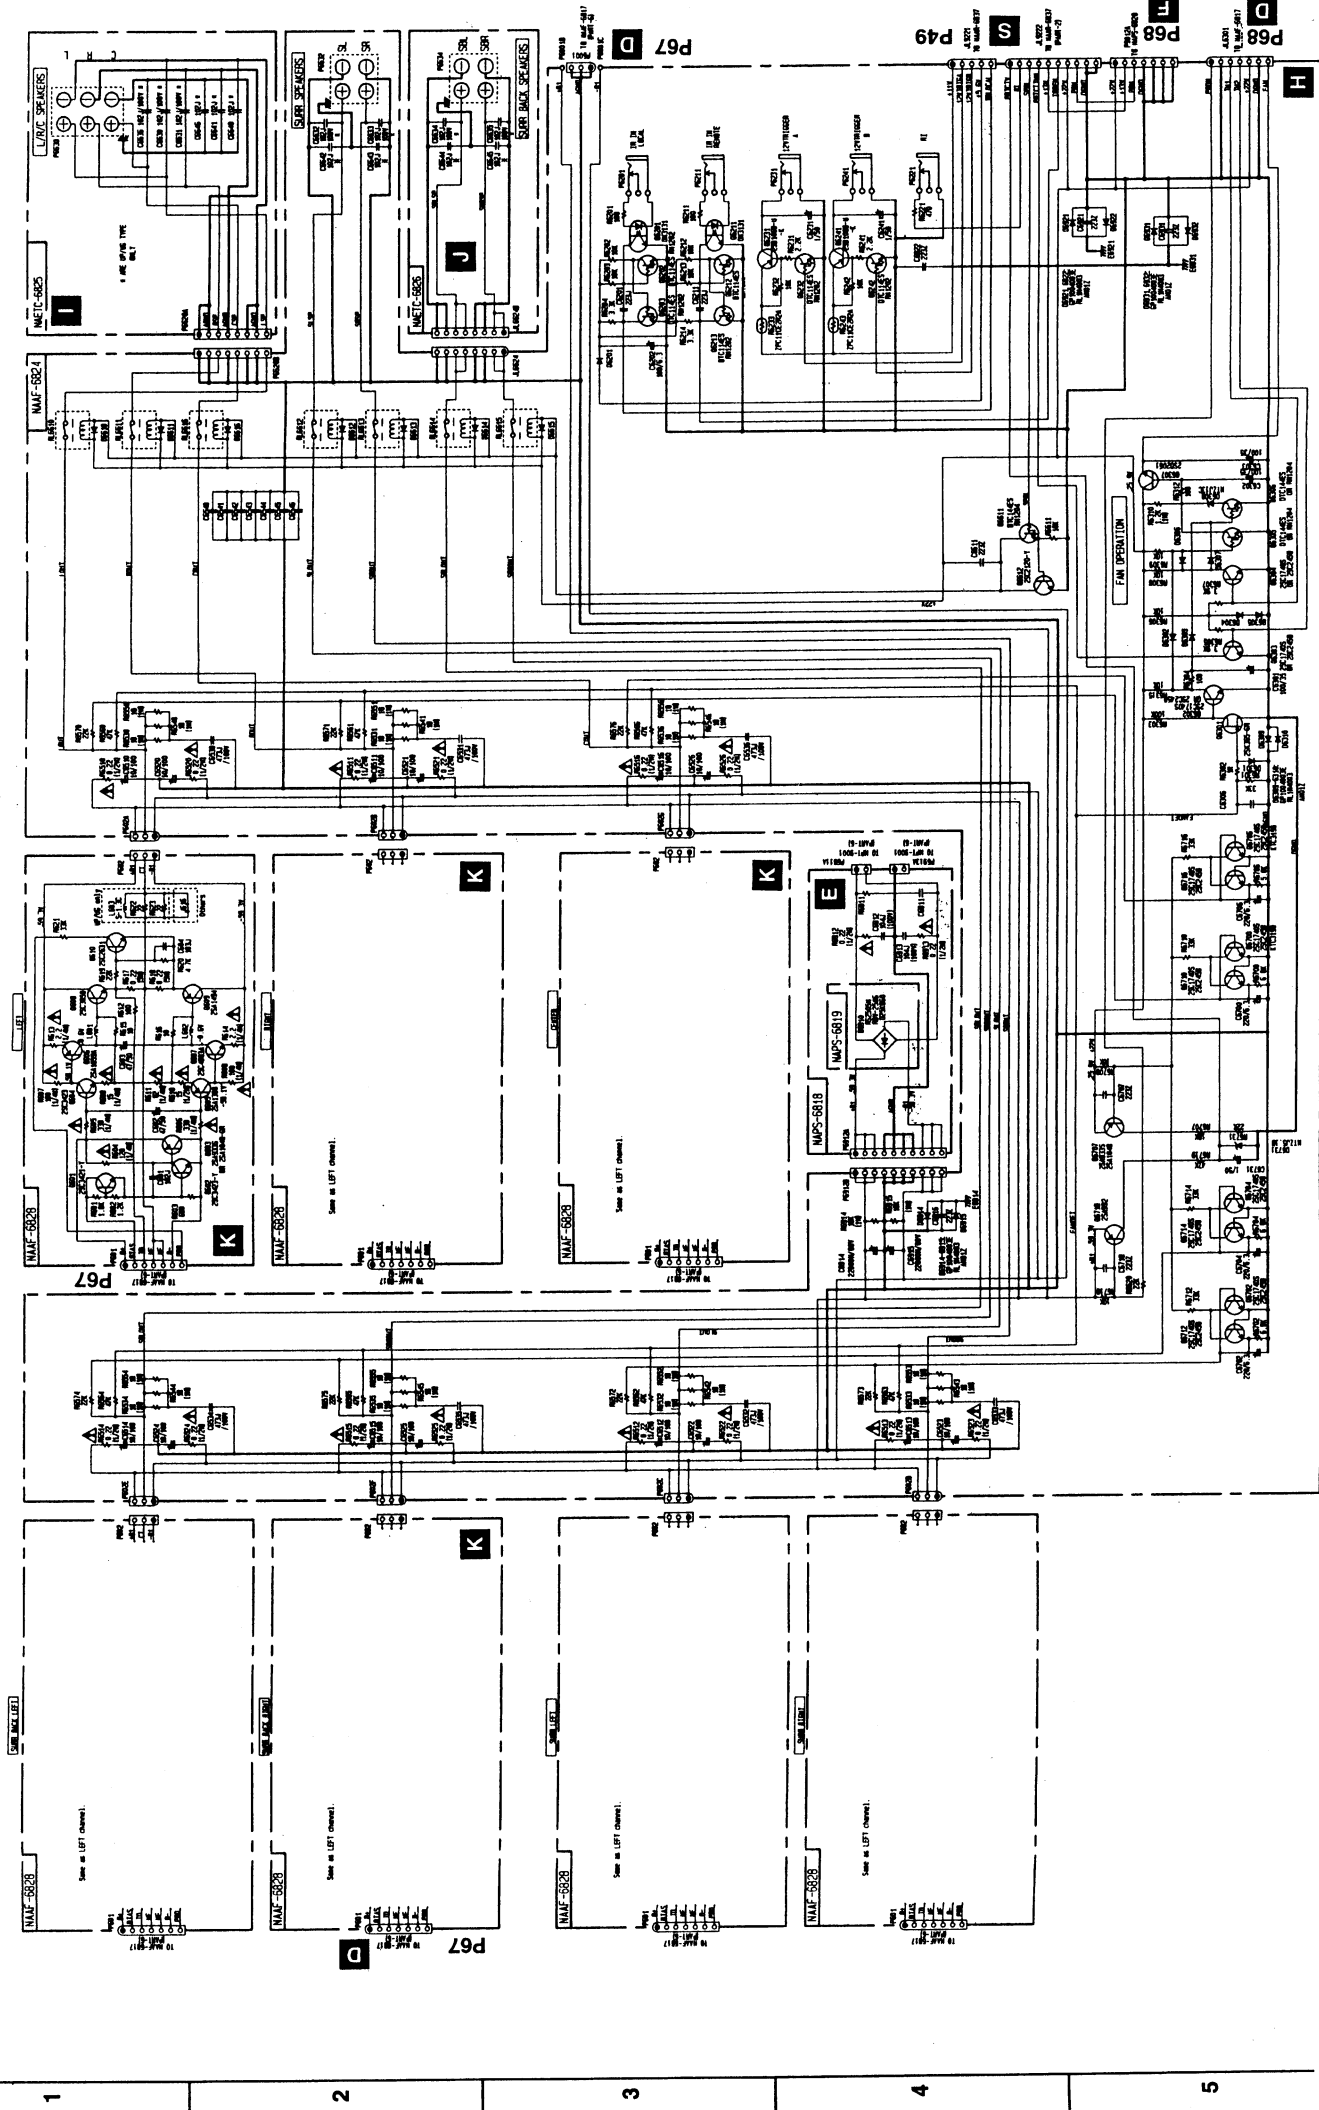

PRINTED CIRCUIT BOARD-PARTS LIST

POWER AMPLIFIER CIRCUIT PC BOARD (NAAF-6828-1A)

CIRCUIT NO.	PART NO.	DESCRIPTION
Transistors		
Q601	2212654	2SC3421-Y
Q602	2202104	2SC3423-Y
Q603	2213354 or 2212125	2SA933S-R or 2SA1048-GR
Q604	2202104	2SC3423-Y
Q605	2202094	2SA1360-Y
Q606	2203334 or 2203333	* 2SA1859A-Y or * 2SA1859A-O
Q607	2203344 or 2203343	* 2SC4883A-Y or * 2SC4883A-O
Q608	2201874, 2201873 or 2201876	* 2SC3858-Y, * 2SC3858-O or * 2SC3858-P
Q609	2201864, 2201863 or 2201866	* 2SA1494-Y, * 2SA1494-O or * 2SA1494-P
Q610	2214984 or 2214985	2SC2631-R or 2SC2631-S
Coils		
L601	5597-45502	FR CORE
L602	5597-45502	FR CORE
Capacitors		
C601	374721024	1000pF±5%,50V,Plastic
C602,C603	393384707	47 μ F,50V, Elect.
C604	374721034	0.01 μ F±5%,50V,Plastic
Resistors		
R604	415471214	△ 120 Ω ±5%,1/4W, Carbon
R605,R606	415473314	△ 330 Ω ±5%,1/4W, Carbon
R607,R608	415471014	△ 100 Ω ±5%,1/4W, Carbon
R609,R610	415471504	△ 15 Ω ±5%,1/4W, Carbon
R611	415478204	△ 82 Ω ±5%,1/4W, Carbon
R613,R614	415470224	△ 2.2 Ω ±5%,1/4W, Carbon
R617,R618	4000076	MPC74-5WK-0.22,Metal plate
Socket		
P601	2009990585	NSAS-14P0794
Plug		
P602	25055166	NPLG-3P150
Heat sinks		
Q606A,Q607A	27160461	RAD-132
Screws		
Q604A	838430167	3TTB+16S(BC),Tapping
Q606B,P607B	82143006	3P+6FN(BC),Pan head
Nut		
Q604B	863430	N-3FN(BC)

NOTE: THE COMPONENTS IDENTIFIED BY MARK △
ARE CRITICAL FOR RISK OF FIRE AND
ELECTRIC SHOCK. REPLACE ONLY WITH
PART NUMBER SPECIFIED.

Replacement for transistor of mark * , if necessary
must be made from the same beta group (Hfe) as
the original type.

PRINTED CIRCUIT BOARD-PARTS LIST

VIDEO TERMINAL PC BOARD (NAVD-6848-1E)

CIRCUIT NO.	PART NO.	DESCRIPTION
ICs		
Q2001,Q2002	222740515R2	74HC4051AF
Q2201	22241037	LC74761-9189
Q2202	222740525R2	74HC4052AF
Q2951	22240943R2	TC9163AF
Q2952	22241221R2	TC9164AF
Transistors		
Q2012,Q2022	2213145R2	2SC2712-GR
Q2013,Q2023	2214375R2	2SA1162-GR
Q2041-Q2046	2216031R2 or	RN1444-A or
Q2053-Q2056	2216032R2	RN1444-B
Q2061-Q2064	2216031R2 or	RN1444-A or
Q2071-Q2074	2216032R2	RN1444-B
Q2101	2213145R2	2SC2712-GR
Q2112,Q2121	2213145R2	2SC2712-GR
Q2113,Q2133	2214375R2	2SA1162-GR
Q2132	2213145R2	2SC2712-GR
Q2141,Q2161	2213145R2	2SC2712-GR
Q2181,Q2191	2213145R2	2SC2712-GR
Q2182,Q2192	2214490R2	RN1404
Q2203,Q2252	2213145R2	2SC2712-GR
Q2253,Q2623	2214375R2	2SA1162-GR
Q2622	2213145R2	2SC2712-GR
Diodes		
D2011,D2012	223234R2	1SS352
D2021,D2022	223234R2	1SS352
D2111,D2112	223234R2	1SS352
D2131,D2132	223234R2	1SS352
D2181,D2182	223234R2	1SS352
D2191,D2192	223234R2	1SS352
D2201	223234R2	1SS352
D2251,D2252	223234R2	1SS352
D2521,D2522	223234R2	1SS352
D2621,D2622	223234R2	1SS352
Coils		
L2201	231237K022R2	NCH-1471
L2202	231292J056R2	NCH-1572
Crystal		
X2201	3010167	XTL-14.32M
Capacitors		
C2011,C2021	354744719	470 μ F,16V, Elect.
C2023,C2024	354741019	100 μ F,16V, Elect.
C2111,C2113	354741019	100 μ F,16V, Elect.
C2114,C2131	354741019	100 μ F,16V, Elect.
C2151,C2171	354741019	100 μ F,16V, Elect.
C2173,C2174	354741019	100 μ F,16V, Elect.
C2181,C2191	354741009	10 μ F,16V, Elect.
C2182,C2192	354780229	2.2 μ F,50V, Elect.
C2183,C2193	354784799	0.47 μ F,50V, Elect.
C2209,C2216	354780109	1 μ F,50V, Elect.
C2212,C2221	354741019	100 μ F,16V, Elect.
C2214	354783399	0.33 μ F,50V, Elect.
C2215	374726824	6800pF $\pm$ 5%,50V,Plastic
C2217	374722234	0.022 μ F $\pm$ 5%,50V,Plastic
C2220	354784799	0.47 μ F,50V, Elect.
C2222	375524744	0.47 μ F $\pm$ 5%,50V,Plastic
C2223,C2226	354741019	100 μ F,16V, Elect.
C2251,C2253	354741019	100 μ F,16V, Elect.
C2254	354741019	100 μ F,16V, Elect.
C2521,C2621	354744719	470 μ F,16V, Elect.
C2523,C2524	354741019	100 μ F,16V, Elect.
C2951,C2925	354741009	10 μ F,16V, Elect.

CIRCUIT NO.	PART NO.	DESCRIPTION
		Terminal
P2001,P2002	25045566	NPJ-4PDYE381
P2003	25045363	NPJ-3PDYE208
		Sockets
P2011,P2013	25050678	NSCT-10P482
P2012	25050675	NSCT-7P479
P2024	25052259	NSCT-26P2156

S VIDEO TERMINAL PC BOARD (NAVD-6849-1E)


CIRCUIT NO.	PART NO.	DESCRIPTION
ICs		
Q2501,Q2502	222740515R2	74HC4051AF
Q2511,Q2521	22241443R2	TK15420M
Q2601,Q2602	222740515R2	74HC4051AF
Q2512,Q2522	2213145R2	2SC2712-GR
Q2513,Q2523	2214375R2	2SA1162-GR
Q2541-Q2543	2216031R2 or	RN1444-A or
Q2552,Q2553	2216032R2	RN1444-B
Q2561,Q2562	2216031R2 or	RN1444-A or
Q2571,Q2572	2216032R2	RN1444-B
Q2612	2213145R2	2SC2712-GR
Q2613	2214375R2	2SA1162-GR
Q2641-Q2643	2216031R2 or	RN1444-A or
Q2652,Q2653	2216032R2	RN1444-B
Q2661,Q2662	2216031R2 or	RN1444-A or
Q2671,Q2672	2216032R2	RN1444-B
Diodes		
D2511,D2512	223234R2	1SS352
D2611,D2612	223234R2	1SS352
Capacitors		
C2501,C2502	354741019	100 μ F,16V, Elect.
C2511,C2611	354744719	470 μ F,16V, Elect.
C2513,C2514	354741019	100 μ F,16V, Elect.
C2613,C2614	354741019	100 μ F,16V, Elect.
Sockets		
P2501-P2503	25051957	NSCT-12P1744
	25051957	NSCT-12P1744
	25051957	NSCT-12P1744
P2504	25051956	NSCT-8P1743
P2511	25050678	NSCT-10P482
P2521,P2522	25050678	NSCT-10P482
P2523	25052253	NSCT-20P2150
P2524	25052259	NSCT-26P2156

Video



SCHEMATIC DIAGRAM

Component video

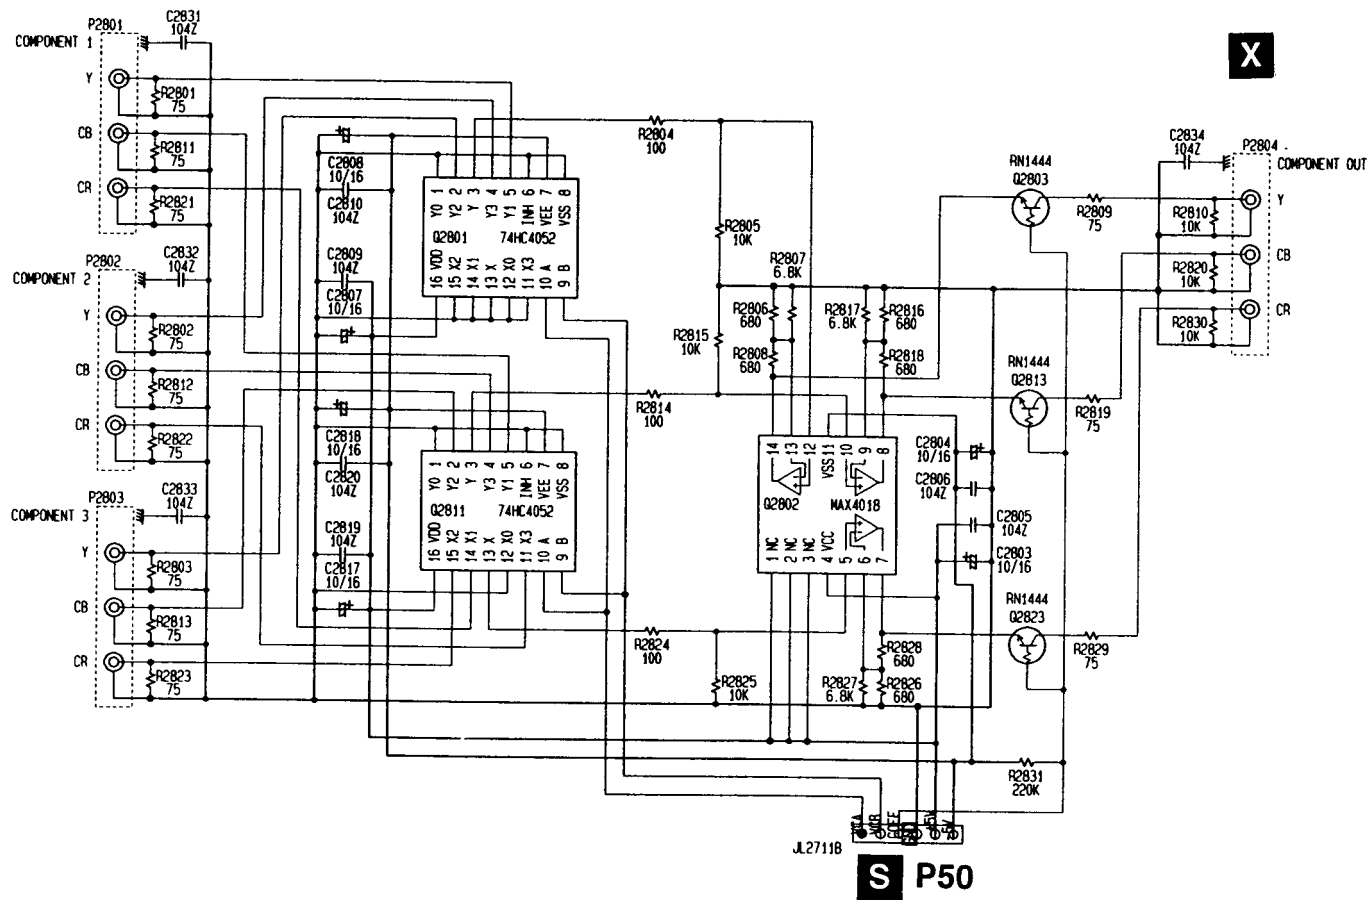

PRINTED CIRCUIT BOARD-PARTS LIST

COMPOSITE VIDEO TERMINAL PC BOARD (NAVD-6850-1E)


CIRCUIT NO.	PART NO.	DESCRIPTION
ICs		
Q2801	222740525R2	74HC4052AF
Q2811	222740525R2	74HC4052AF
Transistors		
Q2803,Q2813	2216031R2 or	RN1444-A or
Q2823	2216032R2	RN1444-B
Capacitors		
C2803,C2804	354741009	10 μ F,16V, Elect.
C2807,C2808	354741009	10 μ F,16V, Elect.
C2817,C2818	354741009	10 μ F,16V, Elect.
Terminals		
P2801-P2804	25045607	NPJ-3PDGLR414

SCHEMATIC DIAGRAM

NAAF-6815


P50

S

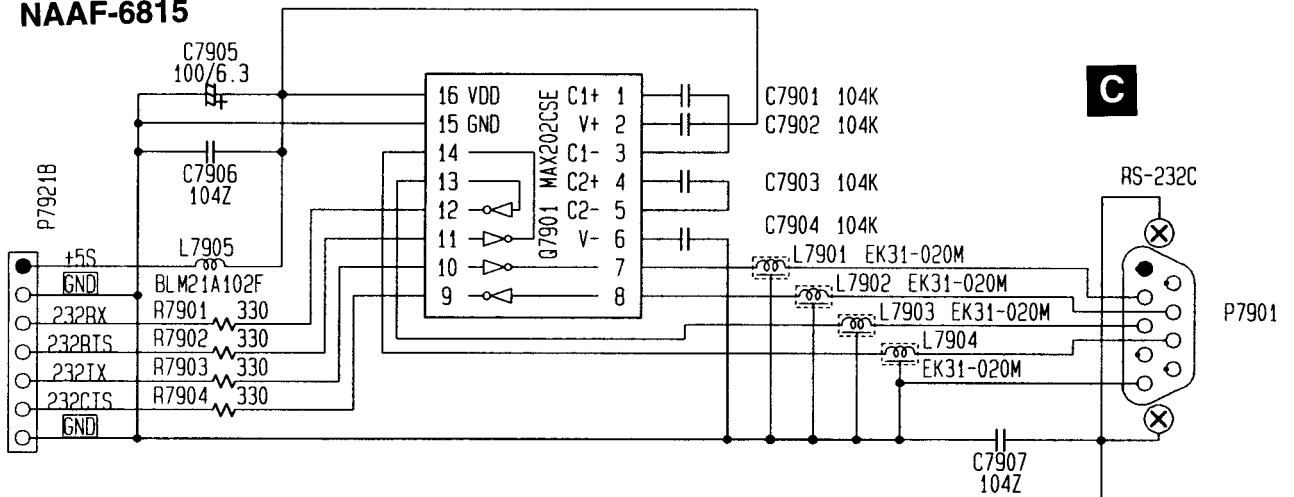

P63

A

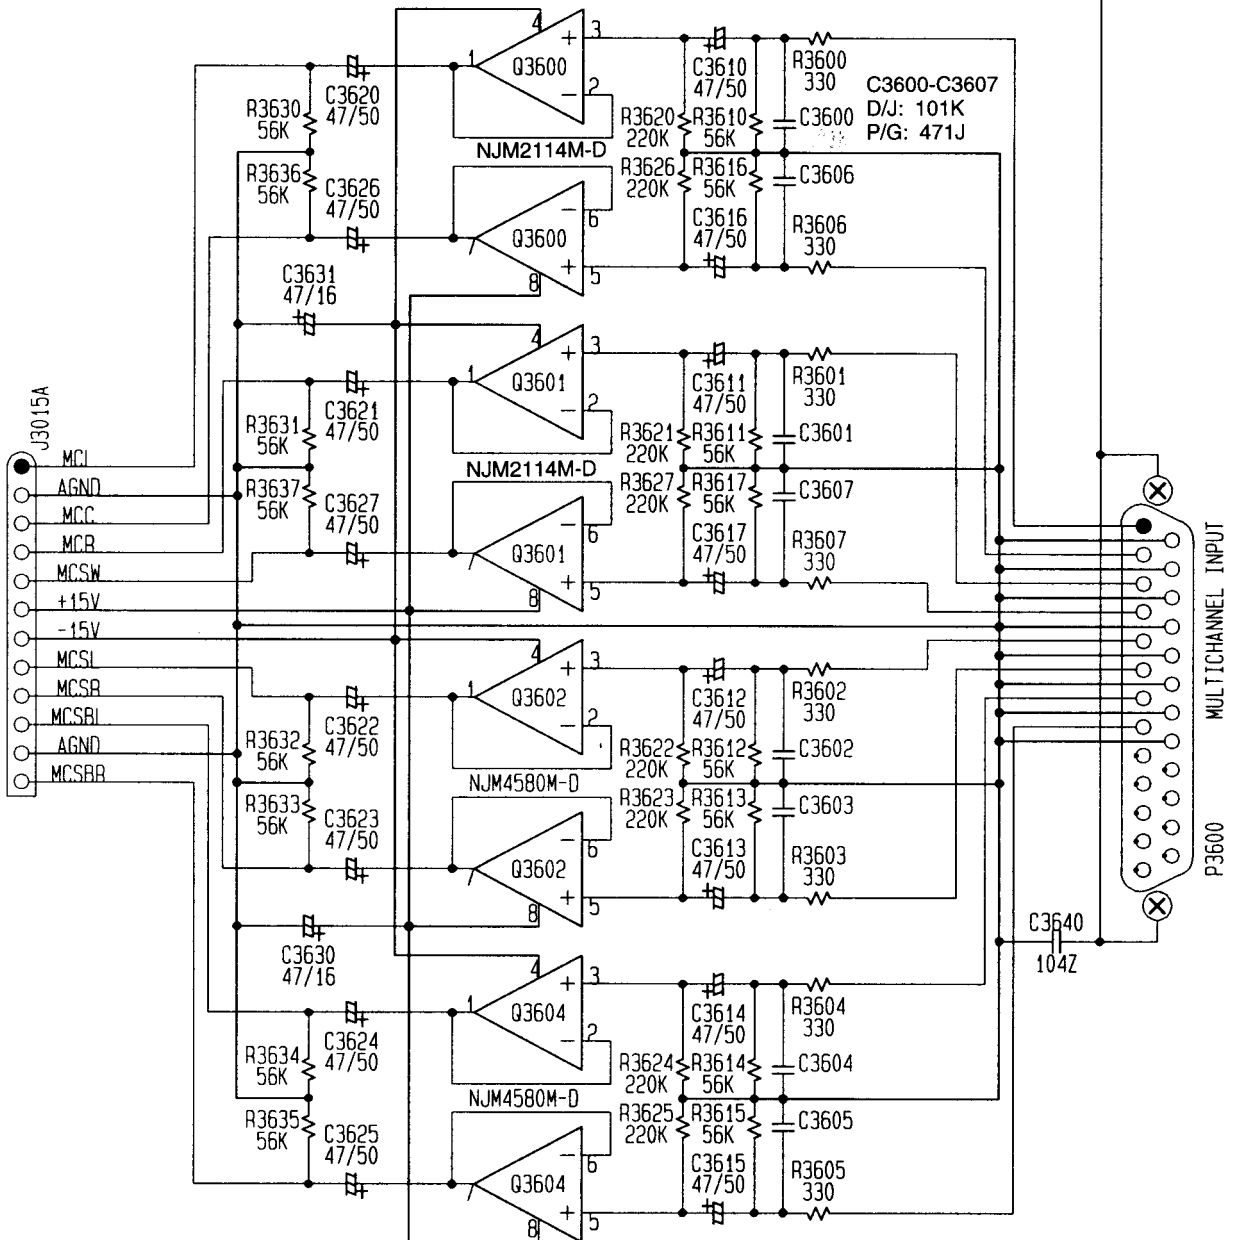


	E	F	G	
--	---	---	---	--

C Multi channel input terminal PC board

PRINTED CIRCUIT BOARD-PARTS LIST

MULTI CHANNEL INPUT TERMINAL PC BOARD (NAAF-6815-1A)			MULTI CHANNEL INPUT TERMINAL PC BOARD (NAAF-6815-1A)		
CIRCUIT NO.	PART NO.	DESCRIPTION	CIRCUIT NO.	PART NO.	DESCRIPTION
	ICs			ICs	
Q3600,Q3601	22241472R2	NJM2114M-D	C3630,C3631	393344707	47 μ F,16V, Elect.
Q3602,Q3604	22241448R2	NJM4580M-D	C7905	354721019	100 μ F,6.3V, Elect.
Q7901	22241447R2	MAX202CSE		Sockets	
	Coils		P3600	25052380	NSCT-25P2276
L7901-L7904	230954	EK31-020M	P7901	25052379	NSCT-9P2277
L7905	230948R2	BLM21A102F	P7921B	25050675	NSCT-7P479
	Capacitors		J3015A	25051096	NSCT-12P883
C3600-C3607	374721015	100pF $\pm$ 10%,50V,Plastic		Bar	
C3610,C3611	393884707	47 μ F,50V, Elect.	P3611	27141754	BBL60
C3612-C3615	393384707	47 μ F,50V, Elect.			
C3616,C3617	393884707	47 μ F,50V, Elect.			
C3620,C3621	393884707	47 μ F,50V, Elect.			
C3622-C3625	393384707	47 μ F,50V, Elect.			
C3626,C3627	393884707	47 μ F,50V, Elect.			

SCHEMATIC DIAGRAM DSP Circuit

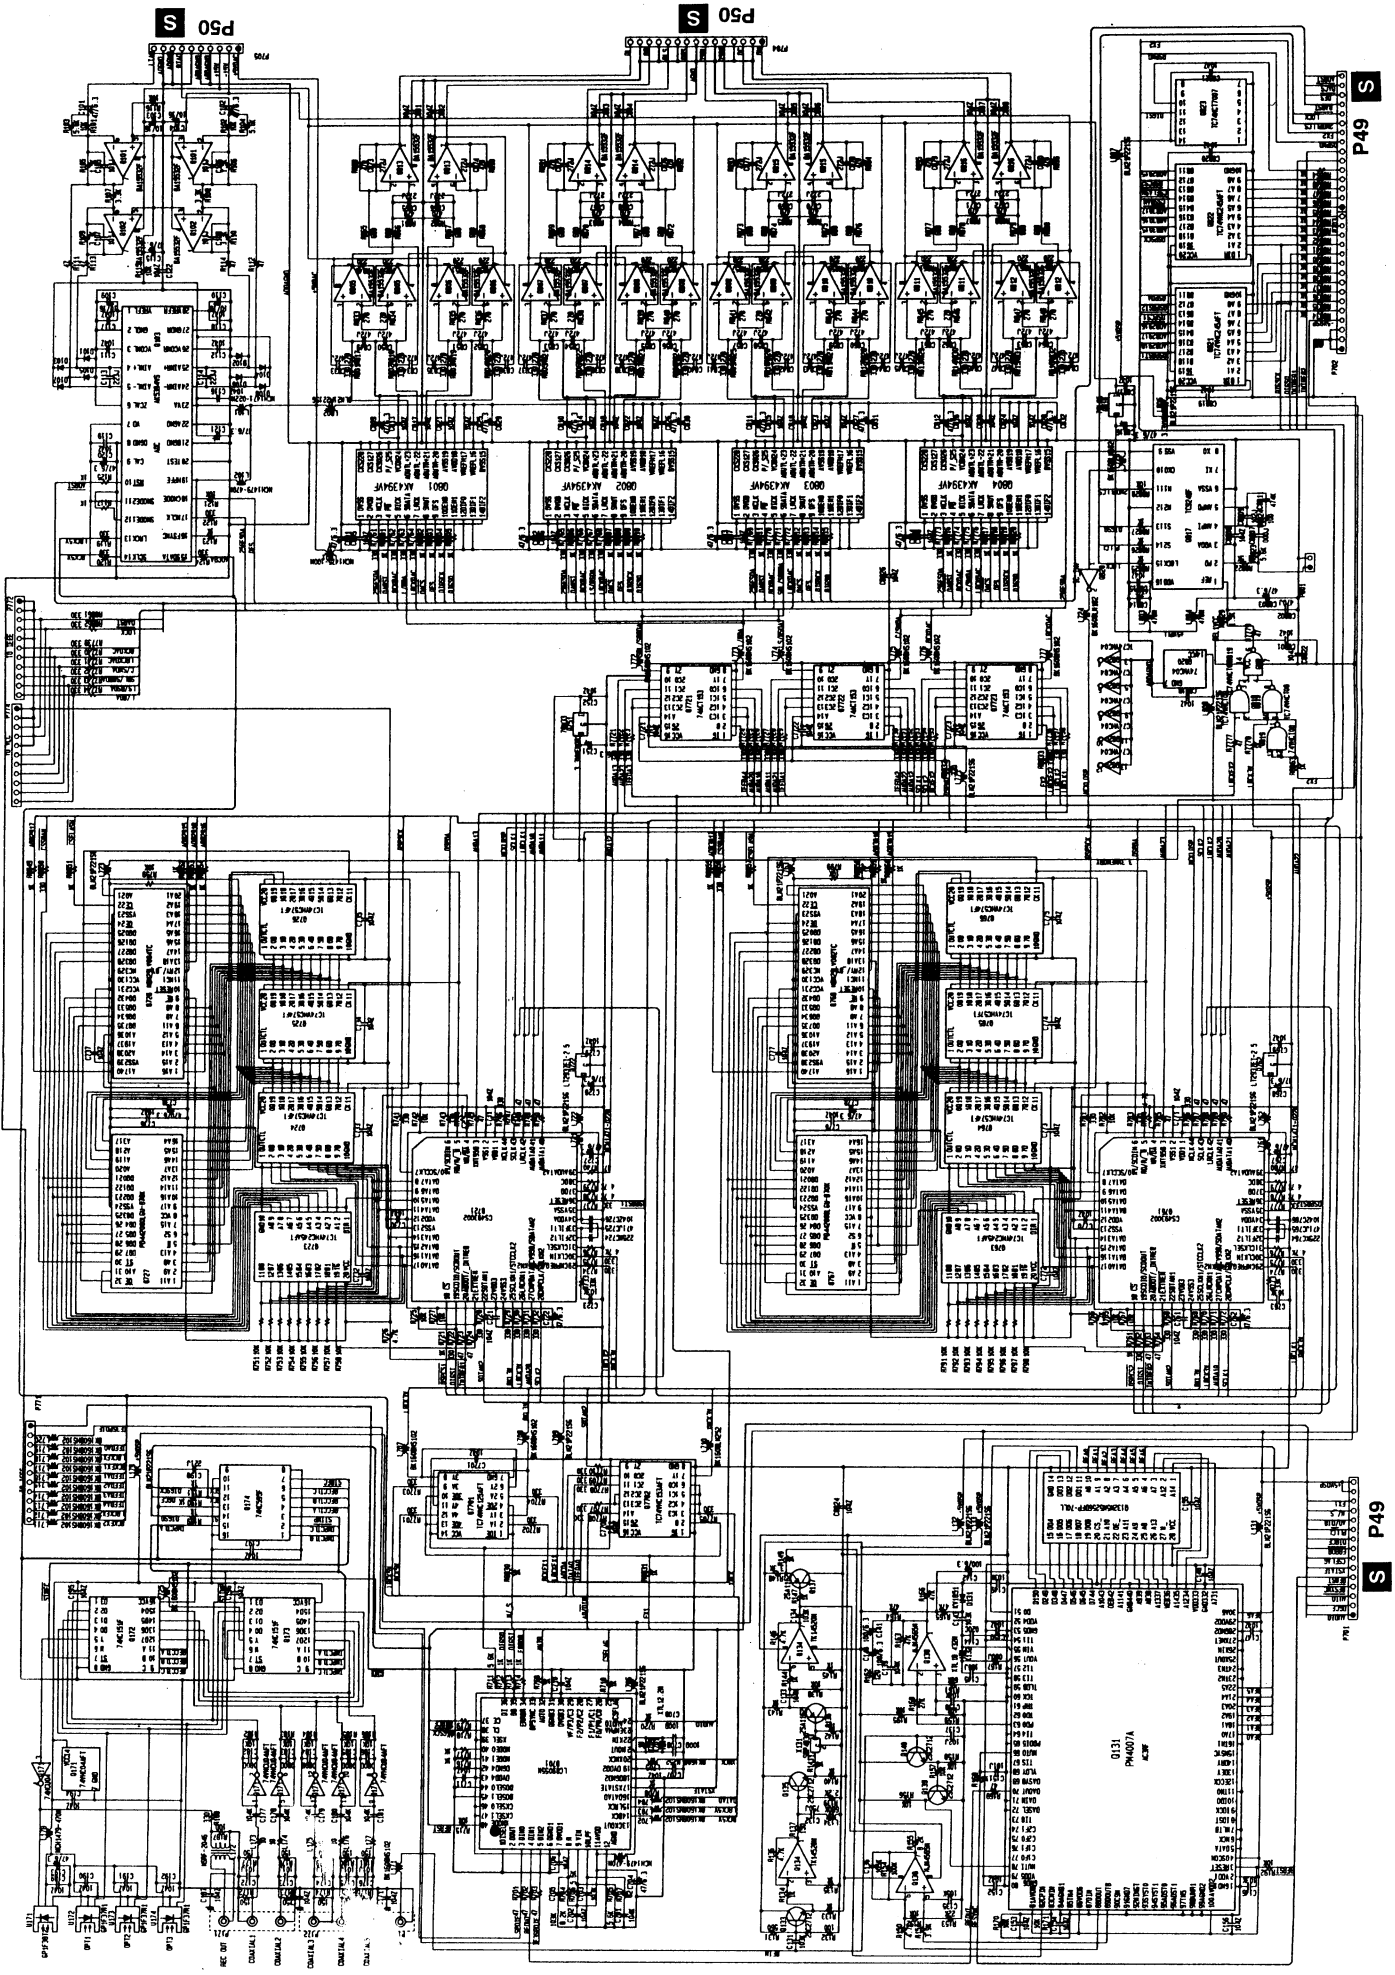

PRINTED CIRCUIT BOARD-PARTS LIST

DSP CIRCUIT PC BOARD (NADG-6830-1)


CIRCUIT NO.	PART NO.	DESCRIPTION
	ICs	
Q101,Q102	22241409R2 or	BA15532F or
	22241449R2	NJM5532M-D
Q103	22241452R2	AK5393VS
Q131	22241107R3	PM4007A
Q132	22241207R2,	M5M5256DPF-55L,
	22240985R2,	TC55257CFL-85,
	22241108R2 or	M5M5256DFP-70L or
	22241208R9	LH52266CN-70LL
Q134	22241443R2	TK15420M
Q138	22241383R2	NJM4565M-D
Q171	22274004HR2TO	TC74VHCU04FT
Q172,Q173	222741515R2TO	TC74HC151F
Q174	222745955R2	74HC595F
Q701	22241454R3	LC89055W-RA8
Q721	22241456R9	CS493002-CL
Q722	22241468R2	LM2937IMP-2.5
Q723,Q763	22274245ER2TO	TC74VHC245AFT
Q724-Q726	22274574ER2TO	TC74VHC574FT
Q727	22241459R3	MPD442000LGU-B70X
Q728	22241457R3	MBM29LV004TC-90PTN
Q751	22278033ER2NEI	MPC29M33T
Q761	22241456R9	CS493002-CL
Q762	22241468R2	LM2937IMP-2.5
Q764-Q766	22274574ER2TO	TC74VHC574FT
Q767	22241459R3	MPD442000LGU-B70X
Q768	22241458R3	MBM29LV002TC-90PTN
Q7701	22274125ER2TO	TC74VHC125FT
Q7702	22274153ER2TO	TC74VHC153FT
Q7721-Q7723	22274153AR2TO	TC74ACT153F
Q801-Q804	22241453R2	AK4394VF
Q805-Q816	22241409R2 or	BA15532F or
	22241449R2	NJM5532M-D
Q817	22240928R2	TC9246F
Q818	222780053R2JR	NJM78L05UA
Q819	22274000GR2TO	TC74VHCT00AFT
Q820	22274004HR2TO	TC74VHCU04FT
Q821,Q822	22274245ER2TO	TC74VHC245AFT
Q823	222740077R2TO	TC74HCT7007AF
	Transistors	
Q133,Q135	2213145R2	2SC2712-GR
Q136,Q137	2214375R2	2SA1162-GR
Q139,Q140	2213145R2	2SC2712-GR
	Diodes	
D101-D108	223234R2	1SS352
D131	223236R2	KV1851-TL
	Crystals	
X132	3010279R2	XTL-18.432M
X701	3010323R2	HC-49/U03C 12.288MHZ
	Filter	
X131	3010263	SBP-4930
	Coils	
L131-L133	230949R2	BLM21P221SG
L179,L706	230949R2	BLM21P221SG
L709,L722	230949R2	BLM21P221SG
L762,L771	230949R2	BLM21P221SG
L802	230949R2	BLM21P221SG
L806-L808	230949R2	BLM21P221SG
L801	231237K100R2	NCH-1475
L102,L178	231237K470R2	NCH-1479
L701,L803	231237K470R2	NCH-1479
L804	231237K470R2	NCH-1479
L101	231237M022R2	NCH-1471
L721,L761	231237M022R2	NCH-1471

CIRCUIT NO.	PART NO.	DESCRIPTION
	Coils	
L763	231237M022R2	NCH-1471
L134	233493K680S	NCH-1487 680K
L171	230955R2	BK1608HS102-T
L702-L704	230955R2	BK1608HS102-T
L705,L710	230956R2	BK1608LM252-T
L707,L708	230955R2	BK1608HS102-T
L711-L720	230955R2	BK1608HS102-T
L724,L726	230958R1	BK1608LM182-T
L725,L772	230955R2	BK1608HS102-T
L773-L777	230955R2	BK1608HS102-T
R169	230956R2	BK1608LM252-T
L172	232136	NSRF-2046
	Capacitors	
C101,C102	356724709R2	47 μ F,6.3V, Elect.
C103,C104	356741009R2	10 μ F,16V, Elect.
C109,C110	356741009R2	10 μ F,16V, Elect.
C115,C120	356724709R2	47 μ F,6.3V, Elect.
C121,C193	356724709R2	47 μ F,6.3V, Elect.
C140-C142	356721019R2	100 μ F,6.3V, Elect.
C704,C722	356724709R2	47 μ F,6.3V, Elect.
C727,C728	356724709R2	47 μ F,6.3V, Elect.
C751,C762	356724709R2	47 μ F,6.3V, Elect.
C767,C768	356724709R2	47 μ F,6.3V, Elect.
C801-C804	356724709R2	47 μ F,6.3V, Elect.
C809-C812	356724709R2	47 μ F,6.3V, Elect.
C829-C832	356724709R2	47 μ F,6.3V, Elect.
C8803,C8814	356724709R2	47 μ F,6.3V, Elect.
C8816	356724709R2	47 μ F,6.3V, Elect.
C738,C778	354724719S	470 μ F,6.3V, Elect.
	Terminals	
P173	25045477	NPJ-1PDBL295
P171,P172	25045624	NPJ-3PDO431
	Sockets	
P701-P704	25050683	NSCT-15P487
P705	25050678	NSCT-10P482
P771,P772	25052439R2	NSCT-11P2336

PARTS LIST

REF.NO.	PART NO.	DESCRIPTION	REF.NO.	PART NO.	DESCRIPTION
1	27100319-1	Chassis	98	27122727	Rear panel
2	28170070	Bushing	99	838430068	3TTB+6B(BC),Self-tapping screw
3	27255004	CS-1U,Clamp	103	29362630	Label, processor
4	27190813	KGPS-10RF,Holder	106	29362609	Label, power transformer
5	29110083	Tape, cloth	107	29362591	Label
6	28141421	t8*10*30,Cushion	108	29360778	⚠ Label
7	28141423	t16*20*30,Cushion	C6914	3504355	CE62W80V22000M, Electrical capacitor
8	27130778	Bracket P	C6915	3504355	CE62W80V22000M, Electrical capacitor
9	838130088	3TTB+8B,Self-tapping screw	F9001	252196	⚠ 12A-UL/T-314, Fuse
10	27115259B	Side bracket	P1201	2047152512	NCFC7-152512,Flexible flat cable
11	27160462	Heat sink S	P2525	2047261022	NCFC7-261022,Flexible flat cable
12	838430107	3TTB+10S(BC), Self-tapping screw	P3005	25060151	Ground etrminal
13	27190009	KGLS-4S,Holder	P3005a	87643010	W3*10F(BC),Flat washer
14	27190902	KGPS-16S,Holder	P3006	27262657	Plate, shield
15	27130779E	Bracket, shield	P608	223031	BFG20E-2,Isolated sheet
16	27190938	KGPS-8S,Holder	P609	223031	BFG20E-2,Isolated sheet
17	27300833	WS-2NS,Clamp, wire	P6351	24502312 or	3110KL-05W-B40(*NSP) or
18	82143006	3P+6FN(BC),Pan head screw		24502311	D08A-24TG(EX), Fan
19	838440089	4TTB+8C(BC),Self-tapping screw	P6352	24502309 or	3610KL05WB40F12 or
20	27130832A	Bracket F		24502310	D09T-24TG(EX),Fan
21	27130837-1	Bracket U	P6710	27301856	Bus bar
22	28141095	Cushion	P6711	27301944	Bus bar
23	27160463	Heat sink L	P6712	27141723	Bus bar
24	27160464	Heat sink R	P681	25055945	NPLG-2P898,Plug
25	801433	3SMS8W.SW+14B(BC),Special screw	P682	25055959	NPLG-1P912,Shorted plug
26	82143010	3P+10FN(BC),Pan head screw	T9001	2301446	⚠ NPT-1386D,Power transformer
27	87643008	W3*8F(BC), Washer	U1	1A871513-1A	NAAF-6813-1A, Main circuit PC board ass'y
28	871430	SW-3(BC), Spring washer	U2	1A871514-1A	NAAF-6814-1A, Input/output terminals PC board ass'y
29	27130835	Bracket HU	U3	1A871515-1A	NAAF-6815-1A, Multi channel input terminal PC board ass'y
30	27130834	Bracket H2	U4	1A871517-1A	NAAF-6817-1A, Power amplifier driver circuit PC board ass'y
31	27190011	KGLS-6S,Holder	U5	1A871518-1A	NAPS-6818-1A, Bridge circuit PC board ass'y
32	27130836	Bracket HL	U6	1A871520-1A	NAPS-6820-1A, Primary circuit PC board assay
33	27130833	Bracket, fan	U7	1A871521-1A	NASW-6821-1A,Power switch PC board ass'y
34	833450102	5STP+10BQ(BC),Self-tapping screw	U8	1A871524-1E	NAAF-6824-1E, Speaker relay circuit PC board ass'y
35	27190983A	Holder, capacitor	U9	1A871525-1E	NAETC-6825-1E,Speaker terminal L/R/C PC board ass'y
36	837440169	4TTT+16C(BC),Self-tapping screw	U10	1A871526-1E	NAETC-6826-1E,Speaker terminal PC board ass'y
37	27170309	Bottom board	U11	1A871528-1A	NAAF-6828-1A,Power amplifier circuit PC board ass'y
38	838430088	3TTB+8B(BC),Self-tapping screw	U12	1A871529-1A	NAETC-6829-1A, Thermal sensor PC board ass'Y
39	27175317	Leg	U13	1A871530-1	NADG-6830-1, DSP circuit PC board ass'y
40	831430088	3TTW+8B(BC),Self-tapping screw	U19	1A871537-1E	NAAR-6837-1E,Main microprocessor circuit PC board ass'y
41	27130780B	Bracket, power transformer	U20	1A871538-1E	NAPS-6838-1E,Rectifier circuit PC board ass'y
42	28170071	Bushing	U21	1A871539-1E	NAPS-6839-1E,Constant voltage circuit PC board ass'y
43	260208	Wire tie	U22	1A871548-1E	NAVD-6848-1E,Video terminal PC board ass'y
44	830440089	4TTC+8C(BC),Self-tapping screw	U23	1A871549-1E	NAVD-6849-1E, S video terminal PC board ass'y
78	28325762	Knob, power	U24	1A871550-1E	NAVD-6850-1E,Component video terminal PC board ass'y
87	28184773A	Top cover			
88	28141422	t12*15*30,Cushion	U26	240134	TFCE1U114A,Tuner unit
89	838430088	3TTB+8B(BC),Self-tapping screw			
90	838440089	4TTB+8C(BC),Self-tapping screw			
91	801597A	Special screw			
92	28184772	Cover			
93	28184771A	Cover, rear			
94	29095874	Sheet, fan			

EXPLODED VIEW

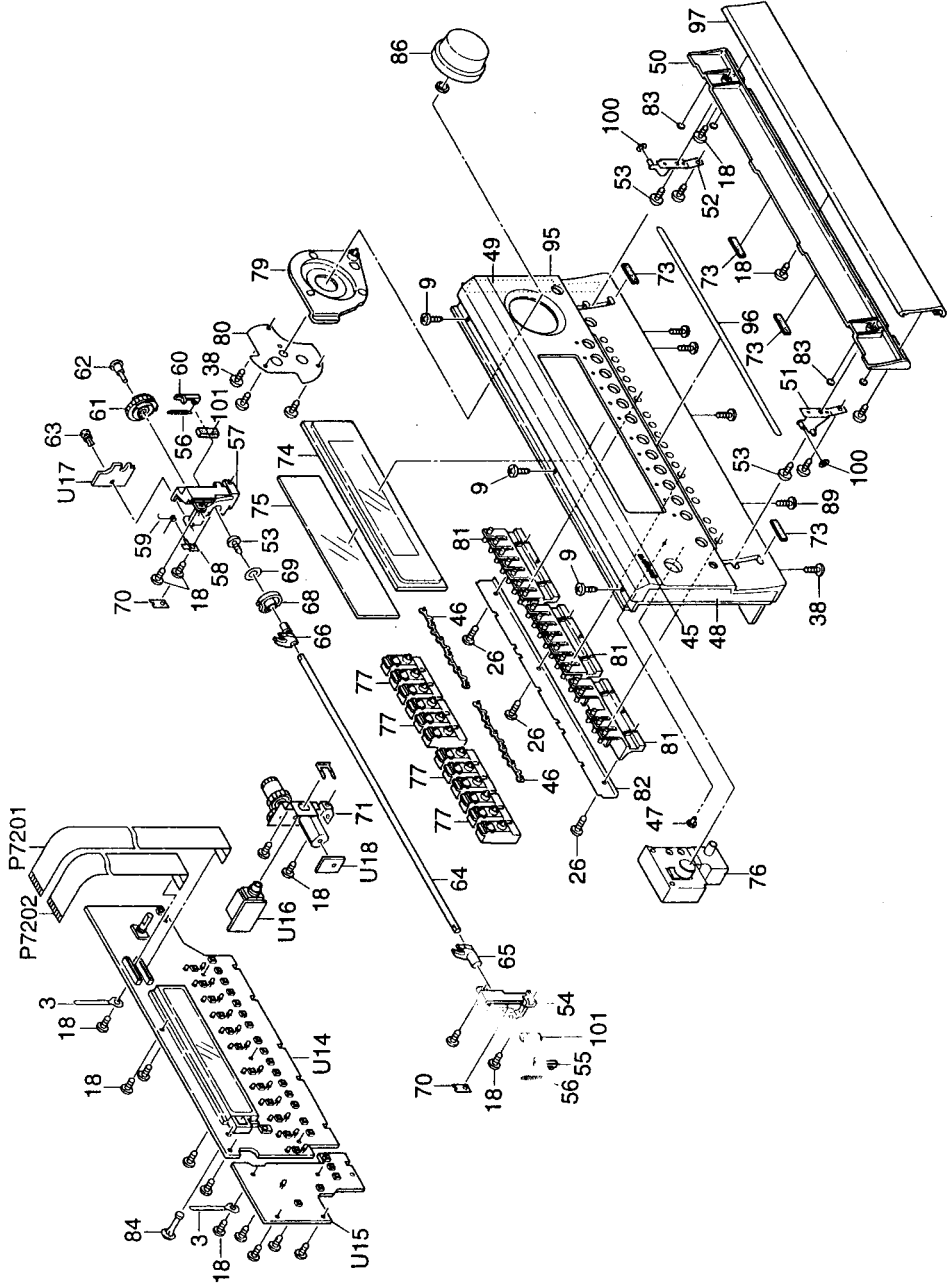

REF.NO.	PART NO.	DESCRIPTION
74	28191885A	Clear plate
75	28133396	Back plate
76	28325761	Knob, standby
77	28325759	Knob, selector
79	27268018A	Guide, volume
80	27130838	Bracket, volume
81	28325723A	Knob, door
82	27141755	Bracket, knob
83	28140860	Cushion
84	27190926	KGPS-18RF,Holder
86	28325763A	Knob, Volume
89	838430088	3TTB+8B(BC), Self-tapping screw
95	27212204	Front panel assembly
96	27262646	Plate L
97	28148442	Door
100	27270218	Sapcer
101	28141432	t1.5*12*4,Cushion
P7201	2047242512	NCFC7-242512,Flexible flat cable
P7202	2047242512	NCFC7-242512,Flexible flat cable
U14	1A871532-1E	NADIS-6832-1E,Display circuit PC board ass'y
U15	1A871533-1E	NASW-6833-1E,Operation switch PC board ass'y
U16	1A871534-1E	NAETC-6834-1E,Headphone terminal PC board ass'y



REF.NO.	PART NO.	DESCRIPTION
57	27191095A	Holder R
58	27141758A	Retainer, spring
59	27180579	Spring, door
60	28335066A	Lever R
61	27301943	Gear A
62	27260364	Shaft A
63	880011	NRP-355,Plastic rivet
64	27260363	Shaft
65	27260365A	Shaft L
66	27260366A	Shaft R
68	27301942	Gear S
69	27141759	Retainer W
70	27141752	Retainer S
71	24804045B	Motor assembly
73	28141426	t1.5*25*5,Cushion

REF.NO.	PART NO.	DESCRIPTION
3	27255004	CS-1U,Circlip
18	82143006	3P+6FN(BC),Pan head screw
26	82143010	3P+10FN(BC),Pan head screw
45	28135278	Badge
46	28198903	Facet
47	28198908	Facet
48	28125368	End cap L
49	28125369	End cap R
50	28148433	Door base
51	28183002A	Stay L
52	28183003A	Stay R
53	834426068	2.6TTS+6B(BC),Self-tapping screw
54	27191094A	Holder L
55	28335065A	Lever L
56	27180580	Spring


PACKING VIEW

Printed matters

- 29365080B Warranty card
- 29342901 Instruction sheet
- 29342900 Instruction manual

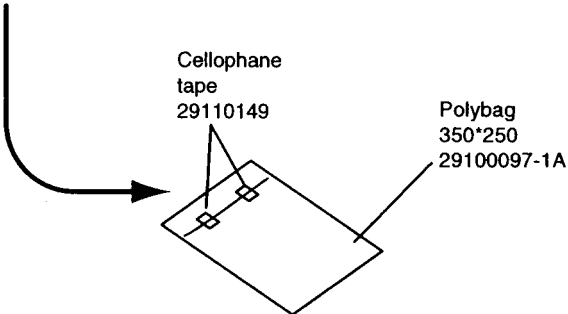


Accessory




AM loop antenna 1
232140




T-shaped FM antenna 1
292142




DB-25 RCA6ch cable 1
2010386

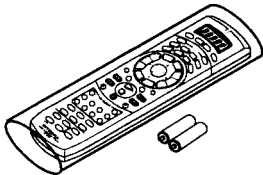


Remote controller 1
RC-418M
24140418A
Batteries (AA, R6, or UM-3) 2
3010054



Power cord 1
AS-UC-2
253301

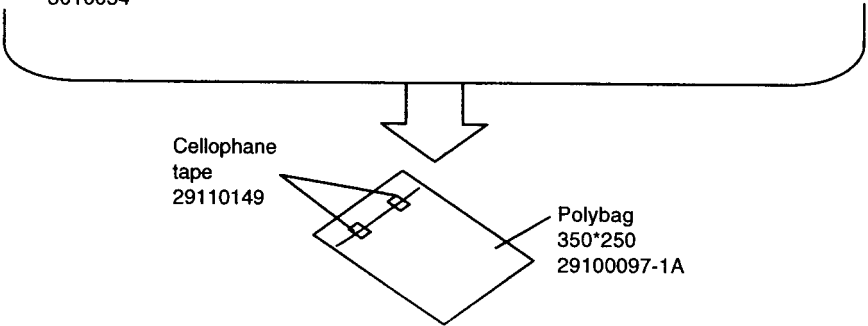

DTR-9.1

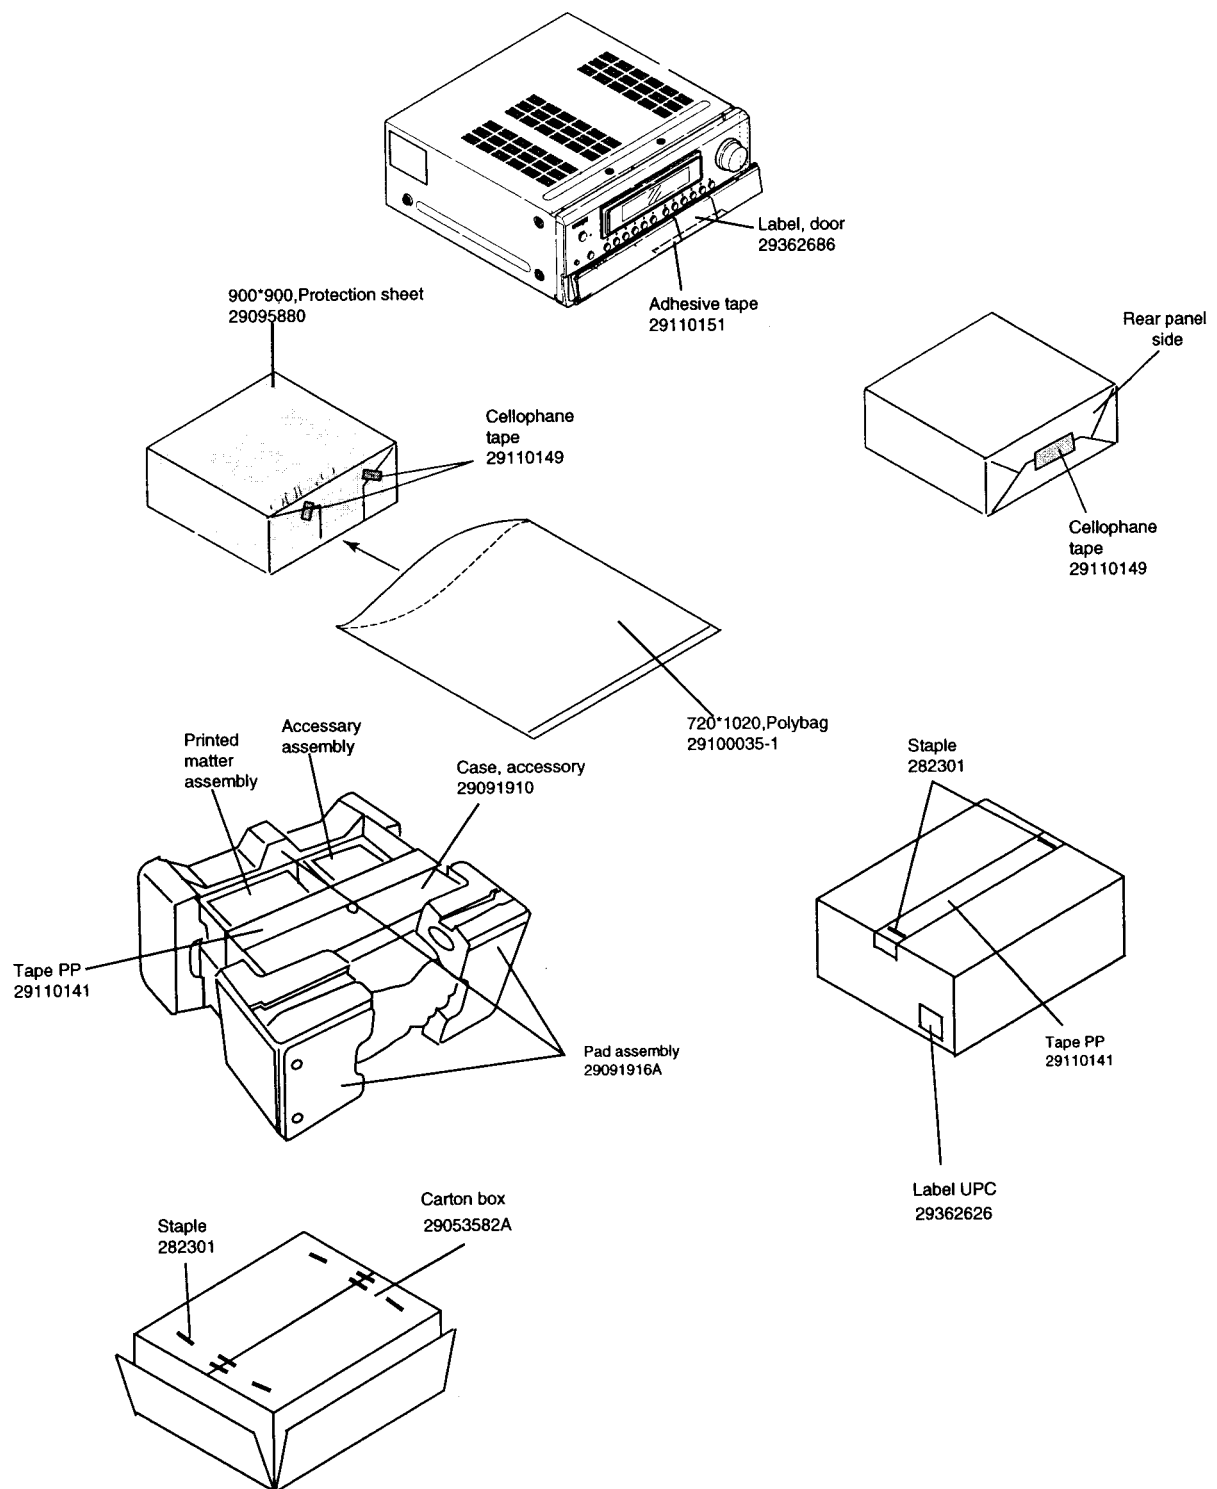

Integra Division of
 ONKYO U.S.A. CORPORATION
 200 Williams Drive, Ramesy, N.J. 07446, U.S.A.
 Tel: 201-825-7950 Fax: 201-825-8150 E-mail: integra@onkyousa.com

Integra Division of
 ONKYO CORPORATION
 Sales & Product Planning Div. :
 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN
 Tel: 072-831-8111 Fax: 072-833-5222



OM3459 NS101 Printed in Japan