

Service Manual

Radio Cassette
RX-5030

FM-AM-FM Stereo Cassette Recorder



■ SPECIFICATIONS

Power Requirement:	AC; 100 ~ 110/115 ~ 127/200 ~ 220/ 230 ~ 250V, 50/60Hz Battery; 9V (six "D" size dry batteries) (Panasonic UM-1 or equivalent)	Output:	LINE OUT; sensitivity 0.36V load impedance 6.8k Ω under EXT SP; 3 ~ 8 Ω HEADPHONE; 8 Ω Woofer; 12cm (5") PM Dynamic speaker (3 Ω) Tweeter; 3cm (1 1/2") ceramic speaker (200 Ω)
Power Consumption:	16W	Speaker:	
Power Output:	8W (4W x 2)...RMS (max.)	Radio Frequency Range:	FM; 88 ~ 108MHz AM; 525 ~ 1610kHz
Frequency Range:	50 ~ 12,000Hz (with normal tape)	Intermediate Frequency:	FM; 10.7MHz AM; 455kHz
Recording System:	AC bias, Magnet erase	Sensitivity:	FM; 1.7 μ V/50mW output AM; 120 μ V/m/50mW output
Program Time:	1 hour with C-60 cassette tape	Dimensions:	47cm(W) x 25.5cm(H) x 14.6cm(D) [18 1/2"(W) x 10"(D) x 5 3/4"(D)]
Track System:	4-track 2-channel stereo recording and playback	Weight:	4.1kg (9 lb. 1 oz.) without batteries
Input:	MIC; sensitivity 0.25mV/applicable microphone impedance 200 ~ 600 Ω LINE IN; sensitivity 250mV/47k Ω over		


Specifications are subject to change without notice.

Panasonic

Panasonic Company
Division of Matsushita Electric
Corporation of America
One Panasonic Way, Secaucus,
New Jersey 07094


Panasonic Hawaii, Inc.
320 Waiakamilo Road, Honolulu,
Hawaii 96817

Matsushita Electric of Canada Ltd.
5770 Ambler Drive,
Mississauga, Ontario L4W 2T3

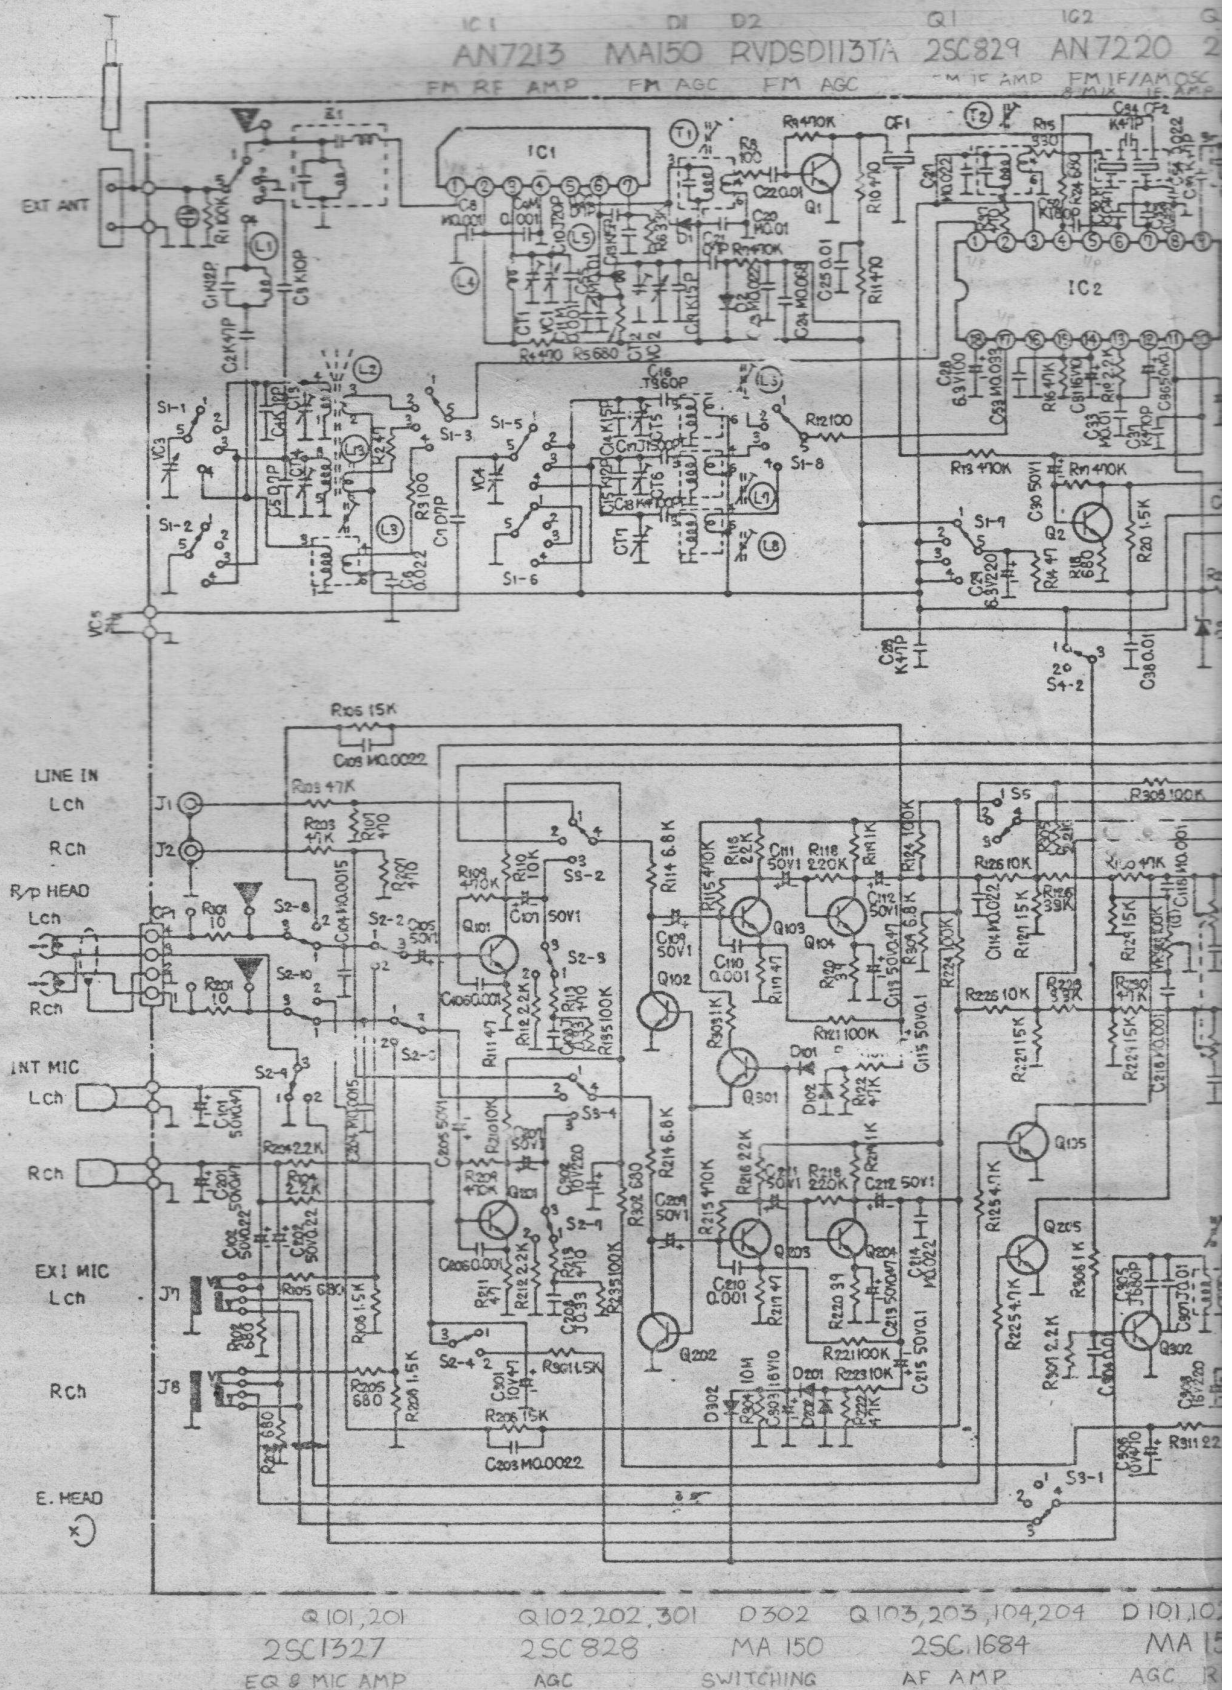

RX-5030F

IC2 Q2 D3 D4 D301
 AN7220 2SC1684 RVDU26R2BKTA LN230RPP LN0720IP
 FM IF/AMOSC AM AMP ZENNER FM ST IND LEVEL/BATT CHECK IND

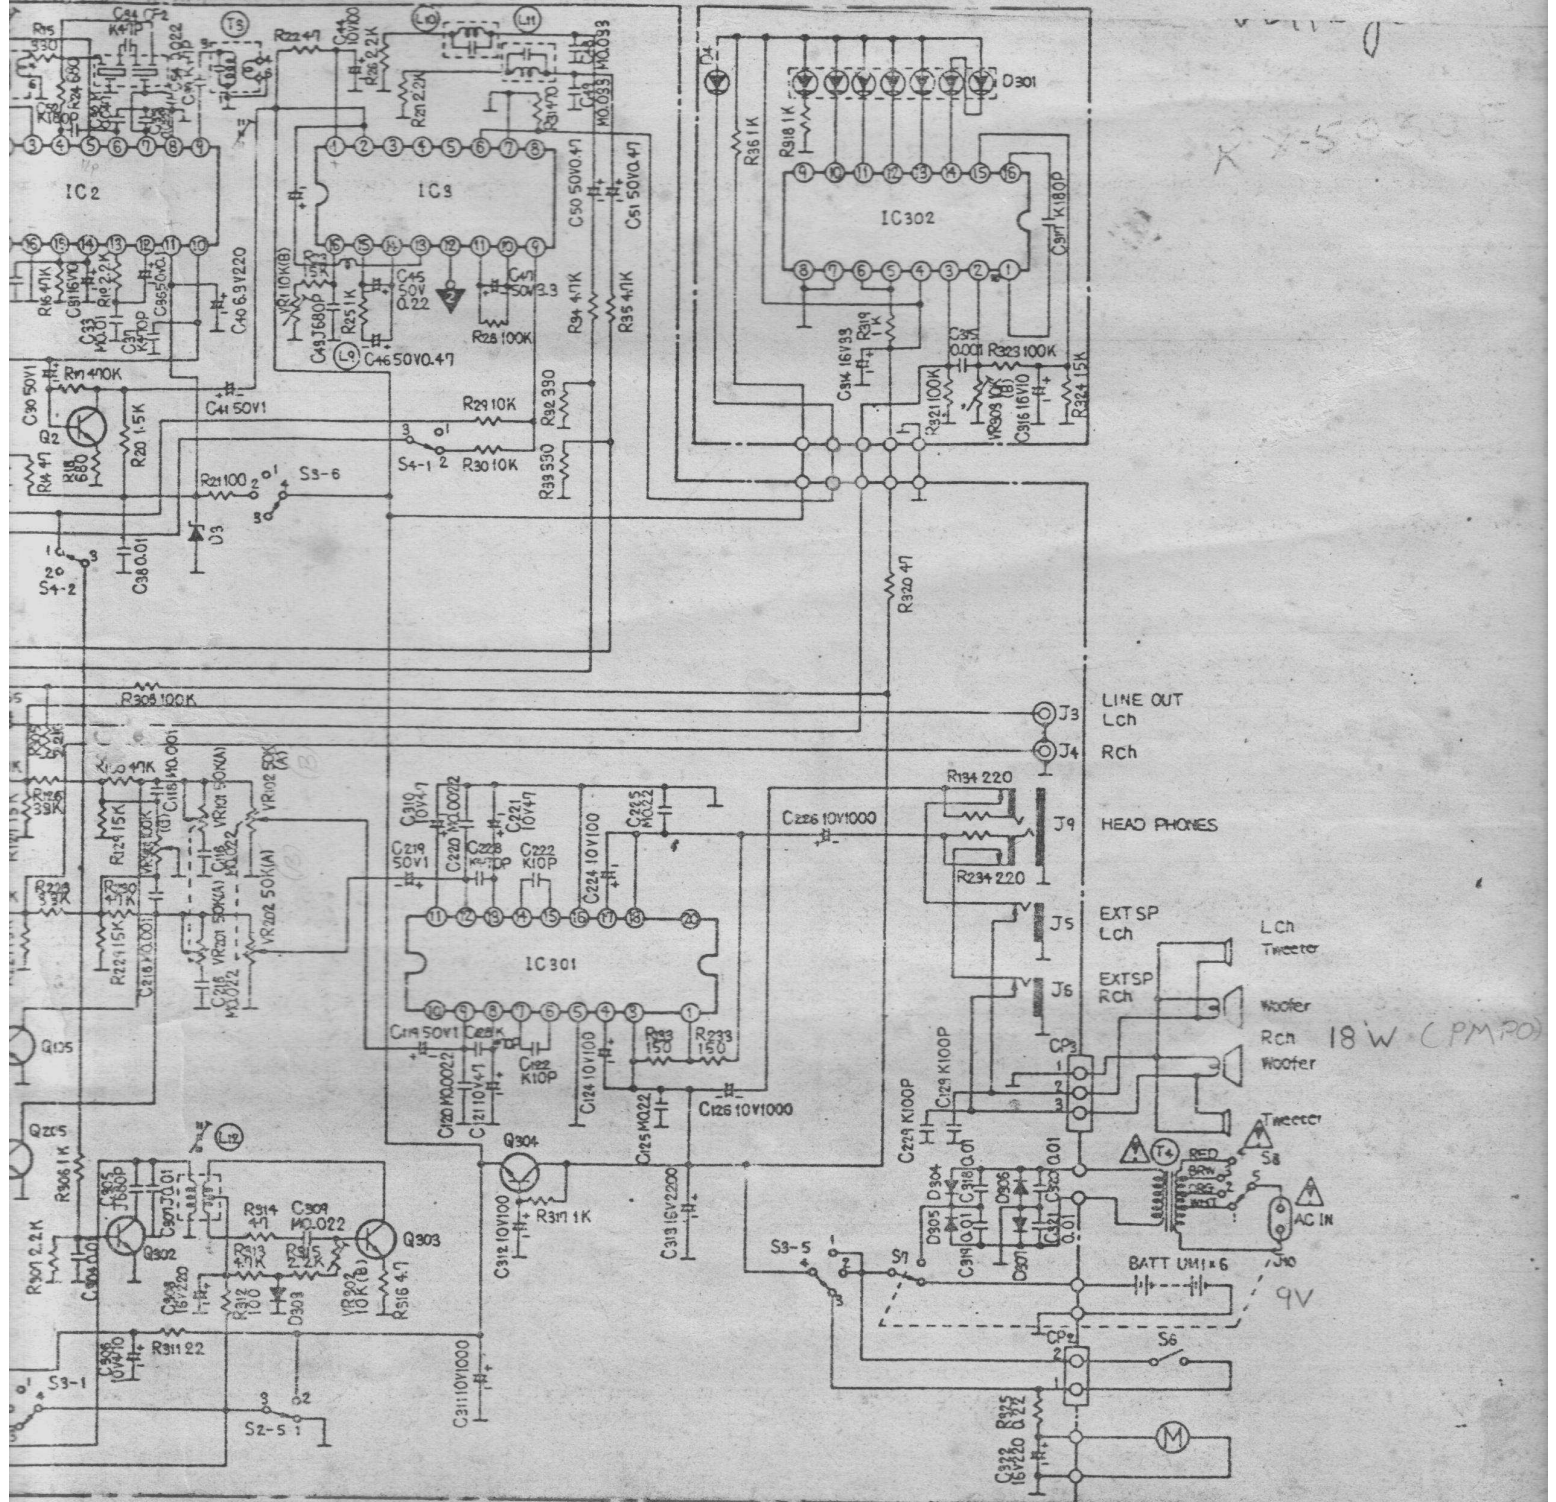

204 D101,102,202 Q105,105,302,304 D303 IC301 D304-307
 MA150 2SC828 MA27WATA RVILA4125 RVD10E1LP
 AGC RECT MUTING SWITCHING, AOC POWER AMP RECT
 RIPPLE FILTER

Q303
 2SC1788
 BIAS OSC

Damir