


Service Manual

**74 PM43 / 01B / 02B / 05B
/ 01G / 02G**

Integrated stereo amplifier



Free service manuals
Gratis schema's

Digitized by

www.freeservicemanuals.info

TABLE OF CONTENTS

SECTION	PAGE
1. BLOCK DIAGRAM	2
2. SCHEMATIC DIAGRAM AND PARTS LOCATION (Pattern Side).....	4
3. EXPLODED VIEW AND PARTS LIST	17
4. TEST EQUIPMENT REQUIRED FOR SERVICING	19
5. IDLING CURRENT ADJUSTMENT	19
6. USE OF SERVICE HOLE	19
7. VOLTAGE CONVERSION	20
8. HOW TO CHANGE THE SUPPLY VOLTAGE.....	20
9. MICROPROCESSOR	20
10. ELECTRICAL PARTS LIST	21

marantz®

model PM-43

MARANTZ DESIGN AND SERVICE

Using superior design and selected high grade components, MARANTZ company has created the ultimate in stereo sound. Only **original MARANTZ parts** can insure that your MARANTZ product will continue to perform to the specifications for which it is famous.

Parts for your MARANTZ equipment are generally available at our National Marantz Subsidiary or Agent.

MARANTZ EUROPE B.V.
P.O. Box 80002
Building SFF 2
5600 JB Eindhoven
The Netherlands
Phone : +31-40-732241
Fax : +31-40-735578

ORDERING PARTS

Parts can be ordered either by mail or by telex. In both cases, the correct part number has to be specified. The following information must be supplied to eliminate delays in processing your order:

1. Complete address
2. Complete part numbers and quantities required
3. Description of parts
4. Model number for which the part is required
5. Way of shipment
6. Signature: any order form or telex must be signed, otherwise such part order will be considered as null and void.

ADDRESSES

AUSTRALIA
MARANTZ AUSTRALIA
Figtree Drive
Australia Centre
Homebush, NSW 2140
AUSTRALIA

FINLAND
MARANTZ
Kuortanegatan 1
00520
Helsingfors 52
Finland

ITALY
MARANTZ ITALIANA SPA
Piazza IV Novembre 3
20124 Milano
Italy

NORWAY
MARANTZ
Postboks 7034
Assiden
3007 Drammen
Norway

SPAIN
MARANTZ SPAIN
Martinez Villergas 2
Apartado 2065
Madrid 28027
Spain

AUSTRIA
MARANTZ
Hietzinger Kai 137a
1130 Wien
Austria

FRANCE
MARANTZ FRANCE
4 Rue Bernard Palissy
92600 Asnières
France

JAPAN
MARANTZ JAPAN INC.
35-1, 7-chome, Sagamiono
Sagamihara-shi, Kanagawa
Japan

PORTUGAL
COREL
Av. da Liberdade
211-2 Esq.
1200 Lisboa
Portugal

SWEDEN
MARANTZ
Box 1324
17125 Solna
Sweden

BELGIUM
MARANTZ EUROPE B.V.
Div. Benelux
P.O.Box 80002
Building SFF 2
5600 JB Eindhoven
The Netherlands

GERMANY
MARANTZ GERMANY GmbH
Kleine Heide 12
Postfach 4802
Halle-Westfalen
Germany

KUWAIT
AL ALAMIAH ELECTRONICS
P.O.Box 8196
Salmiah
22052 Kuwait

SAUDI ARABIA
AL ALAMIAH ELECTRONICS
P.O.Box 5954
University Street
Riyadh 11432
Saudi Arabia

SWITZERLAND
MARANTZ SWITZERLAND
Postfach
8010 Zürich-Müllingen
Switzerland

CHILE
MARANTZ DIVISION OF
PHILIPS S.A.
Av. Santa Maria 0760
Casilla 2687
Santiago
Chile

GREAT BRITAIN
MARANTZ HiFi UK Ltd.
Kingsbridge House
Padbury Oaks
575-583 Bath Road
Longford Middlesex UB7 0EH,
U.K.

NETHERLANDS
MARANTZ EUROPE B.V.
Div. Benelux
P.O.Box 80002
Building SFF 2
5600 JB Eindhoven
The Netherlands

SOUTH AFRICA
MARANTZ S.A.
10 Bond Street
Randburg 2194
P.O. Box 7703
Johannesburg 2000
South Africa

TRADING
MARANTZ TRADING
P.O.Box 20008
Building SFF 2
5600 JB Eindhoven
The Netherlands

DENMARK
MARANTZ
Horsvinget 5
2630 Tastrup
Denmark

GREECE
ADAMCO ELECTR. SA
P.O.Box 21025
Hippocrates Str. 188
Athens 11471
Greece

All of the above locations are fully equipped to take care of your total service needs or can advise you. Because various countries have differing configuration requirements, it is necessary that you contact the service facility in your particular country. In the event that there is no service location listed for your country, please contact the nearest facility for the necessary assistance.

In case of difficulties, do not hesitate to contact the Technical Department at above mentioned address.

TECHNICAL SPECIFICATIONS (DIN)

Power output
RMS 8 Ohms (20 Hz - 20 kHz) 55 / 70 W
DIN 8 Ohms / 4 Ohms 60 / 80 W

IHF dynamic power
8 Ohms / 4 Ohms 70 / 90 W
THD at 8 Ohms RMS rated output 0.008 %
Intermodulation distortion 0.008 %
Damping factor 100

Magnetic cartridge input
Input sensitivity impedance 2.5 mV / 47 k ohms
Accuracy of frequency response to RIAA 0.5 dB
Signal to noise ratio 86 dB


Tuner / CD / Aux / Tape inputs
Input sensitivity impedance 150 mV / 33 k ohms
Signal to noise ratio 102 dB
Frequency response (-1 dB) 10 - 70 kHz
Tone characteristic (100 Hz and 10 kHz) ± 6 dB
Channel separation > 85 dB

General
Power Requirements
/ 01 version (4 voltages) 110 / 120 / 220 / 240 V AC, 50 / 60 Hz
/ 02 version 230 V AC 50 Hz
/ 05 version 240 V AC 50 Hz

Dimensions
Panel width 420 mm
Panel Height 118 mm
Depth 300 mm

Weight
Unit alone 6.2 kg

Specifications subject to change without prior notice.





Free service manuals
Gratis schema's

Digitized by

www.freesevicemanuals.info

1. BLOCK DIAGRM

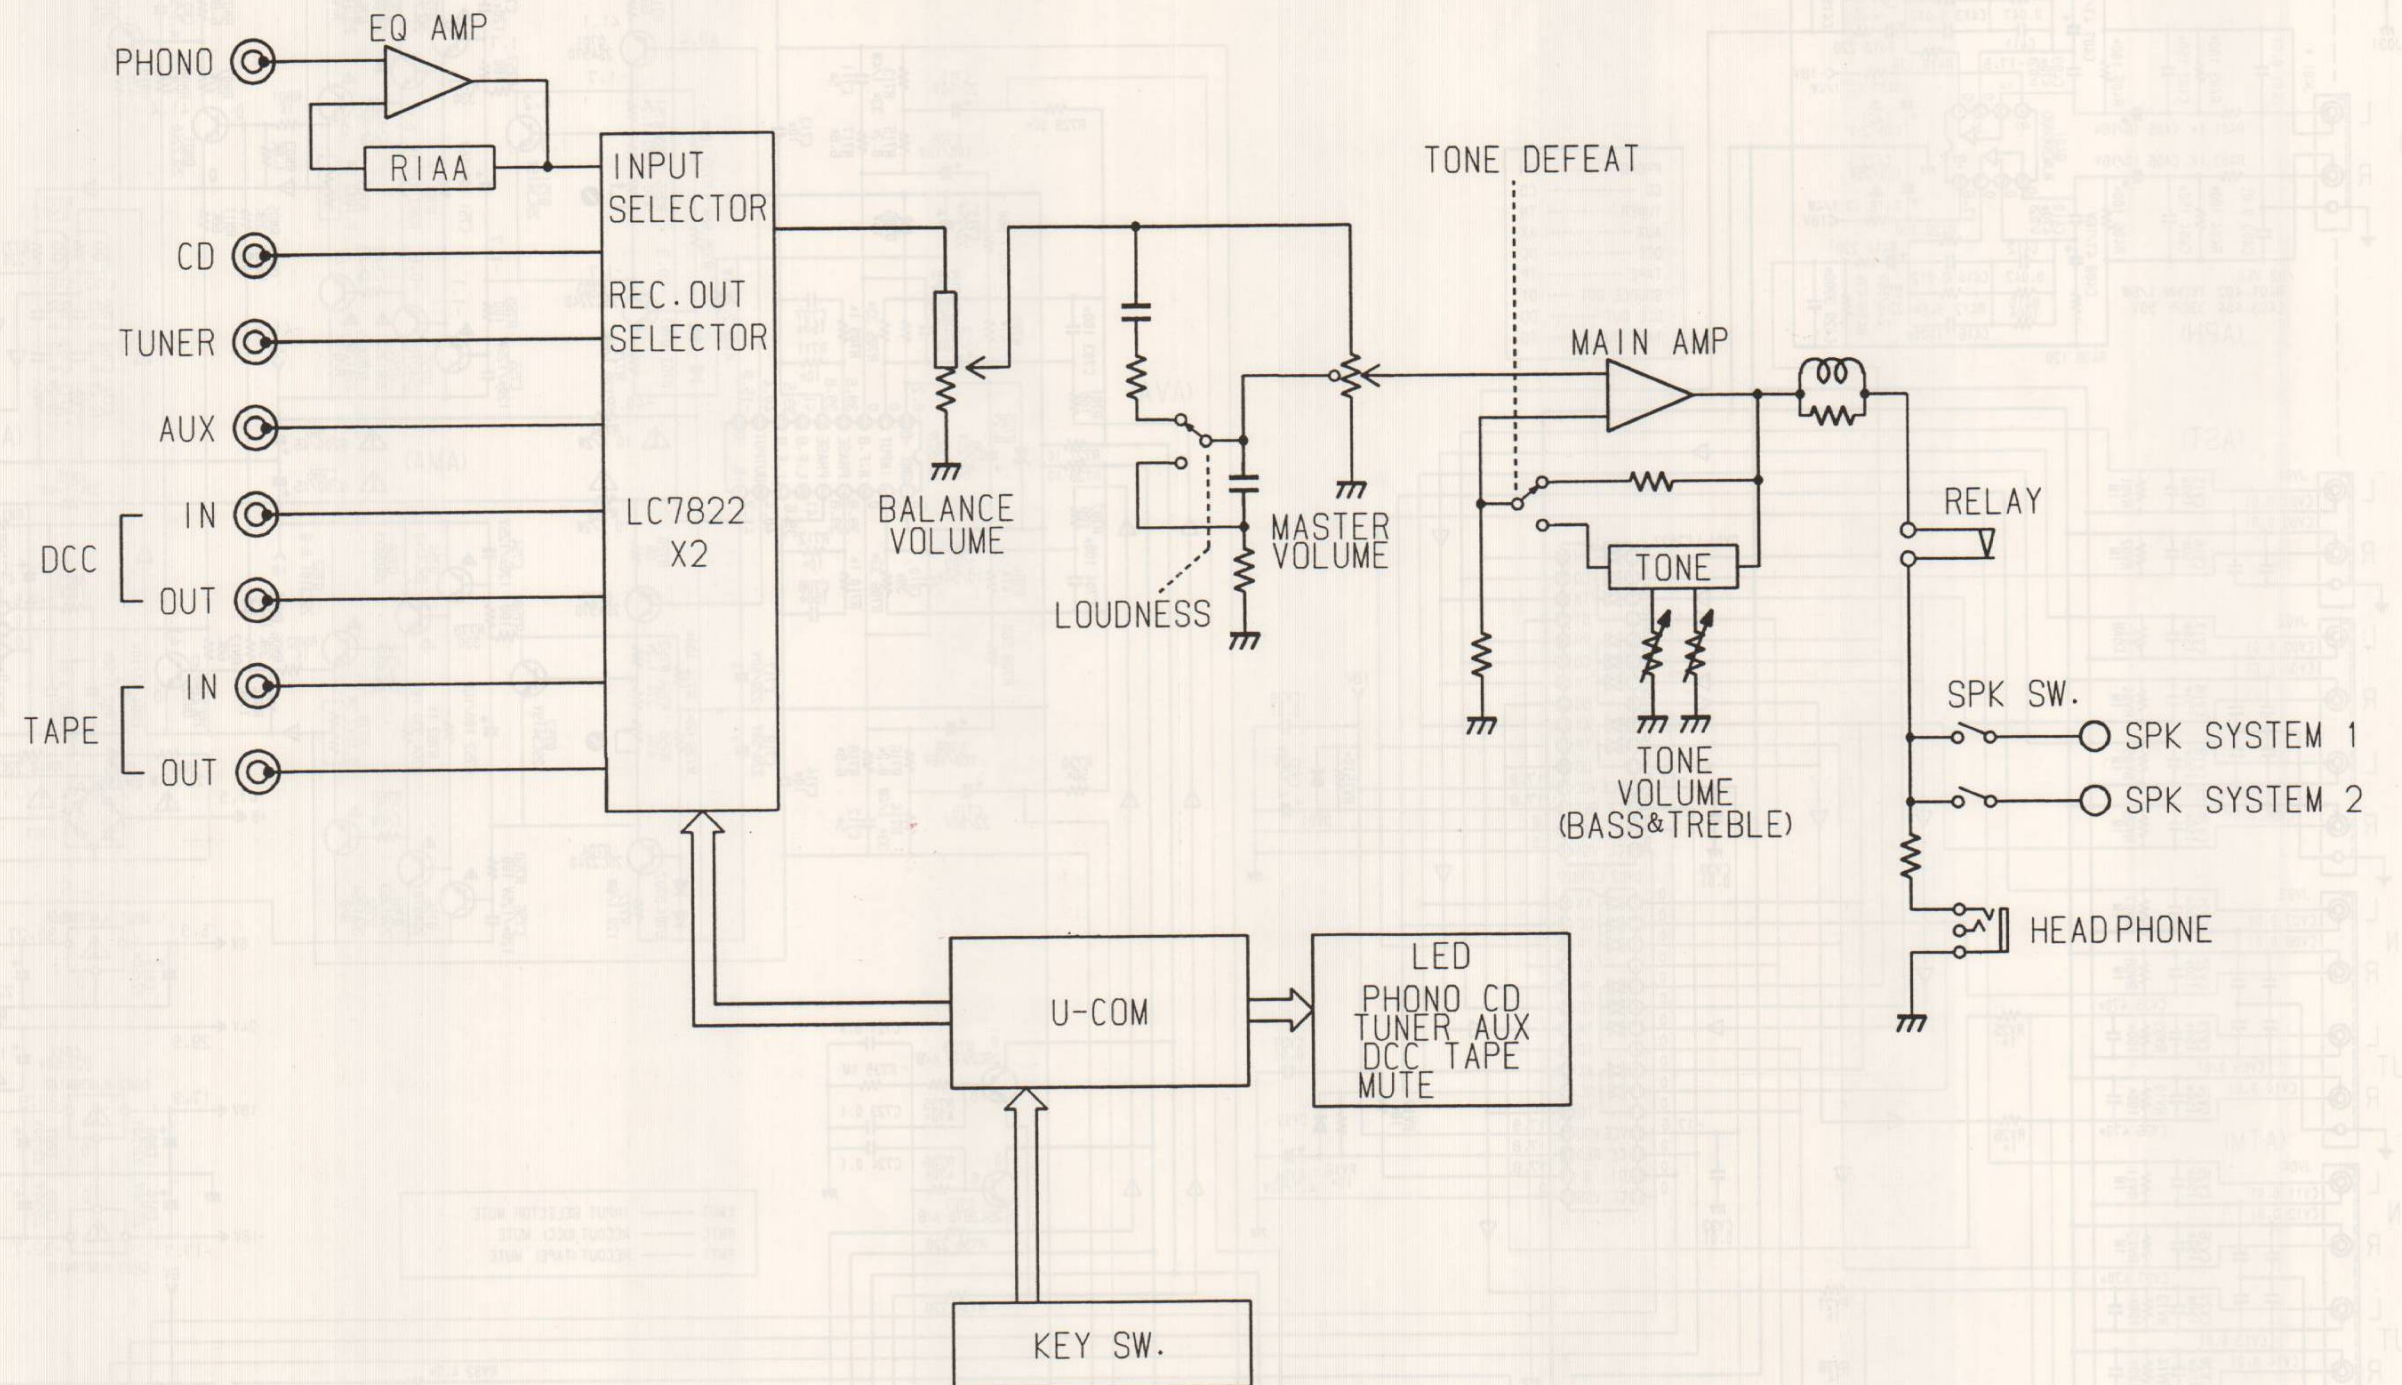


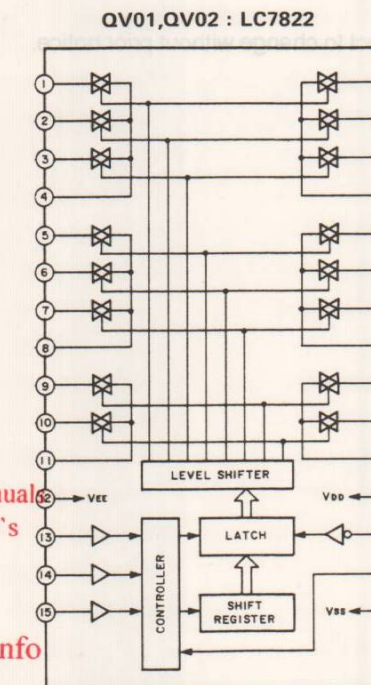




www.freesevicemanuals.info







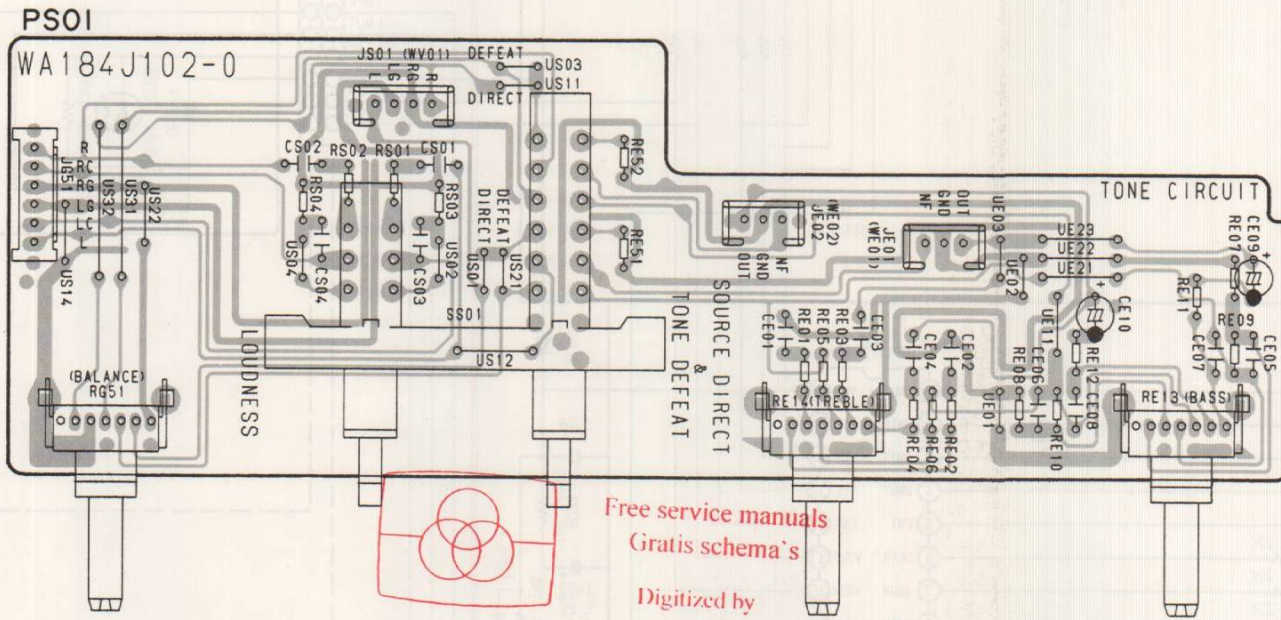


www.freesevicemanuals.info

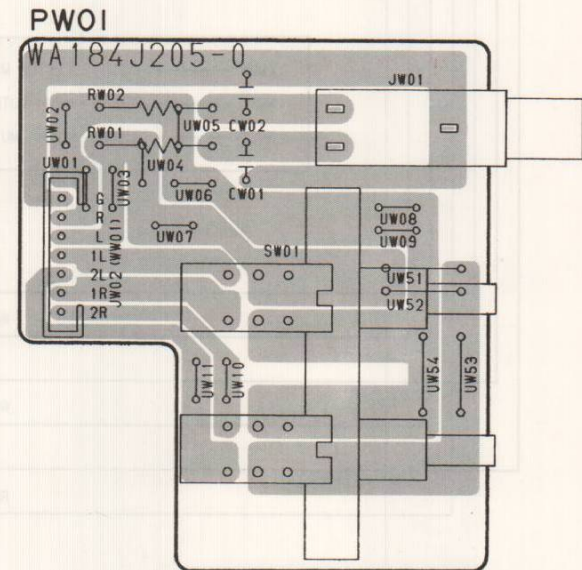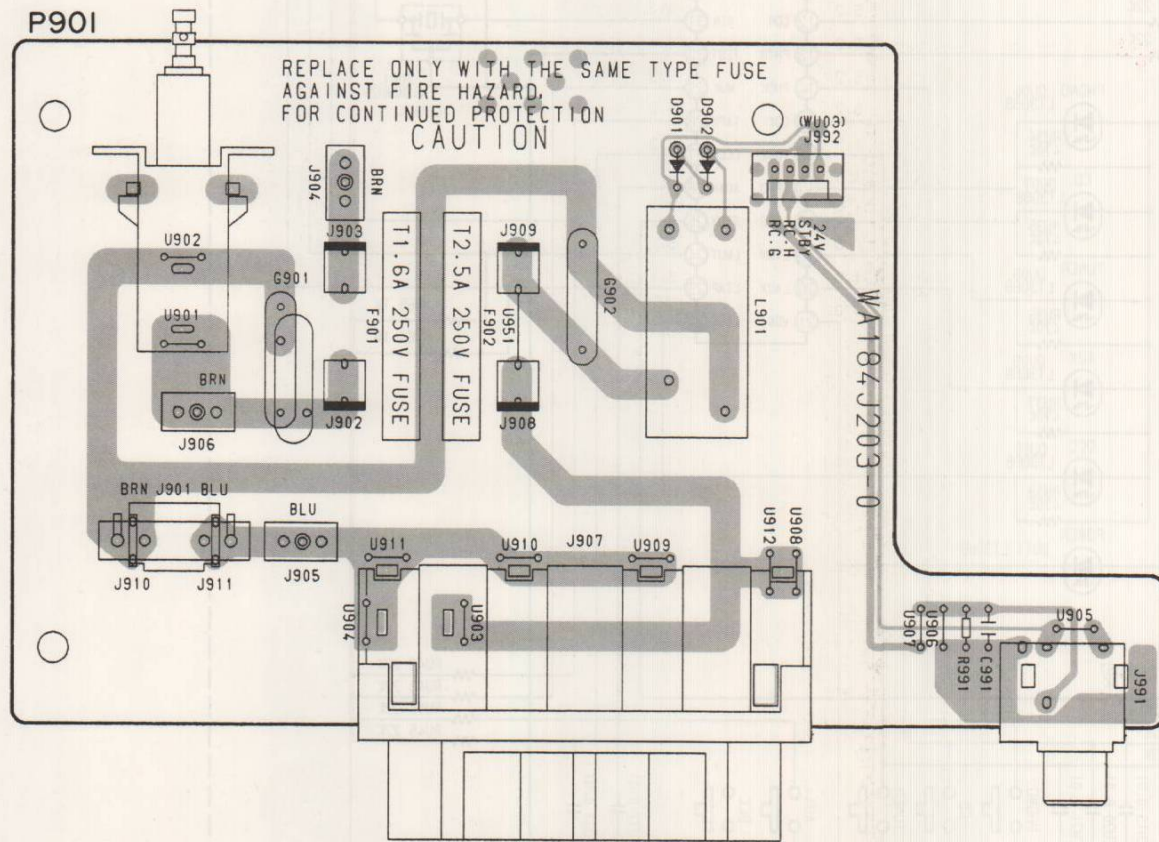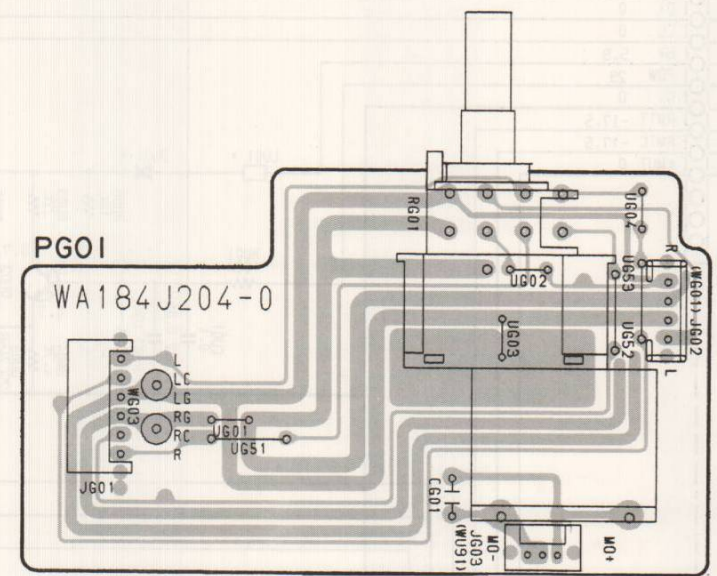

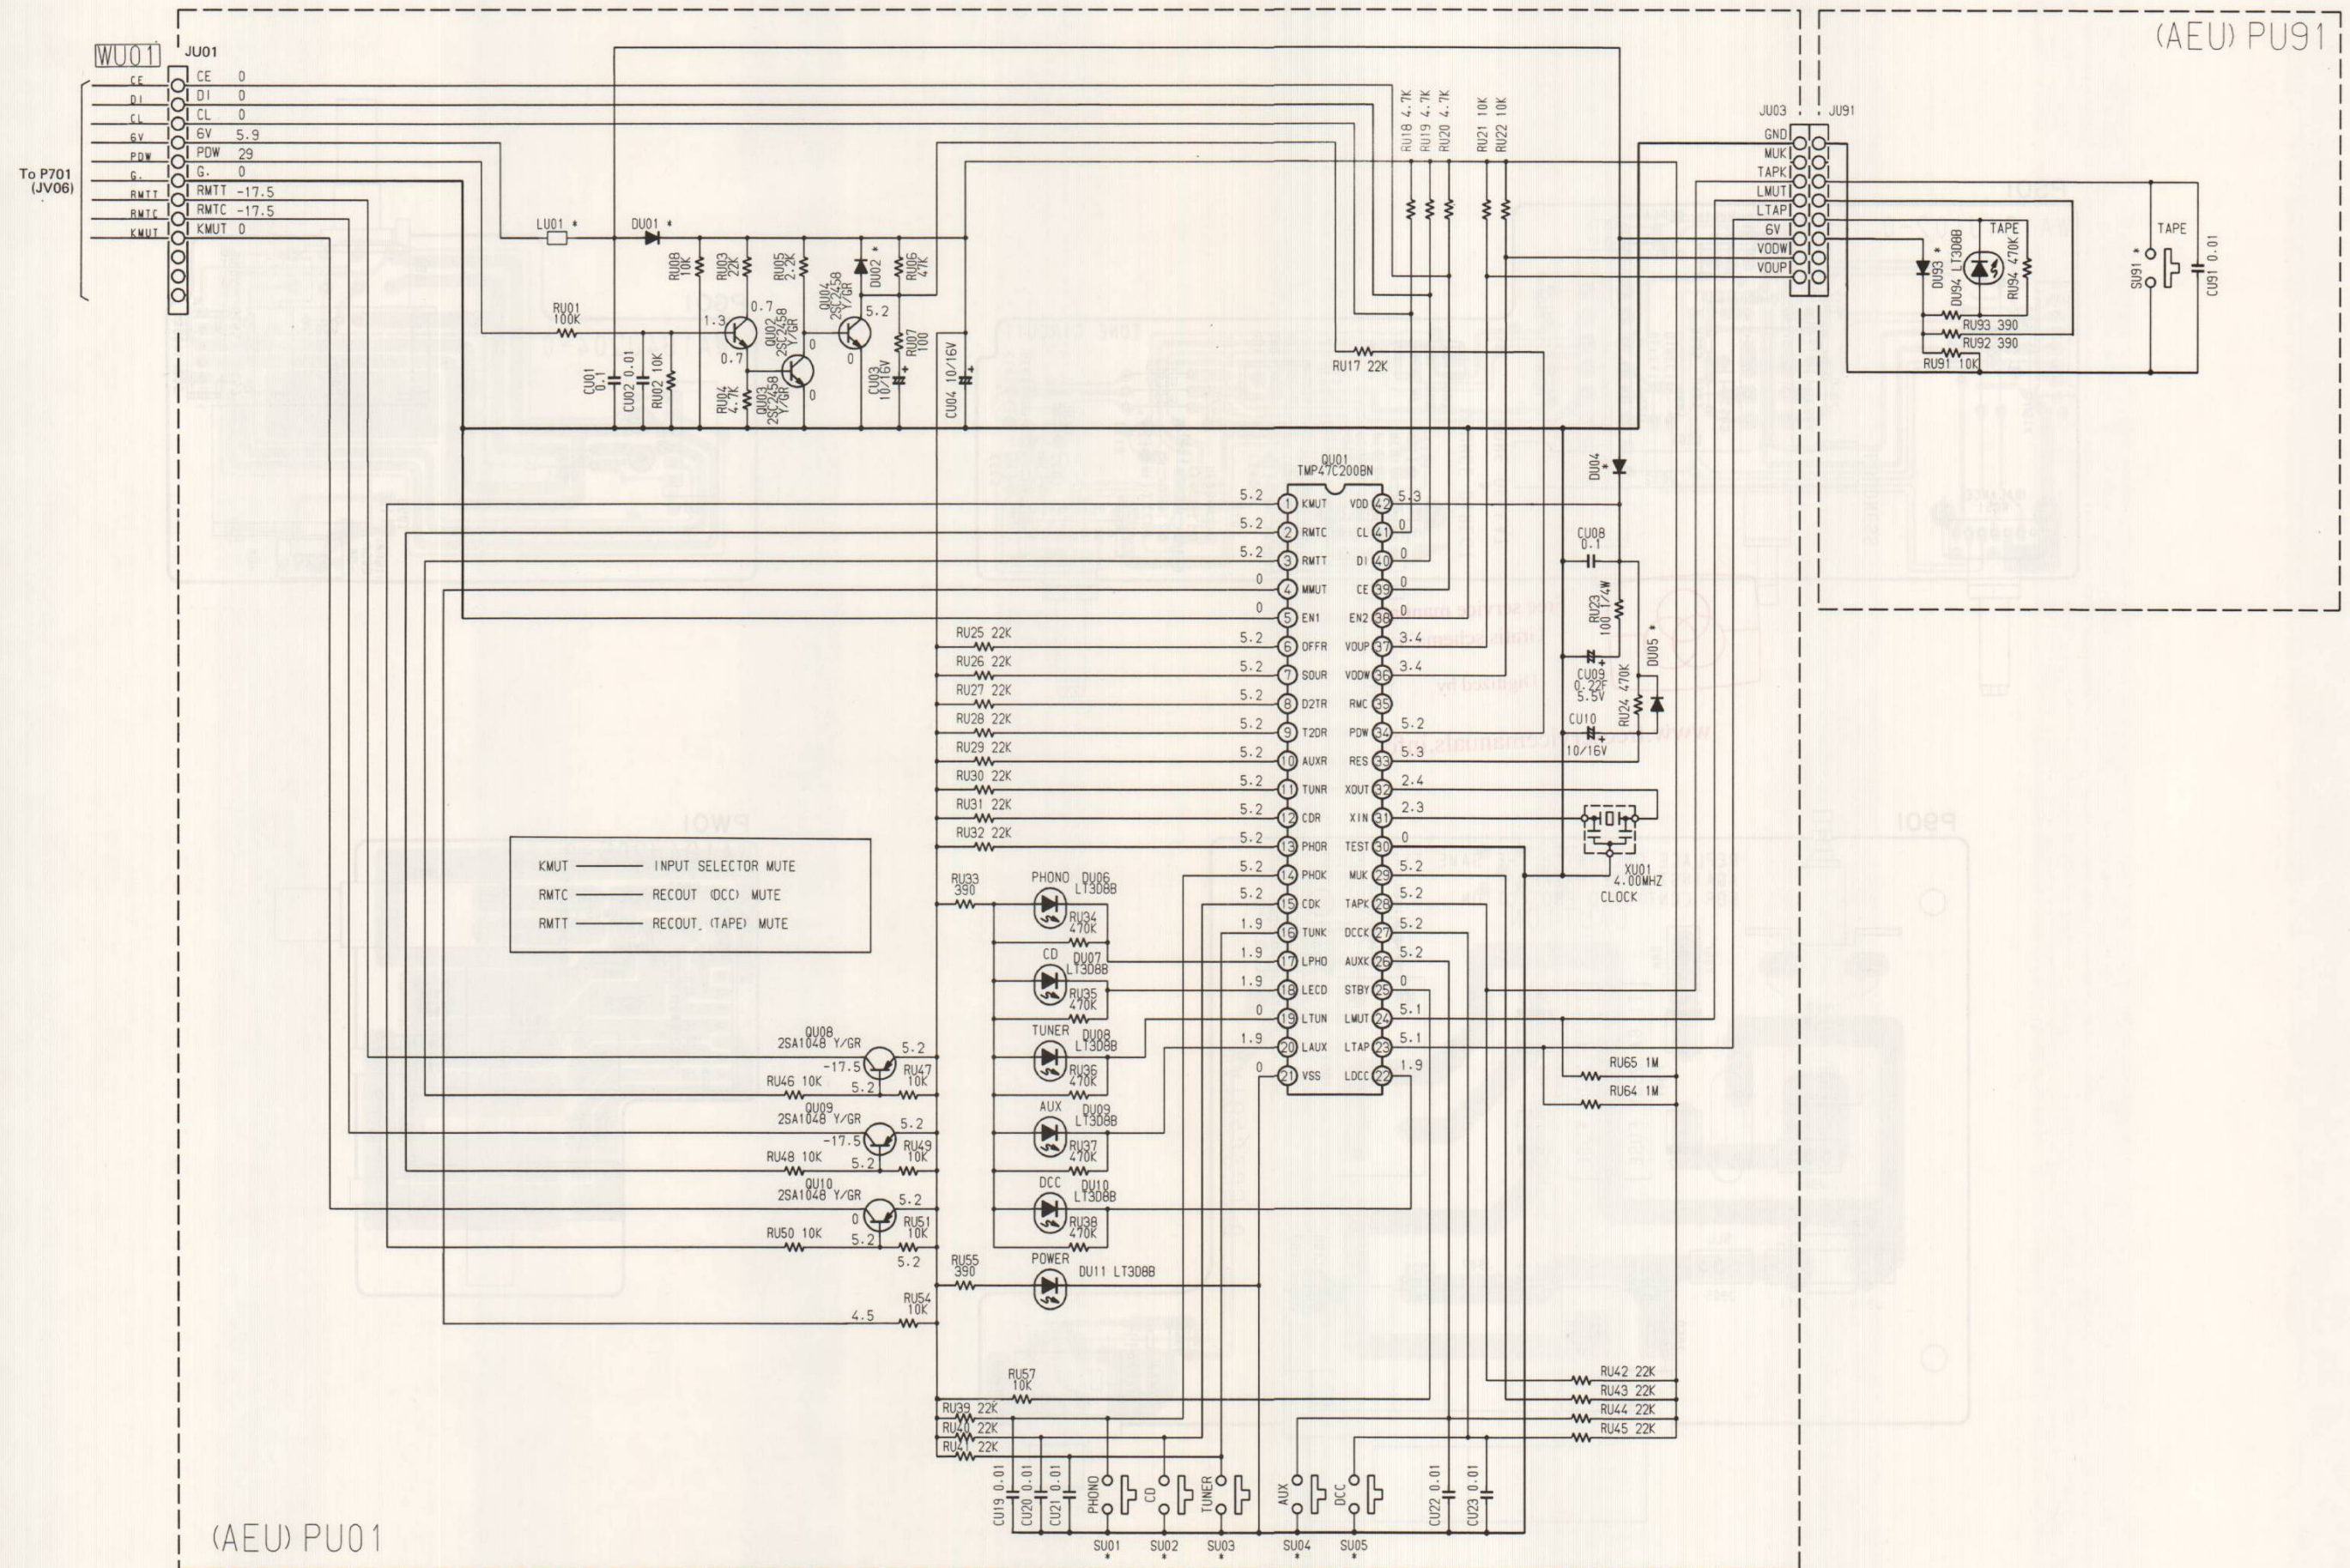


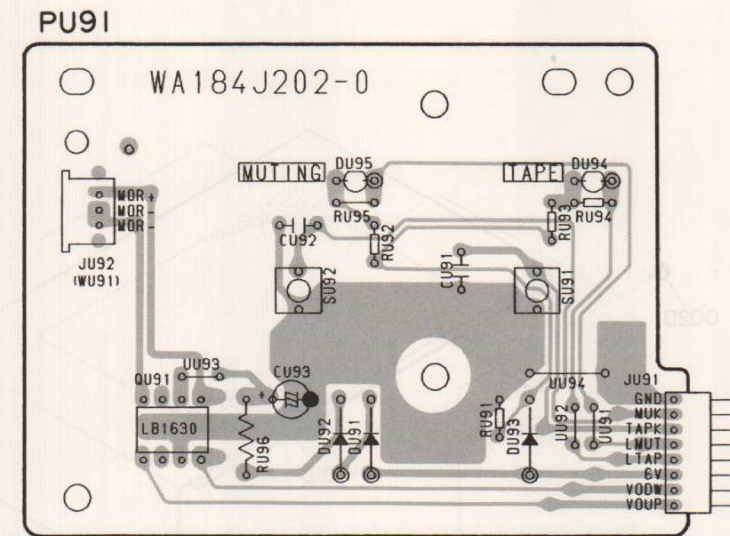

www.freesevicemanuals.info

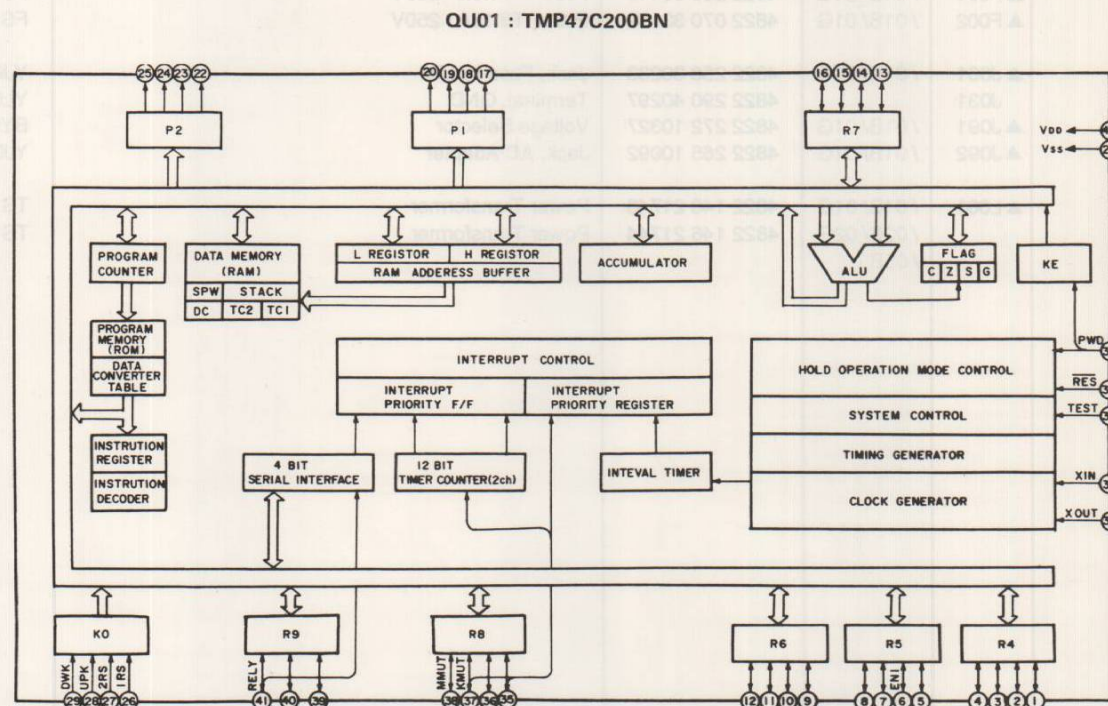

All over the world



All over the world

4. TEST EQUIPMENT REQUIRED FOR SERVICING

Item	Use
Distortion Analyzer	Distortion measurements
Audio Oscillator	Sinewave and squarewave signal source
ACVTVM	Voltage measurements (AC)
Oscilloscope	Waveform analysis and trouble shooting and ASO alignment
Circuit Tester	Trouble shooting
DCVTVM	Voltage measurements (DC)
AC Wattmeter	Monitors primary power to amplifier
Line Voltmeter	Monitors potential of primary power to amplifier
Variable Autotransformer	Adjust level of primery power to amplifier
Shorting Plug	Shorts amplifier input to eliminate noise pickup

5. IDLING CURRENT ADJUSTMENT

- (1)

Before switching the power ON, set the Master Volume control to the minimum position and the Balance and Tone controls to the center positions. Also set semi-fixed resistors R755 (L CH) and R756 (R CH) on PCB P701 to the center positions.
- (2)

Each of the cement resistors R769 (L CH) and R770 (R CH) on the PCB P701 is provided with three test points. Connect a digital voltmeter, set for the DC voltage input, to the test points at the two extremities of the three test points of R769 or R770
- (3)

After the setup above, switch the power ON and adjust semi-fixed resistor R755 (L CH) or R756 (R CH) on PCB P701 according to the digital voltmeter reading. The target setting value is 18 mV (50 mA) for both the L CH and R CH.

Please refer to the table below.

Elapsed time after power ON	Idling current setting value
1 min. - 2 min.	17 mV
2 min. - 3 min.	17.5 mV
More than 3 min.	18 mV

Note on Safety:
Symbol  Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol . Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.


6. USE OF SERVICE HOLE

- (1)

If the use of the service hole is required, remove the cover by cutting 10 bridges (A) using a tool such as a pair of cutter.
- (2)

During this work, be careful of the sharp edges at the cut positions.
- (3)


After using the service hole, rotate the cover and fix it using screws [3 x 6 (M)].

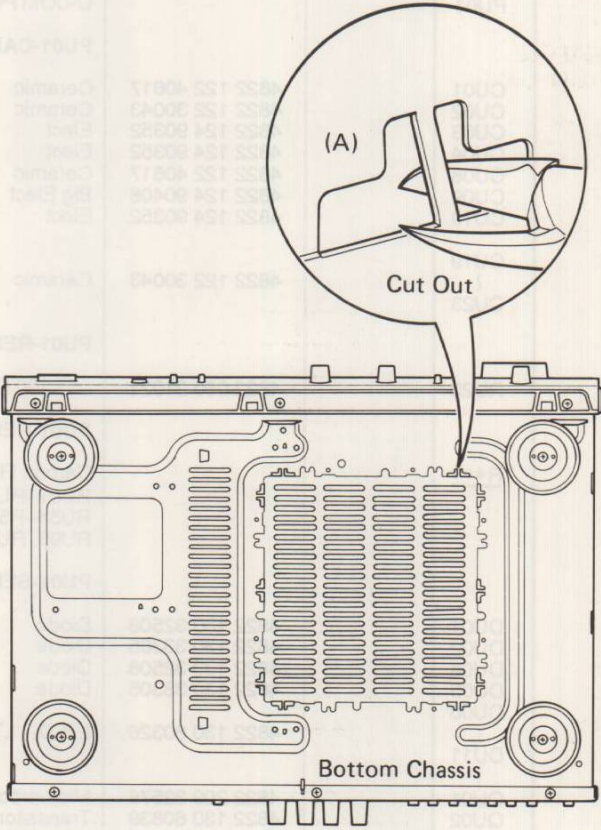

7. VOLTAGE CONVERSION

● **EUROPEAN MODEL ONLY (/ 01)**
To convert the unit to a different power source voltage, change the position as illustrated in the drawing below.

VOLTAGE SELECTOR

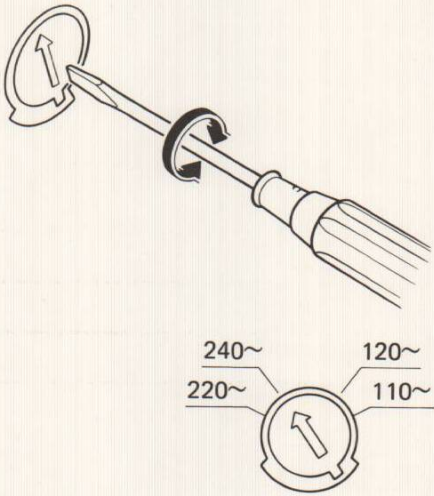


CAUTION
DISCONNECT POWER SUPPLY CORD FROM AC OUTLET BEFORE CONVERTING VOLTAGE.

8. HOW TO CHANGE THE SUPPLY VOLTAGE (/ 02 / 05 Versions)

With the / 05 Version, the rated supply voltage of 240V can be changed to 230V. In the same way, the 230V rated supply voltage of the / 02 Version can be changed to 240V.

Refer to the following diagram for the voltage change procedure.

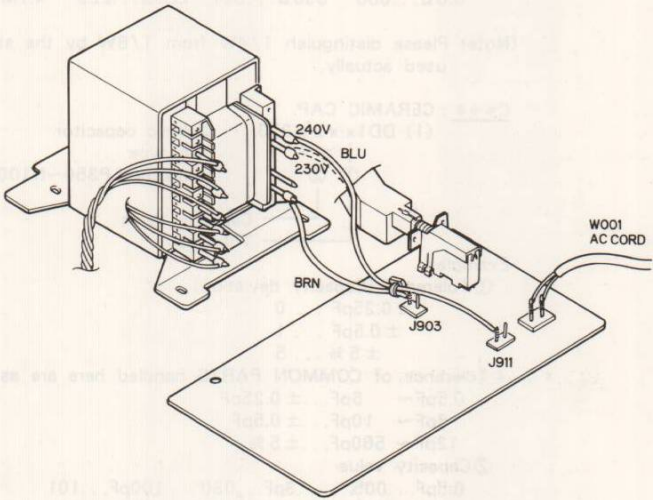

9. MICROPROCESSOR
QU01 : TMP47C200BN

PIN NO.	PORT NAME		I/O	ACT	FUNCTION	PIN NO.	PORT NAME		I/O	ACT	FUNCTION
1	R40	KMUT	O	L	SOURCE MUTE	22	P20	LDCC	O	L	LED INDICATOR DCC
2	R41	RMTC	O	L	TAPE OUT MUTE FOR DCC	23	P21	LTAP	O	L	LED INDICATOR TAPE
3	R42	RMTT	O	L	TAPE OUT MUTE FOR TAPE	24	P22	LMUT	O	L	LED INDICATOR MUTE
4	R43	MMUT	O	H	SPEAKER OUT MUTE	25	P23	STBY	O	H	STAND-BY OTHER CONTROL
5	R50	EN1	I	—	MODEL SELECT #1	26	K00	AUXK	I	L	KEY INPUT AUX
6	R51	OFFR	I	L	RECORDING OUT OFF	27	K01	DCCK	I	L	KEY INPUT DCC
7	R52	SOUR	I	L	RECORDING OUT SOURCE	28	K02	TAPK	I	L	KEY INPUT TAPE
8	R53	D2TR	I	L	RECORDING OUT COPY DCC→TAPE	29	K03	MUK	I	L	KEY INPUT MANUAL MUTE
9	R60	T2DR	I	L	RECORDING OUT COPY TAPE→DCC	30	TEST	TEST	—	—	NOT USED (GND)
10	R61	AUXR	I	L	RECORDING OUT AUX	31	XIN	XIN	—	—	CLOCK 4.00 MHz
11	R62	TUNR	I	L	RECORDING OUT TUNER	32	XOUT	XOUT	—	—	
12	R63	CDR	I	L	RECORDING OUT CD	33	RESET	RES	I	L	SYSTEM RESET
13	R70	PHOR	I	L	RECORDING OUT PHONO	34	HOLD	PDW	I	L	POWER DOWN CHECK
14	R71	PHOK	I	L	KEY INPUT PHONO	35	R80	RMC	I	L	REMOTE CONTROL (RC-5) INPUT
15	R72	CDK	I	L	KEY INPUT CD	36	R81	VODW	O	L	VOLUME CONTROL (DOWN)
16	R73	TUNK	I	L	KEY INPUT TUNER	37	R82	VOUP	O	L	VOLUME CONTROL (UP)
17	P10	LPHO	O	L	LED INDICATOR PHONO	38	R83	EN2	I	—	MODEL SELECT #2
18	P11	LECD	O	L	LED INDICATOR CD	39	R90	CE	O	H	SERIAL OUTPUT (ENABLE)
19	P12	LTUN	O	L	LED INDICATOR TUNER	40	R91	DL	O	H	SERIAL OUTPUT (DATA)
20	P13	LAUX	O	L	LED INDICATOR AUX	41	R92	CL	O	H	SERIAL OUTPUT (CLOCK)
21	VSS	VSS	—	—	GND	42	VDD	VDD	—	—	POWER SUPPLY +5.4V

10. ELECTRICAL PARTS LIST

ASSIGNMENT OF COMMON PARTS CODES.

RESISTOR
R*** : (1) GD05 x x x 140, Carbon film fixed resistor, ± 5 % 1/4W
R*** : (2) GD05 x x x 160, Carbon film fixed resistor, ± 5 % 1/6W

① — Resistance value
Examples :
① Resistance value
0.1Ω...001 10Ω...100 1kΩ...102 100kΩ...104
0.5Ω...005 18Ω...180 2.7kΩ...272 680kΩ...684
1Ω...010 100Ω...101 10kΩ...103 1MΩ...105
6.8Ω...068 390Ω...391 22kΩ...223 4.7MΩ...475

(Note) Please distinguish 1/4W from 1/6W by the shape of parts used actually.

C*** : CERAMIC CAP.
(1) DD1x x x x 370, Ceramic capacitor
Disc type
Temp.coeff.P350~N1000,50V
① ②
Capacity value
Tolerance

Examples
① Tolerance (Capacity deviation)
± 0.25pF ... 0
± 0.5pF ... 1
± 5 % ... 5
* Tolerance of COMMON PARTS handled here are as follows :
0.5pF~ 5pF...± 0.25pF
6pF~ 10pF...± 0.5pF
12pF~ 560pF...± 5 %
② Capacity value
0.5pF...005 3pF...030 100pF...101
1pF...010 10pF...100 220pF...221
1.5pF...015 47pF...470 560pF...561

C*** : CERAMIC CAP.
(1) DK16 x x x 300, High dielectric constant ceramic capacitor
Disc type
Temp.chara. 2B4, 50V
①
Capacity value

Examples
② Capacity value
100pF...101 1000pF...102 10000pF...103
470pF...471 2200pF...222

C*** : ELECTROLY CAP.(, FILM CAP.()
(1) EA x x x x x x 10, Electrolytic capacitor
One-way lead type, Tolerance ± 20 %
① ②
Working voltage
Capacity value

Examples
① Capacity value
0.1μF...104 4.7μF...475 100μF...107
0.33μF...334 10μF...106 330μF...337
1μF...105 22μF...226 1100μF...118
2200μF...228
② Working voltage
6.3V...006 25V...025
10V...010 35V...035
16V...016 50V...050

(2) DF15 x x x 350, Plastic film capacitor
One-way type, Mylar ± 5 % 50V
①
Capacity value

Examples
① Capacity value
0.001μF(1000pF)...102 0.1μF...104
0.0018μF...182 0.56μF...564
0.01μF...103 1μF...105
0.015μF...153

NOTE : The above CODES (R***,R***,C***,C*** and C***) are omitted on the schematic diagram in some case.
On the occasion, be confirmed the common parts on the parts list.

POS.NO	VERSION	PART NO. (FOR EUROPE)	DESCRIPTION	PART NO.
PG01			PG01-MASTER VOLUME CIRCUIT BOARD	
			MASTER VOLUME PCB	WA184J2040
RG01		4822 101 30829	Variable Resistor 100K Ω (VB) x 2	RM01041550
PS01			PS01-TONE / DIRECT / LOUDNESS / BAL. CIRCUIT BOARD	
			TONE/DIRECT/LOUDNESS/BAL. PCB	WA184J1020
CE09 CE10		4822 124 90352 4822 124 90352	Elect 10μF 16V Elect 10μF 16V	OA10601620 OA10601620
C***			PS01-CAPACITORS (COMMON)	
			Plastic Film Capacitor, ±5% 50V: CE01~CE08, CS01~CS04	
RE13 RE14		4822 101 30831 4822 101 30831	50K Ω (C), Variable Bass 50K Ω (C), Variable Treble	RM05032000 RM05032000
RG51		4822 101 30828	100K Ω (MN), Variable Balance	RM01041540
R***			PS01-RESISTOR (COMMON)	
			Carbon Film Fixed Resistor, ±5%: RE01~RE12, RE51, RE52, RS01~RS04	
SS01		4822 276 13435	PS01-MISCELLANEOUS Push Switch, Direct/ Loudness	SP04020600
PU01			PU01-U-COM CIRCUIT BOARD	
			U-COM PCB	WA184J2010
CU01 CU02 CU03 CU04 CU08 CU09 CU10		4822 122 40617 4822 122 30043 4822 124 90352 4822 124 90352 4822 122 40617 4822 124 90406 4822 124 90352	Ceramic 0.1μF +80% -20% 50V Ceramic 0.01μF +80% -20% 50V Elect 10μF 16V Elect 10μF 16V Ceramic 0.1μF +80% -20% 50V Big Elect 0.022F 5.5V Elect 10μF 16V	DD38104010 DK18103310 OA10601620 OA10601620 DD38104010 EX22300530 OA10601620
CU19 CU23		4822 122 30043	Ceramic 0.01μF +80% -20% 50V	DK18103310
RU23		4822 050 21021	PU01-RESISTORS 100 Ω ±5% 1/4W	GG05101140
R***			PU01-RESISTORS (COMMON)	
			Carbon Film Fixed Resistor, ±5%: RU01~RU08, RU14, RU17~RU22, RU24~RU51, RU54~R56, (RU57~RU59[/ 01G]), RU64, RU65, RU91, RU93, RU94	
DU01 DU02 DU04 DU05 DU06		4822 130 32508 4822 130 33305 4822 130 32508 4822 130 33305	Diode DSF10C/ RL103E Diode 1SS176, etc. Diode DSF10C/ RL103E Diode 1SS176, etc.	HD20003000 HD20002000 HD20003000 HD20002000
DU11 QU01 QU02 QU03 QU04		4822 130 80326 4822 209 32576 4822 130 60839 4822 130 60839 4822 130 60839	L.E.D. LT3D8B (RED) Microprocessor TMP47C200BN Transistor 2SC2458 (Y/ GR) Transistor 2SC2458 (Y/ GR) Transistor 2SC2458 (Y/ GR)	HI10062320 HU10085050 HT324582B0 HT324582B0 HT324582B0

POS.NO	VERSION	PART NO. (FOR EUROPE)	DESCRIPTION	PART NO.
QU08		4822 130 60107	Transistor 2SA1048 (Y/ GR)	HT110482B0
QU09		4822 130 60107	Transistor 2SA1048 (Y/ GR)	HT110482B0
QU10		4822 130 60107	Transistor 2SA1048 (Y/ GR)	HT110482B0
QU12	/ 01G	4822 130 60107	Transistor 2SA1048 (Y/ GR)	HT110482B0
QU13	/ 01G	4822 130 60696	Transistor 2SC1627 (O/ Y)	HT316272B0
PU01-MISCELLANEOUS				
LU01		4822 158 60605	Ferrite Core	FC90050060
SU01 } SU05		4822 276 20508	Push Switch, Tact	SP01011280
XU01		4822 242 72223	Ceramic Resonator 4.00MHz	FQ04004030
PU91-MOTOR VOL. DRIVE CIRCUIT BOARD				
PU91			MOTOR VOL. DRIVE PCB	WA184J2020
PU91-CAPACITORS				
CU91		4822 122 30043	Ceramic 0.01μF +80% -20% 50V	DK18103310
PU91-RESISTORS (COMMON)				
R***			Carbon Film Fixed Resistor, ±5%: RU91, RU93, RU94	
PU91-SEMICONDUCTORS				
DU93		4822 130 32508	Diode DSF10C/ RL103E	HD20003000
DU94		4822 130 80326	L.E.D. LT3D8B (RED)	HI10062320
QU91		4822 209 73287	IC LB1630	HC10235030
PU91-MISCELLANEOUS				
SU91		4822 276 20508	Push Switch, Tact	SP01011280
PW01-HEADPHONE / SPK 1/2 SW. CIRCUIT BOARD				
PW01			HEADPHONE / SPK 1/2 SW. PCB	WA184J2050
CW01	/ 02B/ 02G	4822 122 30043	Ceramic Cap. 0.01μF +80% -20% 50V	DK18103310
CW02	/ 02B/ 02G	4822 122 30043	Ceramic Cap. 0.01μF +80% -20% 50V	DK18103310
RW01		4822 116 60455	Resistor 270 Ω ±5% 2W Metal	NK05271020
RW02		4822 116 60455	Resistor 270 Ω ±5% 2W Metal	NK05271020
JW01	/ 01B/ 02B / 05B	4822 267 31274	Jack, Headphone	YJ01003340
	/ 01G/ 02G	4822 267 31365	Jack, Headphone	YJ01003410
SW01		4822 276 12423	Push Switch, Speaker 1/2	SP02021010
P701-MAIN CIRCUIT BOARD				
P701			MAIN PCB	WA184J1010
P701-CAPACITORS				
CN01		4822 124 22274	Elect 4.7μF 50V	OA47505020
CN02		4822 124 41543	Elect 1μF 50V	OA10505020
CN04		4822 124 22275	Elect 47μF 10V	OA47601020
CN05		4822 124 23417	Elect 33μF 10V	OA33601020
CN06		4822 124 22273	Elect 0.47μF 50V	OA47405020
CN07		4822 124 41539	Elect 47μF 16V	OA47601620
CN08		4822 122 40617	Ceramic 0.1μF +80% -20% 50V	DD38104010
CV01 } CV14 CV15		4822 122 30043	Ceramic 0.01μF +80% -20% 50V	DK18103310
	/ 02B/ 02G	4822 126 11069	Ceramic 150pF ±10% 50V	DA16151110
CV28 CV29 } CV32 CV33		4822 122 30043	Ceramic 0.01μF +80% -20% 50V	DK18103310
		4822 124 22274	Elect 4.7μF 50V	OA47505020

POS.NO	VERSION	PART NO. (FOR EUROPE)	DESCRIPTION	PART NO.
CV34 CV35 CV38 CV41 CV44		4822 124 22274	Elect 4.7 μ F 50V	OA47505020
		4822 126 11127	Ceramic 470pF $\pm$ 10% 50V	DA16471110
		4822 122 40617	Ceramic 0.1 μ F +80% -20% 50V	DD38104010
C401 C402 C403	/01B/ 01G /05B	4822 122 30043 4822 122 30043 4822 126 11069	Ceramic 0.01 μ F +80% -20% 50V Ceramic 0.01 μ F +80% -20% 50V Ceramic 150pF $\pm$ 10% 50V	DK18103310 DK18103310 DA16151110
C404	/01B/ 01G /05B	4822 126 11069	Ceramic 150pF $\pm$ 10% 50V	DA16151110
C405 C406 C407 C408 C409 C410	/02B/ 02G /02B/ 02G	4822 124 90352 4822 124 90352 4822 124 41539 4822 124 41539 4822 126 11127 4822 126 11127	Elect 10 μ F 16V Elect 10 μ F 16V Elect 47 μ F 16V Elect 47 μ F 16V Ceramic 470pF $\pm$ 10% 50V Ceramic 470pF $\pm$ 10% 50V	OA10601620 OA10601620 OA47601620 OA47601620 DA16471110 DA16471110
C417 C418 C421 C422		4822 124 90357 4822 124 90357 4822 124 41535 4822 124 41535	Elect 2.2 μ F 50V Elect 2.2 μ F 50V Elect 100 μ F 25V Elect 100 μ F 25V	OA22505020 OA22505020 OA10702520 OA10702520
C701 C702 C703 C704 C705 C706 C707 C708 C709 C710		4822 124 22571 4822 124 22571 4822 126 10364 4822 126 10364 4822 124 90354 4822 124 90354 4822 126 11069 4822 126 11069 4822 126 11068 4822 126 11068	Elect 10 μ F 50V Elect 10 μ F 50V Ceramic 100pF $\pm$ 10% 50V Ceramic 100pF $\pm$ 10% 50V Elect 100 μ F 16V Elect 100 μ F 16V Ceramic 150pF $\pm$ 10% 50V Ceramic 150pF $\pm$ 10% 50V Ceramic 39pF $\pm$ 10% 50V Ceramic 39pF $\pm$ 10% 50V	OA10605020 OA10605020 DA16101110 DA16101110 OA10701620 OA10701620 DA16151110 DA16151110 DA16390110 DA16390110
C711 C712 C713 C714 C715 C716 C717 C718 C719 C720		4822 121 43127 4822 121 43127 4822 121 43128 4822 121 43128 4822 124 90362 4822 124 90362 4822 124 90366 4822 124 90366 4822 124 90361 4822 124 90361	Film 5pF $\pm$ 10% 50V Film 5pF $\pm$ 10% 50V Film 10pF $\pm$ 10% 50V Film 10pF $\pm$ 10% 50V Elect 22 μ F 50V Elect 22 μ F 50V Elect 220 μ F 50V Elect 220 μ F 50V Elect 22 μ F 25V Elect 22 μ F 25V	DF56050090 DF56050090 DF56100090 DF56100090 OA22605020 OA22605020 OA22705020 OA22705020 OA22602520 OA22602520
C721 C723 C724 C751 C752 C753 C756 C761 C764	/02B/ 02G	4822 122 40617 4822 122 40617 4822 122 40617 4822 124 90354 4822 124 90354 4822 121 50548 4822 122 30043	Ceramic 0.1 μ F +80% -20% 50V Ceramic 0.1 μ F +80% -20% 50V Ceramic 0.1 μ F +80% -20% 50V Elect 100 μ F 16V Elect 100 μ F 16V Film 120pF $\pm$ 5% 125V Ceramic 0.01 μ F +80% -20% 50V	DD38104010 DD38104010 DD38104010 OA10701620 OA10701620 DF55121510 DK18103310
▲C765 ▲C766		4822 124 42042 4822 124 42042	Elect 8200 μ F 45V Elect 8200 μ F 45V	OB82804510 OB82804510
C801 C802 C803 C805 C806 C807 C810 C811		4822 122 30043 4822 122 30043 4822 124 41543 4822 124 90356 4822 124 41541 4822 124 90362 4822 124 90366	Ceramic 0.01 μ F +80% -20% 50V Ceramic 0.01 μ F +80% -20% 50V Elect 1 μ F 50V Elect 1000 μ F 35V Elect 470 μ F 35V Elect 22 μ F 50V Elect 220 μ F 50V	DK18103310 DK18103310 OA10505020 OA10803520 OA47703520 OA22605020 OA22705020
C812 C813		4822 124 22695 4822 124 90362	Elect 2200 μ F 35V Elect 22 μ F 50V	OA22803520 OA22605020
G701		4822 121 20263	Component RFD2B474K	BF47400010

POS.NO	VERSION	PART NO. (FOR EUROPE)	DESCRIPTION	PART NO.
C***			P701-CAPACITORS (COMMON) Plastic Film Capacitor, $\pm$ 10%: CN03, C419, C420	
C***			Plastic Film Capacitor, $\pm$ 5%: CV39, CV40, C411~C416, C419, C420, C757, C758, (C759, C760 [/02B/ 02G/ 05B])	
C***			High Dielectric Constant Ceramic Capacitor, 50V: (C403, C404 [/02B/ 02G])	
			P701-RESISTORS	
RN01 RN02 RN15 ▲RN19 RN20		4822 052 10102 4822 052 10102 4822 050 23303 4822 113 90119 4822 050 21503	1K Ω $\pm$ 5% 1/6W 1K Ω $\pm$ 5% 1/6W 33K Ω $\pm$ 5% 1/4W 22 Ω $\pm$ 2% 1/4W, Fusible 15K Ω $\pm$ 5% 1/2W	GG05102160 GG05102160 GG05333140 NF02220140 GG05153120
▲R417 ▲R418		4822 111 90731 4822 111 90731	47 Ω $\pm$ 2% 1/4W, Fusible 47 Ω $\pm$ 2% 1/4W, Fusible	NF02470140 NF02470140
R713 R714 R719	/02B/ 02G /05B	4822 050 23303 4822 050 23303 4822 050 26809	33K Ω $\pm$ 5% 1/4W 33K Ω $\pm$ 5% 1/4W 68 Ω $\pm$ 5% 1/6W	GG05333140 GG05333140 GG05680160
R720	/02B/ 02G /05B	4822 050 26809	68 Ω $\pm$ 5% 1/6W	GG05680160
R721	/02B/ 02G /05B	4822 117 10159	120 Ω $\pm$ 5% 1/6W	GG05121160
R722	/02B/ 02G /05B	4822 117 10159	120 Ω $\pm$ 5% 1/6W	GG05121160
R732 ▲R733 ▲R734		4822 053 10222 4822 116 60313 4822 116 60313	2.2K Ω $\pm$ 5% 1W 10 Ω $\pm$ 5% 1/2W, Fusible 10 Ω $\pm$ 5% 1/2W, Fusible	GA05222010 NH05100120 NH05100120
R755 R756 R757 R760 R761 R762 R763 R764		4822 100 11426 4822 100 11426 4822 052 10101 4822 052 10102 4822 052 10102 4822 053 10331 4822 053 10331	470 Ω , Trimming 470 Ω , Trimming 100 Ω $\pm$ 5% 1/6W 1K Ω $\pm$ 5% 1/6W 1K Ω $\pm$ 5% 1/6W 330 Ω $\pm$ 5% 1W 330 Ω $\pm$ 5% 1W	RA04710780 RA04710780 GG05101160 GG05102160 GG05102160 GA05331010 GA05331010
R765 R768 R769 R770 R771 R772 R773 R774 R775		4822 116 83963 4822 116 82049 4822 116 82049 4822 052 10221 4822 052 10221 4822 053 11109 4822 053 11109 4822 117 10002	2.2 Ω $\pm$ 5% 1/4W 0.18 Ω x 2 3W 0.18 Ω x 2 3W 220 Ω $\pm$ 5% 1/6W 220 Ω $\pm$ 5% 1/6W 10 Ω $\pm$ 5% 2W 10 Ω $\pm$ 5% 2W 2.2K Ω $\pm$ 5% 1/2W	GG05022140 BZ10182010 BZ10182010 GG05221160 GG05221160 GA05100020 GA05100020 GG05222120
▲R801 ▲R802 ▲R803		4822 117 10158 4822 117 10158 4822 116 80653	1 Ω $\pm$ 5% 1/4W 1 Ω $\pm$ 5% 1/4W 22 Ω $\pm$ 5% 1/2W, Fusible	GG05010140 GG05010140 NH05220120
R***			P701-RESISTORS (COMMON) Carbon Film Fixed Resistor, $\pm$ 5%: RN03~RN14, RN16~RN18, RN21, RV01~RV14, RV19~RV28, RV30~RV32, R401~R416, R419, R420, R703~R712, R715~R718, (R719~R722 [/01B/ 01G]) R723~R731, R735~R739, R751~R754, R777, R778	
			P701-SEMICONDUCTORS	
DN01 DN02 DN03 DN05 DN06		4822 130 80837 4822 130 80837 4822 130 33305 4822 130 80839 4822 130 33305	Diode HSS81 Diode HSS81 Diode 1SS176, etc. Diode S5688G Diode 1SS176, etc.	HD20027010 HD20027010 HD20002000 HD20029050 HD20002000
DV01 DV02		4822 130 33305 4822 130 33305	Diode 1SS176, etc. Diode 1SS176, etc.	HD20002000 HD20002000

POS.NO	VERSION	PART NO. (FOR EUROPE)	DESCRIPTION	PART NO.
D701 D704 D705 D706 ▲D707		4822 130 33305	Diode 1SS176, etc.	HD20002000
▲D801 ▲D802	/ 02B/ 02G / 05B	4822 130 80273 4822 130 80322 4822 130 83438	Zener NTJ8.2C Zener NTJ15B Diode D5SB-20	HD30821000 HD31501000 HE20016290
▲D803 ▲D804	/ 02B/ 02G / 05B	4822 130 80839 4822 130 80839	Diode S5688G Diode S5688G	HD20029050 HD20029050
▲D805 ▲D806	/ 02B/ 02G / 05B	4822 130 80839 4822 130 80839	Diode S5688G Diode S5688G	HD20029050 HD20029050
▲D807 ▲D808	/ 02B/ 02G / 05B	4822 130 80839 4822 130 80839	Diode S5688G Diode S5688G	HD20029050 HD20029050
▲D809 ▲D810	/ 02B/ 02G / 05B	4822 130 80839 4822 130 80839	Diode S5688G Diode S5688G	HD20029050 HD20029050
D811		4822 130 32508	Diode RL103E/DSF10C	HD20003000
QN01 QN02 QN03 QN04		4822 130 43233 4822 130 43233 4822 130 42951 4822 209 83312	Transistor 2SC2240 (GR/ BL) Transistor 2SC2240 (GR/ BL) Transistor 2SA970 (GR/ BL) IC TA7317P	HT322402A0 HT322402A0 HT109702A0 HC10042050
QV01 QV02 QV03 QV06		4822 209 73321 4822 209 73321 4822 130 43819	IC LC7822 IC LC7822 Transistor 2SC2878 (A/ B)	HC10241030 HC10241030 HT328782A0
Q401		4822 209 73064	IC NJM2068DD	HC10053090
Q701 Q702 Q703 Q704 Q705 Q707 Q708		4822 130 42951 4822 130 42951 4822 130 43233 4822 130 43233 4822 209 83732 4822 130 43819 4822 130 43819	Transistor 2SA970 (GR/ BL) Transistor 2SA970 (GR/ BL) Transistor 2SC2240 (GR/ BL) Transistor 2SC2240 (GR/ BL) IC AN7062 Transistor 2SC2878 (A/ B) Transistor 2SC2878 (A/ B)	HT109702A0 HT109702A0 HT322402A0 HT322402A0 HC10066020 HT328782A0 HT328782A0
Q751 Q752 Q753 Q754 Q755 Q756 ▲Q757 ▲Q758 ▲Q759 ▲Q760		4822 130 60117 4822 130 60117 4822 130 43233 4822 130 43233 4822 130 42951 4822 130 42951 4822 130 62335 4822 130 62335 4822 130 62334 4822 130 62334	Transistor 2SC3419 (Y) Transistor 2SC3419 (Y) Transistor 2SC2240 (GR/ BL) Transistor 2SC2240 (GR/ BL) Transistor 2SA970 (GR/ BL) Transistor 2SA970 (GR/ BL) Transistor 2SD2033 Transistor 2SD2033 Transistor 2SB1353 Transistor 2SB1353	HT334191Y0 HT334191Y0 HT322402A0 HT322402A0 HT109702A0 HT109702A0 HT420331E0 HT420331E0 HT213531E0 HT213531E0
▲Q761 ▲Q762 ▲Q763 ▲Q764		4822 130 61319 4822 130 61319 4822 130 43018 4822 130 43018	Transistor 2SC3181 (R/ O) Transistor 2SC3181 (R/ O) Transistor 2SA1264 (R/ O) Transistor 2SA1264 (R/ O)	HT331812A0 HT331812A0 HT112642A0 HT112642A0
▲Q801 ▲Q802 ▲Q803		4822 209 62423 4822 209 80675 4822 209 31788	IC 78M06F IC 78M18F IC 79M18F	HC38506090 HC38518090 HC39518090
P701-MISCELLANEOUS				
JV01 JV02 JV03 JV04		4822 290 81598 4822 290 81603 4822 290 81603 4822 290 81603	Terminal, 2P RCA Terminal, 4P RCA Terminal, 4P RCA Terminal, 4P RCA	YT02021130 YT02041030 YT02041030 YT02041030
J401 J701		4822 290 81598 4822 290 61179	Terminal, 2P RCA Terminal, Speaker	YT02021130 YT01080120
▲LN01		4822 280 70354	Relay VB24MBU	LY20240310
L751 L752		4822 157 63085 4822 157 63085	Air Coil, SPK Air Coil, SPK	ML08010010 ML08010010

POS.NO	VERSION	PART NO. (FOR EUROPE)	DESCRIPTION	PART NO.
P901			P901-POWER SW. / AC FUSE CIRCUIT BOARD POWER SW./ AC FUSE PCB	WA184J2030
C901 C991	/ 02B/ 02G	4822 122 30043 4822 122 40617	Ceramic 0.01μF +80% -20% 50V Ceramic 0.1μF +80% -20% 50V	DK18103310 DD38104010
▲G901	/ 01B/ 01G / 02B/ 02G	4822 121 43732	Film 0.01μF ±20% 250V AC	DF77103500
▲G901 ▲G902	/ 05B / 01B/ 01G	4822 122 33276 4822 121 43732	Ceramic 0.01μF ±20% 50V Film 0.01μF ±20% 250V AC	DK17103840 DF77103500
D901 D902	/ 01B/ 01G / 01B/ 01G	4822 130 33305 4822 130 33305	Diode 1SS176, etc. Diode 1SS176, etc.	HD20002000 HD20002000
▲F901	/ 02B/ 02G / 05B	4822 253 30415	Fuse T1.6A 250V	FS10160850
▲J907	/ 01B/ 01G	4822 267 40815	Jack, AC Outlet 3P	YJ04001470
▲L901	/ 01B/ 01G	4822 280 20517	Relay V524MBU	LY10240190
▲S901		4822 276 12924	Push Switch, Power	SP01011540

NOTE ON SAFETY:

Symbol ▲ Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol ▲. Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.