

STEREO HEADPHONES

SE-4

<ART-218-0>

Service Manual

SPECIFICATIONS


Speakers 25 μ polyester-film diaphragm,
dynamic type
Impedance 250 ohms
Sound Pressure Level 96dB/mW (1kHz)
Maximum Input 200mW (each channel)
Frequency Response 20Hz to 20,000Hz
Connection Cord with Pin Plug 3m Y type cord
with 6.3mm diam. 3-P plug
Weight. 215g/7.6oz (without connection cord)
. 262g/9oz (with connection cord)

NOTE:


Specifications and design subject to possible modification
without notice to improvement.



EXPLODED VIEW

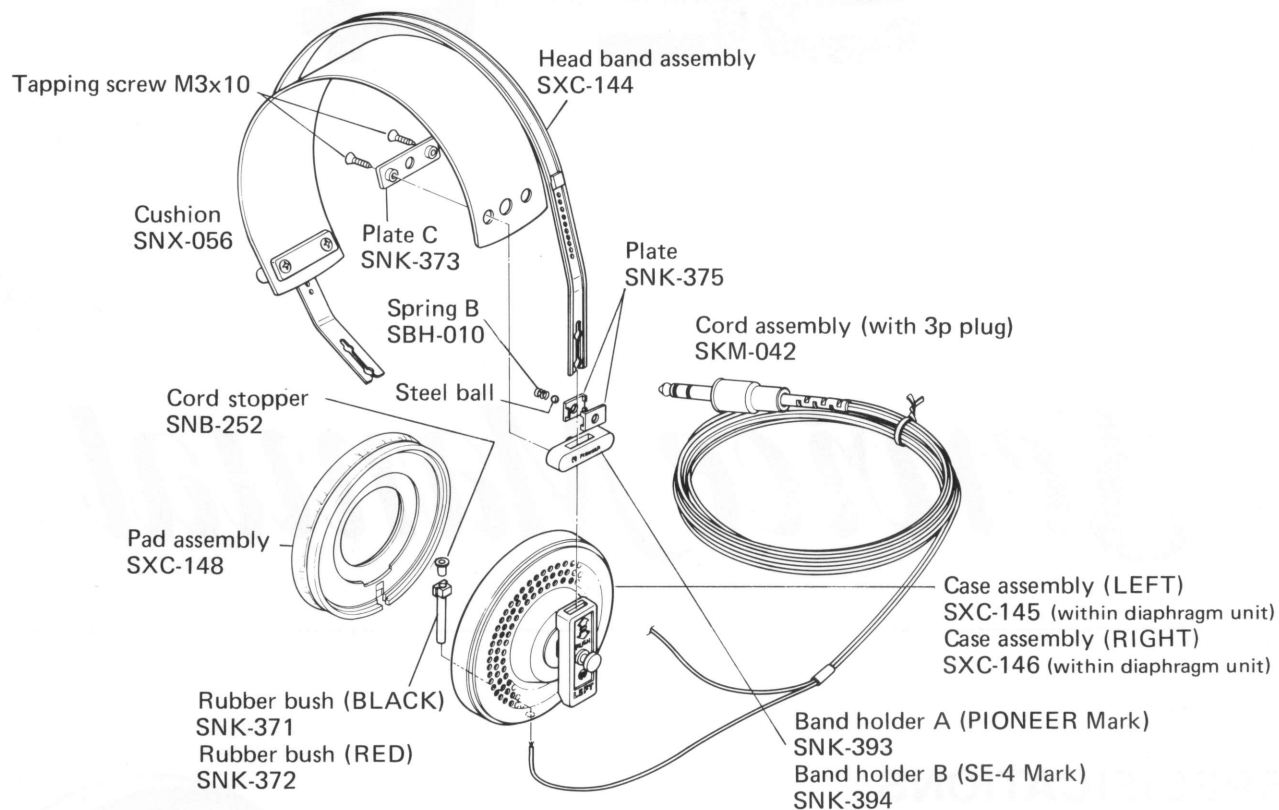

PACKING

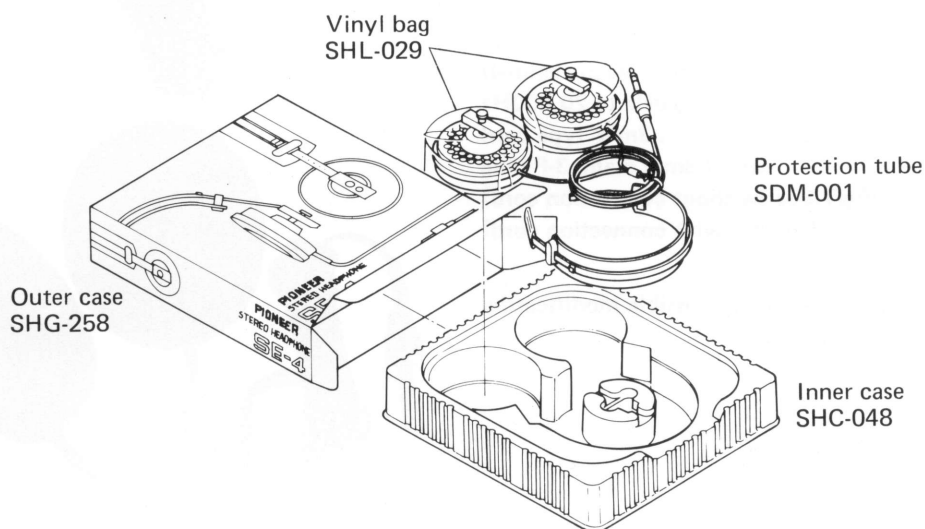

PIONEER ELECTRONIC CORPORATION

4-1, Meguro 1-Chome, Meguro-ku, Tokyo 153, Japan

U.S. PIONEER ELECTRONICS CORPORATION

75 Oxford Drive, Moonachie, New Jersey 07074, U.S.A.

PIONEER ELECTRONIC (EUROPE) N.V.

Luithagen-Haven 9, 2030 Antwerp, Belgium

PIONEER ELECTRONICS AUSTRALIA PTY. LTD.

178-184 Boundary Road, Braeside, Victoria 3195, Australia

Printed in Japan