



RCA Victor Models 46X21, 46X23, and 46X24

Chassis Nos. RC-461A, RC-461B, and RC-461

TECHNICAL INFORMATION AND SERVICE DATA

—1940 No. 6—

SERVICE DIVISION • RCA MANUFACTURING COMPANY, INC. • CAMDEN, N. J., U. S. A.


A Service of the Radio Corporation of America

Electrical and Mechanical Specifications

Frequency Ranges..... 550-1,550 kc and 6-18 mc

PUSH BUTTON RANGES (Model 46X24 only)

- (1) Approximately 540- 945 kc
- (2) Approximately 580-1,020 kc
- (3) Approximately 650-1,320 kc
- (4) Approximately 760-1,440 kc
- (5) Approximately 990-1,560 kc

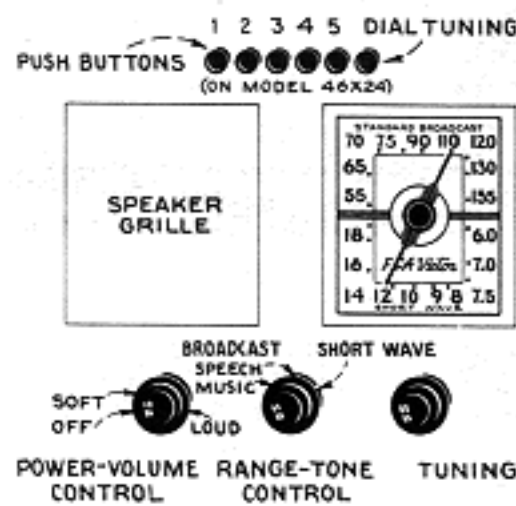

Dial and Controls

Model	Cabinet Description
46X21	Moulded Walnut Plastic
46X23	Walnut
46X24	Walnut (shown above)

Adjustments for Electric Tuning:

The push buttons and corresponding frequency ranges are given in the schematic diagram. Allow the set to warm up for about 15 minutes and proceed as follows: