


SERVICE MANUAL

PREAMPLIFIER **SANSUI CA-2000**

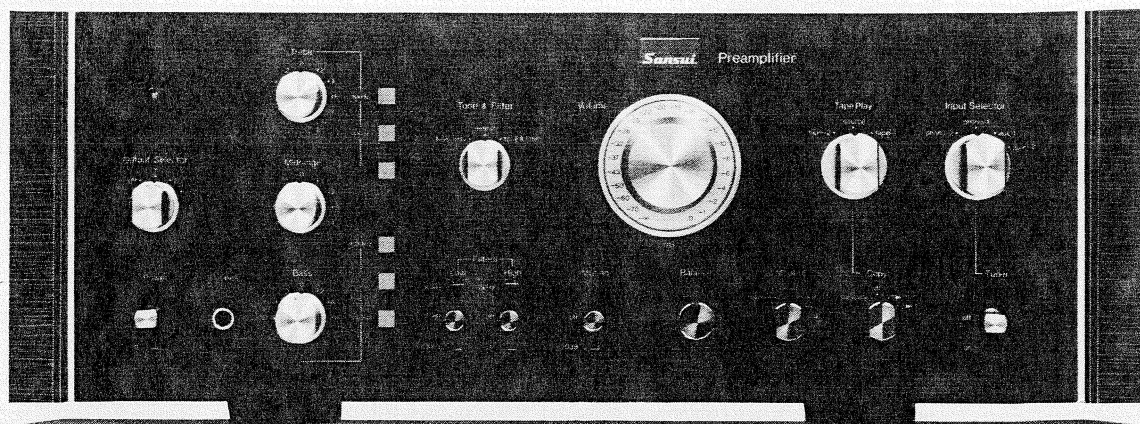

Sansui

SANSUI ELECTRIC CO., LTD.

This service manual is designed for service engineers to repair, adjust, maintain and order the replacement parts of the CA-2000 correctly. When ordering the parts, use the stock number and parts name specifically referring to the Parts Location and Parts Lists. For general usage and maintenance of the unit, please refer to the Operating Instructions attached with the unit.

TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
1.	SPECIFICATIONS	2
2.	BLOCK DIAGRAM	2
3.	OPERATIONS OF NEW CIRCUITS	3
3-1.	Current Mirror Circuit	3
3-2.	Four-gang Level Volume Control	3
4.	PARTS LOCATION & PARTS LIST	4
4-1.	F-2659 Power Supply Circuit Board	4
4-2.	F-2579 Pre-Main Switch Circuit Board	4
4-3.	F-2691 Equalizer Circuit Board	5
4-4.	F-2573 Filter Accessory Circuit Board	5
4-5.	F-2577 Treble Tone Selector Circuit Board	6
4-6.	F-2588 Bass Tone Selector Circuit Board	6
4-7.	F-2571 Tape Copy & Tuner Signal Switching Circuit Board	6
4-8.	F-2572 Tape Play Circuit Board	6
4-9.	F-2575 Midrange Tone Control Circuit Board	7
4-10.	F-2576 Bass & Treble Tone Circuit Board	7
4-11.	F-2491 Circuit Board for Headphone	7
4-12.	F-2569 Input Terminal & Switch Circuit Board	8
4-13.	F-2660 Level Volume Control Circuit Board	8
◇	COMMON PARTS LIST FOR RESISTORS & CAPACITORS ONLY	(Attached)
5.	OTHER PARTS	9
5-1.	Top & Bottom View	9
5-2.	Front View	10
5-3.	Figures	10
6.	SCHEMATIC DIAGRAM	11
7.	PACKING LIST	BACK COVER
8.	ACCESSORY PARTS LIST	BACK COVER

1. SPECIFICATIONS

OUTPUT VOLTAGE

OUTPUT1.0 V (rated)
 (Maximum output level: 12 V at 1 kHz with no more
 than 0.1% total harmonic distortion)
 TAPE REC-1, 2 (Pin jacks) ..150 mV
 TAPE-2 REC/PLAY (DIN socket)
30 mV

TOTAL HARMONIC DISTORTION

.....less than 0.03 %

INTERMODULATION DISTORTION (70 Hz: 7,000 Hz=4: 1

SMPTE method)less than 0.03 %

FREQUENCY RESPONSE (at rated output)

.....10 Hz to 80 kHz ± 0.5 dB
 ± 1.0 dB

RIAA CURVE DEVIATION (PHONO)

.....+0.2dB, -0.2dB (20 Hz to
 20 kHz)

INPUT SENSITIVITY AND IMPEDANCE

(1 kHz for rated output)

PHONO-12 mV, 4 mV, 8 mV/30 k Ω ,
 50 k Ω , 100 k Ω

(Maximum input capability: 1V at 1 kHz, less than
 0.1% distortion and PHONO SENSITIVITY switch
 at 8 mV)

PHONO-22 mV/50 k Ω

AUX150 mV/50 k Ω

TUNER150 mV/50 k Ω

TAPE PLAY-1, 2 (Pin jacks) 150 mV/50 k Ω

TAPE-2 REC/PLAY (DIN socket)

.....150 mV/50 k Ω

HUM AND NOISE (IHF)

PHONO-1better than 75 dB

(Input sensitivity switch at 4 mV)

AUXbetter than 90 dB

TUNERbetter than 90 dB

TAPE PLAY-1,2better than 90 dB

CONTROLS

BASS ± 10 dB (30 Hz)

TONE SELECTOR (turnover frequencies)

.....150 Hz, 300 Hz, 600 Hz

MIDRANGE ± 5 dB (1.5 kHz)

TREBLE ± 10 dB (20 kHz)

TONE SELECTOR (turnover frequencies)

.....2 kHz, 4 kHz, 8 kHz

LOW FILTER-3 dB (20 Hz), 12 dB/oct.

.....-3 dB (60 Hz), 12 dB/oct.

HIGH FILTER-3 dB (7 kHz), 6 dB/oct.

.....-3 dB (12 kHz), 12 dB/oct.

MUTING0 dB, -20 dB

POWER REQUIREMENTS

POWER VOLTAGE100, 120, 220, 240 V, 50/60 Hz

120 V (Usable 110-130 V),

60 Hz for U.S.A. & Canada

POWER CONSUMPTION ..26 Watts

DIMENSIONS460 mm (18 1/8") W

160 mm (6 5/16") H


310 mm (12 1/4") D

WEIGHT9.9 kg (21.8 lbs) net

11.6 kg (25.6 lbs) packed

* Design and specifications subject to change without notice for improvements.

2. BLOCK DIAGRAM

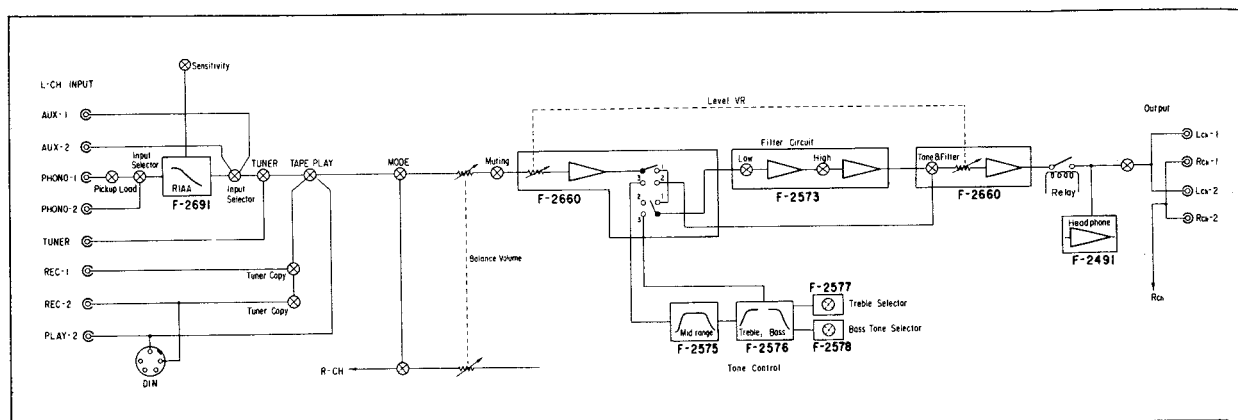


3. OPERATIONS OF NEW CIRCUITS

3-1. Current Mirror Circuit

◇Purpose of use in # CA-2000

By adding current mirror section to balanced-type signal amplifier as Fig. 3-1, the current mirror circuit is effective to improve signal to noise ratio, distortion factor and direct current stability.

Fig. 3-1 Current Mirror Circuit on F-2691 Equalizer Circuit Board

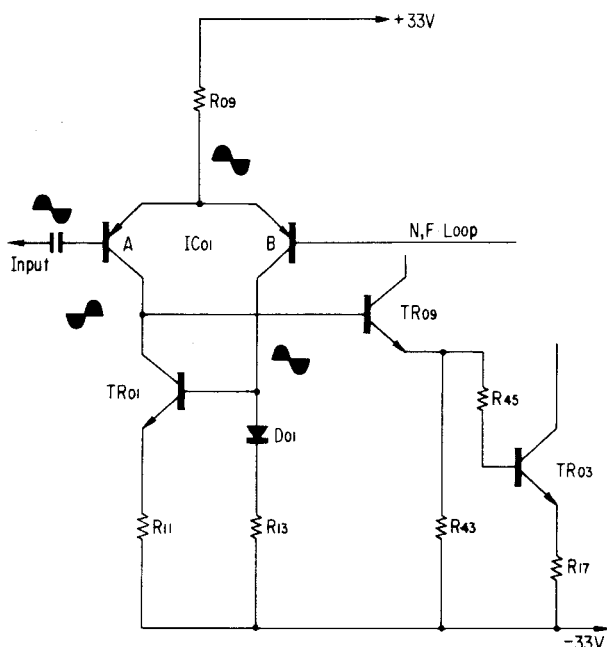

◇Advantages

1. By operation of differential amplification in this driver stage, the current mirror circuit is efficient to reduce the influence of the power line voltage deviation and *Common Mode Rejection Ratio (C.M.R.R.).

$$* \text{C.M.R.R. (dB)} = \frac{\text{Differential Gain}}{\text{Common Mode Gain}}$$

2. By basic functions of push-pull amplifier in this circuit, lower distortion factor is obtained.
3. Since the output impedance of this circuit can be kept extremely high, considerable high gain is obtained.

◇Operation

This Current Mirror Circuit is composed of two semiconductors, TR01 & Diode D01 using as the current mirror section, and a IC01 using as the balanced-typed signal amplifier as shown in Fig. 3-1. The transistor, TR01, and transistor A of first stage built in the IC operate as a pushpull amplifier.

◇Phase Characteristics

When input signal shown in Fig. 3-1. is supplied to the base of the transistor A in the IC in normal operation,

1. Out-of phase signal against the input signal appears at the collector of transistor A.
2. In-phase output signal against the input one appears at the emitter of transistor A.
3. Since the base of transistor B built in the IC is grounded in AC equivalent circuit, transistor B operates as the function of common -base circuit; therefore, the signal appeared at collector of transistor B is in-phase signal against signal appeared at emitter of transistor B.
4. The signal appeared at collector of transistor B is given to the base of TR01. The signal appeared at collector of TR01 is out-of phase to the signal at collector of transistor B and is in-phase signal at collector of transistor A.

Thus, the combination of transistor A and TR01 is used as operation of push-pull amplifier.

◇Open Loop Gain


The open loop gain of conventional diffrential amplifier itself is approximately 30dB to 35dB in normal operation; furthermore, by adding the current mirror circuit in series to conventional differential amplifier, it is possible to obtain high open loop gain, approximately 70dB to 80dB. Consquently, the gain 40dB to 50dB, is able to add to negative feedback loop by using the current mirror circuit in order to improve distortion factors.

3-2. Four-gang Level Volume Control

This unit is equipped with four-gang level volume control for the purpose of the following reason.

Conventional 2-channel stereo control amplifier adopts twin (two)-gang level volume control connecting with the input side of tone control circuit. Therefore, noise components existing in equalizer circuit can be gradually decreased by turning level volume control downward, but noises occured in tone control circuit appears direct to output speaker terminals. To eliminate the noises existing in tone control circuit to speaker terminals at a certain low level of volume control, this model, CA-2000 adopts four-gang level volume control which connects with both output and input sides of tone control circuit individually for 2-channel stereo function.


Fig. 3-2 Level Volume Control on one-channel

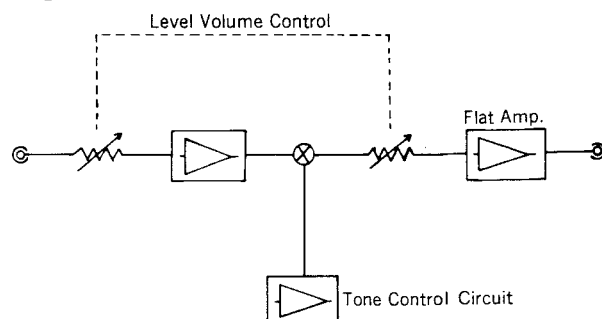

4. PARTS LOCATION & PARTS LIST

4-1. F-2659 Power Supply Circuit Board (Stock No. 7502101)

Conductor Side

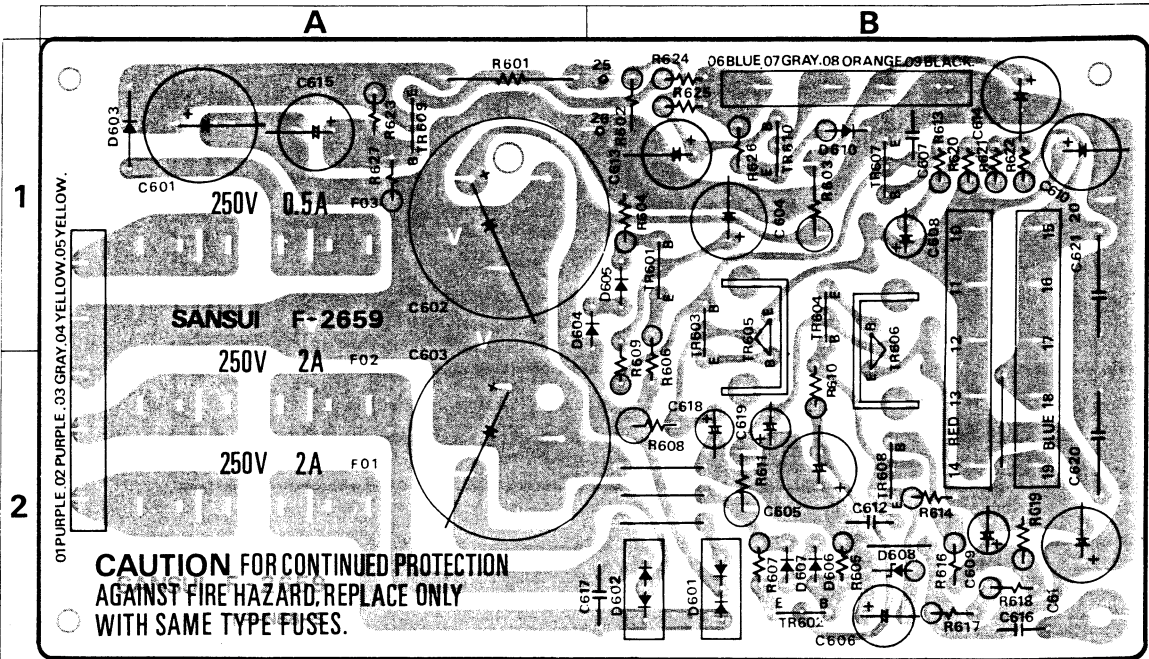


Parts List

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position		
TR601	0300470.1	2SA726 Ⓢ (F, G)	1 B	D602	0310801	10DC2R	Diode 2 B	R603	0202101	100Ω 2 W M.C.	1 B		
TR602	0306070.1	2SC1313 (F, G)		2 B	D603	0310340		10D1 (1S2226)	1 A	R608	0201121	120Ω 1 W M.C.	2 B
TR603	0306070.1	2SC1313 (F, G)		1. 2 B	D604	0340120		VD1212	1 B	R611	0201121	120Ω 1 W M.C.	2 B
TR604	0300470.1	2SA726 Ⓢ (F, G)		1 B	D605	0340120		VD1212	1 B				
TR605	0308450.1	2SD356 (C, D)	1. 2 B	D606	0340120	VD1212	Voristor 2 B	F01	0431240	2A 250V	2 A		
	0308611.2	2SD357 (D, E)		D607	0340120	VD1212		2 B		0432240		2A 250V	
	0303280.1	2SB526 (C, D)		D608	0316250	RD-10E (B)		2 B		0431240		2A 250V	
TR606	0303441.2	2SB527 (D, E)	1. 2 B	D610	0311180	1S1588	Diode 1 B	F02	0432240	2A 250V	AC Fuse 2 A		
	0306070.1	2SC1313 (F, G)				1S2473D			0432240	2A 250V			
TR607	0306070.1	2SC1313 (F, G)	1 B	C602	0549206	1000μF 63V E.C.	1 A	F03	0431210	0.5A 250V	1 A		
TR608	0300470.1	2SA726 Ⓢ (F, G)	2 B	C603	0549206	1000μF 63V E.C.	2 A			0432210		0.5A 250V	
TR609	0306070.1	2SC1313 (F, G)	1 A	C617	0655103	10000pF 500V C.C.	2 B						
TR610	0306070.1	2SC1313 (F, G)	1 B	C620	0602109	1.0μF 100WV M.C.	2 B						
D601	0310800	10DC2	Diode 2 B	C621	0602109	1.0μF 100WV M.C.	1 B						
	0311180	1S1588		R601	0104152	1.5kΩ 1 W C.R.	1 A						

4-2. F-2579 Pre-Main Switch Circuit Board (Stock No. 7594591)

Conductor Side

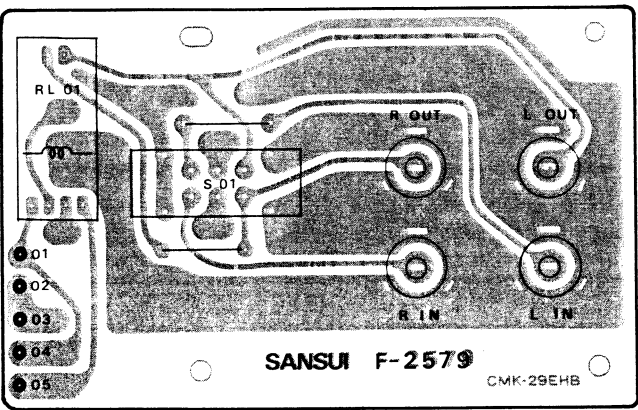


Parts List

Parts No.	Stock No.	Description
D01	0311160	1S2473D
	0311180	1S1588
		Diode
RL01	1150320	Relay Switch
	2430260	Female Pin Jack (White)
	2430270	Female Pin Jack (Red)

4-3. F-2691 Equalizer Circuit Board (Stock No. 7551031)

Conductor Side

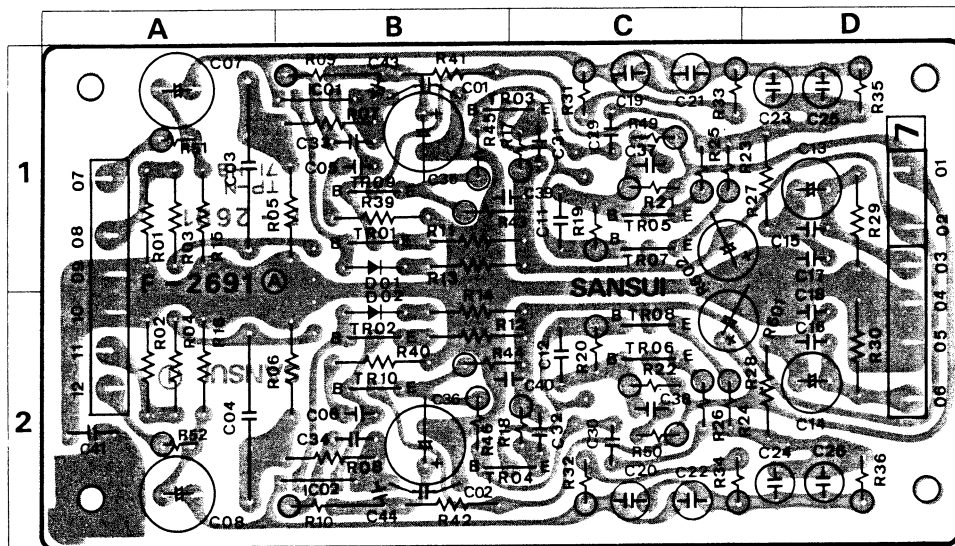


Parts List

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
TR01, 02	0306070, 2	2SC1313 (F, G)	1 C, 2 C	IC01, 02	0360370, 1	25A798 (F, G) Transistor	1 C, 2 C	C25, 26	0620391	390pF 50V P.C.	1 A, 2 A
TR03, 04	0306270, 1	2SC1708 (F, G)	1 B, C	D01, 02	0311160 or 0311180 or 1S1588	Diode	1 C, 2 C	R15, 16	0231332	3.3kΩ	1 D, 2 D
TR05, 06	0306270 or 0306271	2SC1708 (F, G)	1 B, 2 B	C03, 04	0602229	2.2kΩ 100WV M.C.	1 D, 2 D	R31, 32	0231223	22kΩ	1 B, 2 B
TR07, 08	0300710 or 0300711	2SA847 (F, G)	1 B, 2 B	C19, 20	0625562	5600pF	1 B, 2 B	R33, 34	0231564	560kΩ	1 A, 2 A
TR09, 10	0306270, 1	2SC1708 (F, G)	1 C, 2 C	C21, 22	0620101	100pF 50V P.C.	1 B, 2 B	R35, 36	0231473	47kΩ	1 D, 2 D
				C23, 24	0625122	1200pF	1 B, 2 B	R51, 52	0231102	1.0kΩ	1 D, 2 D

4-4. F-2573 Filter Accessory Circuit Board (Stock No. 7561581)

Conductor Side

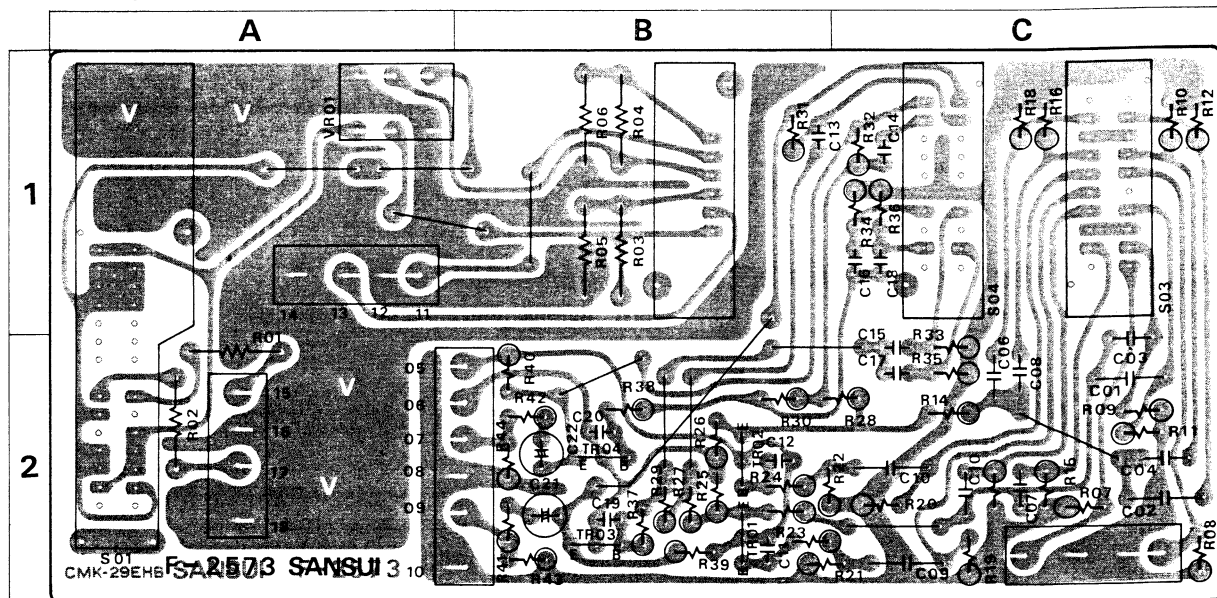


Parts List

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
TR01, 02	0306270, 1	2SC1708 (F, G)	2 B	VR01	1015170, 1	250kΩ (M, N) Balance Volume	1 A	S03	1170950	Low Filter Switch	1 C
TR03, 04	0300760, 1	2SA917 (1, 2)	2 B	S01	1190250	Mode Switch	1, 2 A	S04	1170950	High Filter Switch	1 C
C15, 16	0620821	820pF 50V P.C.	2 C, 1 C	S02	1170770	Muting Switch			2410590	4P Pin Ass'y (Type D)	
									2410910	2P Pin Ass'y (Type E)	

4-5. F-2577 Treble Tone Selector Circuit Board (Stock No. 7561611)

Conductor Side




Parts List

Parts No.	Stock No.	Description
C01, 02	0620331	330 pF
C03, 04	0620911	910 pF
S01	1131150	Treble Tone Push Switch

4-6. F-2578 Bass Tone Selector Circuit Board (Stock No. 7561621)

Conductor Side

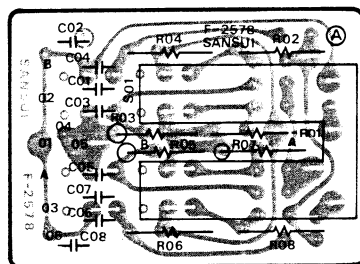


Parts List

Parts No.	Stock No.	Description
S01	1131140	Bass Tone Push Switch

4-7. F-2571 Tape Copy & Tuner Signal Switching Circuit Board (Stock No. 7594561)

Conductor Side

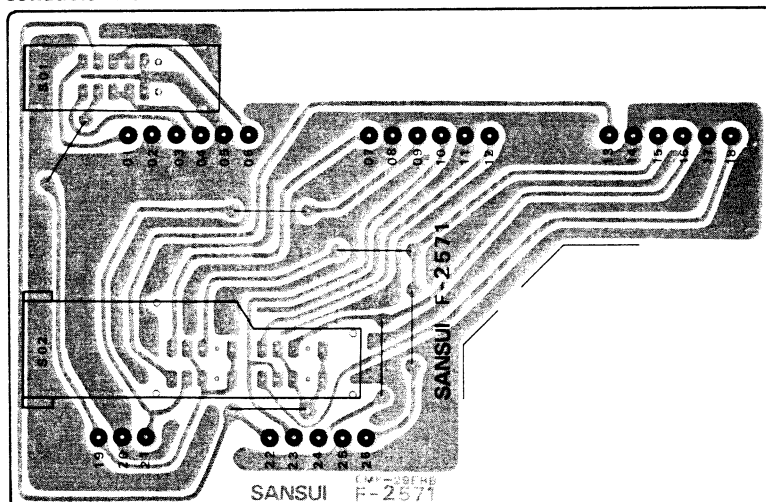


Parts List

Parts No.	Stock No.	Description
S01	1170870	Lever Switch, tuner
S02	1190280	Tape Copy Switch

4-8. F-2572 Tape Play Circuit Board (Stock No. 7594571)

Conductor Side

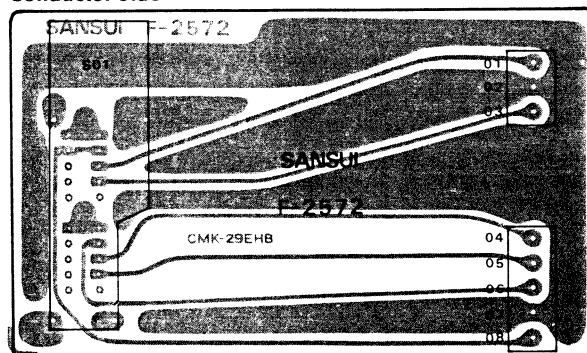


Parts List

Parts No.	Stock No.	Description
S01	1190270	Tape Play switch
	2410760	3P Pin Ass'y (Type C)
	2410780	6P Pin Ass'y (Type C)

4-9. F-2575 Midrange Tone Control Circuit Board (Stock No. 7561591)

Conductor Side

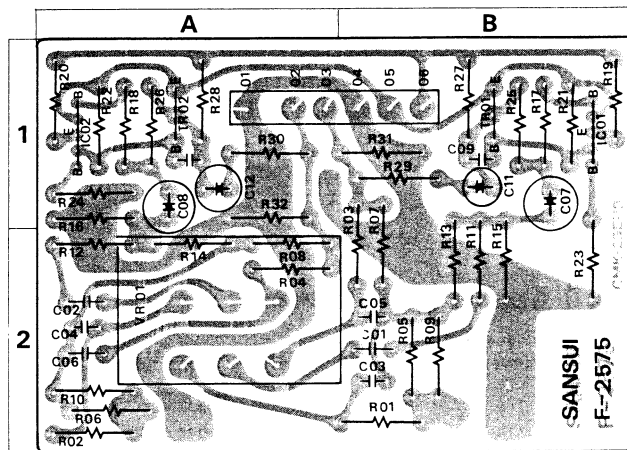


Parts List

Parts No.	Stock No.	Description	Position
TR01, 02	0306270, 1	2SC1708 (F, G) Transistor	2 A, 2 B
IC01, 02	0360290, 1	25A798 (F, G) IC	2 A, 2 B
VR01	1090150, 1	50k Ω (B) $\times$ 2 Midrange Volume	1 B
	2410700	6P Pin Ass'y (Type F)	

4-10. F-2576 Bass & Treble Tone Control Circuit Board (Stock No. 7561601)

Conductor Side

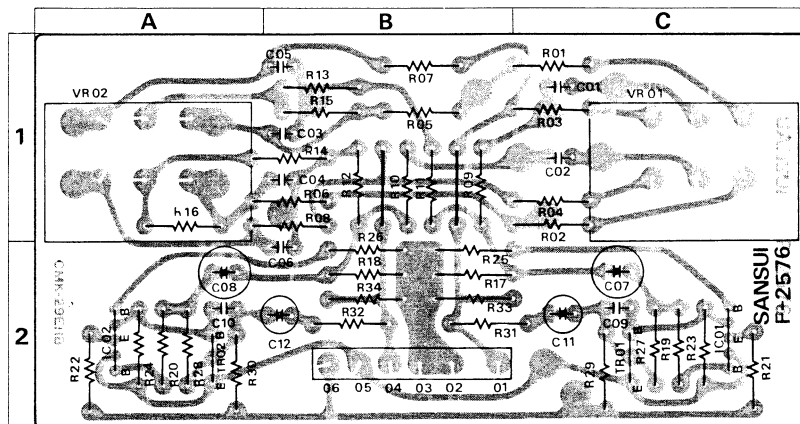


Parts List

Parts No.	Stock No.	Description	Position
TR01, 02	0306270, 1	2SC1708 (F, G) Transistor	2 C, 2 A
IC01, 02	0360290, 1	25A798 (F, G) IC	2 C, 2 A
C01, 02	0620301	300pF 50V P.C.	1 C
VR01	1090150, 1	50k Ω (B) $\times$ 2 Treble Volume	1 C
VR02	1090150, 1	50k Ω (B) $\times$ 2 Bass Volume	1 A
	2410700	6P Pin Ass'y (Type F)	

4-11. F-2491 Circuit Board for Headphone (Stock No. 7594601)


Conductor Side

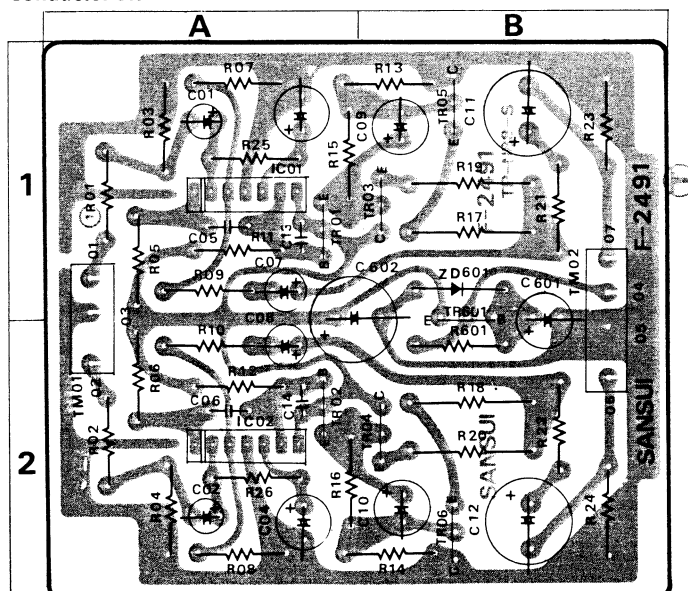

Parts List

Parts No.	Stock No.	Description	Position
TR01, 02	0306070, 1	2SC1313 (F, G)	1 A, 2 A
TR03, 04	0305901, 2	2SC1124 (2, 3)	1 B, 2 B
TR05, 06	0300391, 2	2SA706	1 B, 2 B
TR601	0308450, 1	2SD356 (C, D)	1 B
IC01, 02	0360190	BA312	1 A, 2 A
D601	0316600	RD36E (C)	
R17, 18	0104330	33 Ω 1W C.R.	1 B, 2 B
	0211330	33 Ω 1W M.R.	
R19, 20	0104330	33 Ω 1W C.R.	1 B, 2 B
	0211330	33 Ω 1W M.R.	
R21, 22	0103100	10 Ω	1 B, 2 B
R23, 24	0103331	330 Ω 1/2W C.R.	1 B, 2 B
	2410580	3P Pin Ass'y (Type D)	
	2410590	4P Pin Ass'y (Type D)	

4-12. F-2569 Input Terminal & Switch Circuit Board (Stock No. 7594551)

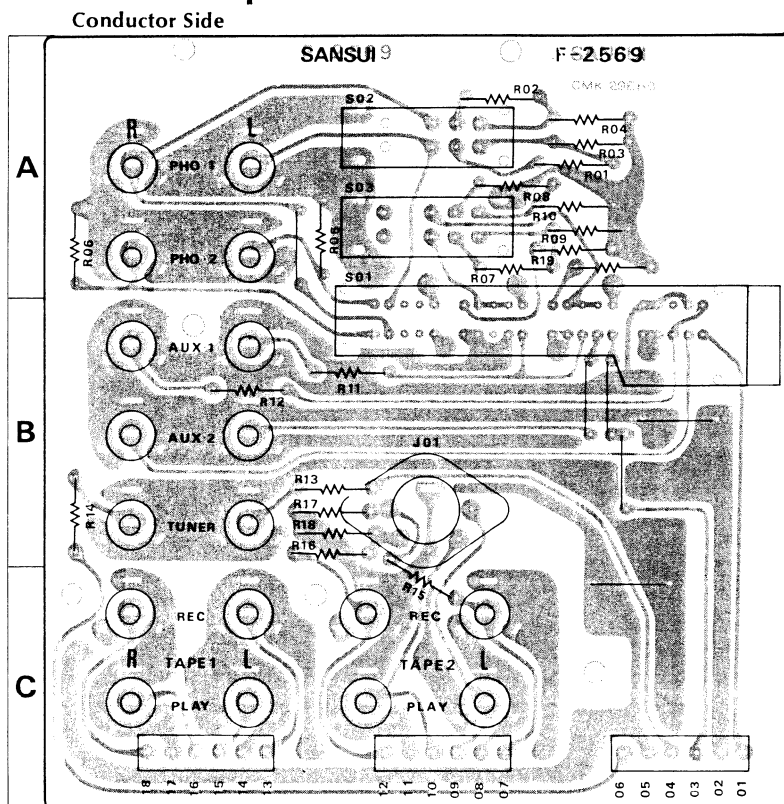


Parts List

Parts No.	Stock No.	Description	Position
R07, 08	0231202	2.0k Ω 1/2W M.R.	A
S01	1190260	Input Selector Switch	A, B
S02	1110310	Pick-up Load Switch	A
S03	1110310	Sensitivity Switch	A
J01	2090030	5P DIN Socket	B
	2410780	6P Pin Ass'y (Type C)	
	2430260	1P Jack (White)	
	2430270	1P Jack (Red)	

4-13. F-2660 Level Volume Control Circuit Board (Stock No. 7594581)

Conductor Side

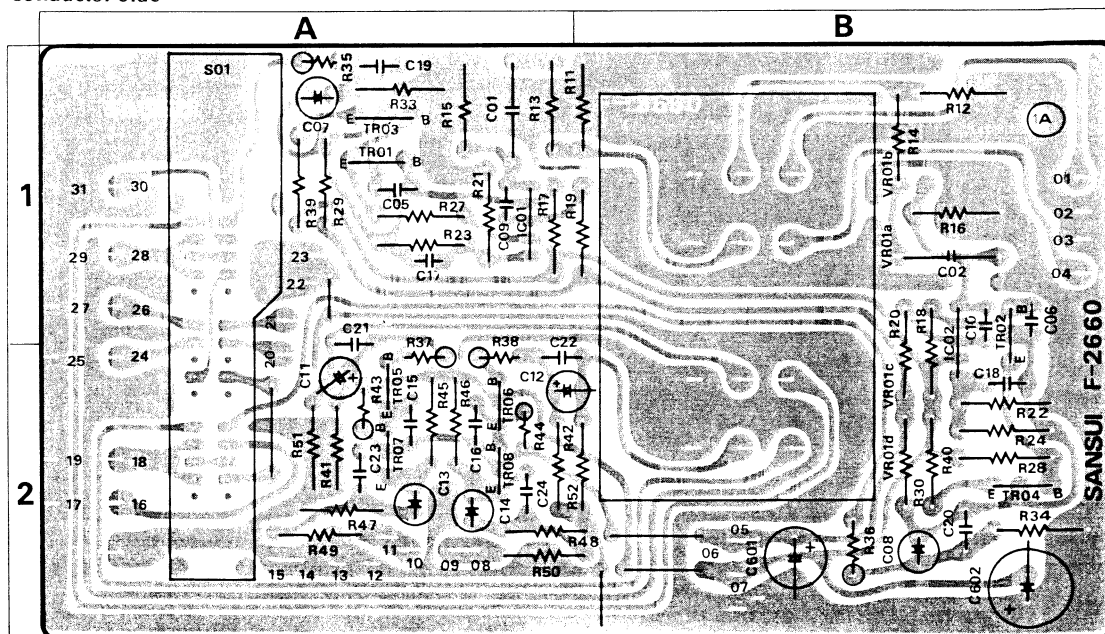

Parts List


Parts No.	Stock No.	Description	Position
TR01, 02	0306270, 1	2SC1708 (F, G)	1 A, 1, 2B
TR03, 04	0306360, 1	2SC1951 (1, 2)	1 A, 2B
TR05, 06	0300470, 1	2SA726 (F, G)	2 A
TR07, 08	0306070, 1	2SC1313 (F, G)	2 A
IC01, 02	0360370, 1	2SA798 (F, G)	1 A, 1, 2B

Parts No.	Stock No.	Description	Position
C01, 02	0602109, 1	1 μ F 100V M.C.	1 A, 1B
VR01	1090220	100k Ω $\times$ 4 Detent Volume	
S01	1190290	Tone & Filter Switch	1, 2A


5. OTHER PARTS

5-1. Top & Bottom View

Top View

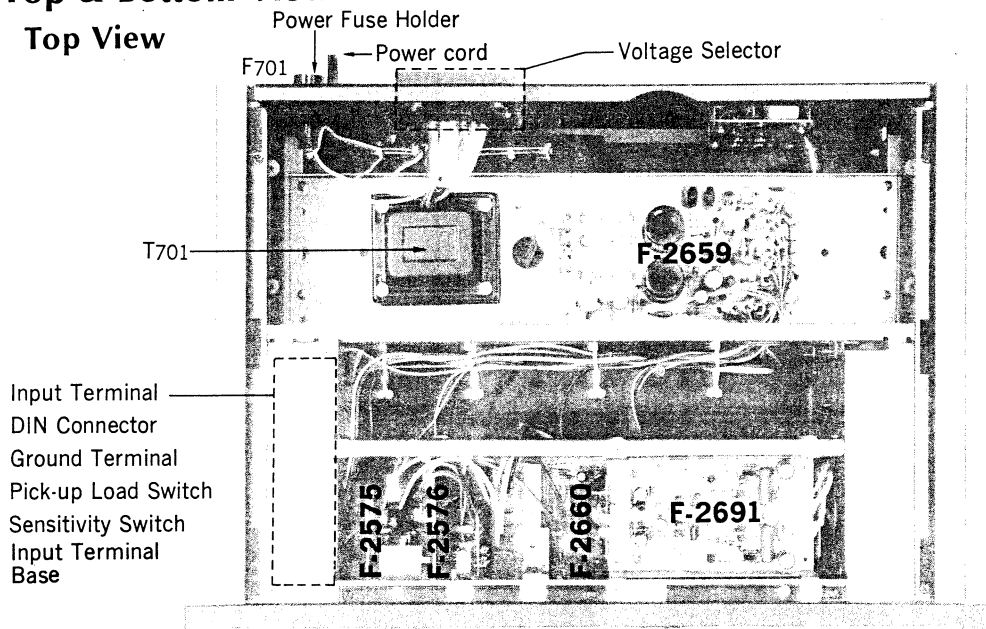

Bottom View

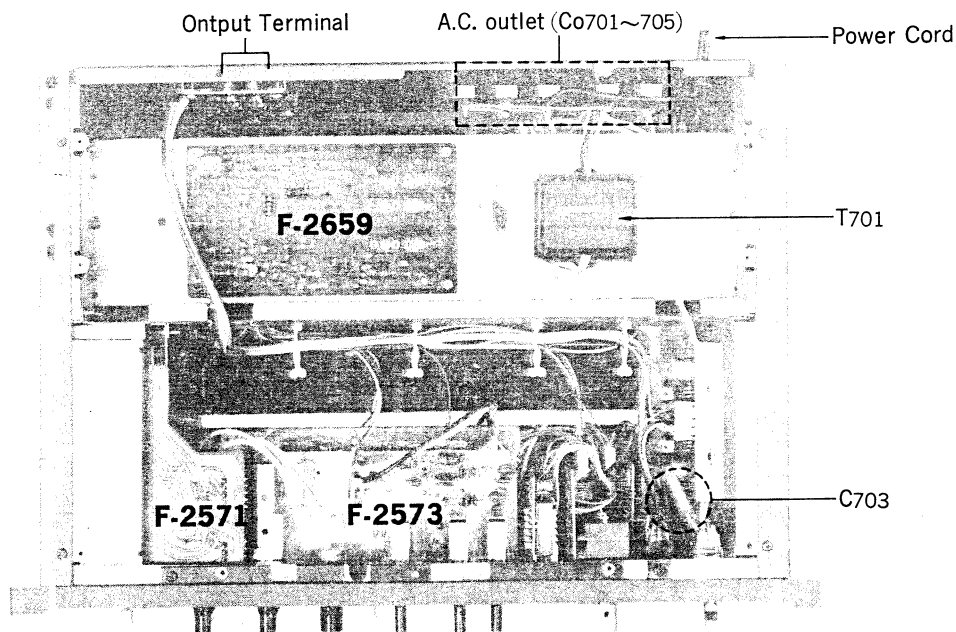


Parts List

Parts No.	Stock No.	Description
F701	0432220	1A 250V (AC 220V~240V)
	0432240	2A 250V (AC 100V~120V)
CO701~705	2450060	AC outlet
	2300060	Power Fuse Holder
	2290150	Ground Terminal
	2410091	Voltage Selector Plug
	2410830	Voltage Selector Socket
	3800240	Power Cord

Parts No.	Stock No.	Description
C703	4002550	Power Transformer
	0659801	0.01 μ F 150V C.C.
	2430260	Female Pin Jack (White)
	2430270	Female Pin Jack (Red)
	5287411	Input Terminal Base
	1110310	Pick-up Load Switch
	1110310	Sensitivity Switch
	2090030	DIN Jack

5-2. Front View

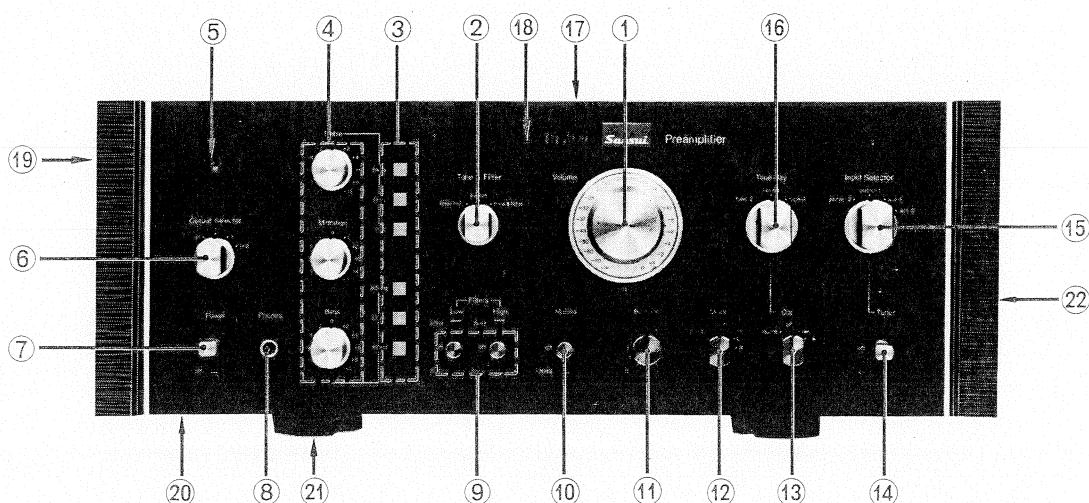

Parts List

Parts No.	Stock No.	Description
1	{ 5318800 1090220 5318262	G-6 Type Knob, Level Volume 100k Ω $\times$ 4 4-gang detent level volume C-6 Type Knob, Tone & Filter Switch
2	{ 1190290 1131150 1131140	Tone & Filter Switch Treble Tone Push Switch Bass Tone Push Switch
3	{ 5318253 1090150, 1	B-6 Type Knob, Treble Volume B-6 Type Knob, Midrange Volume B-6 Type Knob, Bass Volume 50k Ω (B) $\times$ 2 Treble Volume 50k Ω (B) $\times$ 2 Midrange Volume 50k Ω (B) $\times$ 2 Bass Volume
4	{ 7726170 5318262 1101770, 1	LED Ass'y, Protector Indicator C-6 Type Knob, output selector Rotary Switch, output selector
5	{ 5326510 1170510 5047470	E-2 Type Knob, power switch Lever Switch, power switch Masking, lever switch
6	2430170	Headphone Jack

Parts No.	Stock No.	Description
9	{ 5326520 1170950 5047470	E-3 Type Knob, filter & muting switch Low Filter Switch High Filter Switch Masking, lever switch
10	{ 5326520 1170950 5047470	E-3 Type Knob, filter & muting switch Muting Switch Masking, lever switch
11	{ 5318271 1015170, 1	D-6 Type Knob, balance volume 250k Ω (M.N) $\times$ 2, Balance Volume
12	{ 5318281 1190250 5318281	F-6 Type Knob, mode switch Mode Switch F-6 Type Knob, Tape Copy Switch
13	{ 1190280 5326510 1170870	Tape Copy Switch E-2 Type Knob, Tuner Switch Lever Switch, tuner
14	{ 5047470 5318371 1190260	Masking, lever switch H-6 Type Knob, Input Selector Input Selector Switch
15	5318371	H-6 Type Knob, Tape Play Switch

Parts No.	Stock No.	Description
16	1190270	Tape Play Switch
17	5006630	Metal Bonnet
18	7007460	Panel Ass'y
	{ 6906480 5326530 5286721 5286731	Spring, push knob Push Knob Knob Guide Lever Guide for 1 Contact
	{ 5286741 5336581	Lever Guide for 2 Contacts Sansui Mark
19	5006640	Left Side Bonnet
20	5058700	Bottom Plate
21	5517050	Leg
22	5006650	Right Side Bonnet

5-3. Figures

Connectors & Pin Ass'y

Connectors

Type A (3~10 pins)	Type B (2~6 pins)	Stock No.
		2 Pins 2420450 3 Pins 2420460 3 Pins(RED) 2420650 4 Pins 2420470 5 Pins 2420480 6 Pins 2420490

NOTE: Since stock number of female connectors (type B) with wires are not shown in each parts list of Complete circuit board, please refer to the above parts list when ordering the connector.

Pin Ass'y



Type A (3~10 pins)	Type B (3~10 pins)	Type C (3~10 pins)
Type D (2~6 pins)	Type E (2~6 pins)	Type F (2~6 pins)

Abbreviations

C.R. : Carbon Resistor	E.C. : Electrolytic Capacitor
S.R. : Solid Resistor	BP.E.C. : Bi-Polar Electrolytic Capacitor
Ce.R. : Cement Resistor	C.C. : Ceramic Capacitor
M.R. : Metallized Film Resistor	Mi.C. : Mica Capacitor
F.R. : Fusing Resistor	O.C. : Oil Capacitor
N.I.R. : Non-Inflammable Resistor	P.C. : Polystyrene Capacitor
M.C. : Mylar Capacitor	E.C. : Tantalum Capacitor

6. SCHEMATIC DIAGRAM

• La présentation et les spécifications sont susceptibles d'être modifiées sans préavis par suite d'améliorations éventuelles.
• Änderungen, die dem technischen Fortschritt dienen, bleiben vorbehalten.
• Design and specification subject to change without notice for improvements.

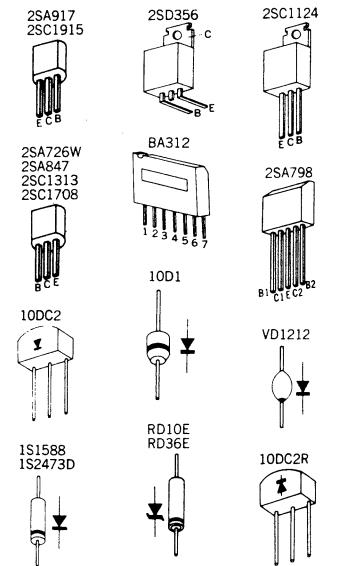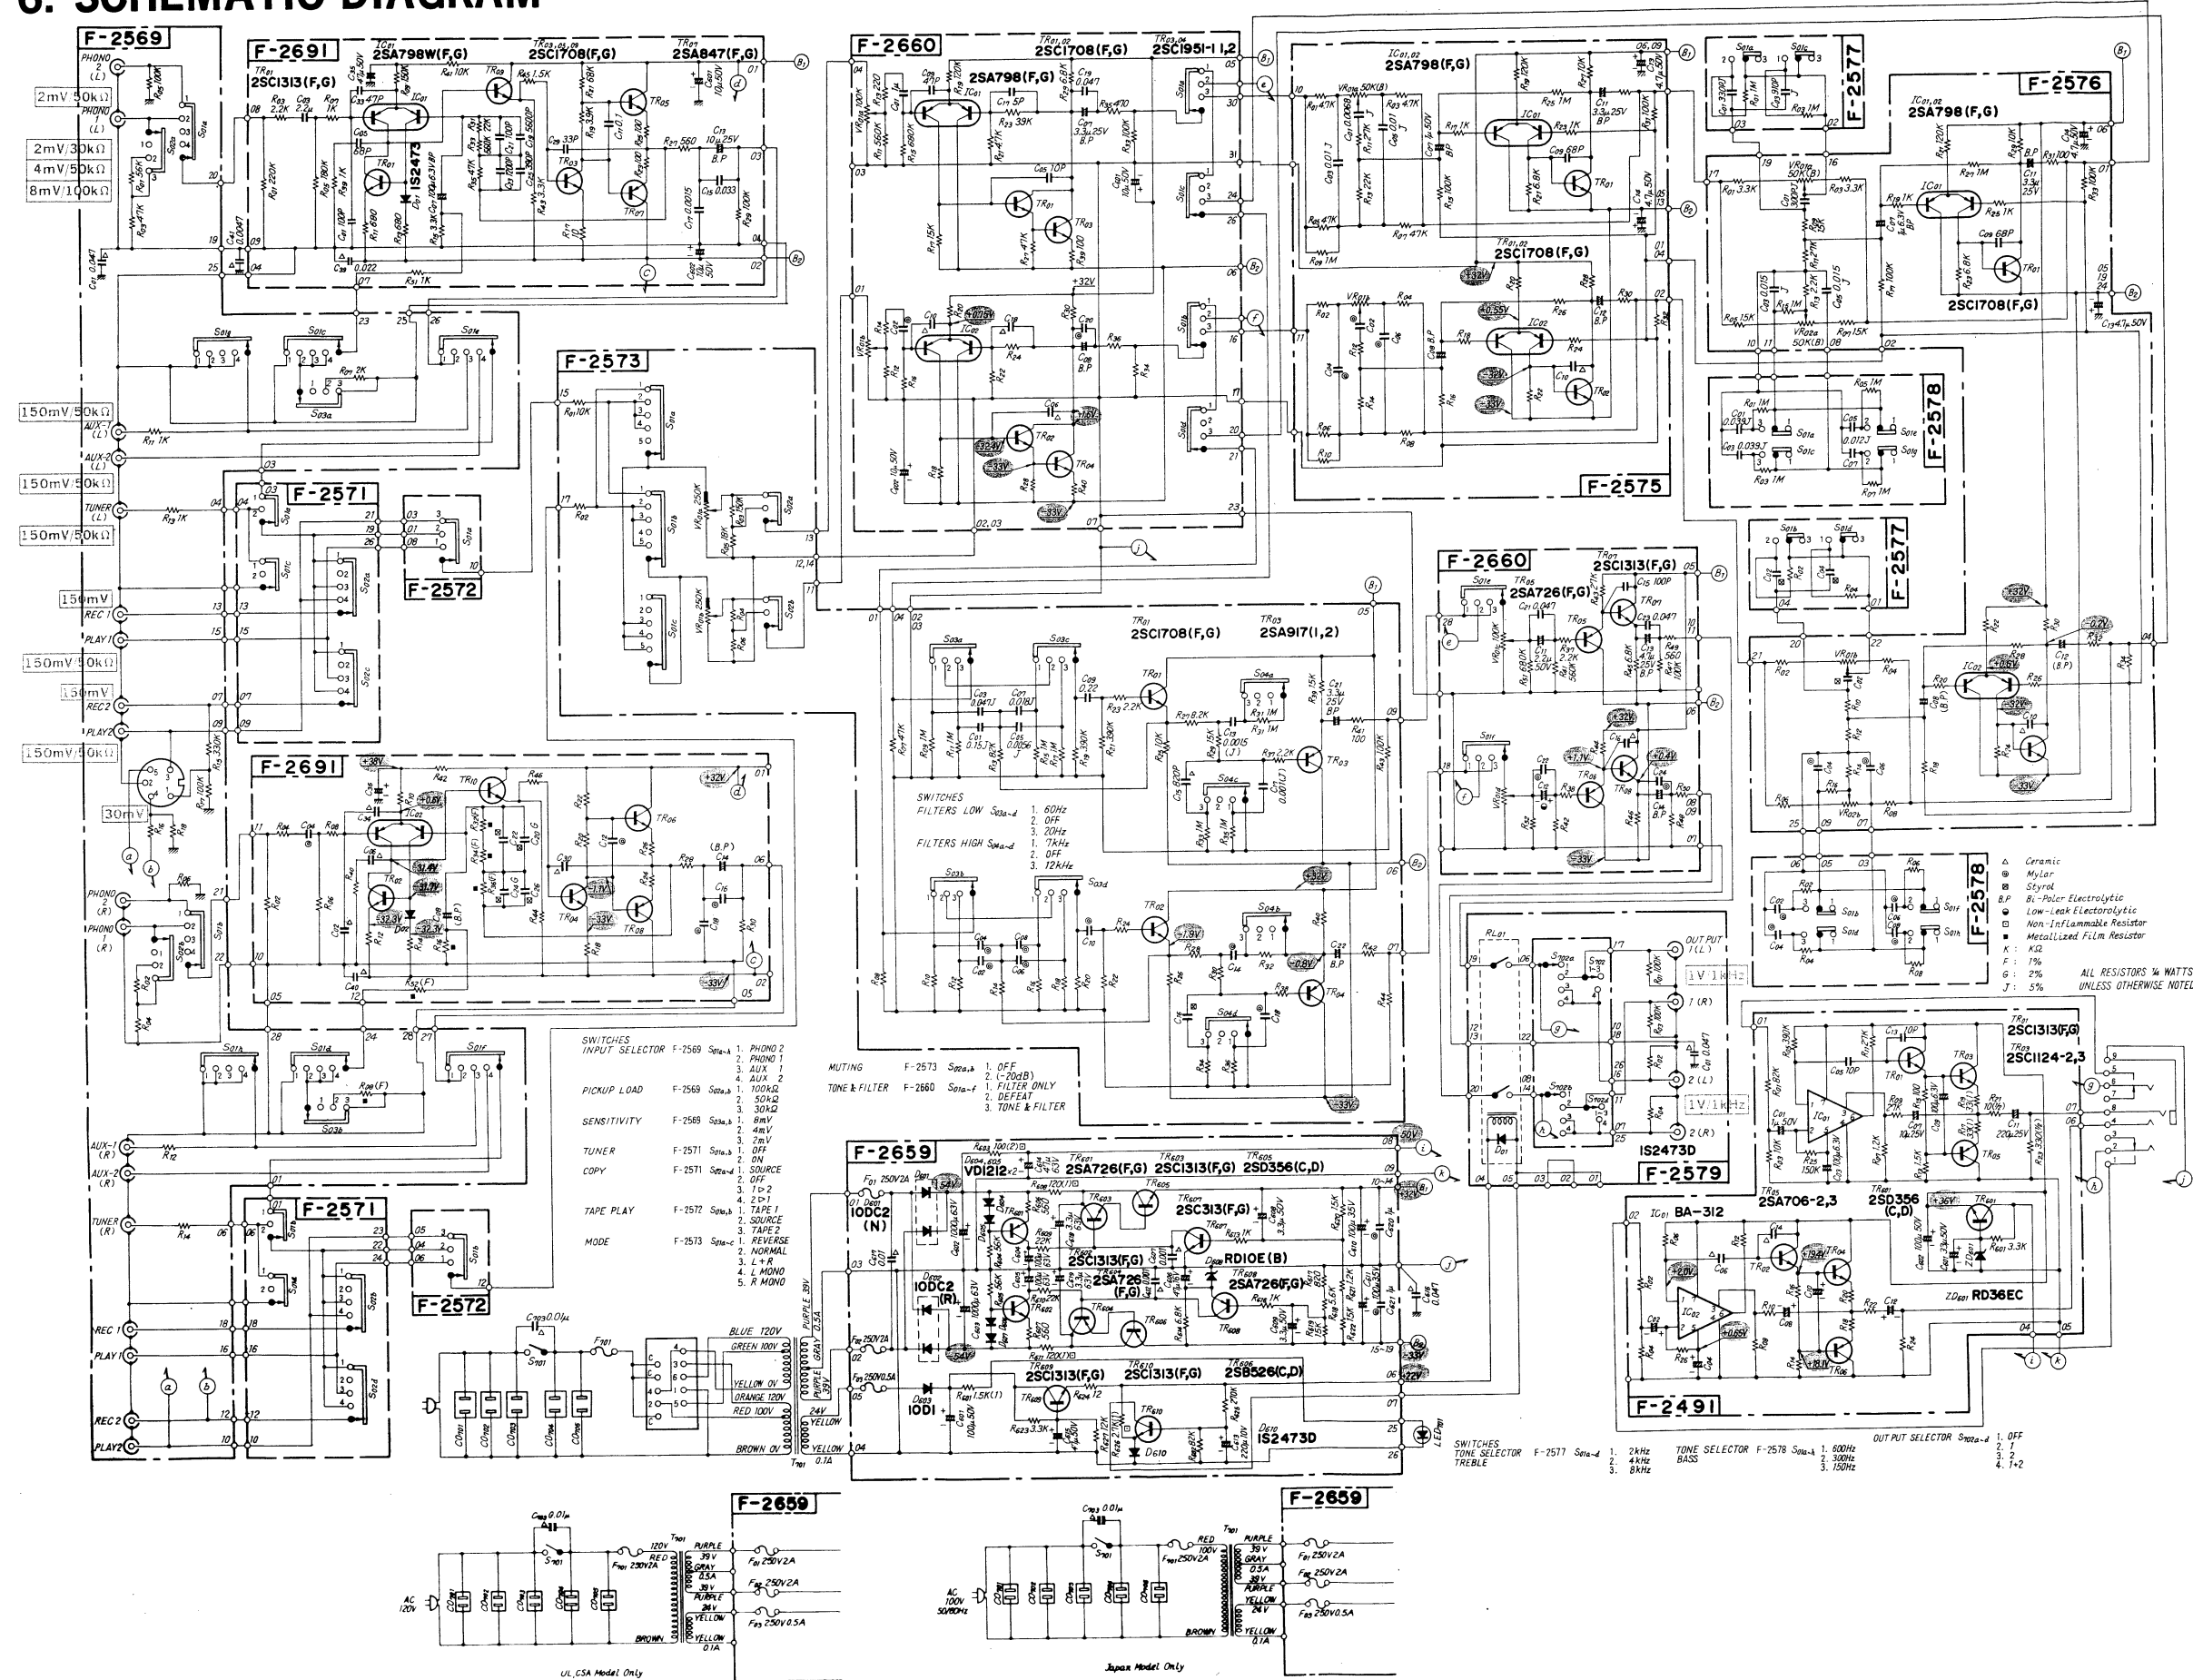

Δ Ceramic
□ Mylar
B.P. Styral
B.P. 8-Polar Electrolytic
○ Low-Leak Electrolytic
□ Non-Inflammable Resistor
■ Metallized Film Resistor
K: KΩ
M: MΩ
F: 1%
G: 2%
J: 5%
ALL RESISTORS IN WATTS
UNLESS OTHERWISE NOTED