

DVD PLAYER

DVD-S510/DV-S5350

SERVICE MANUAL

IMPORTANT NOTICE

This manual has been provided for the use of authorized YAMAHA Retailers and their service personnel. It has been assumed that basic service procedures inherent to the industry, and more specifically YAMAHA Products, are already known and understood by the users, and have therefore not been restated.

WARNING: Failure to follow appropriate service and safety procedures when servicing this product may result in personal injury, destruction of expensive components, and failure of the product to perform as specified. For these reasons, we advise all YAMAHA product owners that any service required should be performed by an authorized YAMAHA Retailer or the appointed service representative.

IMPORTANT: The presentation or sale of this manual to any individual or firm does not constitute authorization, certification or recognition of any applicable technical capabilities, or establish a principle-agent relationship of any form.

The data provided is believed to be accurate and applicable to the unit(s) indicated on the cover. The research, engineering, and service departments of YAMAHA are continually striving to improve YAMAHA products. Modifications are, therefore, inevitable and specifications are subject to change without notice or obligation to retrofit. Should any discrepancy appear to exist, please contact the distributor's Service Division.

WARNING: Static discharges can destroy expensive components. Discharge any static electricity your body may have accumulated by grounding yourself to the ground buss in the unit (heavy gauge black wires connect to this buss).

IMPORTANT: Turn the unit OFF during disassembly and part replacement. Recheck all work before you apply power to the unit.

■ CONTENTS

TO SERVICE PERSONNEL	1	INTERACTIVE TESTS	11~17
WARNINGS	1~2	TEST INSTRUCTIONS DISPLAY BOARD	18~19
PREVENTION OF ELECTROSTATIC DISCHARGE	3	TROUBLESHOOTING	20~25
LOCALE MANAGEMENT INFORMATION	3	TECHNICAL SPECIFICATIONS DVD MODULE	26~27
FRONT PANELS	4	LIST OF ABBREVIATIONS	28
REMOTE CONTROL TRANSMITTER	4	IC DESCRIPTIONS	29~39
REAR PANELS	5	WIRING DIAGRAM	40~41
SPECIFICATIONS	6	BLOCK DIAGRAM	42~45
DISASSEMBLY PROCEDURES	7~8	PRINTED CIRCUIT BOARD	46~66
SERVICE HINTS	8	SCHEMATIC DIAGRAM	67~95
DIAGNOSTIC SOFTWARE	9~10	PARTS LIST	96~107



このサービスマニュアルは、エコマーク認定の再生紙を使用しています。
This Service Manual uses recycled paper.



■ TO SERVICE PERSONNEL


1. Critical Components Information

Components having special characteristics are marked  and must be replaced with parts having specifications equal to those originally installed.

2. Leakage Current Measurement (For 120V Models Only)

When service has been completed, it is imperative to verify that all exposed conductive surfaces are properly insulated from supply circuits.

- Meter impedance should be equivalent to 1500 ohm shunted by 0.15μF.
- Leakage current must not exceed 0.5mA.
- Be sure to test for leakage with the AC plug in both polarities.

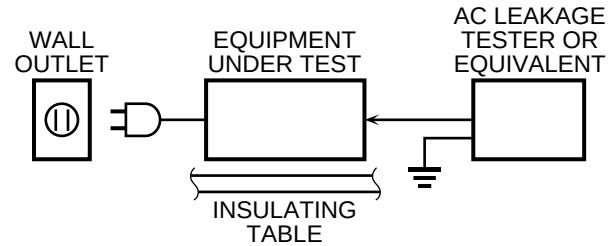

CAUTION: USE OF CONTROLS OR ADJUSTMENTS OR PERFORMANCE OF PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

THE DVD-VIDEO PLAYER SHOULD NOT BE ADJUSTED OR REPAIRED BY ANYONE EXCEPT PROPERLY QUALIFIED SERVICE PERSONNEL.

■ WARNINGS

WARNING: CHEMICAL CONTENT NOTICE!

The solder used in the production of this product contains LEAD. In addition, other electrical/electronic and /or plastic (where applicable) components may also contain traces of chemicals found by the California Health and Welfare Agency (and possibly other entities) to cause cancer and/or birth defects or other reproductive harm.

DO NOT PLACE SOLDER, ELECTRICAL/ELECTRONIC OR PLASTIC COMPONENTS IN YOUR MOUTH FOR ANY REASON WHATSOEVER!

Avoid prolonged, unprotected contact between solder and your skin! When soldering, do not inhale solder fumes or expose eyes to solder/flux vapor!

If you come in contact with solder or components located inside the enclosure of this product, wash your hands before handling food.

WARNING: Laser Safety

This product contains a laser beam component. This component may emit invisible, as well as visible radiation, which may cause eye damage. To protect your eyes and skin from laser radiation, the following precautions must be used during servicing of the unit.

- 1) When testing and/or repairing any component within the product, keep your eyes and skin more than 30 cm away from the laser pick-up unit at all times. Do not stare the laser beam at any time.
- 2) Do not attempt readjustment, disassemble or repair of the laser pick-up, unless noted elsewhere in this manual.
- 3) CAUTION: Use of controls, adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

Laser Emitting conditions:

- 1) When the Top Cover is removed, and the POWER SW is turned to the "ON" position, the laser component will emit a beam for several seconds to detect if a disc is present. During this time (5 - 10 sec.) the laser may radiate through the lens of the laser pick-up unit. Do not attempt any servicing during this period!
If no disc is detected, the laser will stop emitting the beam. when a disc is set, you will not be exposed to any laser emissions.
- 2) The laser power level can be adjusted with the VR on pick-up PWB, however, this level has been set by the factory prior to shipping from the factory. Do not adjust this laser level control unless instruction is provided elsewhere in this manual. Adjustment of this control can increase the laser emission level from the device.

Laser Diode Properties

Type: Semiconductor laser GaAlAs
 Wave length: 650 nm (DVD)
 780 nm (VCD/CD)
 Output Power: 7 mW (DVD)
 10 mW (VCD/CD)
 Beam divergence: 60 degree


Output value is determined by CFR CHAPTER1, SUBCHAPTER J

VARO! : AVATTAESSA JA SUOJALUKITUS OHITETTAESSA OLET ALTTIINA NÄKYMÄTTÖMÄLLE LASER-SÄTEILYLLE. ÄLÄ KATSO SÄTEESEEN.

VARNING! : OSYNLIG LASERSTRÅLNING NÄR DENNA DEL ÄR ÖPPNAD OCH SPÄRREN ÄR URKOPPLAD. BETRAKTA EJ STRÅLEN.

WARNING

The use of optical instruments with this product will increase eye hazard.
 Repair handling should take place as much as possible with a disc loaded inside the player

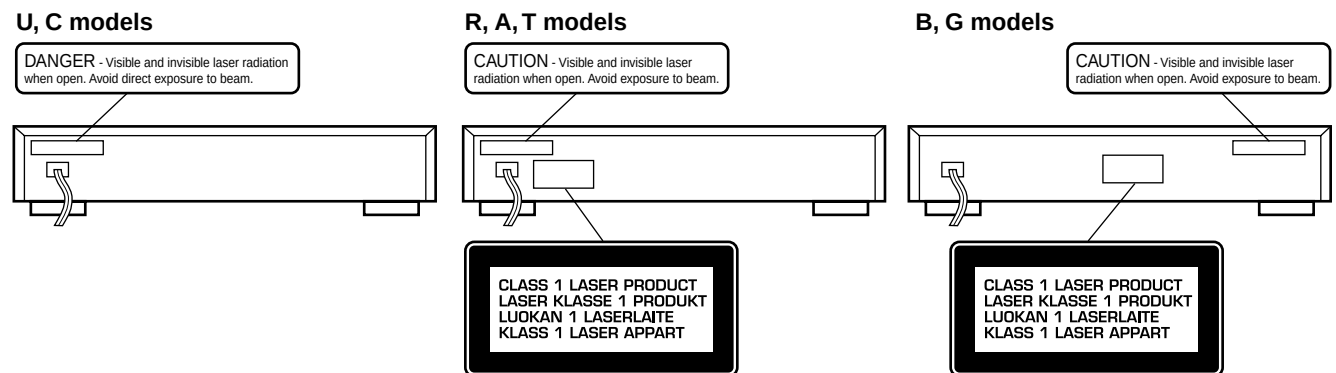

WARNING LOCATION: REAR PANEL

CAUTION VISIBLE AND INVISIBLE LASER RADIATION WHEN OPEN. AVOID EXPOSURE TO BEAM
ADVARSEL SYNLIG OG USYNLIG LASERSTRÅLING VED ÅBNING UNDGÅ UDSÆTTELSE FOR STRÅLING
ADVARSEL SYNLIG OG USYNLIG LASERSTRÅLING NÅR DEKSEL ÅPNES UNNGÅ EKSPONERING FOR STRÅLEN
VARNING SYNLIG OCH OSYNLIG LASERSTRÅLNING NÄR DENNA DEL ÄR ÖPPNAD BETRAKTA EJ STRÅLEN
VARO! AVATT AESSA OLET ALTTIINA NÄKYVÄLLE JA NÄKYMÄTTÖMÄLLE LASER SÄTEILYLLE. ÄLÄ KATSO SÄTEESEEN
VORSICHT SICHTBARE UND UNSICHTBARE LASERSTRAHLUNG WENN ABDECKUNG GEÖFFNET NICHT DEM STRAHL AUSSETZEN
DANGER VISIBLE AND INVISIBLE LASER RADIATION WHEN OPEN. AVOID DIRECT EXPOSURE TO BEAM
ATTENTION RAYONNEMENT LASER VISIBLE ET INVISIBLE EN CAS D'OUVERTURE EXPOSITION DANGEREUSE AU FAISCEAU

Warning for power supply

The primary side of the power supply including the heatsink carries live mains voltage when the player is connected to the mains even when the player is switched off !

This primary area is not shielded so it is possible to touch copper tracks and/or components when servicing the player. Service personnel have to take precautions to prevent touching this area or components in this area .

The primary side of the power supply has been indicated with a lightening stroke and a stripe-marked print on the printed wiring board

Note:

The screws on the DVD mechanism (position 18-1 in on the exploded view drawing) may never be touched, removed or re-adjusted.

Handle the DVD mechanism with care when the unit has to be exchanged!

The DVD mechanism is very sensitive for dropping or giving shocks.

■ PREVENTION OF ELECTROSTATIC DISCHARGE

Some semiconductor (solid state) devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor “chip” components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge (ESD).


1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as “anti-static (ESD protected)” can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.
CAUTION: Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.
8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device).

HANDLING PRECAUTIONS

The laser diode in the optical pickup may break down due to potential difference caused by static electricity of clothes or human body. So be careful of electrostatic breakdown during repair of the DVD mechanism.

Grounding for electrostatic breakdown prevention

1. Human body grounding.
Use the antistatic wrist strap to discharge the static electricity from your body.
2. Work table grounding.
Put a conductive material (sheet) or steel sheet on the area where the optical pickup is placed and ground the sheet.

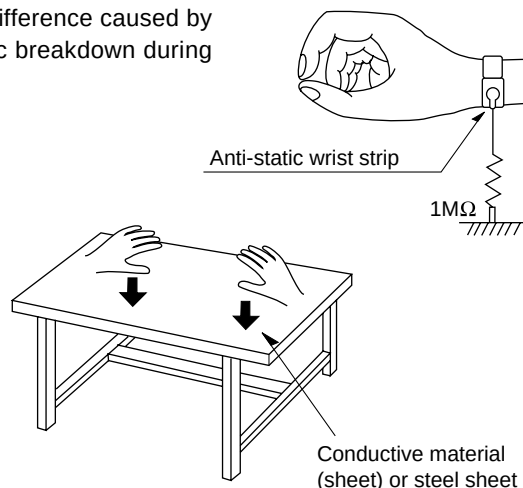


Caution:

The static electricity of your clothes will not be grounded through the wrist strap. So take care not to let your clothes touch the optical pickup.

■ LOCALE MANAGEMENT INFORMATION

Locale Management Information : This DVD player is designed and manufactured to respond to the Locale Management Information that is recorded on a DVD disc. If the Locale number described on the DVD disc does not correspond to the Locale number of this DVD player, this DVD player cannot play this disc.

This product incorporates copyright protection technology that is protected by method claims of certain U.S. patents and other intellectual property rights owned by Macrovision Corporation and other rights owners. Use of this copyright protection technology must be authorized by Macrovision Corporation, and is intended for home and other limited viewing uses only unless otherwise authorized by Macrovision Corporation. Reverse engineering or disassembly is prohibited.

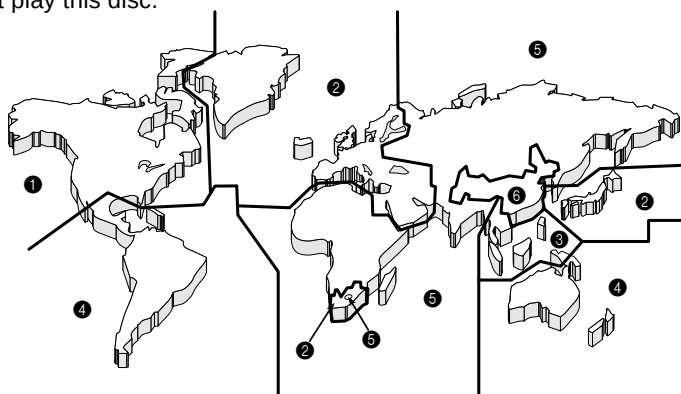


FRONT PANELS


DVD-S510



DV-S5350

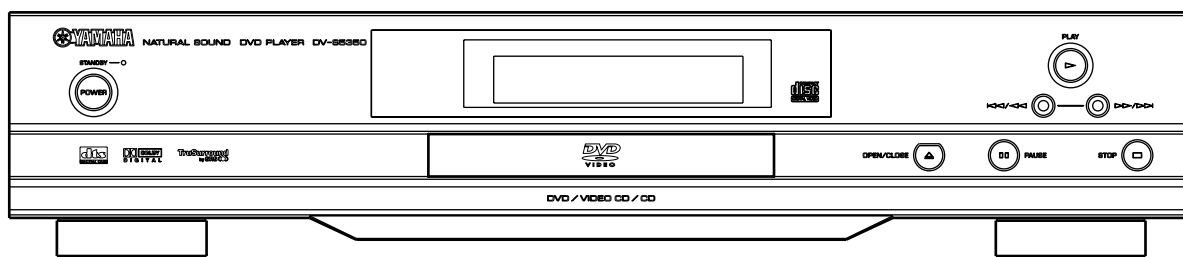


REMOTE CONTROL TRANSMITTER

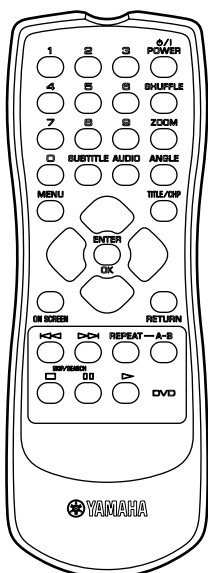


REAR PANELS


DVD-S510 U, C models

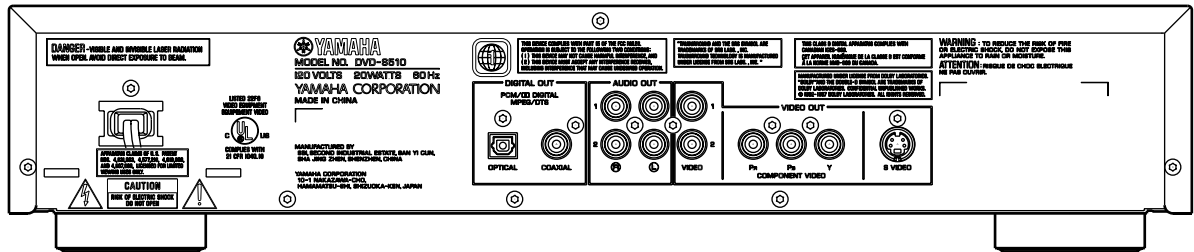


DVD-S510 A model

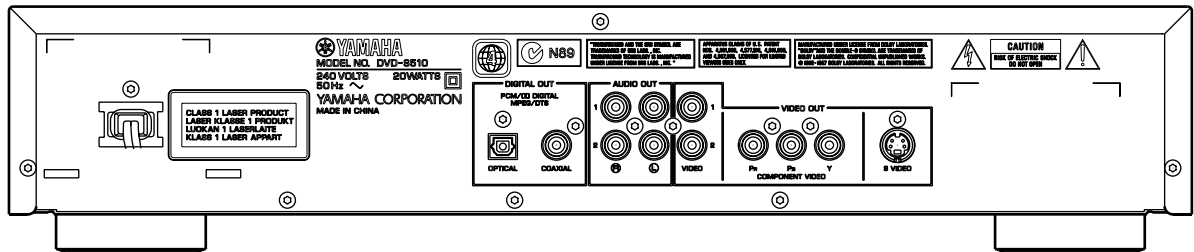


DVD-S510 B, G models

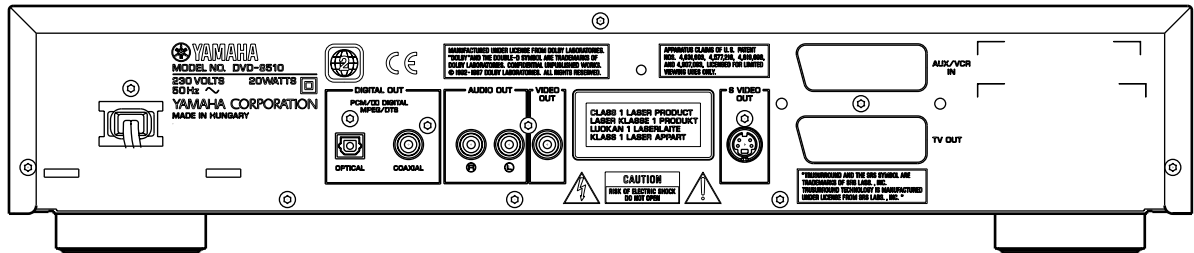


DVD-S510 R model

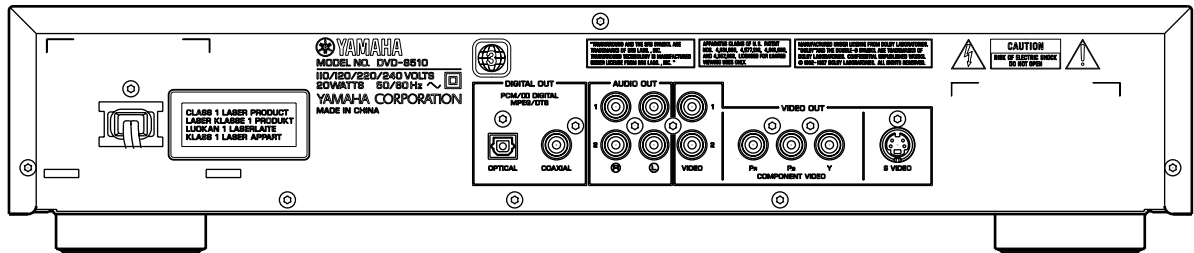

DVD-S510 T model

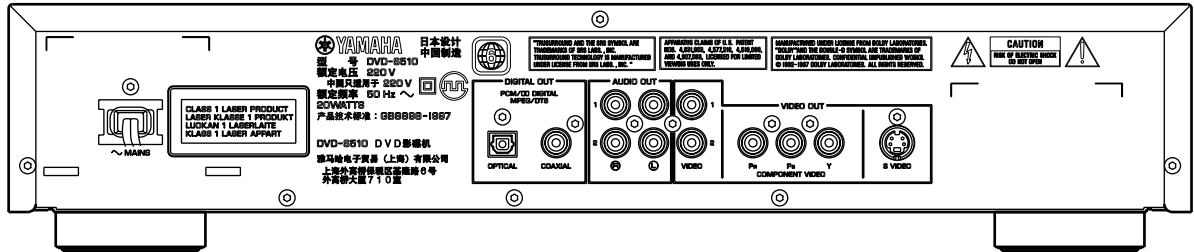

DV-S5350 U model

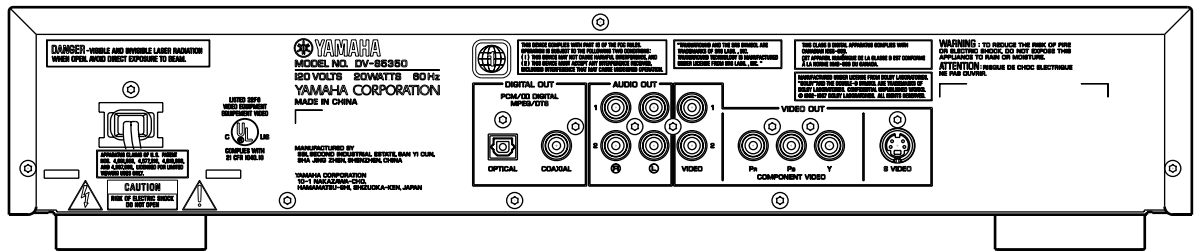

SPECIFICATIONS

PLAYBACK SYSTEM

DVD-Video
Video CD
CD (CD-R and CD-RW)

OPTICAL READOUT SYSTEM

Laser type Semiconductor AlGaAs
Numerical Aperture 0.60 (DVD)
0.45 (VCD/CD)
Wavelength 650 nm (DVD)
780 nm (VCD/CD)

DVD DISC FORMAT

Medium Optical Disc
Diameter 12cm (8cm)
Playing time 2.15 h*
(12cm) One layer
Dual layer 4 h*
Two side 4.30 h*
Single layer
Two side 8 h*
Dual layer

TV STANDARD	EUROPE	USA
	(PAL/50Hz)	(NTSC/60Hz)
Number of lines	625	525
Playback	Multistandard	(PAL/NTSC)

VIDEO FORMAT

DA Converter 10 bits
Signal handling Components
Digital Compression MPEG2 for DVD,
MPEG1 for VCD

DVD

Horiz. Resolution 720 pixels** 720 pixels**
Vertical Resolution 576 lines 480 lines

VCD

Horiz. Resolution 352 pixels 352 pixels
Vertical Resolution 288 lines 240 lines

VIDEO PERFORMANCE

Video output 1 Vpp into 75 ohm
S-Video output Y: 1 Vpp into 75 ohm
C: 0.3 Vpp into 75 ohm
Y 1 Vpp into 75 ohm (U, C, A, R, T)
C_R 0.7 Vpp into 75 ohm (U, C, A, R, T)
C_B 0.7 Vpp into 75 ohm (U, C, A, R, T)
RGB output 1 Vpp into 75 ohm (B, G)
Black Level Shift On/Off
Video Shift Left/Right

AUDIO FORMAT

Digital MPEG Compressed Digital
DTS Compressed Digital
AC-3 Compressed Digital
PCM
Analog Analog Sound Stereo
Dolby Pro Logic downmix from AC-3
multi-channel sound
3D Sound for virtual 5.1 channel sound
on 2 speakers

AUDIO PERFORMANCE

DA Converter 24 bits
DVD fs 48 kHz 2 Hz - 22 kHz
Video CD fs 44.1 kHz 2 Hz - 20 kHz
CD fs 44.1 kHz 2 Hz - 20 kHz
Signal-Noise (1kHz) 95 dB
Dynamic Range (1kHz) 95 dB
Harmonic Distortion + Noise (1kHz) 0.0035 %

CONNECTIONS

SCART SCART2x (B, G)
S-Video Output Mini DIN, 4 pins
Component Video Y Cinch (green)
(U, C, A, R, T) P_B Cinch (blue)
P_R Cinch (red)

Video Output Cinch (yellow) (B, G)
Video Output Cinch (yellow) x2 (U, C, A, R, T)
Audio L+R output Cinch (white/red) (B, G)
Audio L+R output Cinch (white/red) x2 (U, C, A, R, T)
Digital Output 1 coaxial, 1 optical
IEC958 for CDDA / LPCM
IEC1937 for MPEG1/2, AC-3 and DTS

GENERAL

Dimensions(w x h x d) 435 x 91 x 314 mm
Weight Approx. 3.3 Kg
Finish Black color (U, C, A, B, G)
Gold color (R, G, T)
Titan color (G)
Power supply 120 V, 60 Hz (U)
230 V, 50 Hz (B, G)
240 V, 50 Hz (A)
110/120/220/240 V, 50/60 Hz (R)
220 V, 50 Hz (T)
Power consumption 20 W
Standby mode 5 W (B, G)
3 W (When low power Standby is on)

PACKAGE CONTENTS

DVD-Video Player, Remote Control & Batteries,
AC Power cord, Owner's Manual, Audio/Video cable (U, C, A, R, T),
Audio cable (B, G), Video cable (B, G)

GENERAL FUNCTIONALITY

Stop / Play / Pause
Fast Forward / Backward
Time search
Step Forward / Backward
Slow
Title / Chapter / Track Select
Skip Next / Skip Previous
Repeat (Chapter / Title / All) or (Track / All)
A-B Repeat
Shuffle
Enhanced ease of use graphical interface
Zoom (x1.33, x2, x4) with picture enhancement
3D Sound
Audio and video bit rate indicator

DVD FUNCTIONALITY

Multi-angle Selection
Audio Selection (1 out of max. 8 languages)
Subtitles Selection (1 out of max. 32 languages)
Aspect Ratio conversion (16:9, 4:3 Letterbox, 4:3 Pan Scan)
Parental Control and DISC Lock
Disc Menu support (Title Menu and Root Menu)
Resume (5 discs) after stop / standby
Screen Saver (Dim 75% after 15 min.)
Programming Titles/chapters with Favorite Selection

VIDEO CD FUNCTIONALITY

Playback Control for VCD 2.0 discs
Parental Control and DISC lock
Resume (5 discs) after stop / standby
Screen Saver (Dim 75% after 15 min.)
Programming Tracks with Favorite Selection

AUDIO CD FUNCTIONALITY

Time Display (Total / Track / Remaining Track Time)
Full audio functionality with remote control
Programming with Favorite Track Selection

* typical playing time for movie with 2 spoken languages and 3 subtitle languages.

** equivalent to 500 lines on your TV

Specifications subject to change without prior notice.

U U.S.A. model C Canada model
G Europe model B British model
A Australia model R General model
T China model

TruSurround and the SRS symbol are trademarks of SRS Labs., Inc. TruSurround technology is manufactured under license from SRS Labs., Inc.

TruSurround™
with **SRS** (●)®

Manufactured under license from Dolby Laboratories. "Dolby" and the double-D symbol are trademarks of Dolby Laboratories. Confidential Unpublished Works. ©1992 – 1997 Dolby Laboratories, Inc. All rights reserved.


This product incorporates copyright protection technology that is protected by method claims of certain U. S. patents and other intellectual property rights owned by Macrovision Corporation and other rights owners. Use of this copyright protection technology must be authorized by Macrovision Corporation, and is intended for home and other limited viewing uses only, unless otherwise authorized by Macrovision Corporation. Reverse engineering or disassembly is prohibited.

* Manufactured under license from Digital Theater Systems, Inc. US Pat. No. 5,451,942 and other world-wide patents issued and pending. "DTS", "DTS Digital Surround", are trademarks of Digital Theater Systems, Inc. copyright 1996 Digital Theater Systems, inc. All rights reserved.

■ DISASSEMBLY PROCEDURES

See exploded view for item numbers.

When disassembling, use the special screw driver with tip shape in figure.

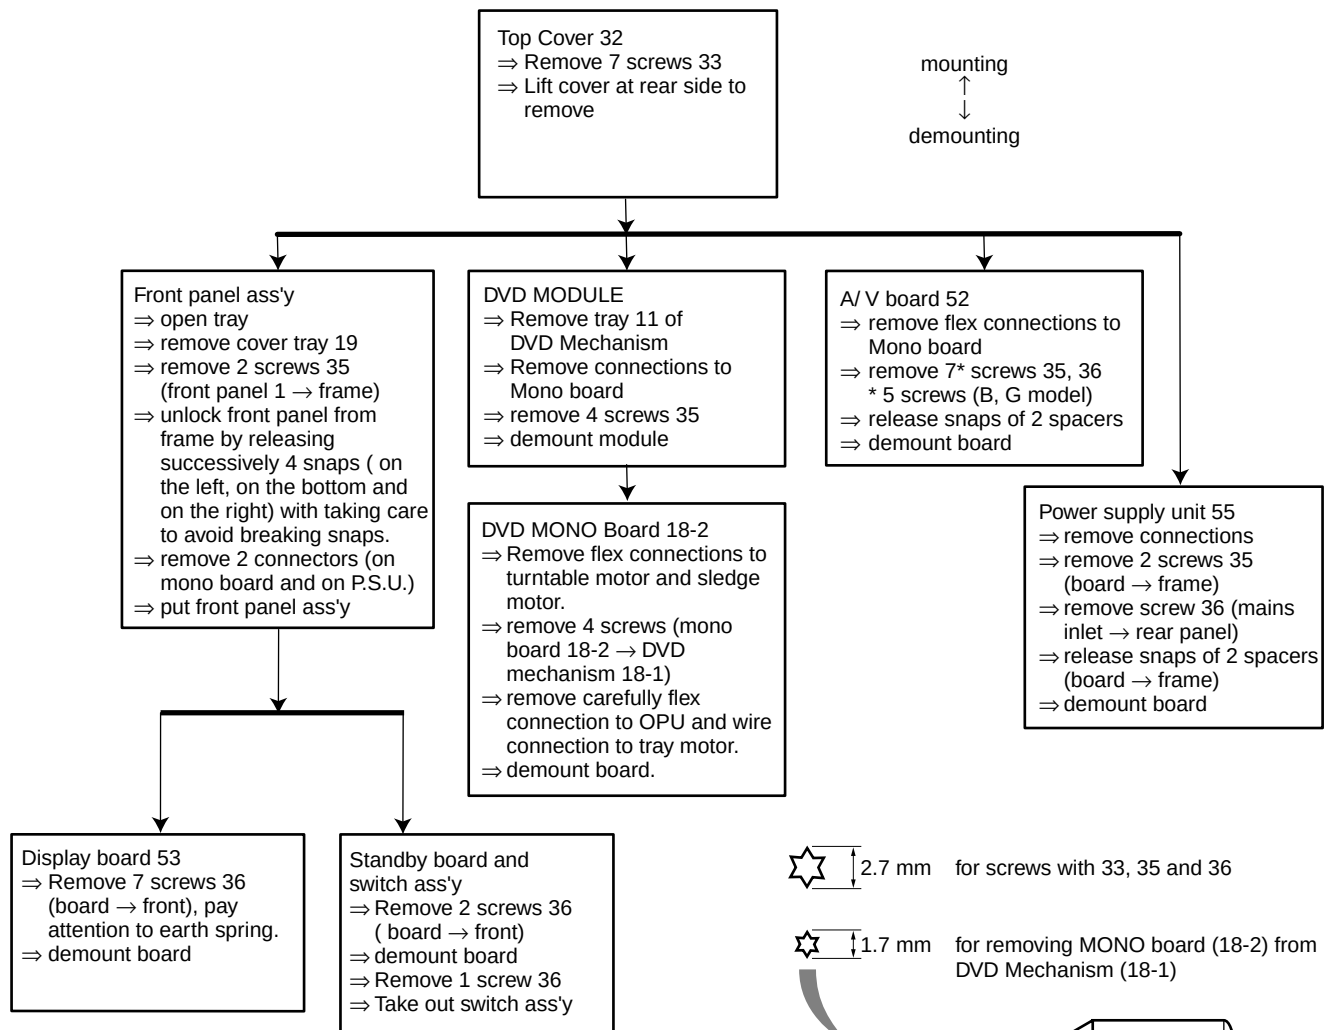

● The way to remove tray

1. Push left end of the lever under the tray toward the right by using screwdriver, move the tray by pulling it forward. (Fig. 1)
2. While lifting up the lever (①), move the left side of the tray by pulling it forward (②). (Fig. 2)
3. While lifting up the tray (③), remove the tray by pulling it forward (④). (Fig. 2)

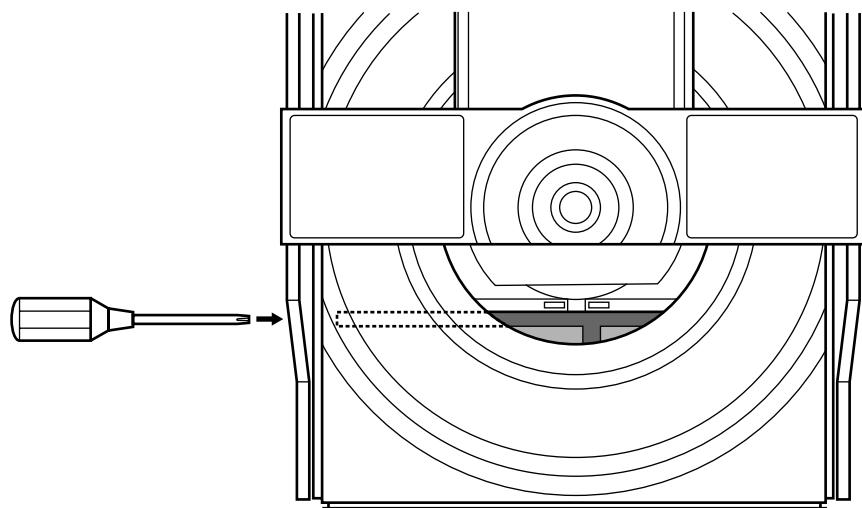


Fig. 1

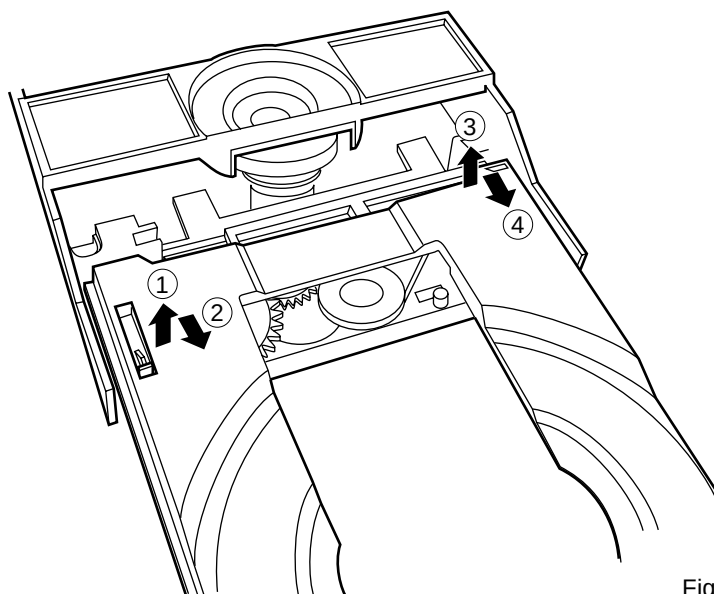


Fig. 2

■ SERVICE HINTS

Diagnostic software

In chapter "Diagnostic software", some tests are referring to the SCART functionality.

These tests are for sets with RGB-output.

For sets without RGB-output, no SCART connector is mounted.

In these sets, the SCART tests will automatically be skipped.

■ DIAGNOSTIC SOFTWARE : SCRIPT INTERFACES

1. DEALER SCRIPT

1.1 Purpose of Dealer Script


The dealer script can give a diagnosis on a standalone DVD player; no other equipment is needed to perform a number of hardware tests to check if the DVD player is faulty. The diagnosis is simply a "error" or "pass" message; no indication is given of faulty hardware modules. Only tests within the scope of the diagnostic software will be executed hence only faults within this scope can be detected.

1.2 Contents of Dealer Script

The dealer script executes all diagnostic nuclei that do not need any user interaction and are meaningful on a standalone DVD player.

The nuclei called in the dealer script are the following (the number after each nucleus name corresponds with the number being on the local display when the nucleus is executed during the dealer script):

Nucleus		Description
VideoColSetupComm	9	Checks the I2C interface with the RGB video processor on the Audio/Video board (only for DVD players with RGB video processor).
VideoScartSwComm	8	Checks the I2C interface with the scart switch on the Audio/Video board
PapChksFl	7	Calculate and verify checksum of FLASH memory.
PapDramWrR	6	Pattern test of all locations in the DRAM(s).
PapI2cDisp	5	Checks the I2C interface with the slave processor on the display PCB.
PapS2bEcho	4	Checks the I2C interface to the basic engine.
PapI2cNvram	3	Checks the I2C interface with the NVRAM.
PapNvramWrR	2	Pattern test of all locations in the NVRAM
CompSdramWrR	1	Pattern test of all locations in the SDRAM(s).

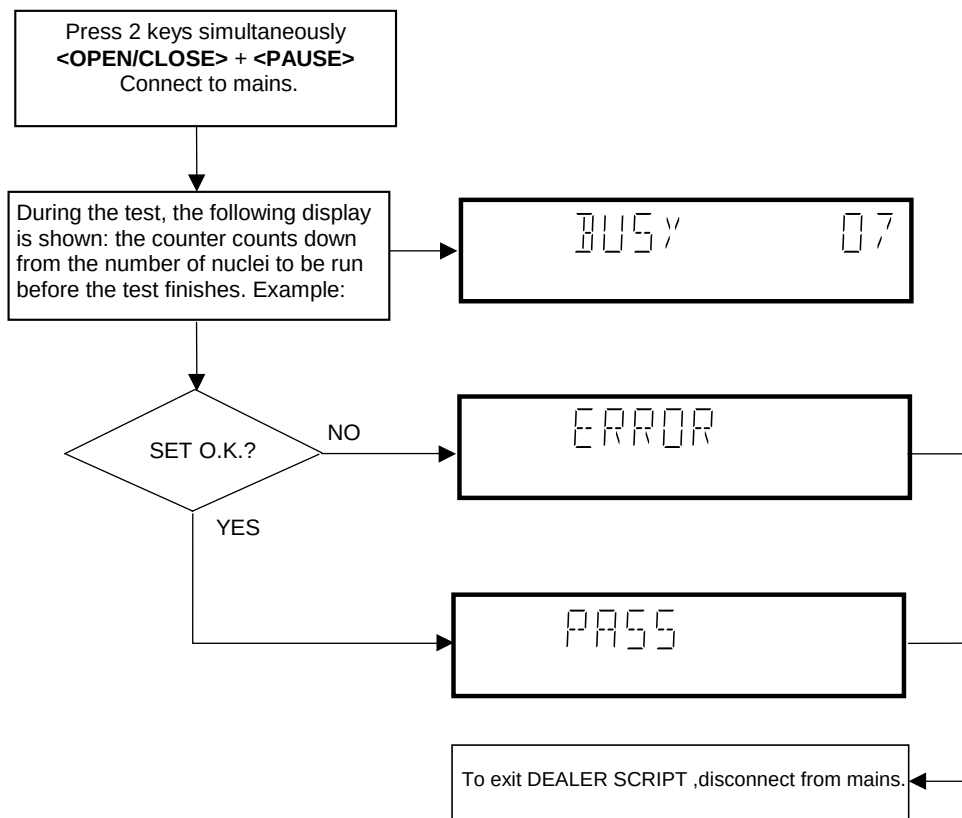

2. PLAYER SCRIPT

2.1 Purpose of Player Script

The Player script will give the opportunity to perform a test that will determine which of the DVD player's modules are faulty, to read the error log and error bits and to perform an endurance loop test. To successfully perform the tests, the DVD player must be connected to a TV set to check the output of a number of nuclei. For DVDv2b a multi-channel amplifier, a set of 6 boxes and an external video source are necessary to test. To be able to check results of certain nuclei, the player script expects some interaction of the user (i.e. to approve a test picture or a test sound). Some nuclei (e.g. nuclei that test functionality of the Basic Engine module) require that the DVD player itself is opened, to enable the user to observe moving parts and approve their movement visually. Only tests within the scope of the diagnostic software will be executed hence only faults within this scope can be detected.

2.2 Contents of Player Script

The player script contains all nuclei that are useful on a DVD player that is connected to a TV-set and help to determine which module of the DVD player is faulty, as well as to read out the contents of the error logs.


2.3 Structure of Player Script

The player script consists of a set of nuclei testing the three hardware modules in the DVD player: the Display PWB, the Digital PWB and the Basic Engine.

Nuclei run by the player test need some user interaction; in the next paragraph this interaction is described. The player test is done in two phases:

1. Interactive tests: this part of the player test depends strongly on user interaction and input to determine nucleus results and to progress through the full test. Reading the error log and error bits information can be useful to determine any errors that occurred recently during normal operation of the DVD player.
2. The loop test will perform the same nuclei as the dealer test, but it will loop through the list of nuclei indefinitely.

2.4 Survey

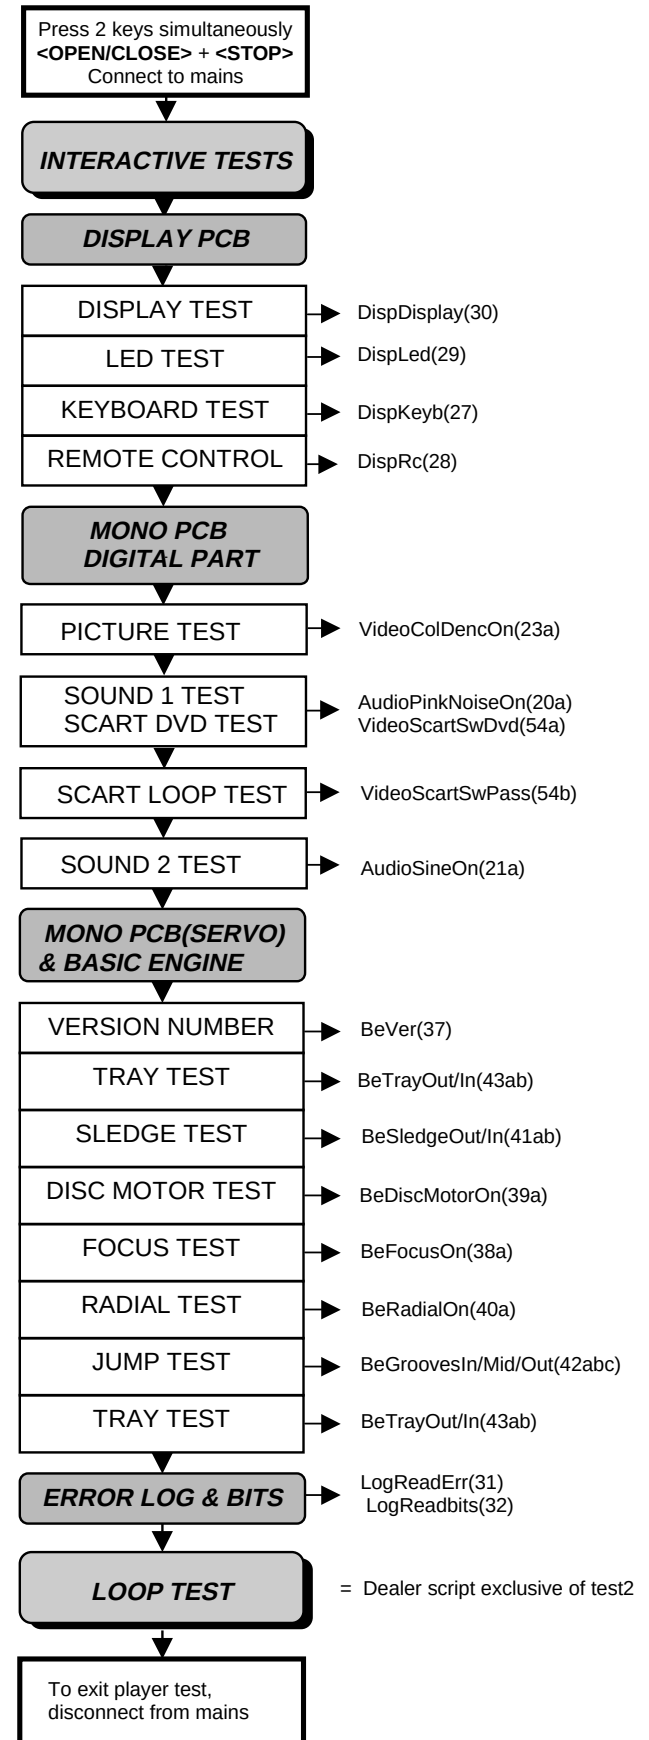

■ INTERACTIVE TESTS

1. DISPLAY PCB

1.1 DISPLAY TEST

The display test is performed by nucleus DispDisplay. By putting a series of test patterns on the local display, the local display is tested. To step through all different patterns, the user must either press PLAY (pattern is ok) or PAUSE (pattern was incorrect) to proceed to the next pattern. The display of patterns is continued in a cyclic manner until the user presses NEXT. If the user presses NEXT before all display patterns are tested, the DispDisplay nucleus will return TRUE (display test successful).

1.2 LED TEST

The LED(s) on the DVD player is (are) tested by nucleus DispLed. The user must check if the LED(s) is (are) lighted; if it is, press PLAY, if it is not, press PAUSE. By pressing NEXT the script will proceed to the next test. If the user presses NEXT before PLAY or PAUSE, the DispLed nucleus will return TRUE (LED test successful).

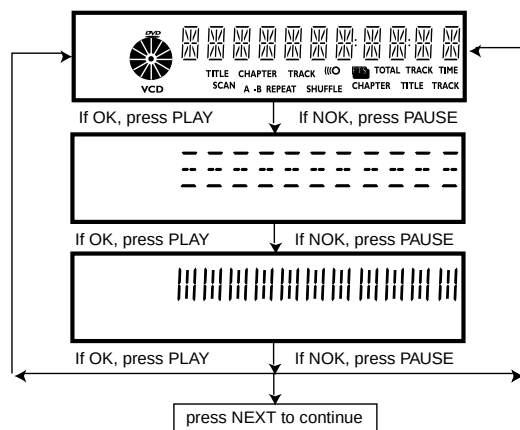


Figure 1

1.3 KEYBOARD TEST

The keyboard of the DVD player is tested by nucleus DispKeyb. The user is expected to press all keys on the local keyboard once. The code of the key pressed is shown on the local display (1 hexadecimal digit) immediately followed by a (hexadecimal) number indicating how many times that key has been pressed. Example of the local display during this test:

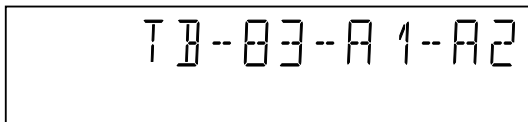


Figure 2

The key-codes displayed on the local display will scroll from right to left when the display gets full, the text "tb-" will remain on display.

key id.	key
0	PLAY
1	NEXT
2	PREVIOUS
3	PAUSE
4	STOP
5	OPEN / CLOSE
A	POWER (B, G models)

Figure 3

If any keys are detected more than once (due to hardware error), the key-code is displayed twice (or more), with the second digit increased by 1.

If the user does not press all keys minimally once (in any order), the DispKeys nucleus will return FALSE and cause an error in the overall result of the player script.

The user can leave the keyboard test by pressing the NEXT key on the local display of the DVD player for at least one full second.

The result of the keyboard test is shown on local display as follows:

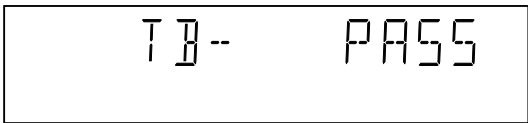


Figure 4

Or

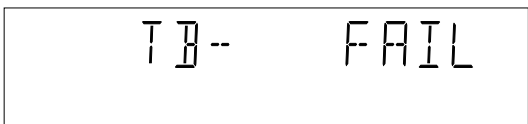


Figure 5

Pressing NEXT on the local keyboard again will proceed to the next text.

1.4 REMOTE CONTROL TEST

The remote control of the DVD player is tested by nucleus DispRc. The user must press any key on the remote control just once. The codes of the key pressed will be shown on the local display in hexadecimal format. Example:

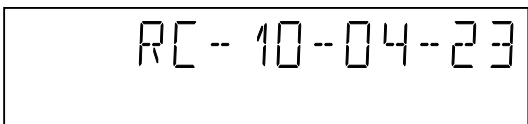


Figure 6

In this example 23 is the hexadecimal code of the pressed RC key. The user can leave the remote-control test by pressing NEXT on the local keyboard of the DVD player. The remote control test is successful if a code was received before the user pressed the NEXT key; pressing the NEXT key before pressing a key on the remote control gives an error in the remote control test (note that the remote control test will also fail if a key on the remote control was pressed but no code was received). The remote control test does not check upon the contents of the received code, that is it will not be checked if the received code matches the key pressed. If desired, the user can manually check this code by using a code-table for the remote control key-codes.

RC Key id	Hexadecimal code
STANDBY	C
STOP	31
PLAY	2C
PLAY BACKWARD	2D
PAUSE	30
STEP FORWARD	F6
STEP BACKWARD	F5
FORWARD	28
FORWARD 4X	DF
FORWARD 8X	E0
BACKWARD	29
BACKWARD 4X	DE
BACKWARD 8X	DD
SLOW	22
SLOW 2	D8
SLOW BACKWARD	23
SLOW BACKWARD 2	DB
NEXT	20
PREVIOUS	21
CURSOR UP	58
CURSOR DOWN	59
CURSOR LEFT	5A
CURSOR RIGHT	5B
OK	5C
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
TITLE/CHP	C8
ANGLE	85
AUDIO	4E
SUBTITLES	4B
SUBTITLE ON/OFF	E3
ROOT MENU	54
TITLE MENU	71
MENU	D1
SETUP MENU	82
ON SCREEN	F
RETURN	83
RESUME	D7
SCAN	2A
SHUFFLE	1C
REPEAT	1D
A/B REPEAT	3B
TOGGLE SCART	43
OPEN/CLOSE	42
FTS	FB
KARAOKE	E4
OPTION	FA
ZOOM	F7

Figure 7

After pressing NEXT, the result of the remote control test is displayed on the local display of the DVD player as follows:

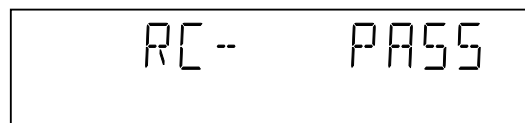


Figure 8

Or

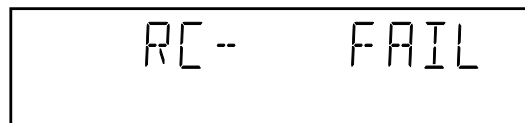


Figure 9

Pressing NEXT on the local keyboard again will proceed to the next test.

2 MONO PCB DIGITAL PART

2.1 PICTURE TEST

The picture test is performed by putting a predefined picture (colour bar) on the display (nucleus VideoColDencOn) and asking the user for confirmation. The display shows the following message:

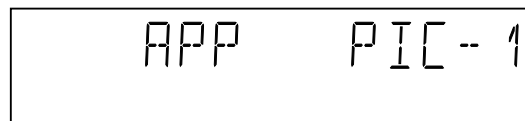


Figure 10

By pressing PLAY, the user confirms the test; pressing PAUSE will indicate the picture was invisible or incorrect. Pressing NEXT will proceed to the next test

2.2 SOUND 1 & SCART DVD TEST

The first soundtest is performed by starting a pink noise sound that needs confirmation from the user (nucleus AudioPinkNoiseOn); the display shows the following message very shortly:

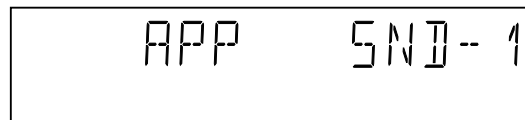


Figure 11

This sound will only be audible from version cut3.1 of Sti5505(item7503 on mono board) onwards. After starting up sound 1, SCART loop-trough will be simultaneously active during this test. SCART loop-trough will be measured with the aid of an external video source. When entering the SCART loop-trough, the local display indicates:

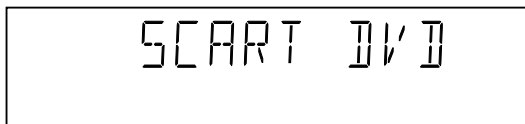


Figure 12

On the TV screen, a colour bar (generated by nucleus VideoColDencOn) is visual and the internally generated pinknoise is audible. By pressing PLAY, the user confirms the test; pressing PAUSE will indicate the sound was inaudible or incorrect. Pressing NEXT will proceed to the next test; if the user presses NEXT without pressing PLAY or PAUSE first, the result of this test will be TRUE (sound ok). By pressing the NEXT button, there will be switched over to the external source, this must become now visible on the TV screen (using the SCART). The local display indicates:

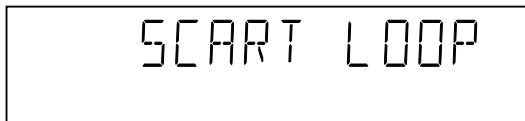


Figure 13

The internally generated colour bar is still available on the CVBS and Y/C outputs. And the pinknoise-signal is still available on the cinch audio outputs. By pressing the PREV button, the internal generated colour bar becomes visual again.

The test can be left by pressing the NEXT key for more than one second.

2.3 SOUND 2 TEST

The second soundtest is performed by producing a sine sound (nucleus AudioSineOn). The signal can be stopped by pressing the STOP-key. The display shows the following message:

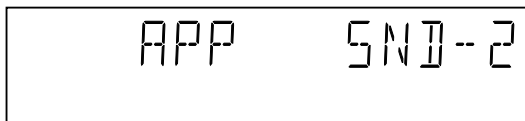


Figure 14

By pressing PLAY, the user confirms the test; pressing PAUSE will indicate that something went wrong. Pressing NEXT will proceed to the next; if the user presses NEXT without pressing PLAY or PAUSE first, the result of this test will be TRUE (sound ok).

3 BASIC ENGINE

note) Basic engine means DVD mechanism.

3.1 VERSION NUMBER

In the basic engine tests, the version number of the Basic Engine will be shown first, as the following example:

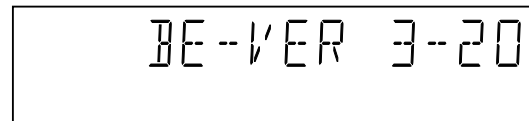


Figure 15

By pressing the NEXT key, the Basic Engine tests are started.

3.2 TRAY TEST

First, the tray is tested. The purpose of this test is also to give the user the opportunity to put a disc in the tray of the DVD player. Some tests on the Basic Engine require that a disc (e.g. DVD MPTD test disc) is present in the player. At the end of the Basic Engine tests, this tray test will be repeated solely to enable the user to remove the disc in the tray. The local display looks as follows:

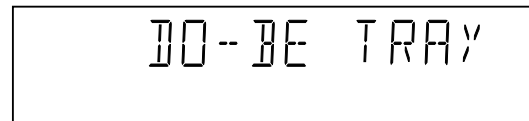


Figure 16

By pressing PLAY or PAUSE, the user can toggle the position of the tray. Note that this test will not contribute to the test result of the Basic Engine. Pressing NEXT will proceed to the next test, after the tray has been closed (by the software) if it was open.

3.3 SLEDGE TEST(visual test)

The second Basic Engine test tests the sledge; the user can move the sledge as many times as desired by using PLAY (nucleus BeSledgeOut) and PAUSE (nucleus BeSledgeIn).

Pressing NEXT on the local keyboard proceeds to the next test.

Note that this test will not contribute to the test result of the Basic Engine. The local display looks as follows during the sledge test:

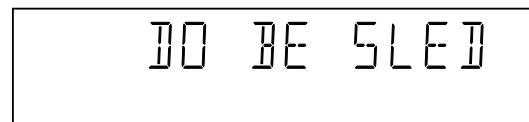
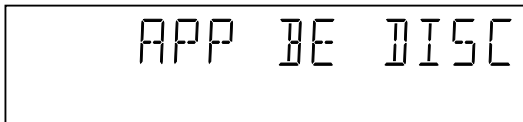


Figure 17

3.4 DISC MOTOR TEST(visual test)

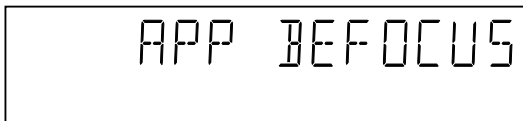
The third Basic Engine test tests the disc motor (nucleus BeDiscMotorOn); the local display looks as follows:

**Figure 18**

By pressing PLAY, the user confirms that the disc motor is running; pressing PAUSE indicates the disc motor does not work. Pressing NEXT proceeds to the next test, after a reset of the disc motor (nucleus BeDiscMotorOff). If the user presses NEXT before pressing PLAY or PAUSE, the result of this test will be TRUE (disc motor is running).

3.5 FOCUS TEST(visual test)

The fourth Basic Engine test tests the focussing; first focussing is turned on by calling nucleus BeFocusOn. The display looks as follows:


**Figure 19**

By pressing PLAY, the user confirms that the focussing was succesful; pressing PAUSE indicates a focussing failure.

Pressing NEXT proceeds to the next test after a reset of the focussing (nucleus BeFocusOff); if NEXT is pressed before PLAY or PAUSE, the result of this test will be TRUE (focus succesful).

3.6 RADIAL TEST(visual & listening test)

The fifth Basic Engine test tests the radial functionality (nucleus BeRadialOn); the local display looks as follows:

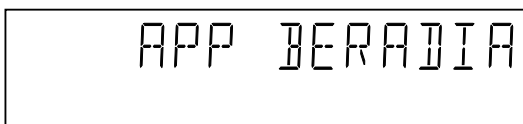**Figure 20**


By pressing PLAY, the user confirms that the radial function worked; pressing PAUSE indicates the function does not work.

Pressing NEXT proceeds to the next test, after a reset of the radial (nucleus BeRadialOff). If the user presses NEXT before pressing PLAY or PAUSE, the result of this test will be TRUE (radial succesful).

3.7 JUMP TEST(listening test)

The sixth and last Basic Engine test tests the jumping by calling nuclei BeGroovesIn, BeGroovesMid and BeGroovesOut.

During this test, the local display looks as follows:

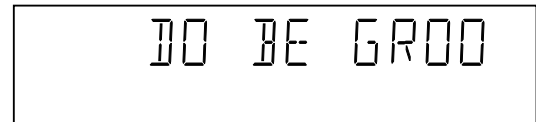
**Figure 21**

The user can switch between the three different types of groove settings by pressing PLAY (forward to next nucleus in the list In-Mid-Out) or PAUSE (backward in the list In-Mid-Out).

This is done in a cyclic manner; note that this test will not contribute to the test result of the Basic Engine. Pressing NEXT proceeds to the next test, after the disc motor has been shut off with a call to nucleus BeDiscMotorOff.

3.8 TRAY TEST

As a last action for the Basic Engine tests, the tray test is repeated. The local display looks as follows:

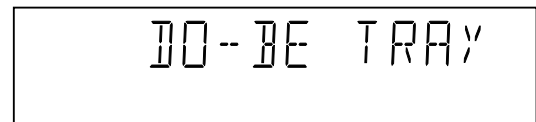**Figure 22**

This test is meant to give the user the opportunity to remove the disc in the tray. The tray position can be toggled using the PLAY and PAUSE key. The tray will be closed (by the software, if it is open) before proceeding to the next test when the user presses the NEXT key.

3.9 ERROR LOG

Reading the error log and error bits information can be useful to determine any errors that occurred recently during normal operation of the DVD player. Reading the error log is done by nucleus LogReadErr. The display during the errorlog readout looks as follows :

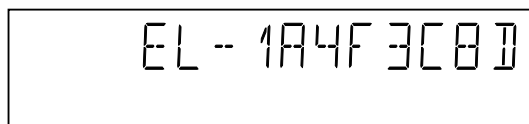


Figure 23

By pressing PLAY or PAUSE, the user can move forward or backward (respectively) through the logged error codes. The highlighted number indicates which errorcode is currently on display (in the example above, errorcode number 4 is displayed). If "0000" is displayed at all positions, the error log is empty. Display of the logged errors is done in a cyclic manner.

The errorcode with the lowest highlighted number is the most recent. By pressing NEXT on the local keyboard, the user can proceed to the next test.

3.10 ERROR BITS

Reading the error bits is done by nucleus LogReadBits. The display during the errorbits readout looks as follows:




Figure 24

Only the set errorbits will be shown by their (decimal) number.

Refer to the appropriate documentation for the explanation of each bit number. If the display only shows "EB-0", no error bits were set. By pressing NEXT, the user can continue to the next test.

See table below:

Error log / bits table	Read ERROR LOG in player script	Read ERROR BITS in player script
Basic engine errors	Value:	Value:
Command to the Basic Engine not allowed in this state or unknown command	150101	8
Parameter(s) from the command to the Basic Engine is not valid	150102	7
Sledge could not be moved to the inner home position	150103	6
Focus failure	150104	5
Turntable motor speed could not be reached within timeout	150105	4
Radial servo could not get on track on the disc	150106	3
PLL could not lock in the accessing or tracking state	150107	2
Subcode or sector information could not be read	150108	1
requested subcode could not be found	150109	16
Tray could not be closed or opened completely	15010A	15
TOC could not be read within timeout	15010B	14
The requested seek on the disc could not be executed	15010C	13
A requested lead-in is not on the disc	15010D	12
A non existing burst cutting area is requested	15010E	11
S2b communication error	1501F0	10
S2b communication error	1501F1	9
S2b communication error	1501F3	24
S2b communication error	1501F4	23
S2b communication error	1501F5	22
Digital PWB errors		
Communication error with the Sti 5505	90000	32
Communication error with the Sti 5505	90001	31
Disply processor errors		
Communication error with the display processor	190000	40

4. LOOP TEST

At the start of the loop test, the display will show the result of the interactive player test:

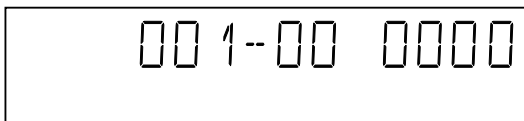


Figure 25

The left side of the display contains a 3-digit code, which can have a value between 000 and 111. These values are to be interpreted as follows:

Displayed Value	Indication for each module		
	Basic Engine	Mono PCB	Display PCB
000	ok	ok	ok
001	ok	ok	faulty
010	ok	faulty	ok
011	ok	faulty	faulty
100	faulty	ok	ok
101	faulty	ok	faulty
110	faulty	faulty	ok
111	faulty	faulty	faulty

Figure 26

The loop test will perform the same nuclei as the dealer test, but it will loop through the list of nuclei indefinitely. The display of the DVD player will display not only the three digits indicating correct/faulty modules and the last found error code (as mentioned, faults are detected as far as they can be within the scope of the diagnostic software), but also a loop counter indicating how many times the loop has been gone through.

Example:

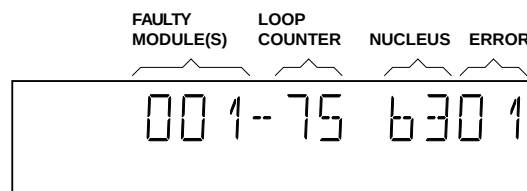


Figure 27

The number after the hyphen indicates the number of times the loop test has been performed; the 4 digits at the right side of the display show the last error that was found when running the loop test: the leftmost two digits of this code indicate which nucleus resulted in a fault; the rightmost two digits refer to the faultcode within that nucleus. For further explanation of this error code, see list of error codes below.

ERROR CODES LOOP TEST

ERROR CODE	NUCLEUS NUMBER	ERROR DESCRIPTION
0601	6	Calculated checksum of FLASH is not correct
0901	9	The DVD DRAM is faulty
1104	11	I2C bus busy before start
1102		NVRAM access time-out
1103		No NVRAM Acknowledge
1104		NVRAM reply time-out
1201	12	I2C bus busy
1202		I2C bus not working
1203		Slave controller not responding
1204		Slave response is not correct
1301	13	Parity error from basic engine to serial
1302		Parity error from serial to basic engine
1303		No communication between serial and basic engine
1304		Communication time-out error
1601	16	The SDRAM is faulty

Figure 28

5. Servicing DVD module and MONO board

5.1 Reset of Virgin Mode

After the player has been powered up for test by the dealer, it would have gone through the Virgin Mode. It is possible to reset the settings made during that mode before the delivery of player to the customer. This can be done as shown in the following diagram:

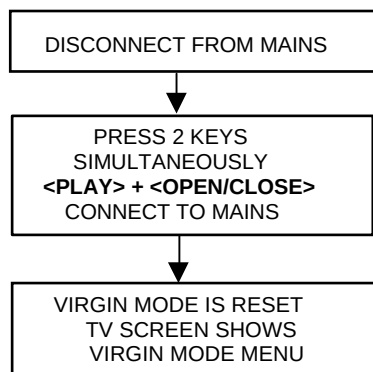


Figure 29

5.2 Trade Mode

When the player is in Trade Mode, the player cannot be controlled by means of the front key buttons, but only by means of the remote control.

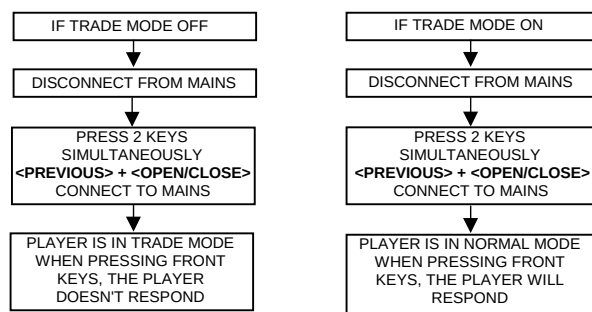


Figure 30

TEST INSTRUCTIONS DISPLAY BOARD

1. Display board

1.1 Introduction

These test instructions are written for all versions of the display PCB.

The contents of the PCB can be split up into next blocks:

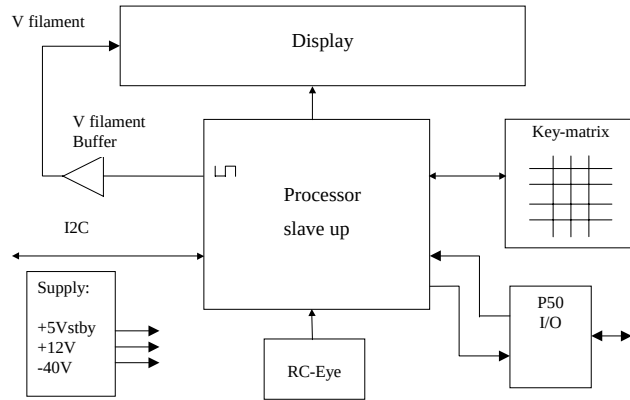


Figure 1

1.2 Functionality description:

The essential component of the display PCB is the μP (slave).

This slave works on an 8MHz resonator and has a reset circuit that is triggered by the +5Vstby. After the reset pulse, the standby control line will release the reset of the host μP . This host μP will then initialize the slave. In addition, when going to stand-by, the slave will put the host μP in reset. When the slave receives the right IR or key code to leave the standby mode, the reset of the host μP will be released.

Other slave functions are:

- Square signal generator to generate the filament voltage, which is required for an AC FTD.
- Generating the grid and segment scanning for the FTD.
- Generating a scanning grid for the keys (separated from display scanning).
- Having inputs for RC (RC5 and RC6) and P50 (P50 controller is built in).

1.3 Reset

Check next reset timing with an oscilloscope at pin 10 of the microprocessor.

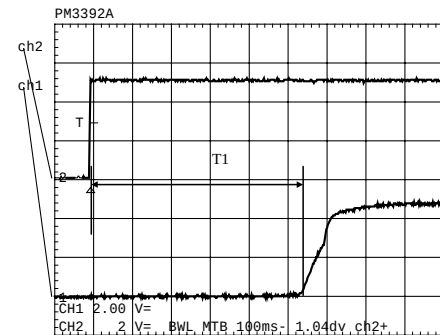


Figure 2

Timing: $400\text{msec} < T1 < 700\text{msec}$.

CH1: +5Vstby voltage at power on.

CH2: Voltage at pin 10.

1.4 Display steering

Check next timing and level for all grid-lines (G1 r G14).

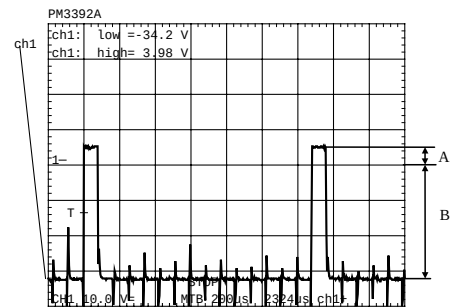


Figure 3

1. Check level A: +4V5 +/-10% for grid lines 1 => 11
2. Check level A: +4V0 +/-10% for grid lines 12 => 14
3. Check level B: -33V +/-10%
4. Check timing and levels of segment-lines P1 => P10:

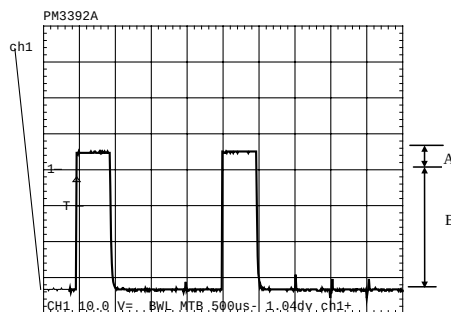


Figure 4

Level A: +4V5 +/-10%

Level B: -33V +/-10%

The data on these segment lines depend on the characters that are displayed.

The characters can be set by sending I2C commands to the display.

See the Slave URS how to send a display command.

1.5 Key-matrix

Connect a extra 10kpull-up resistor to pin 36 en 37 of the μ P and check next matrix scanning at these pins.

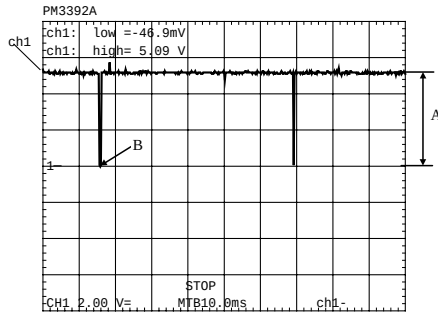


Figure 5

Level A: 5.0V +/-7%

Level B: 0V +/-200mV

Check matrix scanning from pin 26 until 33 of the μ P.

The results should be the same as the diagram above.

1.6 I.R. receiver

Check at pin 23 of the μ P if this line switches from low (< 0.3V) to high (> 4.5V), while pressing a key on a Philips RC5 or RC6 remote control.

1.7 Karaoke interface

The karaoke interface (4 lines) is a single direction communication.

This means that it consists of four μ P output lines.

The interface can be checked by setting or resetting these output-ports via the I2C bus.

Send next command via the I2C bus:

Address	: 0x70
Command byte	: 0x24
Data byte	: xxxxabcd
Where	: a = Karaoke reset.
	: b = Karaoke data.
	: c = Karaoke clock.
	: d = Karaoke strobe.

1.8 P50 interface

P50 is a bi-directional serial interface, which is used for communication between video equipment. For European sets, this communication goes via pin 10 of the scart-bus. In other regions, it can be a cinch bus at the back of the set.


1. Keep the μ P in reset by short-circuiting emitter and collector of transistor 7108, via resistor 3100 and 3104 transistor 7101 is switched on.
2. Check the voltage at the P50 output connector 1118-5: < 200mV.

When the reset is released the μ P output-pin becomes low and transistor 7101 is switched off.

1. Check the voltage at the P50 output connector 1118-5: 4.9V +/-5%.
2. Check also the μ P P50 input (μ P pin 20): 5V +/-5%.
3. Connect the P50 line (connector 1118-5) to ground.
4. Check again the μ P P50 input (μ P pin 20): <0.3V.

■ TROUBLESHOOTING

Display board

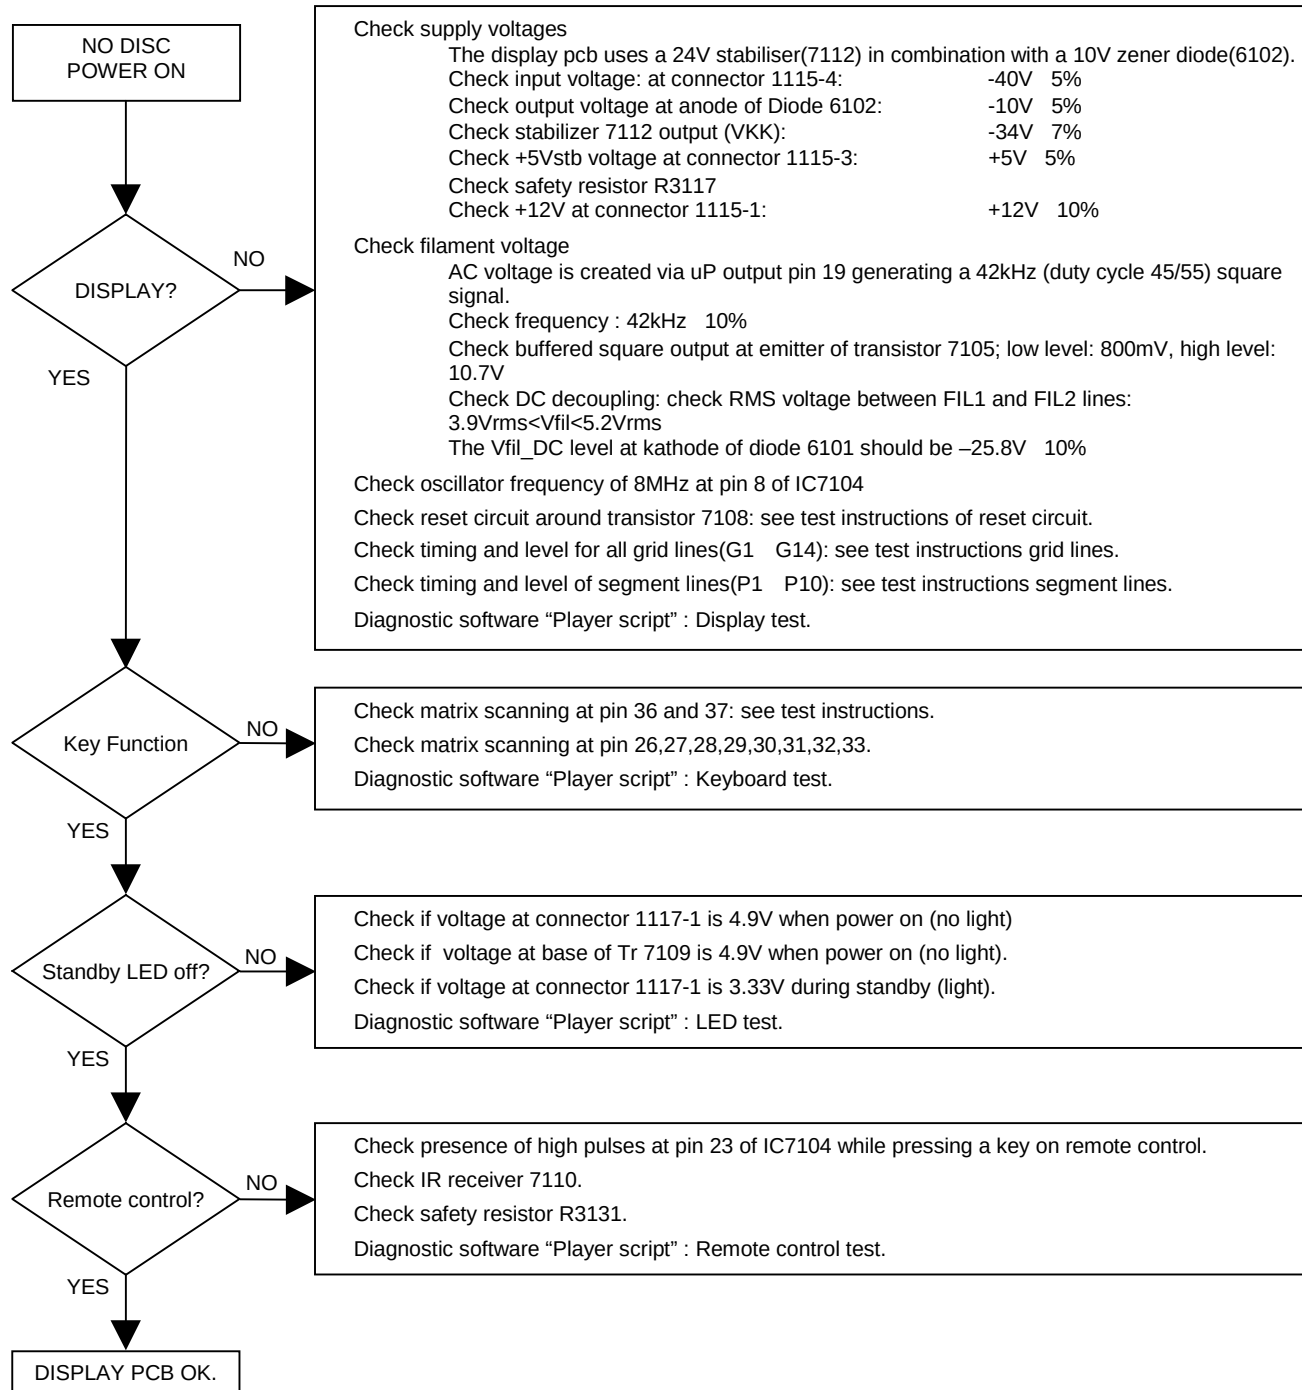




A/V board (B, G models)

Testing of A/ V board can be done using diagnostic software “Player script”.


Mono board is used to generate a sinus with the soundtest SND- 2 or a VIDEO signal with the picture test PIC- 1.


See description in chapter “Diagnostic Software : Script Interfaces”

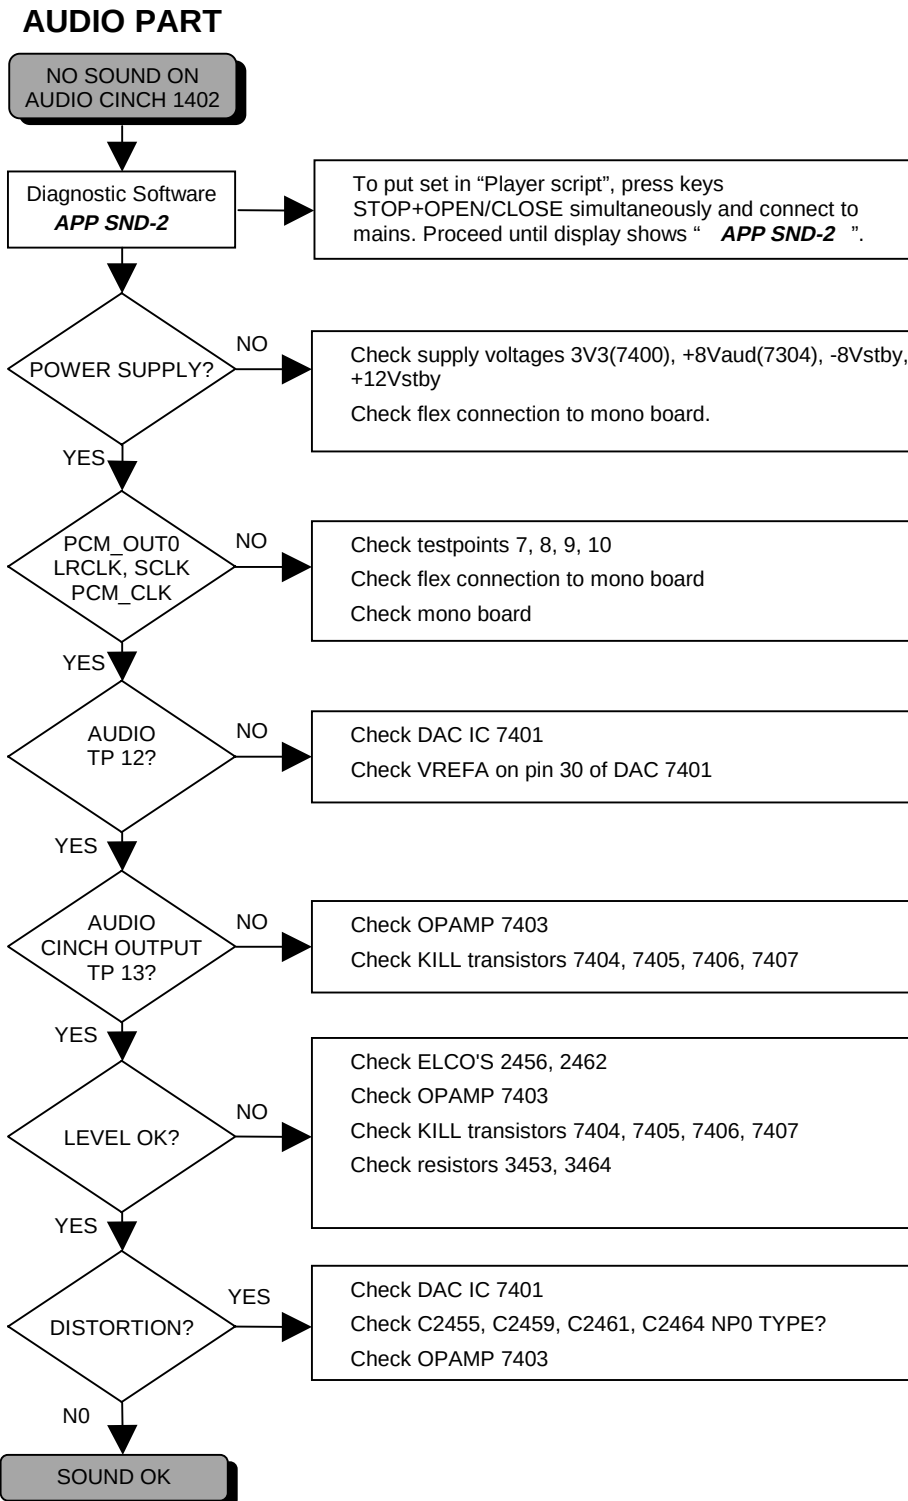


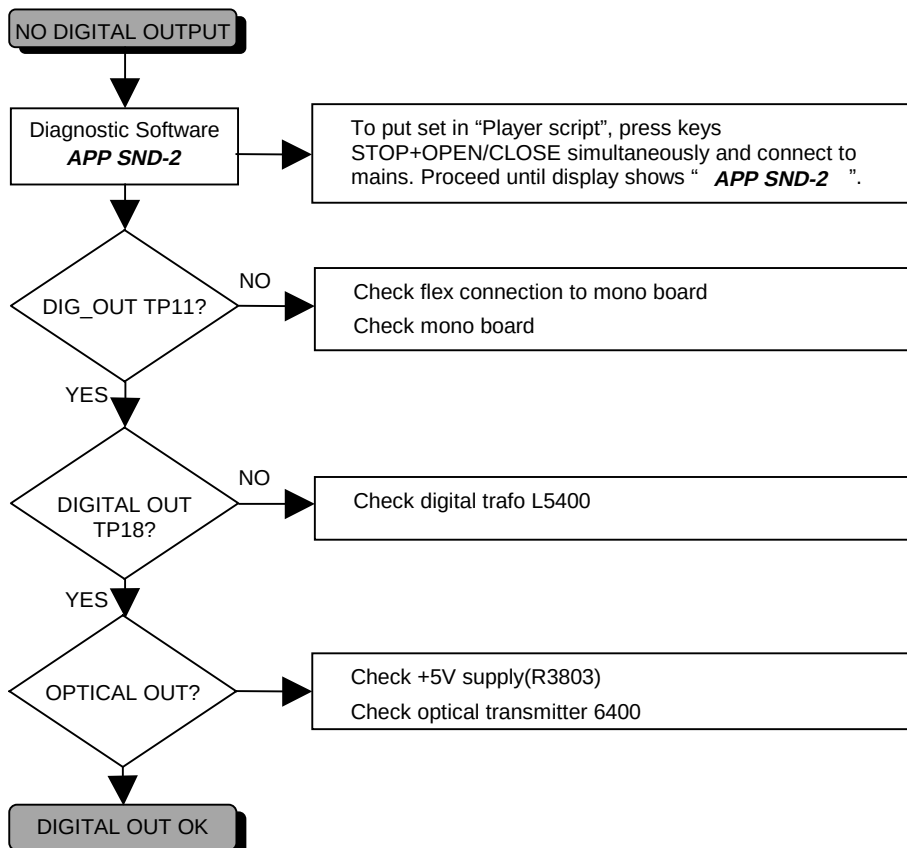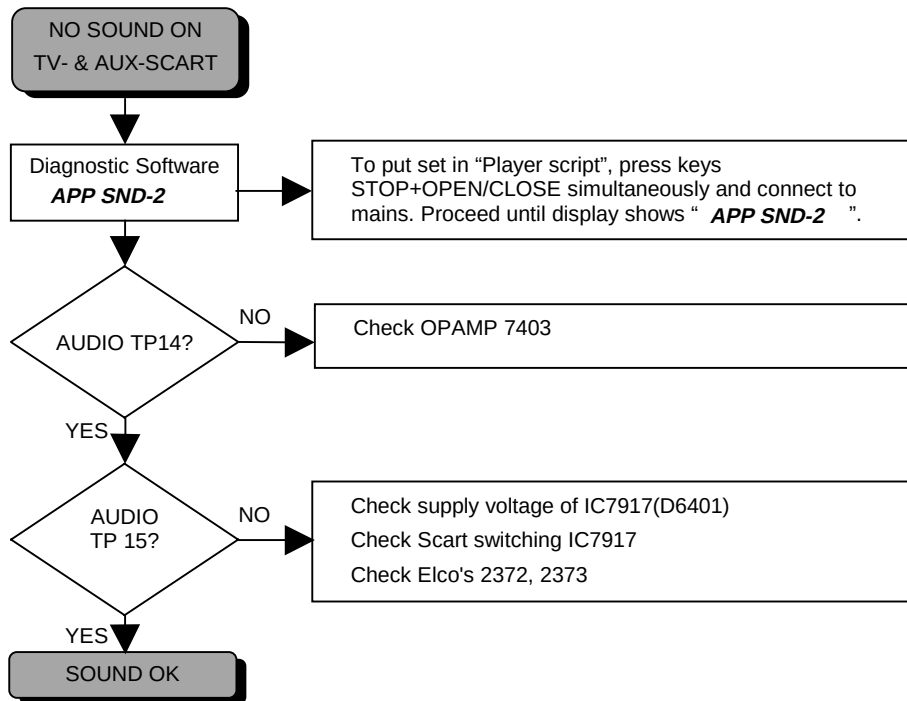


VIDEO PART

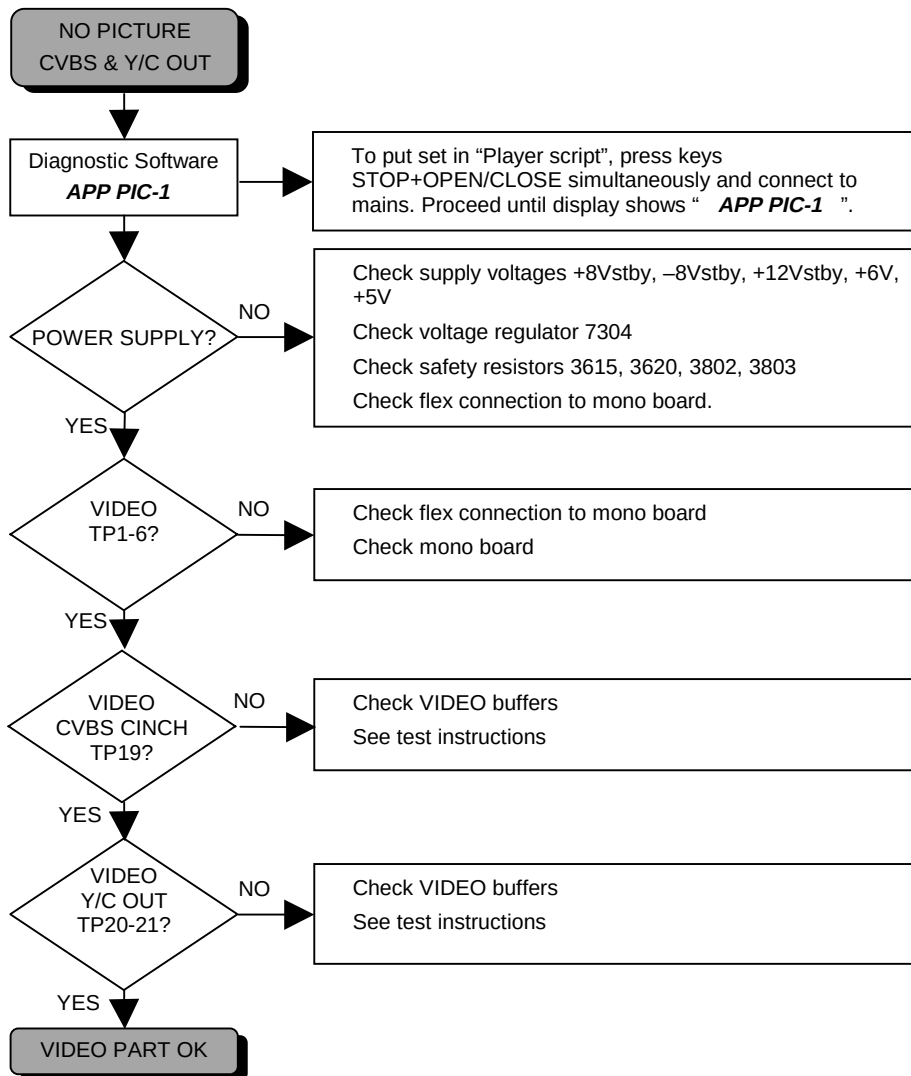

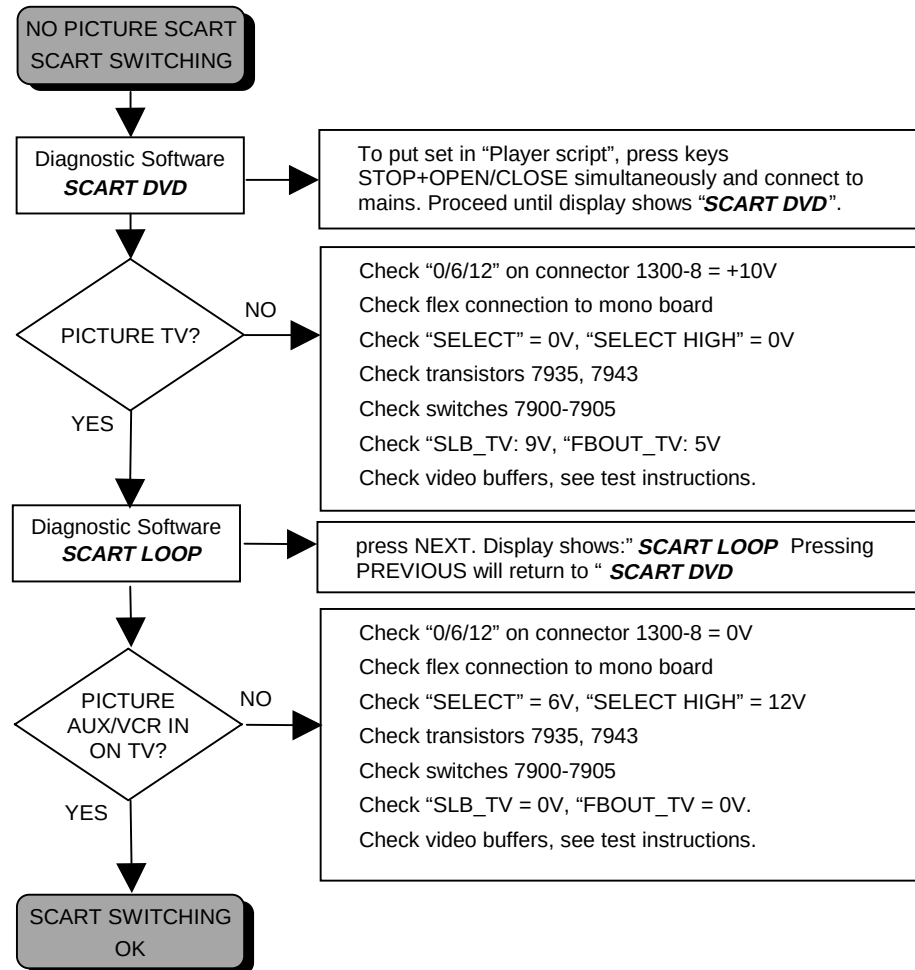





TP 1 : video B

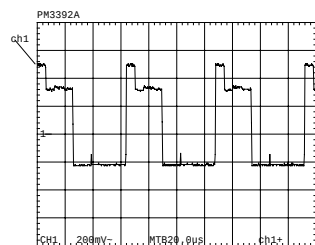


TP 2 : video G

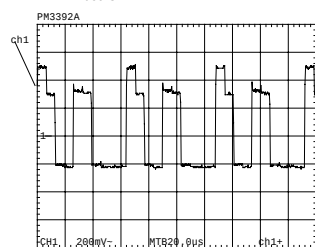


TP 3 : video R




TP 4 : CVBS

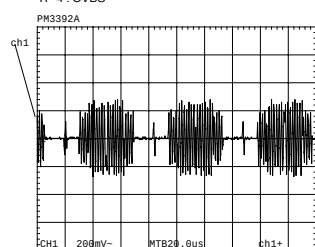


TP 5 : C_ENC

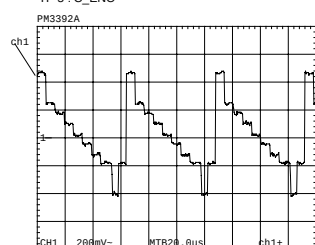


TP 6 : Y_ENC

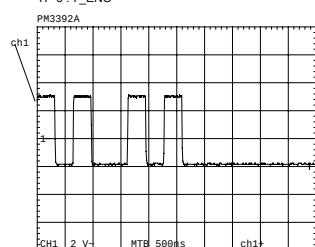


TP 7 : PCM_OUT0

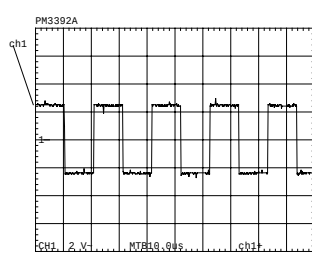


TP 8: LRCK

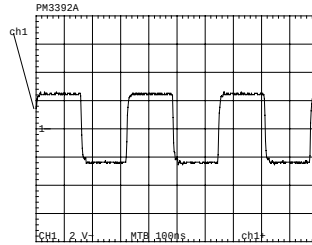


TP 9: SCLK

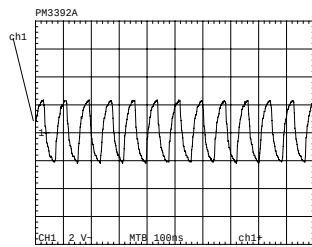


TP 10: PCM_CLK




TP 11: DIG_OUT




TP 12 : ANALOG OUTPUT DAC




TP 13 : ANALOG OUTPUT AUDIO CINCH

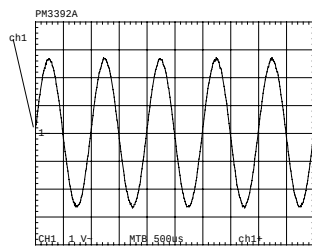


TP 14 : ANALOG OUTPUT AUDIO HP_R & HP_L

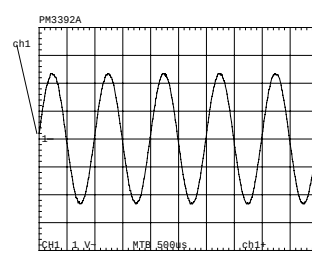


TP 15 : AUDIO SCART SWITCH OUTPUT

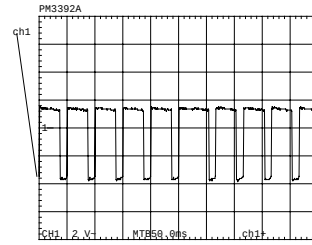


TP 16: SDA

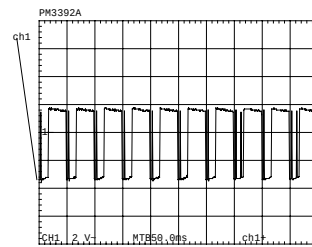


TP 17: SCL




TP 18: DIGITAL OUT

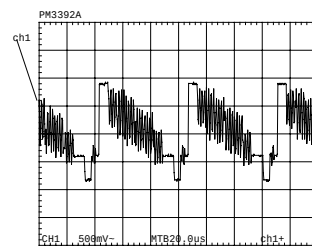

TP 19 : CVBS_OUT

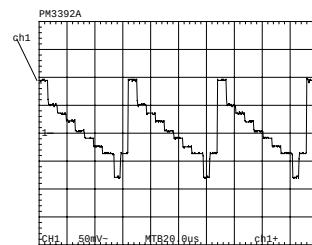

TP 20: Y_OUT

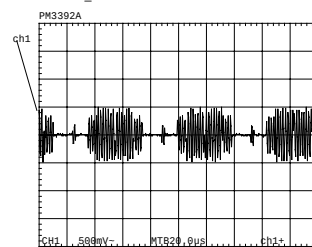

TP 21: C_OUT

■ TECHNICAL SPECIFICATIONS DVD MODULE

1. Connections

1.1 Connector 1600 : Supply input connector.

1. +3.3Vstby
2. +3.3Vstby
3. +5V
4. +5Vstby
5. Vreserved
6. GND
7. GND
8. GND
9. -8Vstby
10. Standby control line
11. +12Vstby
12. GND

1.2 Connector 1603 : A/V 1 connector.

1. P50
2. Blue Video
3. Green Video
4. GND
5. Red Video
6. CVBS
7. GND
8. Slow blanking scart
9. -8Vstby
10. +5V
11. +5V
12. Audio mute
13. GND
14. I2S data0 out
15. I2S wordselect
16. I2S bitclock
17. GND
18. I2S systemclock
19. Center_on
20. Kar_bypass
21. Kar_bypass
22. GND

1.3 Connector 1604 : A/V 2 connector.

1. GND
2. Hor. sync.
3. GND
4. I2S data 2 out
5. GND
6. I2S data 1 out
7. -8Vstby
8. I2C clock
9. +12Vstby
10. I2C data
11. Vreserved
12. +3.3V
13. GND
14. C video
15. GND
16. Y video

1.4 Connector 1501 : I2C interface connector.

1. I2C clock
2. GND
3. I2C data
4. Standby control line
5. P50

1.5 Connector 1602 : Service connector.

1. TXD
2. Service activation
3. RXD
4. Reserved for RTS
5. 5 : GND
6. Reserved for CTS
7. +5V

2. Signal specifications

This the specification of all signals as described under "Connections"

H = +5V $\pm$ 0.5V

h = 3.3V $\pm$ 0.3V

L = 0V $\pm$ 0.5V

I = 0V $\pm$ 0.3V

Stby	: If the set supports a "standby" function, all supply voltages marked with "stby" have to stay on during standby.
Standby control line	: HStandby mode : LOn mode.
P50	: Connection between front and A/V board, and can be used as P50 signal line. The signal is not connected to the module electronics.
Slow blanking scart	: This signal switches between : 0V (220output impedance) : 12Vstby/2 (455output impedance) : 12vstby (690output impedance)
Audio mute	: Can be used for audio mute transistors during stop or power on/off. : Mute on : +5Vstby : Mute off : -8Vstby via a 10k resistor.
I2S data0 out	: I2S front data output. : Level h/l
I2S wordselect / I2S bitclock	: I2S timing signals : Level h/l

I2S systemclock	: 256xFS audio systemclock.
	: Level H/L
Kar_bypass	: Bypasses the karaoke chip on the A/V board.
	: Bypass active H
	: Bypass off L
Center_on	: Switches the center audio to the scart output.
	: Center to scart h
	: L/R to scart l
SPDIF out	: Digital audio output
	: Level H/L
Hor. Sync	: Video Horizontal synchronisation
	: Level h/l
I2S data1 out	: I2S surround data output.
	: Level : h/l.
I2S data2 out	: I2S center/sub data output.
	: Level h/l.
I2C clock / I2C data	: I2C databus
	: Level : H/L
TXD / RXD / RTS / CTS	: Service UART to be connected direct to PC serial input.
	: Output levels H/L
	: Input levels RS232 compliant
Service activation	: Signal open Normal module start-up
	: Signal tied to GND Module start-up in service mode.
Vreserved	: Reserved in case the A/V board requires an extra supply voltage.
	: This supply is limited by a positive polarized 47uF/16V elco +100nF/16V.

3. Performance:

3.1 Digital output

CDDA/LPCM	: According IEC958
MPEG1 is converted to LPCM :	
MPEG2, AC3 audio.	: According IEC1937
DTS.	: According IEC61937 Amendment 1.
	: Digital output level is 0V / 5V with GND as reference. To meet the standards a decouple circuit is necessary.

3.2 I2S output

Accuracy	: Up to 24bit.
Sample rate	: 44.1kHz / 48kHz.
Standard	: Philips I2S output
Number of I2S outputs	: 3 (6 channel : Front / Surround / Center-Bass)
Deemphasis	: Already processed in module.
Audio source streams	: CDDA / MPEG1 / LPCM / MPEG2 / AC3
	: No DTS decoding.
Audio trick modes	: Dolby Pro Logic (multichannel downmix on front output)
	: 3D sound.

3.3 Analog output

The module has no analog audio output.	: The analog audio specification will be determined by the external DAC circuit.
--	--

3.4 Video.

Standards	: The video output standard will follow the source material.
	: The OSD standard is switchable between PAL or NTSC.
Outputs	: The module has 6 analog outputs (3 f o r m a t s) : Y / C C V B S RGB.
Specification.	: The output is fully according PQR3 IMS except
	: Output load > 1k to GND / Cap. load < 47pF.
	: Level 0.5Vpp with 100% white
	: DC-level Sync bottom = -0.65V ± 10%
	: Some specification points are significantly better than PQR3
	: SNR on all video outputs is better than 60dB.
	: Video bandwidth > 5MHz (± 3dB)


■ LIST OF ABBREVIATIONS


B	Buffered Video input Blue from DVD monoboard	Y_ENC	Buffered Luma input from DVD monoboard
BC_AUX	Blue or Chroma input from AUX-scart	YCVBSIN_AUX	Luma or CVBS input from AUX-scart
BC_TV	Blue or Chroma output to TV-scart	YCVBSIN_TV	Luma or CVBS input from TV-scart
C_ENC	Buffered Chroma input from DVD monoboard	YCVBSOUT_AUX	Luma or CVBS output to AUX-scart
CVBS	Buffered Composite video input from DVD monoboard	YCVBSOUT_TV	Luma or CVBS output to TV-scart
DC_OFF	Control signal to switch off -5Vstby and +12Vstby during standby	0/6/12	Scart switch control signal A/V board. 0V : loop through (AUX to TV), 6V : play 16:9 format, 12V : play 4:3 format
DIG_OUT	Digital out		
FBIN_AUX	Fast blanking input from AUX-scart		
FBOUT_TV	Fast blanking output to TV-scart		
G	Buffered Video input Green from DVD monoboard		
GIN_AUX	Video input Green from AUX-scart		
GOUT_TV	Video output Green to TV-scart		
HP_L	Audio output left to headphone and audio scart switch TEA6420		
HP_R	Audio output right to headphone and audio scart switch TEA6420		
KILL	Kill control signal for audio outputs and for soft mute of DAC		
LIN_AUX	Audio input left from AUX-scart		
LIN_TV	Audio input left from TV-scart		
LOUT_AUX	Audio output left to AUX-scart		
LOUT_TV	Audio output left to TV-scart		
LRCLK	Left/Right clock		
PCM_CLK	Audio system clock for DAC		
PCM_OUT0	Audio serial output data		
R	Buffered Video input Red from DVD monoboard		
RCIN_TV	Red or Chroma input from TV-scart		
RCOUT_TV	Red or Chroma output to TV-scart		
RIN_AUX	Audio input right from AUX-scart		
RIN_TV	Audio input right from TV-scart		
ROUT_AUX	Audio output right to AUX-scart		
ROUT_TV	Audio output right to TV-scart		
SCL	I2C bus clock		
SCLK	Audio serial bit clock		
SDA	I2C bus data		
SELECT	Control signal for video scart switches; high = TV ,low = AUX		
SELECT_HIGH	Control signal for switching fast blanking and slow blanking signals; high = TV, low = AUX		
SLB_AUX	Slow blanking control signal from AUX-scart		
SLB_TV	Slow blanking control signal to TV-scart		
STANDBY	Control signal from STI5505 used to switch off -5Vstby and +12Vstby during standby.		
STEREO_L	Audio cinch output left		
STEREO_R	Audio cinch output right		

■ IC DESCRIPTIONS

TZA1033

DVDALAS2plus Advanced Analog DVD Signal Processor and Laser Supply

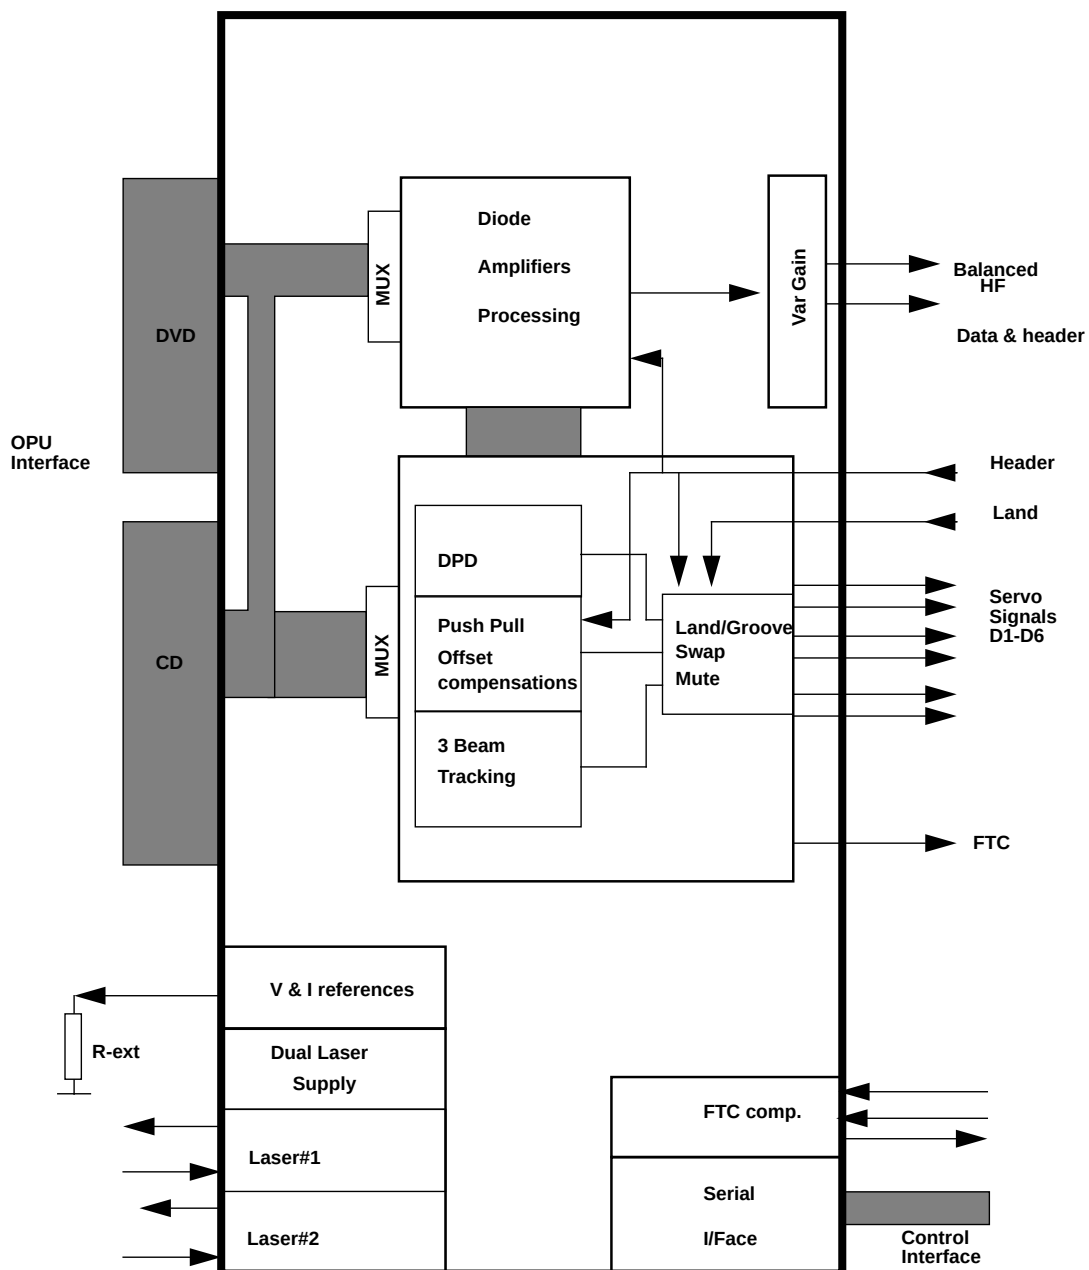


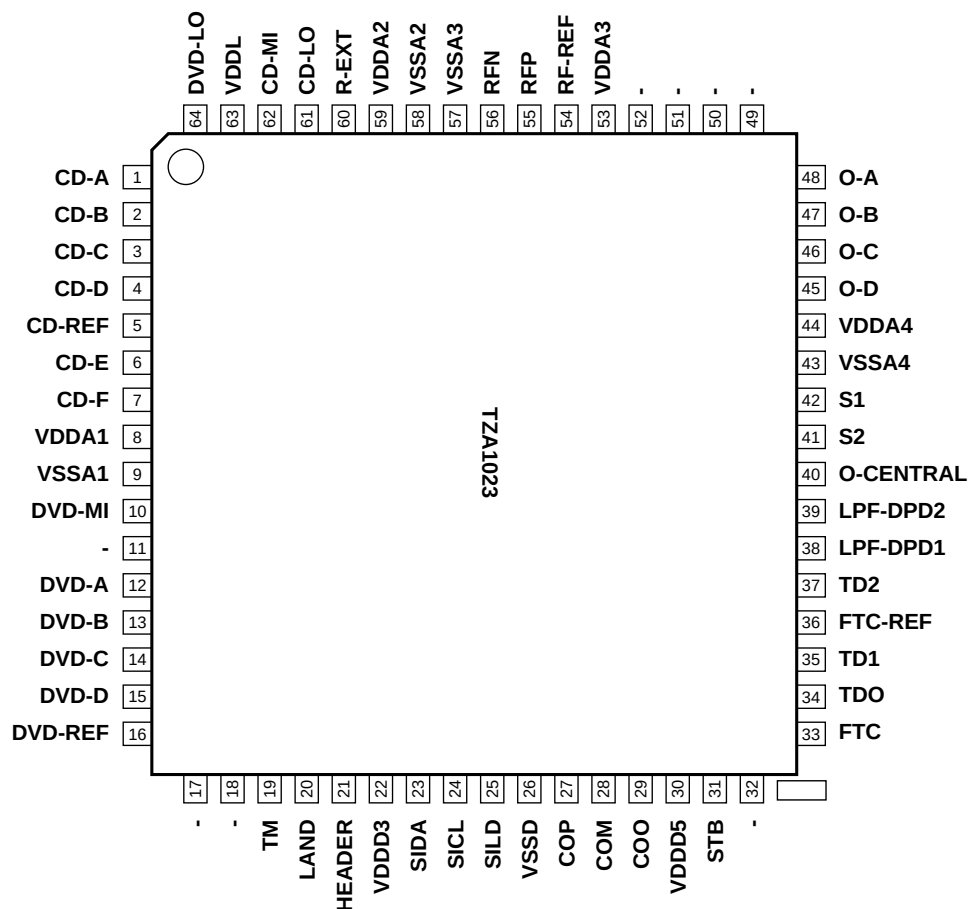TZA1033**DVDALAS2plus Advanced Analog DVD Signal Processor and Laser Supply****Pin description**

Name	Pin	Description
CD-A	1	CD pick up input A
CD-B	2	CD pick up input B
CD-C	3	CD pick up input C
CD-D	4	CD pick up input D
CD-REF	5	CD pick up reference voltage
CD-E	6	CD pick up input E
CD-F	7	CD pick up input F
DVD-A	12	DVD pick up input A
DVD-B	13	DVD pick up input B
DVD-C	14	DVD pick up input C
DVD-D	15	DVD pick up input D
DVD-ref	16	DVD pick up reference voltage
O-A	48	Servo current output for Focus-A
O-B	47	Servo current output for Focus-B
O-C	46	Servo current output for Focus-C
O-D	45	Servo current output for Focus-D

TZA1033**DVDALAS2plus Advanced Analog DVD Signal Processor and Laser Supply**

Name	Pin	Description
O-central	40	Test pin for offset cancelation
TD2	37	Internally connected
FTC-ref	36	Servo output voltage reference input
S1	42	Servo current output for radial tracking
S2	41	Servo current output for radial tracking
TD1	35	Internally connected
FTC	33	Fast track count voltage output
RFP	55	pos. RF output signal
RFN	56	neg. RF output signal
RF-REF	54	DC Reference signal input RF
LPF-DPD1	38	DPD Low pass bandwidth capacitor, channel pos
LPF-DPD2	39	DPD Low pass bandwidth capacitor, channel neg
Land	20	Land/groove toggle input
HEADER	21	Header detector window input
CD-MI	62	CD laser monitor input
DVD-MI	10	DVD laser monitor input
CD-LO	61	CD laser output
DVD-LO	64	DVD laser output
COP	27	Positive input FTC comparator
COM	28	Inverting input FTC comparator
COO	29	FTC comparator output
SIDA	23	Serial host interface data input
SICL	24	Serial host interface clock input
SILD	25	Serial host interface load
VDDA1	8	Analog Supply voltage 1 (RF input)
VDDA2	59	Analog Supply voltage 2 (RF internal)
VDDA3	53	Analog Supply voltage 3 (RF output stage)
VDDA4	44	Analog Supply voltage 4 (Servo)
VDDD5	30	Digital Supply voltage (5V dig core)
VDDD3	22	Digital Supply voltage (3V I/O pads and FTC comp.)
VDDL	63	Supply voltage for laser
VSSA1	9	Analog Ground 1
VSSA2	58	Analog Ground 2
VSSA3	57	Analog Ground 3
VSSA4	43	Analog Ground 4
VSSD	26	Digital ground
R-EXT	60	Reference current input (Connect 12k1 to VSSA4)
STB	31	Standby input
TM	19	Test mode input
TDO	34	Test data out

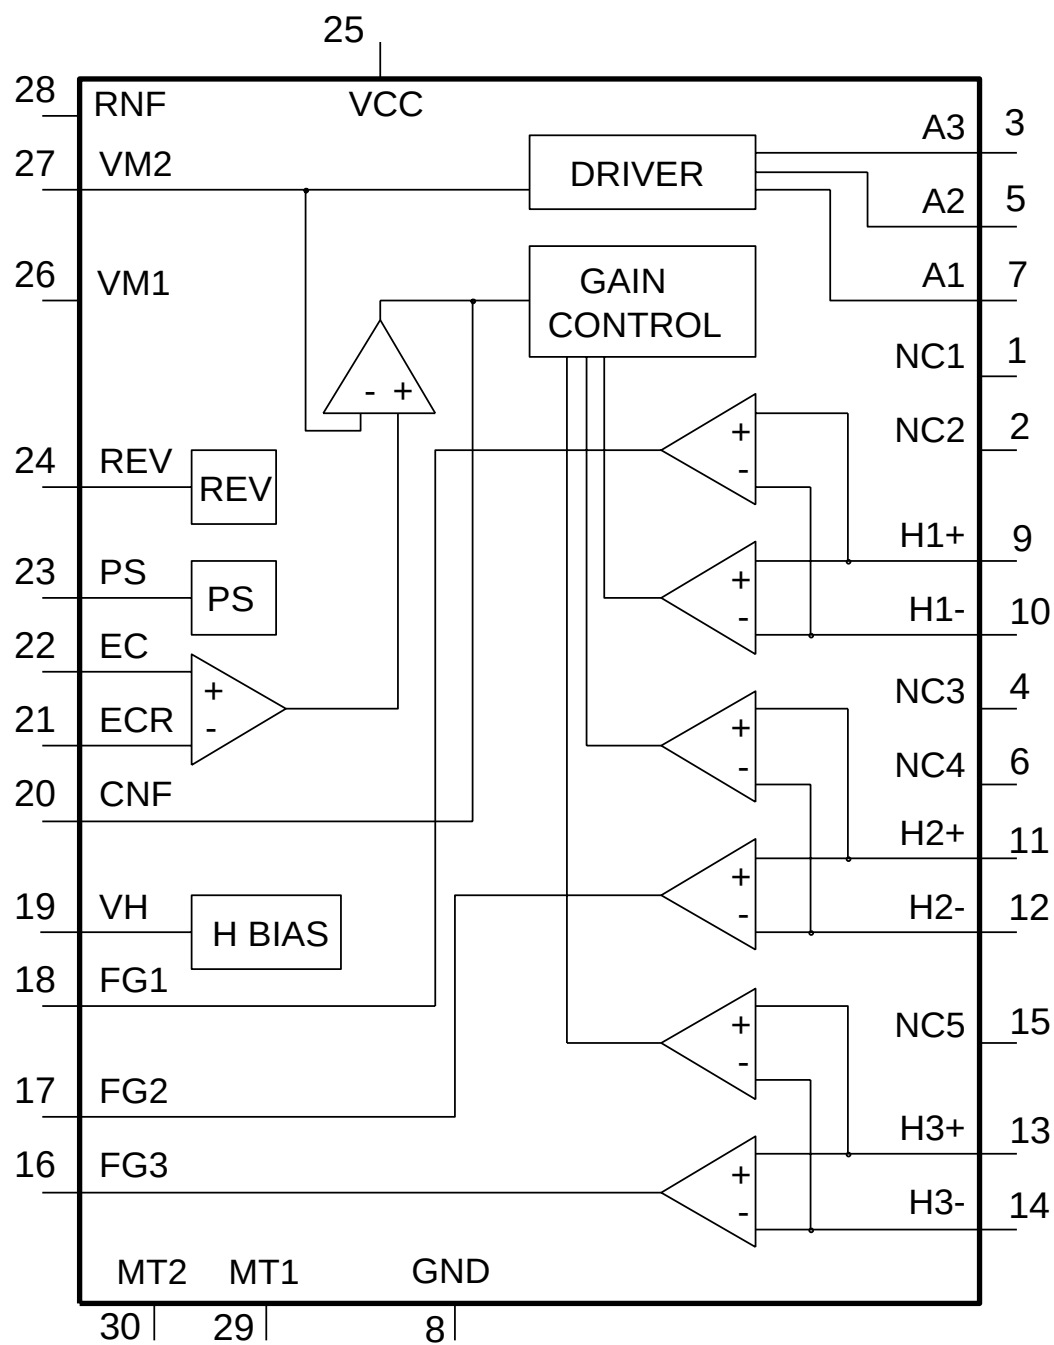
BA6856FP**3 Phase motor driver for DVD players**

BA6856FP
3 Phase motor driver for DVD players

Pin description



PIN No	PIN NAME	DESCRIPTION
1	N.C.	Not connected
2	N.C.	Not connected
3	A3	Output 3 for motor
4	N.C.	Not connected
5	A2	Output 2 for motor
6	N.C.	Not connected
7	A1	Output 1 for motor
8	GND	Ground
9	H1+	Hall input Amp1. positive input
10	H1-	Hall input Amp1. negative input
11	H2+	Hall input Amp2. positive input
12	H2-	Hall input Amp2. negative input
13	H3+	Hall input Amp3. positive input
14	H3-	Hall input Amp3. negative input
15	N.C.	Not connected
16	FG3	FG3 signal output terminal
17	FG2	FG2 signal output terminal
18	FG1	FG1 signal output terminal
19	VH	Hall Bias
20	CNF	Capacitor connection pin for phase compensation
21	ECR	Torque control standard voltage input terminal
22	EC	Torque control voltage input terminal
23	PS	POWER SAVE switch
24	REV	Reverse terminal
25	VCC	Power supply for signal division
26	VM2	Power supply 2 for driver
27	VM1	Power supply 2 for driver
28	RNF	Power supply for driver division

Terminal lay-out

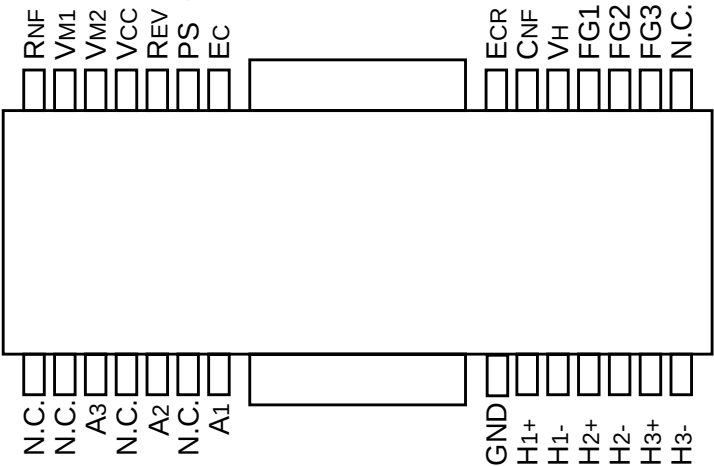

SAA7335

DSP for CD and DVD-ROM system

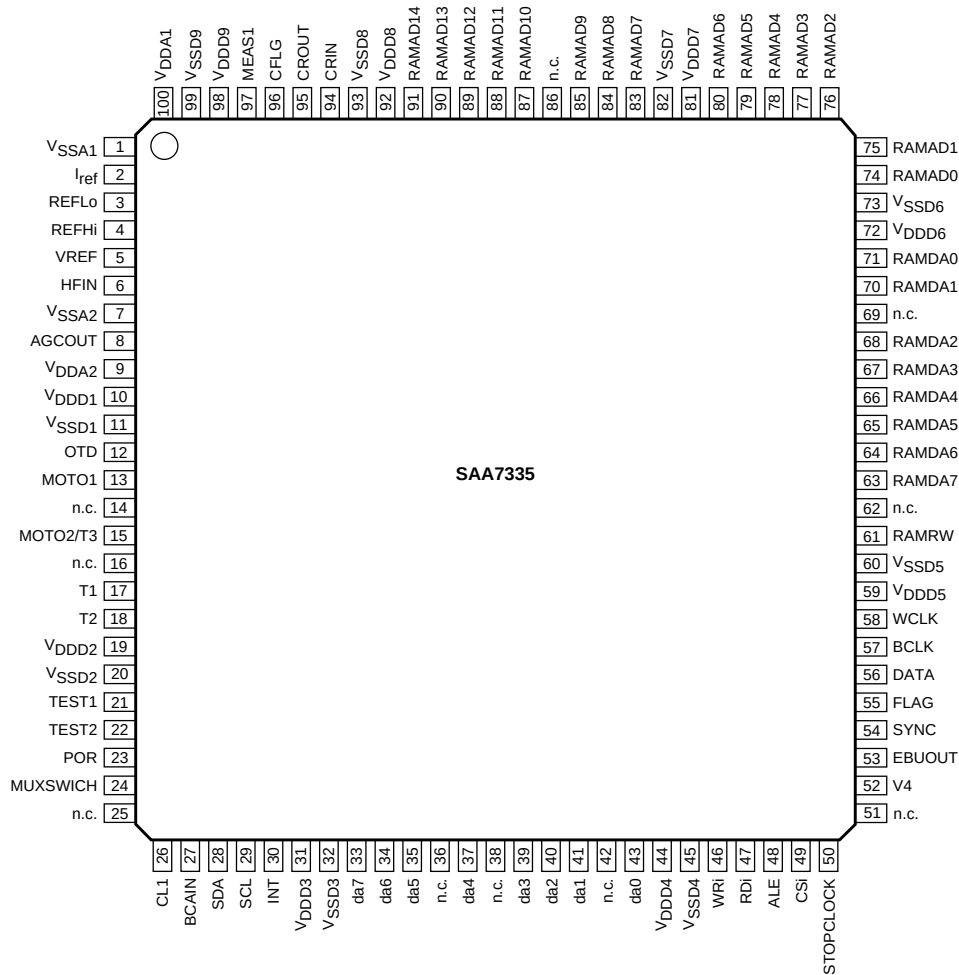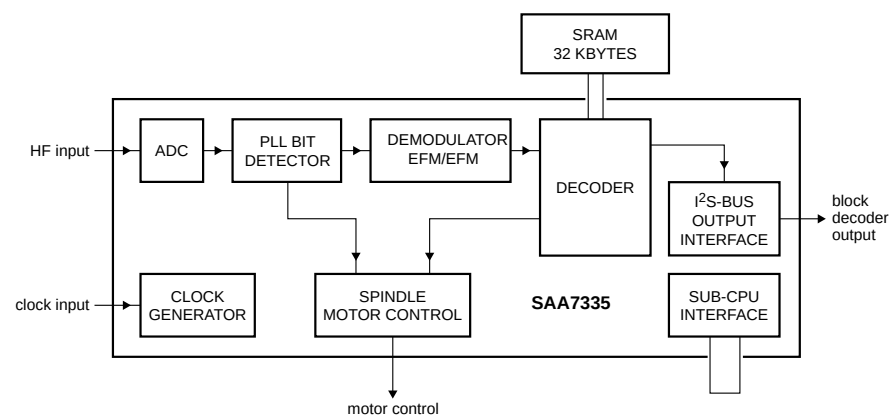


SAA7335**DSP for CD and DVD-ROM system****Pin description**

SYMBOL	PIN	TYPE	DESCRIPTION
VSSA1	1	supply	analog ground 1
Iref	2	I	analog current reference input for ADC
REFLo	3	I	analog low reference input for ADC
REFHi	4	I	analog high reference input for ADC
VREF	5	I	analog negative input
HFIN	6	I	analog positive input
VSSA2	7	supply	analog ground 2
AGCOUT	8	O	analog test pin output
VDDA2	9	supply	analog supply voltage 2
VDDD1	10	supply	digital supply voltage 1
VSSD1	11	supply	digital ground 1
OTD	12	I	off track detect input
MOTO1	13	O	3-state motor control output
n.c.	14	–	not connected, reserved
MOTO2/T3	15	I/O	motor control output/tachometer 3 input
n.c.	16	–	not connected, reserved
T1	17	I	tachometer 1 input
T2	18	I	tachometer 2 input
VDDD2	19	supply	digital supply voltage 2
VSSD2	20	supply	digital ground 2
TEST1	21	I	test input 1
TEST2	22	I	test input 2
POR	23	I	power-on reset input
MUXSWICH	24	I	use clock multiplier input
n.c.	25	–	not connected, reserved
CL1	26	O	divided clock output
BCAIN	27	I	BCA input
SDA	28	I/O	sub-CPU I 2 C-bus serial data input/output
SCL	29	I	sub-CPU I 2 C-bus serial clock input
INT	30	O	sub-CPU interrupt output (open-drain)
VDDD3	31	supply	digital supply voltage 3
VSSD3	32	supply	digital ground 3
da7	33	I/O	sub-CPU data bus bit 7 input/output (parallel)
da6	34	I/O	sub-CPU data bus bit 6 input/output (parallel)
da5	35	I/O	sub-CPU data bus bit 5 input/output (parallel)
n.c.	36	–	not connected, reserved
da4	37	I/O	sub-CPU data bus bit 4 input/output (parallel)
n.c.	38	–	not connected, reserved
da3	39	I/O	sub-CPU data bus bit 3 input/output (parallel)
da2	40	I/O	sub-CPU data bus bit 2 input/output (parallel)
da1	41	I/O	sub-CPU data bus bit 1 input/output (parallel)
n.c.	42	–	not connected, reserved
da0	43	I/O	sub-CPU data bus bit 0 input/output (parallel)
VDDD4	44	supply	digital supply voltage 4
VSSD4	45	supply	digital ground 4
WRi	46	I	sub-CPU write enable input (active LOW)
RD _i	47	I	sub-CPU read enable input (active LOW)
ALE	48	I	sub-CPU address latch enable input
CS _i	49	I	sub-CPU chip select input (active HIGH)
STOPCLOCK	50	O	stop clock output



SAA7335**DSP for CD and DVD-ROM system**

SYMBOL	PIN	TYPE	DESCRIPTION
n.c.	51	–	not connected, reserved
V4	52	O	serial subcode output (for CD)
EBUOUT	53	O	digital audio output
SYNC	54	O	I ² S-bus sector sync output
FLAG	55	O	I ² S-bus correction flag output
DATA	56	O	I ² S-bus serial data output
BCLK	57	I/O	I ² S-bus bit serial clock input/output
WCLK	58	I/O	I ² S-bus word clock input/output
VDDD5	59	supply	digital supply voltage 5
VSSD5	60	supply	digital ground 5
RAMRW	61	O	RAM read/write control output
n.c.	62	–	not connected, reserved
RAMDA7	63	I/O	RAM data bus bit 7 input/output
RAMDA6	64	I/O	RAM data bus bit 6 input/output
RAMDA5	65	I/O	RAM data bus bit 5 input/output
RAMDA4	66	I/O	RAM data bus bit 4 input/output
RAMDA3	67	I/O	RAM data bus bit 3 input/output
RAMDA2	68	I/O	RAM data bus bit 2 input/output
n.c.	69	–	not connected, reserved
RAMDA1	70	I/O	RAM data bus bit 1 input/output
RAMDA0	71	I/O	RAM data bus bit 0 input/output
VDDD6	72	supply	digital supply voltage 6
VSSD6	73	supply	digital ground 6
RAMAD0	74	O	RAM address bit 0 output
RAMAD1	75	O	RAM address bit 1 output
RAMAD2	76	O	RAM address bit 2 output
RAMAD3	77	O	RAM address bit 3 output
RAMAD4	78	O	RAM address bit 4 output
RAMAD5	79	O	RAM address bit 5 output
RAMAD6	80	O	RAM address bit 6 output
VDDD7	81	supply	digital supply voltage 7
VSSD7	82	supply	digital ground 7
RAMAD7	83	O	RAM address bit 7 output
RAMAD8	84	O	RAM address bit 8 output
RAMAD9	85	O	RAM address bit 9 output
n.c.	86	–	not connected, reserved
RAMAD10	87	O	RAM address bit 10 output
RAMAD11	88	O	RAM address bit 11 output
RAMAD12	89	O	RAM address bit 12 output
RAMAD13	90	O	RAM address bit 13 output
RAMAD14	91	O	RAM address bit 14 output
VDDD8	92	supply	digital supply voltage 8
VSSD8	93	supply	digital ground 8
CRIN	94	I	analog crystal input
CROUT	95	O	analog crystal output
CFLG	96	O	correction statistics output
MEAS1	97	O	front-end telemetry output
VDDD9	98	supply	digital supply voltage 9
VSSD9	99	supply	digital ground 9
VDDA1	100	supply	analog supply voltage 1

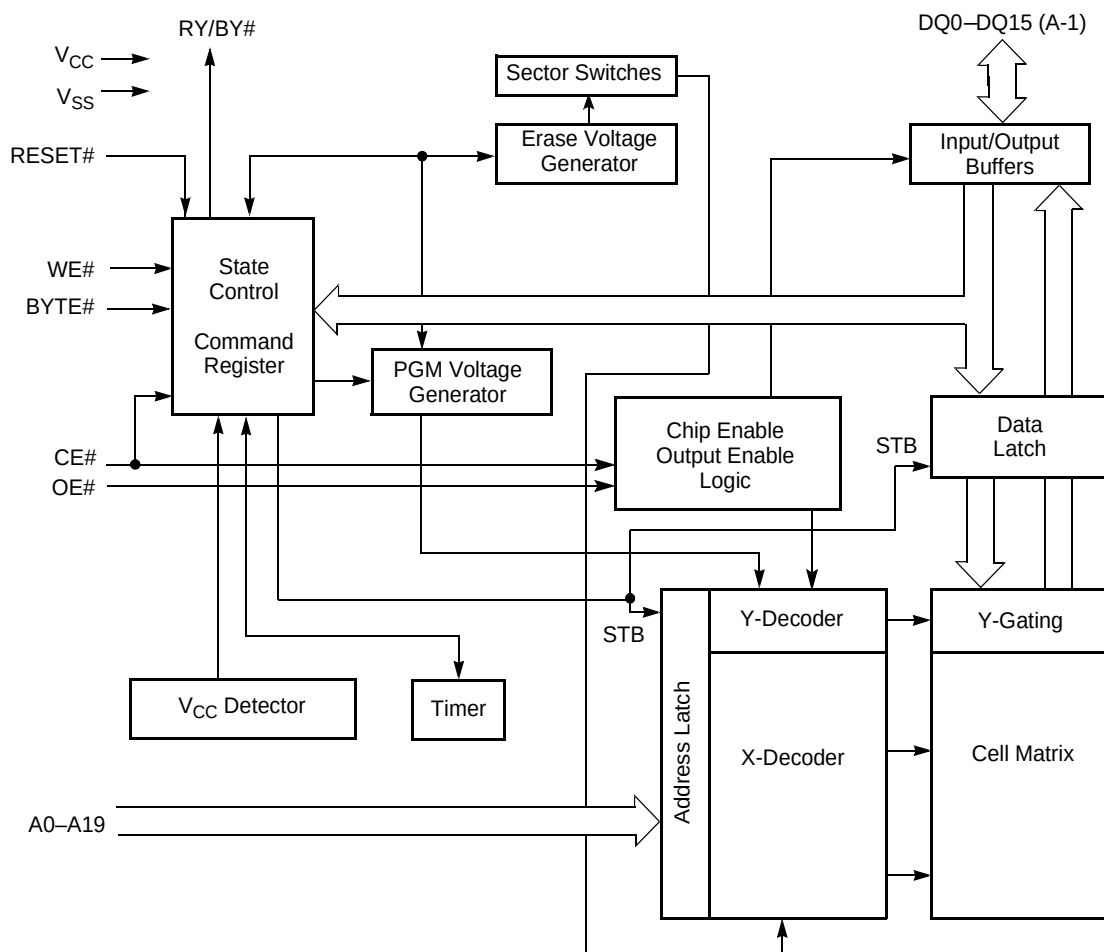
Am29LV160B**16 MB (2 M x 8-bit / 1 M x 16-bit) CMOS 3.0 Volt-only Sector Erase Flash Memory**

MT48LC1M16A1TG S

Synchronous DRAM

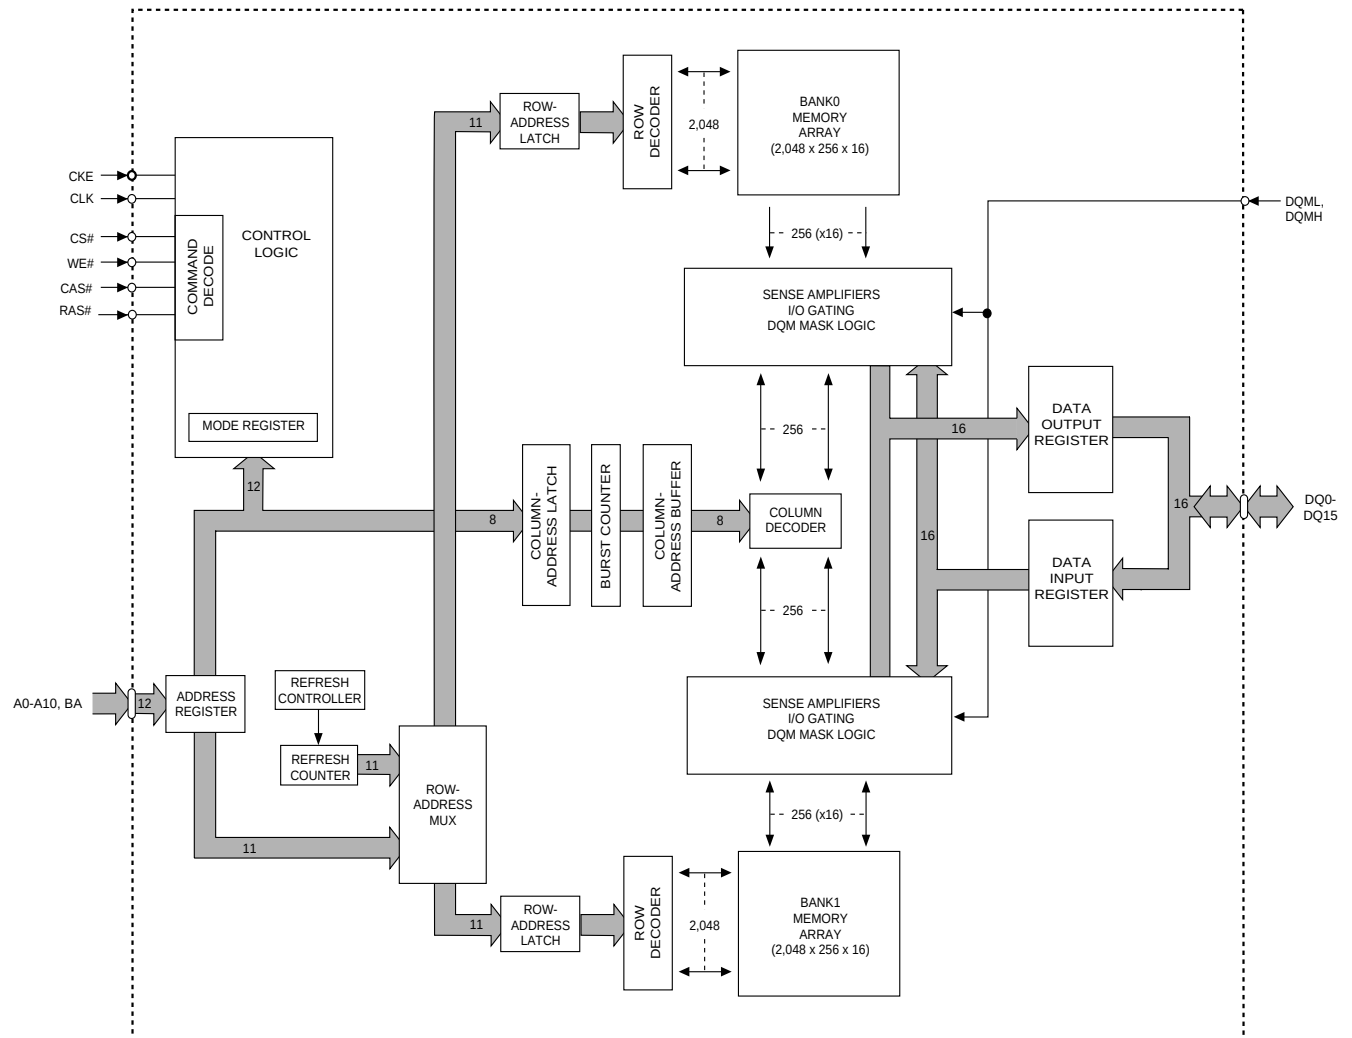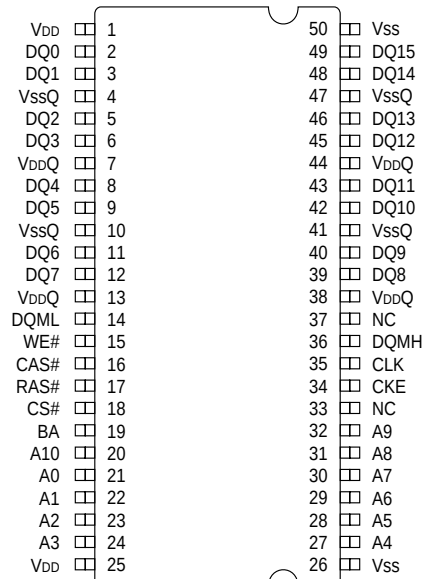


STi5505
DVD backend decoder with integrated host processor





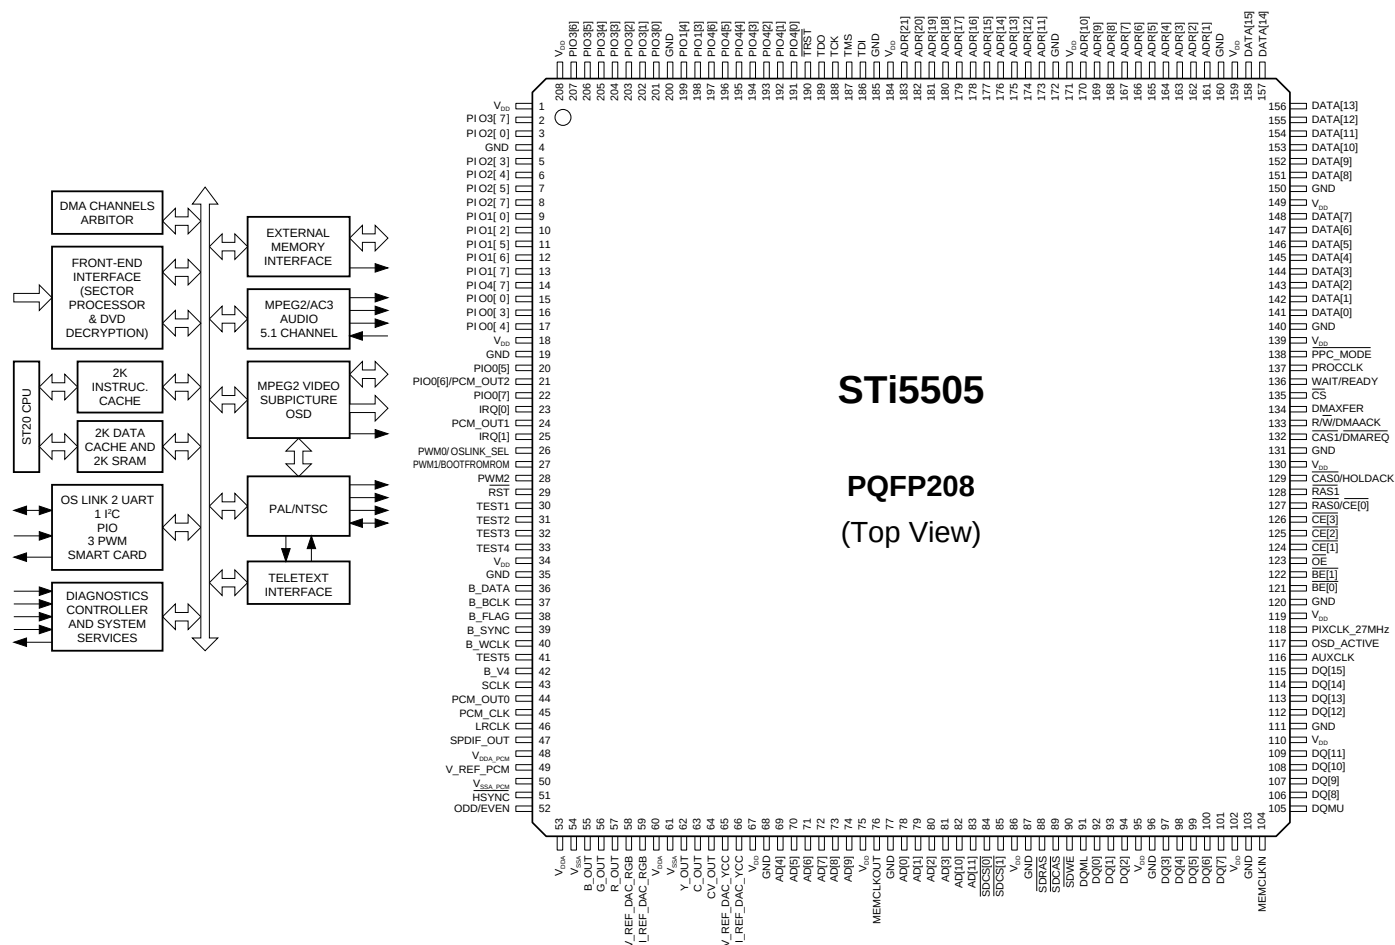


ST24E32 / ST25E32


32k serial I²C EEPROM with extended addressing

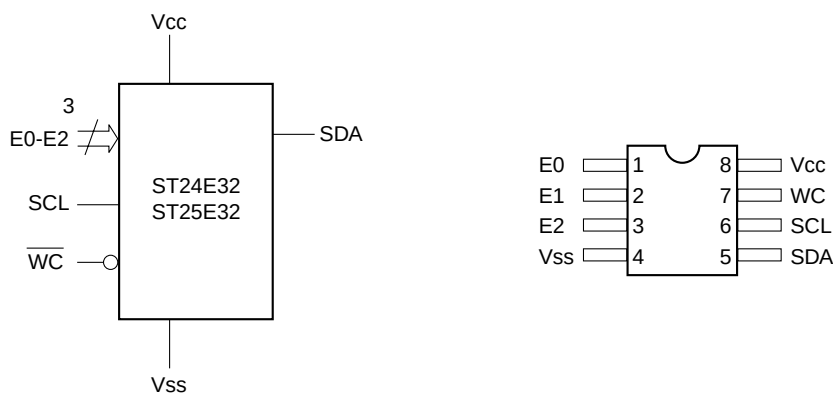


■ WIRING DIAGRAM

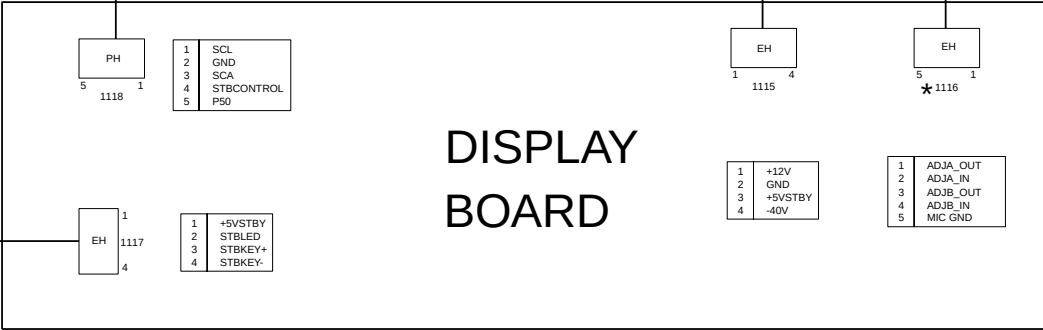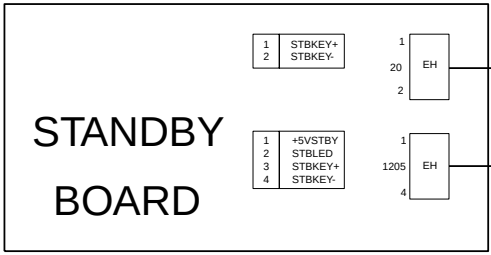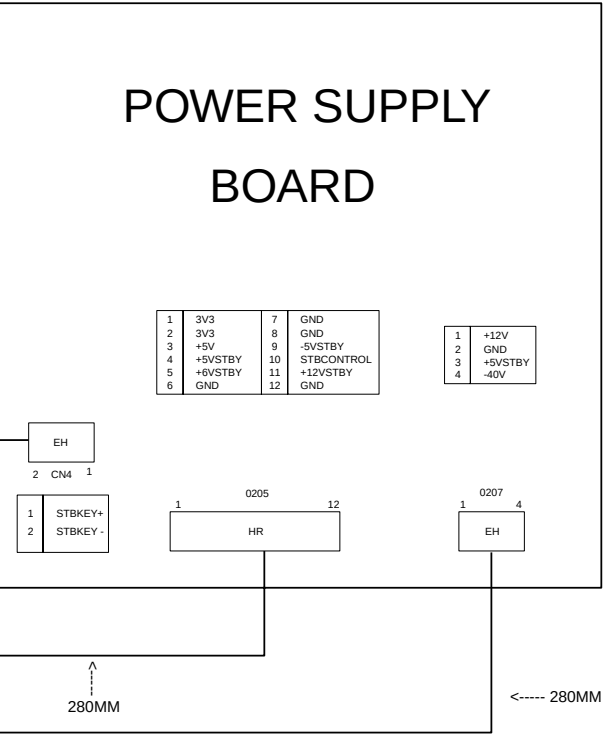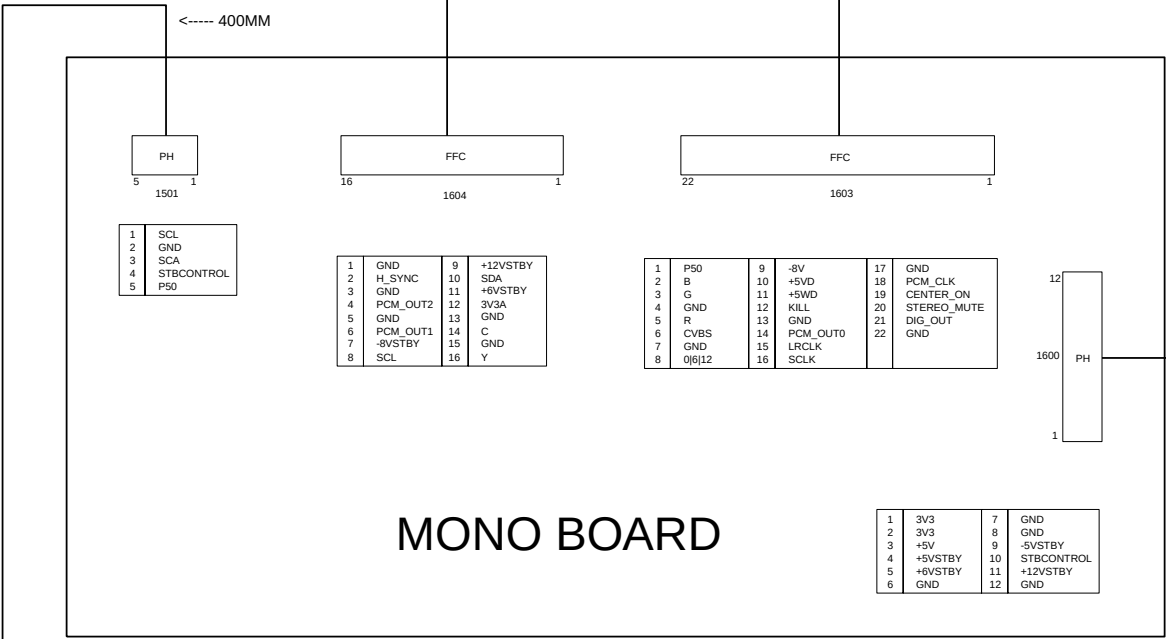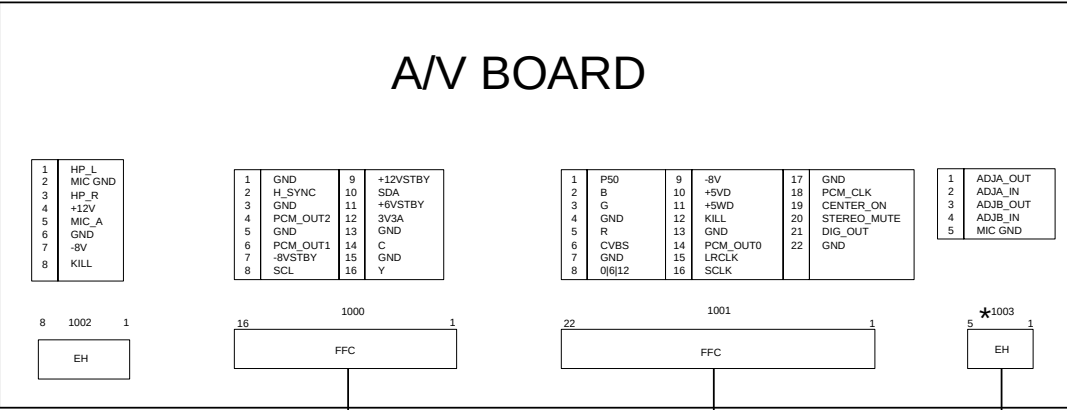


■ BLOCK DIAGRAM (U, C, A, R, T)

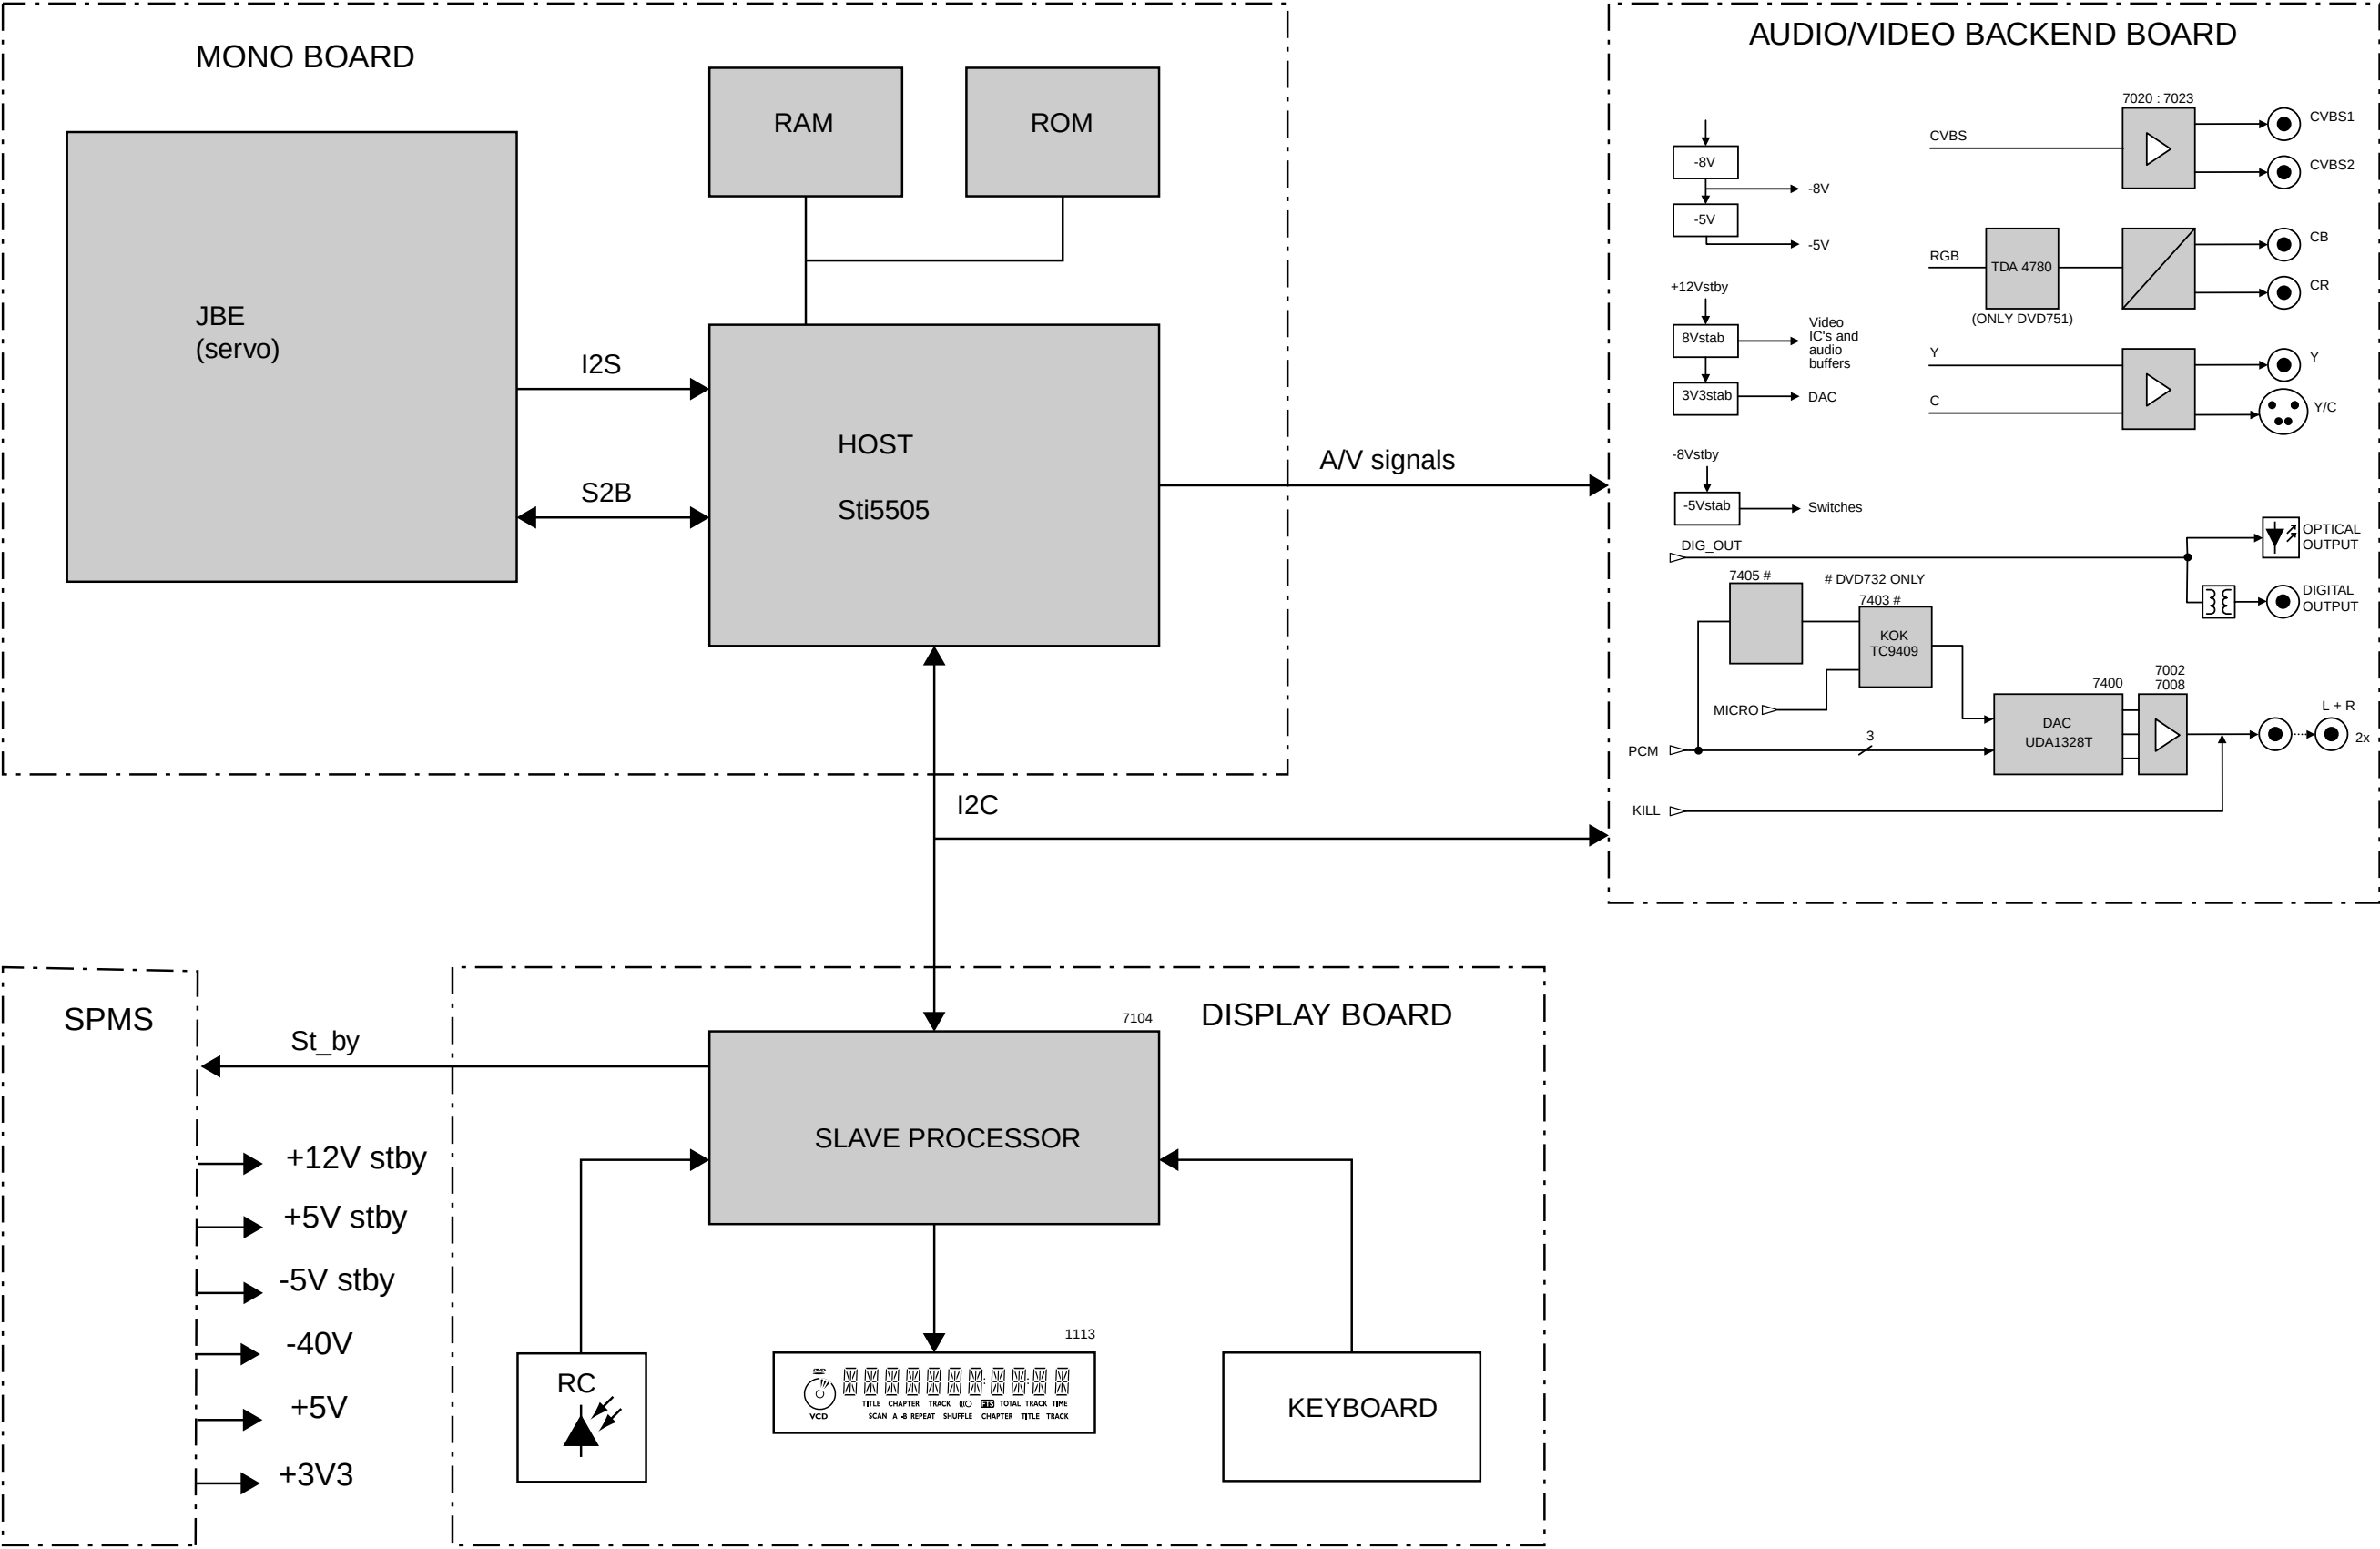


■ BLOCK DIAGRAM (B, G)

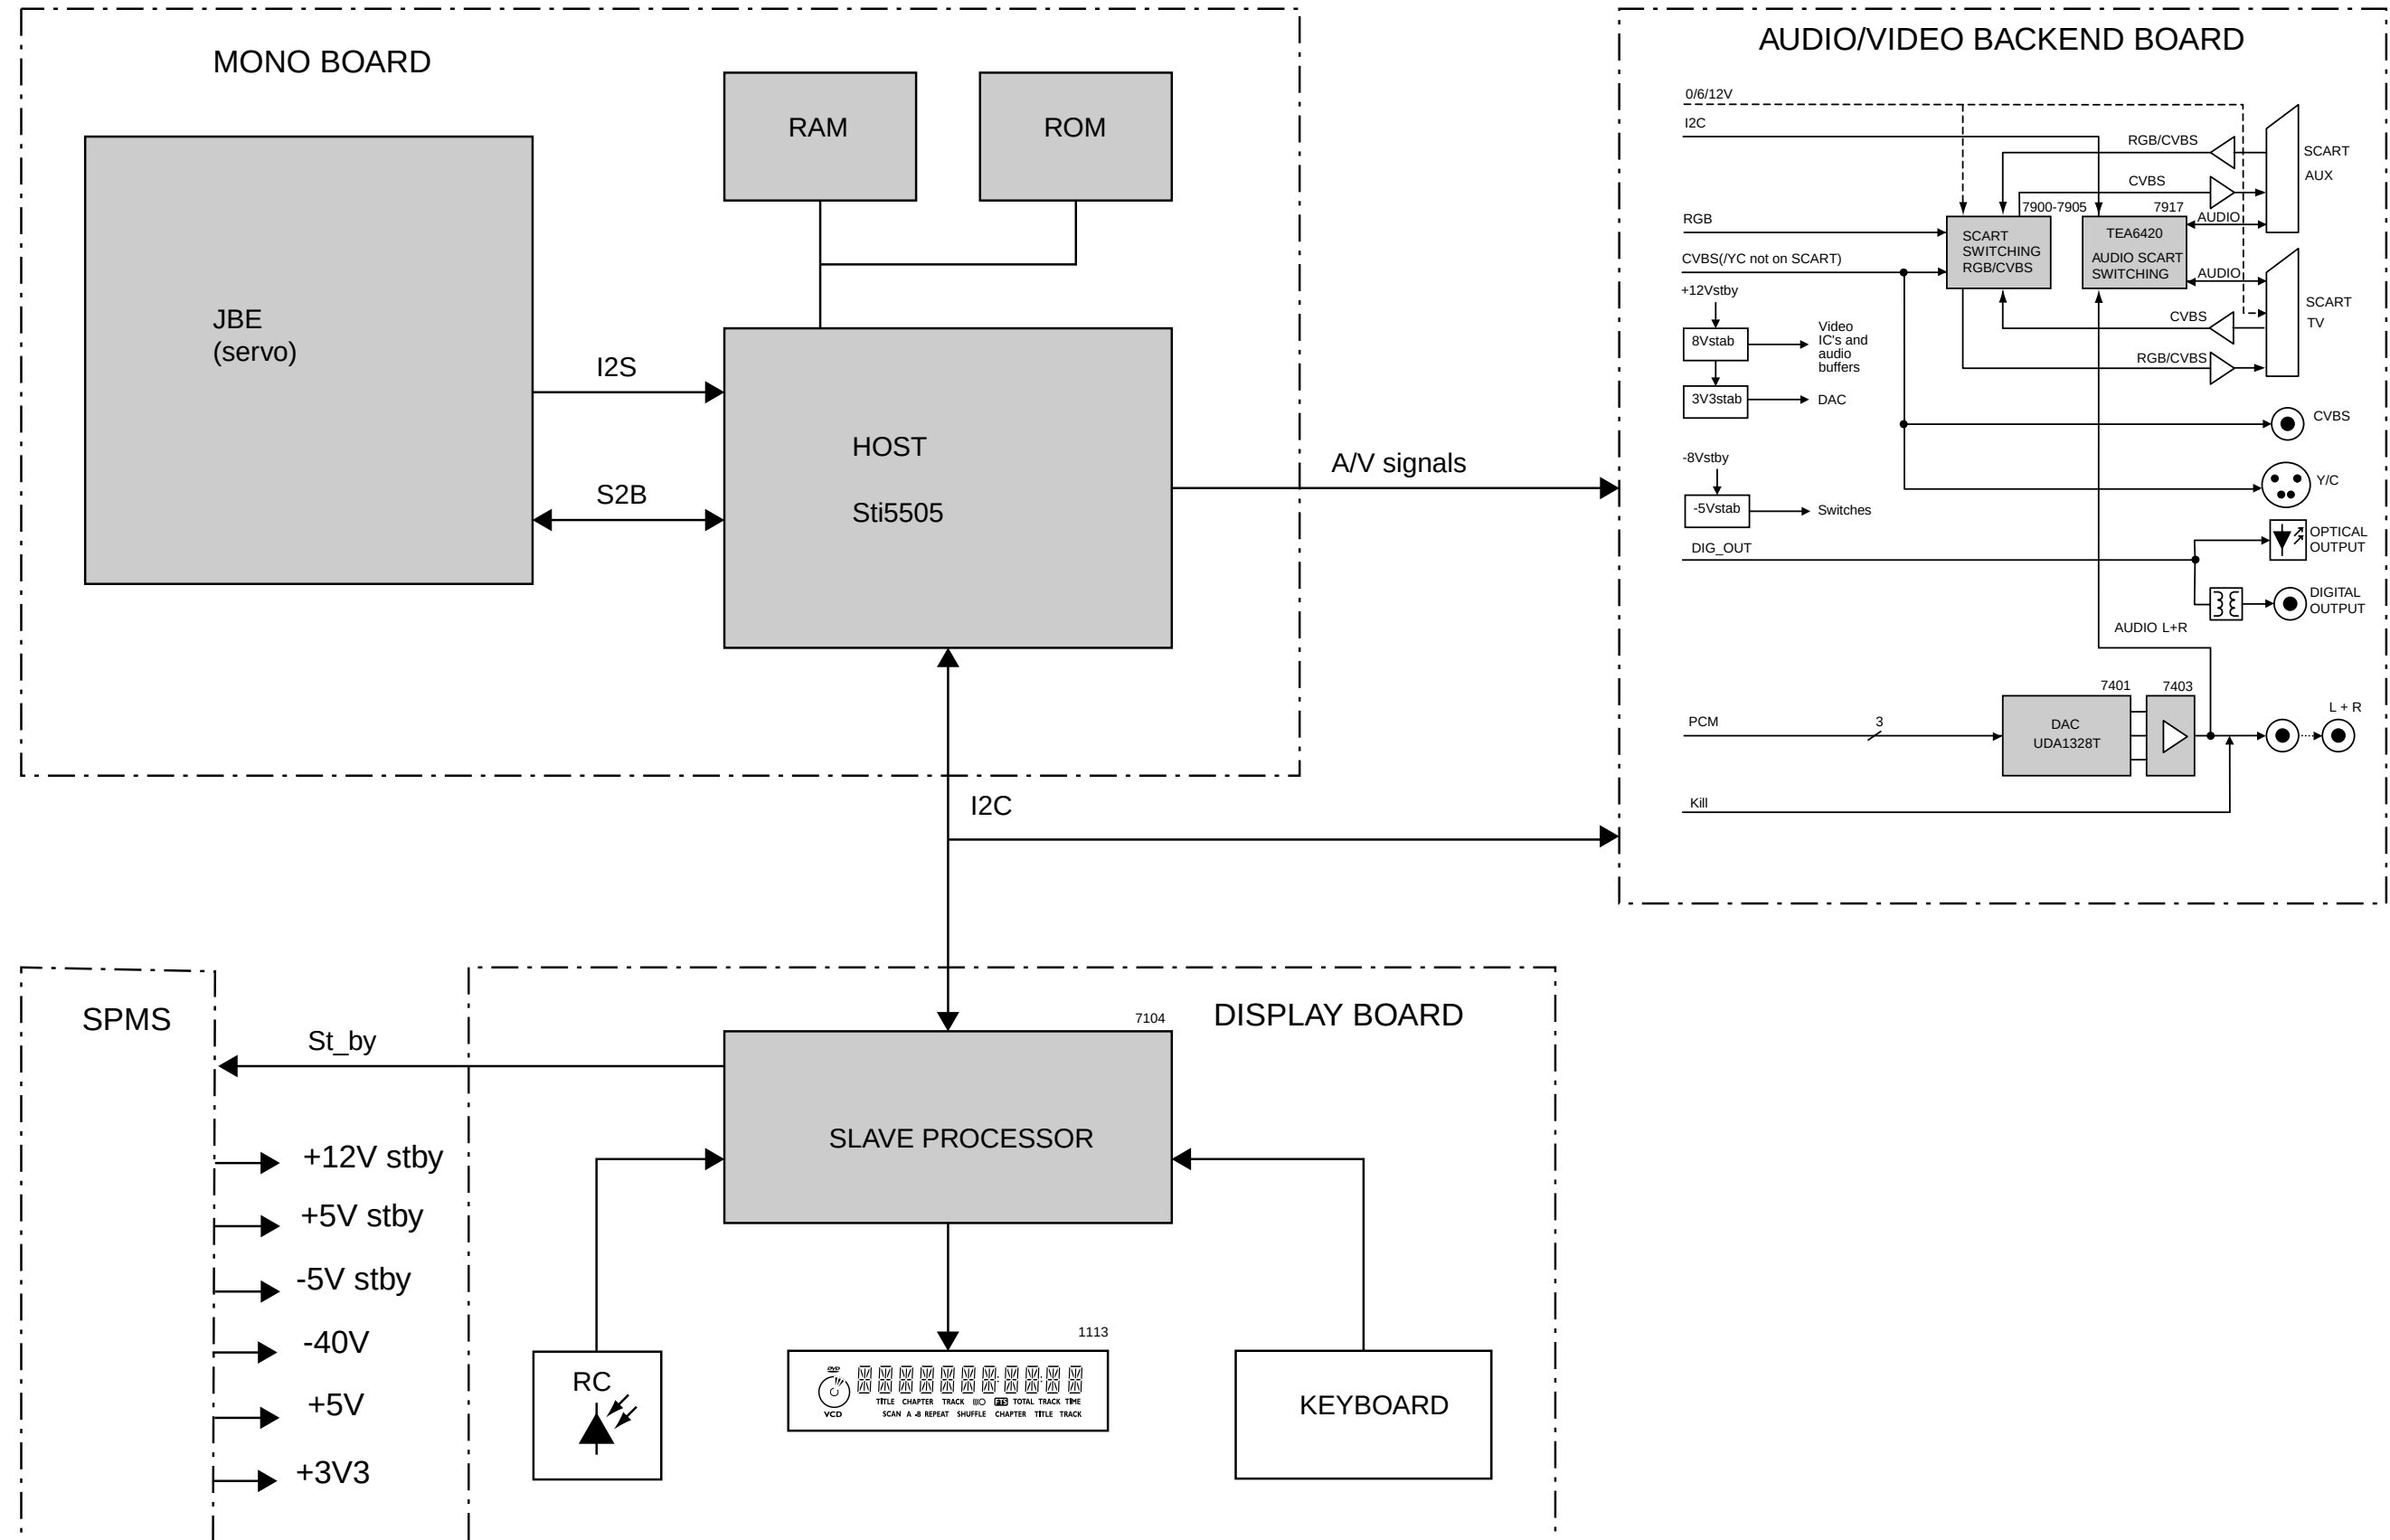

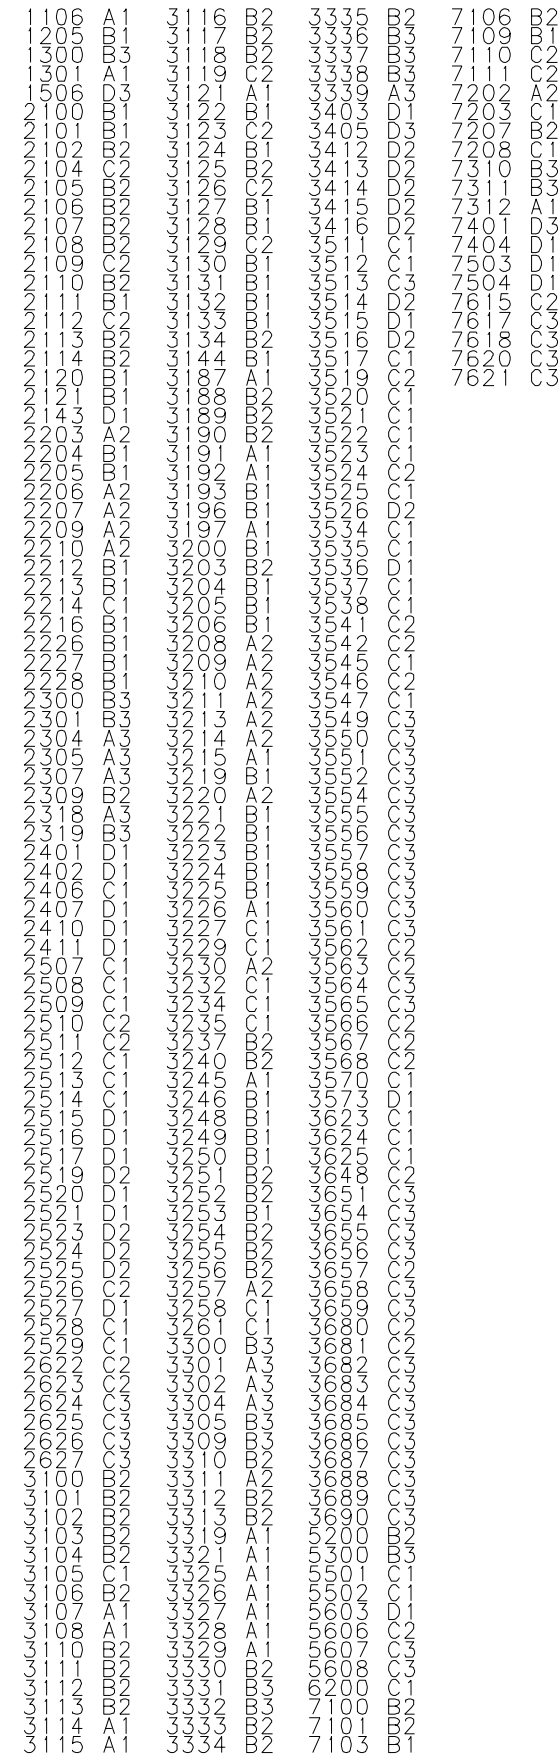


■ PRINTED CIRCUIT BOARD

MONO (Detailed bottom view 1/2)

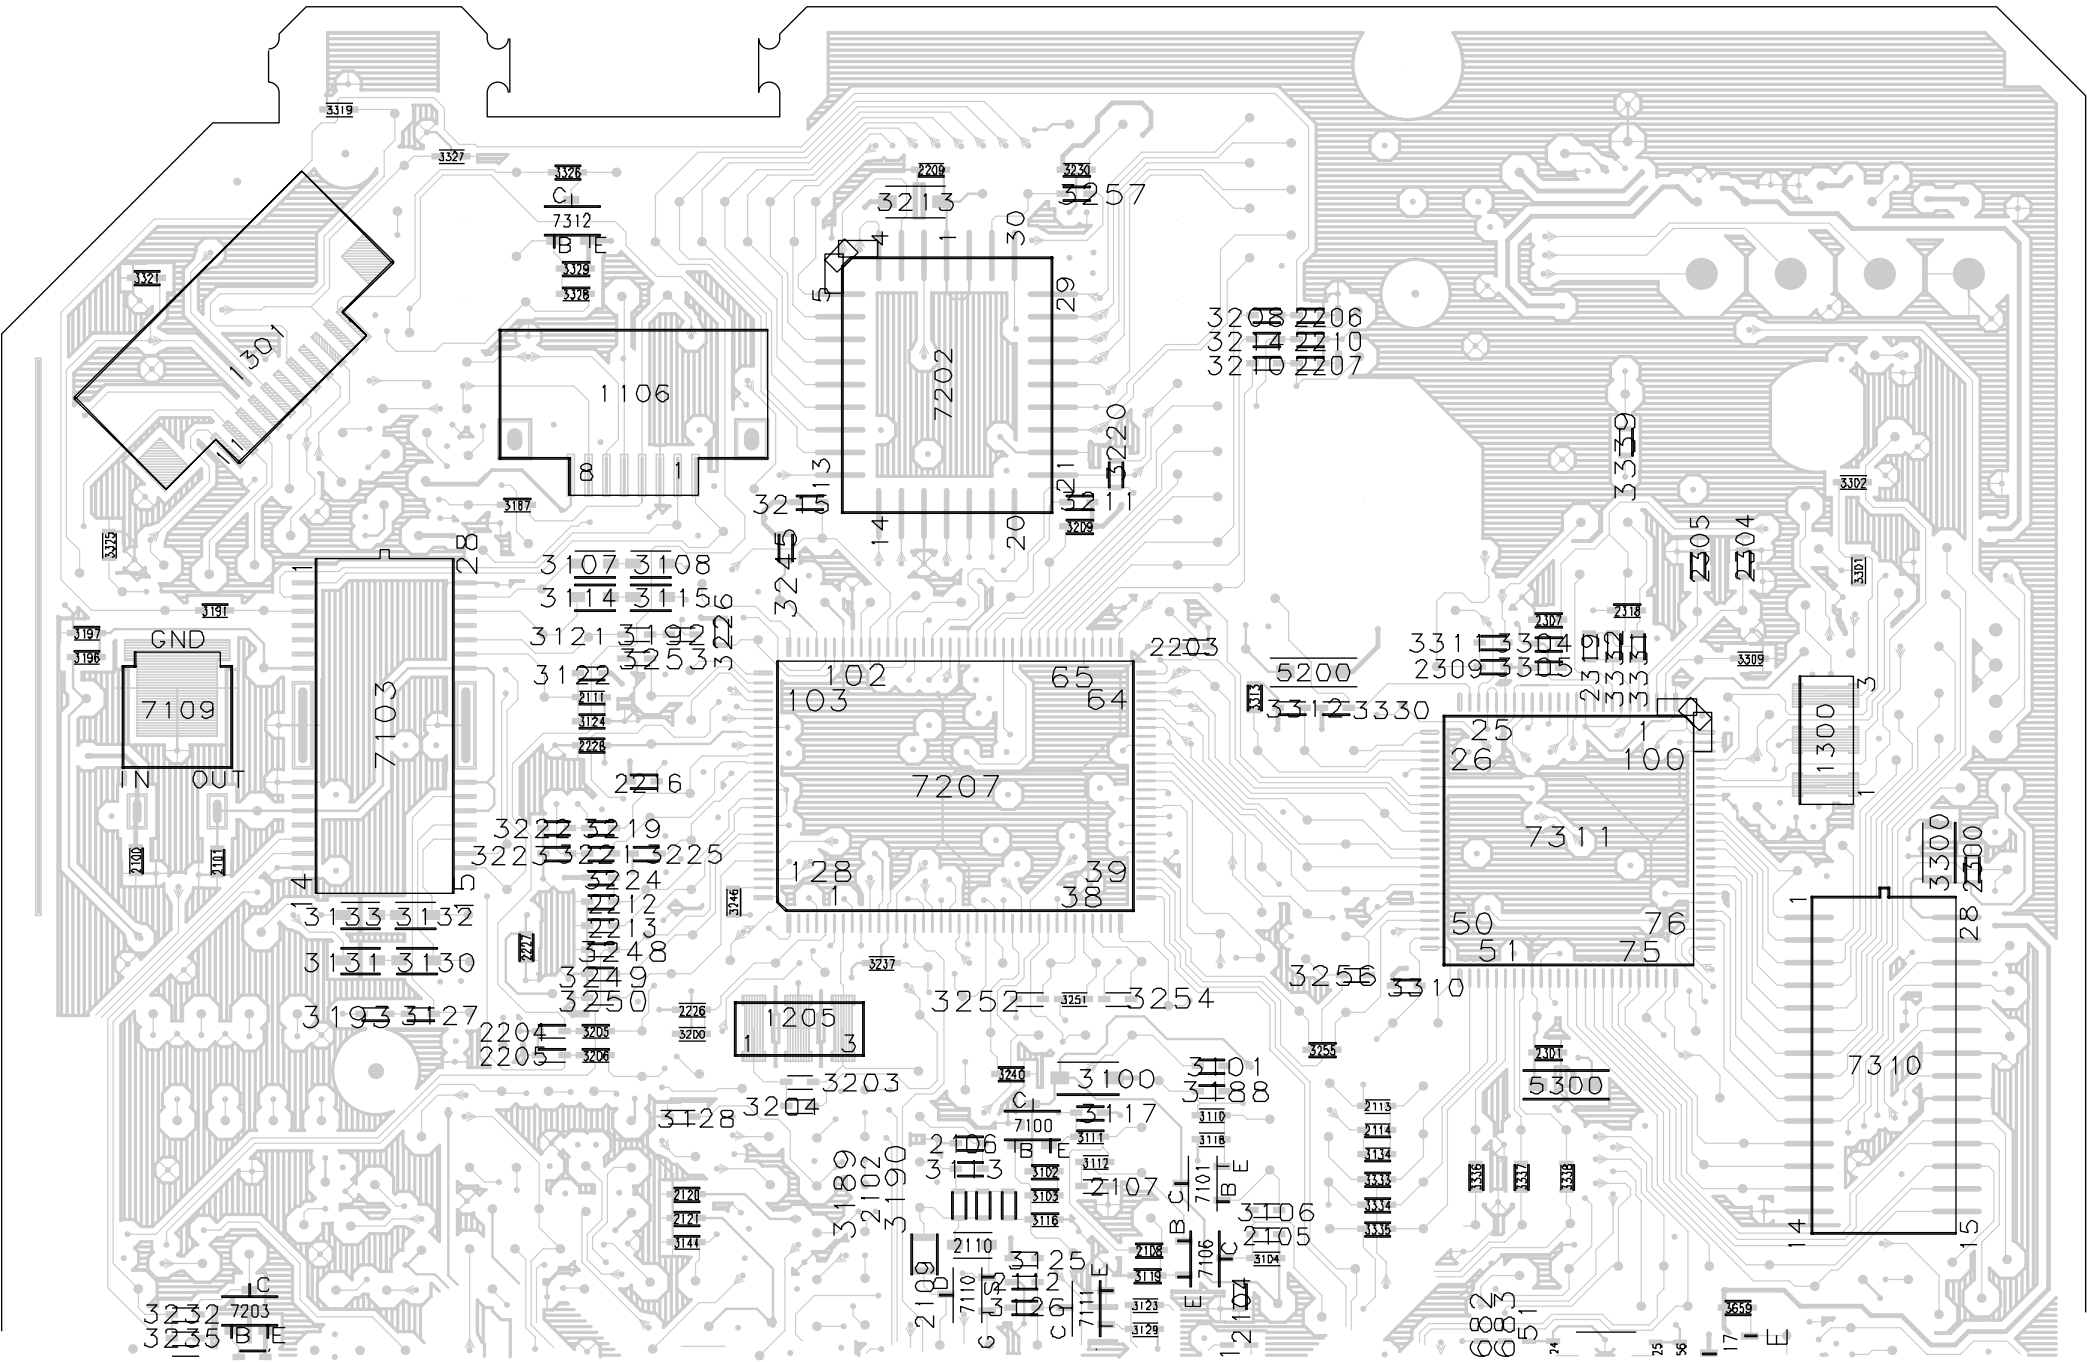


■ PRINTED CIRCUIT BOARD
MONO (Detailed bottom view 2/2)

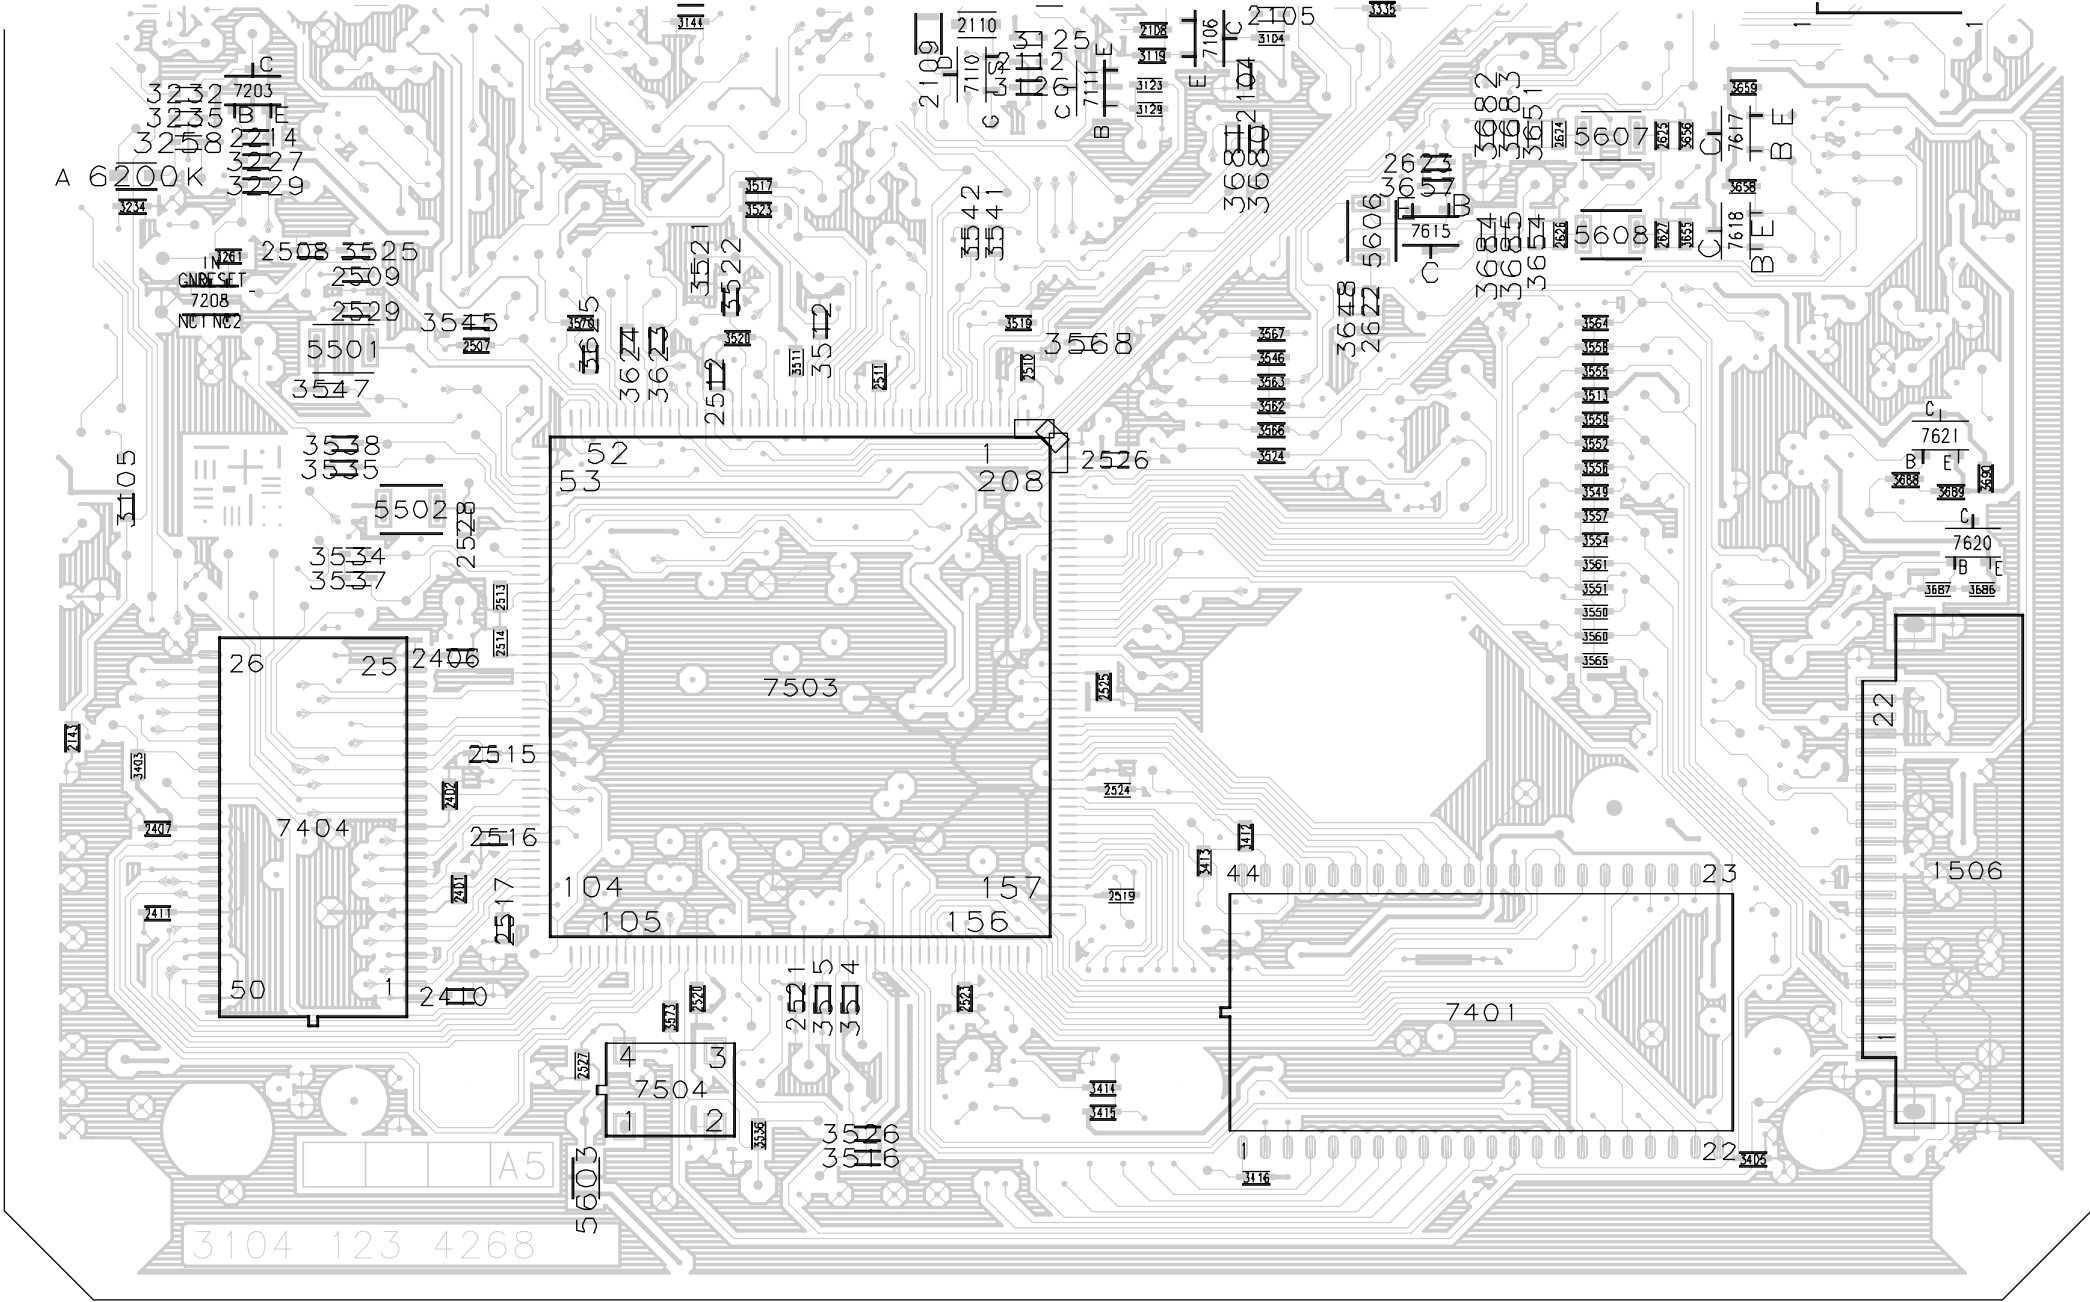


3

[illegible]

■ PRINTED CIRCUIT BOARD
MONO (Detailed top view 1/2)

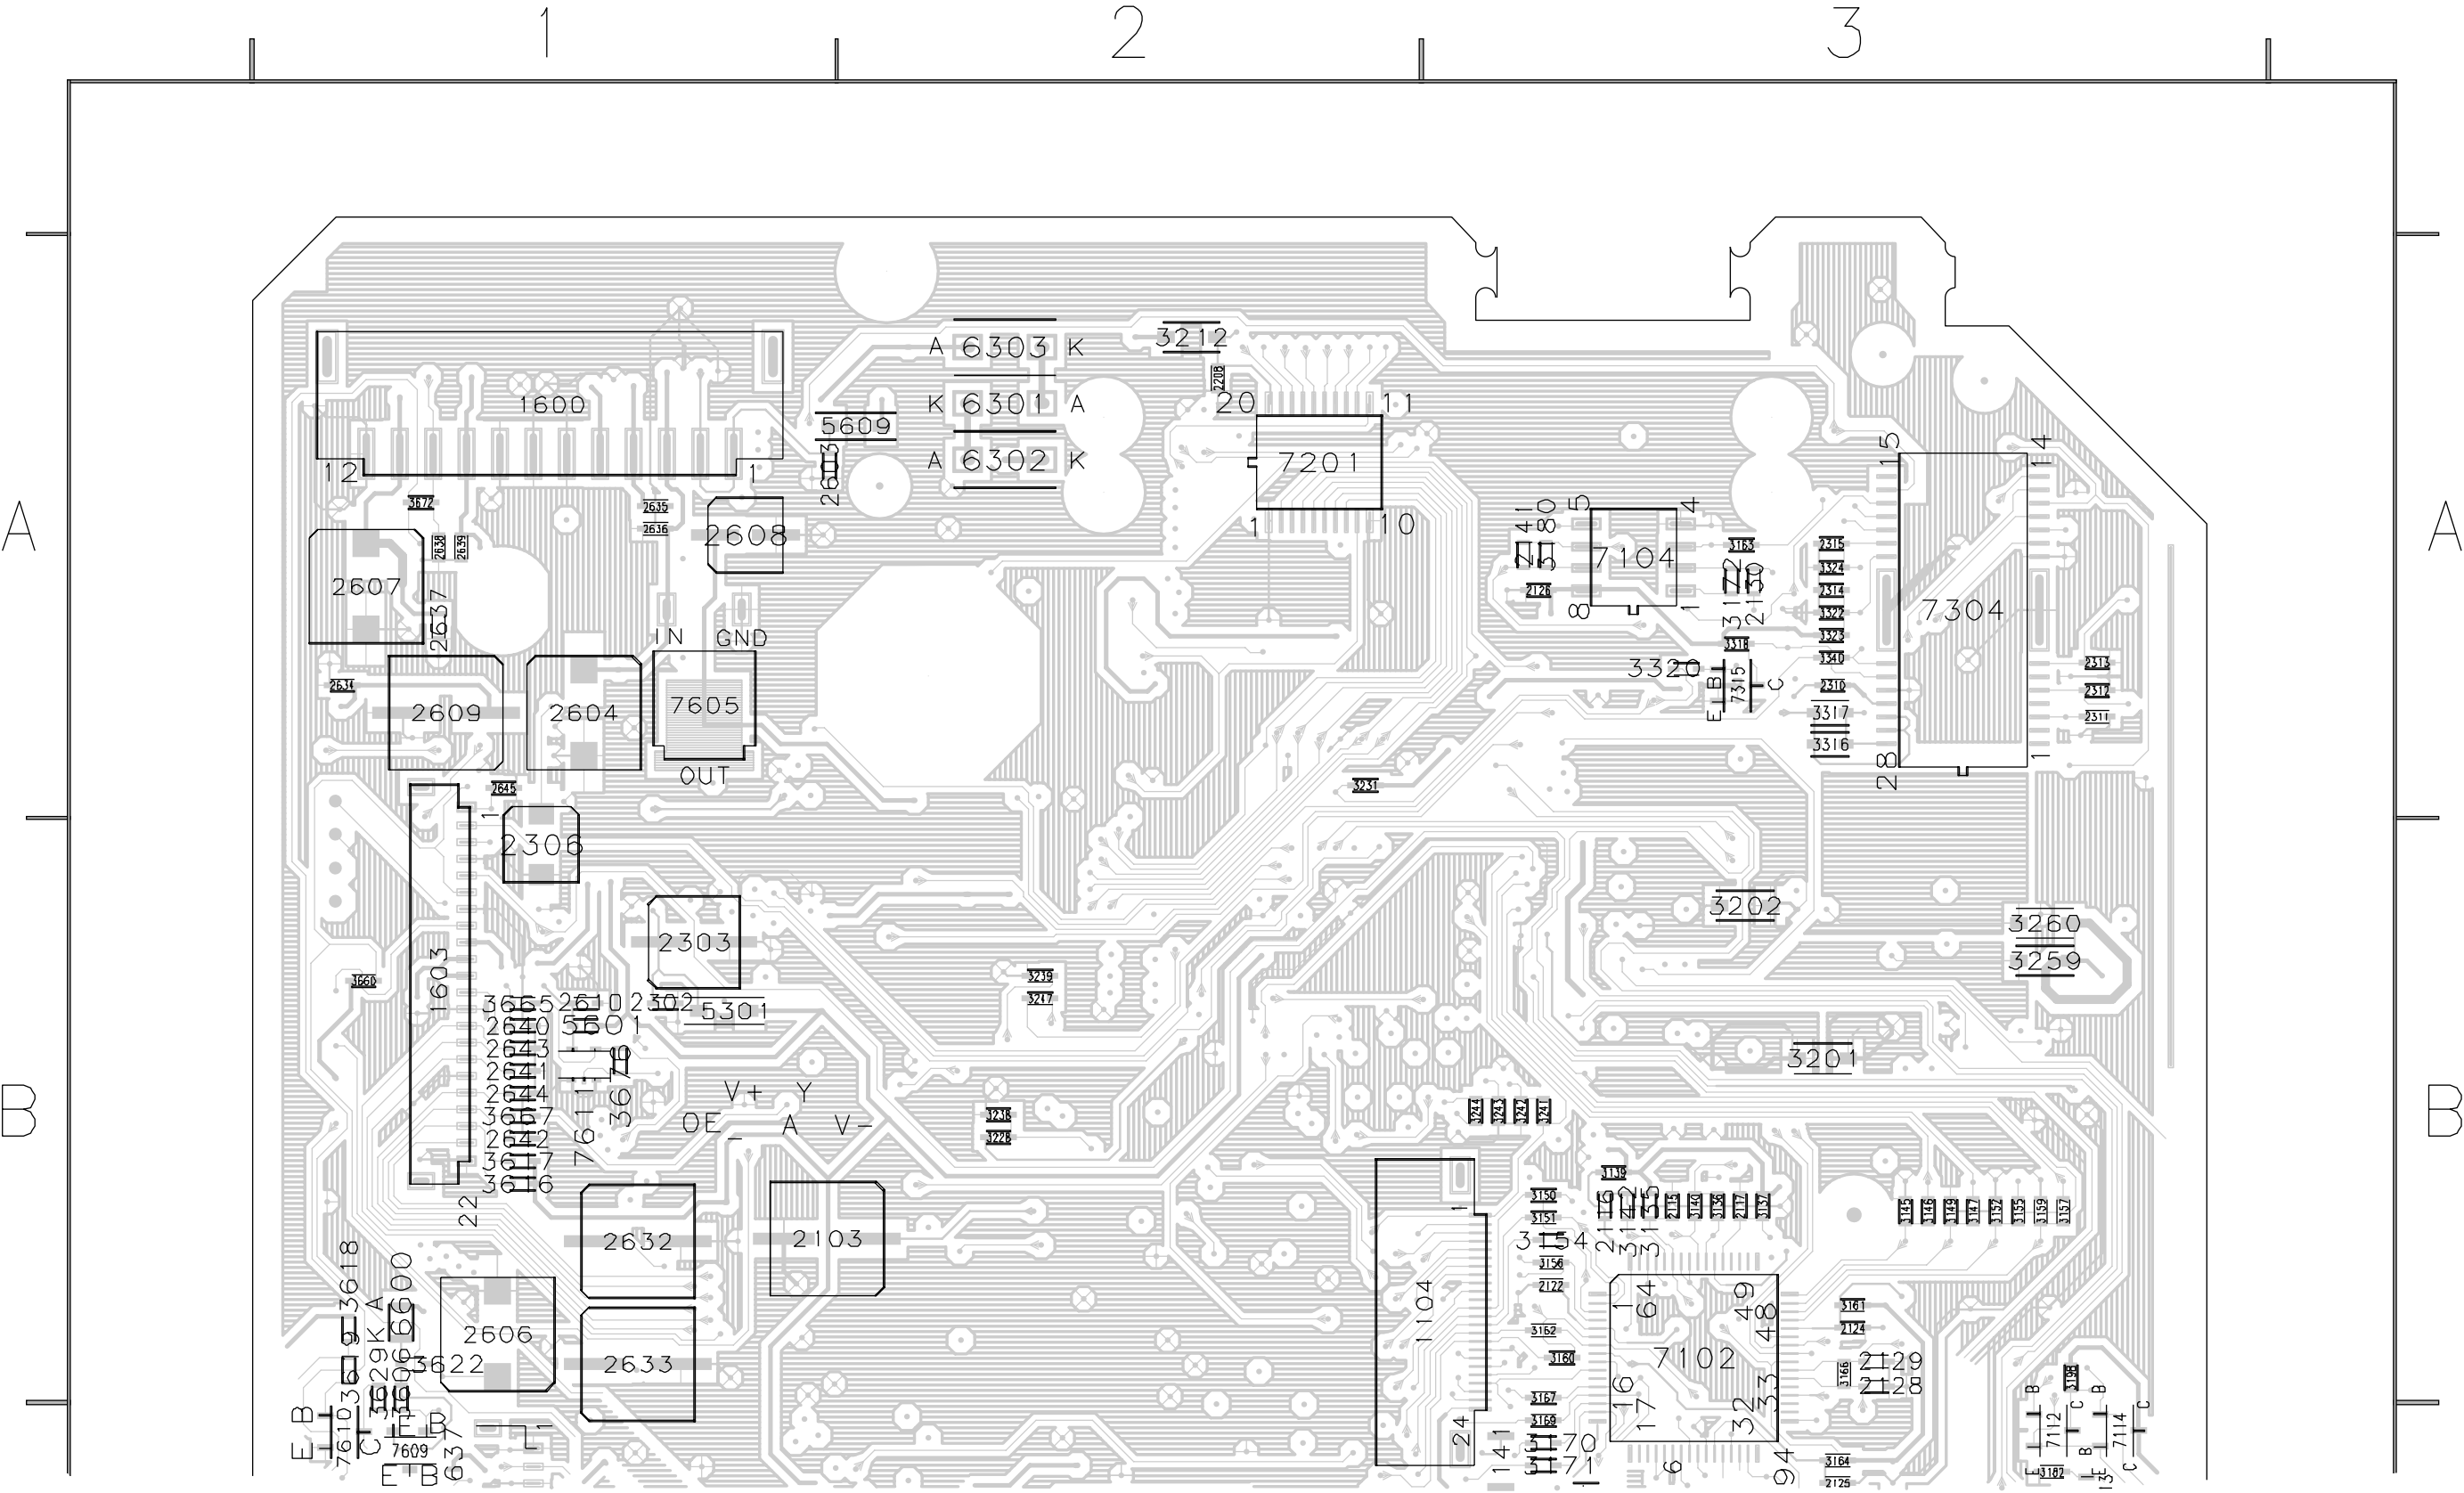


■ PRINTED CIRCUIT BOARD
MONO (Detailed top view 2/2)

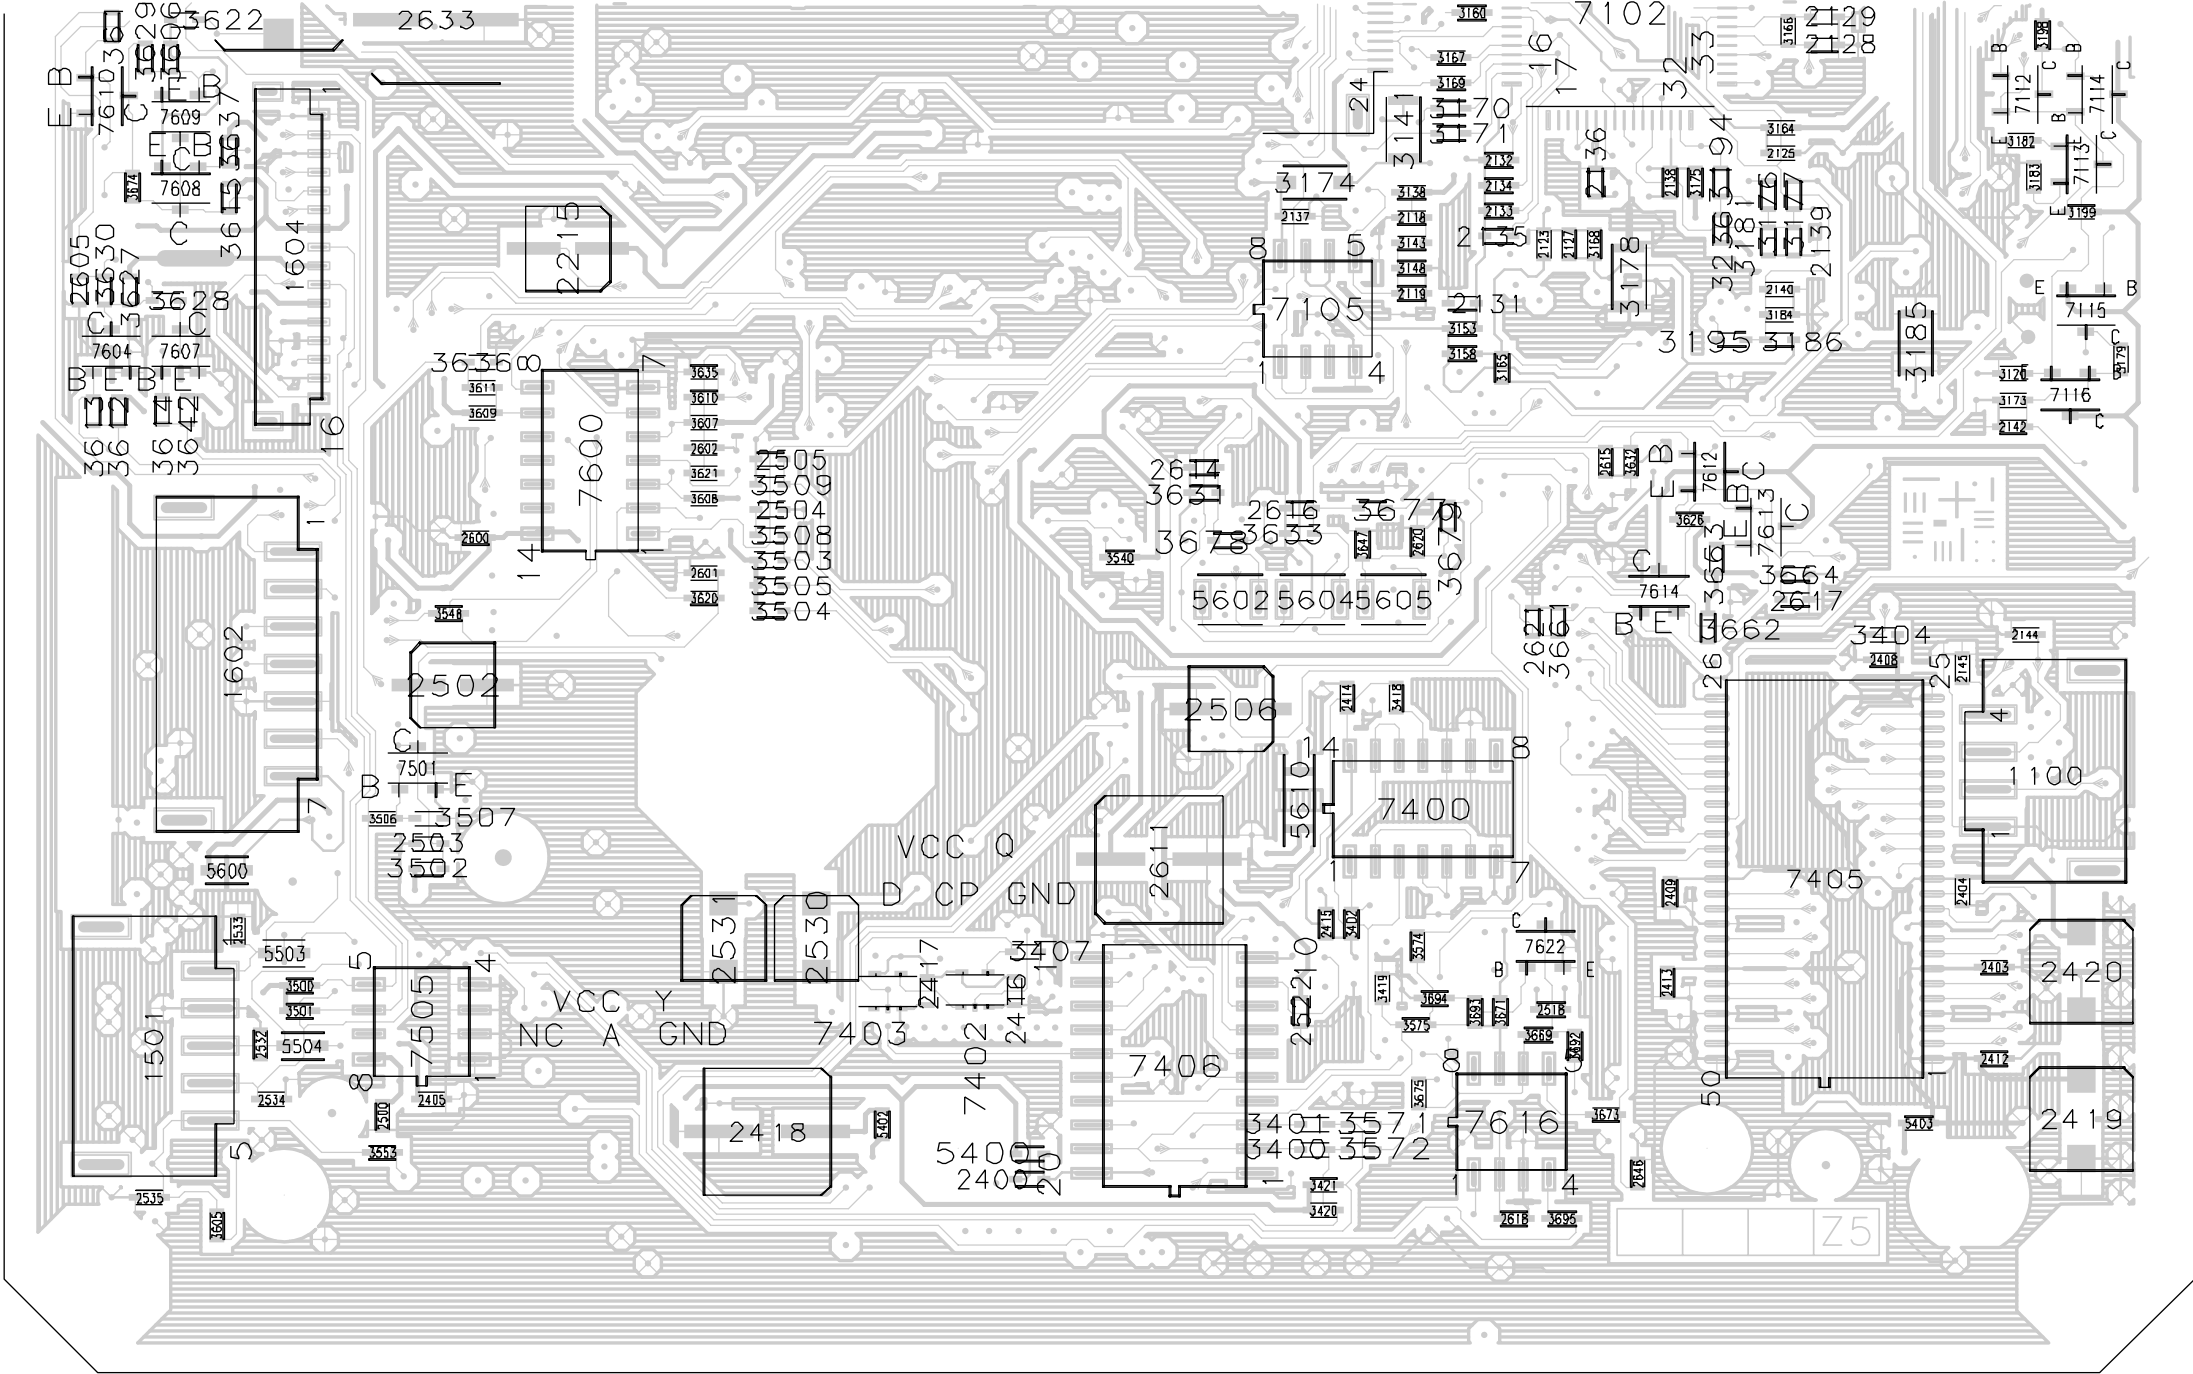


PRINTED CIRCUIT BOARD
A/V (U, C, A, R, T)

1000 A6	1008 C6	2004 B7	2202 A5	2207 A5	2216 B2	3037 B8	3205 B5	5004 C8	5008 C4	9000 A4	9004 A4	9010 B8	9014 A10	TF00 C6
1001 B2	1011 C6	2008 B10	2203 C6	2210 A4	2225 C4	3038 A11	3224 C5	5005 C10	5002 A1	9001 A4	9005 B5	9011 B8	9016 A8	TF01 C7
1003 C1	2001 A2	2016 A11	2204 B8	2214 B6	2231 B1	3040 B11	3225 C5	5006 C9	7010 B2	9002 B3	9006 B5	9012 A9	9017 A10	TF02 C6
1006 C9	2002 A3	2200 A7	2205 B4	2215 B7	3033 B11	3049 B9	5003 C7	5007 C8	7028 C4	9003 B4	9008 A7	9013 A9	9102 A9	

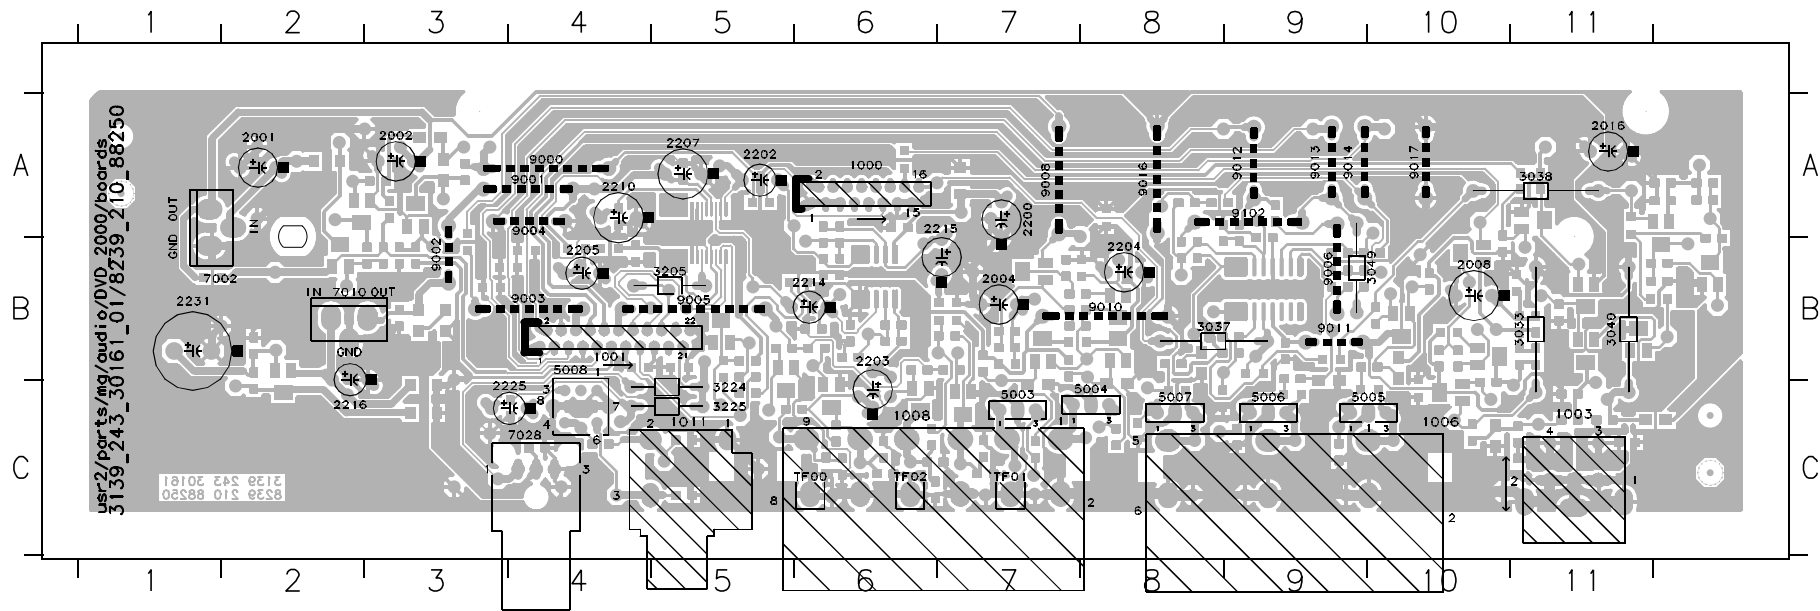

2007 C7	2211 A8	3000 A10	3011 A5	3012 B5	3044 B4	3068 A1	3215 C9	4010 A1	4306 B9	6003 C1	7403 A10	7415 B2	7450 B7	7451 C6
2010 C7	2212 A8	3001 A10	3012 A5	3044 B4	3068 A1	3215 C9	4010 A1	4306 B9	6003 C1	7403 A10	7415 B2	7450 B7	7451 C6	7452 C6
2011 C7	2213 A8	3002 A10	3013 A5	3045 B4	3069 A1	3216 C9	4011 A1	4307 B9	6004 C1	7404 A10	7416 B2	7451 C6	7453 C6	7454 C6
2012 C7	2214 A8	3003 A10	3014 A5	3046 B4	3070 A1	3217 C9	4012 A1	4308 B9	6005 C1	7405 A10	7417 B2	7452 C6	7455 C6	7456 C6
2013 C7	2215 A8	3004 A10	3015 A5	3047 B4	3071 A1	3218 C9	4013 A1	4309 B9	6006 C1	7406 A10	7418 B2	7453 C6	7457 C6	7458 C6
2014 C7	2216 A8	3005 A10	3016 A5	3048 B4	3072 A1	3219 C9	4014 A1	4310 B9	6007 C1	7407 A10	7419 B2	7454 C6	7459 C6	7460 C6
2015 C7	2217 A8	3006 A10	3017 A5	3049 B4	3073 A1	3220 C9	4015 A1	4311 B9	6008 C1	7408 A10	7420 B2	7455 C6	7461 C6	7462 C6
2016 C7	2218 A8	3007 A10	3018 A5	3050 B4	3074 A1	3221 C9	4016 A1	4312 B9	6009 C1	7409 A10	7421 B2	7456 C6	7463 C6	7464 C6
2017 C7	2219 A8	3008 A10	3019 A5	3051 B4	3075 A1	3222 C9	4017 A1	4313 B9	6010 C1	7410 A10	7422 B2	7457 C6	7465 C6	7466 C6
2018 C7	2220 A8	3009 A10	3020 A5	3052 B4	3076 A1	3223 C9	4018 A1	4314 B9	6011 C1	7411 A10	7423 B2	7458 C6	7467 C6	7468 C6
2019 C7	2221 A8	3010 A10	3021 A5	3053 B4	3077 A1	3224 C9	4019 A1	4315 B9	6012 C1	7412 A10	7424 B2	7459 C6	7469 C6	7470 C6

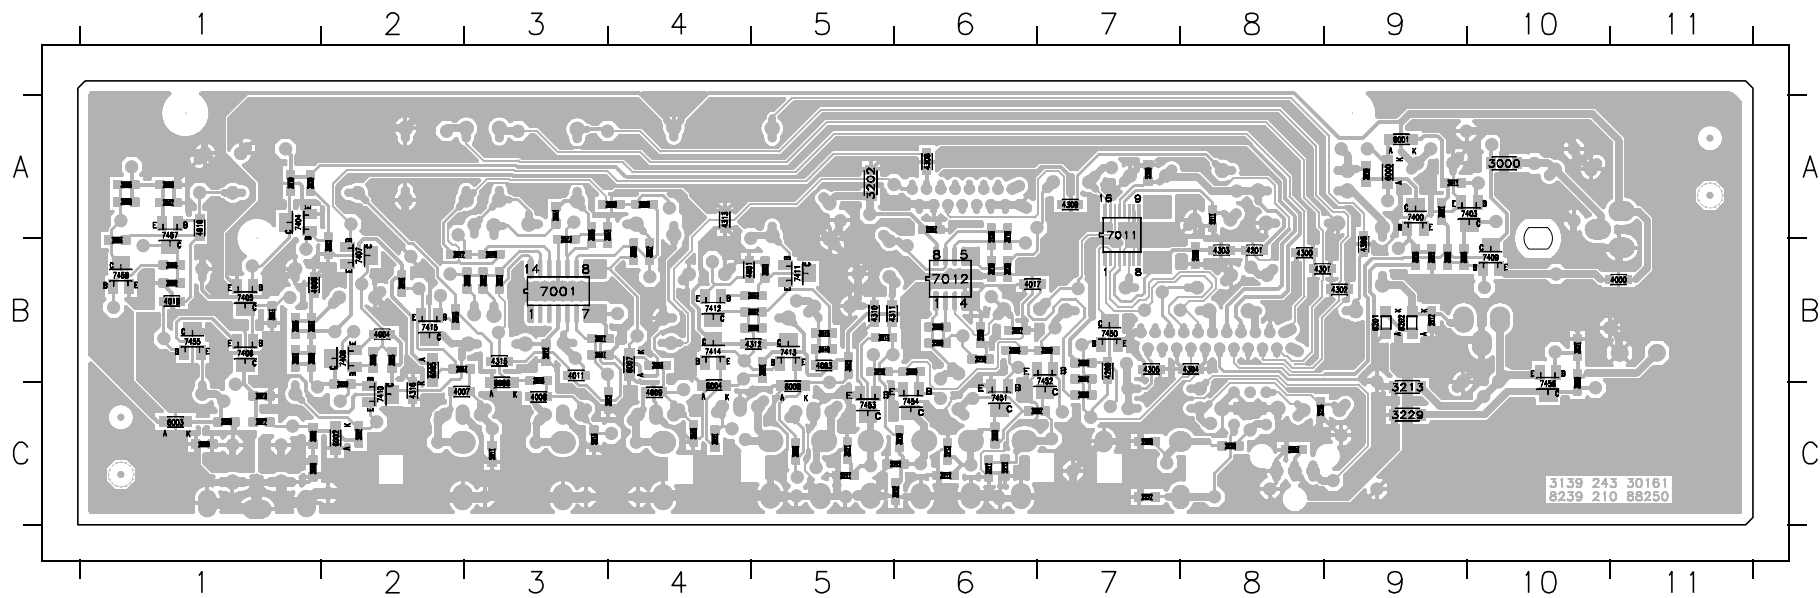


1

■ PRINTED CIRCUIT BOARD


A/V (B, G)

1300 A4	2357 A9	2385 A9	2488 B1	2524 B4	2535 B5	3036 B7	3322 A8	3409 B5	3508 B1	3618 A3	3691 A8	3720 B2	3764 A5	6401 A8	7330 A5	7407 B2	7921 A8
1301 A5	2359 A9	2412 A6	2496 A8	2525 B5	2536 B5	3038 B7	3338 A8	3413 B5	3511 A2	3620 A4	3692 A8	3722 B3	3765 A5	6403 A3	7331 A3	7900 B6	7922 A7
1303 B7	2360 A8	2452 A3	2497 A9	2527 B5	2537 B5	3039 B7	3339 A8	3425 B4	3512 A2	3621 A4	3693 A8	3723 B2	3766 A2	6404 A5	7332 A3	7901 B5	7935 B3
1304 B9	2361 A8	2453 A2	2498 A9	2528 B5	2538 B3	3040 B7	3340 A8	3432 A7	3519 A1	3623 A4	3694 B7	3729 B7	3767 A3	7006 B7	7333 A4	7902 B4	7943 B2
1402 B3	2372 A8	2456 A2	2506 A6	2529 B6	2539 A7	3041 B7	3341 A8	3433 A6	3610 A4	3625 A4	3695 B2	3742 B7	3772 B5	7007 B7	7334 A4	7903 B4	7944 A5
1405 B2	2375 A8	2460 A1	2507 A7	2530 A4	2540 A7	3043 B7	3348 A9	3442 B3	3612 A5	3626 A5	3696 B3	3743 B7	3773 B5	7008 B7	7335 A4	7904 B5	7948 A2
1410 A1	2378 A9	2462 A3	2508 A6	2511 A5	2541 B6	3044 B7	3351 A9	3446 B3	3613 A4	3627 A4	3704 A8	3755 B7	3802 A5	7009 B7	7400 A3	7905 B6	
2353 A9	2382 A9	2469 A2	2509 A8	2532 B6	2542 A5	3045 B7	3363 A9	3462 B3	3614 A5	3629 A8	3705 A8	3760 B7	5400 B1	7010 B7	7401 A1	7917 A9	
2354 A7	2383 A9	2471 A1	2511 B6	2533 B5	2544 B2	3046 B7	3407 A8	3505 B1	3615 A3	3634 A1	3706 A8	3761 B7	6302 A3	7304 A7	7402 A2	7919 A8	
2355 A9	2384 B6	2472 B2	2519 B1	2534 A5	2545 A4	3321 A8	3408 A8	3507 B1	3616 A3	3635 A8	3707 B7	3762 A5	6400 B1	7329 A4	7404 B3	7920 A8	

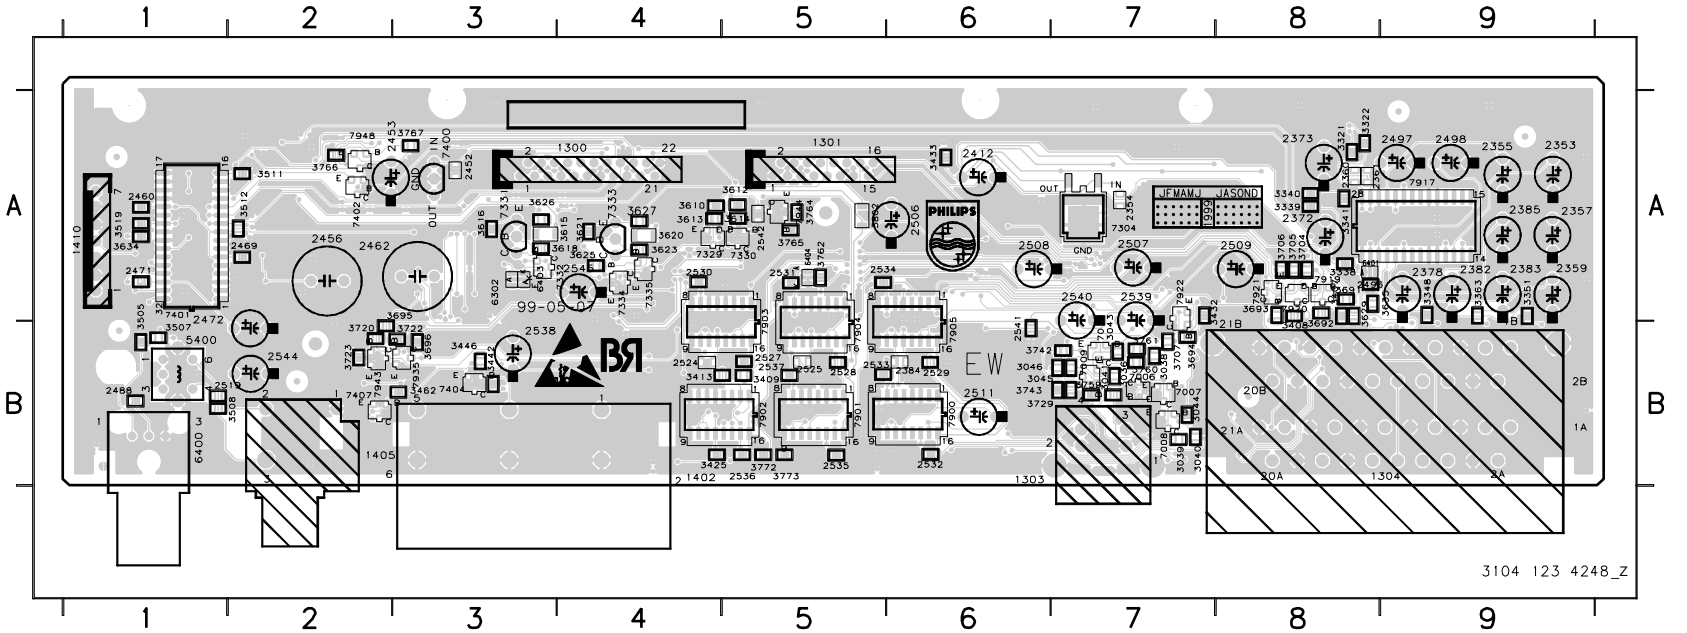


4

2032 B3	2504 B2	3323 B1	3464 A8	3653 B4	3701 B2	3746 B7	3805 B5	7934 B4
2358 B1	2505 B3	3325 B1	3517 A8	3672 A4	3702 A4	3747 A2	3999 A5	7936 A4
2371 B2	2520 B3	3343 B1	3611 A6	3673 A3	3703 A2	3748 A2	7011 B3	7937 A3
2377 B6	2521 B1	3345 B6	3617 A7	3674 A3	3721 A2	3749 A4	7012 B3	7938 A4
2395 B1	2522 B1	3347 B6	3619 A7	3675 A2	3724 B4	3750 B6	7013 B3	7939 A2
2402 B2	2523 B1	3349 B1	3622 A6	3676 A2	3725 A3	3751 B7	7014 B3	7941 B4
2404 B1	2543 B9	3359 B1	3624 A6	3677 A4	3726 A3	3752 B7	7300 B6	7942 A2
2408 B2	3049 B3	3366 B1	3631 A8	3678 A4	3727 A4	3753 B3	7301 B6	7945 B6
2409 B2	3050 B4	3394 A1	3632 A8	3679 A4	3728 B3	3754 B3	7310 B6	7946 B5
2450 A8	3056 B3	3397 B1	3636 A4	3680 A3	3730 B6	3755 B3	7403 A8	7947 B5
2455 A8	3058 B3	3444 A9	3637 A4	3681 A3	3731 A2	3756 A3	7405 B7	7949 B5
2457 B7	3059 B3	3445 B7	3638 A3	3682 A4	3732 B4	3757 A3	7406 B7	
2458 A8	3062 B3	3447 B7	3639 A3	3683 A4	3733 B4	3758 B4	7918 A2	
2459 A8	3063 B3	3448 A9	3640 A4	3684 A2	3734 A3	3763 B6	7923 A4	
2461 A8	3300 B7	3451 A9	3641 A3	3685 A2	3735 A3	3768 A5	7924 A4	
2463 B7	3301 B6	3453 A8	3642 A2	3687 B4	3736 A3	3769 B5	7925 A3	
2464 A8	3313 B1	3454 A8	3643 A2	3688 B4	3737 A3	3770 B6	7926 A3	
2495 B8	3314 B1	3455 A9	3646 B4	3689 A4	3738 A4	3771 B5	7927 A3	
2499 B2	3315 B1	3456 A7	3647 B4	3690 A2	3739 A4	3774 B6	7928 A3	
2500 B2	3316 B1	3457 B8	3648 A4	3697 A4	3740 B3	3800 B4	7929 A2	
2501 B2	3318 B1	3459 A9	3649 A3	3698 A3	3741 B3	3801 A2	7930 A2	
2502 B1	3319 B1	3461 B7	3650 A4	3699 A3	3744 A2	3803 A6	7931 B4	
2503 B2	3320 B1	3463 B7	3651 A2	3700 A2	3745 B6	3804 B5	7933 A4	

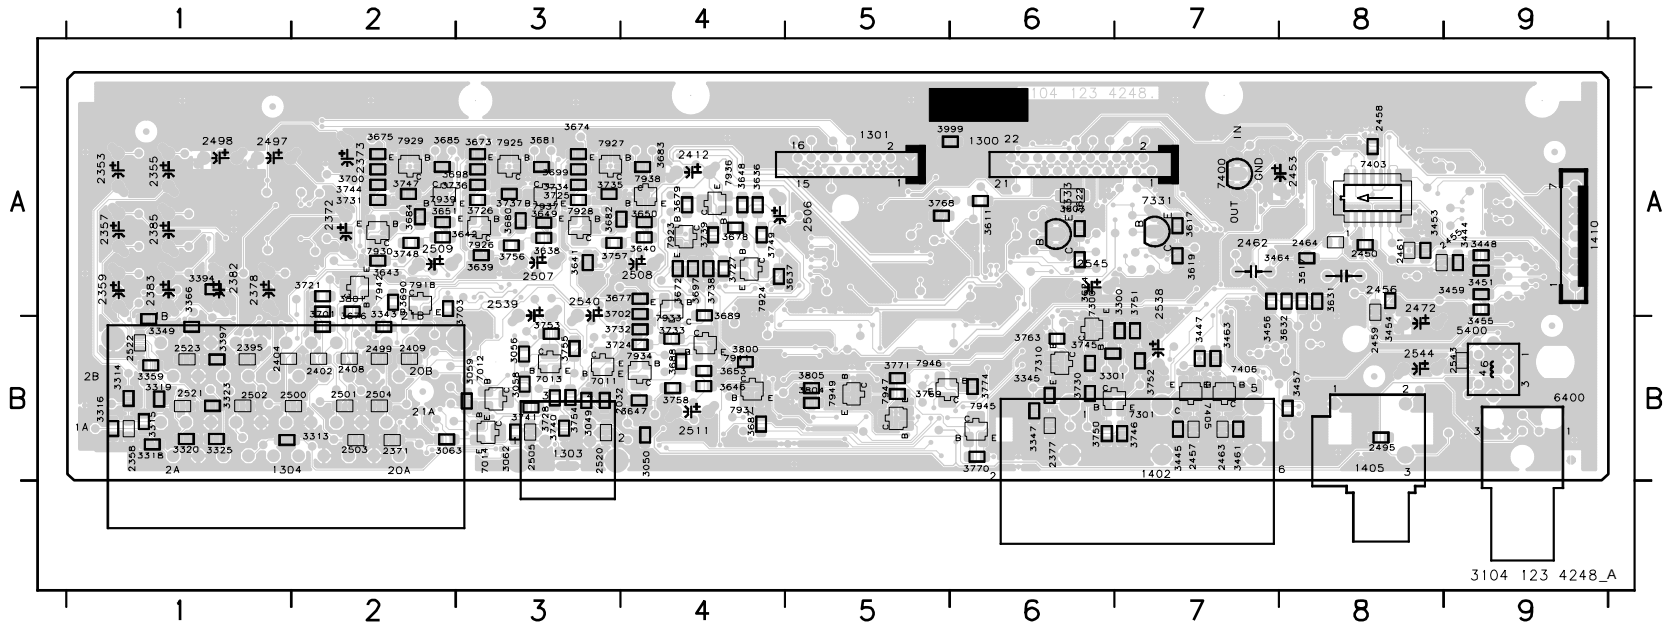


PRINTED CIRCUIT BOARD
DISPLAY

1100 A9101 A9102 A8106 A9107 A8108 A9109 A8110 A4112 A9113 A4115 A7116 A8117 A1118 A1119 A6121 A9122 A9106 A7117 A2123 A2124 A2126 A2129 A2130 A7105 A7106 A7110 A7112 A7

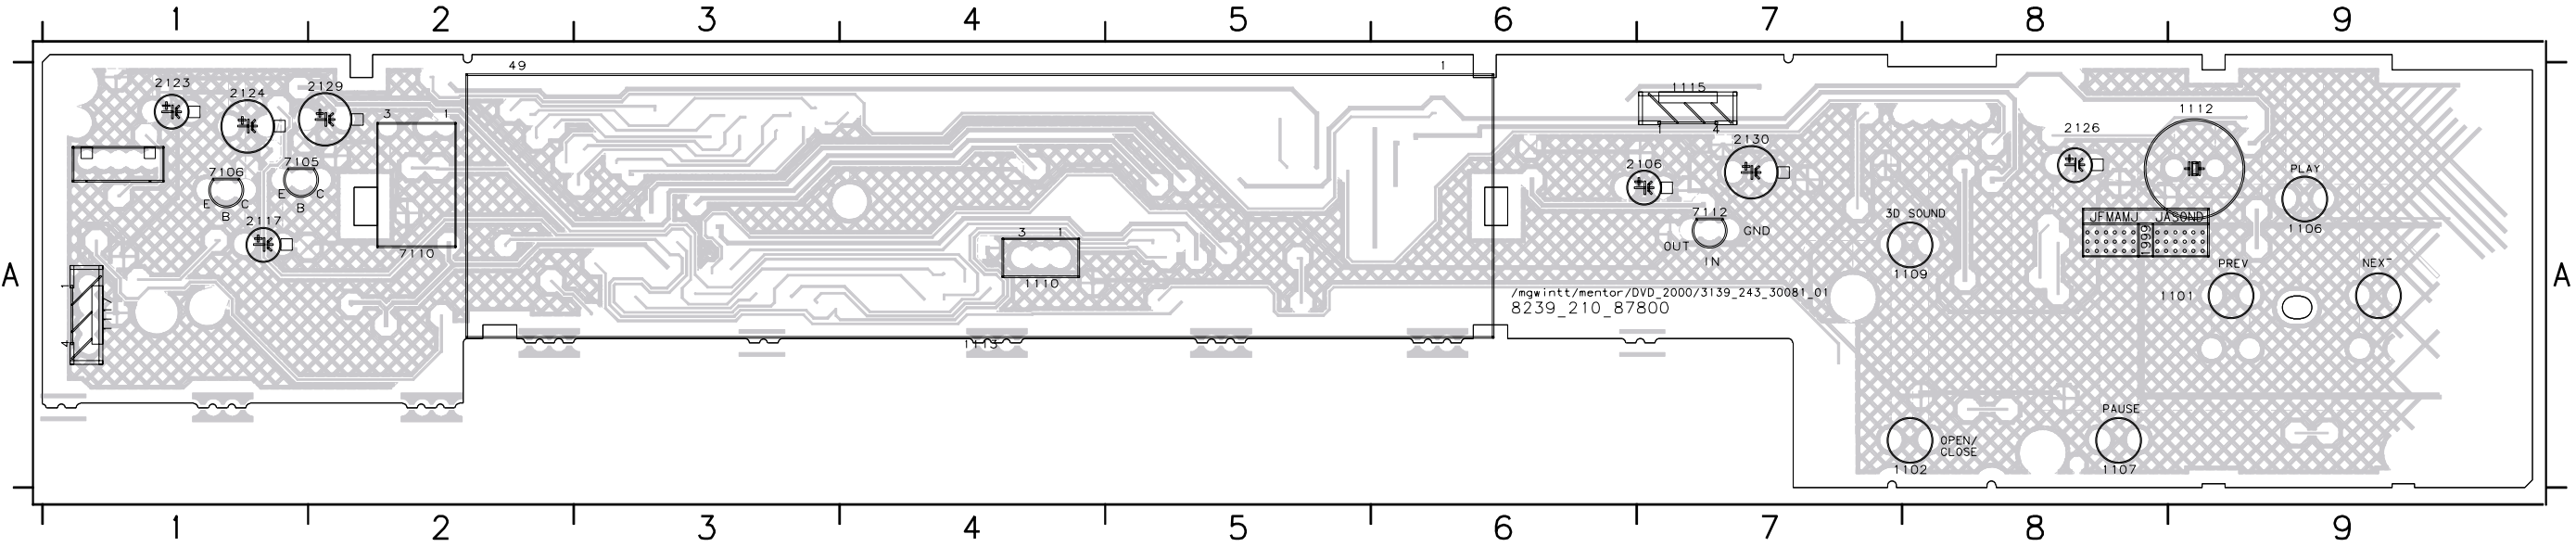


2100 A2103 A8108 A2111 A2116 A9120 A2125 A9201 A13100 A2103 A8106 A2109 A8112 A13115 A3118 A2121 A9125 A9128 A3131 A9134 A9137 A9140 A2144 A2147 A43150 A6102 A7100 A7103 A7108 A1
2101 A2105 A8109 A2114 A9118 A2121 A2128 A2202 A43101 A2104 A3107 A43110 A8113 A8116 A8119 A3122 A9126 A3129 A3132 A9135 A9138 A8142 A9145 A8148 A43100 A2104 A7101 A7104 A6109 A9
2102 A2107 A2110 A2115 A9119 A2122 A2131 A2211 A8102 A2105 A8108 A8111 A13114 A8117 A3120 A8123 A3127 A3130 A9133 A9136 A2139 A9143 A9146 A43149 A43101 A6105 A7102 A7107 A9

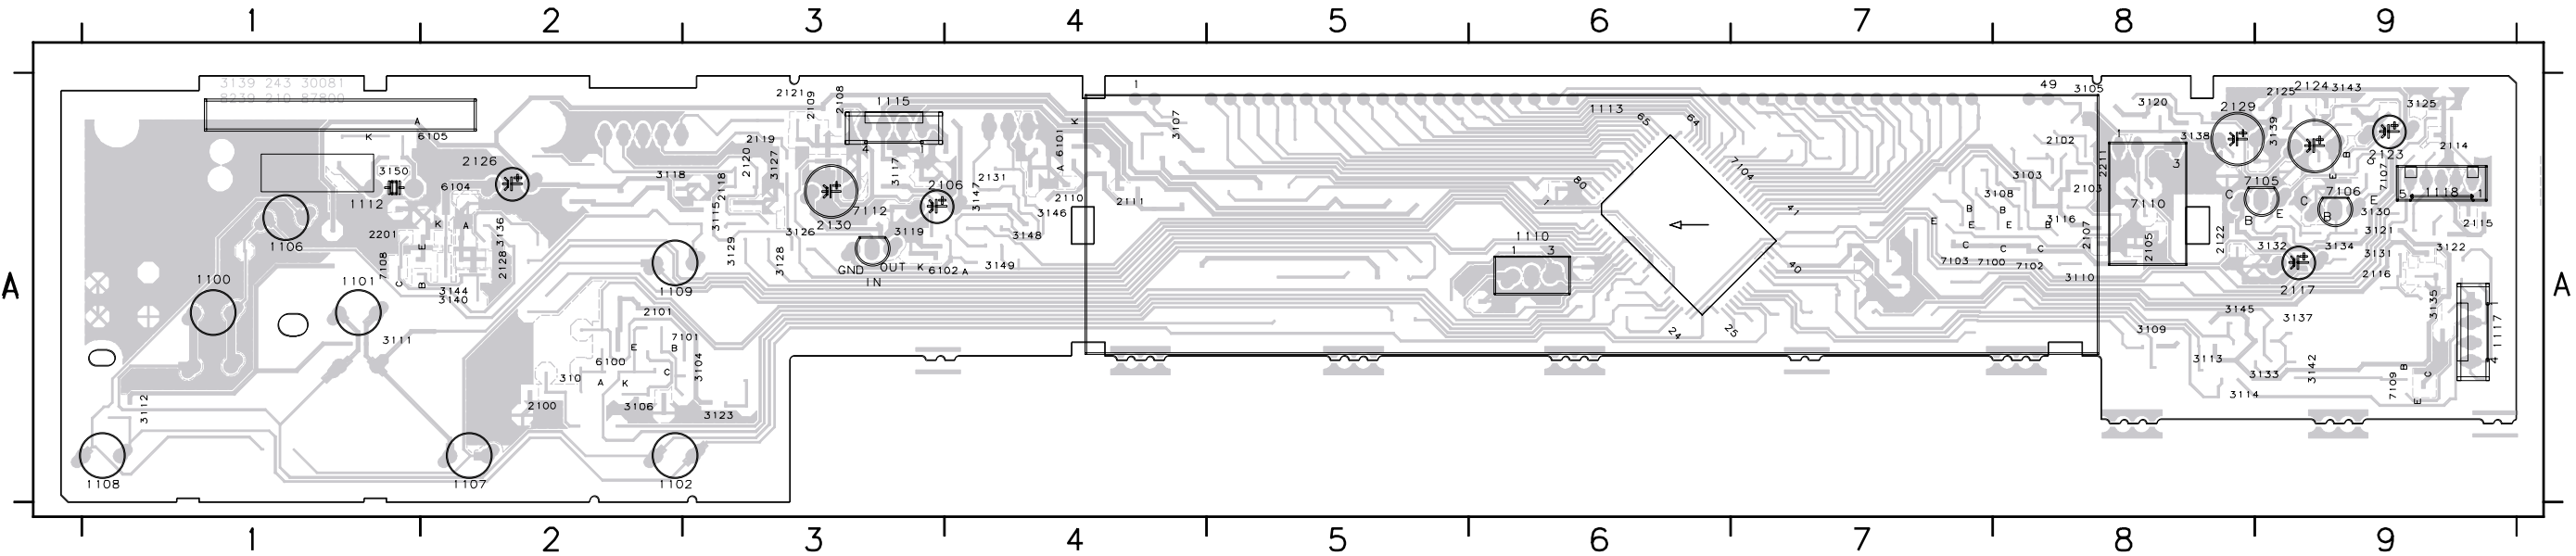


1 ■ PRINTED CIRCUIT BOARD
POWER (B, G)

0101 B1 0208 B9 2122 C2 2129 C4 2134 C5 2232 A7 2240 A7 2259 C8 3111 C4 3126 B4 3133 A3 3201 C6 5125 B4 5223 C6 6110 C3 6132 C5 6231 B6 6261 A6 7150 C3 7255 C7 9202 C8 9207 B9
0125 C4 1120 C1 2123 B3 2130 A4 2141 C4 2233 A8 2241 A6 2260 A7 3120 C1 3127 B4 3134 C3 3233 B8 5131 B6 5230 B7 6111 C3 6140 C4 6240 B6 7125 B4 7201 C6 7259 C7 9203 C8
0205 C9 2119 B2 2125 B3 2131 C5 2210 C7 2236 B6 2250 C6 2261 A7 3121 C3 3128 B4 3135 C5 3262 C6 5135 B5 5231 B7 6120 A3 6210 B7 6241 A7 7131 C6 7233 A8 9101 A1 9204 B9
0206 C8 2120 C2 2126 A3 2132 C5 2211 B7 2238 B7 2251 B6 2263 A6 3122 B2 3129 C4 3140 B4 5120 A2 5210 C7 5240 A7 6122 C3 6211 C6 6250 B6 7141 C3 7236 B7 9122 C2 9205 B9
0207 A9 2121 B3 2127 B4 2133 C5 2230 B7 2239 B8 2253 C7 3105 C1 3123 B2 3132 A4 3155 C4 5121 B2 5222 C6 5260 A7 6123 B2 6230 B6 6260 A6 7145 C4 7237 B8 9201 C6 9206 A8


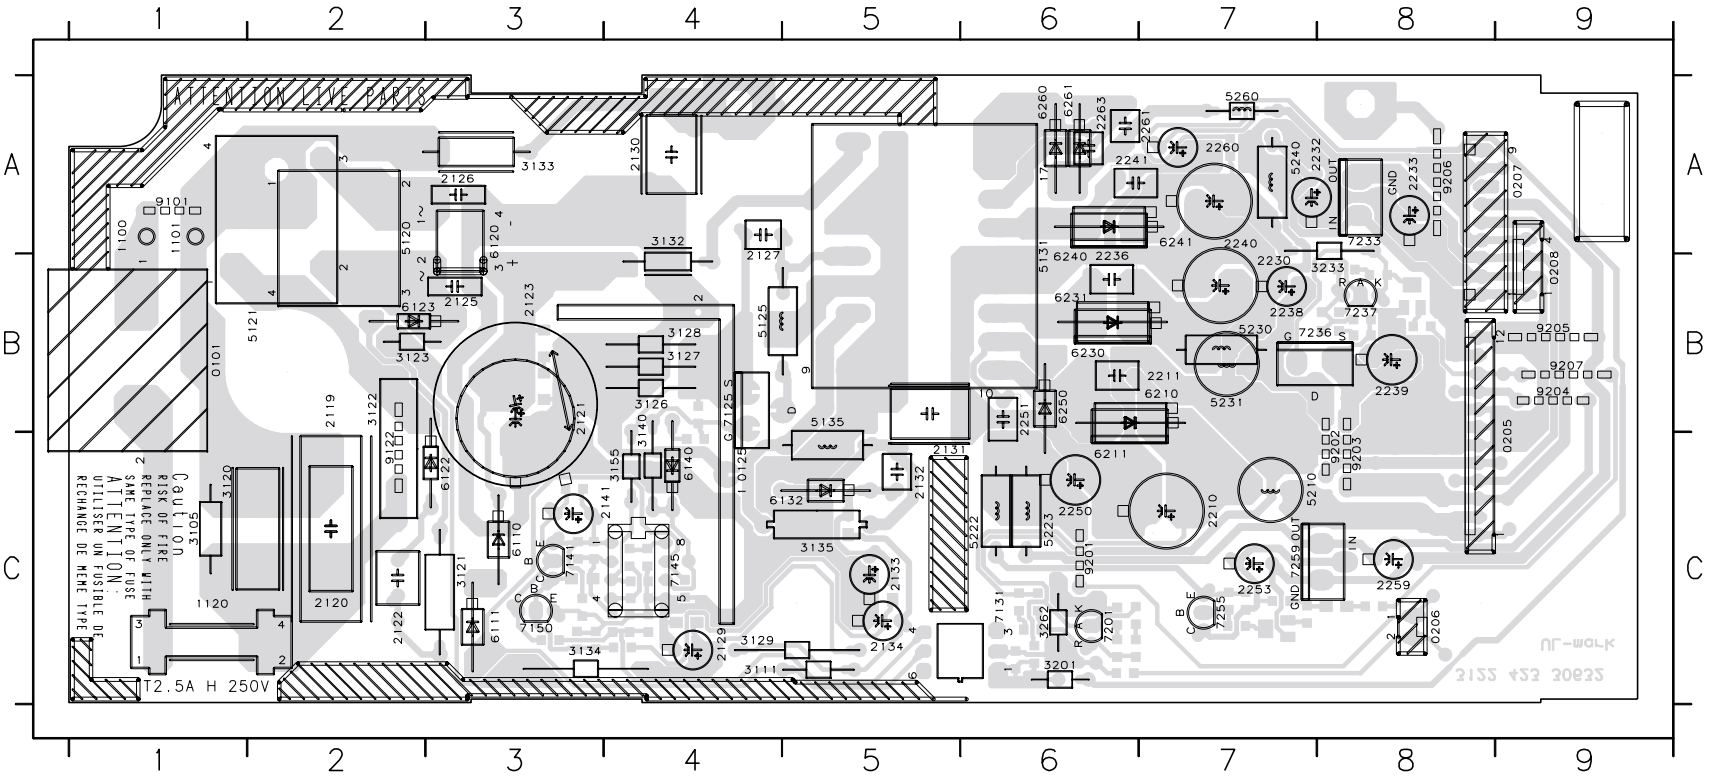


2142 A3 2146 A4 2156 A4 2202 A6 2262 B8 3136 B3 3143 A3 3150 A3 3156 A4 3204 A6 3207 A6 3235 B8 3241 B8 3255 A7 3258 A8 4202 C7 6141 A5 7235 B8
2143 A4 2150 A3 2157 A4 2203 A6 3125 B4 3139 A4 3145 A3 3153 A4 3202 A6 3205 A6 3208 A6 3236 B8 3253 A7 3256 A7 3260 C7 6129 A4 6150 A3 7256 A7
2145 A3 2152 A4 2201 A6 2234 B8 3131 B3 3141 A3 3146 A4 3154 A4 3203 A6 3206 A6 3234 B8 3237 B8 3254 A7 3257 A7 4201 B7 6133 A5 6256 A8

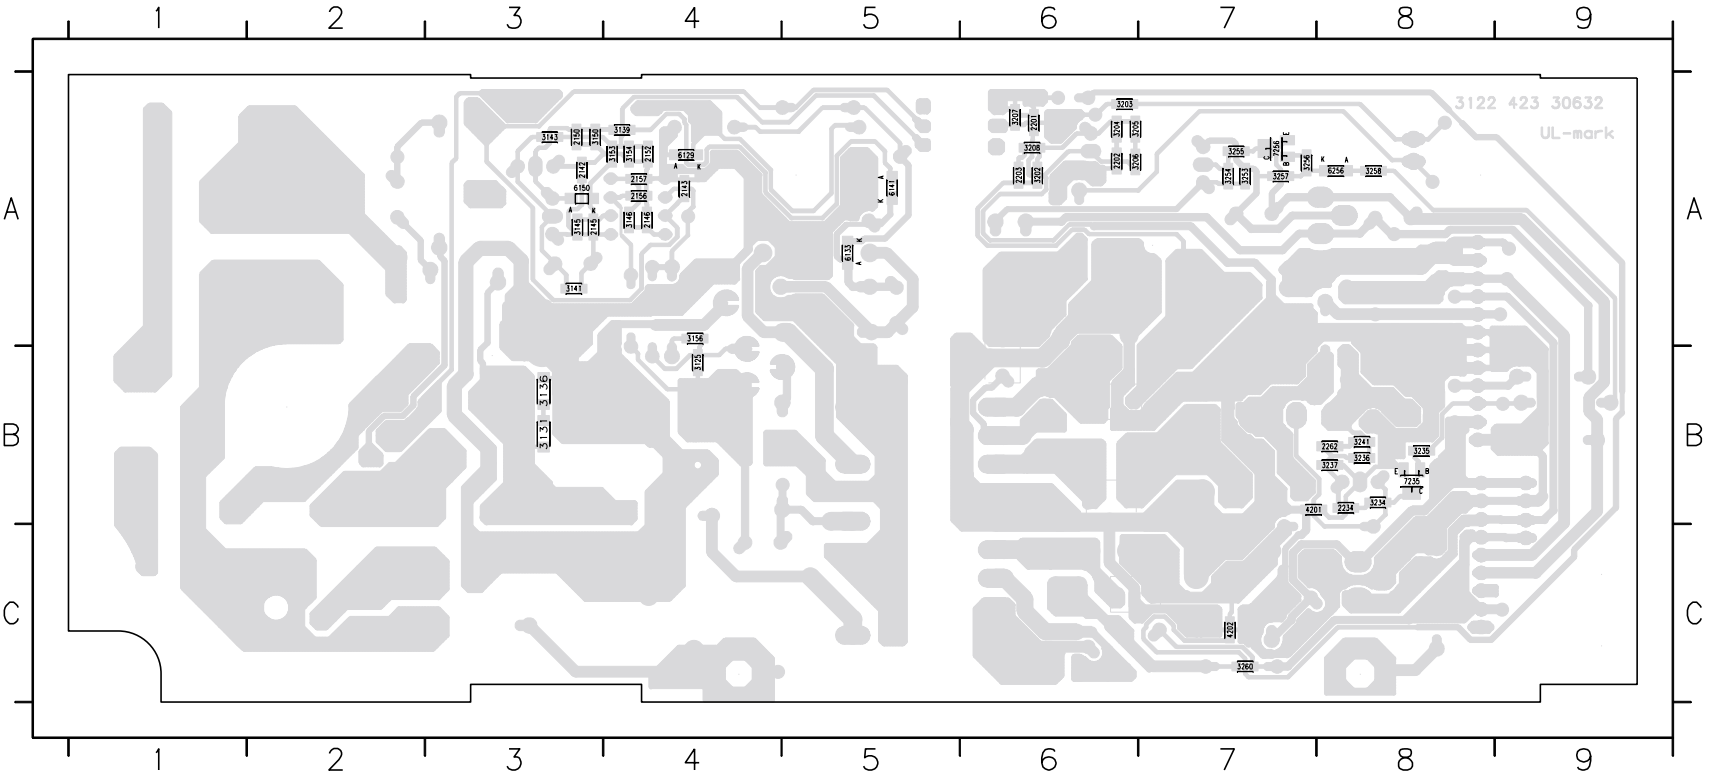

PRINTED CIRCUIT BOARD

VOLUME

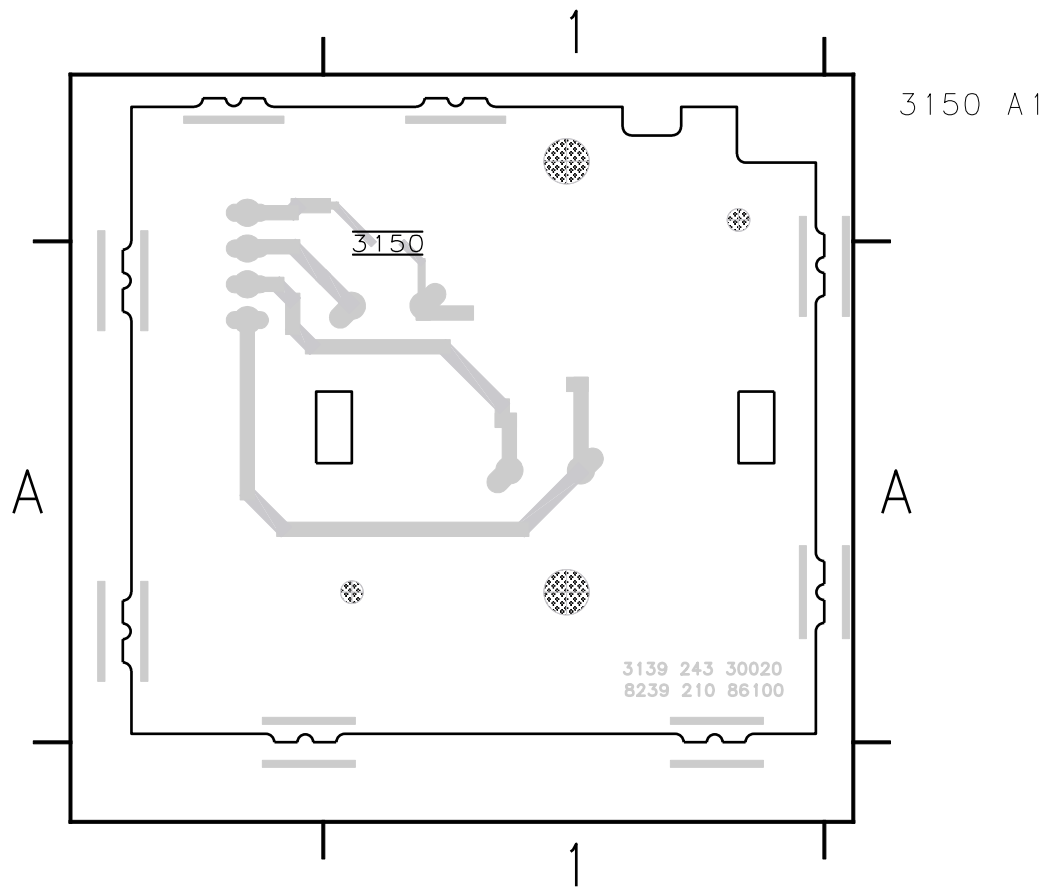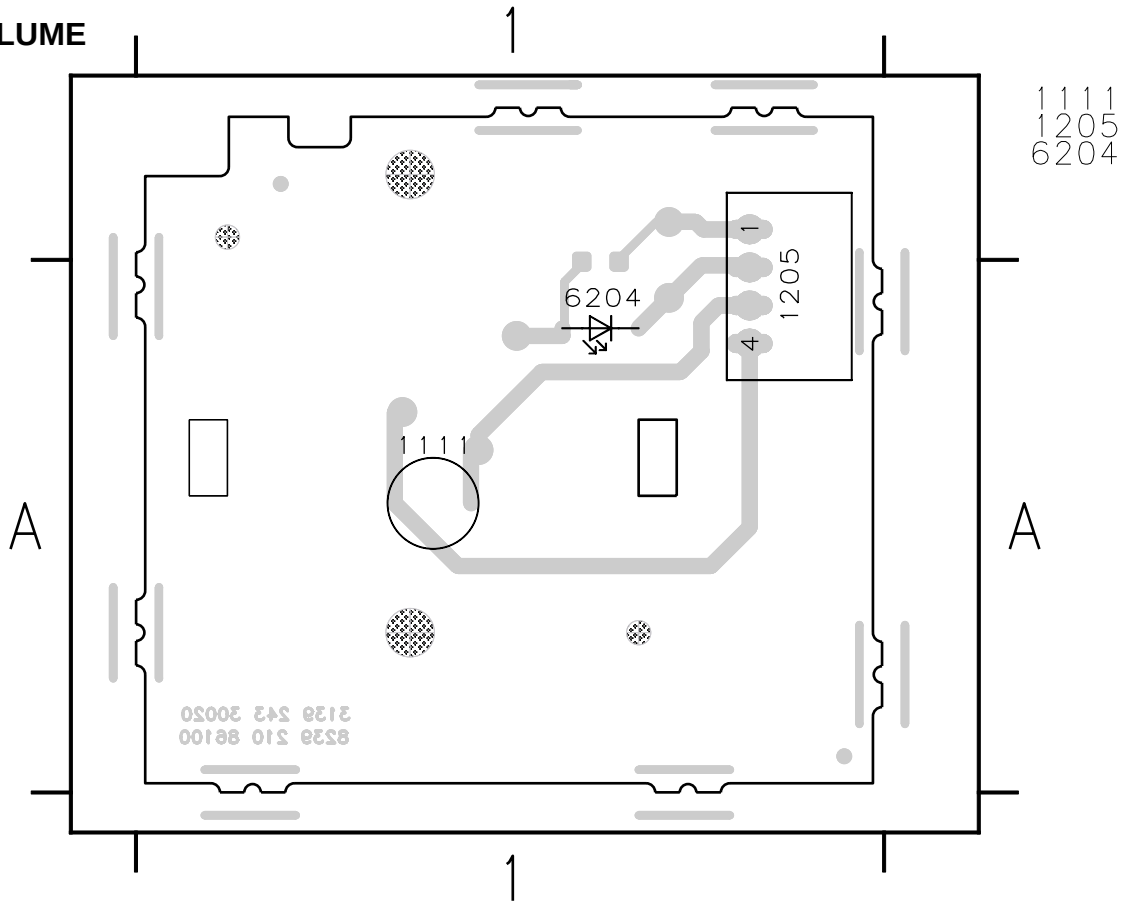


SCHEMATIC DIAGRAM


VOLUME

C1: Volume Adjust PCB

* Only for KOK version only

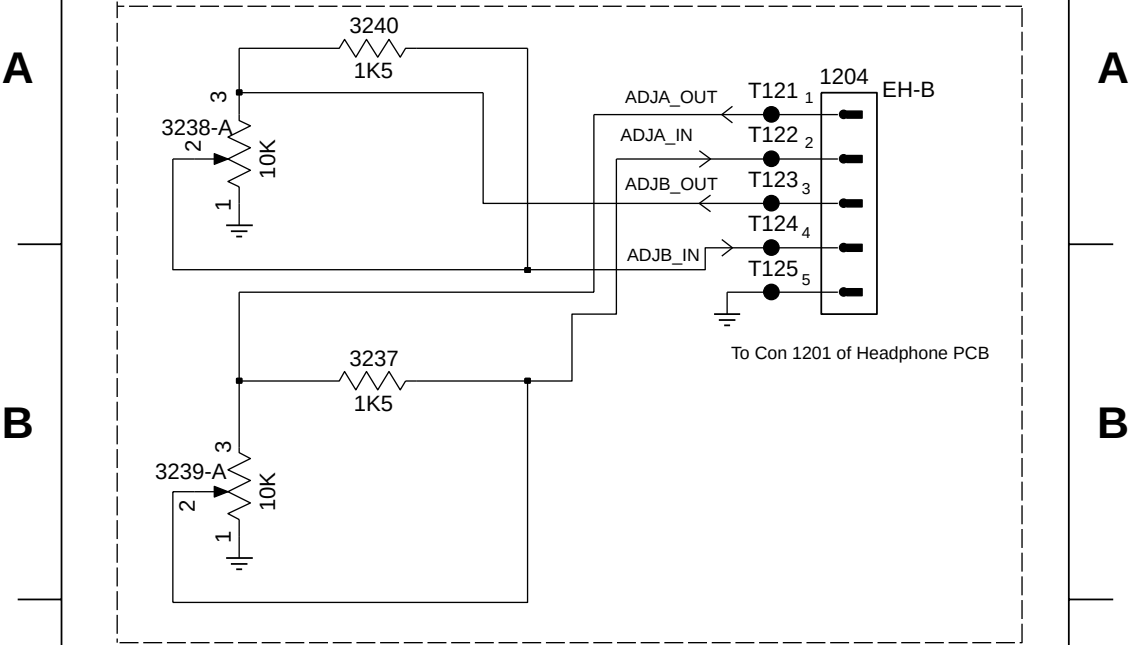


D1: Standby PCB

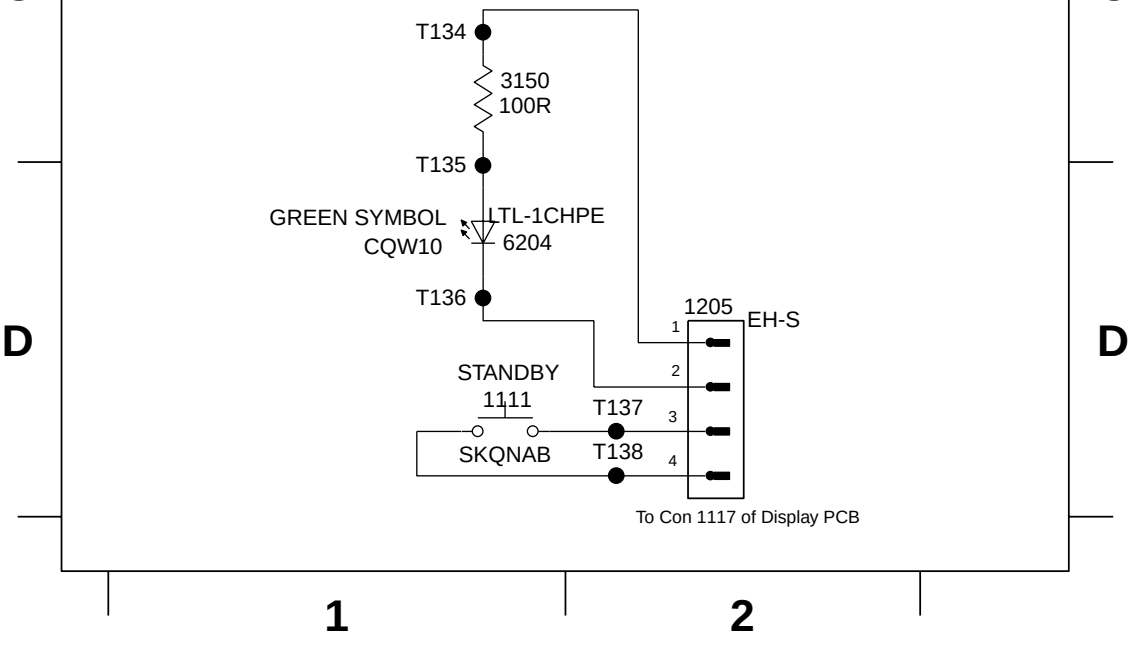


■ SCHEMATIC DIAGRAM

MONO 1/6 (SERVO DALAS)

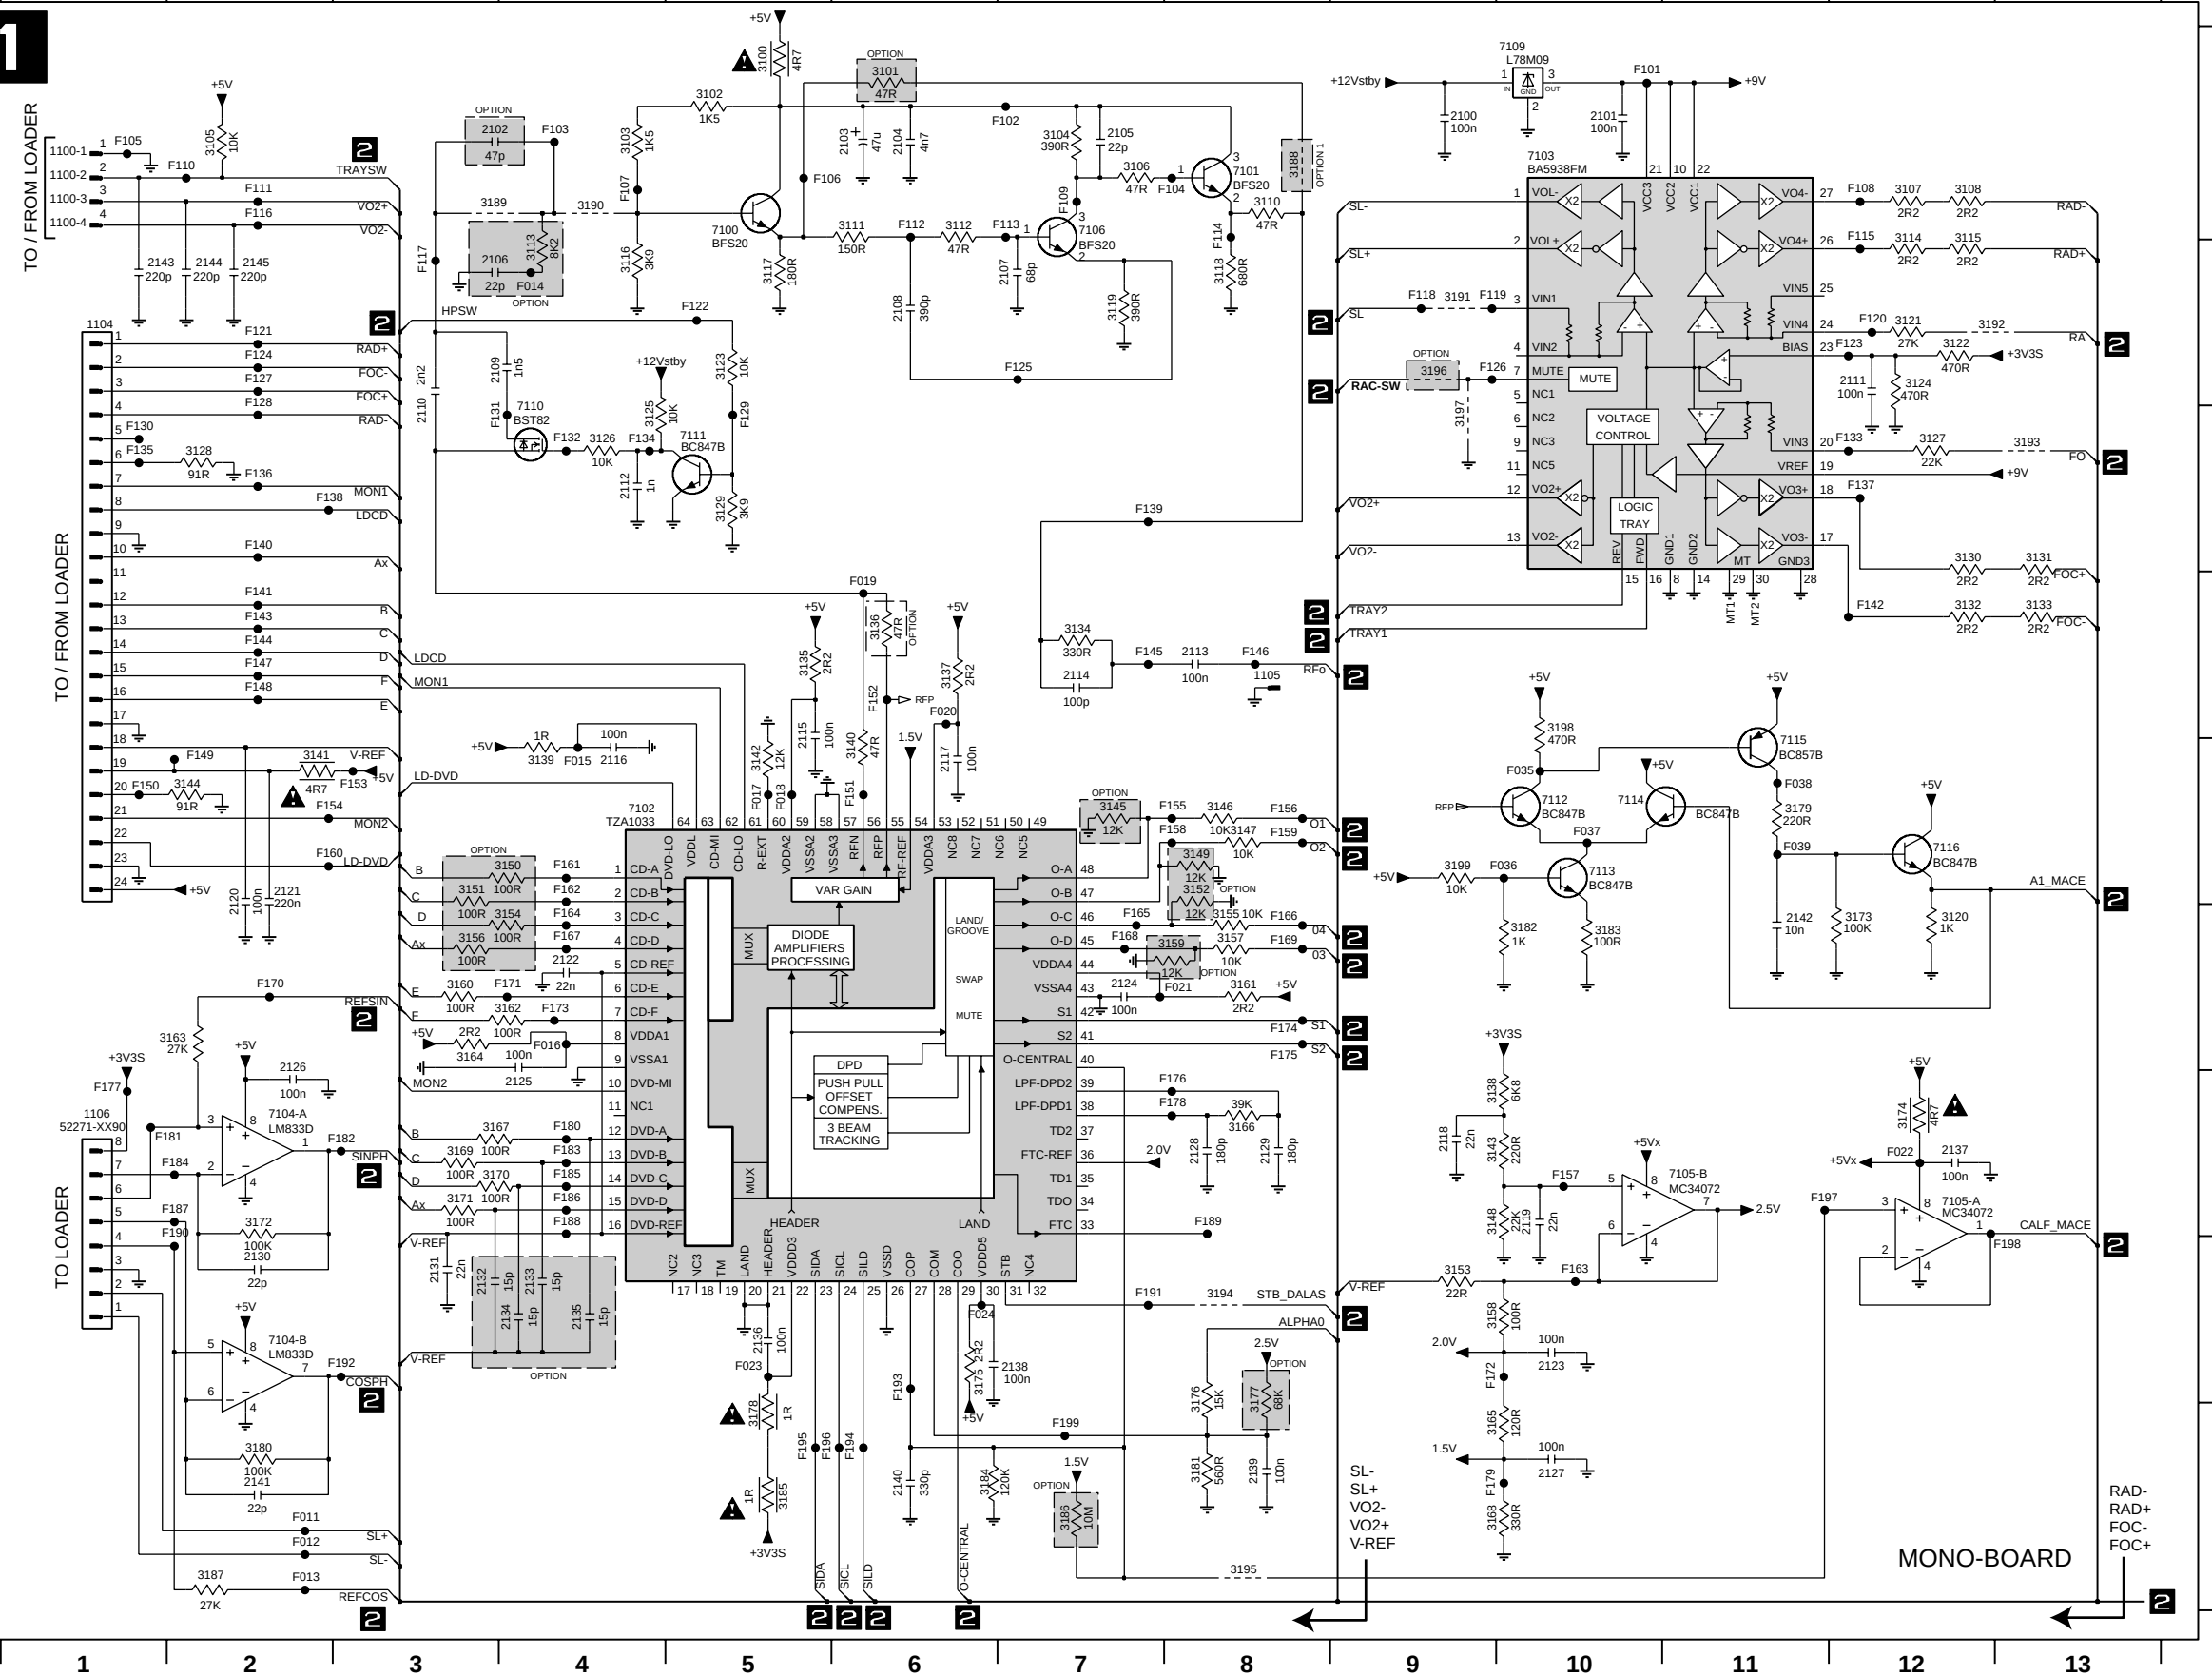

1000-1 A1	3165 F9	F147 D2
1000-2 A1	3166 G8	F148 D2
1000-3 A1	3167 G3	F149 E2
1000-4 A1	3168 F9	F150 E1
1104 B1	3169 G3	F151 E6
1105 D8	3170 G3	F152 D6
1106 G1	3171 G3	F153 E3
2100 A9	3172 G2	F154 E2
2101 A10	3173 F12	F155 E8
2102 A10	3174 G12	F156 E8
2103 A6	3175 H6	F157 G10
2104 A6	3176 H8	F158 E8
2105 A7	3177 H8	F159 E8
2106 B3	3178 I5	F160 E2
2107 B7	3179 E11	F161 E4
2108 B6	3180 I2	F162 E4
2109 B4	3181 I8	F163 H10
2110 C3	3182 F10	F164 F4
2111 B12	3183 F10	F165 F7
2112 C4	3184 I6	F166 F8
2113 D8	3185 I5	F167 F4
2114 D7	3186 I7	F168 F7
2115 D8	3187 G2	F169 F6
2116 E4	3188 A8	F170 F2
2117 E6	3189 A3	F171 F4
2118 G9	3190 A4	F172 H9
2119 G10	3191 B9	F173 F4
2120 E2	3192 B12	F174 F8
2121 E2	3193 C13	F175 F8
2122 F4	3194 H8	F176 H8
2123 H7	3195 I8	F177 G1
2124 F10	3196 B9	F178 G8
2125 G4	3197 C9	F179 I9
2126 G2	3198 D10	F180 G4
2127 I10	3199 E9	F181 G2
2128 G8	3199 A5	F182 G3
2129 G8	7101 A8	F183 G4
2130 H2	7102 A4	F184 G2
2131 H3	7103 E10	F185 G4
2132 H3	7104-A G2	F186 G4
2133 H4	7104-B H2	F187 G2
2134 H4	7105-A G12	F188 G4
2135 H4	7105-B G11	F189 G8
2136 H5	7106 A7	F190 H2
2137 G12	7109 A10	F191 H7
2138 H7	7110 C4	F192 H3
2139 H8	7111 C5	F193 H6
2140 I6	7112 E10	F194 I6
2141 I2	7113 E10	F195 I5
2142 F11	7114 E10	F196 I5
2143 B1	7115 D11	F197 G11
2144 B2	7116 E12	F198 H13
2145 B2	F011 I2	F199 I7
3000 A5	F012 I2	
3001 A6	F013 I2	
3002 A5	F014 B4	
3003 A4	F015 E4	
3004 A7	F016 F4	
3005 A2	F017 E5	
3006 A7	F018 E5	
3007 A12	F019 D6	
3008 A12	F020 D6	
3100 A8	F021 F8	
3111 A6	F022 G12	
3112 A6	F023 H5	
3113 B4	F024 H6	
3114 B12	F035 E10	
3115 B12	F036 E10	
3116 B4	F037 E10	
3117 B5	F038 E11	
3118 B8	F039 E11	
3119 B7	F101 A10	
3120 F12	F102 A7	
3121 B12	F103 A4	
3122 B12	F104 A8	
3123 B5	F105 A1	
3124 B12	F106 A5	
3125 C4	F107 A4	
3126 C4	F108 A12	
3127 C12	F109 A7	
3128 C2	F110 A2	
3129 C5	F111 A2	
3130 C12	F112 A6	
3131 C13	F113 A7	
3132 D12	F114 A8	
3133 D13	F115 B12	
3134 D7	F116 A2	
3135 D5	F117 B3	
3136 D6	F118 B9	
3137 D6	F119 B9	
3138 G9	F120 B12	
3139 E4	F121 B2	
3140 E6	F122 B5	
3141 E2	F123 B12	
3142 E5	F124 B2	
3143 G9	F125 B7	
3144 E2	F126 B9	
3145 E7	F127 B2	
3146 E7	F128 C2	
3147 E5	F129 C5	
3148 G9	F130 C1	
3149 E8	F131 C4	
3150 E4	F132 C4	
3151 E3	F133 C12	
3152 E8	F134 C4	
3153 H9	F135 C1	
3154 F4	F136 C2	
3155 F8	F137 C12	
3156 F3	F138 C2	
3157 F8	F139 C7	
3158 H9	F140 C2	
3159 F8	F141 D2	
3160 F3	F142 D12	
3161 F8	F143 D2	
3162 F4	F144 D2	
3163 F2	F145 D7	
3164 F3	F146 D8	

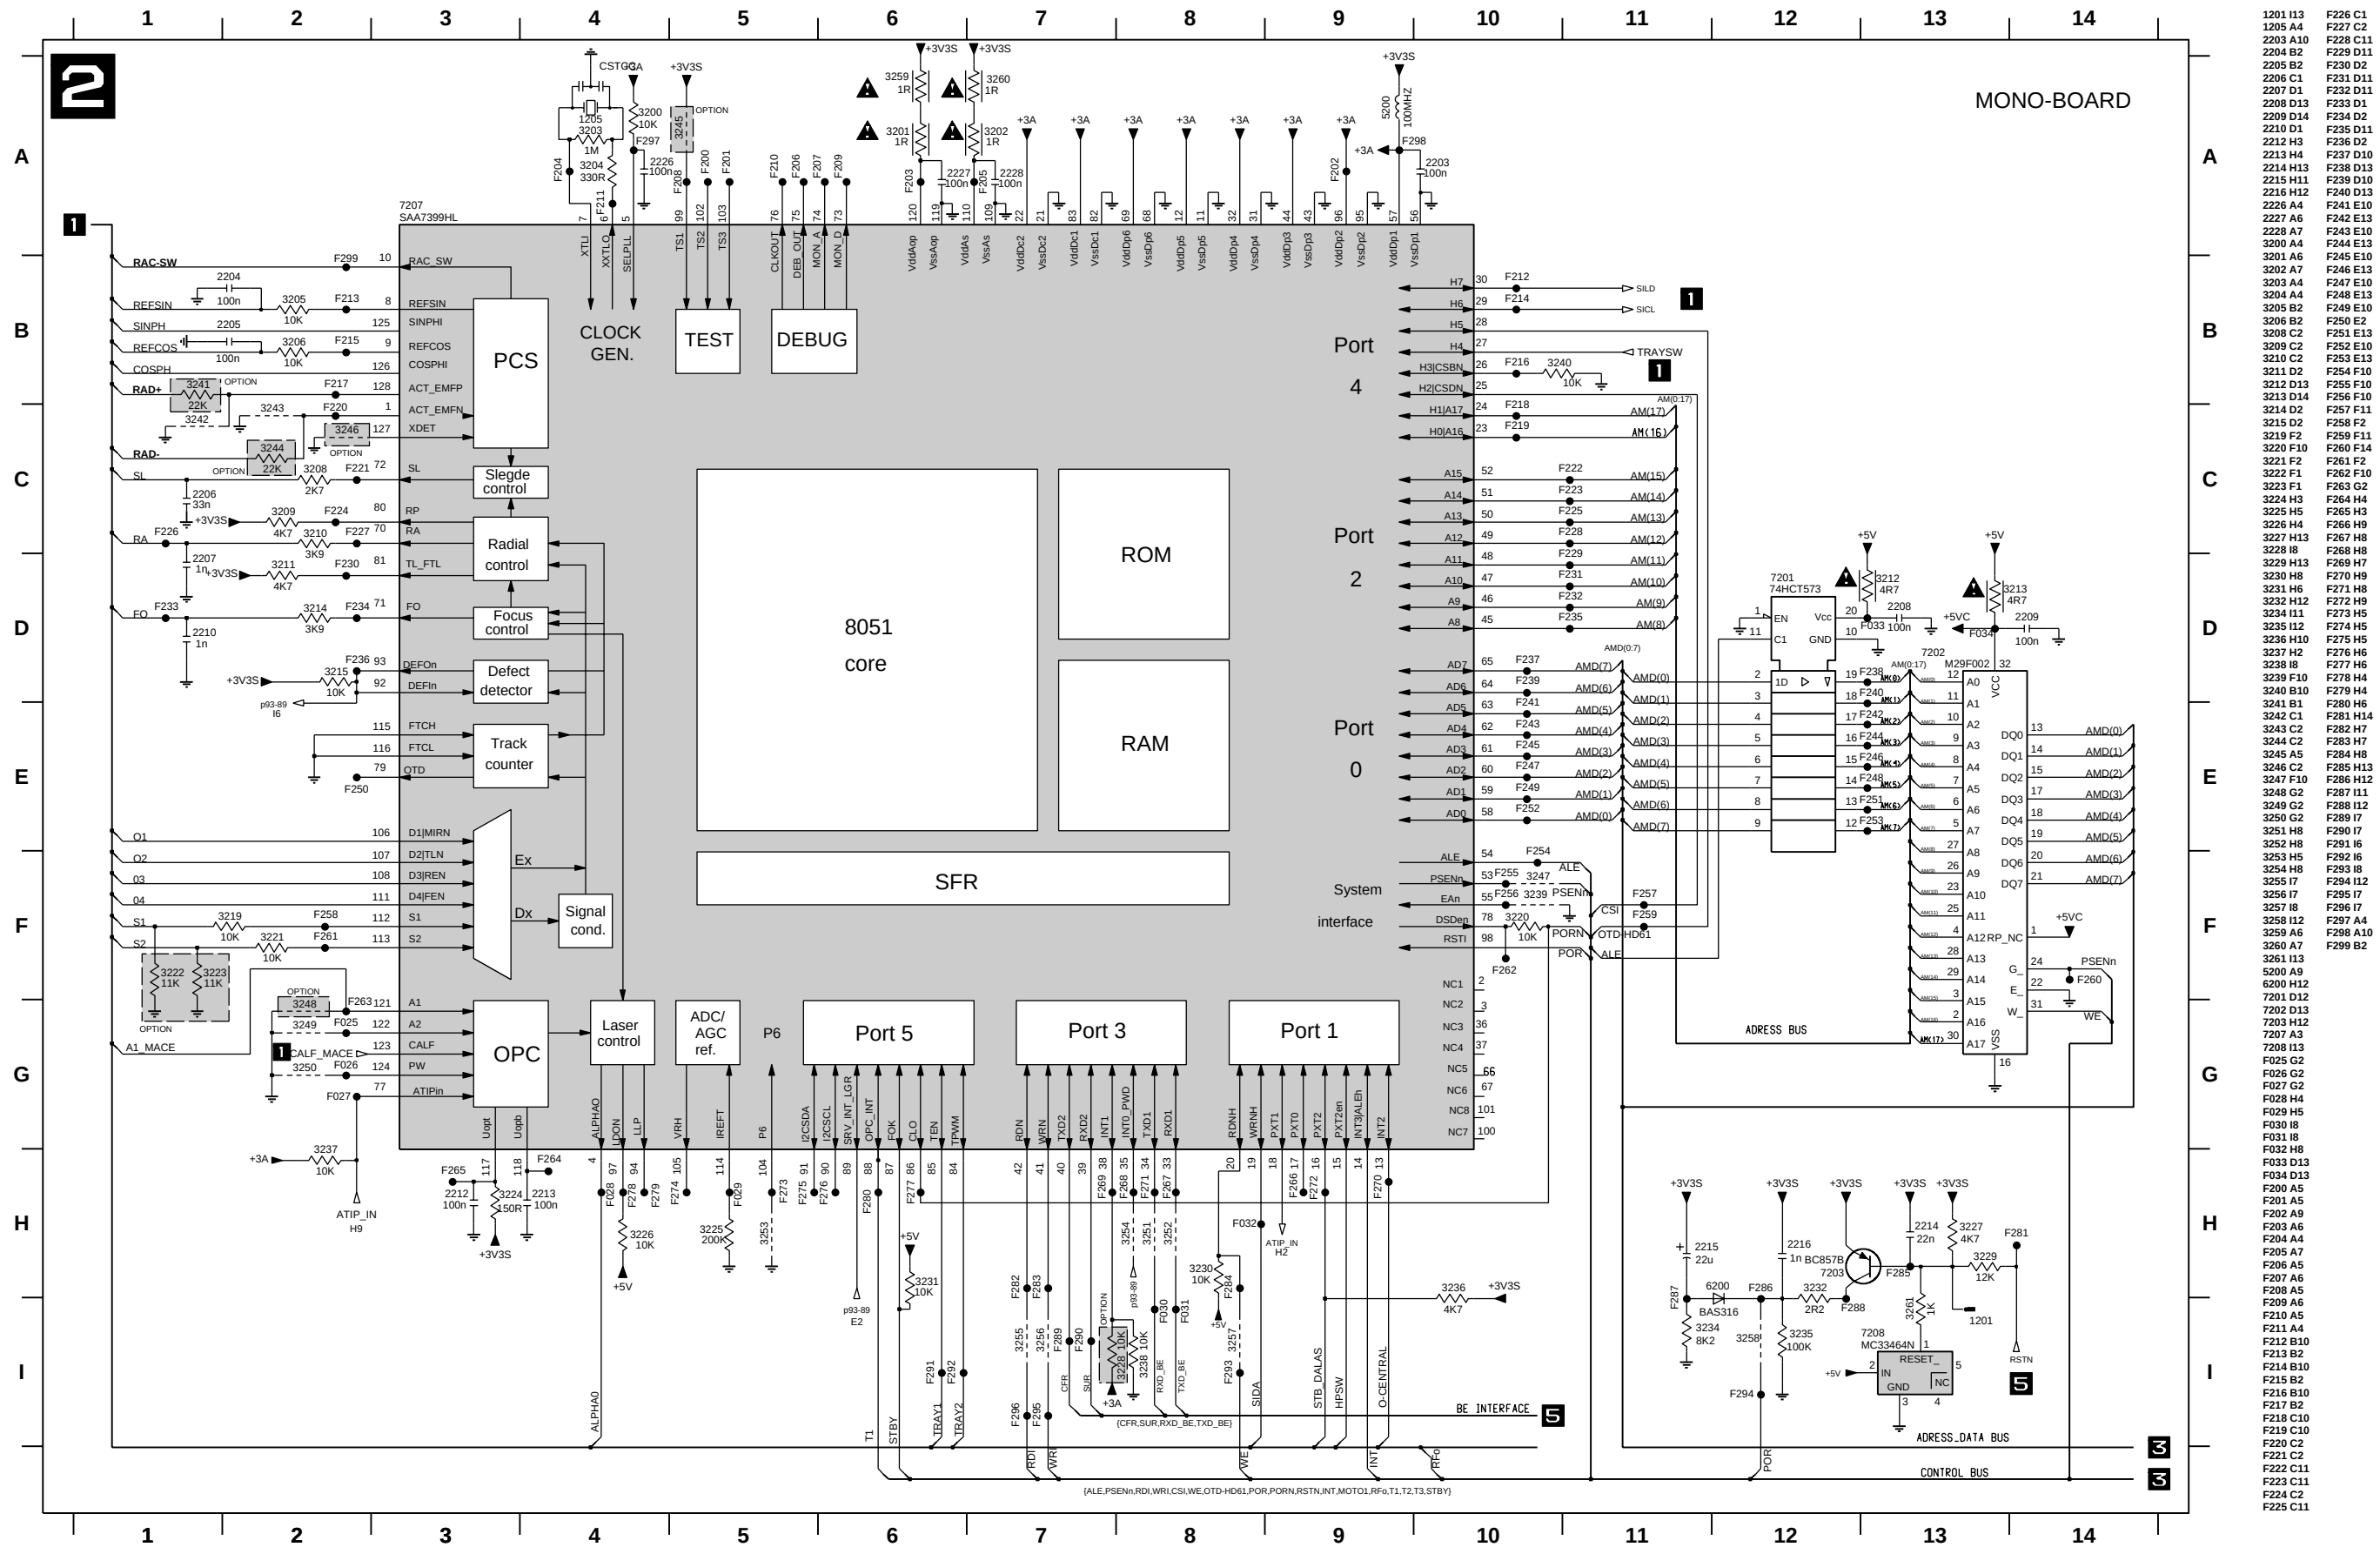

2201 A13	F226 C1
1205 A4	F227 C2
2203 A10	F228 C11
2204 A02	F229 D11
2205 B2	F230 D2
2206 C1	F231 D11
2207 D13	F232 D11
2208 D14	F233 D1
2209 D14	F234 D2
2210 D1	F235 D11
2212 H3	F236 D2
2213 A4	F237 D10
2214 H13	F238 D13
2215 H11	F239 D10
2216 H12	F240 D13
2226 A4	F241 E10
2227 A6	F242 H3
2228 A7	F243 E10
2229 A10	F244 H3
2231 A01	F245 E10
2232 A02	F246 E11
2233 A4	F247 E10
2234 A4	F248 H3
2235 B02	F249 E10
2236 B2	F250 E2
2238 C2	F251 E13
2239 C2	F252 E10
2240 C2	F253 E13
2241 D2	F254 F10
2212 D13	F255 F10
2213 D14	F256 F10
2214 D2	F257 F11
2215 D2	F258 F2
2219 F2	F259 F11
2220 F10	F260 F14
2221 F2	F261 F2
2222 F1	F262 F10
2223 F1	F263 H3
2224 H3	F264 H4
2225 H5	F265 H3
2226 H4	F266 H9
2227 H13	F267 H8
2228 H8	F268 H8
2229 H13	F269 H7
2230 H8	F270 H9
2231 H6	F271 H8
2232 H12	F272 H9
2233 H12	F273 H5
2235 H12	F274 H5
2236 H10	F275 H5
2237 H2	F276 H6
2238 H8	F277 H6
2239 F10	F278 H4
2240 B10	F279 H4
2241 B1	F280 H6
2242 C1	F281 H14
2243 C1	F282 H7
2244 C2	F283 H7
2245 A5	F284 H8
2246 C2	F285 H13
2247 F10	F286 H12
2248 G2	F287 H11
2249 G2	F288 H12
2250 G2	F289 H7
2251 H8	F290 H7
2252 H8	F291 H6
2253 H5	F292 H6
2254 H8	F293 H8
2255 F7	F294 H12
2256 F7	F295 F7
2257 H8	F296 F7
2258 H12	F297 A4
2259 A6	F298 A10
2260 A7	F299 B2
2261 H3	
2262 A4	
2260 H12	
2262 D13	
2270 H12	
2270 H3	
F025 G2	
F026 G2	
F027 G2	
F028 H4	
F029 H5	
F030 H8	
F031 H8	
F032 H8	
F033 D13	
F034 D13	
F200 A5	
F201 A5	
F202 A9	
F203 A6	
F204 A4	
F205 A7	
F206 A5	
F207 A6	
F208 A5	
F209 A6	
F210 A5	
F211 A4	
F212 B10	
F213 B2	
F214 B10	
F215 B2	
F216 B10	
F217 B2	
F218 C10	
F219 C10	
F220 C2	
F221 C2	
F222 C11	
F223 C11	
F224 C2	
F225 C11	


■ SCHEMATIC DIAGRAM

MONO 3/6 (Decoder & Turntable motor control)

MONO-BOARD


ADDRESS-DATA BUS
CONTROL BUS

1300 A7 F353 G13
1301 G14 F354 H13
2300 A12 F355 H10
2301 A9 F356 H14
2302 A6 F357 H7
2303 A6 F358 H7
2304 B6 F359 H13
2305 C5 F360 H8
2306 C3 F361 H10
2307 C3 F362 H8
2309 F7 F363 H10
2310 G11 F364 H13
2311 H12 F365 I13
2312 H13 F366 I13
2313 H13 F367 I13
2314 H8 F368 I10
2315 I10 F369 I13
2318 B4 F370 I13
2319 C5 F371 I10
3300 A11 F372 I13
3301 A7 F373 I12
3302 A7
3304 B3
3305 C4
3309 C6
3310 E6
3311 F8
3312 F6
3313 F7
3316 G9
3317 G10
3318 H8
3319 H13
3320 H7
3321 H13
3322 H9
3323 H9
3324 I9
3325 I13
3326 I14
3327 I13
3328 I13
3329 I13
3330 B5
3331 B5
3332 C5
3333 F8
3334 F9
3335 F9
3336 F9
3337 F9
3338 F9
3339 C6
3340 H9
5300 A8
5301 A5
6301 G9
6302 G9
6303 G8
7304 G12
7310 A11
7311 A6
7312 I13
7315 H8
F300 A11
F301 A9
F302 A7
F303 A5
F304 A7
F305 B10
F306 B6
F307 B10
F308 B10
F309 B5
F310 B10
F311 B10
F312 B4
F313 B10
F314 B6
F315 B10
F316 C6
F317 C10
F318 C10
F319 C6
F320 C10
F321 C10
F322 C6
F323 C6
F324 C10
F325 D10
F326 D10
F327 D10
F328 D10
F329 D10
F330 D10
F331 D10
F332 E10
F333 E10
F334 E10
F335 E10
F336 F8
F337 F7
F338 F8
F339 F6
F340 F7
F341 F7
F342 F10
F343 F9
F344 F9
F345 F9
F346 F9
F347 F9
F348 F8
F349 G10
F350 G12
F351 G10
F352 G13




■ SCHEMATIC DIAGRAM

MONO 5/6 (DVD Decoder STI 5505)

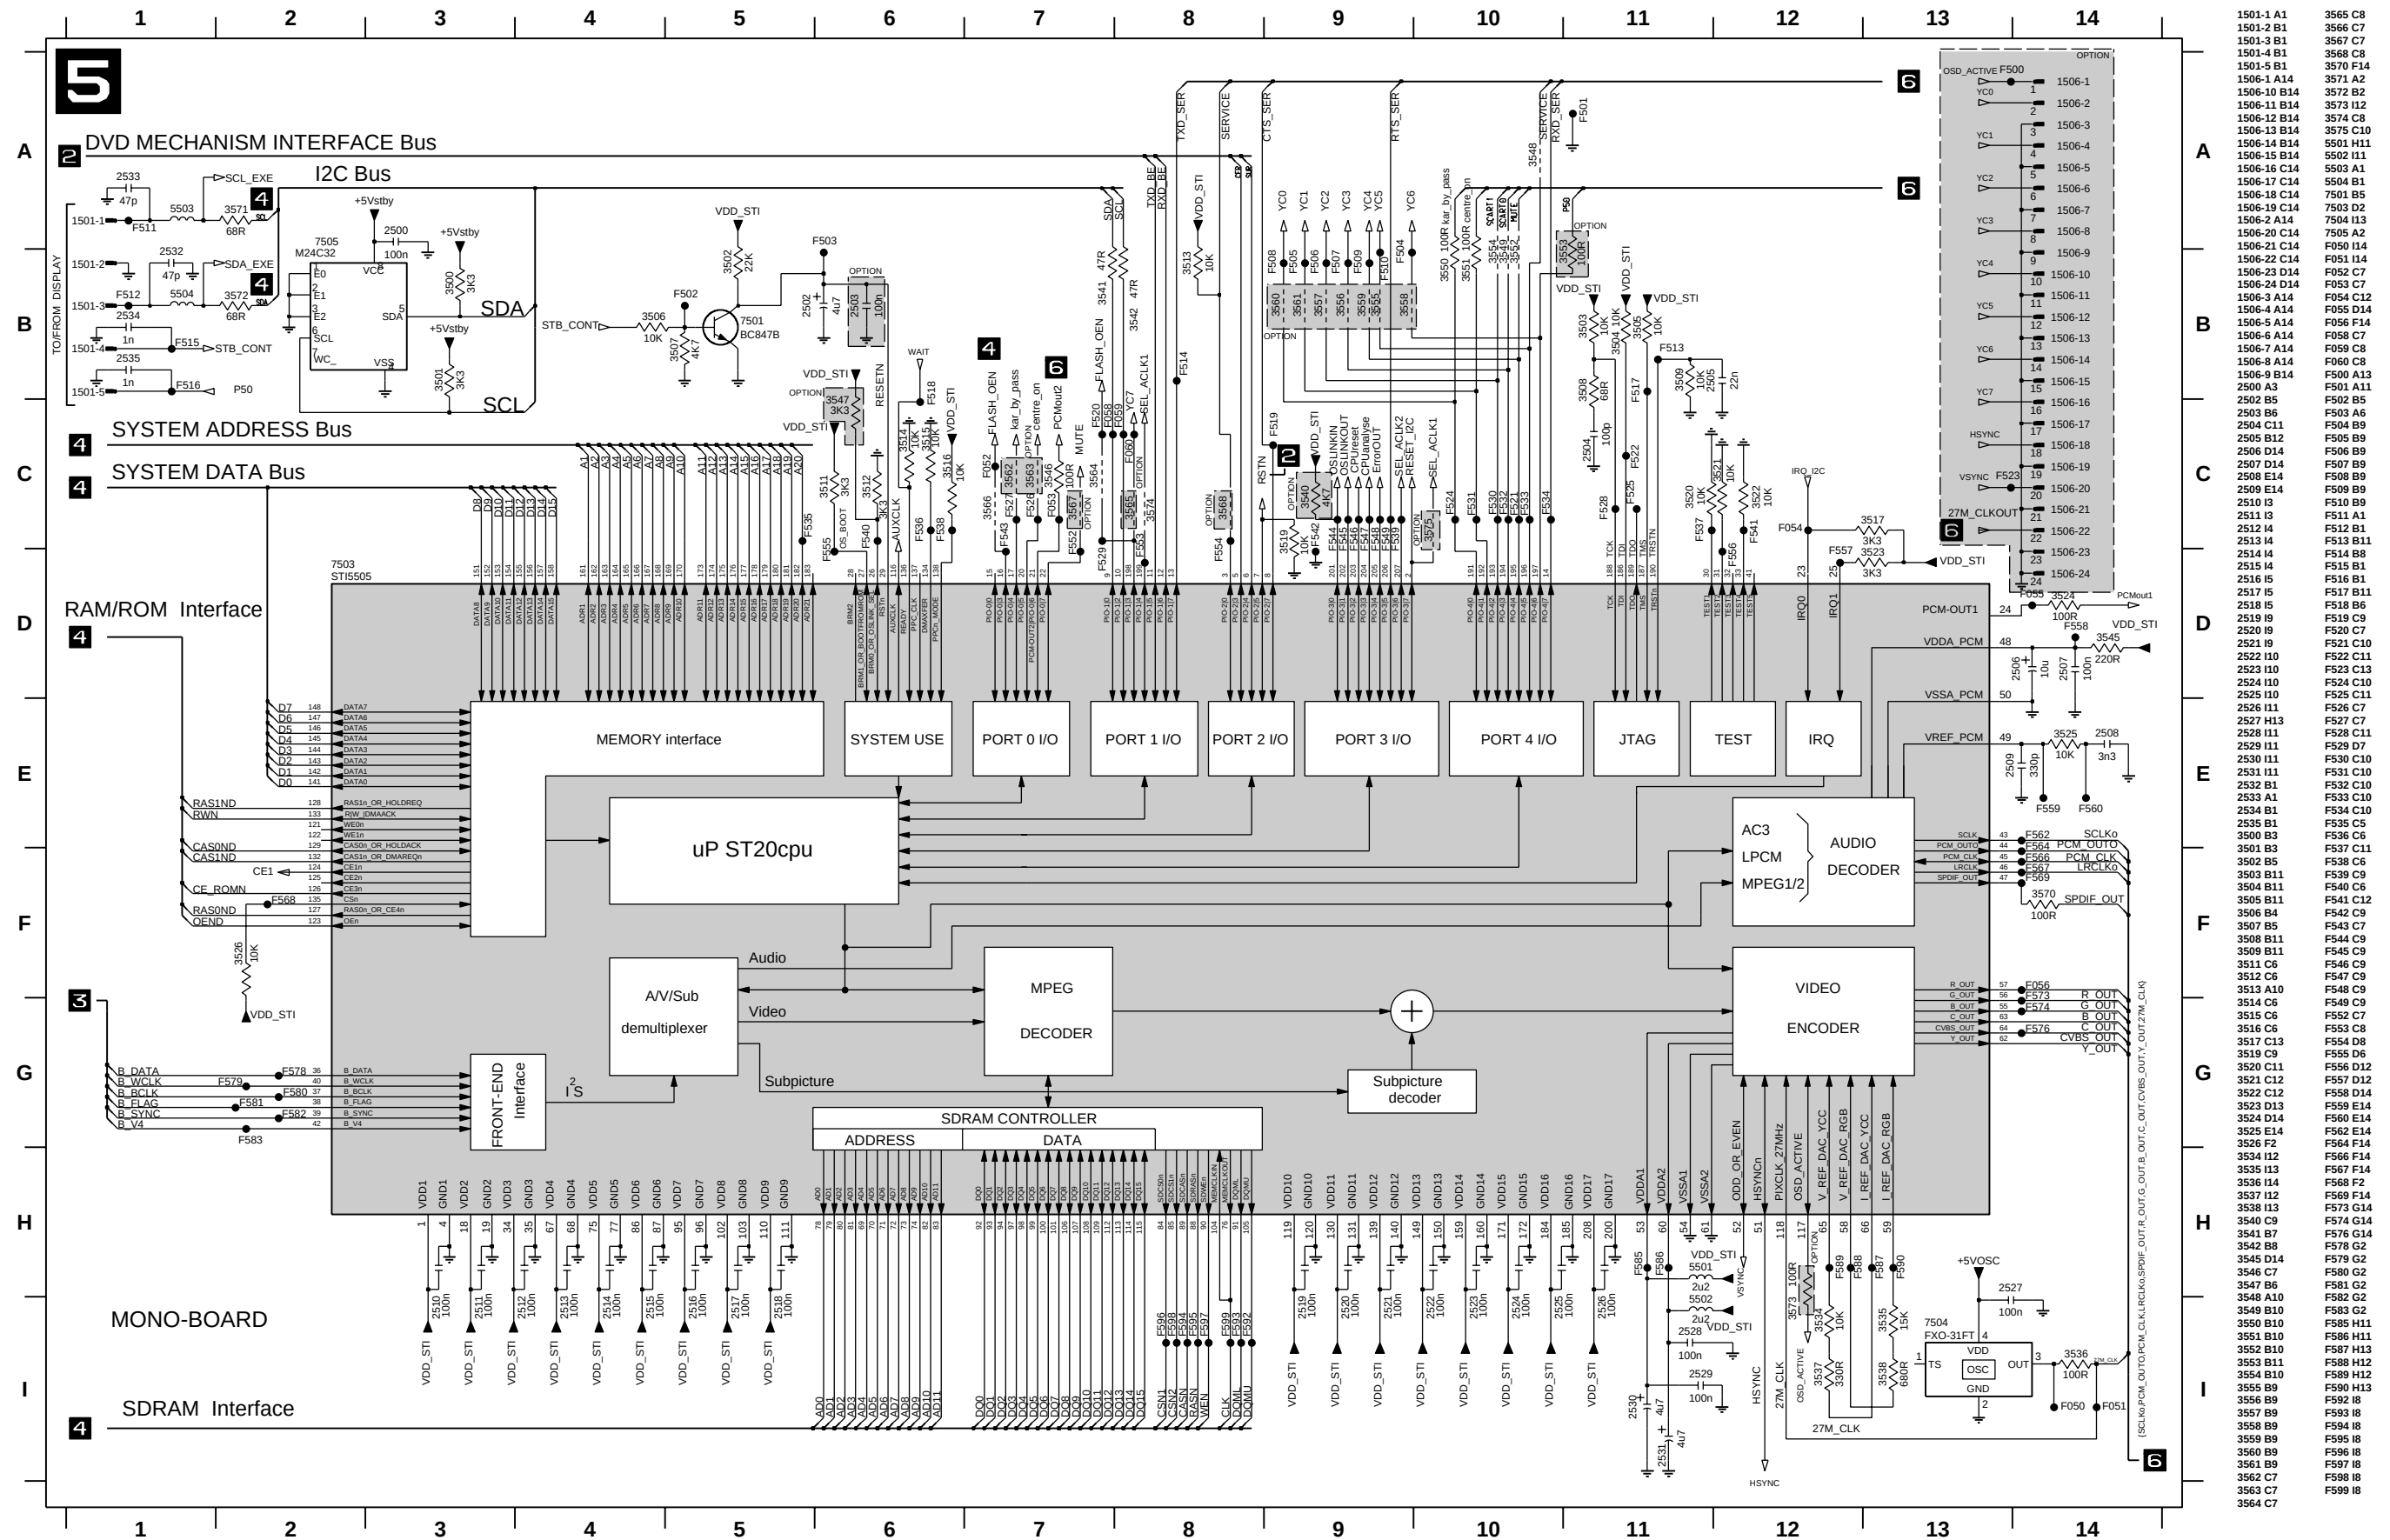

SCHEMATIC DIAGRAM

MONO 6/6 (Back-end & Service interface)

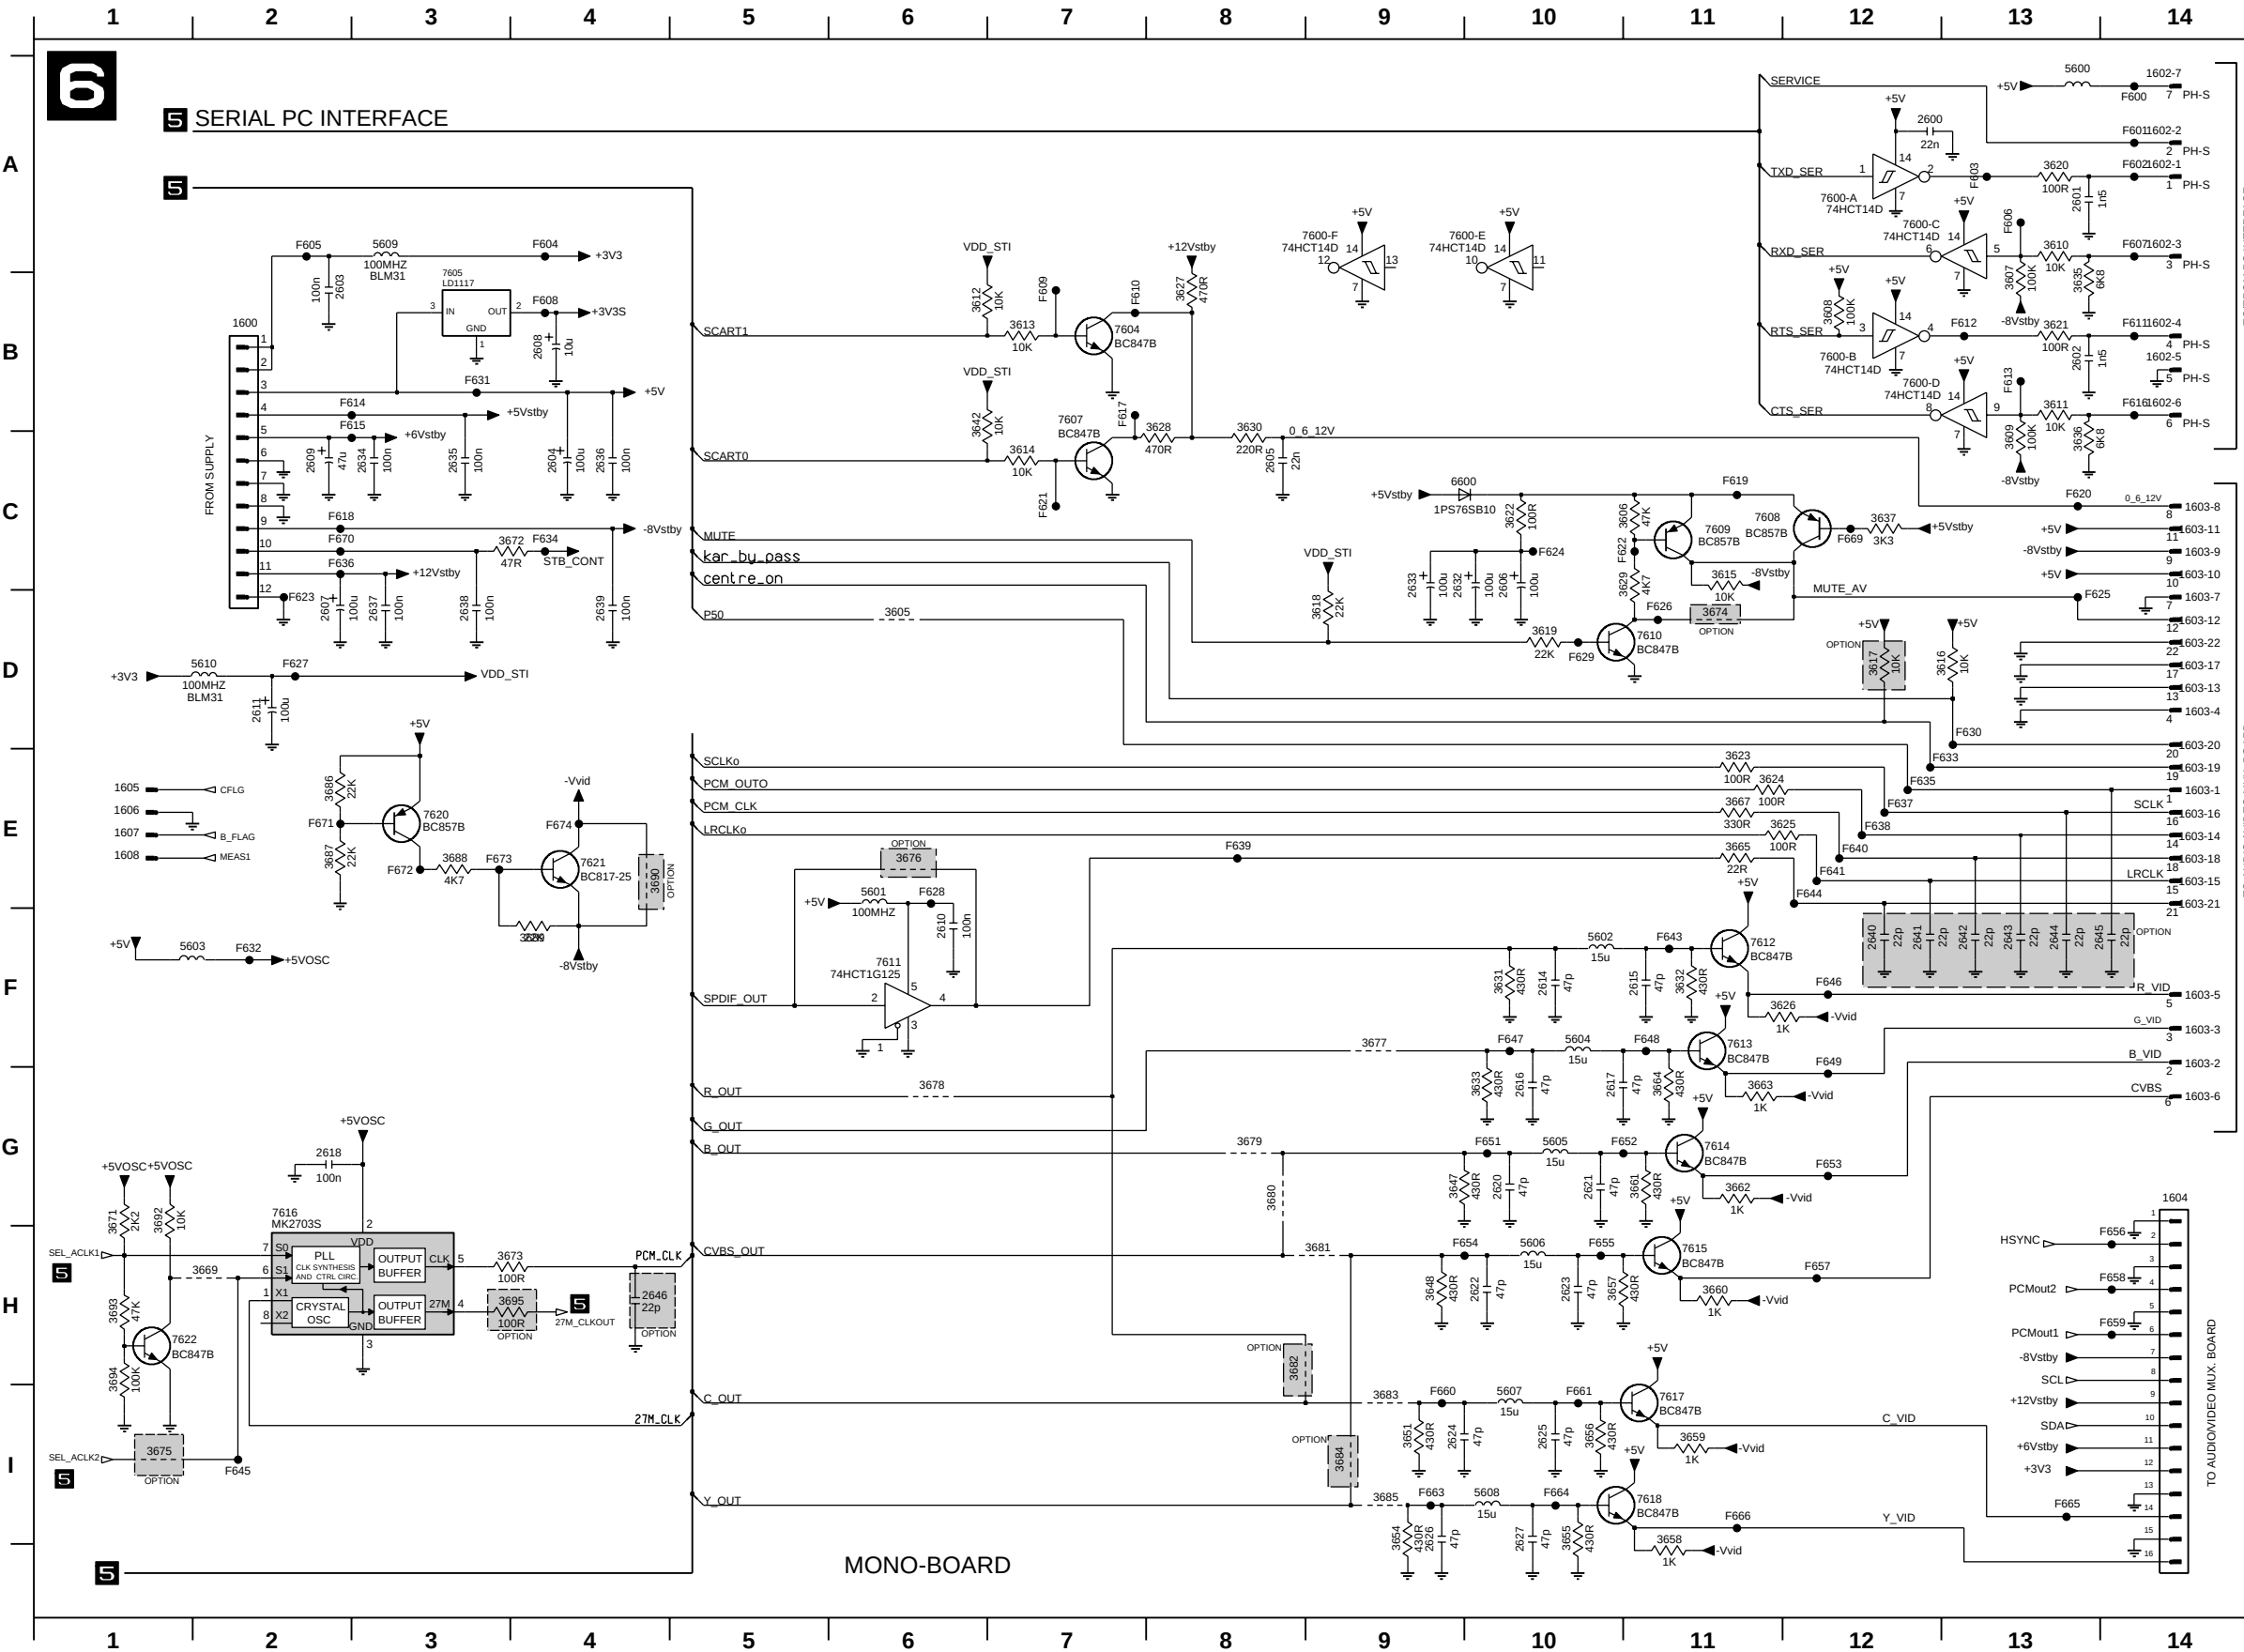

1600 B2	3661 G11	F654 H10
1602-1 A14	3662 G11	F655 H10
1602-2 A14	3663 G11	F656 H10
1602-3 A14	3664 G11	F657 H12
1602-4 B14	3665 E11	F658 H14
1602-5 B14	3667 E11	F659 H14
1602-6 B14	3668 H2	F660 H2
1602-7 A14	3671 G1	F661 I10
1603-1 E14	3672 C4	F663 I9
1603-10 C14	3673 H3	F664 I10
1603-11 C14	3674 D11	F665 I13
1603-12 D14	3675 I1	F666 I11
1603-13 D14	3676 E6	F669 C12
1603-14 E14	3677 F9	F670 C2
1603-15 E14	3678 G6	F671 E2
1603-16 E14	3679 G8	F672 E2
1603-17 D14	3680 G8	F673 E3
1603-18 E14	3681 H9	F674 E4
1603-19 E14	3682 H8	
1603-2 F14	3683 I9	
1603-20 D14	3684 I9	
1603-21 E14	3685 I9	
1603-22 D14	3686 E2	
1603-3 F14	3687 E2	
1603-4 D14	3688 E3	
1603-5 F14	3689 E4	
1603-6 G14	3690 E4	
1603-7 D14	3692 G1	
1603-8 C14	3693 H1	
1603-9 C14	3694 H1	
1604 G14	3695 H4	
1605 E1	5600 A13	
1606 E1	5601 E6	
1607 E1	5602 F10	
1608 E1	5603 F1	
2600 A12	5604 F10	
2601 A13	5605 G10	
2602 B13	5606 H10	
2603 B2	5607 I10	
2604 C4	5608 I10	
2605 C8	5609 A3	
2606 C10	5610 D2	
2607 D2	5610 C9	
2608 B4	7600-A A12	
2609 C2	7600-B B12	
2610 F6	7600-C A12	
2611 D2	7600-D B12	
2614 F10	7600-E A10	
2615 F11	7600-F A9	
2616 G10	7604 B7	
2617 G10	7605 B3	
2618 G2	7607 B7	
2620 G10	7608 C11	
2621 G10	7609 C11	
2622 H10	7610 D11	
2623 H10	7611 F6	
2624 I9	7612 F11	
2625 I10	7613 F11	
2626 I9	7614 G11	
2627 I10	7615 H11	
2632 C9	7616 H2	
2633 C9	7617 I11	
2634 C3	7618 I11	
2635 C3	7620 E3	
2636 C4	7621 E4	
2637 D3	7622 H1	
2638 D3	F600 A14	
2639 D4	F601 A14	
2640 F12	F602 A14	
2641 F12	F603 A13	
2642 F13	F604 A4	
2643 F13	F605 A2	
2644 F13	F606 A13	
2645 F14	F607 A14	
2646 H4	F608 B4	
3605 D6	F609 B7	
3606 C11	F610 B7	
3607 B13	F611 B14	
3608 B12	F612 B13	
3609 C13	F613 B13	
3610 A13	F614 B3	
3611 B13	F615 B3	
3612 B6	F616 B14	
3613 B7	F617 B7	
3614 C7	F618 C2	
3615 C11	F619 C11	
3616 D13	F620 C13	
3617 D12	F621 C7	
3618 D9	F622 C11	
3619 D10	F623 D2	
3620 A13	F624 C10	
3621 B13	F625 D13	
3622 C10	F626 D11	
3623 E11	F627 D2	
3624 E11	F628 E6	
3625 E12	F629 D10	
3626 F12	F630 D13	
3627 B8	F631 B3	
3628 B8	F632 F2	
3629 C11	F633 E13	
3630 B8	F634 C4	
3631 F10	F635 E12	
3632 F11	F636 C2	
3633 G10	F637 E12	
3635 B13	F638 E12	
3636 C13	F639 E8	
3637 C12	F640 E12	
3642 B6	F641 E12	
3647 G9	F643 F11	
3648 H9	F644 E12	
3651 I9	F645 I2	
3654 I9	F646 F12	
3655 I10	F647 F10	
3656 I10	F648 F11	
3657 H10	F649 F12	
3658 I11	F651 G10	
3659 I11	F652 G11	
3660 H11	F653 G12	

7

5



3

2


2

4

2

7



1000 B1	740
1003 E14	740
1006-A F14	740
1006-B G14	740
1006-C H14	740
1008-A B14	740
2001 A6	743
2004 C11	743
2007 D7	743
2008 E6	743
2010 E12	743
2010 E13	743
2011 F12	745
2012 G10	745
2013 H10	745
2014 H12	910
2015 I12	
2016 G5	
2020 A7	
3000 A5	
3003 A4	
3002 A4	
3003 A9	
3004 A10	
3005 A5	
3006 B10	
3007 B10	
3009 B12	
3010 B2	
3011 B4	
3012 B11	
3013 B6	
3014 B6	
3015 B10	
3016 B10	
3017 B7	
3018 B2	
3019 B5	
3020 C5	
3021 C13	
3022 C2	
3023 C5	
3024 C12	
3025 D4	
3028 C5	
3029 D6	
3030 D5	
3031 D6	
3032 D11	
3033 D7	
3034 D5	
3035 D6	
3036 E2	
3038 E4	
3039 E7	
3040 F6	
3041 F3	
3042 F2	
3043 F9	
3044 F11	
3045 F10	
3046 G9	
3047 G9	
3048 G11	
3049 G9	
3050 G9	
3051 H9	
3052 H9	
3053 H10	
3054 H9	
3055 I9	
3056 I11	
3057 I9	
3058 I9	
3059 I9	
3060 I10	
3061 E2	
3062 F4	
3063 F5	
3064 F6	
3065 F5	
3066 F5	
3067 G5	
3068 G5	
4000 A5	
4001 B10	
4003 C10	
4004 C6	
4006 E6	
4007 F12	
4008 G12	
4009 I12	
4010 E6	
4011 E3	
5003 B13	
5004 B13	
5005 F12	
5006 G12	
6007 I12	
6000 B3	
6001 B4	
6002 D8	
6003 F7	
6004 C12	
6005 F11	
6006 H11	
6007 I10	
6008 B12	
7001-A E3	
7001-B H10	
7001-C G10	
7002 A6	
7400 C3	
7403 B5	



SCHEMATIC DIAGRAM

A/V (B, G) 1/4

1 A SUPPLY & VIDEO SWITCHING

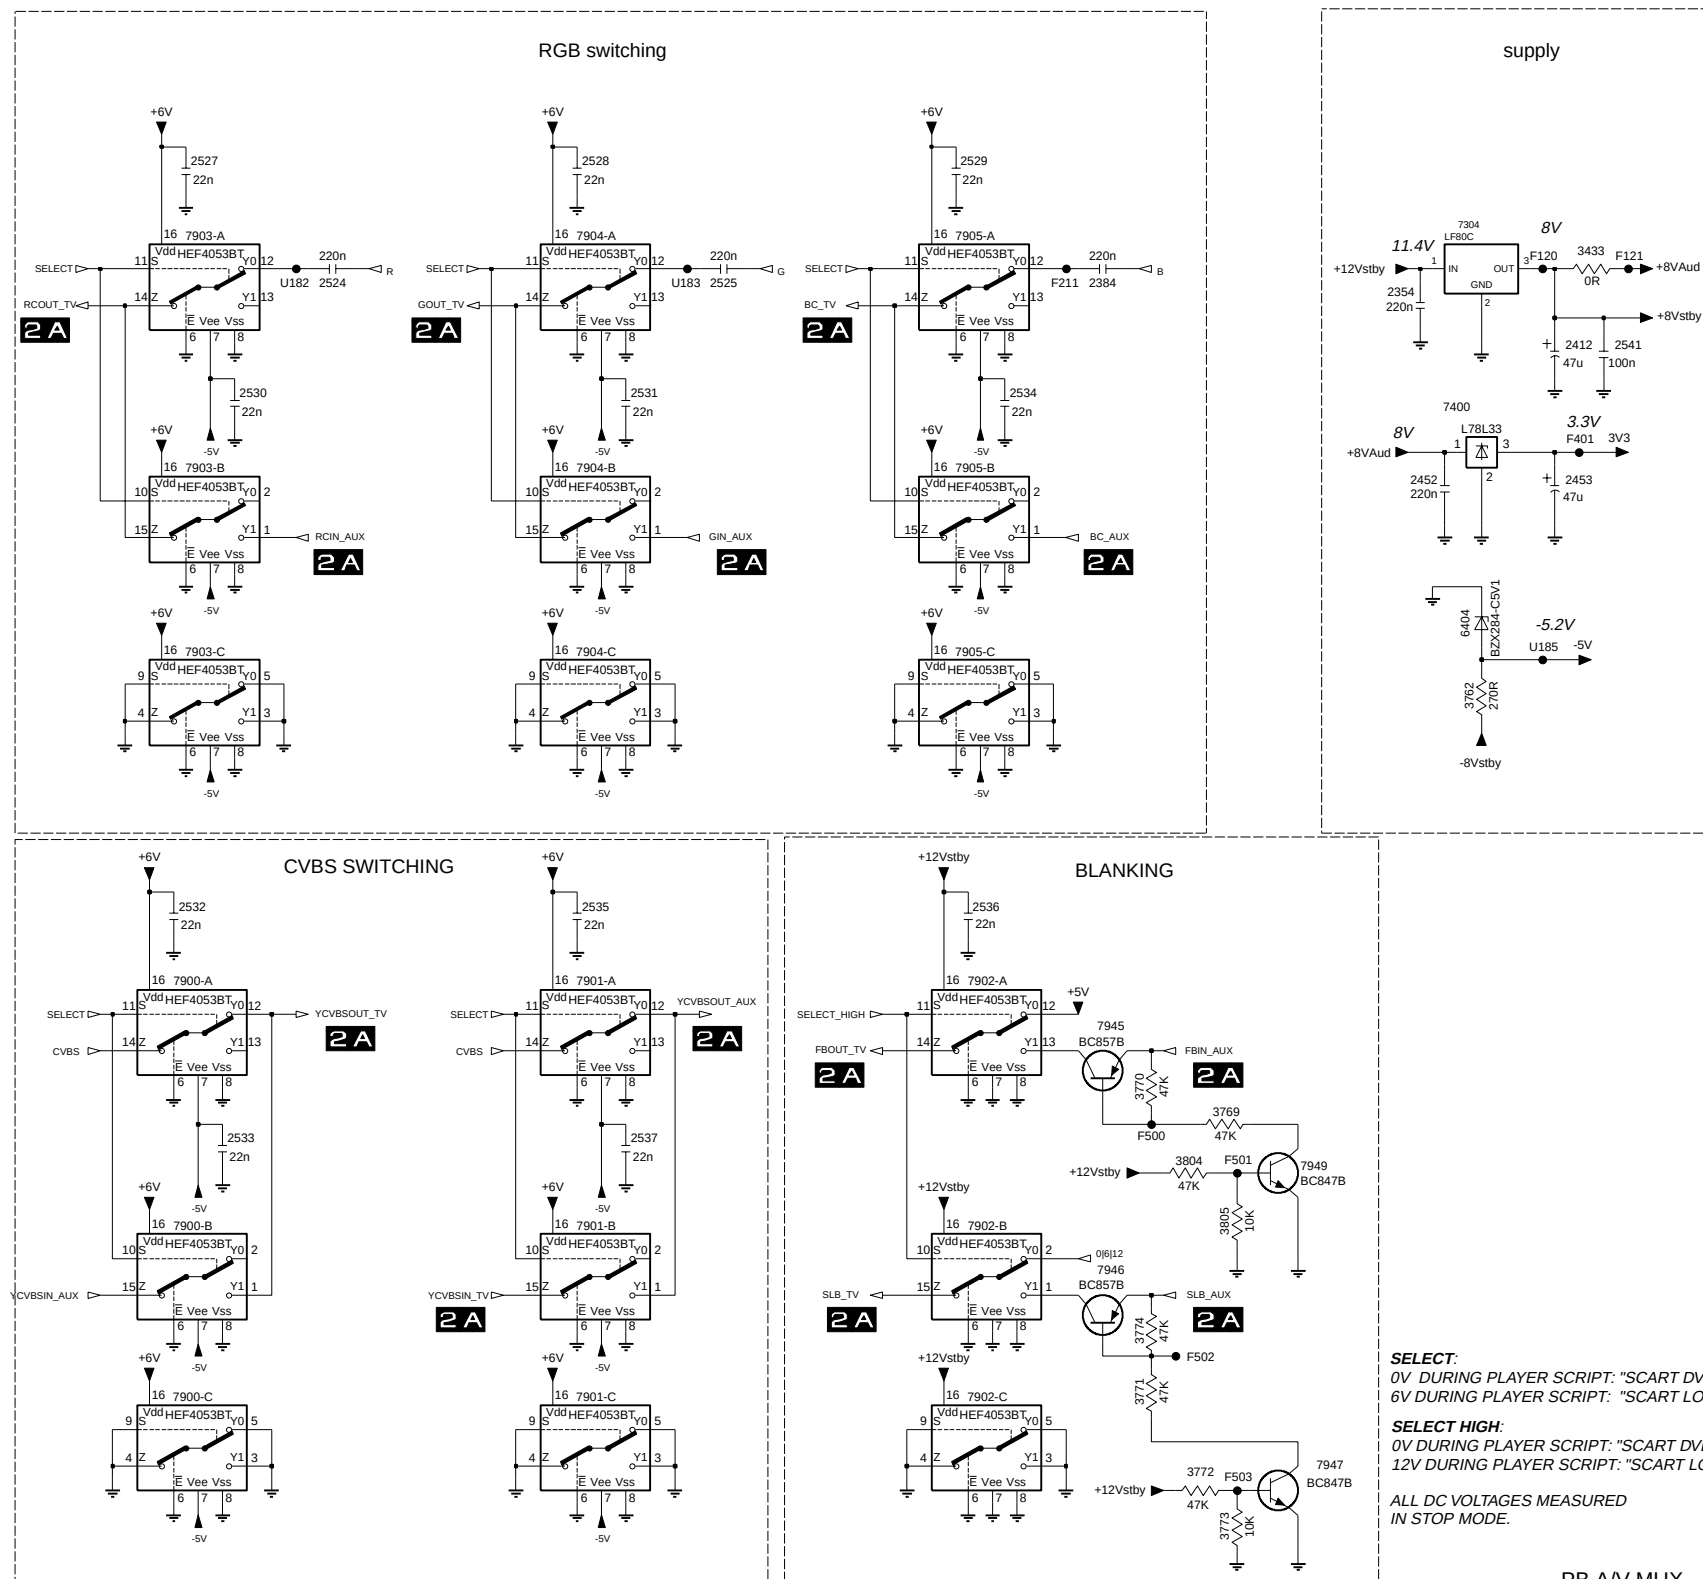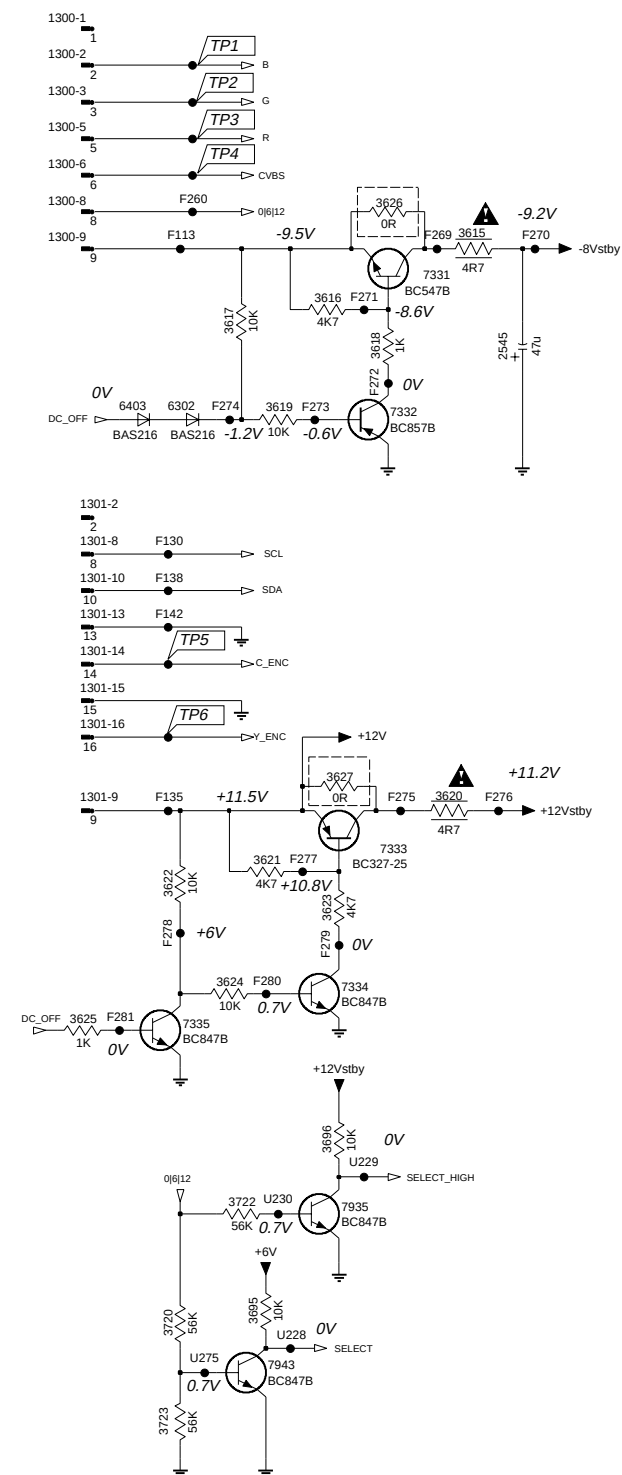

SELECT:
0V DURING PLAYER SCRIPT: "SCART DVD"
6V DURING PLAYER SCRIPT: "SCART LOOP"

SELECT HIGH:
0V DURING PLAYER SCRIPT: "SCART DVD"
12V DURING PLAYER SCRIPT: "SCART LOOP"


ALL DC VOLTAGES MEASURED
IN STOP MODE.

PB A/V MUX
3104 123 4248
130-1

1300-1 A1	F274 C2
1300-2 A1	F275 E3
1300-3 A1	F276 E4
1300-5 A1	F277 F2
1300-6 B1	F278 F2
1300-8 B1	F279 F3
1300-9 B1	F280 F2
1301-10 D1	F281 G1
1301-13 D1	F401 C14
1301-14 D1	F500 G11
1301-15 E1	F501 G12
1301-16 E1	F502 H11
1301-2 D1	F503 I12
1301-8 D1	U182 B6
1301-9 E1	U183 B8
2384 B11	U280 H2
2412 B14	U228 H2
2452 C13	U229 G3
2453 C14	U230 H2
2524 B6	U275 I2
2525 B9	
2527 A6	
2528 A8	
2529 A10	
2530 C6	
2531 C8	
2532 F6	
2533 G6	
2534 C10	
2535 F8	
2536 F10	
2537 G8	
2541 B14	
2545 C4	
3433 B14	
3615 B3	
3616 B3	
3617 C2	
3618 C3	
3619 C2	
3620 E3	
3621 F2	
3622 F2	
3623 F3	
3624 F2	
3625 G1	
3626 B3	
3627 E3	
3695 H2	
3696 G3	
3720 H2	
3722 H2	
3723 I2	
3762 D13	
3769 G12	
3770 G11	
3771 H11	
3773 I12	
3774 H11	
3804 G11	
3805 G12	
6302 C2	
6403 C1	
6404 D13	
7304 B13	
7331 B3	
7332 C3	
7333 F3	
7334 F3	
7335 G2	
7400 C13	
7900-A F6	
7900-B G6	
7900-C H6	
7901-A F8	
7901-B G8	
7901-C H8	
7902-A F10	
7902-B G10	
7902-C H10	
7903-A B6	
7903-B C6	
7903-C D6	
7904-A B8	
7904-B C8	
7904-C D8	
7905-A B10	
7905-B C10	
7905-C D10	
7935 H3	
7943 I2	
7945 F11	
7946 H11	
7947 I12	
7949 G12	
F106 A2	
F109 A2	
F110 A2	
F112 B2	
F113 B2	
F120 B13	
F121 B14	
F130 D2	
F135 E2	
F138 D2	
F142 D2	
F144 D2	
F150 E2	
F211 B11	
F260 B2	
F269 B3	
F270 B4	
F271 B3	
F272 C3	
F273 C2	

SCHEMATIC DIAGRAM

A/V (B, G) 2/4

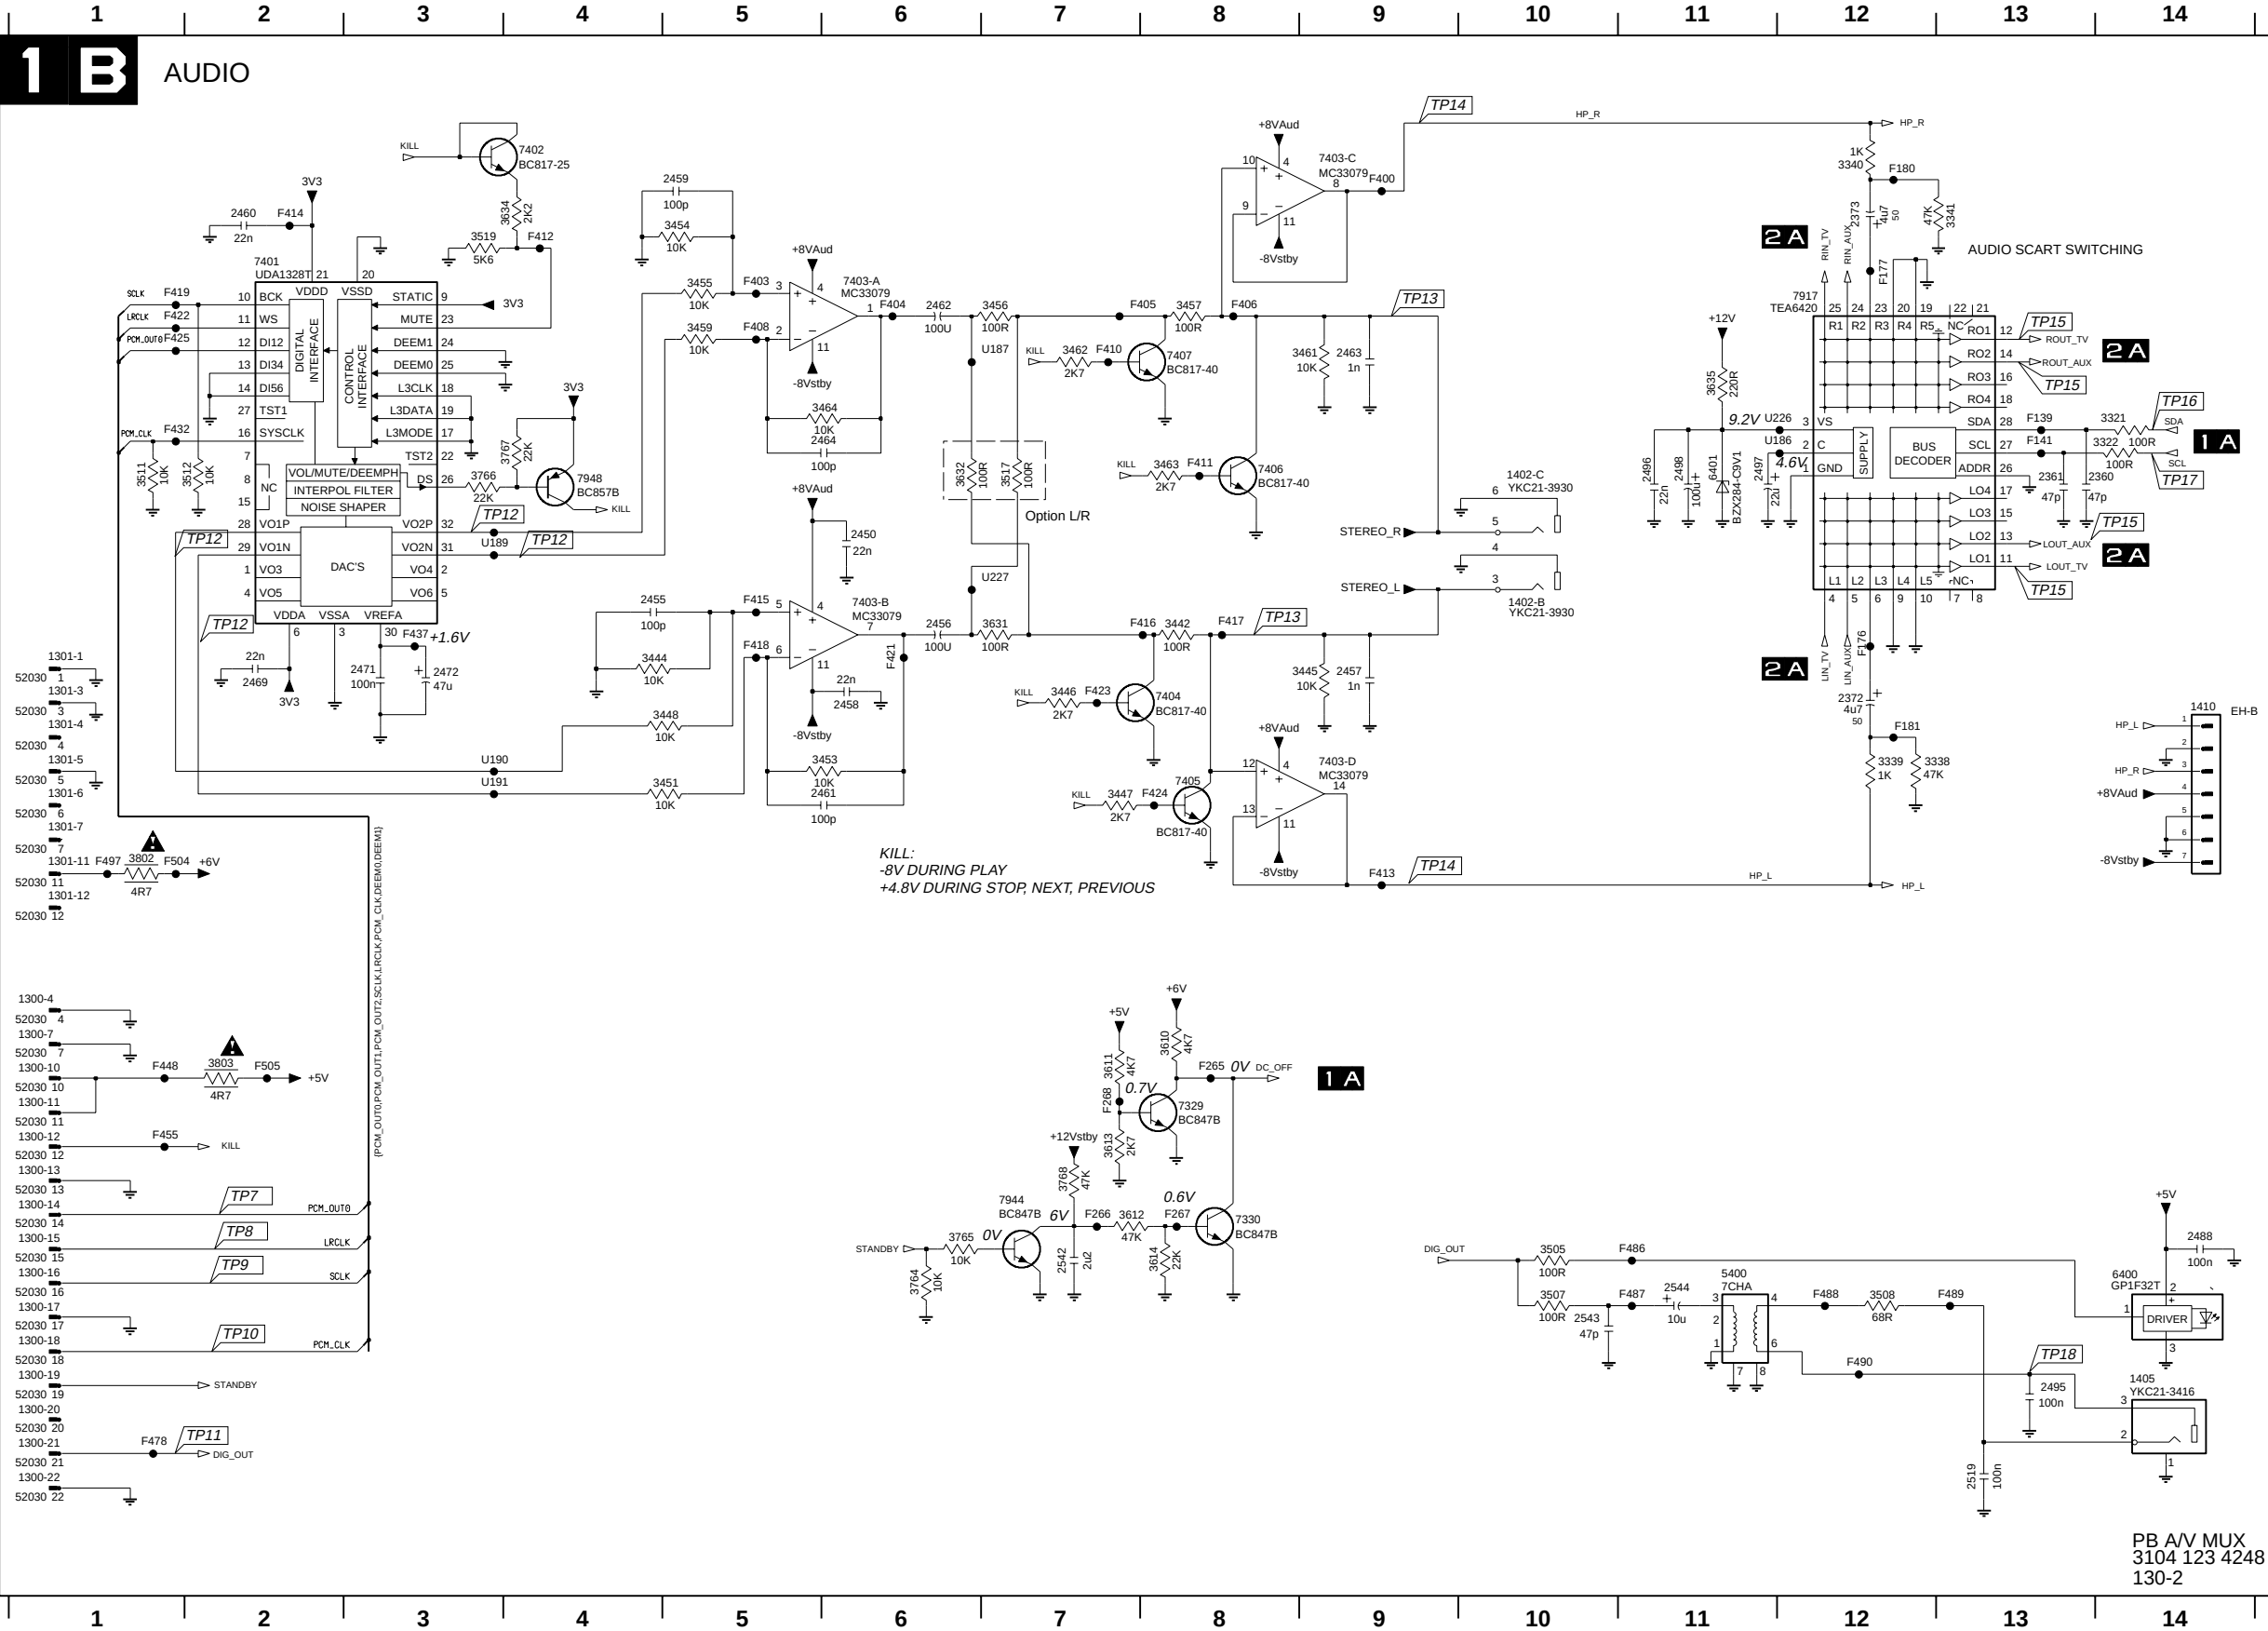

1300-10 G1	7944 G7
1300-11 G1	7948 C4
1300-12 G1	F139 C13
1300-13 G1	F141 C13
1300-14 G1	F176 D12
1300-15 H1	F177 B12
1300-16 H1	F180 A12
1300-17 H1	F181 D12
1300-18 H1	F265 G8
1300-19 I1	F266 H7
1300-20 I1	F267 H8
1300-21 I1	F268 G7
1300-22 I1	F400 A9
1300-4 F1	F403 B5
1300-7 F1	F404 B6
1301-1 D1	F405 B8
1301-11 E1	F406 B8
1301-12 F1	F408 B5
1301-3 D1	F410 B7
1301-4 D1	F411 C8
1301-5 E1	F412 A4
1301-6 E1	F413 E9
1301-7 E1	F414 A2
1402-B D10	F415 D5
1402-C D10	F416 D8
1405 I14	F417 D8
1410 D14	F418 D5
2360 C14	F419 B1
2361 C13	F421 D6
2372 D12	F422 B8
2373 A12	F423 D7
2450 C6	F424 E8
2455 D4	F425 B1
2456 D6	F432 C1
2457 D9	F437 D3
2458 D6	F448 G1
2459 A5	F455 G1
2460 A2	F478 I1
2461 E6	F486 H11
2462 B6	F487 H11
2463 B9	F488 H12
2464 C6	F489 H13
2469 D2	F490 H12
2471 D3	F497 E1
2472 D3	F504 E1
2488 H14	F505 G2
2495 I13	U186 C12
2496 C11	U187 B7
2497 C11	U188 C3
2498 C11	U189 C3
2519 I13	U190 E3
2542 H7	U191 E3
2543 H10	U226 C12
2544 H11	U227 D7
3321 C14	
3322 C14	
3338 E13	
3339 E12	
3340 A12	
3341 A13	
3442 D8	
3444 D4	
3445 D9	
3446 D7	
3447 E7	
3448 D5	
3451 E5	
3453 E6	
3454 A5	
3455 B5	
3456 B7	
3457 B8	
3459 B5	
3461 B9	
3462 B7	
3463 C8	
3464 B6	
3505 H10	
3507 H10	
3508 H12	
3511 C1	
3512 C2	
3517 C7	
3519 A3	
3610 F8	
3611 G7	
3612 H7	
3613 G7	
3614 H8	
3631 D7	
3632 C6	
3634 A4	
3635 B11	
3764 H6	
3765 H6	
3766 C3	
3767 C4	
3768 G7	
3802 E1	
3803 G2	
5400 H11	
6400 H14	
6401 C11	
7329 G8	
7330 H8	
7401 B2	
7402 A4	
7403-A B6	
7403-B D6	
7403-C A9	
7403-D E9	
7404 D8	
7405 E8	
7406 C8	
7407 B8	
7917 B12	

■ SCHEMATIC DIAGRAM

A/V (B, G) 3/4

2A

SCART

1A

1

2

3

4

5

6

7

8

9

10

11

12

13

A

B

3

C

D

4

E

F

5

G

6

I

7

1

2

3

4

5

6

7

8

9

10

11

12

13

AUX-SCART

1A

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I

A

B

C

D

E

F

G

H

I


A

B

SCHEMATIC DIAGRAM

A/V (B, G) 4/4


2B CVBS & YC

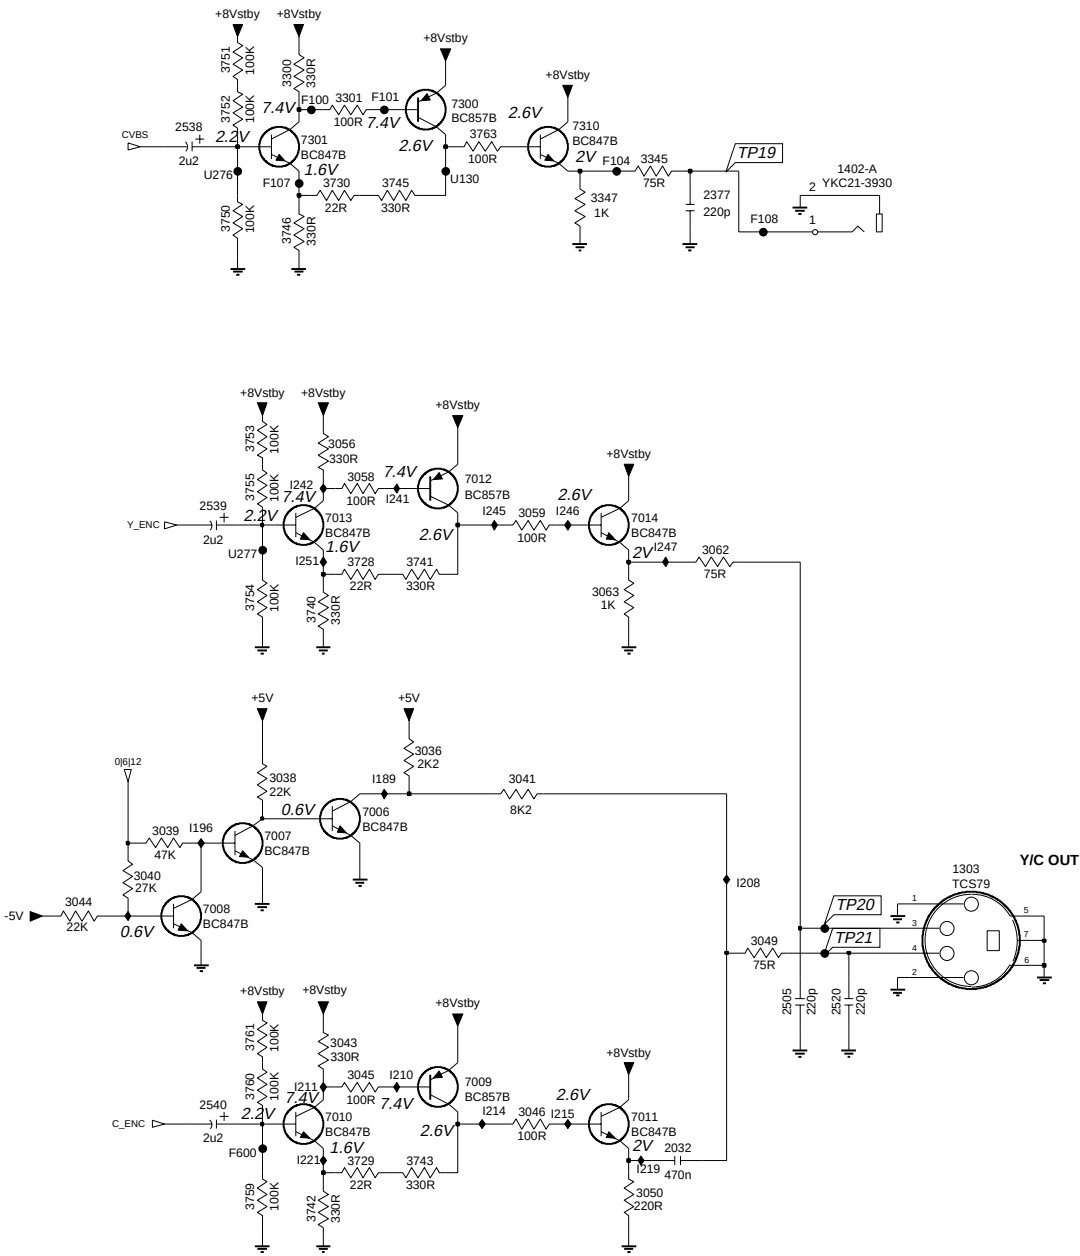

- 1303 F10
- 1402-A B9
- 2032 H8
- 2377 B9
- 2505 G9
- 2520 G9
- 2538 B5
- 2539 D6
- 2540 H6
- 3036 F7
- 3038 F6
- 3039 F5
- 3040 F5
- 3041 F7
- 3043 G6
- 3044 F5
- 3045 G6
- 3046 H7
- 3049 G9
- 3050 H8
- 3056 D6
- 3058 D6
- 3059 D7
- 3062 D9
- 3063 E8
- 3300 B6
- 3301 B6
- 3345 B8
- 3347 B8
- 3728 D6
- 3729 H6
- 3730 B6
- 3740 E6
- 3741 D7
- 3742 H6
- 3743 H7
- 3745 B7
- 3746 B6
- 3750 B6
- 3751 A6
- 3752 B6
- 3753 D6
- 3754 E6
- 3755 D6
- 3759 H6
- 3760 G6
- 3761 G6
- 3763 B7
- 3999 I1
- 7006 F6
- 7007 F6
- 7008 F6
- 7009 G7
- 7010 H6
- 7011 H8
- 7012 D7
- 7013 D6
- 7014 D8
- 7300 B7
- 7301 B6
- 7310 B8
- F100 B6
- F101 B7
- F104 B8
- F107 B6
- F108 B9
- F600 H6
- I189 F7
- I191 F6
- I196 F6
- I200 G5
- I208 F9
- I210 G7
- I211 G6
- I214 H7
- I215 H8
- I219 H8
- I221 H6
- I241 D7
- I242 D6
- I245 D7
- I246 D8
- I247 D8
- I251 D6
- U130 B7
- U192 G9
- U224 G9
- U276 B6
- U277 D6

PB A/V MUX
3104 123 4248
130-4

SCHEMATIC DIAGRAM
POWER (B, G)

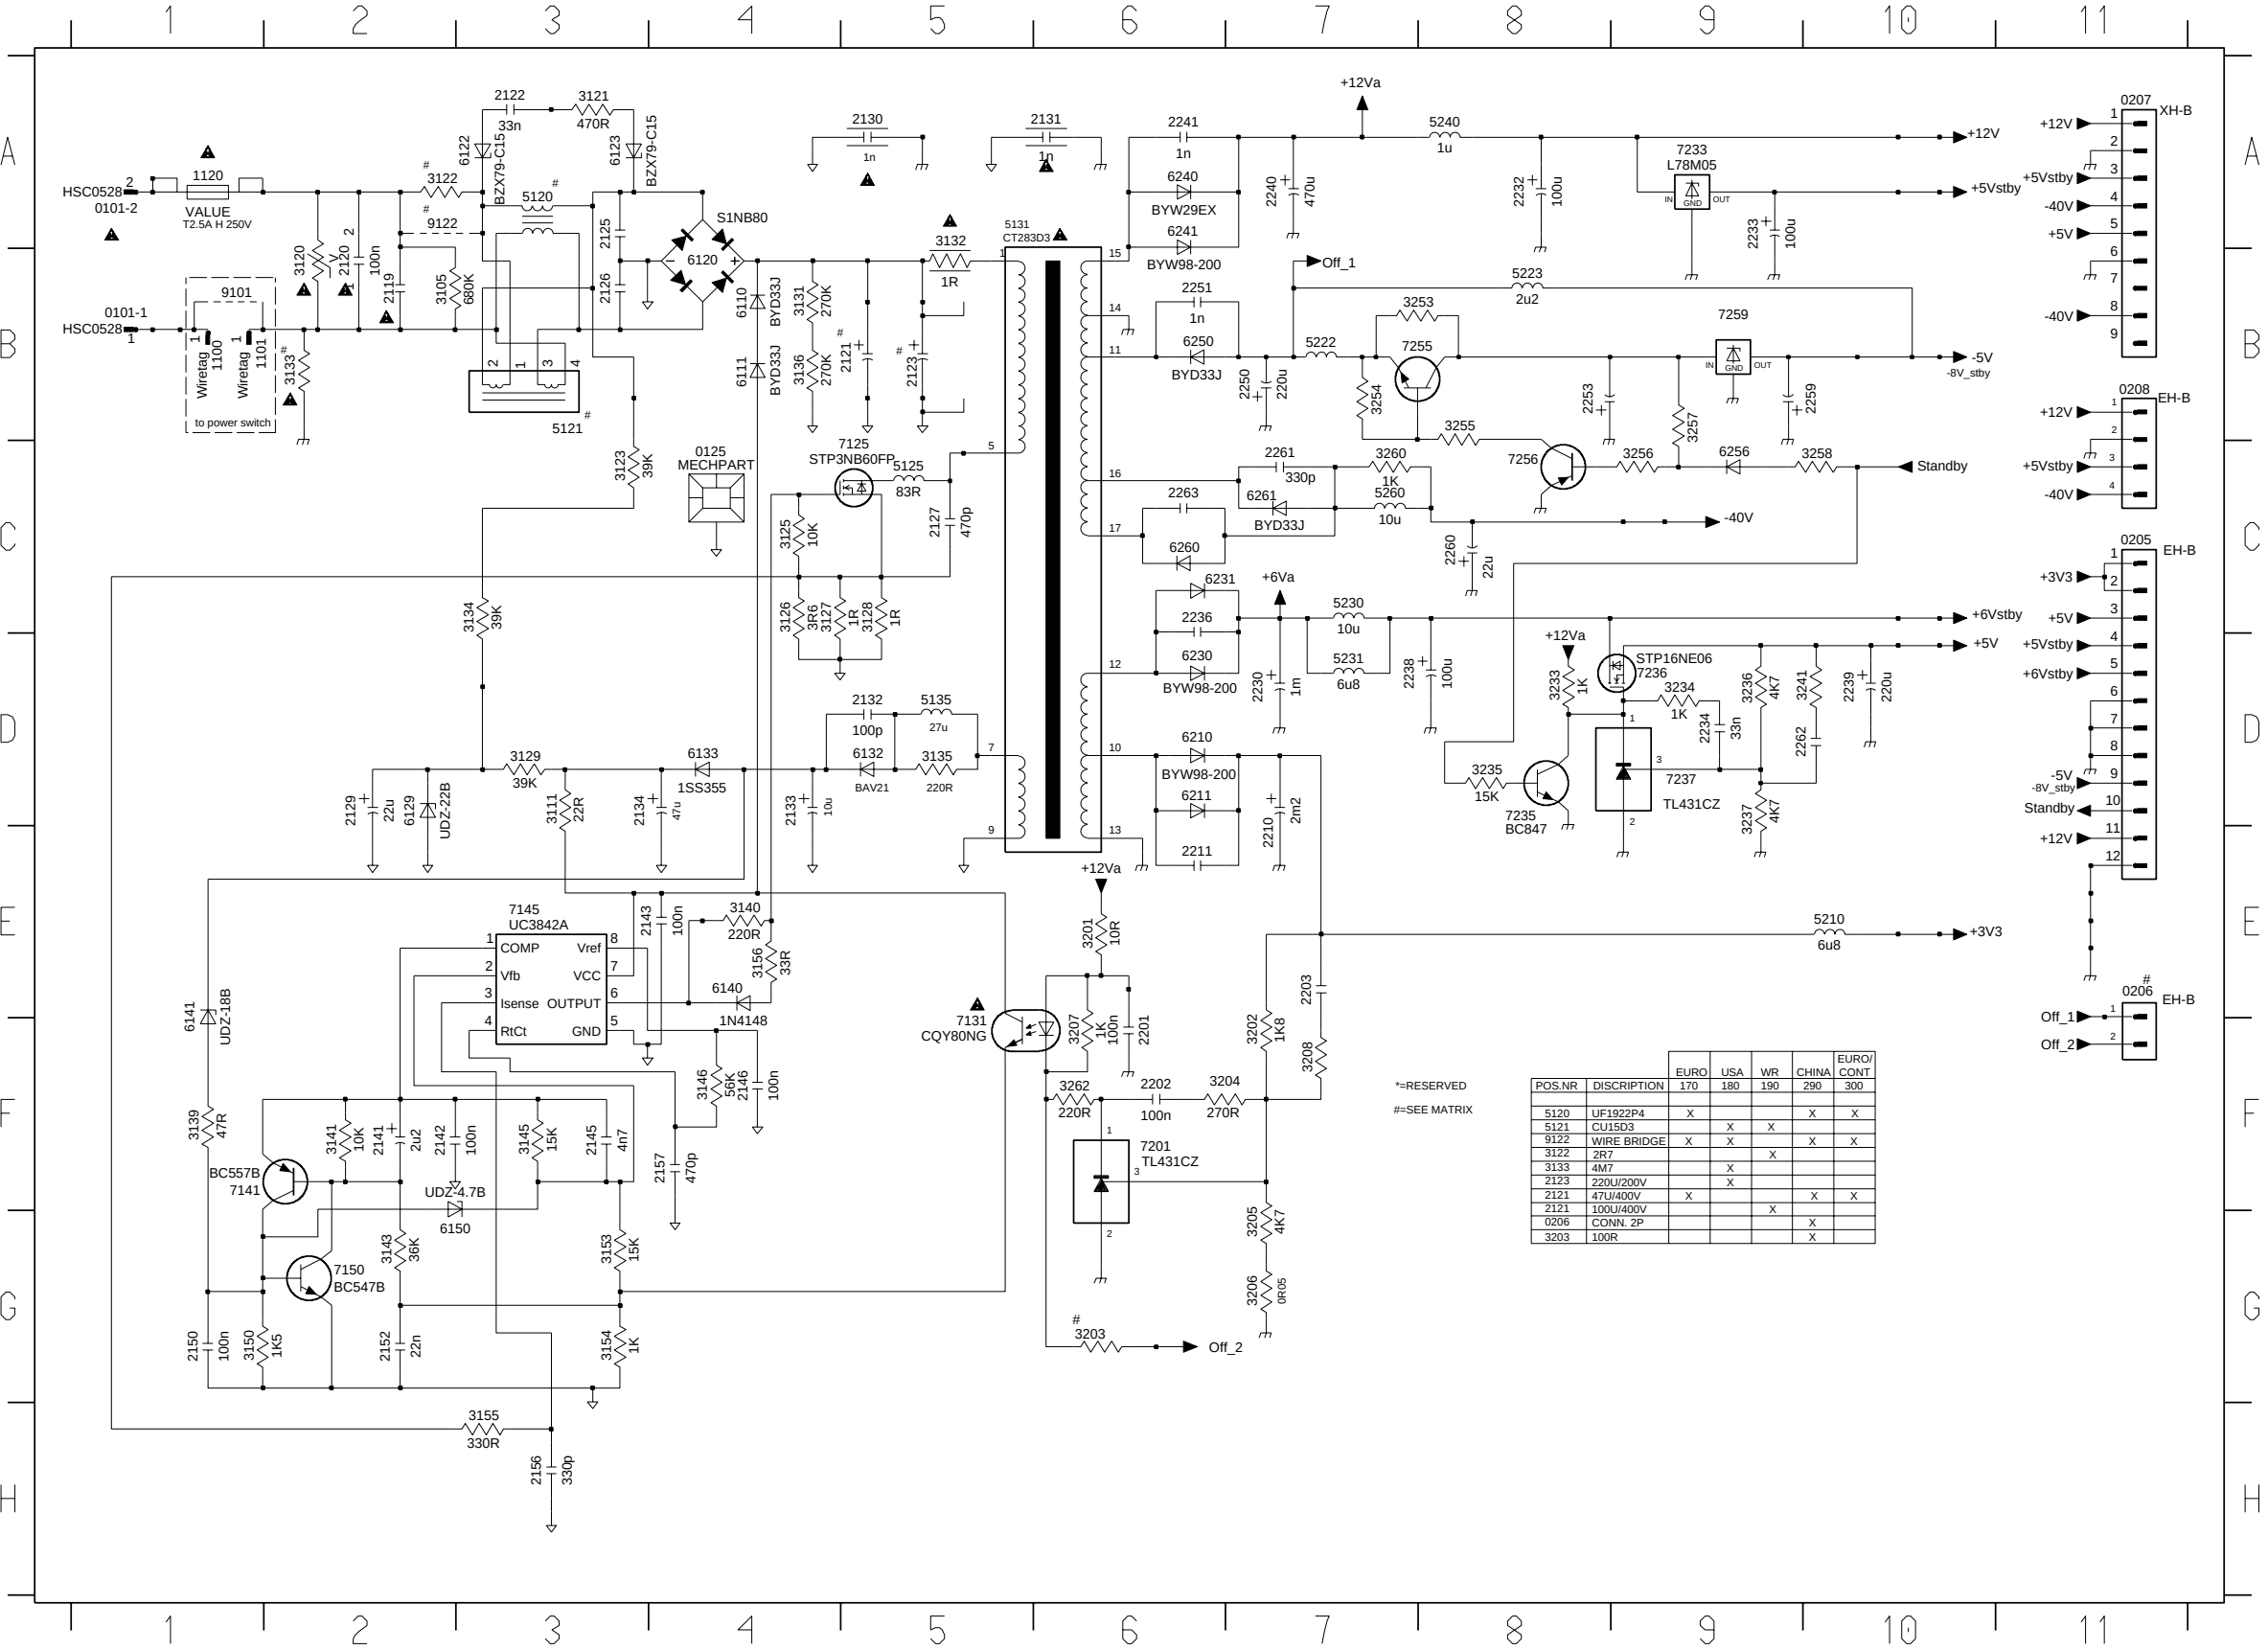

*=RESERVED
#=SEE MATRIX

POS.NR	DISCRIPTION	EURO/				
		170	180	190	290	300
5120	UF1922P4	X			X	X
5121	CU15D3		X	X		
9122	WIRE BRIDGE	X	X		X	X
3122	2R7			X		
3133	4M7		X			
2123	220U/200V		X			
2121	47U/400V	X			X	X
2121	100U/400V			X		
0206	CONN. 2P				X	
3203	100R				X	

0101-1 B1
0101-2 A1
0125 C4
0205 B8
0206 B7
0207 B8
0208 B9
0209 B10
0210 B11
0211 B12
0212 B13
0213 B14
0214 B15
0215 B16
0216 B17
0217 B18
0218 B19
0219 B20
0220 B21
0221 B22
0222 B23
0223 B24
0224 B25
0225 B26
0226 B27
0227 B28
0228 B29
0229 B30
0230 B31
0231 B32
0232 B33
0233 B34
0234 B35
0235 B36
0236 B37
0237 B38
0238 B39
0239 B40
0240 B41
0241 B42
0242 B43
0243 B44
0244 B45
0245 B46
0246 B47
0247 B48
0248 B49
0249 B50
0250 B51
0251 B52
0252 B53
0253 B54
0254 B55
0255 B56
0256 B57
0257 B58
0258 B59
0259 B60
0260 B61
0261 B62
0262 B63
0263 B64
0264 B65
0265 B66
0266 B67
0267 B68
0268 B69
0269 B70
0270 B71
0271 B72
0272 B73
0273 B74
0274 B75
0275 B76
0276 B77
0277 B78
0278 B79
0279 B80
0280 B81
0281 B82
0282 B83
0283 B84
0284 B85
0285 B86
0286 B87
0287 B88
0288 B89
0289 B90
0290 B91
0291 B92
0292 B93
0293 B94
0294 B95
0295 B96
0296 B97
0297 B98
0298 B99
0299 B100
0300 B101
0301 B102
0302 B103
0303 B104
0304 B105
0305 B106
0306 B107
0307 B108
0308 B109
0309 B110
0310 B111
0311 B112
0312 B113
0313 B114
0314 B115
0315 B116
0316 B117
0317 B118
0318 B119
0319 B120
0320 B121
0321 B122
0322 B123
0323 B124
0324 B125
0325 B126
0326 B127
0327 B128
0328 B129
0329 B130
0330 B131
0331 B132
0332 B133
0333 B134
0334 B135
0335 B136
0336 B137
0337 B138
0338 B139
0339 B140
0340 B141
0341 B142
0342 B143
0343 B144
0344 B145
0345 B146
0346 B147
0347 B148
0348 B149
0349 B150
0350 B151
0351 B152
0352 B153
0353 B154
0354 B155
0355 B156
0356 B157
0357 B158
0358 B159
0359 B160
0360 B161
0361 B162
0362 B163
0363 B164
0364 B165
0365 B166
0366 B167
0367 B168
0368 B169
0369 B170
0370 B171
0371 B172
0372 B173
0373 B174
0374 B175
0375 B176
0376 B177
0377 B178
0378 B179
0379 B180
0380 B181
0381 B182
0382 B183
0383 B184
0384 B185
0385 B186
0386 B187
0387 B188
0388 B189
0389 B190
0390 B191
0391 B192
0392 B193
0393 B194
0394 B195
0395 B196
0396 B197
0397 B198
0398 B199
0399 B200
0400 B201
0401 B202
0402 B203
0403 B204
0404 B205
0405 B206
0406 B207
0407 B208
0408 B209
0409 B210
0410 B211
0411 B212
0412 B213
0413 B214
0414 B215
0415 B216
0416 B217
0417 B218
0418 B219
0419 B220
0420 B221
0421 B222
0422 B223
0423 B224
0424 B225
0425 B226
0426 B227
0427 B228
0428 B229
0429 B230
0430 B231
0431 B232
0432 B233
0433 B234
0434 B235
0435 B236
0436 B237
0437 B238
0438 B239
0439 B240
0440 B241
0441 B242
0442 B243
0443 B244
0444 B245
0445 B246
0446 B247
0447 B248
0448 B249
0449 B250
0450 B251
0451 B252
0452 B253
0453 B254
0454 B255
0455 B256
0456 B257
0457 B258
0458 B259
0459 B260
0460 B261
0461 B262
0462 B263
0463 B264
0464 B265
0465 B266
0466 B267
0467 B268
0468 B269
0469 B270
0470 B271
0471 B272
0472 B273
0473 B274
0474 B275
0475 B276
0476 B277
0477 B278
0478 B279
0479 B280
0480 B281
0481 B282
0482 B283
0483 B284
0484 B285
0485 B286
0486 B287
0487 B288
0488 B289
0489 B290
0490 B291
0491 B292
0492 B293
0493 B294
0494 B295
0495 B296
0496 B297
0497 B298
0498 B299
0499 B300
0500 B301
0501 B302
0502 B303
0503 B304
0504 B305
0505 B306
0506 B307
0507 B308
0508 B309
0509 B310
0510 B311
0511 B312
0512 B313
0513 B314
0514 B315
0515 B316
0516 B317
0517 B318
0518 B319
0519 B320
0520 B321
0521 B322
0522 B323
0523 B324
0524 B325
0525 B326
0526 B327
0527 B328
0528 B329
0529 B330
0530 B331
0531 B332
0532 B333
0533 B334
0534 B335
0535 B336
0536 B337
0537 B338
0538 B339
0539 B340
0540 B341
0541 B342
0542 B343
0543 B344
0544 B345
0545 B346
0546 B347
0547 B348
0548 B349
0549 B350
0550 B351
0551 B352
0552 B353
0553 B354
0554 B355
0555 B356
0556 B357
0557 B358
0558 B359
0559 B360
0560 B361
0561 B362
0562 B363
0563 B364
0564 B365
0565 B366
0566 B367
0567 B368
0568 B369
0569 B370
0570 B371
0571 B372
0572 B373
0573 B374
0574 B375
0575 B376
0576 B377
0577 B378
0578 B379
0579 B380
0580 B381
0581 B382
0582 B383
0583 B384
0584 B385
0585 B386
0586 B387
0587 B388
0588 B389
0589 B390
0590 B391
0591 B392
0592 B393
0593 B394
0594 B395
0595 B396
0596 B397
0597 B398
0598 B399
0599 B400
0600 B401
0601 B402
0602 B403
0603 B404
0604 B405
0605 B406
0606 B407
0607 B408
0608 B409
0609 B410
0610 B411
0611 B412
0612 B413
0613 B414
0614 B415
0615 B416
0616 B417
0617 B418
0618 B419
0619 B420
0620 B421
0621 B422
0622 B423
0623 B424
0624 B425
0625 B426
0626 B427
0627 B428
0628 B429
0629 B430
0630 B431
0631 B432
0632 B433
0633 B434
0634 B435
0635 B436
0636 B437
0637 B438
0638 B439
0639 B440
0640 B441
0641 B442
0642 B443
0643 B444
0644 B445
0645 B446
0646 B447
0647 B448
0648 B449
0649 B450
0650 B451
0651 B452
0652 B453
0653 B454
0654 B455
0655 B456
0656 B457
0657 B458
0658 B459
0659 B460
0660 B461
0661 B462
0662 B463
0663 B464
0664 B465
0665 B466
0666 B467
0667 B468
0668 B469
0669 B470
0670 B471
0671 B472
0672 B473
0673 B474
0674 B475
0675 B476
0676 B477
0677 B478
0678 B479
0679 B480
0680 B481
0681 B482
0682 B483
0683 B484
0684 B485
0685 B486
0686 B487
0687 B488
0688 B489
0689 B490
0690 B491
0691 B492
0692 B493
0693 B494
0694 B495
0695 B496
0696 B497
0697 B498
0698 B499
0699 B500
0700 B501
0701 B502
0702 B503
0703 B504
0704 B505
0705 B506
0706 B507
0707 B508
0708 B509
0709 B510
0710 B511
0711 B512
0712 B513
0713 B514
0714 B515
0715 B516
0716 B517
0717 B518
0718 B519
0719 B520
0720 B521
0721 B522
0722 B523
0723 B524
0724 B525
0725 B526
0726 B527
0727 B528
0728 B529
0729 B530
0730 B531
0731 B532
0732 B533
0733 B534
0734 B535
0735 B536
0736 B537
0737 B538
0738 B539
0739 B540
0740 B541
0741 B542
0742 B543
0743 B544
0744 B545
0745 B546
0746 B547
0747 B548
0748 B549
0749 B550
0750 B551
0751 B552
0752 B553
0753 B554
0754 B555
0755 B556
0756 B557
0757 B558
0758 B559
0759 B560
0760 B561
0761 B562
0762 B563
0763 B564
0764 B565
0765 B566
0766 B567
0767 B568
0768 B569
0769 B570
0770 B571
0771 B572
0772 B573
0773 B574
0774 B575
0775 B576
0776 B577
0777 B578
0778 B579
0779 B580
0780 B581
0781 B582
0782 B583
0783 B584
0784 B585
0785 B586
0786 B587
0787 B588
0788 B589
0789 B590
0790 B591
0791 B592
0792 B593
0793 B594
0794 B595
0795 B596
0796 B597
0797 B598
0798 B599
0799 B600
0800 B601
0801 B602
0802 B603
0803 B604
0804 B605
0805 B606
0806 B607
0807 B608
0808 B609
0809 B610
0810 B611
0811 B612
0812 B613
0813 B614
0814 B615
0815 B616
0816 B617
0817 B618
0818 B619
0819 B620
0820 B621
0821 B622
0822 B623
0823 B624
0824 B625
0825 B626
0826 B627
0827 B628
0828 B629
0829 B630
0830 B631
0831 B632
0832 B633
0833 B634
0834 B635
0835 B636
0836 B637
0837 B638
0838 B639
0839 B640
0840 B641
0841 B642
0842 B643
0843 B644
0844 B645
0845 B646
0846 B647
0847 B648
0848 B649
0849 B650
0850 B651
0851 B652
0852 B653
0853 B654
0854 B655
0855 B656
0856 B657
0857 B658
0858 B659
0859 B660
0860 B661
0861 B662
0862 B663
0863 B664
0864 B665
0865 B666
0866 B667
0867 B668
0868 B669
0869 B670
0870 B671
0871 B672
0872 B673
0873 B674
0874 B675
0875 B676
0876 B677
0877 B678
0878 B679
0879 B680
0880 B681
0881 B682
0882 B683
0883 B684
0884 B685
0885 B686
0886 B687
0887 B688
0888 B689
0889 B690
0890 B691
0891 B692
0892 B693
0893 B694
0894 B695
0895 B696
0896 B697
0897 B698
0898 B699
0899 B700
0900 B701
0901 B702
0902 B703
0903 B704
0904 B705
0905 B706
0906 B707
0907 B708
0908 B709
0909 B710
0910 B711
0911 B712
0912 B713
0913 B714
0914 B715
0915 B716
0916 B717
0917 B718
0918 B719
0919 B720
0920 B721
0921 B722
0922 B723
0923 B724
0924 B725
0925 B726
0926 B727
0927 B728
0928 B729
0929 B730
0930 B731
0931 B732
0932 B733
0933 B734
0934 B735
0935 B736
0936 B737
0937 B738
0938 B739
0939 B740
0940 B741
0941 B742
0942 B743
0943 B744
0944 B745
0945 B746
0946 B747
0947 B748
0948 B749
0949 B750
0950 B751
0951 B752
0952 B753
0953 B754
0954 B755
0955 B756
0956 B757
0957 B758
0958 B759
0959 B760
0960 B761
0961 B762
0962 B763
0963 B764
0964 B765
0965 B766
0966 B767
0967 B768
0968 B769
0969 B770
0970 B771
0971 B772
0972 B773
0973 B774
0974 B775
0975 B776
0976 B777
0977 B778
0978 B779
0979 B780
0980 B781
0981 B782
0982 B783
0983 B784
0984 B785
0985 B786
0986 B787
0987 B788
0988 B789
0989 B790
0990 B791
0991 B792
0992 B793
0993 B794
0994 B795
0995 B796
0996 B797
0997 B798
0998 B799
0999 B800
1000 B801
1001 B802
1002 B803
1003 B804
1004 B805
1005 B806
1006 B807
1007 B808
1008 B809
1009 B810
1010 B811
1011 B812
1012 B813
1013 B814
1014 B815
1015 B816
1016 B817
1017 B818
1018 B819
1019 B820
1020 B821
1021 B822
1022 B823
1023 B824
1024 B825
1025 B826
1026 B827
1027 B828
1028 B829
1029 B830
1030 B831
1031 B832
1032 B833
1033 B834
1034 B835
1035 B836
1036 B837
1037 B838
1038 B839
1039 B840
1040 B841
1041 B842
1042 B843
1043 B844
1044 B845
1045 B846
1046 B847
1047 B848
1048 B849
1049 B850
1050 B851
1051 B852
1052 B853
1053 B854
1054 B855
1055 B856
1056 B857
1057 B858
1058 B859
1059 B860
1060 B861
1061 B862
1062 B863
1063 B864
1064 B865
1065 B866
1066 B867
1067 B868
1068 B869
1069 B870
1070 B871
1071 B872
1072 B873
1073 B874
1074 B875
1075 B876
1076 B877
1077 B878
1078 B879
1079 B880
1080 B881
1081 B882
1082 B883
1083 B884
1084 B885
1085 B886
1086 B887
1087 B888
1088 B889
1089 B890
1090 B891
1091 B892
1092 B893
1093 B894
1094 B895
1095 B896
1096 B897
1097 B898
1098 B899
1099 B900
1100 B901
1101 B902
1102 B903
1103 B904
1104 B905
1105 B906
1106 B907
1107 B908
1108 B909
1109 B910
1110 B911
1111 B912
1112 B913
1113 B914
1114 B915
1115 B916
1116 B917
1117 B918
1118 B919
1119 B920
1120 B921
1121 B922
1122 B923
1123 B924
1124 B925
1125 B926
1126 B927
1127 B928
1128 B929
1129 B930
1130 B931
1131 B932
1132 B933
1133 B934
1134 B935
1135 B936
1136 B937
1137 B938
1138 B939
1139 B940
1140 B941
1141 B942
1142 B943
1143 B944
1144 B945
1145 B946
1146 B947
1147 B948
1148 B949
1149 B950
1150 B951
1151 B952
1152 B953
1153 B954
1154 B955
1155 B956
1156 B957
1157 B958
1158 B959
1159 B960
1160 B961
1161 B962
1162 B963
1163 B964
1164 B965
1165 B966
1166 B967
1167 B968
1168 B969
1169 B970
1170 B971
1171 B972
1172 B973
1173 B974
1174 B975
1175 B976
1176 B977
1177 B978
1178 B979
1179 B980
1180 B981
1181 B982
1182 B983
1183 B984
1184 B985
1185 B986
1186 B987
1187 B988
1188 B989
1189 B990
1190 B991
1191 B992
1192 B993
1193 B994
1194 B995
1195 B996
1196 B997
1197 B998
1198 B999
1199 B1000
1200 B1001
1201 B1002
1202 B1003
1203 B1004
1204 B1005
1205 B1006
1206 B1007
1207 B1008
1208 B1009
1209 B1010
1210 B1011
1211 B1012
1212 B1013
1213 B1014
1214 B1015
1215 B1016
1216 B1017
1217 B1018
1218 B1019
1219 B1020
1220 B1021
1221 B1022
1222 B1023
1223 B1024
1224 B1025
1225 B1026
1226 B1027
1227 B1028
1228 B1029
1229 B1030
1230 B1031
1231 B1032
1232 B1033
1233 B1034
1234 B1035
1235 B1036
1236 B1037
1237 B1038
1238 B1039
1239 B1040
1240 B1041
1241 B1042
1242 B1043
1243 B1044
1244 B1045
1245 B1046
1246 B1047
1247 B1048
1248 B1049
1249 B1050
1250 B1051
1251 B1052
1252 B1053
1253 B1054
1254 B1055
1255 B1056
1256 B1057
1257 B1058
1258 B1059
1259 B1060
1260 B1061
1261 B1062
1262 B1063
1263 B1064
1264 B1065
1265 B1066
1266 B1067
1267 B1068
1268 B1069
1269 B1070
1270 B1071
1271 B1072
1272 B1073
1273 B1074
1274 B1075
1275 B1076
1276 B1077
1277 B1078
1278 B1079
1279 B1080
1280 B1081
1281 B1082
1282 B1083
1283 B1084
1284 B1085
1285 B1086
1286 B1087
1287 B1088
1288 B1089
1289 B1090
1290 B1091
1291 B1092
1292 B1093
1293 B1094
1294 B1095
1295 B1096
1296 B1097
1297 B1098
1298 B1099
1299 B1100
1300 B1101
1301 B1102
1302 B1103
1303 B1104
1304 B1105
1305 B1106
1306 B1107
1307 B1108
1308 B1109
1309 B1110
1310 B1111
1311 B1112
1312 B1113
1313 B1114
1314 B1115
1315 B1116
1316 B1117
1317 B1118
1318 B1119
1319 B1120
1320 B1121
1321 B1122
1322 B1123
1323 B1124
1324 B1125
1325 B1126
1326 B1127
1327 B1128
1328 B1129
1329 B1130
1330 B1131
1331 B1132
1332 B1133
1333 B1134
1334 B1135
1335 B1136
1336 B1137
1337 B1138
1338 B1139
1339 B1140
1340 B1141
1341 B1142

PARTS LIST

■ ELECTRICAL PARTS

■ WARNING

Components having special characteristics are marked  and must be replaced with parts having specifications equal to those originally installed.

- For the parts No. of the chip carbon resistors, refer to last page of ELECTRICAL PARTS LIST.

ABBREVIATIONS IN THIS LIST ARE AS FOLLOWS:

C.A.EL.CHP	: CHIP ALUMI.ELECTROLYTIC CAP	L.EMIT	: LIGHT EMITTING MODULE
C.CE	: CERAMIC CAP	LED.DSPLY	: LED DISPLAY
C.CE.ARRAY	: CERAMIC CAP ARRAY	LED.INFRD	: LED,INFRARED
C.CE.CHP	: CHIP CERAMIC CAP	MODUL.RF	: MODULATOR,RF
C.CE.ML	: MULTILAYER CERAMIC CAP	PHOT.CPL	: PHOTO COUPLER
C.CE.M.CHP	: CHIP MULTILAYER CERAMIC CAP	PHOT.INTR	: PHOTO INTERRUPTER
C.CE.SAFTY	: RECOGNIZED CERAMIC CAP	PHOT.RFLCT	: PHOTO REFLECTOR
C.CE.TUBLR	: CERAMIC TUBULAR CAP	PIN.TEST	: PIN,TEST POINT
C.CE.SMI	: SEMI CONDUCTIVE CERAMIC CAP	PLST.RIVET	: PLASTIC RIVET
C.EL	: ELECTROLYTIC CAP	R.ARRAY	: RESISTOR ARRAY
C.MICA	: MICA CAP	R.CAR.	: CARBON RESISTOR
C.ML.FLM	: MULTILAYER FILM CAP	R.CAR.CHP	: CHIP RESISTOR
C.MP	: METALLIZED PAPER CAP	R.CAR.FP	: FLAME PROOF CARBON RESISTOR
C.MYLAR	: MYLAR FILM CAP	R.FUS	: FUSABLE RESISTOR
C.MYLAR.ML	: MULTILAYER MYLAR FILM CAP	R.MTL.CHP	: CHIP METAL FILM RESISTOR
C.PAPER	: PAPER CAPACITOR	R.MTL.FLM	: METAL FILM RESISTOR
C.PLS	: POLYSTYRENE FILM CAP	R.MTL.OXD	: METAL OXIDE FILM RESISTOR
C.POL	: POLYESTER FILM CAP	R.MTL.PLAT	: METAL PLATE RESISTOR
C.POLY	: POLYETHYLENE FILM CAP	RSNR.CE	: CERAMIC RESONATOR
C.PP	: POLYPROPYLENE FILM CAP	RSNR.CRYS	: CRYSTAL RESONATOR
C.TNTL	: TANTALUM CAP	R.TW.CEM	: TWIN CEMENT FIXED RESISTOR
C.TNTL.CHP	: CHIP TANTALUM CAP	R.WW	: WIRE WOUND RESISTOR
C.TRIM	: TRIMMER CAP	SCR.BND.HD	: BIND HEAD B-TITE SCREW
CN	: CONNECTOR	SCR.BW.HD	: BW HEAD TAPPING SCREW
CN.BS.PIN	: CONNECTOR,BASE PIN	SCR.CUP	: CUP TITE SCREW
CN.CANNON	: CONNECTOR,CANNON	SCR.TERM	: SCREW TERMINAL
CN.DIN	: CONNECTOR,DIN	SCR.TR	: SCREW,TRANSISTOR
CN.FLAT	: CONNECTOR,FLAT CABLE	SUPRT.PCB	: SUPPORT,P.C.B.
CN.POST	: CONNECTOR,BASE POST	SURG.PRTCT	: SURGE PROTECTOR
COIL.MX.AM	: COIL,AM MIX	SW.TACT	: TACT SWITCH
COIL.AT.FM	: COIL,FM ANTENNA	SW.LEAF	: LEAF SWITCH
COIL.DT.FM	: COIL,FM DETECT	SW.LEVER	: LEVER SWITCH
COIL.MX.FM	: COIL,FM MIX	SW.MICRO	: MICRO SWITCH
COIL.OUTPT	: OUTPUT COIL	SW.PUSH	: PUSH SWITCH
DIOD.ARRAY	: DIODE ARRAY	SW.RT.ENC	: ROTARY ENCODER
DIODE.BRG	: DIODE BRIDGE	SW.RT.MTR	: ROTARY SWITCH WITH MOTOR
DIODE.CHP	: CHIP DIODE	SW.RT	: ROTARY SWITCH
DIODE.VAR	: VARACTOR DIODE	SW.SLIDE	: SLIDE SWITCH
DIOD.Z.CHP	: CHIP ZENER DIODE	TERM.SP	: SPEAKER TERMINAL
DIODE.ZENR	: ZENER DIODE	TERM.WRAP	: WRAPPING TERMINAL
DSCR.CE	: CERAMIC DISCRIMINATOR	THRMST.CHP	: CHIP THERMISTOR
FER.BEAD	: FERRITE BEADS	TR.CHP	: CHIP TRANSISTOR
FER.CORE	: FERRITE CORE	TR.DGT	: DIGITAL TRANSISTOR
FET.CHP	: CHIP FET	TR.DGT.CHP	: CHIP DIGITAL TRANSISTOR
FL.DSPLY	: FLUORESCENT DISPLAY	TRANS	: TRANSFORMER
FLTR.CE	: CERAMIC FILTER	TRANS.PULS	: PULSE TRANSFORMER
FLTR.COMB	: COMB FILTER MODULE	TRANS.PWR	: POWER TRANSFORMER ASS'Y
FLTR.LC.RF	: LC FILTER,EMI	TUNER.AM	: TUNER PACK,AM
GND.MTL	: GROUND PLATE	TUNER.FM	: TUNER PACK,FM
GND.TERM	: GROUND TERMINAL	TUNER.PK	: FRONT-END TUNER PACK
HOLDER.FUS	: FUSE HOLDER	VR	: ROTARY POTENTIOMETER
IC.PRTCT	: IC PROTECTOR	VR.MTR	: POTENTIOMETER WITH MOTOR
JUMPER.CN	: JUMPER CONNECTOR	VR.SW	: POTENTIOMETER WITH ROTARY SW
JUMPER.TST	: JUMPER,TEST POINT	VR.SLIDE	: SLIDE POTENTIOMETER
L.DTCT	: LIGHT DETECTING MODULE	VR.TRIM	: TRIMMER POTENTIOMETER

Note) Those parts marked with “#” are not included in the P.C.B. ass'y.

P. C. B. MONO

Schm Ref.	PART NO.	Description	Remarks
	AAX21950	P.C.B.	MONO(UCART)
	AAX21940	P.C.B.	MONO(GB)
1104	AAX22180	CON	BMH 24P FFC
1106	AAX22190	CON	BMH 8P FFC
1205	AAX23320	RSNR.CRYS	8.467MHz
1300	AAX23310	RSNR.CRYS	6MHz
1301	AAX22360	CON	11P FEMALE
1603	AAX22210	CON	BMV 22P FFC
1604	AAX22200	CON	BMV 16P FFC
2100	US135100	C.CE.CHP	0.1uF 16V
2101	US135100	C.CE.CHP	0.1uF 16V
2103	UF037470	C.EL.CHP	47uF 16V
2104	US063470	C.CE.CHP	4700pF 50V
2105	US061220	C.CE.CHP	22pF 50V
2107	US061680	C.CE.CHP	68PF 50V
2108	US062390	C.CE.CHP	390PF 50V
2110	US063220	C.CE.CHP	2200pF 50V
2111	US135100	C.CE.CHP	0.1uF 16V
2112	US063100	C.CE.CHP	1000pF 50V
2113	US135100	C.CE.CHP	0.1uF 16V
2114	US062100	C.CE.CHP	100pF 50V
2115	US135100	C.CE.CHP	0.1uF 16V
2116	US135100	C.CE.CHP	0.1uF 16V
2117	US135100	C.CE.CHP	0.1uF 16V
2120	US135100	C.CE.CHP	0.1uF 16V
2121	US135220	C.CE.CHP	0.22uF 16V
2123	US135100	C.CE.CHP	0.1uF 16V
2124	US135100	C.CE.CHP	0.1uF 16V
2125	US135100	C.CE.CHP	0.1uF 16V
2126	US135100	C.CE.CHP	0.1uF 16V
2127	US135100	C.CE.CHP	0.1uF 16V
2128	US062180	C.CE.CHP	180pF 50V
2129	US062180	C.CE.CHP	180pF 50V
2130	US061220	C.CE.CHP	22pF 50V
2131	US044220	C.CE.CHP	0.022uF 25V
2136	US135100	C.CE.CHP	0.1uF 16V
2137	US135100	C.CE.CHP	0.1uF 16V
2138	US135100	C.CE.CHP	0.1uF 16V
2139	US135100	C.CE.CHP	0.1uF 16V
2140	US062330	C.CE.CHP	330P 50V
2141	US061220	C.CE.CHP	22pF 50V
2142	US064100	C.CE.CHP	0.01uF 50V
2143	US062220	C.CE.CHP	220pF 50V
2144	US062220	C.CE.CHP	220pF 50V
2145	US062220	C.CE.CHP	220pF 50V
2203	US135100	C.CE.CHP	0.1uF 16V
2204	US135100	C.CE.CHP	0.1uF 16V
2205	US135100	C.CE.CHP	0.1uF 16V
2206	US034330	C.CE.CHP	0.033uF 16V
2207	US063100	C.CE.CHP	1000pF 50V
2208	US135100	C.CE.CHP	0.1uF 16V
2209	US135100	C.CE.CHP	0.1uF 16V
2210	US063100	C.CE.CHP	1000pF 50V
2212	US135100	C.CE.CHP	0.1uF 16V
2213	US135100	C.CE.CHP	0.1uF 16V
2215	UF017220	C.EL.CHP	22uF 6.3V
2216	US063100	C.CE.CHP	1000pF 50V
2226	US135100	C.CE.CHP	0.1uF 16V
2227	US135100	C.CE.CHP	0.1uF 16V
2228	US135100	C.CE.CHP	0.1uF 16V
2300	US135100	C.CE.CHP	0.1uF 16V
2301	US135100	C.CE.CHP	0.1uF 16V
2302	US135100	C.CE.CHP	0.1uF 16V

* New Parts

Schm Ref.	PART NO.	Description	Remarks
2303	UF017470	C.EL.CHP	47uF 6.3V
2306	UF037100	C.EL.CHP	10uF 16V
2309	US135100	C.CE.CHP	0.1uF 16V
2310	US135100	C.CE.CHP	0.1uF 16V
2314	US135100	C.CE.CHP	0.1uF 16V
2315	US135100	C.CE.CHP	0.1uF 16V
2318	US062120	C.CE.CHP	120PF 50V
2319	US061270	C.CE.CHP	27PF 50V
2401	US135100	C.CE.CHP	0.1uF 16V
2402	US135100	C.CE.CHP	0.1uF 16V
2403	US135100	C.CE.CHP	0.1uF 16V
2404	US135100	C.CE.CHP	0.1uF 16V
2405	US135100	C.CE.CHP	0.1uF 16V
2406	US135100	C.CE.CHP	0.1uF 16V
2407	US135100	C.CE.CHP	0.1uF 16V
2408	US135100	C.CE.CHP	0.1uF 16V
2409	US135100	C.CE.CHP	0.1uF 16V
2410	US135100	C.CE.CHP	0.1uF 16V
2411	US135100	C.CE.CHP	0.1uF 16V
2412	US135100	C.CE.CHP	0.1uF 16V
2413	US135100	C.CE.CHP	0.1uF 16V
2418	UF038100	C.EL.CHP	100uF 16V
2419	UF017470	C.EL.CHP	47uF 6.3V
2420	UF017470	C.EL.CHP	47uF 6.3V
2500	US135100	C.CE.CHP	0.1uF 16V
2502	UF066470	C.EL.CHP	4.7uF 50V
2503	US135100	C.CE.CHP	0.1uF 16V
2504	US062100	C.CE.CHP	100pF 50V
2505	US044220	C.CE.CHP	0.022uF 25V
2506	UF037100	C.EL.CHP	10uF 16V
2507	US135100	C.CE.CHP	0.1uF 16V
2508	US063330	C.CE.CHP	3300pF 50V
2509	US062330	C.CE.CHP	330P 50V
2510	US135100	C.CE.CHP	0.1uF 16V
2511	US135100	C.CE.CHP	0.1uF 16V
2512	US135100	C.CE.CHP	0.1uF 16V
2513	US135100	C.CE.CHP	0.1uF 16V
2514	US135100	C.CE.CHP	0.1uF 16V
2515	US135100	C.CE.CHP	0.1uF 16V
2516	US135100	C.CE.CHP	0.1uF 16V
2517	US135100	C.CE.CHP	0.1uF 16V
2518	US135100	C.CE.CHP	0.1uF 16V
2519	US135100	C.CE.CHP	0.1uF 16V
2520	US135100	C.CE.CHP	0.1uF 16V
2521	US135100	C.CE.CHP	0.1uF 16V
2522	US135100	C.CE.CHP	0.1uF 16V
2523	US135100	C.CE.CHP	0.1uF 16V
2524	US135100	C.CE.CHP	0.1uF 16V
2525	US135100	C.CE.CHP	0.1uF 16V
2526	US135100	C.CE.CHP	0.1uF 16V
2527	US135100	C.CE.CHP	0.1uF 16V
2528	US135100	C.CE.CHP	0.1uF 16V
2529	US135100	C.CE.CHP	0.1uF 16V
2530	UF066470	C.EL.CHP	4.7uF 50V
2531	UF066470	C.EL.CHP	4.7uF 50V
2532	US061470	C.CE.CHP	47pF 50V
2533	US061470	C.CE.CHP	47pF 50V
2534	US063100	C.CE.CHP	1000pF 50V
2535	US063100	C.CE.CHP	1000pF 50V
2600	US044220	C.CE.CHP	0.022uF 25V
2601	US063150	C.CE.CHP	1500pF 50V
2602	US063150	C.CE.CHP	1500pF 50V
2603	US135100	C.CE.CHP	0.1uF 16V

* New Parts

P. C. B. MONO

Schm Ref.	PART NO.	Description	Remarks
* 2604	UF038100	C. EL. CHP 100uF 16V	4822 124 12095
* 2605	US044220	C. CE. CHP 0.022uF 25V	4822 126 14494
* 2606	UF038100	C. EL. CHP 100uF 16V	4822 124 12095
* 2607	UF038100	C. EL. CHP 100uF 16V	4822 124 12095
* 2608	UF037100	C. EL. CHP 10uF 16V	4822 124 23002
* 2609	UF037470	C. EL. CHP 47uF 16V	4822 124 80151
* 2610	US135100	C. CE. CHP 0.1uF 16V	4822 126 14305
* 2611	UF038100	C. EL. CHP 100uF 16V	4822 124 12095
* 2614	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2615	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2616	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2617	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2618	US135100	C. CE. CHP 0.1uF 16V	4822 126 14305
* 2620	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2621	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2622	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2623	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2624	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2625	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2626	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2627	US061470	C. CE. CHP 47pF 50V	4822 122 33777
* 2632	UF038100	C. EL. CHP 100uF 16V	4822 124 12095
* 2633	UF038100	C. EL. CHP 100uF 16V	4822 124 12095
* 2634	US135100	C. CE. CHP 0.1uF 16V	4822 126 14305
* 2635	US135100	C. CE. CHP 0.1uF 16V	4822 126 14305
* 2636	US135100	C. CE. CHP 0.1uF 16V	4822 126 14305
* 2637	US135100	C. CE. CHP 0.1uF 16V	4822 126 14305
* 2638	US135100	C. CE. CHP 0.1uF 16V	4822 126 14305
* 2639	US135100	C. CE. CHP 0.1uF 16V	4822 126 14305
* 3102	HX609900	R. MTL. CHP 1.5KΩ 1/16W	5322 117 13034
* 3103	HX609900	R. MTL. CHP 1.5KΩ 1/16W	5322 117 13034
* 3104	HX609170	R. MTL. CHP 390Ω 1/10W	5322 117 13062
* 3112	HX609650	R. MTL. CHP 47KΩ 1/10W	5322 117 13021
* 3116	NX703350	R. MTL. CHP 3.9KΩ 1/10W	5322 117 13042
* 3119	HX609170	R. MTL. CHP 390Ω 1/10W	5322 117 13062
* 3134	HX609160	R. MTL. CHP 330Ω 1/10W	5322 117 13047
* 3138	HX609950	R. MTL. CHP 6.8KΩ 1/10W	5322 117 13053
* 3142	HX610290	R. MTL. CHP 12K 1/10W	5322 117 13028
* 3143	HX609140	R. MTL. CHP 220Ω 1/10W	5322 117 13043
* 3148	HX610120	R. MTL. CHP 22KΩ 1/16W	5322 117 13022
* 3158	HX609660	R. MTL. CHP 100KΩ 1/10W	5322 117 13017
* 3165	V1192600	R. MTL. CHP 120Ω 1/10W	5322 117 13063
* 3168	HX609160	R. MTL. CHP 330Ω 1/10W	5322 117 13047
* 3172	HX609660	R. MTL. CHP 100KΩ 1/10W	4822 117 13632
* 3173	HX609660	R. MTL. CHP 100KΩ 1/10W	4822 117 13632
* 3180	HX609660	R. MTL. CHP 100KΩ 1/10W	4822 117 13632
* 3182	HX609640	R. MTL. CHP 1KΩ 1/10W	5322 117 13018
* 3183	HX609660	R. MTL. CHP 100KΩ 1/10W	5322 117 13017
* 3198	HX609180	R. MTL. CHP 470Ω 1/10W	5322 117 13049
* 3199	NX703350	R. MTL. CHP 3.9KΩ 1/10W	5322 117 13042
* 3234	HX610400	R. MTL. CHP 8.2KΩ 1/10W	4822 117 12902
* 3235	HX609660	R. MTL. CHP 100KΩ 1/10W	4822 117 13632
* 3322	HX609950	R. MTL. CHP 4.7KΩ 1/10W	5322 117 13026
* 3323	HX609950	R. MTL. CHP 4.7KΩ 1/10W	5322 117 13026
* 3324	HX609660	R. MTL. CHP 100KΩ 1/10W	4822 117 13632
* 3606	HX609650	R. MTL. CHP 47KΩ 1/10W	4822 117 12925
* 3607	HX609660	R. MTL. CHP 100KΩ 1/10W	4822 117 13632
* 3608	HX609660	R. MTL. CHP 100KΩ 1/10W	4822 117 13632
* 3609	HX609660	R. MTL. CHP 100KΩ 1/10W	4822 117 13632
* 3693	HX609650	R. MTL. CHP 47KΩ 1/10W	4822 117 12925
* 5200	AAX22070	COIL BLM31P500SPT	4822 157 11717
* 5300	AAX22070	COIL BLM31P500SPT	4822 157 11717
* 5301	AAX22070	COIL BLM31P500SPT	4822 157 11717

* New Parts

Schm Ref.	PART NO.	Description	Remarks
* 5402	AAX22050	COIL BLM11P600SPT	4822 157 11499
* 5403	AAX22050	COIL BLM11P600SPT	4822 157 11499
* 5501	AAX22110	COIL 2.2uH NL322522T	4822 157 70299
* 5502	AAX22110	COIL 2.2uH NL322522T	4822 157 70299
* 5503	AAX22130	COIL BLM21A601SPT	4822 157 71206
* 5504	AAX22130	COIL BLM21A601SPT	4822 157 71206
* 5600	AAX22130	COIL BLM21A601SPT	4822 157 71206
* 5601	AAX22050	COIL BLM11P600SPT	4822 157 11499
* 5602	AAX22030	COIL 15uH	4822 157 10547
* 5603	AAX22130	COIL BLM21A601SPT	4822 157 71206
* 5604	AAX22030	COIL 15uH	4822 157 10547
* 5605	AAX22030	COIL 15uH	4822 157 10547
* 5606	AAX22030	COIL 15uH	4822 157 10547
* 5607	AAX22030	COIL 15uH	4822 157 10547
* 5608	AAX22030	COIL 15uH	4822 157 10547
* 5609	AAX22070	COIL BLM31P500SPT	4822 157 11717
* 5610	AAX22070	COIL BLM31P500SPT	4822 157 11717
* 6200	AAX22630	DIODE. CHP BAS316	4822 130 11397
* 6301	AAX22690	DIODE. CHP S1D	9322 128 69685
* 6302	AAX22690	DIODE. CHP S1D	9322 128 69685
* 6303	AAX22690	DIODE. CHP S1D	9322 128 69685
* 6600	AAX22650	DIODE. CHP 1PS76SB10	4822 130 11528
* 7100	AAX22750	TR. CHP BFS20	5322 130 42718
* 7101	AAX22750	TR. CHP BFS20	5322 130 42718
* 7102	AAX21880	IC TZAI033HL	9352 637 37518
* 7103	AAX21620	IC BA5938FM	4822 209 17229
* 7104	AAX21660	IC LM833D	4822 209 30095
* 7105	AAX21690	IC MC34072D	4822 209 32073
* 7106	AAX22750	TR. CHP BFS20	5322 130 42718
* 7109	AAX21580	IC AN78M09	4822 209 15083
* 7110	AAX22760	TR. CHP BST72A	5322 130 60803
* 7111	AAX22740	TR. CHP BC847B	4822 130 60511
* 7112	AAX22740	TR. CHP BC847B	4822 130 60511
* 7113	AAX22740	TR. CHP BC847B	4822 130 60511
* 7114	AAX22740	TR. CHP BC847B	4822 130 60511
* 7115	AAX22730	TR. CHP BC856B	4822 130 60373
* 7116	AAX22740	TR. CHP BC847B	4822 130 60511
* 7201	AAX21860	IC 74HCT573	9351 869 80118
* 7202	AAX21550	IC M29P002	3104 123 95660
* 7203	AAX22730	TR. CHP BC856B	4822 130 60373
* 7207	AAX21870	IC SAA7399HL/M2A	9352 636 60557
* 7208	AAX21780	IC MC33464N-45A	9322 139 67685
* 7304	AAX21600	IC BA6856FP	4822 209 16877
* 7310	AAX21590	IC CY7C199-15C	4822 209 15899
* 7311	AAX21890	IC SAA7335HL/E/M2	9352 637 83557
* 7312	AAX22730	TR. CHP BC856B	4822 130 60373
* 7315	AAX22740	TR. CHP BC847B	4822 130 60511
* 7401	AAX21520	IC AM29LV160BT-90SC	3104 123 85540
* 7404	AAX21800	IC MT48LC1M16A1TG-7S	9322 144 59668
* 7405	AAX21800	IC MT48LC1M16A1TG-7S	9322 144 59668
* 7501	AAX22740	TR. CHP BC847B	4822 130 60511
* 7503	AAX21810	IC STI5505EVB	9322 144 88671
* 7503	AAX21830	IC STI5505AVC	9322 151 16671
* 7504	AAX23460	RSNR. CRYST 27MHZ 120P FX0-31F	4822 242 10838
* 7505	AAX21850	IC M24C32-WMN6TNKSA	9322 156 81668
* 7505	AAX21760	IC M24C32-WMN6TNKSA	8204 056 05580
* 7600	AAX21740	IC PC74HCT14T	5322 209 71568
* 7604	AAX22740	TR. CHP BC847B	4822 130 60511
* 7605	AAX21630	IC LD1117DT33	4822 209 17398
* 7607	AAX22740	TR. CHP BC847B	4822 130 60511
* 7608	AAX22730	TR. CHP BC856B	4822 130 60373
* 7609	AAX22730	TR. CHP BC856B	4822 130 60373
* 7610	AAX22740	TR. CHP BC847B	4822 130 60511

* New Parts

P. C. B. MONO & P. C. B. A/V

Schm Ref.	PART NO.	Description	Remarks
*	7612	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7613	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7614	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7615	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7616	AAX21840 IC	SM MK2703STR 9322 151 71668
*	7617	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7618	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7620	AAX22730 TR. CHP	BC856B 4822 130 60373
*	7621	AAX22780 TR. CHP	BC817-25 4822 130 42804
*	7622	AAX22740 TR. CHP	BC847B 4822 130 60511
*		AAX21930 P.C.B.	AV(UCART) 3139 248 80591
*	1000	AAX22220 CN	BMV 16P FFC 2422 025 16525
*	1001	AAX22230 CN	BMV 22P FFC 2422 025 16526
*	1003	AAX22350 CN	4P MDIN 4822 267 10994
*	1006	AAX22250 CN	BM 3P F 2422 026 05049
*	1008	AAX22240 CN	BM 6P F 2422 026 05047
	2001	UR837220 C. EL	22uF 16V
	2002	UR848100 C. EL	100uF 25V
	2004	UR848100 C. EL	100uF 25V
*	2007	UB445470 C.CE.M. CHP	0.47uF 16V
	2008	UR838100 C. EL	100uF 16V
	2009	US062220 C.CE. CHP	220pF 50V
	2010	US062220 C.CE. CHP	220pF 50V
	2012	US044220 C.CE. CHP	0.022uF 25V
	2013	US044220 C.CE. CHP	0.022uF 25V
	2016	UR848100 C. EL	100uF 25V
	2200	UR848100 C. EL	100uF 25V
*	2201	UB445100 C.CE.M. CHP	0.1uF 16V
	2202	UR837100 C. EL	10uF 16V
	2203	UR838100 C. EL	100uF 16V
	2204	UR848100 C. EL	100uF 25V
	2205	UR838100 C. EL	100uF 16V
*	2206	UB445100 C.CE.M. CHP	0.1uF 16V
	2207	UR837470 C. EL	47uF 16V
*	2208	UB445100 C.CE.M. CHP	0.1uF 16V
*	2209	UB445100 C.CE.M. CHP	0.1uF 16V
	2210	UR837470 C. EL	47uF 16V
*	2211	UB445100 C.CE.M. CHP	0.1uF 16V
	2212	US063100 C.CE. CHP	1000pF 50V
	2213	US063100 C.CE. CHP	1000pF 50V
	2214	UR837100 C. EL	10uF 16V
	2215	UR838100 C. EL	100uF 16V
	2216	UR837100 C. EL	10uF 16V
*	2217	UB445470 C.CE.M. CHP	0.47uF 16V
	2221	US063100 C.CE. CHP	1000pF 50V
	2222	US063100 C.CE. CHP	1000pF 50V
	2224	US063100 C.CE. CHP	1000pF 50V
	2225	UR837100 C. EL	10uF 16V
	2226	US061470 C.CE.M. CHP	47pF 50V
*	2227	UB445100 C.CE.M. CHP	0.1uF 16V
	2228	US061470 C.CE.M. CHP	47pF 50V
	2229	US062100 C.CE. CHP	100pF 50V
	2230	US062100 C.CE. CHP	100pF 50V
	2231	UR838470 C. EL	470uF 16V
*	3016	Vi194500 R.MTL. CHP	680Ω 1/10W 5322 117 13051
*	3017	HX610400 R.MTL. CHP	8.2KΩ 1/16W 4822 117 12902
*	3035	Vi194500 R.MTL. CHP	680Ω 1/10 5322 117 13051
	3040	HX610110 R.MTL. CHP	2.2KΩ 1/16W 4822 050 12202
*	3041	HX609930 R.MTL. CHP	3.3KΩ 1/10W 5322 117 13048
*	3042	HX609960 R.MTL. CHP	6.8KΩ 1/16W 5322 117 13053

* New Parts

Schm Ref.	PART NO.	Description	Remarks
*	3046	HX609640 R.MTL. CHP	1KΩ 1/10W 4822 117 13611
*	3047	HX609640 R.MTL. CHP	1KΩ 1/10W 4822 117 13611
*	3050	HX609900 R.MTL. CHP	1.5KΩ 1/16W 5322 117 13034
*	3053	HX609640 R.MTL. CHP	1KΩ 1/10W 4822 117 13611
*	3054	HX609640 R.MTL. CHP	1KΩ 1/10W 4822 117 13611
*	3055	HX609640 R.MTL. CHP	1KΩ 1/10W 4822 117 13611
*	3057	HX610030 R.MTL. CHP	1.2KΩ 1/10W 5322 117 13036
*	3060	HX609640 R.MTL. CHP	1KΩ 1/10W 4822 117 13611
*	3061	HX609960 R.MTL. CHP	6.8KΩ 1/16W 5322 117 13053
*	3208	HX610400 R.MTL. CHP	8.2KΩ 1/16W 4822 117 12902
	3210	HX609950 R.MTL. CHP	4.7KΩ 1/10W 5322 117 13026
*	3216	HX610400 R.MTL. CHP	8.2KΩ 1/16W 4822 117 12902
	3218	HX609950 R.MTL. CHP	4.7KΩ 1/10W 5322 117 13026
*	3231	HX609130 R.MTL. CHP	100K 1/10W 4822 117 13632
*	5003	AAX22140 COIL	DSS306 4822 242 10756
*	5004	AAX22140 COIL	DSS306 4822 242 10756
*	5005	AAX22140 COIL	DSS306 4822 242 10756
*	5006	AAX22140 COIL	DSS306 4822 242 10756
*	5007	AAX22140 COIL	DSS306 4822 242 10756
*	5008	AAX22120 COIL	100uH 4822 157 70601
*	6000	AAX22670 DIODE. CHP	1SS355 4822 130 83649
*	6001	AAX22670 DIODE. CHP	1SS355 4822 130 83649
*	6002	AAX22640 DIODE. CHP	UDZ15B 4822 130 11522
*	6003	AAX22640 DIODE. CHP	UDZ15B 4822 130 11522
*	6004	AAX22640 DIODE. CHP	UDZ15B 4822 130 11522
*	6005	AAX22640 DIODE. CHP	UDZ15B 4822 130 11522
*	6006	AAX22640 DIODE. CHP	UDZ15B 4822 130 11522
*	6007	AAX22640 DIODE. CHP	UDZ15B 4822 130 11522
*	6008	AAX22640 DIODE. CHP	UDZ15B 4822 130 11522
*	7001	AAX21790 IC	AD8073 9322 141 80668
*	7002	AAX21700 IC	L7905CV 4822 209 72684
*	7010	AAX21610 IC	LF33CV 4822 209 16978
*	7011	AAX21900 IC	UDA1334TS/NI 9352 640 74118
*	7012	AAX21660 IC	LM833D 4822 209 30095
*	7028	AAX22270 CN	GP1F32T 4822 130 10845
*	7400	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7403	AAX22730 TR. CHP	BC856B 4822 130 60373
*	7404	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7405	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7406	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7407	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7408	AAX22730 TR. CHP	BC856B 4822 130 60373
*	7409	AAX22780 TR. CHP	BC817-25 4822 130 42804
*	7410	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7411	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7412	AAX22730 TR. CHP	BC856B 4822 130 60373
*	7413	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7414	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7415	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7451	AAX22780 TR. CHP	BC817-25 4822 130 42804
*	7452	AAX22780 TR. CHP	BC817-25 4822 130 42804
*	7453	AAX22780 TR. CHP	BC817-25 4822 130 42804
*	7454	AAX22780 TR. CHP	BC817-25 4822 130 42804
*	7455	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7456	AAX22780 TR. CHP	BC817-25 4822 130 42804
*	7457	AAX22740 TR. CHP	BC847B 4822 130 60511
*	7458	AAX22730 TR. CHP	BC856B 4822 130 60373
*		AAX21920 P.C.B.	AV(GB) 3104 128 06121
*	1300	AAX22290 CN	22P(52030-2210) 4822 265 11154
*	1301	AAX22280 CN	16P(52030-1610) 4822 265 11103

* New Parts

P. C. B. A/V & P. C. B. DISPLAY

Schm Ref.	PART NO.	Description	Remarks
*	3757	HX609130 R.MTL. CHP 100K 1/10W	4822 117 10837
*	3758	HX609130 R.MTL. CHP 100K 1/10W	4822 117 10837
*	3759	HX609130 R.MTL. CHP 100K 1/10W	4822 117 10837
*	3760	HX609130 R.MTL. CHP 100K 1/10W	4822 117 10837
*	3761	HX609130 R.MTL. CHP 100K 1/10W	4822 117 10837
*	5400	AA222120 COIL 100uH	4822 157 70601
*	6302	AA222680 DIODE. CHP BAS216	4822 130 83757
*	6400	AA222270 CN GP1F32T	4822 130 10845
*	6401	AA222800 DIODE. CHP BZX284-C9V1	4822 130 11047
*	6403	AA222680 DIODE. CHP BAS216	4822 130 83757
*	6404	AA222810 DIODE. CHP BZX284-C5V1	4822 130 11383
*	7006	AA222740 TR. CHP BC847B	4822 130 60511
*	7007	AA222740 TR. CHP BC847B	4822 130 60511
*	7008	AA222740 TR. CHP BC847B	4822 130 60511
*	7009	AA222730 TR. CHP BC856B	4822 130 60373
*	7010	AA222740 TR. CHP BC847B	4822 130 60511
*	7011	AA222740 TR. CHP BC847B	4822 130 60511
*	7012	AA222730 TR. CHP BC856B	4822 130 60373
*	7013	AA222740 TR. CHP BC847B	4822 130 60511
*	7014	AA222740 TR. CHP BC847B	4822 130 60511
*	7300	AA222730 TR. CHP BC856B	4822 130 60373
*	7301	AA222740 TR. CHP BC847B	4822 130 60511
*	7304	AA222770 IC LF80C	9322 134 86668
*	7310	AA222740 TR. CHP BC847B	4822 130 60511
*	7329	AA222740 TR. CHP BC847B	4822 130 60511
*	7330	AA222740 TR. CHP BC847B	4822 130 60511
*	7331	AA222700 TR. CHP BC547B	4822 130 40959
*	7332	AA222730 TR. CHP BC856B	4822 130 60373
*	7333	AA222710 TR. CHP BC327-25	4822 130 41246
*	7334	AA222740 TR. CHP BC847B	4822 130 60511
*	7335	AA222740 TR. CHP BC847B	4822 130 60511
*	7400	AA221770 IC L78L33	9322 134 92676
*	7401	AA221640 IC UAD1328T	4822 209 17423
*	7402	AA222780 TR. CHP BC817-25	4822 130 42804
*	7403	AA221680 IC MC33079D	4822 209 32071
*	7404	AA222720 TR. CHP BC817-40	4822 130 42615
*	7405	AA222720 TR. CHP BC817-40	4822 130 42615
*	7406	AA222720 TR. CHP BC817-40	4822 130 42615
*	7407	AA222720 TR. CHP BC817-40	4822 130 42615
*	7900	AA221730 IC HEF4053BT	5322 209 14481
*	7901	AA221730 IC HEF4053BT	5322 209 14481
*	7902	AA221730 IC HEF4053BT	5322 209 14481
*	7903	AA221730 IC HEF4053BT	5322 209 14481
*	7904	AA221730 IC HEF4053BT	5322 209 14481
*	7905	AA221730 IC HEF4053BT	5322 209 14481
*	7917	AA221650 IC TEA6420D	4822 209 17512
*	7918	AA222740 TR. CHP BC847B	4822 130 60511
*	7919	AA222740 TR. CHP BC847B	4822 130 60511
*	7920	AA222740 TR. CHP BC847B	4822 130 60511
*	7921	AA222740 TR. CHP BC847B	4822 130 60511
*	7922	AA222740 TR. CHP BC847B	4822 130 60511
*	7923	AA222740 TR. CHP BC847B	4822 130 60511
*	7924	AA222740 TR. CHP BC847B	4822 130 60511
*	7925	AA222740 TR. CHP BC847B	4822 130 60511
*	7926	AA222740 TR. CHP BC847B	4822 130 60511
*	7927	AA222740 TR. CHP BC847B	4822 130 60511
*	7928	AA222740 TR. CHP BC847B	4822 130 60511
*	7929	AA222740 TR. CHP BC847B	4822 130 60511
*	7930	AA222740 TR. CHP BC847B	4822 130 60511
*	7931	AA222740 TR. CHP BC847B	4822 130 60511
*	7933	AA222740 TR. CHP BC847B	4822 130 60511
*	7934	AA222740 TR. CHP BC847B	4822 130 60511
*	7935	AA222740 TR. CHP BC847B	4822 130 60511

* New Parts

Schm Ref.	PART NO.	Description	Remarks
*	7936	AA222730 TR. CHP BC856B	4822 130 60373
*	7937	AA222730 TR. CHP BC856B	4822 130 60373
*	7938	AA222730 TR. CHP BC856B	4822 130 60373
*	7939	AA222730 TR. CHP BC856B	4822 130 60373
*	7941	AA222730 TR. CHP BC856B	4822 130 60373
*	7942	AA222730 TR. CHP BC856B	4822 130 60373
*	7943	AA222740 TR. CHP BC847B	4822 130 60511
*	7944	AA222740 TR. CHP BC847B	4822 130 60511
*	7945	AA222730 TR. CHP BC856B	4822 130 60373
*	7946	AA222730 TR. CHP BC856B	4822 130 60373
*	7947	AA222740 TR. CHP BC847B	4822 130 60511
*	7948	AA222730 TR. CHP BC856B	4822 130 60373
*	7949	AA222740 TR. CHP BC847B	4822 130 60511
*		AA221960 P.C.B.	DISP(UCART)
*		AA221970 P.C.B.	DISP(GB)
*	2	AA223080 HOLDER	3139 248 80221
*	20	AA222160 CN	3139 248 80361
*	1100	AA222420 SW	3139 244 00440
*	1101	AA222420 SW	2422 025 04849
*	1102	AA222420 SW	4822 276 13775
*	1106	AA222420 SW	4822 276 13775
*	1107	AA222420 SW	4822 276 13775
*	1108	AA222420 SW	4822 276 13775
*	1109	AA222420 SW	4822 276 13775
*	1110	AA223300 RSNR.CRYS	8MHz CSTS
*	1111	AA222420 SW	(GB)
*	1113	AA221510 FL.DSPLY	VFD 14-MT-27GNK
*	1115	AA222320 CN	4P
*	1117	AA222150 CN	BMV 2P M2.5(UCRAT)
*	1117	AA222320 CN	4P (GB)
*	1118	AA222340 CN	5P B5B-PH-K
*	1120	AA222400 SW	2P 100mA30V(UCRAT)
*	1205	AA222170 CN	BMH 2P M2.5(UCRAT)
*	1205	AA222330 CN	4P (GB)
*	2100	US062220 C.CE. CHP	220pF 50V(GB)
*	2101	US062220 C.CE. CHP	220pF 50V(GB)
*	2102	US062100 C.CE. CHP	100pF 50V
*	2103	US062100 C.CE. CHP	100pF 50V
*	2105	AA222460 C.CE.M. CHP	0.039uF 50V
*	2106	UR877100 C.EL	10uF 63V
*	2107	AA222460 C.CE.M. CHP	0.039uF 50V
*	2108	AA222460 C.CE.M. CHP	0.039uF 50V
*	2109	AA222460 C.CE.M. CHP	0.039uF 50V
*	2110	AA222460 C.CE.M. CHP	0.039uF 50V
*	2111	AA222460 C.CE.M. CHP	0.039uF 50V
*	2114	US061220 C.CE. CHP	22pF 50V
*	2115	US061220 C.CE. CHP	22pF 50V
*	2116	AA222460 C.CE.M. CHP	0.039uF 50V
*	2117	UR877100 C.EL	10uF 63V
*	2122	AA222460 C.CE.M. CHP	0.039uF 50V
*	2123	UR837100 C.EL	10uF 16V
*	2124	UR857220 C.EL	22uF 35V
*	2125	US061220 C.CE. CHP	22pF 50V
*	2126	UR877100 C.EL	10uF 63V
*	2128	US063100 C.CE. CHP	1000pF 50V
*	2129	UR857220 C.EL	22uF 35V
*	2130	UR857220 C.EL	22uF 35V
*	2201	AA222460 C.CE.M. CHP	0.039uF 50V
*	2211	US062100 C.CE. CHP	100pF 50V
*	6100	AA222680 DIODE. CHP BAS216	(GB) 4822 130 83757

* New Parts

P. C. B. DISPLAY & P. C. B. POWER

Schm Ref.	PART NO.	Description	Remarks
6101	AAX22660	DIODE.CHP	BZX284-C8V2
6102	AAX22620	DIODE.CHP	BZX284-C10
6104	AAX22680	DIODE.CHP	BAS216
6200	AAX21910	LED	LTL-16KPE-P
7100	AAX22740	TR.CHP	BC847B
7101	AAX22740	TR.CHP	BC847B
7102	AAX22740	TR.CHP	BC847B
7103	AAX22740	TR.CHP	BC847B
7104	AAX21540	IC	TMP87CH74 (UCRAT)
7104	AAX21530	IC	TMP87CH74F (GB)
7105	AAX22860	TR	BC337
7106	AAX22850	TR	BC327
7107	AAX22740	TR.CHP	BC847B
7108	AAX22740	TR.CHP	BC847B
7109	AAX22730	TR.CHP	BC856B
7110	AAX21720	L.DTCT	TSOP1736SB1
7112	AAX21670	IC	MC79L24ACP
	AAX23420	P.S.U.	20PS223(GB)
101	AAX21450	INLET.AC	2P
120	AAX22960	HOLDER.FUS	2P
1120	AAX22950	FUSE	2.5A 250V
2120	AAX23230	C.CE.SAFETY	0.22uF 275V
2121	AAX22010	C.EL	68uF 400V
2122	AAX23240	C.CE.SAFETY	0.033uF 400V
2127	AAX23250	C.CE.SAFETY	470pF 1KV
2130	AAX23260	C.CE.SAFETY	100pF 250V
2131	AAX22480	C.CE	1000pF 250V
2133	UR877100	C.EL	10uF 63V
2134	UR857470	C.EL	47uF 35V
2141	UR866220	C.EL	2.2uF 50V
2143	AAX22490	C.CE	0.1uF 50V
2145	AAX22520	C.CE	4700pF 63V
2146	AAX22490	C.CE	0.1uF 50V
2150	AAX22490	C.CE	0.1uF 50V
2156	AAX22500	C.CE	330pF 63V
2157	AAX22510	C.CE	470pF 50V
2202	AAX22470	C.CE	0.1uF 50V
2210	UR829220	C.EL	2200uF 10V
2230	UR829100	C.EL	1000uF 10V
2232	UR838100	C.EL	100uF 16V
2233	UR838100	C.EL	100uF 16V
2234	AAX22460	C.CE	0.033uF 50V
2238	UR838100	C.EL	100uF 16V
2239	UR838220	C.EL	220uF 16V
2240	UR848470	C.EL	470uF 25V
2250	UR838220	C.EL	220uF 16V
2260	UR867220	C.EL	22uF 50V
3105	AAX23670	R.CAR	680kΩ 1/2W
3111	HL114220	R.MTL.OXD	22Ω 1/2W
3120	AAX22370	S.ABSORBER	1M A/423V 800V
3121	HL325470	R.MTL.OXD	470Ω 2W
3123	HL117390	R.MTL.OXD	39k 1/2W
3126	HL113470	R.MTL.OXD	4.7Ω 1/2W
3127	HL113100	R.MTL.OXD	1Ω 1/2W
3128	HL113100	R.MTL.OXD	1Ω 1/2W
3129	HL117390	R.MTL.OXD	39k 1/2W
3134	HL117390	R.MTL.OXD	39k 1/2W
3135	HL325220	R.MTL.OXD	220Ω 2W
3140	HL115220	R.MTL.OXD	220Ω 1/2W
3155	HL115330	R.MTL.OXD	330Ω 1/2W

* New Parts

CHIP CARBON RESISTORS

Schm Ref.	PART NO.	Description	Remarks
3201	HL113470	R.MTL.OXD	10Ω 1/2W 4822 116 52176
3233	HL116100	R.MTL.OXD	1k 1/2W 4822 050 11002
3262	HL115220	R.MTL.OXD	220Ω 1/2W 4822 116 83872
5120	AAx23620	COIL	LINE FILTER 4822 157 11846
5125	AAx22040	COIL	100mH 4822 157 11411
5131	AAx22020	COIL	TRAFO CT395FANF 4822 146 10402
5210	AAx22080	COIL	6.8uH 7.7x9.5 4822 157 11722
5223	AAx22090	COIL	2.2uH 4822 157 50963
5231	AAx22080	COIL	6.8uH 7.7x9.5 4822 157 11722
5240	AAx22100	COIL	1uH 4x9.8mm 4822 157 51195
5260	AAx22060	COIL	10uH 2.3x3.4 4822 157 11517
6110	AAx22610	DIODE	1N4004G 5322 130 34574
6111	AAx22610	DIODE	1N4004G 5322 130 34574
6120	AAx22600	DIODE	SINB80 4822 130 83707
6122	AAx22570	DIODE	BZX79-B15 4822 130 34281
6123	AAx22570	DIODE	BZX79-B15 4822 130 34281
6132	AAx22580	DIODE	BYD33D 4822 130 42488
6133	AAx22670	DIODE	1S8355 4822 130 83649
6140	AAx22560	DIODE	1N4148 4822 130 30621
6141	AAx22540	DIODE	UDZ18B 4822 130 11152
6150	AAx22530	DIODE	UDZ4.7B 4822 130 11148
6210	AAx22550	DIODE	BYW98-200-C1 4822 130 11584
6230	AAx22550	DIODE	BYW98-200-C1 4822 130 11584
6241	AAx22550	DIODE	BYW98-200-C1 4822 130 11584
6250	AAx22590	DIODE	BYD33J 4822 130 42606
6261	AAx22590	DIODE	BYD33J 4822 130 42606
7125	AAx21500	FET	STP3NB60FP 4822 130 11417
7131	AAx21570	IC	CQY80NG 4822 130 91451
7141	AAx22880	TR	BC557B 4822 130 44568
7145	AAx21820	IC	UC3842A 9322 145 88682
7150	AAx22700	TR	BC547B 4822 130 40959
7201	AAx21710	IC	TL431CLPST 4822 209 81397
7233	AAx21750	IC	LM7805CT 5322 209 86445
7235	AAx22870	TR	BC847 4822 130 42705
7236	AAx21560	IC	STP16NE06 4822 130 11578
7237	AAx21710	IC	TL431CLPST 4822 209 81397

* New Parts

Schm Ref.	PART NO.	Description	Remarks
	RD350000	R. CAR. CHP	0Ω 1/10W 4822 051 20008
	RD353100	R. CAR. CHP	1Ω 1/10W 4822 051 20108
	RD353220	R. CAR. CHP	2.2Ω 1/10W 4822 117 13613
	RD353470	R. CAR. CHP	4.7Ω 1/10W 4822 117 11152
	RD354100	R. CAR. CHP	10Ω 1/10W 4822 051 20109
	RD354220	R. CAR. CHP	22Ω 1/10W 4822 117 12139
	RD354470	R. CAR. CHP	47Ω 1/10W 4822 051 30479
	RD354680	R. CAR. CHP	68Ω 1/10W 4822 051 30689
	RD354750	R. CAR. CHP	75Ω 1/10W 4822 117 11927
	RD355100	R. CAR. CHP	100Ω 1/10W 4822 117 11373
	RD355150	R. CAR. CHP	150Ω 1/10W 4822 051 30151
	RD355180	R. CAR. CHP	180Ω 1/10W 4822 051 30181
	RD355220	R. CAR. CHP	220Ω 1/10W 4822 051 30221
	RD355270	R. CAR. CHP	270Ω 1/10W 4822 051 30271
	RD355330	R. CAR. CHP	330Ω 1/10W 4822 051 30331
	RD355430	R. CAR. CHP	430Ω 1/10W 2322 704 64301
	RD355470	R. CAR. CHP	470Ω 1/10W 4822 051 30471
	RD355660	R. CAR. CHP	560Ω 1/10W 2120 108 93901
	RD355680	R. CAR. CHP	680Ω 1/10W 4822 051 30681
	HX608020	R. CAR. CHP	750Ω 1/10W 4822 117 11931
	RD355820	R. CAR. CHP	820Ω 1/10W 2120 108 93892
	RD356100	R. CAR. CHP	1KΩ 1/10W 4822 051 30102
	RD356220	R. CAR. CHP	2.2KΩ 1/10W 4822 051 30222
	RD356270	R. CAR. CHP	2.7KΩ 1/10W 4822 051 30272
	RD356330	R. CAR. CHP	3.3KΩ 1/10W 4822 051 30332
	RD356390	R. CAR. CHP	3.9KΩ 1/10W 4822 051 30392
	RD356470	R. CAR. CHP	4.7KΩ 1/10W 4822 051 20472
	RD356560	R. CAR. CHP	5.6KΩ 1/10W 4822 051 20562
	RD356680	R. CAR. CHP	6.8KΩ 1/10W 4822 117 11507
	RD356820	R. CAR. CHP	8.2KΩ 1/10W 4822 051 20822
	RD357100	R. CAR. CHP	10KΩ 1/10W 4822 117 10833
	RD357120	R. CAR. CHP	12KΩ 1/10W 4822 051 30123
	RD357150	R. CAR. CHP	15KΩ 1/10W 4822 051 30153
	RD357220	R. CAR. CHP	22KΩ 1/10W 4822 051 30223
	RD357270	R. CAR. CHP	27KΩ 1/10W 4822 051 30273
	RD357390	R. CAR. CHP	39KΩ 1/10W 4822 051 30393
	RD357470	R. CAR. CHP	47KΩ 1/10W 4822 117 10834
	RD357560	R. CAR. CHP	56KΩ 1/10W 4822 117 11148
	RD357820	R. CAR. CHP	82KΩ 1/10W 4822 117 11149
	RD358100	R. CAR. CHP	100KΩ 1/10W 4822 117 10837
	RD359100	R. CAR. CHP	1MΩ 1/10W 4822 051 30105
	HX608540	R. CAR. CHP	47Ω 1/6W 4822 050 14709

* New Parts

Schm Ref.	PART NO.	Description		Remarks

* New Parts



EXPLODED VIEW

When disassembling, use the special screw driver with tip shape in figure.

2.7 mm for screws with 33, 35 and 36

1.7 mm for removing MONO board (18-2) from DVD Mechanism (18-1)

Note) The screw to fix the MONO board 18-2 to the DVD mechanism 18-1 is not available.

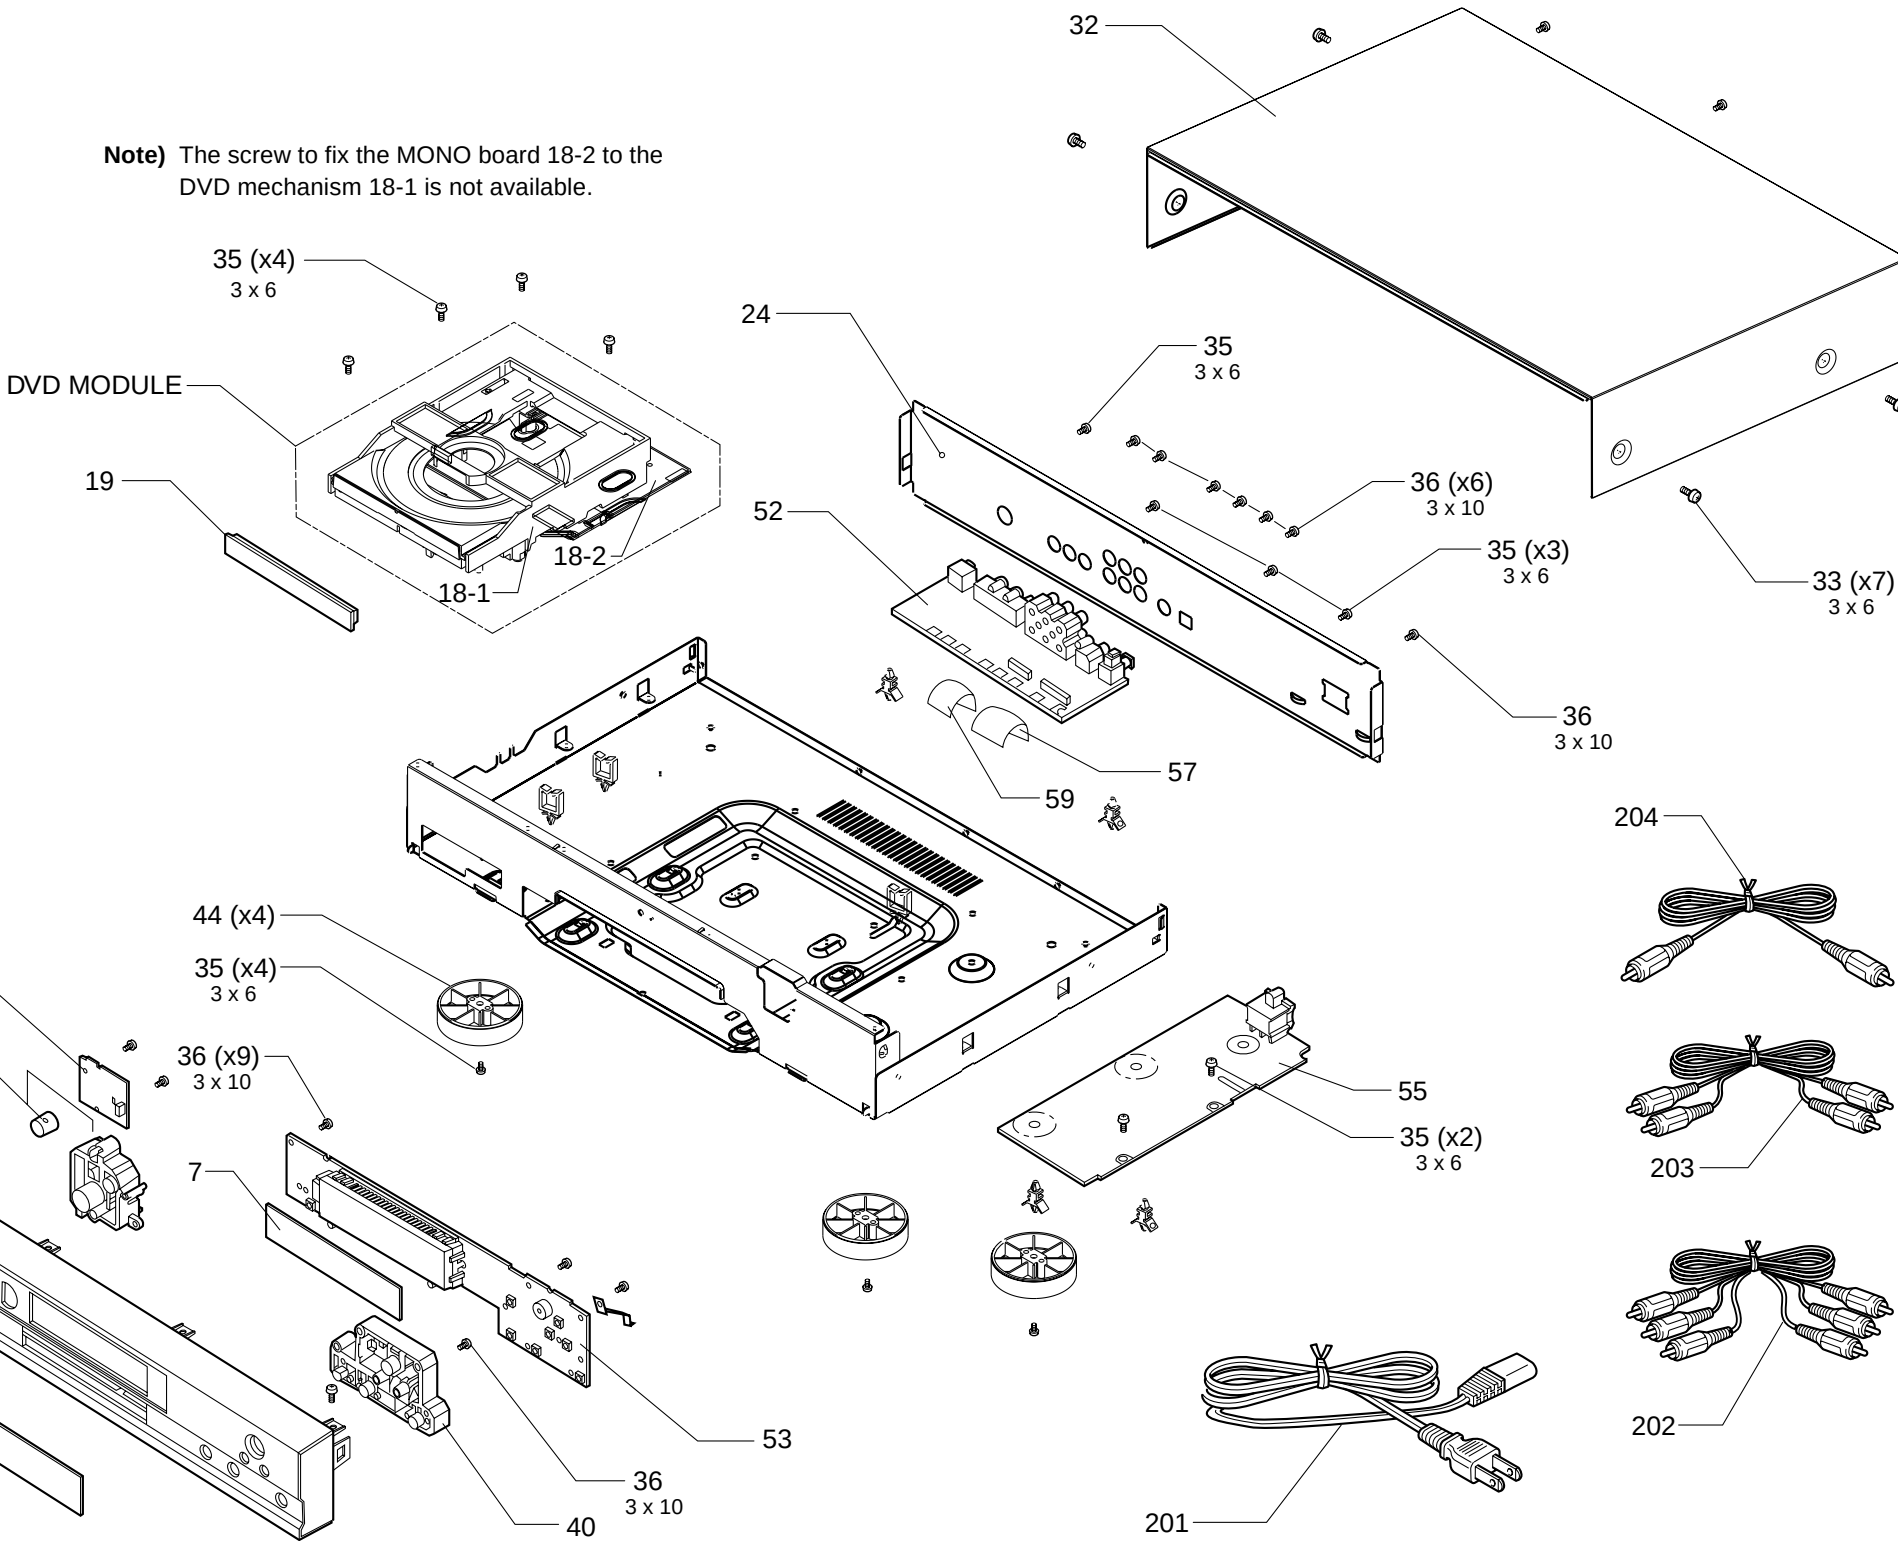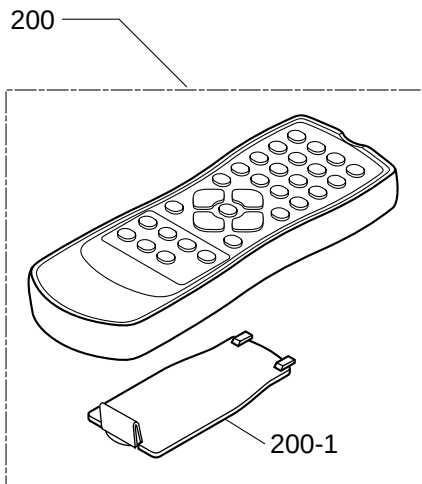

MECHANICAL PARTS


Ref. No.	PART NO.	Description	Remarks	Markets
* 1	AAX23010	FRONT PANEL	S510BL	3139 247 52341 (UCA)
* 1	AAX23060	FRONT PANEL	S510GD	3139 247 52691 (RT)
* 1	AAX23050	FRONT PANEL	S5350BL	3139 247 52681 (U)
* 1	AAX23020	FRONT PANEL	S510BL	3139 247 52351 (GB)
* 1	AAX23030	FRONT PANEL	S510GD	3139 247 52361 (G)
* 1	AAX23040	FRONT PANEL	S510TI	3139 247 52371 (G)
* 2	AAX22900	BADGE YAMAHA	S510BL/TI,S5350BL	3139 240 00061
* 2	AAX22910	BADGE YAMAHA	S510GD	3139 240 00071
* 4	AAX21990	WINDOW	GRAYSMOKE	3139 244 01151
* 5	AAX22920	BUTTON/POWER	S510BL	3139 247 52381
* 5	AAX22930	BUTTON/POWER	S510GD	3139 247 52701
* 5	AAX22940	BUTTON/POWER	S5350BL	3139 247 52711
* 5	AAX22430	BUTTON/STANDBY	BL	3139 247 52391
* 5	AAX22440	BUTTON/STANDBY	GD	3139 247 52401
* 5	AAX22450	BUTTON/STANDBY	TI	3139 247 52411
* 7	AAX22980	FL FILTER		3139 243 10071
		DVD MODULE	ASD-1	3104 129 21920 not available
* 18-1	AAX21470	DVD MECHANISM (BASIC ENGINE)		9305 023 61102
* 18-2	AAX21950	P.C.B. ASS'Y	MONO BOARD	3104 128 06740 (UCART)
* 18-2	AAX21940	P.C.B. ASS'Y	MONO BOARD	3104 128 06730 (GB)
* 19	AAX23100	COVER TRAY	S510BL	3139 247 52451
* 19	AAX23110	COVER TRAY	S510GD	3139 247 52461
* 19	AAX23120	COVER TRAY	S510TI	3139 247 52471
* 19	AAX23130	COVER TRAY	S5350BL	3139 247 52731
* 24	AAX23150	REAR PANEL	S510	3139 247 52502 (UC)
* 24	AAX23160	REAR PANEL	S510	3139 247 52513 (GB)
* 24	AAX23170	REAR PANEL	S510	3139 247 52522 (R)
* 24	AAX23180	REAR PANEL	S510	3139 247 52532 (A)
* 24	AAX23200	REAR PANEL	S510	3139 247 53851 (T)
* 24	AAX23190	REAR PANEL	S5350	3139 247 52742 (U)
* 32	AAX22820	TOP COVER	BL	3139 247 50341
* 32	AAX22830	TOP COVER	GD	3139 247 52481
* 32	AAX22840	TOP COVER	TI	3139 247 52491
* 33	AAX23640	PAN HEAD TORX S-TITE SCREW	3x6 ZN-BL BL	4822 502 13988
* 33	AAX23650	PAN HEAD TORX S-TITE SCREW	3x6 NI GD,TI	2511 077 01039
* 35	AAX23640	PAN HEAD TORX S-TITE SCREW	3x6 ZN-BL	4822 502 13988
* 36	AAX23630	PAN HEAD TORX P-TITE SCREW	3x10 ZN-BL	4822 502 14109
* 40	AAX23330	BUTTON/CONTROL	S510BL	3139 247 52421
* 40	AAX23340	BUTTON/CONTROL	S510GD	3139 247 52431
* 40	AAX23350	BUTTON/CONTROL	S510TI	3139 247 52441
* 40	AAX23360	BUTTON/CONTROL	S5350BL	3139 247 52721
* 44	AAX23280	FOOT ASS'Y	S510BL,S510TI	3139 247 51261
* 44	AAX23290	FOOT ASS'Y	S510GD	3139 247 51461
* 44	AAX23270	FOOT ASS'Y	S5350BL	3139 247 50750
* 52	AAX21930	P.C.B. ASS'Y	AV	3139 248 80591 (UCART)
* 52	AAX21920	P.C.B. ASS'Y	AV	3104 128 06121 (GB)
* 53	AAX21960	P.C.B. ASS'Y	DISPLAY	3139 248 80221 (UCART)
* 53	AAX21970	P.C.B. ASS'Y	DISPLAY	3139 248 80361 (GB)
* 55	AAX23430	POWER SUPPLY UNIT	120V	3139 248 80381 (UC)
* 55	AAX23440	POWER SUPPLY UNIT	110-240V	3139 248 80391 (ART)
* 55	AAX23420	POWER SUPPLY UNIT	20PS223 230V	3122 427 22301 (GB)
* 57	AAX22990	FLEXIBLE FOIL CONNECTION	FFC 22P 130mm	3139 110 34220
* 59	AAX23000	FLEXIBLE FOIL CONNECTION	FFC 16P 130mm	3139 110 34230

* New Parts

DVD-S510/DV-S5350

Ref. No.	PART NO.	Description		Remarks	Markets
* 200	AAX23140	ACCESSORY			
* 200-1	AAX23890	REMOTE CONTROL TRANSMITTER	RC1113202/00	3139 228 87081	
* 201	AAX23370	LID		3139 224 22450	
* 201	AAX23370	POWER CORD ASS'Y	1.8m 1pc	2422 070 98109	(UC)
* 201	AAX23410	POWER CORD ASS'Y	1.8m 1pc	3139 118 73042	(A)
* 201	AAX23400	POWER CORD ASS'Y	1.8m 1pc	3139 118 72784	(R)
* 201	AAX23660	POWER CORD ASS'Y	1.8m 1pc	4822 321 10249	(T)
* 201	AAX23390	POWER CORD ASS'Y	1.8m 1pc	3111 170 21831	(G)
* 201	AAX23380	POWER CORD ASS'Y	1.8m 1pc	3103 140 26741	(B)
* 202	AAX23450	AUDIO/VIDEO CORD	YE/RD/WH 1.5m 1pc	2422 076 00304	(UCART)
* 203	AAX21980	AUDIO CORD	RD/WH 1.5m 1pc	3103 308 92611	(GB)
* 204	AAX22970	VIDEO CORD	YE 1.5m 1pc	3104 108 45432	(GB)

DVD MECHANISM ASS'Y

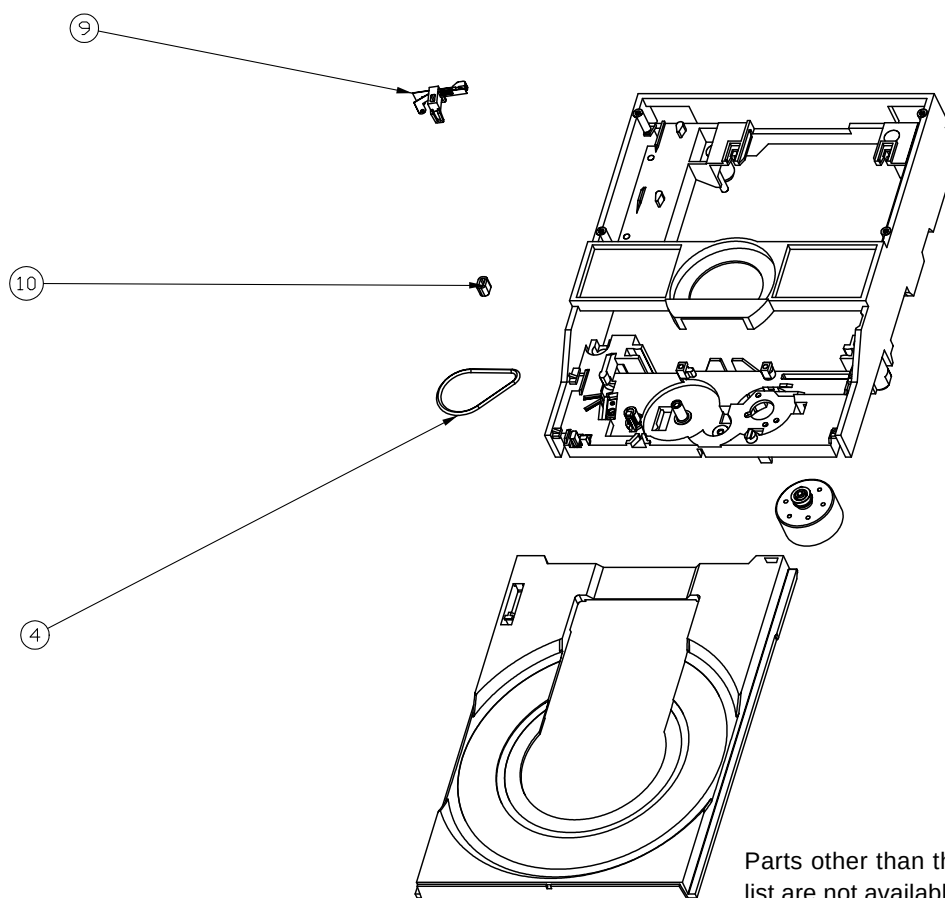

Parts other than the following parts list are not available as spare parts.

Ref. No.	PART NO.	Description		Remarks	Markets
* 4	AAX21470	DVD MECHANISM (BASIC ENGINE)		9305 023 61102	
* 9	AAX23070	BELT/DRIVING		4822 358 10266	
* 10	AAX22410	SWITCH/OTHERS		3139 198 80010	
* 10	AAX23210	RING	TULE	4822 532 13097	
* 10		TRAY		3139 194 00270	not available
* 10		MOTOR	DC <=37.5W	3139 197 50060	not available

* New Parts