

MINI COMPONENT SYSTEM GX-500 GX-500VCD SERVICE MANUAL

GX-500/VCD

GX-500 is composed of GX-500 and NX-GX500.
GX-500VCD is composed of GX-500VCD and NX-GX500.

IMPORTANT NOTICE

This manual has been provided for the use of authorized YAMAHA Retailers and their service personnel. It has been assumed that basic service procedures inherent to the industry, and more specifically YAMAHA Products, are already known and understood by the users, and have therefore not been restated.

WARNING: Failure to follow appropriate service and safety procedures when servicing this product may result in personal injury, destruction of expensive components, and failure of the product to perform as specified. For these reasons, we advise all YAMAHA product owners that any service required should be performed by an authorized YAMAHA Retailer or the appointed service representative.

IMPORTANT: The presentation or sale of this manual to any individual or firm does not constitute authorization, certification or recognition of any applicable technical capabilities, or establish a principle-agent relationship of any form.

The data provided is believed to be accurate and applicable to the unit(s) indicated on the cover. The research, engineering, and service departments of YAMAHA are continually striving to improve YAMAHA products. Modifications are, therefore, inevitable and specifications are subject to change without notice or obligation to retrofit. Should any discrepancy appear to exist, please contact the distributor's Service Division.

WARNING: Static discharges can destroy expensive components. Discharge any static electricity your body may have accumulated by grounding yourself to the ground buss in the unit (heavy gauge black wires connect to this buss).

IMPORTANT: Turn the unit OFF during disassembly and part replacement. Recheck all work before you apply power to the unit.

CONTENTS

TO SERVICE PERSONNEL	1~2	CD ERROR MESSAGES	18
GX-500 PANELS	3~4	CD STANDARD OPERATION CHART	19~22
GX-500VCD PANELS	5	ADJUSTMENTS	23~25
SPECIFICATIONS	6	IC DATA	26~32
INTERNAL VIEW	7	DISPLAY DATA	33~34
DISASSEMBLY PROCEDURES	8~12	BLOCK DIAGRAM	35~39
VOLUME RANGE	13	PRINTED CIRCUIT BOARD	40~62
SYSTEM CONTROL CHECK	13	PIN CONNECTION DIAGRAM	63
TEST MODE	14	SCHEMATIC DIAGRAM	64~71
SYSTEM TEST MODE	14	PARTS LIST	72~103
RECEIVER TEST MODE	15~16	GREASE APPLICATION DIAGRAM	104~105
TAPE TEST MODE	16	GX-500 REMOTE CONTROL TRANSMITTER	106
CD TEST MODE	17	GX-500VCD REMOTE CONTROL TRANSMITTER	107
ALL FUNCTION TEST MODE	18	NX-GX500	108



このサービスマニュアルは、エコマーク認定の再生紙を使用しています。
This Service Manual uses recycled paper.



■ TO SERVICE PERSONNEL


1. Critical Components Information.

Components having special characteristics are marked and must be replaced with parts having specifications equal to those originally installed.

2. Leakage Current Measurement (For 120V Models Only).

When service has been completed, it is imperative to verify that all exposed conductive surfaces are properly insulated from supply circuits.

- Meter impedance should be equivalent to 1500 ohm shunted by 0.15 μ F.

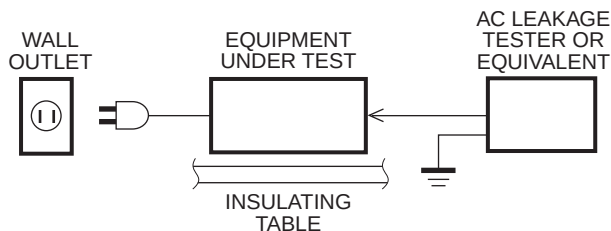

- Leakage current must not exceed 0.5mA.
- Be sure to test for leakage with the AC plug in both polarities.



“CAUTION”

“F201 : FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH SAME TYPE 2.0A, 125V FUSE.”

“F202 : FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH SAME TYPE 4.0A, 125V FUSE.”

CAUTION

F201 : REPLACE WITH SAME TYPE 2.0A, 125V FUSE.

F202 : REPLACE WITH SAME TYPE 4.0A, 125V FUSE.

ATTENTION

F201 : UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE DE 2.0A, 125V.

F202 : UTILISER UN FUSIBLE DE RECHANGE DE MEME TYPE DE 4.0A, 125V.

CAUTION : USE OF CONTROLS OR ADJUSTMENTS OR PERFORMANCE OF PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

THE COMPACT DISC PLAYER SHOULD NOT BE ADJUSTED OR REPAIRED BY ANYONE EXCEPT PROPERLY QUALIFIED SERVICE PERSONNEL.

PROTECTION OF EYES FROM LASER BEAM DURING SERVICING

This set employs a laser. Therefore, be sure to carefully follow the instructions below when servicing .

1. Laser Diode Properties

- Material : GaAlAs
- Wavelength : 780 nm
- Emission Duration : Continuous
- Laser Output : max. 44.6 μ W*

* This output is the value measured at a distance of about 200 mm from the objective lens surface on the Optical Pick-up Block.

- When checking the laser diode emission, keep your eyes more than 30 cm away from the objective lens.

WARNING: CHEMICAL CONTENT NOTICE!


The solder used in the production of this product contains LEAD. In addition, other electrical/electronic and/or plastic (where applicable) components may also contain traces of chemicals found by the California Health and Welfare Agency (and possibly other entities) to cause cancer and/or birth defects or other reproductive harm.

DO NOT PLACE SOLDER, ELECTRICAL/ELECTRONIC OR PLASTIC COMPONENTS IN YOUR MOUTH FOR ANY REASON WHATSOEVER!



Avoid prolonged, unprotected contact between solder and your skin! When soldering, do not inhale solder fumes or expose eyes to solder/flux vapor!

If you come in contact with solder or components located inside the enclosure of this product, wash your hands before handling food.

① B, G, R, L, T models



② B, G, R, L, T models

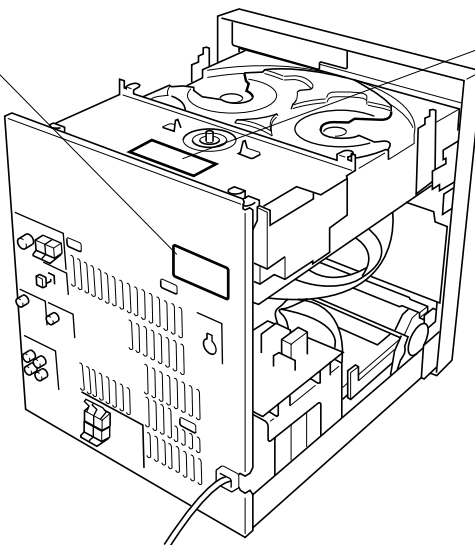**English**

- ① THIS PRINTING (SEE POSITION SHOWN IN THE ILLUSTRATION) INFORMS THE USER THAT THE APPARATUS CONTAINS A LASER COMPONENT.
- ② THIS LABEL (SEE POSITION SHOWN IN THE ILLUSTRATION) WARNS THAT ANY FURTHER PROCEDURE WILL BRING THE USER INTO EXPOSURE WITH THE LASER BEAM.

CAUTION : USE OF CONTROLS, ADJUSTMENTS OR PERFORMANCE OF PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN, MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.

Swedish

- ① DENNA MÄRKNING (SE FIGUR) UPPLYSER OM ATT DET I APPARATEN INGÅR EN LASERKOMPONENT AV TYP KLAS 1.
- ② VARNINGSMÄRKNING (SE FIGUR) FÖR STRÅLNING. INGREPP I APPARATEN BÖR ENDAST FÖRETAGAS AV FACKMAN MED KÄNNEDOM OM LASER. APPARATEN INNEHÅLLER EN LASERKOMPONENT SOM AVGER STRÅLNING ÖVERSTIGANDE GRÄNSEN FÖR LASERKLASS 1.

VARNING : OSYNLIG LASERSTRÅLNING NÄR DENNA DEL ÄR ÖPPNAD: BETRAKTA EJ STRÅLEN.

Danish

- ① DETTE MÆRKAT ER ANBRAGT SOM VIST I ILLUSTRATIONEN FOR AT ADVARE BRUGEREN OM AT APPARATET INDEHOLDER EN LASERKOMPONENT.
- ② DETTE MÆRKAT OM LASEREN ER ANBRAGT PÅ APPARATET SOM EN OPLYSNING OM AT APPARATET INDEHOLDER ET LASERKOMPONENT.

ADVARSEL : INDGREB BOR KUN FORETAGES AF EN FAGMAND DA DER ER RISIKO FOR RADIOAKTIV STRÅLING.


ADVARSEL : USYNLIG LASERSTRÅLING VED ÅBNING.
UNDGÅ UDSÆTTELSE FOR STRÅLING.

Finnish



VARO! :
AVATTAESSA OLET ALTTIINA NÄKYMÄTTÖMÄLLE LASERSÄTEILYLLE. ÄLÄ KATSO SÄTEESEEN.

■ GX-500 PANELS


▼ U, C, R, A models

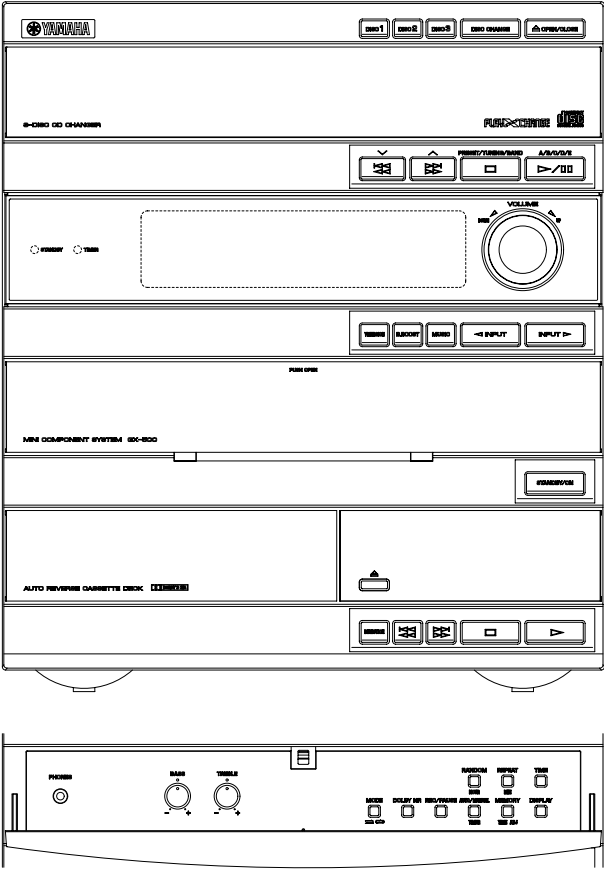


▼ B, G models

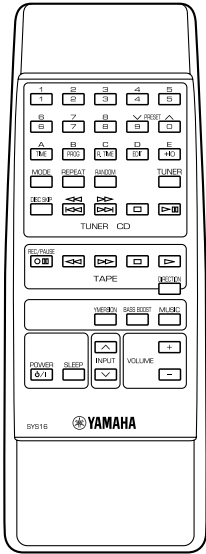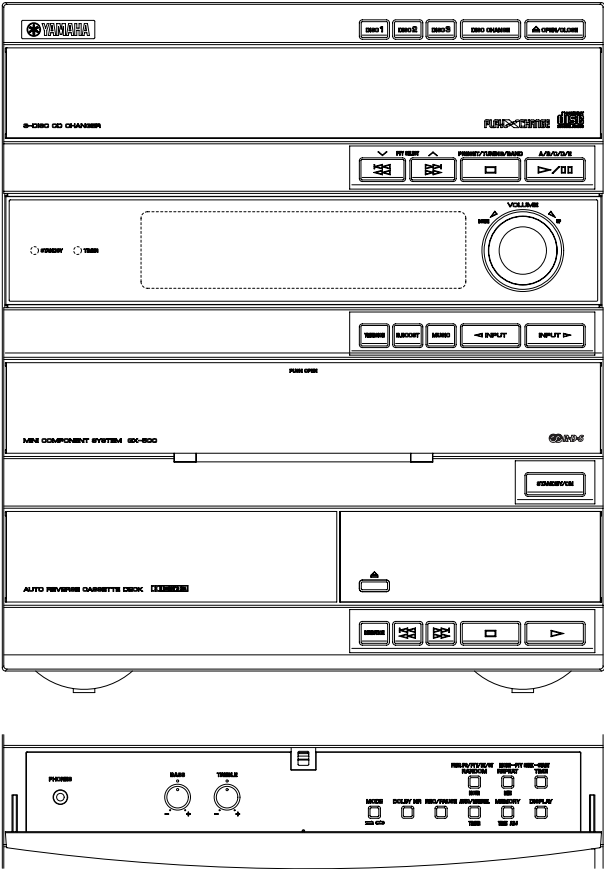


● NX-GX500

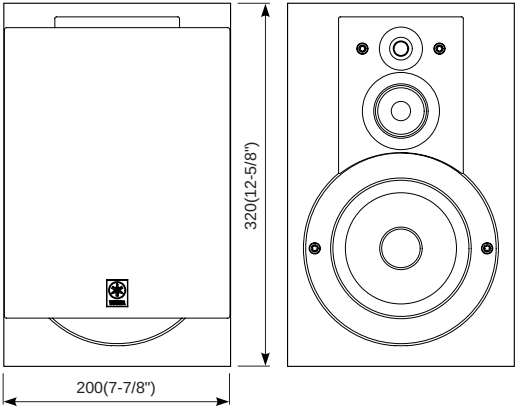


▼ U, C models

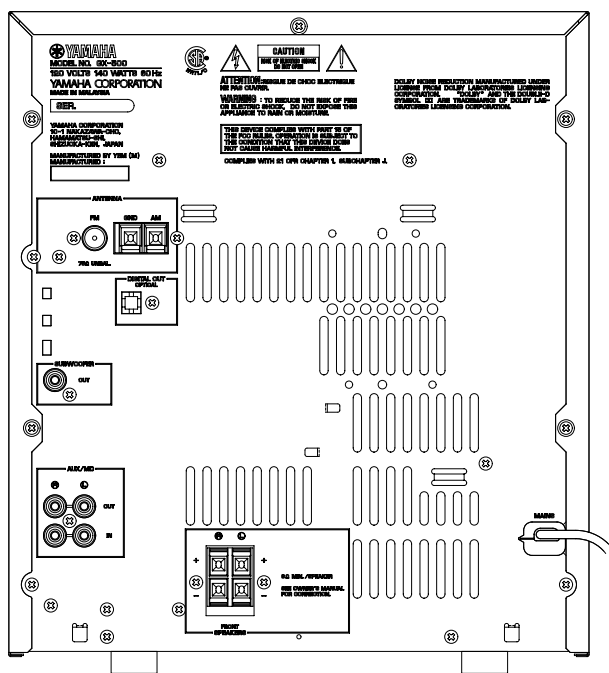


▼ R model

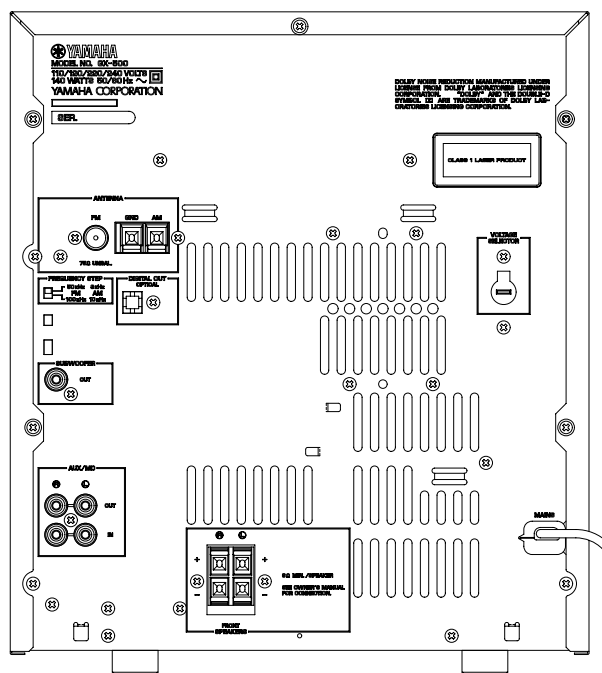

▼ A model

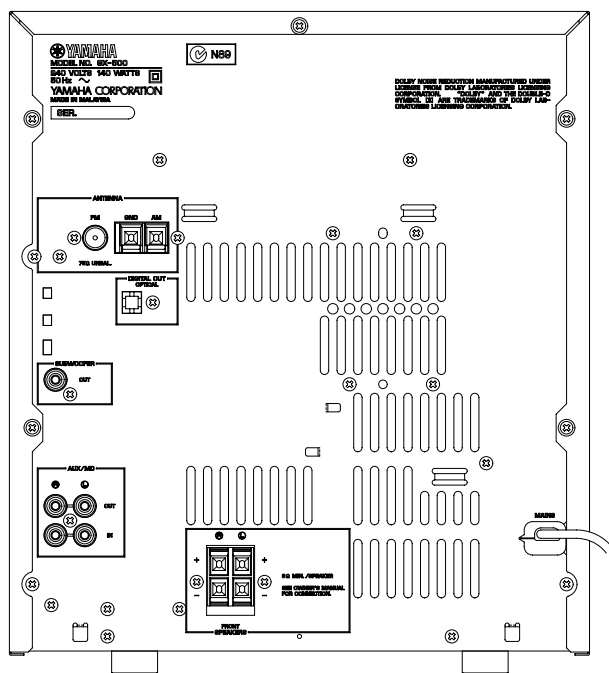

▼ B, G models

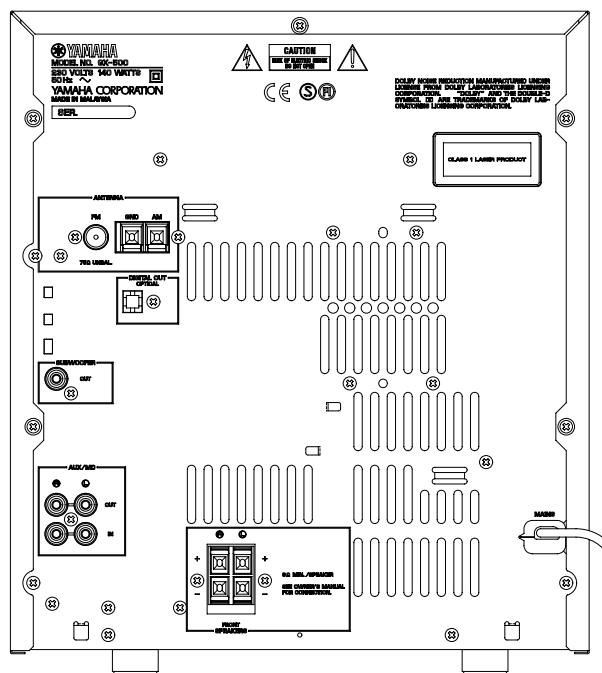

GX-500/VCD



GX-500/VCD



GX-500/VCD



GX-500/VCD



SPECIFICATIONS

AMPLIFIER SECTION

Minimum RMS Output Power per Channel

1kHz, 0.9% THD, 6Ω 80W + 80W

1kHz, 10% THD, 6Ω 100W + 100W

Input Sensitivity/Impedance

AUX/MD 200mV/47kΩ

Spectrum Analyzed Band 5 band
(100Hz, 350Hz, 1kHz, 3.5kHz, 10kHz)

VIDEO SECTION (GX-500VCD only)

Signal Level 1Vp-p/75Ω

TUNER SECTION

FM Tuning Range

U, C models 87.5 to 107.9MHz

R, T models 87.5 to 108.0MHz/87.50 to 108.00MHz

A, B, G, L model 87.50 to 108.00MHz

AM Tuning Range

U, C models 530 to 1,710kHz

R, T models 530 to 1,710kHz/531 to 1,611kHz

A, B, G, L models 531 to 1,611kHz

FM Usable Sensitivity (75Ω)

30dB S/N Quieting, Mono, 1kHz,

100% mod. R, U, C, L, T models 1.5μV (14.8dBf)

DIN Mono, S/N 26dB (A, B, G only) 1.8μV

CD CHANGER SECTION

Type 3-Disc Carousel Auto-changer

Signal Readout Non-contact,
3-beam semi-conductor laser pick-up

D/A Converter 1bit DAC

Filter 8-time oversampling digital filter

Wow & Flutter Unmeasurable

TAPE DECK SECTION

Type Auto Reverse

4-Track 2-Channel playback/recording stereo Cassette Deck

Heads

REC/PB Hard permalloy

Erase Double Gap Ferrite

Motors

Main DC servo motor

Tray Loading DC motor

Wow & Flutter

W.PEAK ±0.19%

W.RMS 0.09%

Frequency Response (-20dB)

Type I/Normal tape 50 to 15,000Hz ± 3dB

Type II/High (CrO₂) tape 50 to 16,000Hz ± 3dB

S/N Ratio

NR off 58dB

Dolby B NR on 66dB

SPEAKER SECTION (NX-GX500)

Type 3-Way Bass-reflex Design
(Magnetic-Shielding Type)

Speakers 13cm (5-1/8") woofer

5cm (1-15/16") tweeter

2cm (13/16") super tweeter

Frequency Range 60 to 20,000Hz

Maximum Input 240W

Impedance 6Ω

Sound Pressure Level 87dB/1m • 2.45V (1W/6Ω)

GENERAL

Power Supply

U, C models AC120V, 60Hz

A model AC240V, 50Hz

B, G, L models AC230V, 50Hz

R, T models AC110/120/220/240V, 60/50Hz

Power Consumption 140W
(approx. 1W when set to the standby mode)

Dimensions (W X H X D)

GX-500 280 X 320 X 364mm
(11" X 12-5/8" X 14-5/16")

NX-GX500 200 X 320 X 218mm
(7-7/8" X 12-5/8" X 8-9/16")

Weight

GX-500 10.5kg (23 lbs. 2 oz)

NX-GX500 3.8kg (8 lbs. 6 oz)/each

Accessories

AM loop antenna X 1


Indoor FM antenna X 1

Remote Control Transmitter X 1

Battery (size "AA", R06) X 2

Speaker Cord X 2

** Specifications subject to change without notice.*

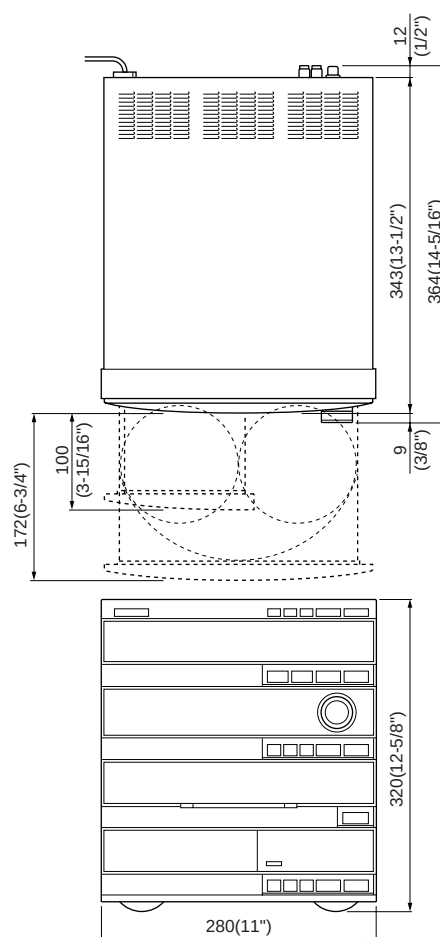

* Manufactured under license from Dolby Laboratories Licensing Corporation. "DOLBY" and the double-D symbol  are trademarks of Dolby Laboratories Licensing Corporation.

U **U.S.A. model**

C **Canadian model**

A **Australian model**

B **British model**

G **European model**


R **General model**

L **Singapore model**

T **China model**


INTERNAL VIEW

Top side

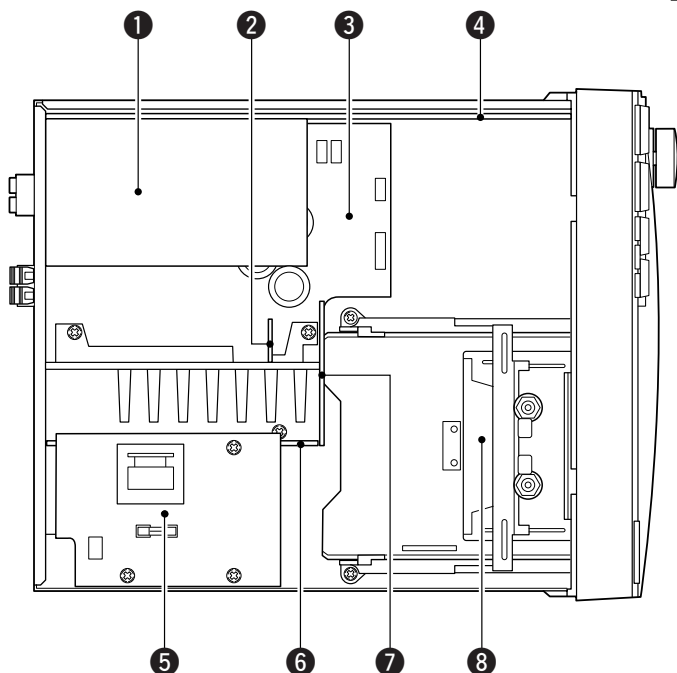

- ❶ P.C.B. TUNER
- ❷ P.C.B. MAIN (5)
- ❸ P.C.B. MAIN (1)
- ❹ P.C.B. INPUT (1)
- ❺ P.C.B. MAIN (2)
- ❻ P.C.B. MAIN (3)
- ❼ P.C.B. MAIN (6)
- ❽ DECK MECHANICAL UNIT

Left side

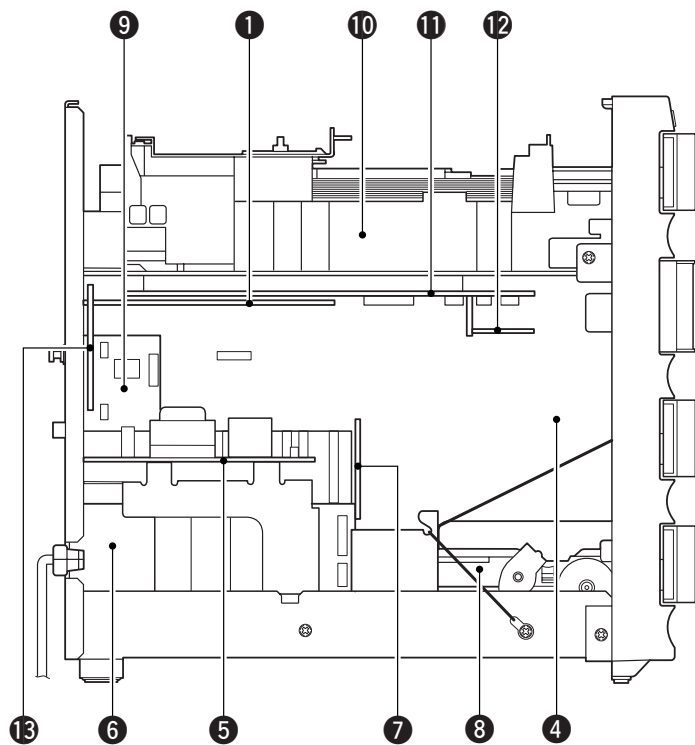

- ❹ GX-500 P.C.B. INPUT (3)
GX-500VCD P.C.B. INPUT (2)
- ❿ GX-500 CD MECHANICAL UNIT
GX-500VCD VCD MECHANICAL UNIT
- ⓫ GX-500 P.C.B. CD
GX-500VCD P.C.B. VCD (1)
- ⓬ VCD MODULE (GX-500VCD only)
- ⓭ P.C.B. MAIN (4) (R, T only)


■ DISASSEMBLY PROCEDURES (Remove parts in the order as numbered.)

1. Removal of Top Cover

Remove 11 screws (①) in Fig. 1.

2. Removal of CD/VCD Mechanical Unit

- Disconnect the power cord from the AC outlet.
- Push the Friction Arm (the bottom side of the CD/VCD Mechanical Unit) with the Ejecting Tool or a tool like as shown in Fig. 2.



Ejecting Tool for CD Tray (TX946040)

- Pull the Tray forward approx. 5cm (2") and remove the CD Lid in Fig. 2.
- Push the Tray back to the original, closed position.
- Disconnect the Flat Connecting Cables (CB9) and remove 3 connectors (CB8 , CB7 and CB10) in Fig. 2
- Remove 4 screws (②) and then remove the CD Mechanical Unit in Fig. 1.

3. Removal of Panel Unit

- Rotate the Loading Gear, then open the Tray and remove the Cassette Lid in Fig. 2.
- Push the Tray back to the original, closed position.
- Disconnect the flat connecting cables (CB10, CB13 and CB11) and remove a connector (CB805) in Fig. 2.
- Remove 6 screws (③ and ④) and then remove the Panel Unit in Fig. 1.

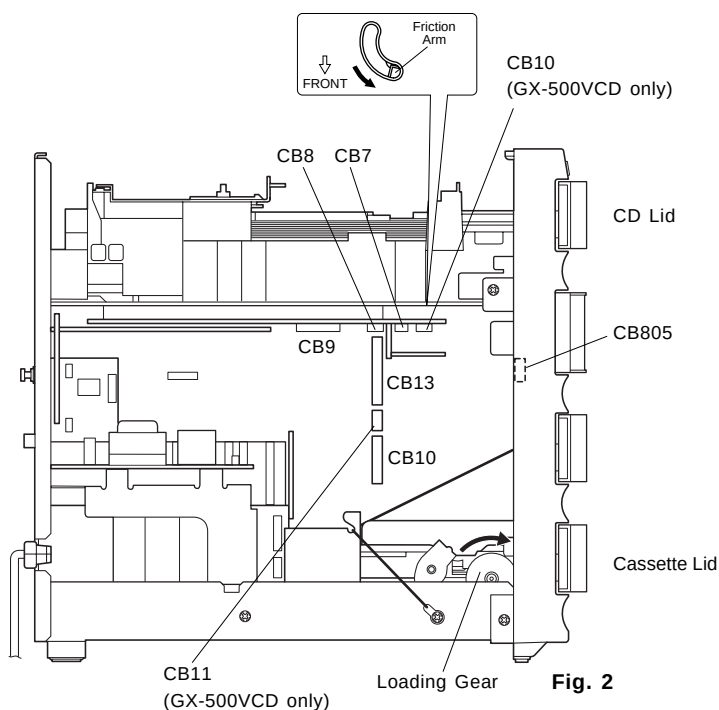


Fig. 2

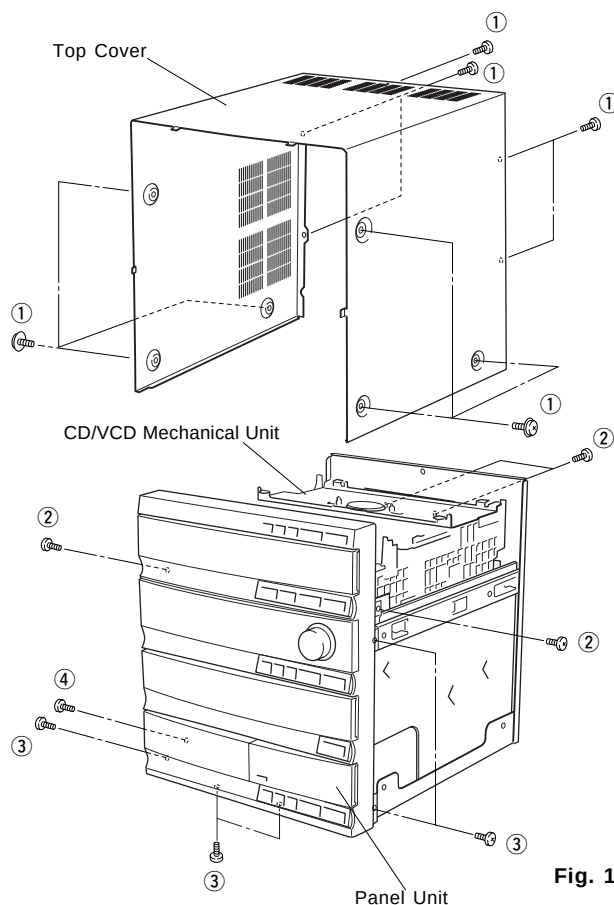


Fig. 1

4. Removal of Deck Mechanical Unit

- Remove 4 screws (⑤) and then remove the Deck Mechanical Unit in Fig. 3.
- Remove 3 connectors (W2, W3 and W4) in Fig. 3.

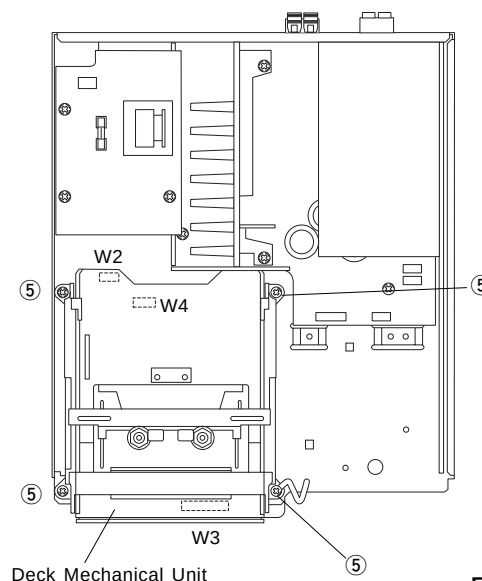


Fig. 3

5. Operation Check of P.C.B. CD/VCD

- Remove the CD Mechanical Unit.
- Remove 4 screws (⑥) and then remove the P.C.B. CD/VCD in Fig. 4.
- Place blocks (at 3 locations) to hold the CD Mechanical Unit horizontally as shown in the Fig. 5.
- Connect the Flat Connecting Cable (CB9) and 3 connectors (CB8, CB7 and CB10) in Fig. 4 and Fig. 5.
- Connect the power plug and turn on the Power Switch.

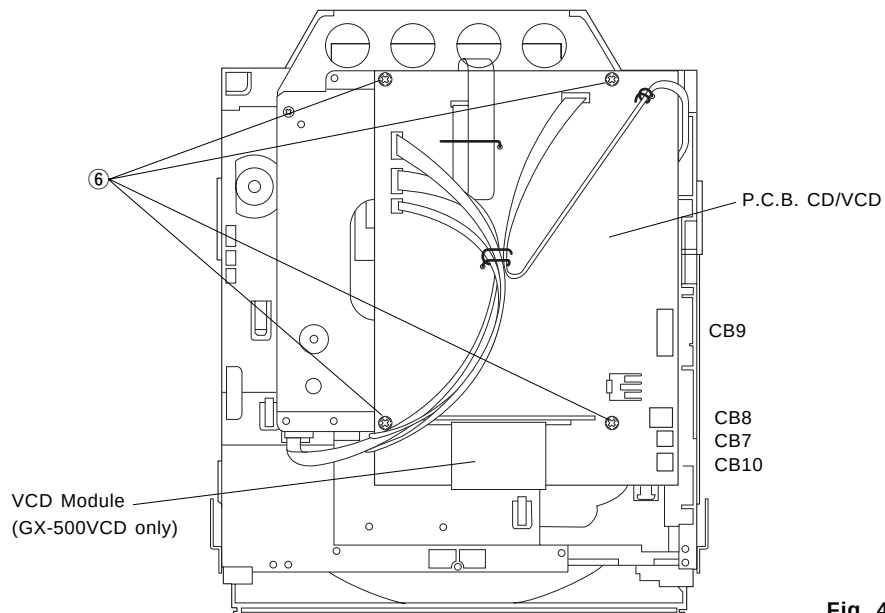


Fig. 4

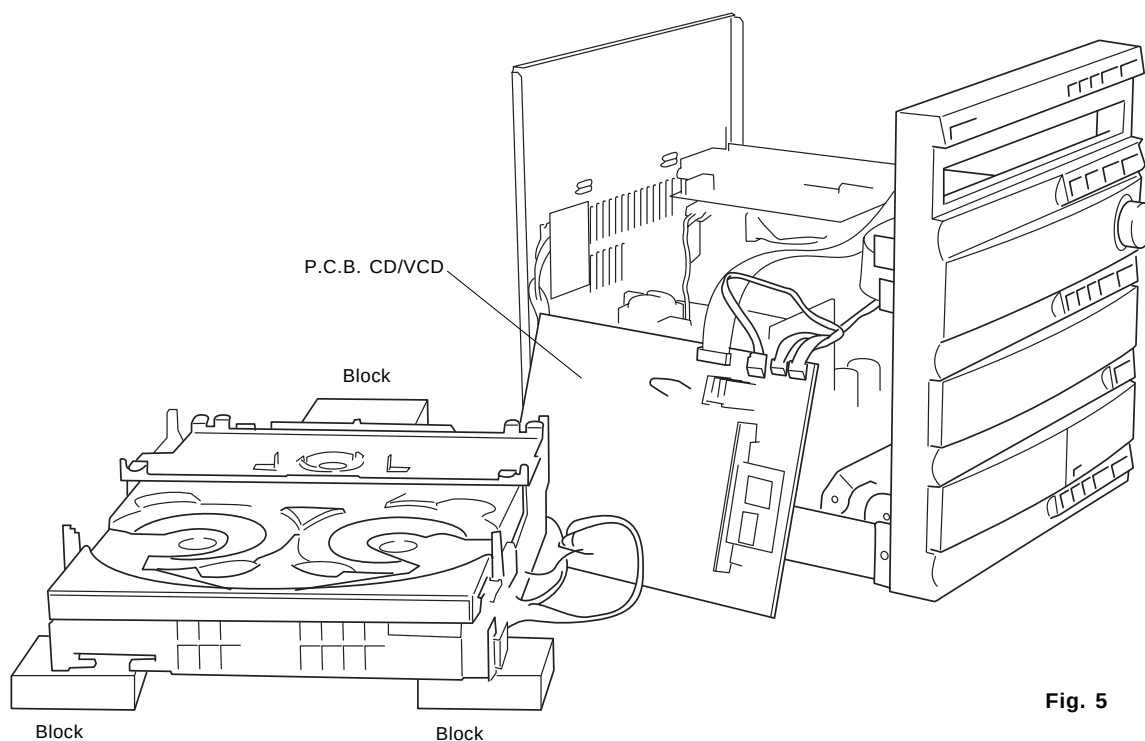


Fig. 5

6. Operation Check of P.C.B. Main (1)

- Remove the CD Mechanical Unit.
- Remove the Panel Unit.
- Remove the Deck Mechanical Unit.
- Remove 5 screws (⑦) in Fig. 6.
- Remove 1 screw (⑧) and then remove the P.C.B. Main (2) in Fig. 7.
- Remove 3 screws (⑨) in Fig. 7.
- Remove 4 screws (⑩) and then remove the Power Transformer in Fig. 8.
- Place the main unit on its left side (viewed from the front) and remove the Bottom Cover in Fig. 9.
- Install the Panel unit to the main unit in Fig. 9.
- Connect the flat connecting cables (CB10, CB13 and CB11) and remove a connector (CB805) in Fig. 2.
- Connect the power plug and turn on the Power Switch.

CAUTION

When the power to this equipment is turned on with the CD/VCD Mechanical Unit disconnected, the capacitor C255(4700/16) of the Main P.C.B. (CD/VCD power supply section) is charged. Connecting the CD/VCD P.C.B. in this state may cause damage to its IC. Therefore, when installing the CD/VCD Mechanical Unit, be sure to discharge the capacitor C255(4700/16) of the Main P.C.B. before making connections. (To discharge it, short the W201 terminal +B and GND with a resistor(270Ω 1W).)

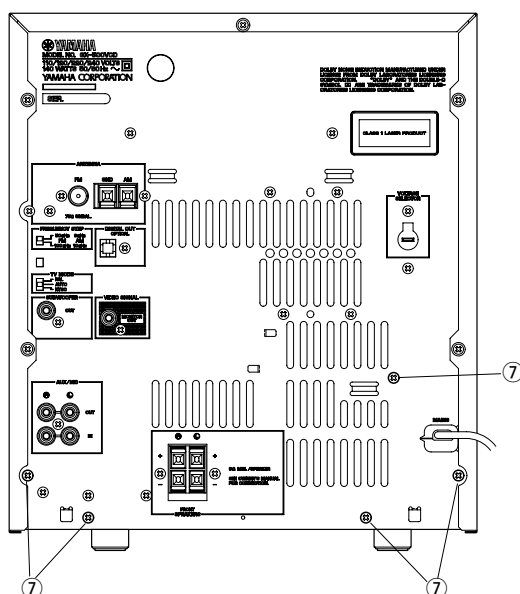


Fig. 6

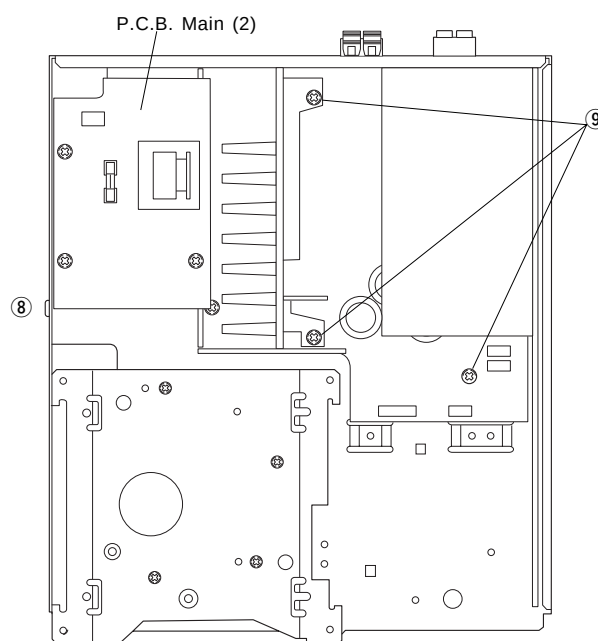


Fig. 7

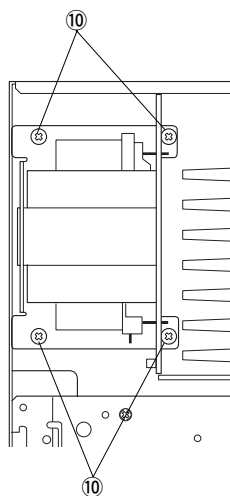


Fig. 8

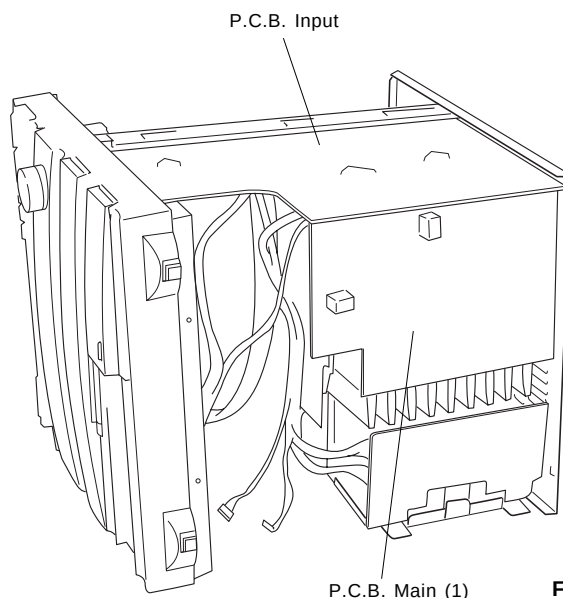


Fig. 9

7. Removal of Tray & Traverse Unit

- Remove 4 screws (⑪) and then remove the Clamp Bracket in Fig. 10.
- Remove 2 screws (⑫) and then remove the Tray Brackets in Fig. 10.
- Push the Friction Arm (the bottom side of the CD Mechanical Unit) with a screwdriver or the like and pull out the Tray forward as in Fig. 10.
- Remove 4 screws (⑬) and take out the Slider in Fig. 11.
- Disconnect the Flat Connecting Cable (16P) and connectors (6P).
- Remove the Traverse Unit in Fig. 11.

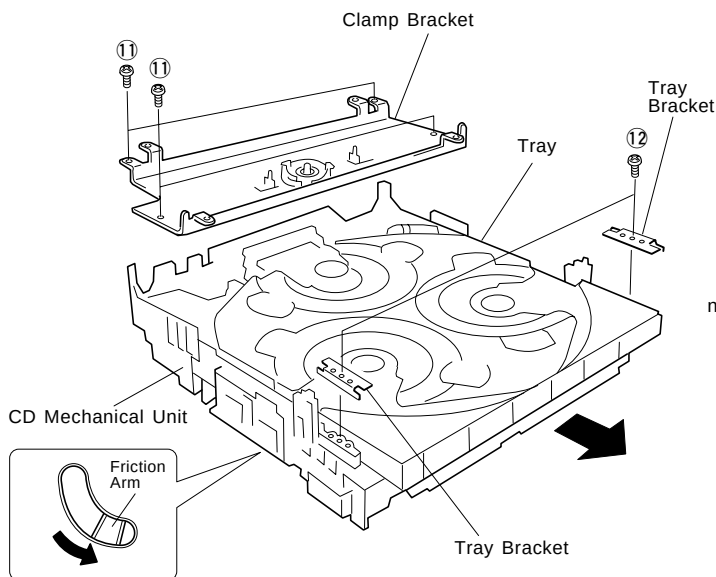


Fig. 10

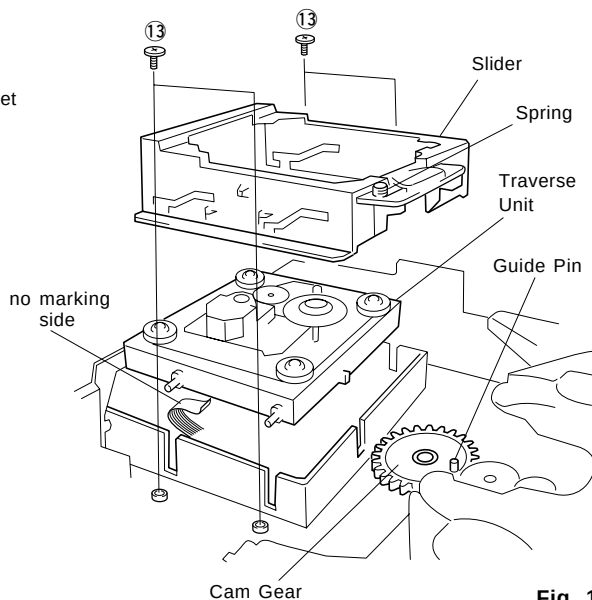


Fig. 11

● Precaution for Installation of Tray

Be sure to fit the shaft of the Friction Gear into the groove in the Tray.

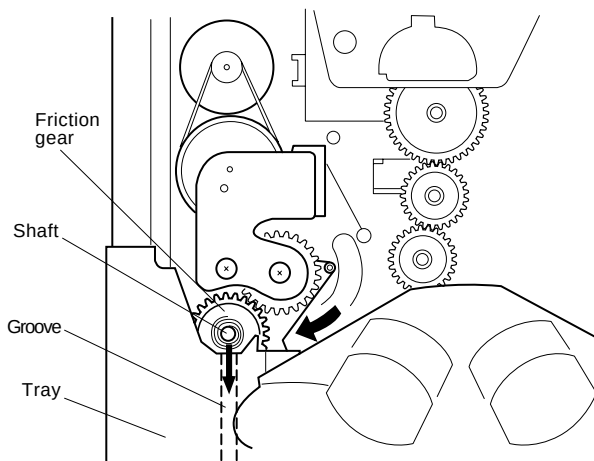


Fig. A

● Installation of Traverse Unit & Slider

- Fit the Traverse Unit into the Chassis.
- Turn the Cam Gear until its Guide Pin comes to the position as shown in Fig. 11.
- Fit the Slider into the Traverse Unit. Set the Spring of the Slider so that it holds down the Guide Pin of the Cam Gear (as shown in Fig. B). (Press the Spring of the Slider once and release it, and it will hold down the Guide Pin of the Cam Gear.)
- After installation, check that the Clamp moves up and down by turning the Load Gear.

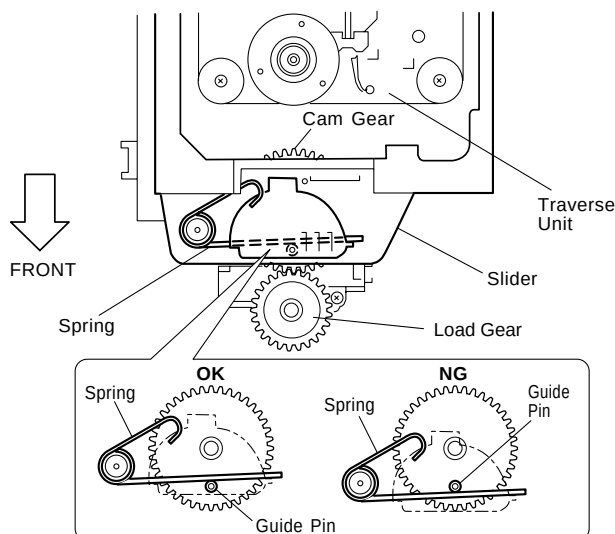


Fig. B

8. Removal of Pick-up Head

- Remove the Gear A in Fig. 12.
- Pull out the Sled Shaft and remove the Pick-up Head in Fig. 12.

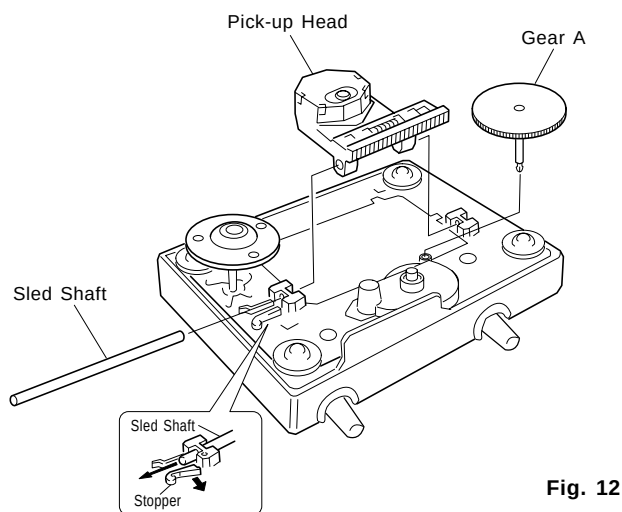


Fig. 12

- Check that the disc table height is as specified below.

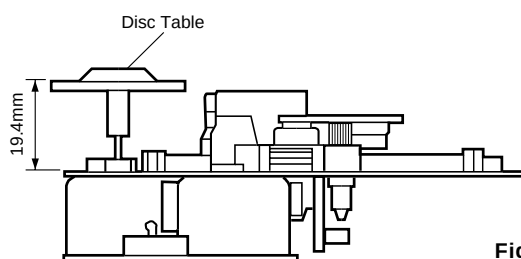


Fig. C

9. Removal of Cassette Mechanism

Remove 4 screws (⑭) and then pull out the Cassette Mechanism in Fig. 13.

10. Removal of Main Motor

Remove 2 screws (⑮) in Fig. 13.

11. Removal of Pinch Roller

Detach the hook and then remove the Pinch Roller in Fig. 14.

12. Removal of Head Ass'y

- Remove 1 screw (⑯) and then remove the Relay P.C.B. in Fig. 14.
 - Remove 2 screws (⑰) and then remove the Head Ass'y in Fig. 14.
- * Perform the adjustment of azimuth after installing the Head Ass'y.

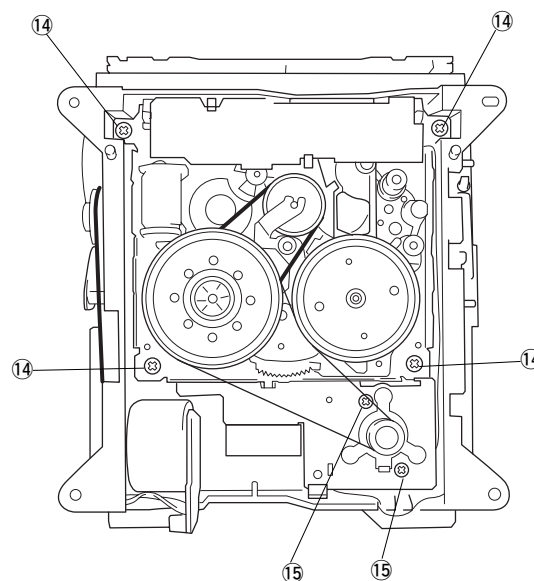


Fig. 13

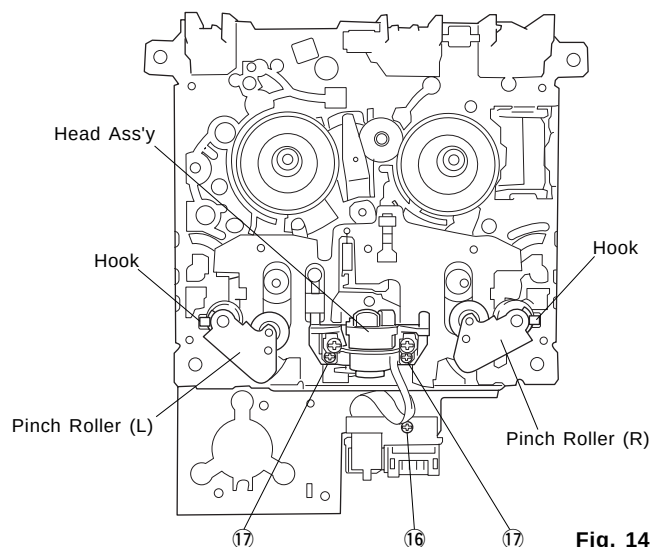



Fig. 14

VOLUME RANGE

DISPLAY	dB	DISPLAY	dB	DISPLAY	dB
VOL MIN	− ∞	VOL 10	−55	VOL 56	−9
VOL 01	−79	VOL 11	−54	VOL 57	−8
VOL 02	−73	.	1dB step	VOL 58	−7
VOL 03	−68			VOL 59	−6
VOL 04	−64			VOL 60	−5
VOL 05	−61			VOL 61	−4
VOL 06	−59			VOL 62	−3
VOL 07	−58			VOL 63	−2
VOL 08	−57	VOL 54	−11	VOL 64	−1
VOL 09	−56	VOL 55	−10	VOL MAX	0

NOTE) When VOLUME is at minimum, MUTE of AMP is on.

SYSTEM CONTROL CHECK

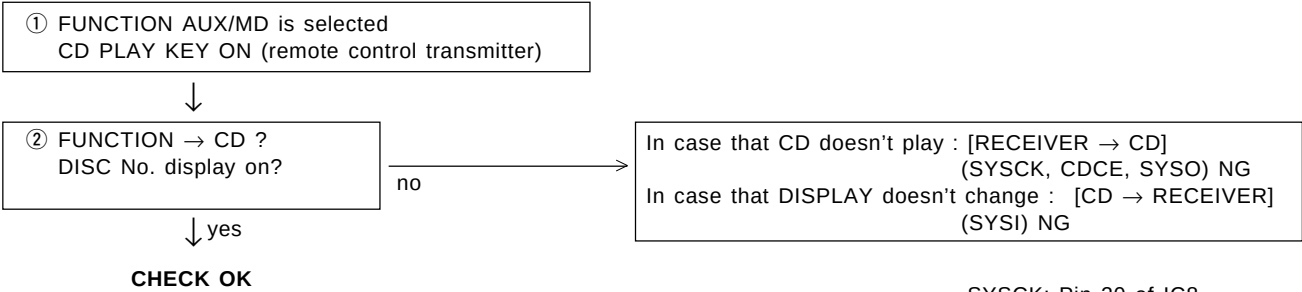

SYSCK: Pin 20 of IC8
CDCE: Pin 25 of IC8
SYSO: Pin 21 of IC8
SYSI: Pin 22 of IC8

■ TEST MODE

To facilitate inspection, measurement and location of any faulty point, 6 types of built-in Test Mode are provided, one for each section.

- System Test Mode : Test mode for the system section. It is also used when entering the test mode for each section.
- Receiver Test Mode : Test mode for the receiver section
- Tape Test Mode : Test mode for the deck section
- CD Test Mode : Test mode for the CD section
- MD Test Mode : Test mode for the MD section (unused for this unit)
- All Function Test Mode : Test mode for all functions

■ SYSTEM TEST MODE

This test mode is used for the system section. Also, this mode must be executed first when entering the test mode for each section.

Starting Procedure

In the STANDBY mode, press the STANDBY/ON button while pressing the RANDOM button and the PLAY/PAUSE(CD) button simultaneously. Once the SYSTEM TEST MODE is set, causal factors for the previous power off appear on the FL display.

Causal factors for power off at starting

Display	Description
<Key Operate	Power off by button operation
<Off Timer	Power off by Off Timer setting
<Sleep Timer	Power off by Sleep Timer function
<Auto Off	Power off by Auto Power Off function
<I-Protect	Power off by detection of an abnormal current value
<V-Protect	Power off by detection of an abnormal voltage value
<Temp Over	Power off by detection of an abnormal temperature value
<AC Cut	Power off by AC power cut
<??	Unknown

Operation Procedure (Selection/finalizing of TEST MODE for each section)

- 1) Select the TEST MODE by the section name, pressing the ▷INPUT (up) or ◁INPUT (down) button.

Display	Description	Ref. page
<Key Operate	Causal factors for power off are displayed. (This state is available immediately after starting.)	14
Test RECEIVER	RECEIVER TEST MODE	15
Test TAPE	TAPE TEST MODE	16
Test CD	CD TEST MODE	17
Test MD	MD TEST MODE (Unused for this unit)	—
Test All Func	ALL FUNCTION TEST MODE	18
Escape Test	The test mode is canceled.	—

- 2) Pressing the MUSIC button will shift the mode to the selected test mode.
For the details of the selected test mode, refer to the Ref. page in the above step 1).

■ RECEIVER TEST MODE

When RECEIVER TEST MODE is set through SYSTEM TEST MODE, "01 G.E.TEST" appears on the FL display. (01 is the test program No.)

Test programs from 01 to 25 are incorporated in RECEIVER TEST MODE.

Operation Procedure (Selection/execution of Test Program)


- 1) Select the test program by pressing the ▷▷TAPE (up) or ◁◁TAPE (down) button.
- 2) Pressing the STANDBY/ON button will execute the selected test program.
- 3) Repeat selection/execution of the test program as necessary.

No. & DISPLAY	FUNCTION	PURPOSE & OPERATION
01 G , E , TEST	Equalizer check mode	Used to check EQ. Pressing the STANDBY/ON button will set the Equalizer Test mode. For the details, refer to page 16.
02 FL + CLEAR	FL display full lighting, RAM CLEAR	Used for lighting of all display segments and clearing of RAM. (Note that the user memory will be cleared.) At the first pressing of the STANDBY/ON button, all display segments light up and at the second pressing, MEMORY and M-CLEAR light up for 2 seconds and RAM of CPU is initialized. (The product mode is restored.) (Presetting of the tuner becomes the manufacturer preset state.)
03 FL FULL	FL display full lighting	Used to check lighting of all display segments. At the first pressing of the STANDBY/ON button, all display segments light up and at the second pressing, this mode is canceled. (The product mode is restored.)
04 APO - ON/OFF 05 RDS - OFF/ON 06 A , PS - ON/OFF 07 A , M , - RDS/ALL 08 CT > C - ON/OFF 09 L > CT - ON/OFF 10 PSR2 - ON/OFF 11 RTBL - ON/OFF 12 SEC - OFF/ON 13 Temp 14 PEAK - ON/OFF 15 AMPC - OFF/ON 16 CDCH - ON/OFF 17 REM CODE 18 L , EN - ON/OFF 19 ALL CH > 20 RDS E / F 21 SUR TEST 22 KEYC - OFF/ON 23 AM - IF	Do not use No. 04 to 23 functions as they are not for servicing.	
24 CANCEL	Used to cancel the test program. (The product mode is restored when the STANDBY/ON button is pressed.)	
25 DEST	Destination display mode	

Equalizer test mode (Test program No. 01)

When the equalizer test mode is set, "GEQ - xxx" is displayed. "xxx" represents the 3 band value of GEQ. It is possible to set the GEQ value directly, using the buttons on the remote control unit.

Example : To obtain flat



Displayed value	0	1	2	3	4	5	6	7	8	9	A	B	C
Gain (dB)	-12	-10	-8	-6	-4	-2	0	+2	+4	+6	+8	+10	+12

Operation Procedure

- To set a value for each band
[0] to [9], [A(TIME)], [B(PROG)], [C(R.TIME)]
- To set all bands to Min (-12dB)
[D(EDIT)]
- To set all bands to Max (+12dB)
[E(+10)]
- To cancel this test mode, press the STANDBY/ON button. (The production mode will be restored.)

● MAKER'S PRESET

BAND	MARKETS	PRESET No.							
		1	2	3	4	5	6	7	8
FM (MHz)	U, C, R, T (100k/10k)	98.1	95.1	87.5	101.5	107.9	88.1	106.1	107.9
	A, B, G, L, R, T (50k/9k)	98.10	95.10	87.50	101.50	108.00	88.10	106.10	107.90
AM (kHz)	U, C, R, T (100k/10k)	630	1080	1400	530	1710	900	1350	1440
	A, B, G, L, R, T (50k/9k)	630	1080	1404	531	1611	900	1350	1440

NOTE 1) PRESET PAGE A : FM B : AM C : FM D : AM E : FM

CAUTION : When executing Test program No. 2 RAM CLEAR, be sure to write down the preset memory contents of the tuner, using a table like the one shown below. Execution of RAM CLEAR will set the memory contents of the tuner back in the factory preset state which means that all the memories preset by the user will be erased.

Preset group	P1	P2	P3	P4	P5	P6	P7	P8
A								
B								
C								
D								
E								

■ TAPE TEST MODE

When TAPE TEST MODE is set through SYSTEM TEST MODE, "Tape Test XXXX" appears on the FL display. (XXXX is the counter value.)

The operation condition of the deck section will be as follows.

- When the reverse mode is set to "endless", the number of playback repetition becomes unlimited. (It is set to "8 " times in the product mode.)
- When in the REC mode, AUX/MD is used automatically for the input source.

■ CD TEST MODE

When CD TEST MODE is set through SYSTEM TEST MODE, "00STM100: 00" appears on the FL display.

The CD TEST MODE is enabled. Each button operates as follows for each mode. The MODE No. is increased by pushing "+10" button.

Button	MODE 1	MODE 2	MODE 3
" 0 "	Open/close the tray	Focus search	Cancel adjust pass *2
" 1 "	Clamp up/down	Play (PLL)	Auto adjustment mode 1 *1 Tracking Offset, Focus Offset, Focus Gain
" 2 "	DISC change	Play (without PLL)	Auto adjustment mode 2 *1 Tracking Balance, Tracking Gain
" 3 "	Mechanism home process	Focus on, Tracking off, Feed off	Auto adjustment mode 3 *1 Focus Gain, Tracking Gain, Focus Balance
" 4 "	Jump to test mode 4	+10 track kick	Read and display the servo coefficient
" 5 "	Tray close, Clamp down	−10 track kick	Displayed servo coefficient address up
" 6 "	—	+1 track kick	Displayed servo coefficient address down
" 7 "	Enter normal operation (without mecha. INIT.)	−1 track kick	Displayed servo coefficient increment
" 8 "	Enter normal operation	+30 track kick	Displayed servo coefficient decrement
" 9 "	Start TEST REPEAT (Do not use this function as it is not for servicing.)	−30 track kick	Send the displayed servo coefficient *2

Button	MODE 4	MODE 5 (GX-500VCD only)
" 0 "	Feed forward (outer direction)	CD-ROM module load
" 1 "	Feed backward (inner direction)	CD-G module load
" 2 "	Rotate the disc motor	Decoder play command
" 3 "	Retard the disc motor	Decoder pause command
" 4 "	port TBLL ← Low, port TBLR ← High	Decoder abort command
" 5 "	port TSLW High/Low alternate	Decoder soft reset
" 6 "	Tray port control (open/close)	Decoder hard reset
" 7 "	Line mute on/off	—
" 8 "	—	—
" 9 "	Jump to Test mode 1	—

*1 "Adj-" lights during the adjustment and disappears at the end of the adjustment.

*2 When the mode is reset to the Production Mode after the servo coefficients are renewed by this operation, auto adjustment is not available unless the auto adjustment pass function is cancelled.

The following button functions are not changed in the test mode No.

OPEN/CLOSE	Open/close the tray
DISC CHANGE	Clamp up/down
☐ (STOP)	Controls for the tray, the disc table and clamping stop. STANDBY command for the servo system.
 /  (PLAY/PAUSE)	Play (PLL)
	Feed forward (outer direction)
	Feed backward (inner direction)
DISC 1	Tray close, clamping down

[VCD Module condition check]

If the VCD module is in a good condition, the blue background appears on the monitor screen when in the CD test mode.

If the blue background does not appear, the possibility is that the VCD module has failed.

NOTE: None of the components of the VCD module can be supplied separately. Only a VCD module unit (VZ150200) is available.

■ ALL FUNCTION TEST MODE

When ALL FUNCTION TEST MODE is set through SYSTEM TEST MODE, "AUX Digital" appears on the FL display.

The operation condition in this mode will be as follows.

- AUX/MD is used as the input source of the receiver section, which is then set to the Dolby Pro Logic mode (GX-500VCD only).
- When a CD is loaded, Full Repeat Play is executed automatically for it.
- When a cassette tape is loaded, Endless Rec Play is executed by the cassette deck automatically.

■ CD ERROR MESSAGES


Error message can be obtained on the display by pushing STOP and TIME buttons simultaneously when CD has stopped (sometimes with the tray open) by an error.

INDICATION	STATE	CONTENTS OF ERROR
E-10	PLAY	CD fails in the disc data reading after the state shift.
E-20	SCAN	
E-30	PAUSE	
E-70	SEARCH	
E-11	PLAY	CD fails in the disc data reading.
E-21	SCAN	
E-31	PAUSE	
E-73	SEARCH	CD fails in the TOC data reading.
E-04	LOAD, SEARCH	Tracking servo is not effective at the disc motor servo PLL.
E-14	LOAD, SEARCH	Disc motor servo PLL is not effective.
E-35		CD fails in focus search.
E-06	SEARCH, PLAY, PAUSE	CD fails in escaping from the lead-in area.
E-47	SEARCH	The inner limit switch does not operate at the feed inner control.
E-57	STOP	
E-77	LOAD, EJECT, CHANGE	
E-18	PLAY	CD fails in recovery from the focus out.
E-28	SCAN	
E-38	PAUSE	
E-48	SEARCH	
E-68	LOAD, DISC CHANGE	
E-AA		Clamp down switch does not operate at the clamp down control.
E-AB		Clamp up switch does not operate at the clamp up control.
E-AC		Close switch does not operate at the tray close control.
E-AD		Open switch does not operate at the tray open control.
E-AE		CD fails in the table control.
E-AF		CD fails in the mecha. home process.
MN ERR		MN662741 does not give response of SENSE with resetting by the units microcomputer.

When "MECHA ER" message appears on the display;

Possible symptoms are, the clamp does not move up or down, the table does not turn, mecha. sensor switch malfunctions, etc. The normal operation may be restored by tuning off the power once and then on again. If it does not work in this way, disassemble the CD mechanical unit and investigate the cause of the failure.

■ CD STANDARD OPERATION CHART

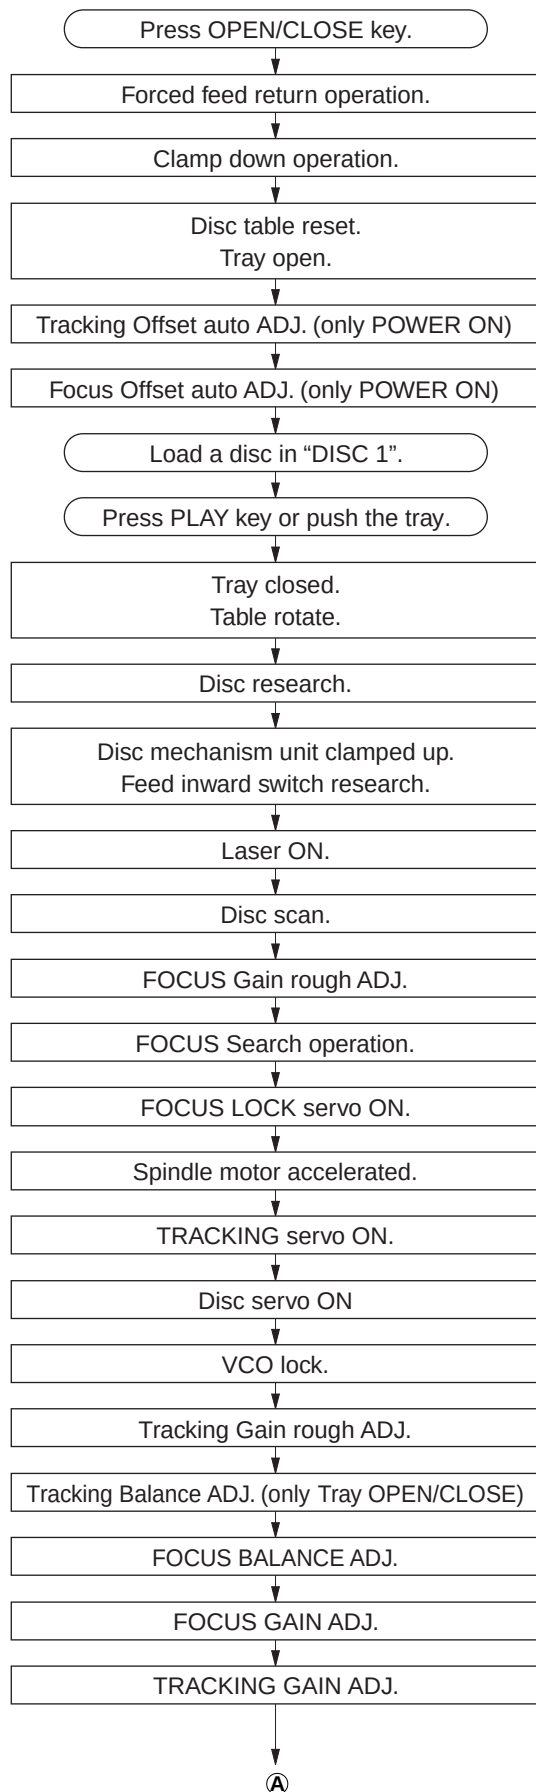

"OPEN" appears in the TIME indicator.


"TRV" signal is output until detection of LIMIT switch.

DISC "1" is turned to DM clamp position.


LDON = "H" (IC5, 40 pin)

$\overline{\text{FLOCK}}$ = "H" → "L" (IC11, 8 pin)


$\overline{\text{TLOCK}}$ = "H" → "L" (IC11, 11 pin)

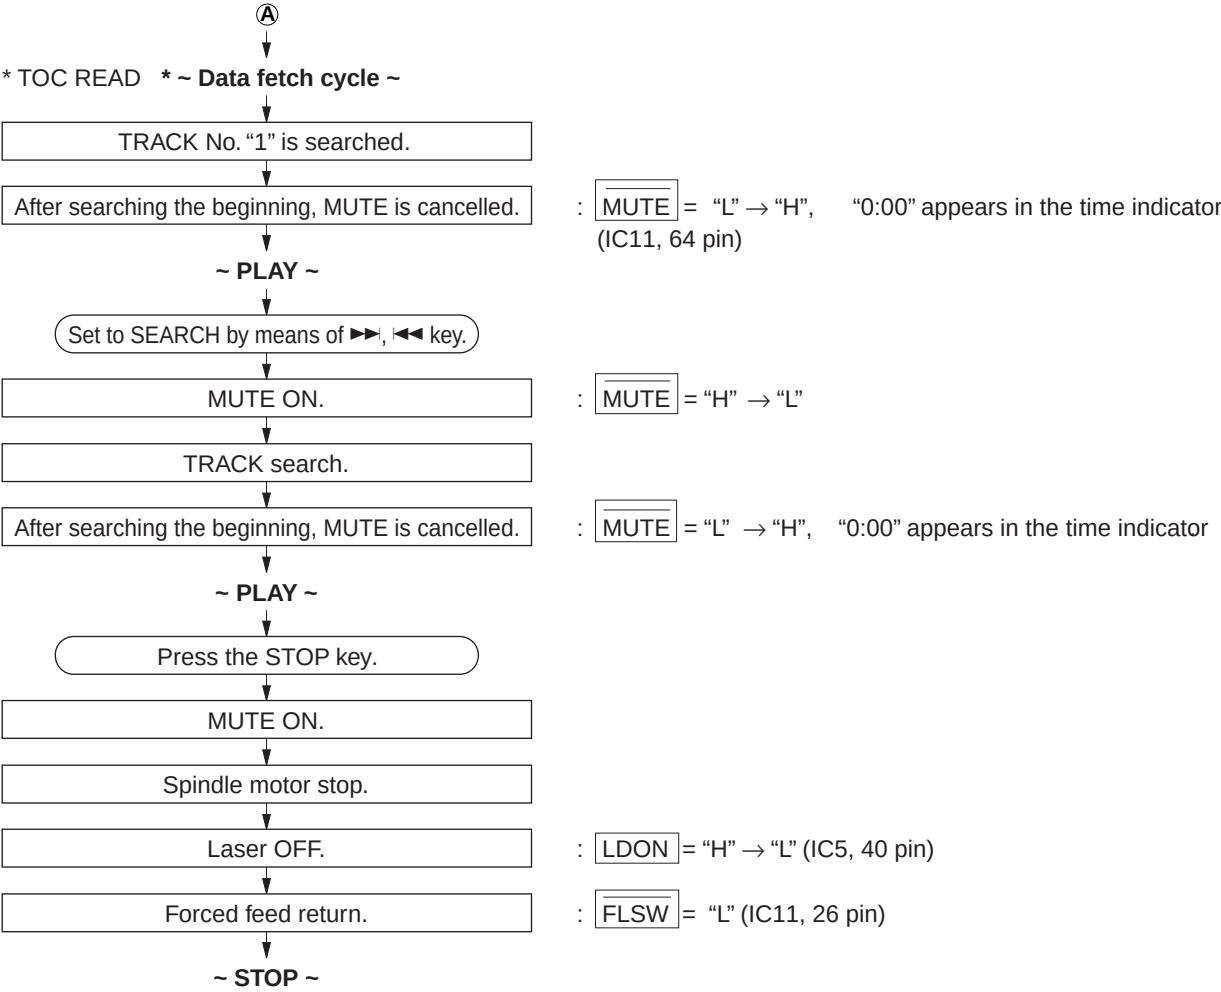


● HOME operation

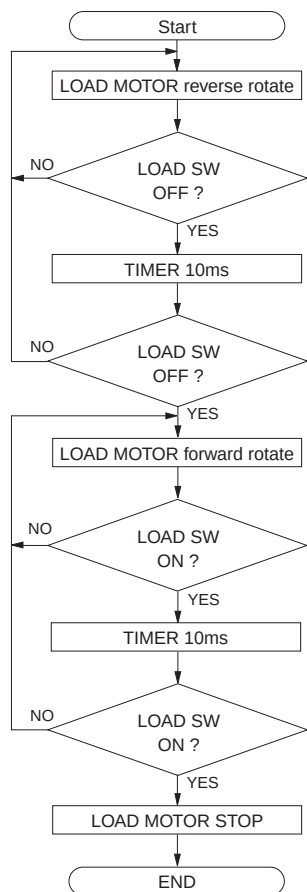


● CLOSE operation

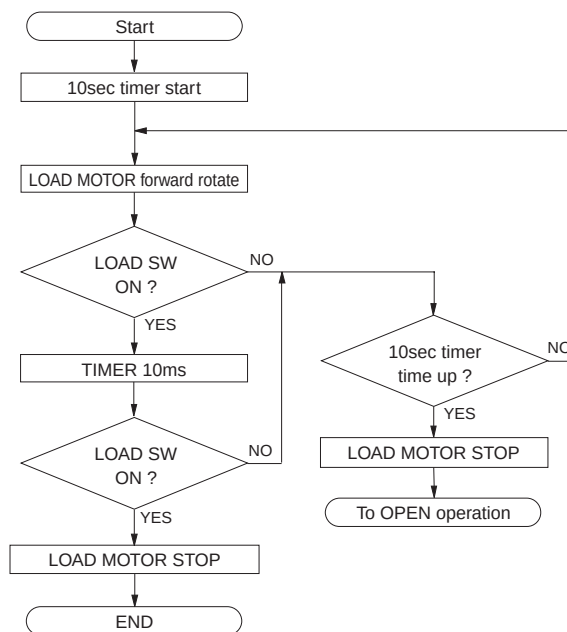


● OPEN operation

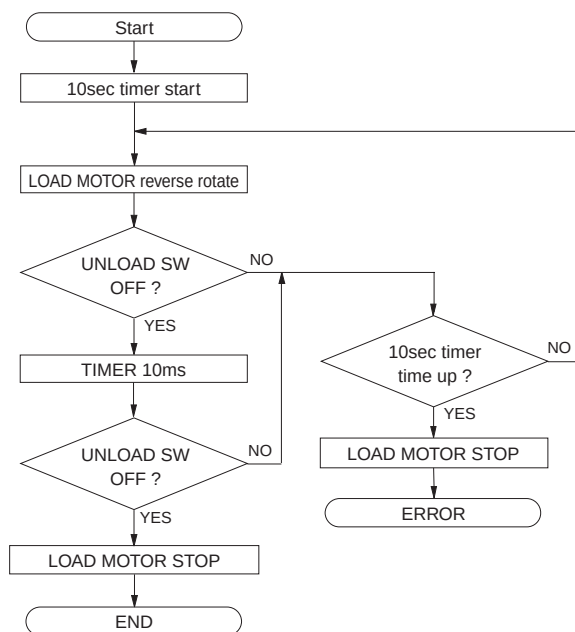

● DOWN operation

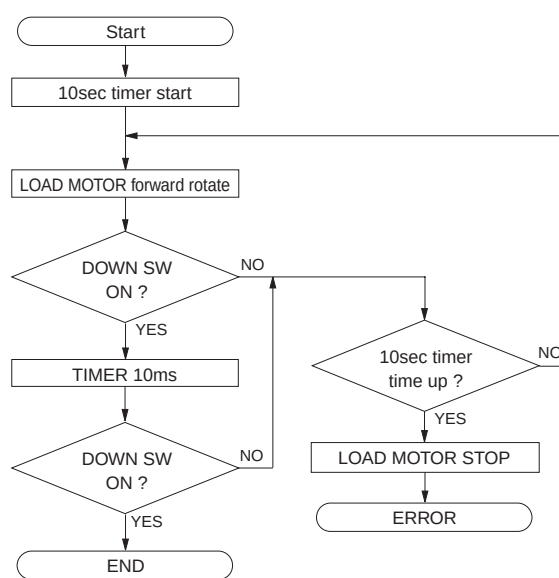

● ROTARY TRAY initialization operation

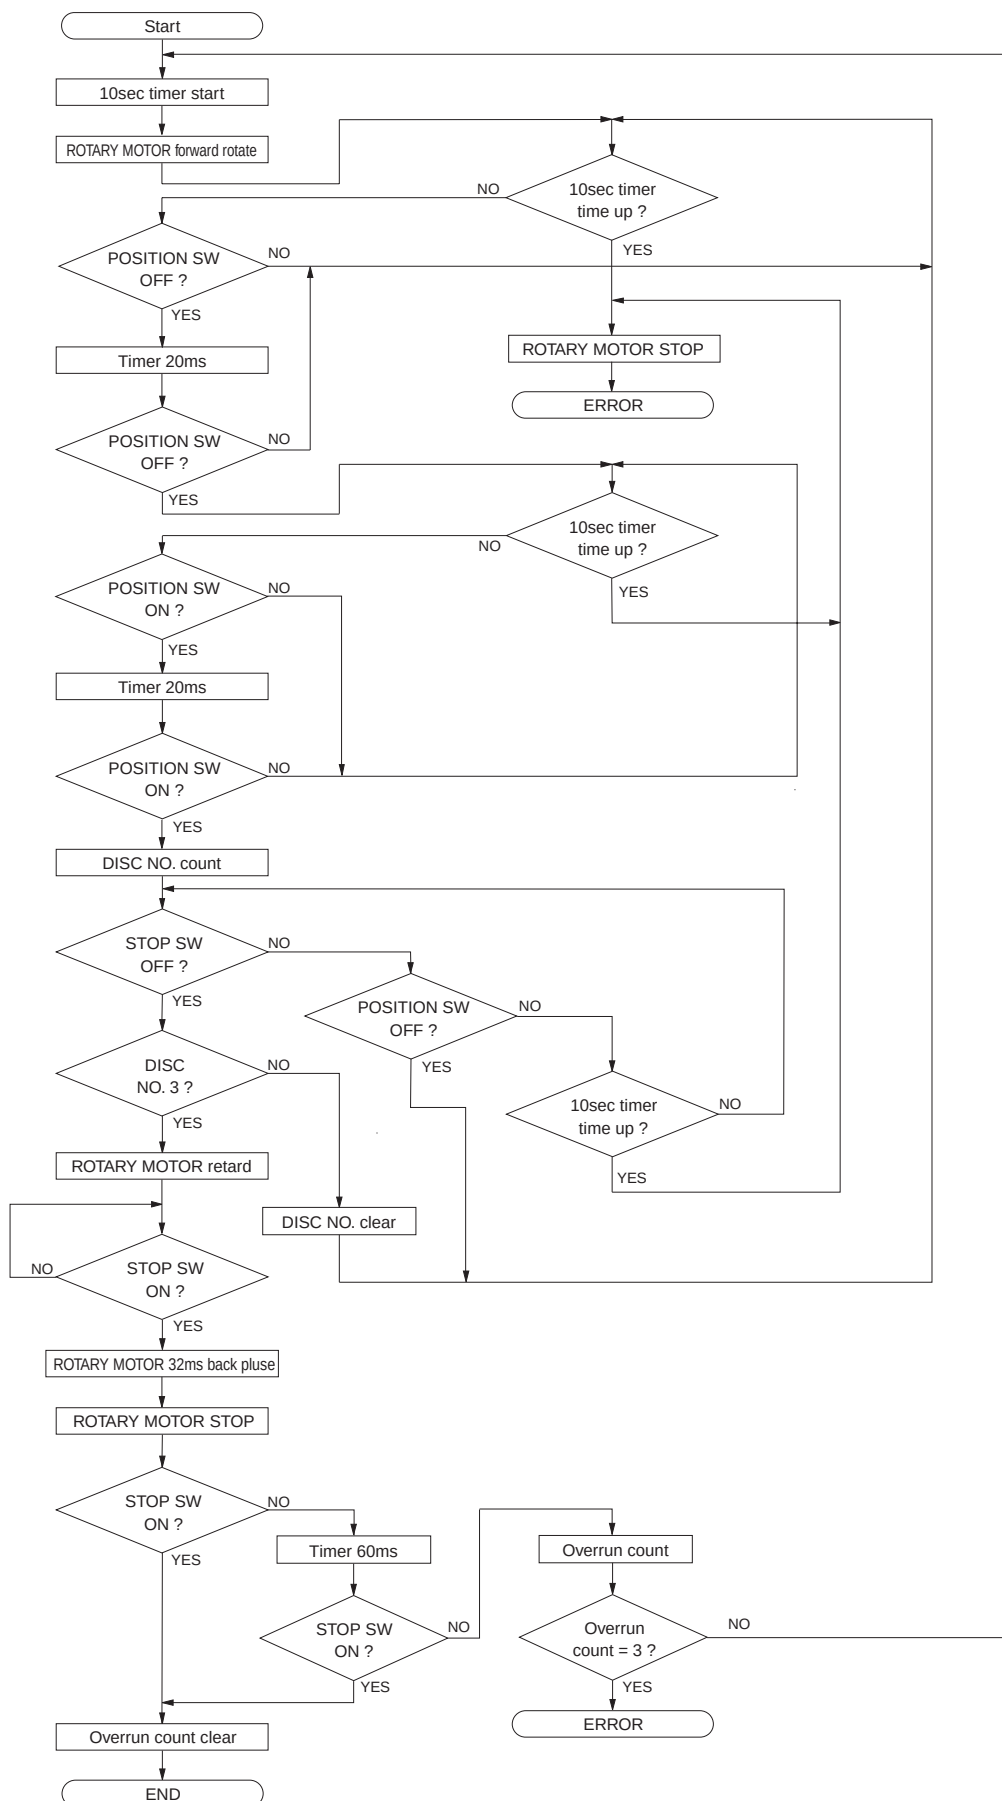

■ ADJUSTMENTS (DECK SECTION ONLY)

1. Before adjustment

- Since head magnetization, dust accumulations, etc. are likely to introduce error in the various characteristics, it is very important that the heads are properly demagnetized and cleaned.
- Make adjustments of mechanical system, playback system and recording system in that order.
- Except for azimuth adjustment, adjust in the forward direction.
- Adjust at TAPE TEST MODE.

2. Instruments required


- Audio frequency oscillator
- ACVM or dual channel (ACVM)
- DCVM
- Wow/flutter meter
- Oscilloscope
- Frequency counter
- Torque meter
- TW-2111A (TX911580) ... Take up/back tension (FWD)
- TW-2121A (TX911570) Take up/back tension (RVS)

CT-160L (TX911120) FF/REW

3. Test tape required

- MTT-111N (TX911650) Normal speed
- MTT-114N (TX911680) Azimuth
- MTT-212N (TX911660) Playback level
- MTT-256 (TX911300) Playback frequency response (Normal)
- MTT-356 (TX911310) Playback frequency response (CrO₂)
- Reference tape
- Type I/Normal (LH) TDK AC225 (VU167200)
- Type II/High (CrO₂) TDK AC514 (VU167300)

● Test point

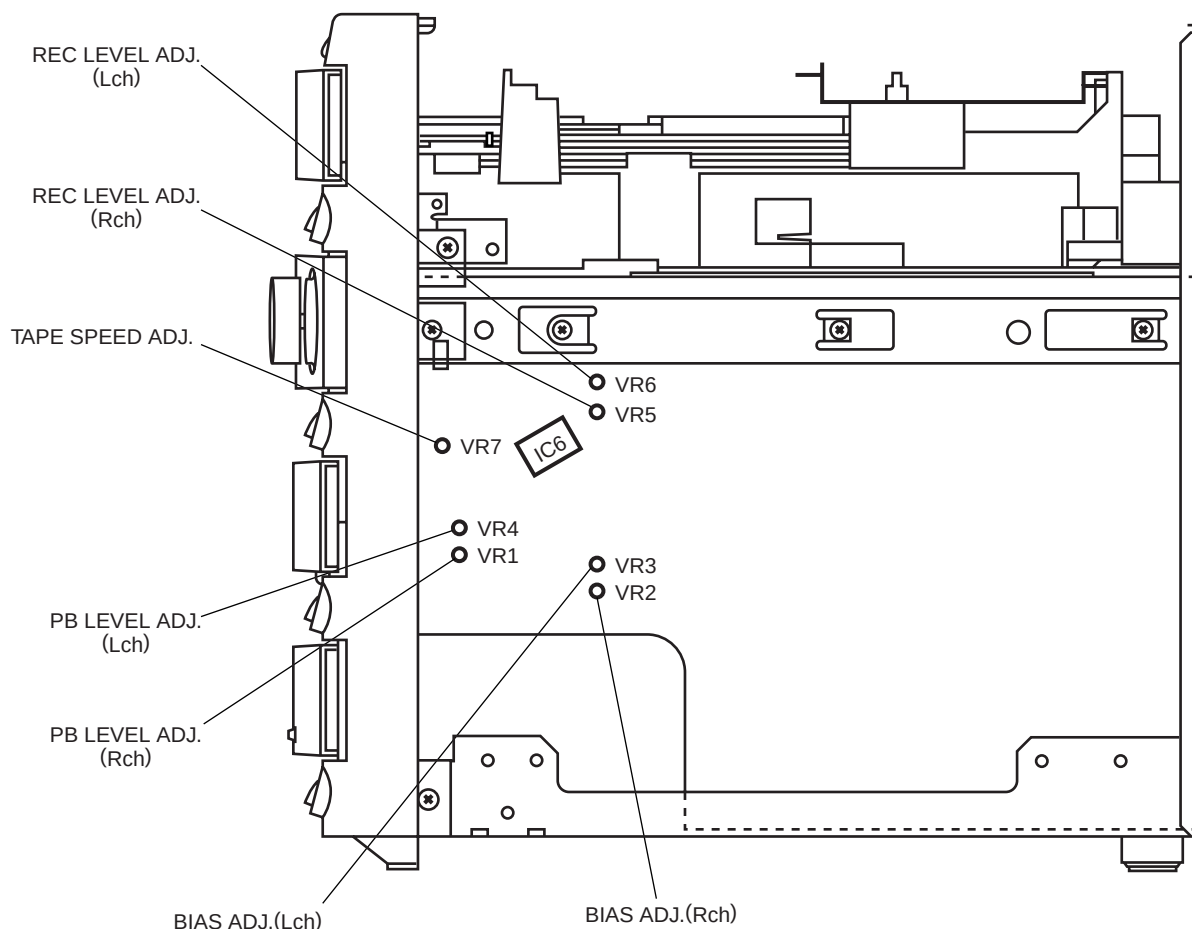

“MECHANICAL ADJUSTMENT”

Step	Item to be Adjusted	Tape	Instrument required	Mode	Adjustment part	Rating	Remarks
1	Check each torque	CT-160L (FF, REW)	Torque meter	FF REW		FF, REW torque : within 70 ~ 160g/cm.	
		TW-2111A (FWD)		PLAY		Take up torque : 30 ~ 70g/cm.	
		TW-2121A (RVS)				Back tension : 1.5 ~ 6g/cm.	
2	Check FF, REW take up time	AC-514 (C-60)		FF REW		80 to 120 seconds.	
3	Azimuth	MTT-114N 10kHz, -10dB	ACVM Oscilloscope	PLAY	Azimuth adjustment screw. (Fig. A)	Playback output of L and R is maximum and phase difference should be minimum both directions. (Fig. B)	After the adjustment make sure to apply screw lock paint.
4	Tape Speed	MTT-111N 3kHz, -10dB	Frequency counter	PLAY	VR7	3000Hz $\pm$ 15Hz	Perform adjustment at the center of the test tape, if possible.
5	Wow/Flutter	MTT-111N 3kHz, -10dB	Wow/flutter meter	PLAY		Less than 0.19% (WRMS)	Confirm at center of the test tape, if possible.

Azimuth adjustment screw. (FORWARD)

Azimuth adjustment screw. (REVERSE)




Fig. A

Rec out L : ch 1
Rec out R : ch 2
DC input, X-Y (Resurge) mode

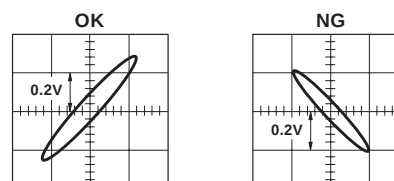


Fig. B

“ELECTRICAL ADJUSTMENT”

- Use 560 mV (250 nwb/m) for 0 dB as the standard level of the unit.
0dB = 250 nwb/m (315 Hz) = - 7 dBV (Rec out level)

< Playback section >

Step	Item to be Adjusted	Tape	Instrument required	Mode	Points of measurement	Adjustment parts	Rating
1	Playback level (315Hz)	MTT-212N 315Hz, 250nwb/m	ACVM	PLAY	REC OUT	VR4 (L ch) VR1 (R ch)	- 7 dBV $\pm$ 0.3 dBV
2	Confirmation of playback frequency response	Test tape for frequency check. 3180 μ s + 120 μ s (LH) (MTT-256) 3180 μ s + 70 μ s (CrO ₂) (MTT-356)	ACVM Oscilloscope	PLAY	REC OUT		Check that the 10kHz playback level is within 0 $\pm$ 3 dB of the 1kHz playback level. (Fig. C)

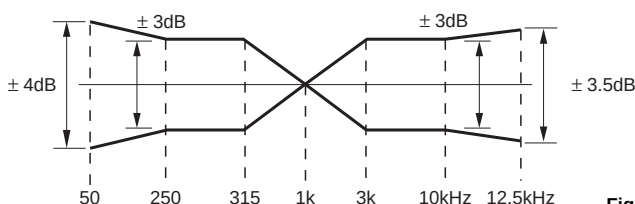
● PLAYBACK FREQUENCY RESPONSE

Fig. C

< Recording section >

Step	Item to be Adjusted	Tape	Instrument required	Mode	Measurement conditions	Points of measurement	Adjustment parts	Rating
1	Recording level	AC-514 High (CrO ₂)	ACVM Audio frequency oscillator	REC PLAY	Input 1 kHz Signal to AUX IN from Audio Frequency Oscillator. Adjust output level of Audio Frequency Oscillator so that the voltage of REC OUT becomes – 27 dBV.	REC OUT	VR6 (L ch) VR5 (R ch)	Adjust for equal record and playback levels. (– 27 dBV ± 0.3 dBV)
2	Recording bias (Total frequency response)	AC-514 High (CrO ₂)	ACVM Audio frequency oscillator	REC PLAY	Input 12.5 kHz Signal to AUX IN from Audio Frequency Oscillator. Adjust output level of Audio Frequency Oscillator so that the voltage of REC OUT becomes – 27 dBV.	REC OUT	VR3 (L ch) VR2 (R ch)	Adjust for equal record and playback levels. (– 27 dBV ± 0.3 dBV)
		AC-225 Normal (LH)						Adjust for equal record and playback levels. (Fig. D) Perform record bias adjustment of High (CrO ₂) tape again, if the rating was not satisfied.
3	Confirmation of recorded level	AC-514 High (CrO ₂)	ACVM Audio frequency oscillator	REC PLAY		REC OUT		Confirm recorded level rating as in step 1. When recorded level rating is improper, go back to step 1 and also carry out adjustments in step 2 again.

● TOTAL FREQUENCY RESPONSE (– 27 dBV)

Dolby NR B & OFF
Type I (Normal)/Type II (High)


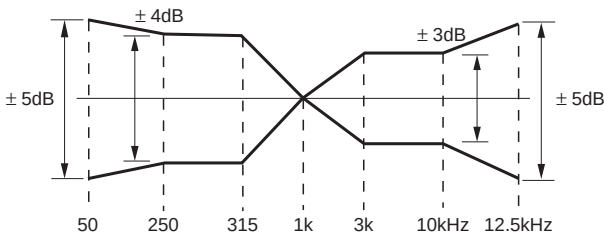


Fig. D

IC DATA

IC5 : MN662741RPB1 [P.C.B. CD/VCD]

Signal Processor & Controller

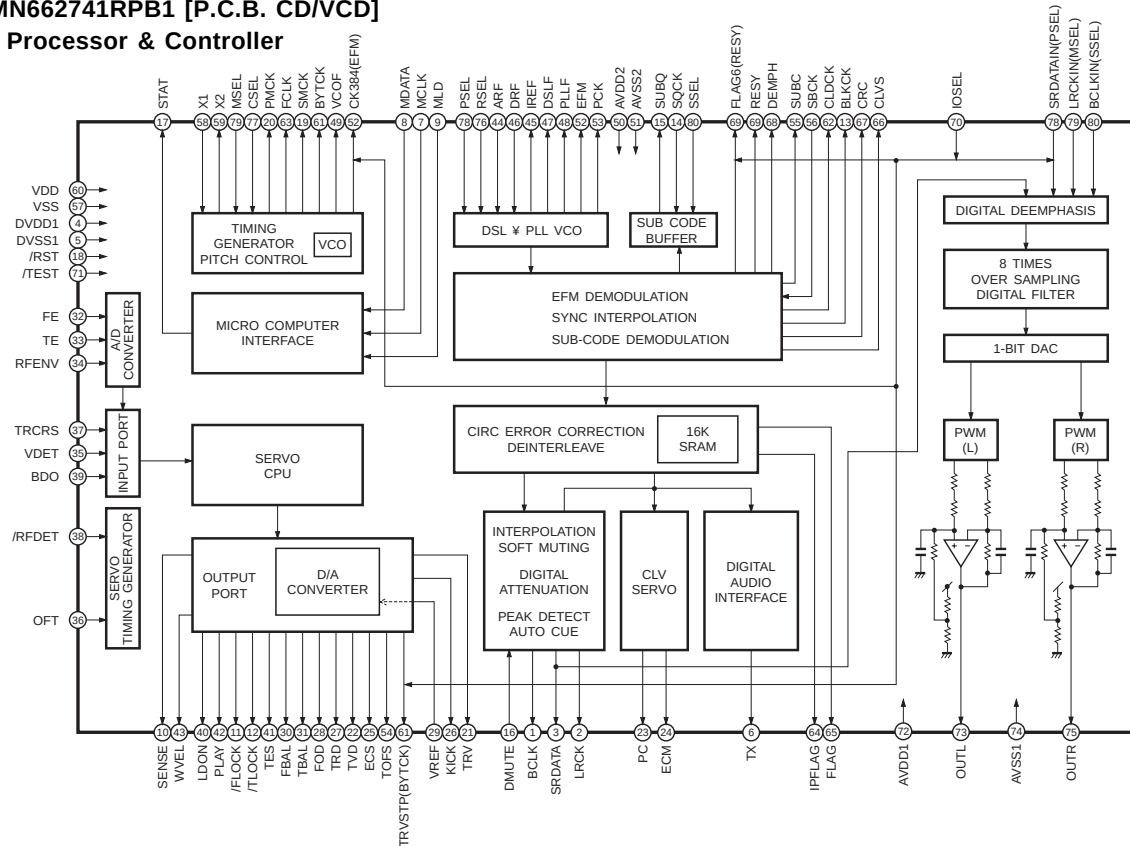

Pin No.	Name	I/O	Function
1	BCLK	O	Bit clock output for SRDATA
2	LRCK	O	L/R identification signal output H : L-ch audio data L : R-ch audio data
3	SRDATA	O	Serial data output
4	DVDD1	I	Power supply for digital circuits (+5)
5	DVSS1	I	GND for digital circuits
6	TX	O	Digital audio interface output signal
7	MCLK	I	Microcomputer command clock signal input (Latches the data at a rising edge)
8	MDATA	I	Microcomputer command data input
9	MLD	I	Microcomputer command load signal input L : Load
10	SENSE	O	Sense signal output (OFT, FESL, NACEND, NAJEND, SFG, NWTEND)
11	$\overline{\text{FLOCK}}$	O	Focus servo pull-in signal (L : Pull-in status)
12	$\overline{\text{TLOCK}}$	O	Tracking servo pull-in signal (L : Pull-in status)
13	BLKCK	O	Sub-code block clock signal ($f_{\text{BLKCK}} = 75\text{Hz}$)
14	SQCK	I	External clock input for sub-code Q register
15	SUBQ	O	Sub-code Q data output
16	DMUTE	I	Muting input H : Mute
17	STAT	O	Status signal (CRC, CUE, CLVS, TTSTOP, FCLV, SQOK, FLAG6, SENSE, FLOCK, TLOCK)
18	$\overline{\text{RST}}$	I	Reset input (Reset when being at L for 472 ns or longer at IOSEL = L) L : Reset
19	SMCK	O	8.4672MHz clock signal output at MSEL = H 4.2336MHz clock signal output at MSEL = L (NC)
20	PMCK	O	88.2kHz clock signal output (NC)
21	TRV	O	Traverse (Feed) forced feed output 3-State
22	TVD	O	Traverse (Feed) drive output
23	PC	O	Spindle motor ON signal L : ON (NC)
24	ECM	O	Spindle motor drive signal (Forced mode output) 3-State
25	ECS	O	Spindle motor drive signal (Servo error signal output)
26	KICK	O	Kick pulse output 3-State
27	TRD	O	Tracking drive output
28	FOD	O	Focus drive output


IC5 : MN662741RPB1 [P.C.B. CD/VCD]

Signal Processor & Controller

Pin No.	Name	I/O	Function
29	VREF	I	Reference voltage for D/A output section (TVD, ECS, TRD, FOD, FBAL, TBAL, TOFS)
30	FBAL	O	Focus balance adjustment output
31	TBAL	O	Tracking balance adjustment output
32	FE	I	Focus error signal input (Analog input)
33	TE	I	Tracking error signal input (Analog input)
34	RFENV	I	RF envelope signal input (Analog input)
35	VDET	I	Vibration detection signal input H : Detect
36	OFT	I	Off track signal input H : Off track
37	TRCRS	I	Track cross signal input
38	RFDET	I	RF detection signal input L : Detect
39	BDO	I	Drop out signal input H : Drop out
40	LDON	O	Laser ON signal output H : ON
41	TES	O	Tracking error shunt signal output H : Shunt
42	PLAY	O	Play signal output H : PLAY (NC)
43	WVEL	O	Double speed status signal output L : Double speed (NC)
44	ARF	I	RF signal input
45	IREF	I	Reference current input pin
46	DRF	I	Bias pin for DSL (NC)
47	DSL F	I/O	DSL loop filter pin
48	PLL F	I/O	PLL loop filter pin
49	VCO F	I/O	VCO loop filter pin (NC)
50	AVDD2	I	Power supply for analog circuits (For DSL, PLL, A/D input blocks, and D/A output blocks) (+5)
51	AVSS2	I	GND for analog circuits (For DSL, PLL, A/D input blocks, and D/A output blocks) (GND)
52	EFM	O	EFM signal output At IOSEL = H : EFM signal output At IOSEL = L : 16.9344 MHz clock output (*1)
53	PCK	O	PLL extraction clock output (f _{PCK} = 4.32MHz) (NC)
54	TOFS	O	Tracking offset adjustment output (NC)
55	SUBC	O	Sub-code serial output
56	SBCK	I	Clock input for sub-code serial output (With pull-up resistor)
57	VSS	I	GND for oscillation circuit
58	X1	I	Crystal oscillation circuit input pin (f = 16.9344MHz, 33.8688MHz)
59	X2	O	Crystal oscillation circuit output pin (f = 16.9344MHz, 33.8688MHz)
60	VDD	I	Power supply for oscillation circuit (+5)
61	BYTCK	O	At IOSEL = H : Byte clock signal output At IOSEL = L : Traverse stop signal output H : STOP mode (*1)
62	CLDCK	O	Sub-code frame clock signal output (f _{CLDCK} = 7.35kHz)
63	FCLK	O	Crystal frame clock signal output (f _{FCLK} = 7.35kHz) (NC)
64	IPFLAG	O	Interpolation flag signal output H : Interpolation
65	FLAG	O	Flag signal output (NC)
66	CLVS	O	Spindle servo phase synchronous status signal outut H : CLV L : Rough servo (NC)
67	CRC	O	Sub-code CRC check result output H : OK L : NG (NC)
68	DEMPH	O	De-emphasis detection signal output H : ON (NC)
69	RESY	O	At IOSEL = H : Frame resynchronizing signal RESY output H : Synchronous L : Asynchronous (*1) At IOSEL = L : Error correction, and deinterleave RAM address reset signal FLAG6 output L : Address reset generated
70	IOSEL	I	Mode selector pin (*1)
71	TEST	I	Test pin (Normal : H) (+5)
72	AVDD1	I	Power supply for analog circuits (For audio output section) (Commonly used for L-ch and R-ch)
73	OUTL	O	L-ch audio output
74	AVSS1	I	GND for analog circuits (For audio output section) (Commonly used for L-ch and R-ch)
75	OUTR	O	R-ch audio output
76	RSEL	I	RF signal polarity specification pin When the bright level is "H", RSEL = H When the bright level is "L", RSEL = L
77	CSEL	I	Crystal oscillation frequency specification pin (H : Crystal oscillation frequency = 33.8688 MHz, L : Crystal oscillation frequency = 16.9344 MHz)
78	PSEL	I	At IOSEL = H : Test pin (Normally L) At IOSEL = L : SRDATA input (*1)
79	MSEL	I	At IOSEL = H : SMCK pin output frequency selector pin H : SMCK = 8.4672MHz, L : SMCK = 4.2336MHz At IOSEL = L : LRCK input H : L-ch data, L : R-ch data SMCK = Fixed at 4.2336 MHz (*1)
80	SSEL	I	At IOSEL = H : SUBQ pin output mode selector pin H : Q-code buffer working mode (*1) At IOSEL = L : BCLK input Q-code buffer mode fixed

*1 These models used "L".

IC11 : M38199EF [P.C.B. CD/VCD]
8 bit μ -COM (CD CPU)

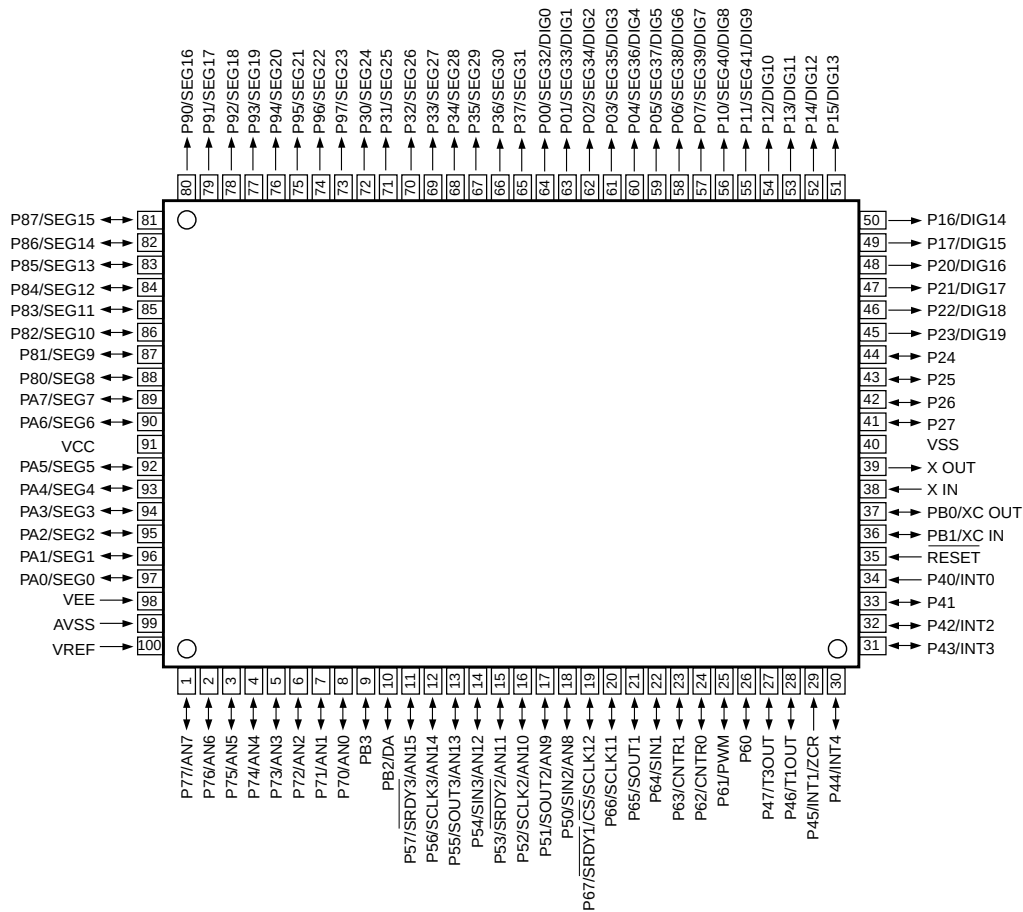

Pin No.	Port	Name	I/O	Function
1	P77	ADR	I	Tray table address detect SW
2	AN6	NTSC	I	Video out PAL/AUTO/NTSC select detect (GX-500VCD only))
3	P75	OPSW	I	Tray open SW
4	P74	/CLSW	I	Tray close SW
5	P73	/STOP	I	Tray table STOP position detect SW
6	P72	/UPSW	I	Clamper up SW
7	P71	/DWSW	I	Clamper down SW
8	P70	/FLOCK	I	Focus servo lock
9	PB3			Open
10	PB2			Open
11	P57	/TLOCK	I	Tracking servo lock
12	P56	/SCLK	O	Serial clock to servo LSI
13	P55	SOUT	O	Serial out to servo LSI
14	P54	SIN	I	Serial in from servo LSI (Q-code or SENSE)
15	P53	HSEL	O	Address/data select signal (GX-500VCD only))
16	P52	/SCLKD	O	Serial clock from decoder (GX-500VCD only))
17	P51	SOD	O	Serial out to decoder (GX-500VCD only))
18	P50	SID	I	Serial in from decoder (GX-500VCD only))
19	P67	/CS	I	System communication chip enable
20	P66	/DCLK	I	Serial clock from system μ -COM (Auto transfer)
21	P65	DSO	O	Serial out to system μ -COM
22	P64	DSI	I	Serial in from system μ -COM
23	P63	STAT	I	Servo status signal
24	P62			Not used
25	P61			Not used
26	P60	/FLSW	I	Feed origin SW
27	P47	/HRDY	I	Decoder data out OK signal (GX-500VCD only))

IC11 : M38199EF [P.C.B. CD/VCD]

8 bit μ -COM (CD CPU)

Pin No.	Port	Name	I/O	Function
28	P46			Open
29	INT1	BLKCK	I	Q-code read OK signal
30	INT4			Open
31	INT3			Open
32	INT2	/HINT	I	Decoder interrupt signal (GX-500VCD only)
33	P41	DEPH	O	De-emphasis control (GX-500VCD only)
34	INT0	/CSINT	I	System μ -COM data automatic transfer initialize, start signal
35	/RESET	RESET	I	Reset
36	XCIN	XCIN		Open
37	XCOU	XCOU		Open
38	XIN	XIN	I	8 MHz (MAIN CLOCK)
39	XOUT	XOUT	O	8 MHz (MAIN CLOCK)
40	VSS	GND		GND
41	P27	K3	I	Not used
42	P26	K2	I	Not used
43	P25	K1	I	Not used
44	P24	K0	I	Not used
45	P23	KD3	O	Not used
46	P22	KD2	O	Not used
47	P21	KD1	O	Not used
48	P20	KD0	O	Not used
49	P17		O	Not used
50	P16		O	Not used
51	P15		O	Not used
52	P14		O	Not used
53	P13		O	Not used
54	P12	/DECRST	O	Decoder reset (GX-500VCD only)
55	P11	DRV	O	Servo driver on
56	P10	FCSG	O	Focus gain high (NC)
57	P07	TROP	O	Tray open control signal (implied clamper control)
58	P06	TRCL	O	Tray close control signal
59	P05	TBL +	O	Tray table revolution
60	P04	TBL -	O	Tray table brake
61	P03			Open
62	P02	/MNRST	O	Servo LSI reset signal
63	P01		O	Open
64	P00	/MUTE	O	Line mute
65	P37	/PON	O	Servo LSI power ON control
66	P36		O	Open
67	P35	DMUTE	O	Digital mute
68	P34	/MLD	O	Microprocessor command store request
69	P33	CMDSEL	O	Serial 2 $\rightarrow$ μ -COM command
70	P32	QSEL	O	Serial 2 $\rightarrow$ Q-code read
71	P31	DOSEL	O	Decoder serial I/O out select (GX-500VCD only)
72	P30	/TSPD	O	Tray table revolution speed control (H : Low speed)
73	P97	VMUTE	O	Video mute (GX-500VCD only)
74	P96		O	Not used
75	P95		O	Not used
76	P94		O	Not used
77	P93		O	Not used
78	P92		O	Not used
79	P91		O	Not used
80	P90		O	Not used
81	P87		O	Not used
82	P86		O	Not used
83	P85		O	Not used
84	P84		O	Not used

IC11 : M38199EF [P.C.B. CD/VCD]**8 bit μ -COM (CD CPU)**

Pin No.	Port	Name	I/O	Function
85	P83		O	Not used
86	P82		O	Not used
87	P81		O	Not used
88	P80		O	Not used
89	PA7		O	Not used
90	PA6		O	Not used
91	VCC	VCC		+5V
92	PA5		O	Not used
93	PA4		O	Not used
94	PA3		O	Not used
95	PA2		O	Not used
96	PA1		O	Not used
97	PA0		O	Not used
98	VEE	VEE		GND
99	AVSS	AVSS		GND (VSS)
100	VREF	VREF		+5V (VCC)

IC8 : M38199EF [P.C.B. INPUT]**8 bit μ -COM (SYSTEM CPU)**

No.	Port	Name	I/O	Function
1	AN7	MSEL	I	MODEL/PRO LOGIC MODE DETECT (A-D)
2	AN6	SPEIN	I	SPECTRUM ANALYZER (BA3835F) IN (A-D)
3	AN5	DSEL	I	MARKET SELECT IN (A-D)
4	AN4	KEY4	I	KEY 4 IN (A-D)
5	AN3	KEY3	I	KEY 3 IN (A-D)
6	AN2	KEY2	I	KEY 2 IN (A-D)
7	AN1	KEY1	I	KEY 1 IN (A-D)
8	AN0	KEY0	I	KEY 0 IN (A-D)
9	PB3			OPEN
10	DA	FAN	O	FAN CONTROL OUT
11	AN15	THER	I	AMP THERMAL DETECT
12	SCLK3	FLCLK	O	SERIAL CLOCK FOR FL DRIVER M66004
13	SO3	FLDATA	O	SERIAL OUT FOR FL DRIVER M66004
14	SI3			OPEN
15	AN11	VPRT	I	ABNORMAL VOLTAGE DETECT
16	SCLK2	TUCLK	O	LC72131/LC72720/M65853FP/LA2787/LV1017/LC75393/LC7536Y CLK OUT
17	SO2	TUDO	O	LC72131/LC72720/M65853FP/LA2787/LV1017/LC75393/LC7536Y DATA OUT
18	SI2	TUDATA	I	LC72131/LC72720 DATA IN
19	P67	/STAD	I	STATION IN (TUNER) [L : STATION AVAILABLE]
20	SCLK1	SYSC	O	SYSTEM COMMAND CLOCK
21	SO1	SYSO	O	SYSTEM COMMAND OUT
22	SI1	SYSI	I	SYSTEM COMMAND IN
23	P63	TUMUTE	O	TUNER MUTE [H : MUTE ON]
24	P62	/AMP MUTE	O	AMP MUTE [L : MUTE ON]
25	P61	CDCE	O	SYSTEM COMMUNICATION CD CE
26	P60	CDRES	O	CD RESET
27	P47	MDCE	O	SYSTEM COMMUNICATION MD CE

IC8 : M38199EF [P.C.B. INPUT]

8 bit μ -COM (SYSTEM CPU)

No.	Port	Name	I/O	Function
28	P46	MDRES	O	MD RESET
29	INT1	ACIN	I	POWER DOWN AC PULSE IN
30	INT4	PDN	O	MD POWER DOWN
31	INT3			OPEN
32	INT2	REMO	I	REMOTE CONTROL SIGNAL IN
33	P41	STEIN	I	TUNER STEREO/MONO DETECT
34	INT0			OPEN
35	/RESET	RESET	I	RESET
36	XCIN	XCIN	I	32.768 kHz IN (SUB CLOCK)
37	XCOUT	XCOUT	O	32.768 kHz OUT (SUB CLOCK)
38	XIN	XIN	I	8 MHz IN (MAIN CLOCK)
39	XOUT	XOUT	O	8 MHz OUT (MAIN CLOCK)
40	VSS	GND	O	GND
41	P27	SPEA	O	SPECTRUM ANALYZER (BA3835F) A OUT
42	P26	SPEB	O	SPECTRUM ANALYZER (BA3835F) B OUT
43	P25	SPEC	O	SPECTRUM ANALYZER (BA3835F) C OUT
44	P24	SPESEL	O	SPECTRUM ANALYZER (BA3835F) SEL OUT
45	P23	DLCE	O	LA2787/LV1017 CE
46	P22	KALATCH	O	KARAOKE IC M65853 LATCH
47	P21	FLRES	O	FL DRIVER RESET
48	P20	FLCE	O	FL DRIVER CE
49	P17	TUCE	O	LC72131/LC72720/LC75393 CE
50	P16	STLED	O	STANDBY LED ON [H : LED ON]
51	P15	TMLED	O	TIMER LED ON [H : LED ON]
52	P14	/BC	O	PRO LOGIC IC CONTROL-BC
53	P13	TEST0	O	TEST PORT
54	P12	TEST1	O	TEST PORT
55	P11	DSEL0	O	MD DIGITAL INPUT SELECT
56	P10	DSEL1	O	MD DIGITAL INPUT SELECT
57	P07	PRON	O	POWER RELAY CONTROL [H : ON]
58	P06	SRON	O	SPEAKER RELAY CONTROL [H : ON]
59	P05	/SMUTE	O	SUB WOOFER MUTE [L : MUTE ON]
60	P04	/A	O	PRO LOGIC IC CONTROL-A [H : ON]
61	P03	/YMA	O	Y MERSION ON [L : ON]
62	P02	IN1B	O	4052 INPUT SELECT
63	P01	IN1A	O	4052 INPUT SELECT
64	P00	IN2A	O	4052 INPUT SELECT
65	P37	IN2B	O	4052 INPUT SELECT
66	P36	RECA	O	4066 CONTROL
67	P35	RECB	O	4066 CONTROL
68	P34	VSEL0	O	LA7956 INPUT SELECT
69	P33	VSEL1	O	LA7956 INPUT SELECT
70	P32	VCR	O	VCR REC INHIBIT [H : INHIBIT]
71	P31	PBMUTE	O	DECK PLAYBACK MUTE
72	P30	RMUTE	O	DECK REC MUTE
73	P97	REC	O	DECK AMP REC
74	P96	BIAS	O	DECK BIAS ON
75	P95	DOLBY	O	DOLBY ON
76	P94	TPEQ	O	TAPE EQUALIZER SELECT [H : 120 μ]
77	P93	SOL	O	DECK SOLENOID ON
78	P92	CPM	O	DECK CAPSTAN MOTOR ON
79	P91	CLOSE	O	TAPE LOADING MOTOR CLOSE
80	P90	OPEN	O	TAPE LOADING MOTOR OPEN
81	P87	ENVA	I	VR ENCODER A
82	P86	ENVB	I	VR ENCODER B
83	P85	ENMA	I	MD ENCODER A
84	P84	ENMB	I	MD ENCODER B


IC8 : M38199EF [P.C.B. INPUT]

8 bit μ -COM (SYSTEM CPU)

No.	Port	Name	I/O	Function
85	P83	/HP	I	HEAD PHONE DETECT [L : HP DETECT]
86	P82	MIC	I	MIC DETECT
87	P81	CASS	I	CASSETTE IN DETECT
88	P80	PLSW	I	DECK MECHA PLAY POSITION DETECT
89	PA7	CRO2	I	CrO2 (70 μ s) POSITION DETECT
90	PA6	/IPRT	I	AMP OVER CURRENT DC VOLTAGE DETECT [L : ABNORMAL DETECT]
91	VCC	+5V		+5V
92	PA5	CLSW	I	DECK CLOSE SW
93	PA4	RECINHF	I	REC INHIBIT FORWARD (SIDE-A)
94	PA3	RECINHR	I	REC INHIBIT REVERSE (SIDE-B)
95	PA2	OPSW	I	DECK OPEN SW
96	PA1	REEL	I	REEL MOTOR PULSE DETECT
97	PA0	MUSIC	I	TAPE MUSIC SENSOR
98	VEE	VEE		GND
99	AVSS	AVSS		GND
100	VREF	VREF		+5V

■ DISPLAY DATA

● V801 : 16-BT-63GK (V2959000)

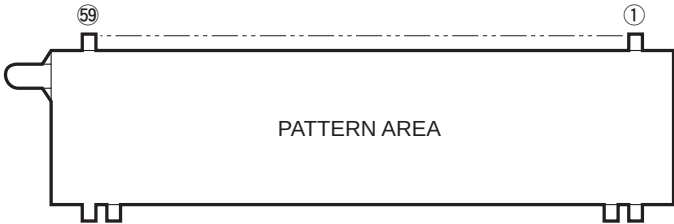


● PIN CONNECTION

Pin No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
Connection	F1	F1	NP	NP	P35	P34	P33	P32	P31	P30	P29	P28	P27	P26	P25	P24	P23	P22	P21	P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	P10

Pin No.	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	
Connection	P9	P8	P7	P6	P5	P4	P3	P2	P1	16G	15G	14G	13G	12G	11G	10G	9G	8G	7G	6G	5G	4G	3G	2G	1G	NP	NP	F2	F2	

Note 1) F1, F2 Filament
2) NP No Pin
3) NC No Connection
4) P1~P35 Datum Line
5) 1G~16G Grid

● GRID ASSIGNMENT

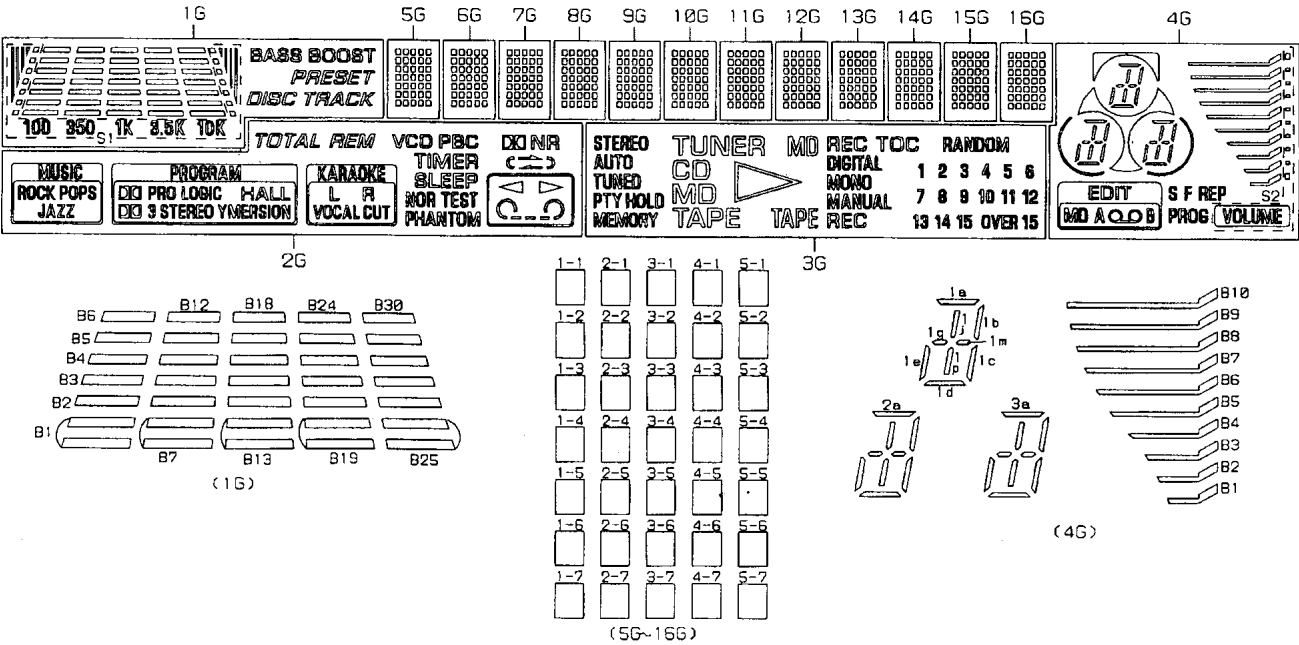

● ANODE CONNECTION


	1G	2G	3G	4G	5G~16G
P1	BASS BOOST	JAZZ	TAPE (右)	S2	1-1
P2	PRESET	ROCK		B1	2-1
P3	DISC	POPS	TAPE (左)	B2	3-1
P4	TRACK		MD (左)	B3	4-1
P5	S1	YMERSON	CD	B4	5-1
P6	B1	3 STEREO	MEMORY	B5	1-2
P7	B2		PTY HOLD	B6	2-2
P8	B3	HALL	TUNED	B7	3-2
P9	B4	DIGI PRO LOGIC	AUTO	B8	4-2
P10	B5		MD (右)	B9	5-2
P11	B6	VOCAL CUT	TUNER	B10	1-3
P12	B7	R	STEREO		2-3
P13	B8	L	REC (T)	1a, 1b, 1d 1g, 1m	3-3
P14	B9		MANUAL	1c	4-3
P15	B10	PHANTOM	MONO	1e	5-3
P16	B11	NOR	DIGITAL	1j, 1p	1-4
P17	B12	TEST	REC (L)	2a, 2b, 2d 2g, 2m	2-4
P18	B13	SLEEP	TOC	2c	3-4

	1G	2G	3G	4G	5G~16G
P19	B14	TIMER	RANDOM	2e	4-4
P20	B15		1	2j, 2p	5-4
P21	B16		2	3a, 3b, 3d 3g, 3m	1-5
P22	B17		3	3c	2-5
P23	B18		4	3e	3-5
P24	B19		5	3j, 3p	4-5
P25	B20		6	()	5-5
P26	B21		7	)	1-6
P27	B22		8	REP	2-6
P28	B23		9	F	3-6
P29	B24	DO NR	10	S	4-6
P30	B25	PBC	11	PROG	5-6
P31	B26	VCD	12		1-7
P32	B27	REM	13	MD	2-7
P33	B28	TOTAL	14	A	3-7
P34	B29	-	15		4-7
P35	B30	-	OVER 15	B	5-7

GX-500/VCD




■ BLOCK DIAGRAM

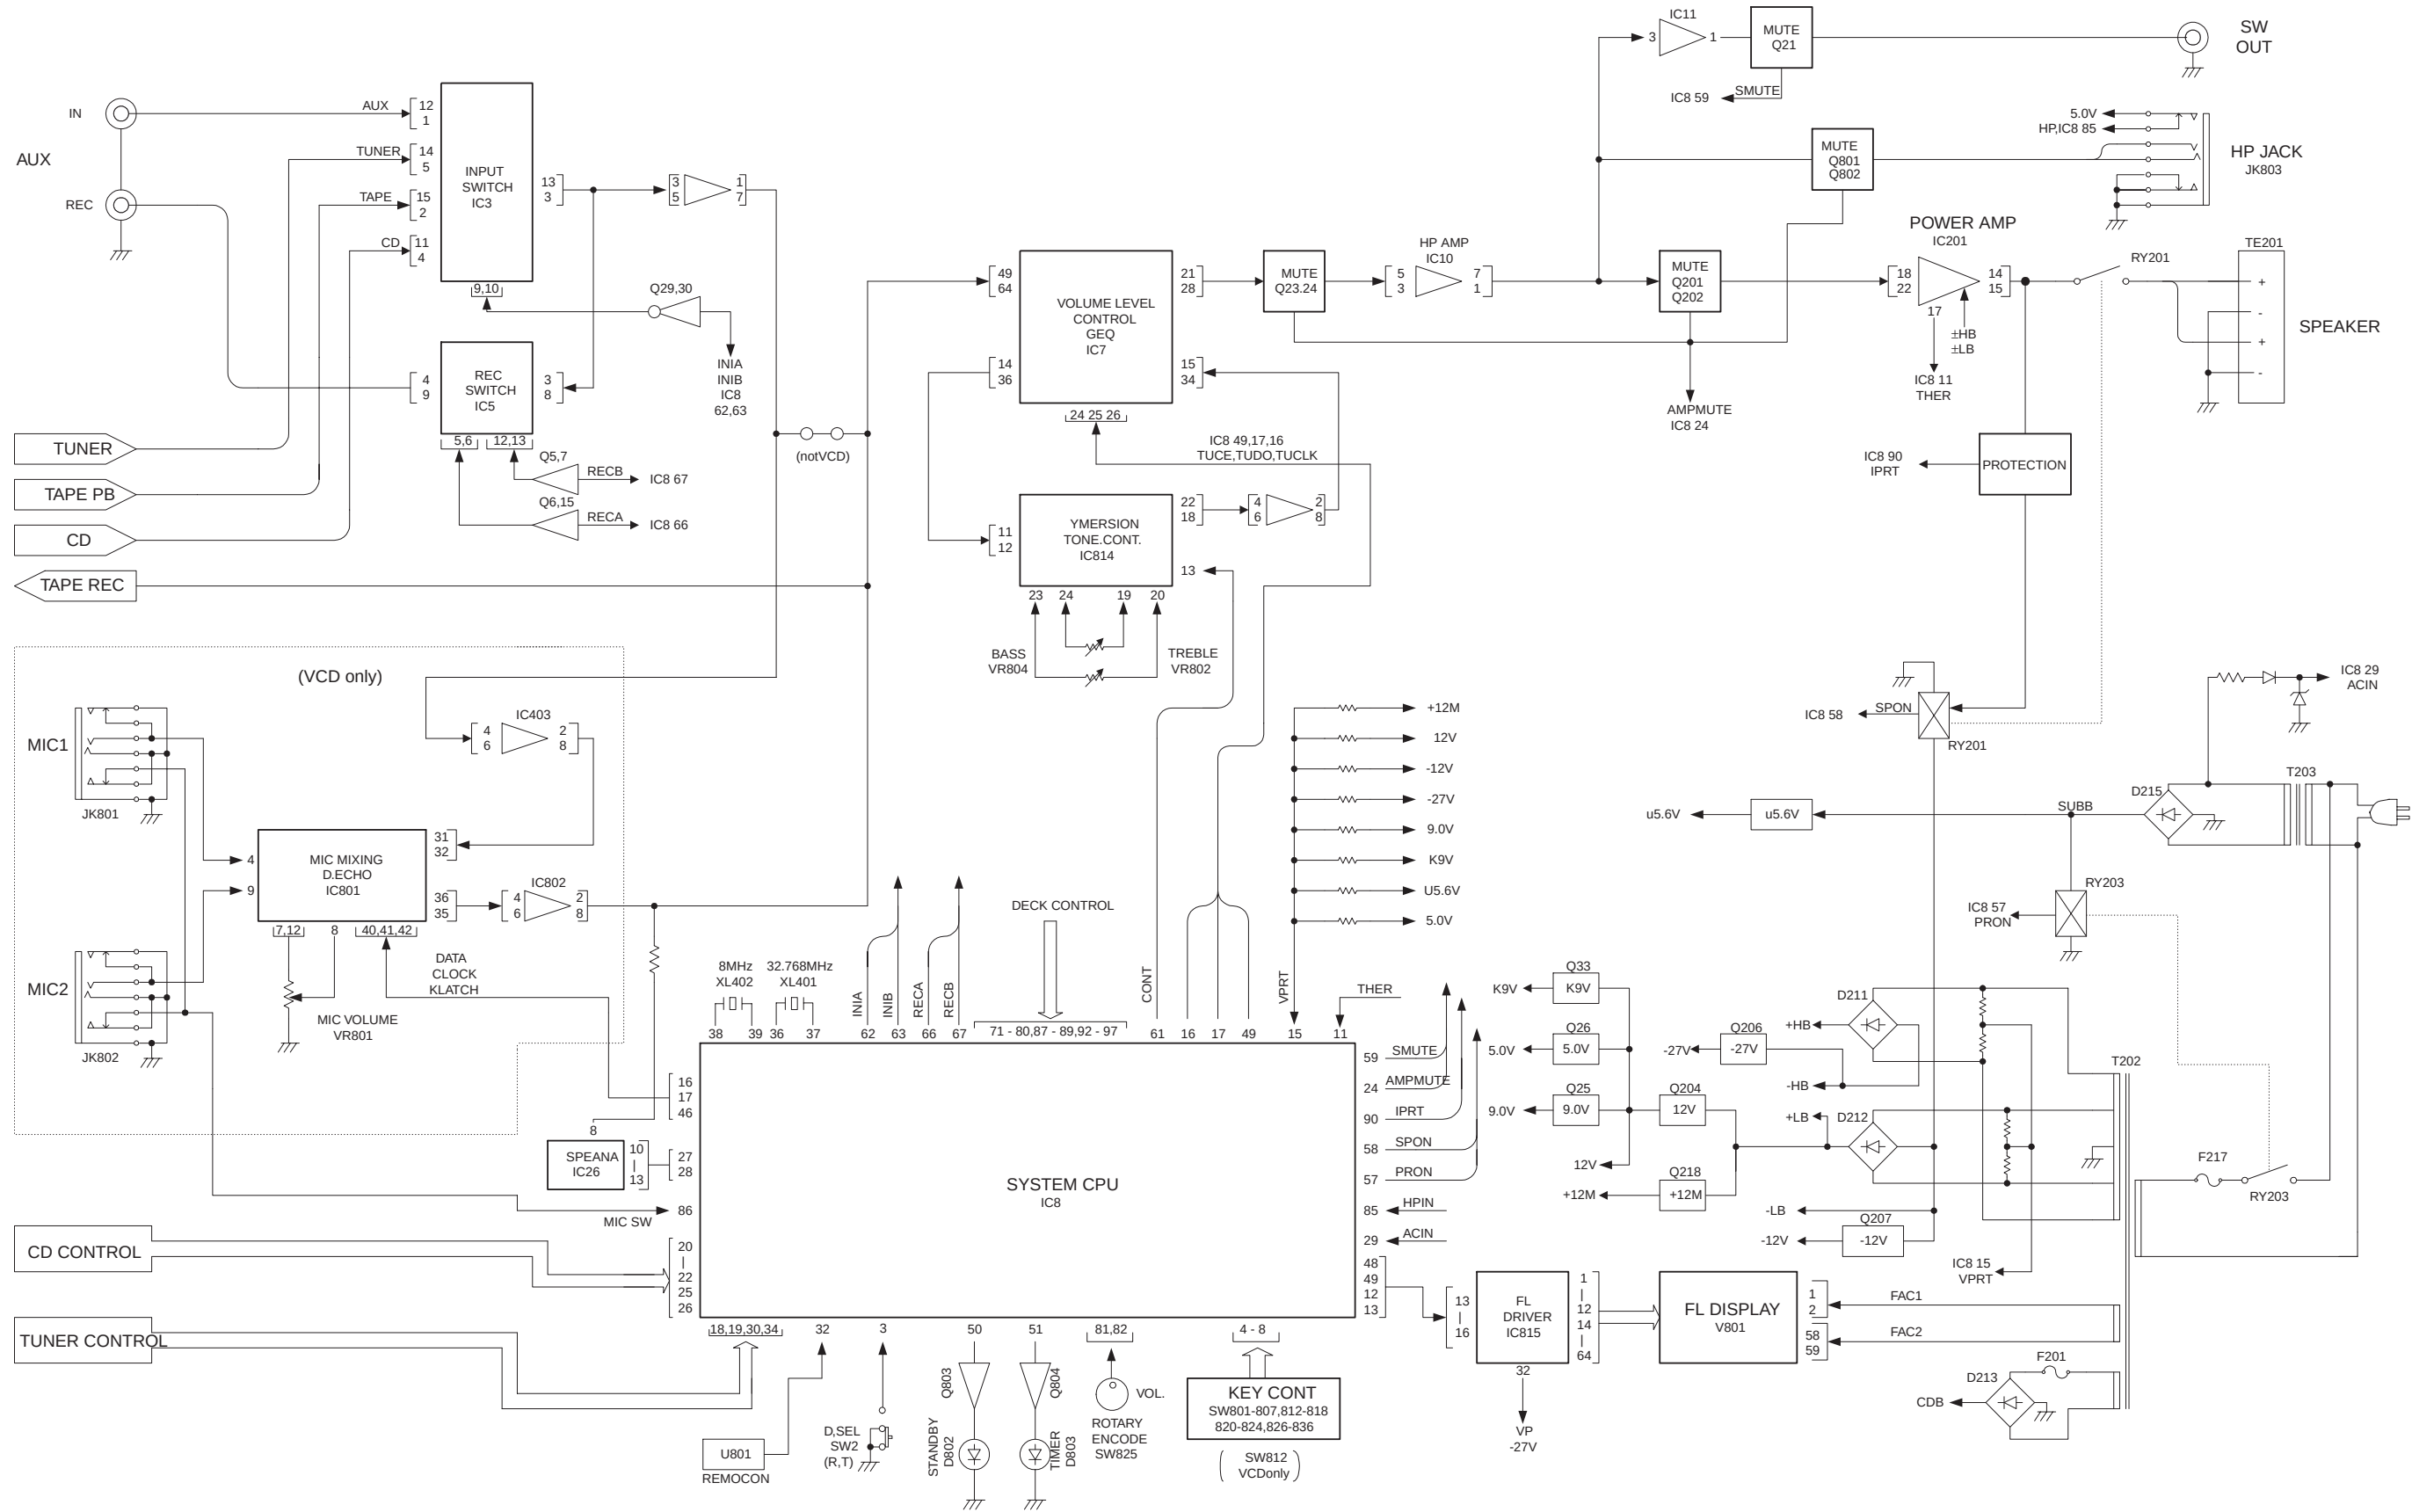


PRINTED CIRCUIT BOARD (Foil side)

P.C.B. TUNER
(Lead Type Device)

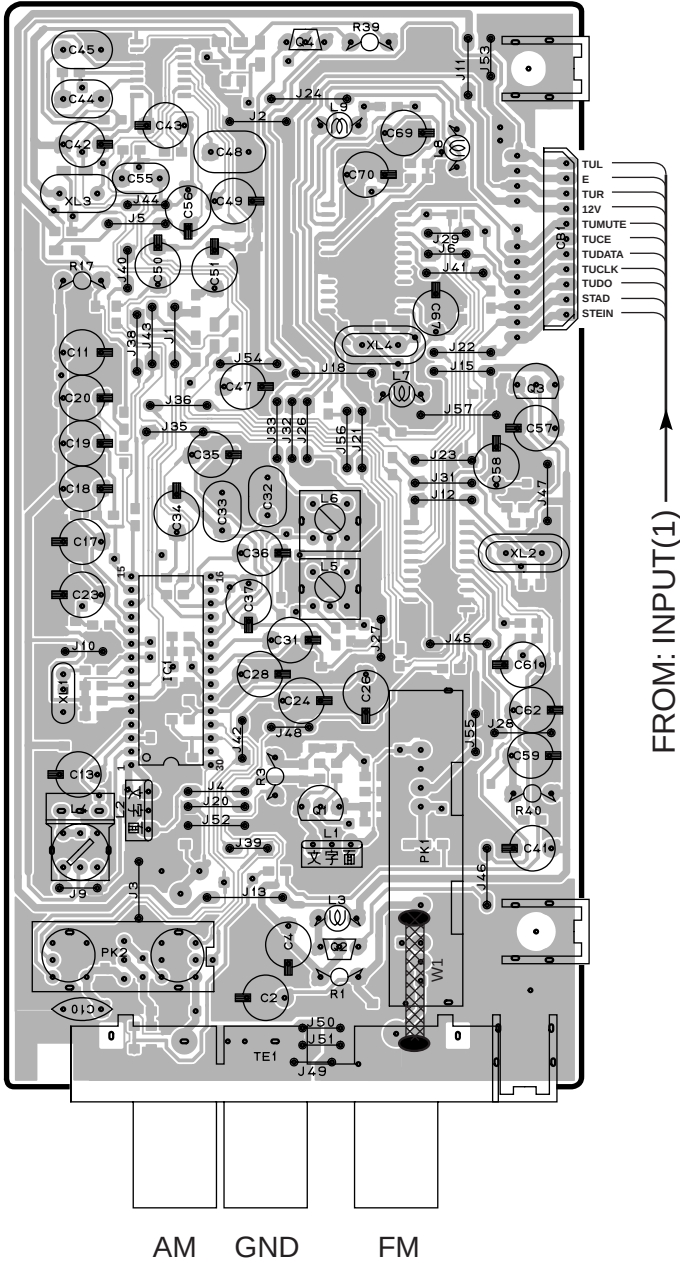

P.C.B. TUNER
(Surface Mount Device)

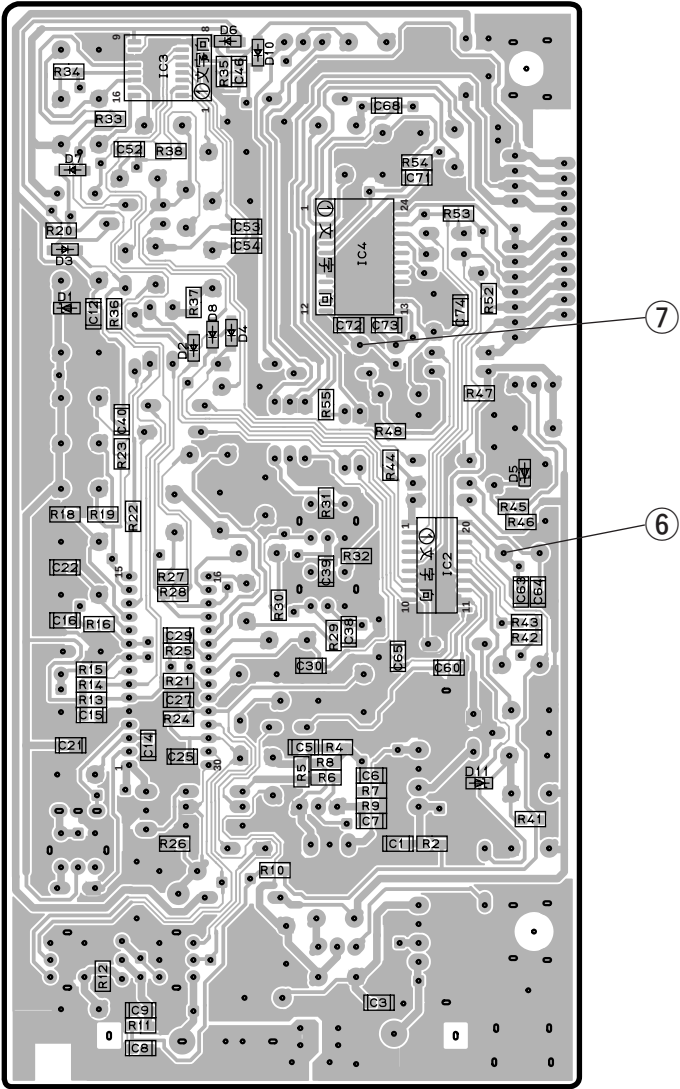


CIRCUIT CHANGES BY MARKET.


	U, C, R, T, L, A	B, G	J
X3	X	X	O
X4	X	O	X
IC3	X	X	O
IC4	X	O	X
Q4	X	X	O
D6 ~ 8, 10	X	X	O
L7 ~ 9	X	O	X
C68, 71 ~ 74	X	O	X
C46, 52 ~ 54	X	X	O
C29	O	O	X
C42 ~ 51, 55, 56	X	X	O
C67, 69, 70	X	O	X
R33 ~ 38	X	X	O
R54	X	O	X
R25	O	O	X
R39	X	X	O
J21	X	O	X
J1, 40, 44	X	X	O

O : USED
X : NOT USED

Point ⑥ (Pin20 of IC2)
V : 2V/div H : 0.1 μsec/div
DC range 1 : 1 probe





Point ⑦ (Pin12 of IC4)
V : 2V/div H : 0.1 μsec/div
DC range 1 : 1 probe




PRINTED CIRCUIT BOARD (Foil side)

GX-500 P.C.B. CD (Lead Type Device)


GX-500 P.C.B. CD (Surface Mount Device)

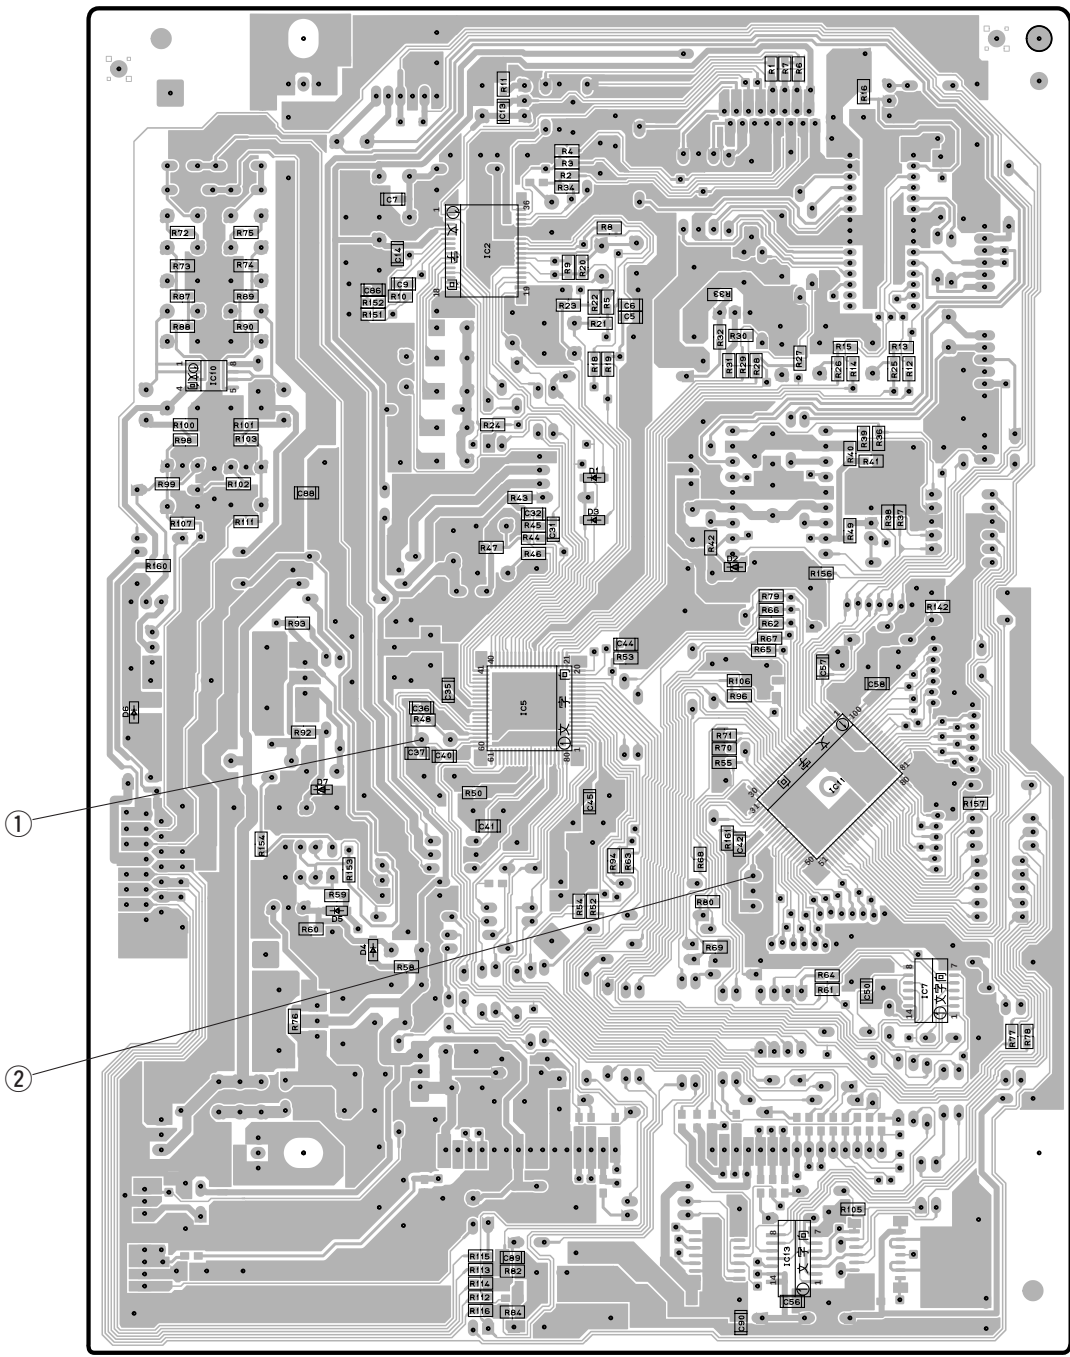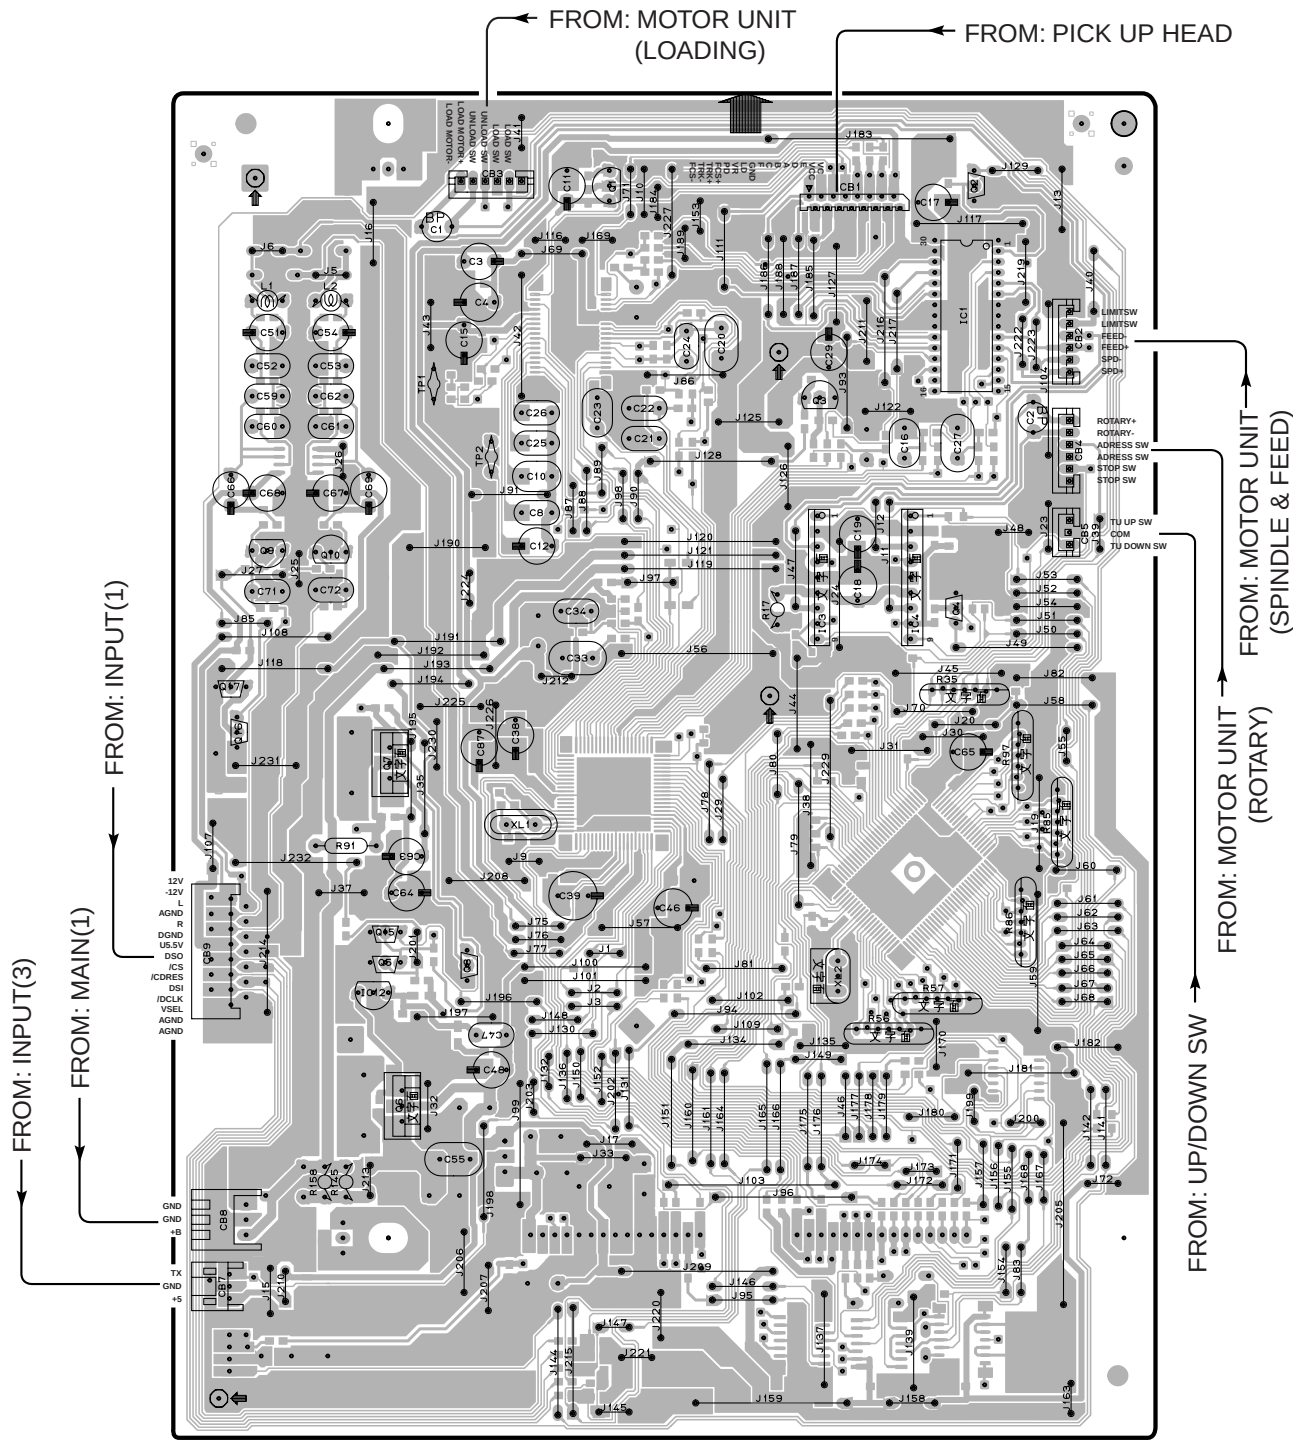



Point ① (Pin59 of IC5)
V : 5V/div H : 50 nsec/div
DC range 1 : 1 probe




Point ② (Pin39 of IC11)
V : 2V/div H : 50 nsec/div
DC range 1 : 1 probe




GX-500VCD P.C.B. VCD(1) (Lead Type Device)

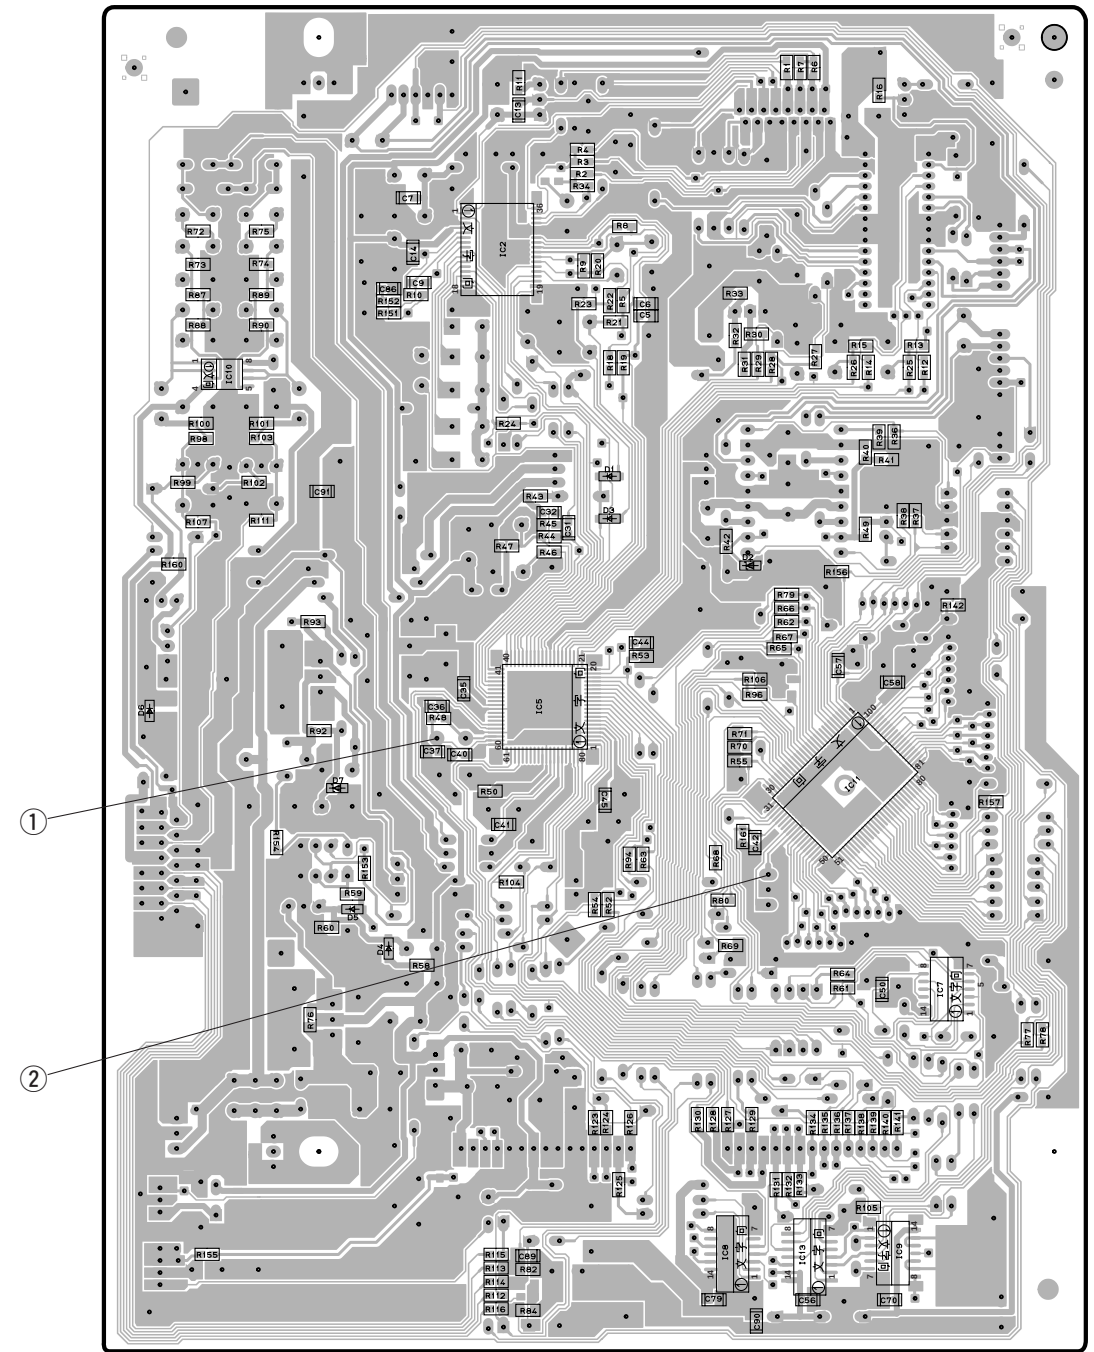

GX-500VCD P.C.B. VCD(2)

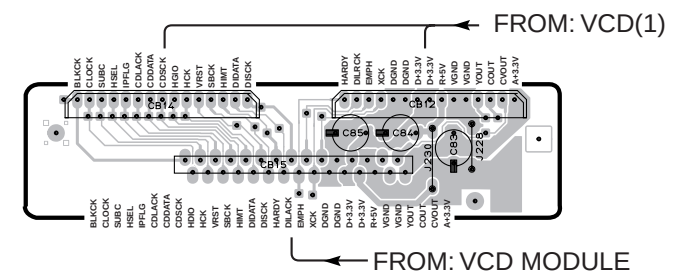


Point ② (Pin39 of IC11)
V : 2V/div H : 50 nsec/div
DC range 1 : 1 probe




6

PRINTED CIRCUIT BOARD (Foil side)


GX-500 P.C.B. INPUT(1) (Surface Mount Device)

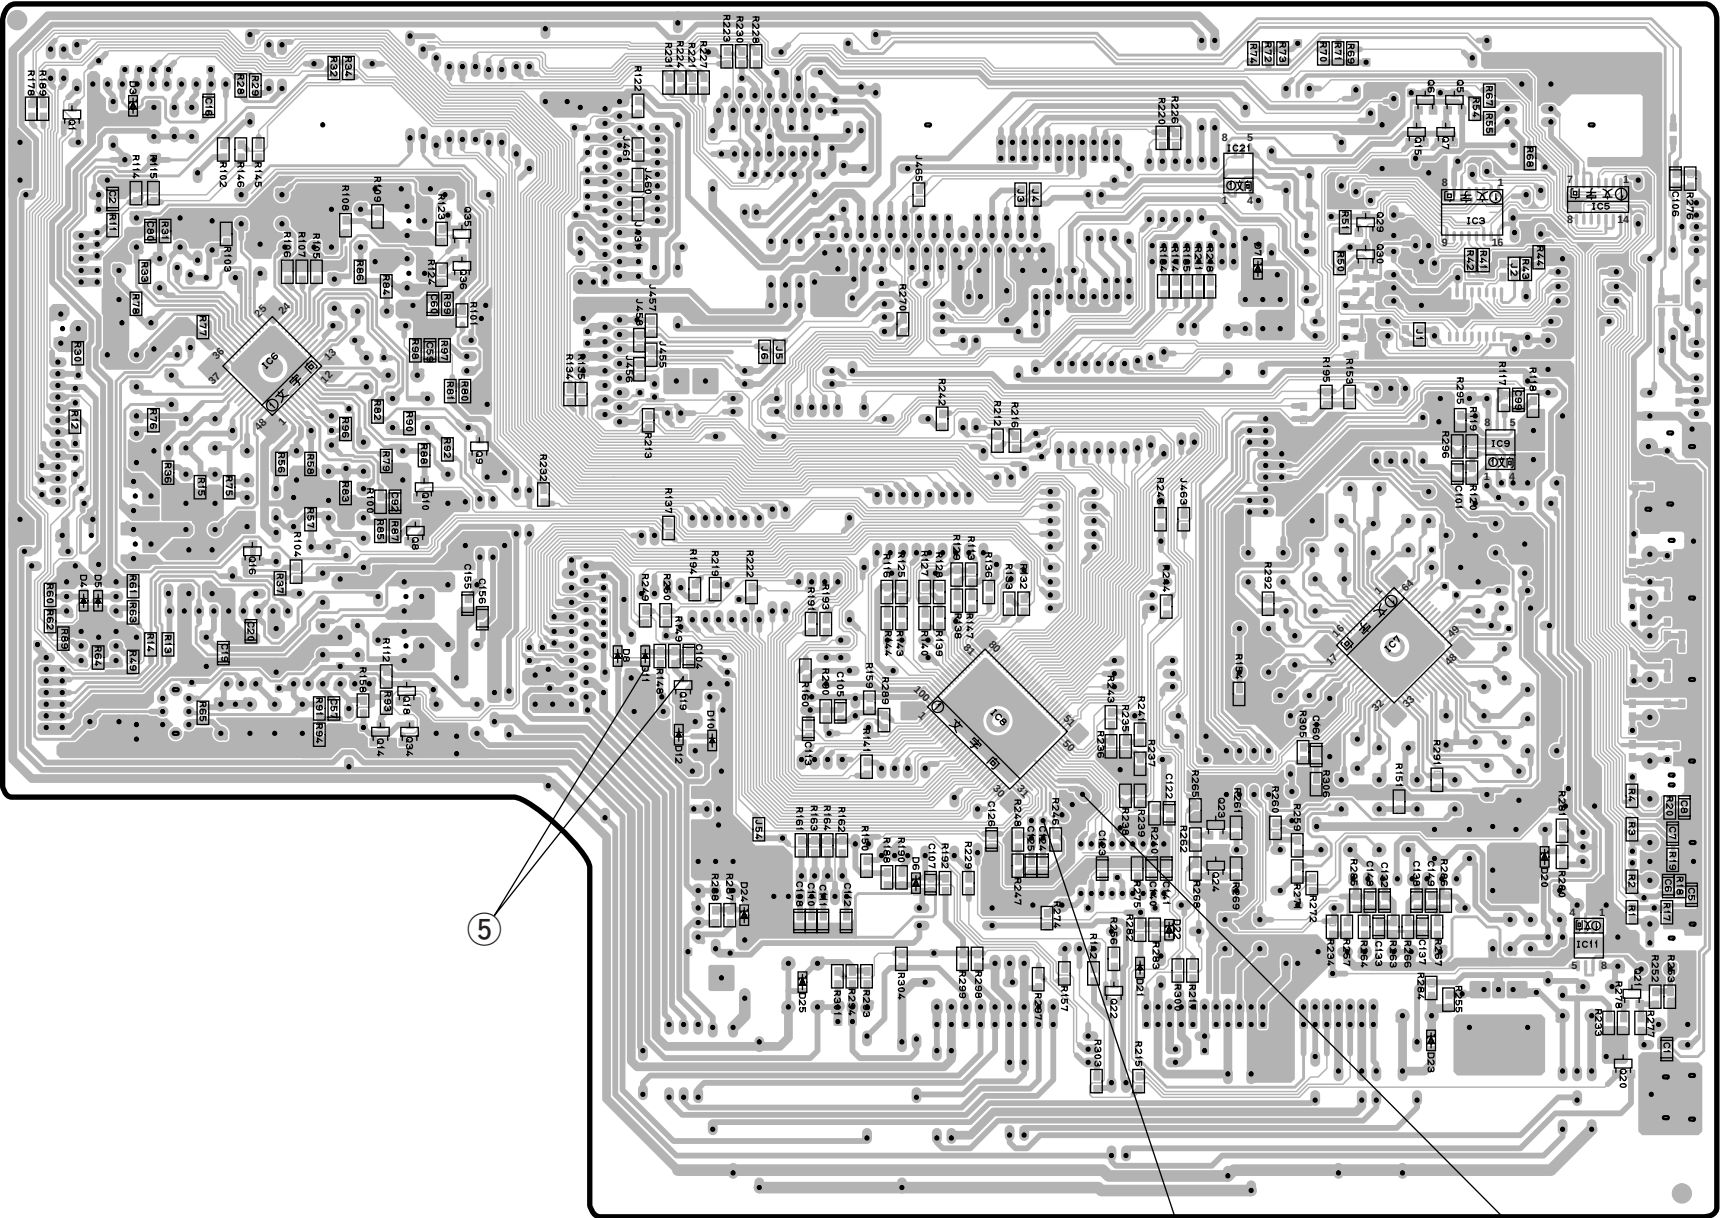


Point ③ (Pin37 of IC8)
V : 2V/div H : 20 μ sec/div
DC range 1 : 1 probe



Point ④ (Pin39 of IC8)
V : 2V/div H : 50 nsec/div
DC range 1 : 1 probe



Point ⑤
CH1 : Collector of Q19 V : 2V/div (CH1)
CH2 : Anode of D11 V : 2V/div (CH2)
H : 0.5 sec/div DC range 1 : 1 probe



With the POWER ON, disconnect the A/C power cord. Reconnect the A/C power cord and the above waveforms will start.



Disconnect the power cord from the AC outlet.

■ PRINTED CIRCUIT BOARD (Foil side)


GX-500VCD P.C.B. INPUT(2)

Lead Type Device

FROM : INPUT(1)

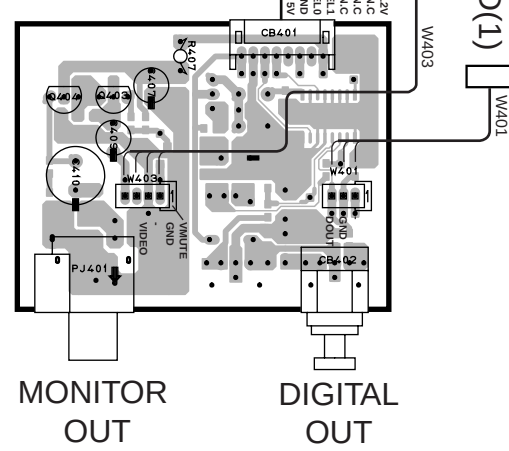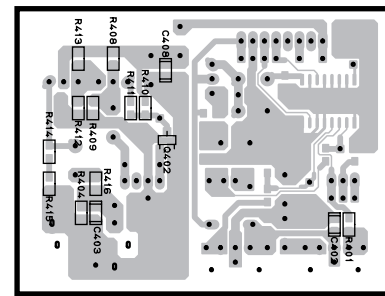
GX-500VCD P.C.B. INPUT(2)
(Surface Mount Device)

GX-500VCD P.C.B. INPUT(1) (Lead Type Device)

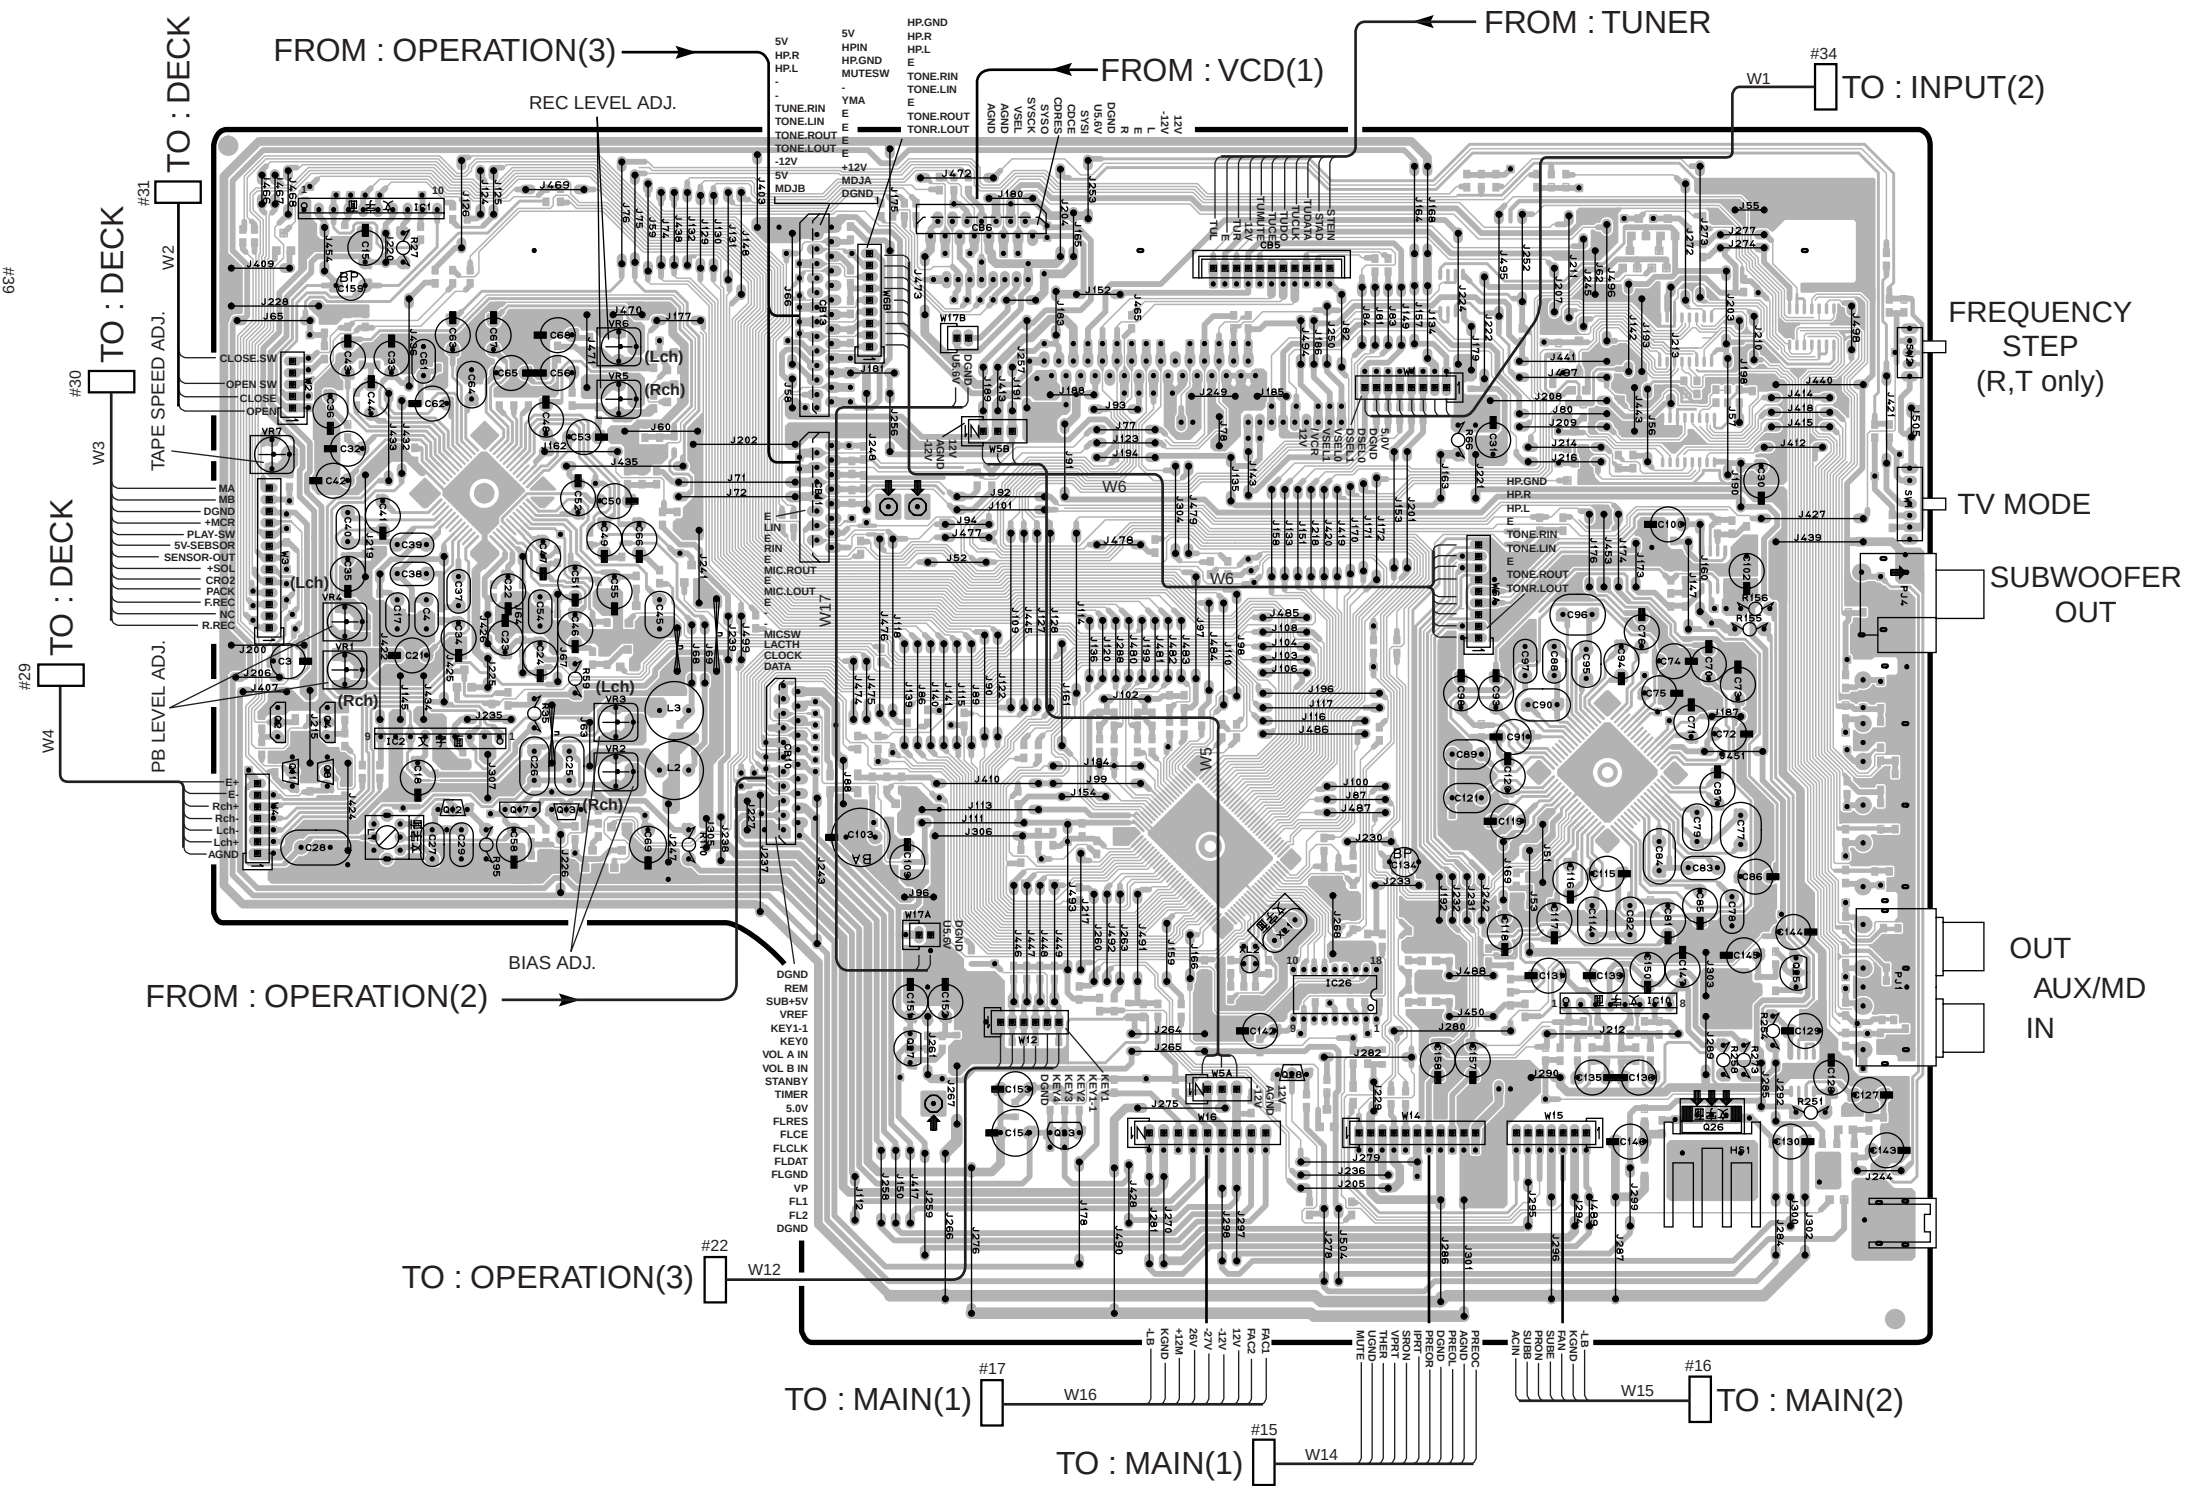


PRINTED CIRCUIT BOARD (Foil side)


GX-500VCD P.C.B. INPUT(1) (Surface Mount Device)

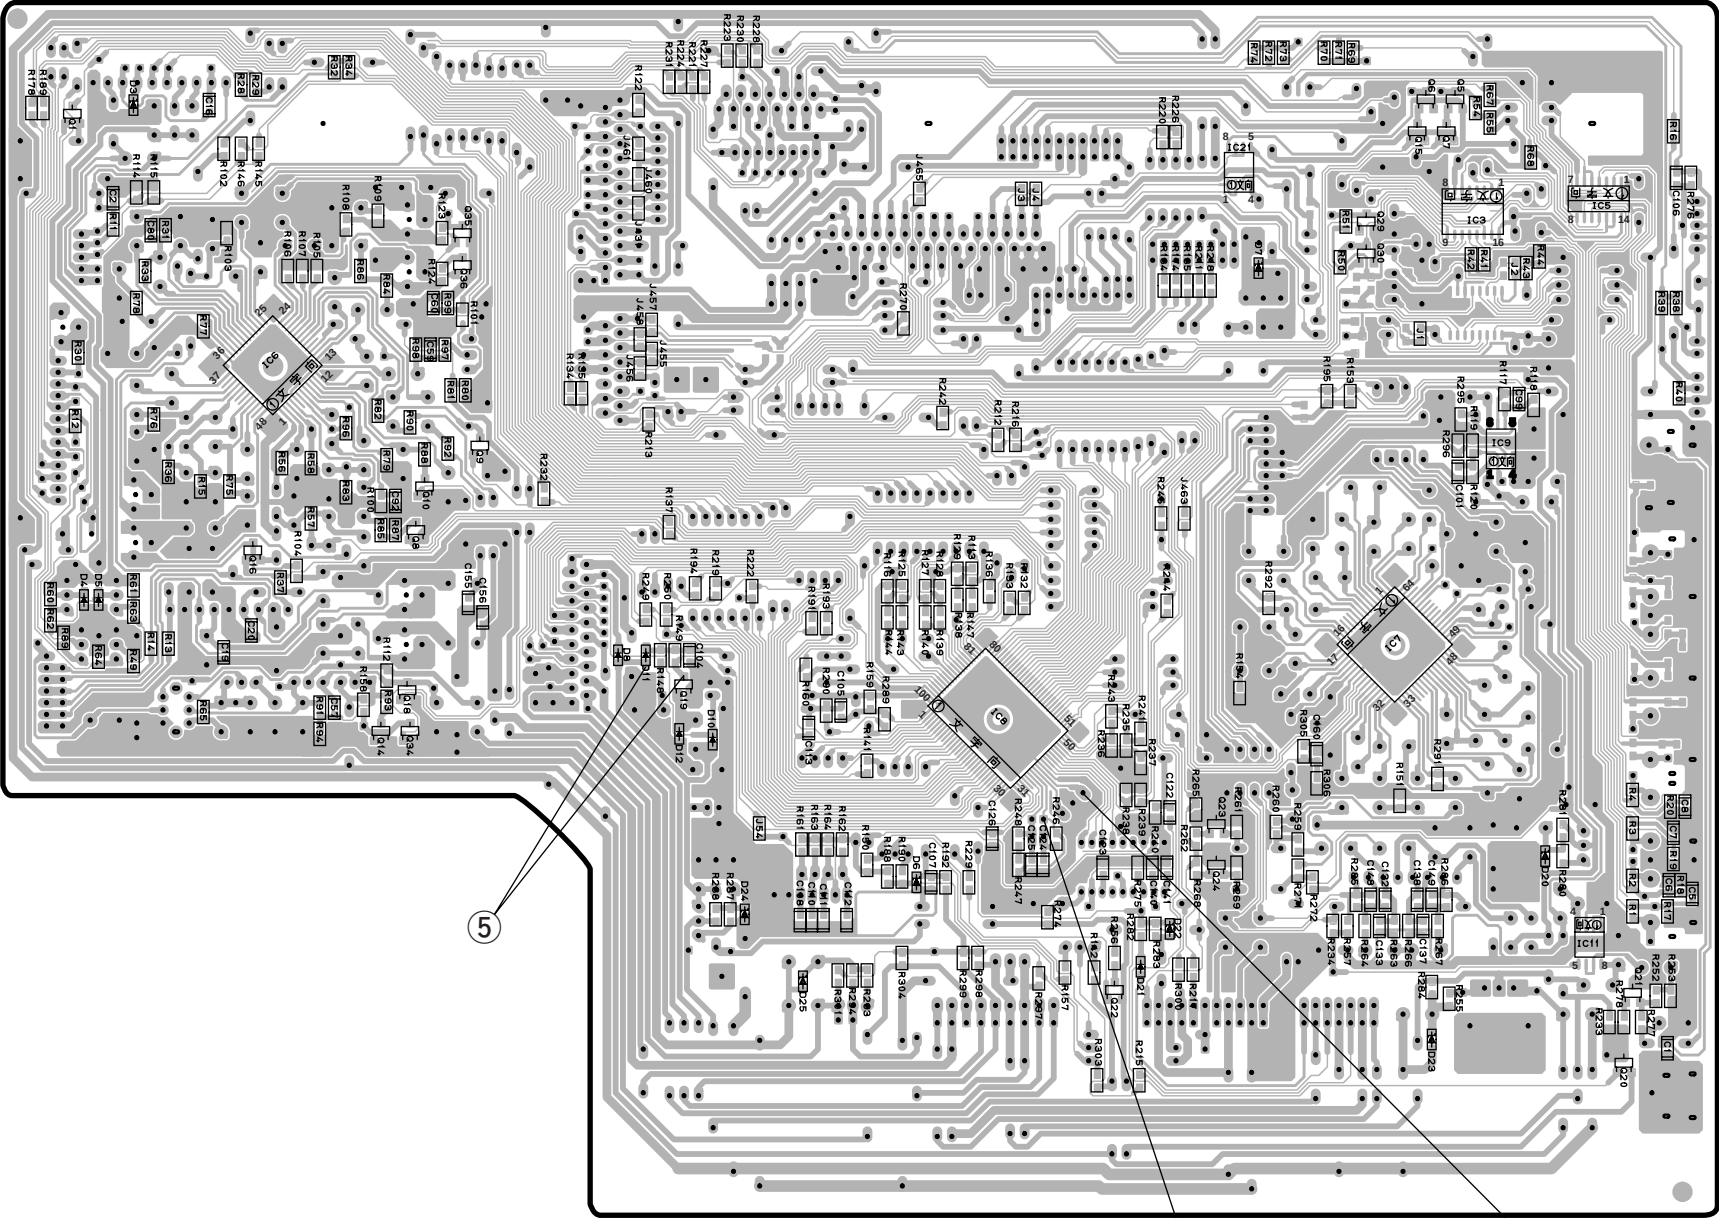

Point ③ (Pin37 of IC8)
V : 2V/div H : 20 μsec/div
DC range 1 : 1 probe




Point ④ (Pin39 of IC8)
V : 2V/div H : 50 nsec/div
DC range 1 : 1 probe



Point ⑤
CH1 : Collector of Q19 V : 2V/div (CH1)
CH2 : Anode of D11 V : 2V/div (CH2)

H : 0.5 sec/div DC range 1 : 1 probe

(This waveform is not available by pushing the power switch ON and OFF.)




With the POWER ON, disconnect the A/C power cord. Reconnect the A/C power cord and the above waveforms will start.


Disconnect the power cord from the AC outlet.

PRINTED CIRCUIT BOARD (Foil side)


P.C.B. OPERATION(1) (Lead Type Device)

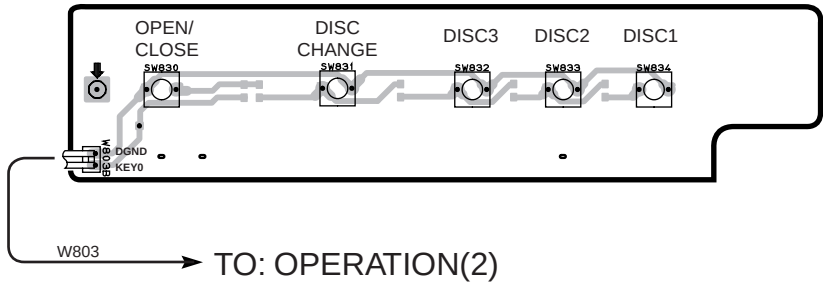


P.C.B. OPERATION(1) (Surface Mount Device)

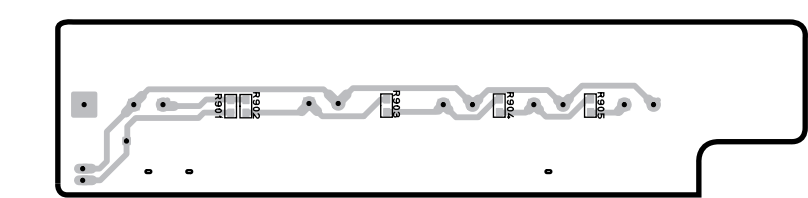


P.C.B. OPERATION(4) (Lead Type Device)

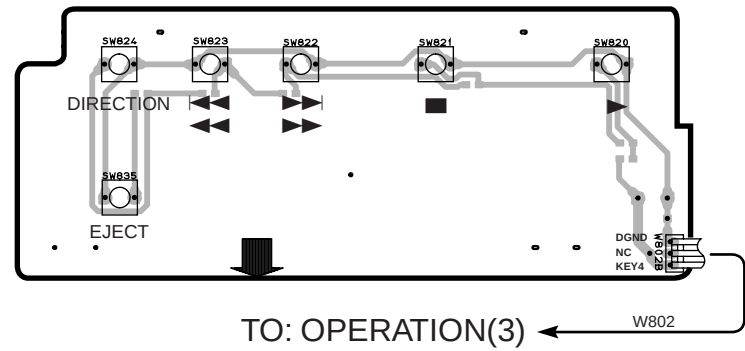


P.C.B. OPERATION(4) (Surface Mount Device)

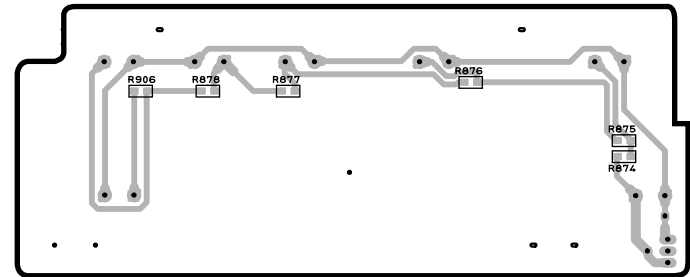

P.C.B. OPERATION(2) (Lead Type Device)

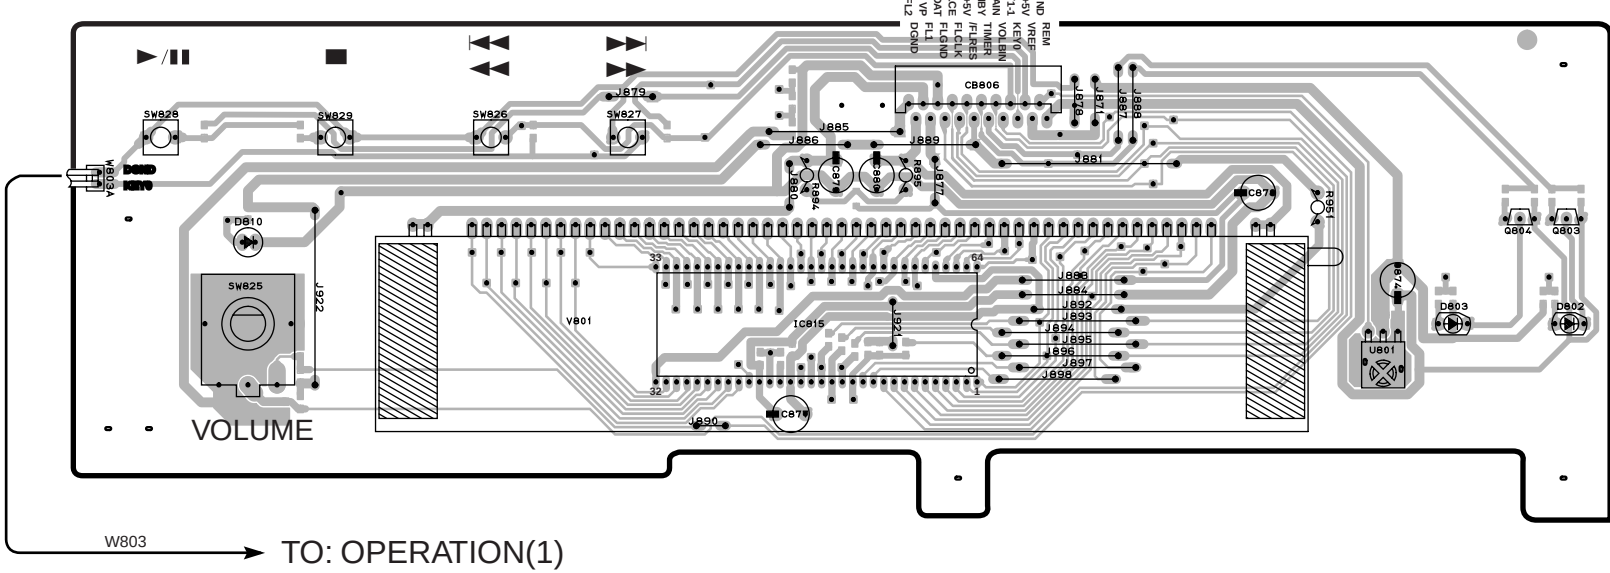


P.C.B. OPERATION(2) (Surface Mount Device)

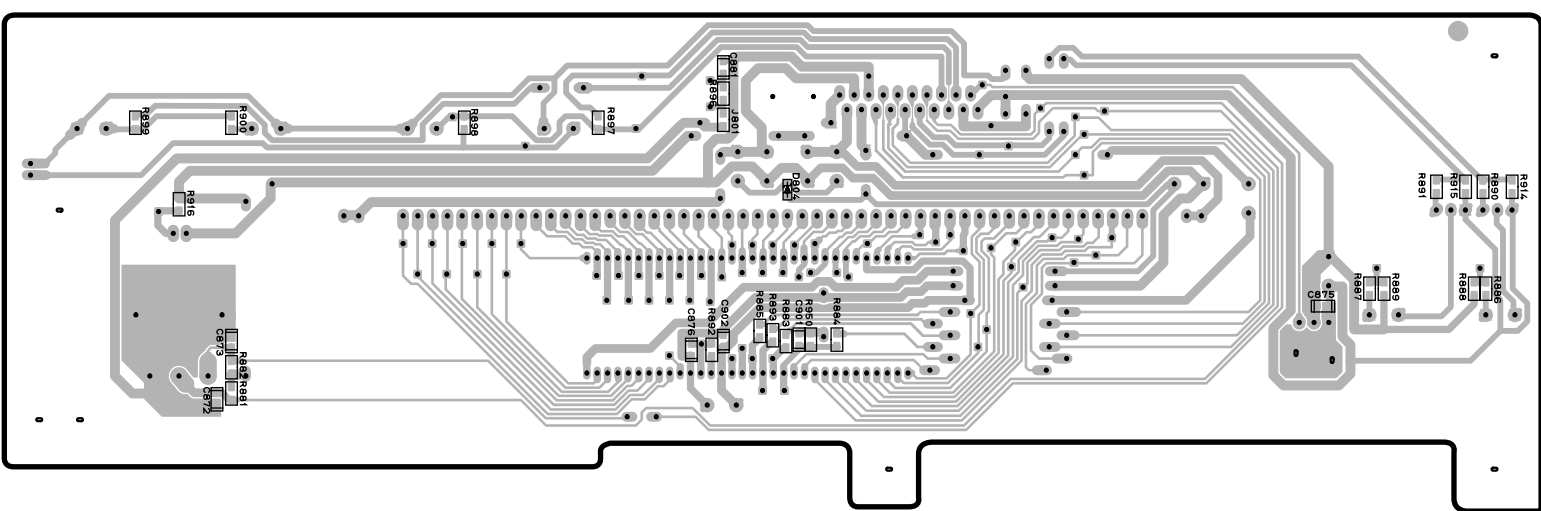


■ PRINTED CIRCUIT BOARD (Foil side)

GX-500 P.C.B. OPERATION(3) (Lead Type Device)

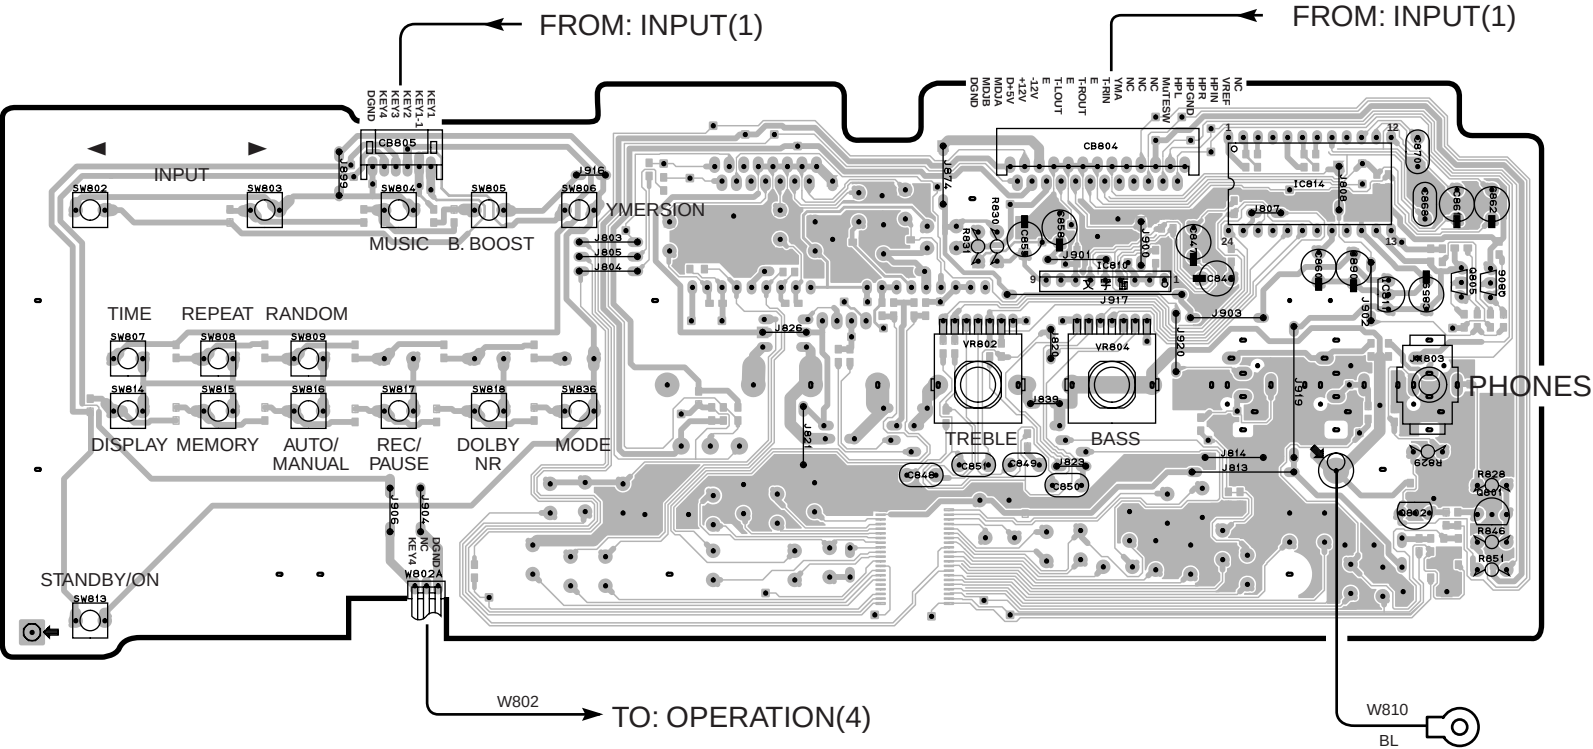


GX-500 P.C.B. OPERATION(3) (Surface Mount Device)

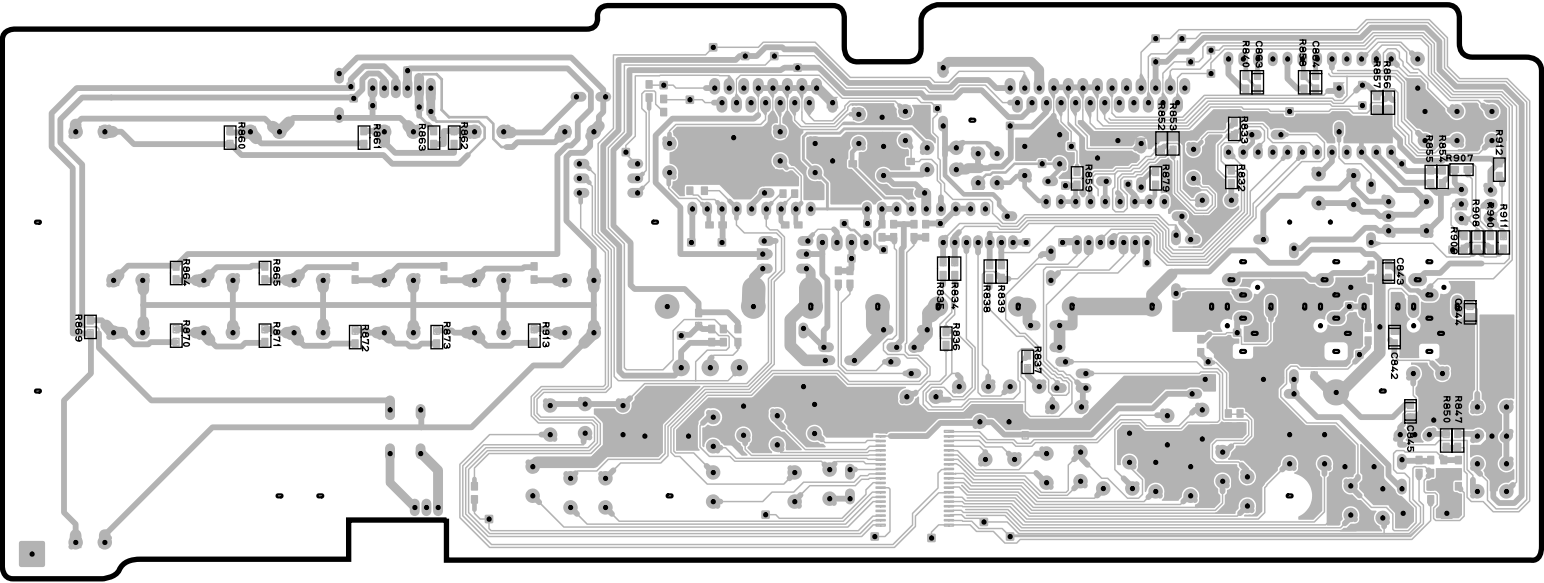


PRINTED CIRCUIT BOARD (Foil side)

GX-500VCD P.C.B. OPERATION(3) (Lead Type Device)

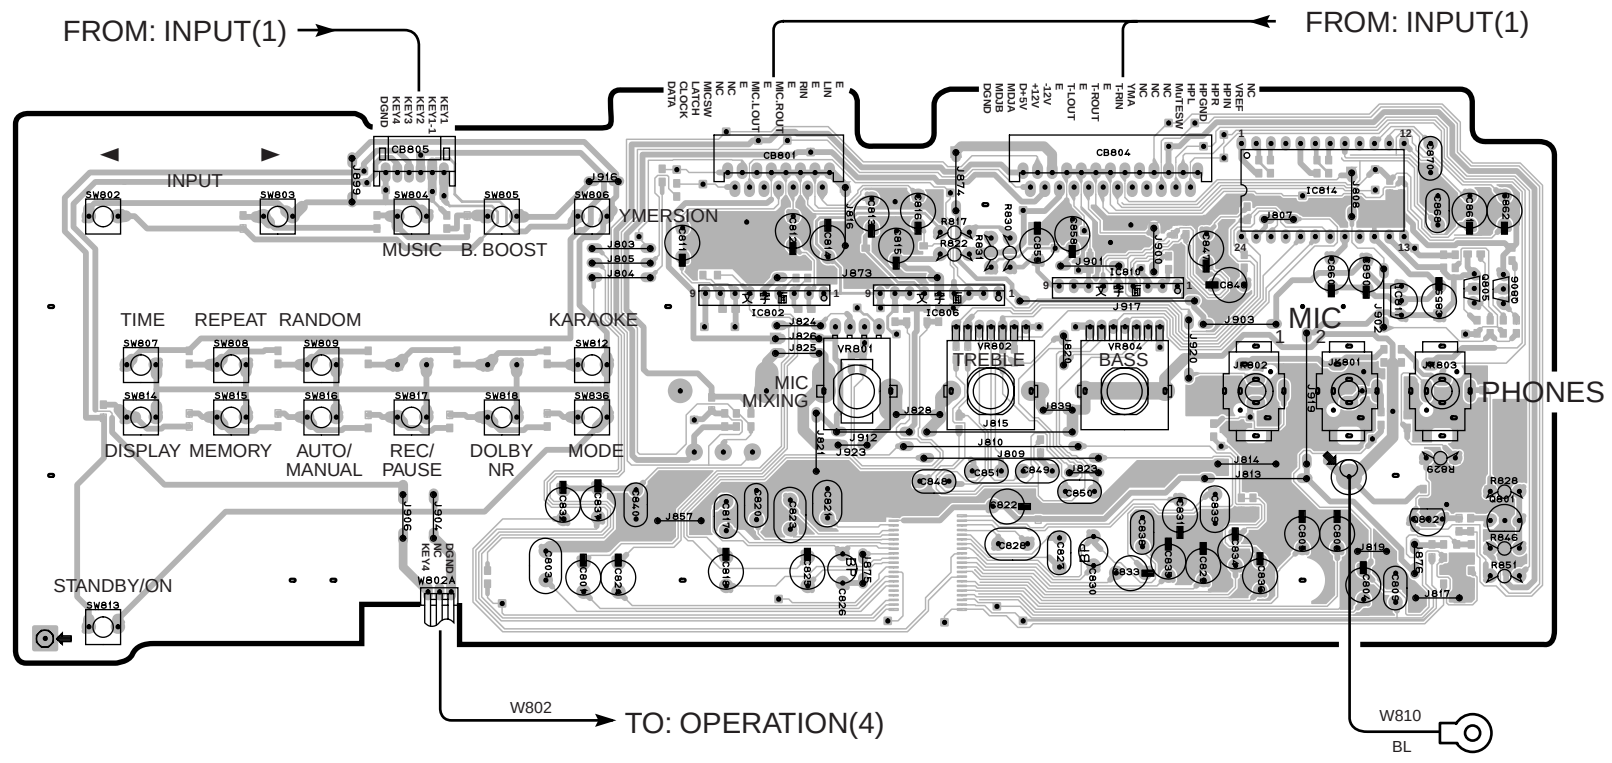


GX-500VCD P.C.B. OPERATION(3) (Surface Mount Device)

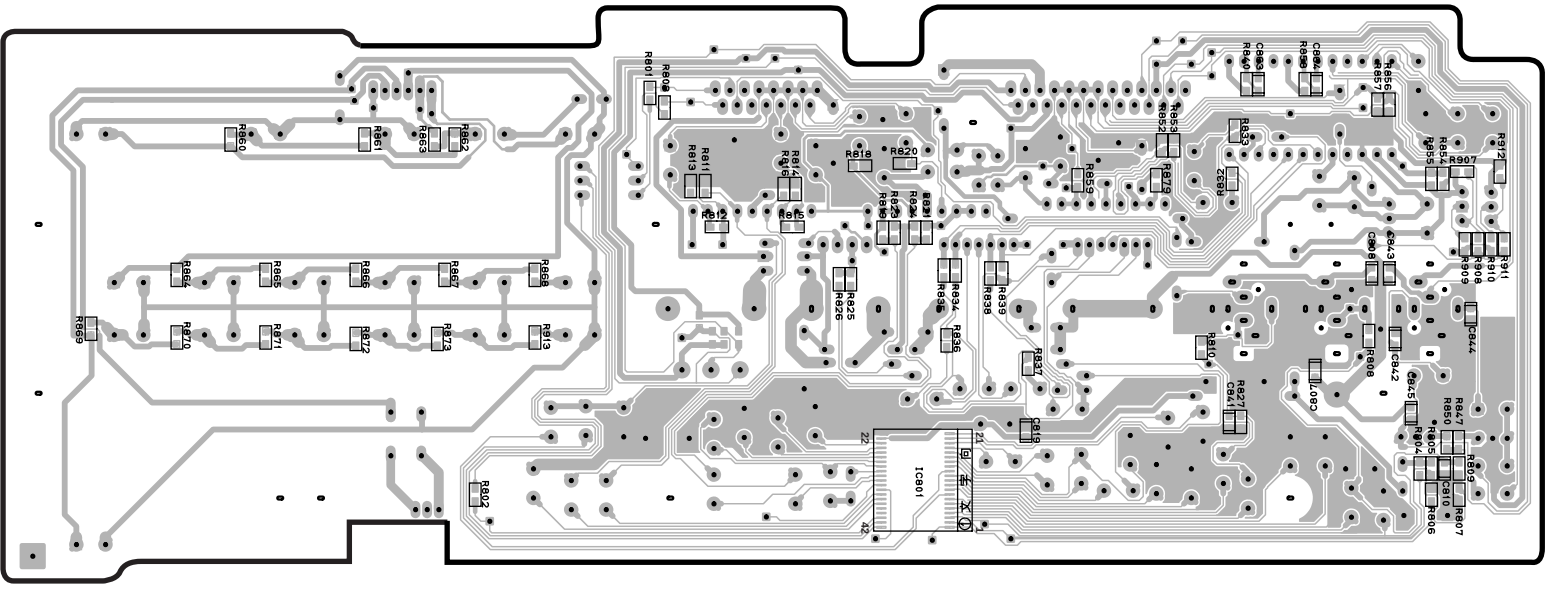


GX-500/GX-500VCD

■ PRINTED CIRCUIT BOARD (Foil side)

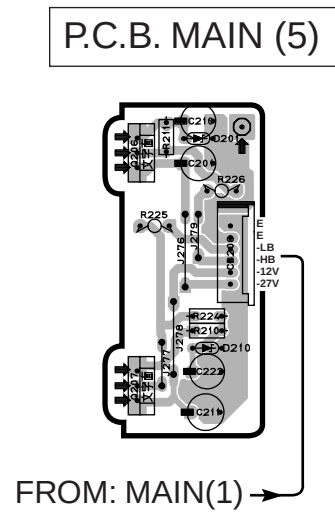

■ SCHEMATIC DIAGRAM (GX-500 CD)

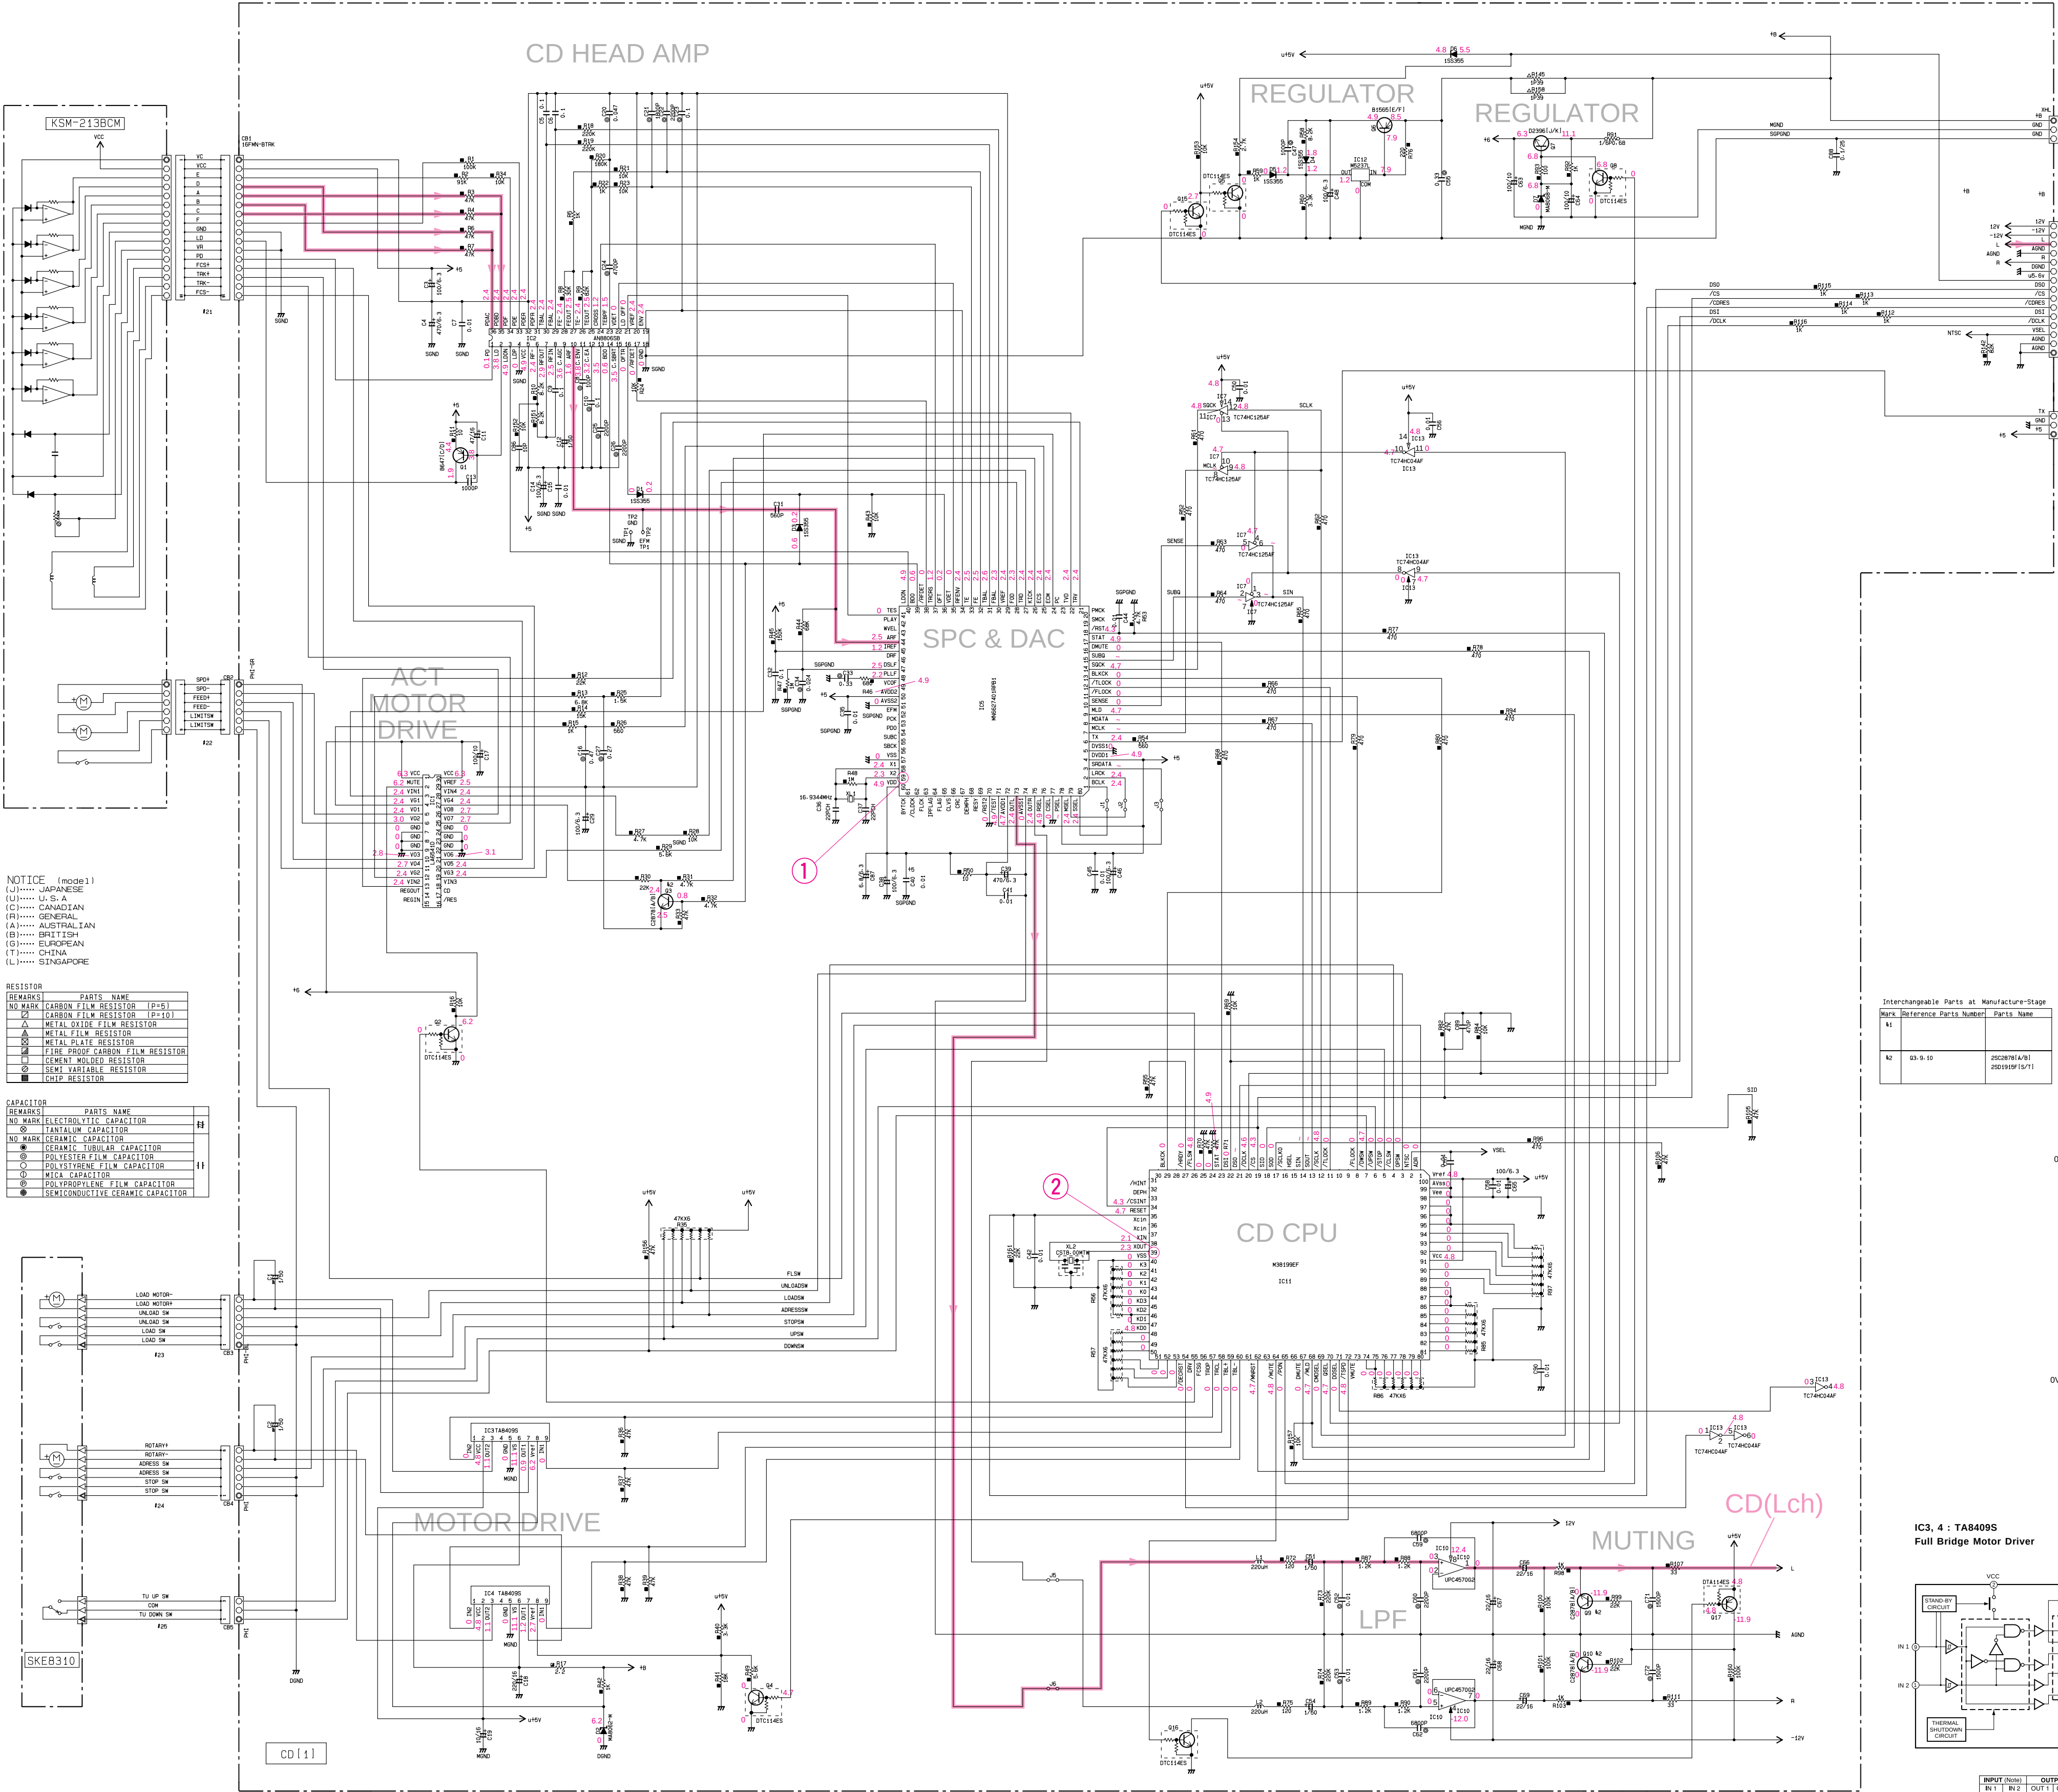


NOTICE (mode1)
(J)..... JAPANESE
(U)..... U.S.A
(C)..... CANADIAN
(R)..... GENERAL
(A)..... AUSTRALIAN
(B)..... BRITISH
(G)..... EUROPEAN
(T)..... CHINA
(L)..... SINGAPORE

REMARKS	PARTS NAME
NO MARK CARBON FILM RESISTOR (P=)	CARBON FILM RESISTOR (P=)
NO MARK CARBON FILM RESISTOR (P=)	CARBON FILM RESISTOR (P=)
NO MARK CARBON FILM RESISTOR (P=)	CARBON FILM RESISTOR (P=)
NO MARK CARBON FILM RESISTOR (P=)	CARBON FILM RESISTOR (P=)
NO MARK CARBON FILM RESISTOR (P=)	CARBON FILM RESISTOR (P=)
NO MARK CARBON FILM RESISTOR (P=)	CARBON FILM RESISTOR (P=)
NO MARK CARBON FILM RESISTOR (P=)	CARBON FILM RESISTOR (P=)
NO MARK CARBON FILM RESISTOR (P=)	CARBON FILM RESISTOR (P=)
NO MARK CARBON FILM RESISTOR (P=)	CARBON FILM RESISTOR (P=)
NO MARK CARBON FILM RESISTOR (P=)	CARBON FILM RESISTOR (P=)


REMARKS	PARTS NAME
NO MARK ELECTROLYTIC CAPACITOR	ELECTROLYTIC CAPACITOR
NO MARK ELECTROLYTIC CAPACITOR	ELECTROLYTIC CAPACITOR
NO MARK ELECTROLYTIC CAPACITOR	ELECTROLYTIC CAPACITOR
NO MARK ELECTROLYTIC CAPACITOR	ELECTROLYTIC CAPACITOR
NO MARK ELECTROLYTIC CAPACITOR	ELECTROLYTIC CAPACITOR
NO MARK ELECTROLYTIC CAPACITOR	ELECTROLYTIC CAPACITOR
NO MARK ELECTROLYTIC CAPACITOR	ELECTROLYTIC CAPACITOR
NO MARK ELECTROLYTIC CAPACITOR	ELECTROLYTIC CAPACITOR
NO MARK ELECTROLYTIC CAPACITOR	ELECTROLYTIC CAPACITOR
NO MARK ELECTROLYTIC CAPACITOR	ELECTROLYTIC CAPACITOR

Mark	Reference Parts Number	Parts Name
A1	03-0-10	2820N/A1/91 SMD 100V 10/11
A2		


Point ① (Pin59 of IC5)
V : 5V/div H : 50 nsec/div
DC range 1 : 1 probe

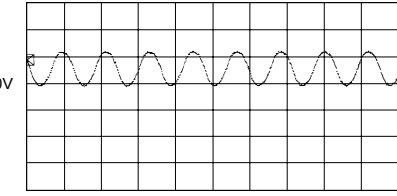


Point ② (Pin39 of IC11)
V : 2V/div H : 50 nsec/div
DC range 1 : 1 probe

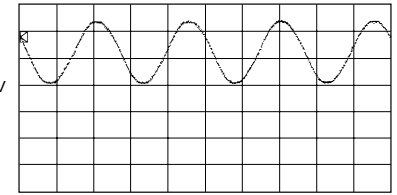


IC2 : AN8803SB
Digital Servo Head Amp

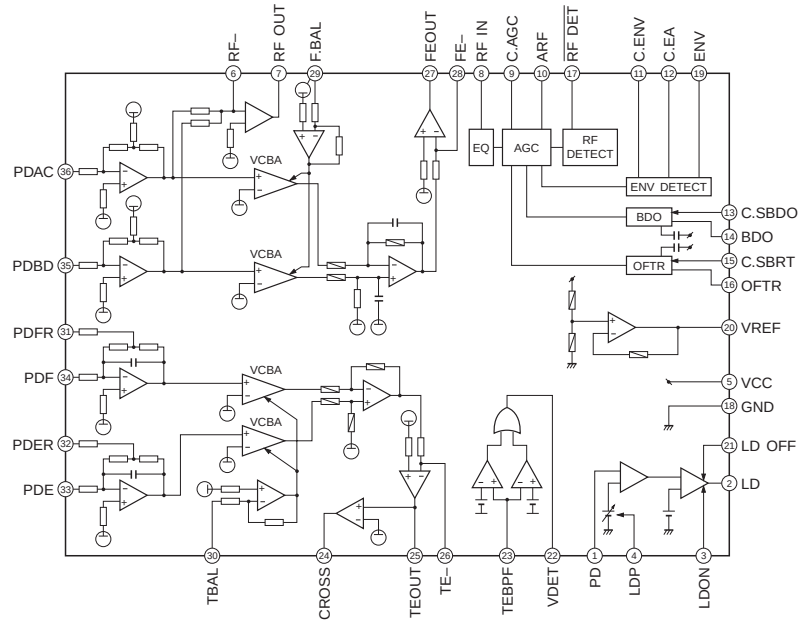


IC1 : LA6541D
4 Channel BTL Driver

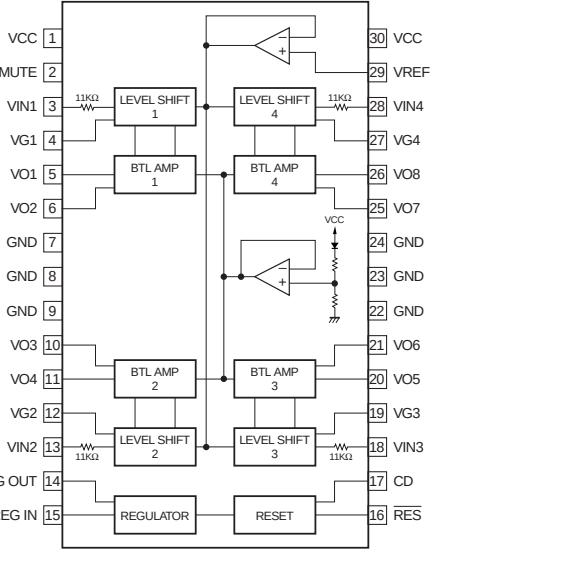


IC7, 9 : TC74HC125AF
Quad 3 State Bus Buffers

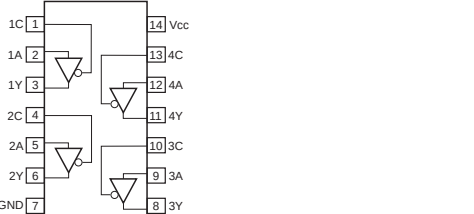


IC13 : TC74HC04AF
Hex Inverters

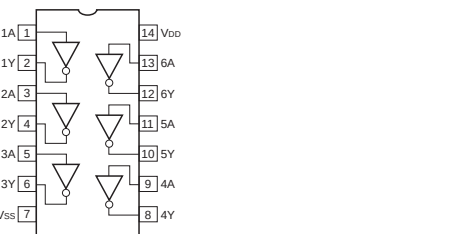


IC8 : TC74VHC14F
Hex Schmitt Trigger Inverters

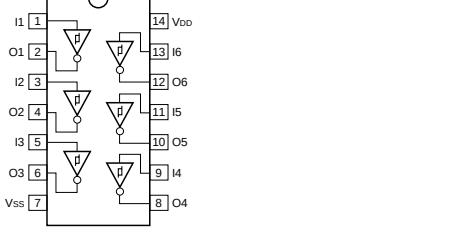

IC10 : μPC4570G2
Dual OP-Amp

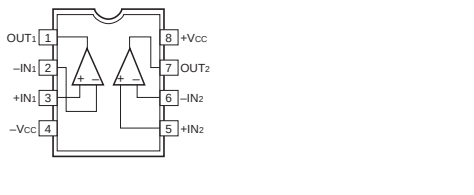


IC3, 4 : TA8409S
Full Bridge Motor Driver

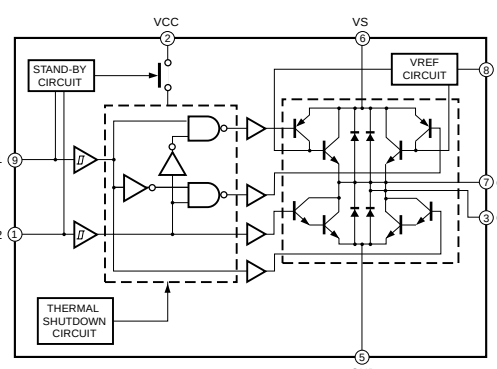


INPUT (mm)	OUTPUT	MODE
IN1 IN2	OUT1 OUT2	STOP
0 0	0 0	STOP
0 1	0 0	STOP
1 0	0 0	STOP
1 1	0 0	STOP

* All voltage are measured with a 10MD/V DC electric volt meter.
* Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.
* Schematic diagram is subject to change without notice.

SCHEMATIC DIAGRAM (GX-500VCD VCD)

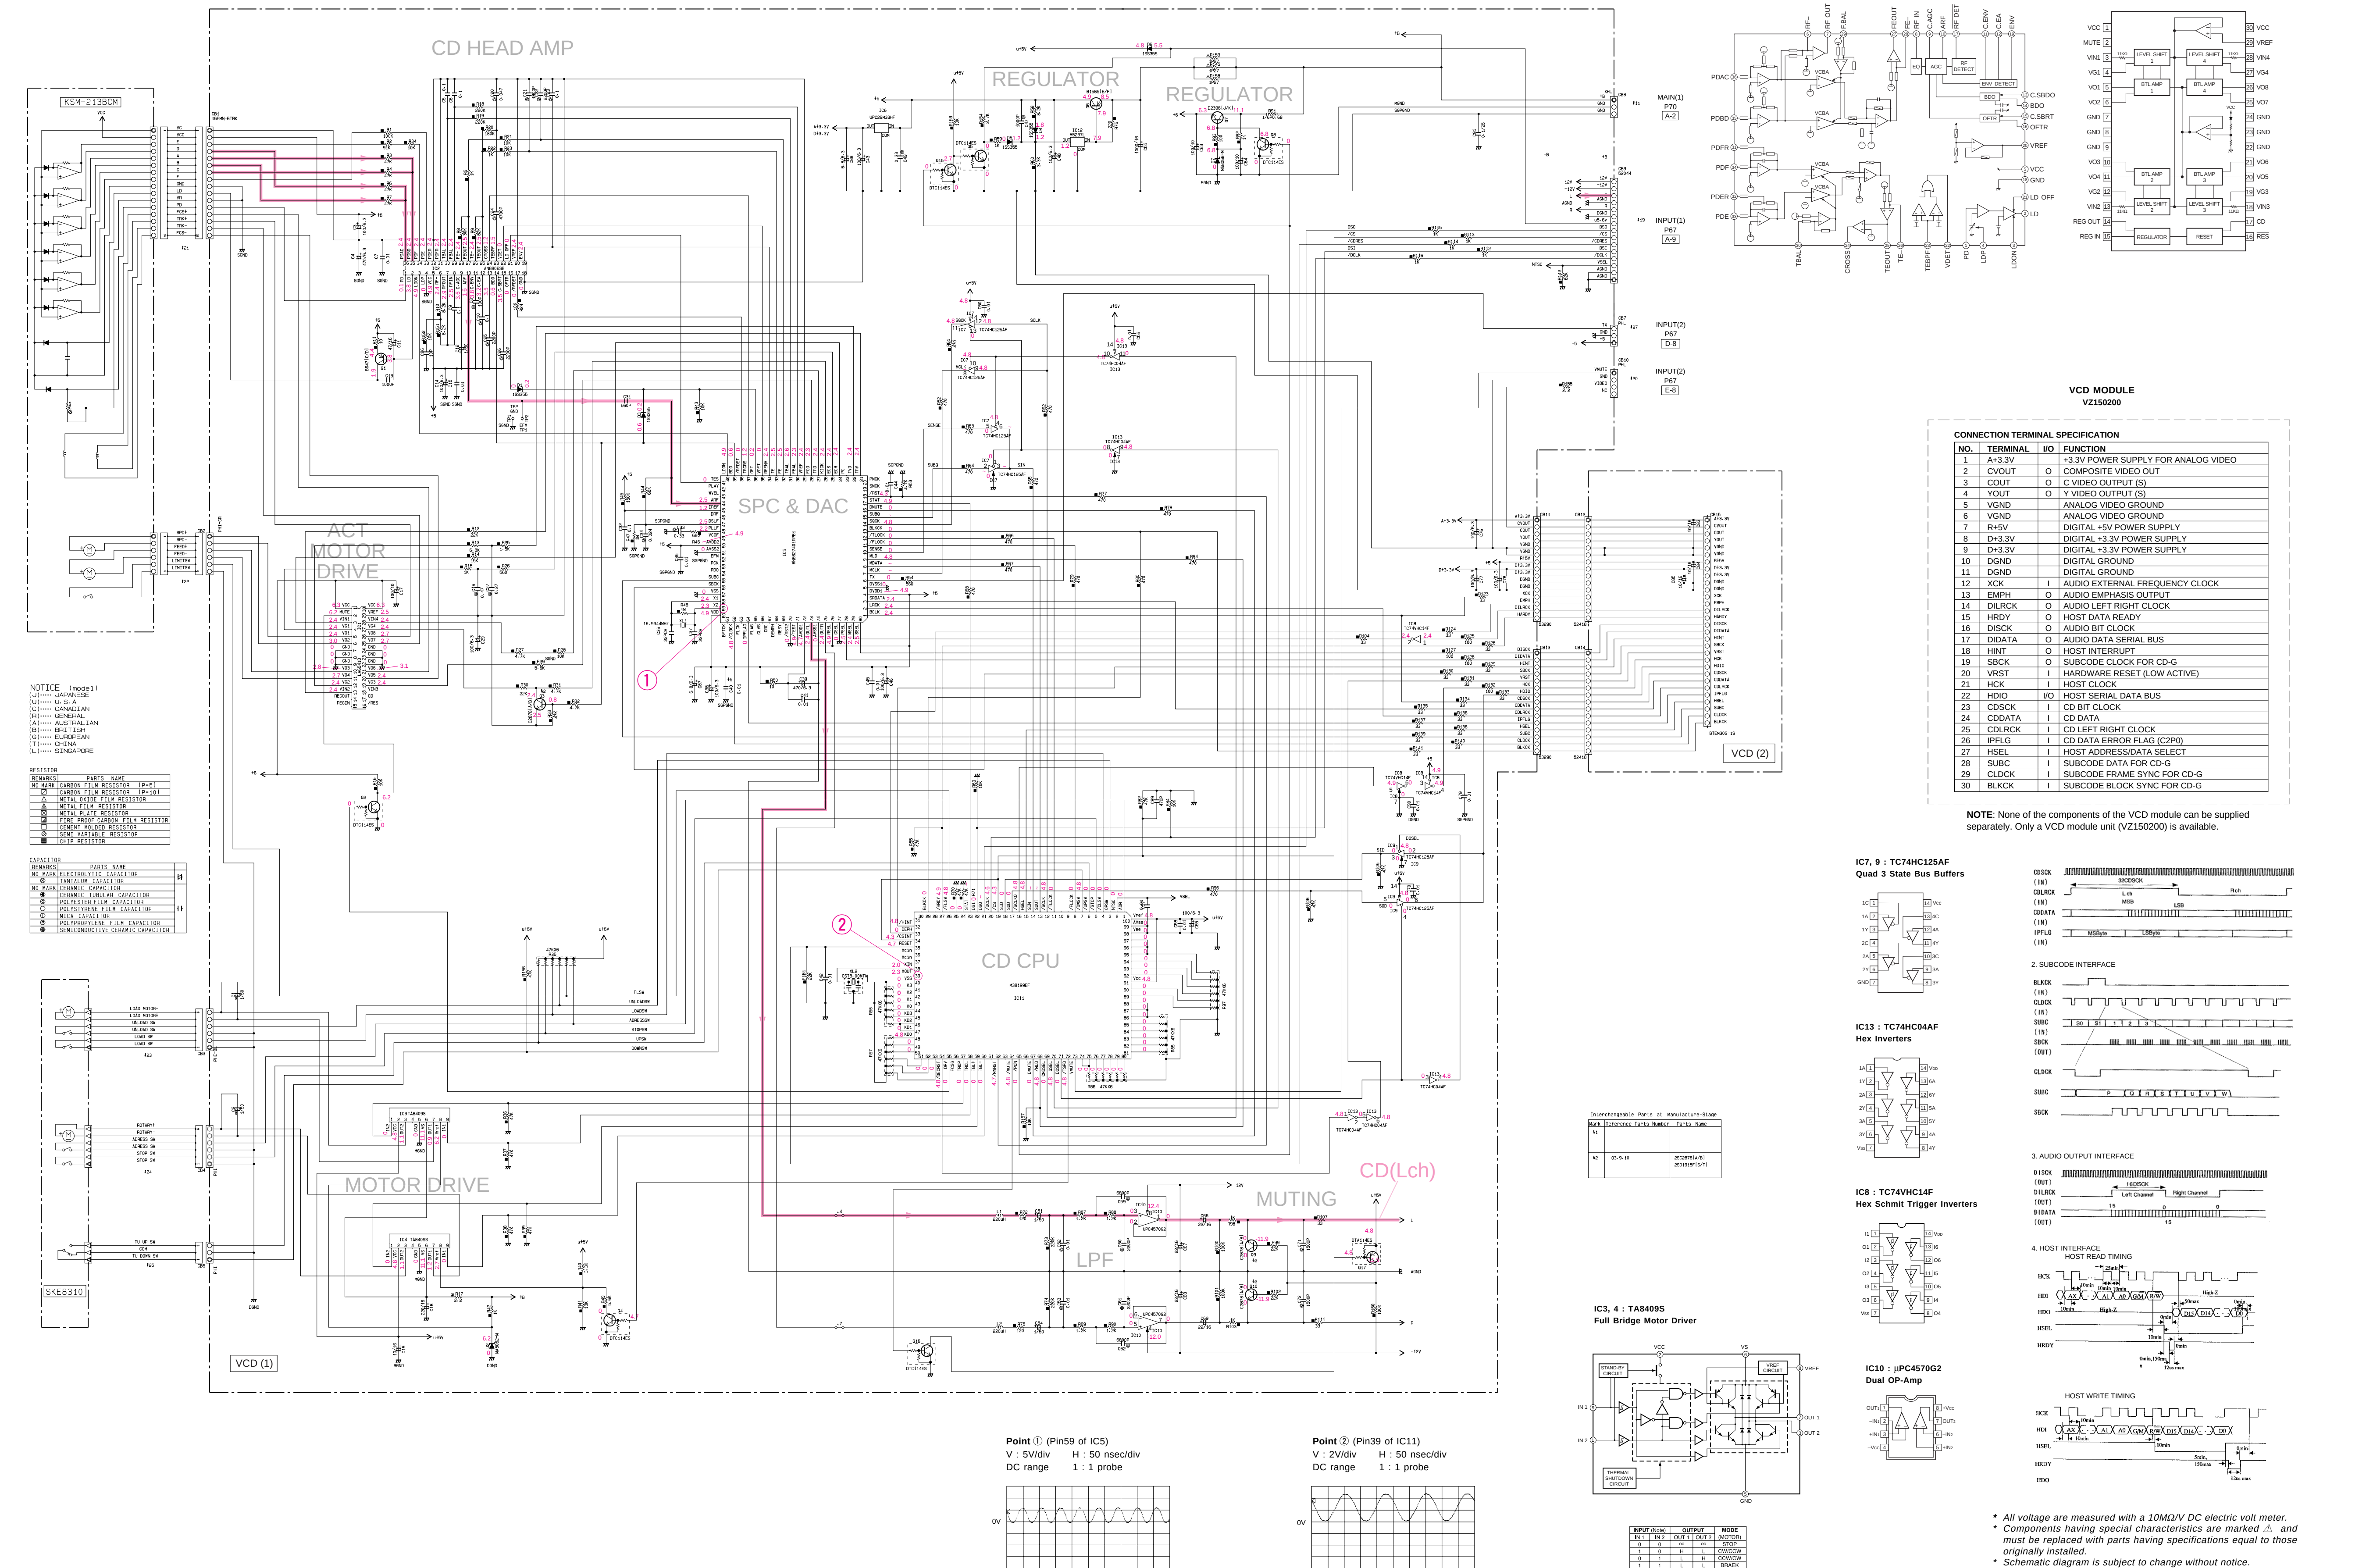


- DOLBY NR OFF




■ SCHEMATIC DIAGRAM (GX-500VCD INPUT)

The voltages are measured by LH tape at PLAY mode (no-signal condition)
Only the voltages () are at REC mode.

● DOLBY NR OFF

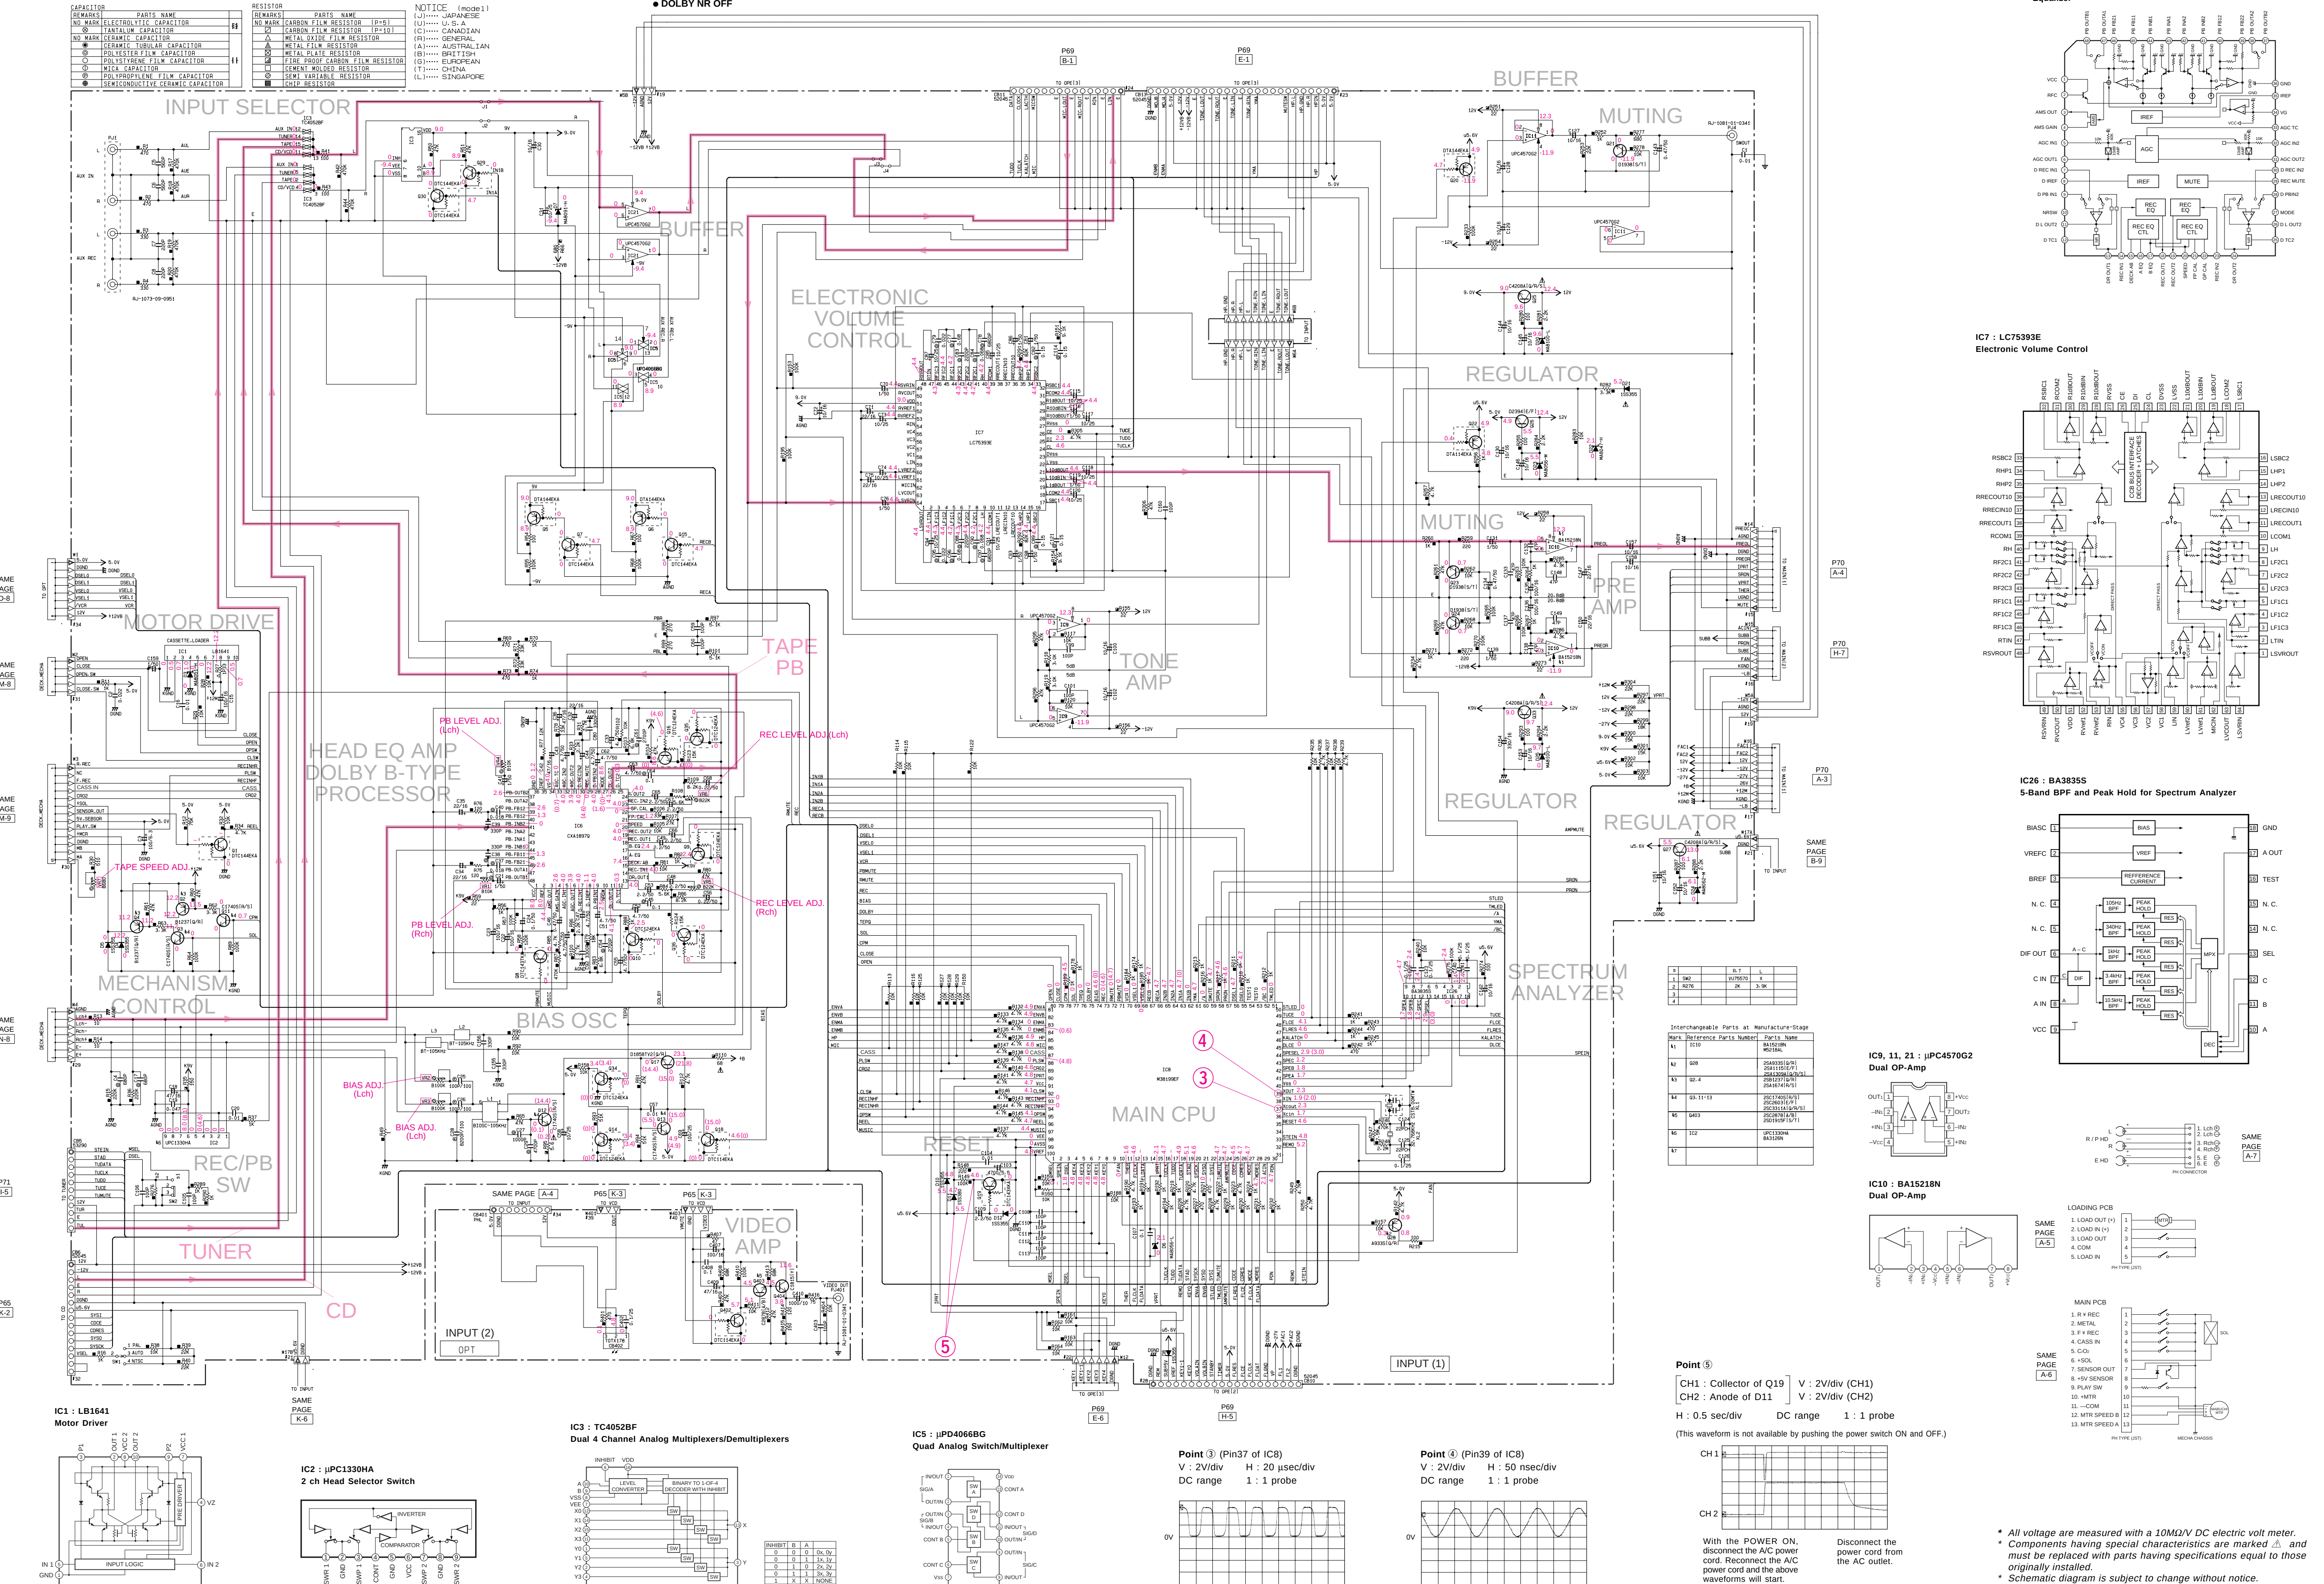

SCHEMATIC DIAGRAM (GX-500 OPERATION)

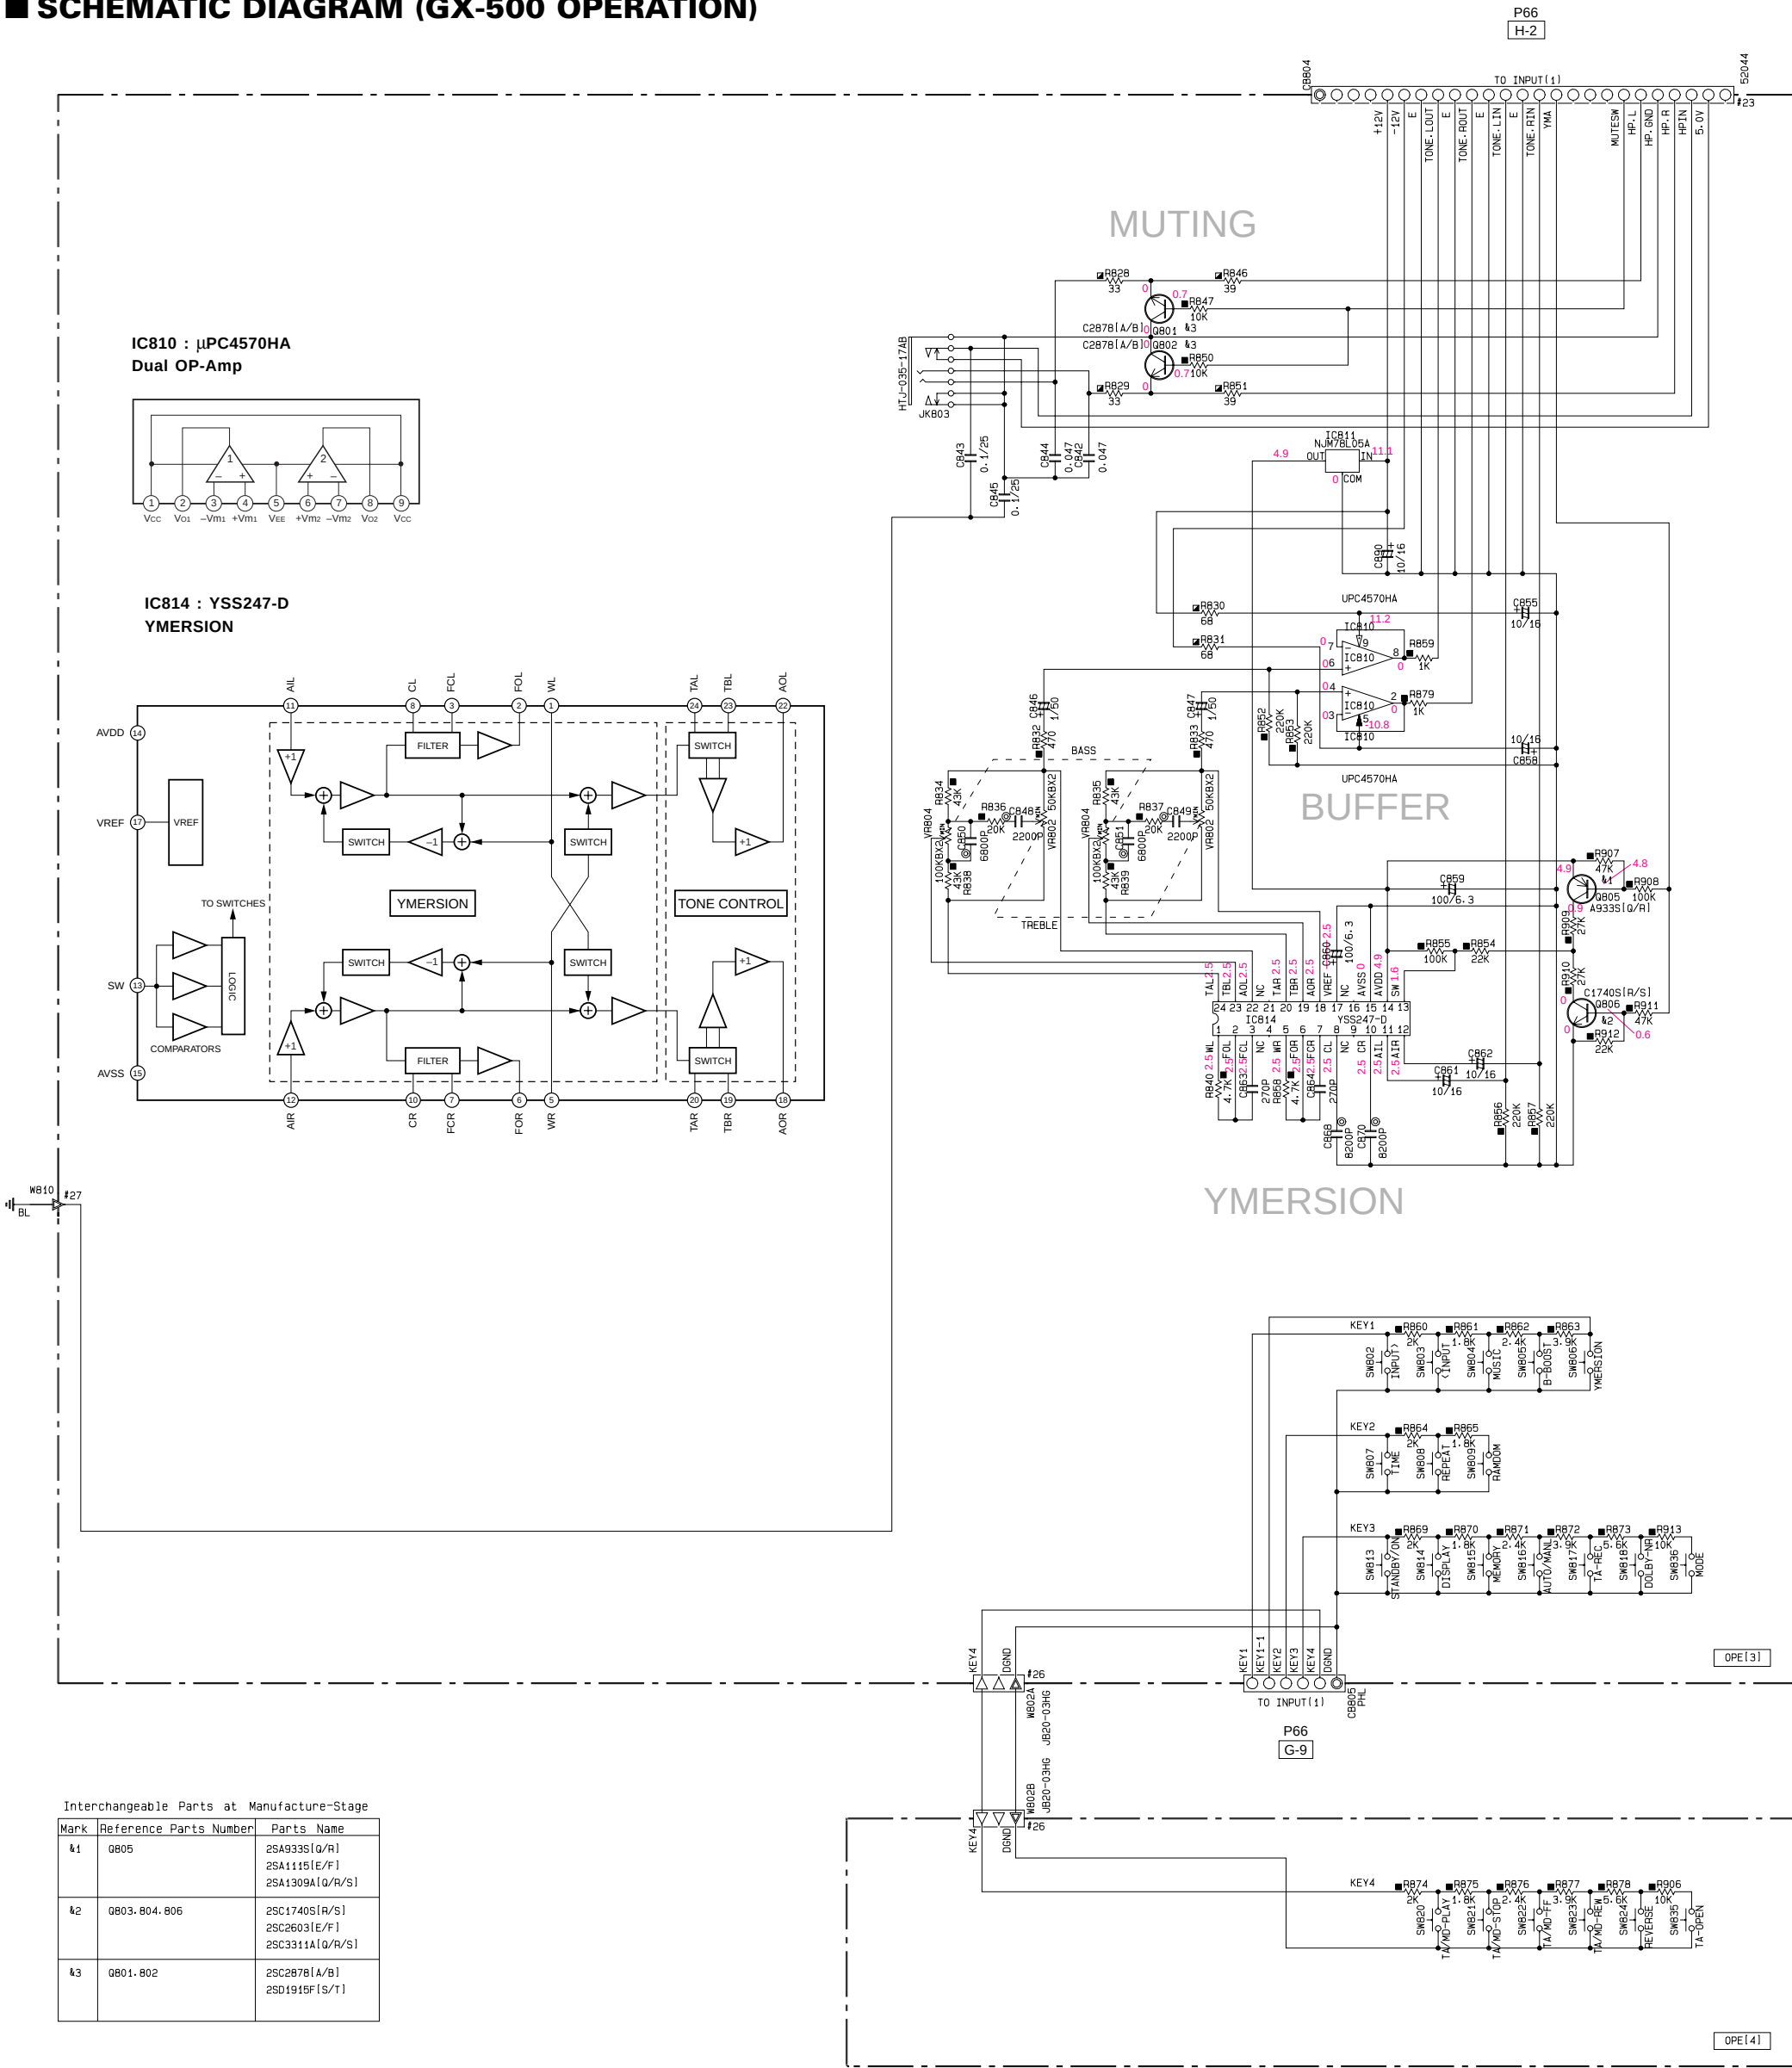


Interchangeable Parts at Manufacture-Stage		
Mark	Reference Parts Number	Parts Name
k1	0B05	25A9335 (G/H)
		25A1115 (E/F)
		25A1309A (G/R/S)
k2	0B03.804.806	25C1740S (R/S)
		25C2603 (E/F)
		25C3311A (G/R/S)
k3	0B01.802	25C2878 (A/B)
		25D1915F (S/T)

CAPACITOR	
REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
⊗	TANTALUM CAPACITOR
NO MARK	CERAMIC CAPACITOR
●	CERAMIC TUBULAR CAPACITOR
⊗	POLYESTER FILM CAPACITOR
○	POLYSTYRENE FILM CAPACITOR
□	MICA CAPACITOR
⊗	POLYPROPYLENE FILM CAPACITOR
●	SEMICONDUCTIVE CERAMIC CAPACITOR


RESISTOR	
REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
⊗	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
⊗	METAL PLATE RESISTOR
□	FIRE PROOF CARBON FILM RESISTOR
⊗	CEMENT MOLDED RESISTOR
⊗	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

NOTICE (model)


(J)..... JAPANESE
(U)..... U.S.A
(C)..... CANADIAN
(R)..... GENERAL
(A)..... AUSTRALIAN
(B)..... BRITISH
(G)..... EUROPEAN
(T)..... CHINA
(L)..... SINGAPORE

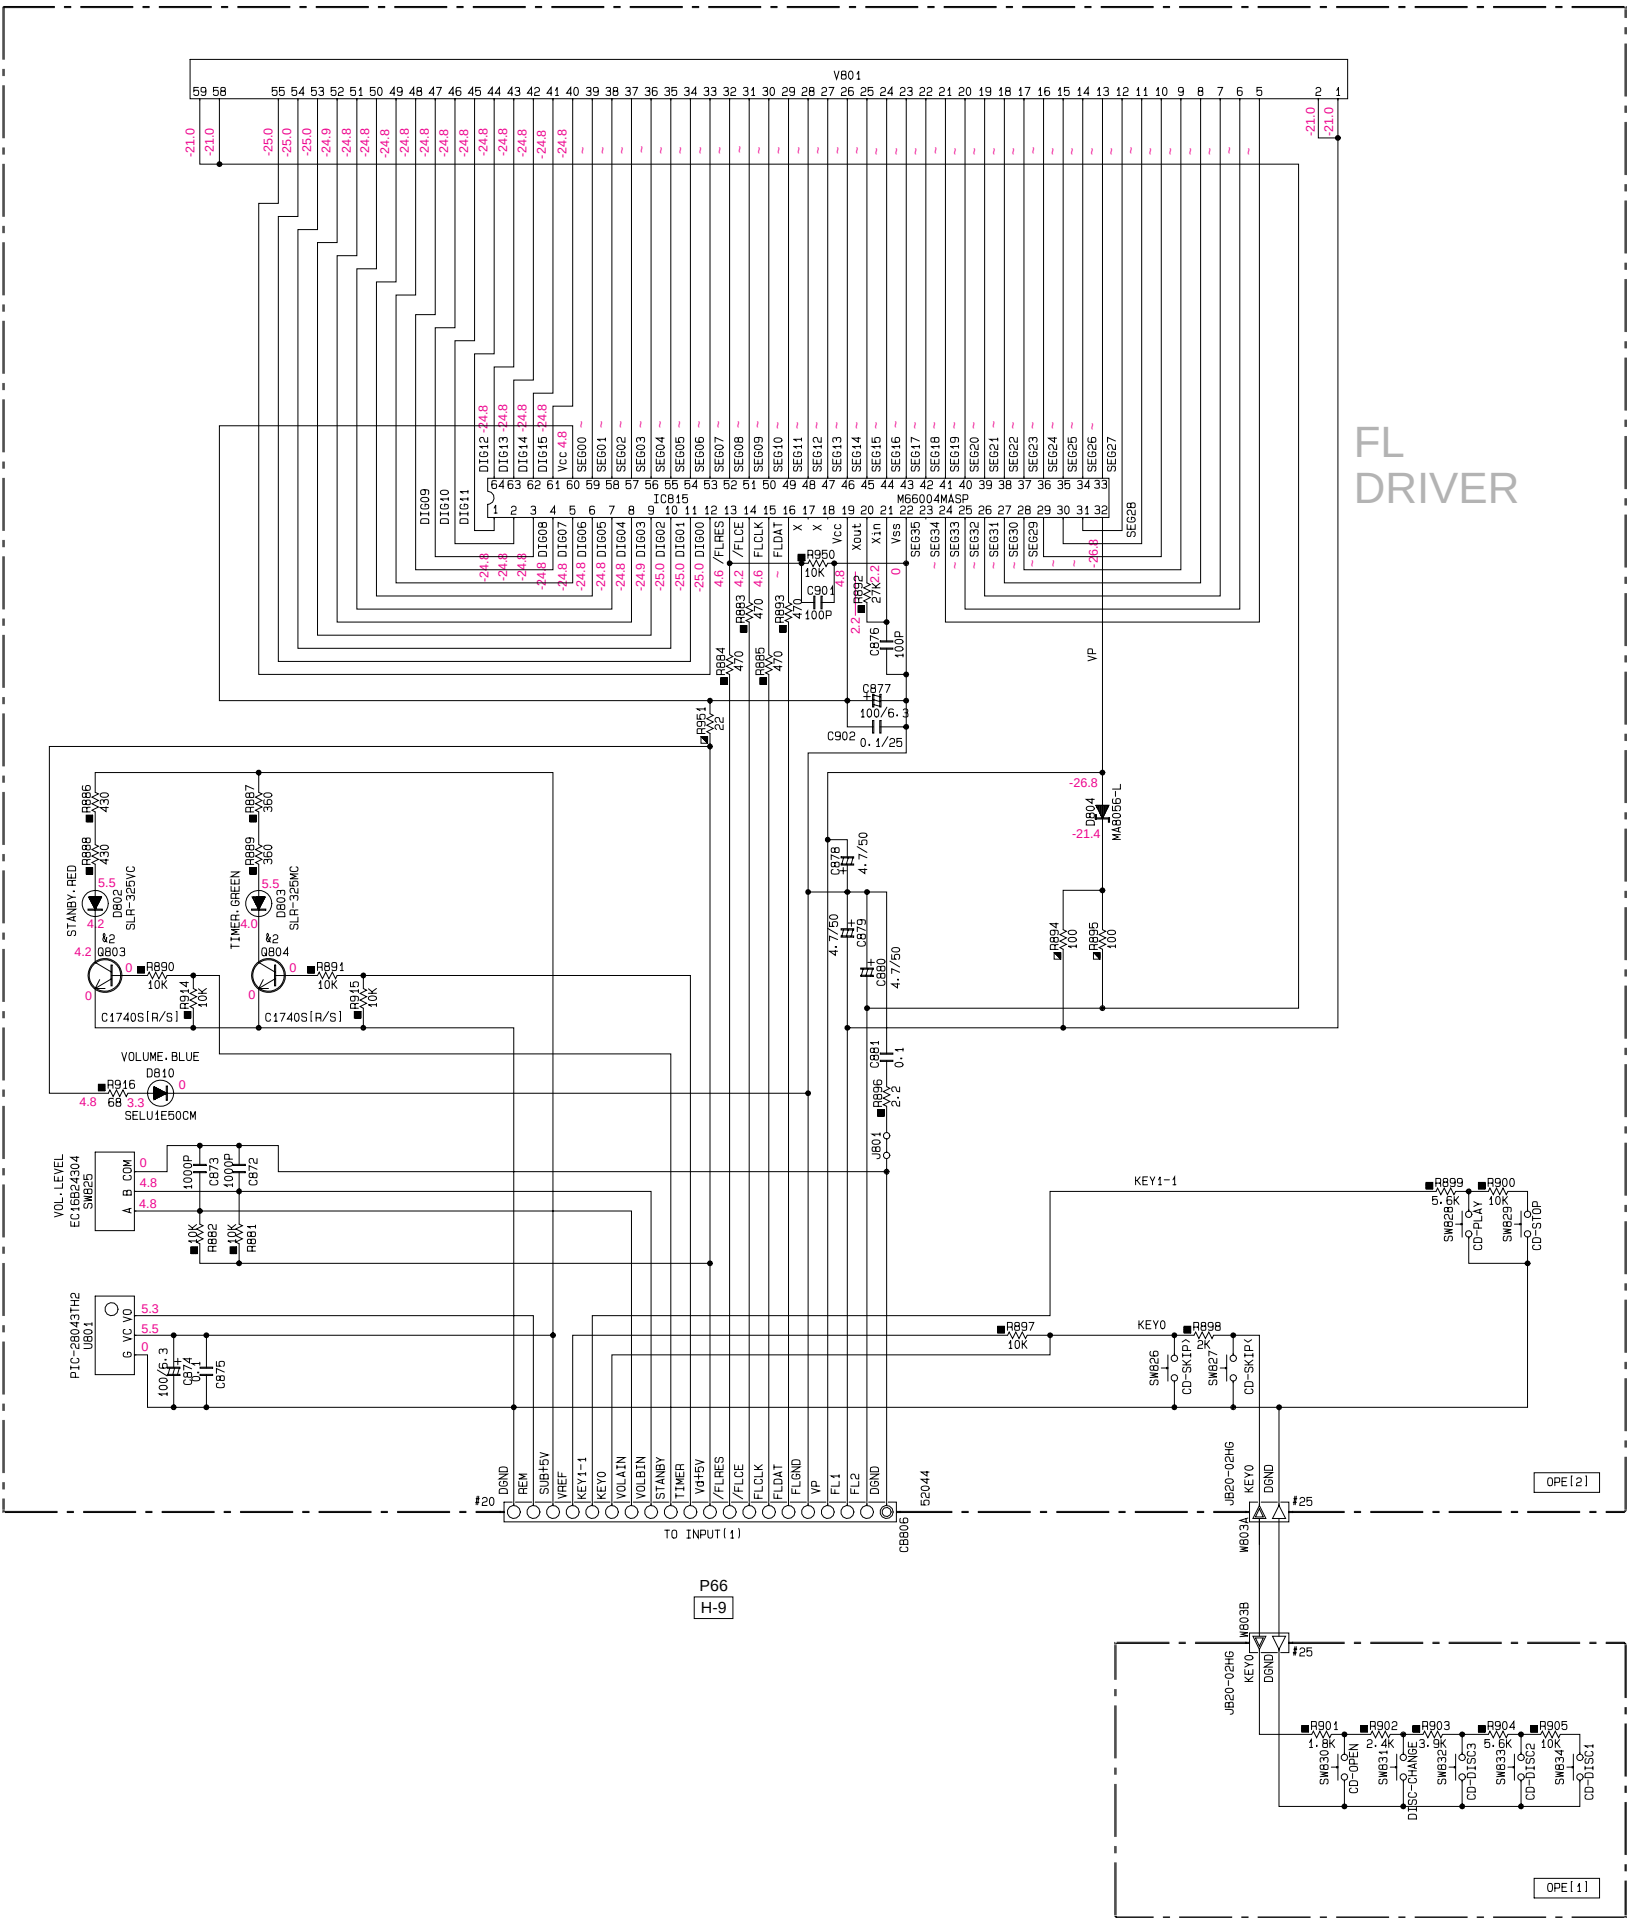

IC815 : M66004MASP
FL Driver

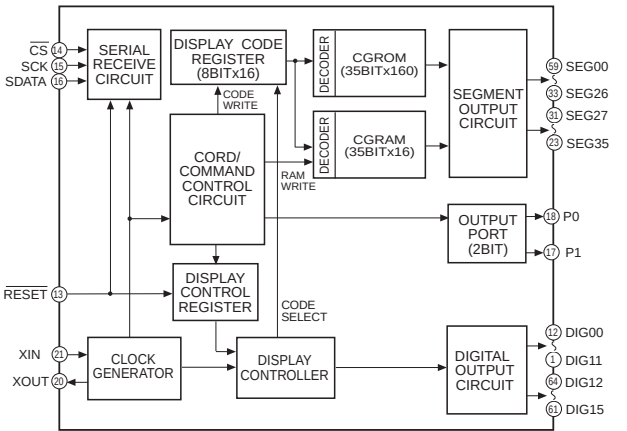

* All voltage are measured with a 10MΩ/V DC electric volt meter.
* Components having special characteristics are marked △ and must be replaced with parts having specifications equal to those originally installed.
* Schematic diagram is subject to change without notice.


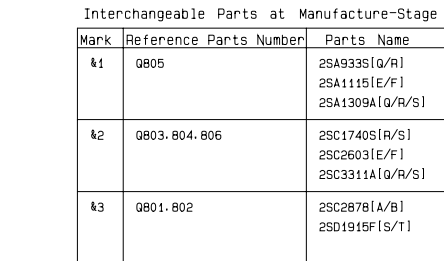


REMARKS		PARTS NAME
NO	MARK	CARBON FILM RESISTOR (P=5)
☒		CARBON FILM RESISTOR (P=10)
☒		METAL OXIDE FILM RESISTOR
☒		METAL FILM RESISTOR
☒		METAL PLATE RESISTOR
☒		FIRE PROOF CARBON FILM RESISTOR
☒		CEMENT MOLDED RESISTOR
☒		SEMI VARIABLE RESISTOR
☒		CHIP RESISTOR


CAPACITOR		
REMARKS	PARTS NAME	
NO MARK	ELECTROLYTIC CAPACITOR	H
⊗	TANTALUM CAPACITOR	
NO MARK	CERAMIC CAPACITOR	H
⊙	CERAMIC TUBULAR CAPACITOR	
⊙	POLYESTER FILM CAPACITOR	
○	POLYSTYRENE FILM CAPACITOR	
Ⓢ	MICA CAPACITOR	
⊙	POLYPROPYLENE FILM CAPACITOR	
⊕	SEMICONDUCTIVE CERAMIC CAPACITOR	

NOTICE (model)
(J).... JAPANESE
(U).... U. S. A
(C).... CANADIAN
(R).... GENERAL
(A).... AUSTRALIAN
(B).... BRITISH
(G).... EUROPEAN
(T).... CHINA
(L).... SINGAPORE


IC802, 806, 810 : μ PC4570HA
Dual OP-Amp

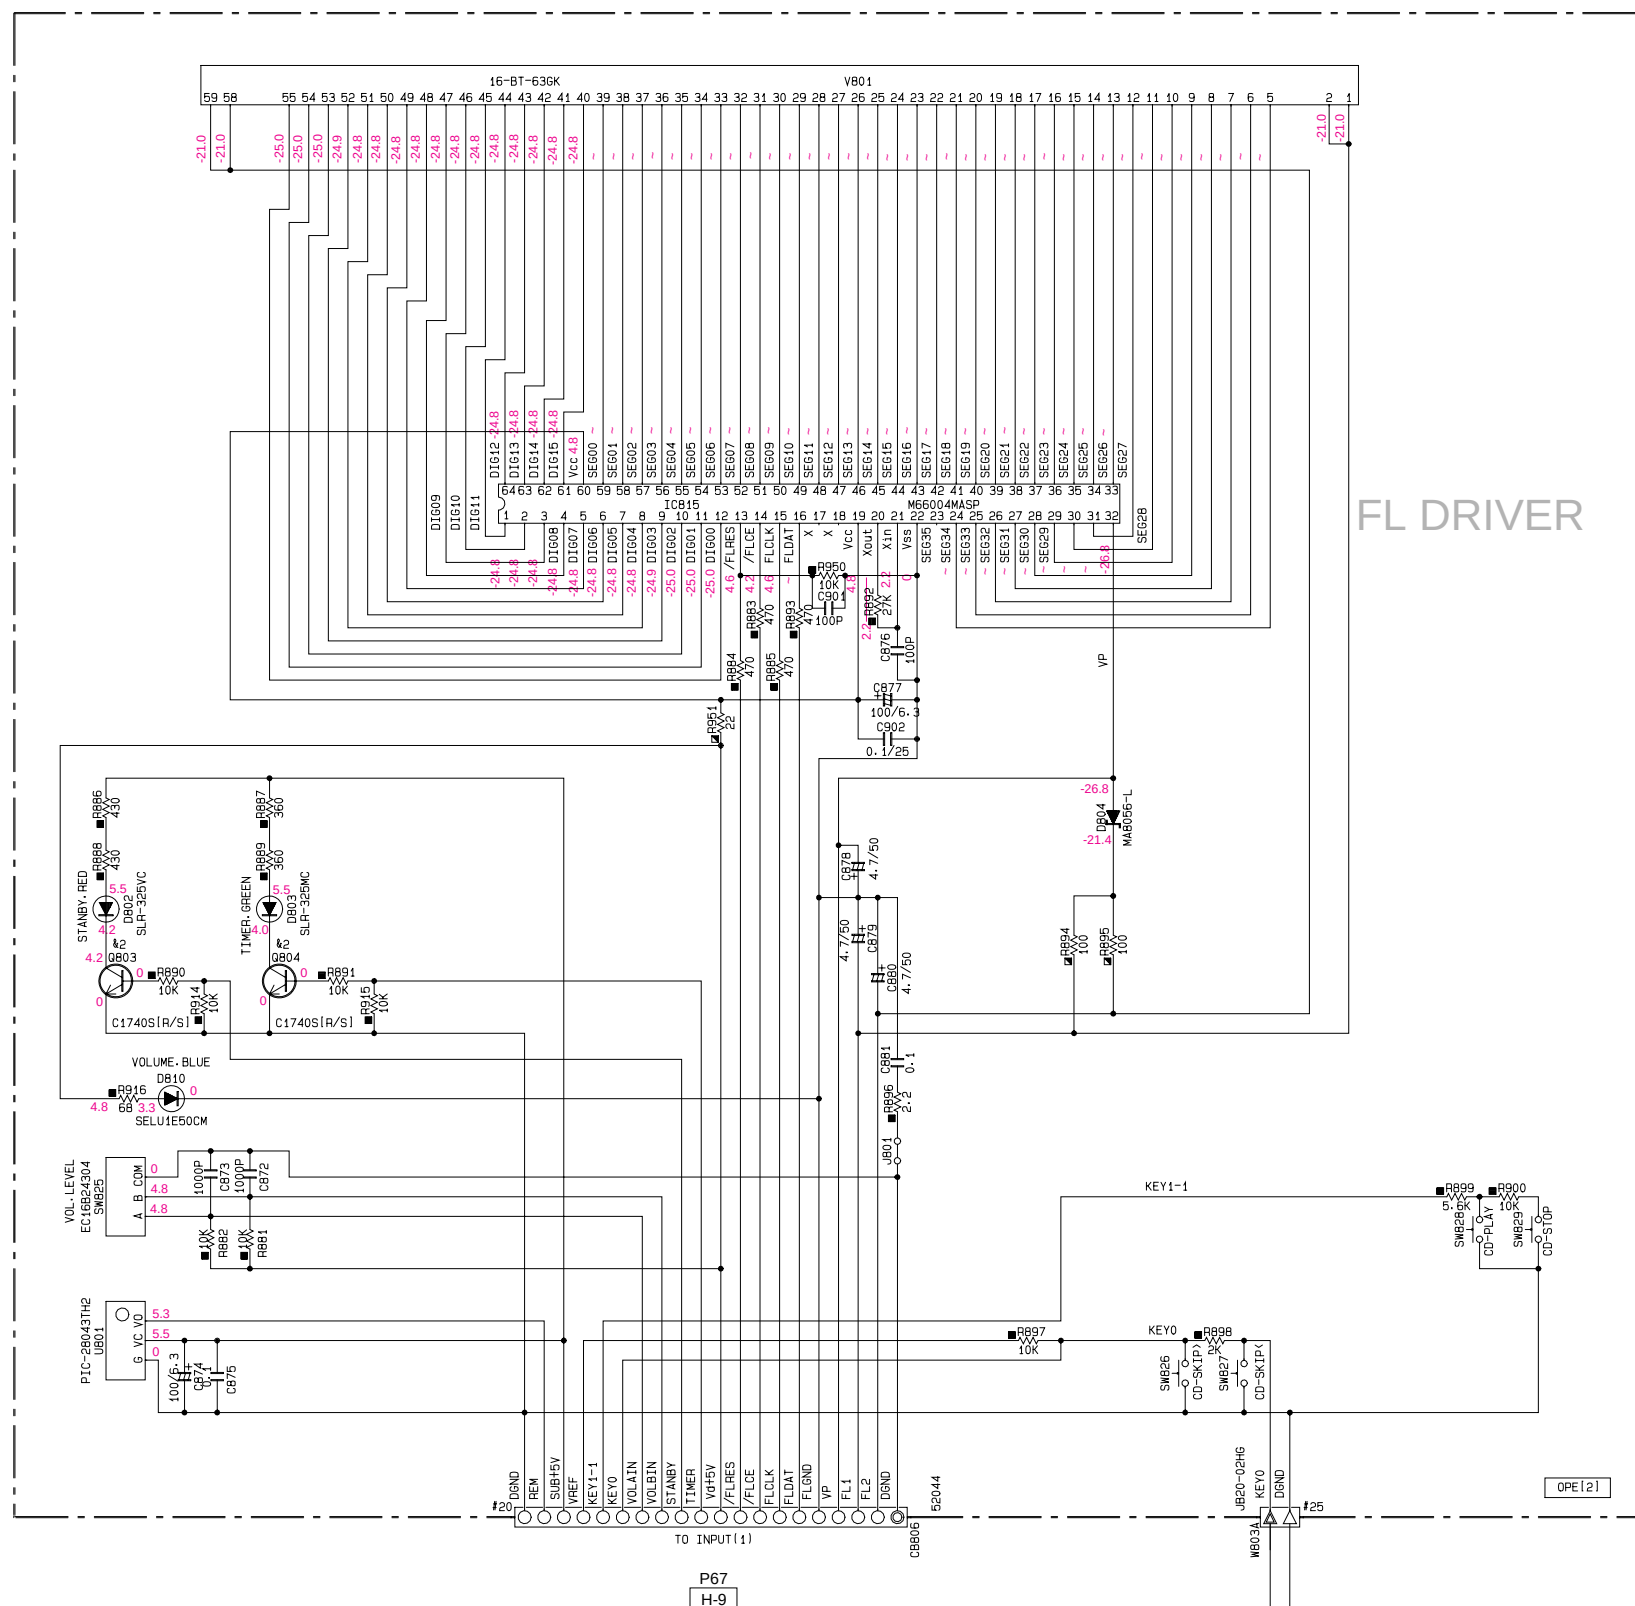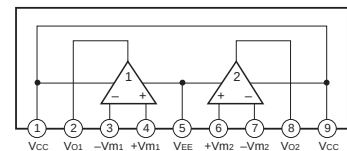


IC801 : M65853FP
Mic Amp with Digital Echo

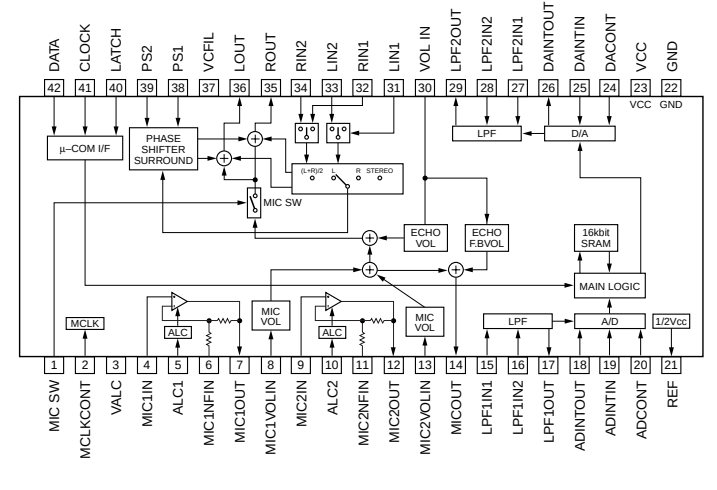

IC814 : YSS247-D
YMERSION

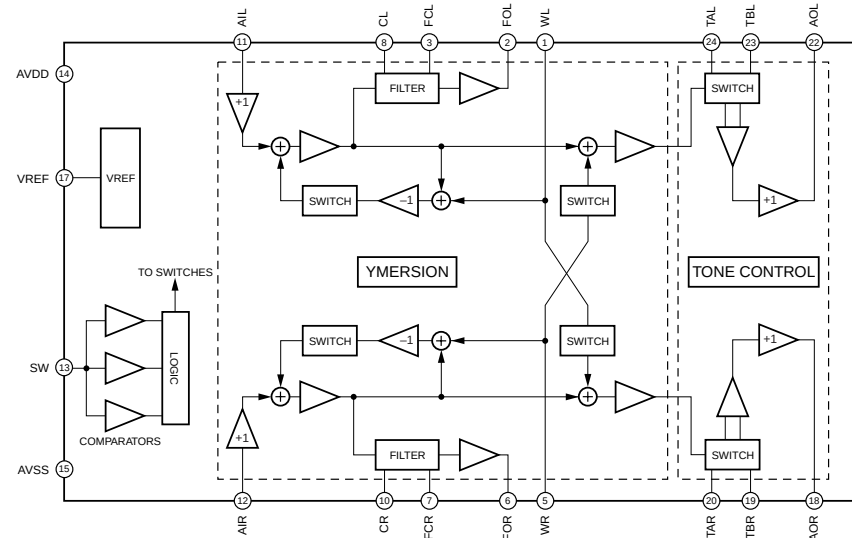

IC815 : M66004MASP
FL Driver

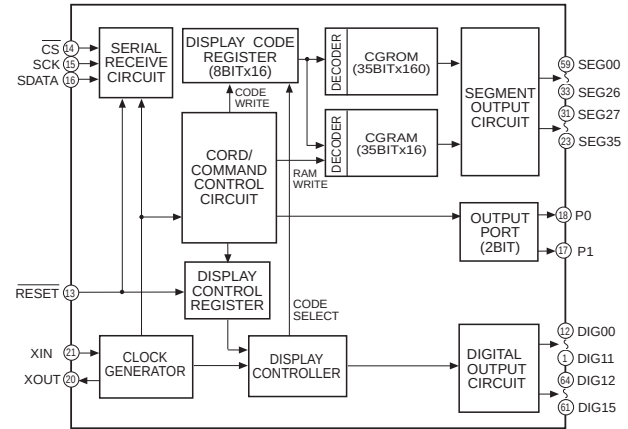

- * All voltage are measured with a 10MΩ/V DC electric volt meter.
- * Components having special characteristics are marked  and must be replaced with parts having specifications equal to those originally installed.
- * Schematic diagram is subject to change without notice.

■ SCHEMATIC DIAGRAM (GX-500/GX-500VCD MAIN)



REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
⊠	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▴	METAL FILM RESISTOR
▾	METAL PLATE RESISTOR
⊞	FIRE PROOF CARBON FILM RESISTOR
□	CEMENT MOLDED RESISTOR
⊕	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR

REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
⊗	TANTALUM CAPACITOR
●	CERAMIC TUBULAR CAPACITOR
⊙	POLYESTER FILM CAPACITOR
○	POLYSTYRENE FILM CAPACITOR
⊖	MICA CAPACITOR
⊕	POLYPROPYLENE FILM CAPACITOR
⦿	SEMICONDUCTIVE CERAMIC CAPACITOR


Mark	Reference Parts Number	Parts Name
41		
42	D201	MTZJ270 HZS272
43	D209, D214	HS8104 1SS133 1SS176
44	RY201	OSA-SS-224DM3 D6402-05(W) ALA2F24
45	RY203	SOT-5-112LMR D61201-01(W)1 ALK5321

NOTICE (model)
(J)..... JAPANESE
(U)..... U. S. A
(C)..... CANADIAN
(R)..... GENERAL
(A)..... AUSTRALIAN
(B)..... BRITISH
(T)..... EUROPEAN
(L)..... CHINA
(L)..... SINGAPORE

8		U. C	R. T	A	B-G-L
1	F201	2A125V V582250	T2AL250V KB00075	T2AL250V KB00075	T2AL250V KB00075
2	F202	4A125V V582250	T4AL250V KB00075	T1.6AL250V KB00165	T1.6AL250V KB00165
3	J201		X	0	0
4	T202	XW019	XW020	XW021	XW022
5	T203	XY443	XY444	XY445	XY445
6	R276	1/300, 2W H200511	X	X	X
7					

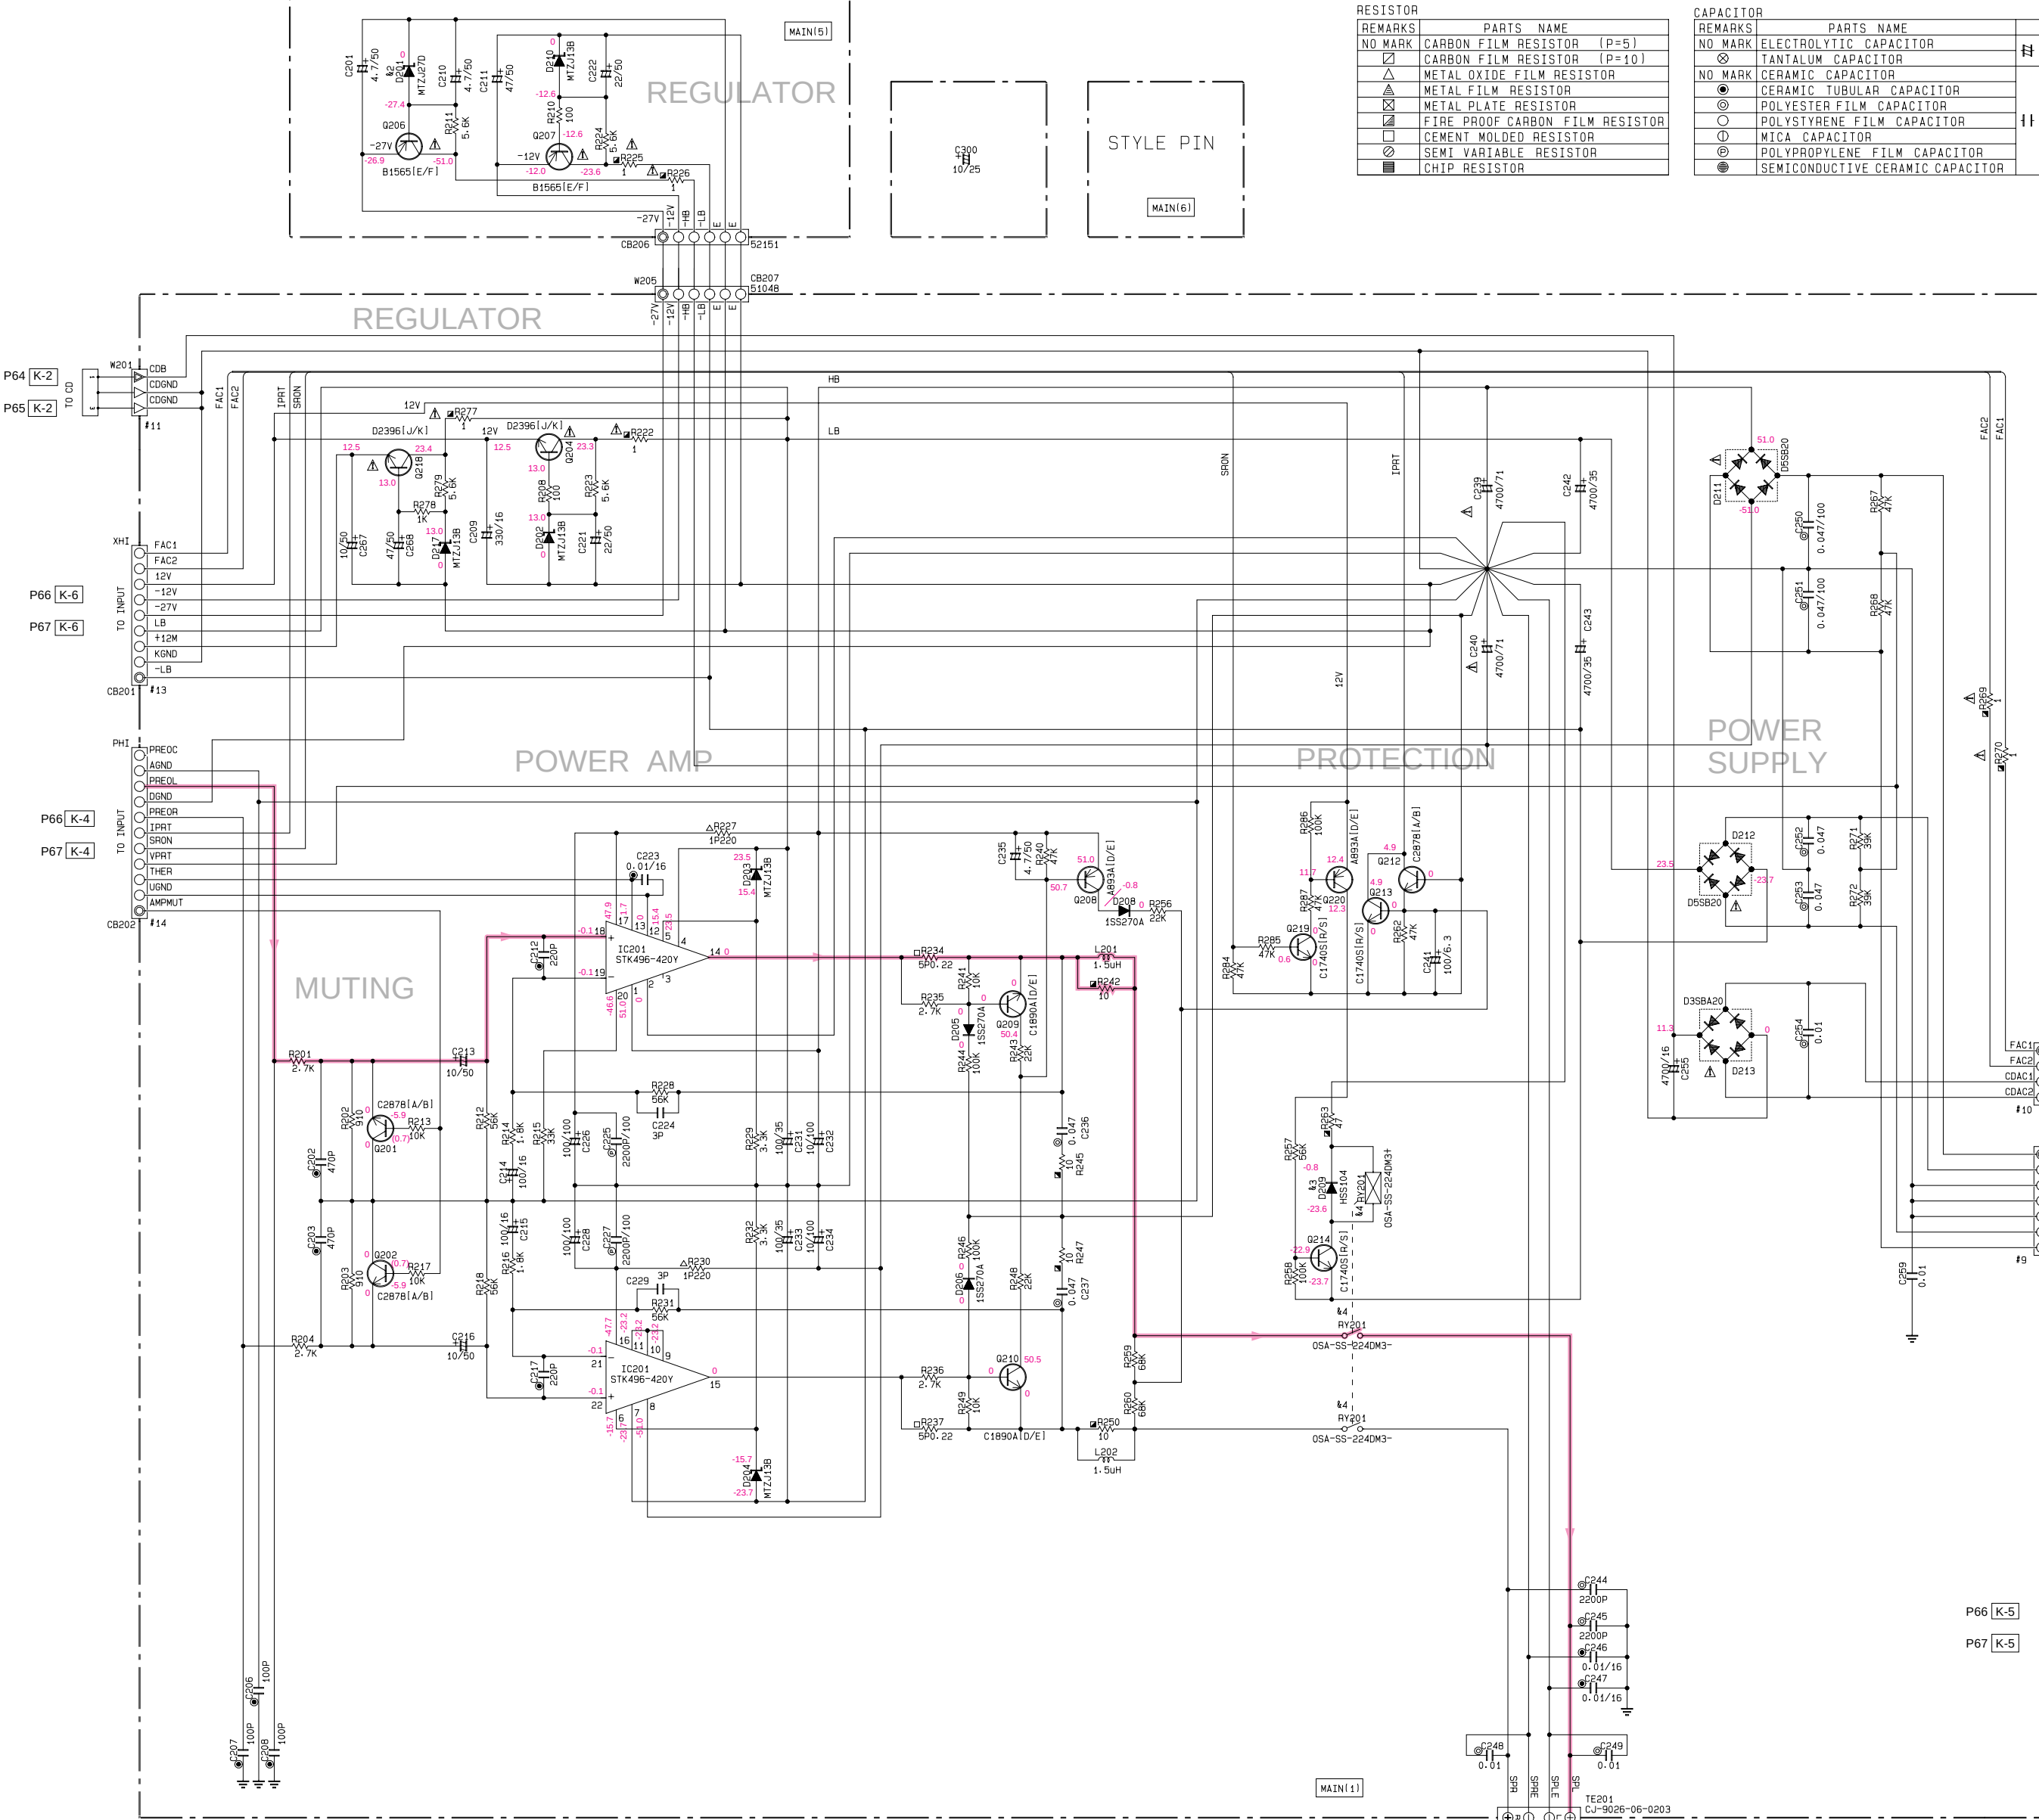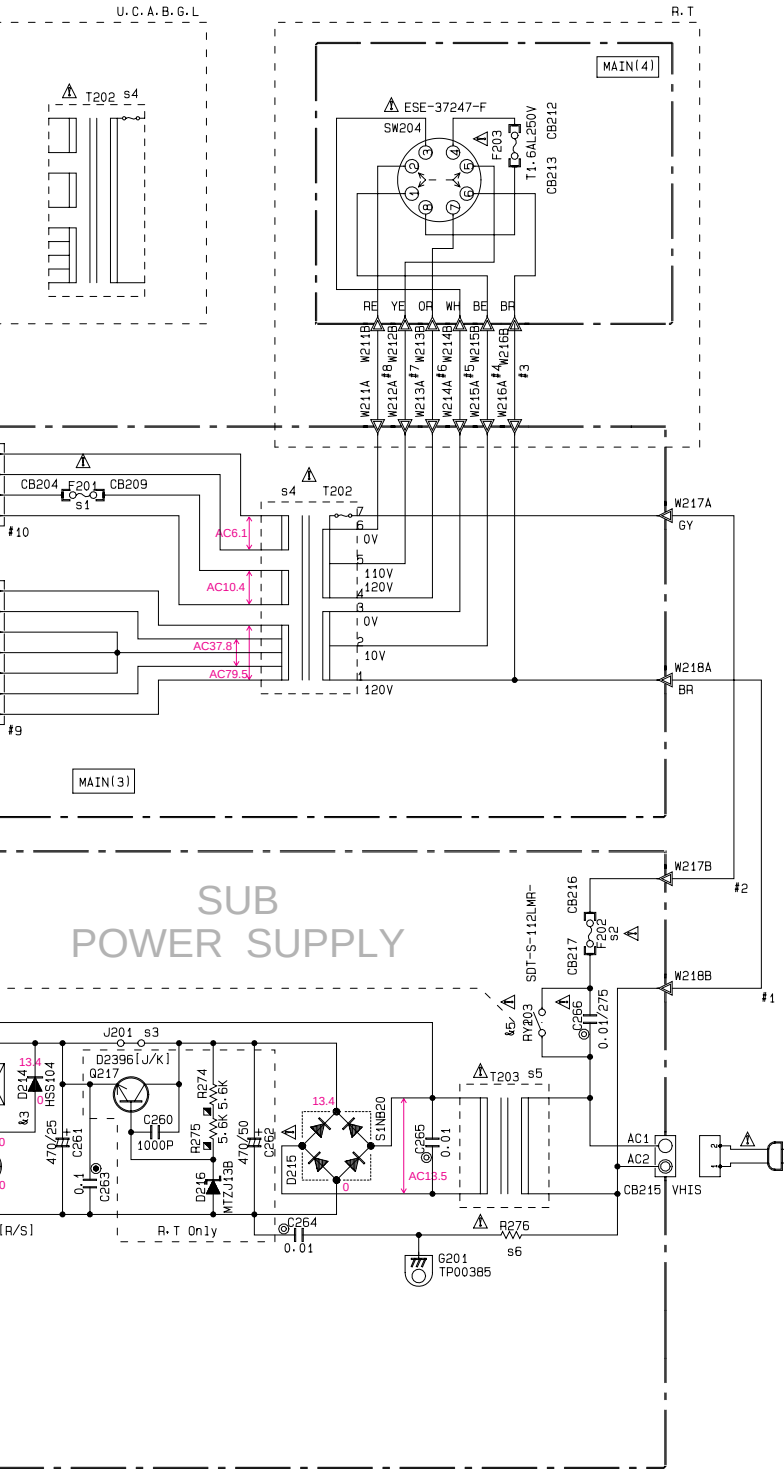


IC201 : STK496-420Y
2 Channel AF Power Amp

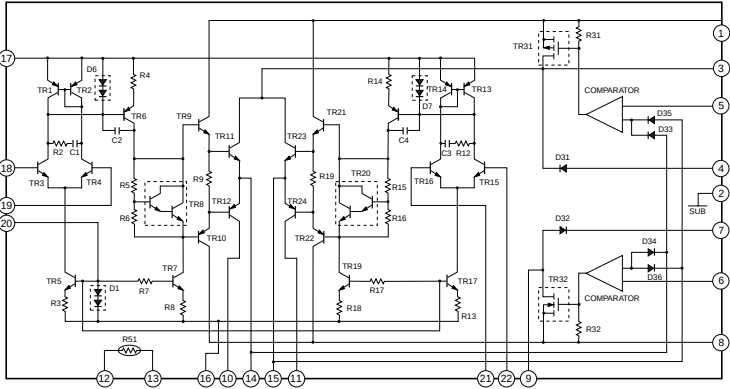

* All voltage are measured with a 10MΩ/V DC electric volt meter.
* Components having special characteristics are marked △ and must be replaced with parts having specifications equal to those originally installed.
* Schematic diagram is subject to change without notice.

■ SCHEMATIC DIAGRAM (GX-500/GX-500VCD TUNER)

Each voltage represents the voltage when receiving FM (stereo) signal and the voltage in the parentheses () is the voltage when receiving AM signal.

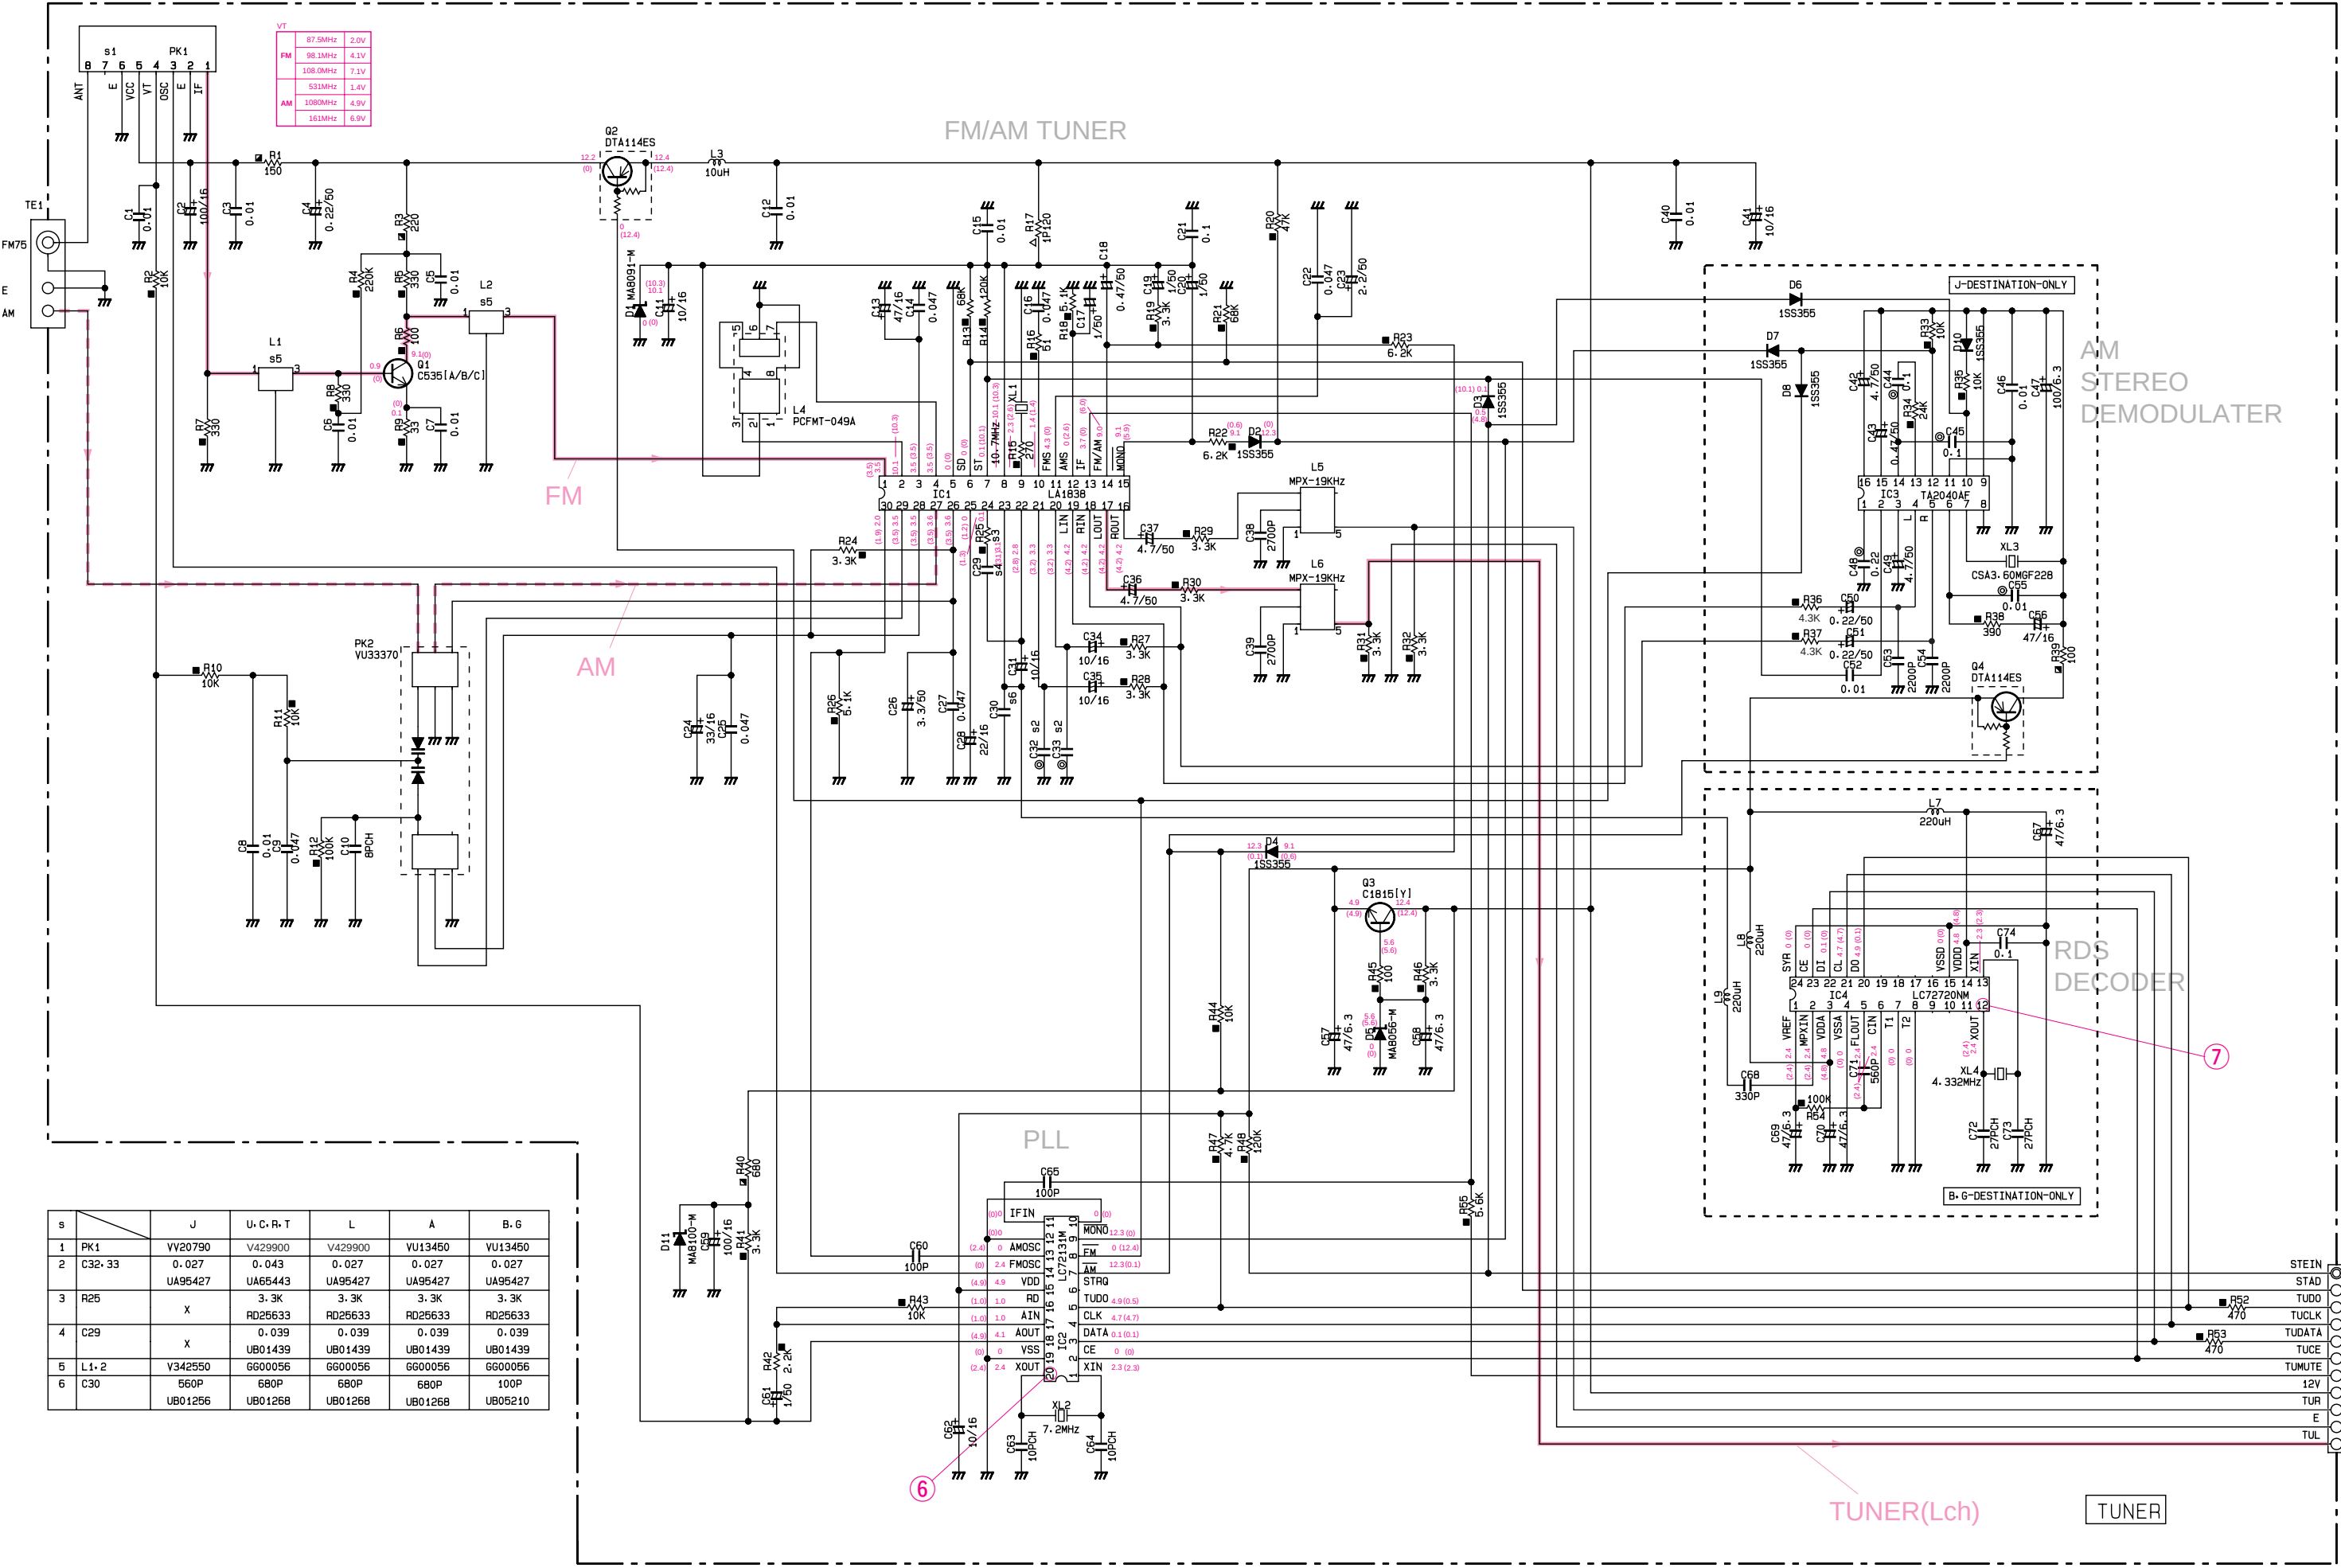


REMARKS	PARTS NAME
NO MARK	CARBON FILM RESISTOR (P=5)
□	CARBON FILM RESISTOR (P=10)
△	METAL OXIDE FILM RESISTOR
▲	METAL FILM RESISTOR
▢	METAL PLATE RESISTOR
▤	FIRE PROOF CARBON FILM RESISTOR
▥	CEMENT WOLDED RESISTOR
⊗	SEMI VARIABLE RESISTOR
■	CHIP RESISTOR


REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
⊗	TANTALUM CAPACITOR
NO MARK	CERAMIC CAPACITOR
⊙	CERAMIC TUBULAR CAPACITOR
⊖	POLYESTER FILM CAPACITOR
○	POLYSTYRENE FILM CAPACITOR
⊕	MICA CAPACITOR
⊖	POLYPROPYLENE FILM CAPACITOR
●	SEMICONDUCTIVE CERAMIC CAPACITOR

NOTICE (model)
(J)..... JAPANESE
(U)..... U.S.A
(C)..... CANADIAN
(A)..... GENERAL
(A)..... AUSTRALIAN
(B)..... BRITISH
(G)..... EUROPEAN
(T)..... CHINA
(L)..... SINGAPORE


IC1 : LA1838
AM/FM Tuner

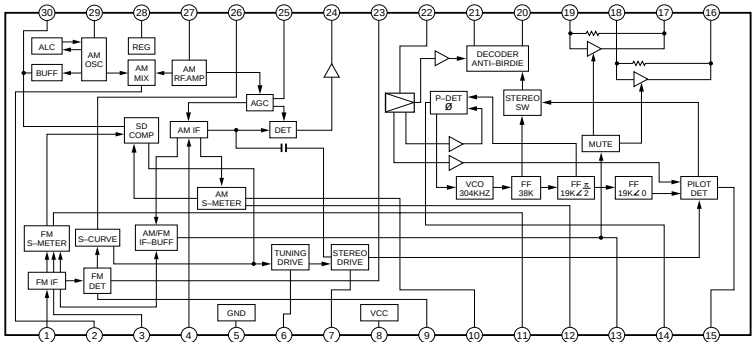


IC2 : LC72131M
PLL Controller

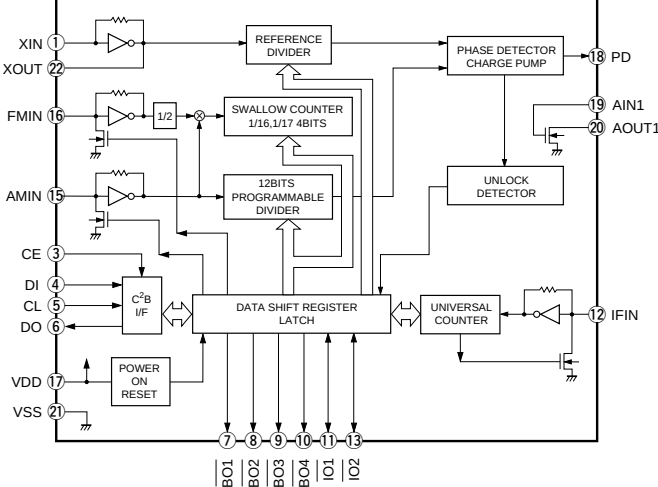

IC4 : LC72720NM
RDS Decoder & Controller

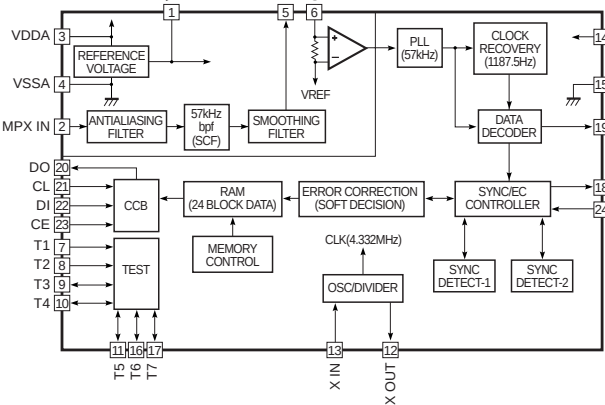


IC3 : TA2040AF
AM Stereo Demodulator

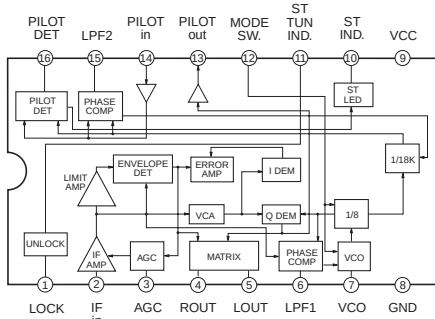


* All voltage are measured with a 10MΩ/V DC electric volt meter.
* Components having special characteristics are marked △ and must be replaced with parts having specifications equal to those originally installed.
* Schematic diagram is subject to change without notice.


PK1 : TFFJ2U515A (V4299000) U, C, R, T, L models

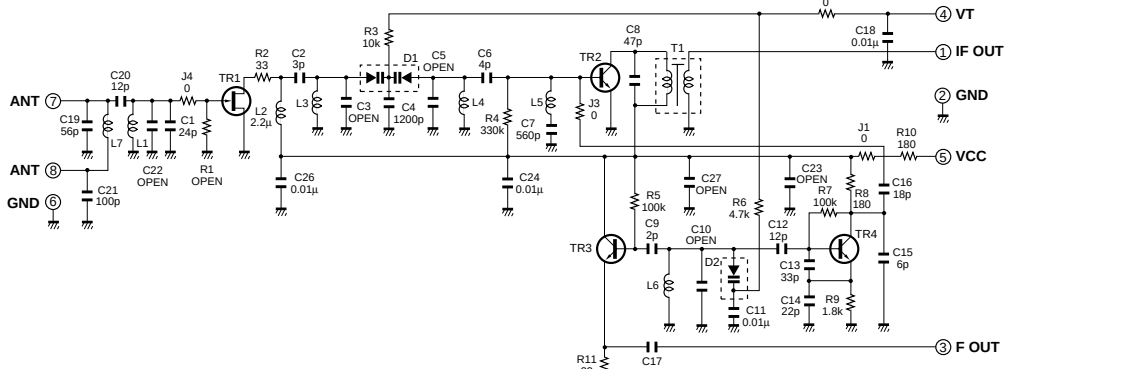


PK1 : TFFJ4E515A (VU134500) A, B, G models

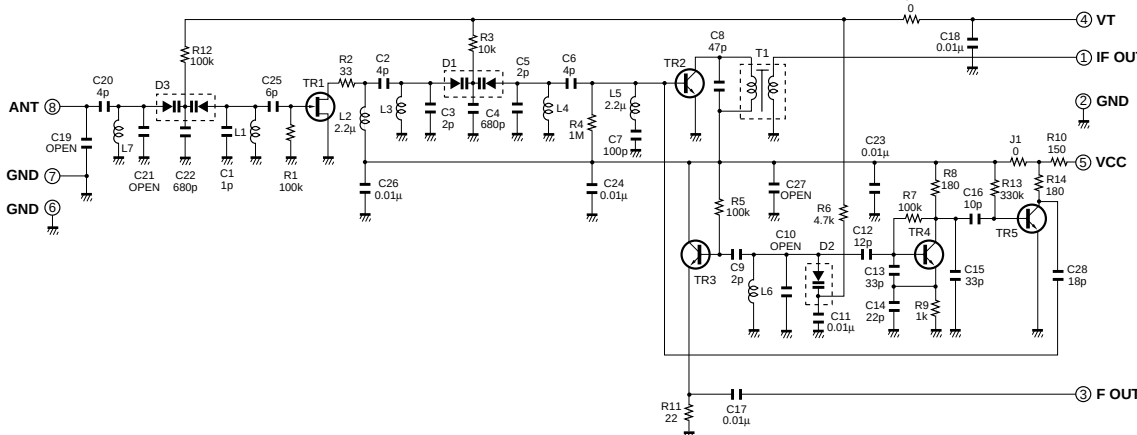


PK1 : TFFJ2J541A (VV207900) J model

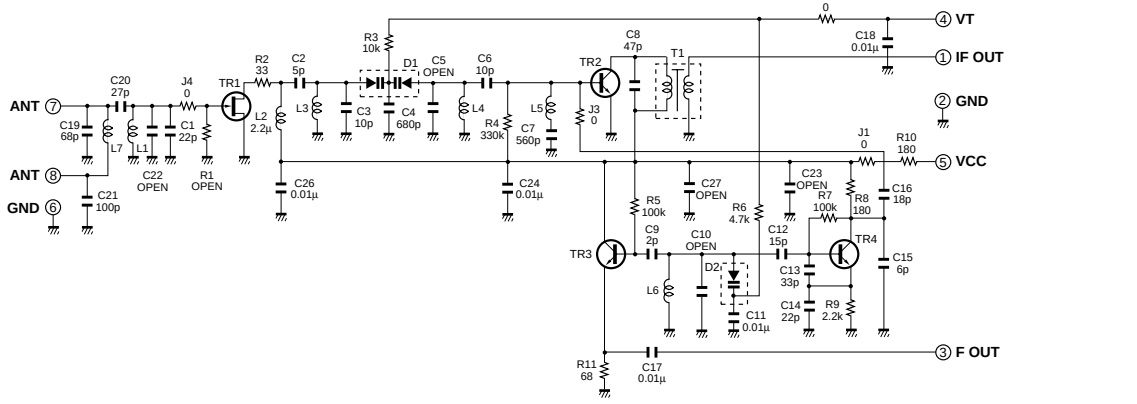

Point ⑥ (Pin20 of IC2)
V : 2V/div H : 0.1 μsec/div
DC range 1 : 1 probe

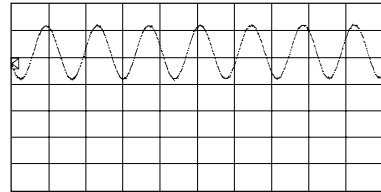

Point ⑦ (Pin12 of IC4)
V : 2V/div H : 0.1 μsec/div
DC range 1 : 1 probe

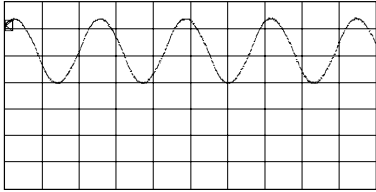

PARTS LIST

■ ELECTRICAL PARTS

■ WARNING

Components having special characteristics are marked $\triangle$ and must be replaced with parts having specifications equal to those originally installed.

- Carbon resistors (1/6W or 1/4W) are not included in the ELECTRICAL PARTS List. For the part Nos. of the carbon resistors refer to the last page.
- Chip resistors are listed on page 89.

ABBREVIATIONS IN THIS LIST ARE AS FOLLOWS :

C.A.EL.CHP	: CHIP ALUMI. ELECTROLYTIC CAP	L.EMIT	: LIGHT EMITTING MODULE
C.CE	: CERAMIC CAP	LED.DSPLY	: LED DISPLAY
C.CE.ARRAY	: CERAMIC CAP ARRAY	LED.INFRD	: LED, INFRARED
C.CE.CHP	: CHIP CERAMIC CAP	MODUL.RF	: MODULATOR, RF
C.CE.ML	: MULTILAYER CERAMIC CAP	PHOT.CPL	: PHOTO COUPLER
C.CE.M.CHP	: CHIP MULTILAYER CERAMIC CAP	PHOT.INTR	: PHOTO INTERRUPTER
C.CE.SAFTY	: RECOGNIZED CERAMIC CAP	PHOT.RFLCT	: PHOTO REFLECTOR
C.CE.TUBLR	: CERAMIC TUBULAR CAP	PIN.TEST	: PIN, TEST POINT
C.CE.SMI	: SEMI CONDUCTIVE CERAMIC CAP	PLST.RIVET	: PLASTIC RIVET
C.EL	: ELECTROLYTIC CAP	R.ARRAY	: RESISTOR ARRAY
C.MICA	: MICA CAP	R.CAR	: CARBON RESISTOR
C.ML.FLM	: MULTILAYER FILM CAP	R.CAR.CHP	: CHIP RESISTOR
C.MP	: METALLIZED PAPER CAP	R.CAR.FP	: FLAME PROOF CARBON RESISTOR
C.MYLAR	: MYLAR FILM CAP	R.FUS	: FUSABLE RESISTOR
C.MYLAR.ML	: MULTILAYER MYLAR FILM CAP	R.MTL.CHP	: CHIP METAL FILM RESISTOR
C.PAPER	: PAPER CAPACITOR	R.MTL.FLM	: METAL FILM RESISTOR
C.PLS	: POLYSTYRENE FILM CAP	R.MTL.OXD	: METAL OXIDE FILM RESISTOR
C.POL	: POLYESTER FILM CAP	R.MTL.PLAT	: METAL PLATE RESISTOR
C.POLY	: POLYETHYLENE FILM CAP	RSNR.CE	: CERAMIC RESONATOR
C.PP	: POLYPROPYLENE FILM CAP	RSNR.CRYS	: CRYSTAL RESONATOR
C.TNTL	: TANTALUM CAP	R.TW.CEM	: TWIN CEMENT FIXED RESISTOR
C.TNTL.CHP	: CHIP TANTALUM CAP	R.WW	: WIRE WOUND RESISTOR
C.TRIM	: TRIMMER CAP	SCR.BND.HD	: BIND HEAD B-TITE SCREW
CN	: CONNECTOR	SCR.BW.HD	: BW HEAD TAPPING SCREW
CN.BS.PIN	: CONNECTOR, BASE PIN	SCR.CUP	: CUP TITE SCREW
CN.CANNON	: CONNECTOR, CANNON	SCR.TERM	: SCREW TERMINAL
CN.DIN	: CONNECTOR, DIN	SCR.TR	: SCREW, TRANSISTOR
CN.FLAT	: CONNECTOR, FLAT CABLE	SUPRT.PCB	: SUPPORT, P.C.B.
CN.POST	: CONNECTOR, BASE POST	SURG.PRTCT	: SURGE PROTECTOR
COIL.MX.AM	: COIL, AM MIX	SW.TACT	: TACT SWITCH
COIL.AT.FM	: COIL, FM ANTENNA	SW.LEAF	: LEAF SWITCH
COIL.DT.FM	: COIL, FM DETECT	SW.LEVER	: LEVER SWITCH
COIL.MX.FM	: COIL, FM MIX	SW.MICRO	: MICRO SWITCH
COIL.OUTPT	: OUTPUT COIL	SW.PUSH	: PUSH SWITCH
DIOD.ARRAY	: DIODE ARRAY	SW.RT.ENC	: ROTARY ENCODER
DIODE.BRG	: DIODE BRIDGE	SW.RT.MTR	: ROTARY SWITCH WITH MOTOR
DIODE.CHP	: CHIP DIODE	SW.RT	: ROTARY SWITCH
DIODE.VAR	: VARACTOR DIODE	SW.SLIDE	: SLIDE SWITCH
DIOD.Z.CHP	: CHIP ZENER DIODE	TERM.SP	: SPEAKER TERMINAL
DIODE.ZENR	: ZENER DIODE	TERM.WRAP	: WRAPPING TERMINAL
DSCR.CE	: CERAMIC DISCRIMINATOR	THRMST.CHP	: CHIP THERMISTOR
FER.BEAD	: FERRITE BEADS	TR.CHP	: CHIP TRANSISTOR
FER.CORE	: FERRITE CORE	TR.DGT	: DIGITAL TRANSISTOR
FET.CHP	: CHIP FET	TR.DGT.CHP	: CHIP DIGITAL TRANSISTOR
FL.DSPLY	: FLUORESCENT DISPLAY	TRANS	: TRANSFORMER
FLTR.CE	: CERAMIC FILTER	TRANS.PULS	: PULSE TRANSFORMER
FLTR.COMB	: COMB FILTER MODULE	TRANS.PWR	: POWER TRANSFORMER ASS'y
FLTR.LC.RF	: LC FILTER ,EMI	TUNER.AM	: TUNER PACK, AM
GND.MTL	: GROUND PLATE	TUNER.FM	: TUNER PACK, FM
GND.TERM	: GROUND TERMINAL	TUNER.PK	: FRONT-END TUNER PACK
HOLDER.FUS	: FUSE HOLDER	VR	: ROTARY POTENTIOMETER
IC.PRTCT	: IC PROTECTOR	VR.MTR	: POTENTIOMETER WITH MOTOR
JUMPER.CN	: JUMPER CONNECTOR	VR.SW	: POTENTIOMETER WITH ROTARY SW
JUMPER.TST	: JUMPER, TEST POINT	VR.SLIDE	: SLIDE POTENTIOMETER
L.DTCT	: LIGHT DETECTING MODULE	VR.TRIM	: TRIMMER POTENTIOMETER

Note) Those parts marked with “#” are not included in the P.C.B. ass'y.

GX-500 P.C.B. INPUT

GX-500/VCD

Schm Ref.	PART NO.	Description
*	V4001700	P.C.B.
*	V4001800	P.C.B.
*	V4001900	P.C.B.
*	V4002000	P.C.B.
*	CB5	VQ963200 CN.BS.PIN 11P
	CB6	VM859600 CN.BS.PIN 15P
	CB10	VQ047500 CN.BS.PIN 20P
	CB13	VP082900 CN.BS.PIN 25P
	CB420	VT707200 L.EMIT TOTX178
	C1	UB044100 C.CE.M.CHP 0.01uF 50V
	C2	UB044220 C.CE.M.CHP 0.022uF 50V
	C3	UR818100 C.EL 100uF 6.3V
	C4	UA952680 C.MYLAR 680pF 50V
	C5	UB012560 C.CE.M.CHP 560pF 50V
	C6	UB012560 C.CE.M.CHP 560pF 50V
	C7	UB012220 C.CE.M.CHP 220pF 50V
	C8	UB012220 C.CE.M.CHP 220pF 50V
	C15	UR838100 C.EL 100uF 16V
	C16	UB044100 C.CE.M.CHP 0.01uF 50V
	C17	UA952680 C.MYLAR 680pF 50V
	C18	UR837470 C.EL 47uF 16V
	C19	UB044470 C.CE.M.CHP 0.047uF 50V
	C20	UB044100 C.CE.M.CHP 0.01uF 50V
	C21	UR866100 C.EL 1uF 50V
	C22	UR838100 C.EL 100uF 16V
	C23	UR838100 C.EL 100uF 16V
	C24	UR865100 C.EL 0.1uF 50V
	C25	UT652100 C.PP 100pF 100V
	C26	UT652100 C.PP 100pF 100V
*	C27	UA953100 C.MYLAR 1000pF 50V
*	C28	UT653820 C.PP 8200pF 100V
	C29	UA953470 C.MYLAR 4700pF 50V
	C30	UR837100 C.EL 10uF 16V
	C31	UR847100 C.EL 10uF 25V
	C32	UR837220 C.EL 22uF 25V
	C33	UR866470 C.EL 4.7uF 50V
	C34	UR837220 C.EL 22uF 25V
	C35	UR837220 C.EL 22uF 25V
	C36	UR866330 C.EL 3.3uF 50V
	C37	UA954180 C.MYLAR 0.018uF 50V
	C38	FG612220 C.CE 220pF 50V
	C39	FG612220 C.CE 220pF 50V
	C40	UA954180 C.MYLAR 0.018uF 50V
	C41	UR866100 C.EL 1uF 50V
	C42	UR837470 C.EL 47uF 16V
	C43	UR866470 C.EL 4.7uF 50V
	C44	UR866470 C.EL 4.7uF 50V
	C45	UA655100 C.MYLAR 0.1uF 50V
	C46	UR865470 C.EL 0.47uF 50V
	C47	UR866470 C.EL 4.7uF 50V
	C48	UR866220 C.EL 2.2uF 50V
	C49	UR866220 C.EL 2.2uF 50V
	C50	UR866470 C.EL 4.7uF 50V

* New Parts

Schm Ref.	PART NO.	Description
C51	UR866470	C.EL 4.7uF 50V
C52	UR866470	C.EL 4.7uF 50V
C53	UR866220	C.EL 2.2uF 50V
C54	UA953270	C.MYLAR 2700pF 50V
C55	UR866470	C.EL 4.7uF 50V
C56	UR865220	C.EL 0.22uF 50V
C57	UB044100	C.CE.M.CHP 0.01uF 50V
C58	UR847100	C.EL 10uF 25V
C59	UB052100	C.CE.M.CHP 100pF 50V
C60	UB052100	C.CE.M.CHP 100pF 50V
C61	UA953270	C.MYLAR 2700pF 50V
C62	UR866470	C.EL 4.7uF 50V
C63	UR866470	C.EL 4.7uF 50V
C64	UA655100	C.MYLAR 0.1uF 50V
C65	UR866220	C.EL 2.2uF 50V
C66	UR866220	C.EL 2.2uF 50V
C67	UR866220	C.EL 2.2uF 50V
C68	UR865220	C.EL 0.22uF 50V
C69	UR848100	C.EL 100uF 25V
C70	UR866100	C.EL 1uF 50V
C71	UR837220	C.EL 22uF 25V
C72	UR837100	C.EL 10uF 16V
C73	UR847100	C.EL 10uF 25V
C74	UR847100	C.EL 10uF 25V
C75	UR837220	C.EL 22uF 25V
C76	UR866100	C.EL 1uF 50V
*	C77	UA655680 C.MYLAR 0.68uF 50V
	C78	UA953680 C.MYLAR 6800pF 50V
	C79	UA954220 C.MYLAR 0.022uF 50V
	C80	UB013220 C.CE.M.CHP 2200pF 50V
	C81	UR866100 C.EL 1uF 50V
	C82	UA654750 C.MYLAR 0.075uF 50V
	C83	UA953220 C.MYLAR 2200pF 50V
	C84	UA954680 C.MYLAR 0.068uF 50V
	C85	UR847100 C.EL 10uF 25V
	C86	UR866100 C.EL 1uF 50V
	C87	UR847100 C.EL 10uF 25V
	C88	UA953220 C.MYLAR 2200pF 50V
	C89	UA654750 C.MYLAR 0.075uF 50V
	C90	UA954680 C.MYLAR 0.068uF 50V
	C91	UR847100 C.EL 10uF 25V
	C92	UB013220 C.CE.M.CHP 2200pF 50V
	C93	UR866100 C.EL 1uF 50V
	C94	UR847100 C.EL 10uF 25V
	C95	UA954220 C.MYLAR 0.022uF 50V
*	C96	UA655680 C.MYLAR 0.68uF 50V
	C97	UA953680 C.MYLAR 6800pF 50V
	C98	UR866100 C.EL 1uF 50V
	C99	UB052100 C.CE.M.CHP 100pF 50V
	C100	UR837100 C.EL 10uF 16V
	C101	UB052100 C.CE.M.CHP 100pF 50V
	C102	UR837100 C.EL 10uF 16V
	C103	VF992600 C.EL 4700uF 5.5V

* New Parts

GX-500 P.C.B. INPUT

Schm Ref.	PART NO.	Description
C104	UB044100	C.CE.M.CHP 0.01uF 50V
C105	UB052100	C.CE.M.CHP 100pF 50V
C106	UB052100	C.CE.M.CHP 100pF 50V
C107	UB245100	C.CE.M.CHP 0.1uF 25V
C108	UB052100	C.CE.M.CHP 100pF 50V
C109	UR866220	C.EL 2.2uF 50V
C110	UB052100	C.CE.M.CHP 100pF 50V
C111	UB052100	C.CE.M.CHP 100pF 50V
C112	UB052100	C.CE.M.CHP 100pF 50V
C113	UB052100	C.CE.M.CHP 100pF 50V
C114	UA654750	C.MYLAR 0.075uF 50V
C115	UR847100	C.EL 10uF 25V
C116	UR866100	C.EL 1uF 50V
C117	UR847100	C.EL 10uF 25V
C118	UR847100	C.EL 10uF 25V
C119	UR866100	C.EL 1uF 50V
C120	UR847100	C.EL 10uF 25V
C121	UA654750	C.MYLAR 0.075uF 50V
C122	UB245100	C.CE.M.CHP 0.1uF 25V
C123	UB245100	C.CE.M.CHP 0.1uF 25V
C124	VJ900300	C.CE.M.CHP 22pF 50V
C125	VJ900300	C.CE.M.CHP 22pF 50V
C126	UB245100	C.CE.M.CHP 0.1uF 25V
C127	UR837100	C.EL 10uF 16V
C128	UR837100	C.EL 10uF 16V
C129	UR837100	C.EL 10uF 16V
C130	UR837100	C.EL 10uF 16V
C131	UR866100	C.EL 1uF 50V
C132	UB051470	C.CE.M.CHP 47pF 50V
C133	UB051470	C.CE.M.CHP 47pF 50V
C134	UN865470	C.EL 0.47uF 50V
C135	UR838100	C.EL 100uF 16V
C136	UR838100	C.EL 100uF 16V
C137	UB051470	C.CE.M.CHP 47pF 50V
C138	UB051470	C.CE.M.CHP 47pF 50V
C139	UR866100	C.EL 1uF 50V
C140	UB245100	C.CE.M.CHP 0.1uF 25V
C141	UB245100	C.CE.M.CHP 0.1uF 25V
C142	UR837100	C.EL 10uF 16V
C143	UR865470	C.EL 0.47uF 50V
C144	UR837100	C.EL 10uF 16V
C145	UR837100	C.EL 10uF 16V
C146	UR837100	C.EL 10uF 16V
C147	UR837220	C.EL 22uF 25V
C148	UB051470	C.CE.M.CHP 47pF 50V
C149	UB051470	C.CE.M.CHP 47pF 50V
C150	UR837220	C.EL 22uF 25V
C151	UR837100	C.EL 10uF 16V
C152	UR837100	C.EL 10uF 16V
C153	UR837100	C.EL 10uF 16V
C154	UR838330	C.EL 330uF 16V
C155	UB012330	C.CE.M.CHP 330pF 50V
C156	UB012330	C.CE.M.CHP 330pF 50V

* New Parts

Schm Ref.	PART NO.	Description
C157	UR837100	C.EL 10uF 16V
C158	UR837100	C.EL 10uF 16V
C159	UN866100	C.EL 1uF 50V
C160	UB052100	C.CE.M.CHP 100pF 50V
C420	UB245100	C.CE.M.CHP 0.1uF 25V
D3	VU992700	DIODE.ZENR MA8051-H 5.3V
D4	VT332900	DIODE 1SS355
D5	VT332900	DIODE 1SS355
D6	VU992900	DIODE.ZENR MA8056-L 5.4V
D7	VU995100	DIODE.ZENR MA8091-H 9.4V
D8	VT332900	DIODE 1SS355
D10	VT332900	DIODE 1SS355
D11	VV833200	DIODE 1SS380
D12	VT332900	DIODE 1SS355
* D20	VU995300	DIODE.ZENR MA8100-L 9.7V
* D21	VT332900	DIODE 1SS355
D22	VU992300	DIODE.ZENR MA8047-H 4.9V
D23	VU993000	DIODE.ZENR MA8056-M 5.6V
D24	VU993400	DIODE.ZENR MA8062-M 6.2V
* D25	VU995300	DIODE.ZENR MA8100-L 9.7V
* D26	VV220700	DIODE.SHOT RB501V-40
* HS1	VN126800	HEAT.SINK U0T-16C25-MP
IC1	XF494A00	IC LB1641
IC2	XD864A00	IC uPC1330HA
IC3	XG903A00	IC TC4052BF MPX
IC5	XF293A00	IC uPD4066G-T1
* IC6	XV473A00	IC CXA1897Q
* IC7	XV474A00	IC LC75393E
IC8	XW069A00	IC M38199MF-096FP CPU
IC9	XF291A00	IC uPC4570G2
IC10	XG938A00	IC BA15218N
IC11	XF291A00	IC uPC4570G2
IC21	XF291A00	IC uPC4570G2
* IC26	XR275A00	IC BA3835S
* L1	VM547800	COIL.BIAS 105KHz
* L2	GE900780	COIL.BIAS 105KHz
* L3	GE900780	COIL.BIAS 105KHz
PJ1	VV306900	JACK.PIN 4P
PJ4	VK437600	JACK.PIN 1P
Q1	VV655700	TR.DGT DTC144EKA
* Q2	VE613300	TR 2SB1237 Q,R
Q3	IC174020	TR 2SC1740S R,S
* Q4	VE613300	TR 2SB1237 Q,R
Q5	VV655300	TR.DGT DTA144EKA
Q6	VV655300	TR.DGT DTA144EKA
Q7	VV655700	TR.DGT DTC144EKA
Q8	V3752400	TR.DGT DTC143TKA
* Q9	VV655500	TR.DGT DTC124EKA
* Q10	VV655500	TR.DGT DTC124EKA
Q11	IC174020	TR 2SC1740S R,S
Q12	IC174020	TR 2SC1740S R,S
Q13	IC174020	TR 2SC1740S R,S
* Q14	VV655500	TR.DGT DTC124EKA

* New Parts

GX-500 P.C.B. INPUT & CD

GX-500/VCD

Schm Ref.	PART NO.	Description
* Q15	VV655700	TR.DGT DTC144EKA
* Q16	VV655500	TR.DGT DTC124EKA
* Q17	VE613400	TR 2SD1858 Q,R
* Q18	VV655400	TR.DGT DTC114EKA
* Q19	V3033500	TR.DGT DTC143XKA
Q20	VV655300	TR.DGT DTA144EKA
* Q21	VZ725900	TR 2SD1938F S,T
* Q22	VV655000	TR.DGT DTA114EKA
* Q23	VZ725900	TR 2SD1938F S,T
* Q24	VZ725900	TR 2SD1938F S,T
△ Q25	VK407600	TR 2SC4208A Q,R,S
△ Q26	VS883400	TR 2SD2394 E,F
Q27	VK407600	TR 2SC4208A Q,R,S
Q28	IA093320	TR 2SA933S Q,R
Q29	VV655700	TR.DGT DTC144EKA
Q30	VV655700	TR.DGT DTC144EKA
△ Q33	VK407600	TR 2SC4208A Q,R,S
* Q34	VV655500	TR.DGT DTC124EKA
* Q35	VV655500	TR.DGT DTC124EKA
* Q36	VV655500	TR.DGT DTC124EKA
R27	VP940100	R.MTL.OXD 33Ω 1W
R35	HV755150	R.CAR.FP 150Ω 1/4W
R59	HV754220	R.CAR.FP 22Ω 1/4W
R66	HV755560	R.CAR.FP 560Ω 1/4W
△ R95	HV753560	R.CAR.FP 5.6Ω 1/4W
△ R110	HV754680	R.CAR.FP 68Ω 1/4W
R155	HV754220	R.CAR.FP 22Ω 1/4W
R156	HV754220	R.CAR.FP 22Ω 1/4W
R251	HV754220	R.CAR.FP 22Ω 1/4W
R254	HV754220	R.CAR.FP 22Ω 1/4W
R258	HV754220	R.CAR.FP 22Ω 1/4W
R273	HV754220	R.CAR.FP 22Ω 1/4W
SW2	VU755700	SW.SLIDE SS029-P012BEB(R)
* VR1	VJ693600	VR.TRIM B10KΩ
* VR2	VJ694300	VR.TRIM B150KΩ
* VR3	VJ694300	VR.TRIM B150KΩ
* VR4	VJ693600	VR.TRIM B10KΩ
* VR5	VJ693800	VR.TRIM B22KΩ
* VR6	VJ693800	VR.TRIM B22KΩ
* VR7	VJ692900	VR.TRIM B680Ω
XL1	VJ802400	RSNR.CE 8MHz
XL2	VQ328900	RSNR.CRYS 32.768KHz
	VJ828000	PIN IMSA-6024-03E
	BB071360	SCR.TERM 8.3x13
*	V4003600	P.C.B. CD
CB1	V2731000	CN.FMN 16P
CB2	VU929500	CN.BS.PIN 6P
CB3	VU534900	CN.BS.PIN 6P
CB4	VB390200	CN.BS.PIN 6P
CB5	VB389900	CN.BS.PIN 3P

* New Parts

Schm Ref.	PART NO.	Description
* CB7	VB858200	CN.BS.PIN 3P
* CB8	LB919030	CN.BS.PIN 3P
CB9	VM929900	CN.BS.PIN 15P
C1	UN866100	C.EL 1uF 50V
C2	UN866100	C.EL 1uF 50V
C3	UR818100	C.EL 100uF 6.3V
C4	UR818470	C.EL 470uF 6.3V
C5	UB045100	C.CE.M.CHP 0.1uF 50V
C6	UB045100	C.CE.M.CHP 0.1uF 50V
C7	UB044100	C.CE.M.CHP 0.01uF 50V
C8	UA952100	C.MYLAR 100pF 50V
C9	UB045100	C.CE.M.CHP 0.1uF 50V
C10	UA655100	C.MYLAR 0.1uF 50V
C11	UR837470	C.EL 47uF 16V
C12	UR866100	C.EL 1uF 50V
C13	UB013100	C.CE.M.CHP 1000pF 50V
C14	UB044100	C.CE.M.CHP 0.01uF 50V
C15	UR818100	C.EL 100uF 6.3V
C16	UA655100	C.MYLAR 0.1uF 50V
C17	UR828100	C.EL 100uF 10V
C18	UR838220	C.EL 220uF 16V
C19	UR837100	C.EL 10uF 16V
C20	UA954470	C.MYLAR 0.047uF 50V
C21	UA953180	C.MYLAR 1800pF 50V
C22	UA953220	C.MYLAR 2200pF 50V
C23	UA655100	C.MYLAR 0.1uF 50V
C24	UA953470	C.MYLAR 4700pF 50V
C25	UA953220	C.MYLAR 2200pF 50V
C26	UA953220	C.MYLAR 2200pF 50V
C27	UA655270	C.MYLAR 0.27uF 50V
C29	UR818100	C.EL 100uF 6.3V
C31	UB012560	C.CE.M.CHP 560pF 50V
C32	UB045100	C.CE.M.CHP 0.1uF 50V
C33	UA655330	C.MYLAR 0.33uF 50V
C34	UA654240	C.MYLAR 0.024uF 50V
C35	UB044100	C.CE.M.CHP 0.01uF 50V
C36	VJ900300	C.CE.M.CHP 22pF 50V
C37	VJ900300	C.CE.M.CHP 22pF 50V
C38	UR818100	C.EL 100uF 6.3V
C39	UR818470	C.EL 470uF 6.3V
C40	UB044100	C.CE.M.CHP 0.01uF 50V
C41	UB044100	C.CE.M.CHP 0.01uF 50V
C42	UB044100	C.CE.M.CHP 0.01uF 50V
C44	UB044100	C.CE.M.CHP 0.01uF 50V
C45	UB044100	C.CE.M.CHP 0.01uF 50V
C46	UR818100	C.EL 100uF 6.3V
* C47	UA653100	C.MYLAR 1000pF 50V
C48	UR818100	C.EL 100uF 6.3V
C50	UB044100	C.CE.M.CHP 0.01uF 50V
C51	UR866100	C.EL 1uF 50V
C52	UA954100	C.MYLAR 0.01uF 50V
C53	UA954100	C.MYLAR 0.01uF 50V
C54	UR866100	C.EL 1uF 50V

* New Parts

GX-500 P.C.B. CD & MAIN

Schm Ref.	PART NO.	Description
C55	UA655330	C.MYLAR 0.33uF 50V
C56	UB044100	C.CE.M.CHP 0.01uF 50V
C57	UB044100	C.CE.M.CHP 0.01uF 50V
C58	UB044100	C.CE.M.CHP 0.01uF 50V
C59	UA953680	C.MYLAR 6800pF 50V
C60	UA953220	C.MYLAR 2200pF 50V
C61	UA953220	C.MYLAR 2200pF 50V
C62	UA953680	C.MYLAR 6800pF 50V
C63	UR828100	C.EL 100uF 10V
C64	UR837100	C.EL 10uF 16V
C65	UR818100	C.EL 100uF 6.3V
C66	UR837220	C.EL 22uF 25V
C67	UR837220	C.EL 22uF 25V
C68	UR837220	C.EL 22uF 25V
C69	UR837220	C.EL 22uF 25V
C71	UA953150	C.MYLAR 1500pF 50V
C72	UA953150	C.MYLAR 1500pF 50V
C86	UB051100	C.CE.M.CHP 10pF 50V
C87	VR498100	C.EL 6.8uF 6.3V
C89	UB012470	C.CE.M.CHP 470pF 50V
C90	UB044100	C.CE.M.CHP 0.01uF 50V
C91	UB045100	C.CE.M.CHP 0.1uF 50V
C100	UB045100	C.CE.M.CHP 0.1uF 50V
C101	UB045100	C.CE.M.CHP 0.1uF 50V
C102	UB045100	C.CE.M.CHP 0.1uF 50V
D1	VT332900	DIODE 1SS355
D2	VU993400	DIODE.ZENR MA8062-M 6.2V
D3	VT332900	DIODE 1SS355
D4	VT332900	DIODE 1SS355
D5	VT332900	DIODE 1SS355
D6	VT332900	DIODE 1SS355
D7	VU993800	DIODE.ZENR MA8068-M 6.8V
G1	VR463400	TERM.GND D3.5 TP00385
G2	VR463400	TERM.GND D3.5 TP00385
HS1	Vi835500	HEAT.SINK PH-0124S-B
HS2	VA119100	HEAT.SINK
* IC1	XV986A00	IC LA6541D DRIVER
IC2	XS741A00	IC AN8806SB
IC3	XR274A00	IC TA8409SE
IC4	XR274A00	IC TA8409SE
IC5	XT342A00	IC MN662741RPB1
* IC7	XQ248A00	IC TC74HC125AF BUS BU
IC10	XF291A00	IC uPC4570G2
IC11	XW063A00	IC M38197MAA-624FP CP
IC12	XQ667A00	IC M5237L
* IC13	XS993A00	IC TC74HC04AF INV
L1	VU889500	COIL 220uH
L2	VU889500	COIL 220uH
Q1	VR402300	TR 2SB647 C,D
Q2	VD678700	TR.DGT DTC114ES
Q3	iC287820	TR 2SC2878 A,B
Q4	VD678700	TR.DGT DTC114ES
Q5	VD678700	TR.DGT DTC114ES

* New Parts

Schm Ref.	PART NO.	Description
Q6	VS883300	TR 2SB1565 E,F
Q7	VR510800	TR 2SD2396 J,K
Q8	VD678700	TR.DGT DTC114ES
Q9	iC287820	TR 2SC2878 A,B
Q10	iC287820	TR 2SC2878 A,B
Q15	VD678700	TR.DGT DTC114ES
Q16	VD678700	TR.DGT DTC114ES
Q17	VD678500	TR.DGT DTA114ES
R17	HV753220	R.CAR.FP 2.2Ω 1/4W
R35	VH307000	R.ARRAY RGLE6X473J
R56	VH307000	R.ARRAY RGLE6X473J
R57	VH307000	R.ARRAY RGLE6X473J
R85	VH307000	R.ARRAY RGLE6X473J
R86	VH307000	R.ARRAY RGLE6X473J
R91	Vi868300	R.FUS 0.68Ω 1/6W
R97	VH307000	R.ARRAY RGLE6X473J
* R145	V3733100	R.MTL.OXD 39Ω 1W
* R158	V3733100	R.MTL.OXD 39Ω 1W
TP1	VL448600	JUMPER.TST
TP2	VL448600	JUMPER.TST
XL1	VJ719800	RSNR.CRYS 16.9344MHz
XL2	VJ802400	RSNR.CE 8MHz
	VJ828000	PIN IMSA-6024-03E
*	V4000600	P.C.B. MAIN(UC)
*	V4000800	P.C.B. MAIN(R)
*	V4000900	P.C.B. MAIN(ABG)
* CB201	VL845300	CN.BS.PIN 9P
* CB202	VB390700	CN.BS.PIN 11P
CB203	VL844800	CN.BS.PIN 4P
CB204	VP206500	HOLDER.FUS EYF-52BC
CB205	VL845100	CN.BS.PIN 7P
CB206	VK026500	CN.BS.PIN 6P
CB207	Vi878400	CN.BS.PIN 6P
CB208	VB390300	CN.BS.PIN 7P
CB209	VP206500	HOLDER.FUS EYF-52BC
CB212	VP206500	HOLDER.FUS EYF-52BC(R)
CB213	VP206500	HOLDER.FUS EYF-52BC(R)
CB215	VG879900	CN.BS.PIN 2P
CB216	VP206500	HOLDER.FUS EYF-52BC
CB217	VP206500	HOLDER.FUS EYF-52BC
C201	UR866470	C.EL 4.7uF 50V
C202	VF466900	C.CE.TUBLR 470pF 50V
C203	VF466900	C.CE.TUBLR 470pF 50V
C206	VF466800	C.CE.TUBLR 100pF 50V
C207	VF466800	C.CE.TUBLR 100pF 50V
C208	VF466800	C.CE.TUBLR 100pF 50V
C209	UR838330	C.EL 330uF 16V
C210	UR866470	C.EL 4.7uF 50V
C211	UR867470	C.EL 47uF 50V
C212	VG278400	C.CE.TUBLR 220pF 50V

* New Parts

GX-500 P.C.B. MAIN

GX-500/VCD

Schm Ref.	PART NO.	Description
C213	UR867100	C.EL 10uF 50V
C214	UR838100	C.EL 100uF 16V
C215	UR838100	C.EL 100uF 16V
C216	UR867100	C.EL 10uF 50V
C217	VG278400	C.CE.TUBLR 220pF 50V
C221	UR867220	C.EL 22uF 50V
C222	UR867220	C.EL 22uF 50V
C223	VF467300	C.CE.TUBLR 0.01uF 16V
C224	FG650300	C.CE 3pF 50V
C225	UT653220	C.PP 2200pF 100V
C226	UR798100	C.EL 100uF 100V
C227	UT653220	C.PP 2200pF 100V
C228	UR798100	C.EL 100uF 100V
C229	FG650300	C.CE 3pF 50V
C231	UR858100	C.EL 100uF 35V
* C232	UR897100	C.EL 10uF 100V
C233	UR858100	C.EL 100uF 35V
* C234	UR897100	C.EL 10uF 100V
C235	UR866470	C.EL 4.7uF 50V
C236	UA954470	C.MYLAR 0.047uF 50V
C237	UA954470	C.MYLAR 0.047uF 50V
△ * C239	V3671100	C.EL 4700uF 71V
△ * C240	V3671100	C.EL 4700uF 71V
* C241	UR818100	C.EL 100uF 6.3V
* C242	V3671000	C.EL 4700uF 35V
* C243	V3671000	C.EL 4700uF 35V
C244	UA953220	C.MYLAR 2200pF 50V
C245	UA953220	C.MYLAR 2200pF 50V
C246	VF467300	C.CE.TUBLR 0.01uF 16V
C247	VF467300	C.CE.TUBLR 0.01uF 16V
C248	UA954100	C.MYLAR 0.01uF 50V
C249	UA954100	C.MYLAR 0.01uF 50V
C250	VR324800	C.MYLAR 0.047uF 100V
C251	VR324800	C.MYLAR 0.047uF 100V
C252	UA954470	C.MYLAR 0.047uF 50V
C253	UA954470	C.MYLAR 0.047uF 50V
C254	UA954100	C.MYLAR 0.01uF 50V
* C255	UR739470	C.EL 4700uF 16V
C259	FG644100	C.CE 0.01uF 50V
C260	FG613100	C.CE 1000pF 50V(R)
C261	UR848470	C.EL 470uF 25V
C262	UR768470	C.EL 470uF 50V(R)
C263	VJ599100	C.CE.TUBLR 0.1uF 50V
C264	UA954100	C.MYLAR 0.01uF 50V
C265	UA954100	C.MYLAR 0.01uF 50V
△ C266	VS741700	C.CE.SAFETY 0.01uF 275V
C267	UR867100	C.EL 10uF 50V
C268	UR867470	C.EL 47uF 50V
C300	UR847100	C.EL 10uF 25V
D201	VG443100	DIODE.ZENR MTZJ27D 27V
D202	VG440500	DIODE.ZENR MTZJ13B 13V
D203	VG440500	DIODE.ZENR MTZJ13B 13V
D204	VG440500	DIODE.ZENR MTZJ13B 13V

* New Parts

Schm Ref.	PART NO.	Description
D205	VN008700	DIODE 1SS270A
D206	VN008700	DIODE 1SS270A
D208	VN008700	DIODE 1SS270A
D209	VD631600	DIODE 1SS133,176,HSS104
D210	VG440500	DIODE.ZENR MTZJ13B 13V
△ D211	VN011400	DIODE.BRG D5SB20 5A 200V
△ D212	VN011400	DIODE.BRG D5SB20 5A 200V
△ D213	VN011300	DIODE.BRG D3SBA20 4A 200V
D214	VD631600	DIODE 1SS133,176,HSS104
△ D215	VR253700	DIODE.BRG S1NB20 1.0A 200V
D216	VG440500	DIODE.ZENR MTZJ13B 13V(R)
D217	VG440500	DIODE.ZENR MTZJ13B 13V
△ F201	KB000750	FUSE.MNI T2.0A 250V(RABG)
△ F201	VS822500	FUSE 2.0A 125V(UC)
△ F202	KB000790	FUSE T4.0A 250V(R)
△ F202	KB001660	FUSE T1.6A 250V(ABG)
△ F202	VS822900	FUSE T4.0A 125V(UC)
△ F203	KB001660	FUSE T1.6A 250V(R)
G201	VR463400	TERM.GND D3.5 TP00385
HS201	V2692300	HEAT.SINK BPUE36-30
* HS202	VN126800	HEAT.SINK U0T-16C25-MP(R)
IC201	XW056A00	IC STK496-420Y 80W 2C
L201	VU038100	COIL 1.5uH
L202	VU038100	COIL 1.5uH
Q201	iC287820	TR 2SC2878 A,B
Q202	iC287820	TR 2SC2878 A,B
△ # Q204	VR510800	TR 2SD2396 J,K
△ Q206	VS883300	TR 2SB1565 E,F
△ Q207	VS883300	TR 2SB1565 E,F
Q208	VP883000	TR 2SA893A D,E
Q209	VP883100	TR 2SC1890A D,E
Q210	VP883100	TR 2SC1890A D,E
Q212	iC287820	TR 2SC2878 A,B
Q213	iC174020	TR 2SC1740S R,S
Q214	iC174020	TR 2SC1740S R,S
Q216	iC174020	TR 2SC1740S R,S
Q217	VR510800	TR 2SD2396 J,K(R)
△ # Q218	VR510800	TR 2SD2396 J,K
Q219	iC174020	TR 2SC1740S R,S
Q220	VP883000	TR 2SA893A D,E
△ R222	HV753100	R.CAR.FP 1Ω 1/4W
△ R225	HV753100	R.CAR.FP 1Ω 1/4W
△ R226	HV753100	R.CAR.FP 1Ω 1/4W
R227	VP940400	R.MTL.OXD 100Ω 1W
R230	VP940400	R.MTL.OXD 100Ω 1W
* R234	V3158200	R.MTL.PLAT 0.22Ω
* R237	V3158200	R.MTL.PLAT 0.22Ω
R242	HV754100	R.CAR.FP 10Ω 1/4W
R245	HV754100	R.CAR.FP 10Ω 1/4W
R247	HV754100	R.CAR.FP 10Ω 1/4W
R250	HV754100	R.CAR.FP 10Ω 1/4W
R263	HV754470	R.CAR.FP 47Ω 1/4W
△ R269	HV753100	R.CAR.FP 1Ω 1/4W

* New Parts

GX-500 P.C.B. MAIN & OPERATION

Schm Ref.	PART NO.	Description
△ R270	HV753100	R.CAR.FP 1Ω 1/4W
R274	HV756560	R.CAR.FP 5.6KΩ 1/4W(R)
R275	HV756560	R.CAR.FP 5.6KΩ 1/4W(R)
△ R277	HV753100	R.CAR.FP 1Ω 1/4W
RY201	VU161600	RELAY DC OSA-SS-224DM3
△ RY203	V2712300	RELAY DC SDT-S-112LMR
△ SW204	VA961800	VOLT.SELCT ESE-37247-F(R)
△ * T203	XV443A00	TRANS.PWR (UC)
△ * T203	XV444A00	TRANS.PWR (R)
△ * T203	XV445A00	TRANS.PWR (ABG)
* TE201	V2996200	TERM.SP 4P CJ-9026-06-0203
	VJ828000	PIN IMSA-6024-03E
	BB071360	SCR.TERM 8.3x13
	EP600140	SCR.BND.HD 3x10 MFZN2-BL
* V4003100 P.C.B. OPERATION		
* CB804	VQ045400	CN.BS.PIN 25P
* CB805	VB858500	CN.BS.PIN 6P
CB806	VQ045000	CN.BS.PIN 20P
C822	UR818100	C.EL 100uF 6.3V
C842	UB044470	C.CE.M.CHP 0.047uF 50V
C843	UB245100	C.CE.M.CHP 0.1uF 25V
C844	UB044470	C.CE.M.CHP 0.047uF 50V
C845	UB245100	C.CE.M.CHP 0.1uF 25V
C846	UR866100	C.EL 1uF 50V
C847	UR866100	C.EL 1uF 50V
C848	UA953220	C.MYLAR 2200pF 50V
C849	UA953220	C.MYLAR 2200pF 50V
C850	UA953680	C.MYLAR 6800pF 50V
C851	UA953680	C.MYLAR 6800pF 50V
C855	UR837100	C.EL 10uF 16V
C858	UR837100	C.EL 10uF 16V
C859	UR818100	C.EL 100uF 6.3V
C860	UR818100	C.EL 100uF 6.3V
C861	UR837100	C.EL 10uF 16V
C862	UR837100	C.EL 10uF 16V
* C863	UB012270	C.CE.M.CHP 270pF 50V
* C864	UB012270	C.CE.M.CHP 270pF 50V
C868	UA953820	C.MYLAR 8200pF 50V
C870	UA953820	C.MYLAR 8200pF 50V
C872	UB013100	C.CE.M.CHP 1000pF 50V
C873	UB013100	C.CE.M.CHP 1000pF 50V
C874	UR818100	C.EL 100uF 6.3V
C875	UB045100	C.CE.M.CHP 0.1uF 50V
C876	UB052100	C.CE.M.CHP 100pF 50V
C877	UM388100	C.EL 100uF 10V
C878	UR866470	C.EL 4.7uF 50V
C879	UR866470	C.EL 4.7uF 50V
C880	UR866470	C.EL 4.7uF 50V
C881	UB045100	C.CE.M.CHP 0.1uF 50V
C890	UR837100	C.EL 10uF 16V

* New Parts

Schm Ref.	PART NO.	Description
C901	UB052100	C.CE.M.CHP 100pF 50V
C902	UB245100	C.CE.M.CHP 0.1uF 25V
D802	VS132300	LED(re) SLR-325VCT31
* D803	VR711400	LED(gr) SLR-325MC
D804	VU992900	DIODE.ZENR MA8056-L 5.4V
* D810	V3253600	LED(bu) SELU1E50CM
IC810	XB247A00	IC uPC4570HA
IC811	XJ757A00	IC NJM78L05A-T3
* IC814	XT952A00	IC YSS247-D
* IC815	XW059A00	IC M66004MASP
* JK803	VT941600	JACK.MNI SW HTJ-035-17AB
Q801	iC287820	TR 2SC2878 A,B
Q802	iC287820	TR 2SC2878 A,B
Q803	iC174020	TR 2SC1740S R,S
Q804	iC174020	TR 2SC1740S R,S
Q805	iA093320	TR 2SA933S Q,R
Q806	iC174020	TR 2SC1740S R,S
R828	HV754330	R.CAR.FP 33Ω 1/4W
R829	HV754330	R.CAR.FP 33Ω 1/4W
R830	HV754680	R.CAR.FP 68Ω 1/4W
R831	HV754680	R.CAR.FP 68Ω 1/4W
R846	HV754390	R.CAR.FP 39Ω 1/4W
R851	HV754390	R.CAR.FP 39Ω 1/4W
R894	HV755100	R.CAR.FP 100Ω 1/4W
R895	HV755100	R.CAR.FP 100Ω 1/4W
R951	HV754220	R.CAR.FP 22Ω 1/4W
SW802	VG392900	SW.TACT SKHVAA
SW803	VG392900	SW.TACT SKHVAA
SW804	VG392900	SW.TACT SKHVAA
SW805	VG392900	SW.TACT SKHVAA
SW806	VG392900	SW.TACT SKHVAA
SW807	VG392900	SW.TACT SKHVAA
SW808	VG392900	SW.TACT SKHVAA
SW809	VG392900	SW.TACT SKHVAA
SW813	VG392900	SW.TACT SKHVAA
SW814	VG392900	SW.TACT SKHVAA
SW815	VG392900	SW.TACT SKHVAA
SW816	VG392900	SW.TACT SKHVAA
SW817	VG392900	SW.TACT SKHVAA
SW818	VG392900	SW.TACT SKHVAA
SW820	VG392900	SW.TACT SKHVAA
SW821	VG392900	SW.TACT SKHVAA
SW822	VG392900	SW.TACT SKHVAA
SW823	VG392900	SW.TACT SKHVAA
SW824	VG392900	SW.TACT SKHVAA
* SW825	VT941400	SW.RT.ENC EC16B24304
SW826	VG392900	SW.TACT SKHVAA
SW827	VG392900	SW.TACT SKHVAA
SW828	VG392900	SW.TACT SKHVAA
SW829	VG392900	SW.TACT SKHVAA
SW830	VG392900	SW.TACT SKHVAA
SW831	VG392900	SW.TACT SKHVAA
SW832	VG392900	SW.TACT SKHVAA

* New Parts

GX-500 P.C.B. OPERATION & TUNER

Schm Ref.	PART NO.	Description	
SW833	VG392900	SW.TACT	SKHVAA
SW834	VG392900	SW.TACT	SKHVAA
SW835	VG392900	SW.TACT	SKHVAA
SW836	VG392900	SW.TACT	SKHVAA
U801	V2856200	L.DTCT	PIC-28043TH2
* V801	V2959000	FL.DSPLY	16-BT-63GK
* VR802	V2969400	VR	B50KΩ
* VR804	V2969500	VR	B100KΩ
	VJ828000	PIN	IMSA-6024-03E
	VU351500	SPACER	FL
	V3112800	SHEET.FL	
	V3281500	SPACER.LED	LDS-20K
	V4000200	P.C.B./CHP	TUNER/TU-02(UCR)
	V4000300	P.C.B./CHP	TUNER/TU-02(A)
	V4000400	P.C.B./CHP	TUNER/TU-02(BG)
* CB1	VQ961400	CN.BS.PIN	11P
C1	UB044100	C.CE.M.CHP	0.01uF 50V
C2	UR838100	C.EL	100uF 16V
C3	UB044100	C.CE.M.CHP	0.01uF 50V
C4	UR865220	C.EL	0.22uF 50V
C5	UB044100	C.CE.M.CHP	0.01uF 50V
C6	UB044100	C.CE.M.CHP	0.01uF 50V
C7	UB044100	C.CE.M.CHP	0.01uF 50V
C8	UB044100	C.CE.M.CHP	0.01uF 50V
C9	UB044470	C.CE.M.CHP	0.047uF 50V
* C10	VA760500	C.CE	8pF 50V
C11	UR837100	C.EL	10uF 16V
C12	UB044100	C.CE.M.CHP	0.01uF 50V
C13	UR837470	C.EL	47uF 16V
C14	UB044470	C.CE.M.CHP	0.047uF 50V
C15	UB044100	C.CE.M.CHP	0.01uF 50V
C16	UB044470	C.CE.M.CHP	0.047uF 50V
C17	UR866100	C.EL	1uF 50V
C18	UR865470	C.EL	0.47uF 50V
C19	UR866100	C.EL	1uF 50V
C20	UR866100	C.EL	1uF 50V
C21	UB045100	C.CE.M.CHP	0.1uF 50V
C22	UB044470	C.CE.M.CHP	0.047uF 50V
C23	UR866220	C.EL	2.2uF 50V
C24	UR837330	C.EL	33uF 16V
C25	UB044470	C.CE.M.CHP	0.047uF 50V
C26	UR866330	C.EL	3.3uF 50V
C27	UB044470	C.CE.M.CHP	0.047uF 50V
C28	UR837220	C.EL	22uF 25V
* C29	UB014270	C.CE.M.CHP	0.027uF 50V
* C30	UB012680	C.CE.M.CHP	680pF 50V(UCRA)
C30	UB052100	C.CE.M.CHP	100pF 50V(BG)
C31	UR837100	C.EL	10uF 16V
C32	UA954270	C.MYLAR	0.027uF 50V(ABG)
C32	UA654430	C.MYLAR	0.043uF 50V(UCR)

* New Parts

Schm Ref.	PART NO.	Description	
C33	UA954270	C.MYLAR	0.027uF 50V(ABG)
C33	UA654430	C.MYLAR	0.043uF 50V(UCR)
C34	UR837100	C.EL	10uF 16V
C35	UR837100	C.EL	10uF 16V
C36	UR866470	C.EL	4.7uF 50V
C37	UR866470	C.EL	4.7uF 50V
C38	UB013270	C.CE.M.CHP	2700pF 50V
C39	UB013270	C.CE.M.CHP	2700pF 50V
C40	UB044100	C.CE.M.CHP	0.01uF 50V
C41	UR837100	C.EL	10uF 16V
C57	UR817470	C.EL	47uF 6.3V
C58	UR817470	C.EL	47uF 6.3V
C59	UR838100	C.EL	100uF 16V
C60	UB052100	C.CE.M.CHP	100pF 50V
C61	UR866100	C.EL	1uF 50V
C62	UR837100	C.EL	10uF 16V
C63	VJ899500	C.CE.M.CHP	10pF 50V
C64	VJ899500	C.CE.M.CHP	10pF 50V
C65	UB052100	C.CE.M.CHP	100pF 50V
C67	UR817470	C.EL	47uF 6.3V(BG)
C68	UB012330	C.CE.M.CHP	330pF 50V(BG)
C69	UR817470	C.EL	47uF 6.3V(BG)
C70	UR817470	C.EL	47uF 6.3V(BG)
C71	UB012560	C.CE.M.CHP	560pF 50V(BG)
C72	VJ900500	C.CE.M.CHP	27pF 50V(BG)
C73	VJ900500	C.CE.M.CHP	27pF 50V(BG)
C74	UB045100	C.CE.M.CHP	0.1uF 50V(BG)
D1	VU995000	DIODE.ZENR	MA8091-M 9.1V
D2	VT332900	DIODE	1SS355
D3	VT332900	DIODE	1SS355
D4	VT332900	DIODE	1SS355
D5	VU993000	DIODE.ZENR	MA8056-M 5.6V
D11	VU995400	DIODE.ZENR	MA8100-M 10V
* IC1	XV228A00	IC	LA1838 FM,AM IF
* IC2	XV229A00	IC	LC72131M
* IC4	XV230A00	IC	LC72720NM(BG)
L1	GG000560	FLTR.CE	(UCRA)
* L1	V4545200	FLTR.CE	SFE10.7MJA1(BG)
L2	GG000560	FLTR.CE	(UCRA)
* L2	V4545200	FLTR.CE	SFE10.7MJA1(BG)
L3	VU887900	COIL	10uH
L4	VU434500	FLTR.CE	450K PCFMT-049A
L5	VR888000	FLTR.LC	19KHz
L6	VR888000	FLTR.LC	19KHz
L7	VU889500	COIL	220uH(BG)
L8	VU889500	COIL	220uH(BG)
L9	VU889500	COIL	220uH(BG)
PK1	V4299000	TUNER.FM	TFFJ2U584A(UCR)
PK1	VU134500	TUNER.FM	TFFJ4E515A(ABG)
PK2	VU333700	COIL.RF.AM	940536051A
Q1	iC053540	TR	2SC535 A,B,C
Q2	VD678500	TR.DGT	DTA114ES
Q3	iC1815I0	TR	2SC1815 Y

* New Parts

GX-500 P.C.B. TUNER

*

* New Parts

* New Parts

GX-500VCD P.C.B. INPUT

Schm Ref.	PART NO.	Description	
*	V4002100	P.C.B.	INPUT(RT)
*	V4002200	P.C.B.	INPUT(L)
*	CB5	VQ963200	CN.BS.PIN 11P
	CB6	VM859600	CN.BS.PIN 15P
	CB10	VQ047500	CN.BS.PIN 20P
	CB11	VM859600	CN.BS.PIN 15P
	CB13	VP082900	CN.BS.PIN 25P
*	CB401	VB858700	CN.BS.PIN 8P
	CB402	VT707200	L.EMIT TOTX178
	C1	UB044100	C.CE.M.CHP 0.01uF 50V
	C2	UB044220	C.CE.M.CHP 0.022uF 50V
	C3	UR818100	C.EL 100uF 6.3V
	C4	UA952680	C.MYLAR 680pF 50V
	C5	UB012560	C.CE.M.CHP 560pF 50V
	C6	UB012560	C.CE.M.CHP 560pF 50V
	C7	UB012220	C.CE.M.CHP 220pF 50V
	C8	UB012220	C.CE.M.CHP 220pF 50V
	C15	UR838100	C.EL 100uF 16V
	C16	UB044100	C.CE.M.CHP 0.01uF 50V
	C17	UA952680	C.MYLAR 680pF 50V
	C18	UR837470	C.EL 47uF 16V
	C19	UB044470	C.CE.M.CHP 0.047uF 50V
	C20	UB044100	C.CE.M.CHP 0.01uF 50V
	C21	UR866100	C.EL 1uF 50V
	C22	UR838100	C.EL 100uF 16V
	C23	UR838100	C.EL 100uF 16V
	C24	UR865100	C.EL 0.1uF 50V
	C25	UT652100	C.PP 100pF 100V
	C26	UT652100	C.PP 100pF 100V
	C27	UA953100	C.MYLAR 1000pF 50V
*	C28	UT653820	C.PP 8200pF 100V
	C29	UA953470	C.MYLAR 4700pF 50V
	C30	UR837100	C.EL 10uF 16V
	C31	UR847100	C.EL 10uF 25V
	C32	UR837220	C.EL 22uF 25V
	C33	UR866470	C.EL 4.7uF 50V
	C34	UR837220	C.EL 22uF 25V
	C35	UR837220	C.EL 22uF 25V
	C36	UR866330	C.EL 3.3uF 50V
	C37	UA954180	C.MYLAR 0.018uF 50V
	C38	FG612220	C.CE 220pF 50V
	C39	FG612220	C.CE 220pF 50V
	C40	UA954180	C.MYLAR 0.018uF 50V
	C41	UR866100	C.EL 1uF 50V
	C42	UR837470	C.EL 47uF 16V
	C43	UR866470	C.EL 4.7uF 50V
	C44	UR866470	C.EL 4.7uF 50V
	C45	UA655100	C.MYLAR 0.1uF 50V
	C46	UR865470	C.EL 0.47uF 50V
	C47	UR866470	C.EL 4.7uF 50V
	C48	UR866220	C.EL 2.2uF 50V
	C49	UR866220	C.EL 2.2uF 50V
	C50	UR866470	C.EL 4.7uF 50V

* New Parts

Schm Ref.	PART NO.	Description	
C51	UR866470	C.EL 4.7uF 50V	
C52	UR866470	C.EL 4.7uF 50V	
C53	UR866220	C.EL 2.2uF 50V	
C54	UA953270	C.MYLAR 2700pF 50V	
C55	UR866470	C.EL 4.7uF 50V	
C56	UR865220	C.EL 0.22uF 50V	
C57	UB044100	C.CE.M.CHP 0.01uF 50V	
C58	UR847100	C.EL 10uF 25V	
C59	UB052100	C.CE.M.CHP 100pF 50V	
C60	UB052100	C.CE.M.CHP 100pF 50V	
C61	UA953270	C.MYLAR 2700pF 50V	
C62	UR866470	C.EL 4.7uF 50V	
C63	UR866470	C.EL 4.7uF 50V	
C64	UA655100	C.MYLAR 0.1uF 50V	
C65	UR866220	C.EL 2.2uF 50V	
C66	UR866220	C.EL 2.2uF 50V	
C67	UR866220	C.EL 2.2uF 50V	
C68	UR865220	C.EL 0.22uF 50V	
C69	UR848100	C.EL 100uF 25V	
C70	UR866100	C.EL 1uF 50V	
C71	UR837220	C.EL 22uF 25V	
C72	UR837100	C.EL 10uF 16V	
C73	UR847100	C.EL 10uF 25V	
C74	UR847100	C.EL 10uF 25V	
C75	UR837220	C.EL 22uF 25V	
C76	UR866100	C.EL 1uF 50V	
*	C77	UA655680	C.MYLAR 0.68uF 50V
	C78	UA953680	C.MYLAR 6800pF 50V
	C79	UA954220	C.MYLAR 0.022uF 50V
	C80	UB013220	C.CE.M.CHP 2200pF 50V
	C81	UR866100	C.EL 1uF 50V
	C82	UA654750	C.MYLAR 0.075uF 50V
	C83	UA953220	C.MYLAR 2200pF 50V
	C84	UA954680	C.MYLAR 0.068uF 50V
	C85	UR847100	C.EL 10uF 25V
	C86	UR866100	C.EL 1uF 50V
	C87	UR847100	C.EL 10uF 25V
	C88	UA953220	C.MYLAR 2200pF 50V
	C89	UA654750	C.MYLAR 0.075uF 50V
	C90	UA954680	C.MYLAR 0.068uF 50V
	C91	UR847100	C.EL 10uF 25V
	C92	UB013220	C.CE.M.CHP 2200pF 50V
	C93	UR866100	C.EL 1uF 50V
	C94	UR847100	C.EL 10uF 25V
	C95	UA954220	C.MYLAR 0.022uF 50V
*	C96	UA655680	C.MYLAR 0.68uF 50V
	C97	UA953680	C.MYLAR 6800pF 50V
	C98	UR866100	C.EL 1uF 50V
	C99	UB052100	C.CE.M.CHP 100pF 50V
	C100	UR837100	C.EL 10uF 16V
	C101	UB052100	C.CE.M.CHP 100pF 50V
	C102	UR837100	C.EL 10uF 16V
*	C103	VF992600	C.EL 4700uF 5.5V

* New Parts

GX-500VCD P.C.B. INPUT

Schm Ref.	PART NO.	Description
C104	UB044100	C.CE.M.CHP 0.01uF 50V
C105	UB052100	C.CE.M.CHP 100pF 50V
C106	UB052100	C.CE.M.CHP 100pF 50V
C107	UB245100	C.CE.M.CHP 0.1uF 25V
C108	UB052100	C.CE.M.CHP 100pF 50V
C109	UR866220	C.EL 2.2uF 50V
C110	UB052100	C.CE.M.CHP 100pF 50V
C111	UB052100	C.CE.M.CHP 100pF 50V
C112	UB052100	C.CE.M.CHP 100pF 50V
C113	UB052100	C.CE.M.CHP 100pF 50V
C114	UA654750	C.MYLAR 0.075uF 50V
C115	UR847100	C.EL 10uF 25V
C116	UR866100	C.EL 1uF 50V
C117	UR847100	C.EL 10uF 25V
C118	UR847100	C.EL 10uF 25V
C119	UR866100	C.EL 1uF 50V
C120	UR847100	C.EL 10uF 25V
C121	UA654750	C.MYLAR 0.075uF 50V
C122	UB245100	C.CE.M.CHP 0.1uF 25V
C123	UB245100	C.CE.M.CHP 0.1uF 25V
C124	VJ900300	C.CE.M.CHP 22pF 50V
C125	VJ900300	C.CE.M.CHP 22pF 50V
C126	UB245100	C.CE.M.CHP 0.1uF 25V
C127	UR837100	C.EL 10uF 16V
C128	UR837100	C.EL 10uF 16V
C129	UR837100	C.EL 10uF 16V
C130	UR837100	C.EL 10uF 16V
C131	UR866100	C.EL 1uF 50V
C132	UB051470	C.CE.M.CHP 47pF 50V
C133	UB051470	C.CE.M.CHP 47pF 50V
C134	UN865470	C.EL 0.47uF 50V
C135	UR838100	C.EL 100uF 16V
C136	UR838100	C.EL 100uF 16V
C137	UB051470	C.CE.M.CHP 47pF 50V
C138	UB051470	C.CE.M.CHP 47pF 50V
C139	UR866100	C.EL 1uF 50V
C140	UB245100	C.CE.M.CHP 0.1uF 25V
C141	UB245100	C.CE.M.CHP 0.1uF 25V
C142	UR837100	C.EL 10uF 16V
C143	UR865470	C.EL 0.47uF 50V
C144	UR837100	C.EL 10uF 16V
C145	UR837100	C.EL 10uF 16V
C146	UR837100	C.EL 10uF 16V
C147	UR837220	C.EL 22uF 25V
C148	UB051470	C.CE.M.CHP 47pF 50V
C149	UB051470	C.CE.M.CHP 47pF 50V
C150	UR837220	C.EL 22uF 25V
C151	UR837100	C.EL 10uF 16V
C152	UR837100	C.EL 10uF 16V
C153	UR837100	C.EL 10uF 16V
C154	UR838330	C.EL 330uF 16V
C155	UB012330	C.CE.M.CHP 330pF 50V
C156	UB012330	C.CE.M.CHP 330pF 50V

* New Parts

Schm Ref.	PART NO.	Description
C157	UR837100	C.EL 10uF 16V
C158	UR837100	C.EL 10uF 16V
C159	UN866100	C.EL 1uF 50V
C160	UB052100	C.CE.M.CHP 100pF 50V
C402	UB245100	C.CE.M.CHP 0.1uF 25V
C403	UB052100	C.CE.M.CHP 100pF 50V
C407	UR838100	C.EL 100uF 16V
C408	UB245100	C.CE.M.CHP 0.1uF 25V
C409	UR837470	C.EL 47uF 16V
C410	UR829100	C.EL 1000uF 10V
D3	VU992700	DIODE.ZENR MA8051-H 5.3V
D4	VT332900	DIODE 1SS355
D5	VT332900	DIODE 1SS355
D6	VU992900	DIODE.ZENR MA8056-L 5.4V
D7	VU995100	DIODE.ZENR MA8091-H 9.4V
D8	VT332900	DIODE 1SS355
D10	VT332900	DIODE 1SS355
D11	VV833200	DIODE 1SS380
D12	VT332900	DIODE 1SS355
* D20	VU995300	DIODE.ZENR MA8100-L 9.7V
* D21	VT332900	DIODE 1SS355
D22	VU992300	DIODE.ZENR MA8047-H 4.9V
D23	VU993000	DIODE.ZENR MA8056-M 5.6V
D24	VU993400	DIODE.ZENR MA8062-M 6.2V
* D25	VU995300	DIODE.ZENR MA8100-L 9.7V
* D26	VV220700	DIODE.SHOT RB501V-40
* HS1	VN126800	HEAT.SINK U0T-16C25-MP
IC1	XF494A00	IC LB1641
IC2	XD864A00	IC uPC1330HA
IC3	XG903A00	IC TC4052BF MPX
IC5	XF293A00	IC uPD4066G-T1
* IC6	XV473A00	IC CXA1897Q
* IC7	XV474A00	IC LC75393E
IC8	XW069A00	IC M38199MF-096FP CPU
IC9	XF291A00	IC uPC4570G2
IC10	XG938A00	IC BA15218N
IC11	XF291A00	IC uPC4570G2
IC21	XF291A00	IC uPC4570G2
* IC26	XR275A00	IC BA3835S
* L1	VM547800	COIL.BIAS 105KHz
* L2	GE900780	COIL.BIAS 105KHz
* L3	GE900780	COIL.BIAS 105KHz
PJ1	VV306900	JACK.PIN 4P
PJ4	VK437600	JACK.PIN 1P
* PJ401	VZ149900	JACK.PIN 1P RJ-1081-04-0341
Q1	VV655700	TR.DGT DTC144EKA
* Q2	VE613300	TR 2SB1237 Q,R
Q3	IC174020	TR 2SC1740S R,S
* Q4	VE613300	TR 2SB1237 Q,R
Q5	VV655300	TR.DGT DTA144EKA
Q6	VV655300	TR.DGT DTA144EKA
Q7	VV655700	TR.DGT DTC144EKA
Q8	V3752400	TR.DGT DTC143TKA

* New Parts

GX-500VCD P.C.B. INPUT & VCD

GX-500/VCD

Schm Ref.	PART NO.	Description
* Q9	VV655500	TR.DGT DTC124EKA
* Q10	VV655500	TR.DGT DTC124EKA
Q11	iC174020	TR 2SC1740S R,S
Q12	iC174020	TR 2SC1740S R,S
Q13	iC174020	TR 2SC1740S R,S
* Q14	VV655500	TR.DGT DTC124EKA
Q15	VV655700	TR.DGT DTC144EKA
* Q16	VV655500	TR.DGT DTC124EKA
* Q17	VE613400	TR 2SD1858 Q,R
* Q18	VV655400	TR.DGT DTC114EKA
* Q19	V3033500	TR.DGT DTC143XKA
Q20	VV655300	TR.DGT DTA144EKA
Q21	VZ725900	TR 2SD1938F S,T
* Q22	VV655000	TR.DGT DTA114EKA
Q23	VZ725900	TR 2SD1938F S,T
Q24	VZ725900	TR 2SD1938F S,T
△ Q25	VK407600	TR 2SC4208A Q,R,S
△ Q26	VS883400	TR 2SD2394 E,F
△ Q27	VK407600	TR 2SC4208A Q,R,S
Q28	iA093320	TR 2SA933S Q,R
Q29	VV655700	TR.DGT DTC144EKA
Q30	VV655700	TR.DGT DTC144EKA
△ Q33	VK407600	TR 2SC4208A Q,R,S
* Q34	VV655500	TR.DGT DTC124EKA
* Q35	VV655500	TR.DGT DTC124EKA
* Q36	VV655500	TR.DGT DTC124EKA
* Q402	VV655400	TR.DGT DTC114EKA
Q403	iC287820	TR 2SC2878 A,B
Q404	iC181510	TR 2SC1815 Y
R27	VP940100	R.MTL.OXD 33Ω 1W
* R35	HV755150	R.CAR.FP 150Ω 1/4W
R59	HV754220	R.CAR.FP 22Ω 1/4W
R66	HV755560	R.CAR.FP 560Ω 1/4W
△ * R95	HV753560	R.CAR.FP 5.6Ω 1/4W
△ R110	HV754680	R.CAR.FP 68Ω 1/4W
R155	HV754220	R.CAR.FP 22Ω 1/4W
R156	HV754220	R.CAR.FP 22Ω 1/4W
R251	HV754220	R.CAR.FP 22Ω 1/4W
R254	HV754220	R.CAR.FP 22Ω 1/4W
R258	HV754220	R.CAR.FP 22Ω 1/4W
R273	HV754220	R.CAR.FP 22Ω 1/4W
R407	HV754470	R.CAR.FP 47Ω 1/4W
SW1	VU755800	SW.SLIDE SS029-P2130GB-PC4
SW2	VU755700	SW.SLIDE SS029-P012BEB(RT)
* VR1	VJ693600	VR.TRIM B10KΩ
* VR2	VJ694300	VR.TRIM B150KΩ
* VR3	VJ694300	VR.TRIM B150KΩ
* VR4	VJ693600	VR.TRIM B10KΩ
* VR5	VJ693800	VR.TRIM B22KΩ
* VR6	VJ693800	VR.TRIM B22KΩ
* VR7	VJ692900	VR.TRIM B680Ω
XL1	VJ802400	RSNR.CE 8MHz
XL2	VQ328900	RSNR.CRYS 32.768KHz

* New Parts

Schm Ref.	PART NO.	Description
	VJ828000	PIN IMSA-6024-03E
	BB071360	SCR.TERM 8.3x13
*	V4003700	P.C.B. VCD
CB1	V2731000	CN.FMN 16P
CB2	VU929500	CN.BS.PIN 6P
CB3	VU534900	CN.BS.PIN 6P
CB4	VB390200	CN.BS.PIN 6P
CB5	VB389900	CN.BS.PIN 3P
CB7	VB858200	CN.BS.PIN 3P
* CB8	LB919030	CN.BS.PIN 3P
CB9	VM929900	CN.BS.PIN 15P
* CB10	VB858300	CN.BS.PIN 4P
CB11	VQ963600	CN.BS.PIN 15P
CB12	VQ961800	CN.BS.PIN 15P
CB13	VQ963600	CN.BS.PIN 15P
CB14	VQ961800	CN.BS.PIN 15P
CB15	VZ085400	CN 30P
C1	UN866100	C.EL 1uF 50V
C2	UN866100	C.EL 1uF 50V
C3	UR818100	C.EL 100uF 6.3V
C4	UR818470	C.EL 470uF 6.3V
C5	UB045100	C.CE.M.CHP 0.1uF 50V
C6	UB045100	C.CE.M.CHP 0.1uF 50V
C7	UB044100	C.CE.M.CHP 0.01uF 50V
C8	UA952100	C.MYLAR 100pF 50V
C9	UB045100	C.CE.M.CHP 0.1uF 50V
C10	UA655100	C.MYLAR 0.1uF 50V
C11	UR837470	C.EL 47uF 16V
C12	UR866100	C.EL 1uF 50V
C13	UB013100	C.CE.M.CHP 1000pF 50V
C14	UB044100	C.CE.M.CHP 0.01uF 50V
C15	UR818100	C.EL 100uF 6.3V
C16	UA655100	C.MYLAR 0.1uF 50V
C17	UR828100	C.EL 100uF 10V
C18	UR838220	C.EL 220uF 16V
C19	UR837100	C.EL 10uF 16V
C20	UA954470	C.MYLAR 0.047uF 50V
C21	UA953180	C.MYLAR 1800pF 50V
C22	UA953220	C.MYLAR 2200pF 50V
C23	UA655100	C.MYLAR 0.1uF 50V
C24	UA953470	C.MYLAR 4700pF 50V
C25	UA953220	C.MYLAR 2200pF 50V
C26	UA953220	C.MYLAR 2200pF 50V
C27	UA655270	C.MYLAR 0.27uF 50V
C29	UR818100	C.EL 100uF 6.3V
C31	UB012560	C.CE.M.CHP 560pF 50V
C32	UB045100	C.CE.M.CHP 0.1uF 50V
C33	UA655330	C.MYLAR 0.33uF 50V
C34	UA654240	C.MYLAR 0.024uF 50V
C35	UB044100	C.CE.M.CHP 0.01uF 50V

* New Parts

GX-500VCD P.C.B. VCD

Schm Ref.	PART NO.	Description
C36	VJ900300	C.CE.M.CHP 22pF 50V
C37	VJ900300	C.CE.M.CHP 22pF 50V
C38	UR818100	C.EL 100uF 6.3V
C39	UR818470	C.EL 470uF 6.3V
C40	UB044100	C.CE.M.CHP 0.01uF 50V
C41	UB044100	C.CE.M.CHP 0.01uF 50V
C42	UB044100	C.CE.M.CHP 0.01uF 50V
C43	UR818100	C.EL 100uF 6.3V
C44	UB044100	C.CE.M.CHP 0.01uF 50V
C45	UB044100	C.CE.M.CHP 0.01uF 50V
C46	UR818100	C.EL 100uF 6.3V
C47	UR866100	C.EL 1uF 50V
C48	UR818100	C.EL 100uF 6.3V
C49	UA655330	C.MYLAR 0.33uF 50V
C50	UB044100	C.CE.M.CHP 0.01uF 50V
C51	UR866100	C.EL 1uF 50V
C52	UA954100	C.MYLAR 0.01uF 50V
C53	UA954100	C.MYLAR 0.01uF 50V
C54	UR866100	C.EL 1uF 50V
C55	UR739100	C.EL 1000uF 16V
C56	UB044100	C.CE.M.CHP 0.01uF 50V
C57	UB044100	C.CE.M.CHP 0.01uF 50V
C58	UB044100	C.CE.M.CHP 0.01uF 50V
C59	UA953680	C.MYLAR 6800pF 50V
C60	UA953220	C.MYLAR 2200pF 50V
C61	UA953220	C.MYLAR 2200pF 50V
C62	UA953680	C.MYLAR 6800pF 50V
C63	UR828100	C.EL 100uF 10V
C64	UR837330	C.EL 33uF 16V
C65	UR818100	C.EL 100uF 6.3V
C66	UR837220	C.EL 22uF 25V
C67	UR837220	C.EL 22uF 25V
C68	UR837220	C.EL 22uF 25V
C69	UR837220	C.EL 22uF 25V
C70	UB044100	C.CE.M.CHP 0.01uF 50V
C71	UA953150	C.MYLAR 1500pF 50V
C72	UA953150	C.MYLAR 1500pF 50V
C76	UR818100	C.EL 100uF 6.3V
C77	UR818100	C.EL 100uF 6.3V
C78	UR818100	C.EL 100uF 6.3V
C79	UB044100	C.CE.M.CHP 0.01uF 50V
C83	UR837100	C.EL 10uF 16V
C84	UR837100	C.EL 10uF 16V
C85	UR837100	C.EL 10uF 16V
C86	UB051100	C.CE.M.CHP 10pF 50V
C87	VR498100	C.EL 6.8uF 6.3V
C88	VR498100	C.EL 6.8uF 6.3V
C89	UB012470	C.CE.M.CHP 470pF 50V
C90	UB044100	C.CE.M.CHP 0.01uF 50V
C91	UB045100	C.CE.M.CHP 0.1uF 50V
C100	UB045100	C.CE.M.CHP 0.1uF 50V
C101	UB045100	C.CE.M.CHP 0.1uF 50V
C102	UB045100	C.CE.M.CHP 0.1uF 50V

* New Parts

Schm Ref.	PART NO.	Description
D1	VT332900	DIODE 1SS355
D2	VU993400	DIODE.ZENR MA8062-M 6.2V
D3	VT332900	DIODE 1SS355
D4	VT332900	DIODE 1SS355
D5	VT332900	DIODE 1SS355
D6	VT332900	DIODE 1SS355
D7	VU993800	DIODE.ZENR MA8068-M 6.8V
G1	VR463400	TERM.GND D3.5 TP00385
G2	VR463400	TERM.GND D3.5 TP00385
* HS1	VN126800	HEAT.SINK U0T-16C25-MP
HS2	VA119100	HEAT.SINK
* IC1	XV986A00	IC LA6541D DRIVER
IC2	XS741A00	IC AN8806SB
IC3	XR274A00	IC TA8409SE
IC4	XR274A00	IC TA8409SE
IC5	XT342A00	IC MN662741RBP1
* IC6	XT333A00	IC uPC29M33HF 3.3V
* IC7	XQ248A00	IC TC74HC125AF BUS BU
* IC8	XN961A00	IC TC74VHC14F INV
* IC9	XQ248A00	IC TC74HC125AF BUS BU
IC10	XF291A00	IC uPC4570G2
IC11	XW066A00	IC M38199MF-097FP CPU
IC12	XQ667A00	IC M5237L
* IC13	XS993A00	IC TC74HC04AF INV
L1	VU889500	COIL 220uH
L2	VU889500	COIL 220uH
Q1	VR402300	TR 2SB647 C,D
Q2	VD678700	TR.DGT DTC114ES
Q3	IC287820	TR 2SC2878 A,B
Q4	VD678700	TR.DGT DTC114ES
Q5	VD678700	TR.DGT DTC114ES
Q6	VS883300	TR 2SB1565 E,F
Q7	VR510800	TR 2SD2396 J,K
Q8	VD678700	TR.DGT DTC114ES
Q9	IC287820	TR 2SC2878 A,B
Q10	IC287820	TR 2SC2878 A,B
Q15	VD678700	TR.DGT DTC114ES
Q16	VD678700	TR.DGT DTC114ES
Q17	VD678500	TR.DGT DTA114ES
R17	HV753220	R.CAR.FP 2.2Ω 1/4W
R35	VH307000	R.ARRAY RGLE6X473J
R56	VH307000	R.ARRAY RGLE6X473J
R57	VH307000	R.ARRAY RGLE6X473J
R85	VH307000	R.ARRAY RGLE6X473J
R86	VH307000	R.ARRAY RGLE6X473J
R91	Vi868300	R.FUS 0.68Ω 1/6W
R97	VH307000	R.ARRAY RGLE6X473J
R145	VU318400	R.MTL.OXD 27Ω 1W
R158	VU318400	R.MTL.OXD 27Ω 1W
R159	VU318400	R.MTL.OXD 27Ω 1W
TP1	VL448600	JUMPER.TST
TP2	VL448600	JUMPER.TST
XL1	VJ719800	RSNR.CRYS 16.9344MHz

* New Parts

GX-500VCD P.C.B. VCD & MAIN

Schm Ref.	PART NO.	Description
XL2	VJ802400 VJ828000	RSNR.CE PIN 8MHz IMSA-6024-03E
* * * *	V4000800 V4000900	P.C.B. P.C.B. MAIN(RT) MAIN(L)
CB201	VL845300	CN.BS.PIN 9P
CB202	VB390700	CN.BS.PIN 11P
CB203	VL844800	CN.BS.PIN 4P
CB204	VP206500	HOLDER.FUS EYF-52BC
CB205	VL845100	CN.BS.PIN 7P
CB206	VK026500	CN.BS.PIN 6P
CB207	Vi878400	CN.BS.PIN 6P
CB208	VB390300	CN.BS.PIN 7P
CB209	VP206500	HOLDER.FUS EYF-52BC
CB212	VP206500	HOLDER.FUS EYF-52BC(RT)
CB213	VP206500	HOLDER.FUS EYF-52BC(RT)
CB215	VG879900	CN.BS.PIN 2P
CB216	VP206500	HOLDER.FUS EYF-52BC
CB217	VP206500	HOLDER.FUS EYF-52BC
C201	UR866470	C.EL 4.7uF 50V
C202	VF466900	C.CE.TUBLR 470pF 50V
C203	VF466900	C.CE.TUBLR 470pF 50V
C206	VF466800	C.CE.TUBLR 100pF 50V
C207	VF466800	C.CE.TUBLR 100pF 50V
C208	VF466800	C.CE.TUBLR 100pF 50V
C209	UR838330	C.EL 330uF 16V
C210	UR866470	C.EL 4.7uF 50V
C211	UR867470	C.EL 47uF 50V
C212	VG278400	C.CE.TUBLR 220pF 50V
C213	UR867100	C.EL 10uF 50V
C214	UR838100	C.EL 100uF 16V
C215	UR838100	C.EL 100uF 16V
C216	UR867100	C.EL 10uF 50V
C217	VG278400	C.CE.TUBLR 220pF 50V
C221	UR867220	C.EL 22uF 50V
C222	UR867220	C.EL 22uF 50V
C223	VF467300	C.CE.TUBLR 0.01uF 16V
C224	FG650300	C.CE 3pF 50V
C225	UT653220	C.PP 2200pF 100V
C226	UR798100	C.EL 100uF 100V
C227	UT653220	C.PP 2200pF 100V
C228	UR798100	C.EL 100uF 100V
C229	FG650300	C.CE 3pF 50V
C231	UR858100	C.EL 100uF 35V
* C232	UR897100	C.EL 10uF 100V
* C233	UR858100	C.EL 100uF 35V
* C234	UR897100	C.EL 10uF 100V
C235	UR866470	C.EL 4.7uF 50V
C236	UA954470	C.MYLAR 0.047uF 50V
C237	UA954470	C.MYLAR 0.047uF 50V
△* C239	V3671100	C.EL 4700uF 71V

* New Parts

Schm Ref.	PART NO.	Description
△* C240	V3671100	C.EL 4700uF 71V
C241	UR818100	C.EL 100uF 6.3V
* C242	V3671000	C.EL 4700uF 35V
* C243	V3671000	C.EL 4700uF 35V
C244	UA953220	C.MYLAR 2200pF 50V
C245	UA953220	C.MYLAR 2200pF 50V
C246	VF467300	C.CE.TUBLR 0.01uF 16V
C247	VF467300	C.CE.TUBLR 0.01uF 16V
C248	UA954100	C.MYLAR 0.01uF 50V
C249	UA954100	C.MYLAR 0.01uF 50V
C250	VR324800	C.MYLAR 0.047uF 100V
C251	VR324800	C.MYLAR 0.047uF 100V
C252	UA954470	C.MYLAR 0.047uF 50V
C253	UA954470	C.MYLAR 0.047uF 50V
C254	UA954100	C.MYLAR 0.01uF 50V
* C255	UR739470	C.EL 4700uF 16V
C259	FG644100	C.CE 0.01uF 50V
C260	FG613100	C.CE 1000pF 50V(RT)
C261	UR848470	C.EL 470uF 25V
C262	UR768470	C.EL 470uF 50V(RT)
C263	VJ599100	C.CE.TUBLR 0.1uF 50V
C264	UA954100	C.MYLAR 0.01uF 50V
C265	UA954100	C.MYLAR 0.01uF 50V
△ C266	VS741700	C.CE.SAFETY 0.01uF 275V
C267	UR867100	C.EL 10uF 50V
C268	UR867470	C.EL 47uF 50V
C300	UR847100	C.EL 10uF 25V
D201	VG443100	DIODE.ZENR MTZJ27D 27V
D202	VG440500	DIODE.ZENR MTZJ13B 13V
D203	VG440500	DIODE.ZENR MTZJ13B 13V
D204	VG440500	DIODE.ZENR MTZJ13B 13V
D205	VN008700	DIODE 1SS270A
D206	VN008700	DIODE 1SS270A
D208	VN008700	DIODE 1SS270A
D209	VD631600	DIODE 1SS133,176,HSS104
D210	VG440500	DIODE.ZENR MTZJ13B 13V
△ D211	VN011400	DIODE.BRG D5SB20 5A 200V
△ D212	VN011400	DIODE.BRG D5SB20 5A 200V
△ D213	VN011300	DIODE.BRG D3SBA20 4A 200V
D214	VD631600	DIODE 1SS133,176,HSS104
△ D215	VR253700	DIODE.BRG S1NB20 1.0A 200V
D216	VG440500	DIODE.ZENR MTZJ13B 13V(RT)
D217	VG440500	DIODE.ZENR MTZJ13B 13V
△ F201	KB000750	FUSE.MNI T2.0A 250V
△ F202	KB000790	FUSE T4.0A 250V(RT)
△ F202	KB001660	FUSE T1.6A 250V(L)
△ F203	KB001660	FUSE T1.6A 250V(RT)
G201	VR463400	TERM.GND D3.5 TP00385
HS201	V2692300	HEAT.SINK BPUE36-30
* HS202	VN126800	HEAT.SINK U0T-16C25-MP(RT)
IC201	XW056A00	IC STK496-420Y 80W 2C
L201	VU038100	COIL 1.5uH
L202	VU038100	COIL 1.5uH

* New Parts

GX-500VCD P.C.B. MAIN & OPERATION

Schm Ref.	PART NO.	Description
Q201	iC287820	TR 2SC2878 A,B
Q202	iC287820	TR 2SC2878 A,B
△# Q204	VR510800	TR 2SD2396 J,K
△ Q206	VS883300	TR 2SB1565 E,F
△ Q207	VS883300	TR 2SB1565 E,F
Q208	VP883000	TR 2SA893A D,E
Q209	VP883100	TR 2SC1890A D,E
Q210	VP883100	TR 2SC1890A D,E
Q212	iC287820	TR 2SC2878 A,B
Q213	iC174020	TR 2SC1740S R,S
Q214	iC174020	TR 2SC1740S R,S
Q216	iC174020	TR 2SC1740S R,S
Q217	VR510800	TR 2SD2396 J,K(RT)
△# Q218	VR510800	TR 2SD2396 J,K
Q219	iC174020	TR 2SC1740S R,S
Q220	VP883000	TR 2SA893A D,E
△ R222	HV753100	R.CAR.FP 1Ω 1/4W
△ R225	HV753100	R.CAR.FP 1Ω 1/4W
△ R226	HV753100	R.CAR.FP 1Ω 1/4W
R227	VP940400	R.MTL.OXD 100Ω 1W
R230	VP940400	R.MTL.OXD 100Ω 1W
* R234	V3158200	R.MTL.PLAT 0.22Ω
* R237	V3158200	R.MTL.PLAT 0.22Ω
R242	HV754100	R.CAR.FP 10Ω 1/4W
R245	HV754100	R.CAR.FP 10Ω 1/4W
R247	HV754100	R.CAR.FP 10Ω 1/4W
R250	HV754100	R.CAR.FP 10Ω 1/4W
R263	HV754470	R.CAR.FP 47Ω 1/4W
△ R269	HV753100	R.CAR.FP 1Ω 1/4W
△ R270	HV753100	R.CAR.FP 1Ω 1/4W
R274	HV756560	R.CAR.FP 5.6KΩ 1/4W(RT)
R275	HV756560	R.CAR.FP 5.6KΩ 1/4W(RT)
△ R277	HV753100	R.CAR.FP 1Ω 1/4W
RY201	VU161600	RELAY DC OSA-SS-224DM3
△ RY203	V2712300	RELAY DC SDT-S-112LMR
△ SW204	VA961800	VOLT.SELCT ESE-37247-F(RT)
△* T203	XV444A00	TRANS.PWR (RT)
△* T203	XV445A00	TRANS.PWR (L)
* TE201	V2996200	TERM.SP 4P CJ-9026-06-0203
	VJ828000	PIN IMSA-6024-03E
	BB071360	SCR.TERM 8.3x13
	EP600140	SCR.BND.HD 3x10 MFZN2-BL
*	V4003400	P.C.B. OPERATION
	CB801	VM929900 CN.BS.PIN 15P
	CB804	VQ045400 CN.BS.PIN 25P
*	CB805	VB858500 CN.BS.PIN 6P
	CB806	VQ045000 CN.BS.PIN 20P

* New Parts

Schm Ref.	PART NO.	Description
C801	UR866100	C.EL 1uF 50V
C803	UA655150	C.MYLAR 0.15uF 50V
C804	UR866100	C.EL 1uF 50V
C805	UR866220	C.EL 2.2uF 50V
C806	UR846470	C.EL 4.7uF 25V
C807	UB245100	C.CE.M.CHP 0.1uF 25V
C808	UB044100	C.CE.M.CHP 0.01uF 50V
C809	UA954100	C.MYLAR 0.01uF 50V
C810	UB012220	C.CE.M.CHP 220pF 50V
C811	UR847470	C.EL 47uF 25V
C812	UR847470	C.EL 47uF 25V
C813	UR866100	C.EL 1uF 50V
C814	UR837100	C.EL 10uF 16V
C815	UR837100	C.EL 10uF 16V
C816	UR866100	C.EL 1uF 50V
C817	UA953100	C.MYLAR 1000pF 50V
C818	UR837100	C.EL 10uF 16V
C819	UB245100	C.CE.M.CHP 0.1uF 25V
C820	UA953470	C.MYLAR 4700pF 50V
C821	UA655100	C.MYLAR 0.1uF 50V
C822	UR818100	C.EL 100uF 6.3V
C823	UA954680	C.MYLAR 0.068uF 50V
C824	UR866100	C.EL 1uF 50V
C825	UR837100	C.EL 10uF 16V
C826	UN866220	C.EL 2.2uF 50V
C827	UA953100	C.MYLAR 1000pF 50V
C828	UA954680	C.MYLAR 0.068uF 50V
C829	UR846470	C.EL 4.7uF 25V
C830	UN866220	C.EL 2.2uF 50V
C831	UR817470	C.EL 47uF 6.3V
C832	UR866100	C.EL 1uF 50V
C833	UR866100	C.EL 1uF 50V
C834	UR866100	C.EL 1uF 50V
C835	UR866220	C.EL 2.2uF 50V
C836	UR866100	C.EL 1uF 50V
C837	UR866100	C.EL 1uF 50V
C838	UA953470	C.MYLAR 4700pF 50V
C839	UA655100	C.MYLAR 0.1uF 50V
C840	UA953820	C.MYLAR 8200pF 50V
C841	UB012220	C.CE.M.CHP 220pF 50V
C842	UB044470	C.CE.M.CHP 0.047uF 50V
C843	UB245100	C.CE.M.CHP 0.1uF 25V
C844	UB044470	C.CE.M.CHP 0.047uF 50V
C845	UB245100	C.CE.M.CHP 0.1uF 25V
C846	UR866100	C.EL 1uF 50V
C847	UR866100	C.EL 1uF 50V
C848	UA953220	C.MYLAR 2200pF 50V
C849	UA953220	C.MYLAR 2200pF 50V
C850	UA953680	C.MYLAR 6800pF 50V
C851	UA953680	C.MYLAR 6800pF 50V
C855	UR837100	C.EL 10uF 16V
C858	UR837100	C.EL 10uF 16V
C859	UR818100	C.EL 100uF 6.3V

* New Parts

GX-500VCD P.C.B. OPERATION & TUNER

Schm Ref.	PART NO.	Description
C860	UR818100	C.EL 100uF 6.3V
C861	UR837100	C.EL 10uF 16V
C862	UR837100	C.EL 10uF 16V
* C863	UB012270	C.CE.M.CHP 270pF 50V
* C864	UB012270	C.CE.M.CHP 270pF 50V
C868	UA953820	C.MYLAR 8200pF 50V
C870	UA953820	C.MYLAR 8200pF 50V
C872	UB013100	C.CE.M.CHP 1000pF 50V
C873	UB013100	C.CE.M.CHP 1000pF 50V
C874	UR818100	C.EL 100uF 6.3V
C875	UB045100	C.CE.M.CHP 0.1uF 50V
C876	UB052100	C.CE.M.CHP 100pF 50V
C877	UM388100	C.EL 100uF 10V
C878	UR866470	C.EL 4.7uF 50V
C879	UR866470	C.EL 4.7uF 50V
C880	UR866470	C.EL 4.7uF 50V
C881	UB045100	C.CE.M.CHP 0.1uF 50V
C890	UR837100	C.EL 10uF 16V
C901	UB052100	C.CE.M.CHP 100pF 50V
C902	UB245100	C.CE.M.CHP 0.1uF 25V
D802	VS132300	LED(re) SLR-325VCT31
* D803	VR711400	LED(gr) SLR-325MC
D804	VU992900	DIODE.ZENR MA8056-L 5.4V
* D810	V3253600	LED(bu) SELU1E50CM
* IC801	XV476A00	IC M65853FP
IC802	XB247A00	IC uPC4570HA
IC806	XB247A00	IC uPC4570HA
IC810	XB247A00	IC uPC4570HA
IC811	XJ757A00	IC NJM78L05A-T3
* IC814	XT952A00	IC YSS247-D
* IC815	XW059A00	IC M66004MASP
* JK801	VT941600	JACK.MNI SW HTJ-035-17AB
* JK802	VT941600	JACK.MNI SW HTJ-035-17AB
* JK803	VT941600	JACK.MNI SW HTJ-035-17AB
Q801	iC287820	TR 2SC2878 A,B
Q802	iC287820	TR 2SC2878 A,B
Q803	iC174020	TR 2SC1740S R,S
Q804	iC174020	TR 2SC1740S R,S
Q805	iA093320	TR 2SA933S Q,R
Q806	iC174020	TR 2SC1740S R,S
R817	HV754330	R.CAR.FP 33Ω 1/4W
R822	HV754330	R.CAR.FP 33Ω 1/4W
R828	HV754330	R.CAR.FP 33Ω 1/4W
R829	HV754330	R.CAR.FP 33Ω 1/4W
R830	HV754680	R.CAR.FP 68Ω 1/4W
R831	HV754680	R.CAR.FP 68Ω 1/4W
* R846	HV754390	R.CAR.FP 39Ω 1/4W
* R851	HV754390	R.CAR.FP 39Ω 1/4W
R894	HV755100	R.CAR.FP 100Ω 1/4W
R895	HV755100	R.CAR.FP 100Ω 1/4W
R951	HV754220	R.CAR.FP 22Ω 1/4W
SW802	VG392900	SW.TACT SKHVAA
SW803	VG392900	SW.TACT SKHVAA

* New Parts

Schm Ref.	PART NO.	Description	
SW804	VG392900	SW.TACT	SKHVAA
SW805	VG392900	SW.TACT	SKHVAA
SW806	VG392900	SW.TACT	SKHVAA
SW807	VG392900	SW.TACT	SKHVAA
SW808	VG392900	SW.TACT	SKHVAA
SW809	VG392900	SW.TACT	SKHVAA
SW812	VG392900	SW.TACT	SKHVAA
SW813	VG392900	SW.TACT	SKHVAA
SW814	VG392900	SW.TACT	SKHVAA
SW815	VG392900	SW.TACT	SKHVAA
SW816	VG392900	SW.TACT	SKHVAA
SW817	VG392900	SW.TACT	SKHVAA
SW818	VG392900	SW.TACT	SKHVAA
SW820	VG392900	SW.TACT	SKHVAA
SW821	VG392900	SW.TACT	SKHVAA
SW822	VG392900	SW.TACT	SKHVAA
SW823	VG392900	SW.TACT	SKHVAA
SW824	VG392900	SW.TACT	SKHVAA
SW825	VT941400	SW.RT.ENC	EC16B24304
SW826	VG392900	SW.TACT	SKHVAA
SW827	VG392900	SW.TACT	SKHVAA
SW828	VG392900	SW.TACT	SKHVAA
SW829	VG392900	SW.TACT	SKHVAA
SW830	VG392900	SW.TACT	SKHVAA
SW831	VG392900	SW.TACT	SKHVAA
SW832	VG392900	SW.TACT	SKHVAA
SW833	VG392900	SW.TACT	SKHVAA
SW834	VG392900	SW.TACT	SKHVAA
SW835	VG392900	SW.TACT	SKHVAA
SW836	VG392900	SW.TACT	SKHVAA
U801	V2856200	L.DTCT	PIC-28043TH2
V801	V2959000	FL.DSPLY	16-BT-63GK
VR801	V2969300	VR	A10KΩ
VR802	V2969400	VR	B50KΩ
VR804	V2969500	VR	B100KΩ
	VJ828000	PIN	IMSA-6024-03E
	VU351500	SPACER	FL
	V3112800	SHEET.FL	
	V3281500	SPACER.LED	LDS-20K
	V4000200	P.C.B./CHP	TUNER/TU-02(RT)
	V4000500	P.C.B./CHP	TUNER/TU-02(L)
CB1	VQ961400	CN.BS.PIN	11P
C1	UB044100	C.CE.M.CHP	0.01uF 50V
C2	UR838100	C.EL	100uF 16V
C3	UB044100	C.CE.M.CHP	0.01uF 50V
C4	UR865220	C.EL	0.22uF 50V
C5	UB044100	C.CE.M.CHP	0.01uF 50V
C6	UB044100	C.CE.M.CHP	0.01uF 50V
C7	UB044100	C.CE.M.CHP	0.01uF 50V
C8	UB044100	C.CE.M.CHP	0.01uF 50V

* New Parts

GX-500VCD P.C.B. TUNER

Schm Ref.	PART NO.	Description
* C9	UB044470	C.CE.M.CHP 0.047uF 50V
C10	VA760500	C.CE 8pF 50V
C11	UR837100	C.EL 10uF 16V
C12	UB044100	C.CE.M.CHP 0.01uF 50V
C13	UR837470	C.EL 47uF 16V
C14	UB044470	C.CE.M.CHP 0.047uF 50V
C15	UB044100	C.CE.M.CHP 0.01uF 50V
C16	UB044470	C.CE.M.CHP 0.047uF 50V
C17	UR866100	C.EL 1uF 50V
C18	UR865470	C.EL 0.47uF 50V
C19	UR866100	C.EL 1uF 50V
C20	UR866100	C.EL 1uF 50V
C21	UB045100	C.CE.M.CHP 0.1uF 50V
C22	UB044470	C.CE.M.CHP 0.047uF 50V
C23	UR866220	C.EL 2.2uF 50V
C24	UR837330	C.EL 33uF 16V
C25	UB044470	C.CE.M.CHP 0.047uF 50V
C26	UR866330	C.EL 3.3uF 50V
C27	UB044470	C.CE.M.CHP 0.047uF 50V
C28	UR837220	C.EL 22uF 25V
C29	UB014270	C.CE.M.CHP 0.027uF 50V
* C30	UB012680	C.CE.M.CHP 680pF 50V
C31	UR837100	C.EL 10uF 16V
C32	UA654430	C.MYLAR 0.043uF 50V(RT)
C32	UA954270	C.MYLAR 0.027uF 50V(L)
C33	UA654430	C.MYLAR 0.043uF 50V(RT)
C33	UA954270	C.MYLAR 0.027uF 50V(L)
C34	UR837100	C.EL 10uF 16V
C35	UR837100	C.EL 10uF 16V
C36	UR866470	C.EL 4.7uF 50V
C37	UR866470	C.EL 4.7uF 50V
C38	UB013270	C.CE.M.CHP 2700pF 50V
C39	UB013270	C.CE.M.CHP 2700pF 50V
C40	UB044100	C.CE.M.CHP 0.01uF 50V
C41	UR837100	C.EL 10uF 16V
C57	UR817470	C.EL 47uF 6.3V
C58	UR817470	C.EL 47uF 6.3V
C59	UR838100	C.EL 100uF 16V
C60	UB052100	C.CE.M.CHP 100pF 50V
C61	UR866100	C.EL 1uF 50V
C62	UR837100	C.EL 10uF 16V
C63	VJ899500	C.CE.M.CHP 10pF 50V
C64	VJ899500	C.CE.M.CHP 10pF 50V
C65	UB052100	C.CE.M.CHP 100pF 50V
D1	VU995000	DIODE.ZENR MA8091-M 9.1V
D2	VT332900	DIODE 1SS355
D3	VT332900	DIODE 1SS355
D4	VT332900	DIODE 1SS355
D5	VU993000	DIODE.ZENR MA8056-M 5.6V
D11	VU995400	DIODE.ZENR MA8100-M 10V
* IC1	XV228A00	IC LA1838 FM,AM IF
* IC2	XV229A00	IC LC72131M
L1	GG000560	FLTR.CE SFE10.7MS3GHY-A

* New Parts

Schm Ref.	PART NO.	Description
L2	GG000560	FLTR.CE SFE10.7MS3GHY-A
L3	VU887900	COIL 10uH
L4	VU434500	FLTR.CE 450K PCFMT-049A
L5	VR888000	FLTR.LC 19KHz
L6	VR888000	FLTR.LC 19KHz
PK1	V4299000	TUNER.FM TFFJ2U584A
PK2	VU333700	COIL.RF.AM 940536051A
Q1	iC053540	TR 2SC535 A,B,C
Q2	VD678500	TR.DGT DTA114ES
Q3	iC1815I0	TR 2SC1815 Y
* R1	HV755150	R.CAR.FP 150Ω 1/4W
R3	HV755220	R.CAR.FP 220Ω 1/4W
R17	VV901100	R.MTL.OXD 120Ω 1W
R40	HV755680	R.CAR.FP 680Ω 1/4W
TE1	VU477800	TERM.ANT AJ-2038-040
* XL1	V2717200	FLTR.CE CDA10.7MG74-A
XL2	VY734600	RSNR.CRYS 7.2MHz
	BB071360	SCR.TERM 8.3x13

* New Parts

CHIP RESISTOR


Schm Ref.	PART NO.	Description
* RD250000	R.CAR.CHP	0Ω 1/10W
RD253100	R.CAR.CHP	1Ω 1/10W
RD253220	R.CAR.CHP	2.2Ω 1/10W
RD254100	R.CAR.CHP	10Ω 1/10W
RD254330	R.CAR.CHP	33Ω 1/10W
* RD254510	R.CAR.CHP	51Ω 1/10W
RD254680	R.CAR.CHP	68Ω 1/10W
RD254750	R.CAR.CHP	75Ω 1/10W
RD255100	R.CAR.CHP	100Ω 1/10W
RD255120	R.CAR.CHP	120Ω 1/10W
RD255150	R.CAR.CHP	150Ω 1/10W
RD255220	R.CAR.CHP	220Ω 1/10W
* RD255270	R.CAR.CHP	270Ω 1/10W
RD255330	R.CAR.CHP	330Ω 1/10W
RD255360	R.CAR.CHP	360Ω 1/10W
RD255430	R.CAR.CHP	430Ω 1/10W
RD255470	R.CAR.CHP	470Ω 1/10W
* RD255510	R.CAR.CHP	510Ω 1/10W
RD255560	R.CAR.CHP	560Ω 1/10W
RD255680	R.CAR.CHP	680Ω 1/10W
RD256100	R.CAR.CHP	1KΩ 1/10W
RD256120	R.CAR.CHP	1.2KΩ 1/10W
RD256150	R.CAR.CHP	1.5KΩ 1/10W
RD256180	R.CAR.CHP	1.8KΩ 1/10W
RD256200	R.CAR.CHP	2KΩ 1/10W
RD256220	R.CAR.CHP	2.2KΩ 1/10W
RD256240	R.CAR.CHP	2.4KΩ 1/10W
RD256270	R.CAR.CHP	2.7KΩ 1/10W
RD256300	R.CAR.CHP	3KΩ 1/10W
RD256330	R.CAR.CHP	3.3KΩ 1/10W
RD256390	R.CAR.CHP	3.9KΩ 1/10W
RD256430	R.CAR.CHP	4.3KΩ 1/10W
RD256470	R.CAR.CHP	4.7KΩ 1/10W
RD256510	R.CAR.CHP	5.1KΩ 1/10W
RD256560	R.CAR.CHP	5.6KΩ 1/10W
RD256620	R.CAR.CHP	6.2KΩ 1/10W
RD256680	R.CAR.CHP	6.8KΩ 1/10W
RD256820	R.CAR.CHP	8.2KΩ 1/10W
RD256910	R.CAR.CHP	9.1KΩ 1/10W
RD257100	R.CAR.CHP	10KΩ 1/10W
RD257120	R.CAR.CHP	12KΩ 1/10W
RD257150	R.CAR.CHP	15KΩ 1/10W
RD257180	R.CAR.CHP	18KΩ 1/10W
* RD257200	R.CAR.CHP	20KΩ 1/10W
RD257220	R.CAR.CHP	22KΩ 1/10W
RD257270	R.CAR.CHP	27KΩ 1/10W
RD257300	R.CAR.CHP	30KΩ 1/10W
RD257330	R.CAR.CHP	33KΩ 1/10W
RD257430	R.CAR.CHP	43KΩ 1/10W
RD257470	R.CAR.CHP	47KΩ 1/10W
RD257510	R.CAR.CHP	51KΩ 1/10W
RD257560	R.CAR.CHP	56KΩ 1/10W
RD257680	R.CAR.CHP	68KΩ 1/10W

* New Parts

Schm Ref.	PART NO.	Description
* RD257750	R.CAR.CHP	75KΩ 1/10W
RD257820	R.CAR.CHP	82KΩ 1/10W
* RD257910	R.CAR.CHP	91KΩ 1/10W
RD258100	R.CAR.CHP	100KΩ 1/10W
* RD258120	R.CAR.CHP	120KΩ 1/10W
RD258150	R.CAR.CHP	150KΩ 1/10W
RD258180	R.CAR.CHP	180KΩ 1/10W
RD258220	R.CAR.CHP	220KΩ 1/10W
RD258470	R.CAR.CHP	470KΩ 1/10W
RD259100	R.CAR.CHP	1MΩ 1/10W
RD259220	R.CAR.CHP	2.2MΩ 1/10W
RD259750	R.CAR.CHP	7.5MΩ 1/10W

* New Parts

■ GX-500 EXPLODED VIEW

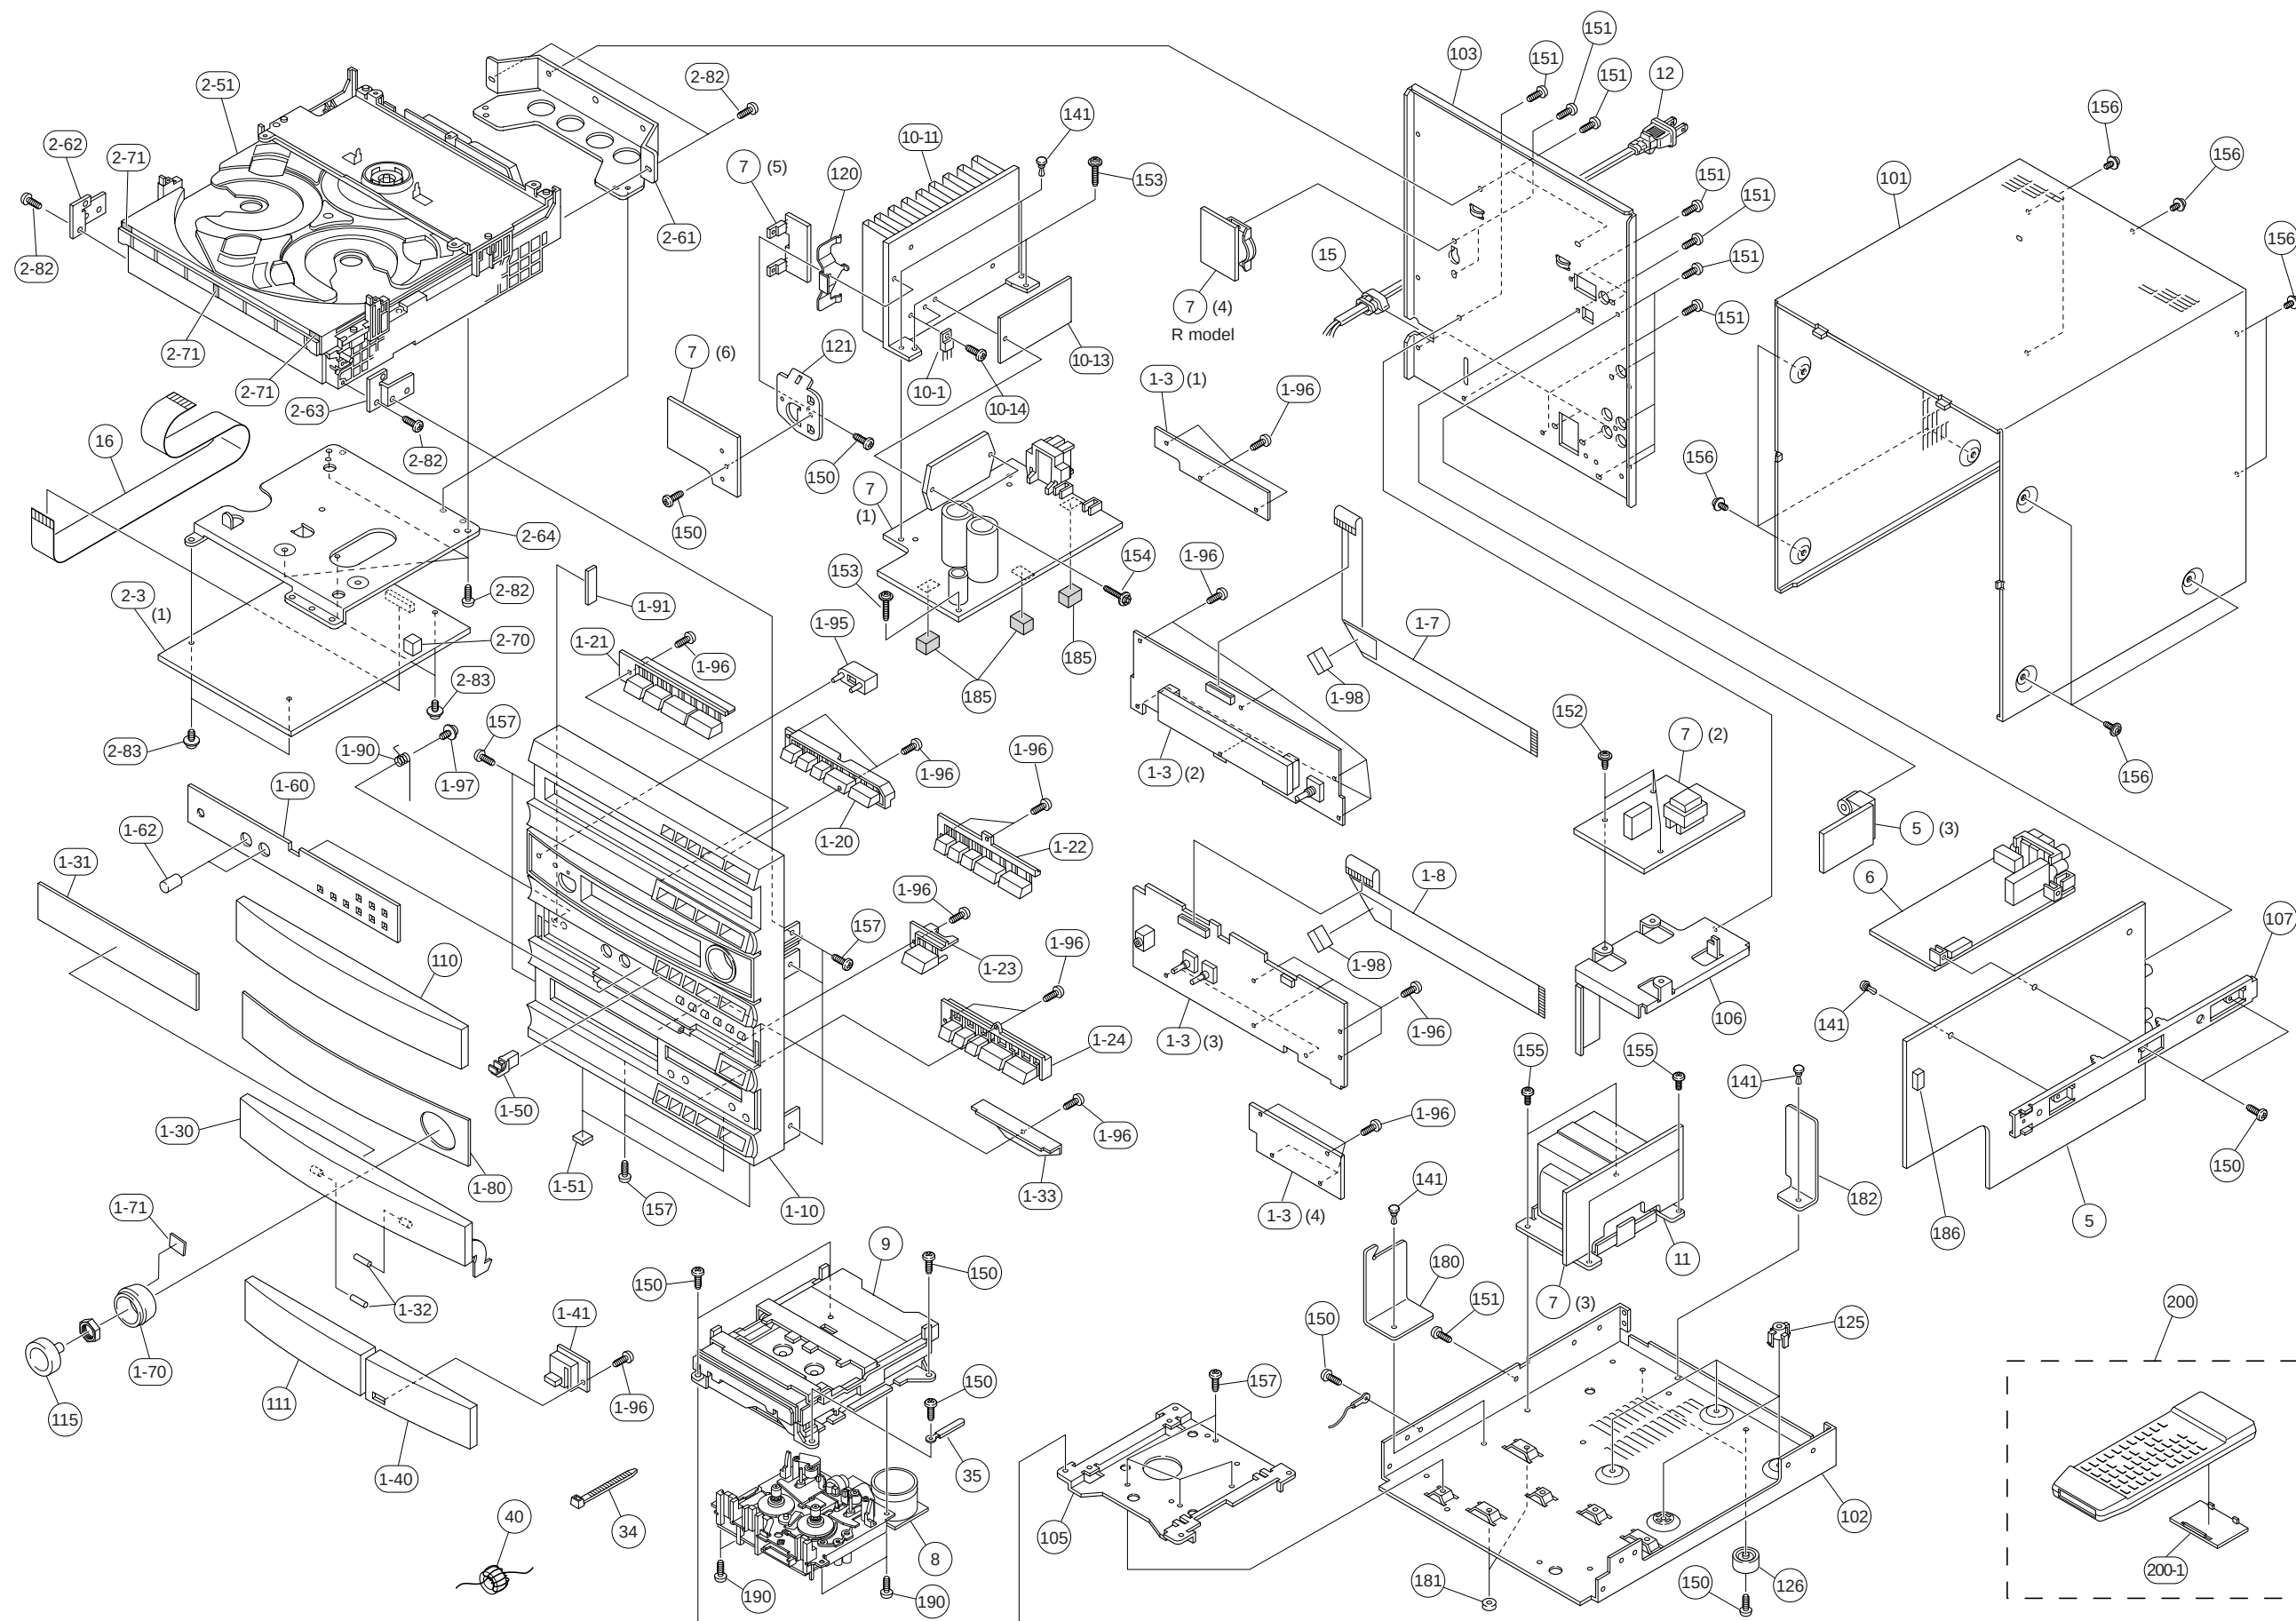

■ GX-500 MECHANICAL PARTS

	Ref. No.	PART NO.	Description	Remarks	Markets
*	1- 3	V4003100	P.C.B. ASS'Y	OPERATION	
*	1- 7	V3728300	BAN-CARD	25P 380mm	
*	1- 8	MF125300	FLEXIBLE FLAT CABLE C&C	25P 300mm	
*	1-10	V3108700	FRONT PANEL	GX-500 GX-500RDS	(UCRA)
*	1-10	V3108800	FRONT PANEL-RDS		(BG)
*	1-20	V3109600	BUTTON	5P-CD	
*	1-21	V3110400	BUTTON	4P-CD	
*	1-22	V3110200	BUTTON	5P-INPUT	
*	1-23	V3110000	BUTTON	1P-STANDBY	
*	1-24	V3109700	BUTTON	5P-OPERATION	
*	1-30	V3111100	LID	PANEL	(UCRA)
	1-30	V3222800	LID	PANEL	(BG)
*	1-31	V3112100	SHEET	LID	
*	1-32	V3263300	SPRING PIN	SUS 2x16mm	
*	1-33	V3188400	STOPPER, PIN		
*	1-40	V3111700	LID	1H	
*	1-41	V3109800	BUTTON	1P-EJ	
*	1-50	V3263200	MINI SIDE ROCK	091Y	
	1-51	VS010000	CUSHION, LEG		
*	1-60	V3112200	PLATE	SP	(UCRA)
*	1-60	V3112300	PLATE	SP-RDS	(BG)
*	1-62	V3110800	KNOB	D10	
*	1-70	V3237100	LENS, KNOB		
*	1-71	V3269700	REFLECTOR	LED	
*	1-80	V3113500	WINDOW, FL		
*	1-90	V3267500	SPRING	D6T	
*	1-91	V3272000	PAD, FRICTION		
*	1-95	V3112000	LENS	2P	
	1-96	VD435300	BIND HEAD P-TITE SCREW	2.6x8 FCRM3-BL	
	1-97	VA775100	PW HEAD P-TITE SCREW	3x8-10 FCRM3-BL	
	1-98	V3750600	SUPPORT	FFC	
*	2- 3	V4003600	P.C.B. ASS'Y	CD	
	2-51	VU638400	CDC MECHANISM UNIT	YMHB310	
*	2-61	VU353900	FRAME	REAR	
*	2-62	VU354100	FRAME	F-L	
*	2-63	VU354200	FRAME	F-R	
	2-64	VU915700	FRAME	PCB	
	2-70	VQ861500	CUSHION	SHEET	
	2-71	V4443400	SPACER, LID		
	2-82	EP630220	BIND HEAD P-TITE SCREW	3x8 ZMC2-BL	
	2-83	VT669300	PW HEAD B-TITE SCREW	3x8-8 MFC2	
*	5	V4001700	P.C.B. ASS'Y	INPUT	(UC)
*	5	V4001800	P.C.B. ASS'Y	INPUT	(R)
*	5	V4001900	P.C.B. ASS'Y	INPUT	(A)
*	5	V4002000	P.C.B. ASS'Y	INPUT	(BG)
*	6	V4000200	P.C.B. ASS'Y	TUNER/TU-02	(UCR)
*	6	V4000300	P.C.B. ASS'Y	TUNER/TU-02	(A)
*	6	V4000400	P.C.B. ASS'Y	TUNER/TU-02	(BG)
*	7	V4000600	P.C.B. ASS'Y	MAIN	(UC)
*	7	V4000800	P.C.B. ASS'Y	MAIN	(R)
*	7	V4000900	P.C.B. ASS'Y	MAIN	(ABG)
*	8	AAX07650	CASSETTE DECK MECH. UINT		F511638
*	9	AAX07660	LOADING UNIT		F511630
	10- 1	VR510800	TRANSISTOR	2SD2396 J,K	Q204,218
*	10-11	V3621800	HEAT SINK		


* New Parts

	Ref. No.	PART NO.	Description	Remarks	Markets
	10-13	VV877700	RADIATION SHEET	48x80 TBM-51W	
	10-14	EP600830	BIND HEAD B-TITE SCREW	3x8 FCRM3-BL	
△ *	11	XW019A00	POWER TRANSFORMER		(UC)
△ *	11	XW020A00	POWER TRANSFORMER		(R)
△ *	11	XW021A00	POWER TRANSFORMER		(A)
△ *	11	XW022A00	POWER TRANSFORMER		(BG)
△	12	V2296800	POWER CORD ASS'Y		(A)
△	12	V2363800	POWER CORD ASS'Y		(UC)
△	12	VN363700	POWER CORD ASS'Y		(G)
△	12	VV437300	POWER CORD ASS'Y		(B)
△	12	VZ542500	POWER CORD ASS'Y		(R)
	15	V2438700	CORD STOPPER	10P1	
*	16	MF115300	FLEXIBLE FLAT CABLE C&C	15P 300mm	
	34	VU590000	BINDING TIE	CBTD001B	
	35	CB836200	BINDING TIE	S-70B	
	40	VB933800	FERRITE CORE	BP53RB310190NOA	(BG)
*	101	V3505700	TOP COVER		
*	102	V3104200	CHASSIS, MAIN		
*	103	V3104300	REAR PANEL		(UC)
*	103	V3104500	REAR PANEL		(R)
*	103	V3104600	REAR PANEL		(A)
*	103	V3104800	REAR PANEL		(BG)
*	105	V3107000	CHASSIS, CASSETTE		
*	106	V3107100	FRAME, TRANSFORMER		
*	107	V3107400	FRAME, SIDE		
*	110	V3110900	LID	CD	
*	111	V3111300	LID	CASSETTE	
*	115	V3110600	KNOB	D32	
	120	V2847700	SUPPORT, IC		
*	121	V3737600	SUPPORT, PWB		
	125	VR264400	SPACER	H8	
	126	VS009900	LEG	22x12.5	
	141	VQ368600	PUSH RIVET	P3555-B	
	150	EP600830	BIND HEAD B-TITE SCREW	3x8 FCRM3-BL	
	151	VN413300	BIND HEAD BONDING B-T. SCREW	3x8 MFZN2-BL	
	152	VT669300	PW HEAD B-TITE SCREW	3x8-8 MFC2	
	153	VT669400	PW HEAD B-TITE SCREW	3x15-8 MFC2	
	154	VK865300	HEX. HEAD TAP. SCREW WITH WS	3x18 FCRM3-BL	
	155	V2728500	BIND HEAD S-TITE SCREW	4x7 MFZN2-BL	
	156	VE529700	PW HEAD B-TITE SCREW	3x6-8 FCRM3-BL	
*	157	EP600130	BIND HEAD B-TITE SCREW	3x6 ZMC2-Y	
	180	V4096200	SHEET, HANGER		
	181	V4095100	PAD	SCREW	
	182	V4175200	SHEET, REAR		(RBG)
	185	V2879500	SPACER PCB-M		
	186	VS936800	DAMPER	3x5x10	
	190	EP600290	BIND HEAD P-TITE SCREW	3x6 ZMC2-Y	
			ACCESSORIES		
*	200	V3191600	REMOTE CONTROL TRANSMITTER	SBAN20184A	
	200-1	AAX03320	LID	35x55BLALPS	
		VQ147100	ANTENNA, FM	1.4m	
		VR248500	ANTENNA, AM LOOP	1.0m	
*			BATTERY, MANGANESE	SUM-3,AA,R06	

* New Parts

GX-500/GX-500VCD

■ GX-500VCD EXPLODED VIEW

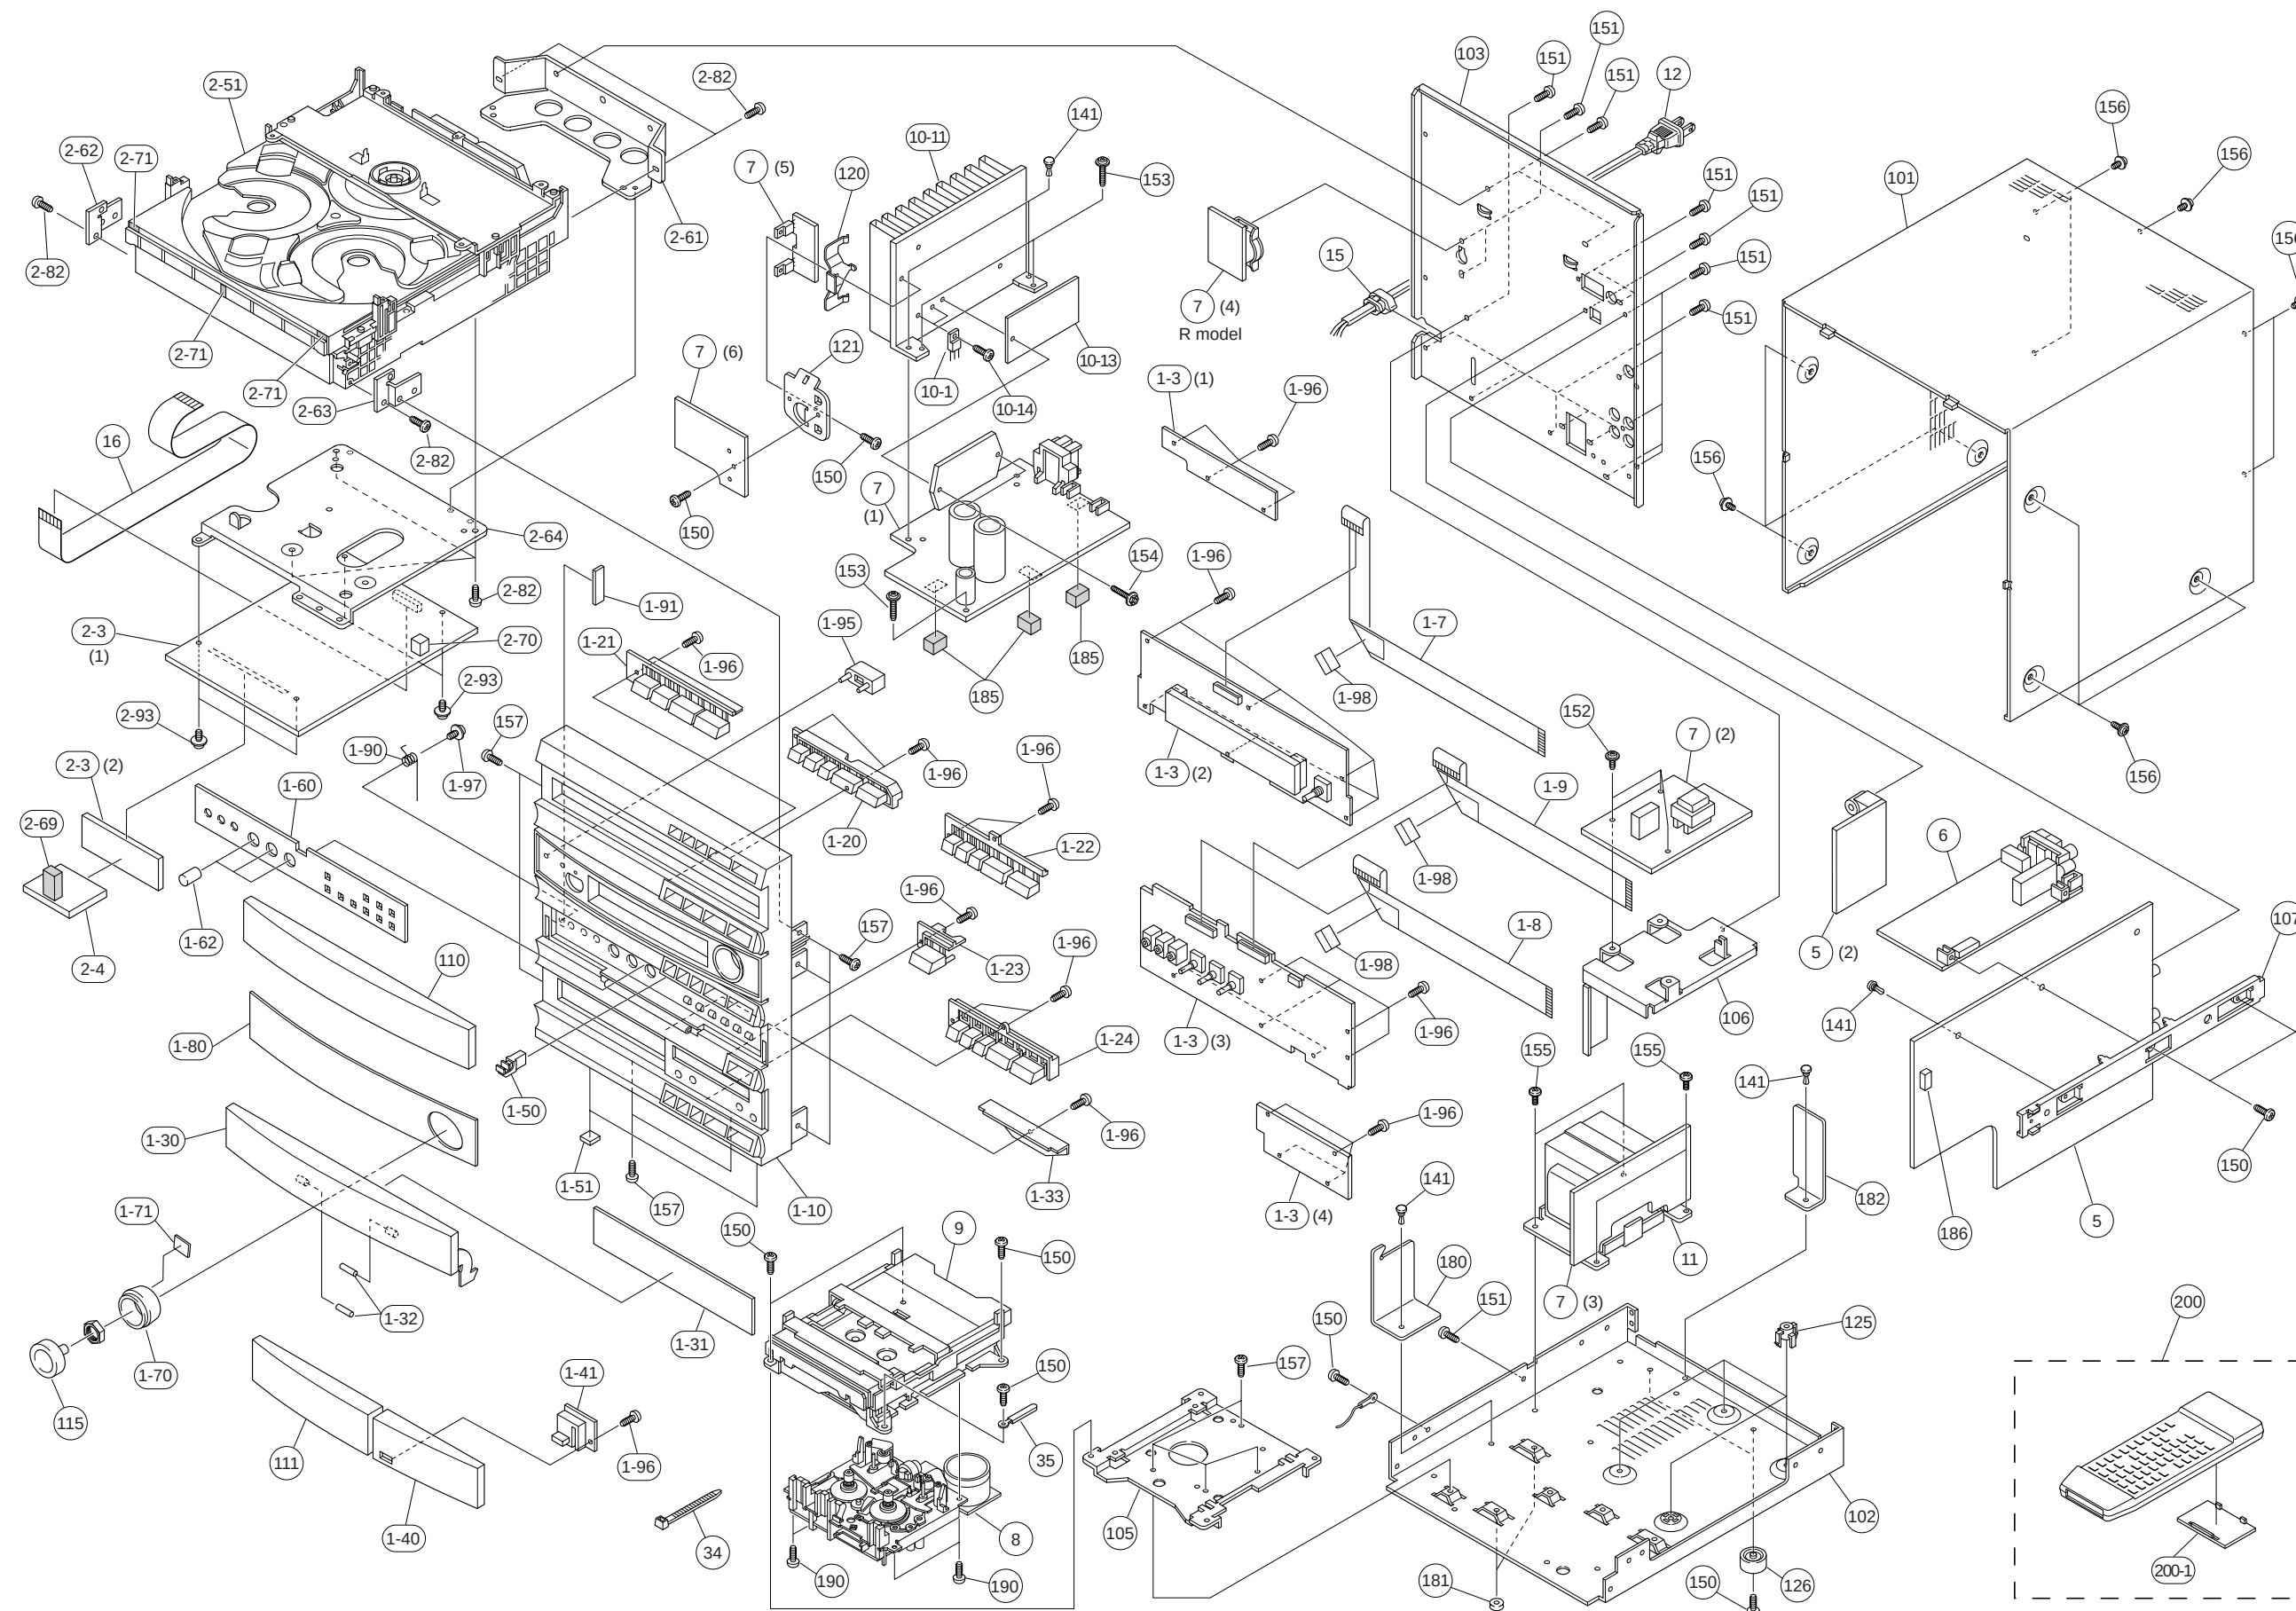

■ GX-500VCD MECHANICAL PARTS

	Ref. No.	PART NO.	Description	Remarks	Markets
*	1- 3	V4003400	P.C.B. ASS'Y	OPERATION	
*	1- 7	V3728300	BAN-CARD	25P 380mm	
*	1- 8	MF125300	FLEXIBLE FLAT CABLE C&C	25P 300mm	
*	1- 9	MF115250	FLEXIBLE FLAT CABLE C&C	15P 250mm	
*	1-10	V3108900	FRONT PANEL		
*	1-20	V3109600	BUTTON	5P-CD	
*	1-21	V3110400	BUTTON	4P-CD	
*	1-22	V3110200	BUTTON	5P-INPUT	
*	1-23	V3110000	BUTTON	1P-STANDBY	
*	1-24	V3109700	BUTTON	5P-OPERATION	
	1-30	V3222900	LID, PANEL		
*	1-31	V3112100	SHEET	LID	
*	1-32	V3263300	SPRING PIN	SUS 2x16mm	
*	1-33	V3188400	STOPPER, PIN		
*	1-40	V3111700	LID	1H	
*	1-41	V3109800	BUTTON	1P-EJ	
*	1-50	V3263200	MINI SIDE ROCK	091Y	
	1-51	VS010000	CUSHION, LEG		
*	1-60	V3112400	PLATE, SP		
*	1-62	V3110800	KNOB	D10	
*	1-70	V3237100	LENS, KNOB		
*	1-71	V3269700	REFLECTOR	LED	
*	1-80	V3113500	WINDOW, FL		
*	1-90	V3267500	SPRING	D6T	
*	1-91	V3272000	PAD, FRICTION		
*	1-95	V3112000	LENS	2P	
	1-96	VD435300	BIND HEAD P-TITE SCREW	2.6x8 FCRM3-BL	
	1-97	VA775100	PW HEAD P-TITE SCREW	3x8-10 FCRM3-BL	
	1-98	V3750600	SUPPORT	FFC	
*	2- 3	V4003700	P.C.B. ASS'Y	VCD	
	2- 4	VZ150200	VCD MODULE	RD-DVK020	
	2-51	VU638400	CDC MECHANISM UNIT	YMHB310	
*	2-61	VU353900	FRAME	REAR	
*	2-62	VU354100	FRAME	F-L	
*	2-63	VU354200	FRAME	F-R	
	2-64	VU915700	FRAME	PCB	
	2-69	VZ208500	SPACER	PCB-VCD	
	2-70	VQ861500	CUSHION	SHEET	
	2-71	V4443400	SPACER, LID		
	2-82	EP630220	BIND HEAD P-TITE SCREW	3x8 ZMC2-BL	
	2-93	VT669300	PW HEAD B-TITE SCREW	3x8-8 MFC2	
*	5	V4002100	P.C.B. ASS'Y	INPUT	(RT)
*	5	V4002200	P.C.B. ASS'Y	INPUT	(L)
*	6	V4000200	P.C.B. ASS'Y	TUNER/TU-02	(RT)
	6	V4000500	P.C.B. ASS'Y	TUNER/TU-02	(L)
*	7	V4000800	P.C.B. ASS'Y	MAIN	(RT)
*	7	V4000900	P.C.B. ASS'Y	MAIN	(L)
*	8	AAX07650	CASSETTE DECK MECH. UINT		F511638
*	9	AAX07660	LOADING UNIT		F511630
	10- 1	VR510800	TRANSISTOR	2SD2396 J,K	
*	10-11	V3621800	HEAT SINK		
	10-13	VV877700	RADIATION SHEET	48x80 TBM-51W	
	10-14	EP600830	BIND HEAD B-TITE SCREW	3x8 FCRM3-BL	


* New Parts

	Ref. No.	PART NO.	Description	Remarks	Markets
⚠ *	11	XW020A00	POWER TRANSFORMER		(RT)
⚠ *	11	XW022A00	POWER TRANSFORMER		(L)
⚠	12	VN363700	POWER CORD ASS'Y		(L)
⚠	12	VZ542500	POWER CORD ASS'Y		(RT)
	15	V2438700	CORD STOPPER	10P1	
*	16	MF115300	FLEXIBLE FLAT CABLE C&C	15P 300mm	
	34	VU590000	BINDING TIE	CBTD001B	
	35	CB836200	BINDING TIE	S-70B	
*	101	V3505700	TOP COVER		
*	102	V3104200	CHASSIS, MAIN		
*	103	V3105000	REAR PANEL		(RT)
*	103	V3105100	REAR PANEL		(L)
*	105	V3107000	CHASSIS, CASSETTE		
*	106	V3107100	FRAME, TRANSFORMER		
*	107	V3107400	FRAME, SIDE		
*	110	V3222700	LID	CD-V	
*	111	V3111300	LID	CASSETTE	
*	115	V3110600	KNOB	D32	
	120	V2847700	SUPPORT, IC		
*	121	V3737600	SUPPORT, PWB		
	125	VR264400	SPACER	H8	
	126	VS009900	LEG	22x12.5	
	141	VQ368600	PUSH RIVET	P3555-B	
	150	EP600830	BIND HEAD B-TITE SCREW	3x8 FCRM3-BL	
	151	VN413300	BIND HEAD BONDING B-T. SCREW	3x8 MFZN2-BL	
	152	VT669300	PW HEAD B-TITE SCREW	3x8-8 MFC2	
	153	VT669400	PW HEAD B-TITE SCREW	3x15-8 MFC2	
	154	VK865300	HEX. HEAD TAP. SCREW WITH WS	3x18 FCRM3-BL	
	155	V2728500	BIND HEAD S-TITE SCREW	4x7 MFZN2-BL	
	156	VE529700	PW HEAD B-TITE SCREW	3x6-8 FCRM3-BL	
*	157	EP600130	BIND HEAD B-TITE SCREW	3x6 ZMC2-Y	
	180	V4096200	SHEET, HANGER		
	181	V4095100	PAD	SCREW	
	182	V4175200	SHEET, REAR		
	185	V2879500	SPACER PCB-M		
	186	VS936800	DAMPER	3x5x10	
	190	EP600290	BIND HEAD P-TITE SCREW	3x6 ZMC2-Y	
			ACCESSORIES		
*	200	V3191700	REMOTE CONTROL TRANSMITTER	SBAN20185A	
200-1	AAX03320	LID		35x55BLALPS	
	VQ147100	ANTENNA, FM		1.4m	
	VR248500	ANTENNA, AM LOOP		1.0m	
		BATTERY, MANGANESE		SUM-3,AA,R06	

* New Parts

GX-500/GX-500VCD

EXPLODED VIEW (CD Mechanism Unit)

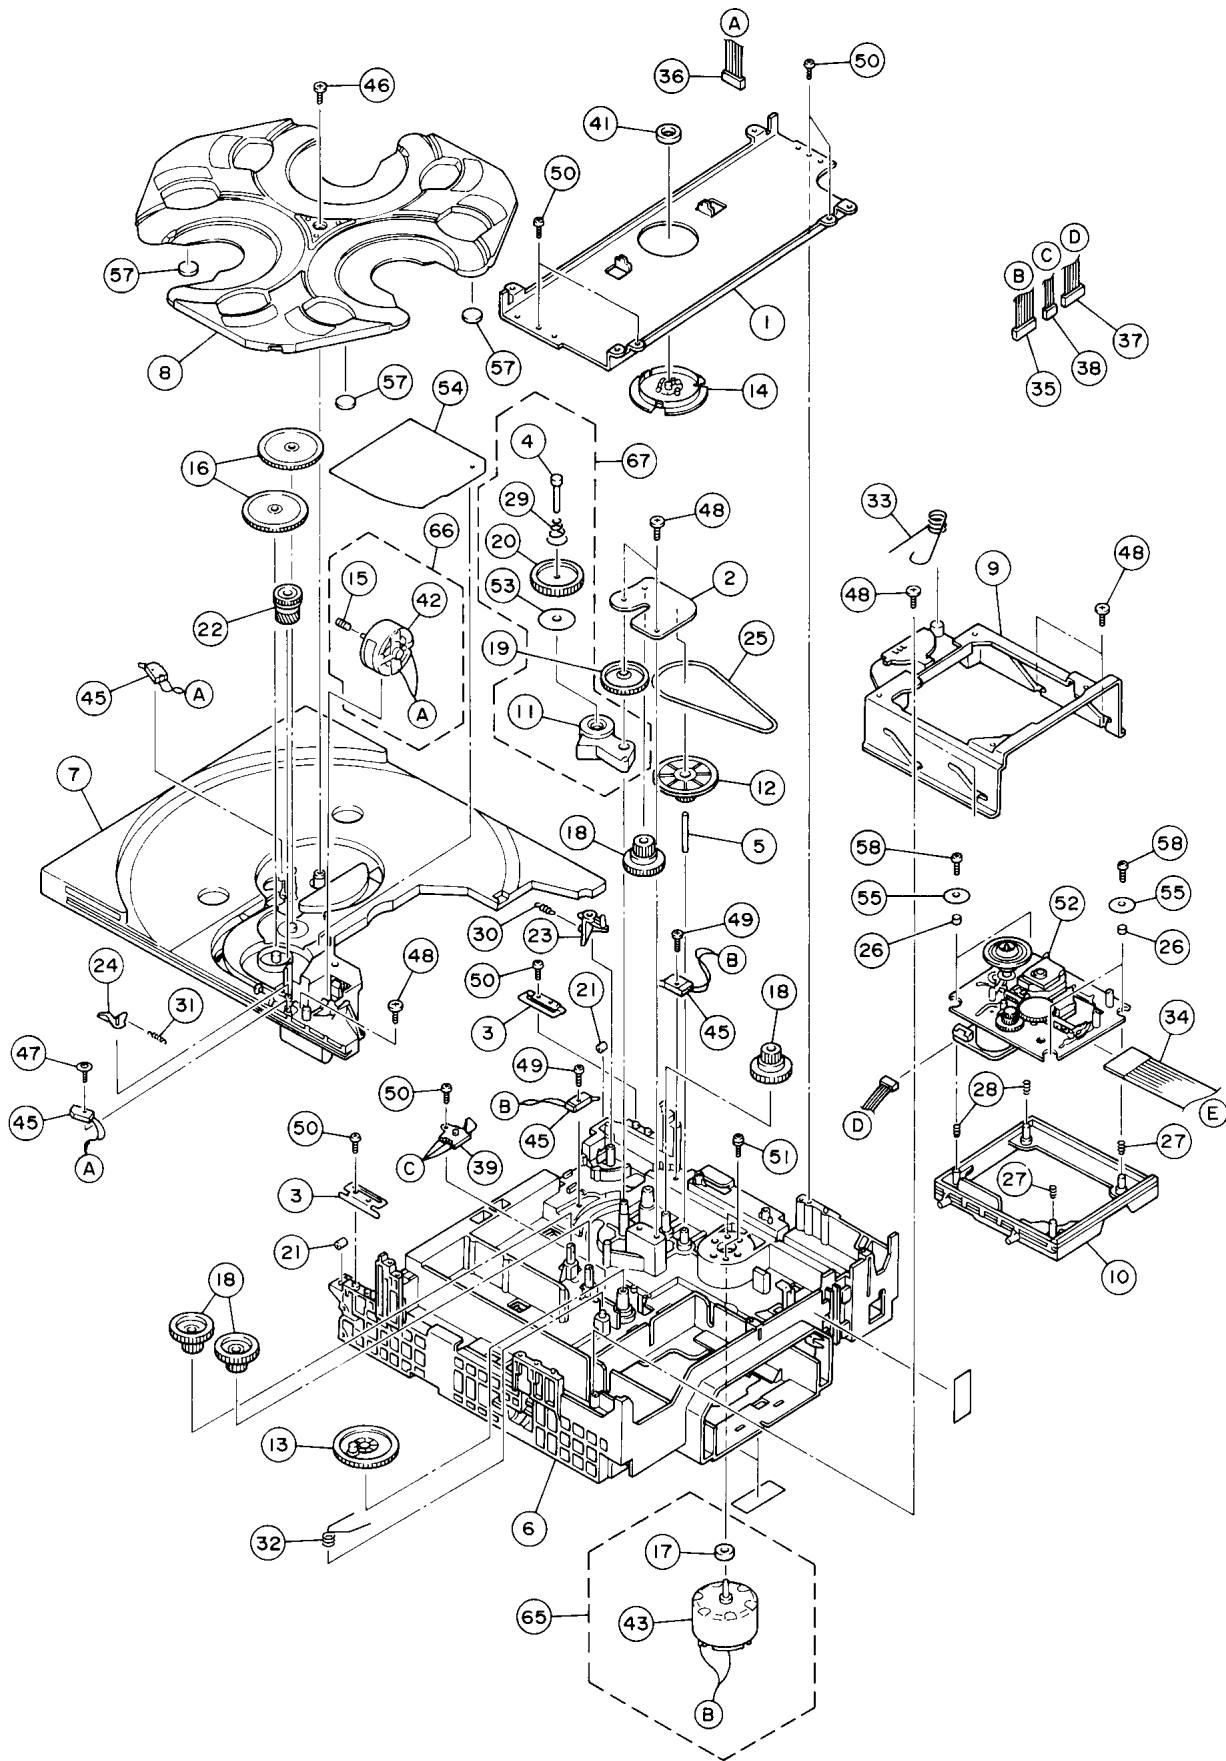

MECHANICAL PARTS (CD Mechanism Unit)

Ref. No.	PART NO.	Description	Remarks	Markets
* 1	VU638400	CDC MECHANISM UNIT	YMHB310	YMHB310
1	CX679550	BRACKET, CLAMP		C3B1007
2	CX679540	BRACKET, GEAR		C3D1002
3	CX679560	BRACKET, TRAY		C3D1003
4	AX623770	SHAFT, FRICTION-B		C3D8014
5	AX623780	SHAFT, PULLEY		C3D2002
6	AX623930	CHASSIS, MAIN		C3A3001
7	CX679430	TRAY, SLIDE		C3A3002
8	CX679440	TRAY, ROTARY		C3A3003
9	CX679410	SLIDER, LIFT		C3B3024
10	AX623880	FRAME, MD-B		C3B3023
11	AX623620	ARM, FRICTION		C3C3006
12	AX623900	PULLEY, LOAD		C3C3010
13	CX679280	CAM GEAR, UP/DOWN		C3C3014
14	CX679380	CLAMPER		C3C3020
15	CX679320	GEAR, WORM		C3D3007
16	CX679310	GEAR, IDLER		C3D3008
17	JX601690	MOTOR, PULLEY (B)		PD3039
18	CX679360	GEAR, LOAD		C3D3011
19	CX679330	GEAR, CENTER		C3D3012
20	CX679340	GEAR, FRICTION		C3D3013
21	AX623940	ROLLER, TRAY		C3D3015
22	CX679350	GEAR, HELICAL		C3D3017
23	CX679650	LEVER, LOCK		C3D3018
24	CX679640	LEVER, BRAKE		C3D3029
25	CX679460	DRIVE BELT		C3D4001
26	CX679260	INSULATOR		C3D4003
27	EX603440	SPRING, MD-H		C3D6012
28	EX603430	SPRING, MD-G		C3D6011
29	EX603460	SPRING, FRICTION		C3D6003
30	EX603490	SPRING, LOCK		C3D6005
31	EX603470	SPRING, BRAKE		C3D6006
32	EX603450	SPRING, CAM		C3D6007
33	EX603480	SPRING, LEFT		C3D6013
34	LX610060	FFC	16P	C3D9017
35	MX605000	WIRE	6P	C3D9019
36	MX604960	FLAT WIRE	6P	C3D9018
37	MX605010	WIRE	6P	C3D9020
38	MX605020	WIRE	3P	C3D9021
39	CX679670	LEVER SWITCH	SSCF	S332061
41	AX623920	MAGNET		T990544
42	JX601670	MOTOR	RF-500TB-12560	91300130
43	JX601680	MOTOR	MNN-6F1LBOK	91433136
45	CX679660	LEVER SWITCH	JPS1220-0201	94437095
46	EX603600	SCREW (F)		C3D8010
47	EX603570	SCREW (B)		C3D8004
48	EX603580	SCREW (C)		C3D8005
49	EX603630	BIND HEAD TAPPING SCREW	2x12	8114512012
50	EX603640	BIND HEAD TAPPING SCREW	2.6x8	8114512608
51	EX603590	SCREW (E)		C3D8009
52	NX635360	TRAVERSE UNIT	KSM-213BCM	90438002
53	CX679510	FELT, FRICTION		C3D8001
54	CX679270	NEW COVER		C3D8019

* New Parts


Ref. No.	PART NO.	Description	Remarks	Markets
55	EX603810	WASHER	C3D8018	
57	CX679400	SHEET, TRAY-B	C3D8015	
58	EX603620	BIND HEAD TAPPING SCREW	8114512008	
65	JX601720	MOTOR ASS'Y, PULLEY	C3D9008	
66	JX601700	MOTOR ASS'Y, WORM	C3D9007	
67	AX623870	FRICTION ARM ASS'Y	C3D3022	

* New Parts

Ref. No.	PART NO.	Description	Remarks	Markets
	NX635360	TRAVERSE UNIT	KSM-213BCM	90438002
1	NX635420	MOTOR CHASSIS ASS'Y	(MB)	X26258771
2	CX679710	MOTOR GEAR ASS'Y		X26257691
3	PX601970	OPTICAL DEVICE	KSS-213B(RP)	884836711
4	AX623980	SLED SHAFT		262690801
5	CX679720	GEAR, A	(S)	262690701
6	EA020036	PAN HEAD SCREW	2x3 ZMC2-Y	762125515
7	KX604660	LEAF SWITCH		157208511
8	NX613040	PWB, MOTOR	6P(S)	163967813
9	LX610120	CONNECTOR PIN	6P	156472211
10	CX680030	GEAR		262700301

* New Parts


■ EXPLODED VIEW (Loading Unit)

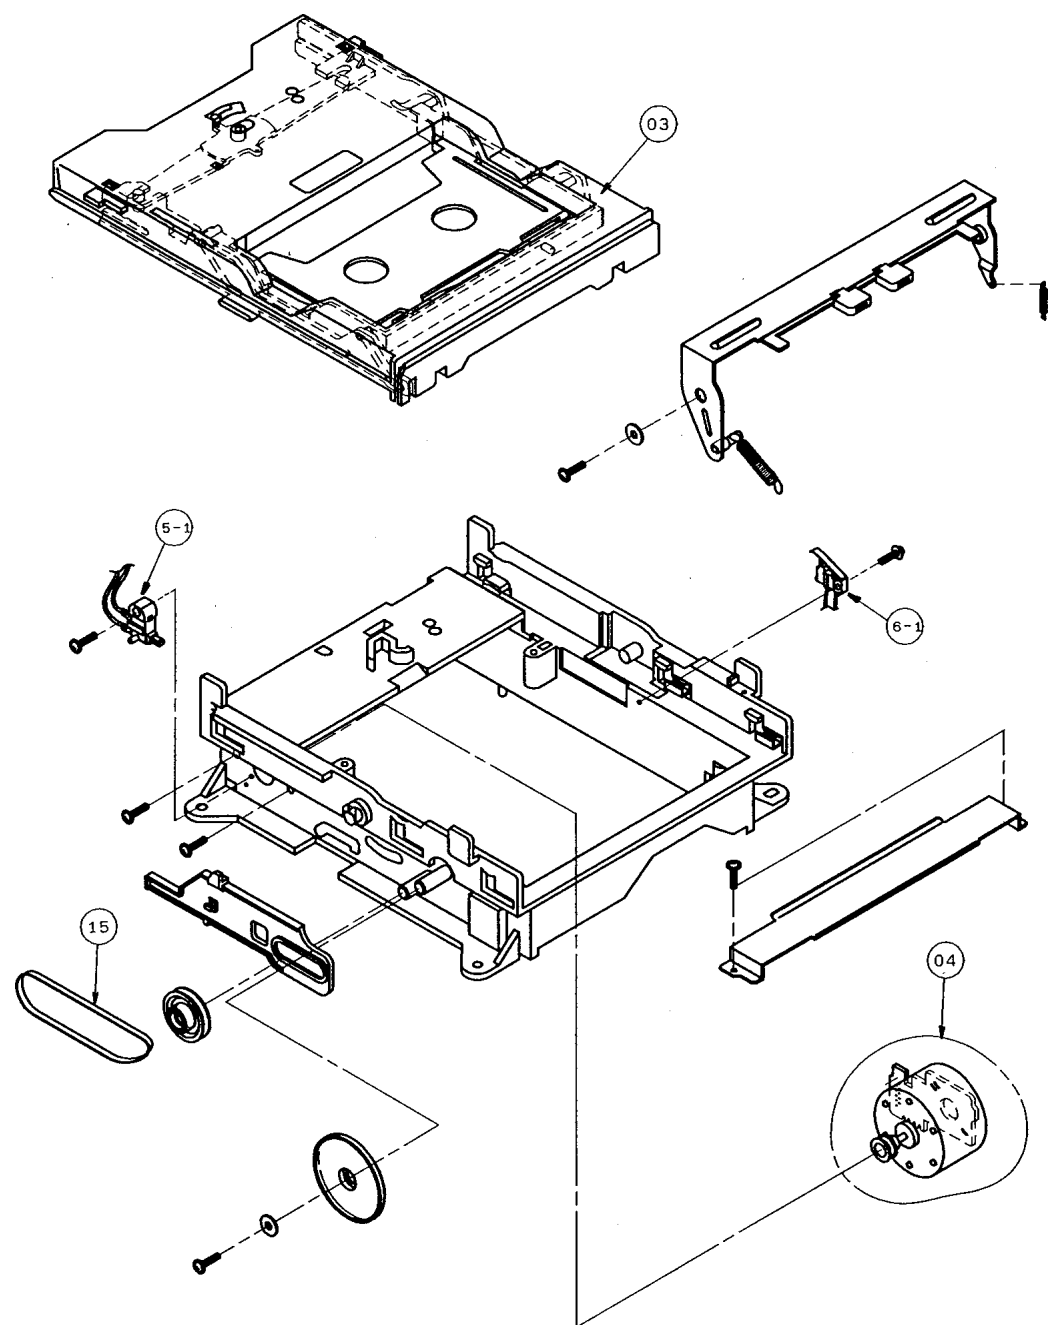

Ref. No.	PART NO.	Description	Remarks	Markets
	AAX07660	LOADING UNIT	F511630	
* 3	AAX07480	HOLDER CST BLOCK	F527078	
* 4	AAX07460	MTR REEL BLOCK	F564313	
* 5-1	AAX07510	SWITCH	UE15S14	
* 6-1	AAX07520	SWITCH	UE18P21	
* 15	AAX07580	BELT	FF19L12	LOADING

* New Parts

■ EXPLODED VIEW (Cassette Deck Mech. Unit)

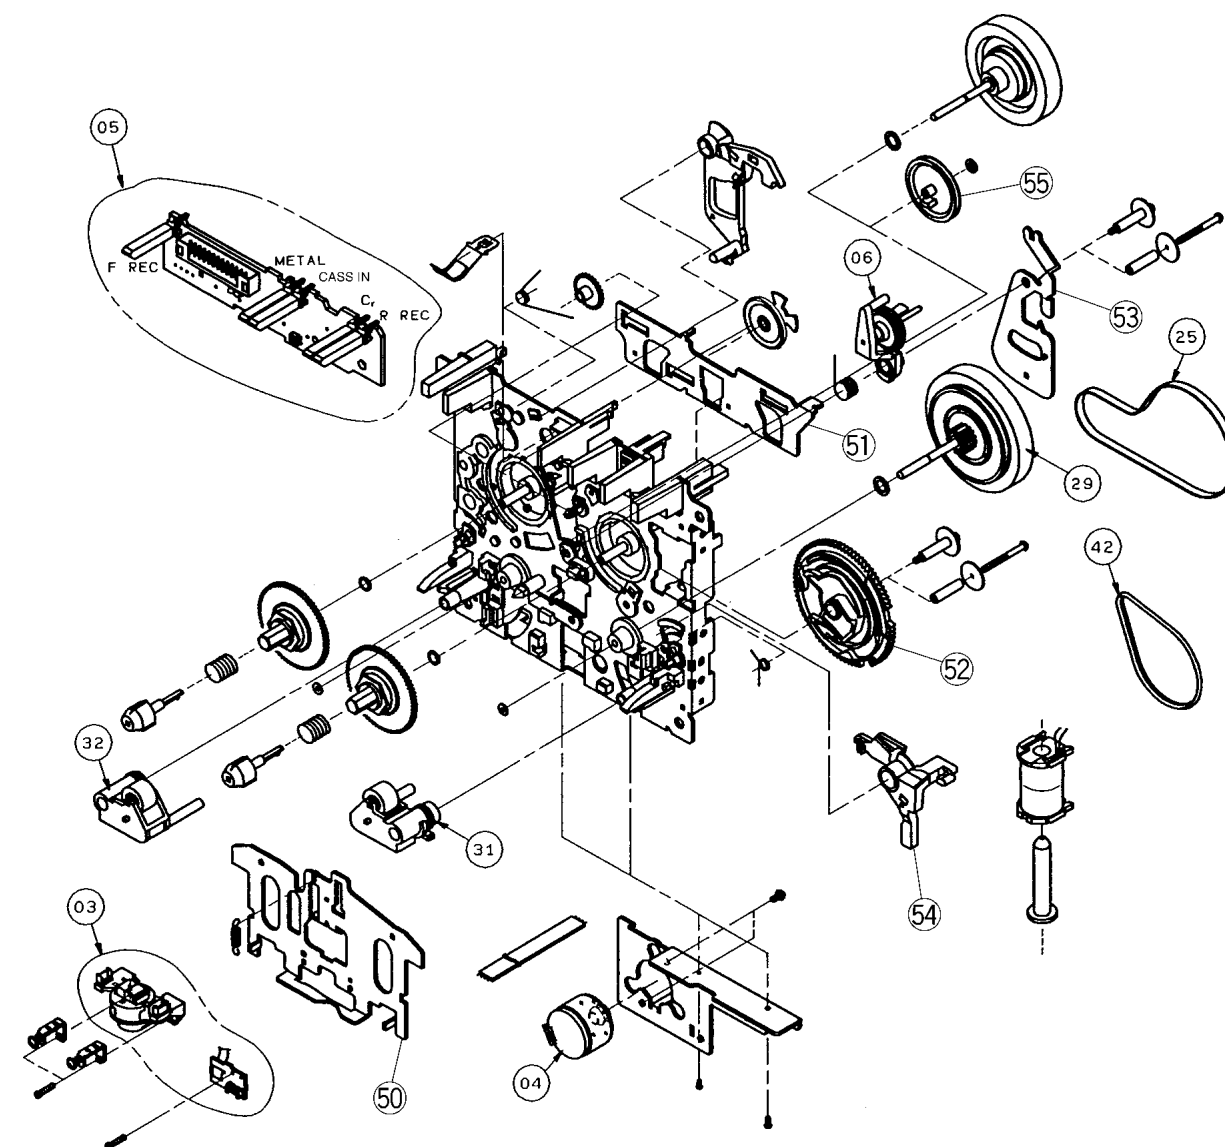

Ref. No.	PART NO.	Description	Remarks	Markets
* 3	AAX07650	CASSETTE DECK MECH. UNIT	F511638	
* 4	AAX07550	PLATE HD BLOCK	F513831	
* 5	AAX07450	MTR MAIN BLOCK	F525327	
* 6	AAX07470	PCB CONTROL BLOCK	F567626	
* 6	AAX07490	CLUTCH ASS'Y BLOCK	F522037	
* 25	AAX07570	BELT	FF19H11	MAIN
* 29	AAX07500	CLUTCH ASS'Y BLOCK	F522048	
* 31	AAX07530	ROLLER PINCH BLOCK	F514129	R
* 32	AAX07540	ROLLER PINCH BLOCK	F514130	L
* 42	AAX07560	BELT	FF18W12	F/R
50	AX623570	HEAD BASE	FC61K28	
51	AX622210	PLATE, SLIDE	FC61L17	
52	CX677140	CAM, GEAR	FD52Y20	
53	CX677130	LEVER	FC62G12	F/R
54	AX623590	LOCK LEVER	FD53D19	
55	CX679800	PULLEY, CLUTCH	FD53F14	

* New Parts

GREASE APPLICATION DIAGRAM (CD Mechanism)

● Grease to be supplied



The same grease as that originally used is not available but a substitutive grease is supplied instead. When using this grease, however, make sure to wipe off the attached grease thoroughly before applying the new one.

Grease originally used	Grease to be supplied	
EM50L	FLOIL G-351	P/NO. TX913160
Molykote 6166	FLOIL G-351	P/NO. TX913160
MX-2400	FLOIL G-351	P/NO. TX913160





EM50L : ➡

Molykote 6166 : ➡

MX-2400 : ➡

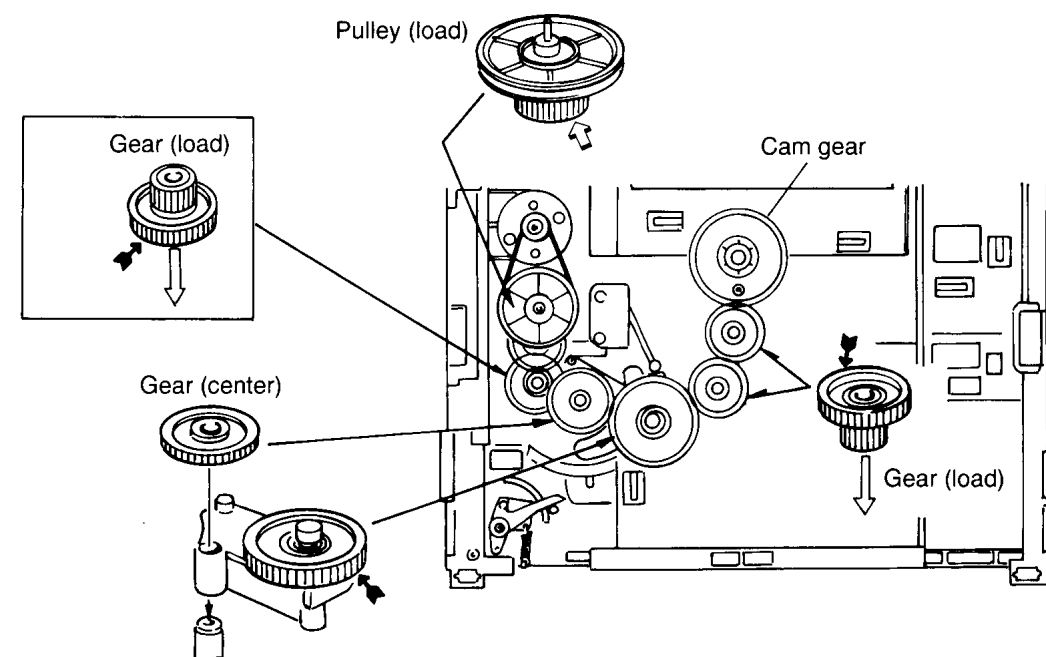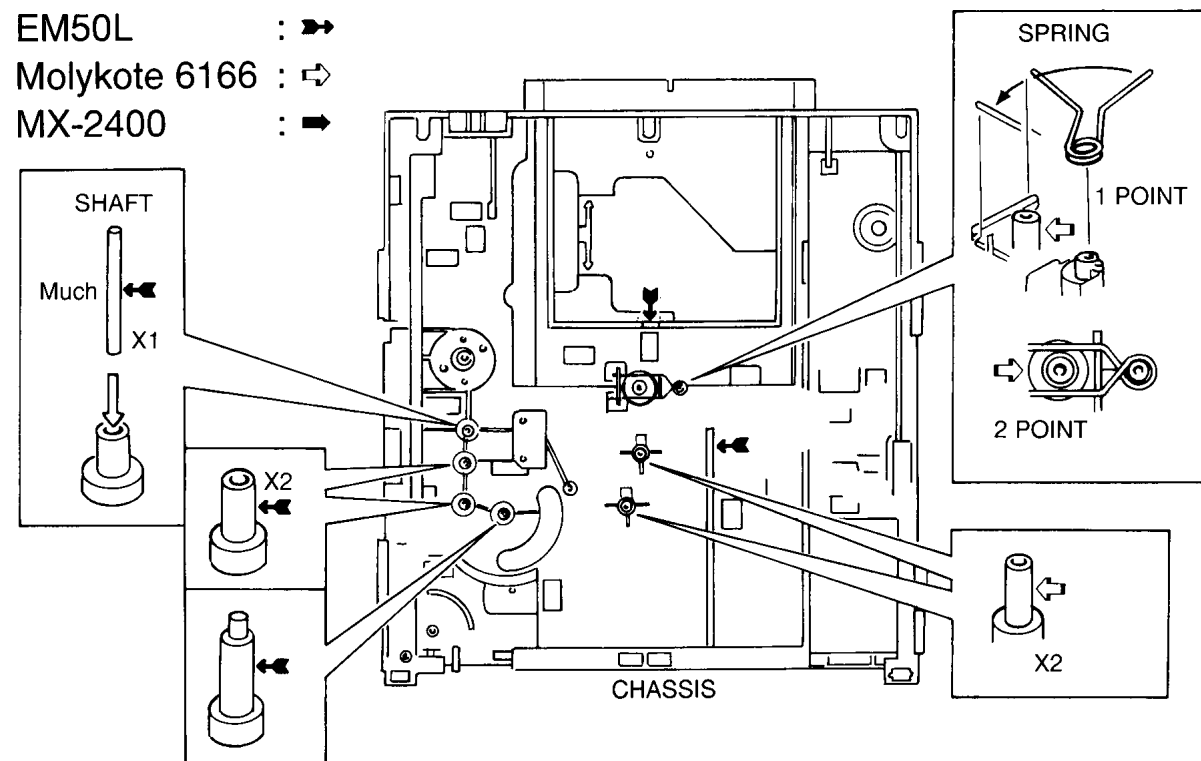


Tray bottom side

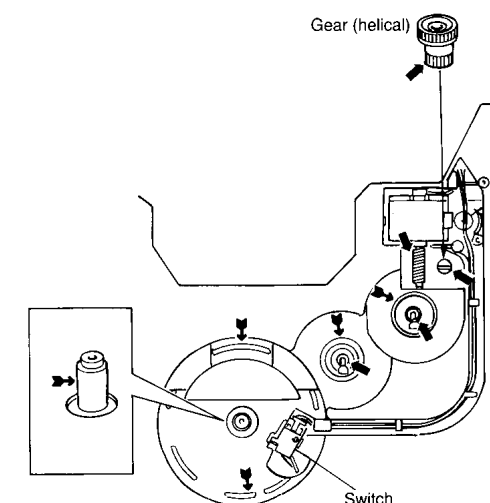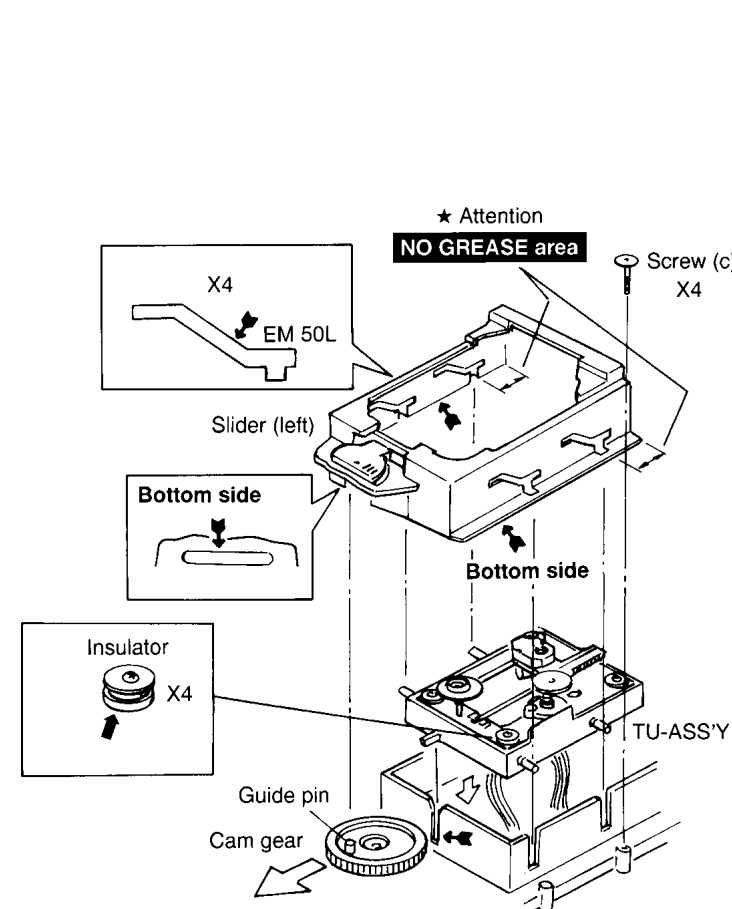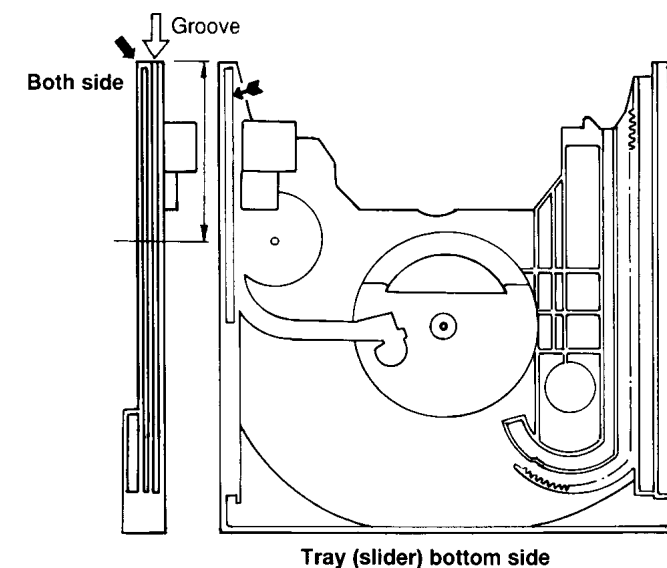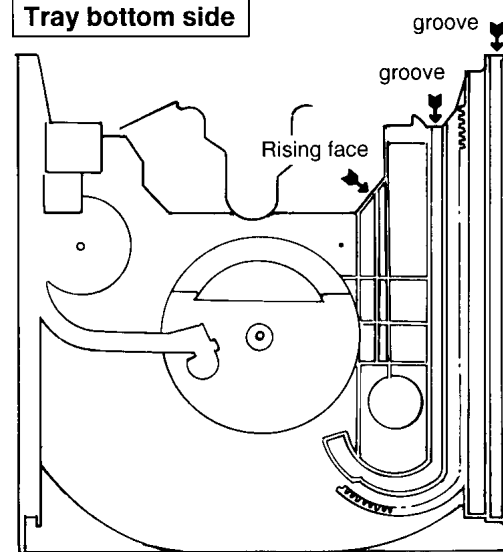



GX-500 REMOTE CONTROL TRANSMITTER

■ SCHEMATIC DIAGRAM

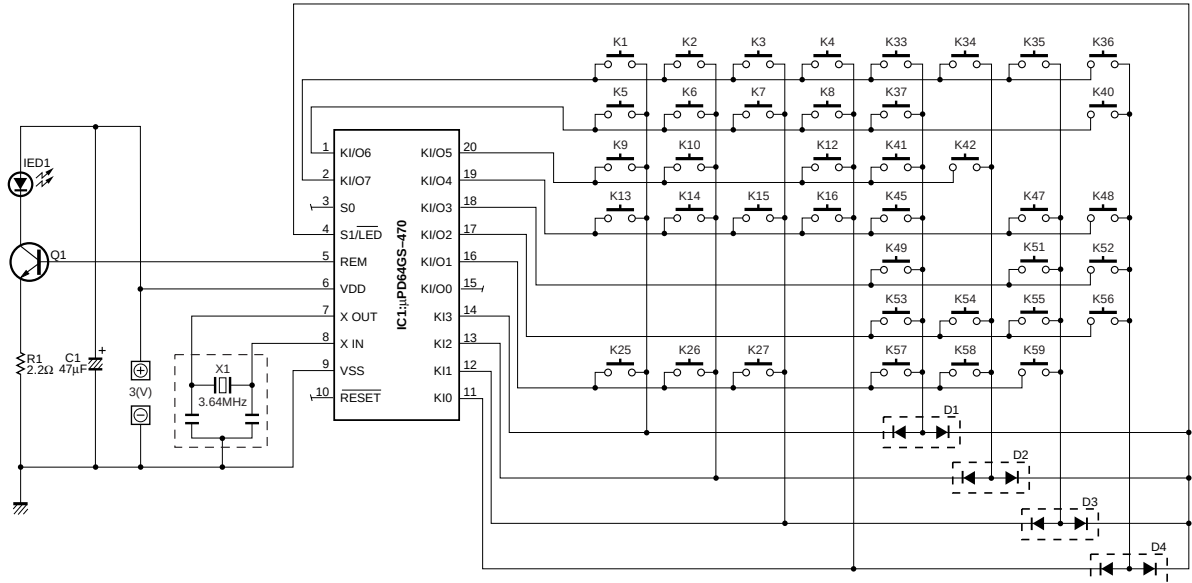


GX-500VCD REMOTE CONTROL TRANSMITTER

■ SCHEMATIC DIAGRAM

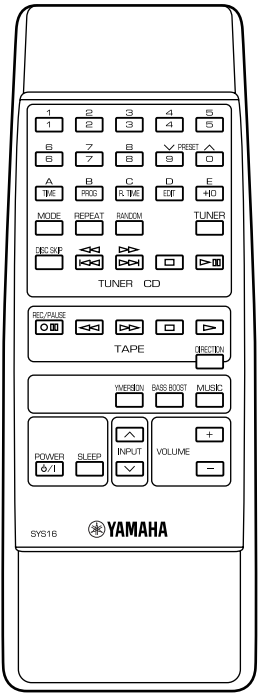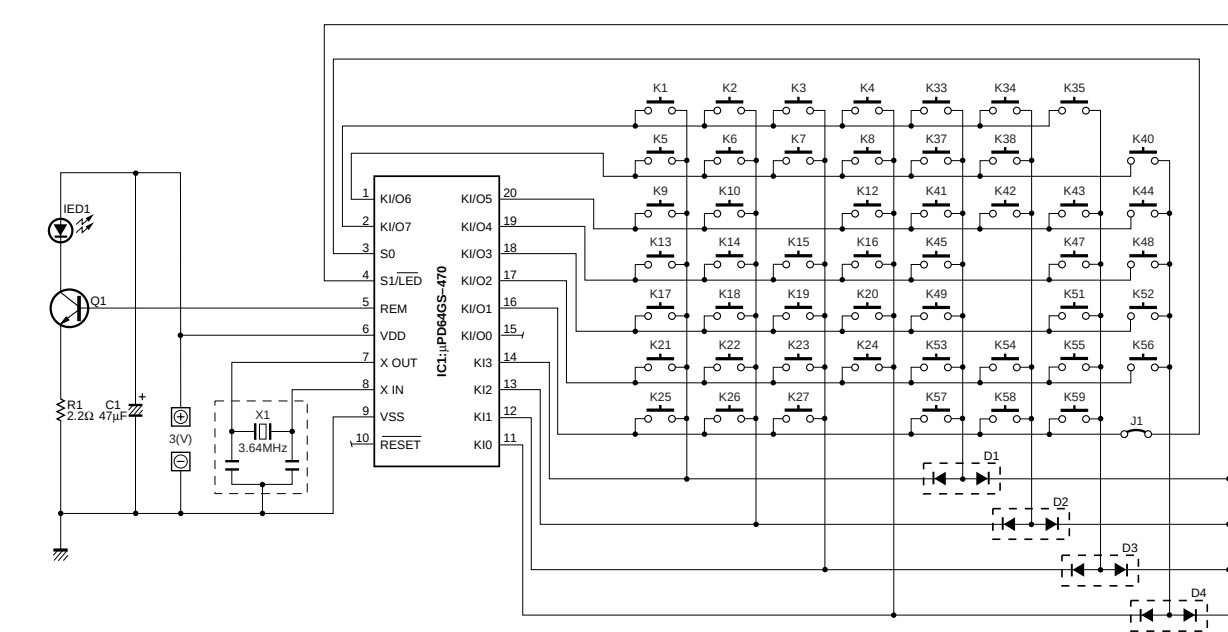

Key No.	FUNCTION	CUSTOM (HEX)	DATA (HEX)
1	2	78	12
2	3	78	13
3	4	78	14
4	5	78	15
5	PROG (CD) B	78	0B
6	R. TIME (CD) C	78	08
7	EDIT (CD) D	78	09
8	+10 E	78	1A
9	REPEAT (CD)	78	0C
10	RANDOM (CD)	78	07
12	TUNER	78	4B
13	◀◀ (CD)	78	04
14	▶▶ (CD)	78	03
15	■ (CD)	78	01
16	▶▶ (CD)	78	02
25	DIRECTION (TAPE)	78	D8
26	VOLUME +	78	1E
27	VOLUME -	78	1F
33	● REC/PAUSE (TAPE)	78	46
34	◀◀ (TAPE)	78	45


Key No.	FUNCTION	CUSTOM (HEX)	DATA (HEX)
35	▶▶ (TAPE)	78	44
36	■ (TAPE)	78	41
37	▶ (TAPE)	78	42
40	YMERSSION	78	5B
41	BASS BOOST	78	85
42	MUSIC	78	5A
45	INPUT ^	78	5E
47	ψ/1 POWER	78	0F
48	SLEEP	78	4F
49	INPUT ∨	78	40
51	1 1	78	11
52	6 6	78	16
53	7 7	78	17
54	8 8	78	18
55	9 ∨PRESET	78	19
56	0 ^PRESET	78	10
57	TIME (CD)	78	0A
58	MODE (CD)	78	5D
59	DISC SKIP	78	0D

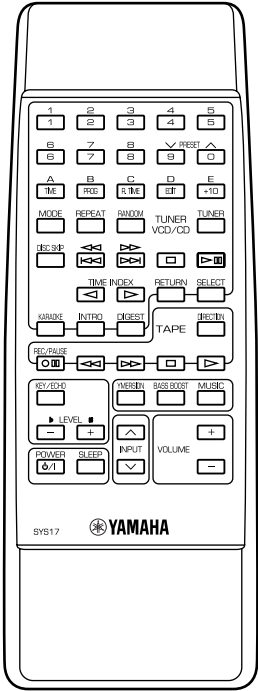

Key No.	FUNCTION	CUSTOM (HEX)	DATA (HEX)
1	2	78	12
2	3	78	13
3	4	78	14
4	5	78	15
5	PROG (CD) B	78	0B
6	R. TIME (CD) C	78	08
7	EDIT (CD) D	78	09
8	+10 E	78	1A
9	REPEAT (CD)	78	0C
10	RANDOM (CD)	78	07
12	TUNER	78	4B
13	◀◀ (CD)	78	04
14	▶▶ (CD)	78	03
15	■ (CD)	78	01
16	▶▶ (CD)	78	02
17	TIME INDEX ◀ (VCD)	78	82
18	TIME INDEX ▶ (VCD)	78	81
19	RETURN (VCD)	78	8B
20	SELECT (VCD)	78	8A
21	● REC/PAUSE (TAPE)	78	46
22	◀◀ (TAPE)	78	45
23	▶▶ (TAPE)	78	44
24	■ (TAPE)	78	41
25	▶ (TAPE)	78	42
26	VOLUME +	78	1E

Key No.	FUNCTION	CUSTOM (HEX)	DATA (HEX)
27	VOLUME -	78	1F
33	KARAOKE	78	5C
34	INTRO	78	83
35	DIGEST	78	84
37	DIRECTION	78	D8
38	KEY/ECHO	78	48
40	YMERSSION	78	5B
41	BASE BOOST	78	85
42	MUSIC	78	5A
43	LEVEL -	78	54
44	LEVEL +	78	53
45	INPUT ^	78	5E
47	ψ/1 POWER	78	0F
48	SLEEP	78	4F
49	INPUT ∨	78	40
51	1 1	78	11
52	6 6	78	16
53	7 7	78	17
54	8 8	78	18
55	9 ∨PRESET	78	19
56	0 ^PRESET	78	10
57	TIME (CD) A	78	0A
58	MODE	78	5D
59	DISC SKIP	78	0D

1 ■ NX-GX500 EXPLODED VIEW

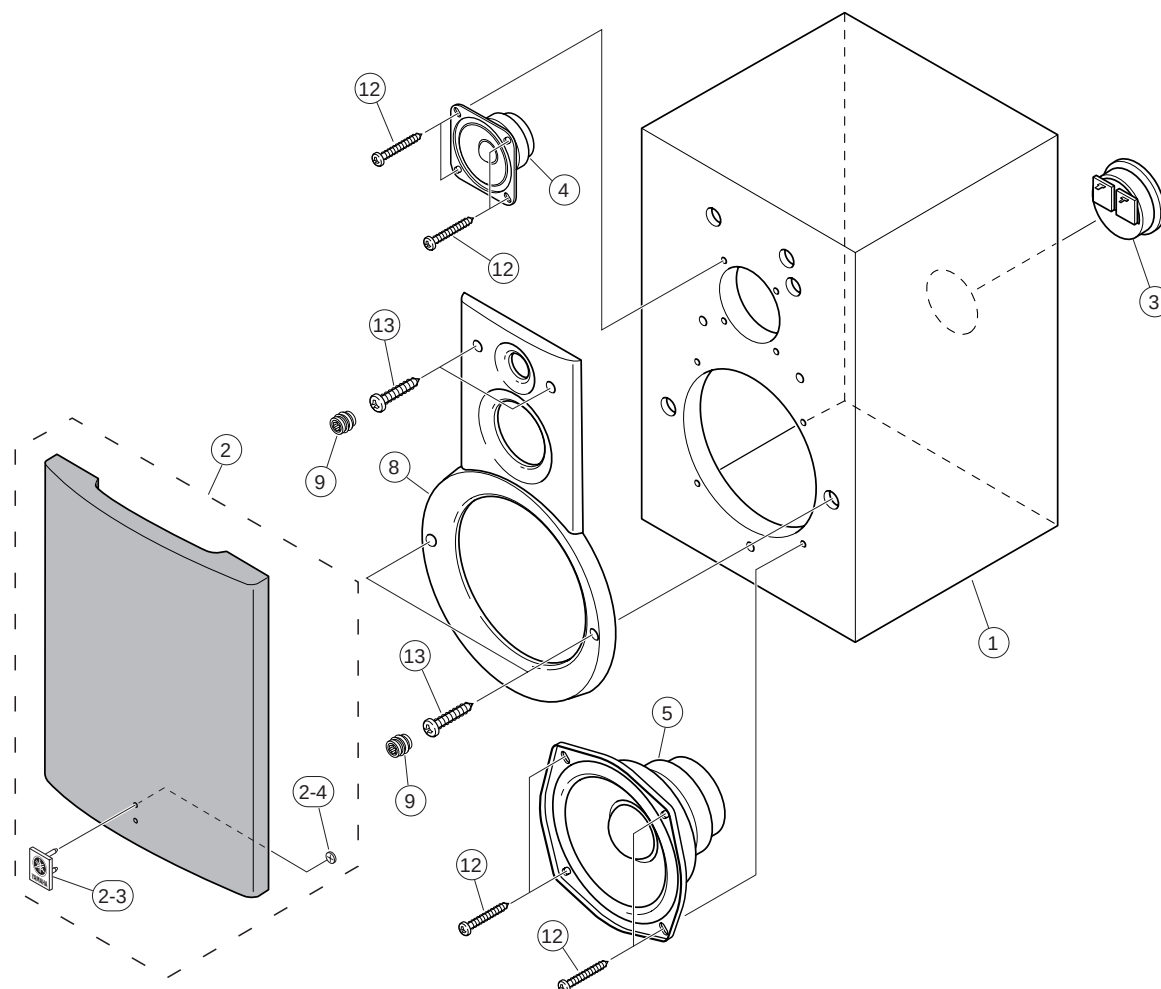

Ref. No.	PART NO.	Description	Remarks	Markets
* 1	V3592800	SPEAKER CABINET	CH	
* 1	V3592900	SPEAKER CABINET	BL	
* 2	V3593000	FRONT GRILLE ASS'Y	CH	
* 2	V3593100	FRONT GRILLE ASS'Y	BL	
2-3	V2192200	EMBLEM		
2-4	VP161000	PUSH NUT		
* 3	V3594000	SPEAKER TERMINAL	213-S5305	
* 4	XV819A00	LOUD SPEAKER JA05U1	5cm	
* 5	XV821A00	LOUD SPEAKER JA13590	13cm	
* 8	V3490500	FRONT PANEL		
* 9	V3594600	CATCHER		
12	EP030580	BINDING HEAD TAPPING SCREW	3.5x20 MFZN2-BL	
13	EP040250	BIND HEAD TAPPING SCREW	4x16 ZMC2-BL	
* 7	V3593700	ACCESSORIES SPEAKER CORD ASS'Y		

* New Parts

Parts List for Carbon Resistors

Value	1/4W Type Part No.	1/6W Type Part No.	Value	1/4W Type Part No.	1/6W Type Part No.
1.0 Ω	HJ35 3100	HF85 3100	10 k Ω	HF45 7100	HF45 7100
1.8 Ω	HJ35 3180	*	11 k Ω	HF45 7110	HF45 7110
2.2 Ω	HJ35 3220	HF85 3220	12 k Ω	HJ35 7120	HF85 7120
3.3 Ω	HJ35 3330	HF85 3330	13 k Ω	HF45 7130	HF45 7130
4.7 Ω	HJ35 3470	HF85 3470	15 k Ω	HF45 7150	HF45 7150
5.6 Ω	HJ35 3560	HF85 3560	18 k Ω	HF45 7180	HF45 7180
10 Ω	HF45 4100	HF45 4100	22 k Ω	HF45 7220	HF45 7220
15 Ω	HJ35 4150	HF85 4150	24 k Ω	HF45 7240	HF45 7240
22 Ω	HF45 4220	HF45 4220	27 k Ω	HJ35 7270	HF85 7270
27 Ω	HJ35 4270	HF85 4270	30 k Ω	HF45 7300	HF45 7300
33 Ω	HF45 4330	HF45 4330	33 k Ω	HF45 7330	HF45 7330
39 Ω	HJ35 4470	HF85 4390	36 k Ω	HF45 7360	HF45 7360
47 Ω	HF45 4470	HF45 4470	39 k Ω	HF45 7390	HF45 7390
56 Ω	HF45 4560	HF45 4560	47 k Ω	HF45 7470	HF45 7470
68 Ω	HF45 4680	HF45 4680	51 k Ω	HF45 7510	HF45 7510
75 Ω	HF45 4750	HF45 4750	56 k Ω	HF45 7560	HF45 7560
82 Ω	HF45 4820	HF45 4820	62 k Ω	HF45 7620	HF45 7620
91 Ω	HF45 4910	HF45 4910	68 k Ω	HF45 7680	HF45 7680
100 Ω	HF45 5100	HF45 5100	82 k Ω	HF45 7820	HF45 7820
110 Ω	HJ35 5110	HF85 5110	91 k Ω	HF45 7910	HF45 7910
120 Ω	HF45 5120	HF45 5120	100 k Ω	HF45 8100	HF45 8100
150 Ω	HF45 5150	HF45 5150	110 k Ω	HF45 8110	HF45 8110
160 Ω	HJ35 5160	*	120 k Ω	HF45 8120	HF45 8120
180 Ω	HF45 5180	HF45 5180	150 k Ω	HF45 8150	HF45 8150
200 Ω	HF45 5200	HF45 5200	180 k Ω	HF45 8180	HF45 8180
220 Ω	HF45 5220	HF45 5220	220 k Ω	HJ35 8220	HF85 8220
270 Ω	HF45 5270	HF45 5270	270 k Ω	HF45 8270	HF45 8270
330 Ω	HF45 5330	HF45 5330	300 k Ω	HF45 8300	HF45 8300
390 Ω	HF45 5390	HF45 5390	330 k Ω	HF45 8330	HF45 8330
430 Ω	HF45 5430	HF45 5430	390 k Ω	HJ35 8390	HF85 8390
470 Ω	HF45 5470	HF45 5470	470 k Ω	HF45 8470	HF45 8470
510 Ω	HF45 5510	HF45 5510	560 k Ω	HJ35 8560	HF85 8560
560 Ω	HF45 5560	HF45 5560	680 k Ω	HJ35 8680	HF85 8680
680 Ω	HF45 5680	HF45 5680	820 k Ω	HJ35 8820	HF85 8820
820 Ω	HF45 5820	HF45 5820	1.0 M Ω	HF45 9100	HF45 9100
910 Ω	HF45 5910	HF45 5910	1.2 M Ω	HJ35 9120	*
1.0 k Ω	HF45 6100	HF45 6100	1.5 M Ω	HJ35 9150	HF85 9150
1.2 k Ω	HF45 6120	HF45 6120	1.8 M Ω	HJ35 9180	HF85 9180
1.5 k Ω	HF45 6150	HF45 6150	2.2 M Ω	HJ35 9220	HF85 9220
1.8 k Ω	HF45 6180	HF45 6180	3.3 M Ω	HJ35 9330	HF85 9330
2.0 k Ω	HJ35 6200	HF85 6200	3.9 M Ω	HJ35 9390	*
2.2 k Ω	HF45 6220	HF45 6220	4.7 M Ω	HJ35 9470	HF85 9470
2.4 k Ω	HJ35 6240	HF85 6240			
2.7 k Ω	HF45 6270	HF45 6270			
3.0 k Ω	HF45 6300	HF45 6300			
3.3 k Ω	HF45 6330	HF45 6330			
3.6 k Ω	HJ35 6360	HF85 6360			
3.9 k Ω	HF45 6390	HF45 6390			
4.7 k Ω	HF45 6470	HF45 6470			
5.1 k Ω	HF45 6510	HF45 6510			
5.6 k Ω	HF45 6560	HF45 6560			
6.8 k Ω	HF45 6680	HF45 6680			
8.2 k Ω	HF45 6820	HF45 6820			
9.1 k Ω	HF45 6910	HF45 6910			

