

AM/FM STEREO TUNER TX-1000/U/TX-2000

SERVICE MANUAL

15215

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquiries@mauritron.co.uk

TX-1000/U
/TX-2000

■ CONTENTS

TO SERVICE PERSONNEL	1	IC BLOCK/CIRCUIT DATA	10 ~ 14
FRONT PANELS	1	WIRING	15
REAR PANELS	2, 3	BLOCK DIAGRAM	16, 17
SPECIFICATIONS	3, 4	PRINTED CIRCUIT BOARD	18 ~ 21
INTERNAL VIEW	4	REMOTE CONTROL TRANSMITTER	22, 23
DISASSEMBLY PROCEDURES	5	SCHEMATIC DIAGRAM	18, 19, 24
ADJUSTMENTS	6 ~ 10	PARTS LIST	25 ~ 32

■ TO SERVICE PERSONNEL


1. Critical Components Information.

Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.

2. Leakage Current Measurement (For 120V Model Only).

When service has been completed, it is imperative that you verify that all exposed conductive surfaces are properly insulated from supply circuits.

- Meter impedance should be equivalent to 1500 ohm shunted by $0.15 \mu\text{F}$.
- Leakage current must not exceed 0.5mA.
- Be sure to test for leakage with the AC plug in both polarities.

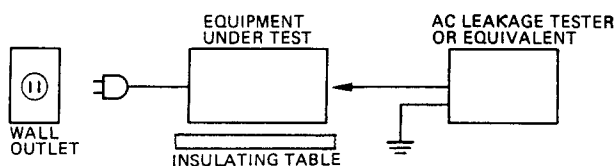


• POLARIZATION


This tuner product is equipped with a polarized alternating-current line plug (a plug having one blade wider than the other). This plug will fit into the power outlet only one way. This is a safety feature. (U, C Model only)

■ FRONT PANELS


• TX-1000

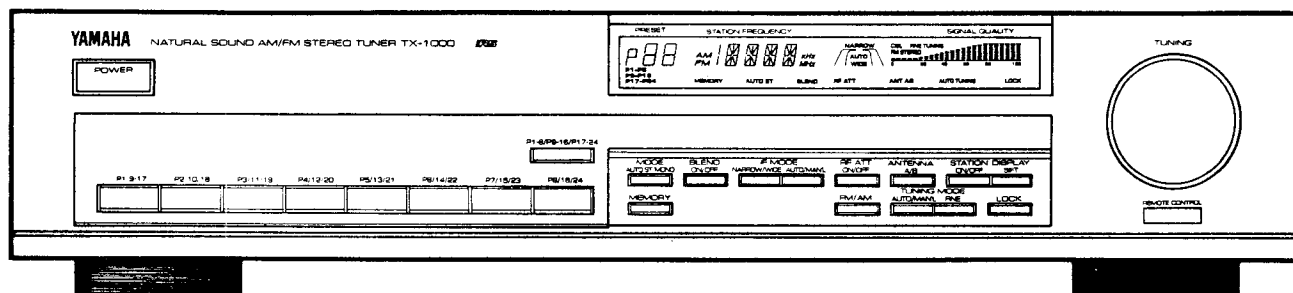

• TX-1000U

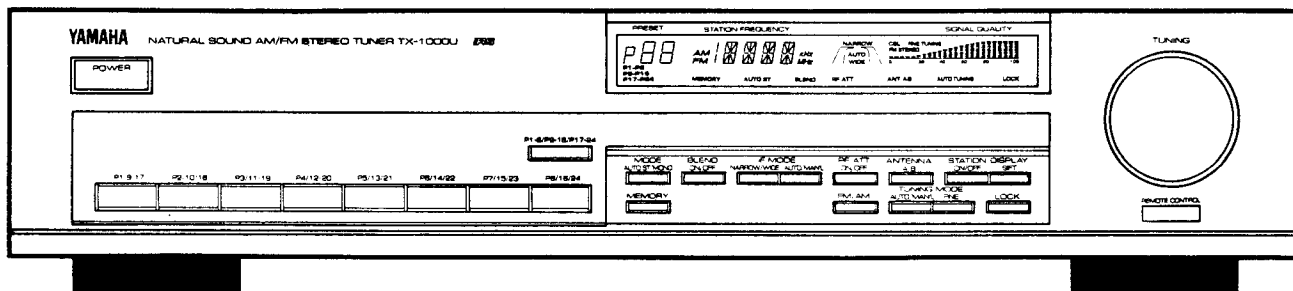


• TX-2000

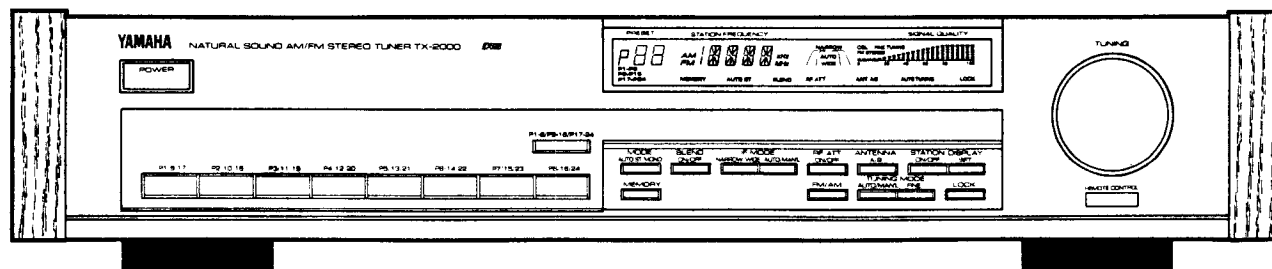


REAR PANELS

TX-1000/1000U


● U.S.A. & Canadian Model

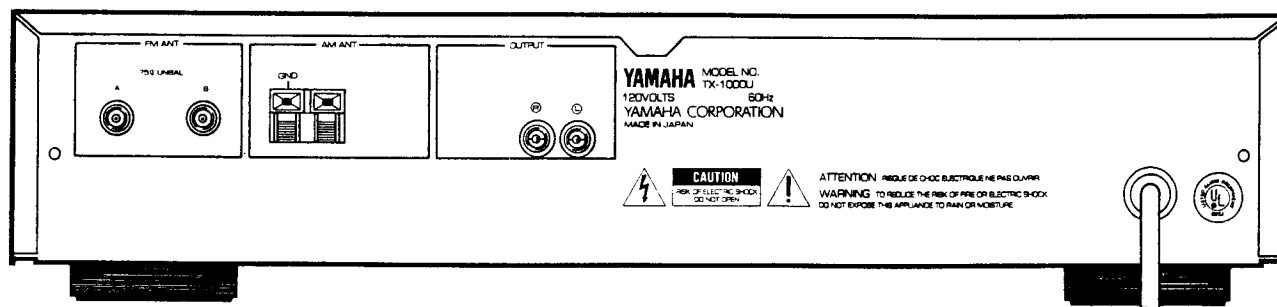


● European Model

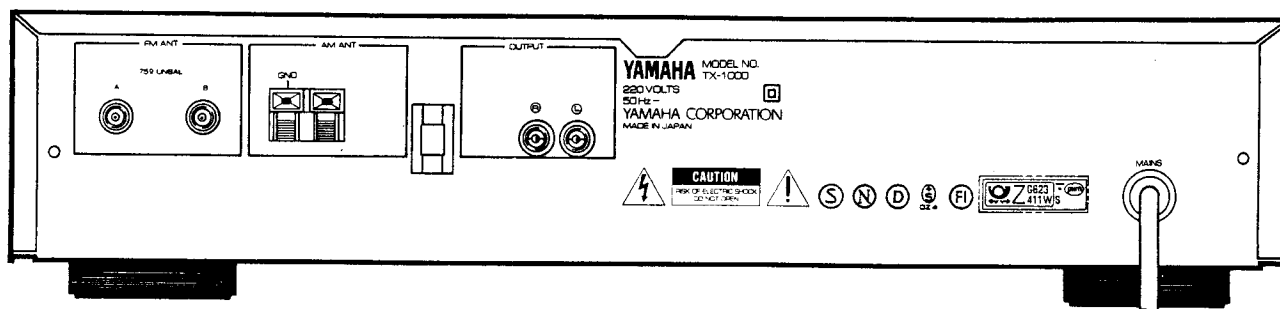

● Australian & British Model

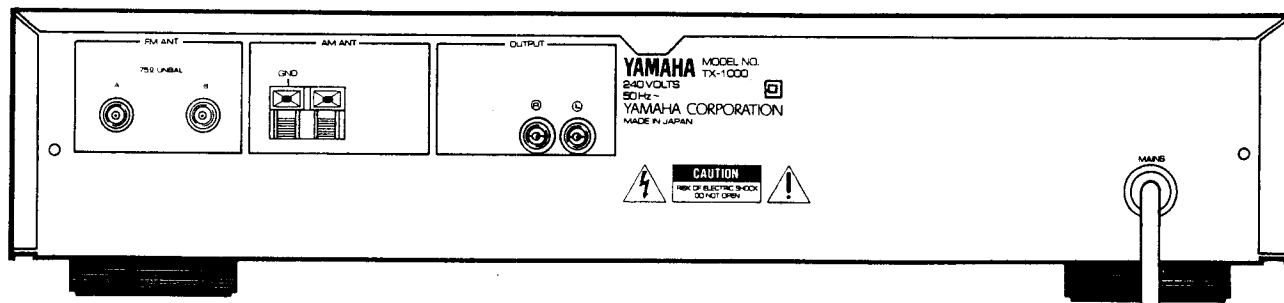

● General Model

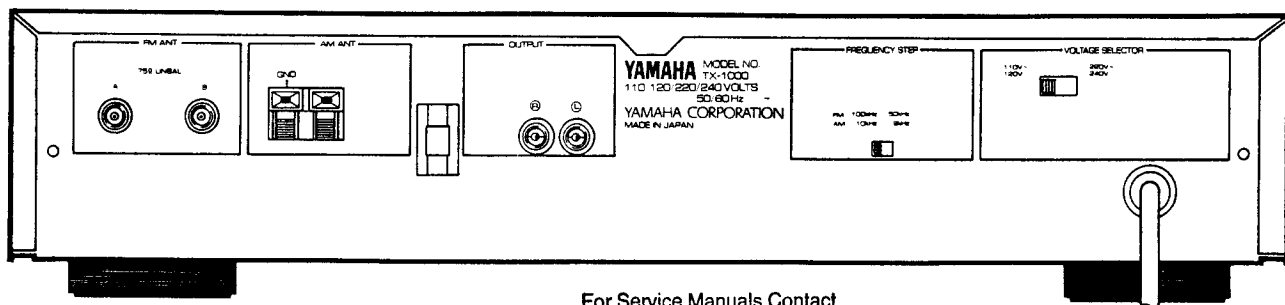


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY

Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquiries@mauritron.co.uk

TX-2000


● U.S.A. & Canadian Model

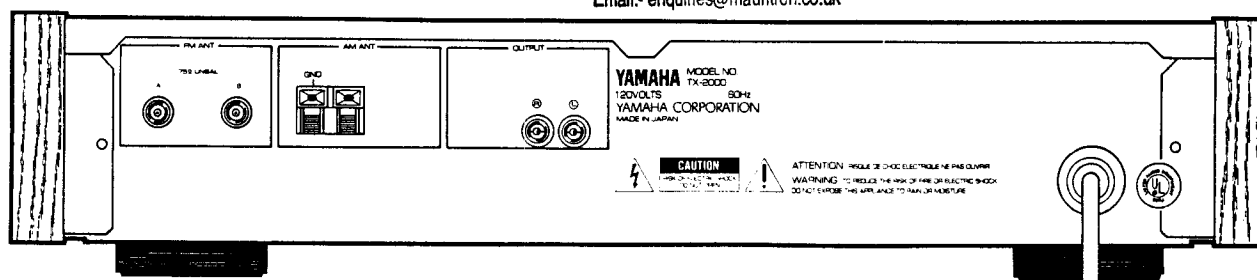


TX-1000/U/TX-2000

TX-2000


● West Germany Model

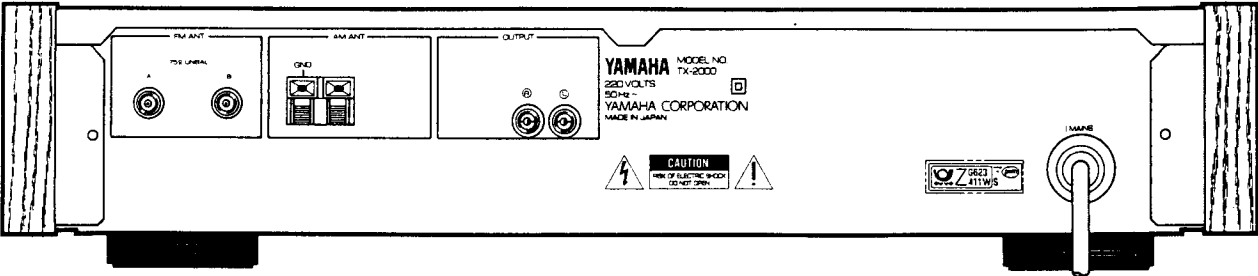


● General Model

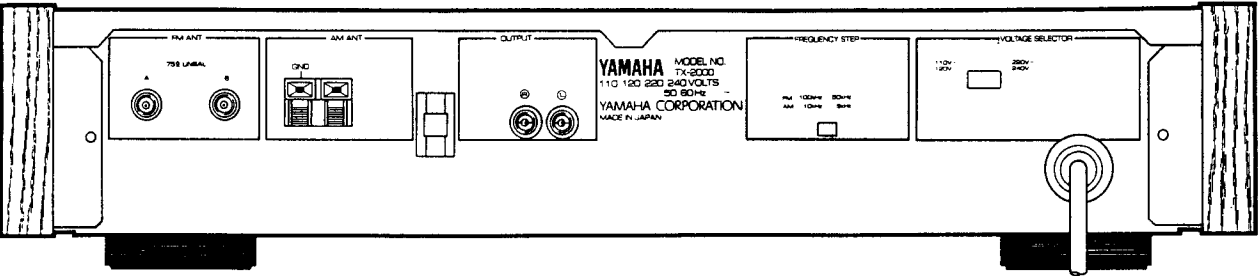

● RS-TX1000

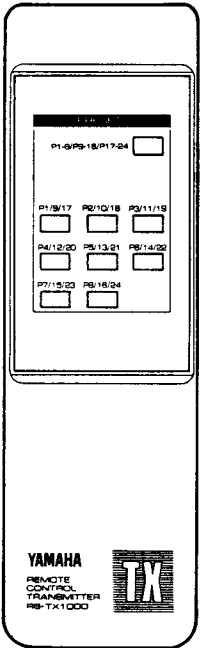

● RS-TX2000

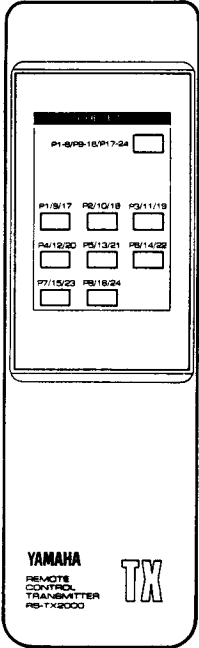

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquiries@mauritron.co.uk

SPECIFICATIONS

● FM Section

Tuning Range	87.6 ~ 108 MHz
50 dB Quieting Sensitivity (IHF)	
75 Ω Mono	1.6 μ V (15.3 dBf)
Stereo	20 μ V (37.2 dBf)
Usable Sensitivity	
30 dB S/N Quieting	0.9 μ V (10.3 dBf)
Usable Sensitivity (DIN)	
75 Ω Mono (S/N 26 dB)	0.8 μ V [W, G model]
Stereo (S/N 46 dB)	22 μ V [W, G model]
Image Response Ratio	95 dB
IF Response Ratio	115 dB
Spurious Response Ratio	110 dB
AM Suppression Ratio	70 dB
Capture Ratio (WIDE)	1.2 dB
Alternate Channel	
Selectivity (NARROW)	90 dB [U, C, R, A, B model]
Selectivity (two Signals)	
40 kHz Dev. $\pm$ 300 kHz	80 dB

Signal to Noise Ratio (IHF)	
Mono	98 dB
Stereo	90 dB
Signal to Noise Ratio	
DIN NOISE RMS 40 kHz Dev.	
Mono	86 dB [W, G model]
Stereo	79 dB [W, G model]
Harmonic Distortion	
WIDE 1 kHz	0.02% [U, C, R, A, B model]
WIDE 1 kHz	0.03% [U, C, R, A, B model]
Harmonic Distortion (40 kHz DEV.)	
WIDE 1 kHz	0.03% [W, G model]
Stereo Separation	
WIDE 1 kHz	68 dB
Frequency Response	
50 Hz to 10 kHz	0 $\pm$ 0.2 -0.3 dB
20 Hz to 15 kHz	0 $\pm$ 0.2 -0.5 dB
Sub-Carrier Product Ratio	65 dB

● AM Section

Tuning Range	520 ~ 1,620 kHz [U, C, R model]
	522 ~ 16, 20 kHz [A,B,W,G model]
Unusable Sensitivity	100 μ Vm [U, C, A, B model]
	250 μ Vm [R, W, G model]
Selectivity	32 dB
Signal to Noise Ratio	52 dB
Image Response Ratio	40 dB
Spurious Response Ratio	50 dB
Harmonic Distortion	0.3%

● AUDIO Section

Output Level/Impedance (Fixed)	
FM 100% MOD, 1 kHz	500mV/1k Ω [U, C, R, A, B model]
	400mV/1k Ω [W, G model]
AM 100% MOD, 400 Hz	150mV/1k Ω

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel: 01844-351694 Fax: 01844-352554
 Email: enquiries@mauritron.co.uk

● GENERAL


Power Supply	AC120V, 60 Hz [U, C model]
	AC110 ~ 120/220 ~ 240V 50/60 Hz [R model]
	AC220V, 50 Hz [W, G model]
	AC240V, 50 Hz [A, B model]
Power Consumption	15W
Dimensions (W x H x D)	
TX-1000	435 x 95 x 366.5 mm (17-1/8" x 3-47/64" x 14-27/64")
TX-2000	473 x 95.5 x 366.5 mm (18-5/8" x 3-48/64" x 14-27/64")
Weight	
TX-1000	6.1 kg (13 lbs. 7.17 oz)
TX-2000	7.2 kg (15 lbs. 13.97 oz)

(U) ... U.S.A. model	(W) ... West Germany model
(C) ... Canadian model	(G) ... European model
(A) ... Australian model	(R) ... General model
(B) ... British model	

Specifications subject to change without notice.

TX-1000/U
TX-2000

INTERNAL VIEW

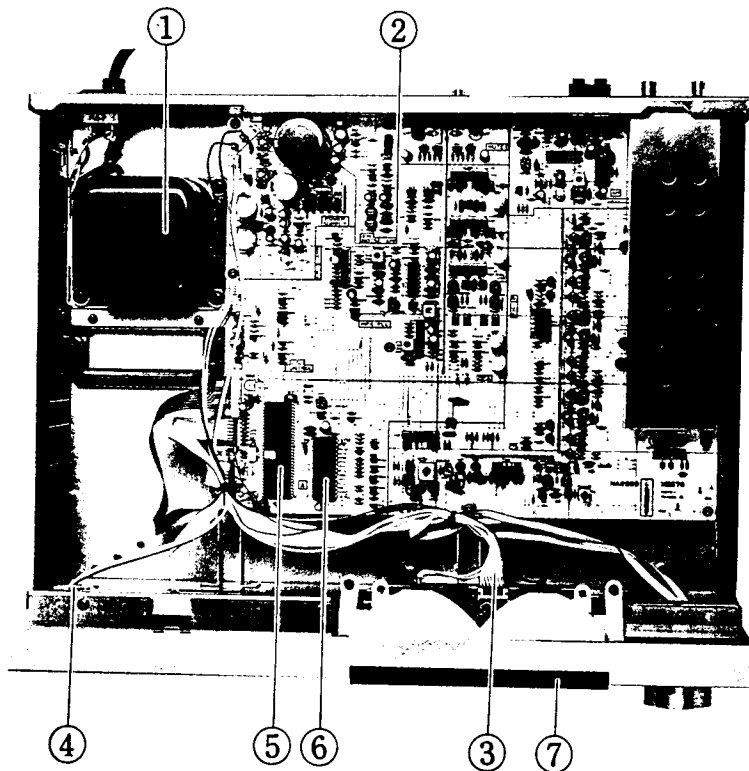


- ① POWER TRANSFORMER
 U, C Models: XE247001
 R Model: XE249001
 W, G Model: XE679001
- ② TUNER CIRCUIT BOARD
- ③ LCD CIRCUIT BOARD
- ④ POWER SWITCH=SW2
- ⑤ IC11: LC66506B-3910
- ⑥ IC12: LC7210
- ⑦ LCD UNIT

DISASSEMBLY PROCEDURES

Step	Item	Operation
1	Top panel	Remove 4 screws ①, remove 1 screw ②, and remove 4 screws ③.
2	Panel unit	Remove 6 screws ④ and 2 rivets ⑤.
3	Rear panel	Remove 8 screws ⑦.
4	TUNER CIRCUIT BOARD (1)	Remove 7 screws ⑧.
5	TUNER CIRCUIT BOARD (2)	Remove 2 rivets ⑨.
6	LCD CIRCUIT BOARD	After removing 2 rivets ⑩, remove 2 more rivets ⑪.
7	FUNCTION CIRCUIT BOARD	Remove 3 screws ⑫.


*Disconnect connectors and remove soldering on wiring as necessary.

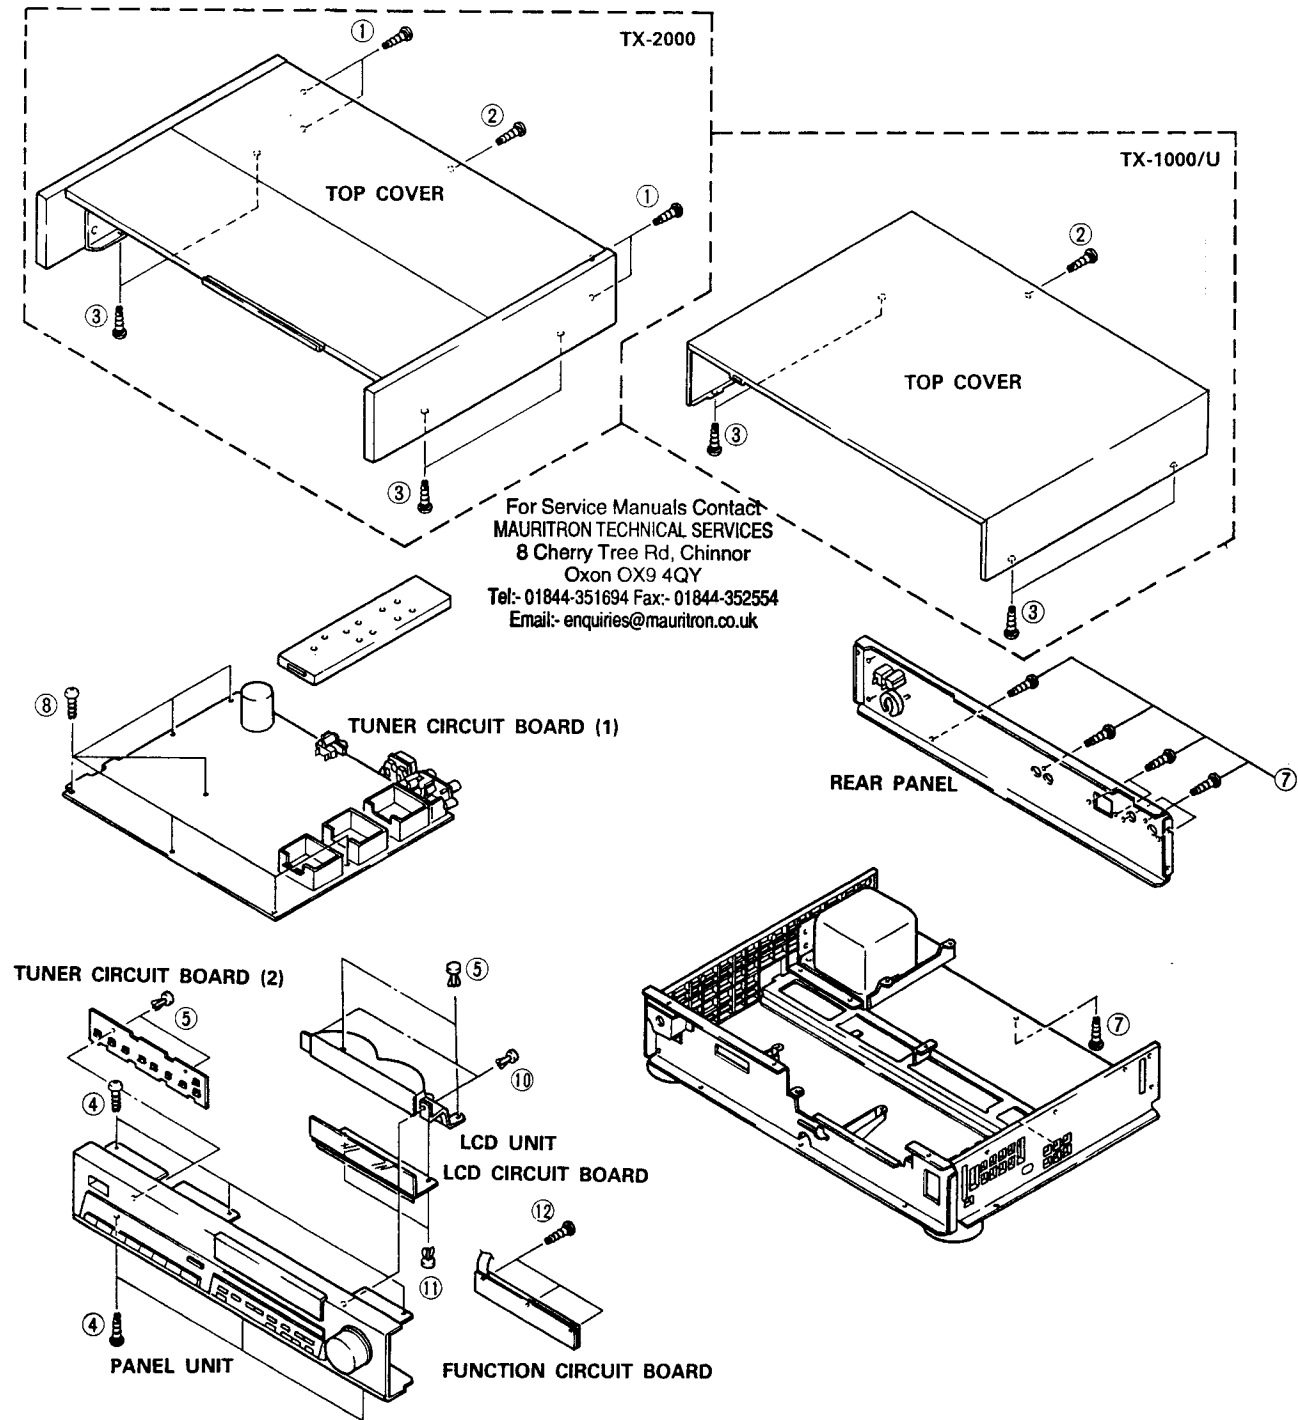

ADJUSTMENTS

● Adjustment points

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquiries@mauriton.co.uk

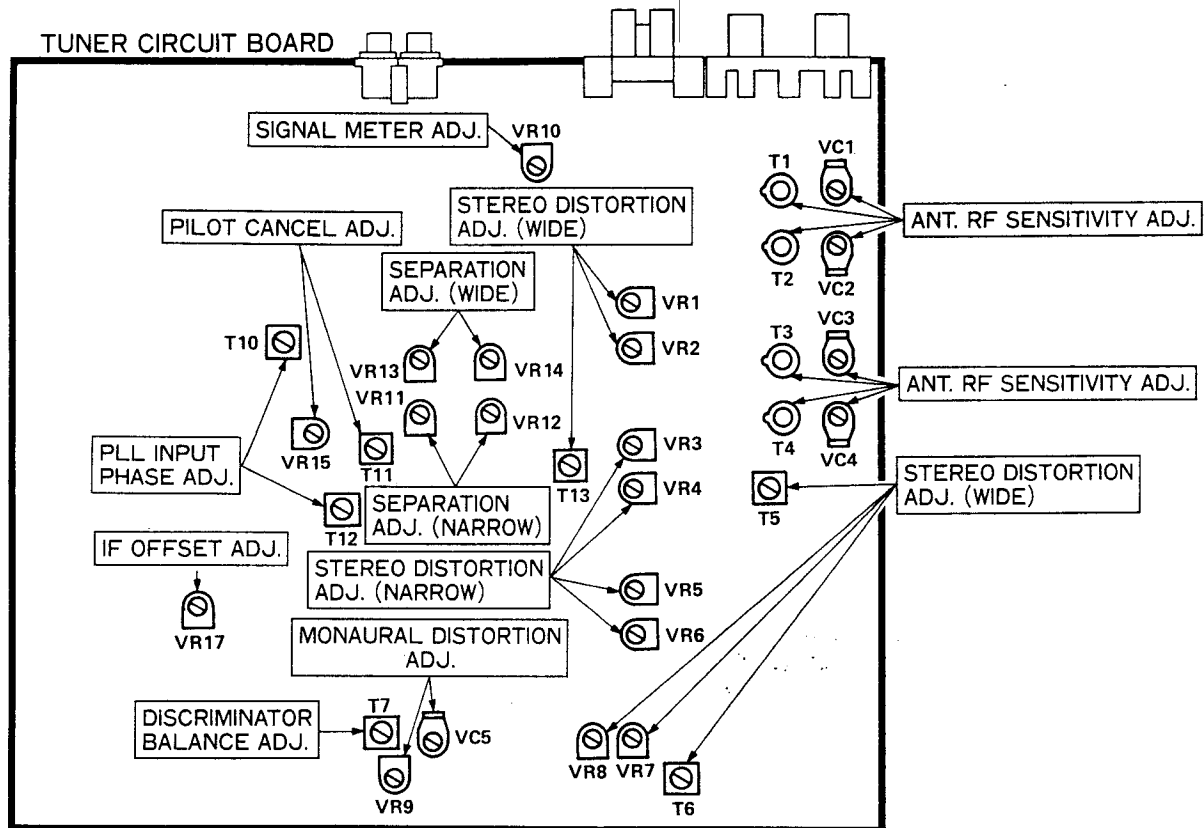

1. Before Adjustment

- 1) Start adjustment approximately 5 minutes after the power has been turned on in order to stabilize circuit operation.
- 2) Adjust the OSC coil and IFT using a high-frequency or nonferrous screwdriver.
- 3) Adjust the FM section first, then adjust the AM section.
- 4) Set the switches to the following positions unless otherwise specified.
 MODE AUTO ST
 BLEND OFF
 IF MODE AUTO WIDE
 RF ATT OFF
 ANTENNA A
- 5) Be sure to carry out adjustments after installing the bottom cover.

2. POWER SUPPLY Check

Confirm that the voltages specified below appear across each terminal and E of the TUNER CIRCUIT BOARD.


Terminal	Voltage	Measuring instrument
+30	+29 $\pm$ 1V	DCVM
+12	+12.5 $\pm$ 0.5V	
-12	-12.5 $\pm$ 0.5V	
+6	+6V $\pm$ 0.5V	

3. Measuring Instruments

FM SG	FM Signal Generator
ST SG	Stereo Signal Generator
AM SG	AM Signal Generator
OSC	Oscillator
DIST M	Distortion Meter
FC	Frequency Counter
AC VM	AC Voltmeter
Center Meter	Ji00036 or equivalent
DC VM	DC Voltmeter

4. FM Tuner Section

- Use 19kHz LPF for output terminals and carry out auditory compensation. Then connect the oscilloscope, AC voltmeter and distortion meter.
- To check the optimum tuning point during adjustment, connect the tuning meter (Ji00036 or equivalent; current sensitivity: 250uA) as shown in the figure.
- The accuracy of FM SG should be within $\pm$ 1kHz.

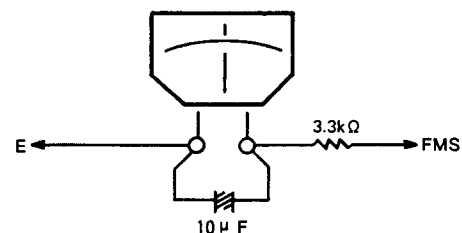

Step	Adjustment item	Test point	Instrument (signal)	Adjustment location	Adjustment method	Rating or standard	Remarks
1	ANT, RF sensitivity adjustment	● ANT A ● Output terminals	● FM SG ● ST SG ● DIST. M ● OSC	VC1~VC4 T1~T4	● Adjust VC1~VC4 for maximum sensitivity at 106MHz. ● Adjust T1~T4 for maximum sensitivity at 88MHz.	less than 4dB μ [U, C, R, A, B, model] less than 6dB μ [W, G model]	
2	Discriminator balance adjustment	● FMS ● E	● TUNING METER	T7	● In autotuning mode, adjust T7 so that the needle of the tuning meter does not move from zero (center).		
3	Monaural distortion adjustment	300 Ω FM ANT Output terminals	FM SG 98.1MHz $\pm$ 1kHz 70dB μ MONO 100Hz 100% Mod. DIST. M, OSC L.P.F	VC5 VR9	Reduce distortion to minimum.	-66dB or less	Reception should be made in WIDE mode.
4	PLL input phase adjustment	300 Ω FM ANT Output terminals L, R	FM SG 98.1MHz $\pm$ 1kHz 70dB μ STEREO (L-R) 1kHz 100% Mod. OSC	T10 T12	Increase output to maximum.		Reception should be made in WIDE mode.
5	Stereo distortion adjustment (WIDE)	300 Ω FM ANT Output terminals L, R	FM SG, ST SG 98.1MHz $\pm$ 1kHz 70dB μ STEREO (L-R) 1kHz 100% Mod. OSC	T5, 6, 13 VR1, 2, 7, 8	Reduce distortion to minimum.	-56dB or less	Reception should be made in WIDE mode. After adjustment, reconfirm sensitivity and disk rebalance. If they are not within the specifications, go back to the step before adjustment and reconfirm again.
	Stereo distortion adjustment (NARROW)	300 Ω FM ANT Output terminals L, R	FM SG, ST SG 98.1MHz $\pm$ 1kHz 70dB μ STEREO L, R 1kHz 100% Mod. DISTM, OSC, LPF	VR3, 4, 5, 6	Reduce distortion to minimum.	-33dB or less	Reception should be made in NARROW mode. After adjustment, reconfirm sensitivity and disk rebalance. If they are not within the specifications, go back to the step before adjustment and reconfirm again.
6	Monaural distortion check	300 Ω FM ANT Output terminals	FM SG 98.1MHz $\pm$ 1kHz 70dB μ MONO 1kHz 100% Mod.		Confirm that monaural distortion is within the specification.	-56dB or less	Reception should be made in WIDE mode.
7	Separation adjustment (WIDE)	300 Ω FM ANT Output terminals L, R	FM SG, ST SG 98.1MHz $\pm$ 1kHz 70dB μ STEREO L, R 1kHz 100% Mod. OSC, AC VM LPF	VR13, 14	Increase L $\rightarrow$ R, R $\rightarrow$ L channel separation to maximum.	Separation 40dB or more	Reception should be made in NARROW mode.
	Separation adjustment (NARROW)	300 Ω FM ANT Output terminals L, R		VR11, 12			

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel: 01844-351694 Fax: 01844-352554
 Email: enquiries@mauritron.co.uk

Step	Adjustment item	Test point	Instrument (signal)	Adjustment location	Adjustment method	Rating or standard	Remarks
8	Pilot cancel adjustment (WIDE)	300Ω FM ANT Output terminals L, R	FM SG, ST SG 98.1MHz ± 1kHz 70dB μ Pilot signal 9% modulation only Remove LPF OSC, AC VM	VR15, T11	Measure with an oscilloscope; reduce 19kHz carrier leakage level to minimum.	-50dB or less	
9	Discriminator balance check	300Ω FM ANT	FM SG, ST SG 98.1MHz ± 1kHz Antenna input -10dB μ STEREO L, R 1kHz 30% Mod.		In autotuning mode, confirm that the needle of the tuning meter does not move from zero.		If unsatisfactory, return to Step 1 and readjust.
10	Signal meter adjustment	300Ω FM ANT	FM SG, ST SG 98.1MHz ± 1kHz Antenna input 80dB μ STEREO L, R 1kHz 30% Mod.	VR10	Adjust VR10 so that the needle of the tuning meter moves to 100.		Reception should be made in WIDE mode
11	Blend check	300Ω FM ANT	FM SG, ST SG 98.1MHz ± 1kHz 70dB μ STEREO L, R 1kHz 100% Mod.		With the BLEND switch on, confirm that separation deteriorates.		Reception should be made in WIDE mode.
12	IF OFFSET adjust	300Ω FM ANT D4-K3 short-circuited	FM SG, ST SG 98.1MHz ± 1kHz Antenna input 70dB μ No Mod.	VR17	Adjust VR17 so that 10kHz shifts 1 digit to 0 or 1.		CSL reception.
13	Autotuning check	300Ω FM ANT D4-K3 left open	FM SG, ST SG 98.1MHz ± 1kHz Antenna input 15dB μ [W model: 18dB μ] 1kHz, 30% Mod.	TUNING knob	Turn the TUNING knob and confirm that autotuning is available.		Audio muting occurs during switching from IF MODE to AUTO TUNING.
14	RF ATT check	300Ω FM ANT	FM SG, ST SG 98.1MHz ± 1kHz Antenna input 20dB μ Mono 1kHz 100% Mod.	RF ATT Switch	Confirm that reception sensitivity deteriorates when the RF ATT switch is on by visual monitoring of the output wave form.		
15	ANTENNA check	ANT A	FM SG, ST SG 98.1MHz ± 1kHz Antenna input 20dB μ Mono 1kHz 100% Mod.	ANTENNA Switch	Confirm that the unit enters the detuning mode when the ANTENNA switch is switched to B. Confirm that the unit enters the detuning mode when the ANTENNA switch is switched to A.		ANT B indicator lights up.
		ANT B			Confirm that the unit enters the detuning mode when the ANTENNA switch is switched to B. Confirm that the unit enters the detuning mode when the ANTENNA switch is switched to A.		ANT A indicator lights up

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel:- 01844-351694 Fax:- 01844-352554
 Email:- enquiries@mauritron.co.uk

1. <AM Tuner Section Adjustment>

- Connect the AM loop antenna to the AM ANT terminals.
- Connect the AM dummy used for adjustment to AM SG.
- The accuracy of AM SG should be within $\pm 0.1\text{kHz}$.

Step	Adjustment item	Test point	Instrument (signal)	Adjustment location	Adjustment method	Rating or standard	Remarks
1	Sensitivity check IFT adjustment	● AM ANT ● GND ● Output terminals L, R	AM SG, dummy ANT. OSC, DIST M $630\text{kHz} \pm 0.1\text{kHz}$ $1080\text{kHz} \pm 0.1\text{kHz}$ $1440\text{kHz} \pm 0.1\text{kHz}$ 400Hz, 30% Mod.	P9 P10 P11	Adjust T9 and increase output to maximum.	$58\text{dB } \mu$ or less $58\text{dB } \mu$ or less $58\text{dB } \mu$ or less	
2	Signal meter check	● AM ANT ● GND ● Output terminals L or R	● AM SG ● OSC. DIST M $1080\text{kHz} \pm 0.1\text{kHz}$ Antenna $100\text{dB } \mu$ 400Hz, 30% Mod.		Confirm that all indicators light up (and go out when detuned).		
3	Autotuning check	● AM ANT ● GND ● Output terminals L, R	● AM SG ● OSC. DIST M $1080\text{kHz} \pm 0.1\text{kHz}$ Antenna $100\text{dB } \mu$ 400Hz, 30% Mod.		Turn the TUNING knob and confirm that autotuning is available.		

<Digital Control Section Check>

Step	Item	Method	Rating or Standard
1.	Preset memory check	Tune in to FM98.1 MHz and store the following settings in Preset Memory 1 (P1): MODE AUTO ST BLEND OFF IF MODE AUTO RF ATT OFF ANTENNA A STATION DIS OFF TUNING MODE AUTO	The MEMORY IND should flash when the MEMORY switch is on; when preset memories 1-8 are on, P1-8 indicators should flash. When P1 is on, the MEMORY IND and P1-8 indicators should go out and the P1 indicator light up.
		2. Tune to AM1080kHz and store in P2.	The MEMORY IND should flash when the MEMORY switch is pressed. When P2 is pressed the MEMORY IND should go out and the P2 indicator light up.
		3. Confirm that the settings stored in P1 and P2 appear when P1 and P2 buttons are pressed.	Both P1 and P2 should light up.
		4. Store the settings in 2 in P9.	P9-16 indicators should flash when the P9-16 memory switches are pressed. The MEMORY IND should flash when the MEMORY switch is pressed. When P9 is on P9-16 indicators should light up, the MEMORY indicator go out, and the P9 indicator light up.
		5. After pressing all the other preset memory buttons except P9, press P9 and confirm that stored settings appear.	
2.	MODE check	Confirm that the unit selects forced monaural reception when the unit is set to FM stereo reception and MONO is selected.	Stereo IND goes out.
3.	LOCK check	Confirm that the frequency does not change when the TUNING knob is turned when the STATION DISPLAY is off and the LOCK switch is pressed.	LOCK IND lights up.


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel: 01844-351694 Fax: 01844-352554
 Email: enquiries@mauritron.co.uk

Step	Item	Method	Rating or Standard
4.	IF MODE check	Confirm that the unit automatically switches to MAN'L when the setting stored in P1 are recalled, the AUTO/MAN'L switch is set to AUTO, and the NARROW/WIDE switch is pressed. Also, confirm that the display changes as these modes are changed. Finally, confirm that the unit switches to NARROW from AUTO WIDE reception as antenna input is gradually reduced.	
5.	FINE TUNING check	Confirm that the FINE TUNING IND lights up (*) when the FINE switch is pressed after recalling the settings stored in P1 and P2, and confirm that the display changes to FM 10kHz and AM 1kHz when the TUNING knob is turned.	*At this time, a zero is displayed in the area where "10kHz" should be, with FM reception (except for A, B and W, G).
6.	STATION DISPLAY check	 is displayed when the STATION DISPLAY switch is turned on. When tuning with the unit in either the AUTO or MAN'L modes, the first digit will flash and the letter "A" is displayed when the SIFT button is pressed next. When the TUNING knob is turned to the right the display will change to A, B, C when the TUNING knob is turned to the left the display will change to A, O, 9, 8 The second digit will flash and the letter "A" will be displayed when the SIFT button is pressed after selecting the desired letter. Confirm that the letter stored in the memory is displayed when the desired letters for all 4 digits have been selected and recalled from the memories in which they have been stored.	
7.	Last station function check	1. Display preset memory settings.	
		2. Turn the power off.	
		3. Turn the power off for 5 seconds; then turn the power on again.	
		4. Confirm that the settings stored in the preset memory are displayed.	P1 indicator lights up.
8.	Remote control function check	Confirm that the special remote control device that comes with the unit can switch between preset memories 1-8/9-16/17-21 and can directly select the station settings stored in preset memories P1/9/17-P8/16/24 Confirm that the RS remote control device (custom code 7A, 7E) can switch between P1-8/9-16/17-24 and can directly up-/down-select the station settings stored in P1/9/17-P9/16/24.	Distance should be 7minch or more (conduct test in an area free of obstacles).


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel:- 01844-351694 Fax:- 01844-352554
 Email:- enquiries@mauritron.co.uk

IC BLOCK/CIRCUIT DATA



- IC1: μ PC577HEF
(3-STAGE, IF AMP & LIMITER)

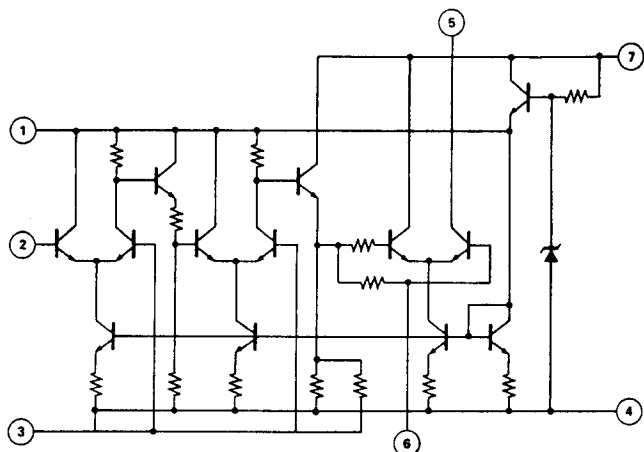

- IC2: M54459L
(1/20, 1/100 DIVISION)

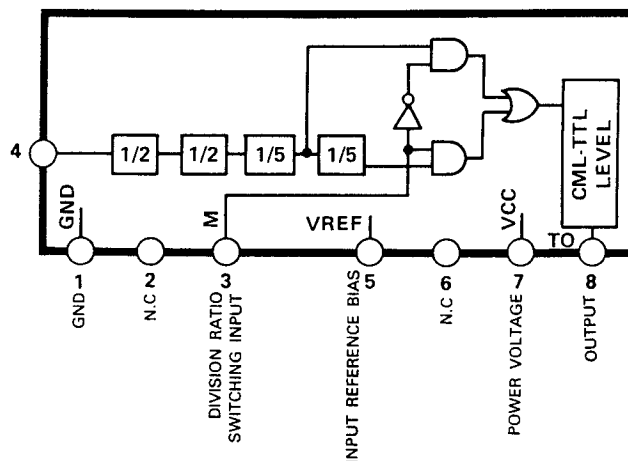


- IC3 ~ 6, 10: NJM2068S
(DUAL OPE-AMP.)

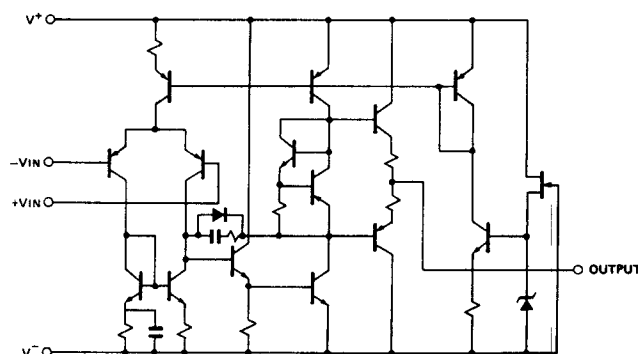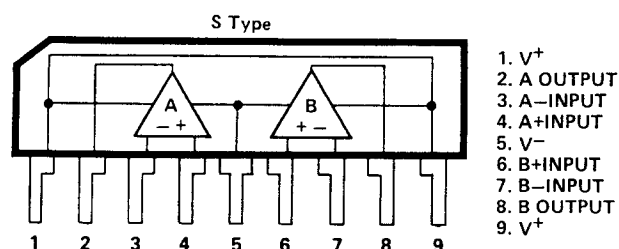


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquiries@mauritron.co.uk


- IC7: LA1266
(AM/FM RF, IF AMP.)

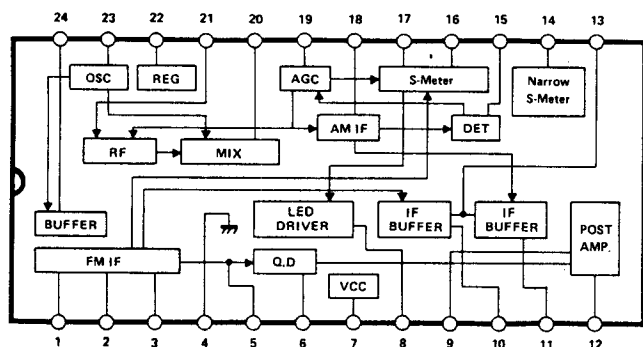


- IC8: NJM4558S
(DUAL OPE-AMP.)

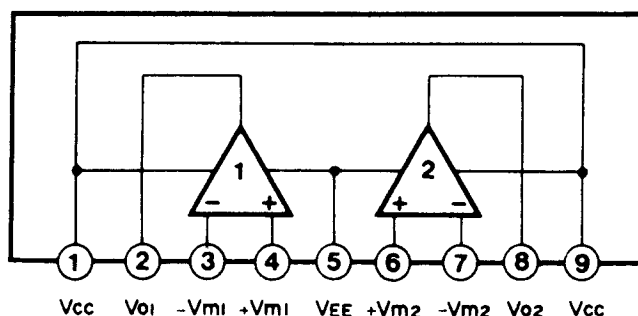



●IC9: LA3433
(FM STEREO DEMODULATION IC)

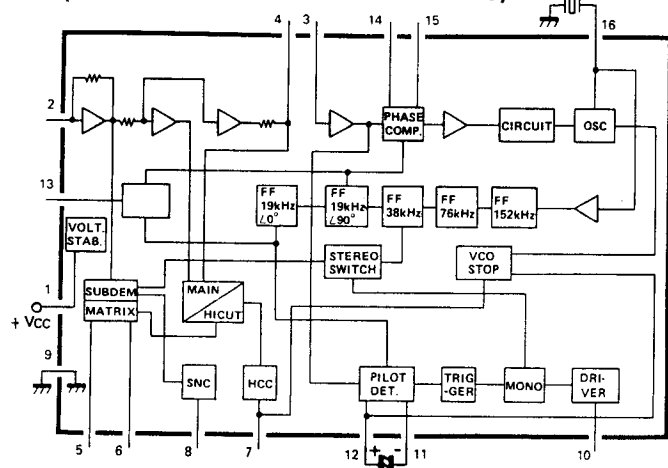


●IC12: LC7210
(C-MOS TUNING CONTROL LSI)

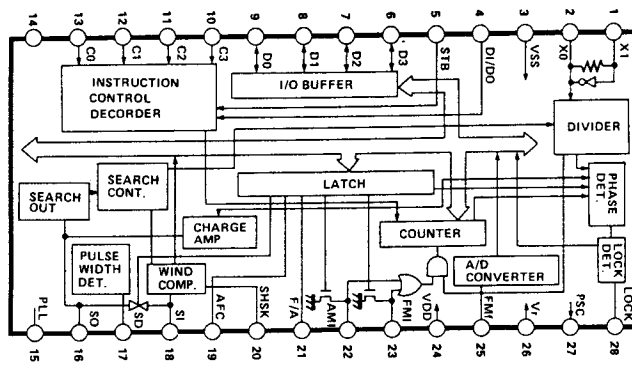

●IC501: LC7582
(LCD DRIVER)

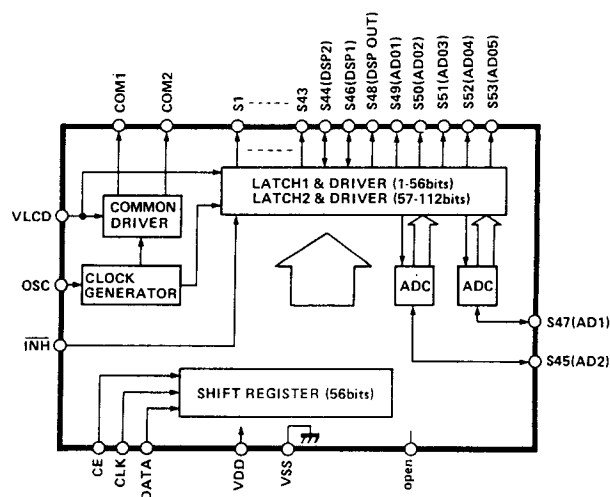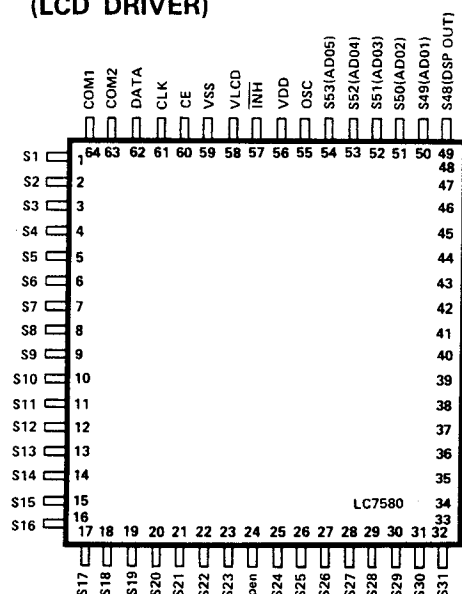


●IC502: LC7583
(LCD DRIVER)

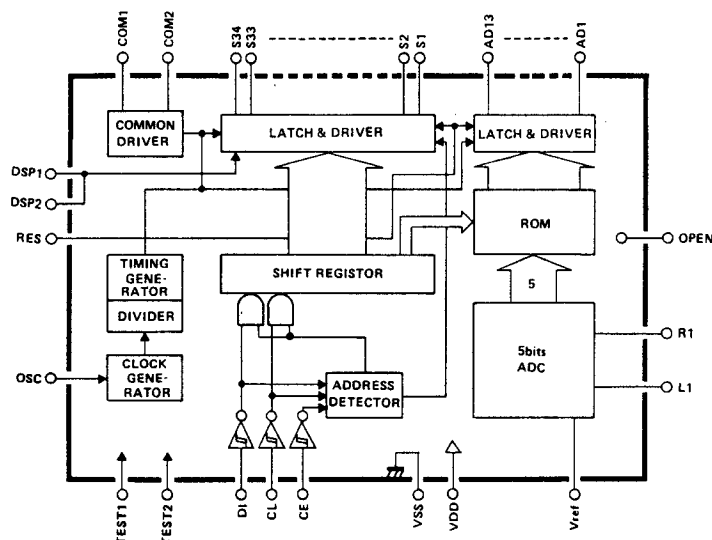

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquiries@mauritron.co.uk

TX-1000/U/TX-2000

●IC11: LC66506B-3910(C-MOS 4 bit MICRO COMPUTER)

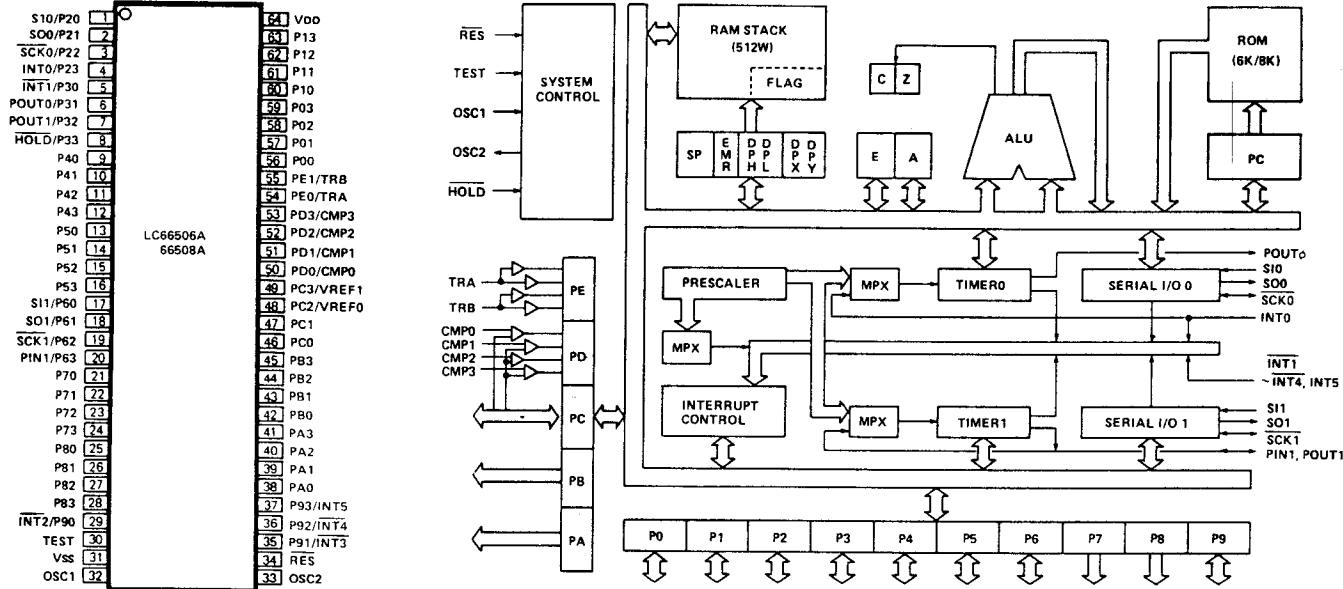


Pin. No.	Description	Data	I/O	Option		Pin. No.	Description	Data	I/O	Option	
				PU/OD (PO/OD)	RESET H/L					PU/OD (PD/OD)	RESET H/L
1	P20/SI0	C ₀	O	OD		33	OSC2				
2	P21/SO0	C ₁	O	OD		34	RES	RESET	I	—	
3	P22/SCK0	C ₂	O	OD		35	P91/INT3				
4	P23/INT0	C ₃	O	OD		36	P92/INT4				
5	P30/INT1					37	P93/INT5				
6	P32/POUT0					38	PA0	D1	O	OD	
7	P32/POUT1	STEREO IN	I	OD		39	PA1	D2	O	OD	
8	P33/HOLD	HOLD	I	—		40	PA2	D3	O	OD	
9	P40	D ₀	I/O	PU		41	PA3	D4	O	OD	
10	P41	D ₁	I/O	PU		42	PB0	D5	O	OD	
11	P42	D ₂	I/O	PU		43	PB1	D6	O	OD	
12	P43	D ₃	I/O	PU		44	PB2				
13	P50	STB	O	OD		45	PB3				
14	P51	I/O	O	OD		46	PC0	K1	I	OD	
15	P52					47	PC1	K2	I	OD	
16	P53					48	PC2/VREF0	K3	I	OD	
17	P60/SI1	BLEND	O	OD		49	PC3/VREF1	K4	I	OD	
18	P61/SO1	WIDE/NARROW	O	OD		50	PD0/CMP0				
19	P62/SCK1	RF	O	OD		51	PD1/CMP1				
20	P63/PIN1	ANT A/B	O	OD		52	PD2/CMP2	REM0	I	OD	
21	P70	A/D	O	PU		53	PD3/CMP3	REM1	I	OD	
22	P71	MUTE	O	OD		54	PE0/TRA	UP	I	OD	
23	P72	METER MUTE	O	OD		55	PE1/TRB	DOWN	I	OD	
24	P73	MONO	O	OD		56	P00	A0	I	PU	
25	P80					57	P01	A1	I	PU	
26	P81					58	P02	CE(LC7582)	O	PU	
27	P82					59	P03	CE(LC7583)	O	PU	
28	P83					60	P10	CLK	O	PU	
29	P90/INT2					61	P11	DATA	O	PU	
30	TEST					62	P12	INH	O	PU	
31	Vss					63	P13				
32	OSC1					64					


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel: 01844-351694 Fax: 01844-352554
Email: enquiries@mauritron.co.uk

● LCD: LCD8003MOJP

● SEGMENT

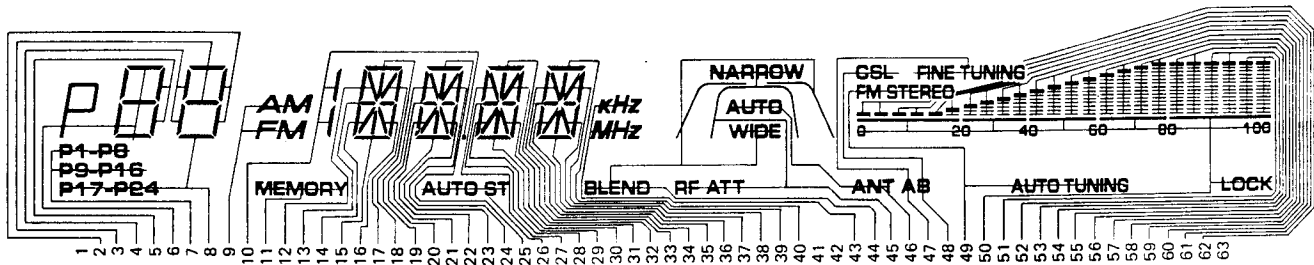

● COMMON

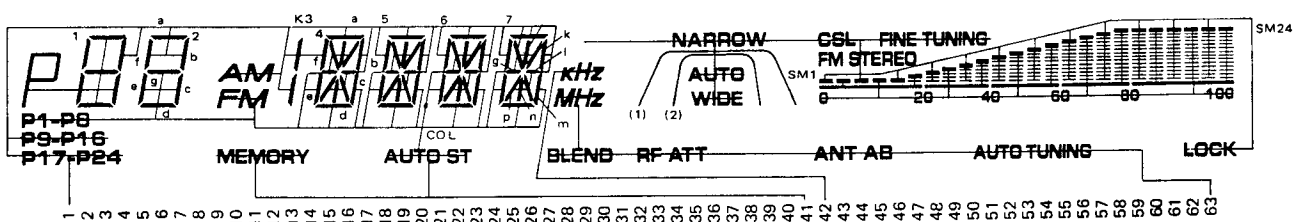


NO.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
COM1	COM	2b	2a	2f	1b	P	P9-P16	P17-P24	AM	K3	—	4f	4l	4p	4n	4m	4b	4a	5f	5l	5p
COM2	—	2c	2g	2e	1c	1adeg	P1-P8	2d	FM	COL	MEMORY	4h	4g	4e	4d	4c	4k	4j	5h	5g	5e

No.	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
COM1	5n	5m	5b	5a	—	6f	6l	6p	6n	6m	6b	6a	7f	7l	7p	7n	7m	7b	7a	—
COM2	5d	5c	5k	5j	AUTO ST	6h	6g	6e	6d	6c	6k	6j	7h	7g	7e	7d	7c	7k	7j	COM

NO.	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
COM3	COM	KHz	WIDE (1)	NARROW (2)	AUTO	FINE TUNING	CSL	FM STEREO	LOCK	SM23	SM21	SM19	SM17	SM15	SM13	SM11	SM9	SM7	SM5	SM3	SM1	—
COM4	—	MHz	BLEND	RF ATT	ANT	A	B	AUTO TUNING	0-100	SM24	SM22	SM20	SM18	SM16	SM14	SM12	SM10	SM8	SM6	SM4	SM2	COM


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel:- 01844-351694 Fax:- 01844-352554
 Email:- enquiries@mauritron.co.uk

■ WIRING

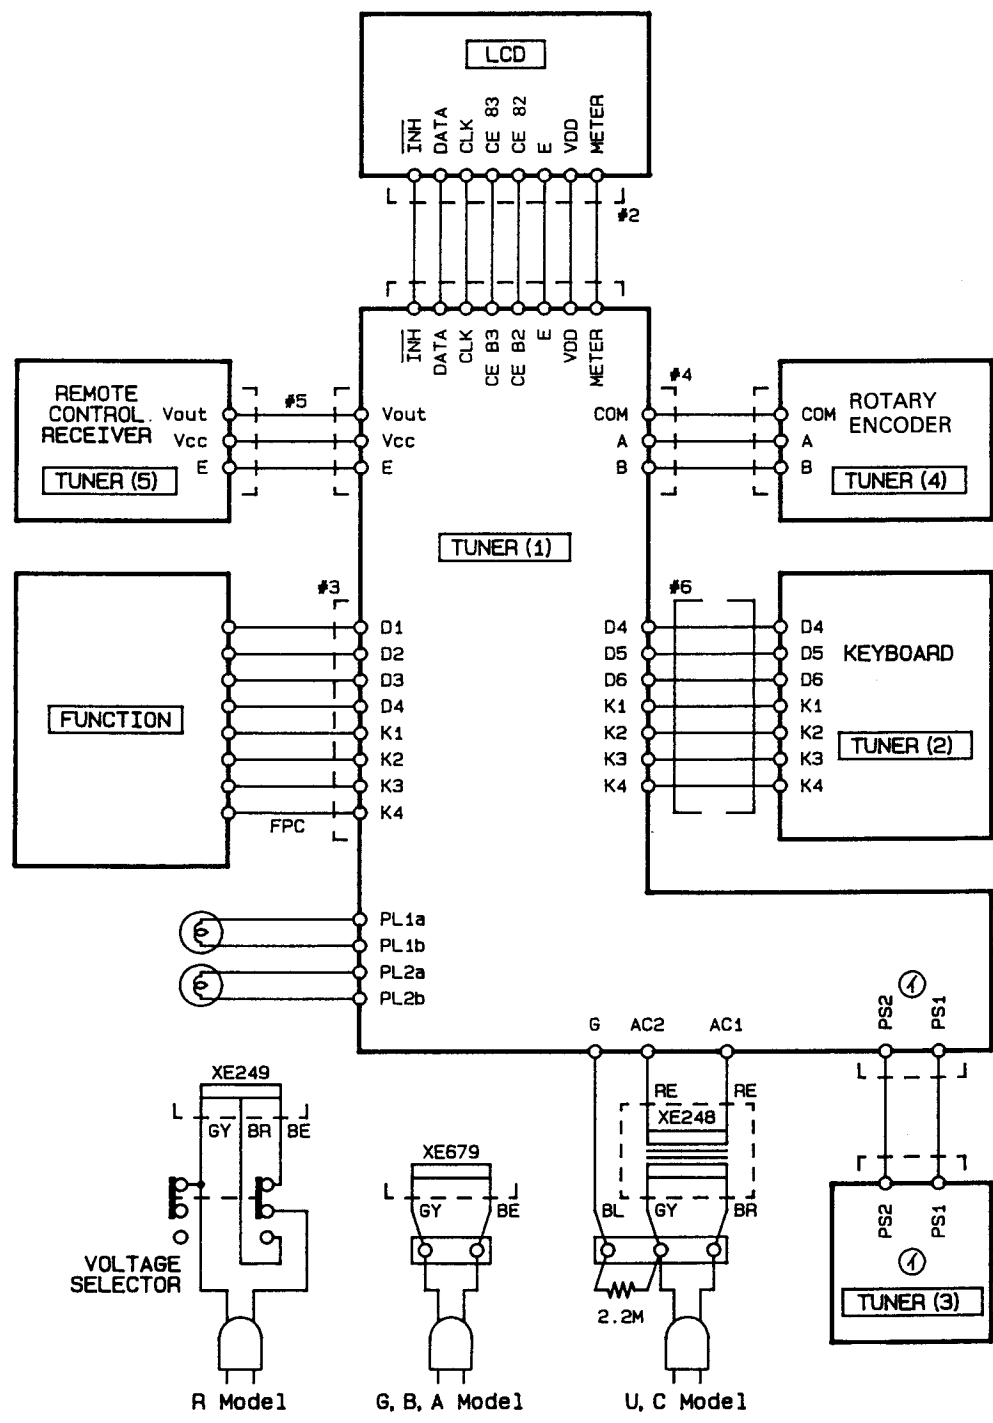

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquiries@mauritron.co.uk

FM IF SECTION

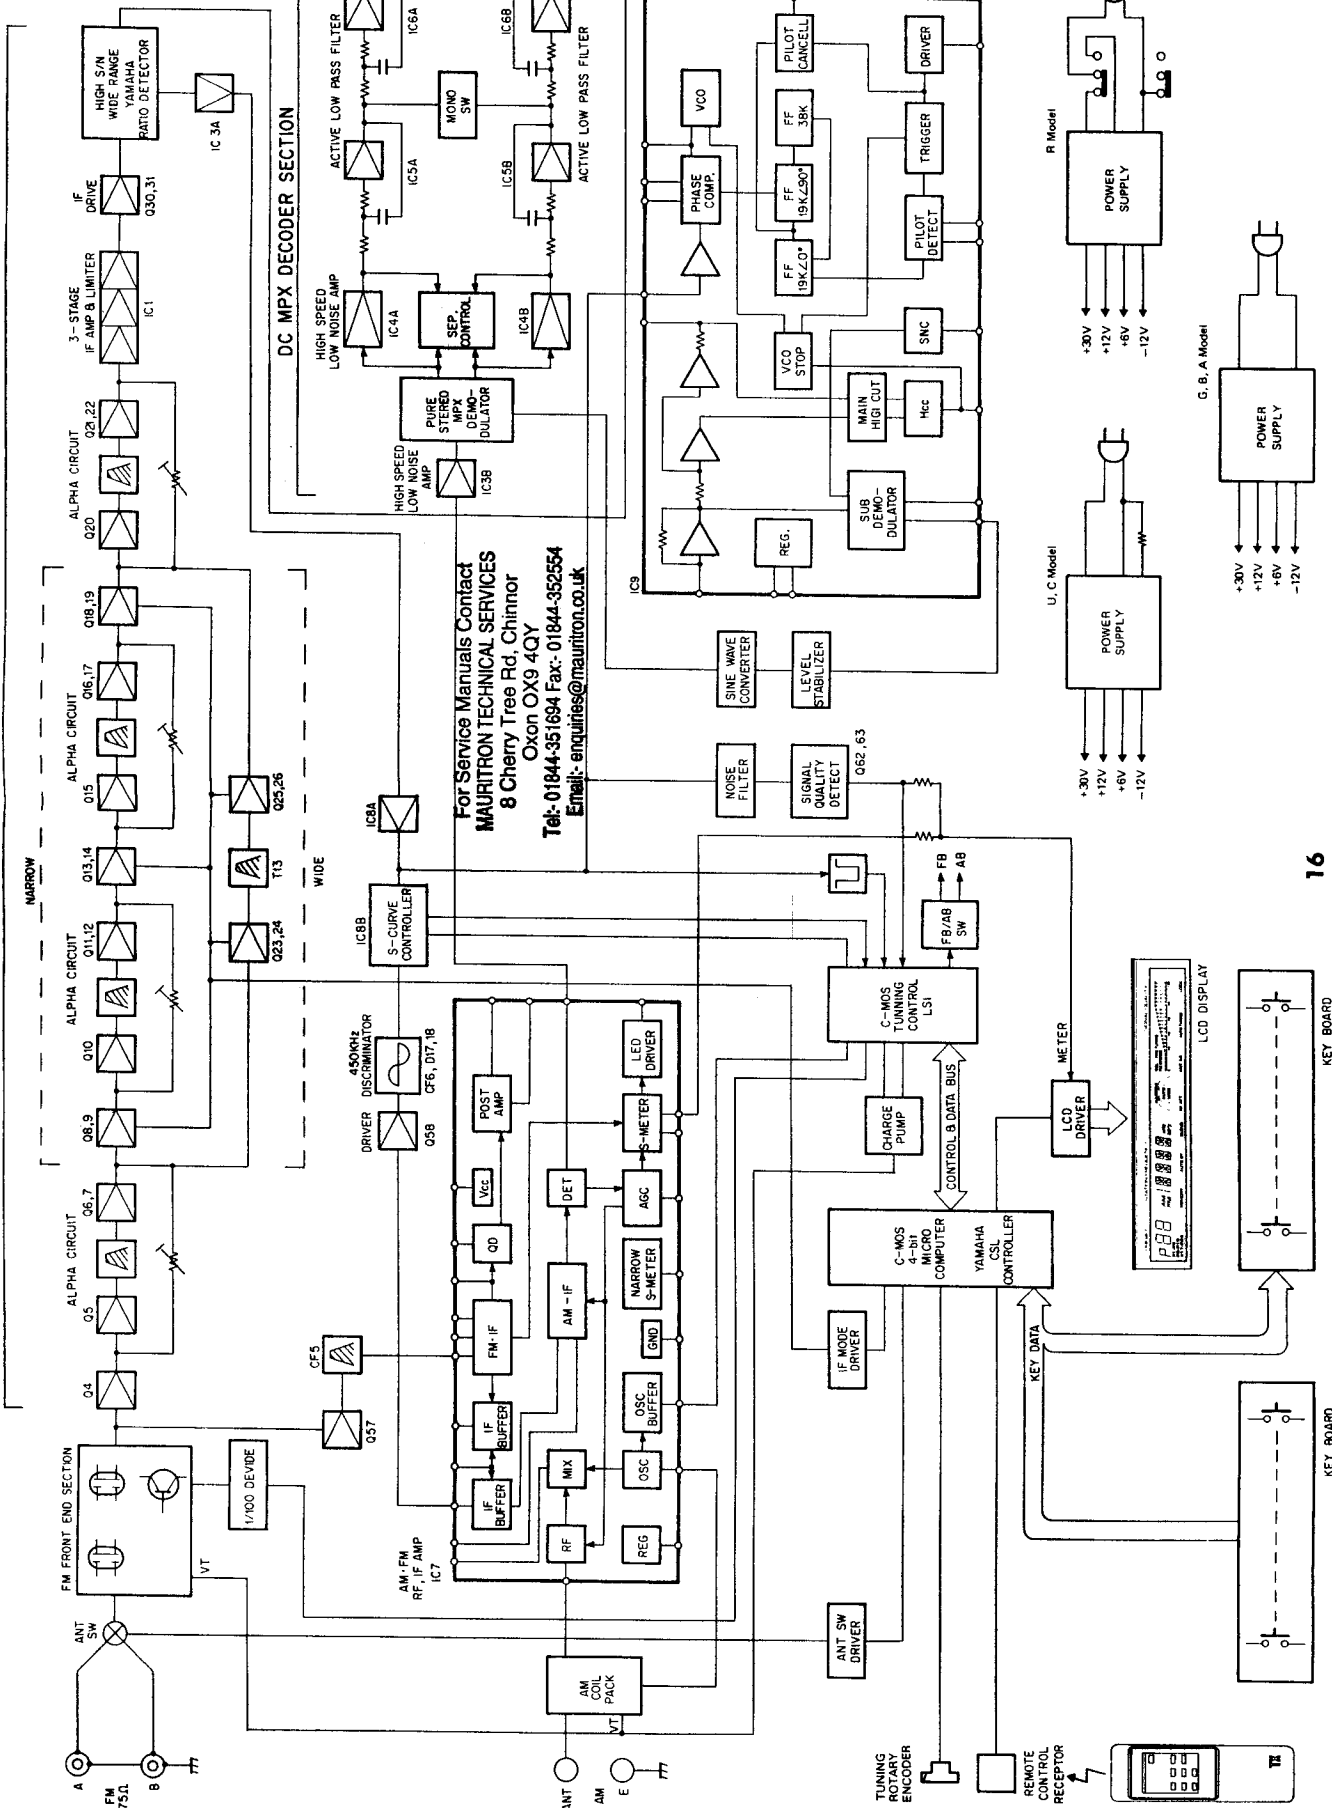


TX-1000/U/TX-2000


PRINTED CIRCUIT BOARD (Pattern Side)

TO TUNER
CIRCUIT BOARD (1)

LCD CIRCUIT BOARD

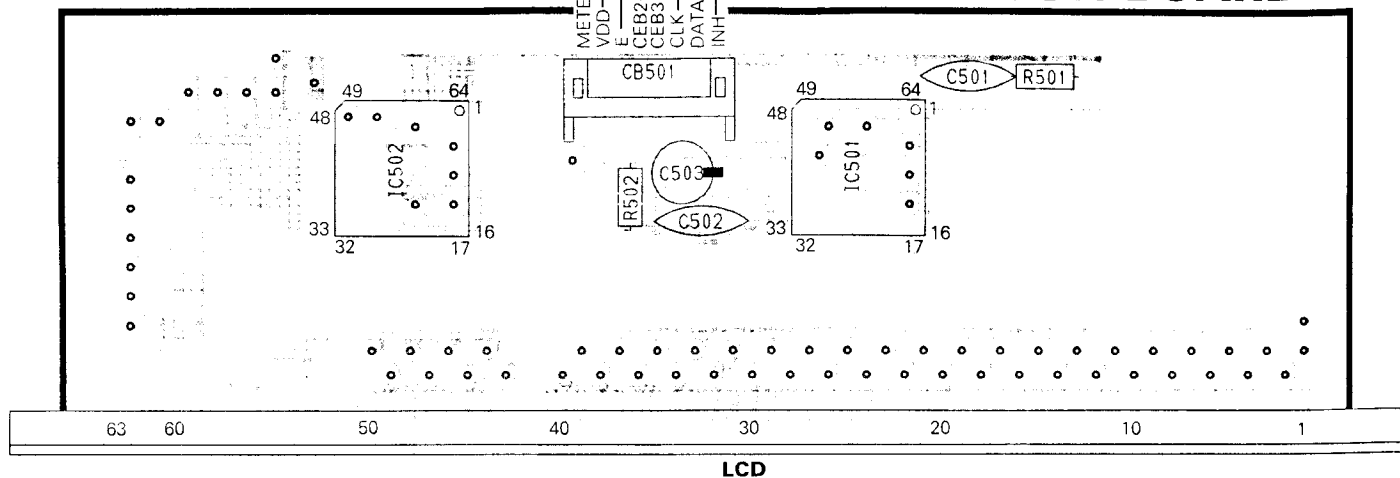



For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquiries@mauritron.co.uk

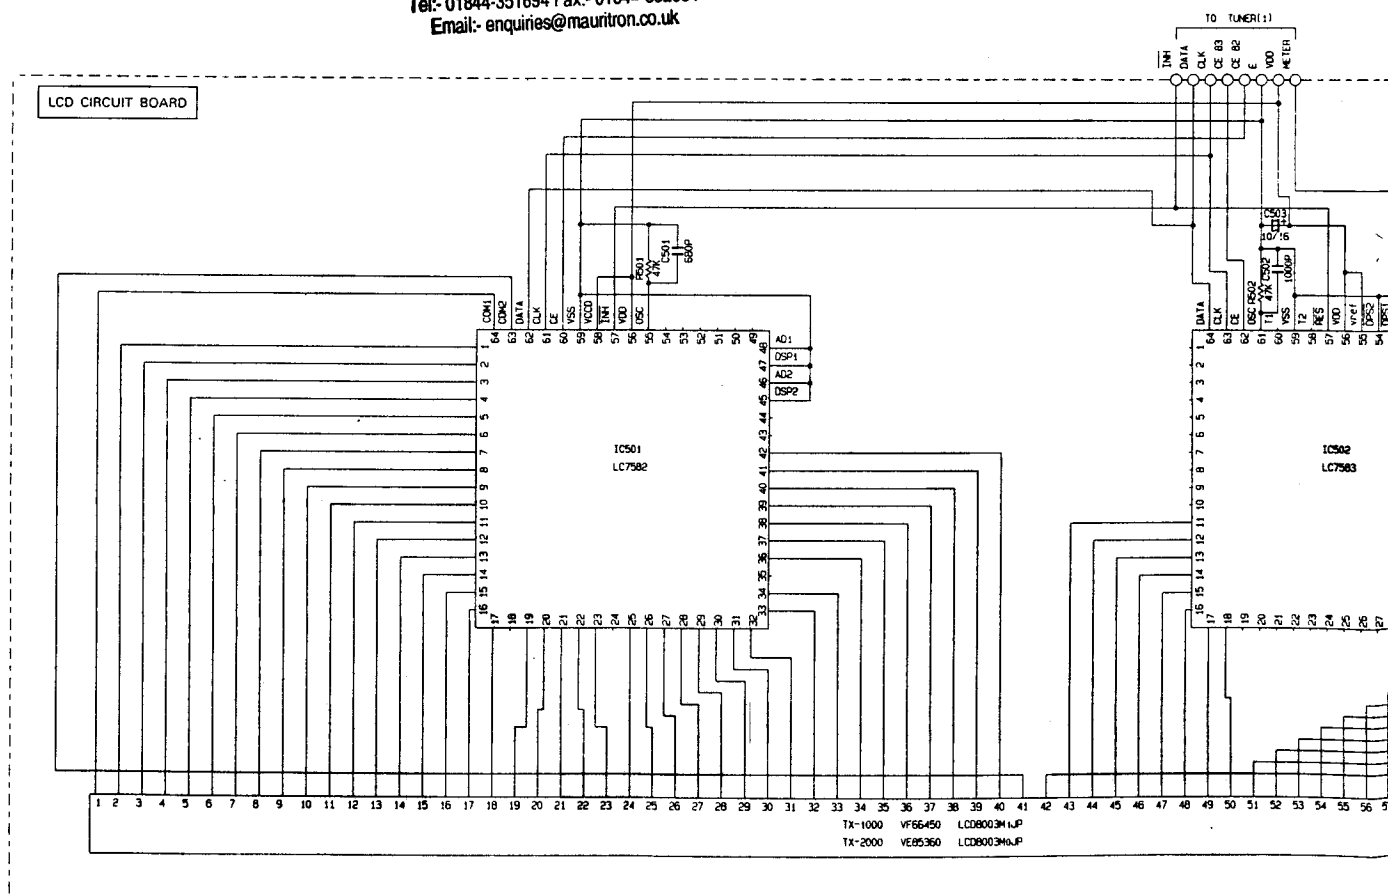

TX-1000 VF66450 LCD8003M(LP)
TX-2000 VE65360 LCD8003M(LP)




※ 文字面：Component Side

FUNCTION CIRC

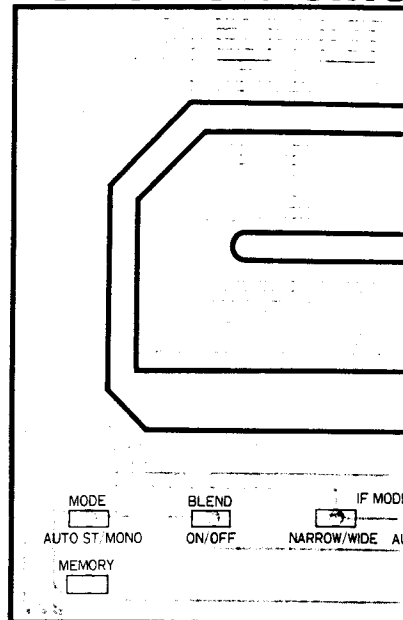


文字面 : Component Side

FUNCTION CIRCUIT BOARD

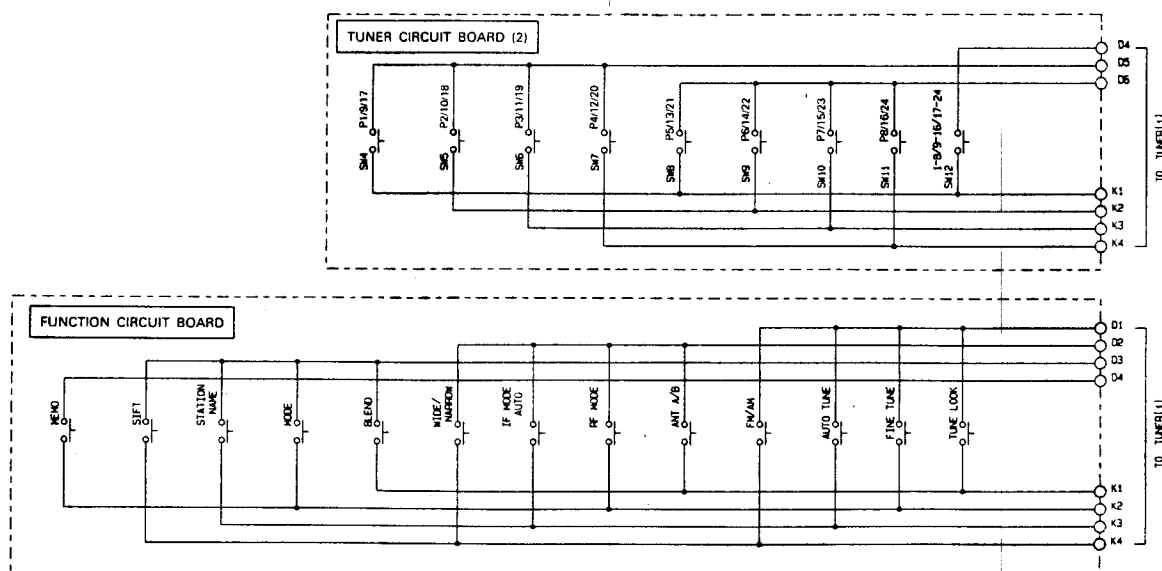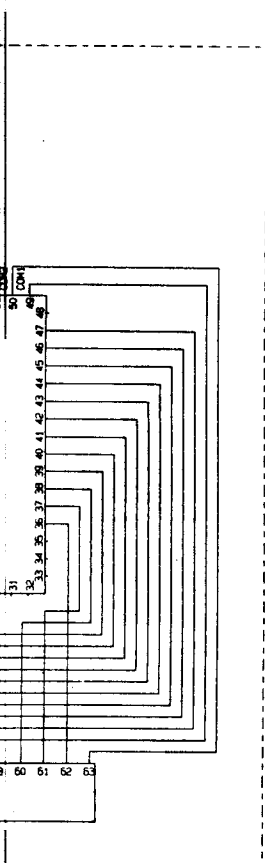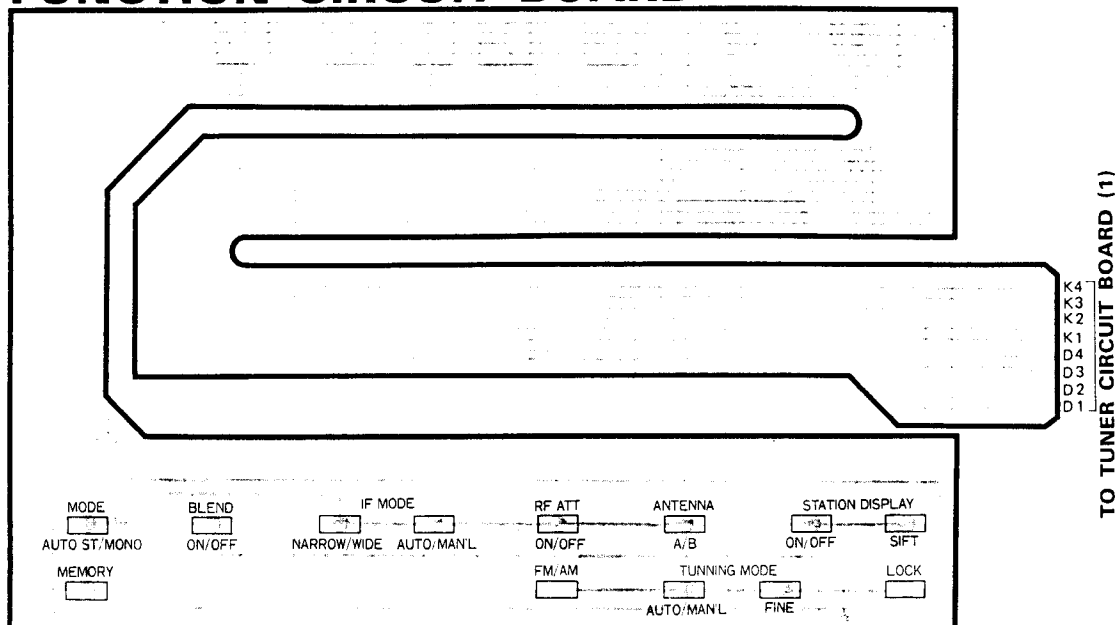

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel: 01844-351694 Fax: 01844-352554
 Email: enquiries@mauritron.co.uk


PRINTED CIRCUIT BOARD (Pattern Side)

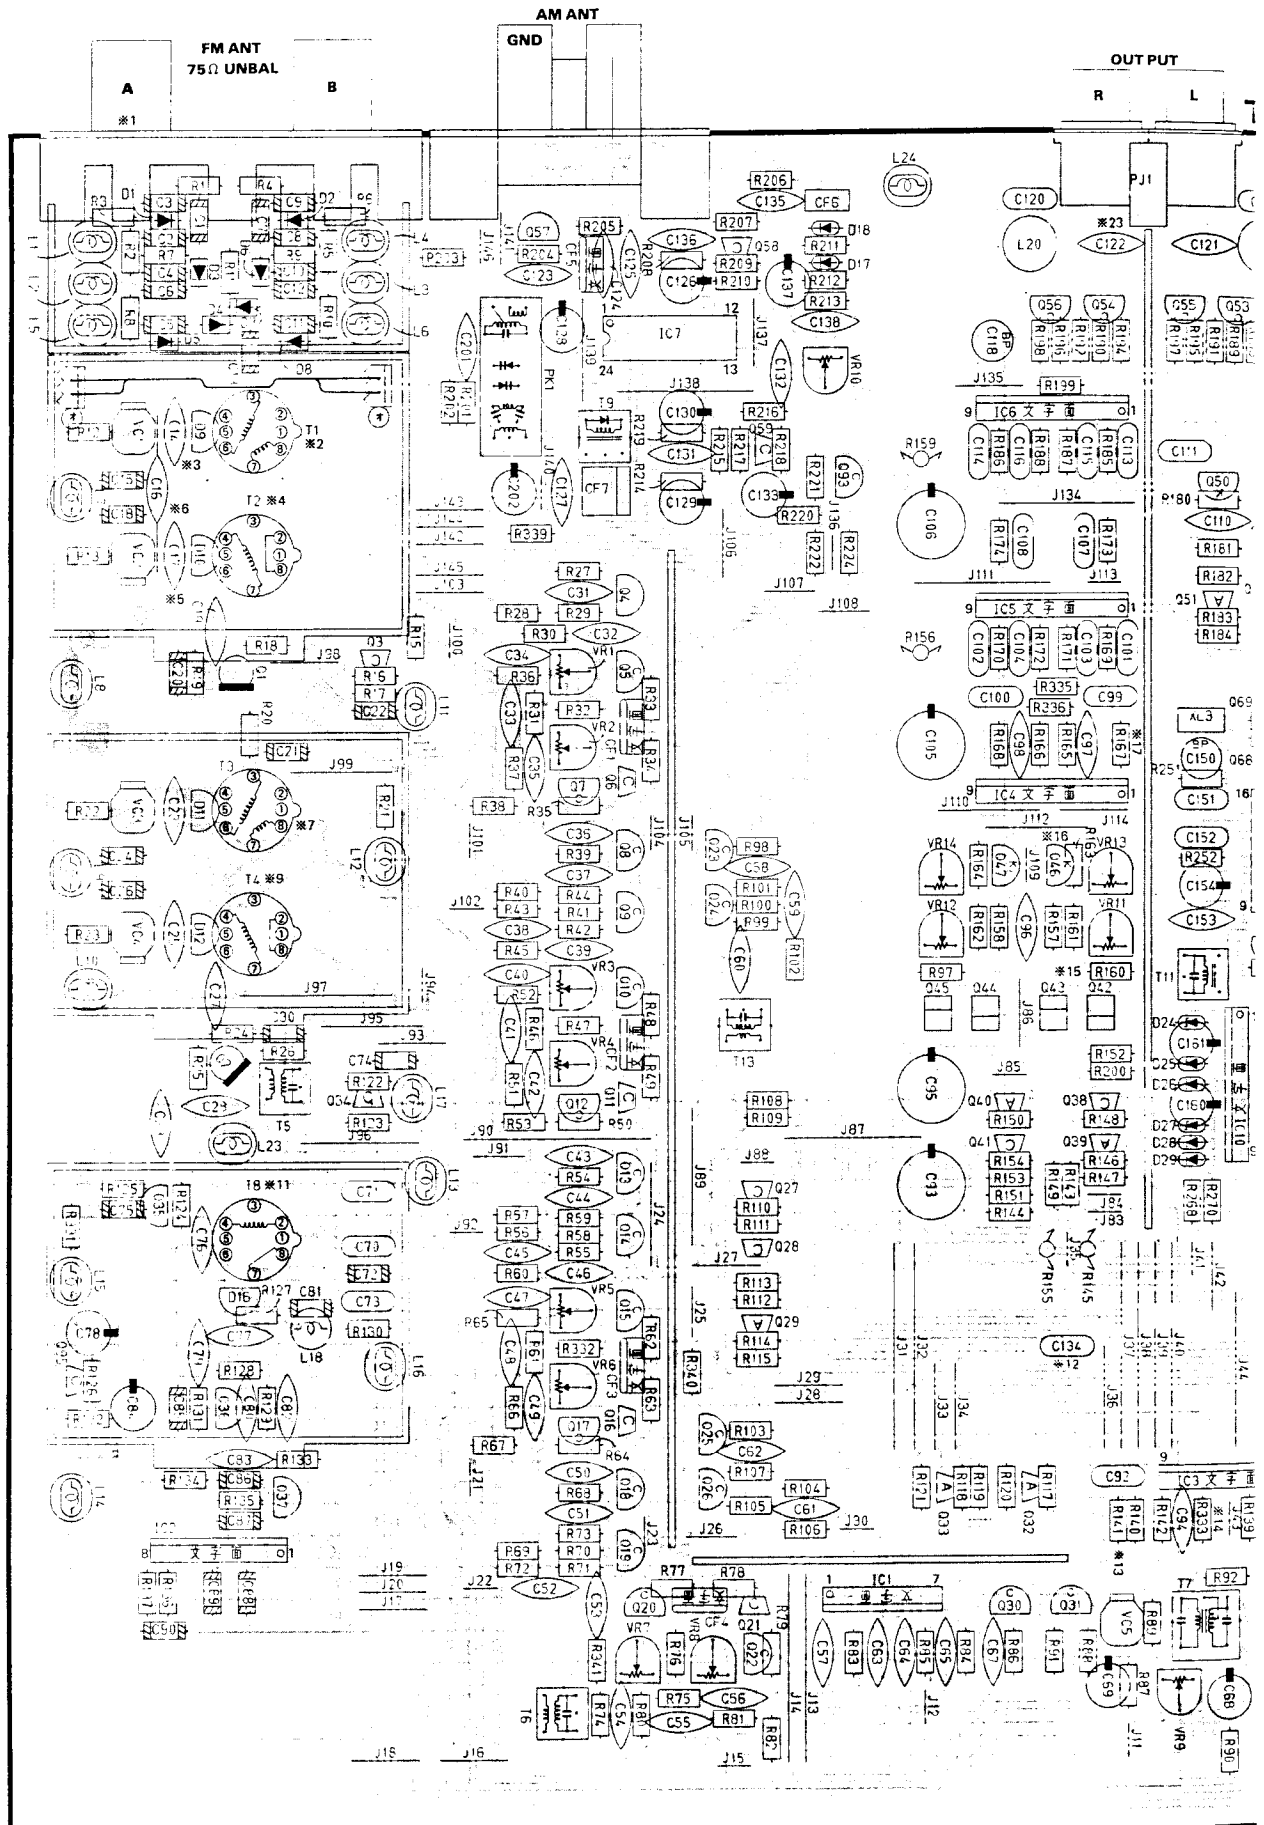




#	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	5
---	---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

TUNER CIRCUIT BOARD (2)

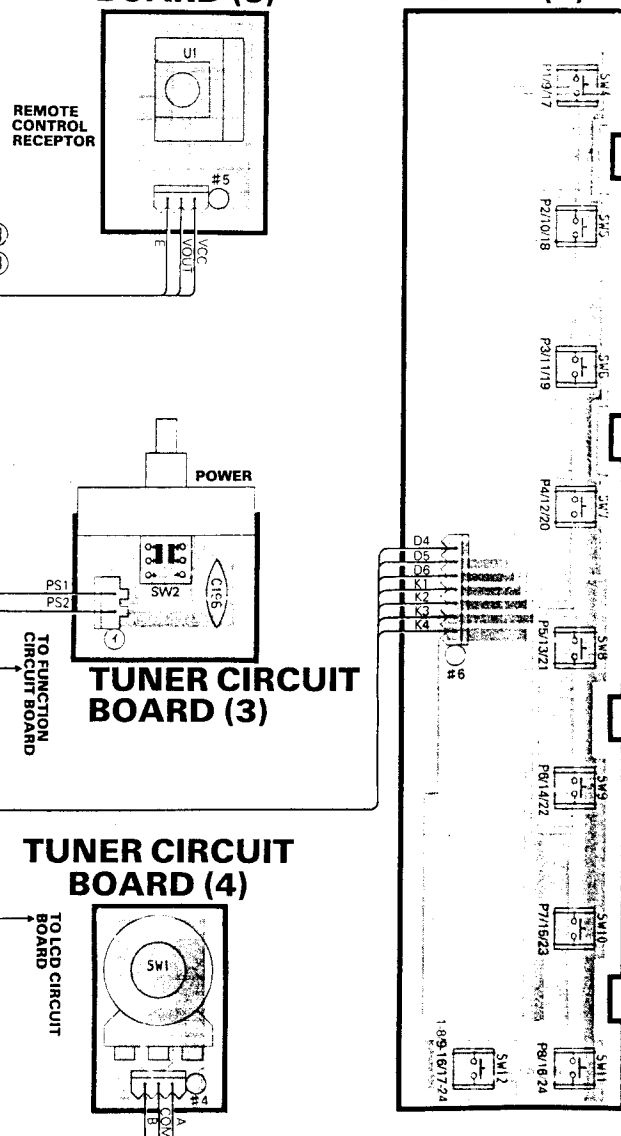


■ REMOTE CONTROL TRANSMITTER (RS-TX1000, RS-TX2000)

● SCHEMATIC DIAGRAM

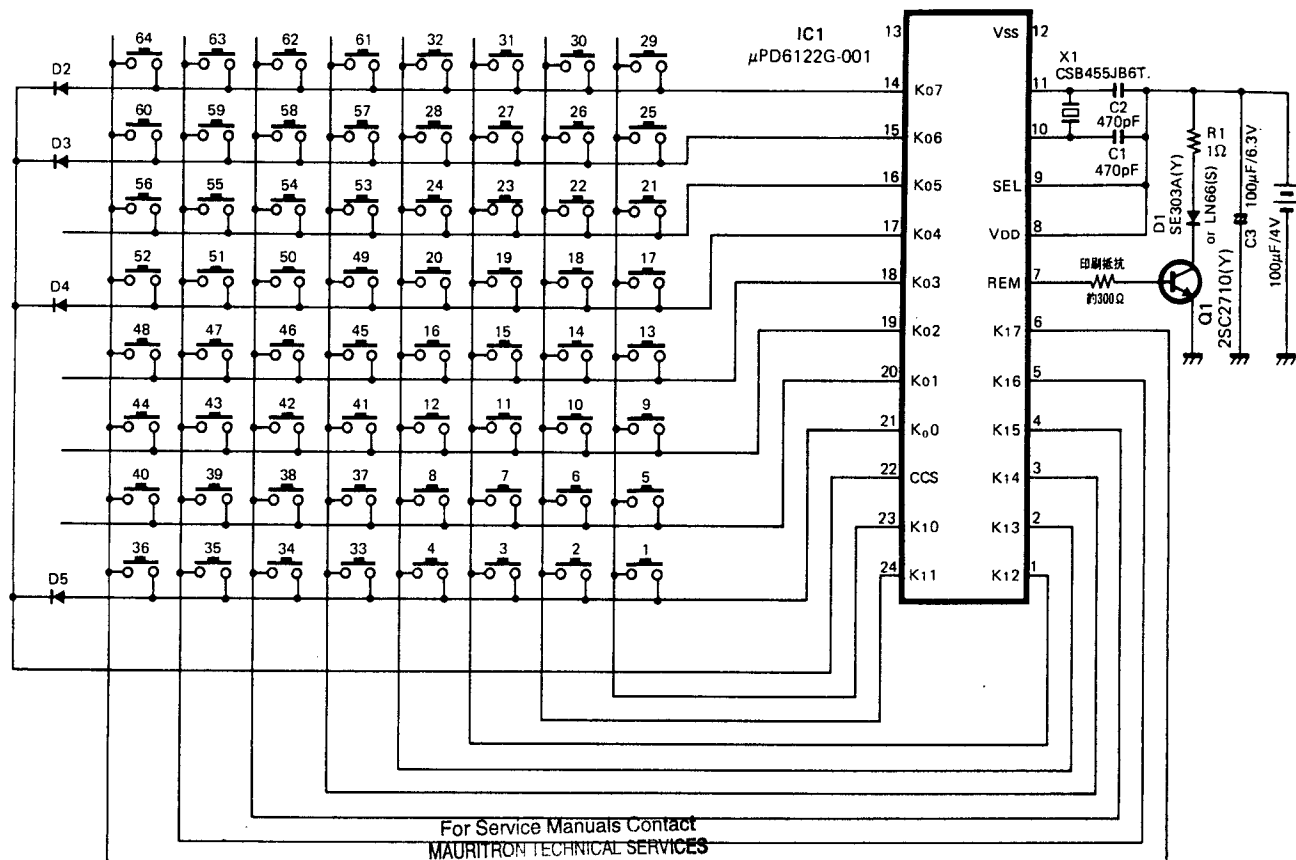


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Trees Rd, Chinnor
Oxon OX9 4QY
Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquiries@mauritron.co.uk

● PRINTED CIRCUIT BOARD

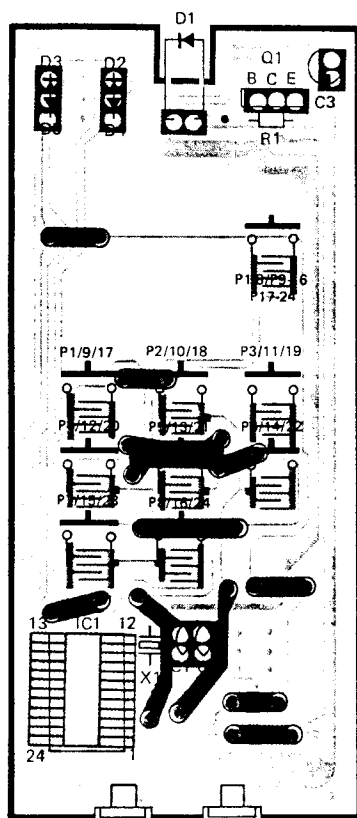

KEY NO.	DATA CODE	FUNCTION
1	00	
2	01	
3	02	
4	03	
5	04	
6	05	
7	06	
8	07	
9	08	
10	09	
11	0A	
12	0B	
13	0C	
14	0D	P1-8/9-16/17-24
15	0E	P1
16	0F	P2
17	10	P3
18	11	P4
19	12	P5
20	13	P6
21	14	P7
22	15	P8
23	16	
24	17	
25	18	
26	19	
27	1A	
28	1B	
29	1C	
30	1D	
31	1E	
32	1F	

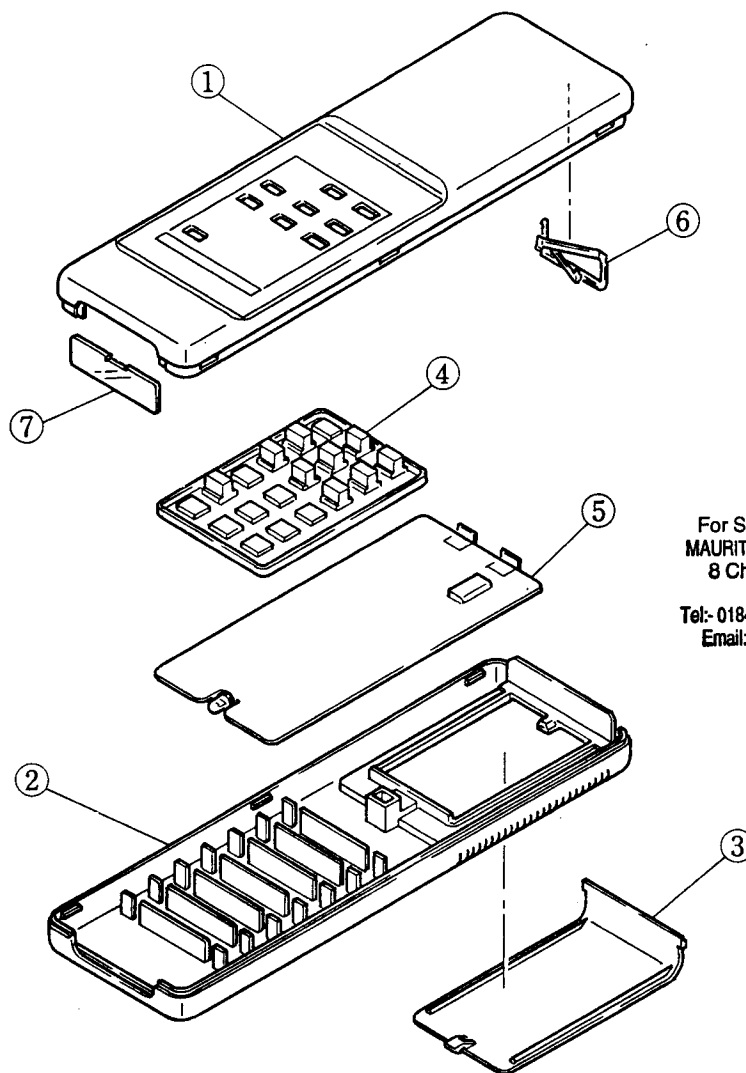


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel:- 01844-351694 Fax:- 01844-352554
 Email:- enquiries@mauritron.co.uk


Ref. No.	Part No.	Description	部 品 名	Remarks	Common Model	Markets	ランク
※	VF 43 20 00	Remote Control Transmitter	RS-TX2000	リモートコントロール トランスミッター		J	
※	VF 43 18 00	〃	RS-TX1000	〃		U,C,R,A,B,G	
※	1 CX 60 49 40	Case (A) Ass'y	RS-TX2000	ケース (A) Ass'y	UR64VCS671	J	
※	〃 CX 60 49 60	〃	RS-TX1000	〃	UR64VCS670	U,C,R,A,B,G	
2	CX 60 27 70	Case (B)		ケース (B)	UR64CS263B	RS-A2000	
3	CX 60 27 80	Lid, Battery		電池 蓋	UR64EC264B	RS-A2000	
※	4 CX 60 49 50	Rubber, Contact	RS-TX2000	ゴム 接点	UR64CT266Q		
※	〃 CX 60 49 70	〃	RS-TX1000	〃	UR64CT266P		
※	5 NX 60 27 60	P.C. Board Ass'y		プリント基板 Ass'y	UR64VPB573		
6	LX 60 02 80	Battery Terminal (A)		電池 電極板 (A)	UR52FD101	RS-KW5	
7	CX 60 05 10	Filter		スモーク板	UR52SB327		
※	NX 60 27 60	P.C. Board Ass'y		プリント基板 Ass'y			
※	iX 61 16 30	IC	μPD6122G001	I C	IC1		
※	QX 60 01 50	Ceramic Resonator	CSB455JB6T	セラミック振動子	X1		
※	iX 61 24 00	Transistor	2SC2710 (Y)	トランジスター	Q1		
	iF 00 47 00	LED	SE303AY	赤外発光ダイオード	D1		
	FG 21 21 00	Ceramic Cap.	100pF 50V	セラコン	C1, 2		
	UJ 11 74 70	Electrolytic Cap.	47 μF 6.3V	ケミコン	C3		
	iX 60 34 80	Diode	MA154WK	ダイオード	D2~5		
	LX 60 02 90	Battery Terminal (B)		電池 電極板 (B)			


※New Parts (新規部品)

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquiries@mauritron.co.uk

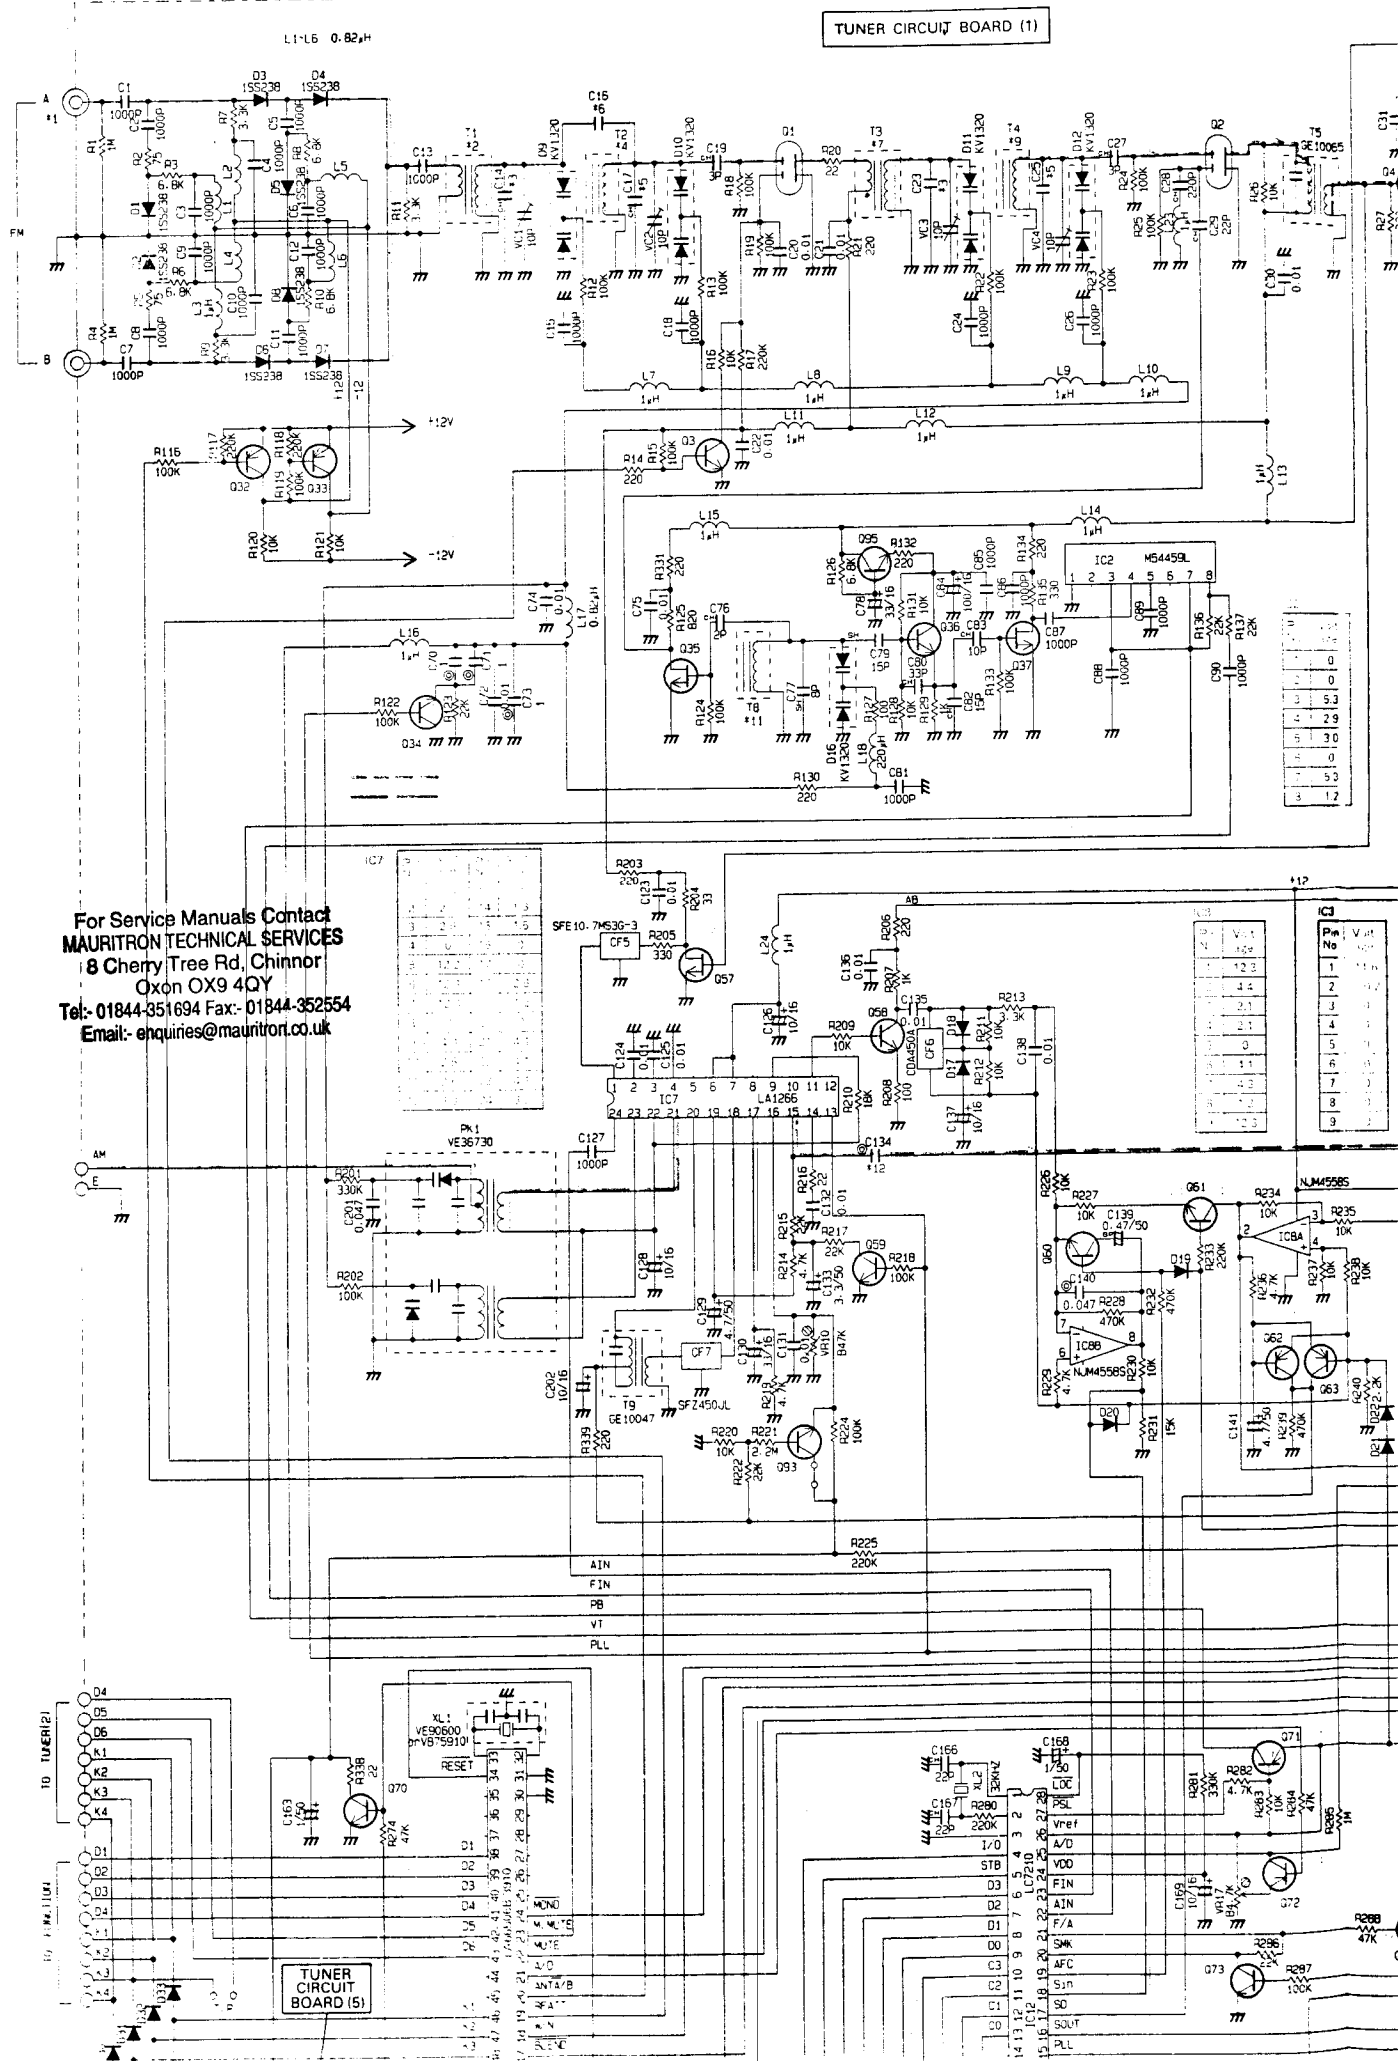


TUNER CIRCUIT BOARD (1)

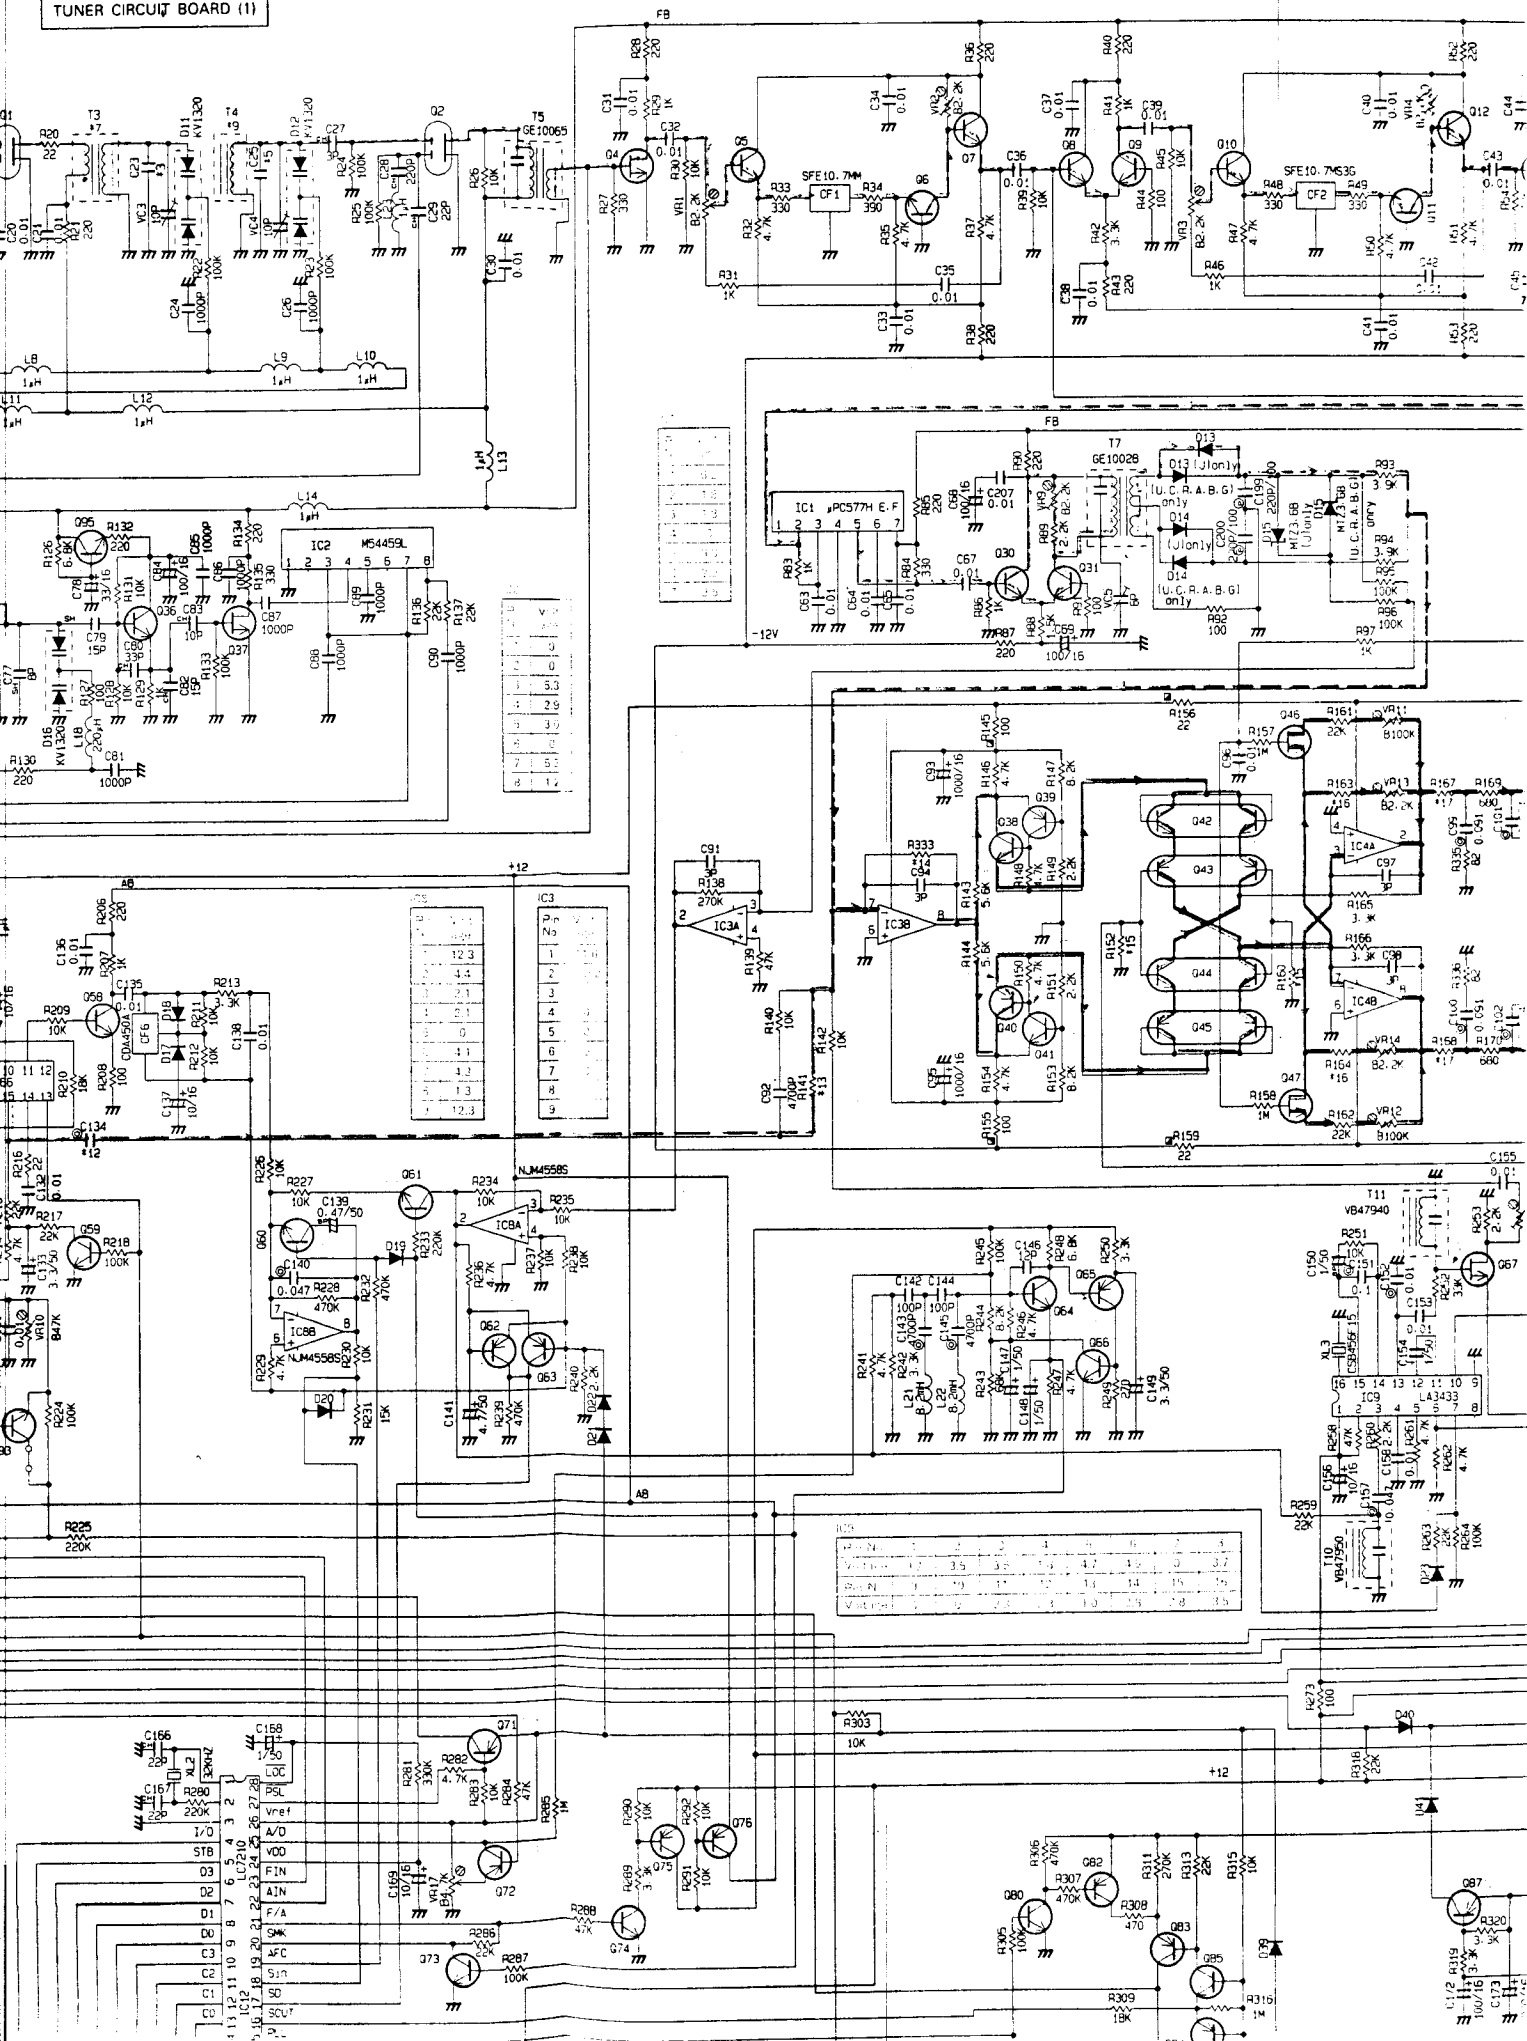

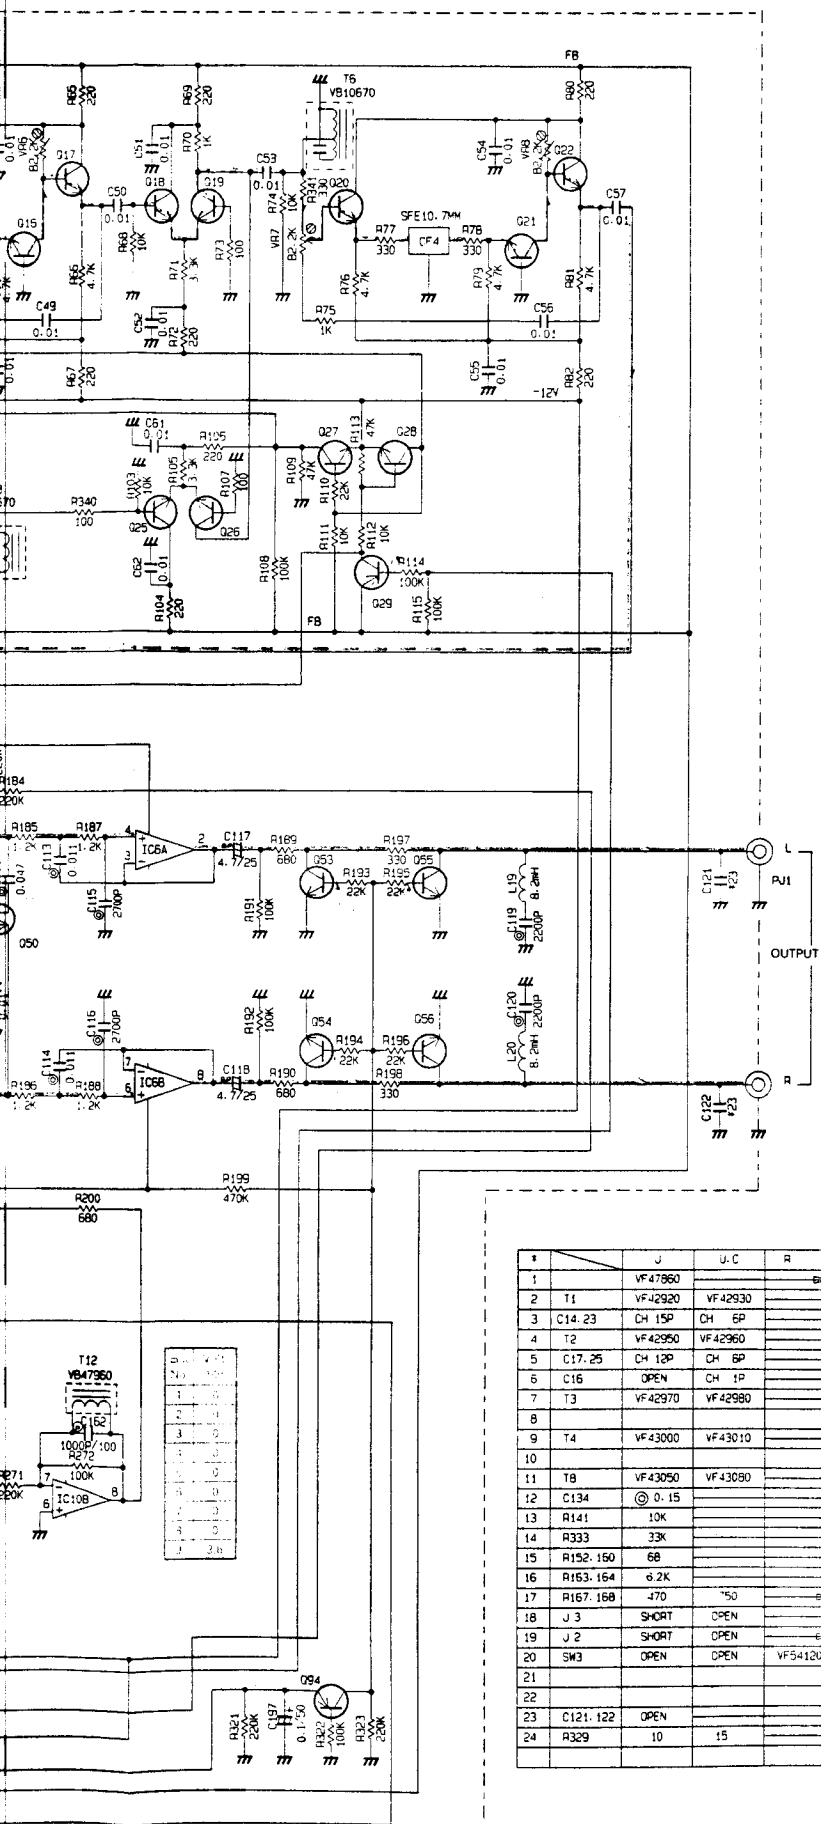


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel:- 01844-351694 Fax:- 01844-352554
 Email:- enquiries@mauritron.co.uk

#	J	U.C	R	A.B	S	
1	VF47860		VF46740			ANT
2	T1	VF42920	VF42930		VF42940	ANT COIL
3	C14.23	CH 15P	CH 6P			ANT C
4	T2	VF42950	VF42960			RF COILa
5	C17.25	CH 12P	CH 6P			RFa c
6	C16	OPEN	CH 1P			RF COP. C
7	T3	VF42970	VF42980			RF COILb
8						
9	T4	VF43000	VF43010			RF COILc
10						
11	T8	VF43050	VF43060			OSC COIL
12	C134	0.15			0.1	AM F
13	R141	10K			15K	AM GAIN
14	R333	33K			47K	FM GAIN
15	R152.150	68			39	MPX LEVEL
16	R153.164	6.2K			4.7K	SEP
17	R167.168	470	750	470		ENF
18	J 3	SHORT	OPEN			CON A0
19	J 2	SHORT	OPEN	SHORT		CON A1
20	SW3	OPEN	OPEN	VF54120	OPEN	CON SW
21						
22						
23	C121.122	OPEN			100P	FTZ
24	R329	10	15		10	LAMP

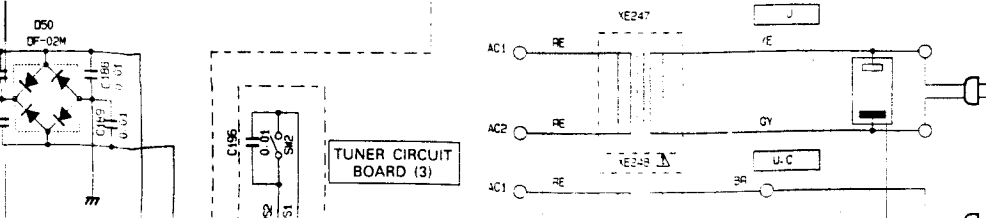


For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel: 01844-351694 Fax: 01844-352554
 Email: enquiries@mauritron.co.uk

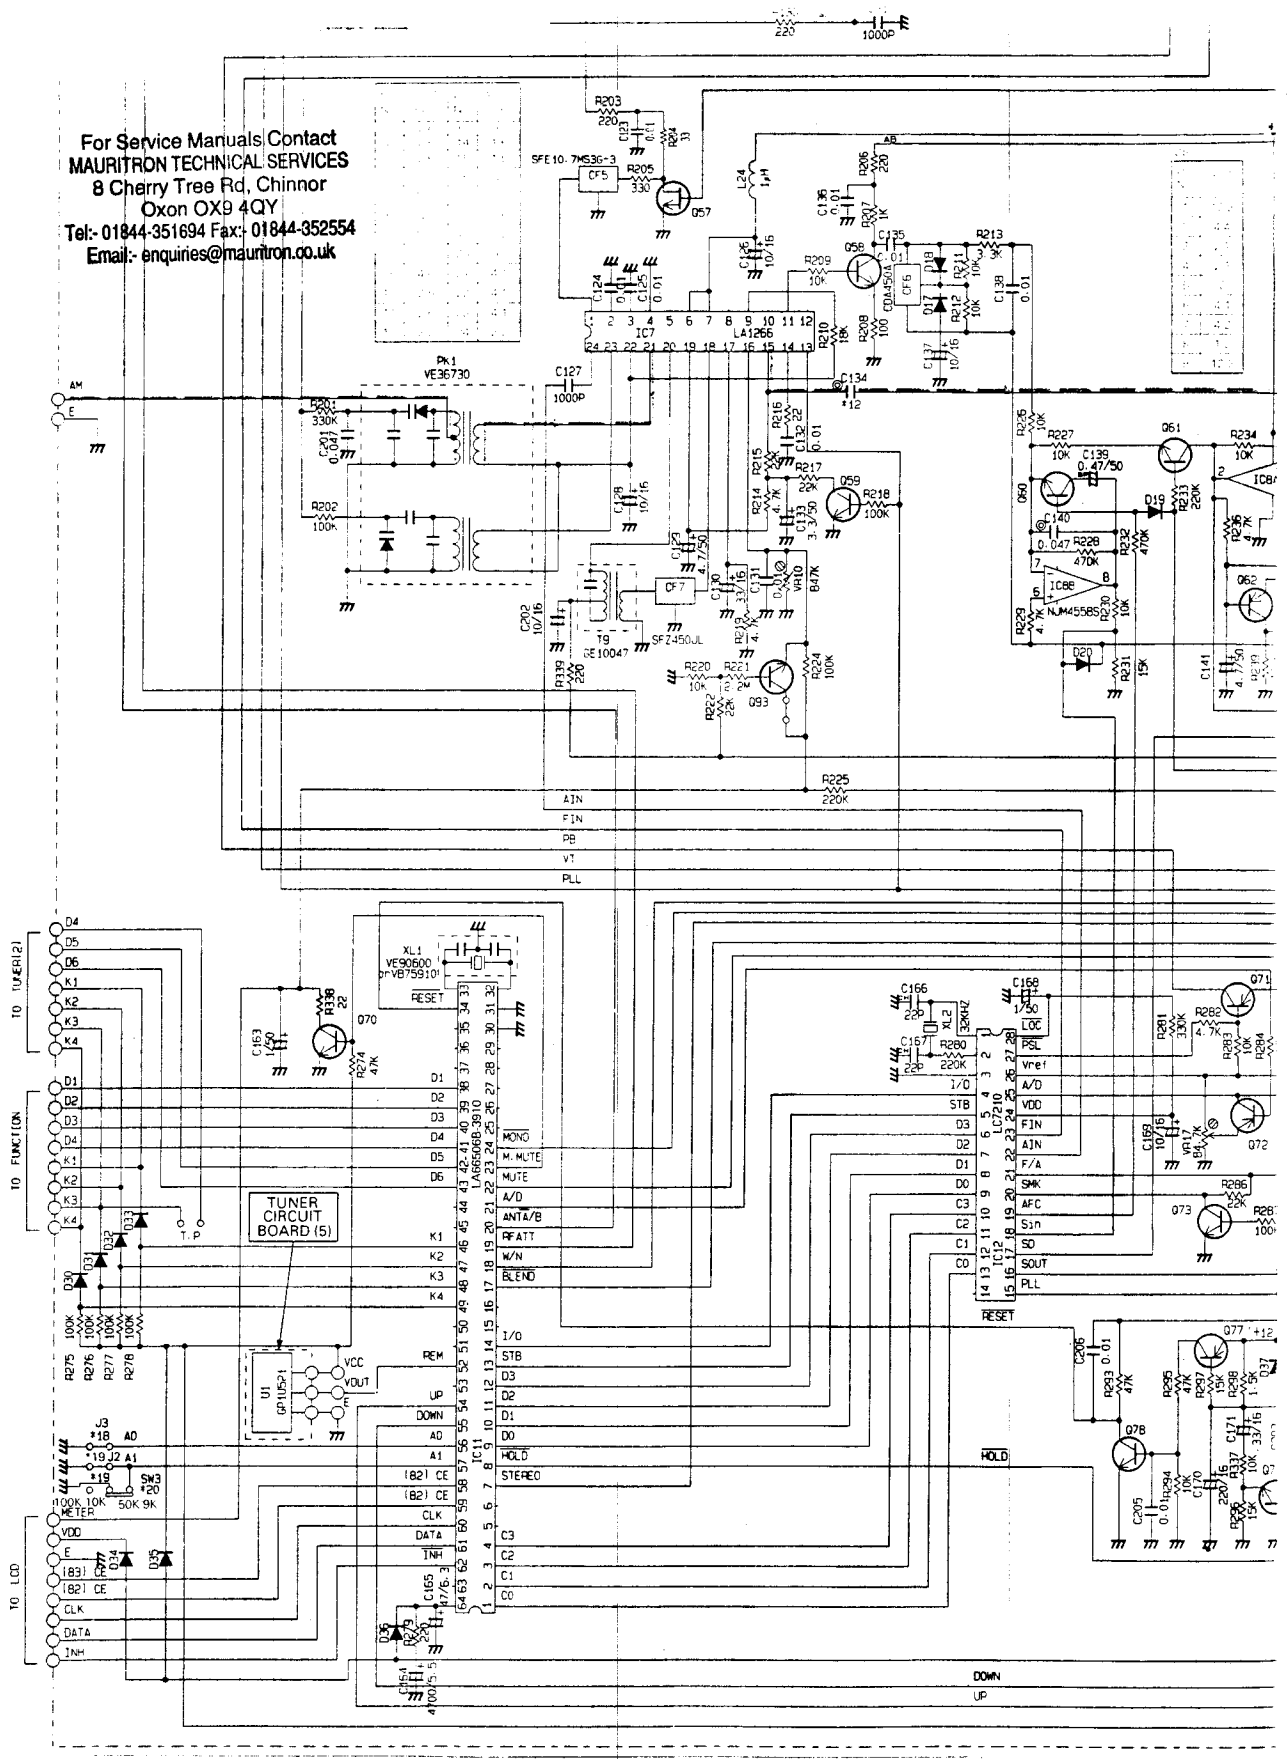


NOTICE

(U)..... U.S.A model
 (C)..... Canadian model
 (A)..... Australian model
 (G)..... European model
 (B)..... British model
 (R)..... General model

RESISTOR	REMARKS
NO MARK	
□	
△	
◇	
○	
×	
+	
•	
◊	
◑	
◒	
◓	
◔	
◕	
◖	
◗	
◘	
◙	
◚	
◛	
◜	
◝	
◞	
◟	
◠	
◡	
◢	
◣	
◤	
◥	
◦	
◧	
◨	
◩	
◪	
◥	
◦	
◧	
◨	
◩	
◪	

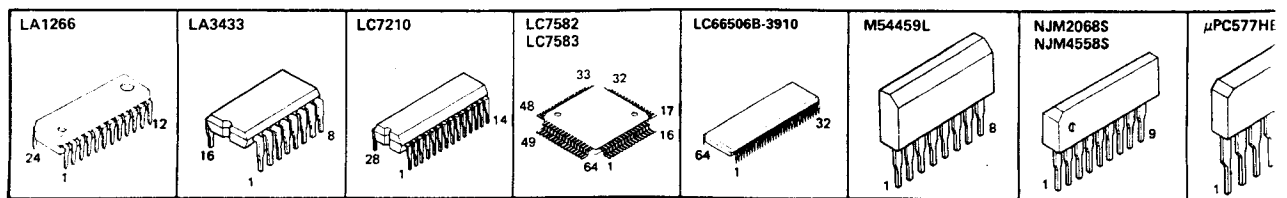

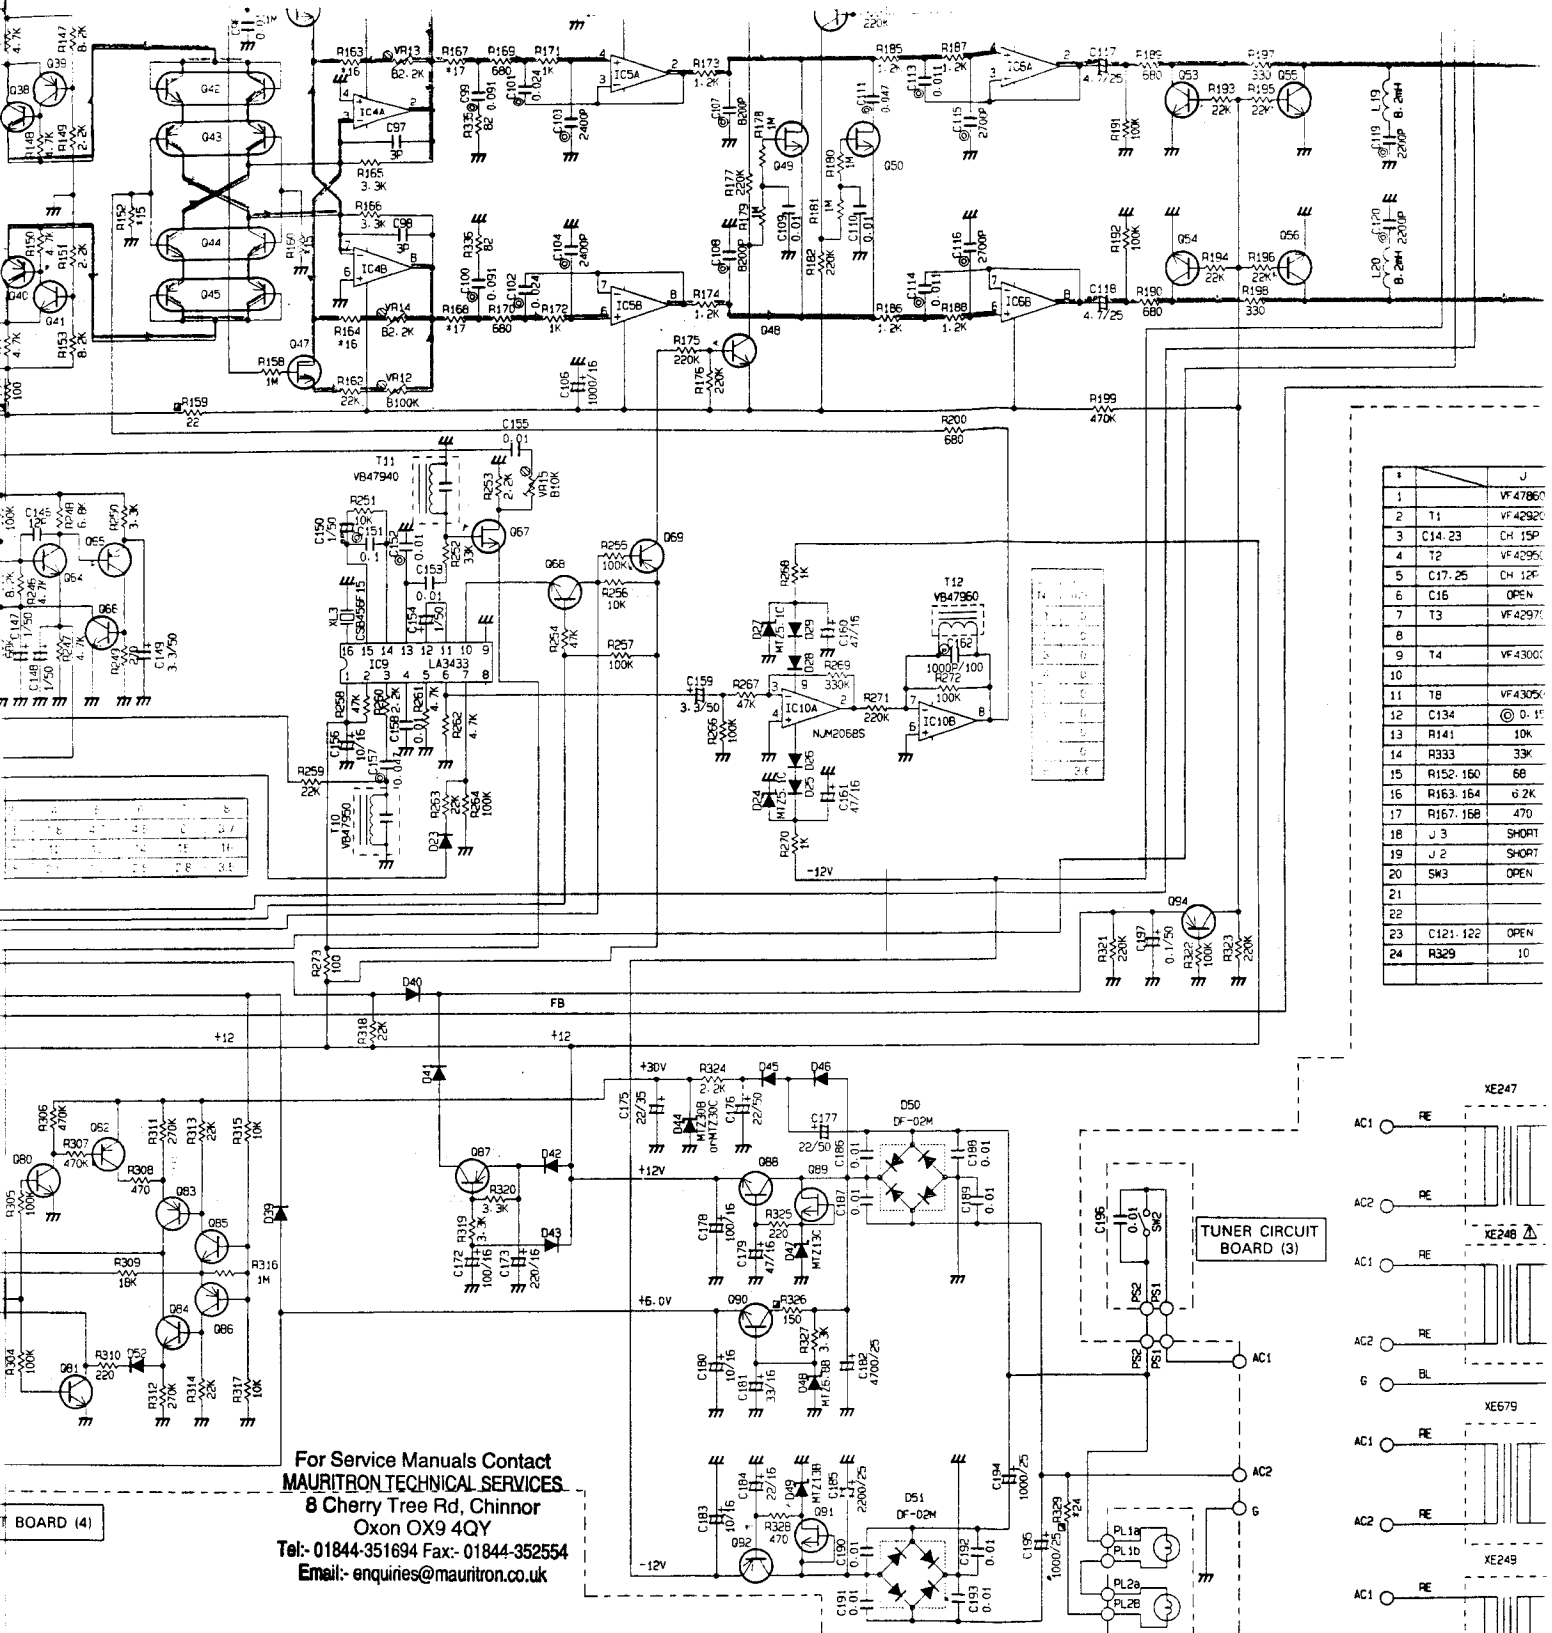

		J
1		VF47960
2	T1	VF42920
3	C14-23	CH 15P
4	T2	VF4295K
5	C17-25	CH 12P
6	C16	OPEN
7	T3	VF42970
8		
9	T4	VF43000
10		
11	T8	VF43050
12	C134	CH 0.1P
13	R141	10K
14	R333	33K
15	R152-160	68
16	R163-164	62K
17	R167-168	470
18	J3	SHORT
19	J2	SHORT
20	SW3	OPEN
21		
22		
23	C121-122	OPEN
24	R329	10

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel:- 01844-351694 Fax:- 01844-352554
 Email:- enquiries@mauritron.co.uk

BOARD (4)

25A935(P, D, R)
25C2061(P, G, R)
25C2878(A, B)
25A13175
25C33305
25C1809(M, N, P)
25C2995(R, O, Y)
25C1847
25K105(H)
25K241(Y)
35K1011(Y, GR)
25A1238
25C3065
25K105(F, H)

	LAST NO.	UN LISTED NO.
C	206	112
R	341	
G	95	52
D	52	

CAPACITOR

REMARKS	PARTS NAME
NO MARK	ELECTROLYTIC CAPACITOR
NO MARK	CERAMIC CAPACITOR
⊙	POLYESTER FILM CAPACITOR
○	POLYSTYRENE FILM CAPACITOR
⊖	MICA CAPACITOR
⊕	POLYPROPYLENE FILM CAPACITOR
⊗	SEMICONDUCTIVE CERAMIC CAPACITOR


UNLESS OTHERWISE SPECIFIED

PNP TRANSISTOR


NPN TRANSISTOR

DIODE 1SS287


25C1847



25C2878AB




25C2995 R, OY




25A1238


25C3065




35K101 Y, GR



DF-02M



KV1320



MTZ3.6B

MTZ5.1C

MTZ6.8B

1SS238

1SS287

Anode

Cathode

MTZ13B

MTZ13C

MTZ30B

MTZ30C

All vol
 Comp
 must l
 origina
 Schem

■ WARNING

PARTS LIST

Components having special characteristics are marked Δ and must be replaced with parts having specifications equal to those originally installed.

• Carbon resistors 1/4 W are not included in the ELECTRICAL PARTS list. For the parts No. of the carbon resistor, refer to P.32 .

■ ELECTRICAL PARTS

Ref. No.	Part No.	Description	部 品 名	Remarks	Common Model	Markets	ランク
※	NA 09 90 40	Tuner Circuit Board	チューナーシート			J	
※	NA 09 90 50	〃	〃			U, C	
※	NA 09 90 60	〃	〃			R	
※	NA 09 90 70	〃	〃	TX-1000		A, B	
※	NA 09 90 80	〃	〃			W/G	
	Fi 19 01 00	Ceramic Cap.	セラコン	C16		U,C,R,A,B,W/G	
	VA 75 99 00	〃	〃	C76			
	Fi 19 03 00	〃	〃	C19, 27			
	Fi 19 11 00	〃	〃	C83			
	VA 76 03 00	〃	〃	C17, 25		U,C,R,A,B,W/G	
※	VA 76 07 00	〃	〃	〃		J	
	VA 76 03 00	〃	〃	C14, 23		U,C,R,A,B,W/G	
※	VA 76 08 00	〃	〃	〃		J	
※	VA 76 08 00	〃	〃	C82			
	VA 76 10 00	〃	〃	C29, 166, 167			
	Fi 19 13 30	〃	〃	C80			
	Fi 19 22 20	〃	〃	C28			
	FG 21 08 00	〃	〃	C77			
	FG 21 11 50	〃	〃	C79			
	FG 20 03 00	〃	〃	C91, 94, 97, 98			
	FG 21 11 20	〃	〃	C146			
	FG 21 21 00	〃	〃	C142, 144			
	FG 21 21 00	〃	〃	C121, 122		W/G	
	FG 21 31 00	〃	〃	C127			
	FG 24 41 00	〃	〃	C31~65, 67, 96, 109, 110, 123~125, 131, 132, 135, 136, 138, 153, 155, 158, 186~193, 196, 203~207			
	FG 24 44 70	〃	〃	C201			
	Fi 44 31 00	〃	円筒形セラコン	C1~13, 15, 18, 24, 26, 81, 85~90			
	VF 46 73 00	〃	〃	C20~22, 30, 72, 74, 75			
	FA 15 32 20	Mylar Cap.	マイラーコン	C119, 120			
	FA 15 32 40	〃	〃	C103, 104			
	FA 15 32 70	〃	〃	C115, 116			
	FA 15 34 70	〃	〃	C92, 143, 145			
	FA 15 38 20	〃	〃	C107, 108			
	FA 15 41 00	〃	〃	C152			
	FA 15 41 10	〃	〃	C113, 114			
	FA 15 42 40	〃	〃	C101, 102			
	FA 15 44 70	〃	〃	C111, 140, 157			
	FA 15 49 10	〃	〃	C99, 100			
	FA 15 51 00	〃	〃	C151			
	FA 15 51 00	〃	〃	C134		W/G	
	FA 15 51 50	〃	〃	〃		J,U,C,R,A,B	
	FA 15 61 00	〃	〃	C70, 71, 73			
	UJ 11 74 70	Electrolytic Cap.	ケミコン	C165			
	UH 13 71 00	〃	〃	C126, 128, 137, 156, 189, 180, 183, 202			
	UH 13 72 20	〃	〃	C184			
	UJ 13 73 30	〃	〃	C78, 130, 171, 181			
	UJ 13 74 70	〃	〃	C160, 161, 179			
	UJ 13 81 00	〃	〃	C68, 69, 84, 172, 178			
	UJ 13 82 20	〃	〃	C170, 173			
	UH 05 72 20	〃	〃	C175			

※New Parts (新規部品)

(NOTE) W/G TX-1000 Markets: G
TX-2000 Markets: W

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel:- 01844-351694 Fax:- 01844-352554
Email:- enquires@mauritron.co.uk

Ref. No.	Part No.	Description	部 品 名	Remarks	Common Model	Markets	ランク
	UH 16 61 00	Electrolytic Cap.	1 μ F 50V	ケ ミ コ ン	C147, 148, 154, 163, 168		
	UH 16 63 30	"	3.3 μ F 50V	"	C133, 149, 159		
	UH 16 64 70	"	4.7 μ F 50V	"	C129, 141		
	UJ 16 72 20	"	22 μ F 50V	"	C176, 177		
	UH 13 91 00	"	1000 μ F 16V	"	C93, 95, 105, 106		
	UH 14 91 00	"	1000 μ F 25V	"	C194, 195		
	UJ 14 92 20	"	2200 μ F 25V	"	C185		
	VB 09 95 00	"	4700 μ F 25V	ブ ロ ッ ク ケ ミ コ ン	C182		
	VB 17 01 00	"	4700 μ F 5.5V	ケ ミ コ ン	C164		
	UK 34 64 70	"	4.7 μ F 25V	B P コ ン	C117, 118		
	UK 66 54 70	"	0.47 μ F 50V	"	C139		
	FM 11 61 00	"	1 μ F 50V	"	C150		
	UT 45 22 20	Polypropylene Film Cap.	220pF 100V	ボ リ プ ロ コ ン	C199, 200		
	UT 45 31 00	"	1000pF 100V	"	C162		
※	VF 43 11 00	Trimmer Capacitor	6pF VCT51A13A	ト リ マ ー コ ン	VC5		
※	VF 43 13 00	"	10pF VCT51C712A	"	VC1~4		
	GE 10 02 80	FM Discriminator Coil		FM ディスクリコイル	T7		
	GE 10 04 70	AM IFT Coil		AM IFT コ イ ル	T9		
	GE 10 06 50	FM IFT Coil		FM IFT コ イ ル	T5		
	VB 10 67 00	FM IFT Coil	10.7MHz	FM IFT コ イ ル	T6, 13		
	VB 47 94 00	LC Filter	19Hz FB-7SG	LC フィルター	T11		
	VB 47 95 00	"	20kHz FB-7SG	"	T10		
	VB 47 96 00	"	38kHz FB-7SG	"	T12		
※	VF 42 92 00	FM ANT Coil		FM ANT コ イ ル	T1	J	
※	VF 42 93 00	"		"	"	U,C,R,B	
※	VF 42 94 00	"		"	"	W/G	
※	VF 42 95 00	FM RF Coil a		FM RF コ イ ル a	T2	J	
※	VF 42 96 00	"		"	"	U,C,R,B,W/G	
※	VF 42 97 00	FM RF Coil b		FM RF コ イ ル b	T3	J	
※	VF 42 98 00	"		"	"	U,C,R,B,W/G	
※	VF 43 00 00	FM RF Coil c		FM RF コ イ ル c	T4	J	
※	VF 43 01 00	"		"	"	U,C,R,B,W/G	
※	VF 43 05 00	FM OSC Coil		FM OSC コ イ ル	T8	J	
※	VF 43 08 00	"		"	"	U,C,R,B,W/G	
	GE 90 06 90	Coil	8.2mH L-8	コ イ ル	L19, 20		
	VB 05 69 00	"	220 μ H ELF0505	"	L18		
	VB 10 03 00	"	8.2mH EL0607	"	L21, 22		
	VB 17 03 00	"	1 μ H EL0606	"	L7~16, 23, 24		
※	VF 96 39 00	"	0.82 μ H EL0405	"	L1~6, 17		
	GG 00 04 20	AM Ceramic Discriminator	CDA450A	AM セラミック式ディスクリ	CF6		
	VC 21 90 00	AM Ceramic Filter	SFZ450JL	AM セラミックフィルター	CF7		
※	VF 46 58 00	FM Ceramic Filter	SFE10.7MM	FM セラミックフィルターキット	CF1, 4		
		"	SFE10.7MS3G-3	"	CF2, 3, 5		
	QU 00 39 00	Quartz Crystal Unit	32kHz	水 晶 振 動 子	XL2		
※	VE 90 59 00	Ceramic Resonator	CSB456F15	セラミック振動子	XL3		
	VB 75 91 00	"	4MHz EFO-FC4004A4	"	XL1		
	HV 45 41 00	Flame Ploof Carbon Resistor	10 Ω 1/4W	不 燃 化 カ ー ボ ン 抵 抗	R329	J, W	

※New Parts (新規部品)

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
8 Cherry Tree Rd, Chinnor
Oxon OX9 4QY
Tel: 01844-351694 Fax: 01844-352554
Email: enquiries@mauritron.co.uk

Ref. No.	Part No.	Description	部品名	Remarks	Common Model	Markets
KA 90 63 80	Test Switch	EVQ-ORB-04M	タクトスイッチ	SW4-12	Inter-changeable	
VE 32 73 00		KHH-MA901				
VF 54 12 00	Push Switch	SPU12	プッシュスイッチ	SW2		
VF 54 12 00	Slide Switch	SSSF11	スライドスイッチ	SW3 Frequency Stop		R
VG 20 04 00	Rotary Encoder	EC16B308	ロータリーエンコーダー	SW1		
VE 63 29 00	Remote Control Receiver	GF1U521	リモコン受光ユニット	U1		
VF 43 16 00	Pin Jack	2P	ピンジャック	PJ1		
VE 36 73 00	AM Coil Pack		AM電子回路コイルパック	PK1		
LB 20 13 00	Base Pin		ベースピン	CB4		
VD 00 46 00		3P	I型PHベースピン	CB1.2		
VD 00 47 00		4P		CB3		
VD 00 50 00		7P		CB6		
VF 46 59 00	Connector	8P	FPCコネクタ	CB5		
LA 00 23 00	Lapping Terminal	i=type 3P P=7.5	ラッピング端子板			
VE 36 56 00	Push Terminal	2P	プッシュターミナル			J.U.C.R
VF 47 86 00	Socket, F	2P	ソケット			A.B.WG
VF 46 74 00	Plug	PAL 2P	プラグ			
VB 71 57 00	PH Connector Assy	B&C 7P $\ell=250$	PHコネクタアッシー			
VB 70 92 00		B&C 3P $\ell=400$				
VB 71 74 00		B&C 8P $\ell=250$				
VB 69 12 00		B&B 2P $\ell=70$				
VG 26 65 00	Heat Sink		放熱板			
BB 07 04 30	Bus Bar	$\ell=55$	バスバー			
VF 20 83 00	Shield Case A	$\ell=145$	シールドケースA			
VF 20 84 00		B				
ED 33 00 66	Bind Head Screw	3 x 6 FCM3-BL	バインドヘッドネジ			
NA 09 90 90	LCD Circuit Board		LCD表示シート	TX-2000		
NA 09 91 00				TX-1000/U		
FG 21 26 80	Ceramic Cap.	680pF	セラミックコンデンサ	C501		
FG 21 31 00		1000pF		C502		
UH 13 71 00	Electrolytic Cap.	10 μ F	電解コンデンサ	C503		
XB 41 70 01	IC	LC7582		IC501		
XB 76 40 01		LC7583		IC502		
VB 85 87 00	Base Pin	L=type	PHベースピン	CB501		
VE 85 36 00	Display		LCD表示器	TX-2000		
VF 86 46 00				TX-1000/U		

※New Parts (新規部品)

Ref. No.	Part No.	Description	部品名	Remarks	Common Model	Markets
HV 45 41 50	Flame Proof Carbon Resistor	15 Ω	不燃化カーボン抵抗	R329		UCRA3
HV 45 42 20		22 Ω		R156, 159		
HV 45 51 00		100 Ω		R145, 155		
HV 45 51 50		150 Ω		R326		
VA 78 77 00	Semi Variable Resistor	B2.2k Ω	半固定抵抗	VR1-9, 13, 14	Inter-changeable	
VB 14 08 00		B2.2k Ω		VR17		
VA 78 79 00		B4.7k Ω		VR15	Inter-changeable	
HT 79 00 20		B10k Ω				
VA 78 83 00		B47k Ω		VR10	Inter-changeable	
VB 24 42 00		B47k Ω		VR11, 12		
VA 78 84 00		B100k Ω				
IA 09 35 10	Transistor	2SA935 P.Q.R	トランジスタ	Q75, 92		
IC 20 61 10		2SC2061 P.Q.R		Q30		
IC 28 78 20		2SC2878 A.B		Q33-56, 60, 93		
VC 21 87 00		2SA1317S		Q36, 37, 40, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 903, 904, 905, 906, 907, 908, 909, 910, 911, 912, 913, 914, 915, 916, 917, 918, 919, 920, 921, 922, 923, 924, 925, 926, 927, 928, 929, 930, 931, 932, 933, 934, 935, 936, 937, 938, 939, 940, 941, 942, 943, 944, 945, 946, 947, 948, 949, 950, 951, 952, 953, 954, 955, 956, 957, 958, 959, 960, 961, 962, 963, 964, 965, 966, 967, 968, 969, 970, 971, 972, 973, 974, 975, 976, 977, 978, 979, 980, 981, 982, 983, 984, 985, 986, 987, 988, 989, 990, 991, 992, 993, 994, 995, 996, 997, 998, 999, 1000, 1001, 1002, 1003, 1004, 1005, 1006, 1007, 1008, 1009, 1010, 1011, 1012, 1013, 1014, 1015, 1016, 1017, 1018, 1019, 1020, 1021, 1022, 1023, 1024, 1025, 1026, 1027, 1028, 1029, 1030, 1031, 1032, 1033, 1034, 1035, 1036, 1037, 1038, 1039, 1040, 1041, 1042, 1043, 1044, 1045, 1046, 1047, 1048, 1049, 1050, 1051, 1052, 1053, 1054, 1055, 1056, 1057, 1058, 1059, 1060, 1061, 1062, 1063, 1064, 1065, 1066, 1067, 1068, 1069, 1070, 1071, 1072, 1073, 1074, 1075, 1076, 1077, 1078, 1079, 1080, 1081, 1082, 1083, 1084, 1085, 1086, 1087, 1088, 1089, 1090, 1091, 1092, 1093, 1094, 1095, 1096, 1097, 1098, 1099, 1100, 1101, 1102, 1103, 1104, 1105, 1106, 1107, 1108, 1109, 1110, 1111, 1112, 1113, 1114, 1115, 1116, 1117, 1118, 1119, 1120, 1121, 1122, 1123, 1124, 1125, 1126, 1127, 1128, 1129, 1130, 1131, 1132, 1133, 1134, 1135, 1136, 1137, 1138, 1139, 1140, 1141, 1142, 1143, 1144, 1145, 1146, 1147, 1148, 1149, 1150, 1151, 1152, 1153, 1154, 1155, 1156, 1157, 1158, 1159, 1160, 1161, 1162, 1163, 1164, 1165, 1166, 1167, 1168, 1169, 1170, 1171, 1172, 1173, 1174, 1175, 1176, 1177, 1178, 1179, 1180, 1181, 1182, 1183, 1184, 1185, 1186, 1187, 1188, 1189, 1190, 1191, 1192, 1193, 1194, 1195, 1196, 1197, 1198, 1199, 1200, 1201, 1202, 1203, 1204, 1205, 1206, 1207, 1208, 1209, 1210, 1211, 1212, 1213, 1214, 1215, 1216, 1217, 1218, 1219, 1220, 1221, 1222, 1223, 1224, 1225, 1226, 1227, 1228, 1229, 1230, 1231, 1232, 1233, 1234, 1235, 1236, 1237, 1238, 1239, 1240, 1241, 1242, 1243, 1244, 1245, 1246, 1247, 1248, 1249, 1250, 1251, 1252, 1253, 1254, 1255, 1256, 1257, 1258, 1259, 1260, 1261, 1262, 1263, 1264, 1265, 1266, 1267, 1268, 1269, 1270, 1271, 1272, 1273, 1274, 1275, 1276, 1277, 1278, 1279, 1280, 1281, 1282, 1283, 1284, 1285, 1286, 1287, 1288, 1289, 1290, 1291, 1292, 1293, 1294, 1295, 1296, 1297, 1298, 1299, 1300, 1301, 1302, 1303, 1304, 1305, 1306, 1307, 1308, 1309, 1310, 1311, 1312, 1313, 1314, 1315, 1316, 1317, 1318, 1319, 1320, 1321, 1322, 1323, 1324, 1325, 1326, 1327, 1328, 1329, 1330, 1331, 1332, 1333, 1334, 1335, 1336, 1337, 1338, 1339, 1340, 1341, 1342, 1343, 1344, 1345, 1346, 1347, 1348, 1349, 1350, 1351, 1352, 1353, 1354, 1355, 1356, 1357, 1358, 1359, 1360, 1361, 1362, 1363, 1364, 1365, 1366, 1367, 1368, 1369, 1370, 1371, 1372, 1373, 1374, 1375, 1376, 1377, 1378, 1379, 1380, 1381, 1382, 1383, 1384, 1385, 1386, 1387, 1388, 1389, 1390, 1391, 1392, 1393, 1394, 1395, 1396, 1397, 1398, 1399, 1400, 1401, 1402, 1403, 1404, 1405, 1406, 1407, 1408, 1409, 1410, 1411, 1412, 1413, 1414, 1415, 1416, 1417, 1418, 1419, 1420, 1421, 1422, 1423, 1424, 1425, 1426, 1427, 1428, 1429, 1430, 1431, 1432, 1433, 1434, 1435, 1436, 1437, 1438, 1439, 1440, 1441, 1442, 1443, 1444, 1445, 1446, 1447, 1448, 1449, 1450, 1451, 1452, 1453, 1454, 1455, 1456, 1457, 1458, 1459, 1460, 1461, 1462, 1463, 1464, 1465, 1466, 1467, 1468, 1469, 1470, 1471, 1472, 1473, 1474, 1475, 1476, 1477, 1478, 1479, 1480, 1481, 1482, 1483, 1484, 1485, 1486, 1487, 1488, 1489, 1490, 1491, 1492, 1493, 1494, 1495, 1496, 1497, 1498, 1499, 1500, 1501, 1502, 1503, 1504, 1505, 1506, 1507, 1508, 1509, 1510, 1511, 1512, 1513, 1514, 1515, 1516, 1517, 1518, 1519, 1520, 1521, 1522, 1523, 1524, 1525, 1526, 1527, 1528, 1529, 1530, 1531, 1532, 1533, 1534, 1535, 1536, 1537, 1538, 1539, 1540, 1541, 1542, 1543, 1544, 1545, 1546, 1547, 1548, 1549, 1550, 1551, 1552, 1553, 1554, 1555, 1556, 1557, 1558, 1559, 1560, 1561, 1562, 1563, 1564, 1565, 1566, 1567, 1568, 1569, 1570, 1571, 1572, 1573, 1574, 1575, 1576, 1577, 1578, 1579, 1580, 1581, 1582, 1583, 1584, 1585, 1586, 1587, 1588, 1589, 1590, 1591, 1592, 1593, 1594, 1595, 1596, 1597, 1598, 1599, 1600, 1601, 1602, 1603, 1604, 1605, 1606, 1607, 1608, 1609, 1610, 1611, 1612, 1613, 1614, 1615, 1616, 1617, 1618, 1619, 1620, 1621, 1622, 1623, 1624, 1625, 1626, 1627, 1628, 1629, 1630, 1631, 1632, 1633, 1634, 1635, 1636, 1637, 1638, 1639, 1640, 1641, 1642, 1643, 1644, 1645, 1646, 1647, 1648, 1649, 1650, 1651, 1652, 1653, 1654, 1655, 1656, 1657, 1658, 1659, 1660, 1661, 1662, 1663, 1664, 1665, 1666, 1667, 1668, 1669, 1670, 1671, 1672, 1673, 1674, 1675, 1676, 1677, 1678, 1679, 1680, 1681, 1682, 1683, 1684, 1685, 1686, 1687, 1688, 1689, 1690, 1691, 1692, 1693, 1694, 1695, 1696, 1697, 1698, 1699, 1700, 1701, 1702, 1703, 1704, 1705, 1706, 1707, 1708, 1709, 1710, 1711, 1		

A

B

C

D

E

TX-1000/U/TX-2000

MECHANISM EXPLODED VIEW

1


2

3

4

5

6

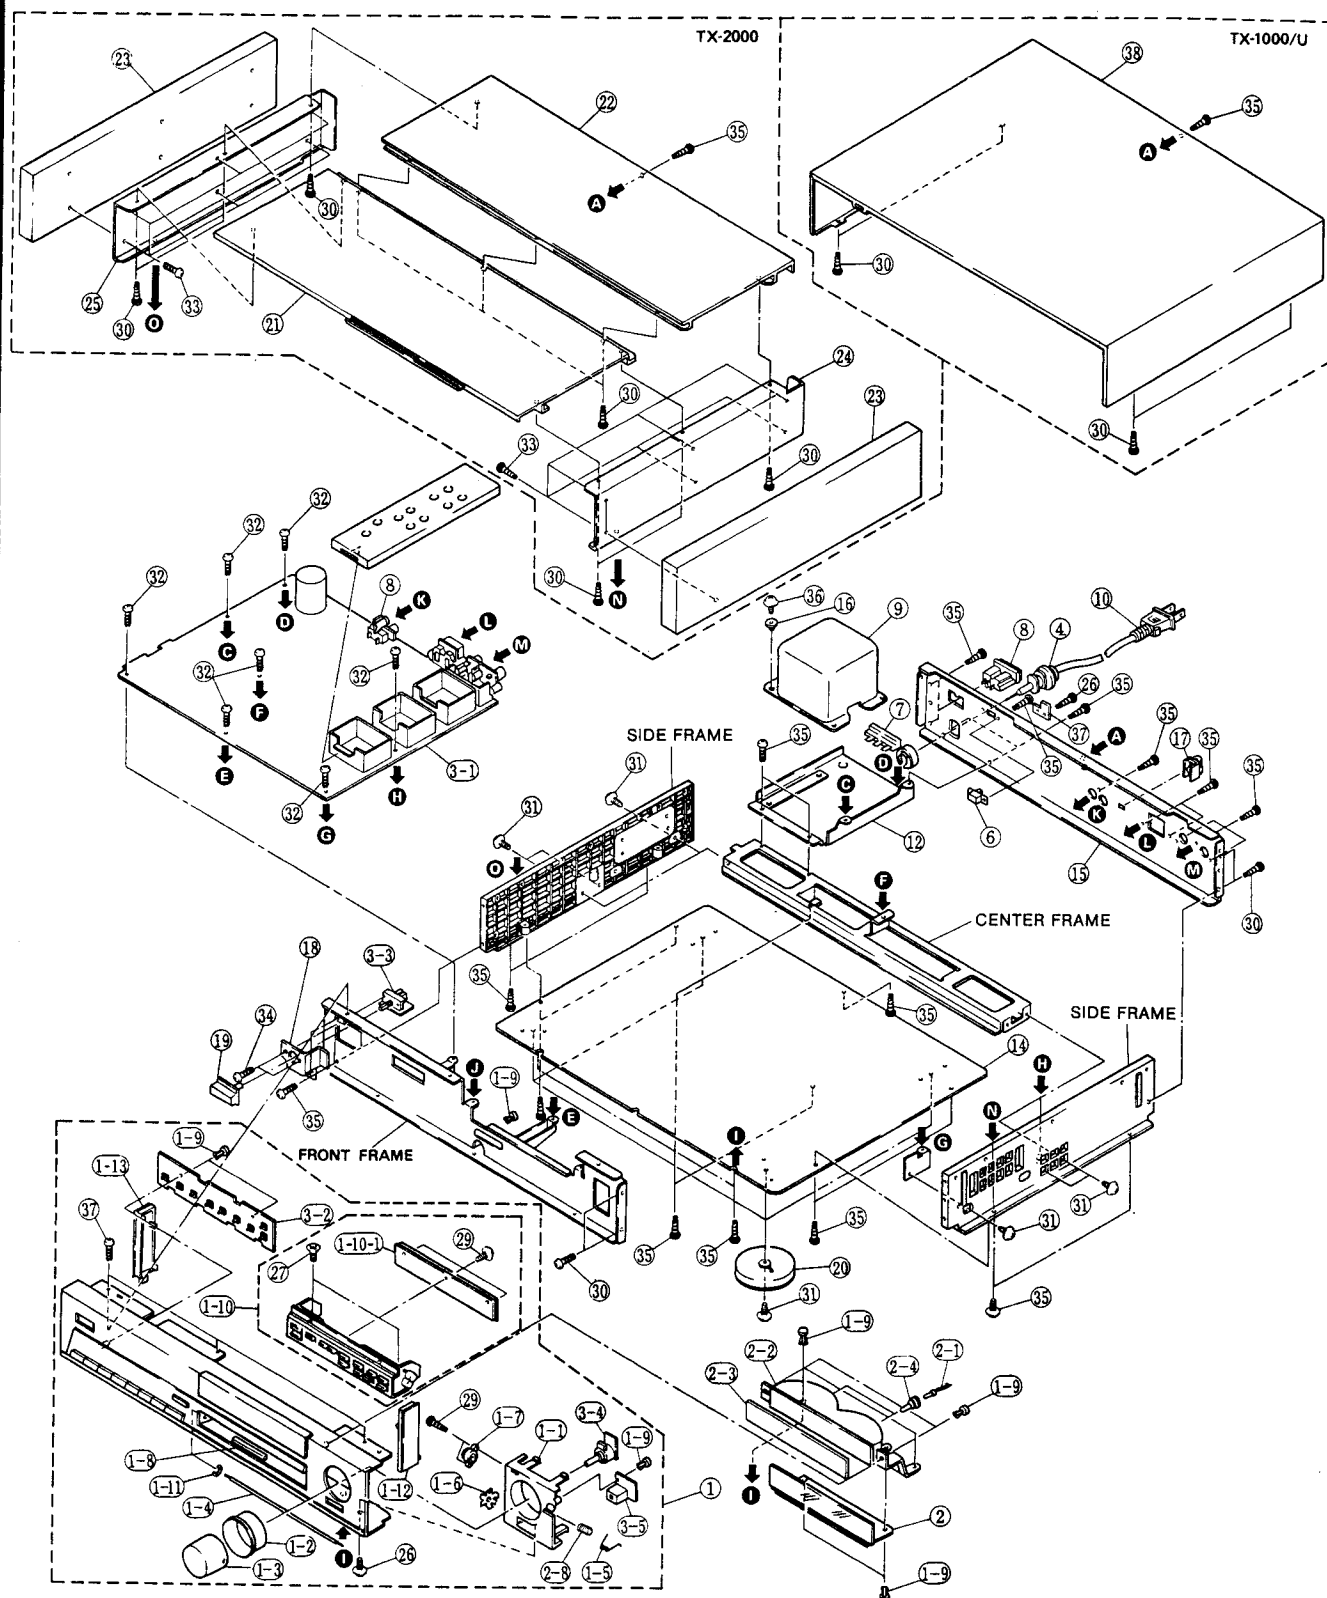

7 29

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel:- 01844-351694 Fax:- 01844-352554
 Email:- enquiries@mauritron.co.uk

Ref. No.	Part No.	Description	部 品 名	Remarks	Common Model	Markets	ランク
※ 1	VF 47 07 00	Panel Unit	パ ネ ル ユ ニ ッ ト	TX-1000U		U, C	
※	VF 47 08 00	〃	〃	TX-1000		R, A, B, G	
※	VF 46 86 00	〃	〃	TX-2000			
※ 1-1	VF 44 54 00	Plate Tuning	プ レ ー ト チ ュ ー ニ ン グ				
※ 1-2	VF 20 87 00	Escutcheon	TUNE エ ス カ ッ シ ョ ン	TX-1000/U			
※	VF 20 85 00	〃	〃	TX-2000			
※ 1-3	VF 20 89 00	Knob Tuning	ノ ブ チ ュ ー ニ ン グ	TX-1000/U			
※	VF 20 88 00	〃	〃	TX-2000			
※ 1-4	VF 21 09 00	Shaft	シ ャ フ ト				
※ 1-5	VF 20 75 00	Spring K	ス プ リ ン グ K				
※ 1-6	VF 20 67 00	Washer Friction	ワ ッ シ ャ ー フ リ ク シ ョ ン				
1-7	PB 06 49 40	Damper	IC72-E ダ ン パ ー				
※ 1-8	VF 20 96 00	Cushion	ク ッ シ ョ ン				
1-9	CB 60 56 20	Plastic Rivet	プ ラ ス テ ィ ッ ク リ ベ ッ ト				
※ 1-10	VG 46 41 00	Sub Panel B Ass'y	サ ブ パ ネ ル B Ass'y	TX-1000/U			
※	VG 46 40 00	〃	〃	TX-2000			
※ 1-10-1	VF 43 17 00	Function Sheet	フ ァ ン ク シ ョ ン シ ー ト				
1-11	EV 50 12 56	E Ring	2.5 FNM3-3G E リ ン グ	PACK			
※ 1-12	VF 20 70 00	Side Cover L	サイ ド カ バ ー L	TX-1000			
※ 1-13	VF 20 74 00	〃 R	〃 R	〃			
※ 2	NA 09 91 00	LCD Circuit Board	LCD 表 示 シ ー ト	TX-1000/U			
※	NA 09 90 90	〃	〃	TX-2000			
※ 2-1	VF 46 60 00	Lamp	8V 150mA ラ ン プ				
※ 2-2	VF 20 68 00	Reflector	リ フ レ ク タ				
※ 2-3	VF 21 10 00	Sheet Diffusion	シ ー ト デ ィ フ ュ ゥ ー ジ ョ ン				
※ 2-4	VF 44 45 00	Lamp Cap	ラ ン プ キ ャ ッ プ				
※ 3	NA 09 90 40	Tuner Circuit Board	チ ュ ー ナ ー シ ー ト			J	
※	NA 09 90 50	〃	〃			U, C	
※	NA 09 90 60	〃	〃			R	
※	NA 09 90 70	〃	〃	TX-1000/U		A, B	
※	NA 09 90 80	〃	〃			W/G	
4	CB 62 01 90	Cord Stopper	CM-22B コ ー ド ス ト ッ パ ー			R, A, B, W/G	
〃	CB 62 02 00	〃	CM-22C			U, C	
5	HG 30 92 20	Carbon Resistor	2.2MΩ 1/2W カ ー ボ ン 抵 抗			U, C	△
6	KA 40 16 80	Slide Switch	ス ラ イ ド ス イ ッ チ	Voltage Selector		R	
7	LA 00 10 00	Lag Terminal	ラ グ 端 子 板			U, C	
〃	VD 61 41 00	Terminal	2P 中 継 端 子 板			A, B, W/G	
8	LB 20 30 60	AC Outlet	AC ア ウ ト レ ッ ト	TX-2000		J	
※ 9	XE 24 70 01	Power Transformer	電 源 ト ラ ン ス			J	△
※	XE 24 80 01	〃	〃			U, C	△
※	XE 24 90 01	〃	〃			R	△
※	XE 67 90 01	〃	〃			W	△
〃	XE 67 90 01	〃	〃	TX-1000/U		A, B, G	
10	VC 61 44 00	Power Cord	12A 125V 電 源 コ ー ド	TX-2000	AX-900	J	
〃	MG 00 22 20	〃	10A 125V	〃		U, C	
〃	MG 00 16 30	〃	6A 250V	〃		R	
〃	MG 00 23 10	〃	7.5A 250V	〃	TX-1000/U	A	
〃	MG 00 23 30	〃	300/300V	〃	〃	B	
〃	MG 00 23 20	〃	2.5A 250V	〃		W/G	
※ 11	VF 44 56 00	Shield Case C	シ ー ル ド ケ ー ス C				
12	AA 62 17 80	Holder, Transformer	ト ラ ン ス ホ ル ダ ー	TX-1000/U	C-80		
※	VF 44 65 00	〃	〃	TX-2000			

※New Parts (新規部品)

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel: 01844-351694 Fax: 01844-352554
 E-mail: mauritron@mauritron.co.uk

Ref. No.	Part No.	Description	部 品 名	Remarks	Common Model	Markets	ランク
13	CA 07 59 40	Spacer, Transformer	トランススパーサー				
※ 14	VF 67 79 00	Bottom Cover	ボトムカバー	TX-1000/U	C-60		
※	VF 44 55 00	〃	〃	TX-2000			
※ 15	VF 20 92 00	Rear Panel	リアパネル	TX-1000/U		U, C	
※	VF 20 93 00	〃	〃	〃		R	
※	VF 20 94 00	〃	〃	〃		G	
※	VF 20 95 00	〃	〃	〃		A, B	
※	VF 20 91 00	〃	〃	TX-2000		J	
※	VF 44 57 00	〃	〃	〃		U, C	
※	VF 44 58 00	〃	〃	〃		R	
※	VF 44 59 00	〃	〃	〃		W	
16	CB 62 30 40	Bushing	絶縁ブッシュ		A-750		
17	CB 60 74 70	Holder, Antenna	アンテナホルダー			R, G	
※ 18	VF 34 04 00	Support P	サポート P				
※ 19	VE 70 75 00	Button	ボタン	POWER TX-1000/U			
※	VF 44 61 00	〃	〃	TX-2000			
20	NB 62 01 40	Leg Ass'y	レッグ Ass'y	TX-1000/U			
※	VE 13 39 00	〃	GY		DSP-3000		
※ 21	VF 44 48 00	Top Cover	トップカバー	TX-2000			
※ 22	VF 44 49 00	〃	〃	〃			
※ 23	VF 44 50 00	Side Cover	サイドカバー	〃			
※ 24	VF 44 52 00	Support Wood L	サポートウッド L	〃			
※ 25	VF 44 53 00	Support Wood R	サポートウッド R	〃			
26	EX 60 08 40	B.W.Head Tapping Screw	2 x 6 FCM3-BL BW ヘッドタッピングネジ				
27	EO 32 00 66	Flat Head Tapping Screw	2 x 6 FCRM3-3I 皿タッピングネジ	PACK TX-1000/U			
※	EO 12 00 66	〃	〃 FCRM3-3G	〃 TX-2000			
28	EK 03 60 60	B.W.Head Tapping Screw	2 x 4 ZMC2-Y BW ヘッドタッピングネジ				
29	Ei 32 00 66	Bind Head Tapping Screw	2 x 6 ZMC2-Y バインドタッピングネジ	PACK			
30	Ei 33 00 86	〃	3 x 8 FCM3-BL	〃			
31	EK 33 60 10	B.W.Head Tapping Screw	3 x 8 FCM3-BL BW ヘッドタッピングネジ				
32	EK 03 00 60	〃	3 x 8 YMC2-Y	〃			
33	EQ 03 11 06	Round Head Wood Screw	3.1 x 10 ZMC2-Y マルモクネジ	TX-2000			
34	ED 33 00 66	Bind Head Screw	3 x 6 FCM3-BL バインド小ネジ	PACK			
35	EZ 00 04 60	Bind Head Bonding Screw	3 x 8 FCM3-BL ボンディング B タイトネジ				
36	EX 60 08 50	Cup Screw	4 x 10 FCM3-BL カップ B タイトネジ				
37	CB 60 14 40	VS Stopper	VS ストッパー			R	
38	VF 20 65 00	Top Cover	トップカバー	TX-1000/U			
	CB 06 92 50	Binding Tie	BK-1 バインドタイ				
		Accessories	付 属 品				
※	VF 43 20 00	Remote Control Transmitter	RS-TX2000 リモコンユニット	TX-2000			
※	VF 43 18 00	〃	RS-TX1000	TX-1000/U			
	VE 36 62 00	Loop Antenna	AM ループアンテナ	TX-2000			
	VE 36 62 00	〃	〃	TX-1000		U, C, A, B	
	VD 63 29 00	〃	〃	〃		R	
	Mi 08 28 40	FM Q match Antenna	FM Q マッチアンテナ			J	
	VG 08 73 00	〃	〃			U, C, R, A, B, W, G	
※	VF 66 47 00	Pin-Plug Cord	ピンプラグコード	TX-2000			
	Mi 08 87 90	〃	〃	TX-1000/U			
※	VE 19 22 00	Antenna Plug	75 $\leftrightarrow$ 300 NTSC プラグアンテナ			J, U, C, R	
	VE 36 49 00	〃	75 $\leftrightarrow$ 300 PAL	〃		W/G	
		Dry Cell	AA, R6	単 3 乾 電 池			


※New Parts (新規部品)

For Service Manuals Contact
MAURITRON TECHNICAL SERVICES
 8 Cherry Tree Rd, Chinnor
 Oxon OX9 4QY
 Tel:- 01844-351694 Fax:- 01844-352554
 Email:- enquiries@mauritron.co.uk

Part List for Carbon Resistor

Value	1/4W Type Part No.	1/6W Type Part No.	Value	1/4W Type Part No.	1/6W Type Part No.
1.0Ω	HJ35 3100	※	12KΩ	HJ35 7120	HF85 7120
1.8 "	HJ35 3180	※	15 "	HJ35 7150	HF85 7150
2.2 "	HJ35 3220	HF85 3220	18 "	HJ35 7180	HF85 7180
3.3 "	HJ35 3330	HF85 3330	22 "	HJ35 7220	HF85 7220
4.7 "	HJ35 3470	HF85 3470	27 "	HJ35 7270	HF85 7270
5.6 "	HJ35 3560	HF85 3560	33 "	HJ35 7330	HF85 7330
10 "	HJ35 4100	HF85 4100	39 "	HJ35 7390	HF85 7390
15 "	HJ35 4150	HF85 4150	47 "	HJ35 7470	HF85 7470
22 "	HJ35 4220	HF85 4220	56 "	HJ35 7560	HF85 7560
27 "	HJ35 4270	HF85 4270	68 "	HJ35 7680	HF85 7680
33 "	HJ35 4330	HF85 4330	82 "	HJ35 7820	HF85 7820
39 "	HJ35 4390	HF85 4390	91 "	HJ35 7910	HF85 7910
47 "	HJ35 4470	HF85 4470	100 "	HJ35 8100	HF85 8100
56 "	HJ35 4560	HF85 4560	120 "	HJ35 8120	HF85 8120
68 "	HJ35 4680	HF85 4680	150 "	HJ35 8150	HF85 8150
82 "	HJ35 4820	HF85 4820	180 "	HJ35 8180	HF85 8180
100 "	HJ35 5100	HF85 5100	220 "	HJ35 8220	HF85 8220
110 "	HJ35 5110	HF85 5100	270 "	HJ35 8270	HF85 8270
120 "	HJ35 5120	HF85 5120	330 "	HJ35 8330	HF85 8330
150 "	HJ35 5150	HF85 5150	390 "	HJ35 8390	HF85 8390
160 "	HJ35 5160	※	470 "	HJ35 8470	HF85 8470
180 "	HJ35 5180	HF85 5180	560 "	HJ35 8560	HF85 8560
220 "	HJ35 5220	HF85 5220	680 "	HJ35 8680	HF85 8680
270 "	HJ35 5270	HF85 5270	820 "	HJ35 8820	HF85 8820
330 "	HJ35 5330	HF85 5330	1.0MΩ	HJ35 9100	HF85 9100
390 "	HJ35 5390	HF85 5390	1.2 "	HJ35 9120	※
470 "	HJ35 5470	HF85 5470	1.5 "	HJ35 9150	HF85 9150
510 "	※	HF85 5510	1.8 "	HJ35 9180	HF85 9180
560 "	HJ35 5560	HF85 5560	2.2 "	HJ35 9220	HF85 9220
680 "	HJ35 5680	HF85 5680	3.3 "	HJ35 9330	HF85 9330
820 "	HJ35 5820	HF85 5820	3.9 "	HJ35 9390	※
910 "	HJ35 5910	HF85 5910	4.7 "	HJ35 9470	※
1.0KΩ	HJ35 6100	HF85 6100			
1.2 "	HJ35 6120	HF85 6120			
1.5 "	HJ35 6150	HF85 6150			
1.8 "	HJ35 6180	HF85 6180			
2.0 "	HJ35 6200	HF85 6200			
2.2 "	HJ35 6220	HF85 6220			
2.4 "	HJ35 6240	HF85 6240			
2.7 "	HJ35 6270	HF85 6270			
3.0 "	HJ35 6300	HF85 6300			
3.3 "	HJ35 6330	HF85 6330			
3.6 "	HJ35 6360	HF85 6360			
3.9 "	HJ35 6390	HF85 6390			
4.7 "	HJ35 6470	HF85 6470			
5.1 "	HJ35 6510	HF85 6510			
5.6 "	HJ35 6560	HF85 6560			
6.8 "	HJ35 6680	HF85 6680			
8.2 "	HJ35 6820	HF85 6820			
9.1 "	HJ35 6910	HF85 6910			
10 "	HJ35 7100	HF85 7100			

1/4W Type



1/6W Type

