

aiwa



CA-D240

COMPACT DISC
CARRY COMPONENT SYSTEM

- BASIC TAPE MECHANISM: TN-21ZSC-1675
- BASIC CD MECHANISM: KSM-213 CDM

- TYPE: HE

SIMPLE MANUAL

- Replace this Service Manual with "Revision Publishing" when it is issued.

S/M Code No. 09-98A-305-20A

MANUAL
SERVICE

ELECTRICAL MAIN PARTS LIST - 1/4

NOTE: The characters in the suffix column indicate the part usage.

HEJSTNC	REF.NO	PARTS NO.	XX KANRI NO.	DESCRIPTION	B SUFFIX
C	501	87-010-248-080	0E	CAP, ELECT 220-10V	AB
C	502	87-010-382-080	0E	CAP, ELECT 22-25V	AB
C	526	87-010-401-080	0E	CAP, ELECT 1-50V	AB
C	521	87-010-401-080	0E	CAP, ELECT 1-50V	AB
C	525	87-010-401-080	0E	CAP, ELECT 1-50V	AB
C	524	87-010-401-080	0E	CAP, ELECT 1-50V	AB
C	523	87-010-401-080	0E	CAP, ELECT 1-50V	AB
C	522	87-010-401-080	0E	CAP, ELECT 1-50V	AB
C	531	87-018-124-080	0E	CAP, CER 270P-50V	AB
C	532	87-018-124-080	0E	CAP, CER 270P-50V	AB
IC	501	87-017-889-010	1A	IC, NJM4558LD	AB
SW	501	88-CT6-618-010		SLIDE SW 4P3T	AB
C	212	87-010-406-080	0E	CAP, ELECT 22-50	AB
C	211	87-010-406-080	0E	CAP, ELECT 22-50	AB
C	221	87-010-263-080	0E	CAP, ELECT 100-10V	AB
C	220	87-010-405-080	0E	CAP, ELECT 10-50V	AB
C	223	87-010-408-080	0E	CAP, ELECT 47-50V	AB
C	222	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	AB
Q	207	89-318-154-080	0E	TR, 2SC1815 (0.4W)	AB
C	504	87-010-405-080	0E	CAP, ELECT 10-50V	AB
C	503	87-010-405-080	0E	CAP, ELECT 10-50V	AB
Q	544	89-318-155-080	0E	TR, 2SC1815 (0.4W)	AB
Q	542	89-318-155-080	0E	TR, 2SC1815 (0.4W)	AB
Q	543	89-318-155-080	0E	TR, 2SC1815 (0.4W)	AB
Q	541	89-318-155-080	0E	TR, 2SC1815 (0.4W)	AB
VR	601	87-A90-720-010		ROTARY VOLUME 50KA 2	AB
C	602	87-010-101-080	0E	CAP, ELECT 220-16	AB
C	603	87-010-235-080	0E	CAP, E 470-16 SME	
C	604	87-010-260-080	0E	CAP, ELECT 47-25V	AB
C	603	87-010-385-080	0E	CAP, ELECT 220-25V	AB
C	601	87-010-401-080	0E	CAP, ELECT 1-50V	
C	605	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB
C	601	87-010-405-080	0E	CAP, ELECT 10-50V	AB
C	613	87-010-401-080	0E	CAP, ELECT 1-50V	
C	614	87-010-401-080	0E	CAP, ELECT 1-50V	
C	634	87-010-221-080	0E	CAP, ELECT 470-10V	
C	633	87-010-221-080	0E	CAP, ELECT 470-10V	
C	634	87-010-236-080	1A	CAP, E 1000-10 SME	AB
C	633	87-010-236-080	1A	CAP, E 1000-10 SME	AB
C	635	87-010-263-080	0E	CAP, ELECT 100-10V	AB
C	636	87-010-263-080	0E	CAP, ELECT 100-10V	AB
C	632	87-010-374-080	0E	CAP, ELECT 47-10V	
C	631	87-010-374-080	0E	CAP, ELECT 47-10V	
C	631	87-010-382-080	0E	CAP, ELECT 22-25V	AB
C	632	87-010-382-080	0E	CAP, ELECT 22-25V	AB
C	662	87-018-125-080	0E	CAP, CER 330P-50V	AB
C	661	87-018-125-080	0E	CAP, CER 330P-50V	AB
CN	601	88-CT6-621-010		SP TERMINAL 4P LEVER	AB
D	805	87-070-345-080	0E	DIODE, IN4148	AB
D	806	87-070-345-080	0E	DIODE, IN4148	AB
IC	601	87-001-485-010	1C	IC, TA8207K	AB
IC	601	87-CD7-602-010	1B	IC, TA8227P	AB
ICP	721	87-001-132-010	0E	FUSE, ICP-N38	AB
J	601	87-009-216-010	1A	JACK, DIA 3.5	AB
L	601	87-005-847-080	0E	COIL, 2.2UH(CECS)	AB
L	602	87-005-847-080	0E	COIL, 2.2UH(CECS)	AB
Q	614	87-026-462-080	0E	TR, 2SC1740 S(RS 0.3W)	AB
Q	613	87-026-462-080	0E	TR, 2SC1740 S(RS 0.3W)	AB
Q	612	89-414-683-080	0E	TR, 2SD1468S 150MHZ 0.4	AB
Q	611	89-414-683-080	0E	TR, 2SD1468S 150MHZ 0.4	AB
		87-A90-160-080	0E	FUSE CLAMP, FC 51F	AB
		88-CT6-624-010		SPR, BATT	AB
C	651	87-010-405-080	0E	CAP, ELECT 10-50V	AB
C	724	87-010-263-080	0E	CAP, ELECT 100-10V	AB
C	722	87-010-374-080	0E	CAP, ELECT 47-10V	AB
C	721	87-010-453-090	1C	CAP, ELECT 4700-25V SME	AB
C	743	87-010-221-080	0E	CAP, ELECT 470-10V	AB
C	741	87-010-263-080	0E	CAP, ELECT 100-10V	AB
D	651	87-070-345-080	0E	DIODE, IN4148	AB
D	652	87-070-345-080	0E	DIODE, IN4148	AB
D	704	87-A40-465-010	0E	DIODE, FR202	AB
D	702	87-A40-465-010	0E	DIODE, FR202	AB
D	703	87-A40-465-010	0E	DIODE, FR202	AB
D	701	87-A40-465-010	0E	DIODE, FR202	AB
D	721	87-027-513-080	0E	ZENER, HZ6B2L (200MA)	AB
D	741	87-027-825-080	0E	ZENER, HZ9A3L	AB
D	743	87-070-345-080	0E	DIODE, IN4148	AB
D	742	87-070-345-080	0E	DIODE, IN4148	AB
PN	701	87-A60-109-010	0E	CONN, 2P V S2M-2W	AB
Q	652	87-026-462-080	0E	TR, 2SC1740 S(RS 0.3W)	AB
Q	651	87-026-463-080	0E	TR, 2SA933S (0.3W)	AB
Q	721	89-318-155-080	0E	TR, 2SC1815 (0.4W)	AB
Q	742	89-318-155-080	0E	TR, 2SC1815 (0.4W)	AB
		88-CT6-619-010		BACK SLIDE SW 6P2T SHORTIN	AB
		88-CT6-632-010		TERMINAL ASSY MECHA 1P	AB
C	307	87-010-374-080	0E	CAP, ELECT 47-10V	AB

*

ELECTRICAL MAIN PARTS LIST - 2/4

C	308	87-010-374-080	0E	CAP, ELECT 47-10V	AB.....
C	306	87-010-401-080	0E	CAP, ELECT 1-50V	AB.....
C	305	87-010-401-080	0E	CAP, ELECT 1-50V	AB.....
C	314	87-010-248-080	0E	CAP, ELECT 220-10V	AB.....
C	318	87-010-374-080	0E	CAP, ELECT 47-10V	AB.....
C	313	87-010-380-080	0E	CAP, ELECT 47-16V	AB.....
C	311	87-010-405-080	0E	CAP, ELECT 10-50V	AB.....
C	319	87-018-150-080	0E	CAP, TC-U 18P-50 CH	AB.....
C	324	87-018-205-080	0E	CAP, CERA-SOL 0.022	AB.....
C	331	87-010-400-080	0E	CAP, ELECT 0.47-50V	AB.....
C	333	87-010-405-080	0E	CAP, ELECT 10-50V	AB.....
C	332	87-010-405-080	0E	CAP, ELECT 10-50V	AB.....
CN	30	87-A60-110-010	0E	CONN, 4P V S2M-4W	AB.....
CN	751	87-009-346-010	0E	CONN, 3P PH H	AB.....
D	301	87-070-345-080	0E	DIODE, IN4148	AB.....
IC	201	87-A20-569-010	1C	IC, BA3308	AB.....
L	301	88-CT6-620-010		REC OSC	AB.....
Q	301	87-026-291-080	1A	TR, DTC124XS	AB.....
Q	302	87-026-462-080	0E	TR, 2SC1740 S(RS 0.3W)	AB.....
Q	304	89-318-154-080	0E	TR, 2SC1815 (0.4W)	AB.....
Q	305	89-318-154-080	0E	TR, 2SC1815 (0.4W)	AB.....
Q	303	89-320-011-080	0E	TR, 2SC2001 (15W)	AB.....
R	761	87-029-019-010	0E	RES, FUSEIBLE 1/2W-2.2	AB.....
C	808	87-010-248-080	0E	CAP, ELECT 220-10V	A.....
C	809	87-010-405-080	0E	CAP, ELECT 10-50V	A.....
C	803	87-018-113-080	0E	CAP, CER 33P-50V	A.....
C	807	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	A.....
C	804	87-018-141-080	0E	CAP, CERA-SOL SS 3.3P CH	A.....
C	805	87-018-151-080	0E	CAP, CERA-SOL SS 20P CH	A.....
C	816	87-010-405-080	0E	CAP, ELECT 10-50V	A.....
C	814	87-018-109-080	0E	CAP, CER 22P-50V	A.....
C	815	87-018-109-080	0E	CAP, CER 22P-50V	A.....
C	813	87-018-132-080	0E	CAP, CER 2200P-16V	A.....
C	810	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	A.....
C	812	87-018-209-080	0E	CAP, CER 0.1-50V	A.....
C	811	87-018-209-080	0E	CAP, CER 0.1-50V	A.....
C	843	87-018-115-080	0E	CAP, CER 47P-50V	A.....
C	844	87-018-115-080	0E	CAP, CER 47P-50V	A.....
C	841	87-018-115-080	0E	CAP, CER 47P-50V	A.....
C	840	87-018-115-080	0E	CAP, CER 47P-50V	A.....
C	842	87-018-115-080	0E	CAP, CER 47P-50V	A.....
C	846	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	A.....
D	801	87-070-345-080	0E	DIODE, IN4148	A.....
D	802	87-070-345-080	0E	DIODE, IN4148	A.....
D	803	87-070-345-080	0E	DIODE, IN4148	A.....
L	801	87-003-148-080	0E	COIL BIAS 33UH	A.....
L	802	87-003-149-080	0E	COIL, 47UH	A.....
Q	802	87-026-291-080	1A	TR, DTC124XS	A.....
Q	807	87-026-291-080	1A	TR, DTC124XS	A.....
Q	808	87-026-463-080	0E	TR, 2SA933S (0.3W)	A.....
X	801	87-030-252-010	1A	VIB, X TAL 32.768K 5PPM	A.....
C	802	87-010-248-080	0E	CAP, ELECT 220-10V	A.....
CN	801	87-A60-109-010	0E	CONN, 2P V S2M-2W	A.....
D	804	87-001-519-010	0E	LIGHT EMITTING DIODE, SLR-37	A.....
D	802	87-001-519-010	0E	LIGHT EMITTING DIODE, SLR-37	A.....
D	807	87-001-519-010	0E	LIGHT EMITTING DIODE, SLR-37	A.....
D	801	87-001-519-010	0E	LIGHT EMITTING DIODE, SLR-37	A.....
D	803	87-001-519-010	0E	LIGHT EMITTING DIODE, SLR-37	A.....
D	805	87-001-519-010	0E	LIGHT EMITTING DIODE, SLR-37	A.....
D	804	87-027-607-080	0E	ZENER, HZ7B3L	A.....
LCD	801	87-CT7-601-010		LCD, 7CT-7	A.....
Q	805	87-026-290-080	0E	TR, DTA124X	A.....
Q	803	87-026-290-080	0E	TR, DTA124X	A.....
Q	804	87-026-290-080	0E	TR, DTA124X	A.....
Q	809	87-026-291-080	1A	TR, DTC124XS	A.....
Q	801	89-318-154-080	0E	TR, 2SC1815 (0.4W)	A.....
Q	810	87-026-291-080	1A	TR, DTC124XS	A.....
S	807	87-A90-095-080	0E	SW, TACT EVQ11G04M	A.....
S	808	87-A90-095-080	0E	SW, TACT EVQ11G04M	A.....
S	803	87-A90-095-080	0E	SW, TACT EVQ11G04M	A.....
S	809	87-A90-095-080	0E	SW, TACT EVQ11G04M	A.....
S	805	87-A90-095-080	0E	SW, TACT EVQ11G04M	A.....
S	802	87-A90-095-080	0E	SW, TACT EVQ11G04M	A.....
S	804	87-A90-095-080	0E	SW, TACT EVQ11G04M	A.....
S	806	87-A90-095-080	0E	SW, TACT EVQ11G04M	A.....
S	810	87-A90-095-080	0E	SW, TACT EVQ11G04M	A.....
S	811	87-A90-095-080	0E	SW, TACT EVQ11G04M	A.....
		88-CT6-625-010		JACK, MIC	AB.....
C	239	87-010-401-080	0E	CAP, ELECT 1-50V	AB.....
C	238	87-010-401-080	0E	CAP, ELECT 1-50V	AB.....
C	234	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB.....
C	235	87-010-544-080	0E	CAP, ELECT 0.1-50V	AB.....
C	240	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
C	241	87-010-401-080	0E	CAP, ELECT 1-50V	AB.....
D	221	87-070-345-080	0E	DIODE, IN4148	AB.....
D	222	87-070-345-080	0E	DIODE, IN4148	AB.....
Q	420	87-026-610-080	0E	TR, KTC3198GR	AB.....
Q	422	87-026-610-080	0E	TR, KTC3198GR	AB.....
Q	421	89-322-405-080	0E	TR, 2SC2240GR	A.....
VR	0	87-A90-768-010		VR, RTRY 10KAX1 1 H	AB.....
		81-NWB-655-010	1A	COIL, 10UH TROIDAL	AB.....
C	4	87-010-248-080	0E	CAP, ELECT 220-10V	AB.....

ELECTRICAL MAIN PARTS LIST - 3/4

C	9	87-010-248-080	0E	CAP, ELECT 220-10V	AB.....
C	3	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
C	6	87-010-374-080	0E	CAP, ELECT 47-10V	AB.....
C	1	87-010-403-080	0E	CAP, ELECT 3.3-50V	AB.....
C	5	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	AB.....
C	2	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	AB.....
C	10	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
C	12	87-010-401-080	0E	CAP, ELECT 1-50V	AB.....
C	14	87-010-405-080	0E	CAP, ELECT 10-50V	AB.....
C	16	87-010-545-080	0E	CAP, ELECT 0.22-50V	AB.....
C	17	87-018-125-080	0E	CAP, CER 330P-50V	AB.....
C	13	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	AB.....
C	25	87-018-129-080	0E	CAP, CER 680P-50V	AB.....
C	36	87-010-374-080	0E	CAP, ELECT 47-10V	AB.....
C	32	87-010-374-080	0E	CAP, ELECT 47-10V	AB.....
C	33	87-010-401-080	0E	CAP, ELECT 1-50V	AB.....
C	30	87-018-123-080	0E	CAP, CER 220P-50V	AB.....
C	35	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	AB.....
C	38	87-018-209-080	0E	CAP, CER 0.1-50V	AB.....
C	48	87-018-111-080	0E	CAP, CERA-SOL SS 27P	AB.....
C	40	87-018-141-080	0E	CAP, CERA-SOL SS 3.3P CH	AB.....
C	42	87-018-150-080	0E	CAP, TC-U 18P-50 CH	AB.....
C	49	87-018-209-080	0E	CAP, CER 0.1-50V	AB.....
C	45	87-018-209-080	0E	CAP, CER 0.1-50V	AB.....
C	47	87-018-209-080	0E	CAP, CER 0.1-50V	AB.....
C	46	87-018-209-080	0E	CAP, CER 0.1-50V	AB.....
C	59	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
C	57	87-018-113-080	0E	CAP, CER 33P-50V	AB.....
C	58	87-018-113-080	0E	CAP, CER 33P-50V	AB.....
C	50	87-018-127-080	0E	CAP, CER 470P-50V	AB.....
C	62	87-010-370-080	0E	CAP, E 330-6.3 SME	AB.....
C	63	87-010-405-080	0E	CAP, ELECT 10-50V	AB.....
C	64	87-010-405-080	0E	CAP, ELECT 10-50V	AB.....
C	69	87-018-121-080	0E	CAP, CER 150P-50V	AB.....
C	65	87-018-125-080	0E	CAP, CER 330P-50V	AB.....
C	66	87-018-125-080	0E	CAP, CER 330P-50V	AB.....
C	60	87-018-209-080	0E	CAP, CER 0.1-50V	AB.....
C	61	87-018-209-080	0E	CAP, CER 0.1-50V	AB.....
C	76	87-010-221-080	0E	CAP, ELECT 470-10V	AB.....
C	78	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
C	75	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	AB.....
C	77	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	AB.....
C	79	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	AB.....
C	80	87-010-221-080	0E	CAP, ELECT 470-10V	AB.....
C	87	87-010-221-080	0E	CAP, ELECT 470-10V	AB.....
C	81	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB.....
C	85	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	AB.....
C	90	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
C	94	87-018-119-080	0E	CAP, CER 100P-50V	AB.....
C	91	87-018-119-080	0E	CAP, CER 100P-50V	AB.....
C	93	87-018-119-080	0E	CAP, CER 100P-50V	AB.....
C	92	87-018-119-080	0E	CAP, CER 100P-50V	AB.....
C	95	87-018-119-080	0E	CAP, CER 100P-50V	AB.....
C	96	87-018-209-080	0E	CAP, CER 0.1-50V	AB.....
C	437	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB.....
C	1001	87-010-401-080	0E	CAP, ELECT 1-50V	AB.....
CN	2	87-A60-061-010	0E	CONN, 06P V 9604S-06C	AB.....
CN	1	87-A60-424-010	0E	CONN, 16P V TOC-B	AB.....
D	1	87-020-465-080	0E	DIODE, 1SS133 (110MA)	AB.....
D	3	87-070-345-080	0E	DIODE, IN4148	AB.....
D	4	87-070-345-080	0E	DIODE, IN4148	AB.....
L	1	87-003-102-080	0E	COIL, 10UH	AB.....
Q	3	87-026-291-080	1A	TR, DTC124XS	AB.....
Q	1	87-026-463-080	0E	TR, 2SA933S (0.3W)	AB.....
Q	5	87-026-464-080	0E	TR, DTC114TS (0.3W)	AB.....
Q	4	87-026-464-080	0E	TR, DTC114TS (0.3W)	AB.....
Q	6	87-026-486-080	0E	TR, DTA144TS	AB.....
Q	2	89-112-965-080	0E	TR, 2SA1296 (0.75W)	AB.....
Q	71	89-113-187-080	0E	TR, 2SA1318TU	AB.....
SFR	1	87-024-176-010	0E	SFR, 100K DIA6 V	.B.....
X	1	81-592-641-080	1A	CERALOCK 16.93MHZ	AB.....
		88-CT6-612-010		TERMINAL, 1P TU	A.....
		88-CT7-602-010		SLIDE SW, 2P2T	
		88-CT7-603-010		SLIDE SW, 2P2T	A.....
		88-CT7-638-010		SW, SL 2-4-3 BAND	A.....
	0201	87-018-151-080	0E	CAP, CERA-SOL SS 20P CH	A.....
C	0	87-018-134-080	0E	CAPACITOR, TC-U 0.01-16	
C	203	87-018-111-080	0E	CAP, CERA-SOL SS 27P	A.....
C	209	87-018-112-080	0E	CAP, TC-U 30P-50 SL	A.....
C	202	87-018-113-080	0E	CAP, CER 33P-50V	A.....
C	202	87-018-114-080	0E	CAP, CERA-SOL SS 39P	
C	208	87-018-119-080	0E	CAP, CER 100P-50V	A.....
C	215	87-014-036-010	0E	CAP, PP 130P-100 J	A.....
C	213	87-018-110-080	0E	CAP, CERA-SOL SS 24P	A.....
C	212	87-018-113-080	0E	CAP, CER 33P-50V	A.....
C	211	87-018-144-080	0E	CAP, TC-U 5.6P-50 CH	A.....
C	212	87-018-150-080	0E	CAP, TC-U 18P-50 CH	
C	222	87-010-263-080	0E	CAP, ELECT 100-10V	A.....
C	223	87-010-382-080	0E	CAP, ELECT 22-25V	A.....
C	229	87-010-403-080	0E	CAP, ELECT 3.3-50V	A.....
C	228	87-010-403-080	0E	CAP, ELECT 3.3-50V	A.....
C	220	87-010-404-080	0E	CAP, ELECT 4.7-50V	A.....

ELECTRICAL MAIN PARTS LIST - 4/4

C	227	87-018-126-080	0E	CAP, TC-U 390P-50 B	A.....
C	231	87-010-401-080	0E	CAP, ELECT 1-50V	A.....
C	234	87-010-401-080	0E	CAP, ELECT 1-50V	A.....
C	235	87-010-401-080	0E	CAP, ELECT 1-50V	A.....
C	230	87-014-061-010	0E	CAP, PP 1500P-100 J	A.....
C	243	87-014-043-010	0E	CAP, PP 270P-100 J	A.....
C	242	87-018-149-080	0E	CAP, TC-U 15P-50 CH	A.....
CF	201	87-008-261-010	1A	FILTER, SFE10.7MA5-A	A.....
CF	202	88-CT7-611-010		FLTR, AM SFU4558	A.....
D	202	87-070-345-080	0E	DIODE, IN4148	AB.....
D	201	87-070-345-080	0E	DIODE, IN4148	AB.....
D	204	87-070-345-080	0E	DIODE, IN4148	AB.....
D	801	87-001-519-010	0E	LIGHT EMITTING DIODE, SLR-37	AB.....
IC	1	87-A20-001-010	2M	IC, LA1186N	AB.....
IC	2	87-A20-879-010		IC, LA1805	AB.....
IC	2	88-CT7-626-010		IC, LA1806	
IFT	204	88-CT7-607-010		IFT, FM ORG	A.....
IFT	205	88-CT7-608-010		IFT, FM GRN	A.....
IFT	208	88-CT7-610-010		IFT, AM WHT	A.....
L	0	88-CT7-627-010		COIL, 4.5MM*3T	
L	0	88-CT7-639-010		BAR-ANT, MW-LW	A.....
L	206	88-CT7-604-010		AMBARANT(10 80)	
L	202	88-CT7-605-010		SPRING COIL, 4T 4.5 ANT	A.....
L	201	88-CT7-605-010		SPRING COIL, 4T 4.5 ANT	A.....
L	203	88-CT7-606-010		SPRING COIL, 5T 4.5 ANT	A.....
L	207	88-CT7-609-010		AM OSC	A.....
SFR	201	87-024-433-080	0E	SFR, 10K RH063EC	A.....
VC	1	87-A90-428-010		P.V.C, 20P-126P 21 C	A.....
VC	2	87-A90-428-010		P.V.C, 20P-126P 21 C	A.....
VC	3	87-A90-428-010		P.V.C, 20P-126P 21 C	A.....
VC	4	87-A90-428-010		P.V.C, 20P-126P 21 C	A.....

MECHANICAL PARTS LIST - 1/2

NOTE: The characters in the suffix column indicate the part usage.

HEJSTNC	XX	B		
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	86-CT9-039-010		BADGE, AIWA 30N	AB
	88-CT6-002-010		BOX, CD	AB
	88-CT6-019-010		LENS, Q	AB
	88-CT6-020-010		LENS, GEQ	AB
	88-CT6-021-010		LENS, ST	AB
	88-CT6-022-010		COVER, HNDL	AB
	88-CT6-023-010		REAR CABINET RF(6)	AB
	88-CT6-024-010		HANDL, (6)	AB
	88-CT6-026-010		CHAS, CD CDM	AB
	88-CT6-041-010		LID, BATTERY(6)	AB
	88-CT6-043-010		CABI, FR D	
	88-CT7-006-010		POINTER, TU	AB
	88-CT9-001-010		CAB FRONT U	AB
	88-CT9-003-010		BOX CASS	AB
	88-CT9-014-010		CABI, FR D	
	88-CT6-011-010		BTN, CD	
	88-CT6-012-010		BTN, GEQ	AB
	88-CT6-014-010		BTN, Q	AB
	88-CT6-015-010		BTN, BAND	
	88-CT6-016-010		KNOB, RTRY VOL	AB
	88-CT6-017-010		KNOB, RTRY MIC	AB
	88-CT6-018-010		KNOB, SL FUNC	AB
	88-CT7-003-010		KNOB, RTRY TU	AB
	88-CT7-004-010		KNOB, SL BAND	AB
	88-CT9-004-010		CASS KEY	AB
	88-CT9-017-010		BTN REPEAT ABS	AB
	86-CT9-026-010		PLATE, AC	
	88-CT6-005-010		WINDOW, CD	AB
	88-CT6-031-010		PLATE, BATT	AB
	88-CT6-046-010		PANEL, CD	AB
	88-CT7-005-010		WINDOW, DISPLAY U	
	88-CT7-007-010		WINDOW, DISPLAY	
	88-CT7-008-010		WINDOW, DISPLAY EZ	A
	88-CT7-009-010		WINDOW, DISPLAY HR	B
	88-CT9-002-010		CASS WINDOW	AB
	86-CD4-225-010		CHUCK(A)	AB
	86-CT9-205-110		HLDR, REC	AB
	86-CT9-206-010		HLDR, TRANS	
	86-CT9-207-010		HLDR, ANT	AB
	86-CT9-208-010		HLDR, KEY CASS	AB
	86-CT9-210-010		SPR-T, CASS	AB
	86-CT9-211-010		SPR-T, CD	AB
	86-CT9-212-010		SPR-C, BATT LINK	AB
	86-CT9-213-010		SPR-C, BATT(-)	AB
	86-CT9-218-010		HLDR, CHUCK B	AB
	86-CT9-219-110		OIL-DMPR, GEAR	AB
	86-CT9-220-110		OIL-DMPR, BRACKET	AB
	86-CT9-222-010		PLATE, MAGNET	AB
	86-CT9-223-010		CUSH, FOOT	AB
	87-036-368-010	0E	MAGNET	AB
	87-CT7-201-110		HLDR, GEQ	AB
	87-CT7-205-110		LEVER, SW1	AB
	88-CT7-201-010		LEVER, SW 2	AB
	88-CT9-201-010		SPR-P RECORD	AB
	81-CD5-204-010	0E	SCREW CD	AB
	87-067-520-010	0E	TAPPING SCREW, VFTT+2-6	AB
	87-493-100-410	0E	VWWS+3-16 BLK	AB
	87-571-033-410	0E	TAPPING SCREW, VIT+2-4	AB
	87-651-073-410	0E	VT1+2.6-6	AB
	87-651-075-210	0E	VT1+2.6-10	AB
	87-651-104-410	0E	VT1+3-30	AB
	87-751-097-410	0E	SCREW 3X12	AB
	87-A90-086-010	0E	COVER, AC-SOCKET	AB
	88-CT6-606-010		FFC WIRE 16P(1.0)	AB
ANT	0		ANT, ROD	AB
CN	0		CONN ASSY, 5P RPH	AB
CN	0		CONN ASSY, 8P MO	AB
F	0	1A	FUSE, 2.5AT	AB
F	0	1A	FUSE, 2A UL	
F	0	0E	FUSE, 2.5A 125V D UL	
J	0	1A	JACK, AC U W/SW	
J	0		JACK, AC E W/SW	AB
J	0		JACK, AC D W/SW	
PT	0		PT, D	
PT	0		PT, EZ/K	A
PT	0		POWER TRANS, EI-57/25	B
PT	0		PT, U	
		0E	VT1+3-16	AB
			SPEAKER, 5'40HM 5W	AB
			SPEAKER, 5'80HM 5W	
		0E	FUSE CLAMP, FC 51F	AB
			SPR, BATT	AB
			BACK SLIDE SW 6P2T SHORTIN	AB
			TERMINAL, ASSY MECHA 1P	AB
			JACK, MIC	AB
		1A	COIL, 10UH TROIDAL	AB

MECHANICAL PARTS LIST - 2/2


88-CT6-612-010	TERMINAL, 1P TU	A.....
88-CT7-602-010	SLIDE SW 2P2T	
88-CT7-603-010	SLIDE SW 2P2T	A.....
88-CT7-638-010	SW, SL 2-4-3 BAND	A.....

ACCESSORIES / PACKAGE LIST - 1/1


NOTE: The characters in the suffix column indicate the part usage.

HEJSTNC	REF.NO	PARTS NO.	XX KANRI NO.	DESCRIPTION	B SUFFIX
	IC 2	87-A20-187-010	2M	IC, LC78622E	AB.....
	IC 1	87-A20-446-010	1E	C-IC, LA9241ML	AB.....
	IC 4	87-A20-856-010	1D	IC, BA6898S	AB.....
	IC 201	87-A20-946-040	1D	C-IC, MM1434XF	AB.....
	IC 801	88-CT7-601-010	1H	IC, TMP47C446ADF-***	AB.....
	Q 741	89-213-702-010	1A	TR, 2SB1370 (1.8W)	AB.....
	S 0	87-036-389-010	1B	SW, PUSH LOCK	AB.....
		88-CT9-901-010		IB, D	
		88-CT9-905-010		IB, ESF	
		88-CT9-906-010		IB, ECA	.B.....
		88-CT9-908-010		IB, 9L	A.....
		87-050-076-010	1C	AC CORD SET ASSY, E	AB.....
		87-A80-027-010	1B	AC CORD SET, U BLK SPT2	
		87-A80-033-010	1C	AC CORD SET, D BLK	
		87-A90-312-010		PLUG, CONVERSION WTN-1157R1	.B.....


SCHEMATIC DIAGRAM – 1 (MAIN)

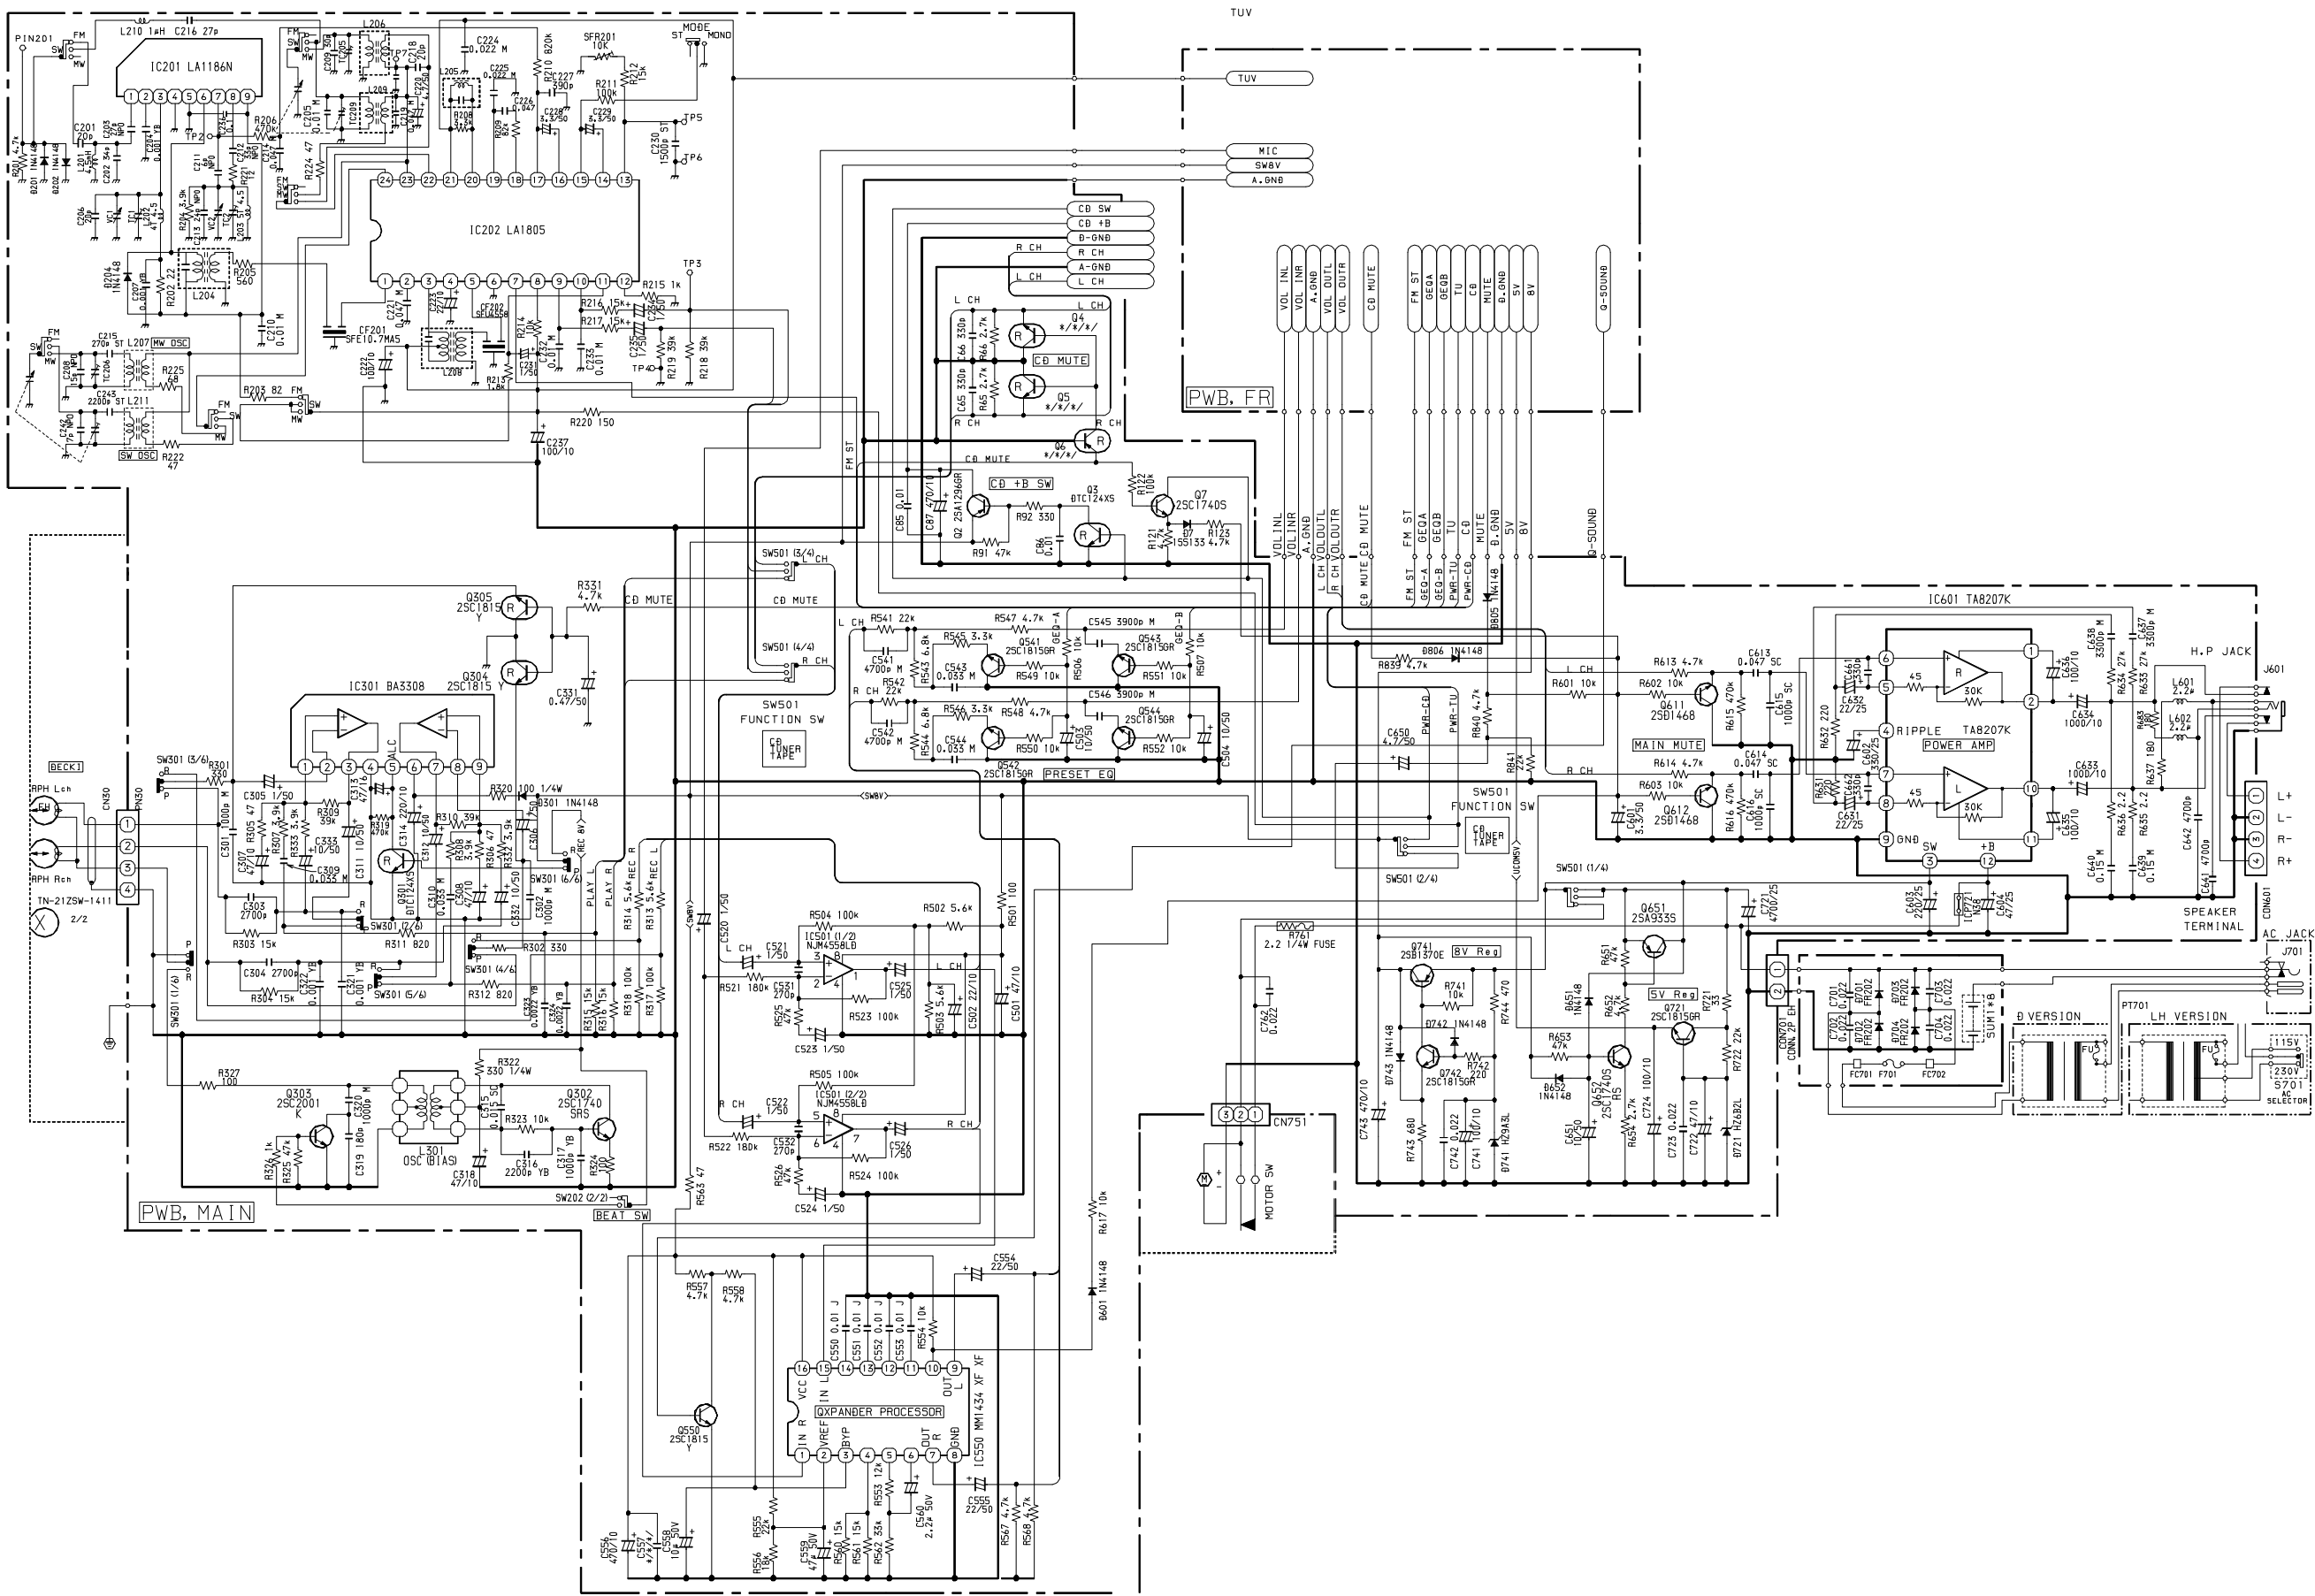

SCHEMATIC DIAGRAM – 2 (FRONT)

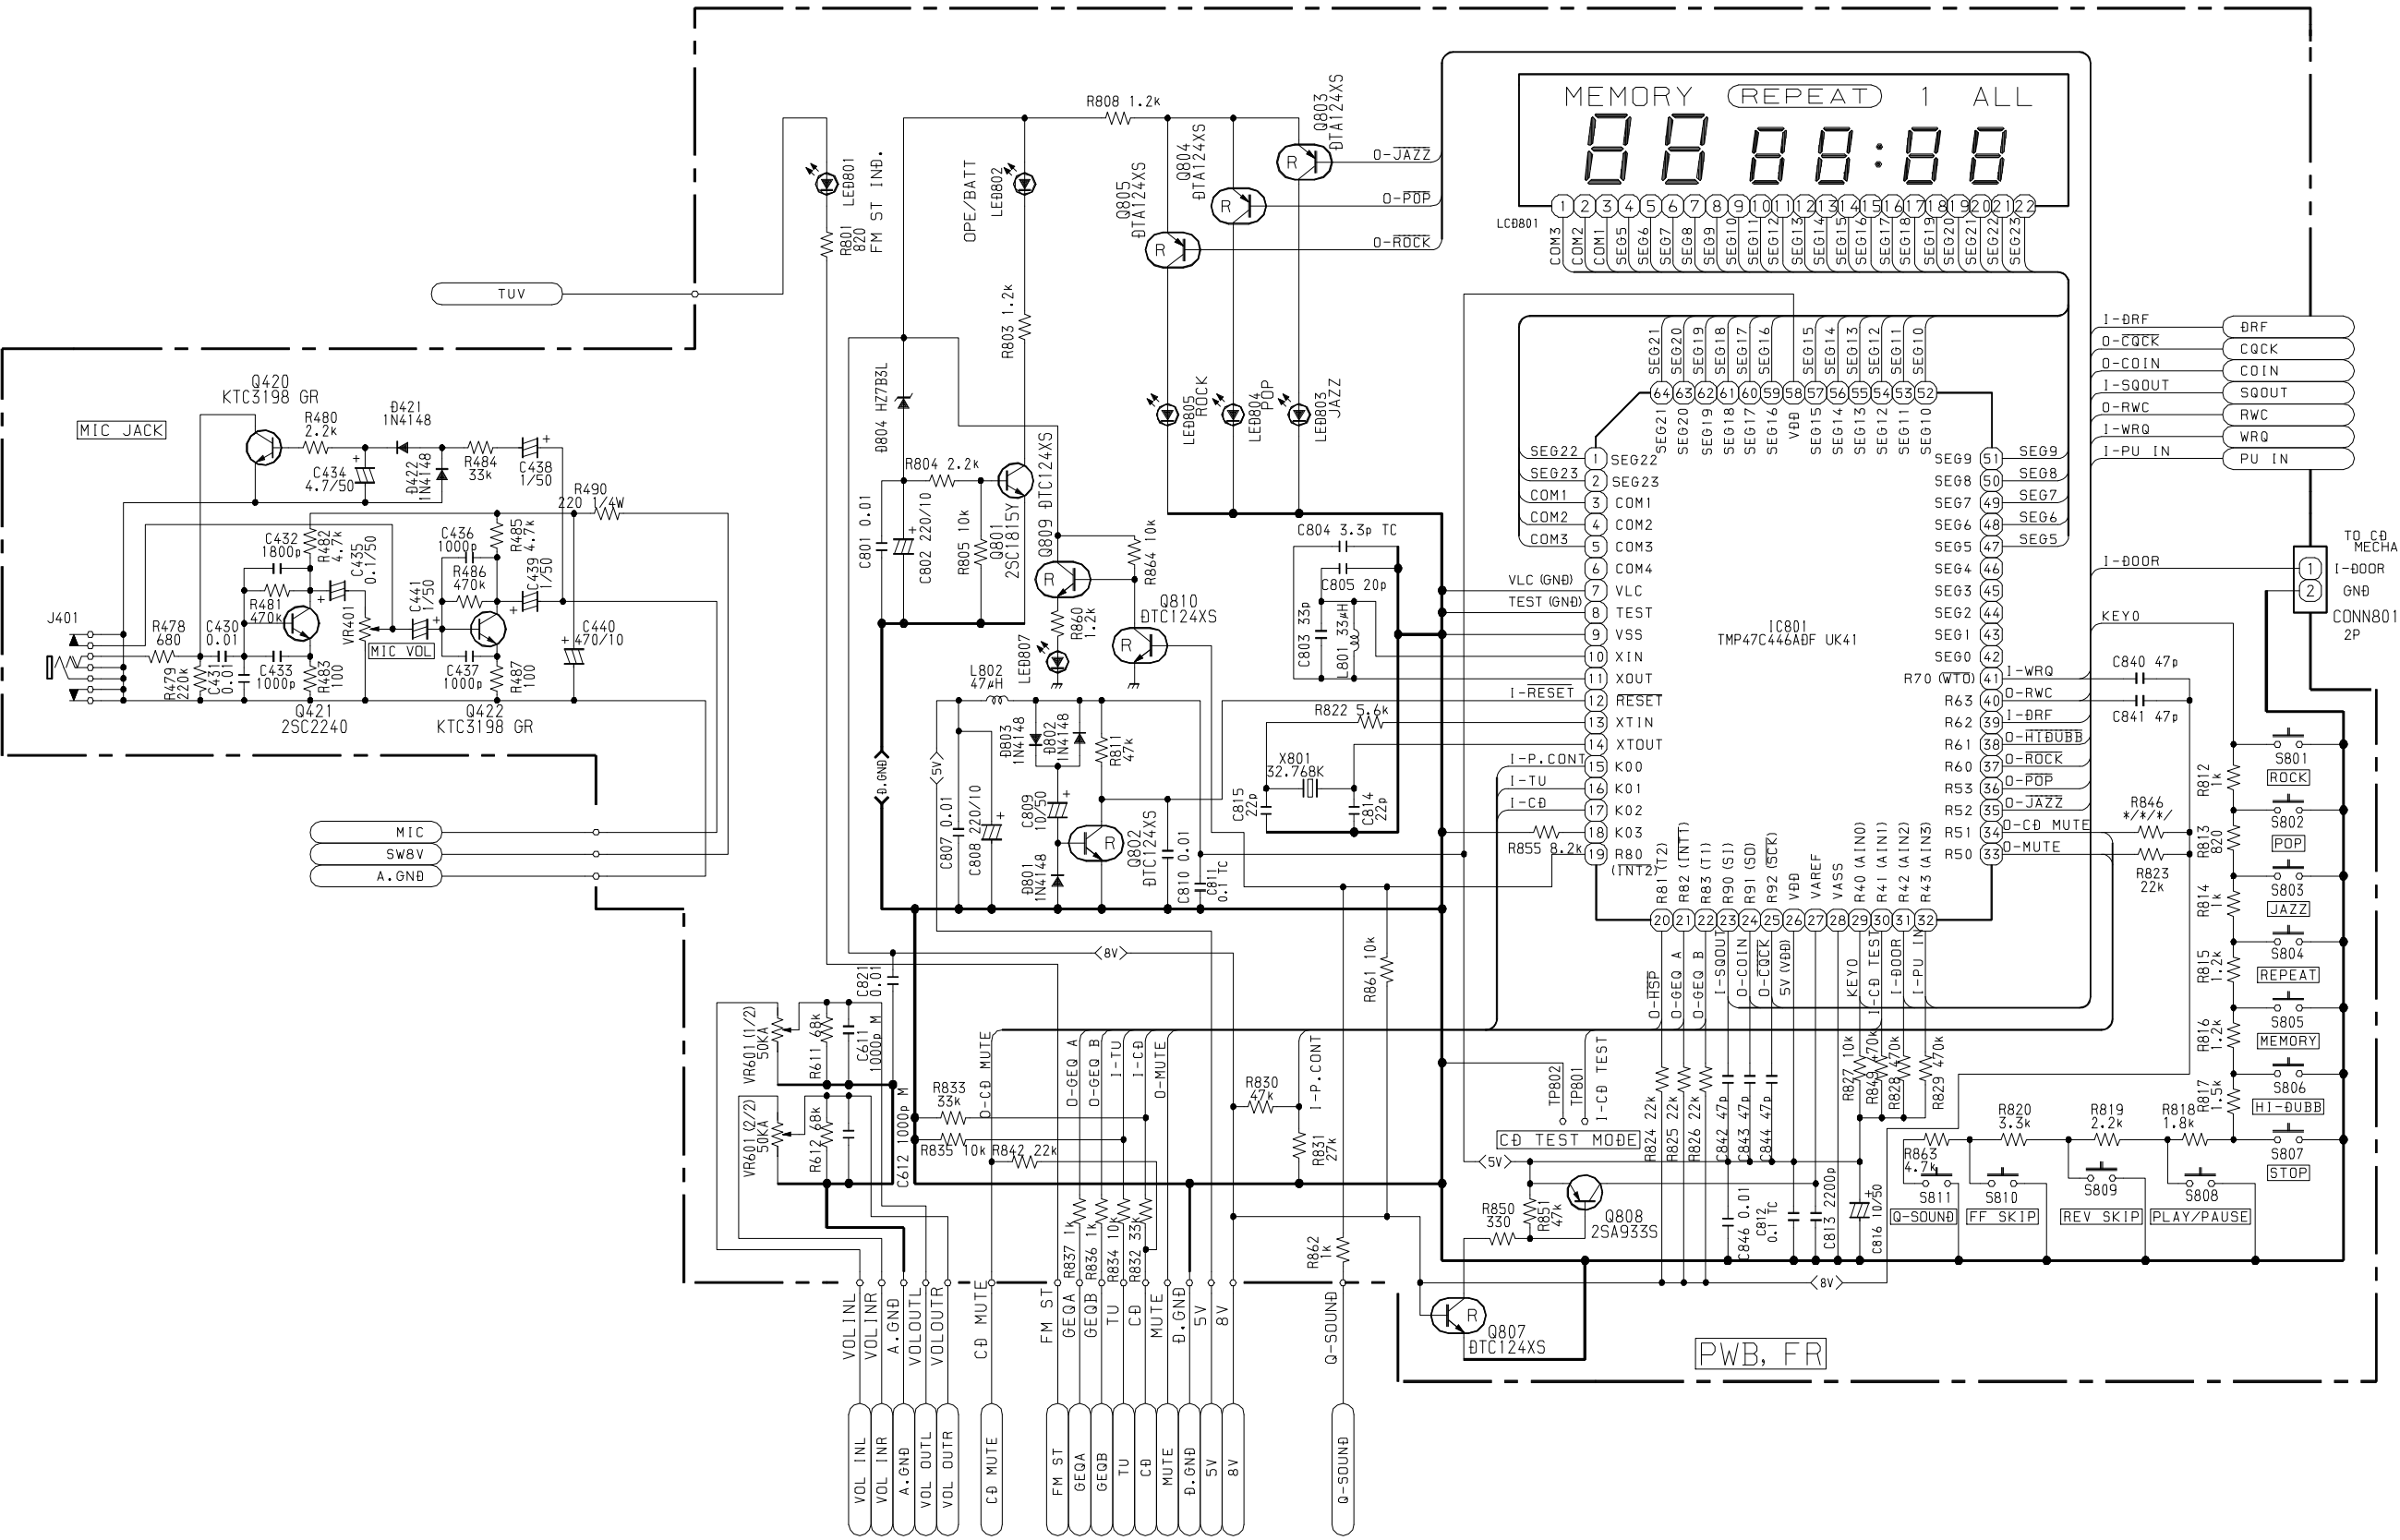

SCHEMATIC DIAGRAM – 3 (CD MAIN)

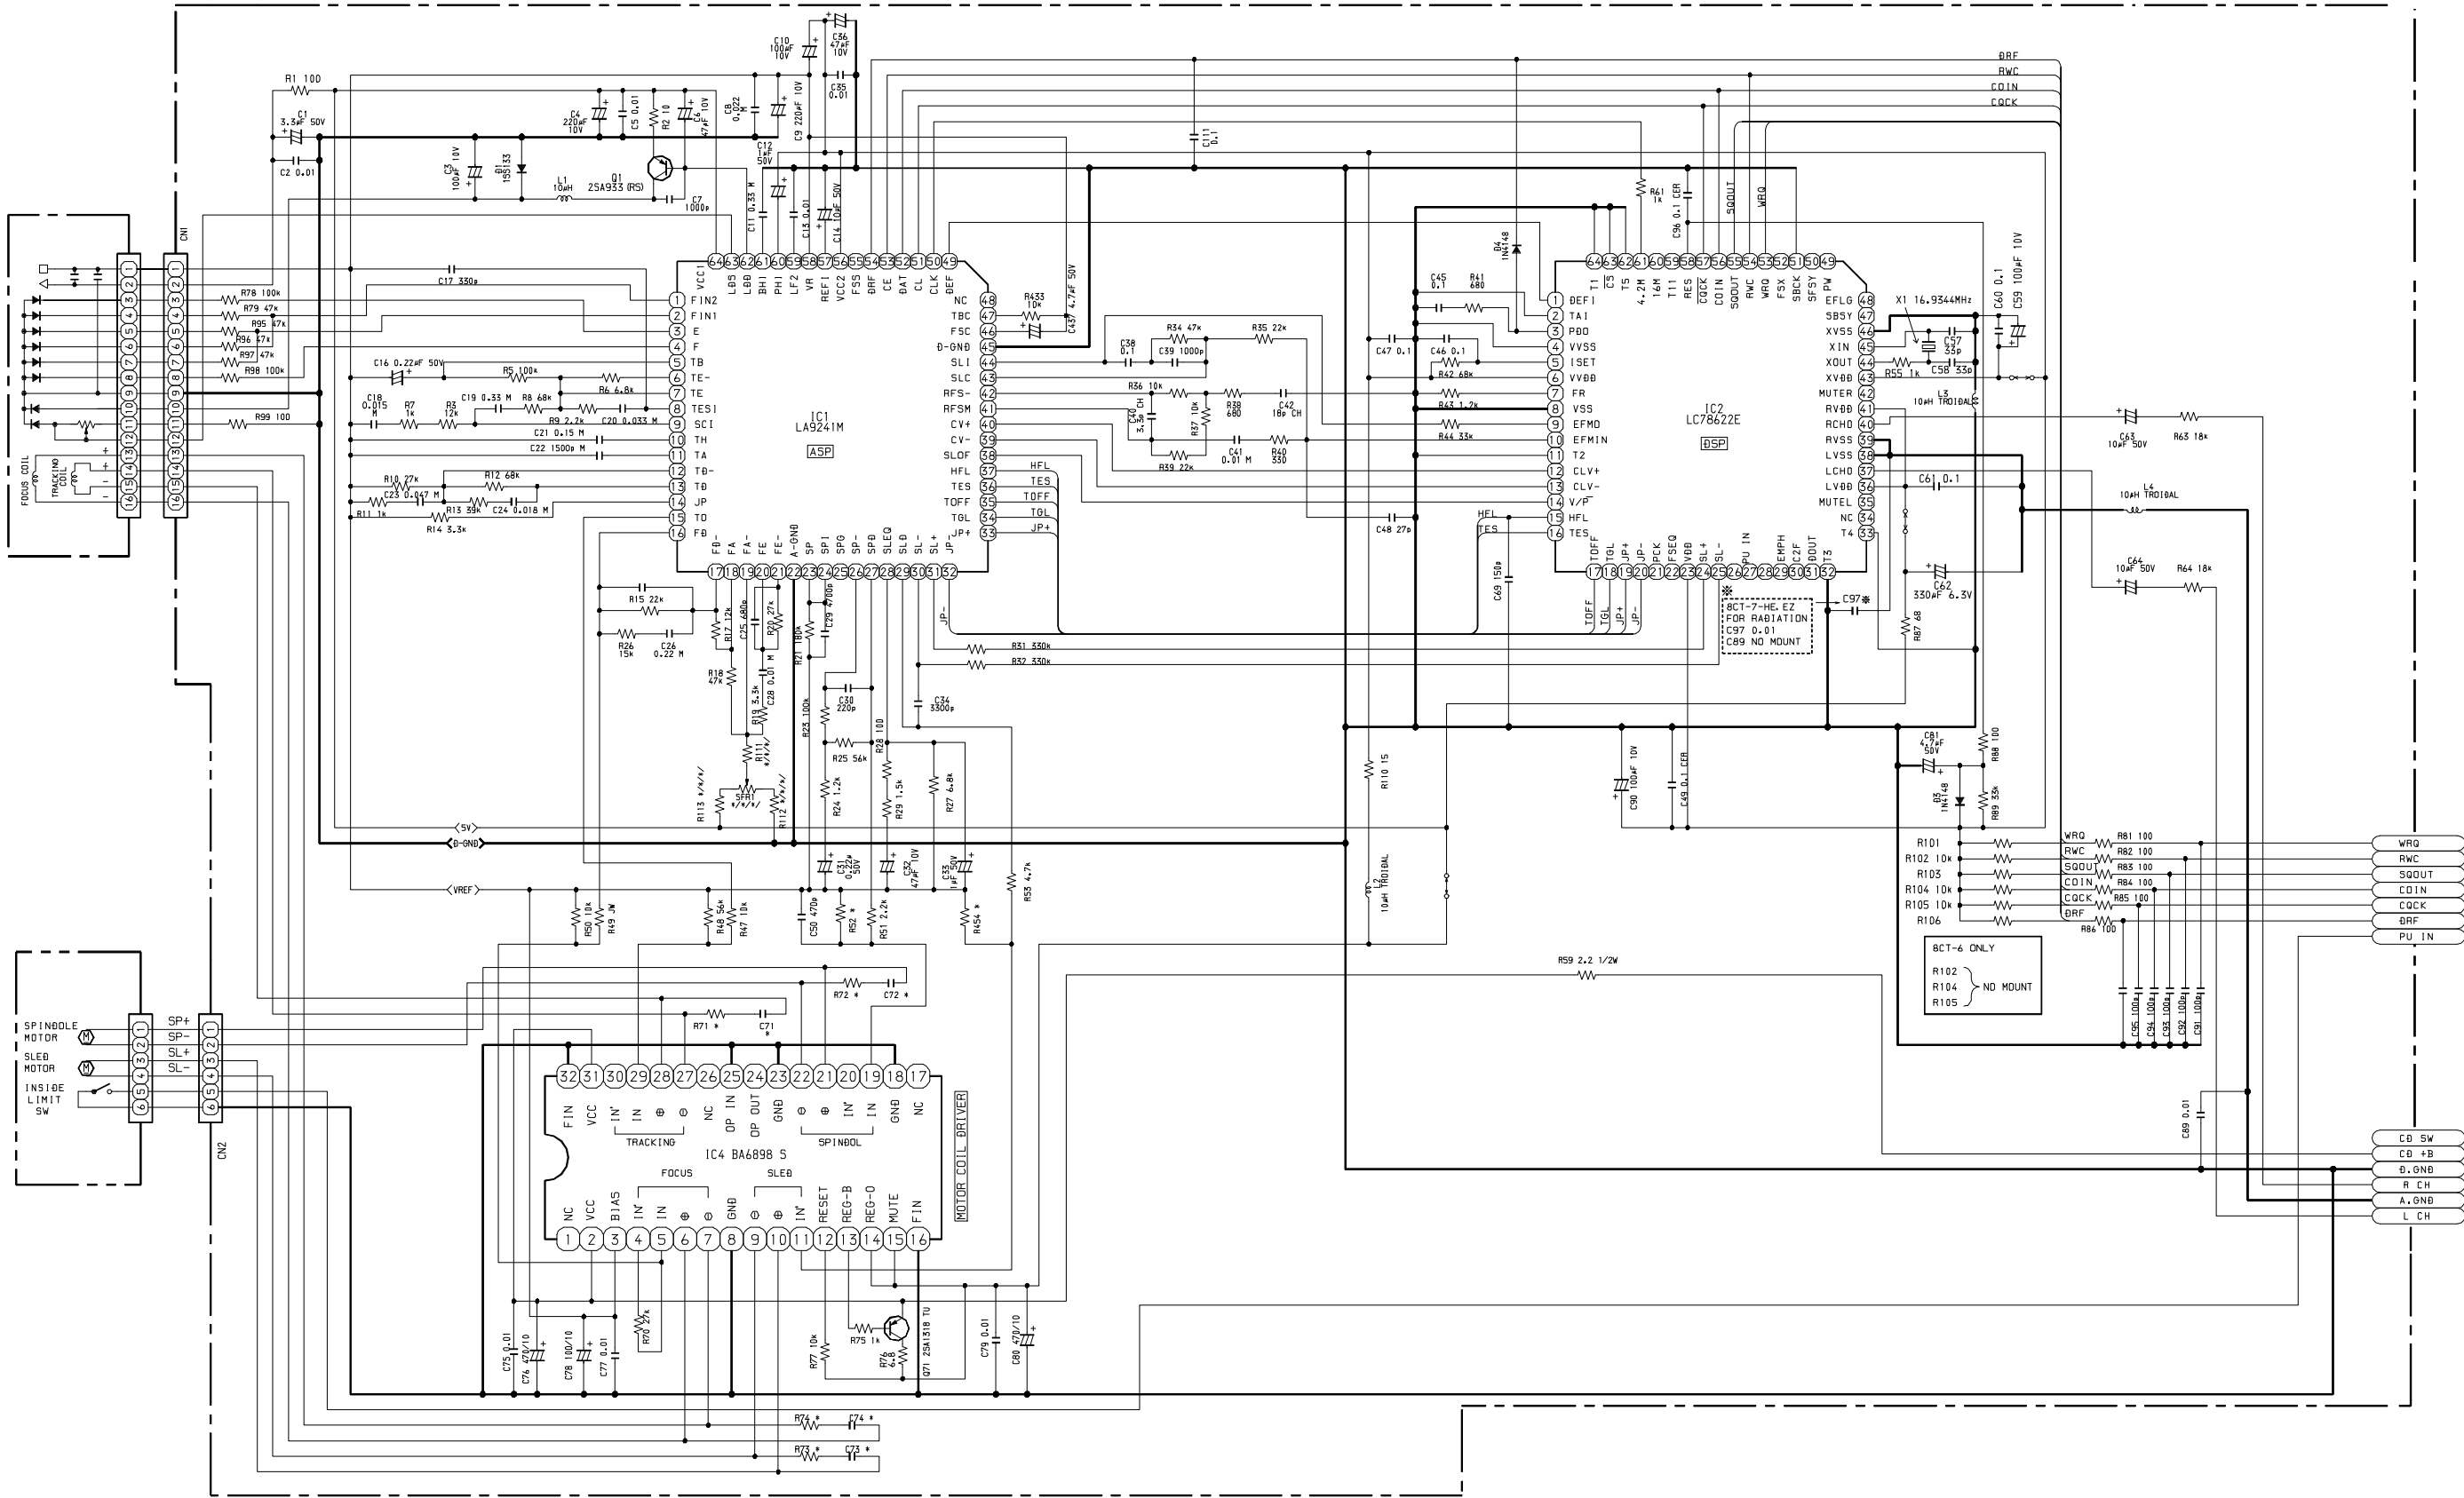

サービス技術ニュース	
番号	連絡内容
Gー ー	
Gー ー	
Gー ー	

アイワ株式会社
AIWA CO.,LTD.

9820543

Tokyo Japan