

aiwa



CSD-ED88 CSD-ED89

COMPACT DISC STEREO RADIO
CASSETTE RECORDER

- TYPE: (89): HA, HR, LH, EZ,
(88): LH

SIMPLE MANUAL

- Replace this Service Manual with "Revision Publishing" when it is issued.

ELECTRICAL MAIN PARTS LIST - 1/6

NOTE: The characters in the suffix column indicate the part usage.

HR		XX		A
LH1		XX		B
LH		XX		C
EZ		XX		D
HA		XX		E
REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
C	218	87-010-400-080	CAP, ELECT 0.47-50V	ABCDE
C	217	87-010-400-080	CAP, ELECT 0.47-50V	ABCDE
C	228	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	229	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	232	87-010-213-080	C-CAP, S 0.015-50 B	ABCDE
C	231	87-010-213-080	C-CAP, S 0.015-50 B	ABCDE
C	238	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	237	87-010-374-080	CAP, ELECT 47-10V	ABCDE
C	235	87-010-544-080	CAP, ELECT 0.1-50V	ABCDE
C	236	87-010-544-080	CAP, ELECT 0.1-50V	ABCDE
C	234	87-010-546-080	CAP, ELECT 0.33-50V	ABCDE
C	233	87-010-546-080	CAP, ELECT 0.33-50V	ABCDE
C	248	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	247	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	246	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	241	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	245	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	244	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	243	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	242	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	262	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE
C	261	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE
D	281	87-A40-466-080	ZENER, MTZJ2.7A	ABCDE
IC	203	87-A21-111-040	C-IC, M62495FP	ABCDE
C	209	87-010-190-080	S CHIP F 0.01	ABCDE
C	208	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE
C	207	87-010-408-080	CAP, ELECT 47-50V	ABCDE
C	210	87-010-190-080	S CHIP F 0.01	ABCDE
C	215	87-010-425-080	C-CAP, 0.22-25 F	ABCDE
C	216	87-010-425-080	C-CAP, 0.22-25 F	ABCDE
C	211	87-010-544-080	CAP, ELECT 0.1-50V	ABCDE
C	212	87-010-544-080	CAP, ELECT 0.1-50V	ABCDE
C	223	87-010-190-080	S CHIP F 0.01	ABCDE
C	226	87-010-190-080	S CHIP F 0.01	ABCDE
C	222	87-010-190-080	S CHIP F 0.01	ABCDE
C	220	87-010-405-080	CAP, ELECT 10-50V	ABCDE
IC	201	87-A20-946-040	C-IC, MM1434XF	ABCDE
C	251	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	263	87-010-178-080	CHIP CAP 1000P	ABCDE
C	264	87-010-178-080	CHIP CAP 1000P	ABCDE
C	269	87-010-248-080	CAP, ELECT 220-10V	
C	265	87-010-260-080	CAP, ELECT 47-25V	
C	266	87-010-260-080	CAP, ELECT 47-25V	
C	268	87-010-380-080	CAP, ELECT 47-16V	ABCDE
C	267	87-010-380-080	CAP, ELECT 47-16V	ABCDE
C	265	87-010-383-080	CAP, ELECT 33-25V	ABCDE
C	266	87-010-383-080	CAP, ELECT 33-25V	ABCDE
C	268	87-015-953-080	CAP, E 4.7-35 LL	
C	267	87-015-953-080	CAP, E 4.7-35 LL	
C	264	87-018-124-080	CAP, CER 270P-50V	
C	263	87-018-124-080	CAP, CER 270P-50V	
C	279	87-010-112-080	CAP, ELECT 100-16V	ABCDE
C	271	87-010-221-080	CAP, ELECT 470-10V	ABCDE
C	272	87-010-221-080	CAP, ELECT 470-10V	ABCDE
C	279	87-010-236-080	CAP, E 1000-10 SME	
C	277	87-010-260-080	CAP, ELECT 47-25V	ABCDE
C	278	87-010-384-080	CAP, ELECT 100-25V	ABCDE
C	273	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	ABCDE
C	274	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	ABCDE
C	274	87-018-209-080	CAP, CER 0.1-50V	
C	281	87-010-263-080	CAP, ELECT 100-10V	
C	281	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	280	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	293	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	
C	294	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	
C	291	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	
C	292	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	
IC	201	87-002-555-010	IC, TA8210AH	
IC	201	87-A20-591-010	IC, BA5417	ABCDE
J	251	87-A60-569-010	JACK, HTJ-035-18	ABCDE
Q	244	89-320-011-010	TR, 2SC2001 (0.6W)	ABCDE
Q	243	89-320-011-010	TR, 2SC2001 (0.6W)	ABCDE
R	277	87-025-329-080	RESISTOR, 1/4W 2.2	
R	275	87-025-329-080	RESISTOR, 1/4W 2.2	
R	276	87-025-329-080	RESISTOR, 1/4W 2.2	
R	278	87-025-329-080	RESISTOR, 1/4W 2.2	
S	270	87-A91-377-010	SW, PUSH 2-2-2 SPUN192600	
C	308	87-010-221-080	CAP, ELECT 470-10V	ABCDE
C	309	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	307	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	306	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	301	87-010-453-010	CAP, ELECT 4700-25V	ABCDE

*

ELECTRICAL MAIN PARTS LIST - 2/6

C	301	87-016-452-090	CAP, E 6800-25 SKR	
C	315	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	312	87-010-248-080	CAP, ELECT 220-10V	ABCDE.....
C	314	87-010-248-080	CAP, ELECT 220-10V	ABCDE.....
C	310	87-010-248-080	CAP, ELECT 220-10V	ABCDE.....
C	311	87-010-263-080	CAP, ELECT 100-10V	ABCDE.....
C	904	87-018-209-080	CAP, CER 0.1-50V	
C	902	87-018-209-080	CAP, CER 0.1-50V	
C	901	87-018-209-080	CAP, CER 0.1-50V	
C	903	87-018-209-080	CAP, CER 0.1-50V	
C	903	87-A10-577-080	CAP, CER 0.022-50 Z YF	ABCDE.....
C	904	87-A10-577-080	CAP, CER 0.022-50 Z YF	ABCDE.....
C	901	87-A10-577-080	CAP, CER 0.022-50 Z YF	ABCDE.....
C	902	87-A10-577-080	CAP, CER 0.022-50 Z YF	ABCDE.....
D	307	87-017-148-080	ZENER, HZS6A1L	ABCDE.....
D	304	87-017-161-080	ZENER, HZS7C2L	ABCDE.....
D	309	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	306	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	308	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	305	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	303	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	311	87-017-139-010	ZENER, HZS15-2	ABCDE.....
D	901	87-070-178-090	DIODE, 1N5402-BD54	
D	902	87-070-178-090	DIODE, 1N5402-BD54	
D	904	87-070-178-090	DIODE, 1N5402-BD54	
D	903	87-070-178-090	DIODE, 1N5402-BD54	
D	903	87-A40-465-010	DIODE, FR202	ABCDE.....
D	902	87-A40-465-010	DIODE, FR202	ABCDE.....
D	901	87-A40-465-010	DIODE, FR202	ABCDE.....
D	904	87-A40-465-010	DIODE, FR202	ABCDE.....
FC	0	87-033-213-010	CLAMP, FUSE SMK	ABCDE.....
IC	310	87-070-416-010	IC, NJU7201 L55	ABCDE.....
Q	303	87-026-291-010	TR, DTC124XS	ABCDE.....
Q	307	87-026-462-010	TR, 2SC1740S	ABCDE.....
Q	305	87-026-462-010	TR, 2SC1740S	ABCDE.....
Q	302	87-026-463-010	TR, 2SA933S, RS	ABCDE.....
Q	306	88-NF9-637-010	TR, 2SA1318T/U	ABCDE.....
Q	301	89-112-965-010	TR, 2SA1296GR	ABCDE.....
Q	304	89-213-702-010	TR, 2SB1370 (1.8W)	ABCDE.....
Q	310	87-026-462-010	TR, 2SC1740S	ABCDE.....
C	803	87-010-177-080	C-CAP, S 820P-50 SL	ABCDE.....
C	804	87-010-177-080	C-CAP, S 820P-50 SL	ABCDE.....
C	801	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE.....
C	802	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE.....
C	809	87-010-406-010	CAP, E 22-50 SM	ABCDE.....
C	805	87-012-158-080	C-CAP, S 390P-50 CH	ABCDE.....
C	806	87-012-158-080	C-CAP, S 390P-50 CH	ABCDE.....
C	815	87-010-374-010	CAP, ELECT 47-10V	ABCDE.....
C	819	87-010-401-010	CAP, ELECT 1-50V	ABCDE.....
C	818	87-010-401-010	CAP, ELECT 1-50V	ABCDE.....
C	817	87-010-401-010	CAP, ELECT 1-50V	ABCDE.....
C	814	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE.....
C	813	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE.....
C	812	87-010-404-010	CONDENSER 4.7-50	ABCDE.....
C	811	87-010-404-010	CONDENSER 4.7-50	ABCDE.....
C	810	87-010-406-010	CAP, E 22-50 SM	ABCDE.....
C	823	87-010-213-080	C-CAP, S 0.015-50 B	ABCDE.....
C	824	87-010-213-080	C-CAP, S 0.015-50 B	ABCDE.....
C	820	87-010-401-010	CAP, ELECT 1-50V	ABCDE.....
C	828	87-010-404-010	CONDENSER 4.7-50	ABCDE.....
C	827	87-010-404-010	CONDENSER 4.7-50	ABCDE.....
C	825	87-010-405-080	CAP, ELECT 10-50V	ABCDE.....
C	826	87-010-405-080	CAP, ELECT 10-50V	ABCDE.....
C	821	87-012-153-080	C-CAP, S 120P-50 CH	ABCDE.....
C	822	87-012-153-080	C-CAP, S 120P-50 CH	ABCDE.....
C	833	87-010-179-080	CAP, CHIP S B1200P	ABCDE.....
C	839	87-010-186-080	CAP, CHIP 4700P	ABCDE.....
C	831	87-010-198-080	CAP, CHIP 0.022	ABCDE.....
C	832	87-010-198-080	CAP, CHIP 0.022	ABCDE.....
C	834	87-010-248-080	CAP, ELECT 220-10V	ABCDE.....
C	830	87-010-260-080	CAP, ELECT 47-25V	ABCDE.....
C	835	87-010-374-010	CAP, ELECT 47-10V	ABCDE.....
C	838	87-010-405-080	CAP, ELECT 10-50V	ABCDE.....
C	845	87-010-178-080	CHIP CAP 1000P	ABCDE.....
C	844	87-010-178-080	CHIP CAP 1000P	ABCDE.....
C	849	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCDE.....
C	840	87-010-186-080	CAP, CHIP 4700P	ABCDE.....
C	843	87-010-190-080	S CHIP F 0.01	ABCDE.....
C	842	87-010-194-080	CAP, CHIP 0.047	ABCDE.....
C	846	87-010-194-080	CAP, CHIP 0.047	ABCDE.....
C	841	87-010-194-080	CAP, CHIP 0.047	ABCDE.....
C	850	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCDE.....
CN	851	87-010-186-080	CAP, CHIP 4700P	ABCDE.....
CN	802	87-049-469-010	CONN, 4P V	ABCDE.....
CN	801	87-049-469-010	CONN, 4P V	ABCDE.....
D	9	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	8	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	2	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	1	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	4	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	3	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	5	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....

ELECTRICAL MAIN PARTS LIST - 3/6

D	7	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	6	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	10	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	41	87-070-136-080	ZENER, MTZJ5.1B	ABCDE
D	807	87-017-437-080	DIODE, 1N4148M	ABCDE
D	805	87-017-437-080	DIODE, 1N4148M	ABCDE
D	808	87-017-437-080	DIODE, 1N4148M	ABCDE
D	803	87-017-437-080	DIODE, 1N4148M	ABCDE
D	801	87-017-437-080	DIODE, 1N4148M	ABCDE
D	806	87-017-437-080	DIODE, 1N4148M	ABCDE
D	802	87-017-437-080	DIODE, 1N4148M	ABCDE
D	804	87-017-437-080	DIODE, 1N4148M	ABCDE
D	809	87-017-437-080	DIODE, 1N4148M	ABCDE
D	810	87-017-437-080	DIODE, 1N4148M	ABCDE
D	841	87-070-136-080	ZENER, MTZJ5.1B	ABCDE
IC	302	87-A21-145-040	C-IC, BA4560F-E2	ABCDE
IC	301	87-A21-145-040	C-IC, BA4560F-E2	ABCDE
IC	801	87-A21-145-040	C-IC, BA4560F-E2	ABCDE
IC	802	87-A21-145-040	C-IC, BA4560F-E2	ABCDE
L	1	87-007-342-010	COIL, OSC 85K BIAS	ABCDE
L	801	87-007-342-010	COIL, OSC 85K BIAS	ABCDE
Q	2	87-026-462-010	TR, 2SC1740S	ABCDE
Q	3	87-026-463-010	TR, 2SA933S, RS	ABCDE
Q	4	87-026-463-010	TR, 2SA933S, RS	ABCDE
Q	8	87-026-496-080	FET, 2SJ103GR	ABCDE
Q	9	87-026-496-080	FET, 2SJ103GR	ABCDE
Q	5	89-110-150-010	TR, 2SA1015	ABCDE
Q	7	89-110-150-010	TR, 2SA1015	ABCDE
Q	6	89-318-155-010	TR, 2SC1815(GR)	ABCDE
Q	1	89-318-155-010	TR, 2SC1815(GR)	ABCDE
Q	10	87-026-464-010	TR, DTC114TS	ABCDE
Q	802	87-026-462-010	TR, 2SC1740S	ABCDE
Q	803	87-026-463-010	TR, 2SA933S, RS	ABCDE
Q	804	87-026-463-010	TR, 2SA933S, RS	ABCDE
Q	808	87-026-496-080	FET, 2SJ103GR	ABCDE
Q	809	87-026-496-080	FET, 2SJ103GR	ABCDE
Q	805	89-110-150-010	TR, 2SA1015	ABCDE
Q	807	89-110-150-010	TR, 2SA1015	ABCDE
Q	806	89-318-155-010	TR, 2SC1815(GR)	ABCDE
Q	801	89-318-155-010	TR, 2SC1815(GR)	ABCDE
Q	810	87-026-464-010	TR, DTC114TS	ABCDE
R	40	87-029-124-010	RES, FUSE 2.2-1/4	ABCDE
R	840	87-029-124-010	RES, FUSE 2.2-1/4	ABCDE
C	299	87-010-190-080	S CHIP F 0.01	ABCDE
C	321	87-010-190-080	S CHIP F 0.01	ABCDE
C	322	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	325	87-010-405-080	CAP, ELECT 10-50V	ABCDE
CN	204	87-049-469-010	CONN, 4P V	ABCDE
CN	203	87-049-469-010	CONN, 4P V	ABCDE
CN	201	87-099-016-010	CONN, 14P 6216V	ABCDE
CN	207	87-099-186-010	CONN, 6P EH V WHT	
CN	208	87-099-186-010	CONN, 6P EH V WHT	
CN	205	87-A60-109-010	CONN, 2P V S2M-2W	ABCDE
CN	211	87-A60-111-010	CONN, 5P V S2M 5W	
D	32	87-027-607-080	ZENER, HZ7B3L	ABCDE
D	323	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	322	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
Q	323	87-026-291-080	TR, DTC124XS	ABCDE
Q	322	87-026-463-080	TR, 2SA933S (0.3W)	ABCDE
Q	321	89-318-154-080	TR, 2SC1815 (0.4W)	ABCDE
C	608	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	609	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	606	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	607	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	601	87-010-313-080	CAP, CHIP 18P	ABCDE
C	604	87-010-314-080	C-CAP, S 22P-50V	ABCDE
C	602	87-010-315-080	C-CAP, S 27P-50 CH	ABCDE
C	605	87-010-317-080	C-CAP, S 39P-50 CH	ABCDE
C	603	87-010-317-080	C-CAP, S 39P-50 CH	ABCDE
C	617	87-010-178-080	CHIP CAP 1000P	ABCDE
C	614	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	611	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	612	87-010-248-080	CAP, ELECT 220-10V	ABCDE
C	610	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	615	87-010-400-080	CAP, ELECT 0.47-50V	ABCDE
C	616	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	613	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE
C	618	87-010-405-080	CAP, ELECT 10-50V	ABCDE
CN	601	87-099-031-010	CONN, 14P 6216 H	ABCDE
CN	603	87-099-199-010	CONN, 6P 6216 H	ABCDE
CN	608	87-099-200-010	CONN, 7P 6216H	ABCDE
CN	604	87-099-200-010	CONN, 7P 6216H	ABCDE
CN	605	87-099-200-010	CONN, 7P 6216H	ABCDE
CN	602	87-099-200-010	CONN, 7P 6216H	ABCDE
CN	609	87-099-200-010	CONN, 7P 6216H	ABCDE
D	602	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	601	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	614	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	611	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	612	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
IC	602	87-A21-245-010	IC, RPM6938-V4	ABCDE
IC	601	8Z-CH4-636-010	IC, LC867132V-****	ABCDE

ELECTRICAL MAIN PARTS LIST - 4/6

L	601	87-003-171-010	COIL, 15UH TROIDAL	ABCDE
LCD	601	8Z-CH4-635-010	LCD, HLC7365 ZCH-4	ABCDE
LED	606	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	602	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	603	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	601	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	605	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	604	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	607	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	609	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	610	88-CD6-631-010	LED, 934GD GRN	ABCDE
Q	601	87-026-291-010	TR, DTC124XS	ABCDE
Q	603	87-026-291-010	TR, DTC124XS	ABCDE
Q	602	87-026-463-010	2SA933S, RS	ABCDE
Q	608	87-026-464-010	TR, DTC114TS	ABCDE
Q	609	87-026-464-010	TR, DTC114TS	ABCDE
Q	607	87-026-464-010	TR, DTC114TS	ABCDE
Q	605	87-026-464-010	TR, DTC114TS	ABCDE
Q	606	87-026-464-010	TR, DTC114TS	ABCDE
Q	604	87-026-464-010	TR, DTC114TS	ABCDE
Q	610	87-026-464-010	TR, DTC114TS	ABCDE
Q	611	87-026-464-010	TR, DTC114TS	ABCDE
Q	621	87-026-291-010	TR, DTC124XS	ABCDE
S	606	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	608	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	601	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	609	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	602	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	604	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	607	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	605	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	603	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	614	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	616	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	612	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	615	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	611	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	610	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	613	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
X	602	87-030-273-010	VIB, XTAL 32.768K5PPM	ABCDE
X	601	87-A70-070-080	VIB, CER 5.76MHZ CRHF	ABCDE
C	400	87-010-178-080	CHIP CAP 1000P	ABCDE
C	407	87-010-178-080	CHIP CAP 1000P	ABCDE
C	402	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	405	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	409	87-010-248-080	CAP, ELECT 220-10V	ABCDE
C	404	87-010-248-080	CAP, ELECT 220-10V	ABCDE
C	403	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	406	87-010-374-080	CAP, ELECT 47-10V	ABCDE
C	401	87-010-403-080	CAP, ELECT 3.3-50V	ABCDE
C	413	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	410	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	412	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	414	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	416	87-010-545-080	CAP, ELECT 0.22-50V	ABCDE
C	417	87-012-157-080	C-CAP, S 330P-50 CH	ABCDE
C	425	87-010-176-080	C-CAP, S 680P-50 SL	ABCDE
C	429	87-010-186-080	CAP, CHIP 4700P	ABCDE
C	439	87-010-178-080	CHIP CAP 1000P	ABCDE
C	438	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	435	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	432	87-010-374-080	CAP, ELECT 47-10V	ABCDE
C	436	87-010-374-080	CAP, ELECT 47-10V	ABCDE
C	433	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	437	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	431	87-010-545-080	CAP, ELECT 0.22-50V	ABCDE
C	430	87-012-156-080	C-CAP, S 220P-50 CH	ABCDE
C	440	87-010-147-080	C-CAP, S 3P-50 CH	ABCDE
C	447	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	445	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	446	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	442	87-010-313-080	CAP, CHIP 18P	ABCDE
C	448	87-010-315-080	C-CAP, S 27P-50 CH	ABCDE
C	459	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	457	87-010-316-080	C-CAP, S 33P-50 CH	ABCDE
C	458	87-010-316-080	C-CAP, S 33P-50 CH	ABCDE
C	450	87-012-140-080	CAP 470P	ABCDE
C	463	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCDE
C	466	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	468	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	460	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	461	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	463	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	467	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	462	87-010-370-080	CAP, E 330-6.3 SME	ABCDE
C	465	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	469	87-012-154-080	C-CAP, S 150P-50 CH	ABCDE
C	473	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	474	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	471	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	472	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	475	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE

ELECTRICAL MAIN PARTS LIST - 5/6

C	477	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	479	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	476	87-010-236-080	CAP, E 1000-10 SME	ABCDE.....
C	478	87-010-263-080	CAP, ELECT 100-10V	ABCDE.....
C	489	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE.....
C	480	87-010-221-080	CAP, ELECT 470-10V	ABCDE.....
C	482	87-010-405-080	CAP, ELECT 10-50V	ABCDE.....
C	481	87-010-405-080	CAP, ELECT 10-50V	ABCDE.....
C	483	87-012-156-080	C-CAP, S 220P-50 CH	ABCDE.....
C	484	87-012-156-080	C-CAP, S 220P-50 CH	ABCDE.....
C	490	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE.....
C	499	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
C	495	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
C	497	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
C	498	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
C	493	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
C	496	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
CN	403	87-099-195-010	CONN, 7P 6216 V	ABCDE.....
CN	401	87-A60-424-010	CONN, 16P V TOC-B	ABCDE.....
D	403	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	402	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	401	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	491	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	494	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
IC	401	87-A20-446-010	C-IC, LA9241ML	ABCDE.....
IC	402	87-A20-459-010	C-IC, LC78622ED	ABCDE.....
IC	404	87-A21-093-010	IC, LA6541D	ABCDE.....
L	404	81-NWB-655-010	COIL, 10UH TROIDAL	.BC.E.....
L	405	81-NWB-655-010	COIL, 10UH TROIDAL	.BC.E.....
L	403	81-NWB-655-010	COIL, 10UH TROIDAL	.BC.E.....
L	401	87-003-102-080	COIL, 10UH	ABCDE.....
L	402	87-005-847-080	COIL, 2.2UH(CECS)	ABCDE.....
L	406	87-005-847-080	COIL, 2.2UH(CECS)	ABCDE.....
L	404	87-008-372-010	FILTER, EMI BL OIRNI	...D.....
L	403	87-008-372-010	FILTER, EMI BL OIRNI	...D.....
L	405	87-008-372-010	FILTER, EMI BL OIRNI	...D.....
Q	403	87-026-502-080	DTC144TS	ABCDE.....
Q	402	89-113-184-080	TR, 2SA1318T	ABCDE.....
SFR	401	87-024-175-080	SEMI-FIXED RESISTOR, 47K	ABCDE.....
X	401	81-592-641-010	VIB, CER 16.93MHZ	ABCDE.....
X	401	87-A70-046-010	VIB, XTAL 16.934MHZ	ABCDE.....
C	491	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	492	87-010-221-080	CAP, ELECT 470-10V	ABCDE.....
D	492	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	491	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	494	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
Q	401	87-026-463-080	TR, 2SA933S (0.3W)	ABCDE.....
Q	492	87-026-291-080	TR, DTC124XS	ABCDE.....
Q	491	89-112-965-080	TR, 2SA1296 (0.75W)	ABCDE.....
C	5	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE.....
C	6	87-010-311-080	CAP 12P	ABC.E.....
C	6	87-010-313-080	CAP, CHIP 18P	...D.....
C	3	87-010-314-080	C-CAP, S 22P-50V	ABCDE.....
C	1	87-010-314-080	C-CAP, S 22P-50V	ABCDE.....
C	2	87-010-316-080	C-CAP, S 33P-50 CH	ABCDE.....
C	7	87-012-158-080	C-CAP, S 390P-50 CH	ABC.E.....
C	8	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
C	7	87-014-051-080	CAPACITOR (PP), 560P	...D.....
C	19	87-010-112-080	CAP, ELECT 100-16V	ABCDE.....
C	13	87-010-145-080	C-CAP, S 1P-50 CH	ABCDE.....
C	17	87-010-194-080	CAP, CHIP 0.047	ABCDE.....
C	12	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	10	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	11	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	14	87-010-305-080	C-CAP 470P-50CH	ABCDE.....
C	16	87-010-380-080	CAP, ELECT 47-16V	ABCDE.....
C	15	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
C	18	87-015-819-080	CAPACITOR, 0.01	ABCDE.....
C	22	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	21	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	26	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	23	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	20	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE.....
C	24	87-015-629-080	CHIP CAPACITOR, 0.0022	ABCDE.....
C	25	87-016-460-080	C-CAP, S 0.22-16 B	ABCDE.....
C	29	87-016-669-080	C-CAP, S 0.1-25 K B	ABCDE.....
C	28	87-016-669-080	C-CAP, S 0.1-25 K B	ABCDE.....
C	27	87-A11-067-080	C-CAP, S 1-10 K B	ABCDE.....
C	36	87-010-112-080	CAP, ELECT 100-16V	ABCDE.....
C	37	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	31	87-010-198-080	CAP, CHIP 0.022	.BC.E.....
C	30	87-010-198-080	CAP, CHIP 0.022	.BC.E.....
C	30	87-010-213-080	C-CAP, S 0.015-50 B	A..D.....
C	31	87-010-213-080	C-CAP, S 0.015-50 B	A..D.....
C	38	87-010-380-080	CAP, ELECT 47-16V	ABCDE.....
C	33	87-010-401-080	CAP, ELECT 1-50V	ABCDE.....
C	34	87-010-401-080	CAP, ELECT 1-50V	ABCDE.....
C	39	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE.....
C	35	87-015-819-080	CAPACITOR, 0.01	ABCDE.....
C	48	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	47	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	46	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....

ELECTRICAL MAIN PARTS LIST - 6/6

C	40	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	44	87-010-311-080	CAP, 12P	ABCDE.....
C	45	87-010-312-080	C-CAP, S 15P-50 CH	ABCDE.....
C	42	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
C	41	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
C	43	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
C	55	87-010-197-080	CAP, CHIP 0.01 DM	...D.....
C	53	87-010-197-080	CAP, CHIP 0.01 DM	...D.....
C	52	87-010-197-080	CAP, CHIP 0.01 DM	...D.....
C	50	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	51	87-010-316-080	C-CAP, S 33P-50 CH	...D.....
C	54	87-014-055-080	CAP, PP 820P-100 J	...D.....
CF	3	82-785-747-080	CF, MS2 GHY, R	ABCDE.....
CF	2	82-785-747-080	CF, MS2 GHY, R	ABCDE.....
CF	1	87-A91-094-010	FLTR, CDA10.7 MG80A	ABCDE.....
CN	1	87-099-194-010	CONN, 6P 6216V	ABCDE.....
D	6	87-017-072-080	ZENER, HZS3B1	ABCDE.....
D	2	87-070-345-080	DIODE, IN4148	ABCDE.....
D	1	87-070-345-080	DIODE, IN4148	ABCDE.....
HD	2	88-CD6-661-010	HLDR, BAR ANT.	ABCDE.....
HD	1	88-CD6-661-010	HLDR, BAR ANT.	ABCDE.....
IC	1	87-A21-184-010	IC, TA2104AN	ABCDE.....
IC	2	87-A21-185-040	C-IC, LC72121M	ABCDE.....
L	9	87-005-849-080	COIL, 10UH(CECS)	ABCDE.....
L	8	87-005-849-080	COIL, 10UH(CECS)	ABCDE.....
L	2	87-A50-347-010	COIL, FM BPF EX	ABCDE.....
L	4	87-A50-420-010	COIL, MW OSC(SYN)	ABCDE.....
L	5	87-A50-424-010	COIL, FM RF EX(SYN)	ABCDE.....
L	6	87-A50-427-010	COIL, FM OSC EX(SYN)	ABCDE.....
L	6	87-A50-454-010	COIL, FM OSC U(SYN)	...D.....
L	3	87-A91-095-010	BAR-ANT, MW FOR 2B(SYN)	ABC.E.....
L	3	87-A91-096-010	BAR-ANT, MW/LW FOR 3B(SYN)	...D.....
L	7	87-A91-308-010	FLTR, PCFAZH- 450T (TOK)	ABCDE.....
L	2	88-CD6-655-010	COIL, FM5MM*3.5T	ABCDE.....
L	51	87-A50-421-010	COIL, LW OSC(SYN)	...D.....
L	1	89-319-233-080	TR, 2SC1923 (0.1W)	ABCDE.....
Q	54	87-026-214-080	TR, DTA114YS (0.3W)	...D.....
Q	52	87-026-447-080	TR, 2SC1740S R	...D.....
Q	51	87-A30-092-080	FET, 2SK439E/F	...D.....
Q	53	89-320-011-080	TR, 2SC2001 (15W)	...D.....
SCR	4	87-A40-615-070	VARI-CAP, KV1311NT	ABCDE.....
SCR	5	87-A40-615-070	VARI-CAP, KV1311NT	ABCDE.....
SCR	3	87-A40-616-070	VARI-CAP, SVC384(S/T)	ABCDE.....
TC	1	87-011-220-080	TRIMMER CAP 20P VTC	ABCDE.....
TC	51	87-011-233-080	TRIMER, 50P VCT54	...D.....
X	1	87-A70-061-010	VIB, XTAL 4.500MHZ CSA-309	ABCDE.....

MECHANICAL PARTS LIST - 1/2

NOTE: The characters in the suffix column indicate the part usage.

HR		XX		A
LH1		XX		B
LH		XX		C
EZ		XX		D
HA		XX		E
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	87-B00-020-010		BADGE,AIWA 30 GOLD	ABCDE
	88-CH6-019-010		PANEL,CD	ABCDE
	8Z-CH4-002-110		CABI,REAR	
	8Z-CH4-003-010		CHAS,CD	ABCDE
	8Z-CH4-005-010		WINDOW,CD	ABCDE
	8Z-CH4-007-010		WINDOW,CASS	ABCDE
	8Z-CH4-008-010		LID,BATT	ABCDE
	8Z-CH4-009-010		HANDL,ARM	ABCDE
	8Z-CH4-010-010		HANDL,GRIP	ABCDE
	8Z-CH4-013-010		PANEL,LCD21	
	8Z-CH4-019-110		CABI,TOP 2L	ABCDE
	8Z-CH4-020-110		CABI,TOP 2R	ABCDE
	8Z-CH4-030-110		COVER,PH	ABCDE
	8Z-CH4-064-010		WINDOW,LCD EZ	
	8Z-CHE-001-010		CABI,FR 14	
	8Z-CHE-002-010		CABI,FR 14A	A,CDE
	8Z-CHE-003-010		BOX,CASS 14	ABCDE
	8Z-CHE-004-010		WINDOW,LED 14	
	8Z-CHE-006-010		WINDOW,LED 14LH	.BC.E
	8Z-CHE-007-010		CABI,REAR 10W	
	8Z-CHE-008-010		BOX,CD 14	ABCDE
	8Z-CHE-009-010		PANEL,LCD21 14	ABCDE
	8Z-CHE-011-010		WINDOW,LCD 14	ABC.E
	8Z-CHE-012-010		WINDOW,LCD 14EZ	...D
	8Z-CHE-014-010		GRILLE,FR L 14	ABCDE
	8Z-CHE-015-010		GRILLE,FR R 14	ABCDE
	8Z-CHE-016-010		GRILLE,TOP L 14	ABCDE
	8Z-CHE-017-010		GRILLE,TOP R 14	ABCDE
	8Z-CHE-018-010		WINDOW,LED 14A	A..D
	8Z-CHE-019-010		CABI,FR 14B	.B
	8Z-CHE-020-010		CABI,FR 14C	
	8Z-CHE-021-010		BOX,CD 14A	
	8Z-CHE-022-010		BOX,CASS 14A	
	8Z-CHE-024-010		CABI,TOP 2L A	
	8Z-CHE-025-010		CABI,TOP 2R A	
	8Z-CHE-026-010		COVER,PH A	
	8Z-CHE-027-010		LID,BATT A	
	8Z-CHE-028-010		HANDL,ARM A	
	8Z-CHE-029-010		HANDL,GRIP A	
	8Z-CHE-032-010		CABI,REAR LH	ABCDE
	8Z-CHG-011-010		WINDOW,LED 16A	
	8Z-CHR-013-010		GRILLE,FR L 24	
	8Z-CHR-014-010		GRILLE,FR R 24	
	8Z-CHR-015-010		GRILLE,TOP L 24	
	8Z-CHR-016-010		GRILLE,TOP R 24	
	8Z-CH4-023-110		BTN,VOL	ABCDE
	8Z-CH4-024-010		BTN,CD	ABCDE
	8Z-CH4-025-010		BTN,REPEAT	ABCDE
	8Z-CH4-026-010		BTN,FUNC	ABCDE
	8Z-CH4-027-010		BTN,EQ	ABCDE
	8Z-CH4-028-010		KEY,CASS 21	ABCDE
	8Z-CH4-031-010		BTN,POWER-SAVE	
	87-CD6-041-010		PLATE,AC	...D
	84-CD5-215-010		GEAR	ABCDE
	84-CD5-216-010		BRACKET	ABCDE
	84-CD5-217-010		PLATE,MAGNET	ABCDE
	85-CD7-217-010		HLDR,CHUCK A	ABCDE
	86-CT4-218-010		CUSHION,FOOT/PORON	ABCDE
	87-036-368-010		MAGNET	ABCDE
	87-A91-151-010		SW,LEAF 1P2T/TC48-021	ABCDE
	87-CD6-213-010		SPR-C,BATT (-)	ABCDE
	87-CD6-214-010		SPR-C,BATT LINK	ABCDE
	87-CD6-222-010		SPR-C,BATT (-) L	ABCDE
	87-CD6-223-010		SPR-C,BATT LINK L	ABCDE
	88-CH6-207-010		HLDR,ANT	ABCDE
	88-CH6-220-010		CUSHION,CD A	ABCDE
	8Z-CH4-201-010		HLDR,LCD	ABCDE
	8Z-CH4-204-010		HLDR,SPEAKER	ABCDE
	8Z-CH4-205-010		SPR-T,CASS	ABCDE
	8Z-CH4-206-010		SPR-T,CD	ABCDE
	8Z-CH4-207-010		HLDR,OIL-DMPR	ABCDE
	8Z-CH4-208-010		HLDR,PWB	ABCDE
	8Z-CH4-209-010		HLDR,PT	ABCDE
	8Z-CH4-210-010		HLDR,LED	ABCDE
	8Z-CH4-211-010		BASE,CHUCK	ABCDE
	8Z-CH4-212-010		RING,CHUCK	ABCDE
	8Z-CH4-214-010		HLDR,REC-SW 21	ABCDE
	8Z-CH4-216-010		HLDR,FUNC-PWB	ABCDE
	8Z-CH4-217-010		HLDR,PT A	
	87-067-566-010		TAPPING SCREW, VFTT+3-6	ABCDE
	87-254-097-410		U+3-12 CR	ABCDE
	87-261-037-410		V+2-10 GLD	ABCDE

MECHANICAL PARTS LIST - 2/2

		87-342-074-010	UT2+2.6-8	ABCDE.....
		87-571-032-410	VIT+2-3	ABCDE.....
		87-644-096-410	UT1+3-10 CR	ABCDE.....
		87-661-100-410	VFT1+3-16	ABCDE.....
		87-741-095-410	UT2+3-8 GLD	ABCDE.....
		87-751-094-410	VT2+3-6 W10SL0T	ABCDE.....
*		87-751-075-410	VT2+2.6-10	ABCDE.....
*		87-B10-239-010	QT2+3-8 W/O CR	ABCDE.....
*		87-B10-242-010	UT2+3-30 W/O CR	ABCDE.....
		87-035-192-010	FUSE, 4AT	
		87-035-347-010	FUSE, 2.5A 250V T	ABC.E.....
		87-036-389-010	SW,PUSH LOCK	ABCDE.....
		87-A60-177-010	JACK,AC U W/SW	
		87-A60-178-010	JACK,AC E W/SW	ABCDE.....
		87-A90-092-080	PROTECTOR, 2.5A 491	...D.....
		87-A91-369-010	SW,AC SL 2 2 2 SDKGA41700	ABC.E.....
		88-CH6-626-010	PT,U	
		88-CH6-627-010	PT,E	...D.....
		88-CH6-628-010	PT,H	ABC.E.....
		8Z-CH4-614-010	CONN ASSY, 6P CD-ME	ABCDE.....
		8Z-CH4-618-010	FF-CABLE, 16P CD-RF	ABCDE.....
		8Z-CH4-620-010	FF-CABLE, 7P FR-LED	ABCDE.....
		8Z-CH4-621-010	FF-CABLE, 7P CD-FR	ABCDE.....
		8Z-CH4-640-010	ANT,ROD	ABCDE.....
		8Z-CH4-645-010	SPKR,MAYLOR 80HM SILVER	ABCDE.....
		8Z-CH4-663-010	PT,E (75-35)	
		8Z-CH4-664-010	SPKR,10 60HM	
		8Z-CH4-665-010	SPKR,MAYLOR 80HM (2.0W)	
		8Z-CH4-667-010	CONN ASSY, 6P I-AMP	
		8Z-CH4-668-010	CONN ASSY, 6P O-AMP	
		8Z-CH4-669-010	CONN ASSY, 5P S-PWR	
SP	0	88-CD5-602-010	SPKR 4'3.2	ABC.E.....
SP	0	88-CD5-603-010	SPKR,10 70HM	...D.....
W	0	8Z-CH4-619-010	FF-CABLE, 14P AF-FR	ABCDE.....
W	0	8Z-CH4-622-010	FF-CABLE, 6P TU-FR	ABCDE.....


ACCESSORIES / PACKAGE LIST - 1/1


NOTE: The characters in the suffix column indicate the part usage.

HR	XX	A.....
LH1	XX	B.....
LH	XX	C.....
EZ	XX	D.....
HA	XX	E.....


REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	8Z-CH4-908-010	IB	EZ(9L)B	D.....
	8Z-CH4-918-010	IB	EZ(9L)FM	D.....
	8Z-CHE-905-010	IB	U(ESF)B	D.....
	8Z-CHE-907-010	IB	HR(ECA)B	A.....
	8Z-CHE-908-010	IB	EZ(9L)B, 90	D.....
	8Z-CHE-909-010	IB	K(E)B, 90	D.....
	8Z-CHE-915-010	IB	U(ESF)FM	D.....
	8Z-CHE-917-010	IB	HR(ECA)FM	...C.E.....
	8Z-CHG-906-010	IB	LH(ESP)B	..C.E.....
	8Z-CHG-916-010	IB	LH(ESP)FM	D.....
	87-A80-034-010	AC	CORD SET ASSY, K W/F MAY-BG	D.....
	87-A80-036-010	AC	CORD SET ASSY, E W/FLTR VOL	ABCD.....
	87-A80-109-010	AC	CORD, HK7281 BLK U	E.....
	87-A80-119-010	AC	CORD SET ASSY, AZ	E.....
	87-A90-312-010	PLUG	CONVERSION WTN-1157R1	ABC.E.....
	8Z-CK4-962-010	RC	UNIT, RC-ZAT04 (VS)	ABCDE.....

SCHEMATIC DIAGRAM – 1 (MAIN 1/2)

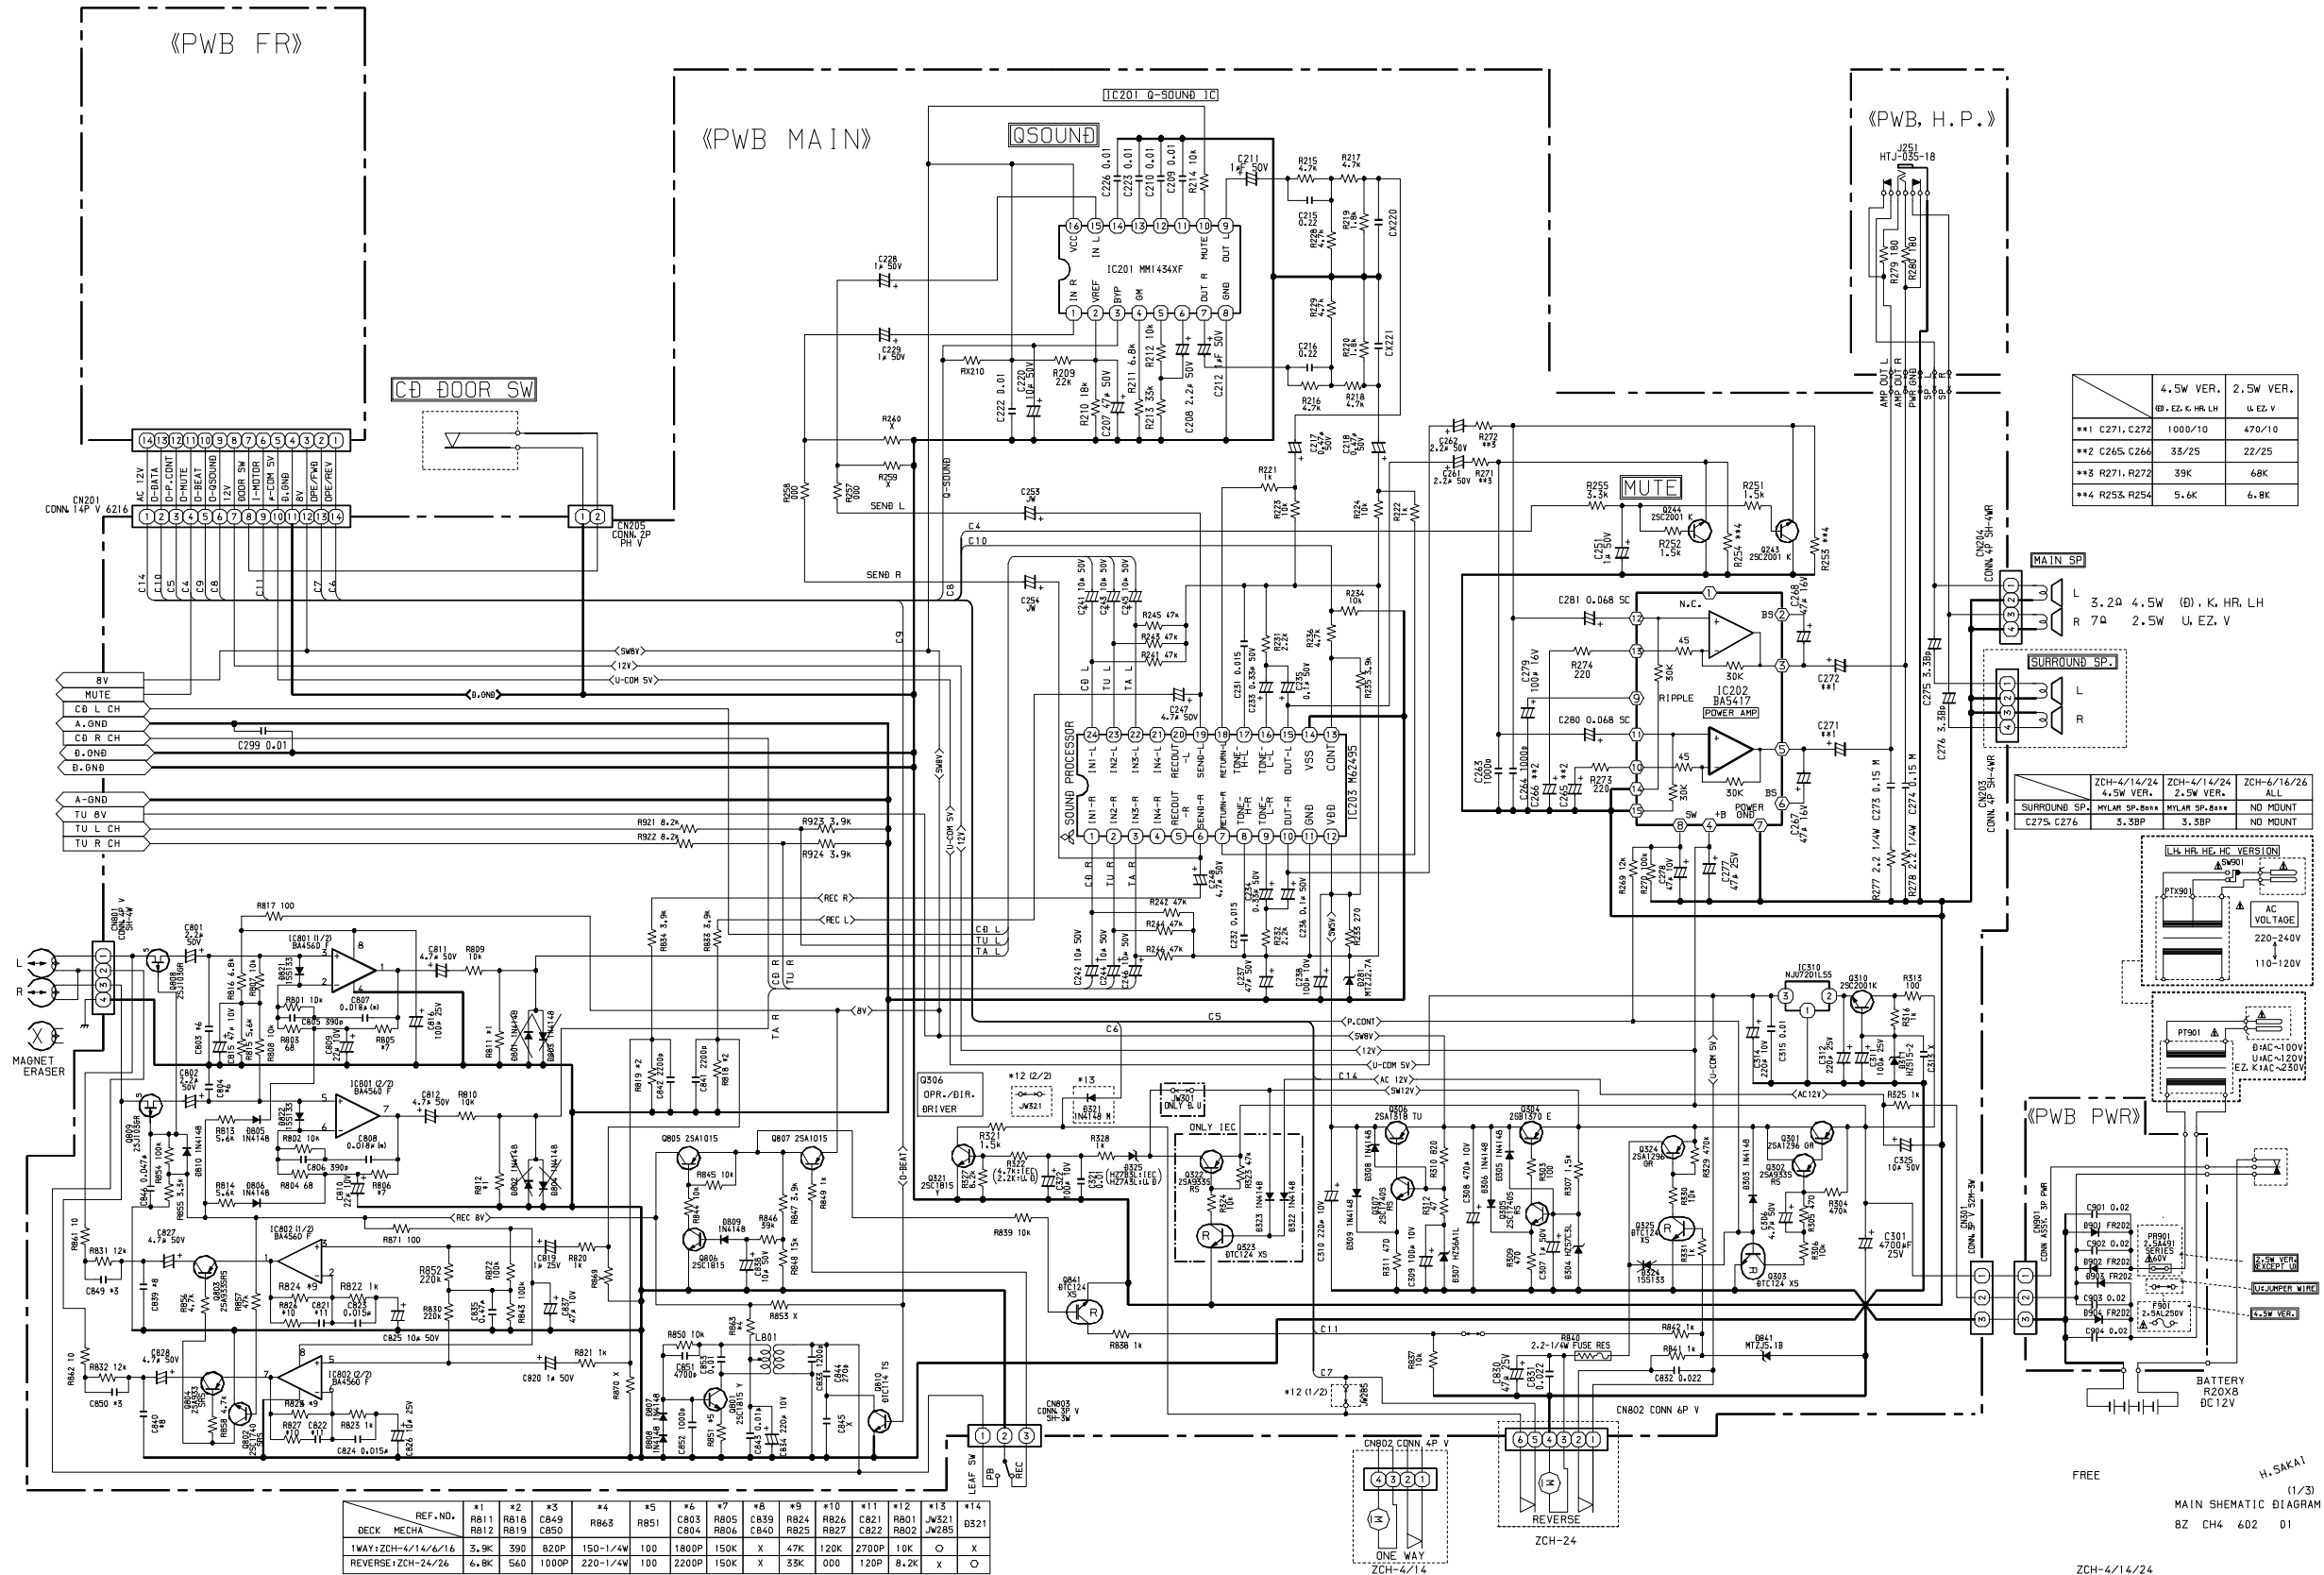

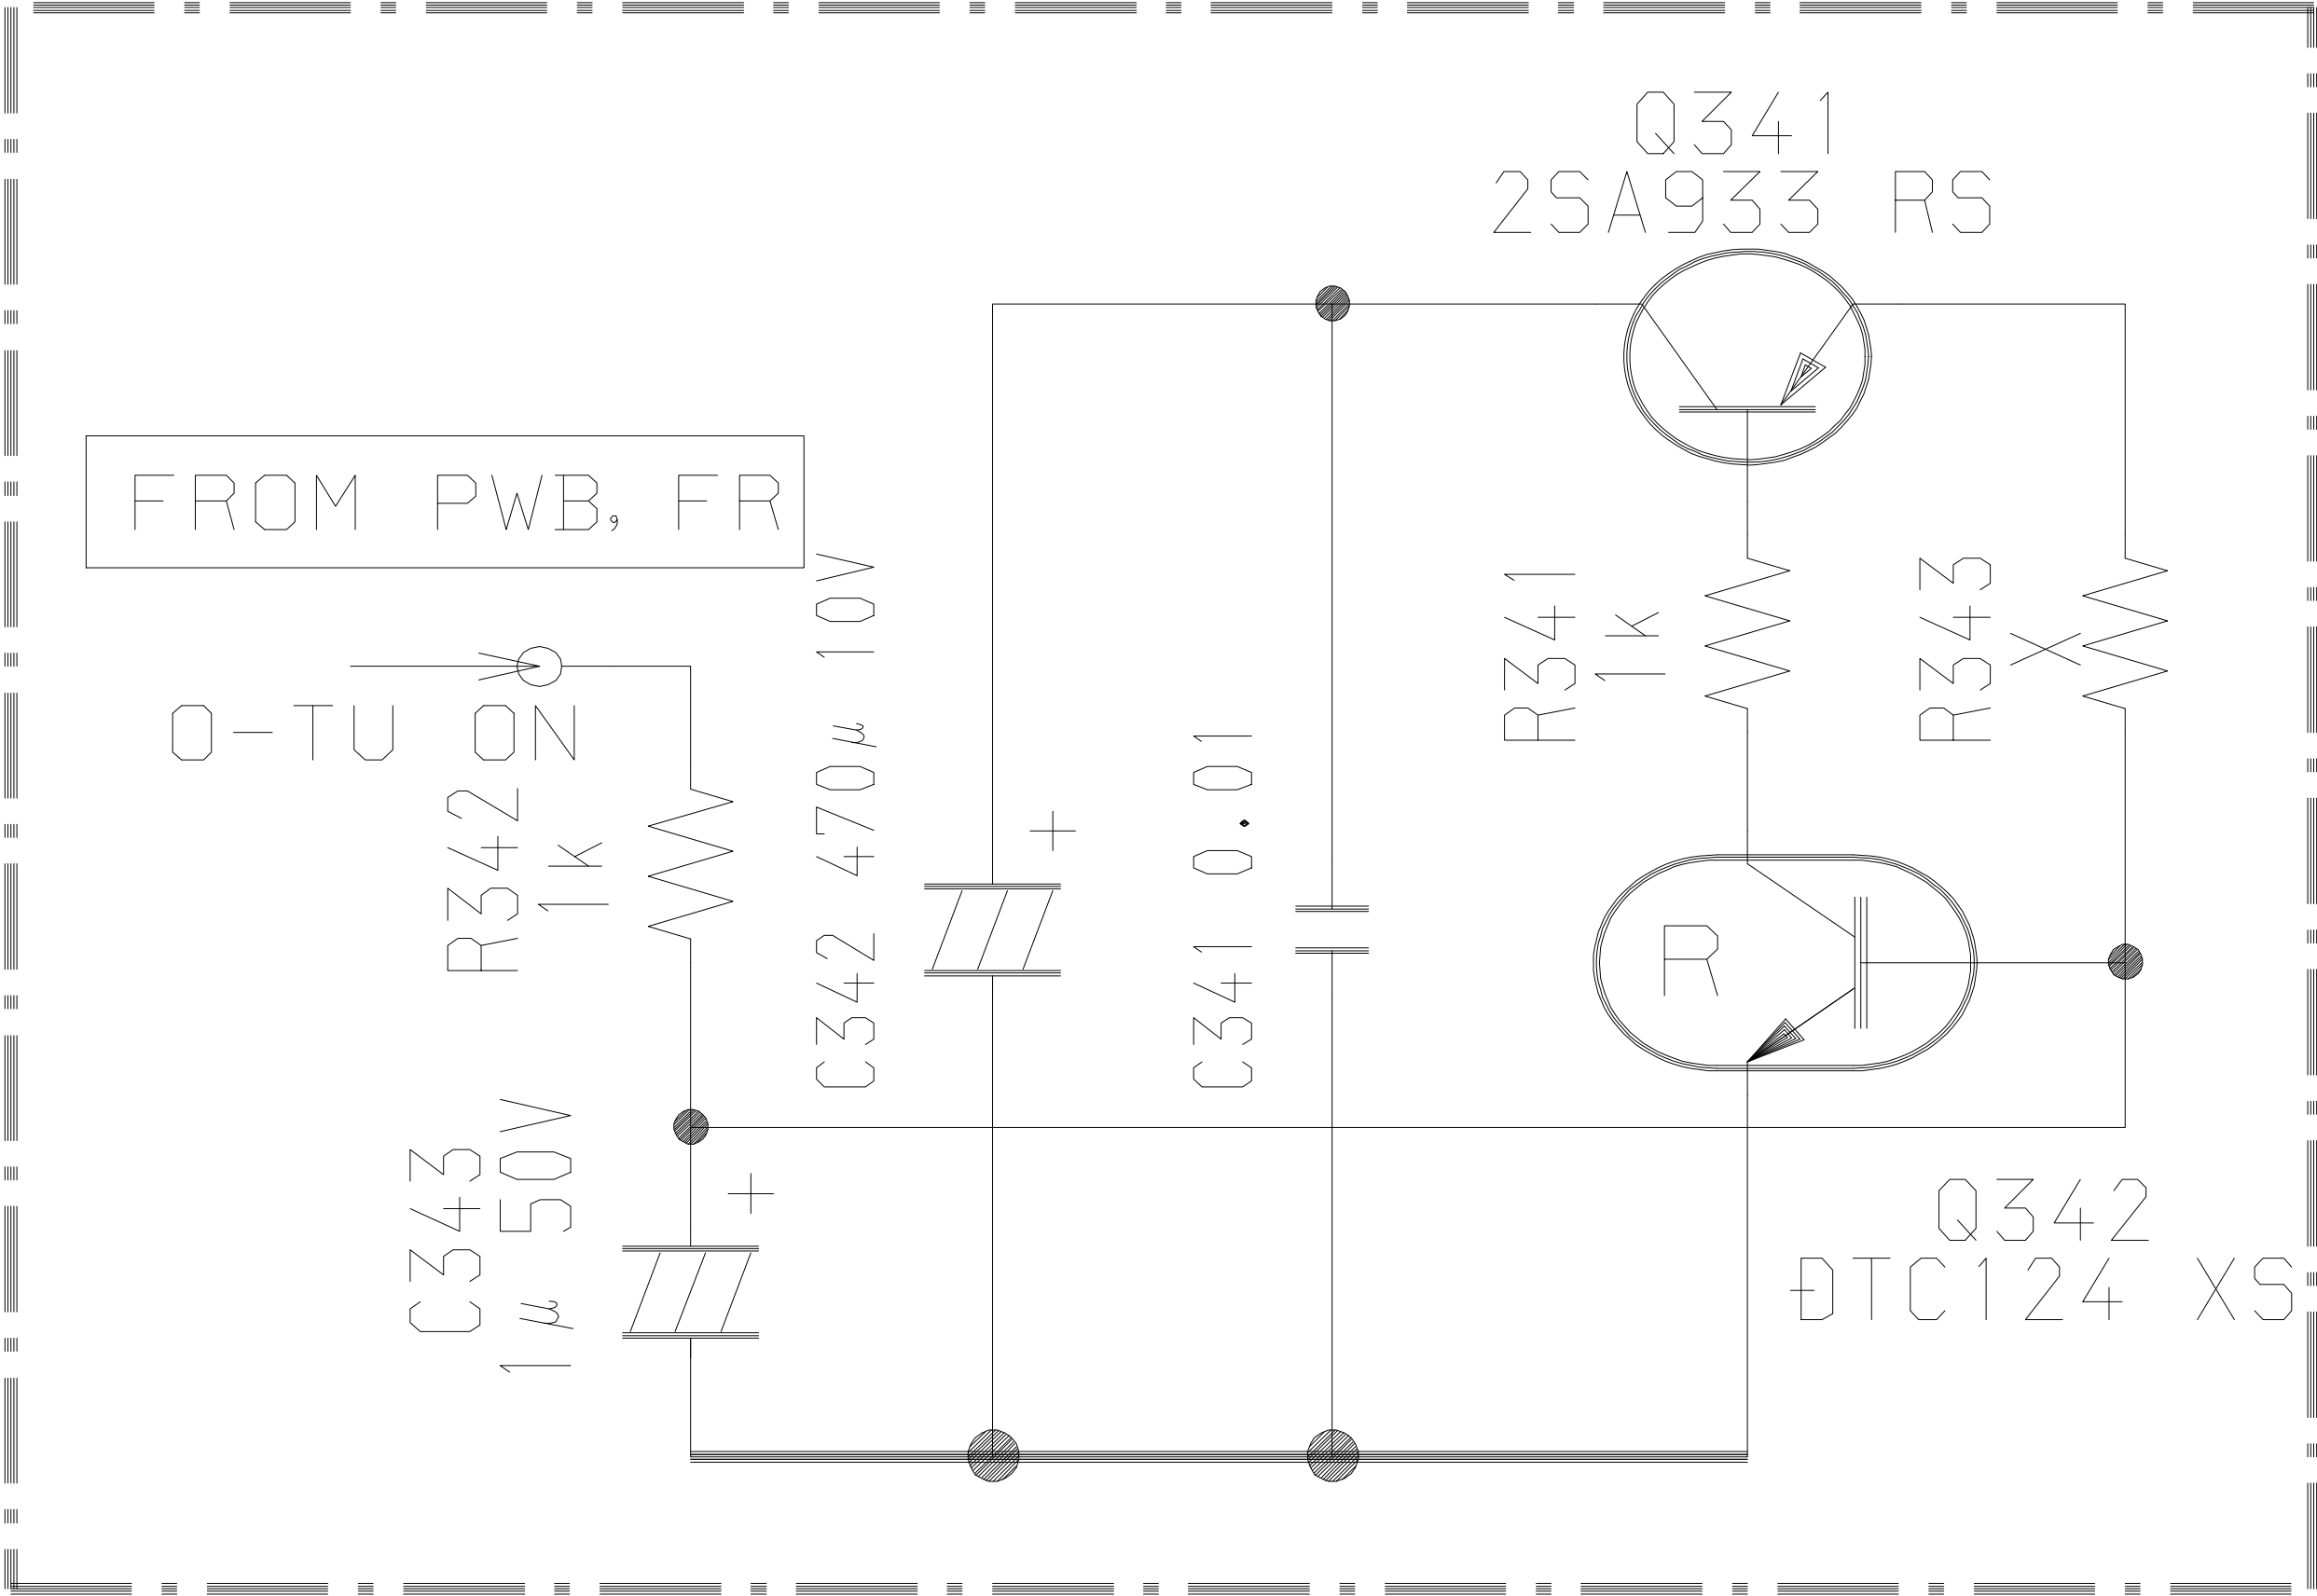

SCHEMATIC DIAGRAM – 3 (CD)

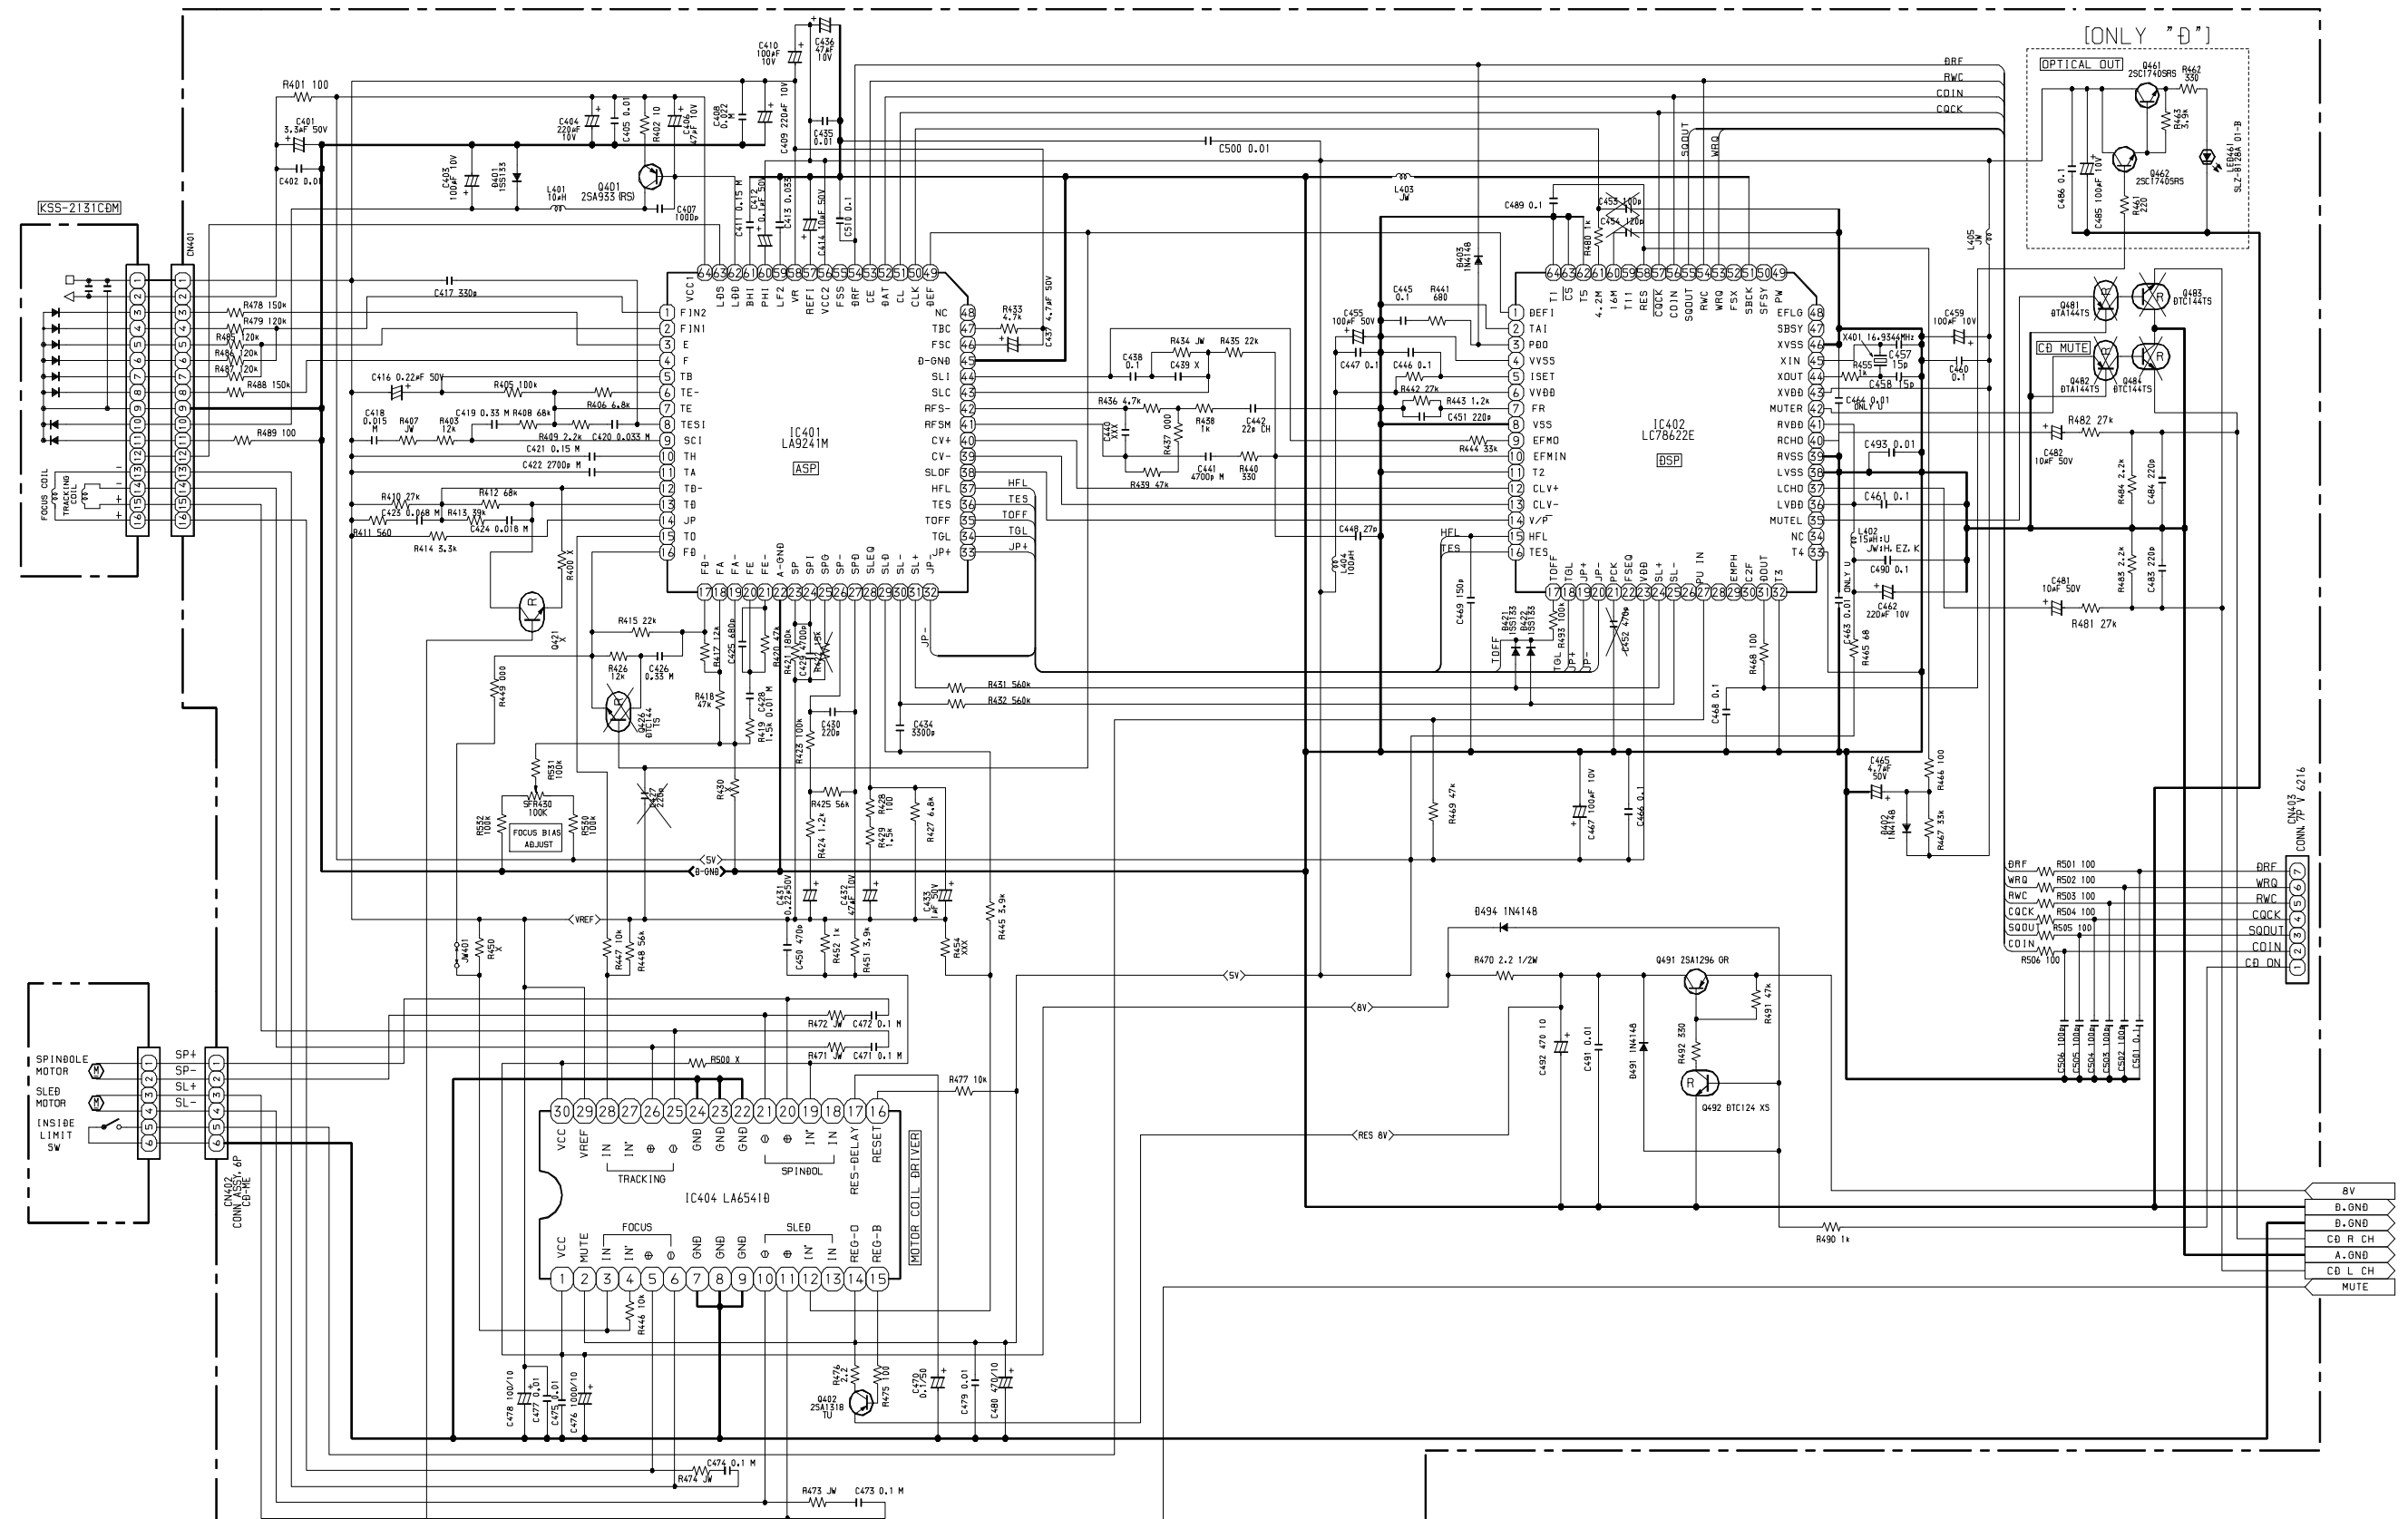


FREE

94V0


W. SAKAI

CD SCHEMATIC DIAGRAM


SCHEMATIC DIAGRAM – 4 (FRONT)

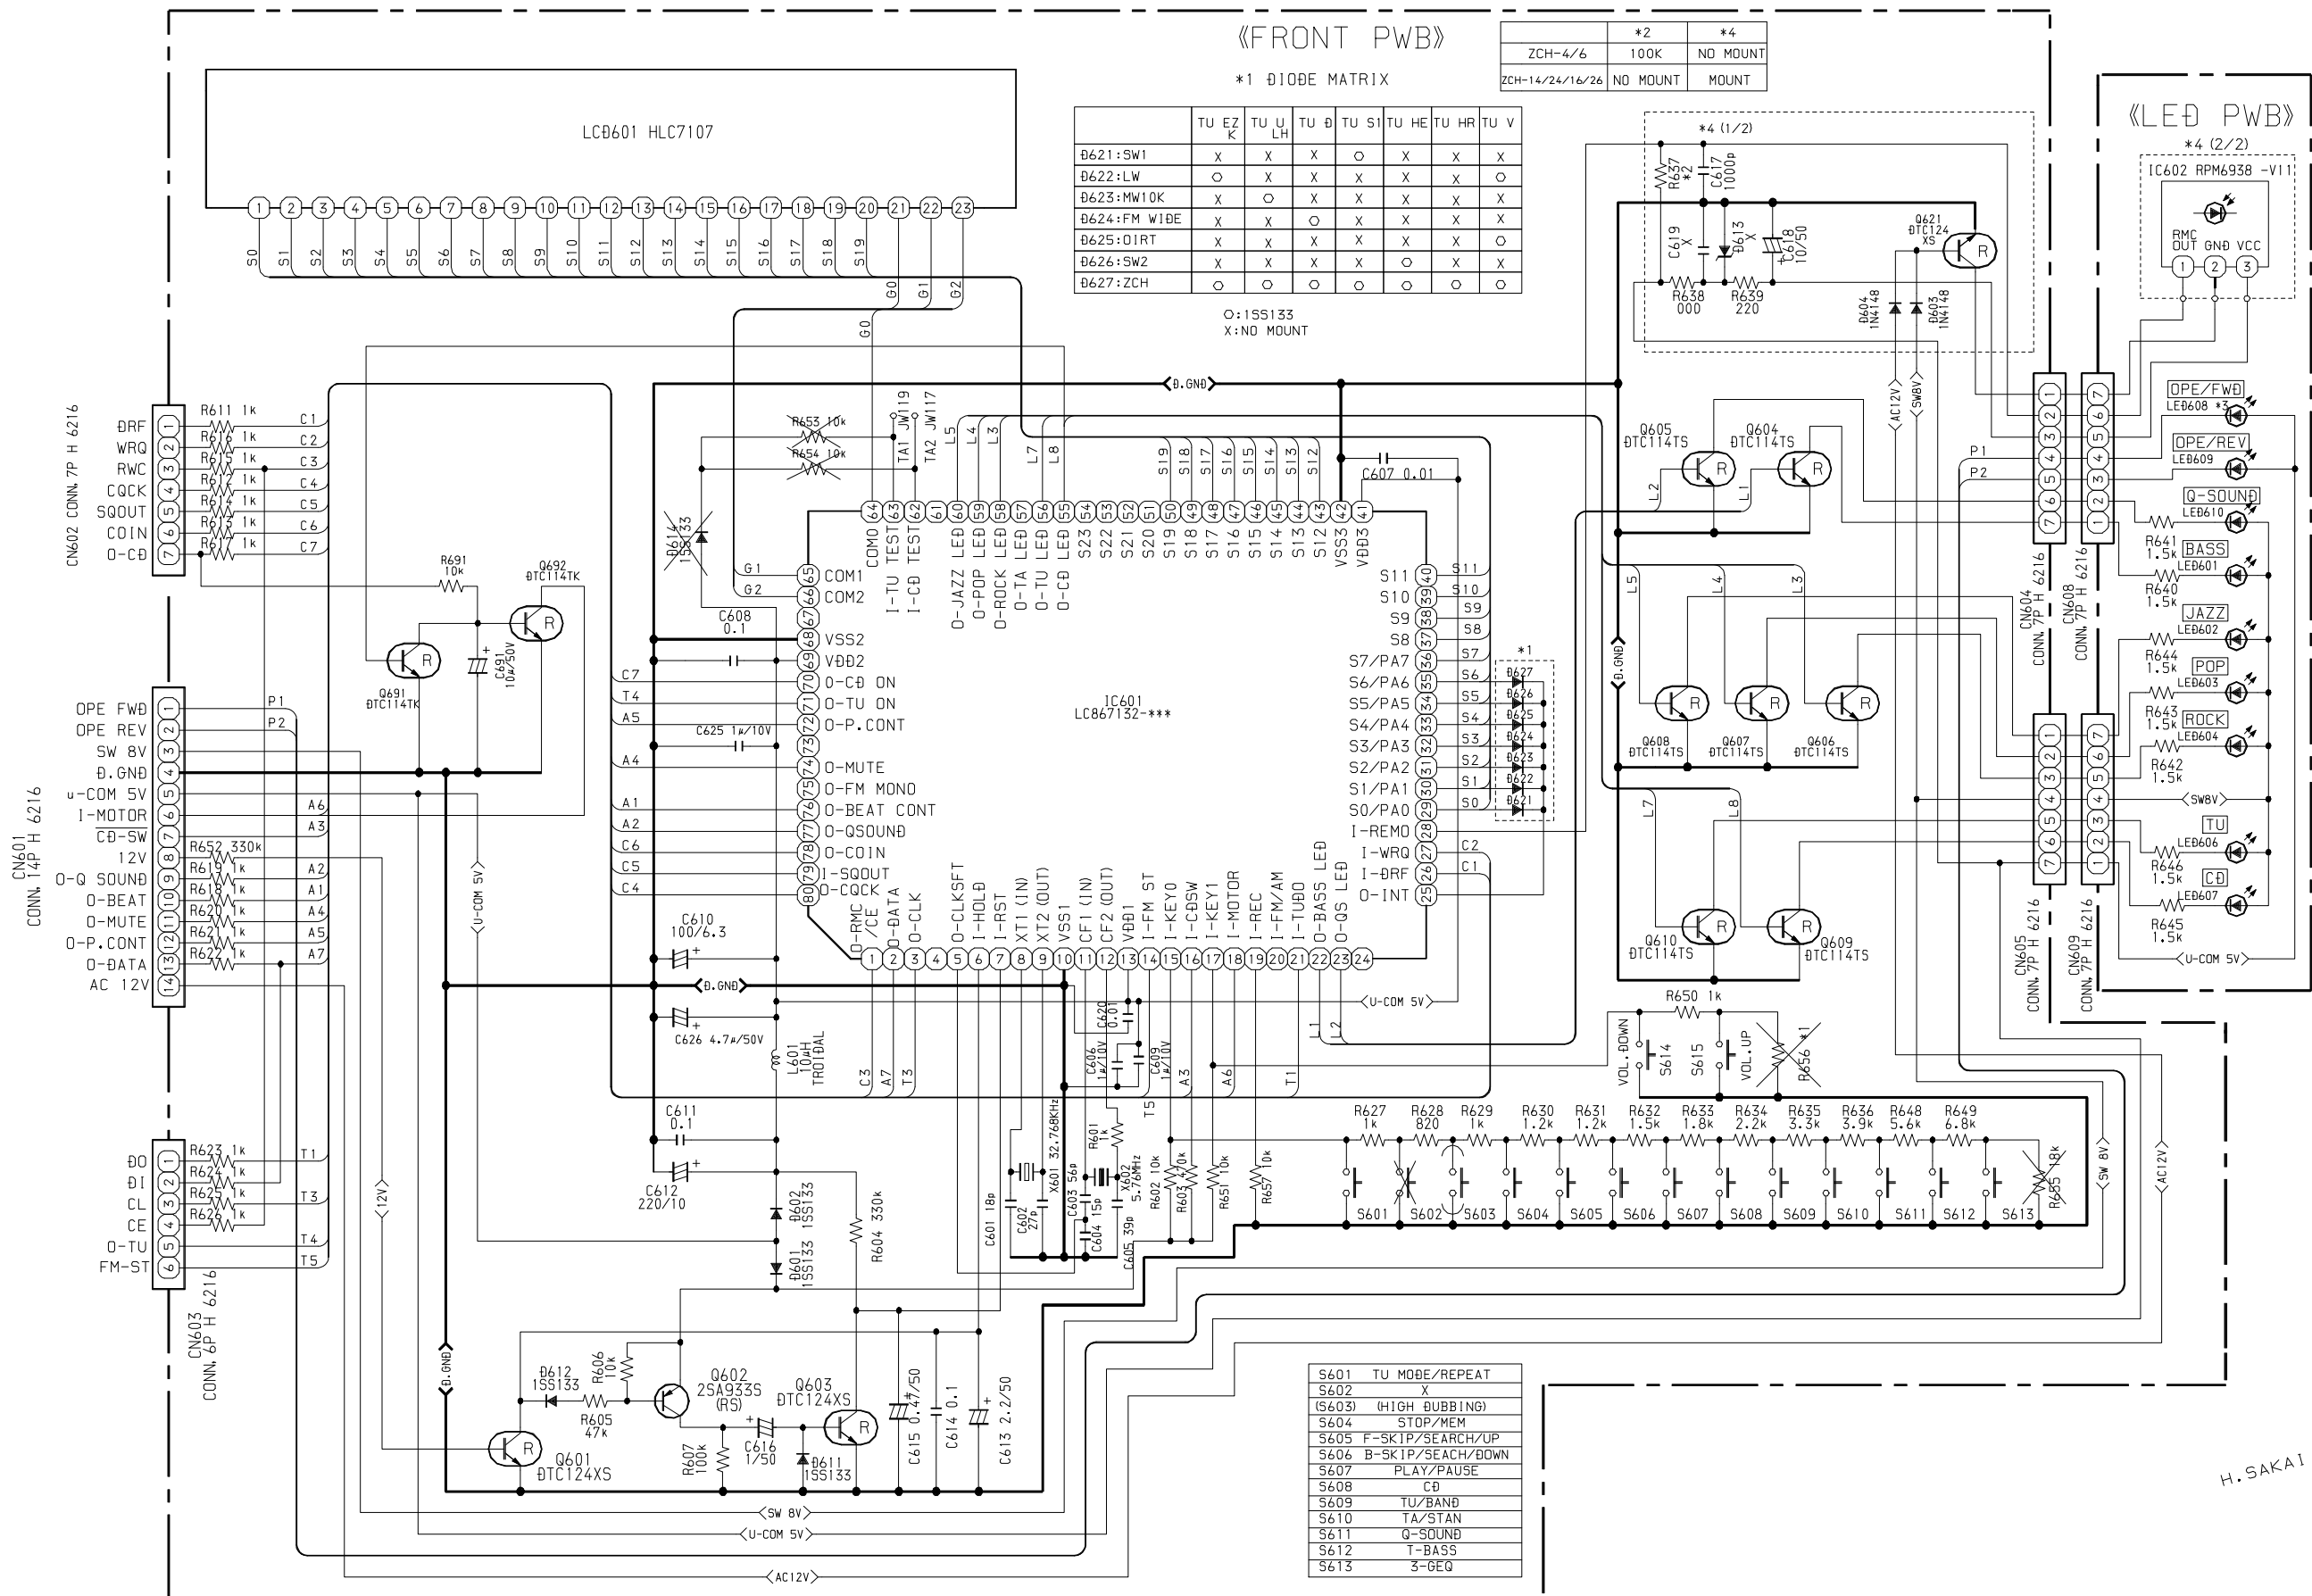

H. SAKAI

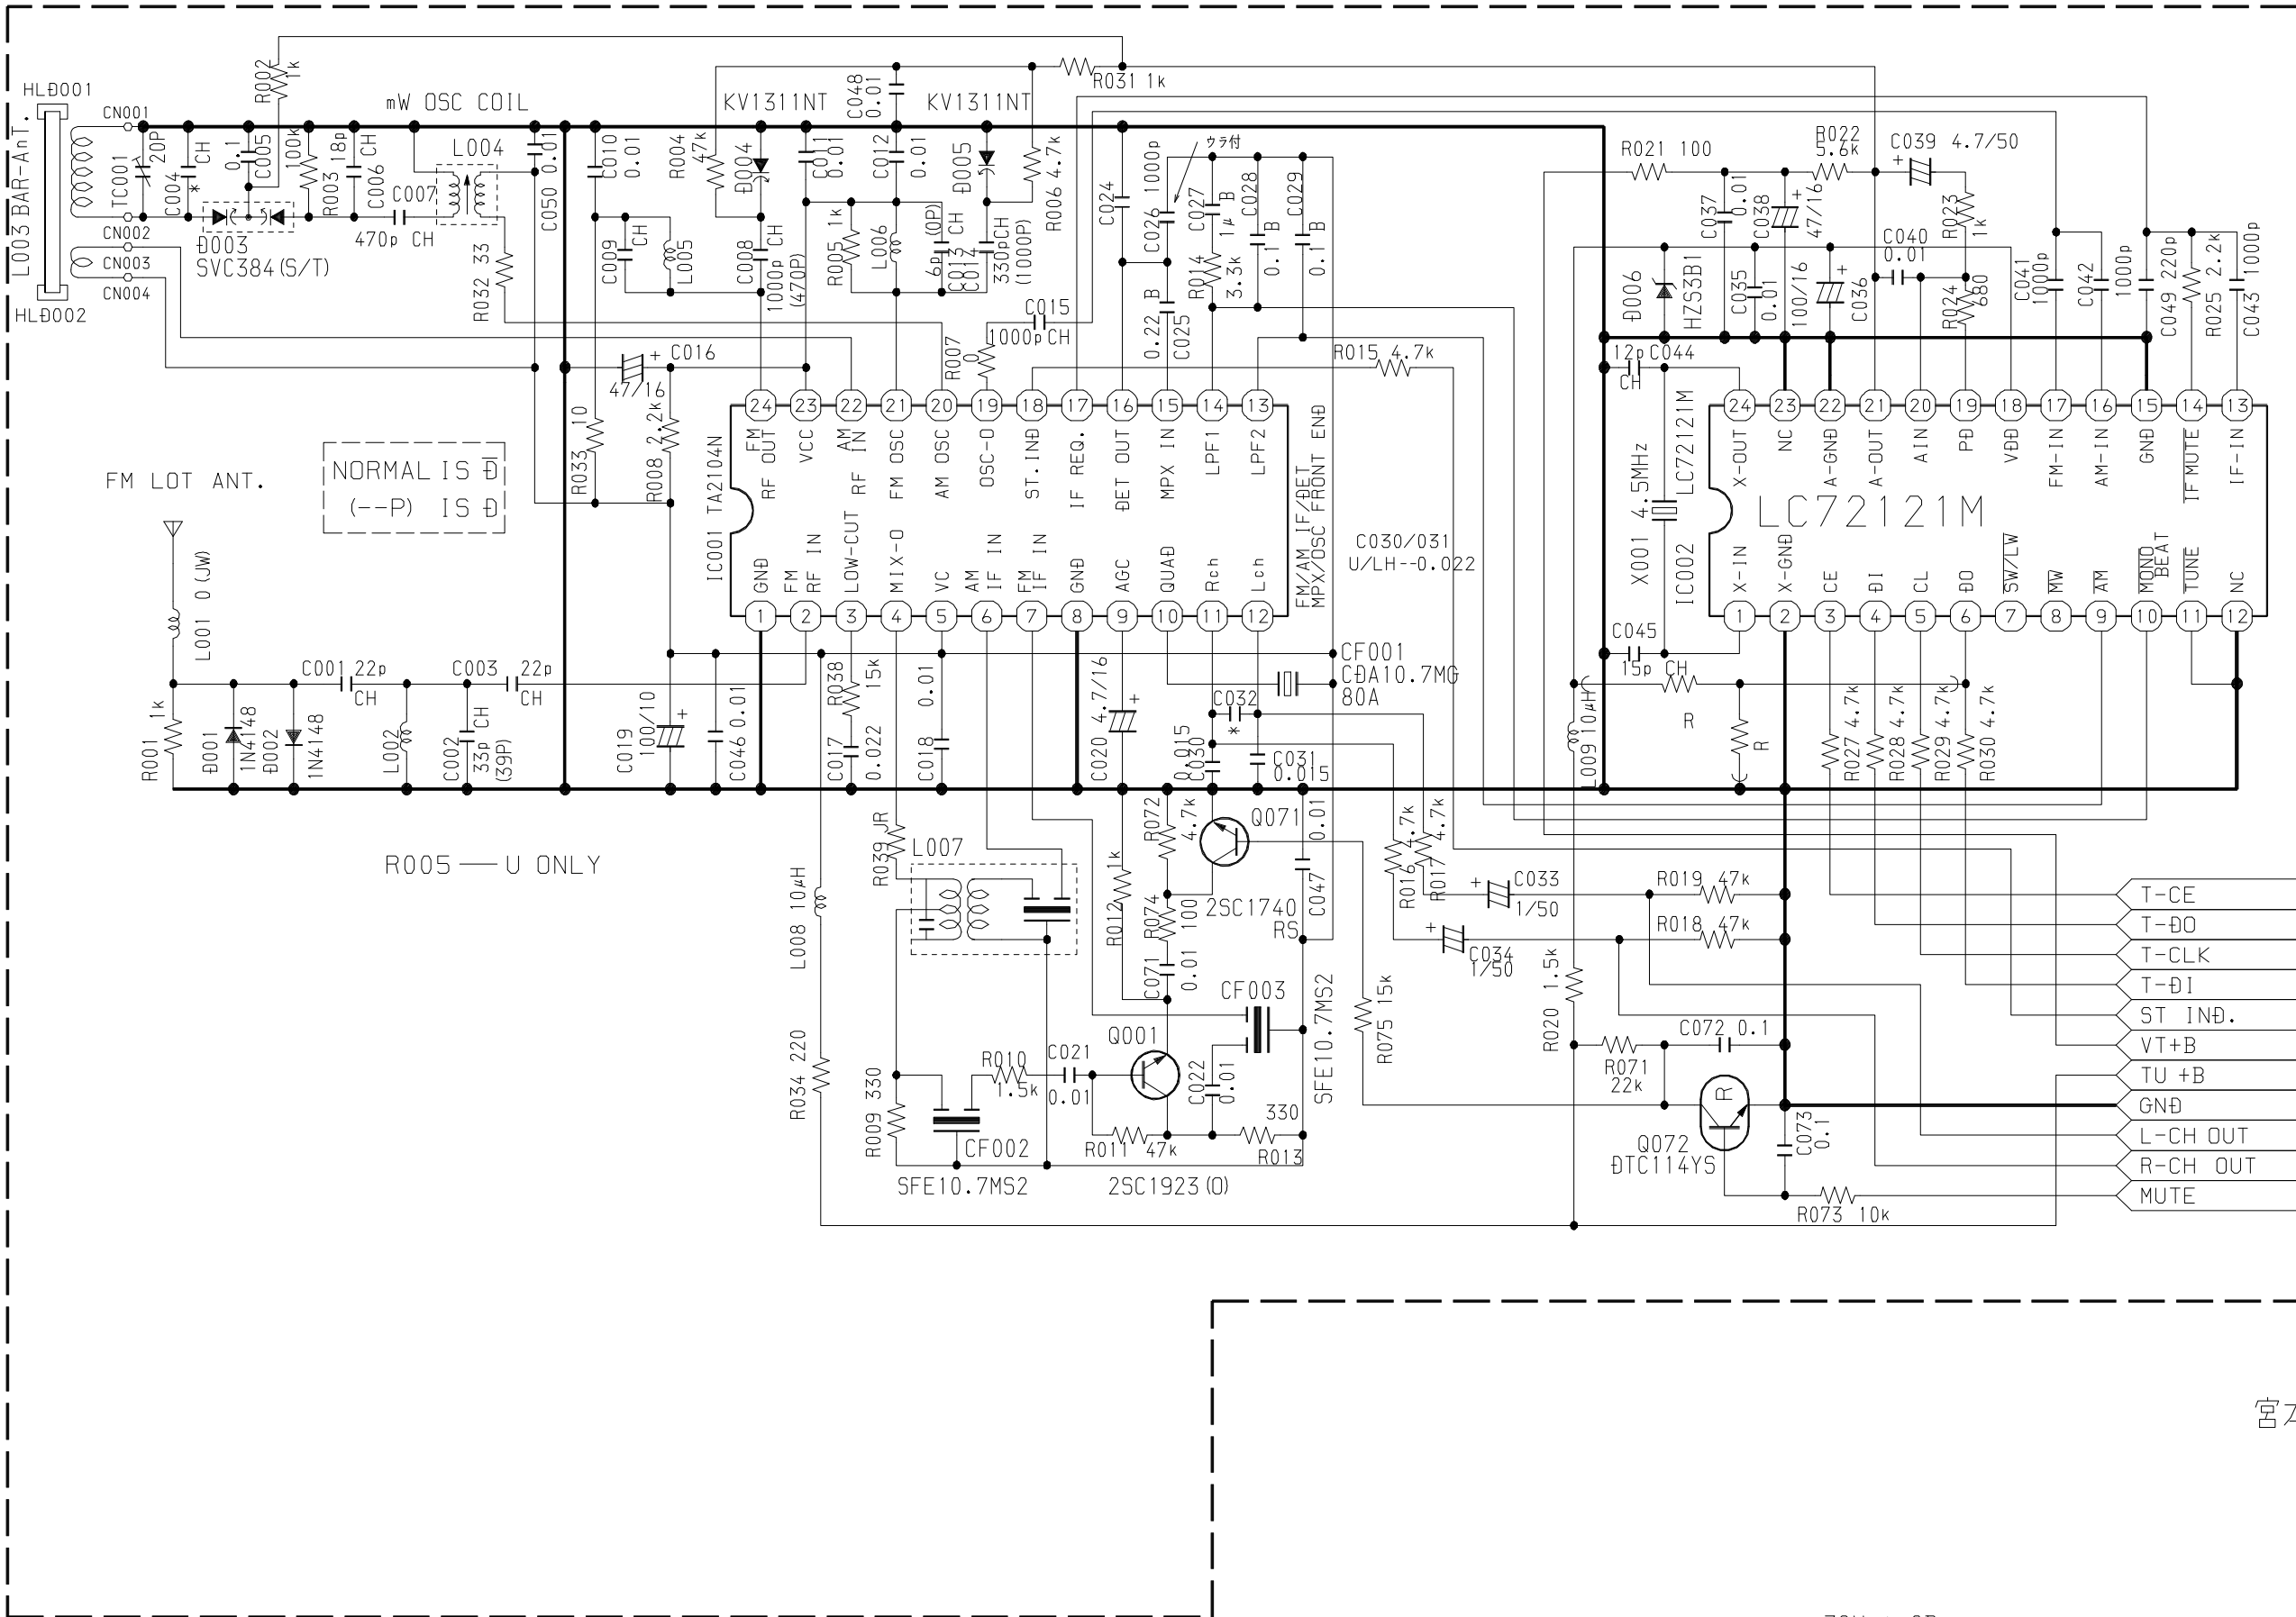

宮本

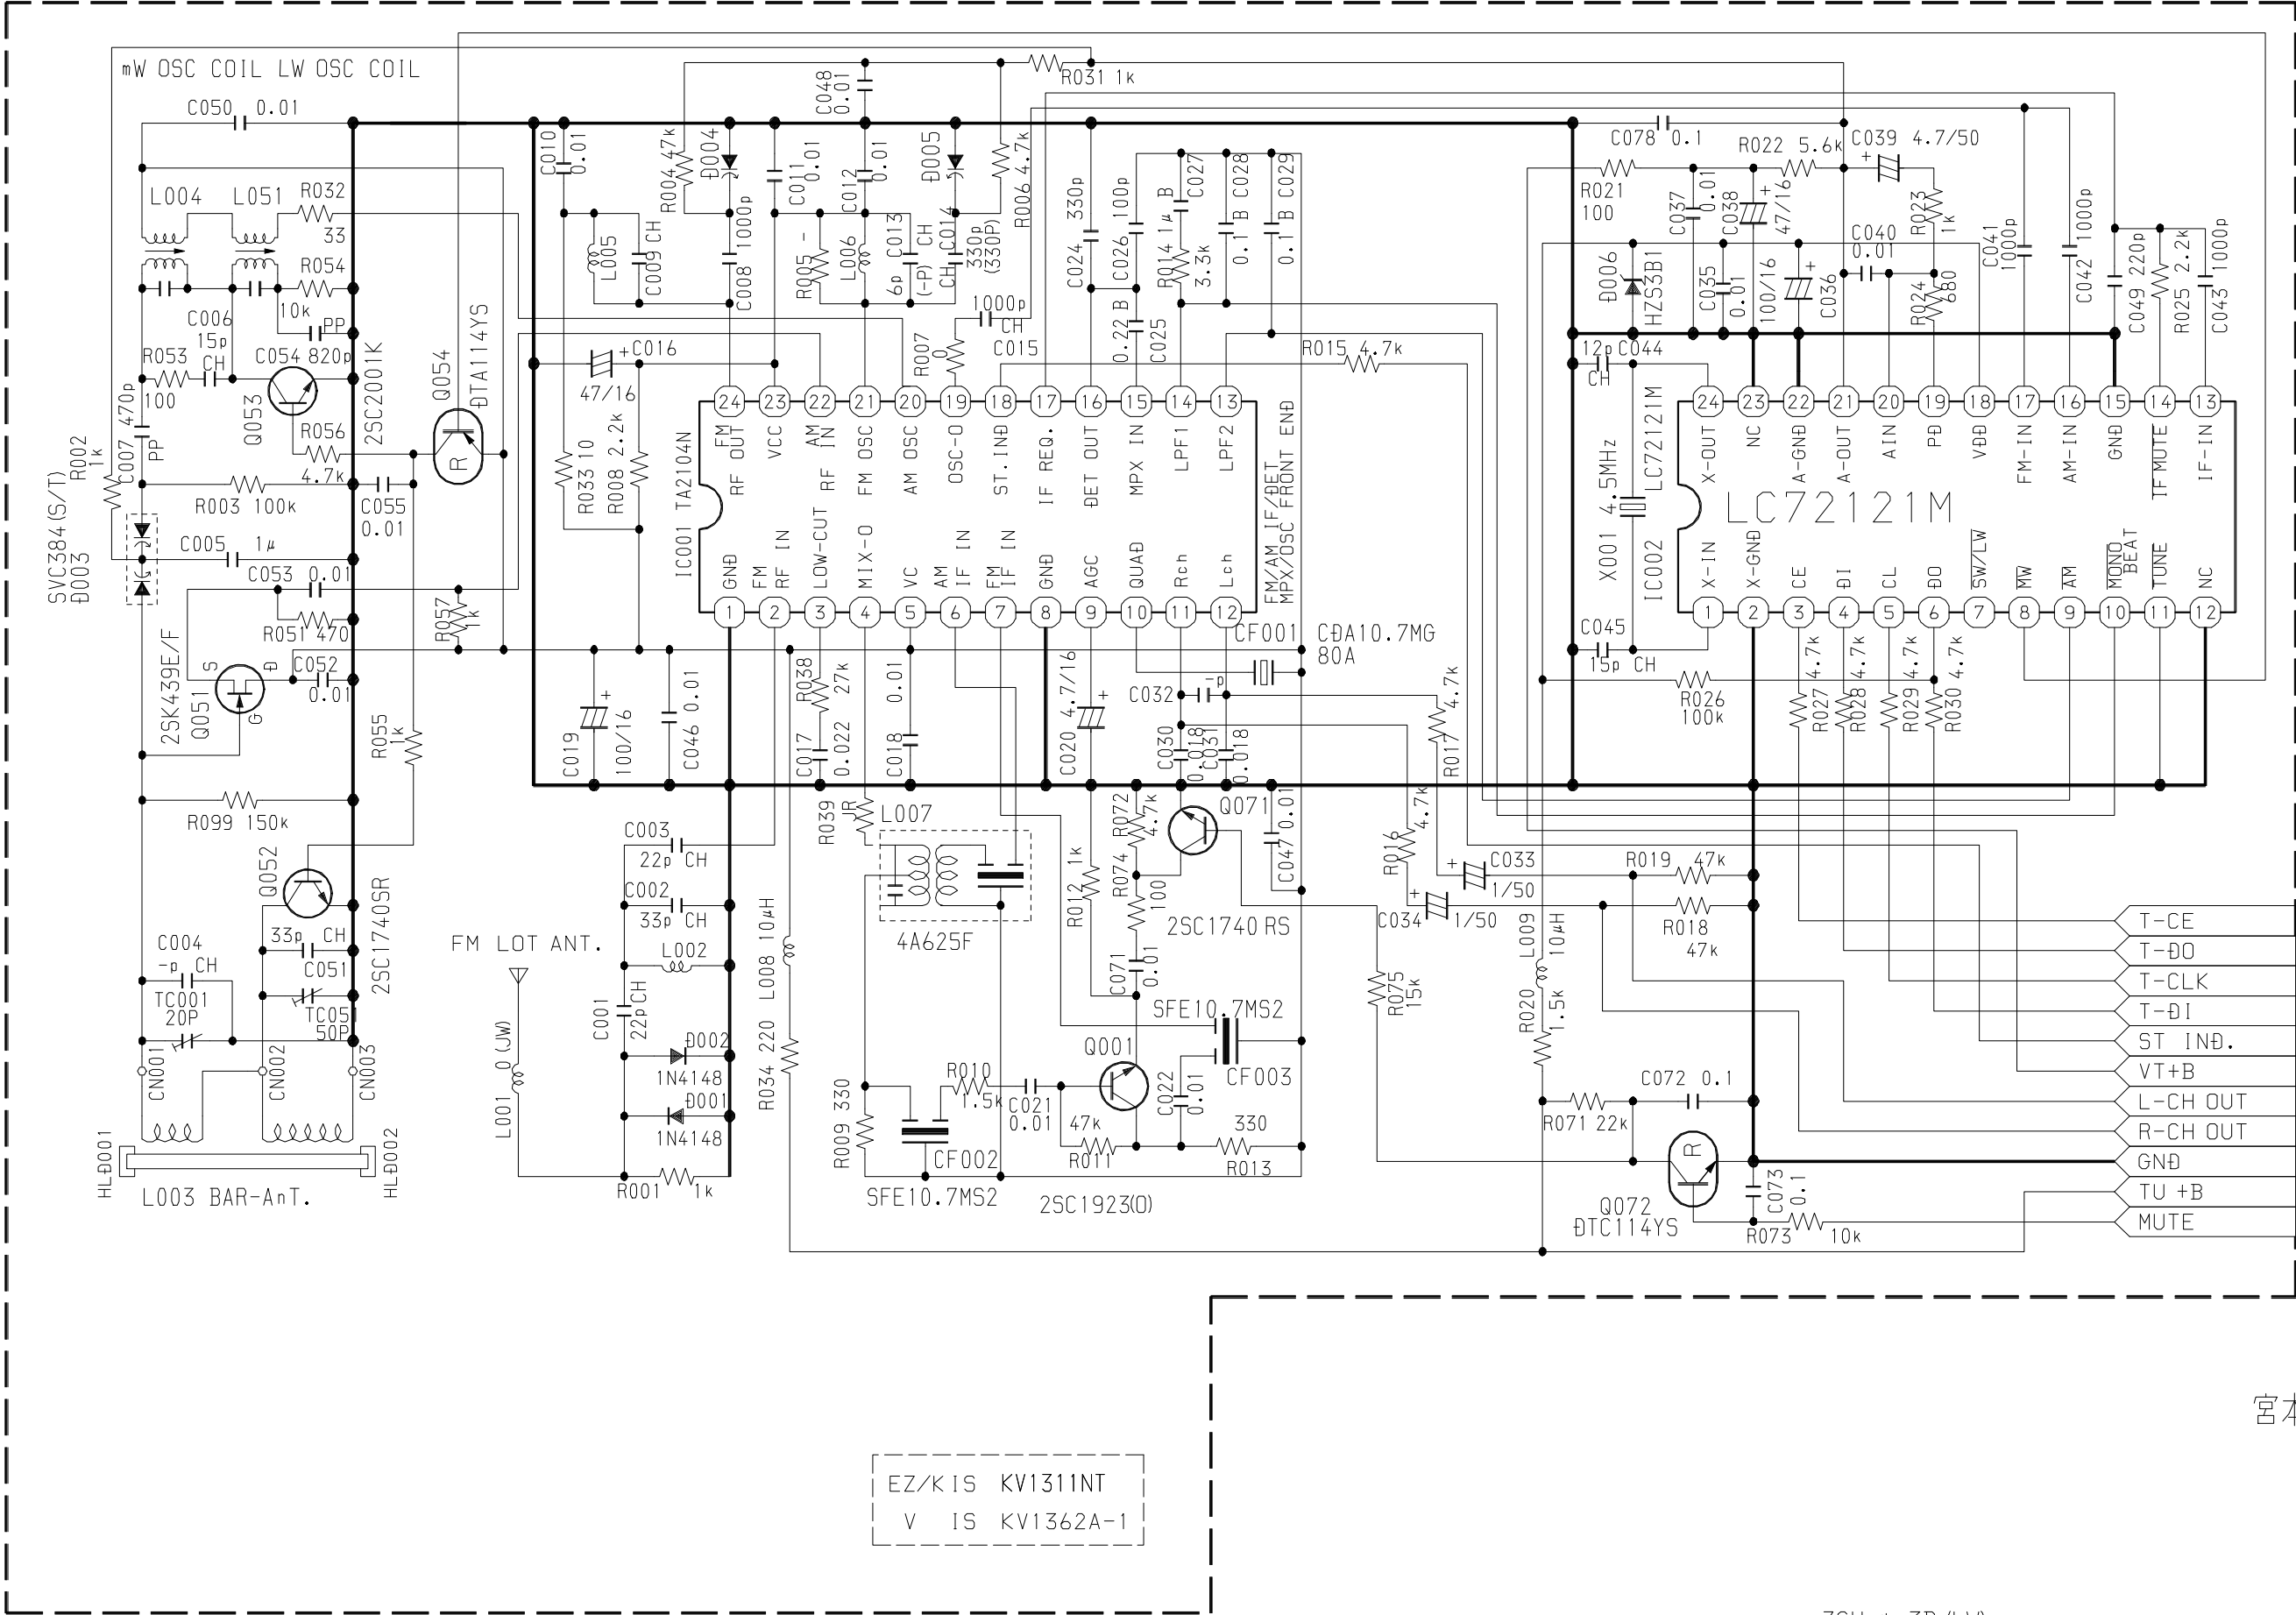

サービス技術ニュース	
番号	連絡内容
G- -	
G- -	
G- -	

アイワ株式会社
AIWA CO.,LTD.

9630472

Tokyo Japan