

aiwa



CSD-ED88 CSD-ED89

COMPACT DISC STEREO RADIO
CASSETTE RECORDER

- TYPE: (89): HA, HR, LH, EZ,
(88): LH

SIMPLE MANUAL

- Replace this Service Manual with "Revision Publishing" when it is issued.

ELECTRICAL MAIN PARTS LIST - 1/6

NOTE: The characters in the suffix column indicate the part usage.

HR		XX		A
LH1		XX		B
LH		XX		C
EZ		XX		D
HA		XX		E
		KANRI		
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
C	218	87-010-400-080	CAP, ELECT 0.47-50V	ABCDE
C	217	87-010-400-080	CAP, ELECT 0.47-50V	ABCDE
C	228	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	229	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	232	87-010-213-080	C-CAP, S 0.015-50 B	ABCDE
C	231	87-010-213-080	C-CAP, S 0.015-50 B	ABCDE
C	238	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	237	87-010-374-080	CAP, ELECT 47-10V	ABCDE
C	235	87-010-544-080	CAP, ELECT 0.1-50V	ABCDE
C	236	87-010-544-080	CAP, ELECT 0.1-50V	ABCDE
C	234	87-010-546-080	CAP, ELECT 0.33-50V	ABCDE
C	233	87-010-546-080	CAP, ELECT 0.33-50V	ABCDE
C	248	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	247	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	246	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	241	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	245	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	244	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	243	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	242	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	262	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE
C	261	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE
D	281	87-A40-466-080	ZENER, MTZJ2.7A	ABCDE
IC	203	87-A21-111-040	C-IC, M62495FP	ABCDE
C	209	87-010-190-080	S CHIP F 0.01	ABCDE
C	208	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE
C	207	87-010-408-080	CAP, ELECT 47-50V	ABCDE
C	210	87-010-190-080	S CHIP F 0.01	ABCDE
C	215	87-010-425-080	C-CAP, 0.22-25 F	ABCDE
C	216	87-010-425-080	C-CAP, 0.22-25 F	ABCDE
C	211	87-010-544-080	CAP, ELECT 0.1-50V	ABCDE
C	212	87-010-544-080	CAP, ELECT 0.1-50V	ABCDE
C	223	87-010-190-080	S CHIP F 0.01	ABCDE
C	226	87-010-190-080	S CHIP F 0.01	ABCDE
C	222	87-010-190-080	S CHIP F 0.01	ABCDE
C	220	87-010-405-080	CAP, ELECT 10-50V	ABCDE
IC	201	87-A20-946-040	C-IC, MM1434XF	ABCDE
C	251	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	263	87-010-178-080	CHIP CAP 1000P	ABCDE
C	264	87-010-178-080	CHIP CAP 1000P	ABCDE
C	269	87-010-248-080	CAP, ELECT 220-10V	
C	265	87-010-260-080	CAP, ELECT 47-25V	
C	266	87-010-260-080	CAP, ELECT 47-25V	
C	268	87-010-380-080	CAP, ELECT 47-16V	ABCDE
C	267	87-010-380-080	CAP, ELECT 47-16V	ABCDE
C	265	87-010-383-080	CAP, ELECT 33-25V	ABCDE
C	266	87-010-383-080	CAP, ELECT 33-25V	ABCDE
C	268	87-015-953-080	CAP, E 4.7-35 LL	
C	267	87-015-953-080	CAP, E 4.7-35 LL	
C	264	87-018-124-080	CAP, CER 270P-50V	
C	263	87-018-124-080	CAP, CER 270P-50V	
C	279	87-010-112-080	CAP, ELECT 100-16V	ABCDE
C	271	87-010-221-080	CAP, ELECT 470-10V	ABCDE
C	272	87-010-221-080	CAP, ELECT 470-10V	ABCDE
C	279	87-010-236-080	CAP, E 1000-10 SME	
C	277	87-010-260-080	CAP, ELECT 47-25V	ABCDE
C	278	87-010-384-080	CAP, ELECT 100-25V	ABCDE
C	273	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	ABCDE
C	274	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	ABCDE
C	274	87-018-209-080	CAP, CER 0.1-50V	
C	281	87-010-263-080	CAP, ELECT 100-10V	
C	281	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	280	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	293	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	
C	294	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	
C	291	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	
C	292	87-010-628-080	CAP, E 3.3-16 M 5L BP SRE	
IC	201	87-002-555-010	IC, TA8210AH	*
IC	201	87-A20-591-010	IC, BA5417	ABCDE
J	251	87-A60-569-010	JACK, HTJ-035-18	ABCDE
Q	244	89-320-011-010	TR, 2SC2001 (0.6W)	ABCDE
Q	243	89-320-011-010	TR, 2SC2001 (0.6W)	ABCDE
R	277	87-025-329-080	RESISTOR, 1/4W 2.2	
R	275	87-025-329-080	RESISTOR, 1/4W 2.2	
R	276	87-025-329-080	RESISTOR, 1/4W 2.2	
R	278	87-025-329-080	RESISTOR, 1/4W 2.2	
S	270	87-A91-377-010	SW, PUSH 2-2-2 SPUN192600	
C	308	87-010-221-080	CAP, ELECT 470-10V	ABCDE
C	309	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	307	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	306	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	301	87-010-453-010	CAP, ELECT 4700-25V	ABCDE

ELECTRICAL MAIN PARTS LIST - 2/6

C	301	87-016-452-090	CAP, E 6800-25 SKR	
C	315	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	312	87-010-248-080	CAP, ELECT 220-10V	ABCDE.....
C	314	87-010-248-080	CAP, ELECT 220-10V	ABCDE.....
C	310	87-010-248-080	CAP, ELECT 220-10V	ABCDE.....
C	311	87-010-263-080	CAP, ELECT 100-10V	ABCDE.....
C	904	87-018-209-080	CAP, CER 0.1-50V	
C	902	87-018-209-080	CAP, CER 0.1-50V	
C	901	87-018-209-080	CAP, CER 0.1-50V	
C	903	87-018-209-080	CAP, CER 0.1-50V	
C	903	87-A10-577-080	CAP, CER 0.022-50 Z YF	ABCDE.....
C	904	87-A10-577-080	CAP, CER 0.022-50 Z YF	ABCDE.....
C	901	87-A10-577-080	CAP, CER 0.022-50 Z YF	ABCDE.....
C	902	87-A10-577-080	CAP, CER 0.022-50 Z YF	ABCDE.....
D	307	87-017-148-080	ZENER, HZS6A1L	ABCDE.....
D	304	87-017-161-080	ZENER, HZS7C2L	ABCDE.....
D	309	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	306	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	308	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	305	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	303	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	311	87-017-139-010	ZENER, HZS15-2	ABCDE.....
D	901	87-070-178-090	DIODE, 1N5402-BD54	
D	902	87-070-178-090	DIODE, 1N5402-BD54	
D	904	87-070-178-090	DIODE, 1N5402-BD54	
D	903	87-070-178-090	DIODE, 1N5402-BD54	
D	903	87-A40-465-010	DIODE, FR202	ABCDE.....
D	902	87-A40-465-010	DIODE, FR202	ABCDE.....
D	901	87-A40-465-010	DIODE, FR202	ABCDE.....
D	904	87-A40-465-010	DIODE, FR202	ABCDE.....
FC	0	87-033-213-010	CLAMP, FUSE SMK	ABCDE.....
IC	310	87-070-416-010	IC, NJU7201 L55	ABCDE.....
Q	303	87-026-291-010	TR, DTC124XS	ABCDE.....
Q	307	87-026-462-010	TR, 2SC1740S	ABCDE.....
Q	305	87-026-462-010	TR, 2SC1740S	ABCDE.....
Q	302	87-026-463-010	TR, 2SA933S, RS	ABCDE.....
Q	306	88-NF9-637-010	TR, 2SA1318T/U	ABCDE.....
Q	301	89-112-965-010	TR, 2SA1296GR	ABCDE.....
Q	304	89-213-702-010	TR, 2SB1370 (1.8W)	ABCDE.....
Q	310	87-026-462-010	TR, 2SC1740S	ABCDE.....
C	803	87-010-177-080	C-CAP, S 820P-50 SL	ABCDE.....
C	804	87-010-177-080	C-CAP, S 820P-50 SL	ABCDE.....
C	801	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE.....
C	802	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE.....
C	809	87-010-406-010	CAP, E 22-50 SM	ABCDE.....
C	805	87-012-158-080	C-CAP, S 390P-50 CH	ABCDE.....
C	806	87-012-158-080	C-CAP, S 390P-50 CH	ABCDE.....
C	815	87-010-374-010	CAP, ELECT 47-10V	ABCDE.....
C	819	87-010-401-010	CAP, ELECT 1-50V	ABCDE.....
C	818	87-010-401-010	CAP, ELECT 1-50V	ABCDE.....
C	817	87-010-401-010	CAP, ELECT 1-50V	ABCDE.....
C	814	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE.....
C	813	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE.....
C	812	87-010-404-010	CONDENSER 4.7-50	ABCDE.....
C	811	87-010-404-010	CONDENSER 4.7-50	ABCDE.....
C	810	87-010-406-010	CAP, E 22-50 SM	ABCDE.....
C	823	87-010-213-080	C-CAP, S 0.015-50 B	ABCDE.....
C	824	87-010-213-080	C-CAP, S 0.015-50 B	ABCDE.....
C	820	87-010-401-010	CAP, ELECT 1-50V	ABCDE.....
C	828	87-010-404-010	CONDENSER 4.7-50	ABCDE.....
C	827	87-010-404-010	CONDENSER 4.7-50	ABCDE.....
C	825	87-010-405-080	CAP, ELECT 10-50V	ABCDE.....
C	826	87-010-405-080	CAP, ELECT 10-50V	ABCDE.....
C	821	87-012-153-080	C-CAP, S 120P-50 CH	ABCDE.....
C	822	87-012-153-080	C-CAP, S 120P-50 CH	ABCDE.....
C	833	87-010-179-080	CAP, CHIP S B1200P	ABCDE.....
C	839	87-010-186-080	CAP, CHIP 4700P	ABCDE.....
C	831	87-010-198-080	CAP, CHIP 0.022	ABCDE.....
C	832	87-010-198-080	CAP, CHIP 0.022	ABCDE.....
C	834	87-010-248-080	CAP, ELECT 220-10V	ABCDE.....
C	830	87-010-260-080	CAP, ELECT 47-25V	ABCDE.....
C	835	87-010-374-010	CAP, ELECT 47-10V	ABCDE.....
C	838	87-010-405-080	CAP, ELECT 10-50V	ABCDE.....
C	845	87-010-178-080	CHIP CAP 1000P	ABCDE.....
C	844	87-010-178-080	CHIP CAP 1000P	ABCDE.....
C	849	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCDE.....
C	840	87-010-186-080	CAP, CHIP 4700P	ABCDE.....
C	843	87-010-190-080	S CHIP F 0.01	ABCDE.....
C	842	87-010-194-080	CAP, CHIP 0.047	ABCDE.....
C	846	87-010-194-080	CAP, CHIP 0.047	ABCDE.....
C	841	87-010-194-080	CAP, CHIP 0.047	ABCDE.....
C	850	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCDE.....
CN	851	87-010-186-080	CAP, CHIP 4700P	ABCDE.....
CN	802	87-049-469-010	CONN, 4P V	ABCDE.....
CN	801	87-049-469-010	CONN, 4P V	ABCDE.....
D	9	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	8	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	2	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	1	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	4	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	3	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	5	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....

ELECTRICAL MAIN PARTS LIST - 3/6

D	7	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	6	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	10	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	41	87-070-136-080	ZENER, MTZJ5.1B	ABCDE
D	807	87-017-437-080	DIODE, 1N4148M	ABCDE
D	805	87-017-437-080	DIODE, 1N4148M	ABCDE
D	808	87-017-437-080	DIODE, 1N4148M	ABCDE
D	803	87-017-437-080	DIODE, 1N4148M	ABCDE
D	801	87-017-437-080	DIODE, 1N4148M	ABCDE
D	806	87-017-437-080	DIODE, 1N4148M	ABCDE
D	802	87-017-437-080	DIODE, 1N4148M	ABCDE
D	804	87-017-437-080	DIODE, 1N4148M	ABCDE
D	809	87-017-437-080	DIODE, 1N4148M	ABCDE
D	810	87-017-437-080	DIODE, 1N4148M	ABCDE
D	841	87-070-136-080	ZENER, MTZJ5.1B	ABCDE
IC	302	87-A21-145-040	C-IC, BA4560F-E2	ABCDE
IC	301	87-A21-145-040	C-IC, BA4560F-E2	ABCDE
IC	801	87-A21-145-040	C-IC, BA4560F-E2	ABCDE
IC	802	87-A21-145-040	C-IC, BA4560F-E2	ABCDE
L	1	87-007-342-010	COIL, OSC 85K BIAS	ABCDE
L	801	87-007-342-010	COIL, OSC 85K BIAS	ABCDE
Q	2	87-026-462-010	TR, 2SC1740S	ABCDE
Q	3	87-026-463-010	TR, 2SA933S, RS	ABCDE
Q	4	87-026-463-010	TR, 2SA933S, RS	ABCDE
Q	8	87-026-496-080	FET, 2SJ103GR	ABCDE
Q	9	87-026-496-080	FET, 2SJ103GR	ABCDE
Q	5	89-110-150-010	TR, 2SA1015	ABCDE
Q	7	89-110-150-010	TR, 2SA1015	ABCDE
Q	6	89-318-155-010	TR, 2SC1815(GR)	ABCDE
Q	1	89-318-155-010	TR, 2SC1815(GR)	ABCDE
Q	10	87-026-464-010	TR, DTC114TS	ABCDE
Q	802	87-026-462-010	TR, 2SC1740S	ABCDE
Q	803	87-026-463-010	TR, 2SA933S, RS	ABCDE
Q	804	87-026-463-010	TR, 2SA933S, RS	ABCDE
Q	808	87-026-496-080	FET, 2SJ103GR	ABCDE
Q	809	87-026-496-080	FET, 2SJ103GR	ABCDE
Q	805	89-110-150-010	TR, 2SA1015	ABCDE
Q	807	89-110-150-010	TR, 2SA1015	ABCDE
Q	806	89-318-155-010	TR, 2SC1815(GR)	ABCDE
Q	801	89-318-155-010	TR, 2SC1815(GR)	ABCDE
Q	810	87-026-464-010	TR, DTC114TS	ABCDE
R	40	87-029-124-010	RES, FUSE 2.2-1/4	ABCDE
R	840	87-029-124-010	RES, FUSE 2.2-1/4	ABCDE
C	299	87-010-190-080	S CHIP F 0.01	ABCDE
C	321	87-010-190-080	S CHIP F 0.01	ABCDE
C	322	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	325	87-010-405-080	CAP, ELECT 10-50V	ABCDE
CN	204	87-049-469-010	CONN, 4P V	ABCDE
CN	203	87-049-469-010	CONN, 4P V	ABCDE
CN	201	87-099-016-010	CONN, 14P 6216V	ABCDE
CN	207	87-099-186-010	CONN, 6P EH V WHT	
CN	208	87-099-186-010	CONN, 6P EH V WHT	
CN	205	87-A60-109-010	CONN, 2P V S2M-2W	ABCDE
CN	211	87-A60-111-010	CONN, 5P V S2M 5W	
D	32	87-027-607-080	ZENER, HZ7B3L	ABCDE
D	323	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	322	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
Q	323	87-026-291-080	TR, DTC124XS	ABCDE
Q	322	87-026-463-080	TR, 2SA933S (0.3W)	ABCDE
Q	321	89-318-154-080	TR, 2SC1815 (0.4W)	ABCDE
C	608	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	609	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	606	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	607	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	601	87-010-313-080	CAP, CHIP 18P	ABCDE
C	604	87-010-314-080	C-CAP, S 22P-50V	ABCDE
C	602	87-010-315-080	C-CAP, S 27P-50 CH	ABCDE
C	605	87-010-317-080	C-CAP, S 39P-50 CH	ABCDE
C	603	87-010-317-080	C-CAP, S 39P-50 CH	ABCDE
C	617	87-010-178-080	CHIP CAP 1000P	ABCDE
C	614	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	611	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	612	87-010-248-080	CAP, ELECT 220-10V	ABCDE
C	610	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	615	87-010-400-080	CAP, ELECT 0.47-50V	ABCDE
C	616	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	613	87-010-402-080	CAP, ELECT 2.2-50V	ABCDE
C	618	87-010-405-080	CAP, ELECT 10-50V	ABCDE
CN	601	87-099-031-010	CONN, 14P 6216 H	ABCDE
CN	603	87-099-199-010	CONN, 6P 6216 H	ABCDE
CN	608	87-099-200-010	CONN, 7P 6216H	ABCDE
CN	604	87-099-200-010	CONN, 7P 6216H	ABCDE
CN	605	87-099-200-010	CONN, 7P 6216H	ABCDE
CN	602	87-099-200-010	CONN, 7P 6216H	ABCDE
CN	609	87-099-200-010	CONN, 7P 6216H	ABCDE
D	602	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	601	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	614	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	611	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
D	612	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE
IC	602	87-A21-245-010	IC, RPM6938-V4	ABCDE
IC	601	8Z-CH4-636-010	IC, LC867132V-****	ABCDE

ELECTRICAL MAIN PARTS LIST - 4/6

L	601	87-003-171-010	COIL, 15UH TROIDAL	ABCDE
LCD	601	8Z-CH4-635-010	LCD, HLC7365 ZCH-4	ABCDE
LED	606	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	602	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	603	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	601	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	605	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	604	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	607	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	609	88-CD6-630-010	LED, 934ID RED	ABCDE
LED	610	88-CD6-631-010	LED, 934GD GRN	ABCDE
Q	601	87-026-291-010	TR, DTC124XS	ABCDE
Q	603	87-026-291-010	TR, DTC124XS	ABCDE
Q	602	87-026-463-010	2SA933S, RS	ABCDE
Q	608	87-026-464-010	TR, DTC114TS	ABCDE
Q	609	87-026-464-010	TR, DTC114TS	ABCDE
Q	607	87-026-464-010	TR, DTC114TS	ABCDE
Q	605	87-026-464-010	TR, DTC114TS	ABCDE
Q	606	87-026-464-010	TR, DTC114TS	ABCDE
Q	604	87-026-464-010	TR, DTC114TS	ABCDE
Q	610	87-026-464-010	TR, DTC114TS	ABCDE
Q	611	87-026-464-010	TR, DTC114TS	ABCDE
Q	621	87-026-291-010	TR, DTC124XS	ABCDE
S	606	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	608	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	601	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	609	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	602	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	604	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	607	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	605	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	603	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	614	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	616	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	612	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	615	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	611	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	610	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
S	613	87-A90-696-080	SW, TACT TS2103-03-430	ABCDE
X	602	87-030-273-010	VIB, XTAL 32.768K5PPM	ABCDE
X	601	87-A70-070-080	VIB, CER 5.76MHZ CRHF	ABCDE
C	400	87-010-178-080	CHIP CAP 1000P	ABCDE
C	407	87-010-178-080	CHIP CAP 1000P	ABCDE
C	402	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	405	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	409	87-010-248-080	CAP, ELECT 220-10V	ABCDE
C	404	87-010-248-080	CAP, ELECT 220-10V	ABCDE
C	403	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	406	87-010-374-080	CAP, ELECT 47-10V	ABCDE
C	401	87-010-403-080	CAP, ELECT 3.3-50V	ABCDE
C	413	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	410	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	412	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	414	87-010-405-080	CAP, ELECT 10-50V	ABCDE
C	416	87-010-545-080	CAP, ELECT 0.22-50V	ABCDE
C	417	87-012-157-080	C-CAP, S 330P-50 CH	ABCDE
C	425	87-010-176-080	C-CAP, S 680P-50 SL	ABCDE
C	429	87-010-186-080	CAP, CHIP 4700P	ABCDE
C	439	87-010-178-080	CHIP CAP 1000P	ABCDE
C	438	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	435	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	432	87-010-374-080	CAP, ELECT 47-10V	ABCDE
C	436	87-010-374-080	CAP, ELECT 47-10V	ABCDE
C	433	87-010-401-080	CAP, ELECT 1-50V	ABCDE
C	437	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	431	87-010-545-080	CAP, ELECT 0.22-50V	ABCDE
C	430	87-012-156-080	C-CAP, S 220P-50 CH	ABCDE
C	440	87-010-147-080	C-CAP, S 3P-50 CH	ABCDE
C	447	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	445	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	446	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	442	87-010-313-080	CAP, CHIP 18P	ABCDE
C	448	87-010-315-080	C-CAP, S 27P-50 CH	ABCDE
C	459	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	457	87-010-316-080	C-CAP, S 33P-50 CH	ABCDE
C	458	87-010-316-080	C-CAP, S 33P-50 CH	ABCDE
C	450	87-012-140-080	CAP 470P	ABCDE
C	463	87-010-184-080	CHIP CAPACITOR 3300P(K)	ABCDE
C	466	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	468	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	460	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	461	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	463	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE
C	467	87-010-263-080	CAP, ELECT 100-10V	ABCDE
C	462	87-010-370-080	CAP, E 330-6.3 SME	ABCDE
C	465	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE
C	469	87-012-154-080	C-CAP, S 150P-50 CH	ABCDE
C	473	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	474	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	471	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	472	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE
C	475	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE

ELECTRICAL MAIN PARTS LIST - 5/6

C	477	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	479	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	476	87-010-236-080	CAP, E 1000-10 SME	ABCDE.....
C	478	87-010-263-080	CAP, ELECT 100-10V	ABCDE.....
C	489	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE.....
C	480	87-010-221-080	CAP, ELECT 470-10V	ABCDE.....
C	482	87-010-405-080	CAP, ELECT 10-50V	ABCDE.....
C	481	87-010-405-080	CAP, ELECT 10-50V	ABCDE.....
C	483	87-012-156-080	C-CAP, S 220P-50 CH	ABCDE.....
C	484	87-012-156-080	C-CAP, S 220P-50 CH	ABCDE.....
C	490	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE.....
C	499	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
C	495	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
C	497	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
C	498	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
C	493	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
C	496	87-010-322-080	C-CAP, S 100P-50 CH	ABCDE.....
CN	403	87-099-195-010	CONN, 7P 6216 V	ABCDE.....
CN	401	87-A60-424-010	CONN, 16P V TOC-B	ABCDE.....
D	403	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	402	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	401	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	491	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	494	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
IC	401	87-A20-446-010	C-IC, LA9241ML	ABCDE.....
IC	402	87-A20-459-010	C-IC, LC78622ED	ABCDE.....
IC	404	87-A21-093-010	IC, LA6541D	ABCDE.....
L	404	81-NWB-655-010	COIL, 10UH TROIDAL	.BC.E.....
L	405	81-NWB-655-010	COIL, 10UH TROIDAL	.BC.E.....
L	403	81-NWB-655-010	COIL, 10UH TROIDAL	.BC.E.....
L	401	87-003-102-080	COIL, 10UH	ABCDE.....
L	402	87-005-847-080	COIL, 2.2UH(CECS)	ABCDE.....
L	406	87-005-847-080	COIL, 2.2UH(CECS)	ABCDE.....
L	404	87-008-372-010	FILTER, EMI BL OIRNI	...D.....
L	403	87-008-372-010	FILTER, EMI BL OIRNI	...D.....
L	405	87-008-372-010	FILTER, EMI BL OIRNI	...D.....
Q	403	87-026-502-080	DTC144TS	ABCDE.....
Q	402	89-113-184-080	TR, 2SA1318T	ABCDE.....
SFR	401	87-024-175-080	SEMI-FIXED RESISTOR, 47K	ABCDE.....
X	401	81-592-641-010	VIB, CER 16.93MHZ	ABCDE.....
X	401	87-A70-046-010	VIB, XTAL 16.934MHZ	ABCDE.....
C	491	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	492	87-010-221-080	CAP, ELECT 470-10V	ABCDE.....
D	492	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	491	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
D	494	87-020-465-080	DIODE, 1SS133 (110MA)	ABCDE.....
Q	401	87-026-463-080	TR, 2SA933S (0.3W)	ABCDE.....
Q	492	87-026-291-080	TR, DTC124XS	ABCDE.....
Q	491	89-112-965-080	TR, 2SA1296 (0.75W)	ABCDE.....
C	5	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABCDE.....
C	6	87-010-311-080	CAP 12P	ABC.E.....
C	6	87-010-313-080	CAP, CHIP 18P	...D.....
C	3	87-010-314-080	C-CAP, S 22P-50V	ABCDE.....
C	1	87-010-314-080	C-CAP, S 22P-50V	ABCDE.....
C	2	87-010-316-080	C-CAP, S 33P-50 CH	ABCDE.....
C	7	87-012-158-080	C-CAP, S 390P-50 CH	ABC.E.....
C	8	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
C	7	87-014-051-080	CAPACITOR (PP), 560P	...D.....
C	19	87-010-112-080	CAP, ELECT 100-16V	ABCDE.....
C	13	87-010-145-080	C-CAP, S 1P-50 CH	ABCDE.....
C	17	87-010-194-080	CAP, CHIP 0.047	ABCDE.....
C	12	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	10	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	11	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	14	87-010-305-080	C-CAP, S 470P-50CH	ABCDE.....
C	16	87-010-380-080	CAP, ELECT 47-16V	ABCDE.....
C	15	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
C	18	87-015-819-080	CAPACITOR, 0.01	ABCDE.....
C	22	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	21	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	26	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	23	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	20	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE.....
C	24	87-015-629-080	CHIP CAPACITOR, 0.0022	ABCDE.....
C	25	87-016-460-080	C-CAP, S 0.22-16 B	ABCDE.....
C	29	87-016-669-080	C-CAP, S 0.1-25 K B	ABCDE.....
C	28	87-016-669-080	C-CAP, S 0.1-25 K B	ABCDE.....
C	27	87-A11-067-080	C-CAP, S 1-10 K B	ABCDE.....
C	36	87-010-112-080	CAP, ELECT 100-16V	ABCDE.....
C	37	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	31	87-010-198-080	CAP, CHIP 0.022	.BC.E.....
C	30	87-010-198-080	CAP, CHIP 0.022	.BC.E.....
C	30	87-010-213-080	C-CAP, S 0.015-50 B	A..D.....
C	31	87-010-213-080	C-CAP, S 0.015-50 B	A..D.....
C	38	87-010-380-080	CAP, ELECT 47-16V	ABCDE.....
C	33	87-010-401-080	CAP, ELECT 1-50V	ABCDE.....
C	34	87-010-401-080	CAP, ELECT 1-50V	ABCDE.....
C	39	87-010-404-080	CAP, ELECT 4.7-50V	ABCDE.....
C	35	87-015-819-080	CAPACITOR, 0.01	ABCDE.....
C	48	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	47	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	46	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....

ELECTRICAL MAIN PARTS LIST - 6/6

C	40	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	44	87-010-311-080	CAP, 12P	ABCDE.....
C	45	87-010-312-080	C-CAP, S 15P-50 CH	ABCDE.....
C	42	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
C	41	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
C	43	87-012-349-080	C-CAP, S 1000P-50 CH	ABCDE.....
C	55	87-010-197-080	CAP, CHIP 0.01 DM	...D.....
C	53	87-010-197-080	CAP, CHIP 0.01 DM	...D.....
C	52	87-010-197-080	CAP, CHIP 0.01 DM	...D.....
C	50	87-010-197-080	CAP, CHIP 0.01 DM	ABCDE.....
C	51	87-010-316-080	C-CAP, S 33P-50 CH	...D.....
C	54	87-014-055-080	CAP, PP 820P-100 J	...D.....
CF	3	82-785-747-080	CF, MS2 GHY, R	ABCDE.....
CF	2	82-785-747-080	CF, MS2 GHY, R	ABCDE.....
CF	1	87-A91-094-010	FLTR, CDA10.7 MG80A	ABCDE.....
CN	1	87-099-194-010	CONN, 6P 6216V	ABCDE.....
D	6	87-017-072-080	ZENER, HZS3B1	ABCDE.....
D	2	87-070-345-080	DIODE, IN4148	ABCDE.....
D	1	87-070-345-080	DIODE, IN4148	ABCDE.....
HD	2	88-CD6-661-010	HLDR, BAR ANT.	ABCDE.....
HD	1	88-CD6-661-010	HLDR, BAR ANT.	ABCDE.....
IC	1	87-A21-184-010	IC, TA2104AN	ABCDE.....
IC	2	87-A21-185-040	C-IC, LC72121M	ABCDE.....
L	9	87-005-849-080	COIL, 10UH(CECS)	ABCDE.....
L	8	87-005-849-080	COIL, 10UH(CECS)	ABCDE.....
L	2	87-A50-347-010	COIL, FM BPF EX	ABCDE.....
L	4	87-A50-420-010	COIL, MW OSC(SYN)	ABCDE.....
L	5	87-A50-424-010	COIL, FM RF EX(SYN)	ABCDE.....
L	6	87-A50-427-010	COIL, FM OSC EX(SYN)	ABCDE.....
L	6	87-A50-454-010	COIL, FM OSC U(SYN)	ABCDE.....
L	3	87-A91-095-010	BAR-ANT, MW FOR 2B(SYN)	ABC.E.....
L	3	87-A91-096-010	BAR-ANT, MW/LW FOR 3B(SYN)	...D.....
L	7	87-A91-308-010	FLTR, PCFAZH- 450T (TOK)	ABCDE.....
L	2	88-CD6-655-010	COIL, FM5MM*3.5T	ABCDE.....
L	51	87-A50-421-010	COIL, LW OSC(SYN)	...D.....
L	1	89-319-233-080	TR, 2SC1923 (0.1W)	ABCDE.....
Q	54	87-026-214-080	TR, DTA114YS (0.3W)	...D.....
Q	52	87-026-447-080	TR, 2SC1740S R	...D.....
Q	51	87-A30-092-080	FET, 2SK439E/F	...D.....
Q	53	89-320-011-080	TR, 2SC2001 (15W)	...D.....
SCR	4	87-A40-615-070	VARI-CAP, KV1311NT	ABCDE.....
SCR	5	87-A40-615-070	VARI-CAP, KV1311NT	ABCDE.....
SCR	3	87-A40-616-070	VARI-CAP, SVC384(S/T)	ABCDE.....
TC	1	87-011-220-080	TRIMMER CAP 20P VTC	ABCDE.....
TC	51	87-011-233-080	TRIMER, 50P VCT54	...D.....
X	1	87-A70-061-010	VIB, XTAL 4.500MHZ CSA-309	ABCDE.....

MECHANICAL PARTS LIST - 1/2

NOTE: The characters in the suffix column indicate the part usage.

HR		XX		A
LH1		XX		B
LH		XX		C
EZ		XX		D
HA		XX		E
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	87-B00-020-010		BADGE,AIWA 30 GOLD	ABCDE
	88-CH6-019-010		PANEL,CD	ABCDE
	8Z-CH4-002-110		CABI,REAR	
	8Z-CH4-003-010		CHAS,CD	ABCDE
	8Z-CH4-005-010		WINDOW,CD	ABCDE
	8Z-CH4-007-010		WINDOW,CASS	ABCDE
	8Z-CH4-008-010		LID,BATT	ABCDE
	8Z-CH4-009-010		HANDL,ARM	ABCDE
	8Z-CH4-010-010		HANDL,GRIP	ABCDE
	8Z-CH4-013-010		PANEL,LCD21	
	8Z-CH4-019-110		CABI, TOP 2L	ABCDE
	8Z-CH4-020-110		CABI, TOP 2R	ABCDE
	8Z-CH4-030-110		COVER, PH	ABCDE
	8Z-CH4-064-010		WINDOW,LCD EZ	
	8Z-CHE-001-010		CABI,FR 14	
	8Z-CHE-002-010		CABI,FR 14A	A,CDE
	8Z-CHE-003-010		BOX,CASS 14	ABCDE
	8Z-CHE-004-010		WINDOW,LED 14	
	8Z-CHE-006-010		WINDOW,LED 14LH	.BC.E
	8Z-CHE-007-010		CABI,REAR 10W	
	8Z-CHE-008-010		BOX,CD 14	ABCDE
	8Z-CHE-009-010		PANEL,LCD21 14	ABCDE
	8Z-CHE-011-010		WINDOW,LCD 14	ABC.E
	8Z-CHE-012-010		WINDOW,LCD 14EZ	...D
	8Z-CHE-014-010		GRILLE,FR L 14	ABCDE
	8Z-CHE-015-010		GRILLE,FR R 14	ABCDE
	8Z-CHE-016-010		GRILLE, TOP L 14	ABCDE
	8Z-CHE-017-010		GRILLE, TOP R 14	ABCDE
	8Z-CHE-018-010		WINDOW,LED 14A	A..D
	8Z-CHE-019-010		CABI,FR 14B	.B
	8Z-CHE-020-010		CABI,FR 14C	
	8Z-CHE-021-010		BOX,CD 14A	
	8Z-CHE-022-010		BOX,CASS 14A	
	8Z-CHE-024-010		CABI, TOP 2L A	
	8Z-CHE-025-010		CABI, TOP 2R A	
	8Z-CHE-026-010		COVER, PH A	
	8Z-CHE-027-010		LID,BATT A	
	8Z-CHE-028-010		HANDL,ARM A	
	8Z-CHE-029-010		HANDL,GRIP A	
	8Z-CHE-032-010		CABI,REAR LH	ABCDE
	8Z-CHG-011-010		WINDOW,LED 16A	
	8Z-CHR-013-010		GRILLE,FR L 24	
	8Z-CHR-014-010		GRILLE,FR R 24	
	8Z-CHR-015-010		GRILLE, TOP L 24	
	8Z-CHR-016-010		GRILLE, TOP R 24	
	8Z-CH4-023-110		BTN,VOL	ABCDE
	8Z-CH4-024-010		BTN,CD	ABCDE
	8Z-CH4-025-010		BTN,REPEAT	ABCDE
	8Z-CH4-026-010		BTN,FUNC	ABCDE
	8Z-CH4-027-010		BTN,EQ	ABCDE
	8Z-CH4-028-010		KEY,CASS 21	ABCDE
	8Z-CH4-031-010		BTN,POWER-SAVE	
	87-CD6-041-010		PLATE,AC	...D
	84-CD5-215-010		GEAR	ABCDE
	84-CD5-216-010		BRACKET	ABCDE
	84-CD5-217-010		PLATE,MAGNET	ABCDE
	85-CD7-217-010		HLDR,CHUCK A	ABCDE
	86-CT4-218-010		CUSHION,FOOT/PORON	ABCDE
	87-036-368-010		MAGNET	ABCDE
	87-A91-151-010		SW,LEAF 1P2T/TC48-021	ABCDE
	87-CD6-213-010		SPR-C,BATT (-)	ABCDE
	87-CD6-214-010		SPR-C,BATT LINK	ABCDE
	87-CD6-222-010		SPR-C,BATT (-) L	ABCDE
	87-CD6-223-010		SPR-C,BATT LINK L	ABCDE
	88-CH6-207-010		HLDR,ANT	ABCDE
	88-CH6-220-010		CUSHION,CD A	ABCDE
	8Z-CH4-201-010		HLDR,LCD	ABCDE
	8Z-CH4-204-010		HLDR,SPEAKER	ABCDE
	8Z-CH4-205-010		SPR-T,CASS	ABCDE
	8Z-CH4-206-010		SPR-T,CD	ABCDE
	8Z-CH4-207-010		HLDR,OIL-DMPR	ABCDE
	8Z-CH4-208-010		HLDR,PWB	ABCDE
	8Z-CH4-209-010		HLDR,PT	ABCDE
	8Z-CH4-210-010		HLDR,LED	ABCDE
	8Z-CH4-211-010		BASE,CHUCK	ABCDE
	8Z-CH4-212-010		RING,CHUCK	ABCDE
	8Z-CH4-214-010		HLDR,REC-SW 21	ABCDE
	8Z-CH4-216-010		HLDR,FUNC-PWB	ABCDE
	8Z-CH4-217-010		HLDR,PT A	
	87-067-566-010		TAPPING SCREW, VFTT+3-6	ABCDE
	87-254-097-410		U+3-12 CR	ABCDE
	87-261-037-410		V+2-10 GLD	ABCDE

MECHANICAL PARTS LIST - 2/2

		87-342-074-010	UT2+2.6-8	ABCDE.....
		87-571-032-410	VIT+2-3	ABCDE.....
		87-644-096-410	UT1+3-10 CR	ABCDE.....
		87-661-100-410	VFT1+3-16	ABCDE.....
		87-741-095-410	UT2+3-8 GLD	ABCDE.....
		87-751-094-410	VT2+3-6 W10SL0T	ABCDE.....
*		87-751-075-410	VT2+2.6-10	ABCDE.....
*		87-B10-239-010	QT2+3-8 W/O CR	ABCDE.....
*		87-B10-242-010	UT2+3-30 W/O CR	ABCDE.....
		87-035-192-010	FUSE, 4AT	
		87-035-347-010	FUSE, 2.5A 250V T	ABC.E.....
		87-036-389-010	SW,PUSH LOCK	ABCDE.....
		87-A60-177-010	JACK,AC U W/SW	
		87-A60-178-010	JACK,AC E W/SW	ABCDE.....
		87-A90-092-080	PROTECTOR, 2.5A 491	...D.....
		87-A91-369-010	SW,AC SL 2 2 2 SDKGA41700	ABC.E.....
		88-CH6-626-010	PT,U	
		88-CH6-627-010	PT,E	...D.....
		88-CH6-628-010	PT,H	ABC.E.....
		8Z-CH4-614-010	CONN ASSY, 6P CD-ME	ABCDE.....
		8Z-CH4-618-010	FF-CABLE, 16P CD-RF	ABCDE.....
		8Z-CH4-620-010	FF-CABLE, 7P FR-LED	ABCDE.....
		8Z-CH4-621-010	FF-CABLE, 7P CD-FR	ABCDE.....
		8Z-CH4-640-010	ANT,ROD	ABCDE.....
		8Z-CH4-645-010	SPKR,MAYLOR 80HM SILVER	ABCDE.....
		8Z-CH4-663-010	PT,E (75-35)	
		8Z-CH4-664-010	SPKR,10 60HM	
		8Z-CH4-665-010	SPKR,MAYLOR 80HM (2.0W)	
		8Z-CH4-667-010	CONN ASSY, 6P I-AMP	
		8Z-CH4-668-010	CONN ASSY, 6P O-AMP	
		8Z-CH4-669-010	CONN ASSY, 5P S-PWR	
SP	0	88-CD5-602-010	SPKR 4'3.2	ABC.E.....
SP	0	88-CD5-603-010	SPKR,10 70HM	...D.....
W	0	8Z-CH4-619-010	FF-CABLE, 14P AF-FR	ABCDE.....
W	0	8Z-CH4-622-010	FF-CABLE, 6P TU-FR	ABCDE.....


ACCESSORIES / PACKAGE LIST - 1/1


NOTE: The characters in the suffix column indicate the part usage.

HR	XX	A
LH1	XX	B
LH	XX	C
EZ	XX	D
HA	XX	E


REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	8Z-CH4-908-010	IB	EZ(9L)B	D.....
	8Z-CH4-918-010	IB	EZ(9L)FM	D.....
	8Z-CHE-905-010	IB	U(ESF)B	D.....
	8Z-CHE-907-010	IB	HR(ECA)B	A.....
	8Z-CHE-908-010	IB	EZ(9L)B, 90	D.....
	8Z-CHE-909-010	IB	K(E)B, 90	D.....
	8Z-CHE-915-010	IB	U(ESF)FM	D.....
	8Z-CHE-917-010	IB	HR(ECA)FM	...C.E.....
	8Z-CHG-906-010	IB	LH(ESP)B	..C.E.....
	8Z-CHG-916-010	IB	LH(ESP)FM	D.....
	87-A80-034-010	AC	CORD SET ASSY, K W/F MAY-BG	D.....
	87-A80-036-010	AC	CORD SET ASSY, E W/FLTR VOL	ABCD.....
	87-A80-109-010	AC	CORD, HK7281 BLK U	E.....
	87-A80-119-010	AC	CORD SET ASSY, AZ	E.....
	87-A90-312-010	PLUG	CONVERSION WTN-1157R1	ABC.E.....
	8Z-CK4-962-010	RC	UNIT, RC-ZAT04 (VS)	ABCDE.....

SCHEMATIC DIAGRAM – 1 (MAIN 1/2)

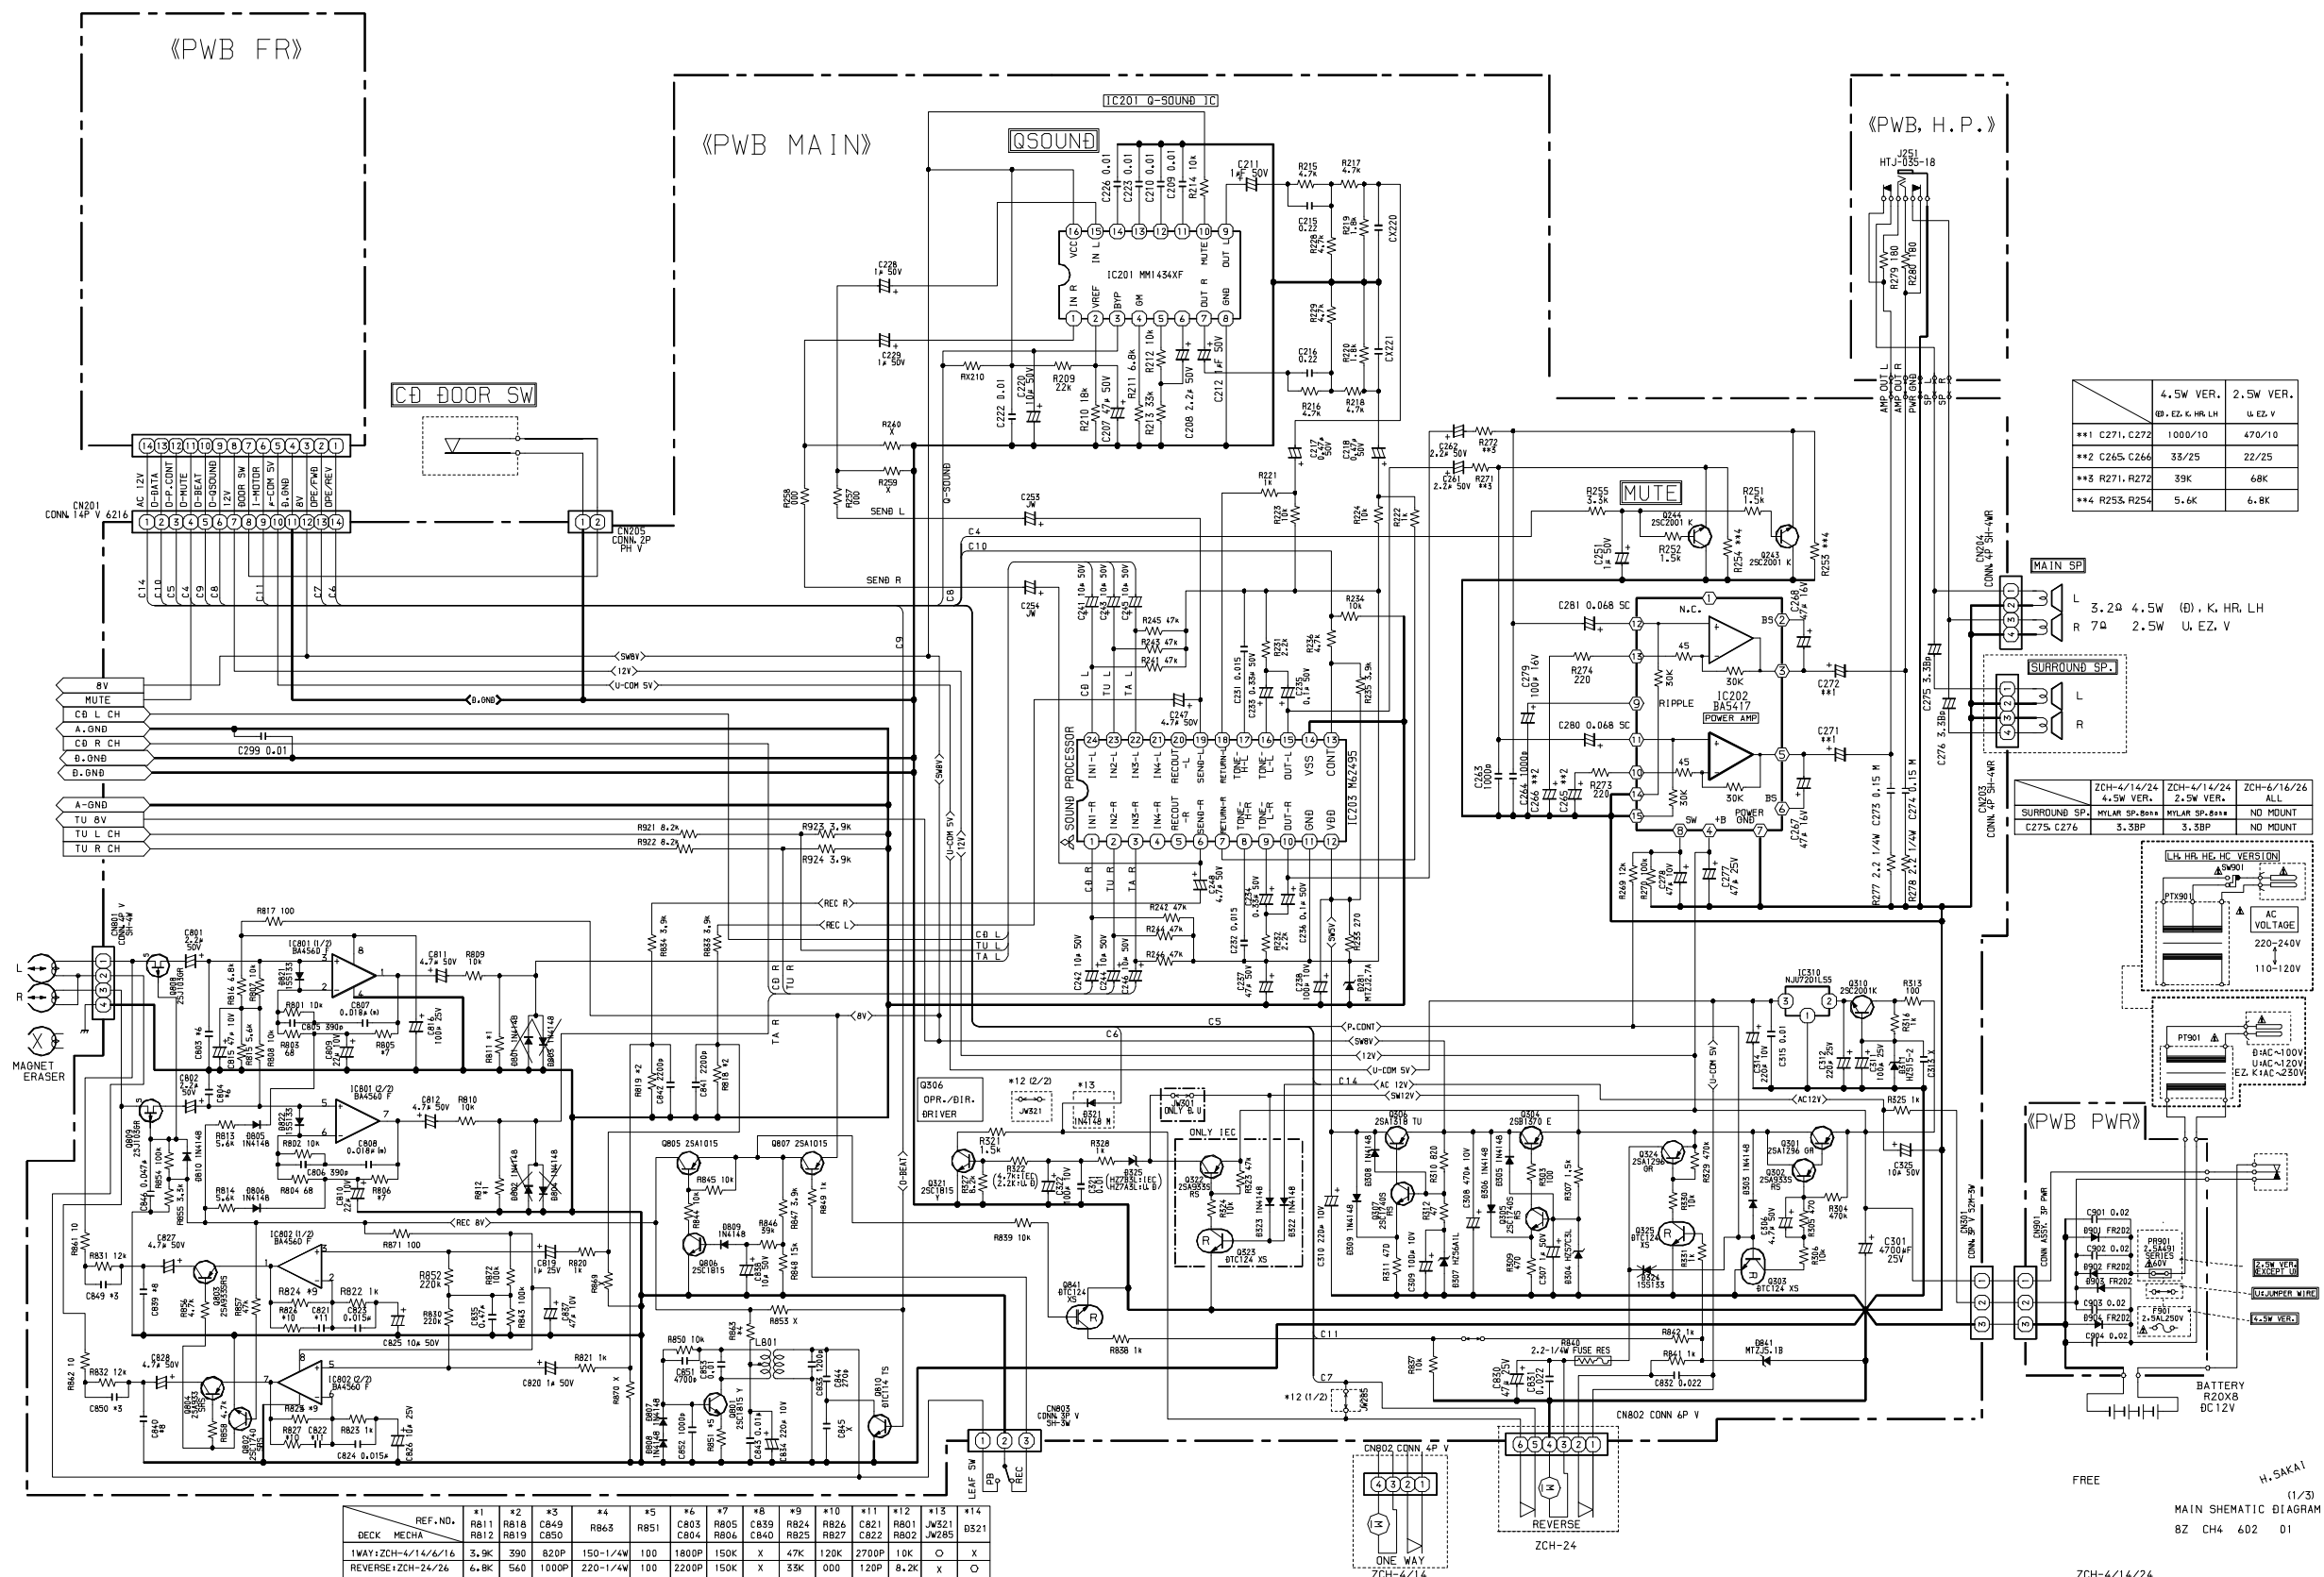

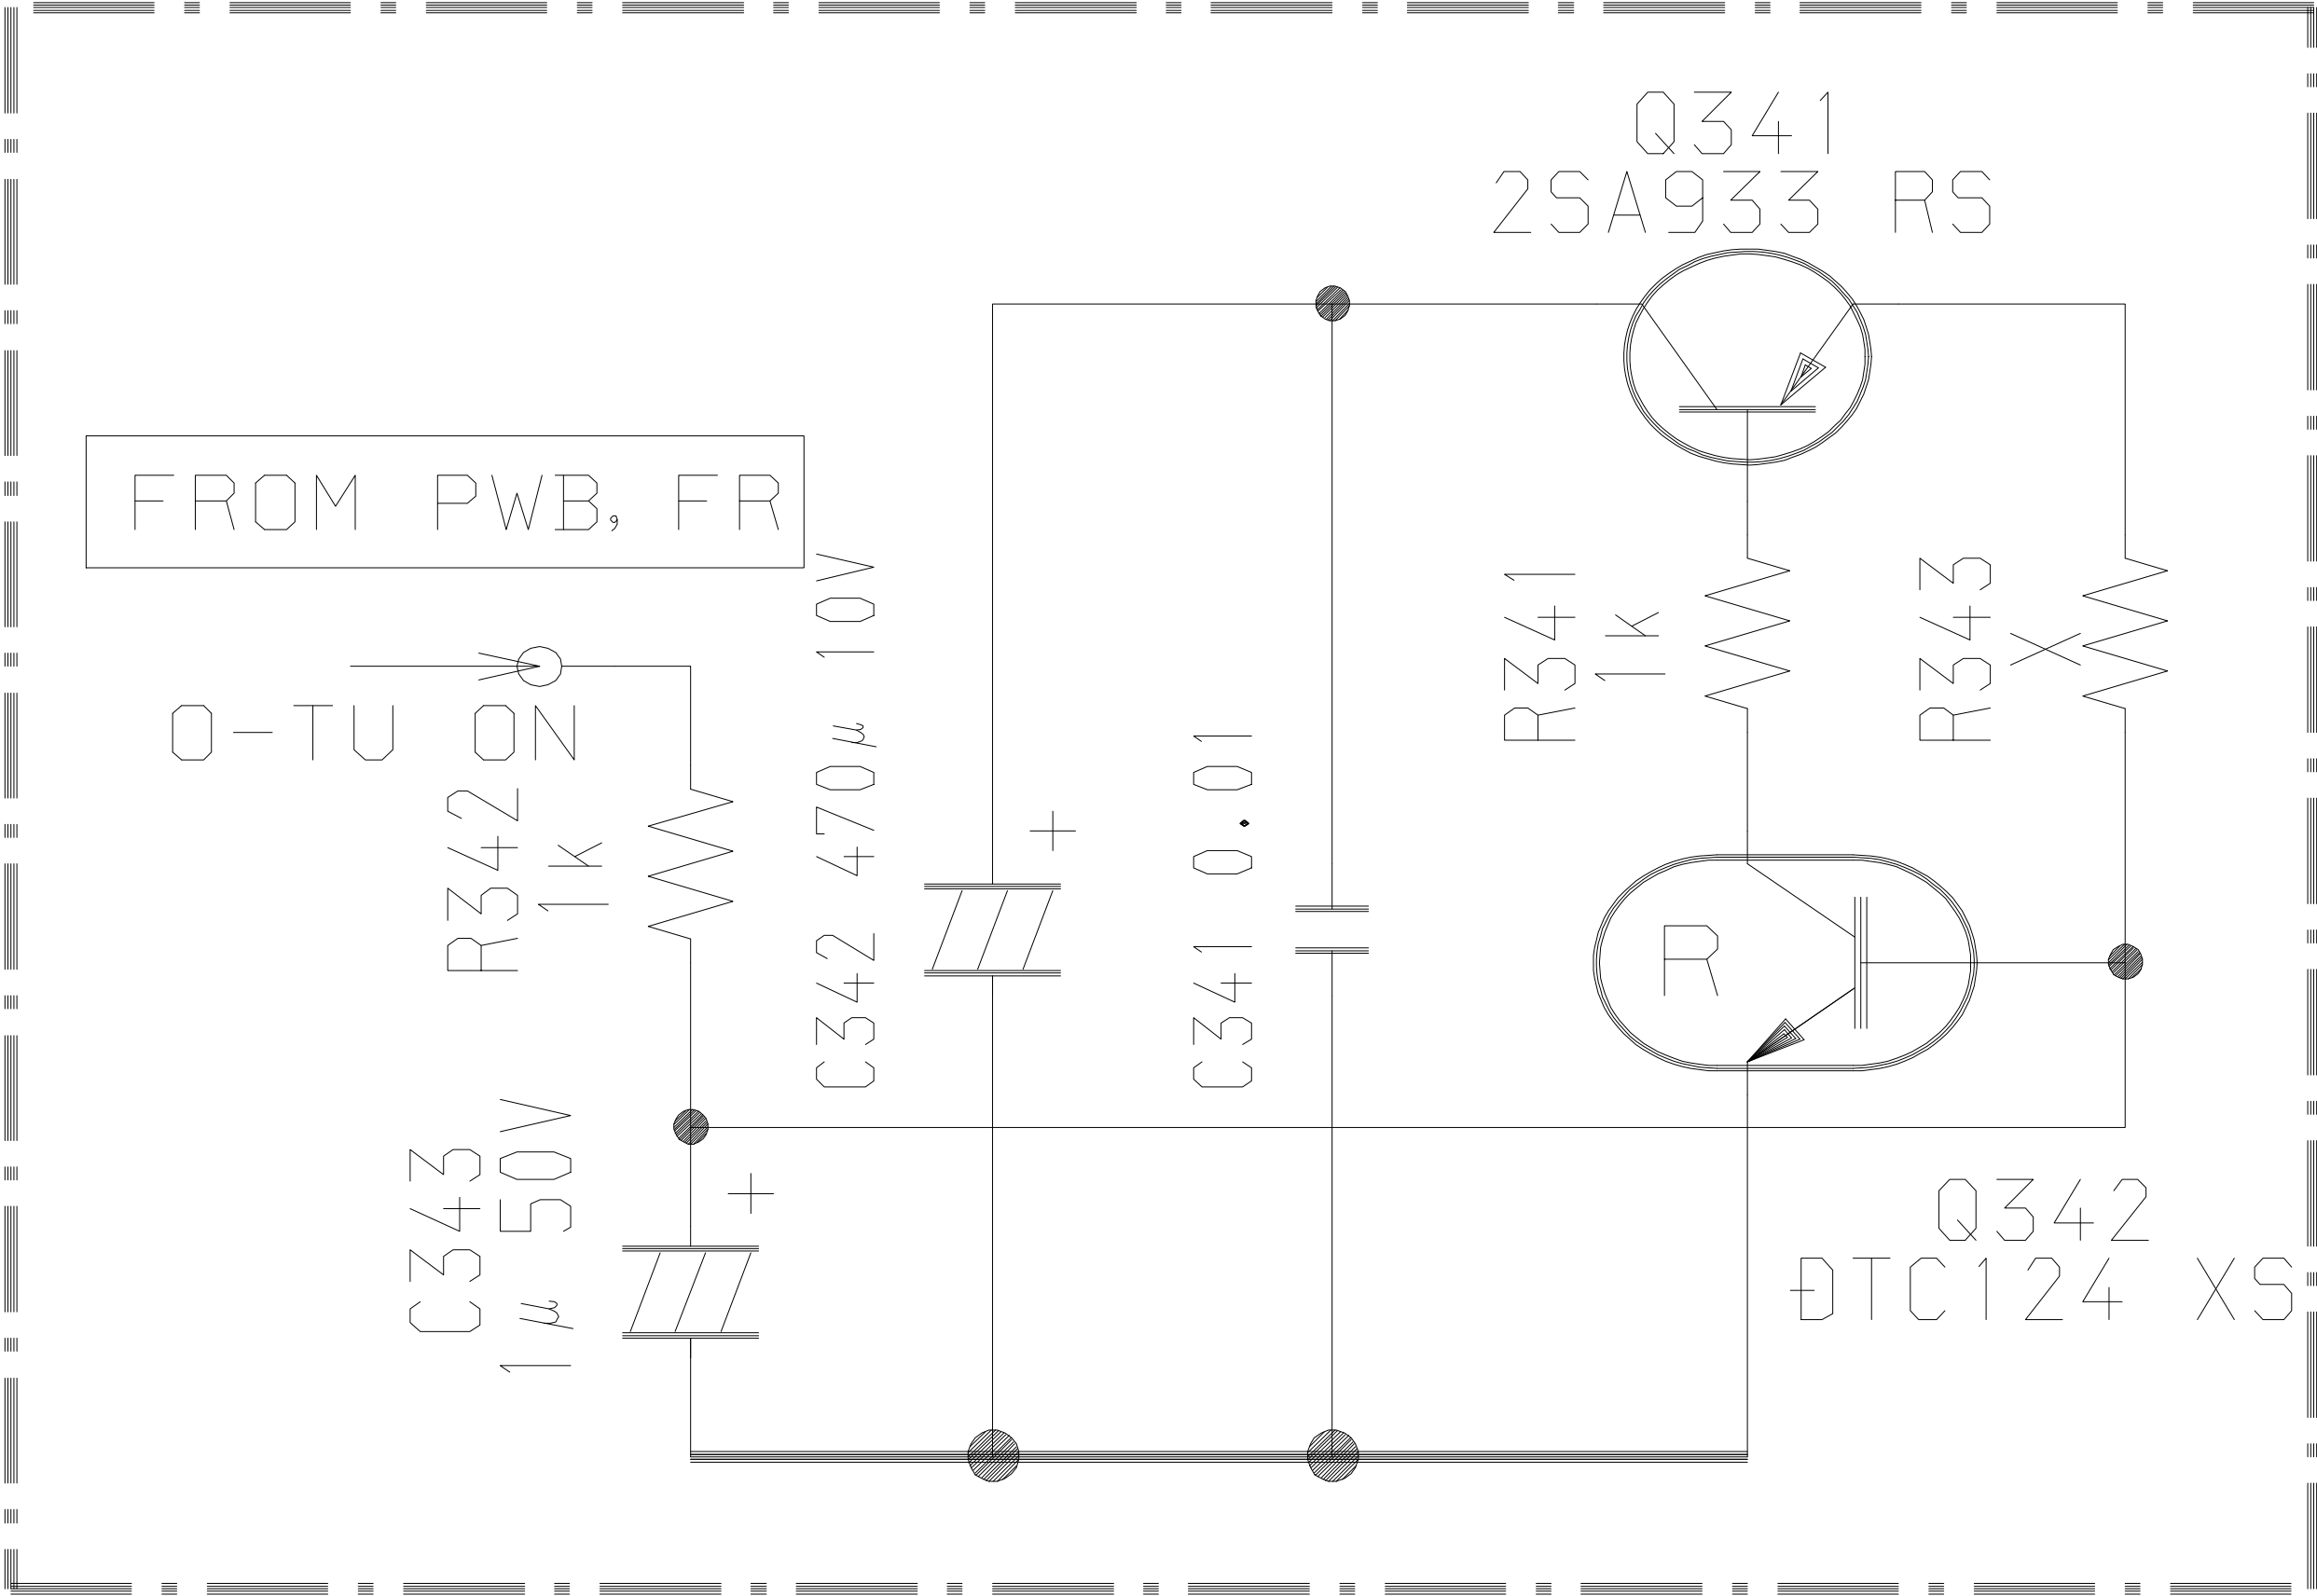

SCHEMATIC DIAGRAM – 3 (CD)

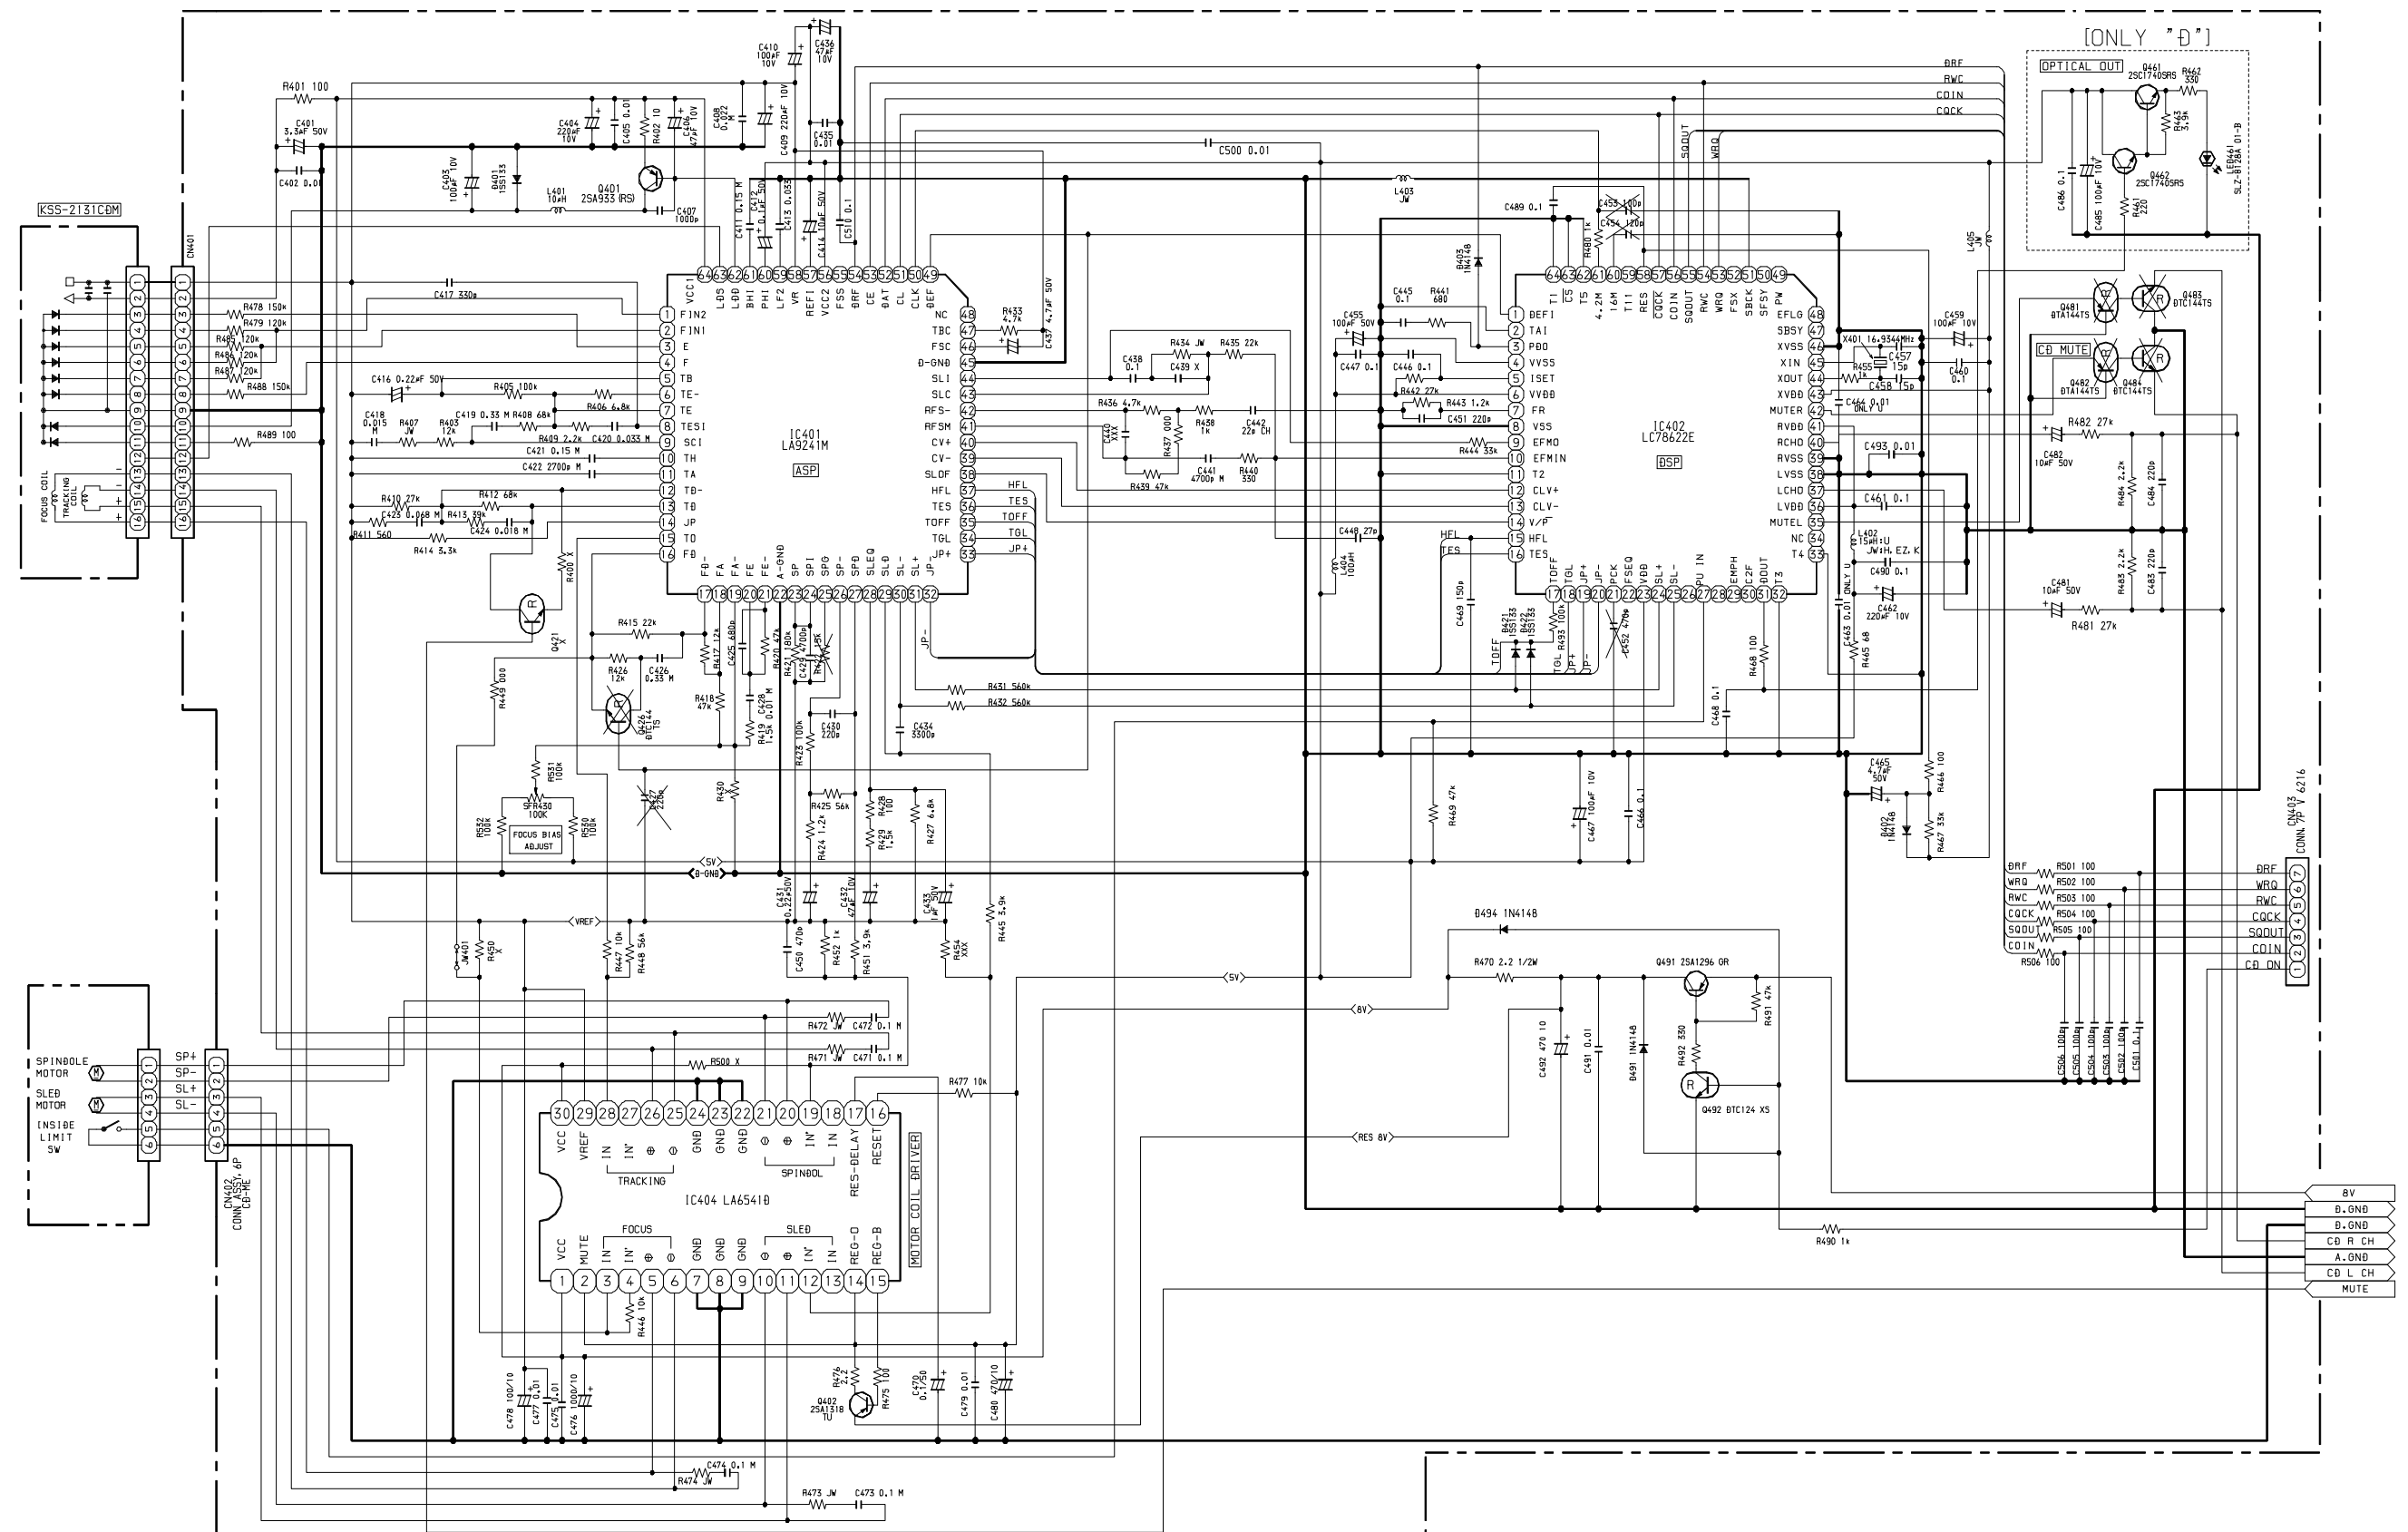

FREE

94V0


ZCH-4/6 SERIES

W.SAKAI


CD SCHEMATIC DIAGRAM

CSD-EB37


SCHEMATIC DIAGRAM – 4 (FRONT)

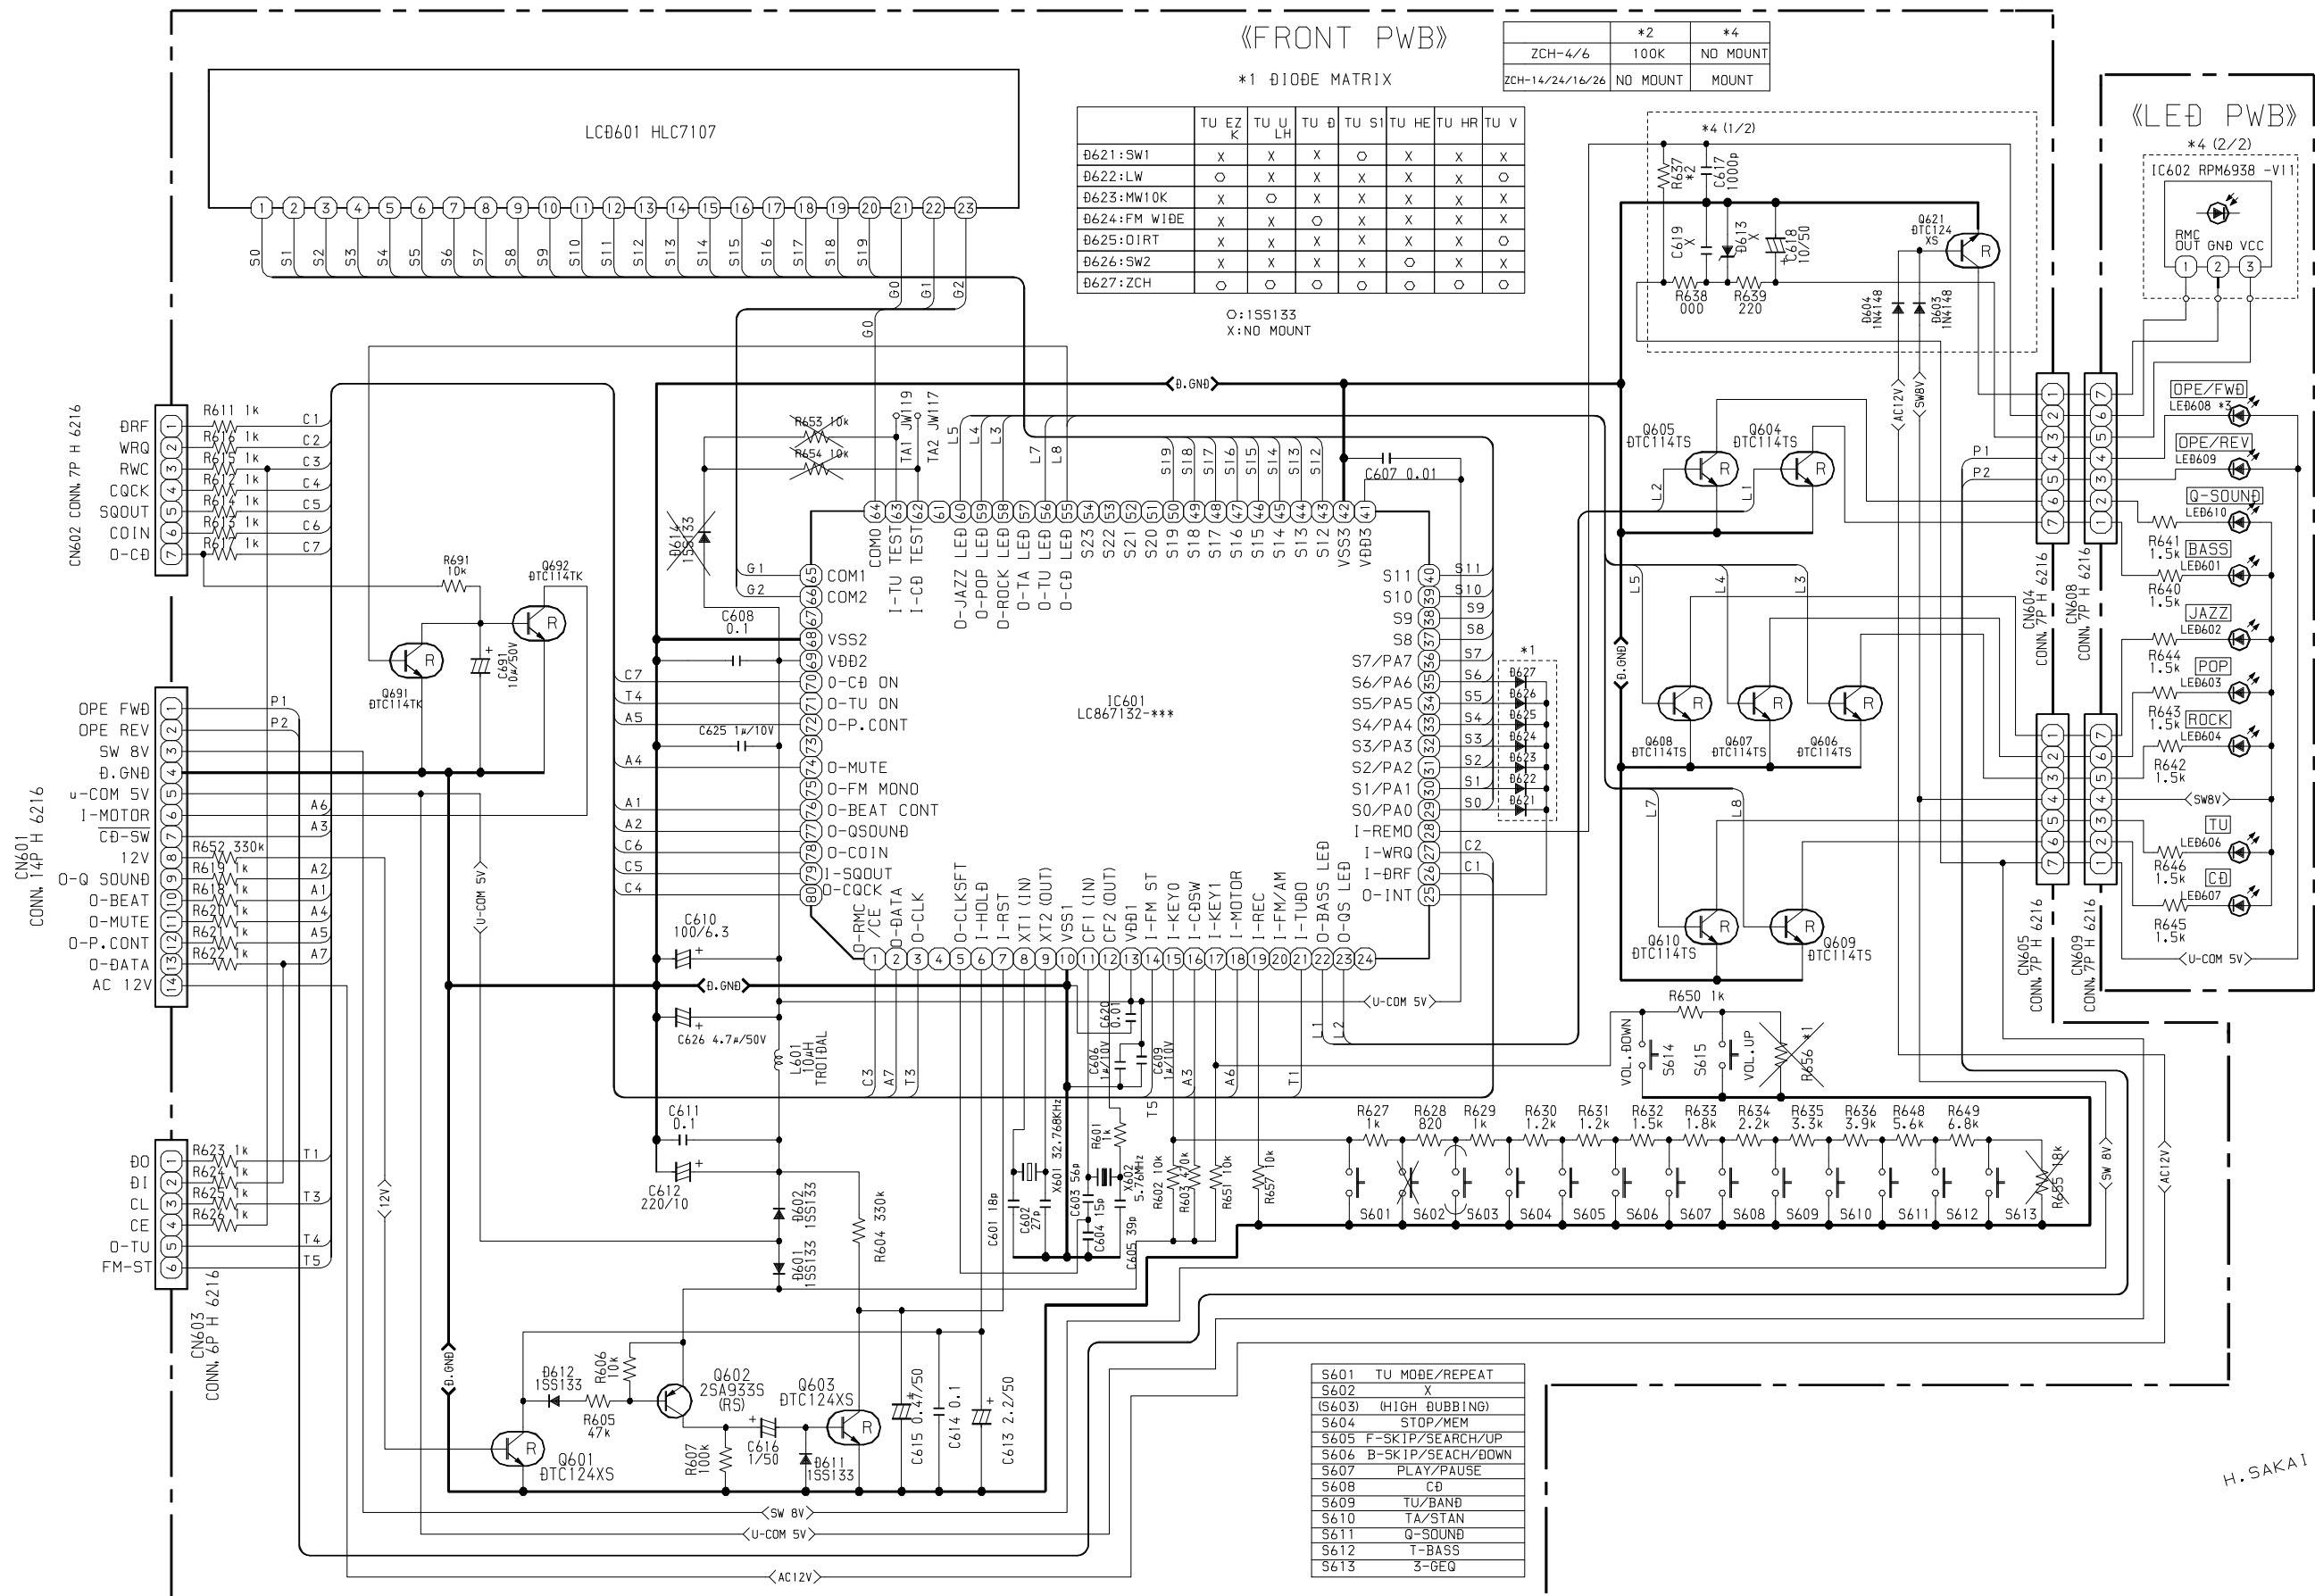

H. SAKAI

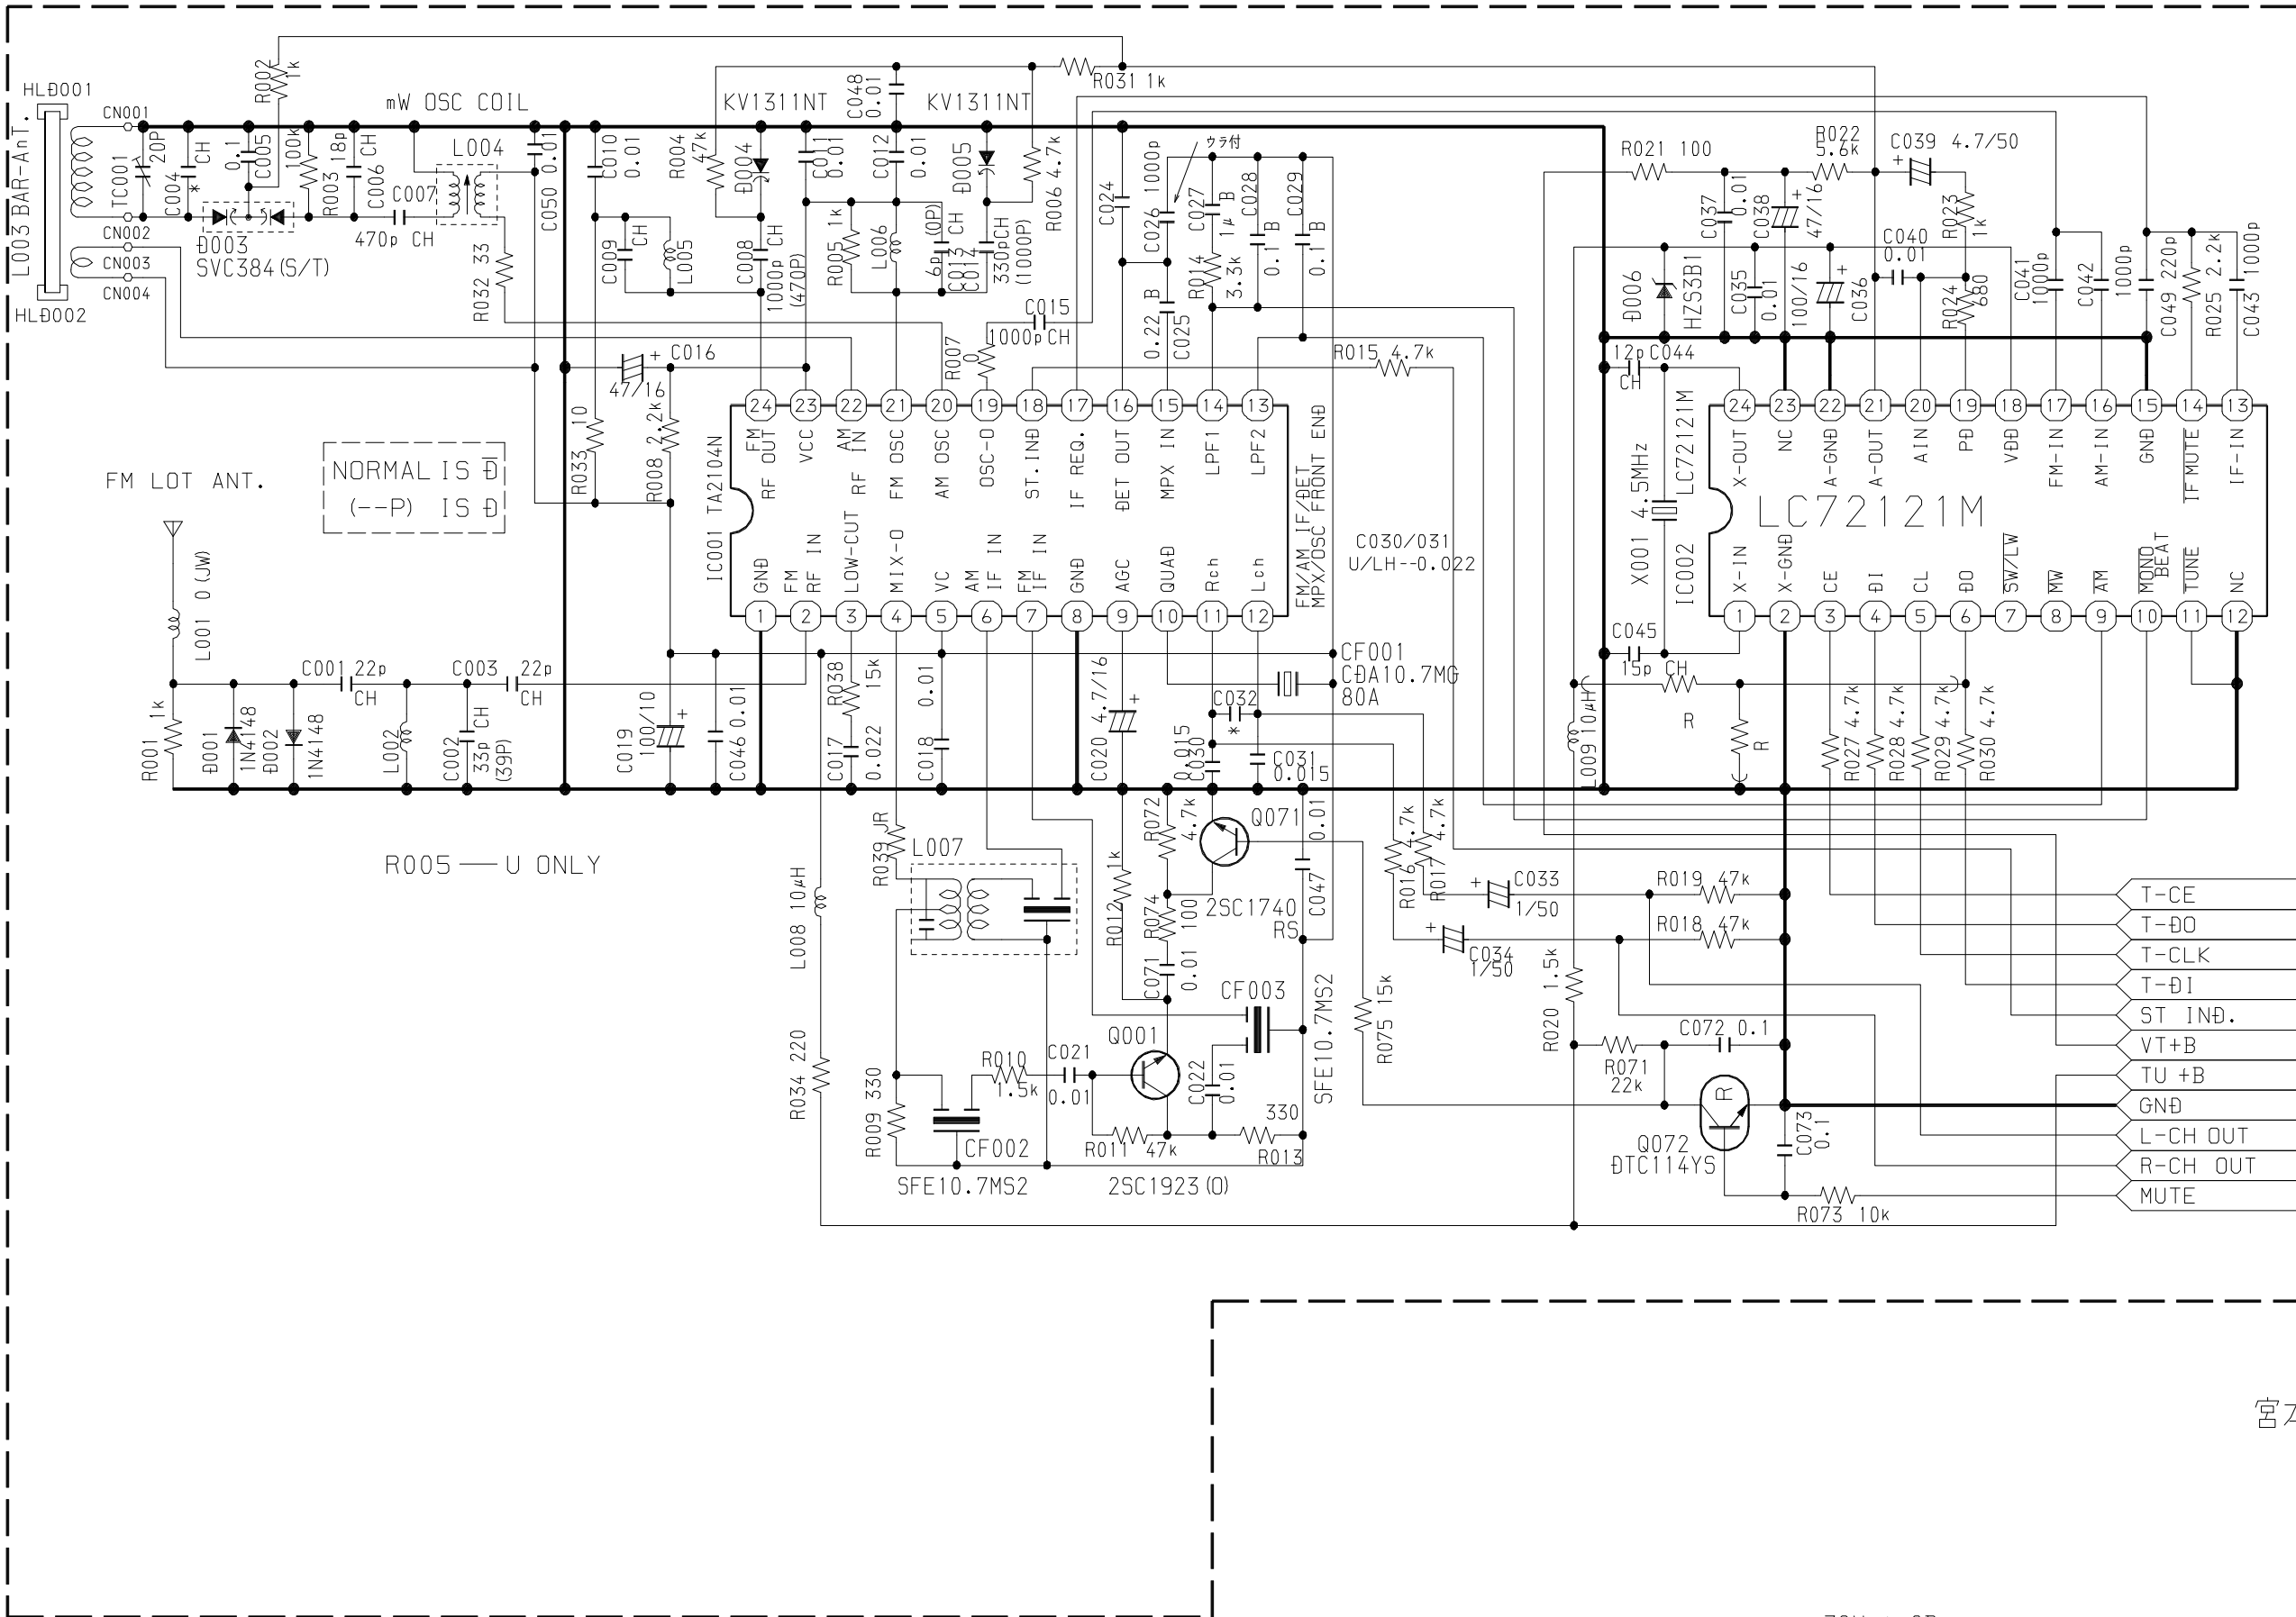

宮本

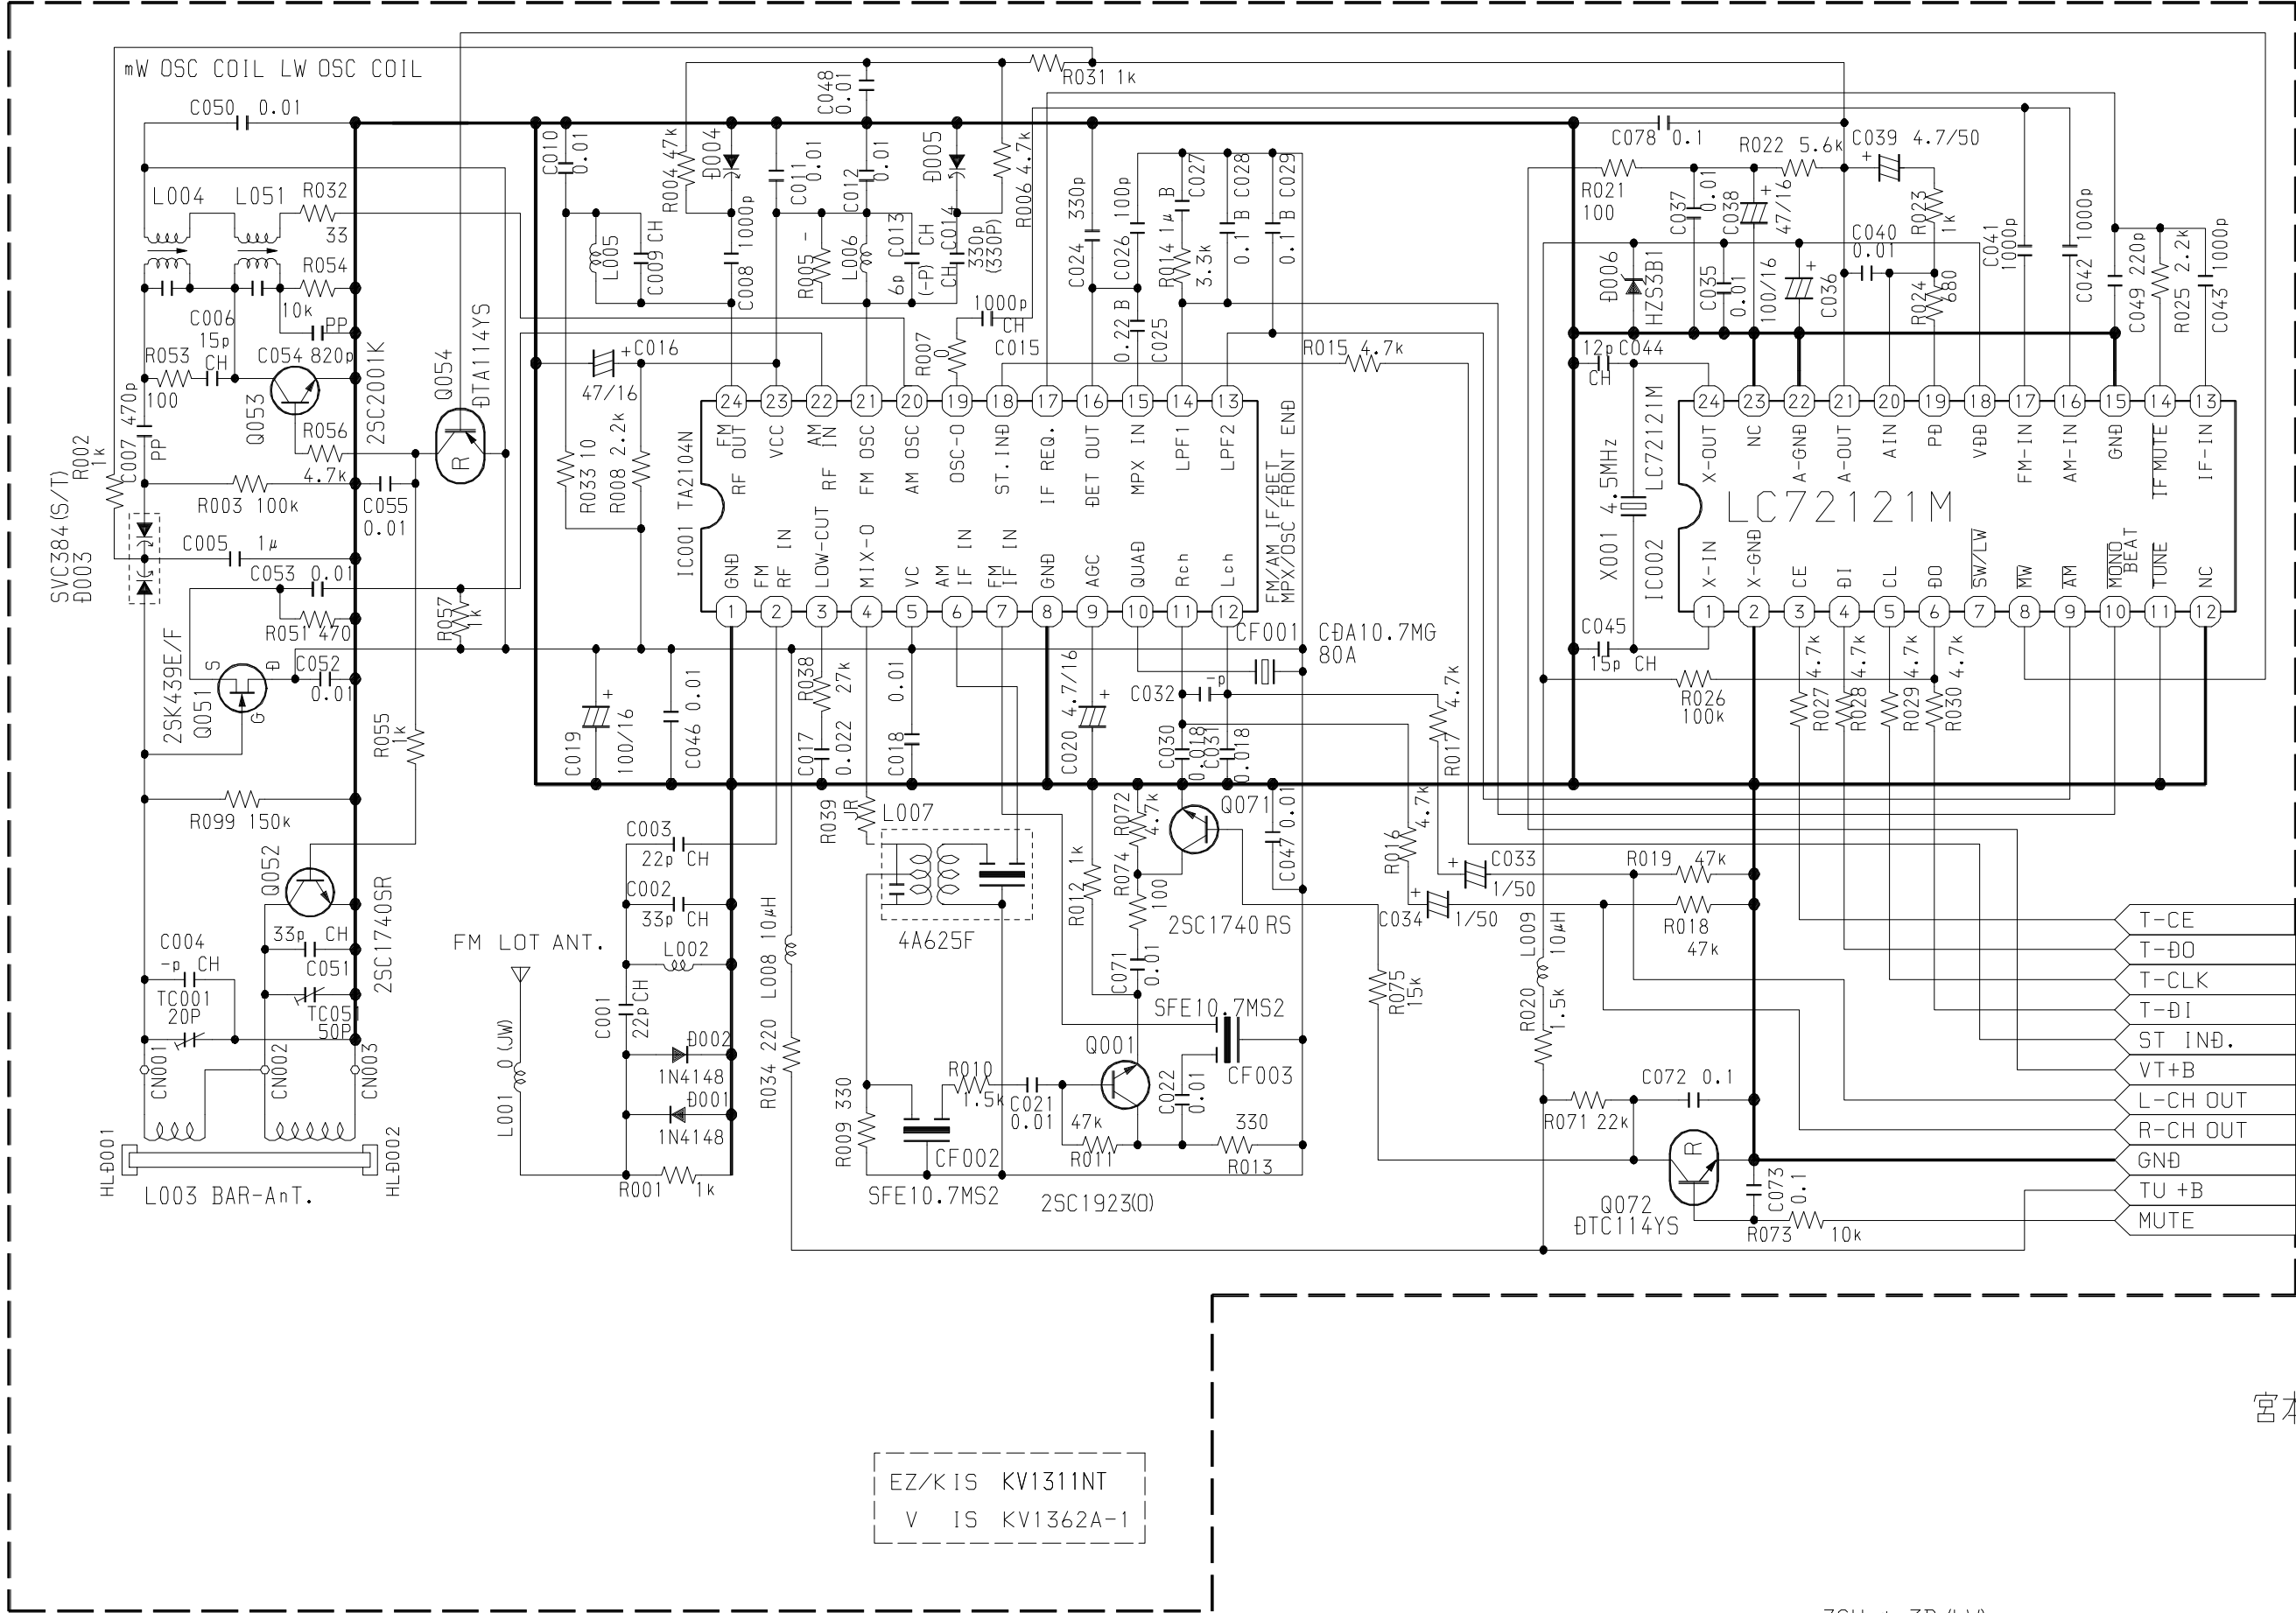

サービス技術ニュース	
番号	連絡内容
G- -	
G- -	
G- -	

アイワ株式会社
AIWA CO.,LTD.

9630472

Tokyo Japan