

The Harman Kardon

Model AVR18RDS

Manual

AUDIO AND VIDEO RECEIVER

Technical Manual

CONTENTS

SPECIFICATIONS.....	3
ALIGNMENT PROCEDURES.....	4
EXPLODED VIEW.....	7
BLOCK DIAGRAM.....	8
WIRING DIAGRAM.....	9
SCHEMATIC DIAGRAM.....	11
P. C. BOARD.....	17
PARTS LIST.....	21

SPECIFICATIONS

FRONT AMP SECTION

	Normalinal	Limit
Continuous Power Output (STEREO MODE), Input: CD THD: 0.08%, 8ohms Both Channel Driven (20Hz - 20KHz) (SURROUND MODE) THD: 0.3%, 8ohms, 1KHz	≥ 50W ≥ 40W	≥ 45W ≥ 35W
THD at 50W, 8ohms, Input: CD 20Hz 1KHz 20KHz	≤ 0.05% ≤ 0.05% ≤ 0.05%	≤ 0.08% ≤ 0.08% ≤ 0.08%
IM Distortion at 50W, 8ohms, Vol: Max	≤ 0.05%	≤ 0.08%
Input Sensitivity for Rated Power Output (50W) Tape Monitor/ CD/ DVD Video 1/ Video 2/ Video 3/ 6-CH In	200mV 200mV	150-250mV 150-250mV
S/N Ratio Input Shorted at 1KHz 1W Output (WTD IHF-A) CD	≥ 95dB	≥ 90dB
Tone Control Bass: 100Hz Treble: 10Hz	+10dB - 10dB +10dB - 10dB	+10±2dB - 10±2dB +10±2dB - 10±2dB
Frequency Response at -3dB Mode: Stereo, Ref: 1KHz, 10Hz-120KHz 15Hz-100KHz		
Channel Crosstalk Input Shorted by 1Kohms 100Hz 1KHz 10KHz	≥ 60dB ≥ 60dB ≥ 50dB	≥ 52dB ≥ 52dB ≥ 42dB

CENTER AMP SECTION

Normalinal	Limit	Normalinal	Limit
RMS Output Power THD (0.05%, 8ohms, 1KHz) Only Center Channel Driven	≥ 40W	≥ 35W	
S/N Ratio (Input Level: 350mV) Input shorted, IHF-A WTD	≥ 70dB	≥ 65dB	
Frequency Response at -3dB 8ohms, Dolby Pro-Logic	40Hz-30KHz	60Hz-20KHz	

REAR AMP SECTION

Normalinal	Limit
RMS Output Power THD (0.7%, 8ohms, 1KHz) Only Rear Channel Driven	≥ 40W ≥ 35W
S/N Ratio (Input shorted, IHF-A WTD) Delay: 20ms, Input Level: 350mV	≥ 63dB ≥ 55dB
Frequency Response at -3dB 8ohms, Dolby Pro-Logic	80Hz-7KHz 100Hz-6KHz

VIDEO AMP SECTION

Normalinal	Limit
Input Sensitivity/Impedance (DVD, VIDEO1, VIDEO2, VIDEO3)	1Vp-p/75 Ω ±1dB
Output Level/Impedance VIDEO1, Monitor	1Vp-p/75 Ω ±1dB
Frequency Response at -3dB	DC-8MHz DC-6MHz

FM SECTION

	Normalinal	Limit
Tuning Cover Range USA/ Canada: 100KHz STEP Europe : 50KHz STEP Mono Usable Sensitivity(75ohms Input, 98MHz)	87.50-108.00MHz 87.50-108.00MHz	≤ 12.2dbf ≤ 17.3dbf
Image Rejection (at 98MHz) USA/Canada Europe	≥ 40dB ≥ 70dB	≥ 35dB ≥ 65dB
IF Rejection (at 98MHz) 50dB Quieting Sensitivity (at 98MHz, 100% MOD.) IHF Band Pass Filter	≥ 80dB	≥ 70dB
Stereo Distortion (1KHz, 100% MOD. at 98MHz, 65dbf Input) IHF Band Pass Filter	≤ 41.2dbf	≤ 47.3dbf
Mono S/N Ratio (500 Input, 100% MOD. at 98MHz) IHF Band Pass Filter	≤ 0.3%	≤ 0.5%
Stereo Frequency Response(-3dB) USA/Canada De-Emphasis: 75μs Europe De-Emphasis: 50μs	≥ 65dB 20Hz-15KHz 20Hz-15KHz	≥ 60dB 40Hz-14KHz 40Hz-14KHz
AM suppression at 98MHz	≥ 52dB	≥ 47dB
Muting threshold (at 98MHz) Overload Distortion at 98MHz	35.2dbf 0.3%	31.2-39.2dbf 1%
Capture Ratio at 65dbf Stereo Separation (at 98MHz, 100% MOD., 500μV Input) IHF Band Pass Filter	≤ 1.5dB ≥ 40dB	≤ 2.5dB ≥ 30dB
1KHz Tape out Level (at 98MHz)	500mV	350-650mV

AM SECTION

	Normalinal	Limit
Tuning Cover Range (MW) USA/ Canada: 10KHz STEP Other : 9KHz STEP	520-1710MHz 522-1611MHz	
Usable Sensitivity 999/990KHz Image Rejection (at 999KHz) AGC Figure of Merit (From 100mV/m at 999/1000KHz)	≤ 500μV/m ≥ 35dB ≥ 55dB	≤ 1000μV/m ≥ 30dB ≥ 50dB
Distortion (999/1000Hz, 30% MOD. 50mV/m Input) Frequency Response (999/1000KHz) at -6dB	≤ 1.0% 80Hz-2.3KHz	≤ 1.5% 100Hz-2KHz
Selectivity (at 999/1000Hz) 9KHz/ 10KHz S/N Ratio (999/1000KHz, With Antenna Input 50mV/m)	≥ 25dB ≥ 40dB	≥ 20dB ≥ 35dB
Overload Distortion at 999/1000KHz TAPE Output Level at 999/1000KH (5mV/m Input)	≥ 1%	≥ 1.5%

GENERAL

	Normalinal	Limit
Power Consumption At Rated Power All Channel Driven USA/Canada Europe Idling at Minimum Volume Control USA/Canada Europe	195W (1/8Pmax) 550W 70W 70W	160-200W 500-600W 50-90W 50-90W
Power Supplies: USA/Canada Europe	AC120V, 60Hz AC230V, 50Hz	
Dimensions (W×H×D) mm	440×140×380	
Weight(kgs)	13.1	


ALIGNMENT PROCEDURES

1. Equipment Required

- AM Standard Signal Generator (AM SSG)
- Oscilloscope
- AC Voltmeter
- FM Standard Signal Generator (FM SSG)
- Stereo Modulator
- Audio Generator
- Distortion Meter
- DC Voltmeter
- Frequency Counter

Note: Disconnect external FM antenna prior to alignment

2. Alignment and Test Points

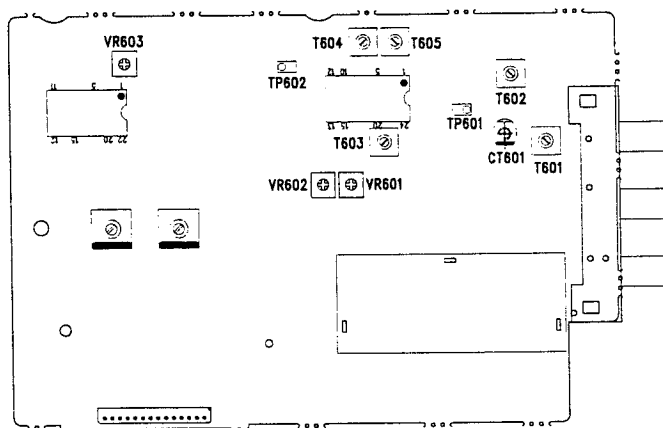


3. AM IF and RF Alignment

Preparation

1. Output of signal Generator should not be higher than necessary to obtain an optimum output reading.
2. Signal Generator Modulation: 30%
3. Switch: Press to AM.

Step	Signal Generator Frequency	Receiver Frequency on the Display	Equipment Connection	Adjustment Point	Adjust for
1	999KHz (400Hz, Mod.)	522KHz	DC Voltmeter TP601	T602	1.2V reading Maximum
2	603KHz (400Hz, Mod.)	603KHz	AC Voltmeter to TAPE OUT jack	T601	reading Maximum
3	1404KHz (400Hz, Mod.)	400KHz	AC Voltmeter to TAPE OUT jack	CT601	reading Maximum
4	999KHz (400Hz, Mod.)	999KHz	AC Voltmeter to TAPE OUT jack	T603	reading FL display "TUNED"
5	999KHz (400Hz, Mod.)	999KHz	Same as Step 1.	VR601	Indicator on receiver with AM SSG Output level of 800 μ V/m

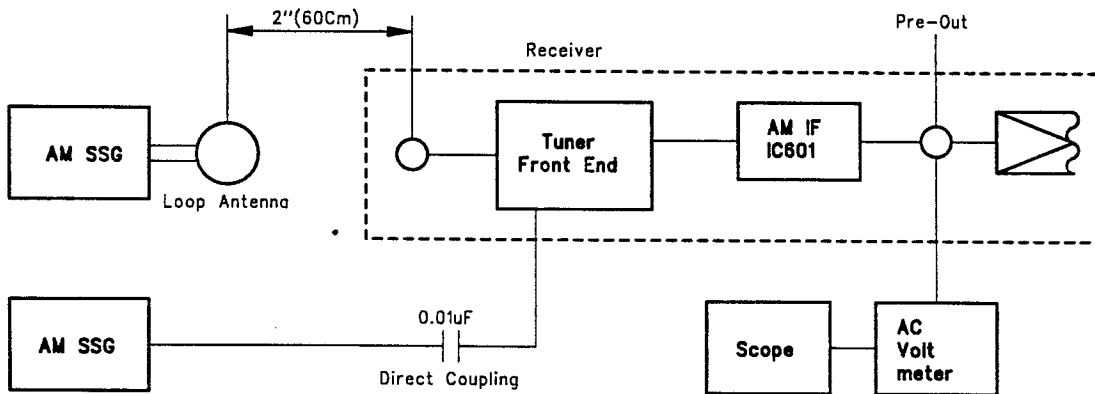


AM Alignment Connection

4. FM IF Alignment

PreparaMn

1. Signal Generator output should be no higher than necessary to obtain an optimum output reading.
2. Switch Press to FM.
3. Signal generator deviation: 40KHz

Step	Signal Generator Frequency	Receiver Frequency on the Display	Equipment Connection	Adjustment Point	Adjust for
1	98.0MHz (1KHz, Mod.)	98.0MHz	DC Voltmeter to TP 602	T604	Zero reading on DC voltmeter
2	98.0MHz (1KHz, Mod.)	98.0MHz	Distortion meter to TAPE OUT jack	T605	Minimum distortion
3	98.0MHz (1KHz, Mod.)	98.0MHz	Same as Step 1	VR602	FL display "TUNED" Indication on receiver with FM SSG output level of 35.2 dbf

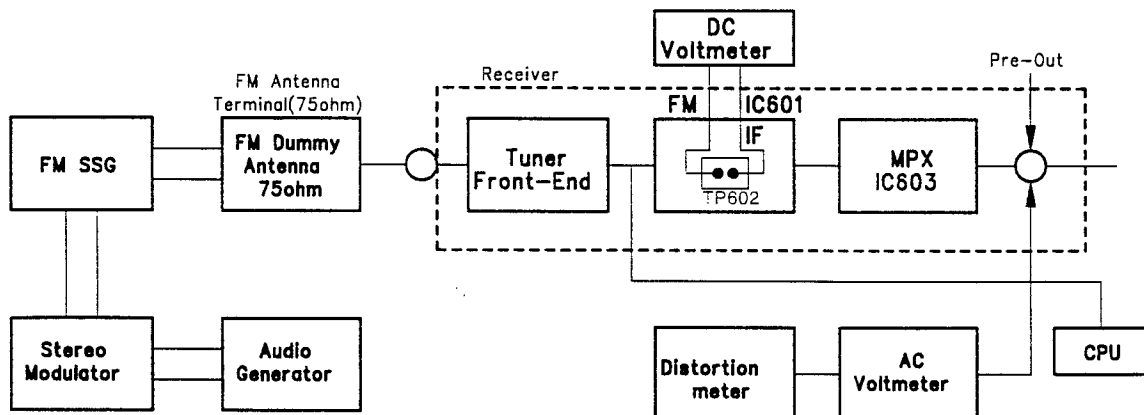

FM RF/IF and MPX Alignment Connection

5. MPX Alignment, SM Alignment


Preparation

1. Switch : Press to FM.
2. Tuner for 98MHz on band.
3. Signal Generator output level : 1000 μ V.
4. Deviation : 40KHz at 53.3% modulation of composite signal.
5. Connect Signal Generator to FM antenna terminal through FM dummy antenna (75 Ω).


Step	19KHz Modulation Level	Signal Generator Frequency Setting	Equipment Connection	Adjustment Point	Adjust for
1	7.5KHz Mod.	Composite to channel 1KHz R	AC voltmeter to TAPE OUT jack of R channel	-	Adjust for about 450mV of audio output
2	7.5KHz Mod.	Composite to channel 1KHz L	AC voltmeter to TAPE OUT jack of R channel	VR603	AC voltmeter reading should be at least 40dB below.
3	7.5KHz Mod.	Composite to channel 1KHz R	AC voltmeter to TAPE OUT jack of L channel	VR603	Same as Step 2.
If you could not obtain -40dB reading in Steps 2 and 3 (compared with Step 1), read just VR603 until you obtain -40dB readings for both steps 2 and 3. Nominal is -45dB.					

EXPLODED VIEW


NO	PARTS NAME	CODE NO	Q'TY	REMARK	NO	PARTS NAME	CODE NO
1	KNOB-VOLUME	MJAF-16090-ZZ4	1	ABS	28	SHIELD-VIDEO	MPAC-16230-I
2	KNOB-BALANCE	MJAF-16070-ZZ4	3	ABS	29	BUSH-CORD	MJAG-00280-(
3	PANEL-FRONT	MJAF-06080-ZZ1	1	ABS	30	CORD-AC A'SSY	MPAC-04820-I
4	KNOB-MUTE	MJAF-16080-ZZ4	1	ABS	31	TERMINAL-GND	MMAC-02060-
5	KNOB-CHOICE(C)	MJAF-08030-ZZ3	1	ABS	32	CUSHION-A	MRAG-12950-I
6	KNOB-CHANNEL	MJAF-08000-ZZ3	1	ABS	33	CUSHION-A	MRAG-13040-I
7	KNOB-CHOICE(B)	MJAF-08020-ZZ3	1	ABS	34	CUSHION-A	MRAG-13050-I
8	KNOB-SPEAKER	MJAF-16060-ZZ4	2	ABS	35	CORK-TERMINAL	MJAG-13060-I
9	KNOB-CHOICE(A)	MJAF-08010-ZZ3	1	ABS		SCREW-TAPPING	XSTB-30100-Z
10	KNOB-POWER	MJAF-16110-ZZ4	1	ABS		SCREW-TAPPING	XSTB-30100-Z
11	LENS-POWER	MAAF-16120-ZZ4	1	ACRYL		SCREW-TAPPING	XSTB-30080-Z
12	KNOB-STANDBY	MJAF-16050-ZZ4	1	ABS		SCREW-TAPPING	XSTB-30080-Z
13	WINDOW-FL	MAAF-08070-ZZ3	1	PVC		SCREW-T/P-TOOTH	MMAC-03592-I
14	FILTER-FL	MAAF-16150-ZZ4	1	PVC		SCREW-RADIATOR	MMAC-15650-I
15	NUT		4			SCREW-BH/W	MMTC-12180-(
16	WASHER		1			SCREW-TAPPING	XSTS-30080-Z
17	SHIELD-BALANCE	MPAC-16160-004	1	ET-HD		SCREW-TAPPING	XSTS-30180-Z
18	RADIATOR-MAIN	MEAC-04840-002	1	A6063		SCREW-TAPPING	XSTB-40080-Z
19	BRACKET-RADIATOR(S)	MPAC-16150-004	5	SECC		SCREW-TAPPING	XSTB-40080-Z
20	BRACKET-PCB	MPAC-16170-004	1	US CO			
21	CUSHION-A	MRAG-13030-004	1	EVA			
22	FOOT	MJAF-15640-ZZ4	4	ABS			
23	CHASSIS-BOTTOM	MPAC-04810-002	1	US CO			
24	SUPPORT-PCB	MJAF-16140-ZZ4	6	ABS			
25	CHASSIS-BACK	MPAC-04771-ZZ2	1	US CO			
26	CHASSIS-TOP	MPAC-04820-ZZ2	1	VCM			
27	CHASSIS-PANEL	MPAC-04760-003	1	US CO			

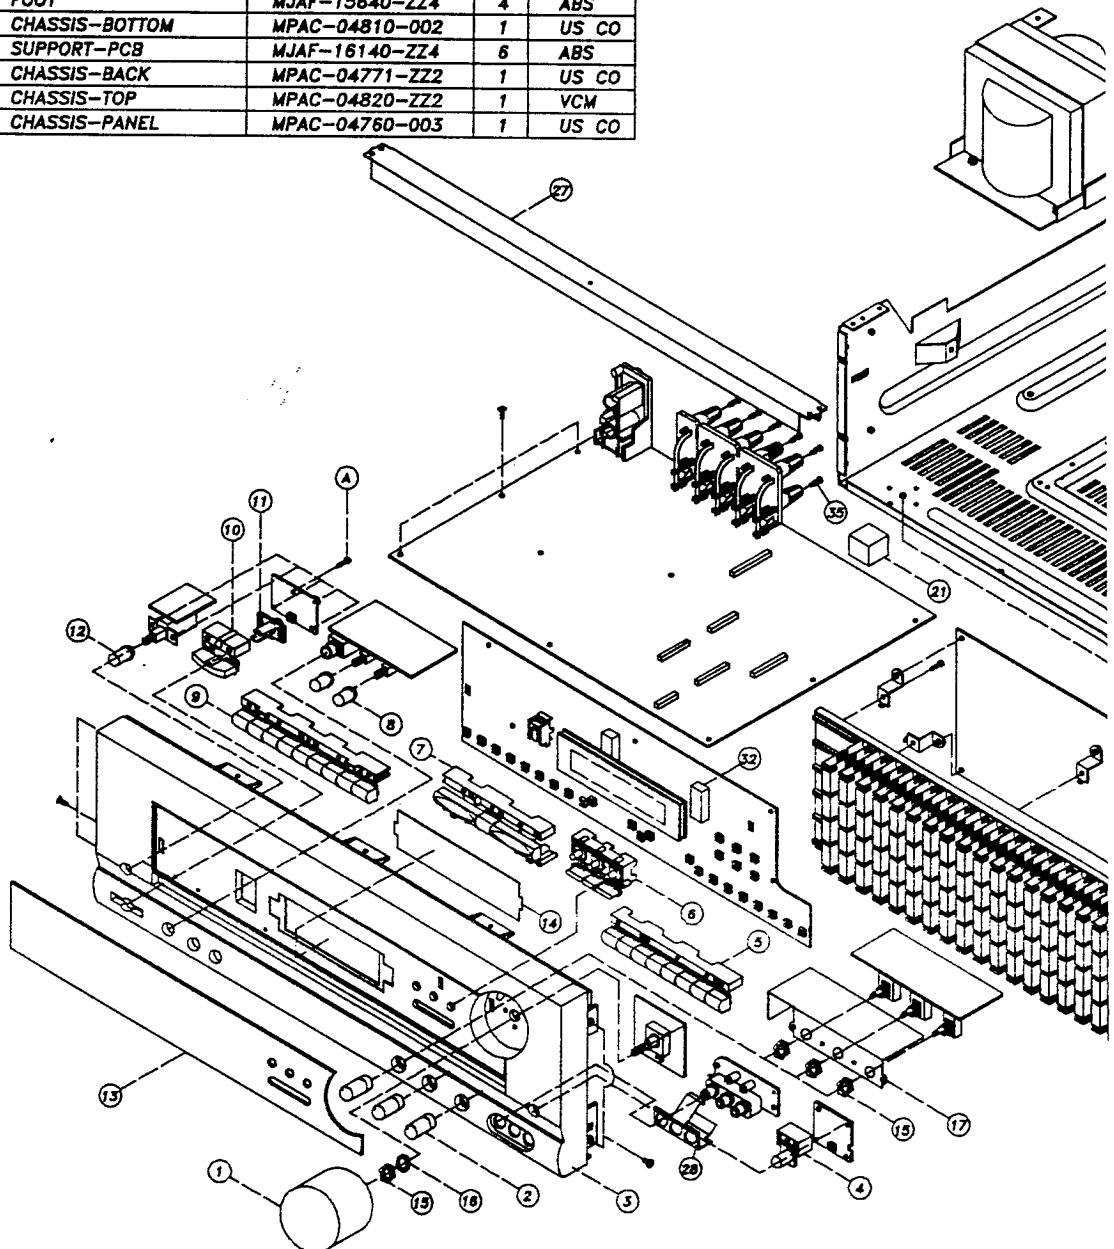


CODE NO	Q'TY	REMARK
PAC-16230-004	1	ET-HD
JAG-00280-003	1	***
PAC-04820-ZZ2	1	***
MAC-02060-004	1	***
RAG-12950-004	2	EVA
RAG-13040-004	1	FELT
RAG-13050-004	2	FELT
JAG-13060-ZZ4	10	ABS
STB-30100-ZB4	13	***
STB-30100-ZY4	27	***
STB-30080-ZY4	25	***
STB-30080-ZB4	14	***
MAC-03592-004	8	***
MAC-15650-004	15	***
MTC-12180-004	1	***
STS-30080-ZY4	8	***
STS-30180-ZY4	6	***
STB-40080-ZY8	4	***
STB-40080-ZB8	6	***

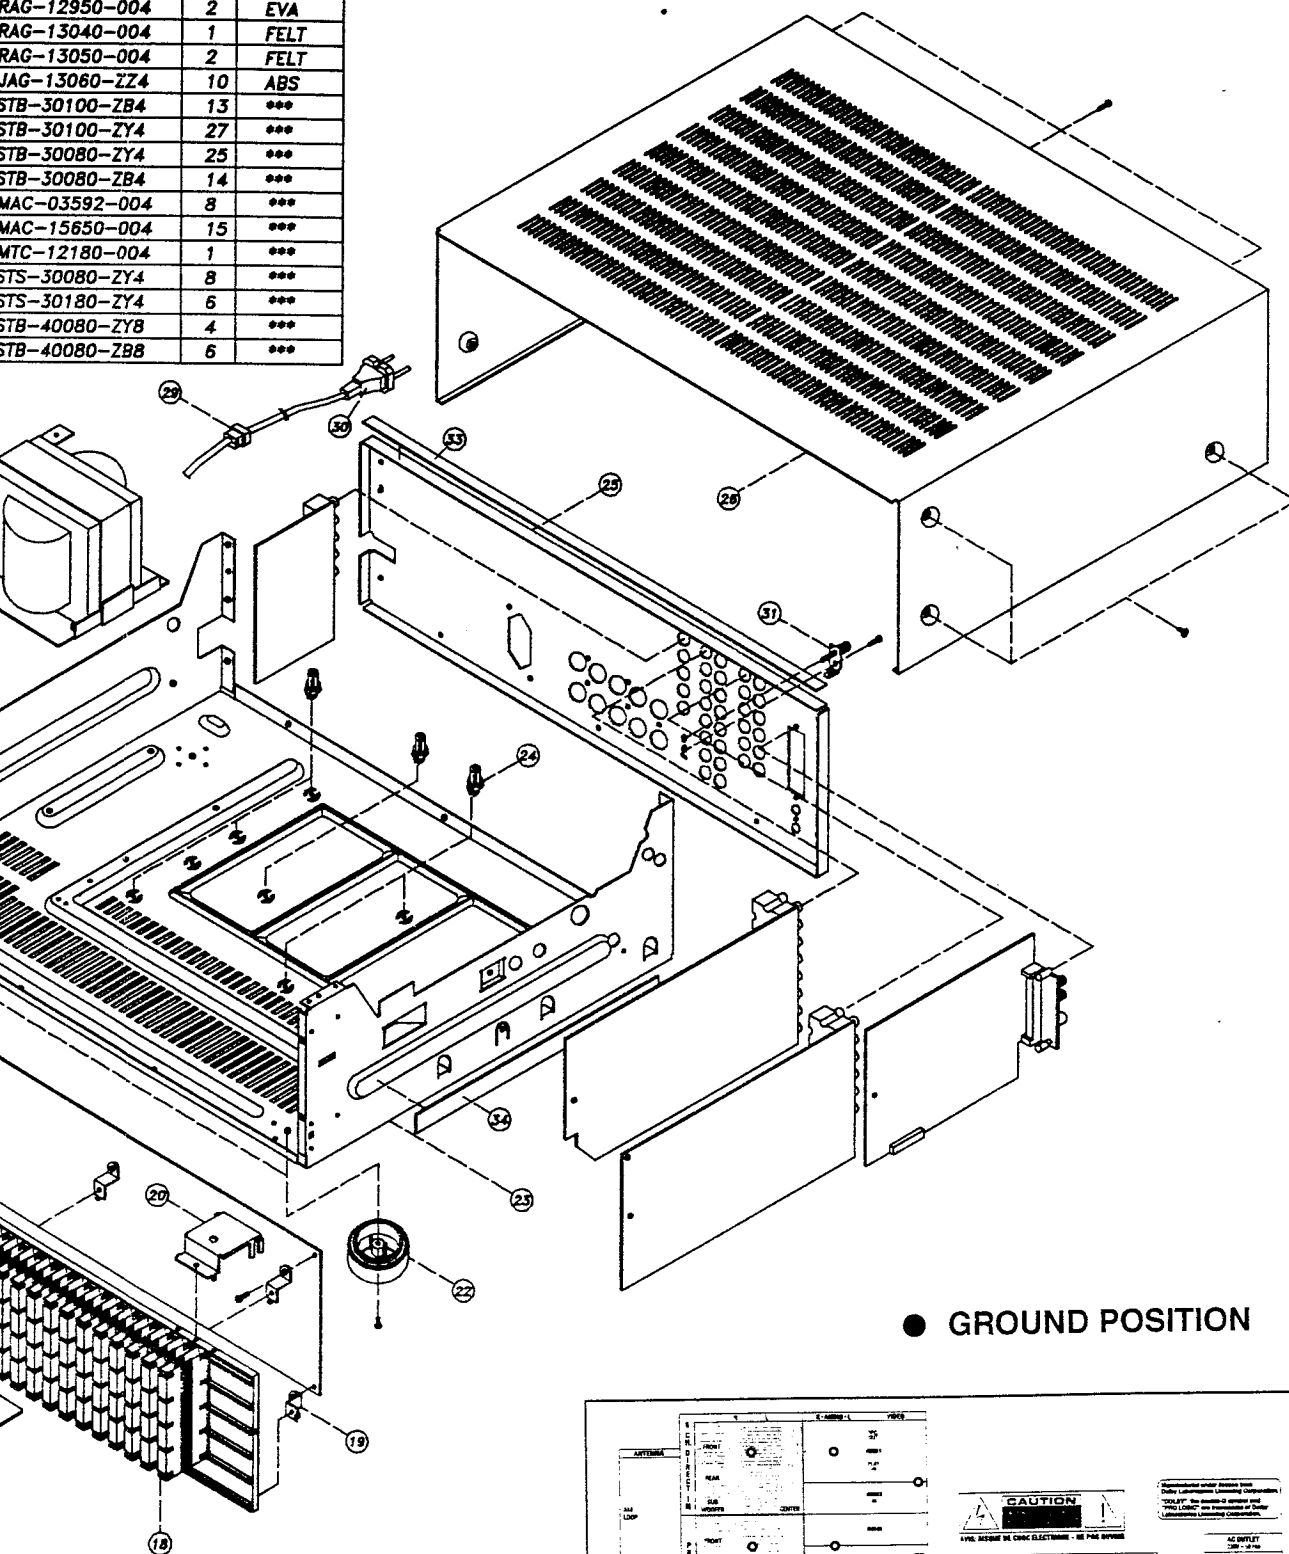


● GROUND POSITION

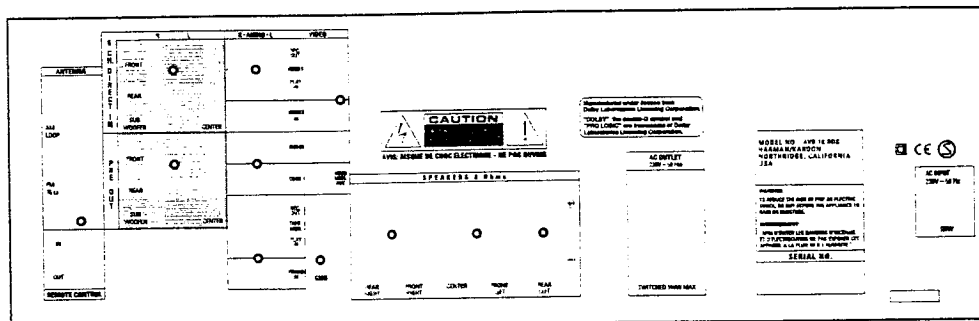


BLOCK DIAGRAM

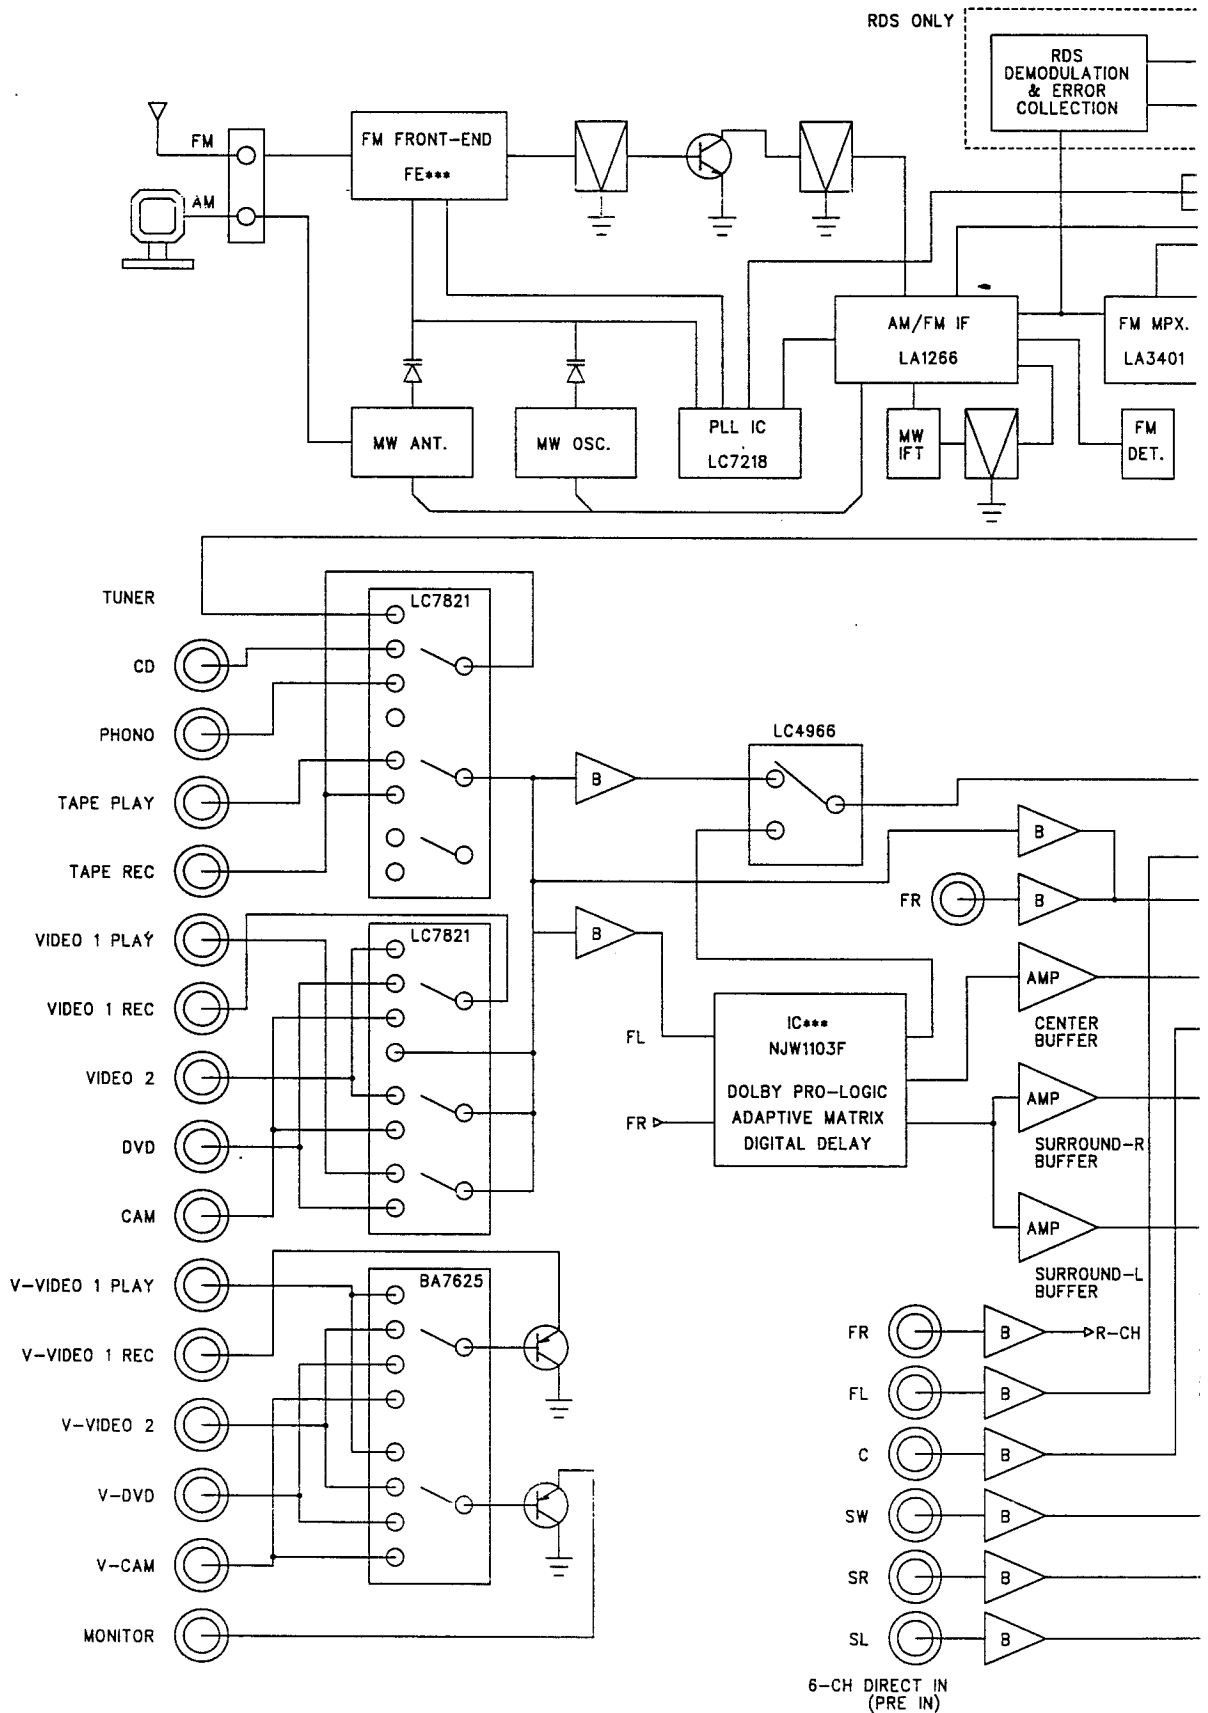

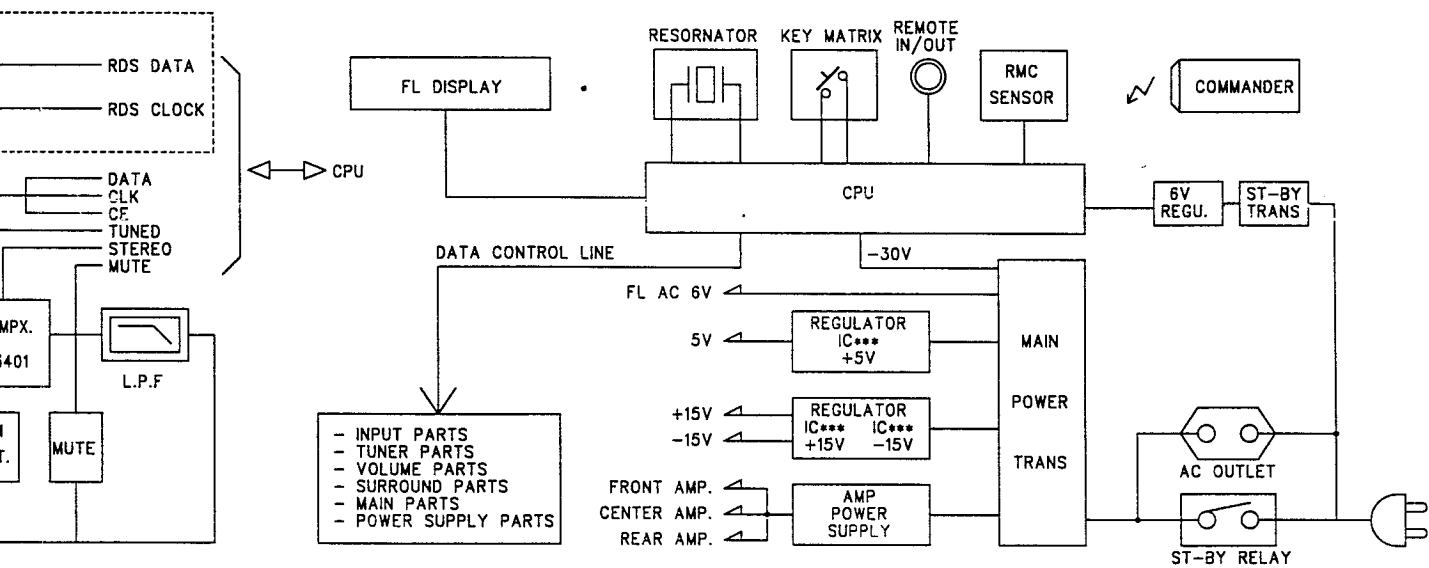


WIRING DIAGRAM

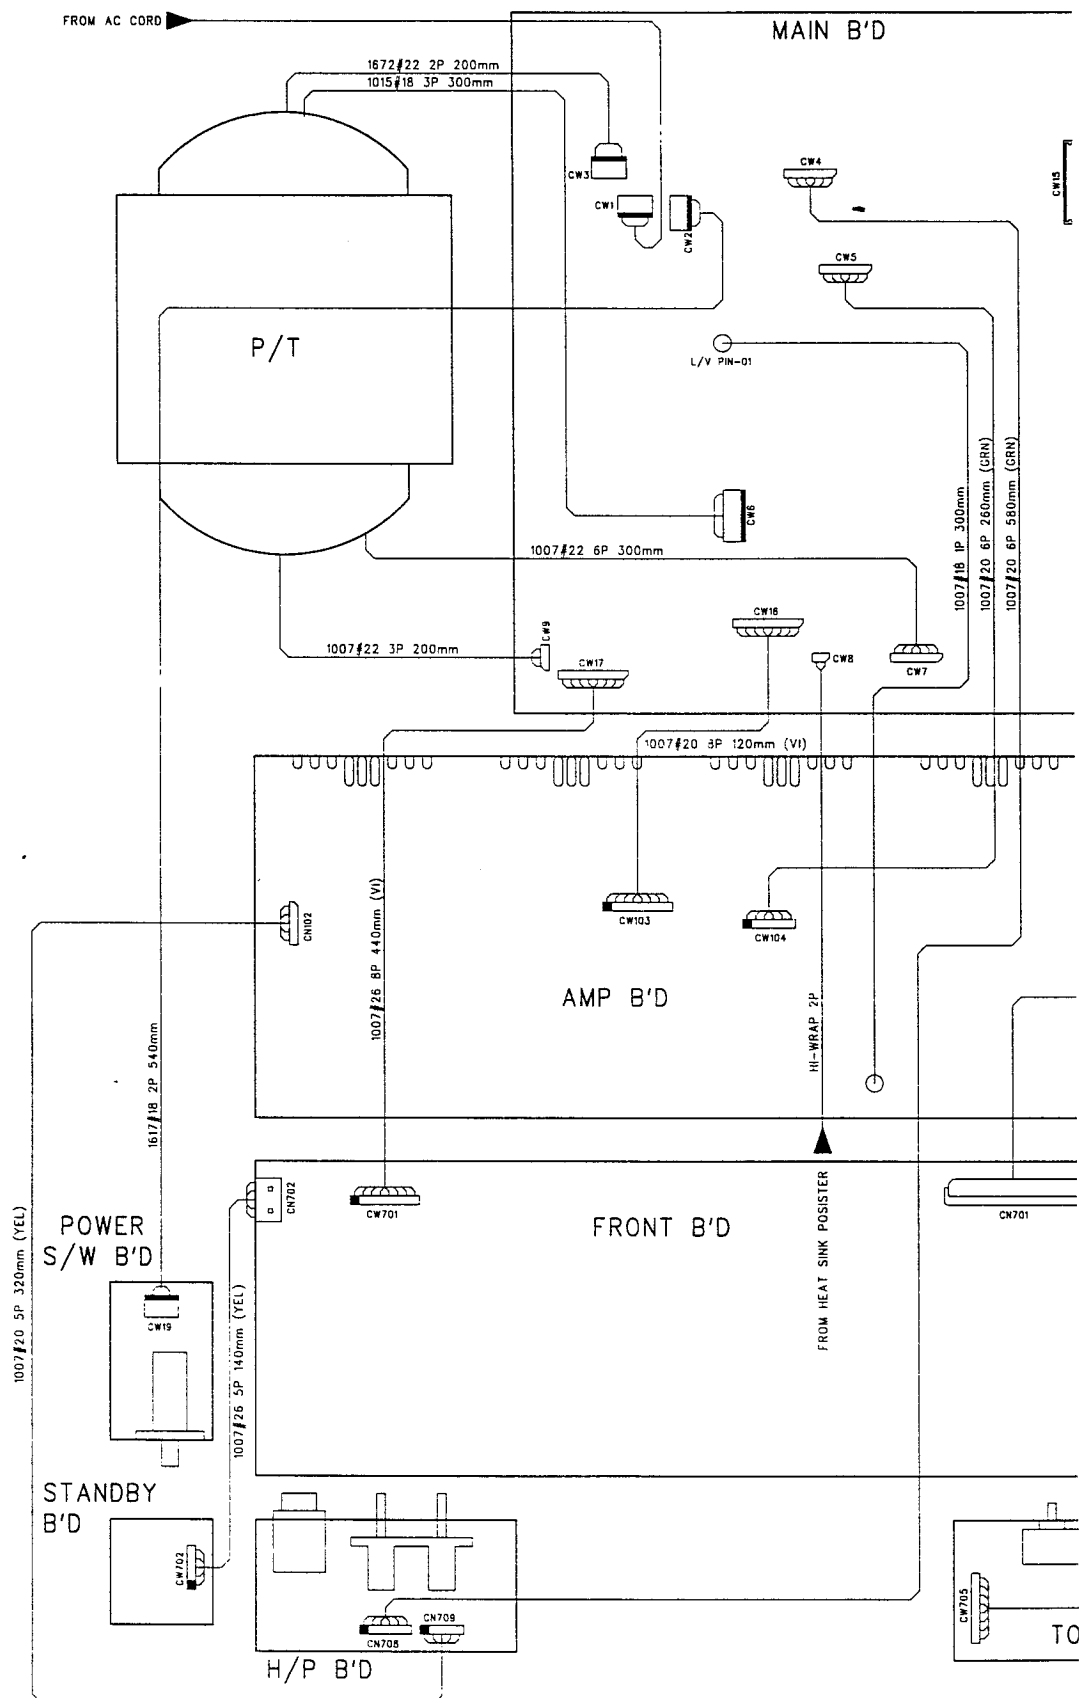




SCHEMATIC DIAGRAM


■ AMP

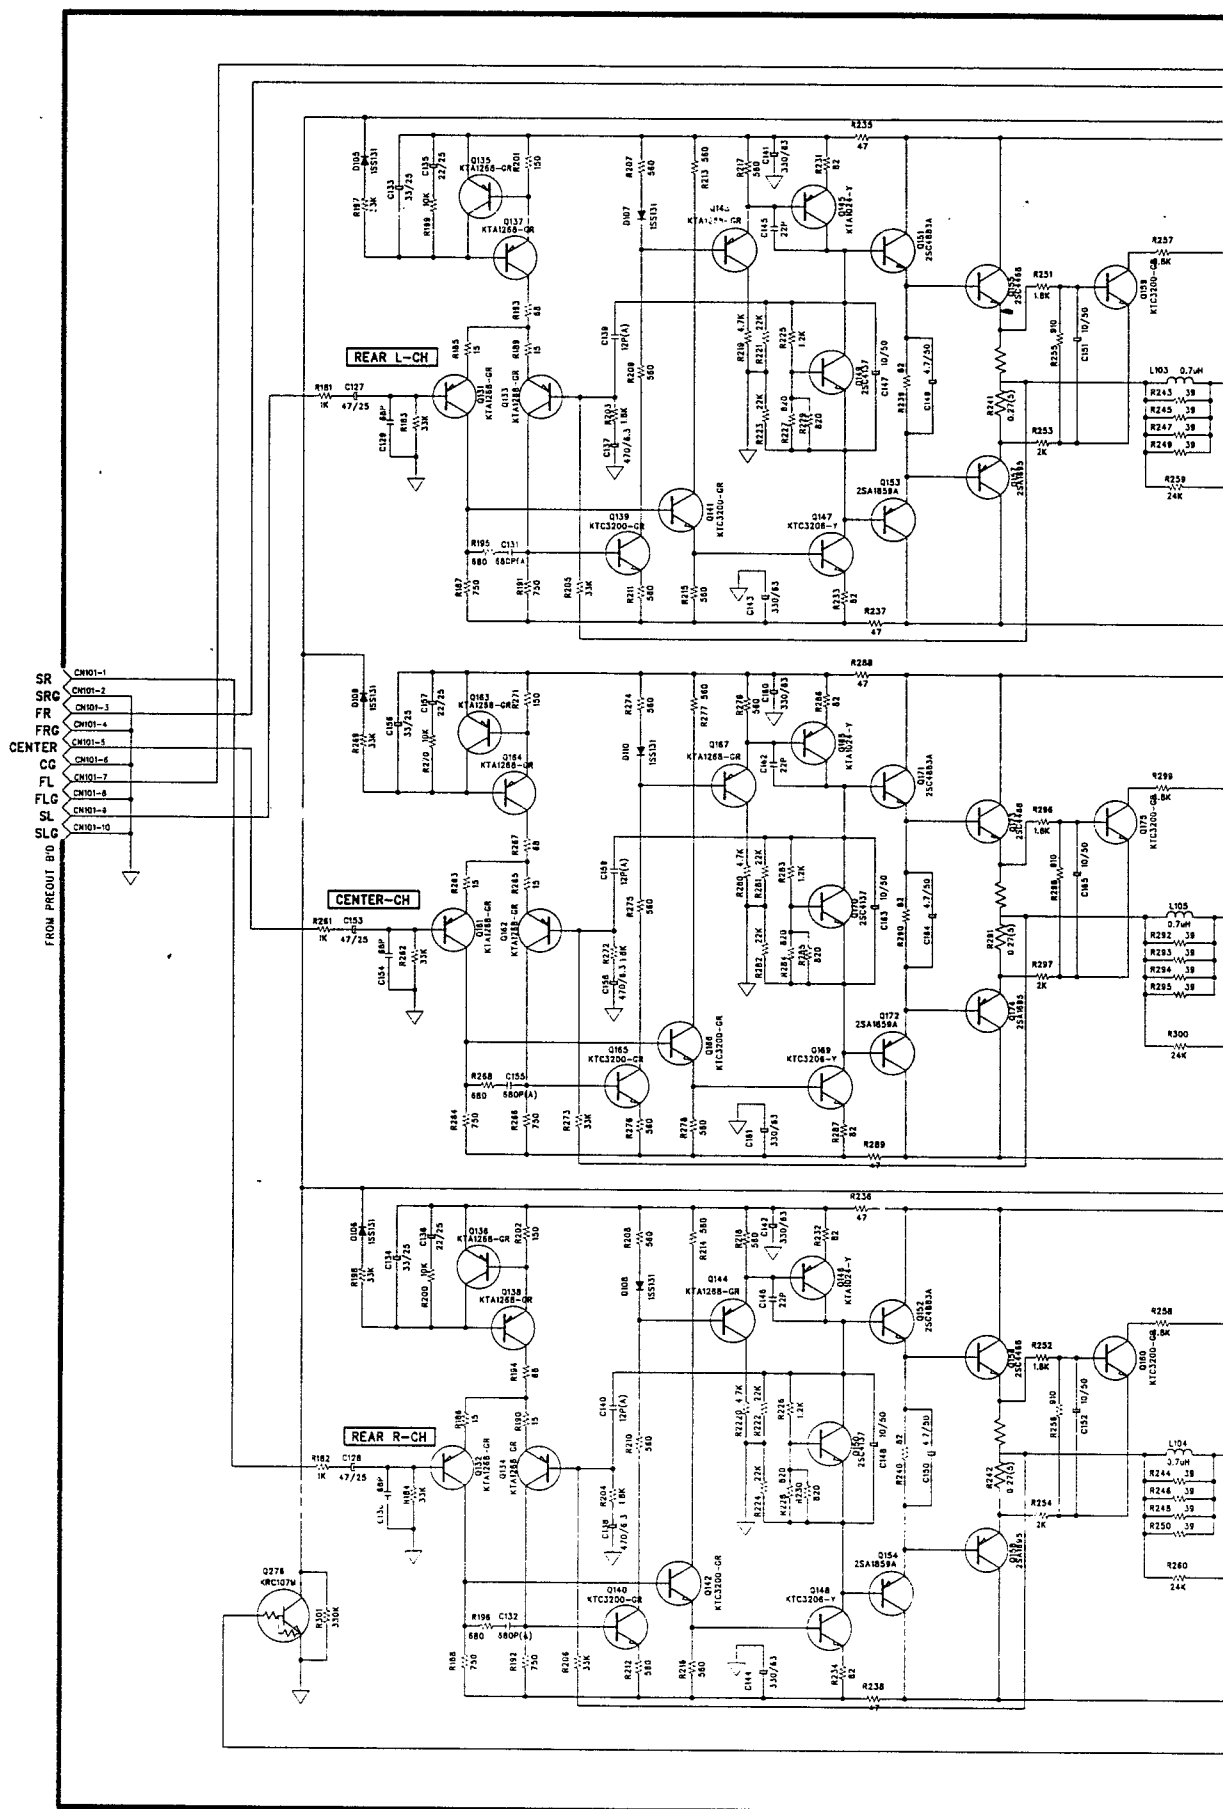


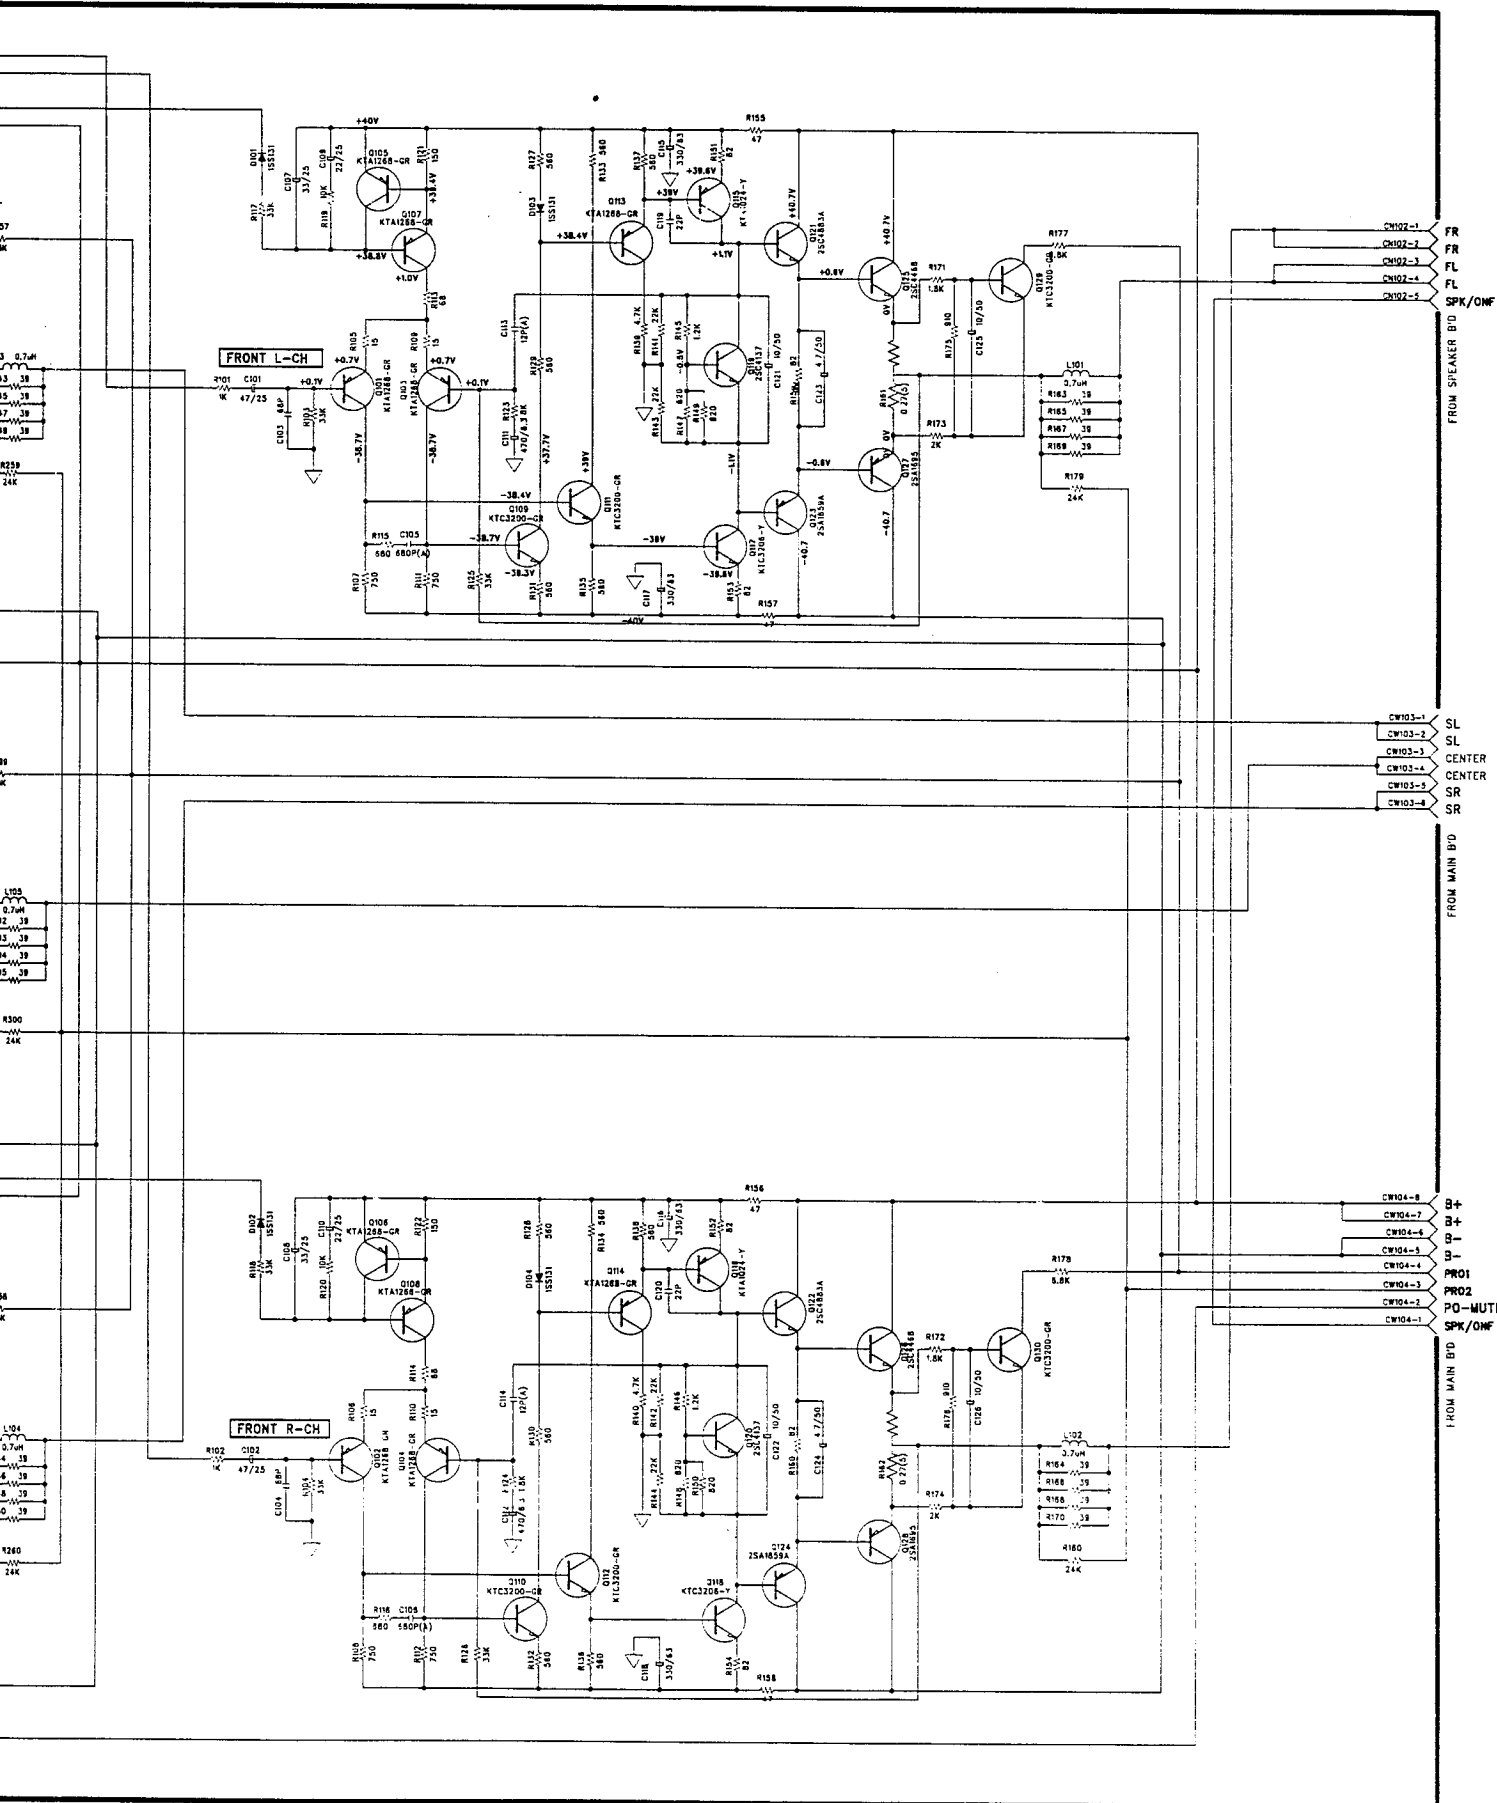

SCHEMATIC DIAGRAM


TUNER

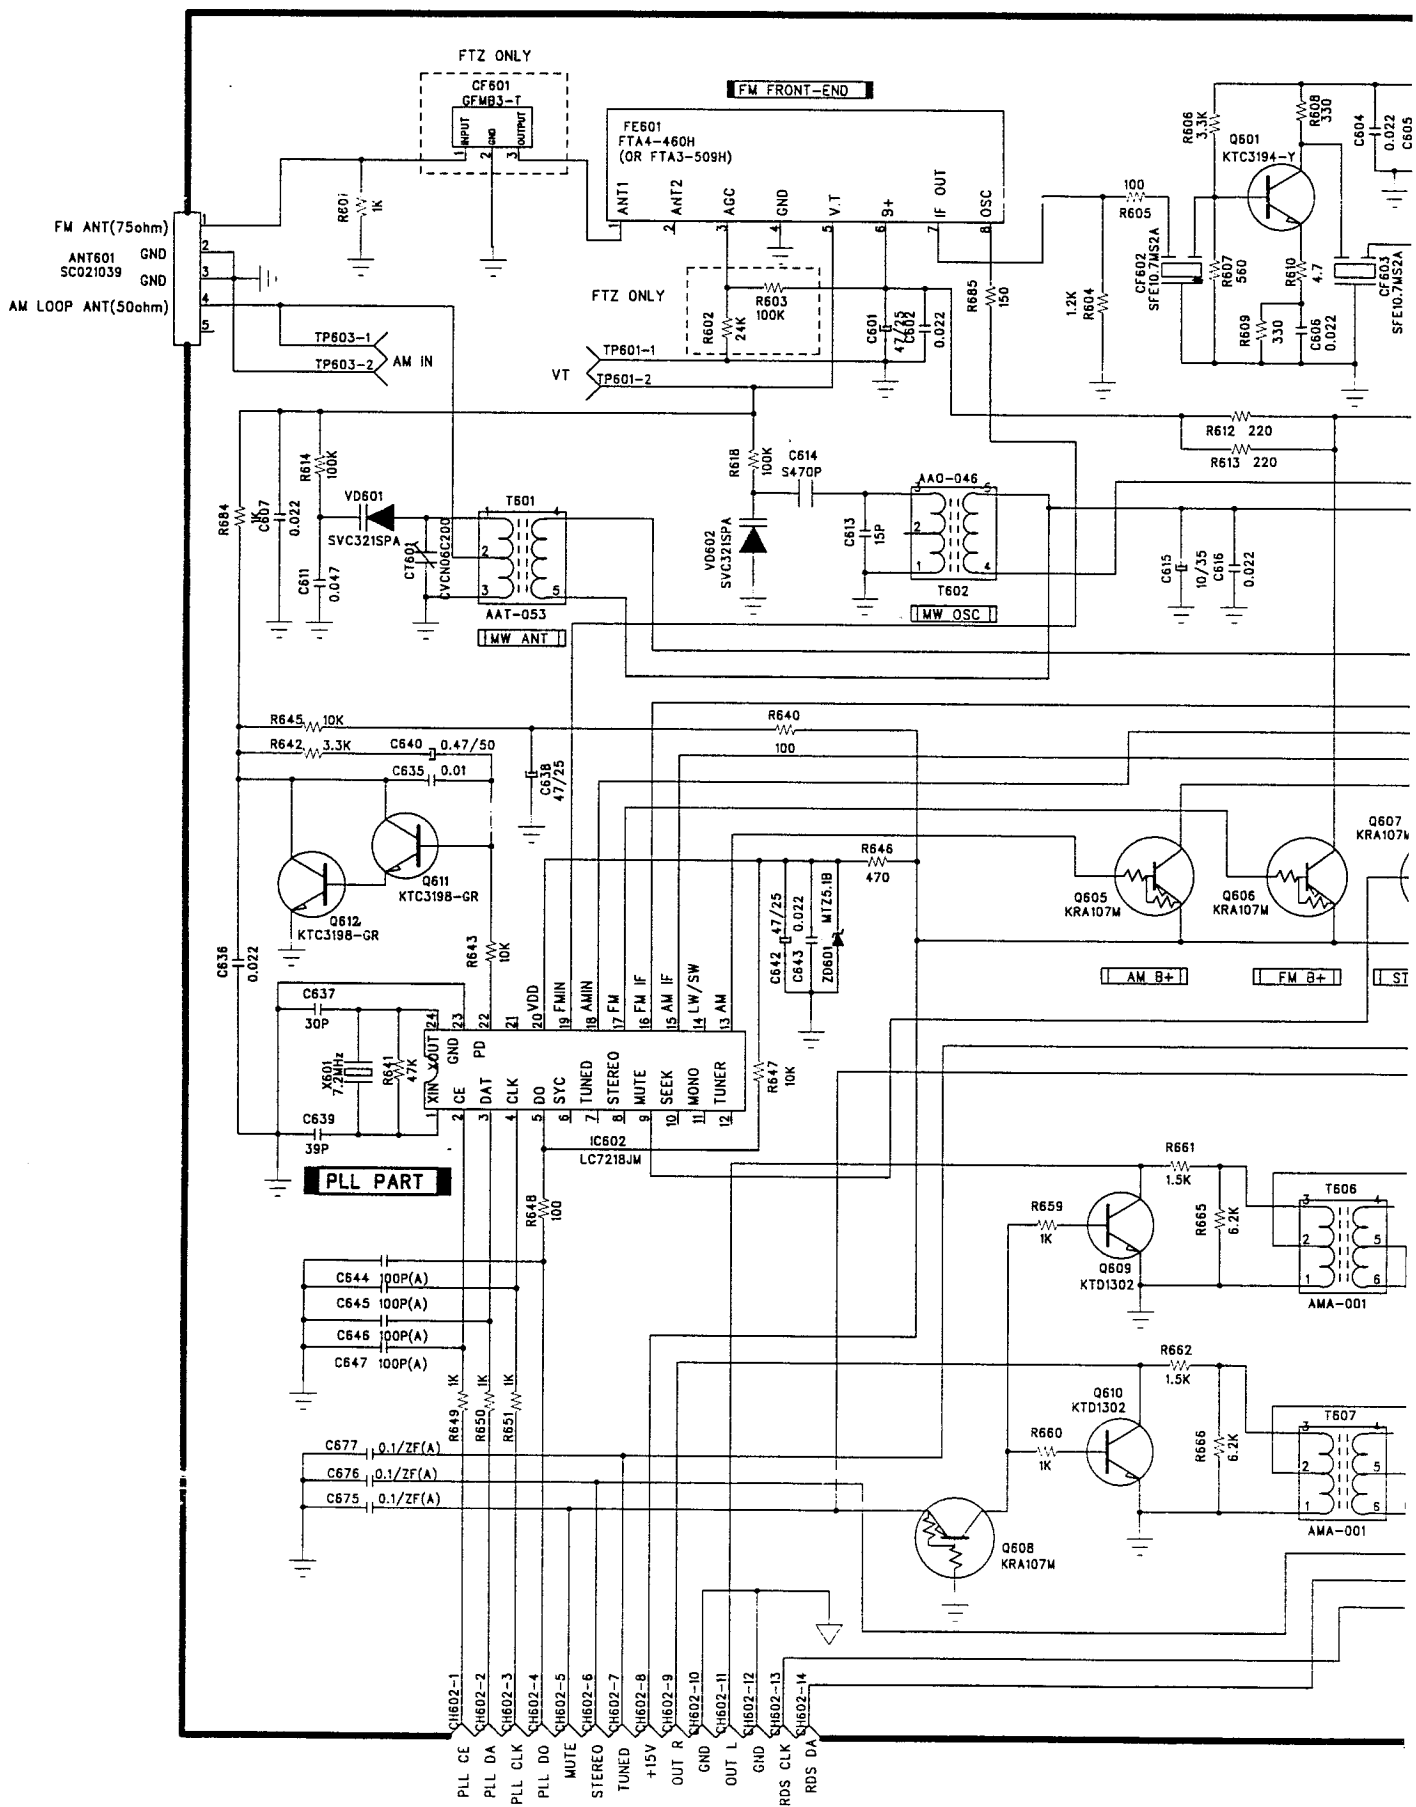


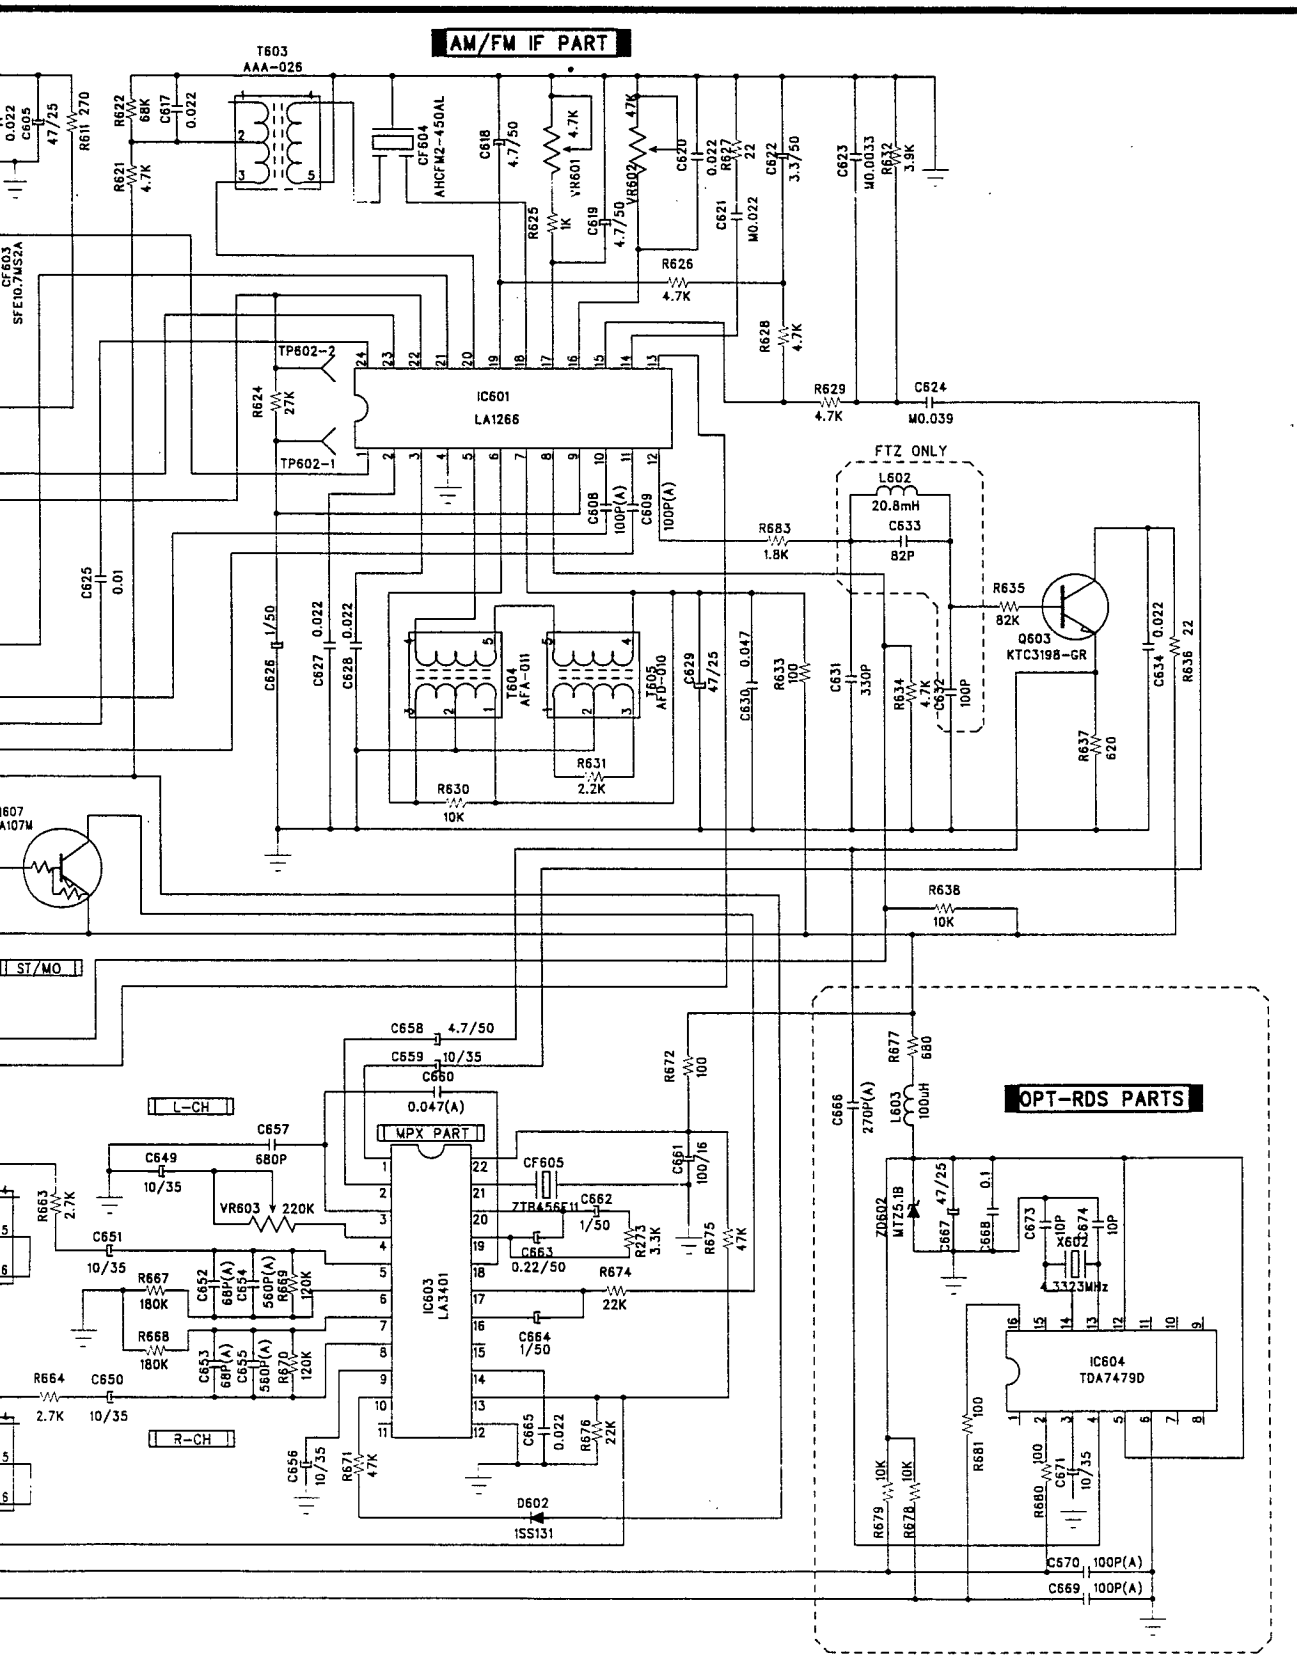


OPTION TABLE		
LOC.NO	U.S.A	Europe
ANT601	SC0210393N	SC0210392N
CF601	X	0
FE601	FTA3-509H	FTA4-460H
R602	X	0
R603	X	0
R624	27K	47K
L602	X	0
C633	X	0
C632	X	0
R669	120K	220K
R670	120K	220K
C654	560P(A)	220P(A)
C655	560P(A)	220P(A)
C652	68P(A)	10P(A)
C653	68P(A)	10P(A)
R657	180K	270K
R658	180K	270K
R685	X	150
R637	620	390
CF602	SFE10.7MS2A	SFE10.7MJA
RDS	X	0

■ AUDIO INPUT & PROLOGIC

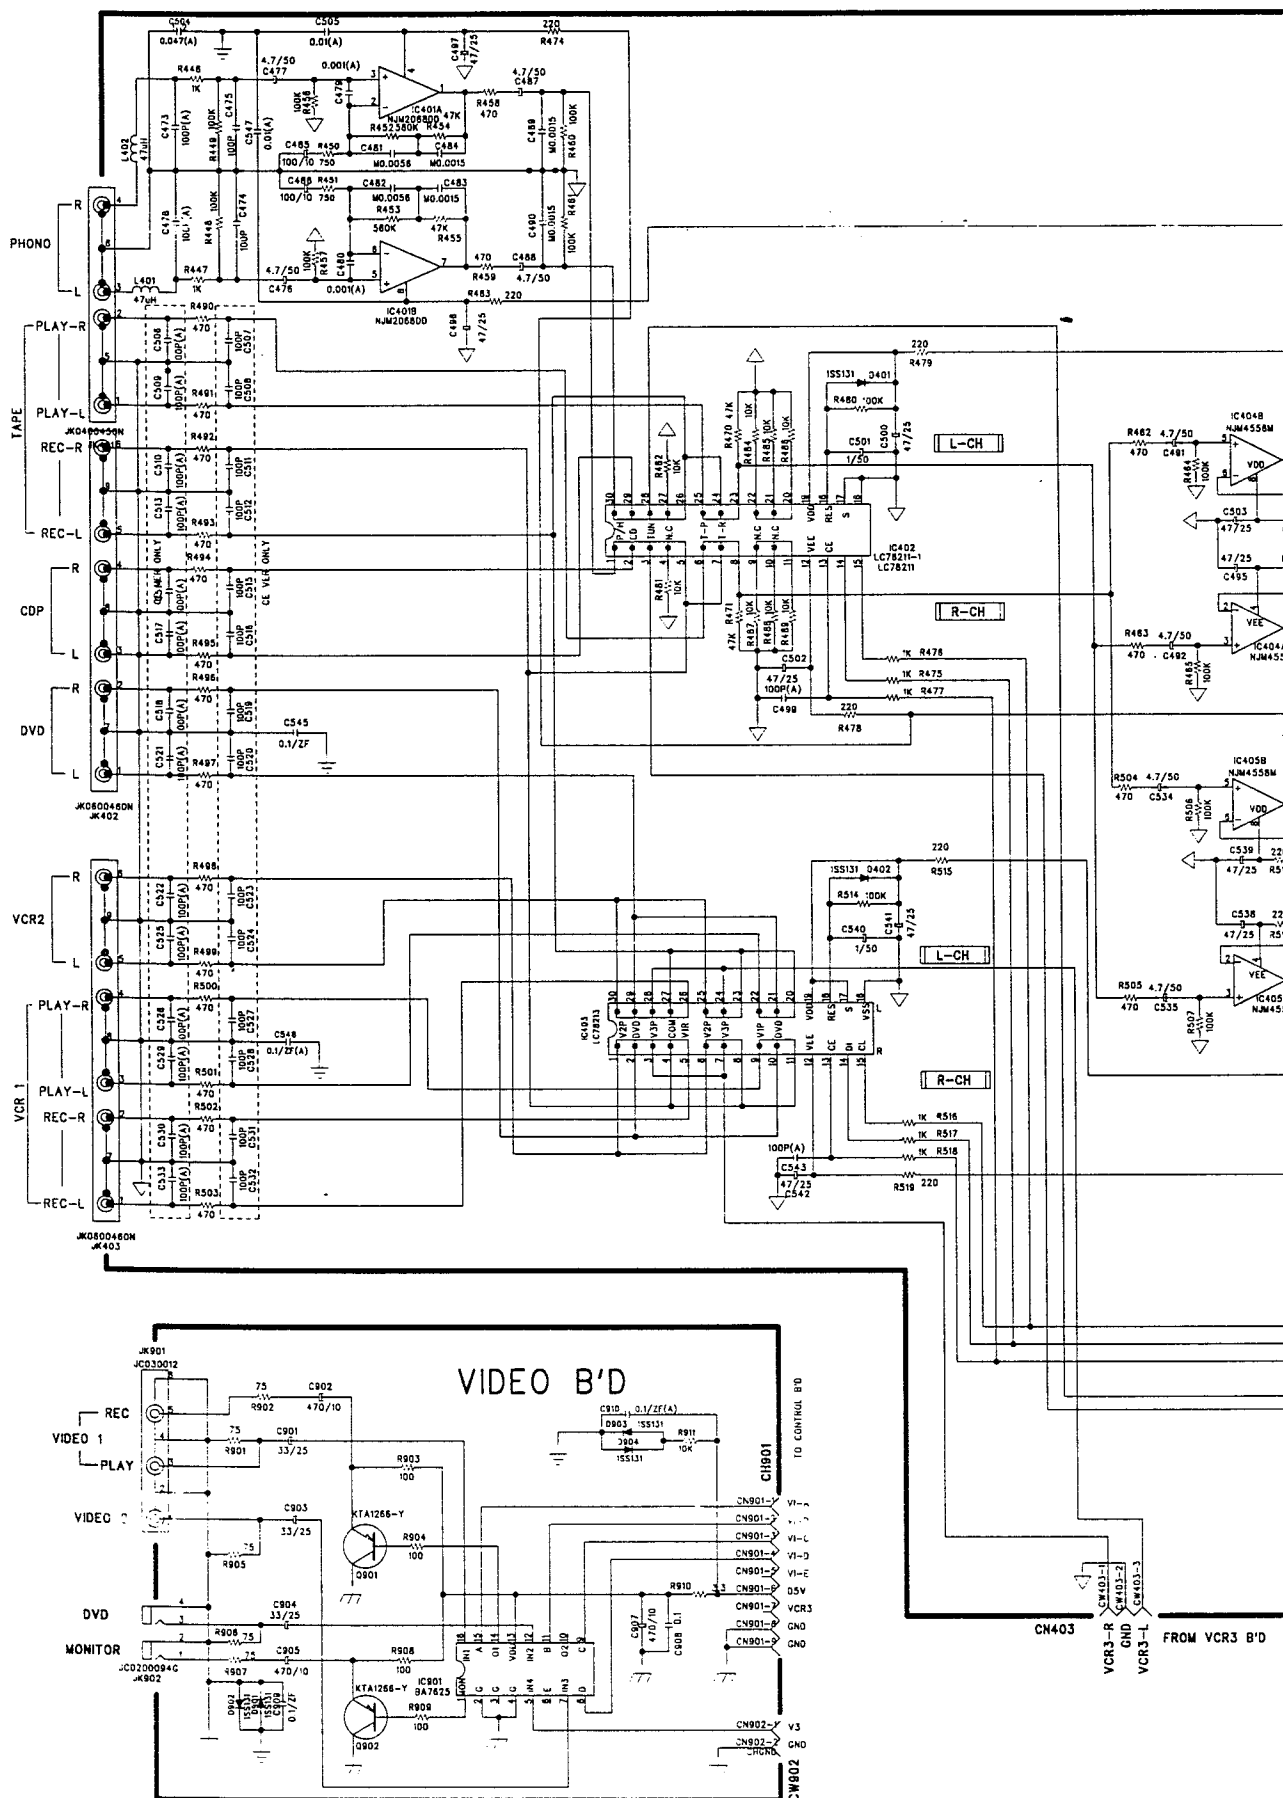




■ HEAD PHONE

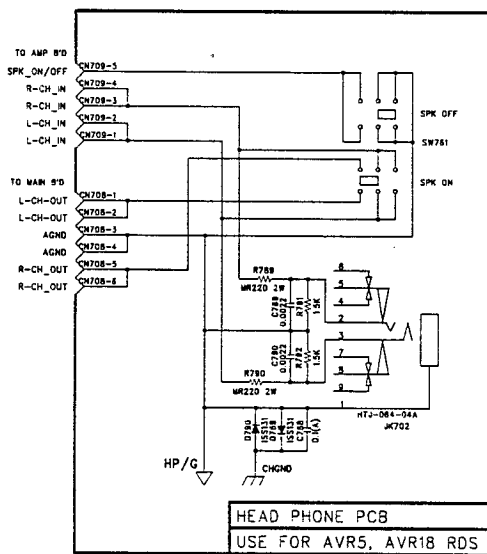

*DESTINATION OPTION


LOC. NO.	USA	EUROPE
R791, R792	X	0
C771 - C774	X	0
C789, C790	X	0

■ VIDEO 3 INPUT

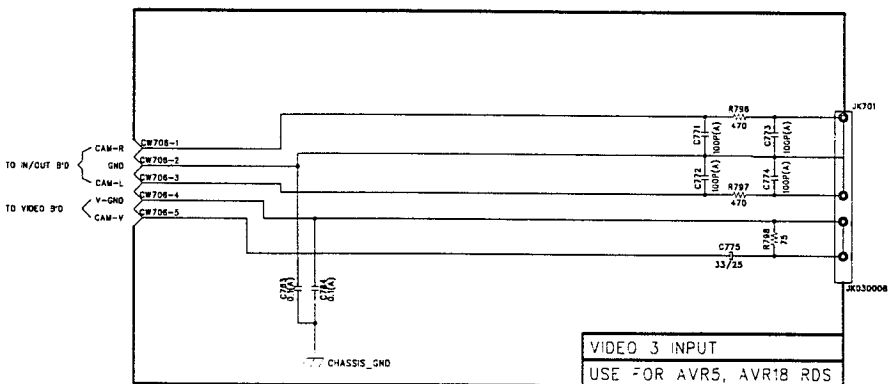


SCHEMATIC DIAGRAM

■ **TONE, TREBLE, BALANCE VOL**

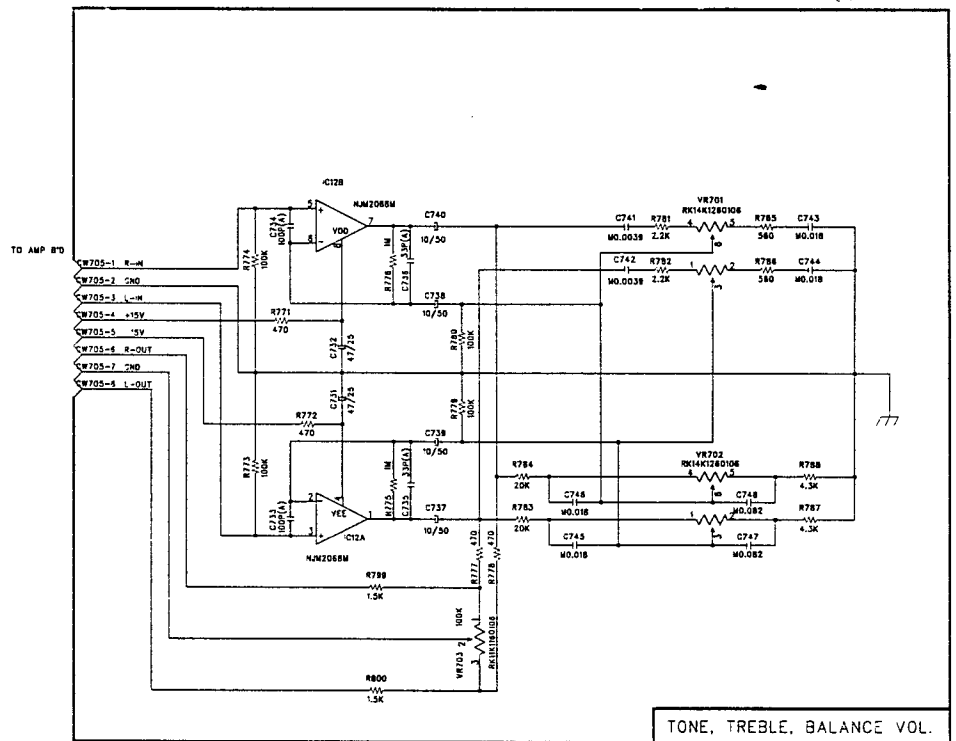



■ **ENCODER VOL**

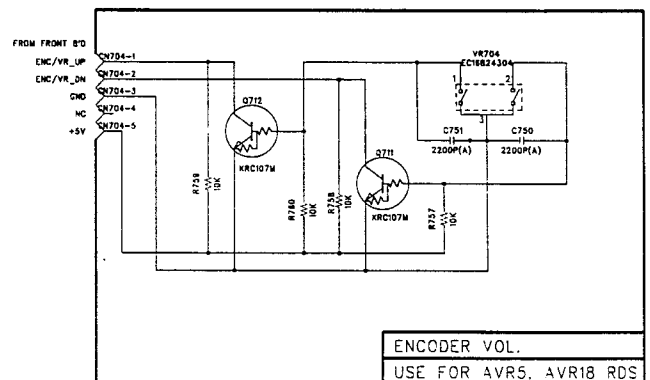


SCHEMATIC DIAGRAM

■ MAIN

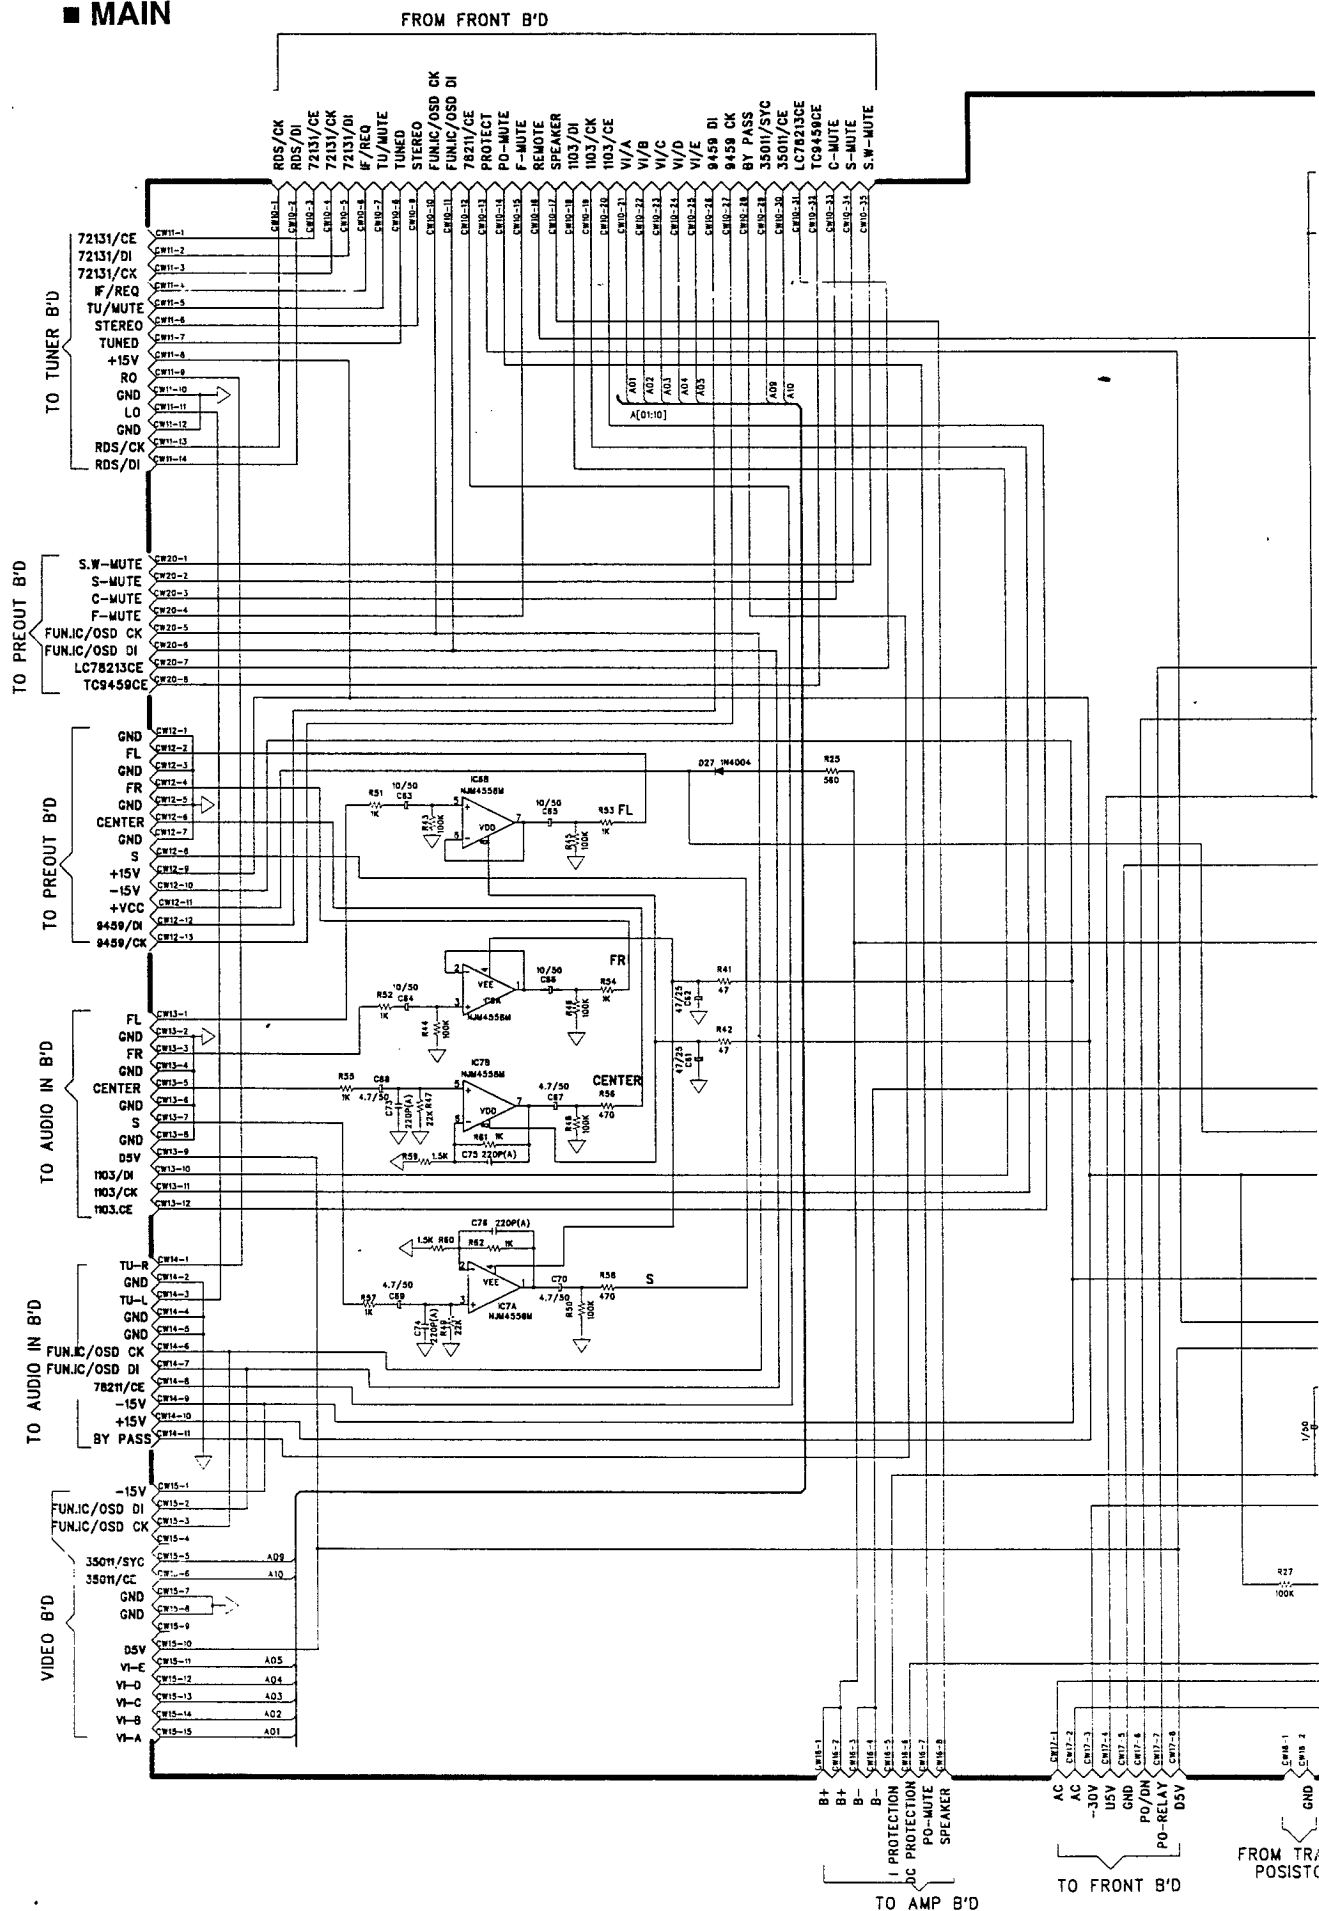


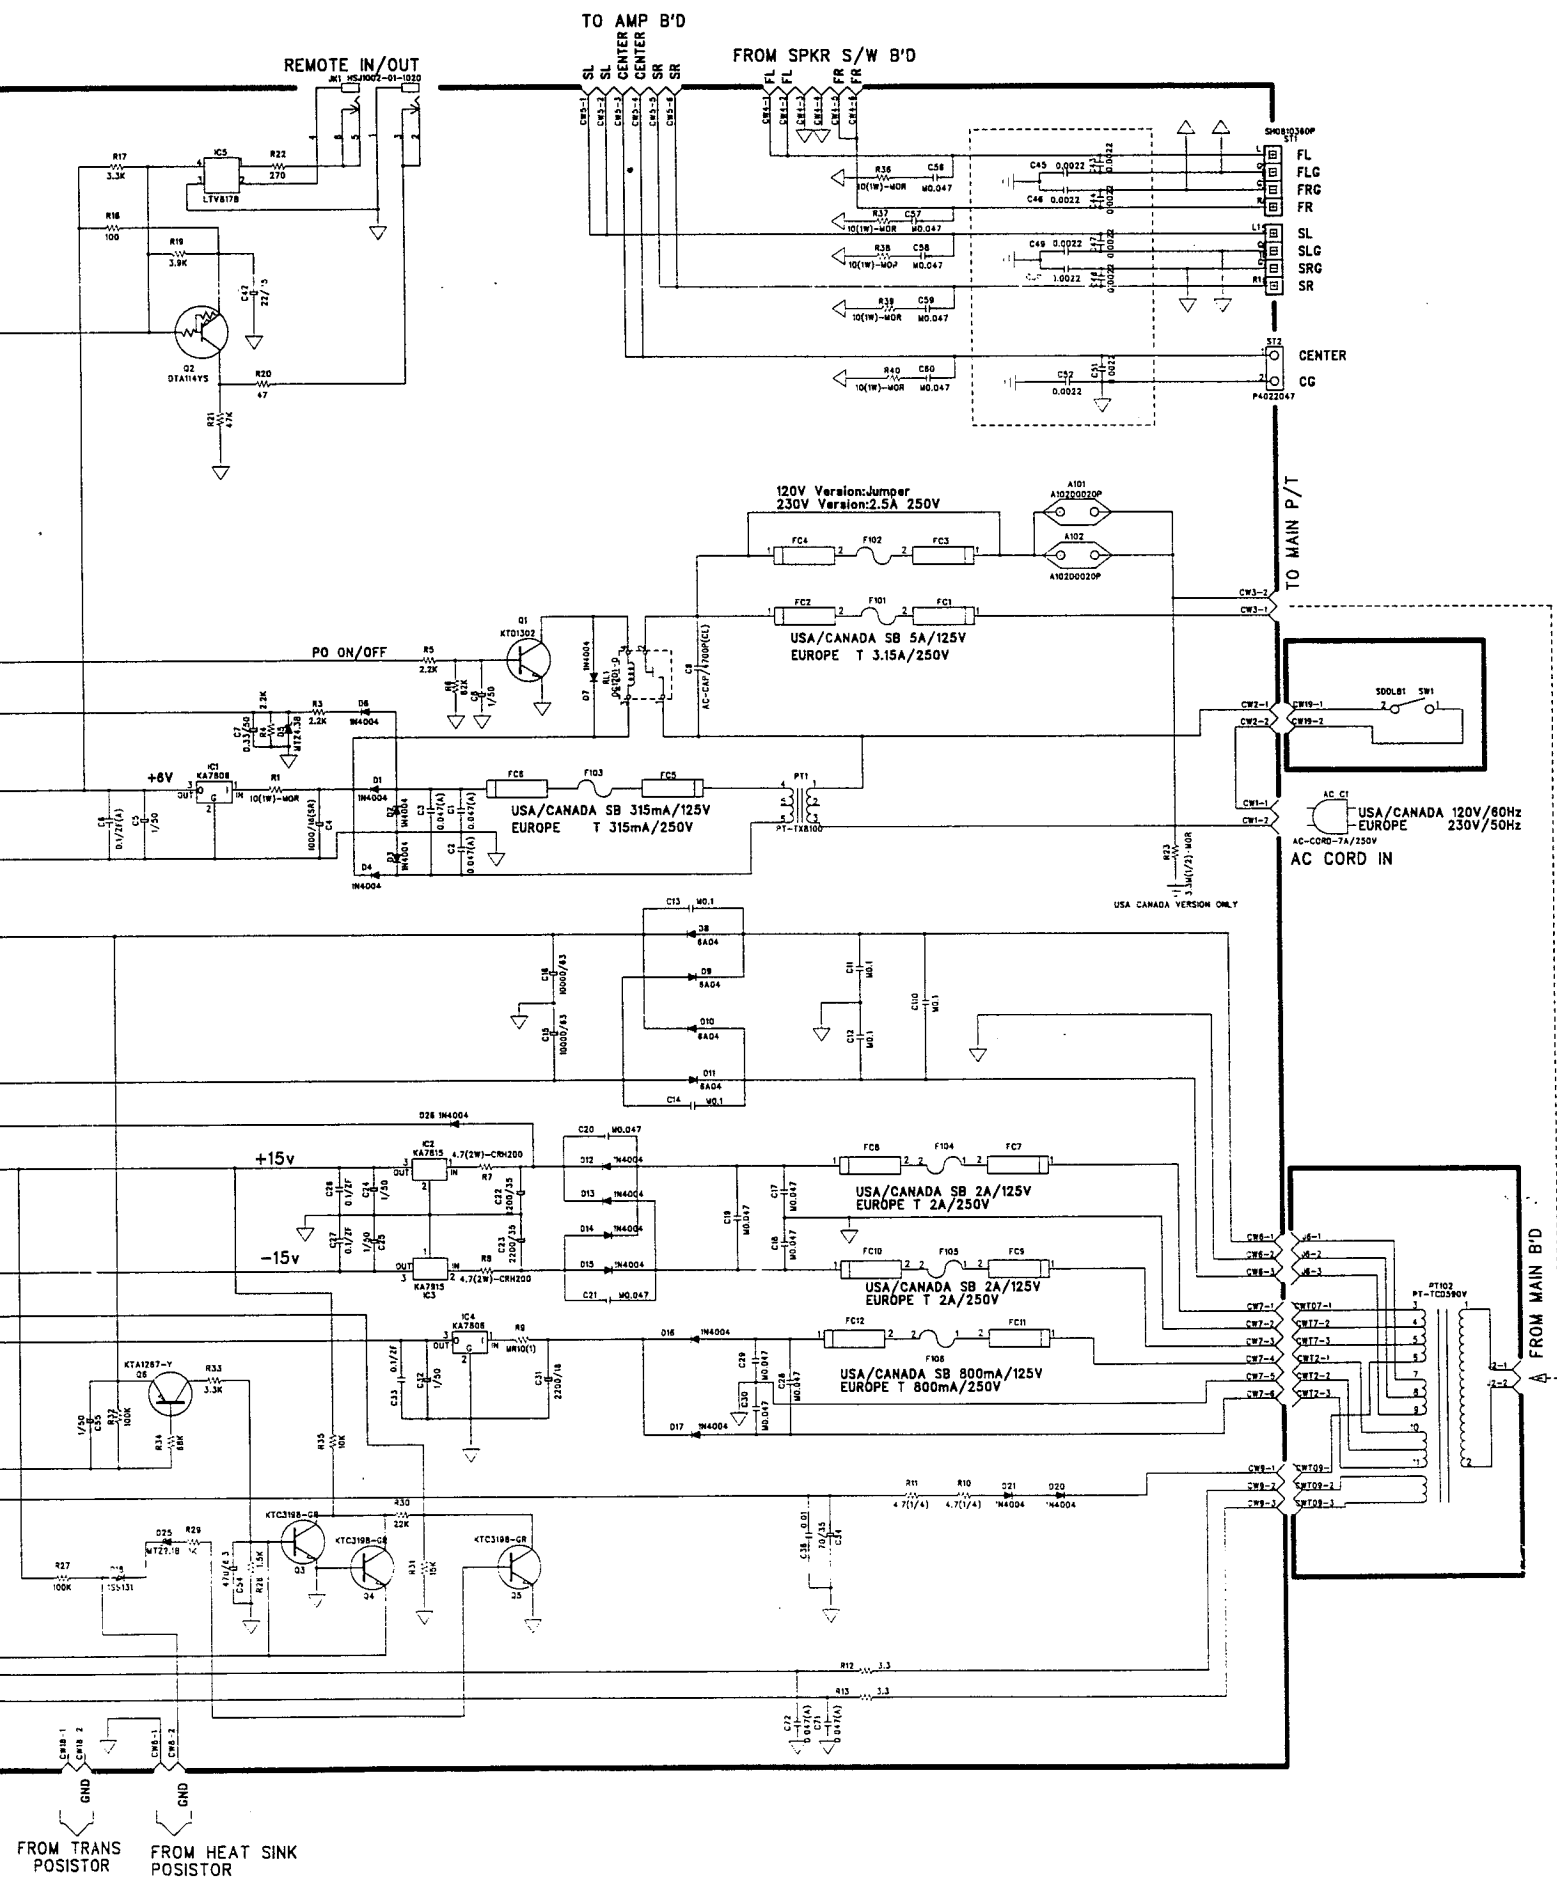


■ **FRONT**

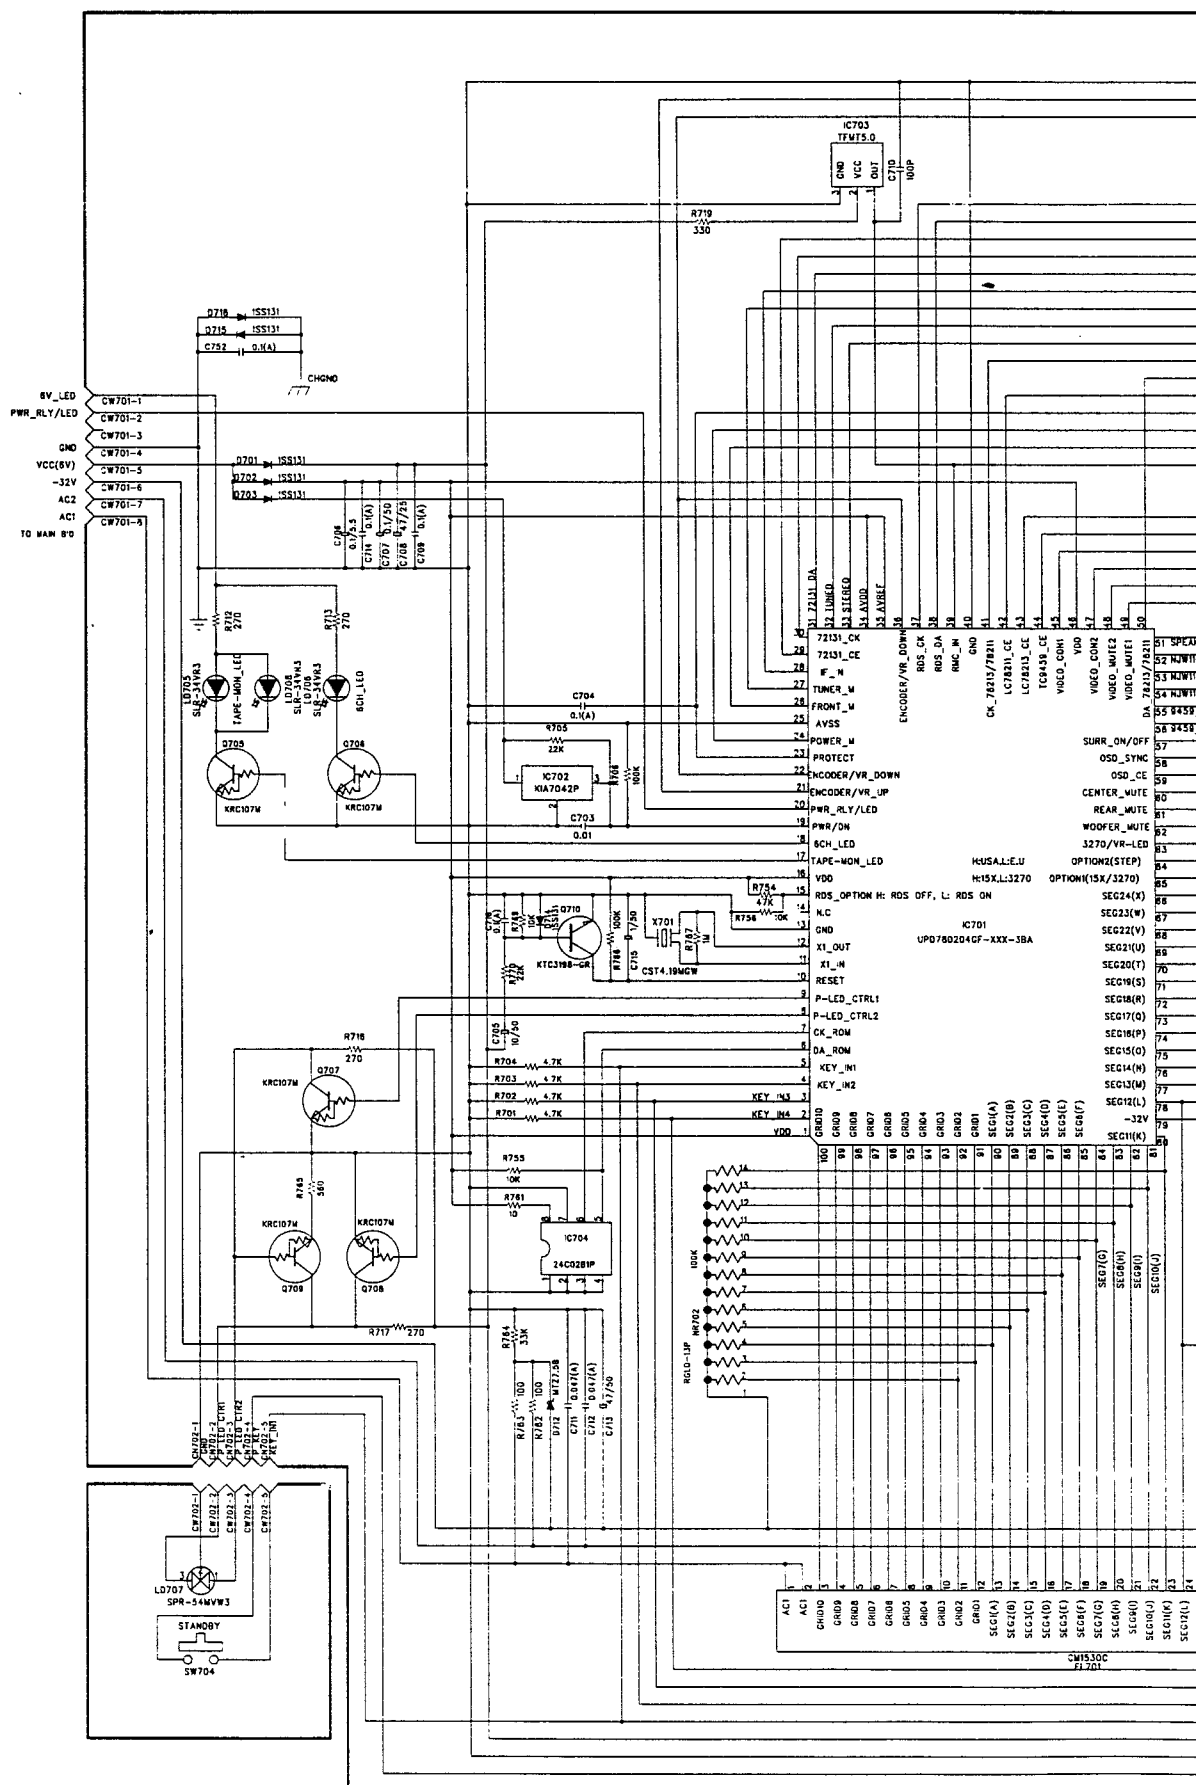


■ PREOUT

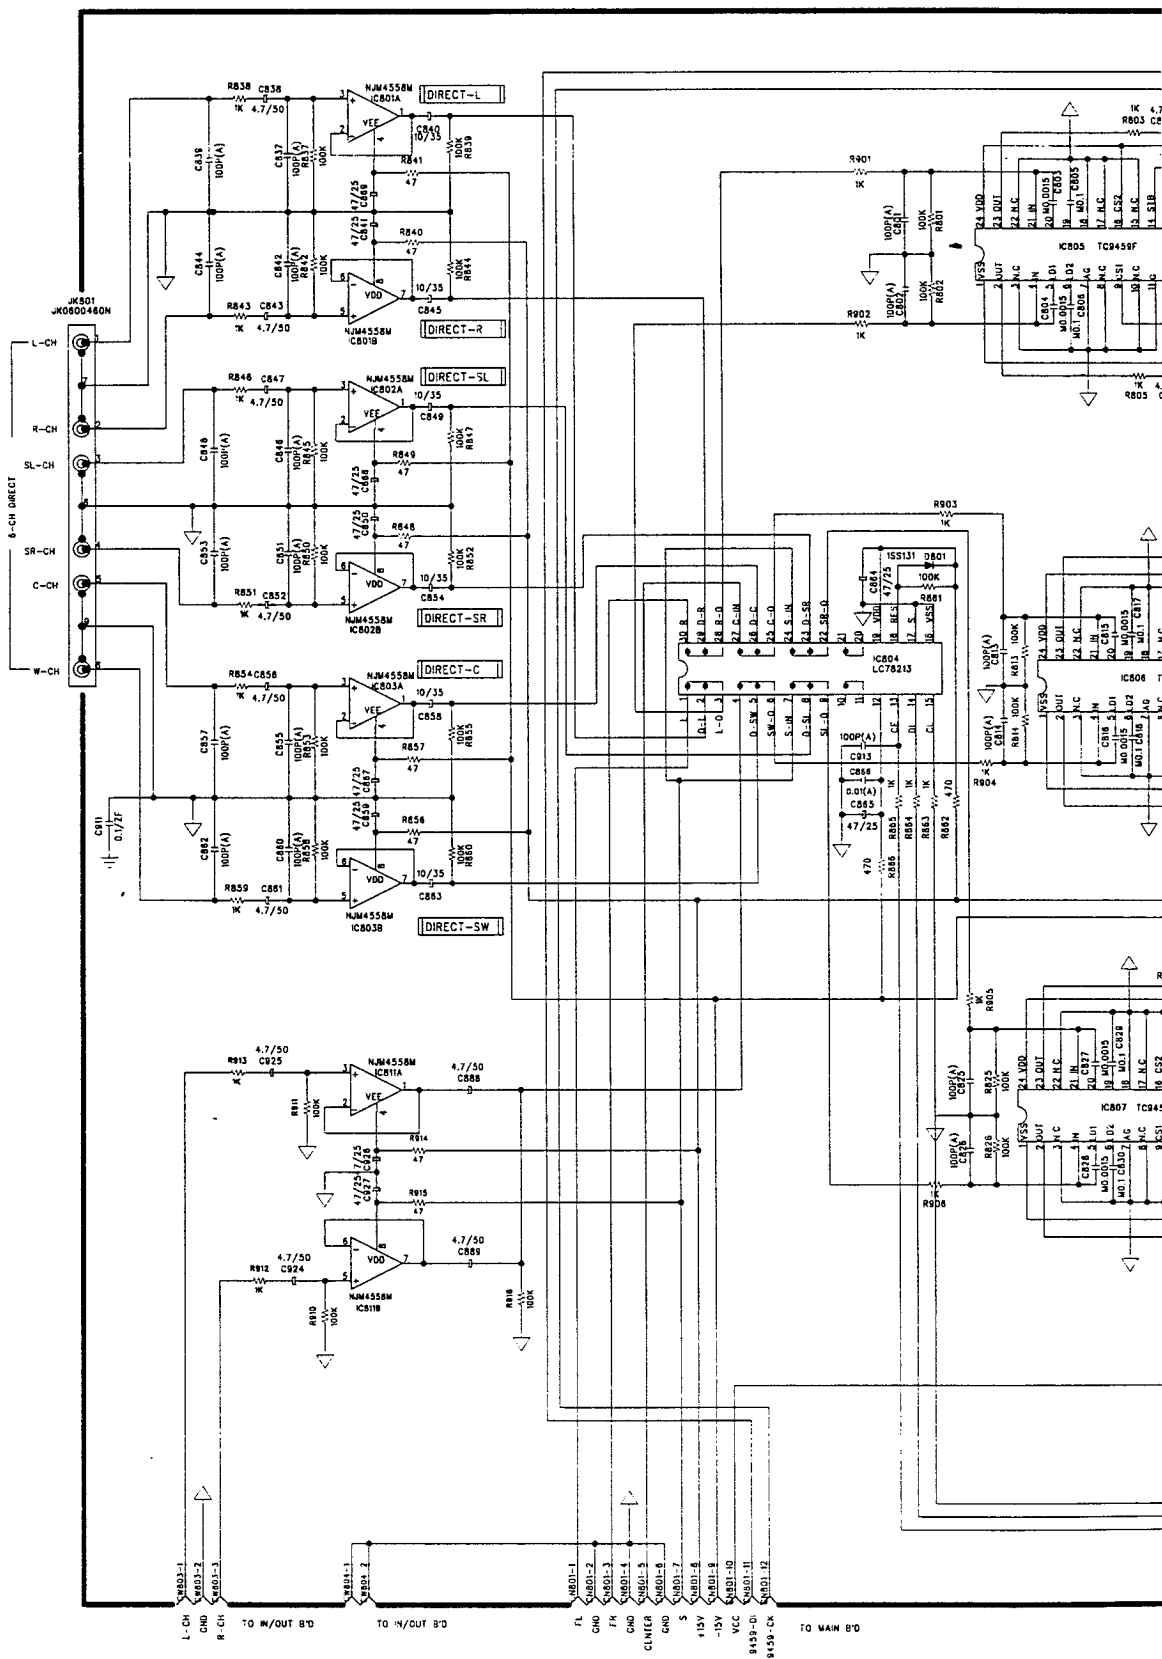


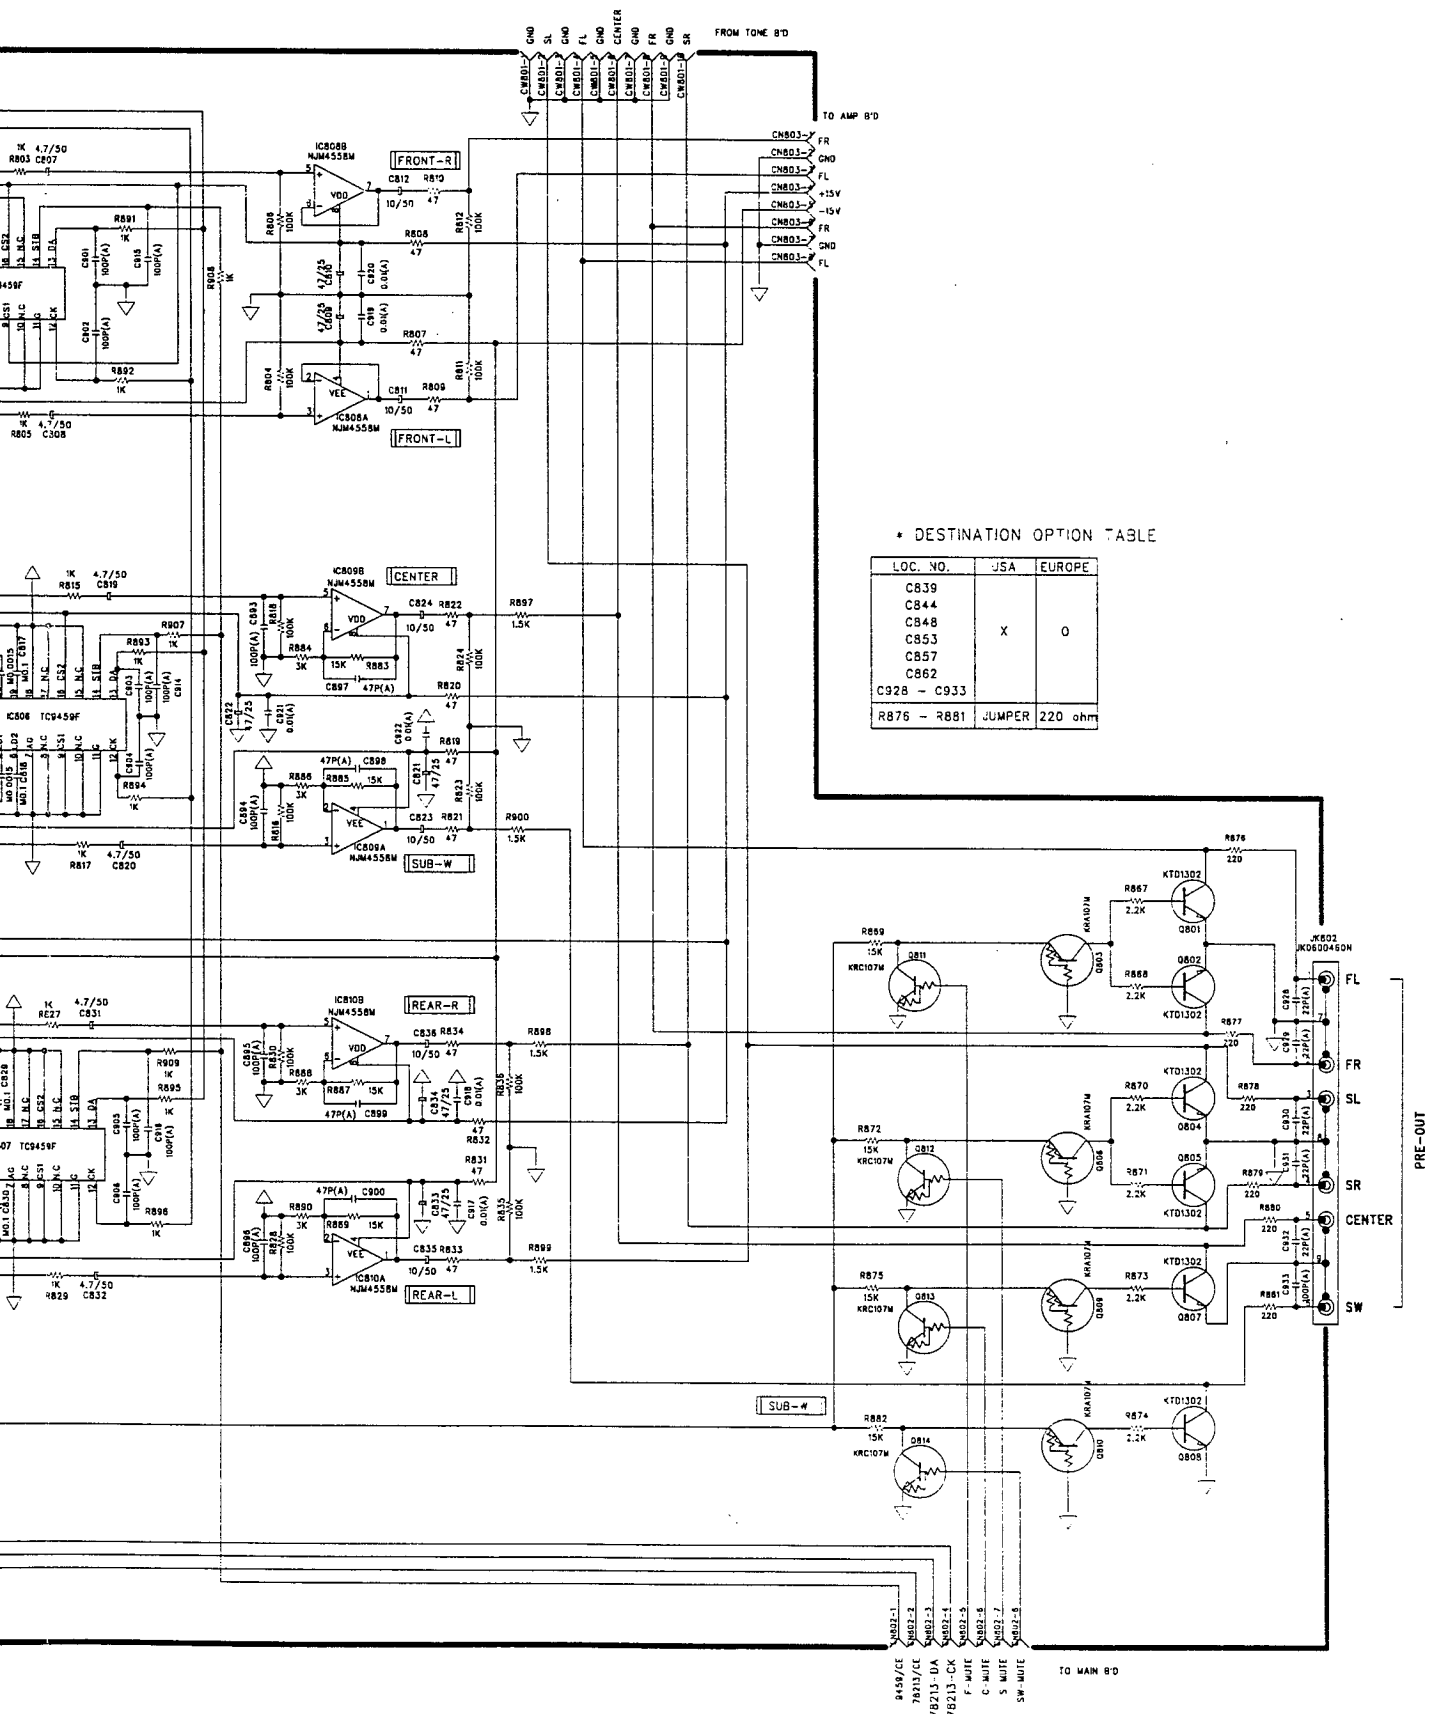

P. C. BOARD

■ FRONT, TUNER, SPEAKER & TONE P. C. BOARD

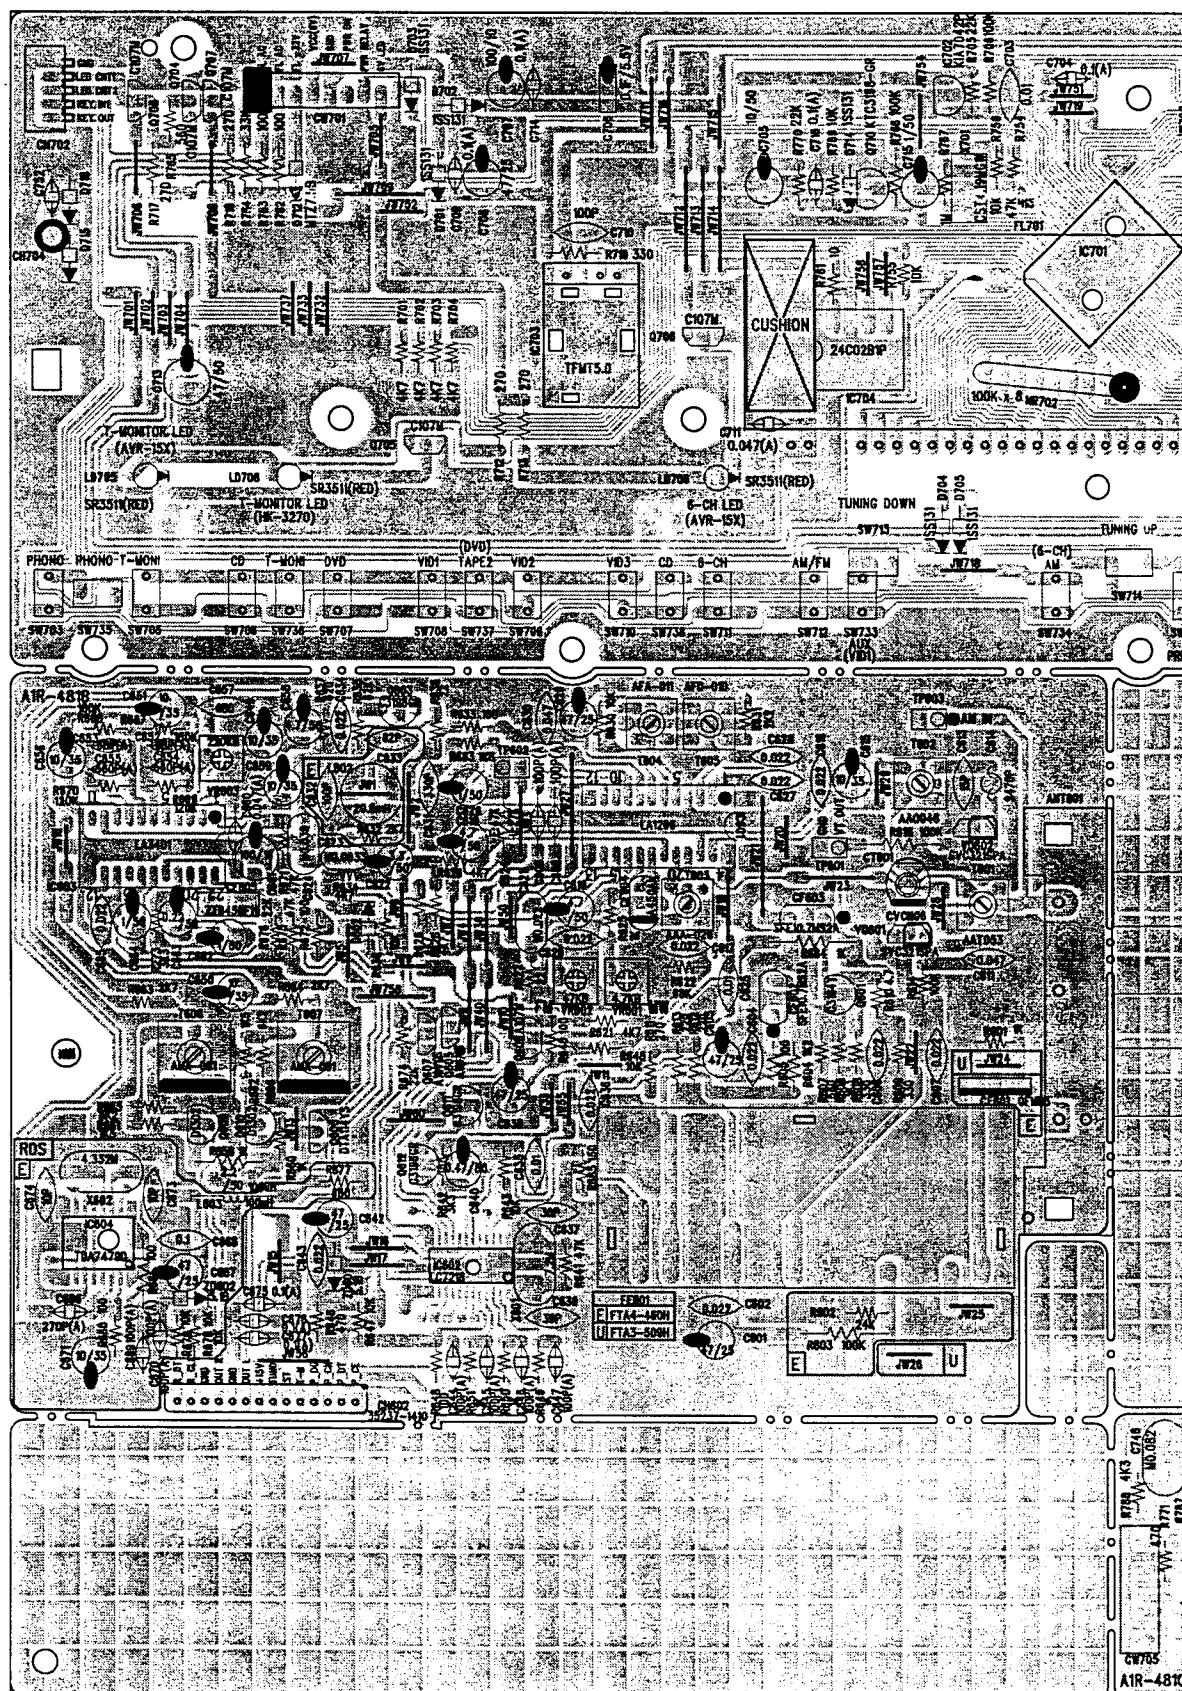

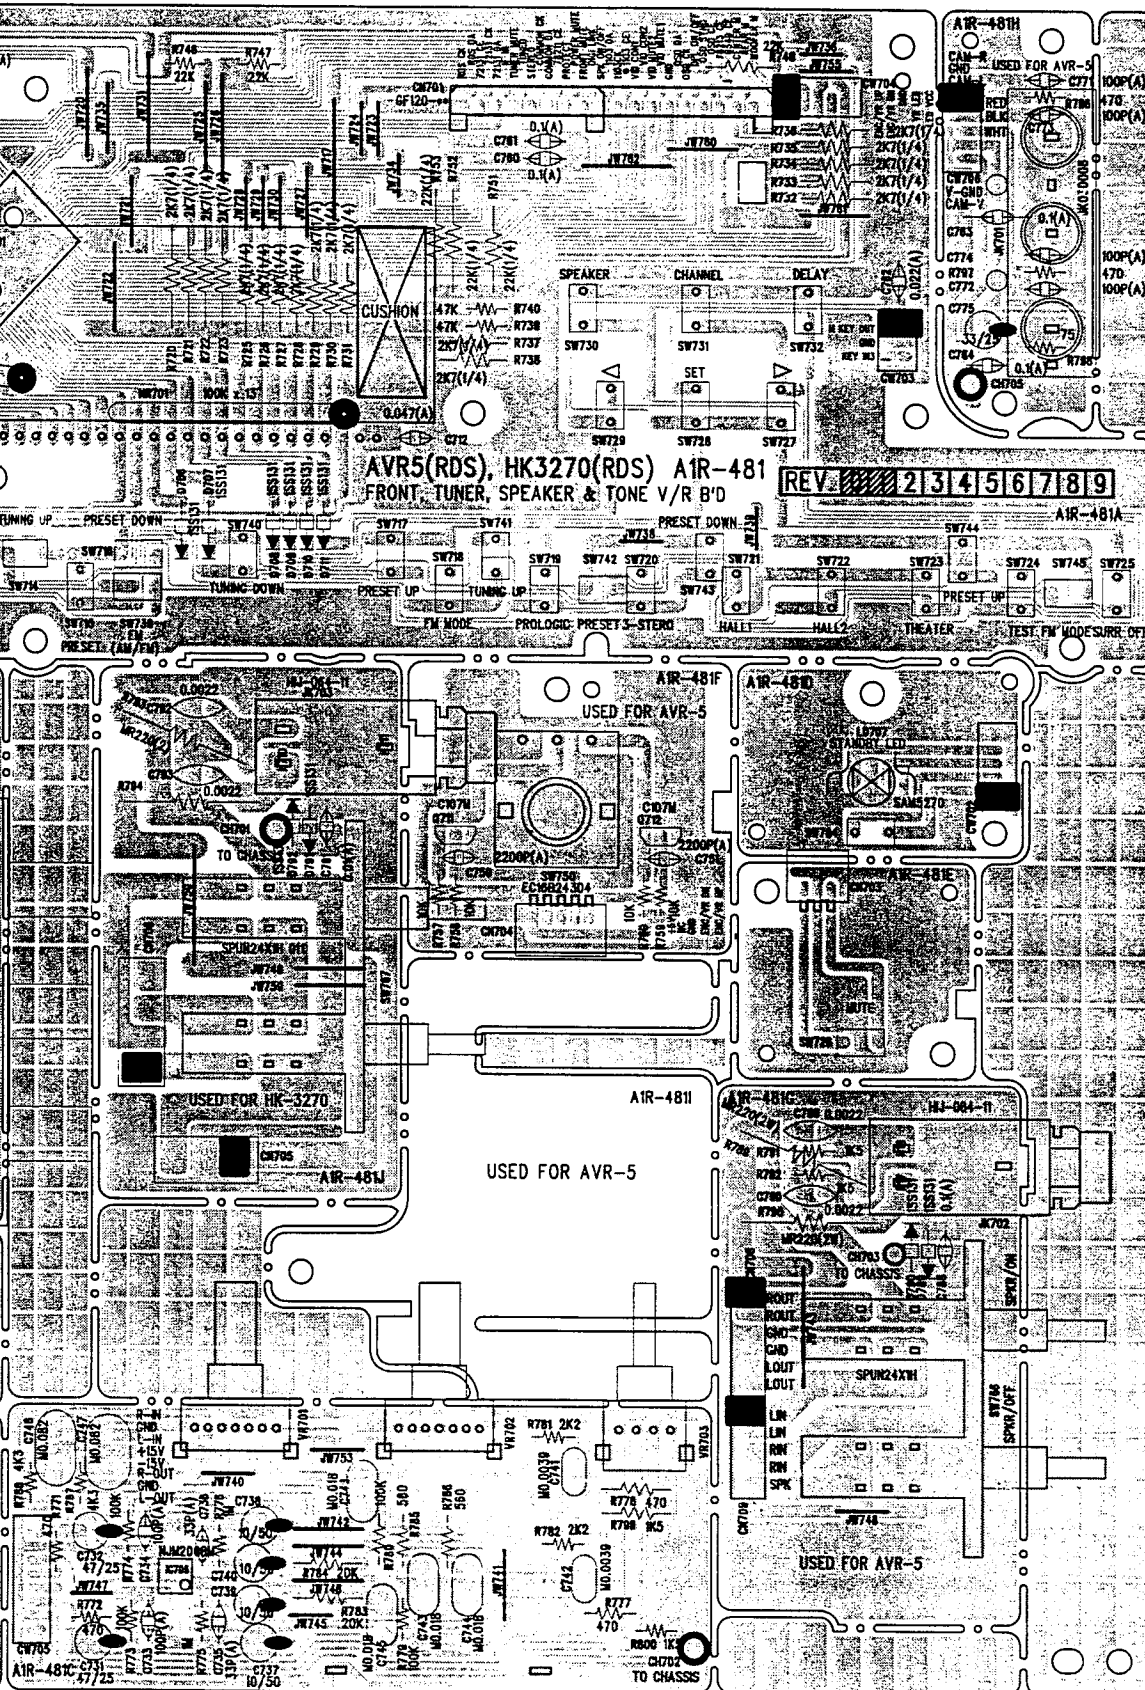

• MODEL OPTION TABLE

LOC. NO.	AVR5	HK3270
SW703		
SW705 - SW725	0	X
SW727 - SW732		
SW733 - SW745	X	0
JW705		
JW727 - JW730	0	X
JW752	X	0
LD705, LD708	0	X
LD708	X	0
Q706	0	X
D709, D711	0	X
R713		
R720 - R722		
R725 - R735	0	X
R739		
R748		
R751		
R758	X	0
CN701	35P	16P
CW701	8P	7P
R777, R778	470	1.5K
R799, R800	1.5K	JUMPER


• DESTINATION OPTION TABLE


LOC. NO.	USA	EUROPE
R737, R758	X	0
R740, R754	0	X
R791, R792	X	0
C771 - C774		
C789, C790	X	0
C792, C793		
ANT801	SC0210393N	SC0210392N
CF801	X	0
JW24	0	X
FE601	FTA3-509H	FTA4-460H
JW28	0	X
R602, R603, JW25	X	0
C632, C633, R632	X	0
L602	X	0
JW1	0	X
R669, R670	120K	220K
C654, C655	560P(A)	220P(A)
C652, C653	68P(A)	10P(A)
R667, R668	180K	270K
R624	27K	47K
R685	JUMPER	150
CF802	SFE10.7MS2A	SFE10.7MA
R637	620	390
RDS	X	0

• MICOM OPTION TABLE

	OTP	MASKING MICOM
NR701, NR702	0	X

■ MAIN P. C. BOARD

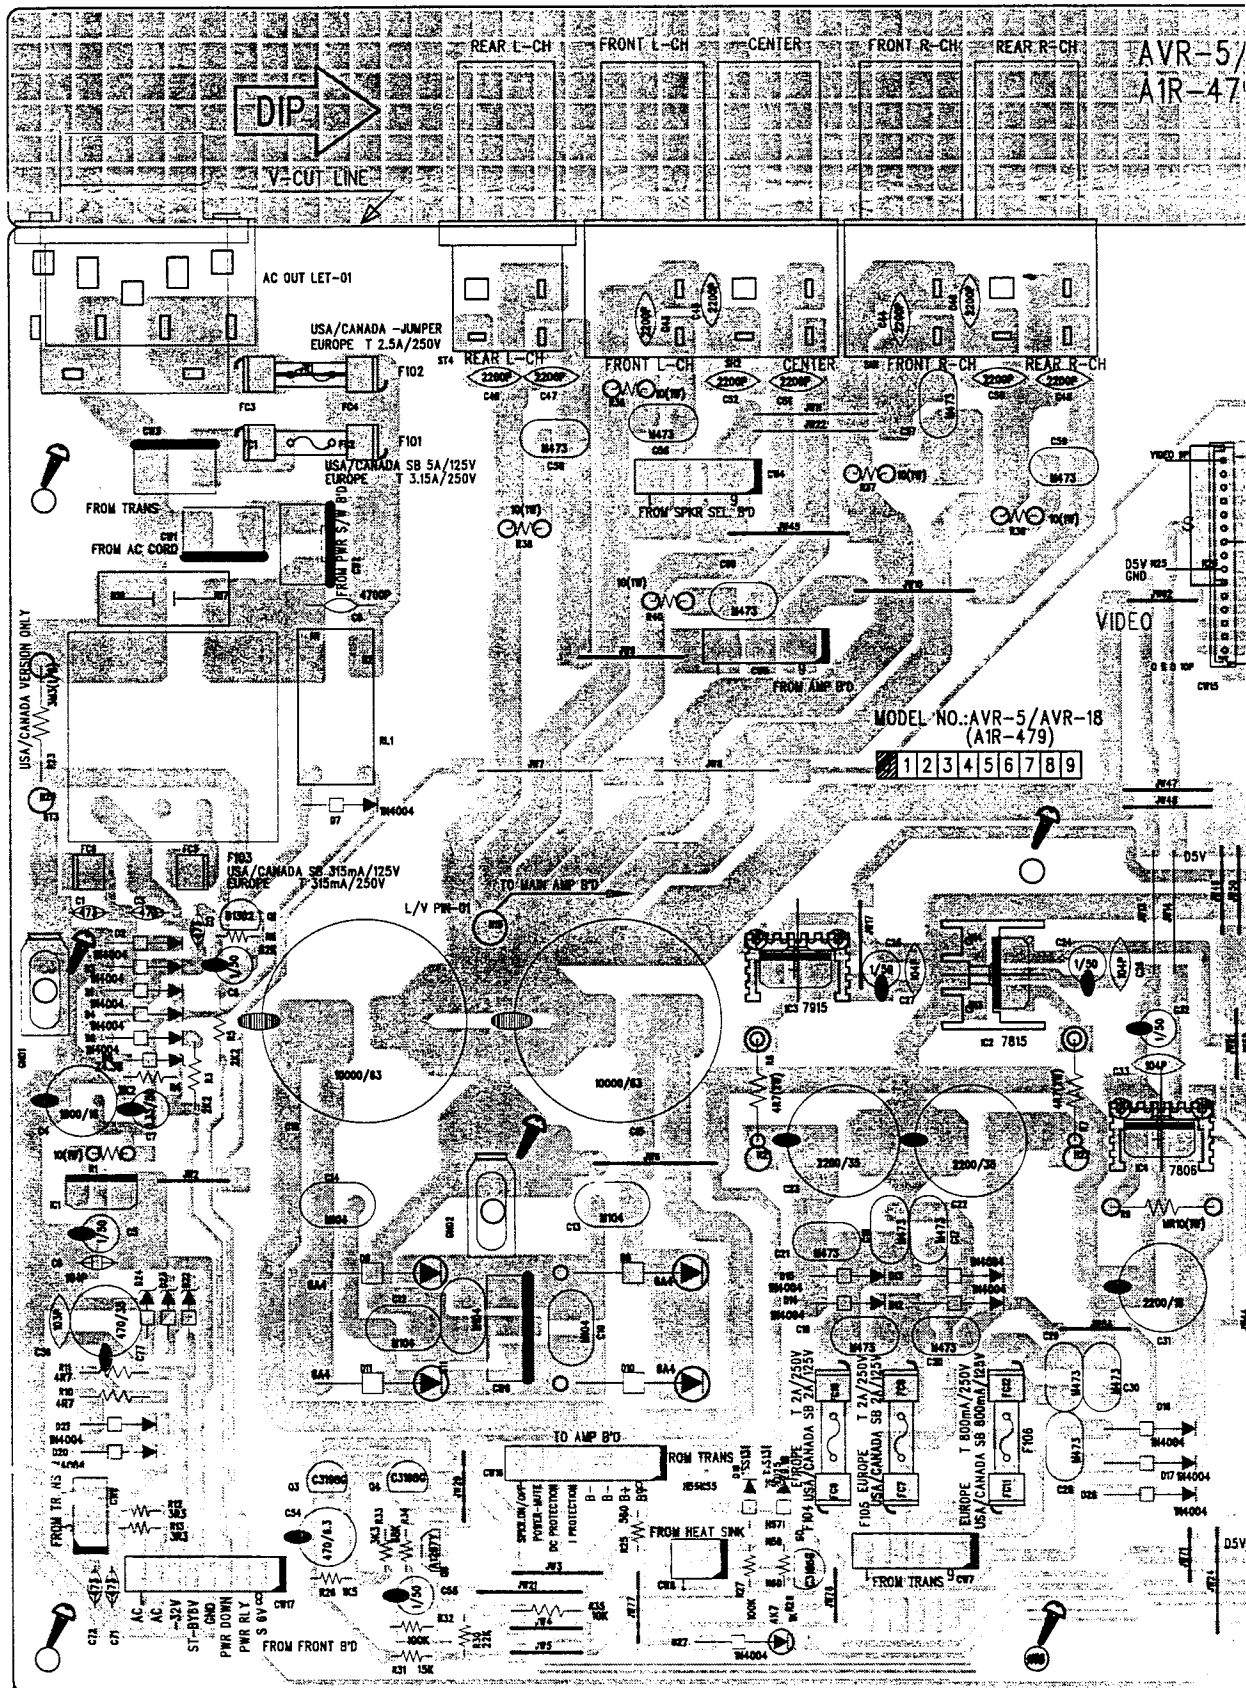

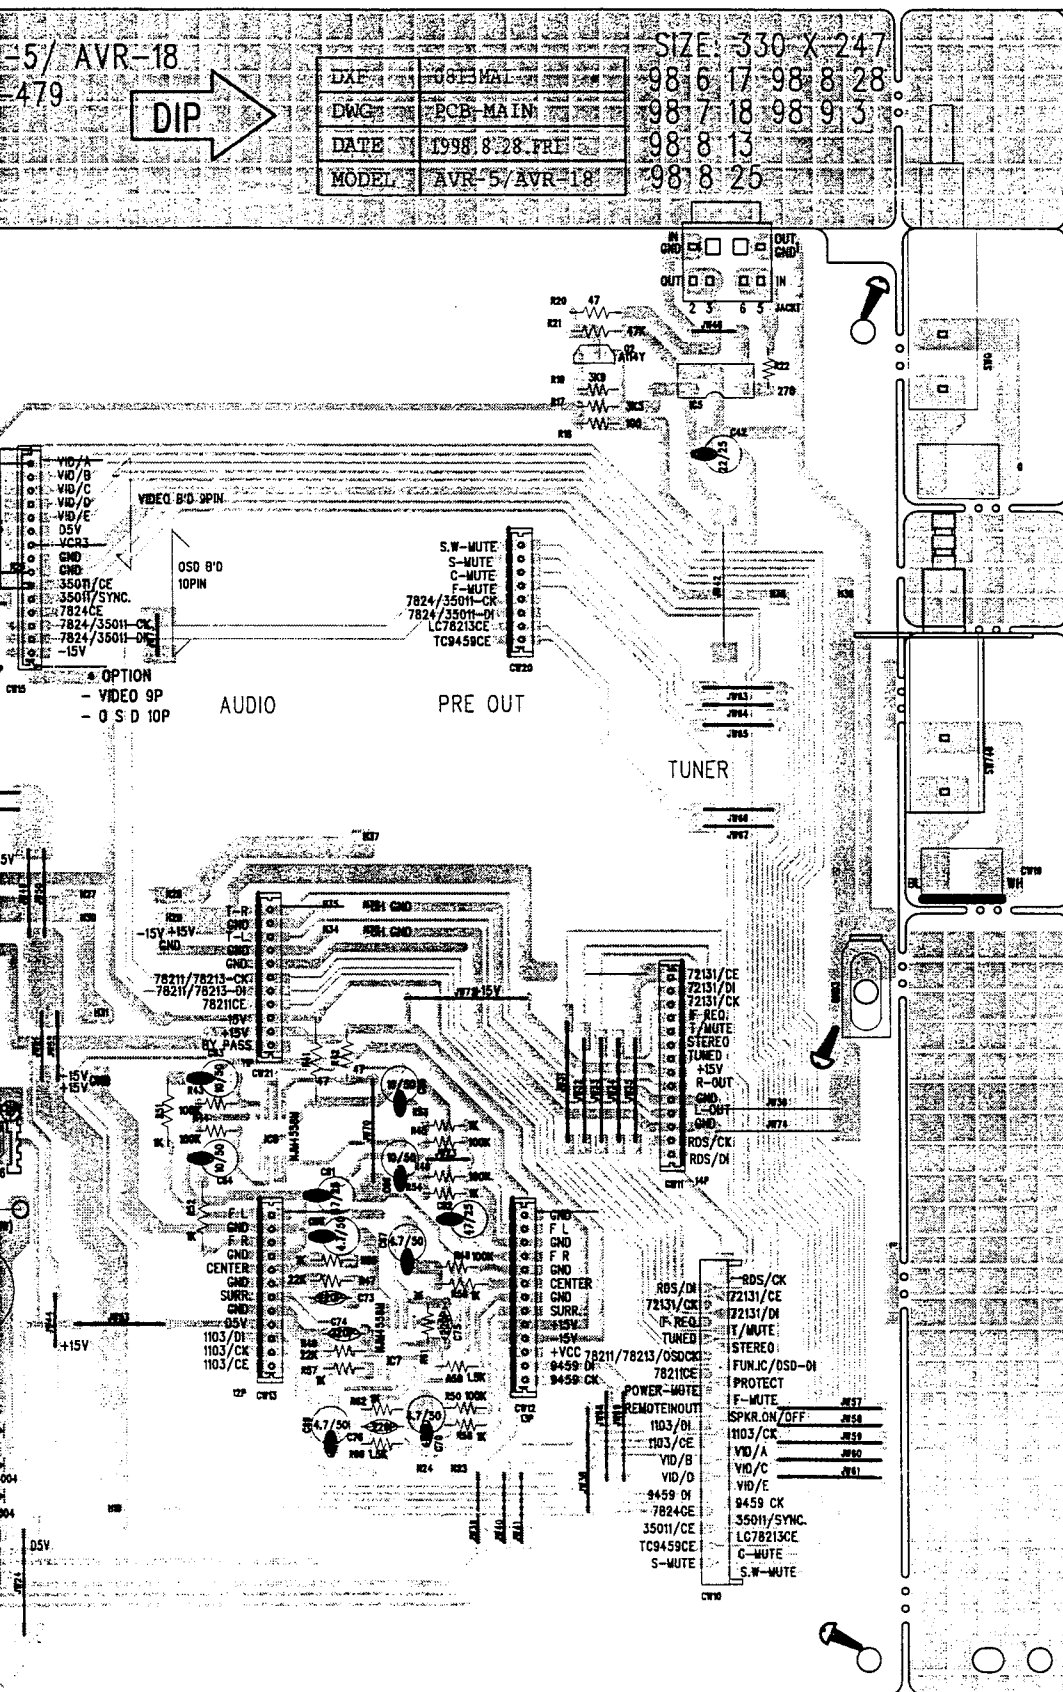



OPTION

LOC'	AVR 5	18RDS
1 AC OUTLET	S2764 T214	YKE31- 0090
2 SUB P/T	A35- 326C-U	A35- 326Y-V
3 3.3W(1/2W) R23	ADD	DEL
4 JW1	ADD	DEL
5 F3, F4	DEL	ADD
6 C43, 44 45, 46 C:2200P	DEL	ADD
7 C47, 49 51, 52 C:2200P	DEL	ADD
8 C50, 48 C:2200P	DEL	ADD
9 D22, 23 24	DEL	DEL

P. C. BOARD

■ MAIN AMP & AUDIO INPUT P. C. BOARD

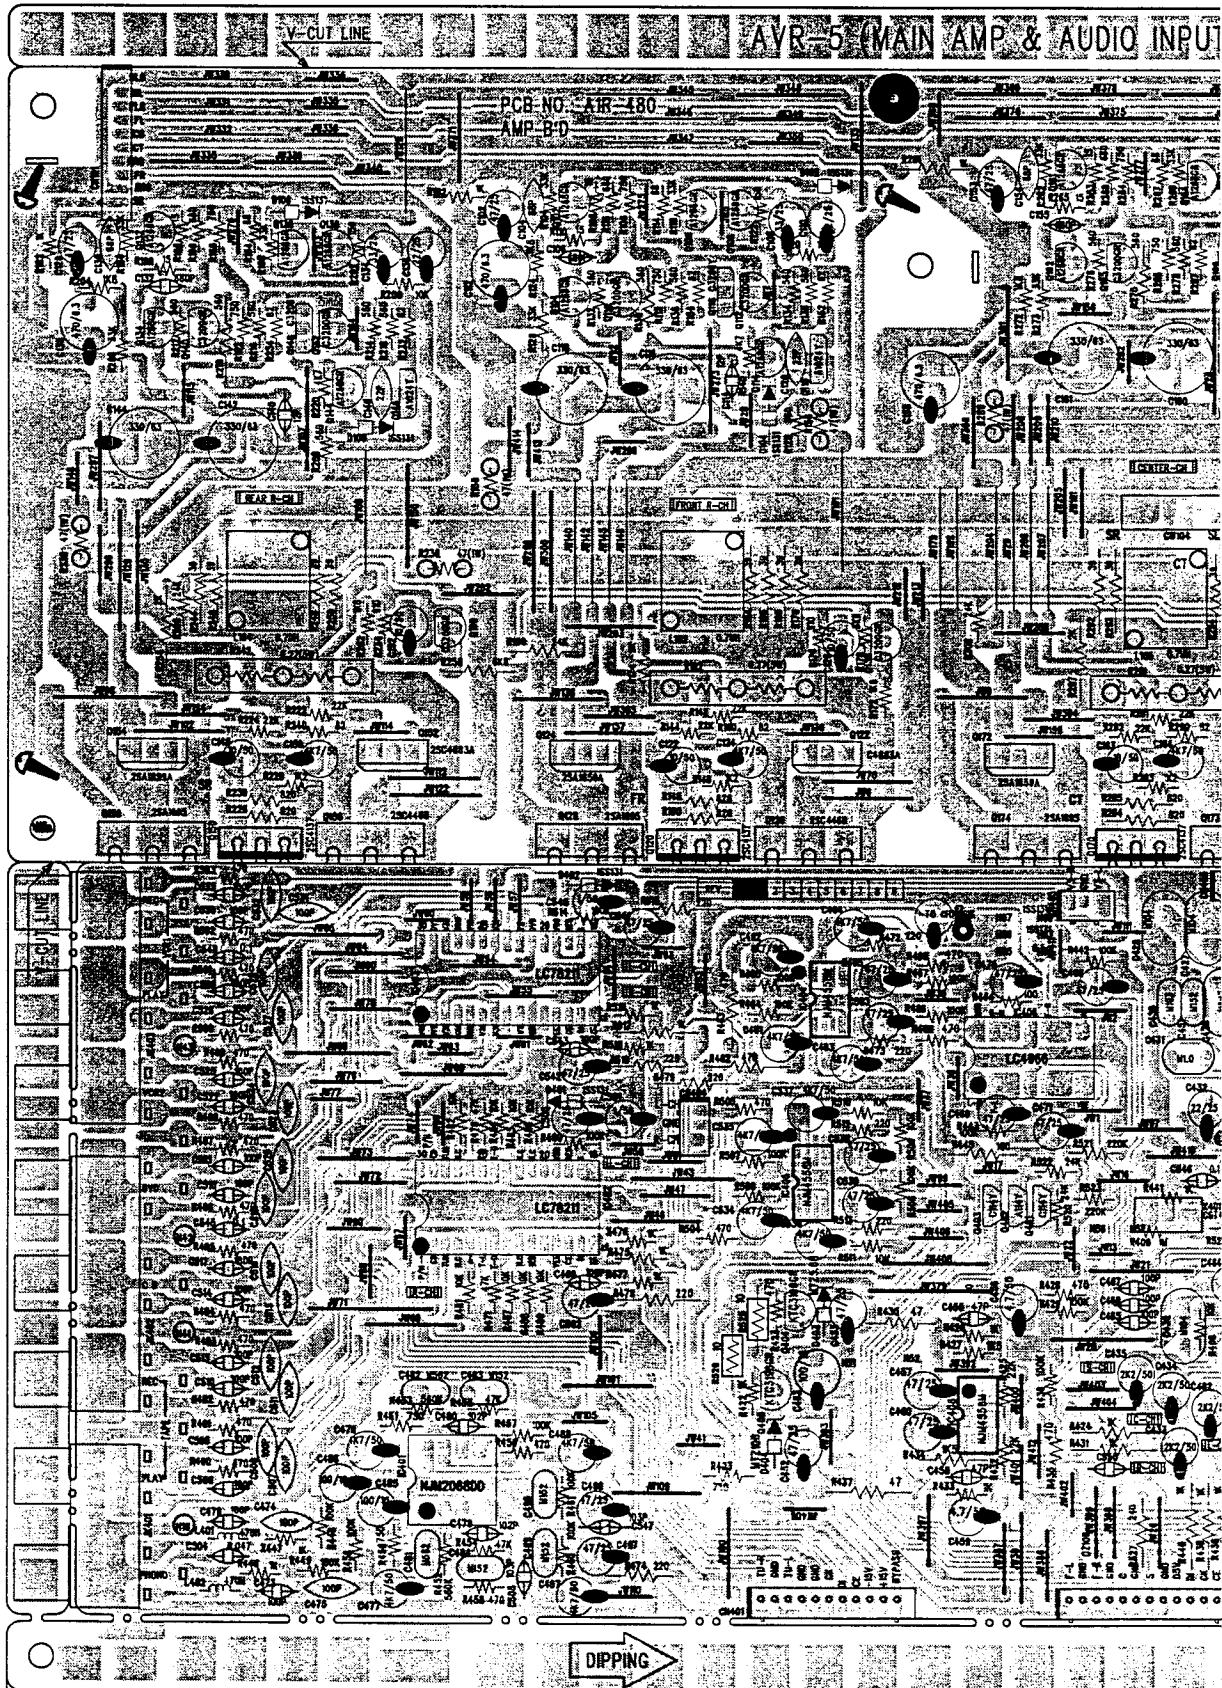


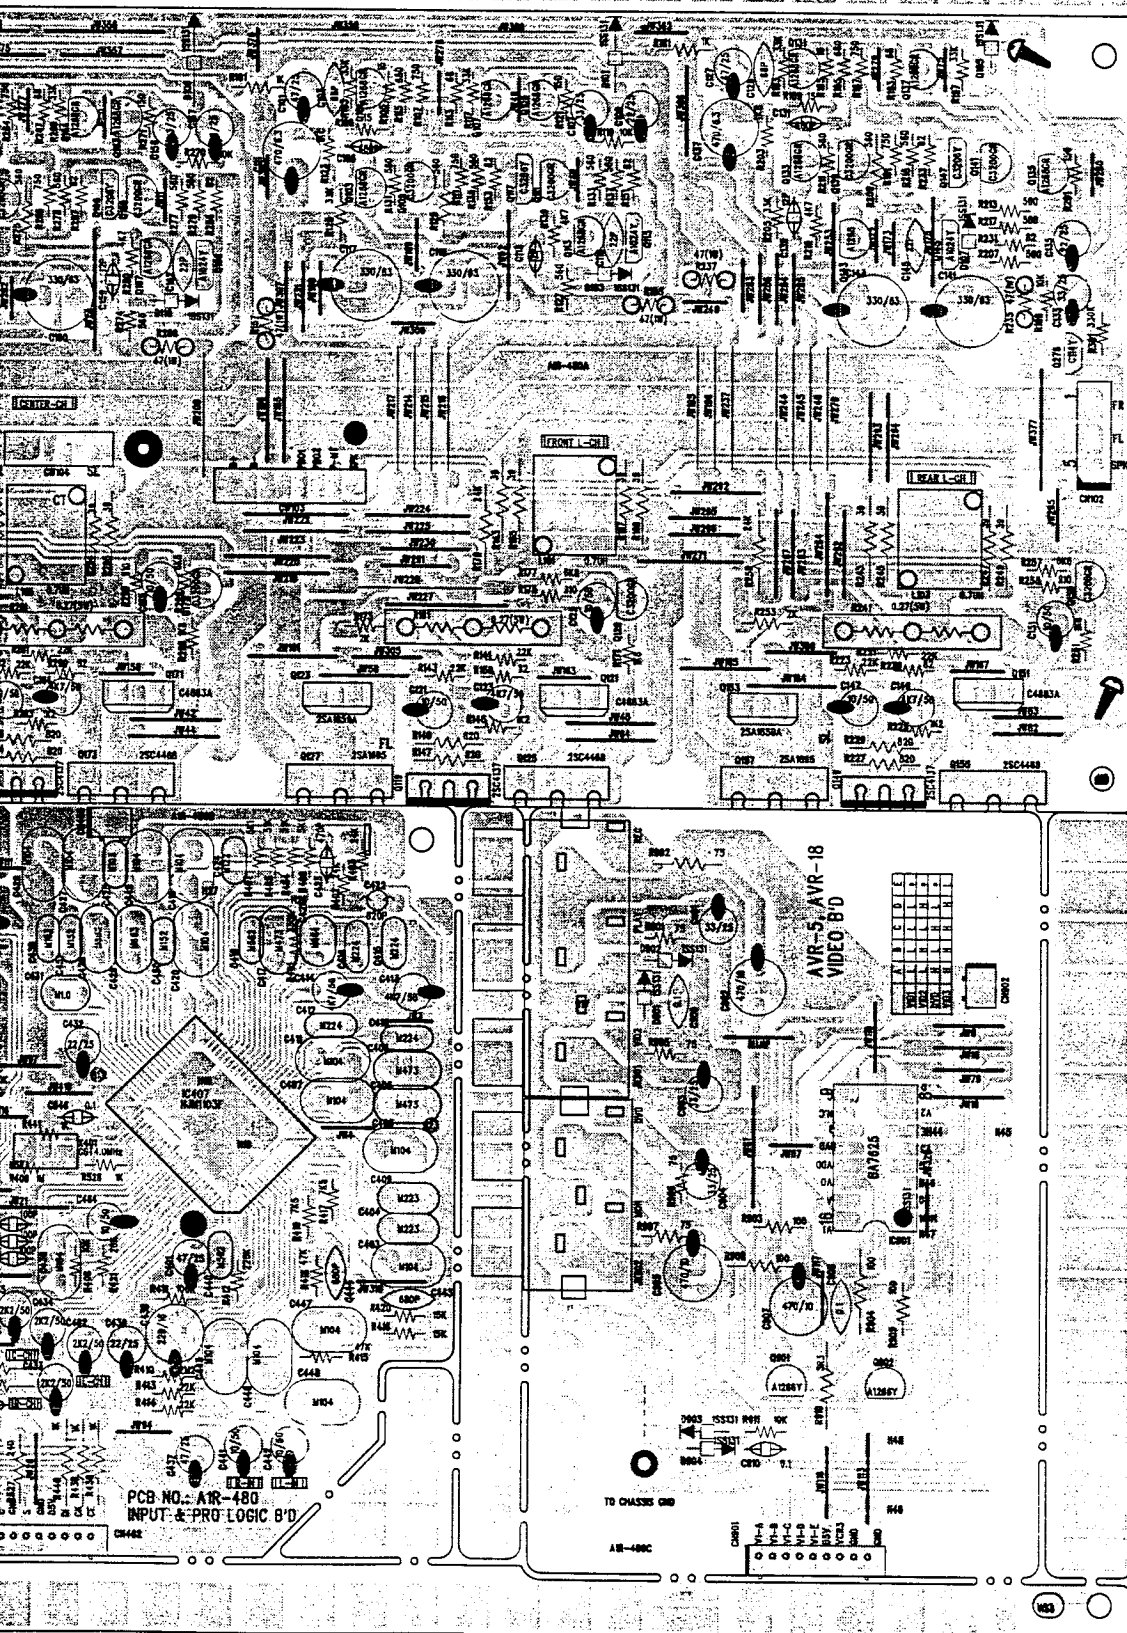


* OPTION TABLE

LOCATION NO	VALUE	PC	UK/CSA	CE	POSITION
L401L402	470N	2	JUMPER	0	PHONO
C473,C478	100P	2	X	0	PHONO
C504,C507,C508,C509	100P	8	X	0	TAPE
C510,C511,C512,C513					
C514,C515,C516,C517	100P	4	X	0	CDP
C518,C519,C520,C521	100P	4	X	0	DVD
C522,C523,C524,C525	100P	4	X	0	VIDEO2
C526,C527,C528,C529	100P	8	X	0	VIDEO1
C530,C531,C532,C533					

■ PREOUT P. C. BOARD

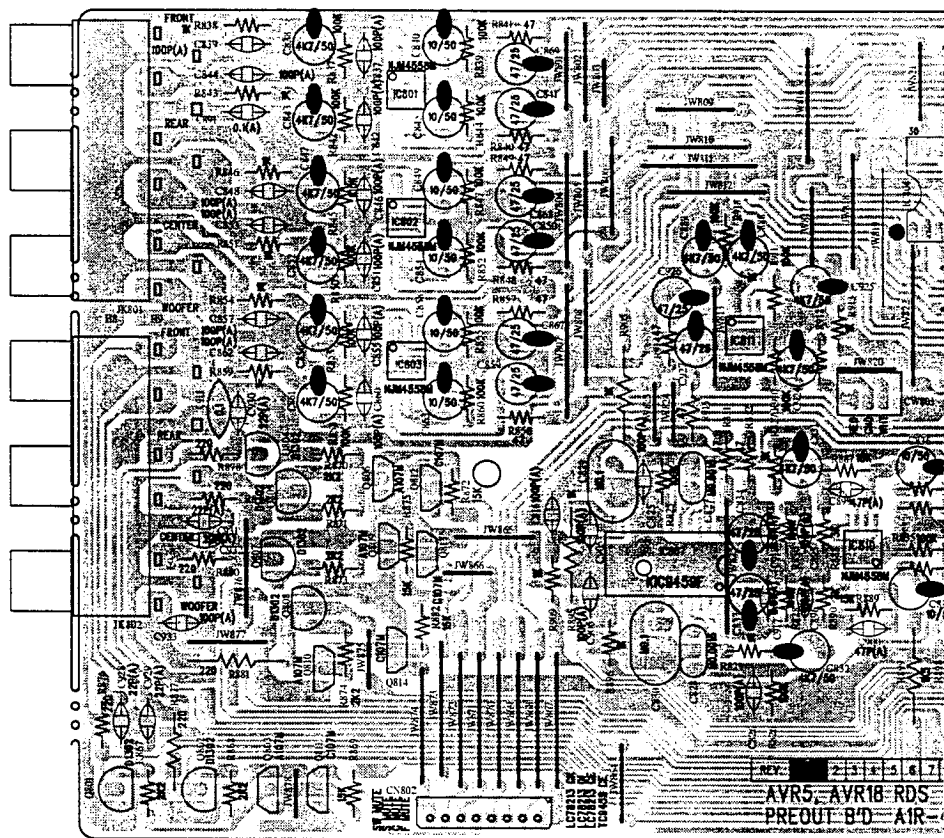

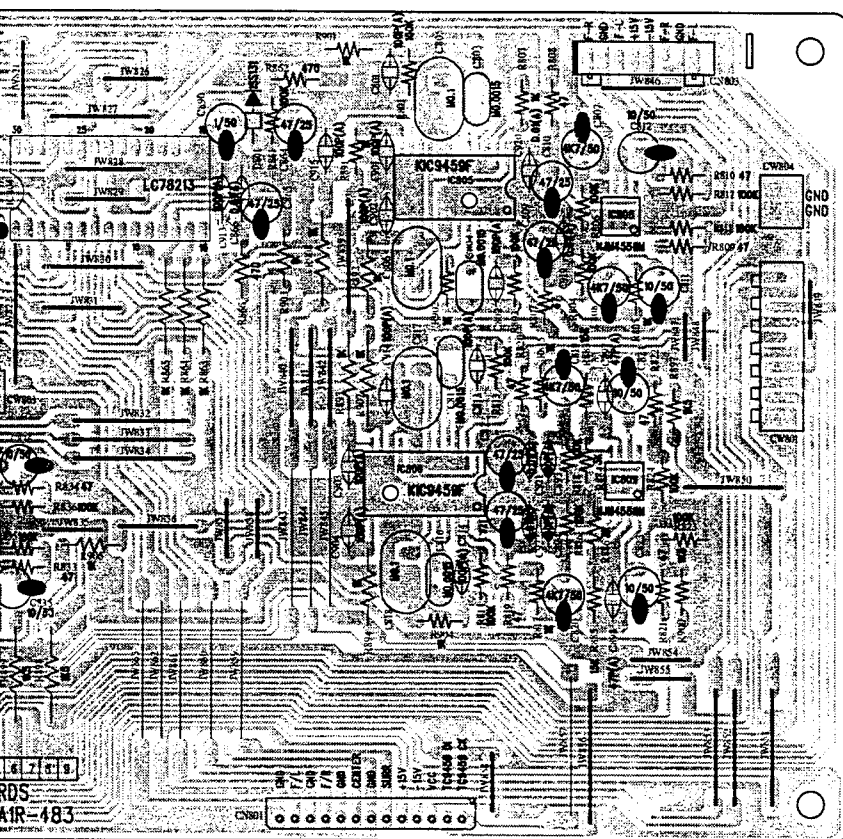

* DESTINATION OPTION TABLE

LOC. NO.	USA	EU
C839		
C844		
C848		
C853	X	0
C857		
C862		
C928 - C932		
C933		
R876 - R881	JUMPER	220 ohm

PARTS LIST

1. BLOCK MECHA

Part No.	Description	Ref. No
ACAC-00393-002	CORD-AC(CORE O)	KKJ-1004A,JE201-03,JE203T
ACRC-0056J-000	ASS'Y-REMOCON	AVR18RDS
ANTL-00060-E50	ANTENNA-LOOP	AAN-007 19.5uH 7T 125x93
ANTT-00090-075	ANTENNA-T TYPE	75ohm AFN009 3480 W/SOCKET
BAMN-00010-150	BATTERY MANGANESE	R03(AAAM) 1.5V 10.5x44.5
FGFB-S2002-837	FUSE GLASS	2A 250V 50T
FGFB-S2502-837	FUSE GLASS	2.5A 250V 5x20 V/S/B T
FGFB-S3151-837	FUSE GLASS	315mA 250V 5x20 V/S/B T
FGFB-S3152-837	FUSE GLASS	3.15A 250V 5x20 V/S/B T
FGFB-S8001-837	FUSE GLASS	800mA 250V 5x20 V/S/B T
LLA3-35401-E10	CARD CABLE	KF2B35/400 P7S9 B9 VS3 VB3
MAAF-08070-ZZ3	WINDOW-FL	PVC, A700D R(a)
MAAF-16120-ZZ4	LENS-POWER	PMMA(IF-850)
MAAF-16150-ZZ4	FILTER-FL	PVC, RSM-05
MEAC-04840-002	RADIATOR-MAIN	A6063,T-5 +AL
MJAF-06080-ZZ1	PANEL-FRONT	ABS-720
MJAF-08000-ZZ3	KNOB-CHANNEL	ABS-720
MJAF-08010-ZZ3	KNOB-CHOICE(A)	ABS-720
MJAF-08020-ZZ3	KNOB-CHOICE(B)	ABS-720
MJAF-08030-ZZ3	KNOB-CHOICE(C)	ABS-720
MJAF-15640-ZZ4	FOOT(A)	
MJAF-16050-ZZ4	KNOB-STANDBY	ABS-720
MJAF-16060-ZZ4	KNOB-SPEAKER	ABS-720
MJAF-16070-ZZ4	KNOB-BALANCE	ABS-720
MJAF-16080-ZZ4	KNOB-MUTE	ABS-720
MJAF-16090-ZZ4	KNOB-VOLUME	ABS-720
MJAF-16110-ZZ4	KNOB-POWER	ABS-720
MJAF-16140-004	SUPPORT-PCB	ABS-720
MJAG-00280-003	CORD-BUSH	NIFCO
MJAG-04540-004	CABLE-TIE-L80	*
MJAG-13060-ZZ4	CORK-TERMINAL	ABS HF-380
MMAC-03592-004	SCREW-T/P-TOOTH	BH T2T 3X10 FE-ZB
MMAC-12060-004	TERMINAL-GND	
MMAC-15650-004	SCREW-RADIATOR	
MMSC-00900-004	AIR-STAPLER	
MMTC-12180-004	SCREW-BH/W	
MPAC-04760-003	CHASSIS-PANEL	US Coating t1.0
MPAC-04771-ZZ2	CHASSIS-BACK	US Coating t1.0
MPAC-04810-002	CHASSIS-BOTTOM	US Coating t1.2
MPAC-04820-ZZ2	CHASSIS-TOP	VCM t0.95(SECC0.8+PVC0.15)
MPAC-16160-004	SHIELD-BALANCE	ET-HD t0.5
MPAC-16170-004	BRACKET-PCB	US Coating t1.0
MPAC-16220-004	BRACKET-RADIATOR(S)	US COATING T1.0
MPAC-16230-004	SHIELD-VIDEO	ET-HD,0.3T
MRAG-13030-004	CUSHION-A	EVA(VE-45),15X15X12T
MRAG-13040-004	CUSHION-A	FELT 437x10x0.5 S
MRAG-13050-004	CUSHION-A	FELT 250x10x0.5 S
MWAW-00910-003	PALLETS	1040X1126X141
PTAP-03420-YJV	TRANSFORMER-POWER	A96-342Y-V 230V/50Hz
TRSC-01680-SB0	TRANSISTOR N-H FREQ	2SC4137 TO-126FP Q119
TRSC-01680-SB0	TRANSISTOR N-H FREQ	2SC4137 TO-126FP Q120
TRSC-01680-SB0	TRANSISTOR N-H FREQ	2SC4137 TO-126FP Q149
TRSC-01680-SB0	TRANSISTOR N-H FREQ	2SC4137 TO-126FP Q150
TRSC-01680-SB0	TRANSISTOR N-H FREQ	2SC4137 TO-126FP Q170
TRTA-0090Y-SJ0	TRANSISTOR P-H FREQ	2SA1695-Y TO3P Q127
TRTA-0090Y-SJ0	TRANSISTOR P-H FREQ	2SA1695-Y TO3P Q128
TRTA-0090Y-SJ0	TRANSISTOR P-H FREQ	2SA1695-Y TO3P Q157
TRTA-0090Y-SJ0	TRANSISTOR P-H FREQ	2SA1695-Y TO3P Q158
TRTA-0090Y-SJ0	TRANSISTOR P-H FREQ	2SA1695-Y TO3P Q174
TRTC-0130Y-SJ0	TRANSISTOR N-H FREQ	2SC4468-Y TO3P Q125
TRTC-0130Y-SJ0	TRANSISTOR N-H FREQ	2SC4468-Y TO3P Q126
TRTC-0130Y-SJ0	TRANSISTOR N-H FREQ	2SC4468-Y TO3P Q155
TRTC-0130Y-SJ0	TRANSISTOR N-H FREQ	2SC4468-Y TO3P Q156
TRTC-0130Y-SJ0	TRANSISTOR N-H FREQ	2SC4468-Y TO3P Q173

Part No.	Description	Ref. No
U345-6A354-450	WIRE-ASS'Y	UL1617#18 BLU-540 3P
VSTH-00101-101	POSISTOR	P43T6D100BW23
XSTB-30080-ZB4	SCREW-TAPPING	BHT2T 3x8 FE-ZB
XSTB-30080-ZY4	SCREW-TAPPING	BHT2T 3x8 FE-ZY
XSTB-30100-ZB4	SCREW-TAPPING	BHT2T 3x10 FE-ZB
XSTB-30100-ZY4	SCREW-TAPPING	BHT2T 3x10 FE-ZY
XSTB-40080-ZB8	SCREW-TAPPING	BHT3T 4x8 FE-ZB
XSTB-40080-ZY8	SCREW-TAPPING	BHT3T 4x8 FE-ZY
XSTS-30080-ZY4	SCREW-TAPPING	PHWT2T 3x8 FE-ZY
XSTS-30180-ZY4	SCREW-TAPPING	PHWT2T 3x18 FE-ZY
YGAP-13910-004	ANGLE PROTECTOR	50x50x880
YGAP-14000-004	ANGLE PROTECTOR(A)	50x50x1,020
YGAP-14250-ZZ4	BOX-GIFT	DW-3
YIAR-I2001-ZZE	INST-MANUAL	
YSAP-12070-002	CUSHION-L/R	EPS
YVAP-01862-ZZ4	POLY-BAG-I(G)	
YVAP-13320-ZZ4	TOILON-SHEET	750x1200, 0.5t
YWAR-I2001-ZZA	WARRANTY-CARD	
7JJG-00016-000	PP BAND	18mm * 560m
7JJG-00016-001	PP BAND CLIP	1300pc

2. BLOCK MAIN

Part No.	Description	Ref. No
CACS-S472M-180	CAPACITOR AC	DE7150 F472MVA1 250V BS415
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T
CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T
CCCT-J103Z-0DF	CAPACITOR CERAMIC	0.047uF Z 50V F T
CCCT-J104Z-0FF	CAPACITOR CERAMIC	0.01uF Z 50V F T
CCCT-J104Z-0FF	CAPACITOR CERAMIC	0.1uF Z 50V F T
CCCT-J104Z-0FF	CAPACITOR CERAMIC	0.1uF Z 50V F T
CCCT-J104Z-0FF	CAPACITOR CERAMIC	0.1uF Z 50V F T
CCCT-J222K-0DB	CAPACITOR CERAMIC	0.1uF Z 50V F T
CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
CCCT-J222K-0DB	CAPACITOR CERAMIC	2200PF K 50V B T
CEEM-G222M-LR1	CAPACITOR E/ALUMINUM	2200PF K 50V B T
CEEM-G222M-LR1	CAPACITOR E/ALUMINUM	2200uF M 35V 16x31.5 U M
CEET-C471M-FI1	CAPACITOR E/ALUMINUM	2200uF M 35V 16x31.5 U M
CEET-E102M-HL0	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U T
CEET-E222M-KL0	CAPACITOR E/ALUMINUM	1000uF M 16V 10x16 T
CEET-F220M-CI0	CAPACITOR E/ALUMINUM	2200uF M 16V 12.5x16 T
CEET-F470M-CI0	CAPACITOR E/ALUMINUM	22uF M 25V 5x11 T
CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T
CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T
CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T
CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T
CEET-F470M-CI0	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T
CEET-JR33M-CI0	CAPACITOR E/ALUMINUM	0.33uF M 50V 5x11 T
CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T
CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T
CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T
CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T
CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T
CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T
CEET-J1R0M-CI0	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T
CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T
CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T
CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T
CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T

Part No.	Description		Ref. No
KNCW-01520-BS9	CONNECTOR-WAFER	35336-1110 20MM 11P	CW14
KNCW-01520-CS9	CONNECTOR-WAFER	35336-1210 2M/M 12PIN	CW13
KNCW-01520-DS9	CONNECTOR-WAFER	35336-1310 20MM 13P	CW12
KNCW-01520-ES9	CONNECTOR-WAFER	35336-1410 20MM 14P	CW11
KNCW-01520-8S9	CONNECTOR-WAFER	35336-0810 2M/M 8P	CW20
KNCW-01520-9S9	CONNECTOR-WAFER	35336-0910 2M/M 9P	CW15
MEAC-08215-004	RADIATOR-TR		
MEAC-12693-004	HEAT-SINK(TR)		
MPAC-03811-004	TERMINAL-GND		GND1
MPAC-03811-004	TERMINAL-GND		GND2
MPAC-03811-004	TERMINAL-GND		GND3
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC1
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC10
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC11
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC12
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC2
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC3
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC4
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC5
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC6
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC7
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC3
MPAC-11620-004	FUSE CLIP	5.2Pi TAPPING TYPE	FC9
PCSR-04790-11B	PCB-SINGLE	A1R-479	PC31
PTAC-03260-YJV	TRANSFORMER-POWER	A35-326Y-V 230V/50Hz	
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R18
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R29
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R51
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R52
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R53
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R54
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R55
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R56
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R57
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R58
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R35
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R32
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R43
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R44
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R45
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R46
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R47
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R48
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R49
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R50
RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T	R26
RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T	R31
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R3
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R4
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R5
RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T	R30
RCFT-E271J-000	RESISTOR-CARBON FILM	270ohm 1/5W 5% T	R22
RCFT-E3R3J-000	RESISTOR-CARBON FILM	3.3ohm 1/5W 5% T	R12
RCFT-E3R3J-000	RESISTOR-CARBON FILM	3.3ohm 1/5W 5% T	R13
RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T	R17
RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T	R33
RCFT-E392J-000	RESISTOR-CARBON FILM	3.9Kohm 1/5W 5% T	R19
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R20
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R41
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R42
RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T	R28
RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T	R21
RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T	R24
RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T	R25
RCFT-E682J-000	RESISTOR-CARBON FILM	6.8Kohm 1/5W 5% T	R27
RCFT-E683J-000	RESISTOR-CARBON FILM	68Kohm 1/5W 5% T	R34
RCFT-E823J-000	RESISTOR-CARBON FILM	82Kohm 1/5W 5% T	R6
RFUT-F4R7J-120	RESISTOR-FUSIBLE	4.7ohm 1/4W 5% T	R10

Part No.	Description		Ref. No
RFUT-F4R7J-120	RESISTOR-FUSIBLE	4.7ohm 1/4W 5% T	R11
RMOH-H100J-100	RESISTOR-METAL OXIDE	PRO1 1W 10ohm 5% R-SHAPE T	R9
RMOH-J4R7J-030	RESISTOR-METAL OXIDE	4.7ohm 2W 5% CRH200	R7
RMOH-J4R7J-030	RESISTOR-METAL OXIDE	4.7ohm 2W 5% CRH200	R8
RMOR-H100J-0C0	RESISTOR-METAL OXIDE	10ohm 1W 5% ERG(X)1SJ100E	R1
RMOR-H100J-0C0	RESISTOR-METAL OXIDE	10ohm 1W 5% ERG(X)1SJ100E	R36
RMOR-H100J-0C0	RESISTOR-METAL OXIDE	10ohm 1W 5% ERG(X)1SJ100E	R37
RMOR-H100J-0C0	RESISTOR-METAL OXIDE	10ohm 1W 5% ERG(X)1SJ100E	R38
RMOR-H100J-0C0	RESISTOR-METAL OXIDE	10ohm 1W 5% ERG(X)1SJ100E	R39
RMOR-H100J-0C0	RESISTOR-METAL OXIDE	10ohm 1W 5% ERG(X)1SJ100E	R40
SKAO-00130-4CV	AC OUTLET	YKE31-0090	
SKPH-00520-360	MINIATURE JACK	HSJ1002-01-1020	JK1
SWPU-00591-059	SWITCH-PUSH	SDDL1B1-A1-F-2	SW1
TESP-00401-02P	TERMINAL SPEAKER	SH0210381P 2P	ST2
TESP-00460-08S	TERMINAL SPEAKER	SH0810361P 8P	ST1
TRTA-0067Y-SD0	TRANSISTOR P-H FREQ	KTA1267-Y TO92M	Q6
TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M	
TRTC-0016G-SD0	TRANSISTOR N-H FREQ	KTC3198-GR TO92	Q3
TRTC-0016G-SD0	TRANSISTOR N-H FREQ	KTC3198-GR TO92	Q4
TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92	Q1
XSTB-30080-ZY4	SCREW-TAPPING	BHT2T 3x8 FE-ZY	

3. BLOCK AMP

Part No.	Description		Ref. No
CCAT-F103Z-AAF	CAPACITOR CERAMIC	0.01uF Z 25V F T	C505
CCAT-F103Z-AAF	CAPACITOR CERAMIC	0.01uF Z 25V F T	C547
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	
CCAT-J102K-AAB	CAPACITOR CERAMIC	1000PF K 50V B T	C479
CCAT-J102K-AAB	CAPACITOR CERAMIC	1000PF K 50V B T	C480
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C545
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C546
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C548
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C549
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C550
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C910
CCAT-J120J-AAC	CAPACITOR CERAMIC	12PF J 50V C T	
CCAT-J470J-AAZ	CAPACITOR CERAMIC	47PF J 50V SL T	C455
CCAT-J470J-AAZ	CAPACITOR CERAMIC	47PF J 50V SL T	C458
CCAT-J471K-AAB	CAPACITOR CERAMIC	470PF K 50V B T	C423
CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T	C504
CCAT-J681K-AAB	CAPACITOR CERAMIC	680PF K 50V B T	C105
CCAT-J681K-AAB	CAPACITOR CERAMIC	680PF K 50V B T	C106
CCAT-J681K-AAB	CAPACITOR CERAMIC	680PF K 50V B T	C131
CCAT-J681K-AAB	CAPACITOR CERAMIC	680PF K 50V B T	C132
CCAT-J681K-AAB	CAPACITOR CERAMIC	680PF K 50V B T	C155
CCCT-J104Z-0FF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C908
CCCT-J104Z-0FF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C909
CCCT-J681K-0BB	CAPACITOR CERAMIC	680PF K 50V B T	C443
CCCT-J681K-0BB	CAPACITOR CERAMIC	680PF K 50V B T	C444
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C474
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C475
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C507
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C508
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C511
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C512
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C515
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C516
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C519
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C520
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C523
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C524
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C527
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C528
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C531
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C532
CCTT-J220J-0BZ	CAPACITOR CERAMIC	22PF J 50V SL T	C119
CCTT-J220J-0BZ	CAPACITOR CERAMIC	22PF J 50V SL T	C120
CCTT-J220J-0BZ	CAPACITOR CERAMIC	22PF J 50V SL T	C145

Part No.	Description		Ref. No
CCTT-J220J-0BZ	CAPACITOR CERAMIC	22PF J 50V SL T	C146
CCTT-J220J-0BZ	CAPACITOR CERAMIC	22PF J 50V SL T	C162
CCTT-J680J-0FC	CAPACITOR CERAMIC	68PF J 50V CH T	C103
CCTT-J680J-0FC	CAPACITOR CERAMIC	68PF J 50V CH T	C104
CCTT-J680J-0FC	CAPACITOR CERAMIC	68PF J 50V CH T	C129
CCTT-J680J-0FC	CAPACITOR CERAMIC	68PF J 50V CH T	C130
CCTT-J680J-0FC	CAPACITOR CERAMIC	68PF J 50V CH T	C154
CEET-C471M-FI1	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U T	C111
CEET-C471M-FI1	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U T	C112
CEET-C471M-FI1	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U T	C137
CEET-C471M-FI1	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U T	C138
CEET-C471M-FI1	CAPACITOR E/ALUMINUM	470uF M 6.3V 8x11.5 U T	C158
CEET-D101M-CIO	CAPACITOR E/ALUMINUM	100uF M 10V 5x11 T	C485
CEET-D101M-CIO	CAPACITOR E/ALUMINUM	100uF M 10V 5x11 T	C486
CEET-D471M-FI1	CAPACITOR E/ALUMINUM	470uF M 10V 8x11.5 U T	C902
CEET-D471M-FI1	CAPACITOR E/ALUMINUM	470uF M 10V 8x11.5 U T	C905
CEET-D471M-FI1	CAPACITOR E/ALUMINUM	470uF M 10V 8x11.5 U T	C907
CEET-E101M-DIO	CAPACITOR E/ALUMINUM	100uF M 16V 6.3x11 T	C463
CEET-E221M-FIO	CAPACITOR E/ALUMINUM	220uF M 16V 8x11.5 T	C438
CEET-F220M-CIO	CAPACITOR E/ALUMINUM	22uF M 25V 5x11 T	C109
CEET-F220M-CIO	CAPACITOR E/ALUMINUM	22uF M 25V 5x11 T	C110
CEET-F220M-CIO	CAPACITOR E/ALUMINUM	22uF M 25V 5x11 T	C135
CEET-F220M-CIO	CAPACITOR E/ALUMINUM	22uF M 25V 5x11 T	C136
CEET-F220M-CIO	CAPACITOR E/ALUMINUM	22uF M 25V 5x11 T	C157
CEET-F220M-CIO	CAPACITOR E/ALUMINUM	22uF M 25V 5x11 T	C432
CEET-F220M-CIO	CAPACITOR E/ALUMINUM	22uF M 25V 5x11 T	C439
CEET-F330M-CIO	CAPACITOR E/ALUMINUM	33uF M 25V 5x11 T	C107
CEET-F330M-CIO	CAPACITOR E/ALUMINUM	33uF M 25V 5x11 T	C108
CEET-F330M-CIO	CAPACITOR E/ALUMINUM	33uF M 25V 5x11 T	C133
CEET-F330M-CIO	CAPACITOR E/ALUMINUM	33uF M 25V 5x11 T	C134
CEET-F330M-CIO	CAPACITOR E/ALUMINUM	33uF M 25V 5x11 T	C156
CEET-F330M-CIO	CAPACITOR E/ALUMINUM	33uF M 25V 5x11 T	C901
CEET-F330M-CIO	CAPACITOR E/ALUMINUM	33uF M 25V 5x11 T	C903
CEET-F330M-CIO	CAPACITOR E/ALUMINUM	33uF M 25V 5x11 T	C904
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C101
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C102
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C127
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C128
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C153
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C401
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C437
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C452
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C453
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C457
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C460
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C468
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C469
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C470
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C471
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C495
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C496
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C497
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C500
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C502
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C503
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C538
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C539
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C541
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C542
CEET-J1R0M-CIO	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T	C501
CEET-J1R0M-CIO	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T	C540
CEET-J1R0M-CIO	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T	C551
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C121
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C122
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C125
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C126
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C147
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C148

Part No.	Description					Ref. No	
CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF	M	50V	5x11	T	C151
CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF	M	50V	5x11	T	C152
CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF	M	50V	5x11	T	C163
CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF	M	50V	5x11	T	C165
CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF	M	50V	5x11	T	C441
CEET-J100M-CI0	CAPACITOR E/ALUMINUM	10uF	M	50V	5x11	T	C442
CEET-J100M-CI0	CAPAGITOR E/ALUMINUM	10uF	M	50V	5x11	T	C464
CEET-J2R2M-CI0	CAPACITOR E/ALUMINUM	2.2uF	M	50V	5x11	T	C402
CEET-J2R2M-CI0	CAPACITOR E/ALUMINUM	2.2uF	M	50V	5x11	T	C433
CEET-J2R2M-CI0	CAPACITOR E/ALUMINUM	2.2uF	M	50V	5x11	T	C434
CEET-J2R2M-CI0	CAPACITOR E/ALUMINUM	2.2uF	M	50V	5x11	T	C435
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C123
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C124
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C149
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C150
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C164
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C413
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C414
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C456
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C459
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C476
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C477
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C487
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C488
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C491
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C492
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C493
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C494
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C534
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C535
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C536
CEET-J4R7M-CI0	CAPACITOR E/ALUMINUM	4.7uF	M	50V	5x11	T	C537
CEET-L331M-DI1	CAPACITOR E/ALUMINUM	330uF	M	63V	10x20	SHL T	C115
CEET-L331M-DI1	CAPACITOR E/ALUMINUM	330uF	M	63V	10x20	SHL T	C116
CEET-L331M-DI1	CAPACITOR E/ALUMINUM	330uF	M	63V	10x20	SHL T	C117
CEET-L331M-DI1	CAPACITOR E/ALUMINUM	330uF	M	63V	10x20	SHL T	C118
CEET-L331M-DI1	CAPACITOR E/ALUMINUM	330uF	M	63V	10x20	SHL T	C141
CEET-L331M-DI1	CAPACITOR E/ALUMINUM	330uF	M	63V	10x20	SHL T	C142
CEET-L331M-DI1	CAPACITOR E/ALUMINUM	330uF	M	63V	10x20	SHL T	C143
CEET-L331M-DI1	CAPACITOR E/ALUMINUM	330uF	M	63V	10x20	SHL T	C144
CEET-L331M-DI1	CAPACITOR E/ALUMINUM	330uF	M	63V	10x20	SHL T	C160
CEET-L331M-DI1	CAPACITOR E/ALUMINUM	330uF	M	63V	10x20	SHL T	C161
CFMT-L105J-FJ0	CAPACITOR F/POLYESTR	1uF	J	63V	8x12.5	TL	C431
CFMT-L224J-EF0	CAPACITOR F/POLYESTR	0.22uF	J	63V	7.5x8.5	TL	C410
CFMT-L224J-EF0	CAPACITOR F/POLYESTR	0.22uF	J	63V	7.5x8.5	TL	C412
CFMT-L224J-EF0	CAPACITOR F/POLYESTR	0.22uF	J	63V	7.5x8.5	TL	C415
CFMT-L224J-EF0	CAPACITOR F/POLYESTR	0.22uF	J	63V	7.5x8.5	TL	C416
CFMT-L684J-FI0	CAPACITOR F/POLYESTR	0.68uF	J	63V	8x11.5	TL	C421
CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF	J	100V	6x7	T	C425
CFMT-N103J-DE0	CAPACITOR F/POLYESTR	0.01uF	J	100V	6x7	T	C430
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C403
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C407
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C408
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C411
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C419
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C420
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C427
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C428
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C436
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C445
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C446
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C447
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C448
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF	J	100V	12.1x14	T	C449
CFMT-N122J-CJ0	CAPACITOR F/POLYESTR	0.0012uF	J	100V	5.4x12	T	C424
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF	J	100V	5.4x12	T	C450
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF	J	100V	5.4x12	T	C451
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF	J	100V	5.4x12	T	C483

Part No.	Description		Ref. No
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12 T	C484
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12 T	C489
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12 T	C490
CFMT-N223J-EK0	CAPACITOR F/POLYESTR	0.022uF J 100V 7.4x13 T	C404
CFMT-N223J-EK0	CAPACITOR F/POLYESTR	0.022uF J 100V 7.4x13 T	C409
CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13 T	C405
CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13 T	C406
CFMT-N473J-GK0	CAPACITOR F/POLYESTR	0.047uF J 100V 8.9x13 T	C417
CFMT-N562J-DJ0	CAPACITOR F/POLYESTR	0.0056uF J 100V 5.8x12 T	C418
CFMT-N562J-DJ0	CAPACITOR F/POLYESTR	0.0056uF J 100V 5.8x12 T	C440
CFMT-N562J-DJ0	CAPACITOR F/POLYESTR	0.0056uF J 100V 5.8x12 T	C481
CFMT-N562J-DJ0	CAPACITOR F/POLYESTR	0.0056uF J 100V 5.8x12 T	C482
CFMT-N683J-HK0	CAPACITOR F/POLYESTR	0.068uF J 100V 9.9x14 T	C426
CFMT-N683J-HK0	CAPACITOR F/POLYESTR	0.068uF J 100V 9.9x14 T	C429
CFST-O821J-CJ0	CAPACITOR F/STYROL	820PF J 125V 5.5x12 T	C422
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D101
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D102
DDTS-00070-SC0	DICDE-SI	1SS133 (40V 0.11A) DO-40 T	D103
DDTS-00070-SO0	DICDE-SI	1SS133 (40V 0.11A) DO-40 T	D104
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D105
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D106
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D107
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D108
DDTS-00070-SC0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D109
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D110
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D401
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D402
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D405
DDTS-00070-SC0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D406
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D901
DDTS-00070-SC0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D902
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D903
DDTS-00070-SC0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D904
DDTZ-G056B-SCS	DIODE ZENER	MTZJ5.6B 5.45-5.73 DO34 T	D403
DDTZ-G100B-SO0	DIODE ZENER	MTZ10B 9.41-9.90 DO40 T	D404
ICDG-00260-S10	IC FUNCTION SELECTOR	LC7821 DIP30S	IC402
ICDG-00260-S10	IC FUNCTION SELECTOR	LC7821 DIP30S	IC403
ICLN-03310-SG0	IC DOLBY	NJW-1103F QFP80	IC407
ICLN-03650-SB0	IC VIDEO S/W	BA7625 DIP16	IC901
ICLN-03690-S10	IC BYPOLAR SWITCH	LC4966 DIP14	IC406
ICOP-00134-SG0	IC DUAL OP AMP	NJM4558M SOP8	IC404
ICOP-00134-SG0	IC DUAL OP AMP	NJM4558M SOP8	IC405
ICOP-00134-SG0	IC DUAL OP AMP	NJM4558M SOP8	IC408
ICOP-00432-SG0	IC OP AMP	NJM2068DD DIP8	IC401
KIBK-00190-E40	COIL-AUDIO CHOCK	0.7uH COIL-CHOCK	L101
KIBK-00190-E40	COIL-AUDIO CHOCK	0.7uH COIL-CHOCK	L102
KIBK-00190-E40	COIL-AUDIO CHOCK	0.7uH COIL-CHOCK	L103
KIBK-00190-E40	COIL-AUDIO CHOCK	0.7uH COIL-CHOCK	L104
KIBK-00190-E40	COIL-AUDIO CHOCK	0.7uH COIL-CHOCK	L105
KIOT-4470K-003	COIL-INDUCTOR	47uH K LAL02 T	L401
KIOT-4470K-003	COIL-INDUCTOR	47uH K LAL02 T	L402
KNCW-00140-5TM	CONNECTOR-WAFER	5267-05A 2.5mm MILK	CN102
KNCW-00240-AT9	CONNECTOR-WAFER	53014-10 2.0mm WHT	CN101
KNCW-00240-2T9	CONNECTOR-WAFER	53014-02 2.0mm WHT	CN901
KNCW-00240-2T9	CONNECTOR-WAFER	53014-02 2.0mm WHT	CN902
KNCW-00240-3T9	CONNECTOR-WAFER	53014-03 2.0mm WHT	CN403
KNCW-00240-3T9	CONNECTOR-WAFER	53014-03 2.0mm WHT	CN404
KNCW-01510-BS9	CONNECTOR-WAFER	35237-1110 2M/M 11P	CN401
KNCW-01510-CS9	CONNECTOR-WAFER	35237-1210 2M/M 12PIN	CN402
KNCW-01510-9S9	CONNECTOR-WAFER	35237-0910 2M/M 9P	CN901
KTRE-00091-040	RESONATOR	CST4.00MGW-TF01 T05	X401
PCSR-04800-11B	PCB-SINGLE	A1R-480	PCB1
RCFT-E100J-000	RESISTOR-CARBON FILM	10ohm 1/5W 5% T	R525
RCFT-E100J-000	RESISTOR-CARBON FILM	10ohm 1/5W 5% T	R526
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R444
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R445
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R903
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R904

Part No.	Description	Ref. No
RCFT-E471J-000	RESISTOR-CARBON FILM	R503
RCFT-E471J-000	RESISTOR-CARBON FILM	R504
RCFT-E471J-000	RESISTOR-CARBON FILM	R505
RCFT-E472J-000	RESISTOR-CARBON FILM	R139
RCFT-E472J-000	RESISTOR-CARBON FILM	R140
RCFT-E472J-000	RESISTOR-CARBON FILM	R219
RCFT-E472J-000	RESISTOR-CARBON FILM	R220
RCFT-E472J-000	RESISTOR-CARBON FILM	R280
RCFT-E473J-000	RESISTOR-CARBON FILM	R415
RCFT-E473J-000	RESISTOR-CARBON FILM	R418
RCFT-E473J-000	RESISTOR-CARBON FILM	R454
RCFT-E473J-000	RESISTOR-CARBON FILM	R455
RCFT-E473J-000	RESISTOR-CARBON FILM	R470
RCFT-E473J-000	RESISTOR-CARBON FILM	R471
RCFT-E512J-000	RESISTOR-CARBON FILM	R406
RCFT-E512J-000	RESISTOR-CARBON FILM	R407
RCFT-E513J-000	RESISTOR-CARBON FILM	R404
RCFT-E513J-000	RESISTOR-CARBON FILM	R405
RCFT-E561J-000	RESISTOR-CARBON FILM	R127
RCFT-E561J-000	RESISTOR-CARBON FILM	R128
RCFT-E561J-000	RESISTOR-CARBON FILM	R129
RCFT-E561J-000	RESISTOR-CARBON FILM	R130
RCFT-E561J-000	RESISTOR-CARBON FILM	R131
RCFT-E561J-000	RESISTOR-CARBON FILM	R132
RCFT-E561J-000	RESISTOR-CARBON FILM	R133
RCFT-E561J-000	RESISTOR-CARBON FILM	R134
RCFT-E561J-000	RESISTOR-CARBON FILM	R135
RCFT-E561J-000	RESISTOR-CARBON FILM	R136
RCFT-E561J-000	RESISTOR-CARBON FILM	R137
RCFT-E561J-000	RESISTOR-CARBON FILM	R138
RCFT-E561J-000	RESISTOR-CARBON FILM	R207
RCFT-E561J-000	RESISTOR-CARBON FILM	R208
RCFT-E561J-000	RESISTOR-CARBON FILM	R209
RCFT-E561J-000	RESISTOR-CARBON FILM	R210
RCFT-E561J-000	RESISTOR-CARBON FILM	R211
RCFT-E561J-000	RESISTOR-CARBON FILM	R212
RCFT-E561J-000	RESISTOR-CARBON FILM	R213
RCFT-E561J-000	RESISTOR-CARBON FILM	R214
RCFT-E561J-000	RESISTOR-CARBON FILM	R215
RCFT-E561J-000	RESISTOR-CARBON FILM	R216
RCFT-E561J-000	RESISTOR-CARBON FILM	R217
RCFT-E561J-000	RESISTOR-CARBON FILM	R218
RCFT-E561J-000	RESISTOR-CARBON FILM	R274
RCFT-E561J-000	RESISTOR-CARBON FILM	R275
RCFT-E561J-000	RESISTOR-CARBON FILM	R276
RCFT-E561J-000	RESISTOR-CARBON FILM	R277
RCFT-E561J-000	RESISTOR-CARBON FILM	R278
RCFT-E561J-000	RESISTOR-CARBON FILM	R279
RCFT-E564J-000	RESISTOR-CARBON FILM	R452
RCFT-E564J-000	RESISTOR-CARBON FILM	R453
RCFT-E680J-000	RESISTOR-CARBON FILM	R113
RCFT-E680J-000	RESISTOR-CARBON FILM	R114
RCFT-E680J-000	RESISTOR-CARBON FILM	R193
RCFT-E680J-000	RESISTOR-CARBON FILM	R194
RCFT-E680J-000	RESISTOR-CARBON FILM	R267
RCFT-E681J-000	RESISTOR-CARBON FILM	R115
RCFT-E681J-000	RESISTOR-CARBON FILM	R116
RCFT-E681J-000	RESISTOR-CARBON FILM	R195
RCFT-E681J-000	RESISTOR-CARBON FILM	R196
RCFT-E681J-000	RESISTOR-CARBON FILM	R268
RCFT-E682J-000	RESISTOR-CARBON FILM	R177
RCFT-E682J-000	RESISTOR-CARBON FILM	R178
RCFT-E682J-000	RESISTOR-CARBON FILM	R257
RCFT-E682J-000	RESISTOR-CARBON FILM	R258
RCFT-E682J-000	RESISTOR-CARBON FILM	R299
RCFT-E750J-000	RESISTOR-CARBON FILM	R901
RCFT-E750J-000	RESISTOR-CARBON FILM	R902
RCFT-E750J-000	RESISTOR-CARBON FILM	R905

Part No.	Description		Ref. No
RCFT-E750J-000	RESISTOR-CARBON FILM	75ohm 1/5W 5% T	R906
RCFT-E750J-000	RESISTOR-CARBON FILM	75ohm 1/5W 5% T	R907
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R107
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R108
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R111
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R112
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R187
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R188
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R191
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R192
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R264
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R266
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R450
RCFT-E751J-000	RESISTOR-CARBON FILM	750ohm 1/5W 5% T	R451
RCFT-E752J-000	RESISTOR-CARBON FILM	7.5Kohm 1/5W 5% T	R417
RCFT-E752J-000	RESISTOR-CARBON FILM	7.5Kohm 1/5W 5% T	R419
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R151
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R152
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R153
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R154
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R159
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R160
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R231
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R232
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R233
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R234
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R239
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R240
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R286
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R287
RCFT-E820J-000	RESISTOR-CARBON FILM	82ohm 1/5W 5% T	R290
RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T	R147
RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T	R148
RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T	R149
RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T	R150
RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T	R227
RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T	R228
RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T	R229
RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T	R230
RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T	R284
RCFT-E821J-000	RESISTOR-CARBON FILM	820ohm 1/5W 5% T	R285
RCFT-E911J-000	RESISTOR-CARBON FILM	910ohm 1/5W 5% T	R175
RCFT-E911J-000	RESISTOR-CARBON FILM	910ohm 1/5W 5% T	R176
RCFT-E911J-000	RESISTOR-CARBON FILM	910ohm 1/5W 5% T	R255
RCFT-E911J-000	RESISTOR-CARBON FILM	910ohm 1/5W 5% T	R256
RCFT-E911J-000	RESISTOR-CARBON FILM	910ohm 1/5W 5% T	R298
RMFS-LR27J-0J0	RESISTOR-METAL PLATE	0.27ohm 5W 5% MPR-55R	R161
RMFS-LR27J-0J0	RESISTOR-METAL PLATE	0.27ohm 5W 5% MPR-55R	R162
RMFS-LR27J-0J0	RESISTOR-METAL PLATE	0.27ohm 5W 5% MPR-55R	R241
RMFS-LR27J-0J0	RESISTOR-METAL PLATE	0.27ohm 5W 5% MPR-55R	R242
RMFS-LR27J-0J0	RESISTOR-METAL PLATE	0.27ohm 5W 5% MPR-55R	R291
RMOR-H470J-0C0	RESISTOR-METAL OXIDE	47ohm 1W 5% ERG(X)1SJ470E	R155
RMOR-H470J-0C0	RESISTOR-METAL OXIDE	47ohm 1W 5% ERG(X)1SJ470E	R156
RMOR-H470J-0C0	RESISTOR-METAL OXIDE	47ohm 1W 5% ERG(X)1SJ470E	R157
RMOR-H470J-0C0	RESISTOR-METAL OXIDE	47ohm 1W 5% ERG(X)1SJ470E	R158
RMOR-H470J-0C0	RESISTOR-METAL OXIDE	47ohm 1W 5% ERG(X)1SJ470E	R235
RMOR-H470J-0C0	RESISTOR-METAL OXIDE	47ohm 1W 5% ERG(X)1SJ470E	R236
RMOR-H470J-0C0	RESISTOR-METAL OXIDE	47ohm 1W 5% ERG(X)1SJ470E	R237
RMOR-H470J-0C0	RESISTOR-METAL OXIDE	47ohm 1W 5% ERG(X)1SJ470E	R238
RMOR-H470J-0C0	RESISTOR-METAL OXIDE	47ohm 1W 5% ERG(X)1SJ470E	R288
RMOR-H470J-0C0	RESISTOR-METAL OXIDE	47ohm 1W 5% ERG(X)1SJ470E	R289
SKRC-00400-041	SOCKET-RCA	JK0400450N	JK401
SKRC-00420-061	SOCKET-RCA	JK0600460N	JK402
SKRC-00420-061	SOCKET-RCA	JK0600460N	JK403
SKRC-00470-031	SOCKET-RCA	JC0300125N 3P	JK901
SKRC-00680-021	PIN JACK	JC0200095N 2P	JK902
TRSA-01450-SJ0	TRANSISTOR N-H FREQ	2SA1859A	Q123
TRSA-01450-SJ0	TRANSISTOR N-H FREQ	2SA1859A	Q124

Part No.	Description		Ref. No
TRSA-01450-SJ0	TRANSISTOR N-H FREQ	2SA1859A	Q153
TRSA-01450-SJ0	TRANSISTOR N-H FREQ	2SA1859A	Q154
TRSA-01450-SJ0	TRANSISTOR N-H FREQ	2SA1859A	Q172
TRSC-01540-SJ0	TRANSISTOR N-H FREQ	2SC4883A	Q121
TRSC-01540-SJ0	TRANSISTOR N-H FREQ	2SC4883A	Q122
TRSC-01540-SJ0	TRANSISTOR N-H FREQ	2SC4883A	Q151
TRSC-01540-SJ0	TRANSISTOR N-H FREQ	2SC4883A	Q152
TRSC-01540-SJ0	TRANSISTOR N-H FREQ	2SC4883A	Q171
TRTA-0008Y-SD0	TRANSISTOR P-H FREQ	KTA1266-Y TO92	Q901
TRTA-0008Y-SD0	TRANSISTOR P-H FREQ	KTA1266-Y TO92	Q902
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q101
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q102
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q103
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q104
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q105
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q106
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q107
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q108
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TC92	Q113
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q114
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q131
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q132
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TC92	Q133
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q134
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q135
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q136
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q137
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q138
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q143
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q144
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q161
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q162
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q163
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TO92	Q164
TRTA-0011G-SD0	TRANSISTOR P-H FREQ	KTA1268-GR TC92	Q167
TRTA-0013Y-SD0	TRANSISTOR N-H FREQ	KTA1024-Y	Q115
TRTA-0013Y-SD0	TRANSISTOR N-H FREQ	KTA1024-Y	Q116
TRTA-0013Y-SD0	TRANSISTOR N-H FREQ	KTA1024-Y	Q145
TRTA-0013Y-SD0	TRANSISTOR N-H FREQ	KTA1024-Y	Q146
TRTA-0013Y-SD0	TRANSISTOR N-H FREQ	KTA1024-Y	Q168
TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M	Q402
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q109
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q110
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TC92	Q111
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q112
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q129
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q130
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q139
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q140
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q141
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q142
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q159
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q160
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q165
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q166
TRTC-0015G-SD0	TRANSISTOR N-H FREQ	KTC3200-GR TO92	Q175
TRTC-0016G-SD0	TRANSISTOR N-H FREQ	KTC3198-GR TO92	Q404
TRTC-0016G-SD0	TRANSISTOR N-H FREQ	KTC3198-GR TO92	Q405
TRTC-0087Y-SD0	TRANSISTOR N-H FREQ	KTC3206-Y TO92L	Q117
TRTC-0087Y-SD0	TRANSISTOR N-H FREQ	KTC3206-Y TO92L	Q118
TRTC-0087Y-SD0	TRANSISTOR N-H FREQ	KTC3206-Y TO92L	Q147
TRTC-0087Y-SD0	TRANSISTOR N-H FREQ	KTC3206-Y TO92L	Q148
TRTC-0087Y-SD0	TRANSISTOR N-H FREQ	KTC3206-Y TO92L	Q169
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q276
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q401
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q403
U1T1-01520-Z10	WIRE-ASS'Y	1007#22 BLK-200 3.2pi	
U1T3-01330-T40	WIRE-ASS'Y	1007#18 BLK-300 YFH-800	

Part No.	Description		Ref. No
U610-5M426-200	WIRE-ASS'Y	UL1007#20 GRN-260 6P	CW104
U810-7M412-200	WIRE-ASS'Y	1007#20 VIT-120 8P	CW103

4. BLOCK PREOUT

Part No.	Description		Ref. No
CCAT-F103Z-AAF	CAPACITOR CERAMIC	0.01uF Z 25V F T	C866
CCAT-F103Z-AAF	CAPACITOR CERAMIC	0.01uF Z 25V F T	C917
CCAT-F103Z-AAF	CAPACITOR CERAMIC	0.01uF Z 25V F T	C918
CCAT-F103Z-AAF	CAPACITOR CERAMIC	0.01uF Z 25V F T	C919
CCAT-F103Z-AAF	CAPACITOR CERAMIC	0.01uF Z 25V F T	C920
CCAT-F103Z-AAF	CAPACITOR CERAMIC	0.01uF Z 25V F T	C921
CCAT-F103Z-AAF	CAPACITOR CERAMIC	0.01uF Z 25V F T	C922
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C801
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C802
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C813
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C814
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C825
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C826
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C837
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C839
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C842
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C844
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C846
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C848
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C851
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C853
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C855
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C857
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C860
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C862
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C893
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C894
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C895
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C896
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C901
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C902
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C903
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C904
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C905
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C906
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C913
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C914
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C915
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C916
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C933
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C891
CCAT-J220J-AAZ	CAPACITOR CERAMIC	22PF J 50V SL T	C928
CCAT-J220J-AAZ	CAPACITOR CERAMIC	22PF J 50V SL T	C929
CCAT-J220J-AAZ	CAPACITOR CERAMIC	22PF J 50V SL T	C930
CCAT-J220J-AAZ	CAPACITOR CERAMIC	22PF J 50V SL T	C931
CCAT-J220J-AAZ	CAPACITOR CERAMIC	22PF J 50V SL T	C932
CCAT-J470J-AAZ	CAPACITOR CERAMIC	47PF J 50V SL T	C897
CCAT-J470J-AAZ	CAPACITOR CERAMIC	47PF J 50V SL T	C898
CCAT-J470J-AAZ	CAPACITOR CERAMIC	47PF J 50V SL T	C899
CCAT-J470J-AAZ	CAPACITOR CERAMIC	47PF J 50V SL T	C900
CCCT-J104Z-0FF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C911
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C309
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C310
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C821
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C822
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C833
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C834
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C841
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C850
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C859
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C864
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C865
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C867

Part No.	Description		Ref. No
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C868
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C869
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C926
CEET-F470M-CIO	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C927
CEET-J1R0M-CIO	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T	C890
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C811
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C812
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C823
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C824
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C835
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C836
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C840
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C845
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C849
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C854
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C858
CEET-J100M-CIO	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C863
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C8C7
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C808
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C819
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C820
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C831
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C832
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C838
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C843
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C847
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C852
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C856
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C861
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C888
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C889
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C924
CEET-J4R7M-CIO	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C925
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14 T	C805
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14 T	C806
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14 T	C817
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14 T	C818
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14 T	C829
CFMT-N104J-JK0	CAPACITOR F/POLYESTR	0.10uF J 100V 12.1x14 T	C830
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12 T	C803
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12 T	C804
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12 T	C815
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12 T	C816
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12 T	C827
CFMT-N152J-CJ0	CAPACITOR F/POLYESTR	0.0015uF J 100V 5.4x12 T	C828
DDTS-00070-SC0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D801
ICCM-01300-SD0	IC VOLUME CONTROL IC	KIC9459F SOP24	IC805
ICCM-01300-SD0	IC VOLUME CONTROL IC	KIC9459F SOP24	IC806
ICCM-01300-SD0	IC VOLUME CONTROL IC	KIC9459F SOP24	IC807
ICLN-03590-S10	IC ANALOG FUNCTION	LC78213 DIP30	IC804
ICOP-00134-SG0	IC DUAL OP AMP	NJM4558M SOP8	IC801
ICOP-00134-SG0	IC DUAL OP AMP	NJM4558M SOP8	IC802
ICOP-00134-SG0	IC DUAL OP AMP	NJM4558M SOP8	IC803
ICOP-00134-SG0	IC DUAL OP AMP	NJM4558M SOP8	IC808
ICOP-00134-SG0	IC DUAL OP AMP	NJM4558M SOP8	IC809
ICOP-00134-SG0	IC DUAL OP AMP	NJM4558M SOP8	IC810
ICOP-00134-SG0	IC DUAL OP AMP	NJM4558M SOP8	IC811
KNCW-00240-8T9	CONNECTOR-WAFER	53014-08 2.0mm WHT	CW803
KNCW-01510-DS9	CONNECTOR-WAFER	35237-1310 2M/M 13P	CN801
KNCW-01510-8S9	CONNECTOR-WAFER	35237-0810 2M/M 8P	CN802
PCSR-04830-11B	PCB-SINGLE	A1R-483	PCB1
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R803
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R805
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R815
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R817
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R827
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R829
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R838

[illegible]

Part No.	Description		Ref. No
RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T	R885
RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T	R887
RCFT-E153J-000	RESISTOR-CARBON FILM	15Kohm 1/5W 5% T	R889
RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T	R876
RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T	R877
RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T	R878
RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T	R879
RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T	R880
RCFT-E222J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T	R881
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R867
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R868
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R870
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R871
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R873
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R874
RCFT-E302J-000	RESISTOR-CARBON FILM	3Kohm 1/5W 5% T	R884
RCFT-E302J-000	RESISTOR-CARBON FILM	3Kohm 1/5W 5% T	R886
RCFT-E302J-000	RESISTOR-CARBON FILM	3Kohm 1/5W 5% T	R888
RCFT-E302J-000	RESISTOR-CARBON FILM	3Kohm 1/5W 5% T	R890
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R807
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R808
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R809
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R810
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R819
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R820
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R821
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R822
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R831
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R832
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R833
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R834
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R840
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R841
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R848
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R849
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R856
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R857
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R914
RCFT-E470J-000	RESISTOR-CARBON FILM	47ohm 1/5W 5% T	R915
RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	R862
RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	R866
SKRC-00750-060	SOCKET-RCA	JK060046BN	JK801
SKRC-00750-060	SOCKET-RCA	JK060046BN	JK302
TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M	Q803
TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TC92M	Q806
TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M	Q809
TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M	Q810
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TC92M	Q811
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q812
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q813
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q814
TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92	Q801
TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92	Q802
TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92	Q804
TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92	Q805
TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92	Q807
TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92	Q808
UA08-30810-250	WIRE-ASS'Y	1533#28 GRY-100 10P	CW801
U208-1M715-250	WIRE-ASS'Y	UL1007#26 BRN-150 2P	CW804
U308-8S818-250	WIRE-ASS'Y	2547#28 GRY-180 3P	CW805

5. BLOCK FRONT

Part No.	Description		Ref. No
3TBP-00140-BPM	FILTER-MICA PRINT	GFMB3-T	CF601
BTCE-00040-107	FILTER-CERAMIC	SFE10.7MS2-A-TF21	CF603
BTCE-00152-107	FILTER-CERAMIC	SFE10.7MJA10H-A-TF21	CF602
BTCE-00450-045	FILTER-CERAMIC	AHCFM2-450AL	CF604
CCAT-E222M-AAV	CAPACITOR CERAMIC	2200PF M 16V Y5R T	C750

Part No.	Description		Ref. No
CCAT-E222M-AAY	CAPACITOR CERAMIC	2200PF M 16V Y5R T	C751
CCAT-F223Z-AAF	CAPACITOR CERAMIC	0.022uF Z 25V F T	C762
CCAT-J100J-AAC	CAPACITOR CERAMIC	10PF J 50V C T	C652
CCAT-J100J-AAC	CAPACITOR CERAMIC	10PF J 50V C T	C653
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C608
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C609
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C644
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C645
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C646
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C647
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C669
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C670
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C733
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C734
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C771
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C772
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C773
CCAT-J101K-AAB	CAPACITOR CERAMIC	100PF K 50V B T	C774
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C675
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C676
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C677
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C704
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C709
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C714
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C716
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C752
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C760
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C761
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C763
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C764
CCAT-J104Z-AAF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C738
CCAT-J221K-AAB	CAPACITOR CERAMIC	220PF K 50V B T	C654
CCAT-J221K-AAB	CAPACITOR CERAMIC	220PF K 50V B T	C655
CCAT-J271K-AAB	CAPACITOR CERAMIC	270PF K 50V B T	C666
CCAT-J330J-AAZ	CAPACITOR CERAMIC	33PF J 50V SL T	C735
CCAT-J330J-AAZ	CAPACITOR CERAMIC	33PF J 50V SL T	C736
CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T	C660
CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T	C711
CCAT-J473Z-AAF	CAPACITOR CERAMIC	0.047uF Z 50V F T	C712
CCCT-J103Z-ODF	CAPACITOR CERAMIC	0.01uF Z 50V F T	C625
CCCT-J103Z-ODF	CAPACITOR CERAMIC	0.01uF Z 50V F T	C635
CCCT-J103Z-ODF	CAPACITOR CERAMIC	0.01uF Z 50V F T	C703
CCCT-J104Z-OFF	CAPACITOR CERAMIC	0.1uF Z 50V F T	C668
CCCT-J222K-ODB	CAPACITOR CERAMIC	2200PF K 50V B T	C789
CCCT-J222K-ODB	CAPACITOR CERAMIC	2200PF K 50V B T	C790
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C602
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C604
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C606
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C607
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C616
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C617
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C620
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C627
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C628
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C634
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C636
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C643
CCCT-J223Z-OFF	CAPACITOR CERAMIC	0.022uF Z 50V F T	C665
CCCT-J473Z-OJF	CAPACITOR CERAMIC	0.047uF Z 50V F T	C611
CCCT-J473Z-OJF	CAPACITOR CERAMIC	0.047uF Z 50V F T	C630
CCTT-J100D-0BC	CAPACITOR CERAMIC	10PF D 50V CH T	C673
CCTT-J100D-0BC	CAPACITOR CERAMIC	10PF D 50V CH T	C674
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C632
CCTT-J101J-0CZ	CAPACITOR CERAMIC	100PF J 50V SL T	C710
CCTT-J150J-0BC	CAPACITOR CERAMIC	15PF J 50V CH T	C613
CCTT-J300J-0CC	CAPACITOR CERAMIC	30PF J 50V CH T	C637
CCTT-J331J-0FZ	CAPACITOR CERAMIC	330PF J 50V SL T	C631
CCTT-J390J-0DC	CAPACITOR CERAMIC	39PF J 50V CH T	C639

Part No.	Description		Ref. No
CCTT-J681J-0BZ	CAPACITOR CERAMIC	680PF J 50V SL T	C657
CCTT-J820J-0BZ	CAPACITOR CERAMIC	82PF J 50V SL T	C633
CEET-D101M-C10	CAPACITOR E/ALUMINUM	100uF M 10V 5x11 T	C707
CEET-E101M-D10	CAPACITOR E/ALUMINUM	100uF M 16V 6.3x11 T	C661
CEET-F330M-C10	CAPACITOR E/ALUMINUM	33uF M 25V 5x11 T	C775
CEET-F470M-C10	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C601
CEET-F470M-C10	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C605
CEET-F470M-C10	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C629
CEET-F470M-C10	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C638
CEET-F470M-C10	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C642
CEET-F470M-C10	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C667
CEET-F470M-C10	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C708
CEET-F470M-C10	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C731
CEET-F470M-C10	CAPACITOR E/ALUMINUM	47uF M 25V 5x11 T	C732
CEET-G100M-C10	CAPACITOR E/ALUMINUM	10uF M 35V 5x11 T	C615
CEET-G100M-C10	CAPACITOR E/ALUMINUM	10uF M 35V 5x11 T	C649
CEET-G100M-C10	CAPACITOR E/ALUMINUM	10uF M 35V 5x11 T	C650
CEET-G100M-C10	CAPACITOR E/ALUMINUM	10uF M 35V 5x11 T	C651
CEET-G100M-C10	CAPACITOR E/ALUMINUM	10uF M 35V 5x11 T	C656
CEET-G100M-C10	CAPACITOR E/ALUMINUM	10uF M 35V 5x11 T	C659
CEET-G100M-C10	CAPACITOR E/ALUMINUM	10uF M 35V 5x11 T	C671
CEET-JR22M-C10	CAPACITOR E/ALUMINUM	0.22uF M 50V 5x11 T	C663
CEET-JR47M-C10	CAPACITOR E/ALUMINUM	0.47uF M 50V 5x11 T	C640
CEET-J1R0M-C10	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T	C626
CEET-J1R0M-C10	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T	C662
CEET-J1R0M-C10	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T	C664
CEET-J1R0M-C10	CAPACITOR E/ALUMINUM	1.0uF M 50V 5x11 T	C715
CEET-J100M-C10	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C705
CEET-J100M-C10	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C737
CEET-J100M-C10	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C738
CEET-J100M-C10	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C739
CEET-J100M-C10	CAPACITOR E/ALUMINUM	10uF M 50V 5x11 T	C740
CEET-J3R3M-C10	CAPACITOR E/ALUMINUM	3.3uF M 50V 5x11 T	C622
CEET-J4R7M-C10	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C618
CEET-J4R7M-C10	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C619
CEET-J4R7M-C10	CAPACITOR E/ALUMINUM	4.7uF M 50V 5x11 T	C658
CEET-J470M-D10	CAPACITOR E/ALUMINUM	47uF M 50V 6.3x11 T	C713
CEGS-B104Z-BK0	CAPACITOR E/DO LAYER	0.1F Z 5.5V EECS5R5V104	C706
CFMT-N153J-EK0	CAPACITOR F/POLYESTR	0.015uF J 100V 7.1x13 T	C745
CFMT-N153J-EK0	CAPACITOR F/POLYESTR	0.015uF J 100V 7.1x13 T	C746
CFMT-N183J-EK0	CAPACITOR F/POLYESTR	0.018uF J 100V 7.3x13 T	C743
CFMT-N183J-EK0	CAPACITOR F/POLYESTR	0.018uF J 100V 7.3x13 T	C744
CFMT-N223J-EK0	CAPACITOR F/POLYESTR	0.022uF J 100V 7.4x13 T	C621
CFMT-N332J-DJ0	CAPACITOR F/POLYESTR	0.0033uF J 100V 5.8x12 T	C623
CFMT-N392J-DJ0	CAPACITOR F/POLYESTR	0.0039uF J 100V 5.8x12 T	C741
CFMT-N392J-DJ0	CAPACITOR F/POLYESTR	0.0039uF J 100V 5.8x12 T	C742
CFMT-N393J-FK0	CAPACITOR F/POLYESTR	0.039uF J 100V 8.5x13 T	C624
CFMT-N823J-IK0	CAPACITOR F/POLYESTR	0.082uF J 100V 10.6x14 T	C747
CFMT-N823J-IK0	CAPACITOR F/POLYESTR	0.082uF J 100V 10.6x14 T	C748
CFST-O471J-CJ0	CAPACITOR F/STYROL	470PF J 125V 5.5x12 T	C614
DDSV-00120-S10	DIODE-VVC	SVC321SPA-C2 AM8V DO40S	VD601
DDSV-00120-S10	DIODE-VVC	SVC321SPA-C2 AM8V DO40S	VD602
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D602
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D701
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D702
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D703
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D704
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D705
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D706
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D707
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D708
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D709
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D710
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D711
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D714
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D715
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D716
DDTS-00070-S00	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D789

Part No.	Description		Ref. No
DDTS-00070-SO0	DIODE-SI	1SS133 (40V 0.11A) DO-40 T	D790
DDTZ-G051B-SOS	DIODE ZENER	MTZJ5.1B 4.94-5.20 DO34 T	ZD601
DDTZ-G051B-SOS	DIODE ZENER	MTZJ5.1B 4.94-5.20 DO34 T	ZD602
DDTZ-G075B-SO0	DIODE ZENER	MTZ7.5B 7.07-7.45 DO40 T	D712
DPFL-00630-00P	DISPLAY-FLUORSCENT	CM1530C	FL701
DPLE-00201-RR0	DISPLAY-LED	SR3511 RED 5mm TAPPING	LD705
DPLE-00201-RR0	DISPLAY-LED	SR3511 RED 5mm TAPPING	LD706
DPLE-00280-RG0	DISPLAY-LED	SAM5270 RED/GRN	LD707
ICCM-00231-SR0	IC 2K CMOS EEPROM	M24C02-BN6 DIP8	IC704
ICHY-00221-U60	IC REMOTE RECEIVER	TSOP1238TB1	IC703
ICLN-03610-S10	IC PLL FM MPX	LA3401 DIP22	IC603
ICLN-03620-S10	IC AM/FM IF	LA1266 DIP24	IC601
ICLN-03630-SR0	IC RDS DEMODULATOR	TDA7479D SOP16	IC604
ICLN-03680-S10	IC PLL	LC7218JM SOP-24	IC602
ICMP-03100-S20	IC MICOM	UPD780204GF-049-3BA QFP100	IC701
ICOP-00210-SD0	IC RESET	KIA7042P/F 4.2V TO-92	IC702
ICOP-03150-SG0	IC OP AMP	NJM2068M SOP8	IC705
IFFA-00110-E20	IFT-FM	AFA011 7mm-CAN	T604
IFFD-00100-E20	IFT-FM DET	AFD010 7mm-CAN	T605
KIAA-00260-E20	COIL-AM IFT	AAA-026 7MC-K502713N4-KR	T603
KIAO-00460-E20	COIL-AM OSC	AAO046 MW 7mm - CAN	T602
KIAT-00530-E20	COIL-AM ANT	AAT053 MW 7mm - CAN	T601
KIFK-00080-E20	COIL-FM CHOKE	AFK016 A187LY-K5006 20.8mH	L602
KIML-A0010-E20	COIL-FM MPX FILTER	AMA001 19KHz 10mm-CAN	T606
KIML-A0010-E20	COIL-FM MPX FILTER	AMA001 19KHz 10mm-CAN	T607
KIOT-4101K-003	COIL-INDUCTOR	100uH K LA 40 T L 02	L603
KNCW-00160-3S9	CONNECTOR-WAFER	53015-0310 2mm-WHT	CN703
KNCW-00160-5S9	CONNECTOR-WAFER	53015-0510 2mm-WHT	CN702
KNCW-00160-5S9	CONNECTOR-WAFER	53015-0510 2mm-WHT	CN704
KNCW-01490-2T9	CONNECTOR-WAFER	JE115-AT-02P	TP601
KNCW-01490-2T9	CONNECTOR-WAFER	JE115-AT-02P	TP602
KNCW-01490-2T9	CONNECTOR-WAFER	JE115-AT-02P	TP603
KNCW-01510-ES9	CONNECTOR-WAFER	35237-1410 2M/M 14P	CH602
KNCW-06380-16S	CONNECTOR-WAFER	GF120-16S-TS 1.25mm S	CN701
KTAL-00041-072	CRYSTAL	HC-49/U 7.200000MHz	X601
KTAL-00321-433	CRYSTAL	HC-49/U 4.332MHz	X602
KTRE-00170-042	RESONATOR	CST4.19MGW 4.19MHz	X701
KTRE-00300-288	RESONATOR	ZTB456F11	CF605
MRAG-13020-004	CUSHION-A	EVA(VE-45),10X25X6T	
NERX-J0078-104	NETWORK-RESISTOR	EXB F9E104J 100Kx8 9P	NR702
NERX-J017D-104	NETWORK-RESISTOR	ANR14X104J 2.54 100K 14P	NR701
PCSR-04810-11B	PCB-SINGLE	A1R-481	PCB1
RCFT-E100J-000	RESISTOR-CARBON FILM	10ohm 1/5W 5% T	R761
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R605
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R633
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R640
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R648
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R672
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R680
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R681
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R762
RCFT-E101J-000	RESISTOR-CARBON FILM	100ohm 1/5W 5% T	R763
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R601
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R625
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R649
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R650
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R651
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R659
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R660
RCFT-E102J-000	RESISTOR-CARBON FILM	1Kohm 1/5W 5% T	R684
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R630
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R638
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R643
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R645
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R647
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R678
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R679
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R755

Part No.	Description		Ref. No
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R756
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R757
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R758
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R759
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R760
RCFT-E103J-000	RESISTOR-CARBON FILM	10Kohm 1/5W 5% T	R769
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R603
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R614
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R618
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R706
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R766
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R773
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R774
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R779
RCFT-E104J-000	RESISTOR-CARBON FILM	100Kohm 1/5W 5% T	R780
RCFT-E105J-000	RESISTOR-CARBON FILM	1Mohm 1/5W 5% T	R767
RCFT-E105J-000	RESISTOR-CARBON FILM	1Mohm 1/5W 5% T	R775
RCFT-E105J-000	RESISTOR-CARBON FILM	1Mohm 1/5W 5% T	R776
RCFT-E122J-000	RESISTOR-CARBON FILM	1.2Kohm 1/5W 5% T	R604
RCFT-E151J-000	RESISTOR-CARBON FILM	150ohm 1/5W 5% T	R685
RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T	R661
RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T	R662
RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T	R791
RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T	R792
RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T	R799
RCFT-E152J-000	RESISTOR-CARBON FILM	1.5Kohm 1/5W 5% T	R800
RCFT-E182J-000	RESISTOR-CARBON FILM	1.8Kohm 1/5W 5% T	R683
RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T	R627
RCFT-E220J-000	RESISTOR-CARBON FILM	22ohm 1/5W 5% T	R636
RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T	R612
RCFT-E221J-000	RESISTOR-CARBON FILM	220ohm 1/5W 5% T	R613
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R631
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R781
RCFT-E222J-000	RESISTOR-CARBON FILM	2.2Kohm 1/5W 5% T	R782
RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T	R674
RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T	R676
RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T	R705
RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T	R746
RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T	R747
RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T	R748
RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T	R770
RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T	R783
RCFT-E223J-000	RESISTOR-CARBON FILM	22Kohm 1/5W 5% T	R784
RCFT-E224J-000	RESISTOR-CARBON FILM	220Kohm 1/5W 5% T	R669
RCFT-E224J-000	RESISTOR-CARBON FILM	220Kohm 1/5W 5% T	R670
RCFT-E243J-000	RESISTOR-CARBON FILM	24Kohm 1/5W 5% T	R602
RCFT-E271J-000	RESISTOR-CARBON FILM	270ohm 1/5W 5% T	R611
RCFT-E271J-000	RESISTOR-CARBON FILM	270ohm 1/5W 5% T	R712
RCFT-E271J-000	RESISTOR-CARBON FILM	270ohm 1/5W 5% T	R713
RCFT-E271J-000	RESISTOR-CARBON FILM	270ohm 1/5W 5% T	R716
RCFT-E271J-000	RESISTOR-CARBON FILM	270ohm 1/5W 5% T	R717
RCFT-E272J-000	RESISTOR-CARBON FILM	2.7Kohm 1/5W 5% T	R632
RCFT-E272J-000	RESISTOR-CARBON FILM	2.7Kohm 1/5W 5% T	R663
RCFT-E272J-000	RESISTOR-CARBON FILM	2.7Kohm 1/5W 5% T	R664
RCFT-E274J-000	RESISTOR-CARBON FILM	270Kohm 1/5W 5% T	R667
RCFT-E274J-000	RESISTOR-CARBON FILM	270Kohm 1/5W 5% T	R668
RCFT-E331J-000	RESISTOR-CARBON FILM	330ohm 1/5W 5% T	R608
RCFT-E331J-000	RESISTOR-CARBON FILM	330ohm 1/5W 5% T	R609
RCFT-E331J-000	RESISTOR-CARBON FILM	330ohm 1/5W 5% T	R719
RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T	R273
RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T	R606
RCFT-E332J-000	RESISTOR-CARBON FILM	3.3Kohm 1/5W 5% T	R642
RCFT-E333J-000	RESISTOR-CARBON FILM	33Kohm 1/5W 5% T	R764
RCFT-E391J-000	RESISTOR-CARBON FILM	390ohm 1/5W 5% T	R637
RCFT-E392J-000	RESISTOR-CARBON FILM	3.9Kohm 1/5W 5% T	R787
RCFT-E392J-000	RESISTOR-CARBON FILM	3.9Kohm 1/5W 5% T	R788
RCFT-E4R7J-000	RESISTOR-CARBON FILM	4.7ohm 1/5W 5% T	R610
RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	R646

Part No.	Description		Ref. No
RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	R771
RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	R772
RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	R777
RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	R778
RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	R796
RCFT-E471J-000	RESISTOR-CARBON FILM	470ohm 1/5W 5% T	R797
RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T	R621
RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T	R626
RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T	R628
RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T	R629
RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T	R634
RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T	R701
RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T	R702
RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T	R703
RCFT-E472J-000	RESISTOR-CARBON FILM	4.7Kohm 1/5W 5% T	R704
RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T	R624
RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T	R641
RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T	R671
RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T	R675
RCFT-E473J-000	RESISTOR-CARBON FILM	47Kohm 1/5W 5% T	R739
RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T	R607
RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T	R765
RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T	R785
RCFT-E561J-000	RESISTOR-CARBON FILM	560ohm 1/5W 5% T	R786
RCFT-E622J-000	RESISTOR-CARBON FILM	6.2Kohm 1/5W 5% T	R665
RCFT-E622J-000	RESISTOR-CARBON FILM	6.2Kohm 1/5W 5% T	R666
RCFT-E681J-000	RESISTOR-CARBON FILM	680ohm 1/5W 5% T	R677
RCFT-E683J-000	RESISTOR-CARBON FILM	68Kohm 1/5W 5% T	R622
RCFT-E750J-000	RESISTOR-CARBON FILM	75ohm 1/5W 5% T	R798
RCFT-E823J-000	RESISTOR-CARBON FILM	82Kohm 1/5W 5% T	R635
RCFT-F223J-010	RESISTOR-CARBON FILM	22Kohm 1/4W 5% T	R751
RCFT-F223J-010	RESISTOR-CARBON FILM	22Kohm 1/4W 5% T	R752
RCFT-F223J-010	RESISTOR-CARBON FILM	22Kohm 1/4W 5% T	R753
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R720
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R721
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R722
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R723
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R725
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R726
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R727
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R728
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R729
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R730
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R731
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R732
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R733
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R734
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R735
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R736
RCFT-F272J-010	RESISTOR-CARBON FILM	2.7Kohm 1/4W 5% T	R737
RMOH-J221J-040	RESISTOR-METAL OXIDE	220ohm 2W 5% H	R789
RMOH-J221J-040	RESISTOR-METAL OXIDE	220ohm 2W 5% H	R790
SKPH-00332-66W	PHONE JACK	HTJ-064-11	JK702
SKRC-00380-031	SOCKET-RCA	JK0300081G	JK701
SWPU-00602-060	SWITCH-PUSH	SPUN24X1H DC25V 1A	SW766
SWRT-00200-020	ENCODER VOLUME	EC16B243040H	SW750
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW703
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW704
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW705
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW706
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW707
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW708
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW709
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW710
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW711
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW712
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW713
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW714

Part No.	Description		Ref. No
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW715
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW716
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW717
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW718
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW719
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW720
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW721
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW722
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW723
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW724
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW725
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW726
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW727
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW728
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW729
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW730
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW731
SWTA-00220-060	SWITCH-TACT	SKHV10910(A) 12V 50mA	SW732
TEAT-00160-02S	TERMINAL ANTENNA	SC0210392N	ANT601
TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M	Q605
TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M	Q606
TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M	Q607
TRTA-00940-SD0	TRANSISTOR P-H FREQ	KRA107M W/RESIST TO92M	Q608
TRTC-0010Y-SD0	TRANSISTOR N-H FREQ	KTC3194-Y TO92	Q601
TRTC-0016G-SD0	TRANSISTOR N-H FREQ	KTC3198-GR TO92	Q603
TRTC-0016G-SD0	TRANSISTOR N-H FREQ	KTC3198-GR TO92	Q611
TRTC-0016G-SD0	TRANSISTOR N-H FREQ	KTC3198-GR TO92	Q612
TRTC-0016G-SD0	TRANSISTOR N-H FREQ	KTC3198-GR TO92	Q710
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q704
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q705
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q706
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q707
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q708
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q711
TRTC-01700-SD0	TRANSISTOR N-H FREQ	KRC107M W/RESIST TO92M	Q712
TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92	Q609
TRTD-00200-SD0	TRANSISTOR N-L FREQ	KTD-1302 TO92	Q610
TUFF-00201-00K	FM/ F/E TUNER	FTA4-460H	FE601
UM08-50860-000	WIRE-ASS'Y	1007#26,2547#28 BR,BK 460	CW706
UM08-80850-000	WIRE-ASS'Y	2547#28x2,1007#26 400 GRY	CW705
U1T1-01520-Z10	WIRE-ASS'Y	1007#22 BLK-200 3.2pi	CH702
U1T1-01520-Z10	WIRE-ASS'Y	1007#22 BLK-200 3.2pi	CH703
U1T1-01520-Z10	WIRE-ASS'Y	1007#22 BLK-200 3.2pi	CH705
U308-8S810-250	WIRE-ASS'Y	2547#28 GRY-100 10P	CW702
U508-4M710-250	WIRE-ASS'Y	1007#26 YEL-100 5P	CW704
U508-4M714-250	WIRE-ASS'Y	1007#26 YEL-140 5P	CW702
U510-4M432-200	WIRE-ASS'Y	UL1007#20 YEL-320 5P	CN709
U610-5M458-200	WIRE-ASS'Y	UL1007#20 GRN-580 6P	CN708
U810-7M744-200	WIRE-ASS'Y	UL1007#26 VIT-440 8P	CW701
VCTC-00022-200	TRIMMER	CVCN06C200	CT601
VFEB-A021B-224	RESISTOR-SEMI FIXED	RH0638C-220KB 220Kohm	VR603
VFEB-A021B-472	RESISTOR-SEMI FIXED	RH0638C-4.7KB 4.7Kohm	VR601
VFEB-A021B-473	RESISTOR-SEMI FIXED	RH0638C-47KB 47Kohm	VR602
VRAE-P049W-104	VR-ROTARY	RK11K1160106-100KW	VR703
VRAE-P050C-104	VR-ROTARY	RK14K1260106-100KCx2	VR701
VRAE-P050C-104	VR-ROTARY	RK14K1260106-100KCx2	VR702