


The DC voltage is an actual reading measured with a high impedance type voltmeter with a cassette loaded at playback mode. The measurement value may vary depending on the measuring instruments used or on the product. Bias circuit DC voltage is measured while in the record mode.

DOLBY and the double-D symbol are trademarks of Dolby Laboratories Licensing Corporation. Noise reduction circuit made under license from Dolby Laboratories Licensing Corporation.

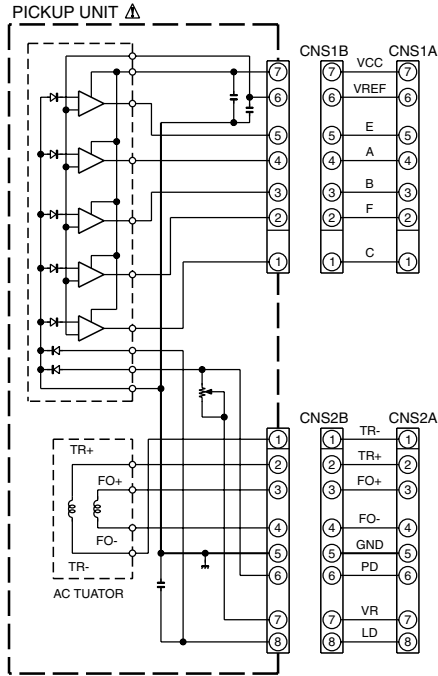



CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ indicates safety critical components. For continued protection against risk of fire, replace only with same type and rating fuse(s). To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.


The DC voltage is an actual reading measured with a high impedance type voltmeter. The measurement value may vary depending on the measuring instruments used or on the product. Refer to the voltage during PLAY unless otherwise specified; The value shown in () is the voltage measured at the moment of STOP.


The DC voltage is an actual reading measured with a high impedance type voltmeter as the AM/FM signal generator is specified to the conditions as shown in the list below. The measurement value may vary depending on the measuring instruments used or on the product. The value shown in () is actual reading measured in the AM mode.

MODE	CARRIER	MODULATION		ANT INPUT
		FREQUENCY	DEVIATION	
FM	98MHz	1kHz	STEREO 67.5kHz 7.5kHz(Pilot)	60dB
AM	1000(999)kHz	400Hz	MONO 30% MOD	60dB

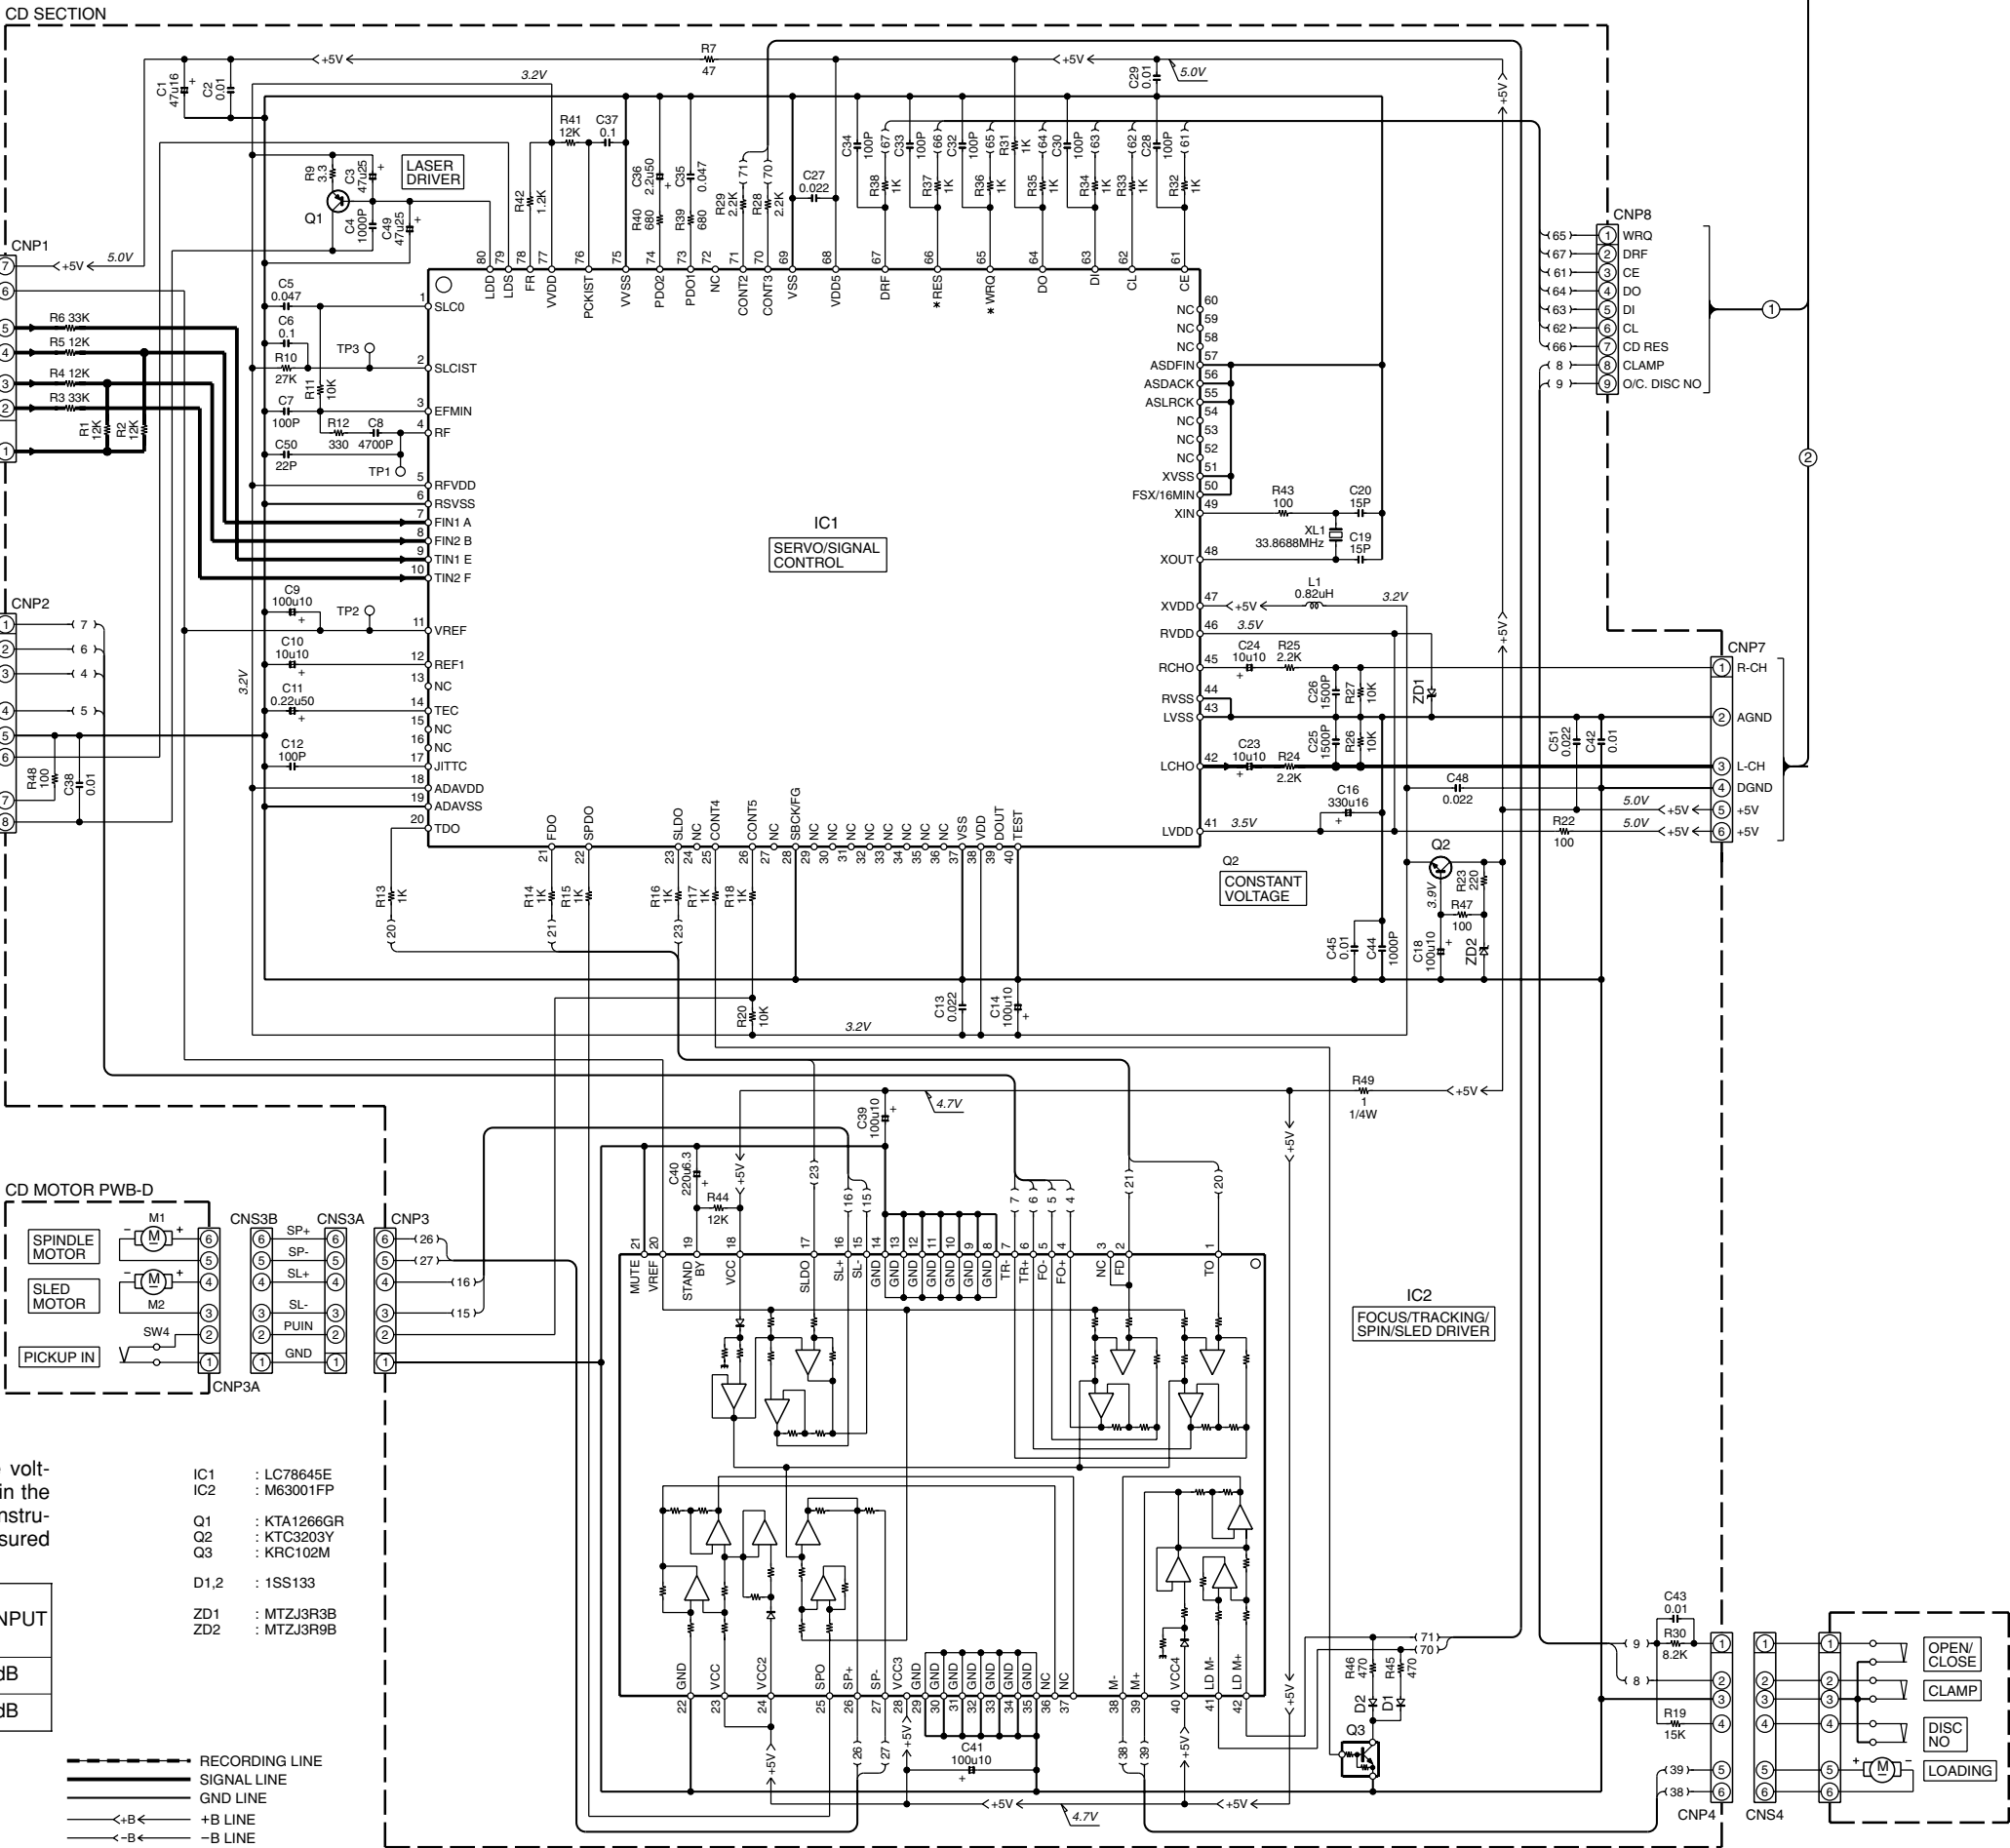


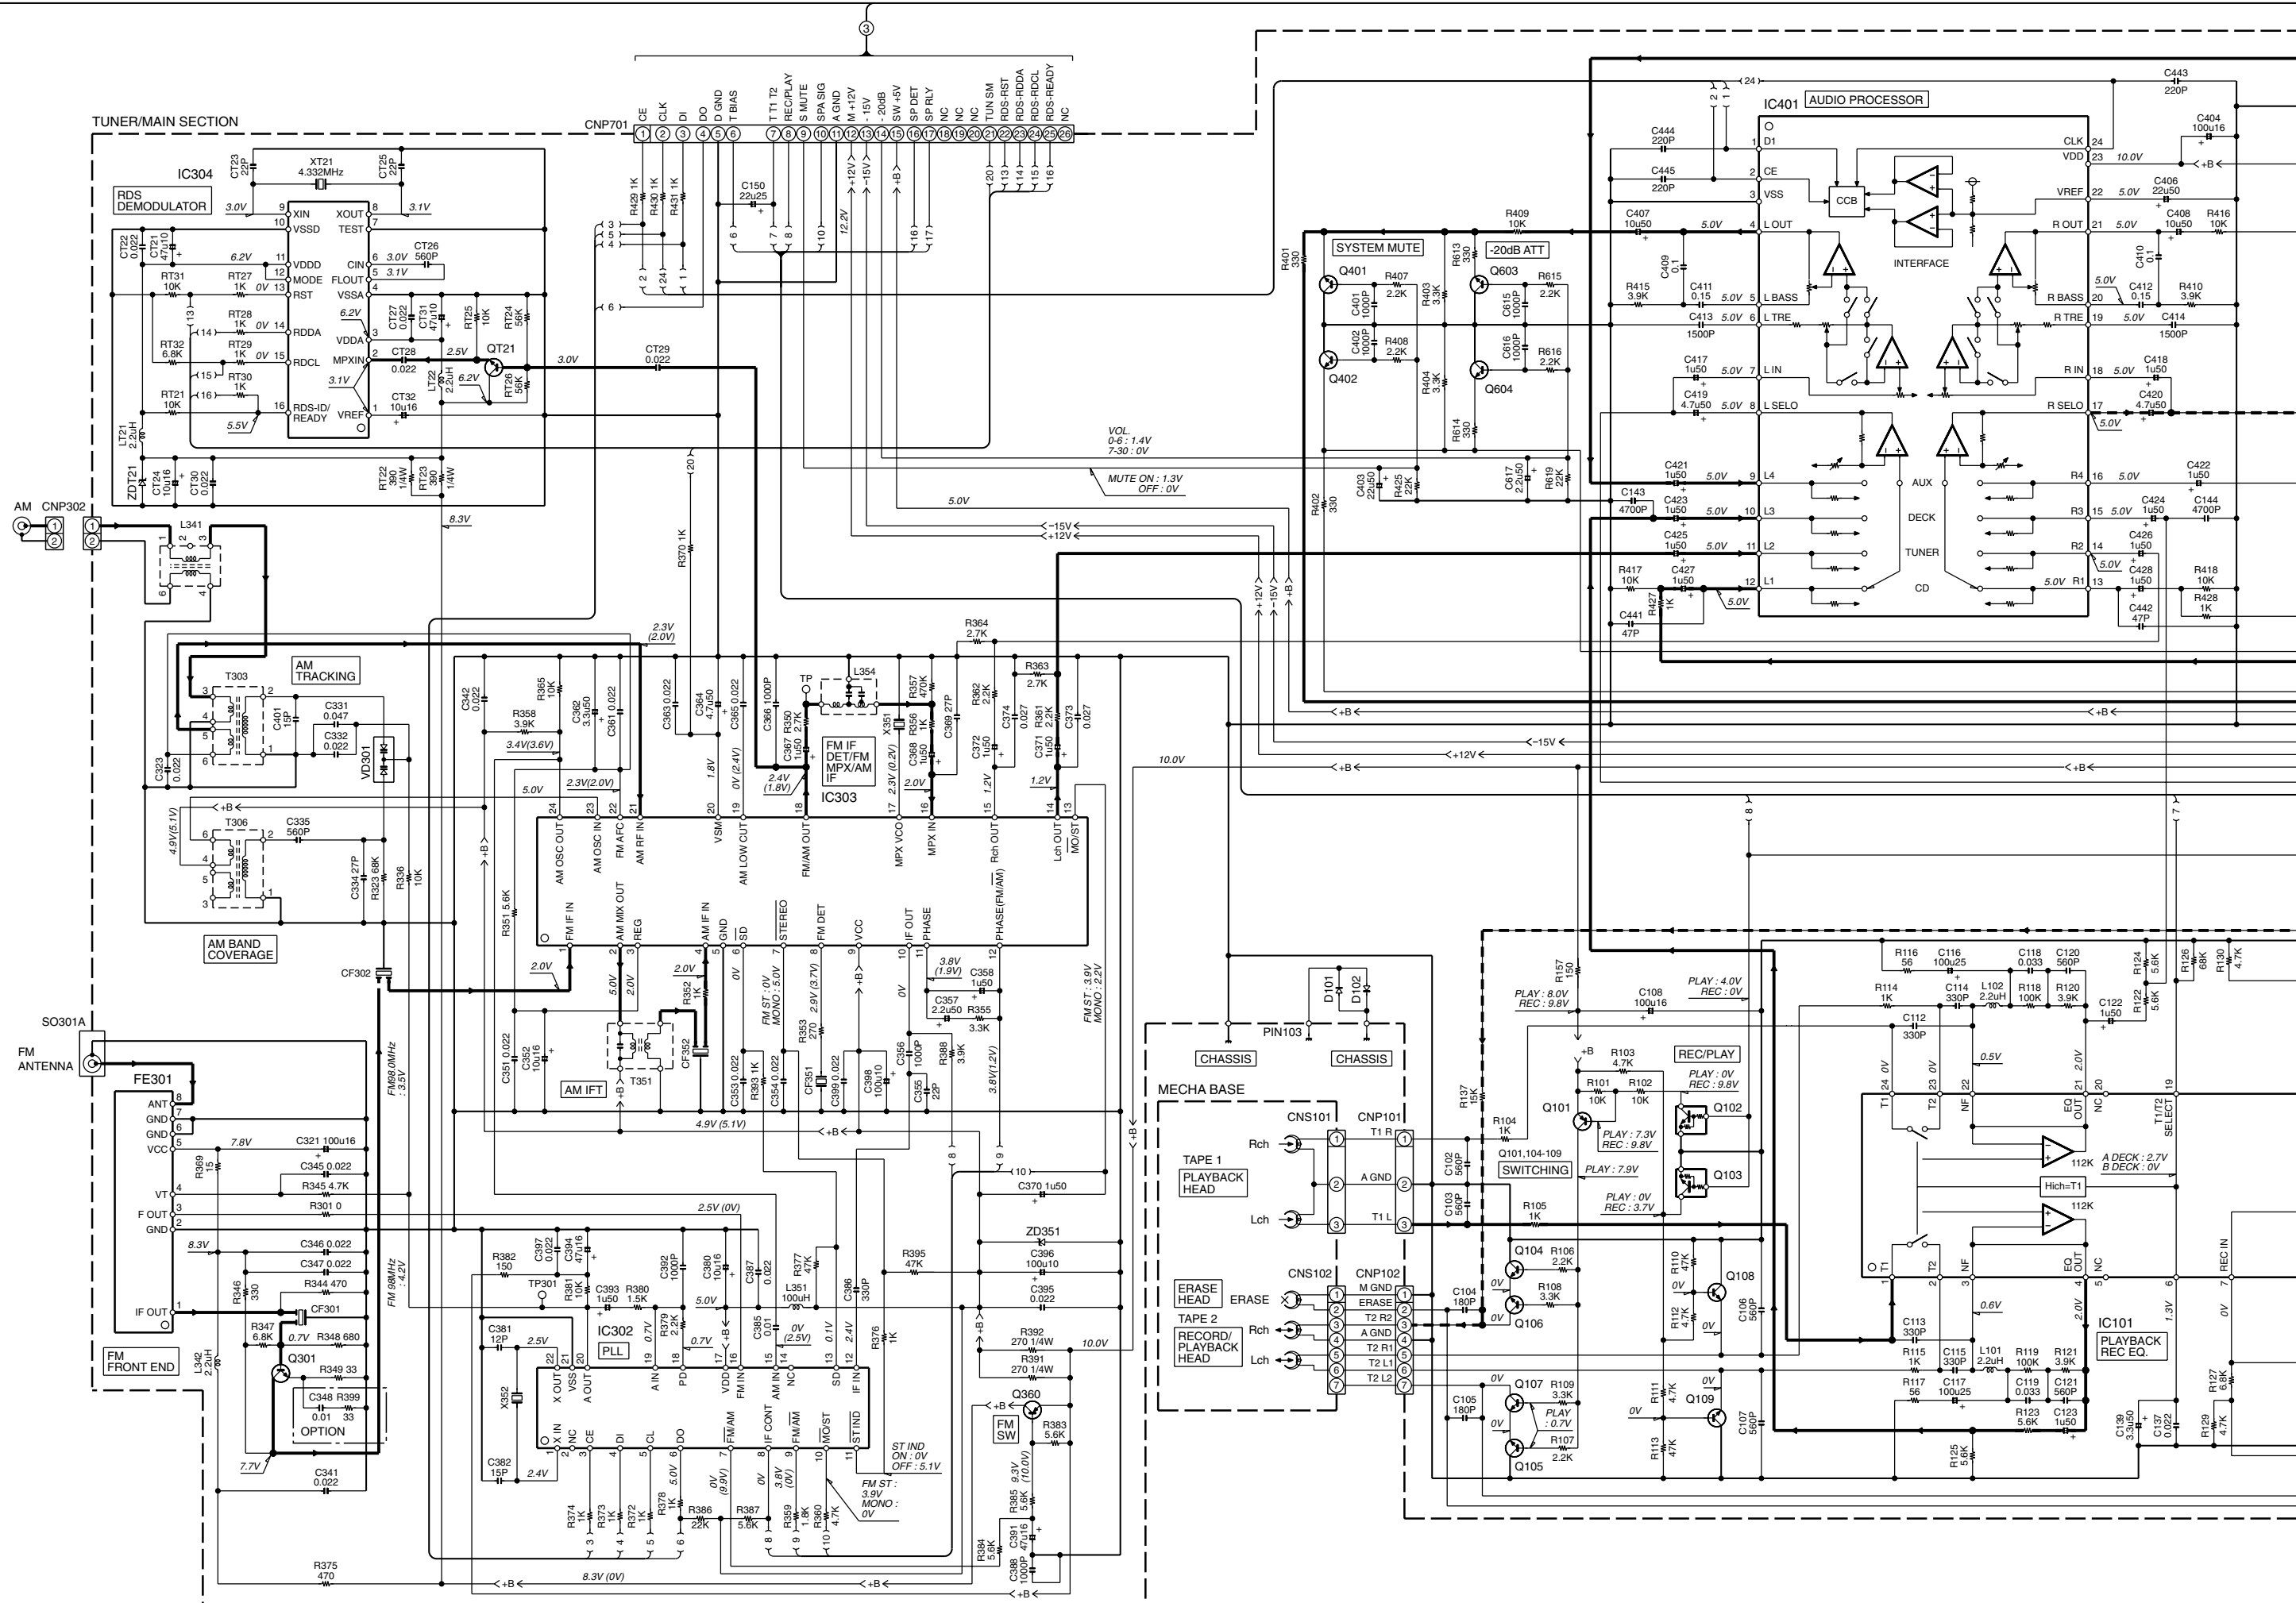

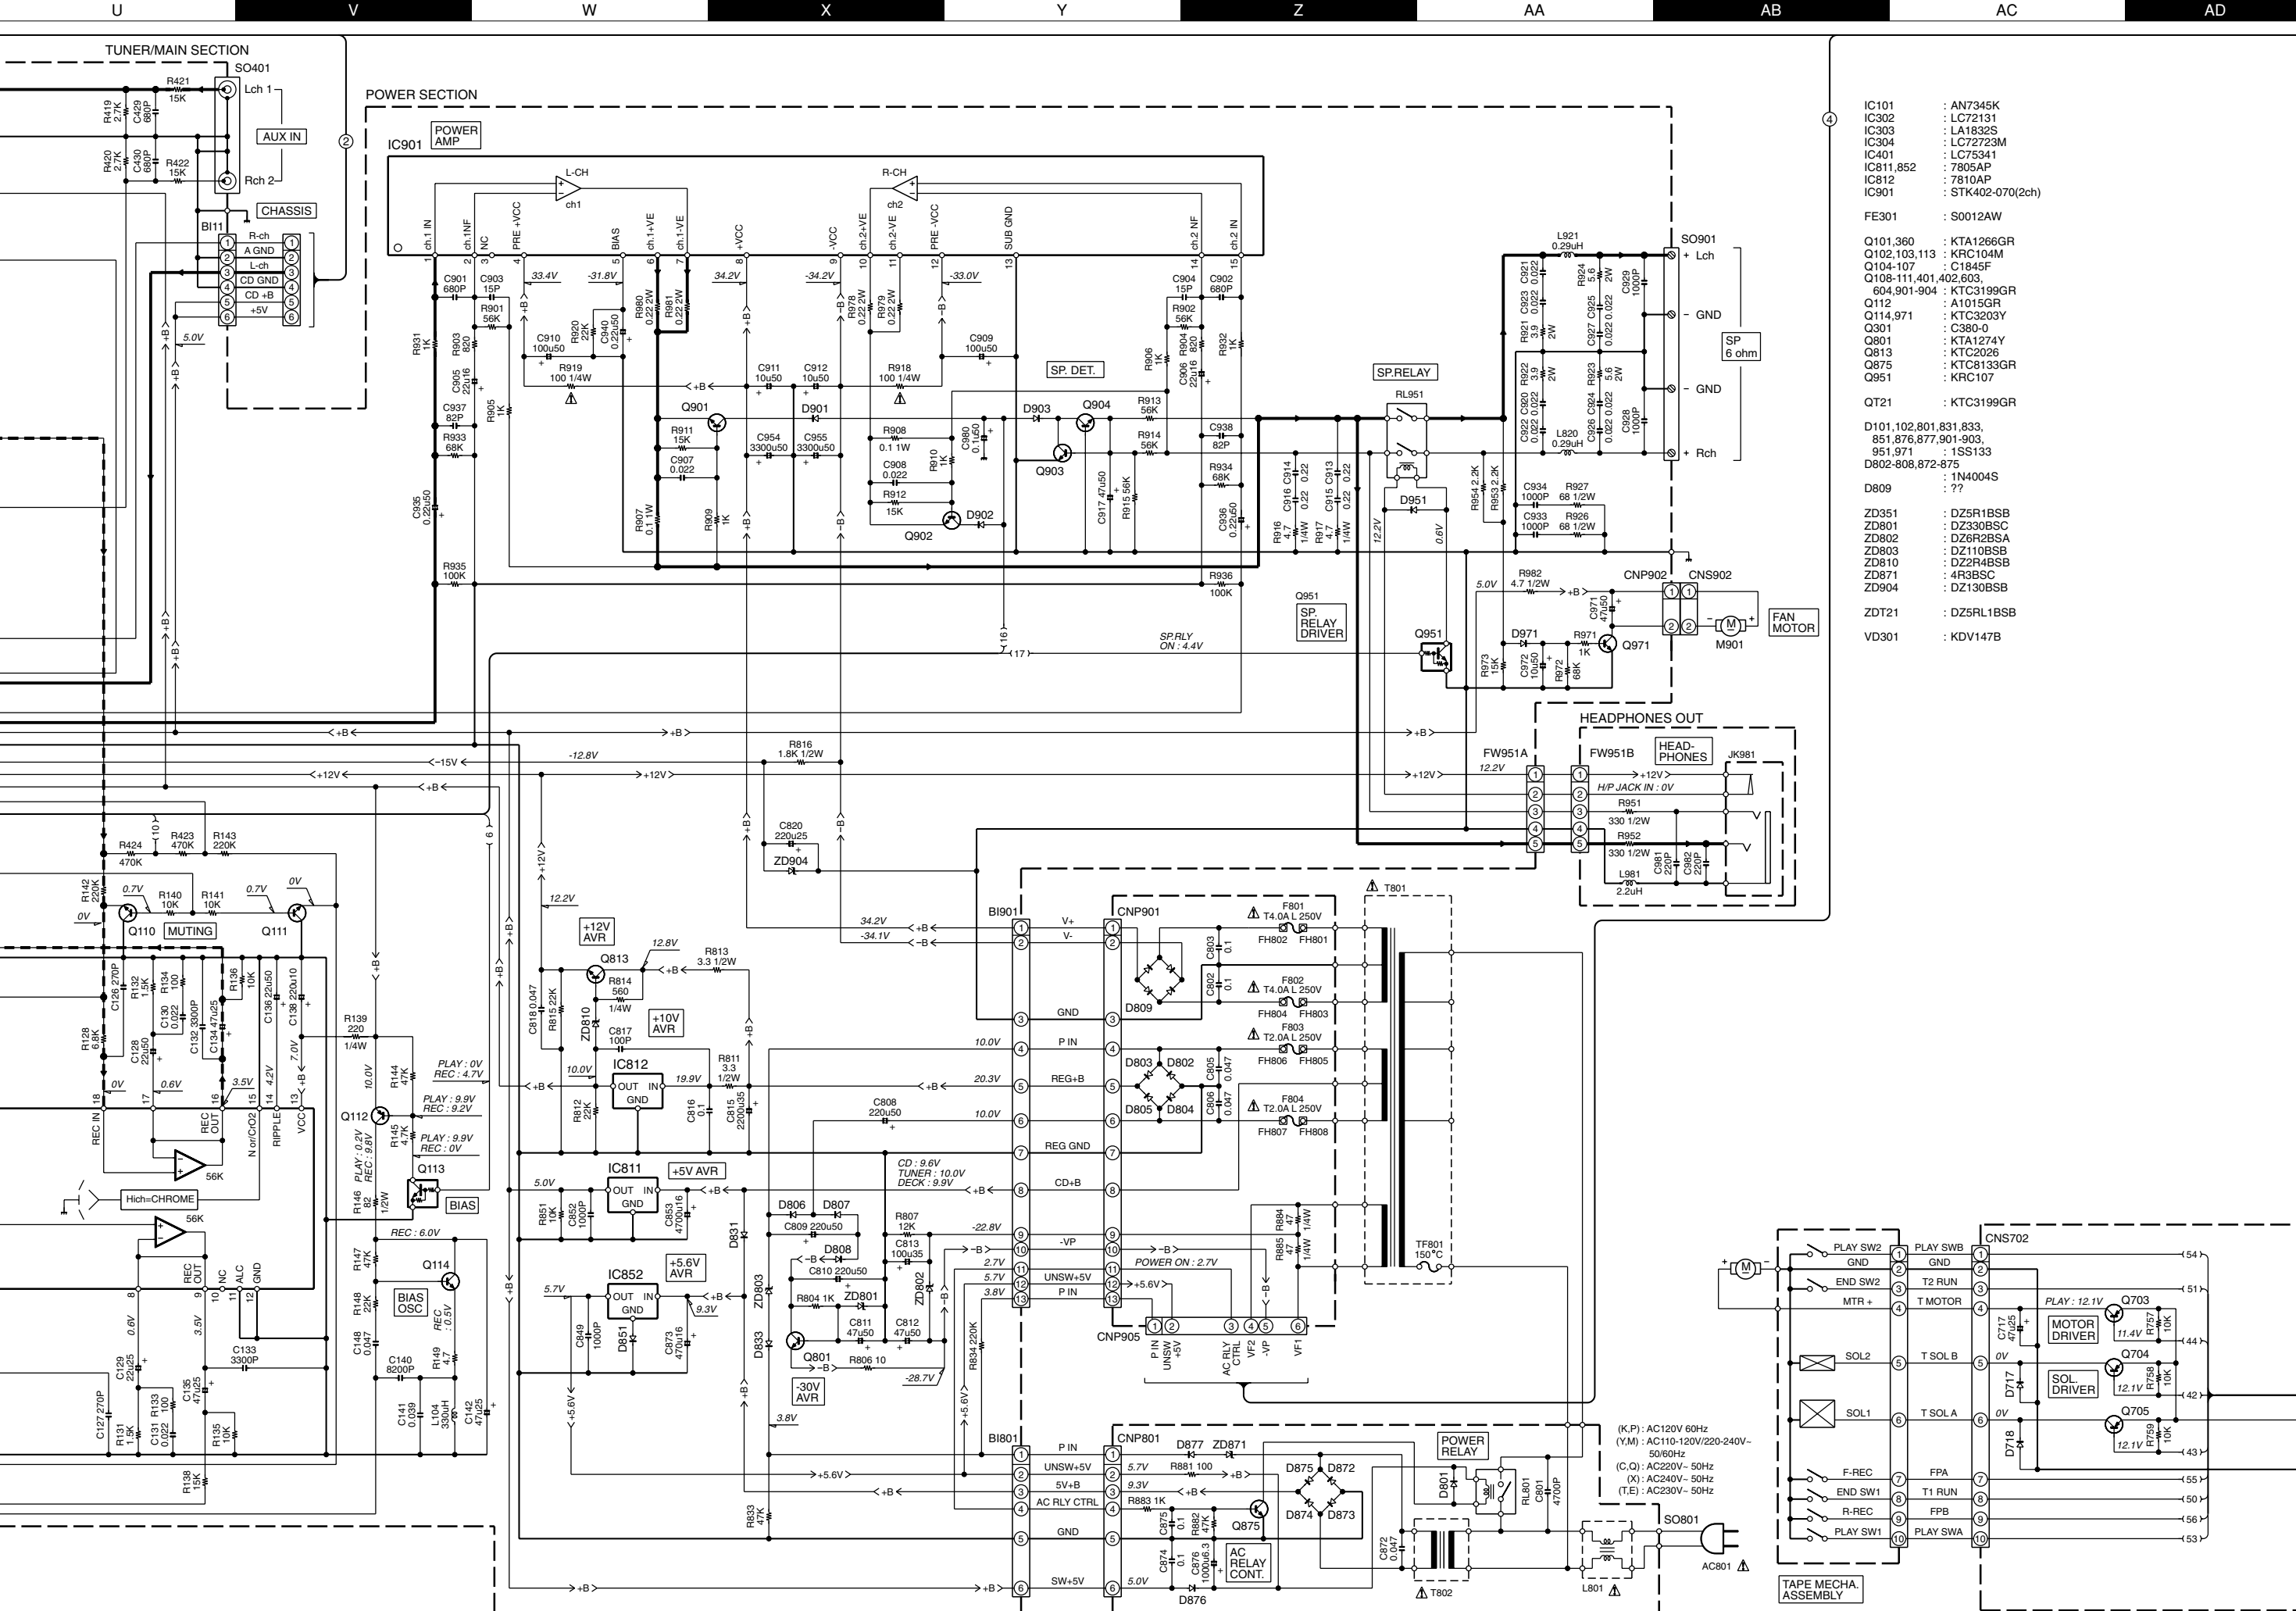

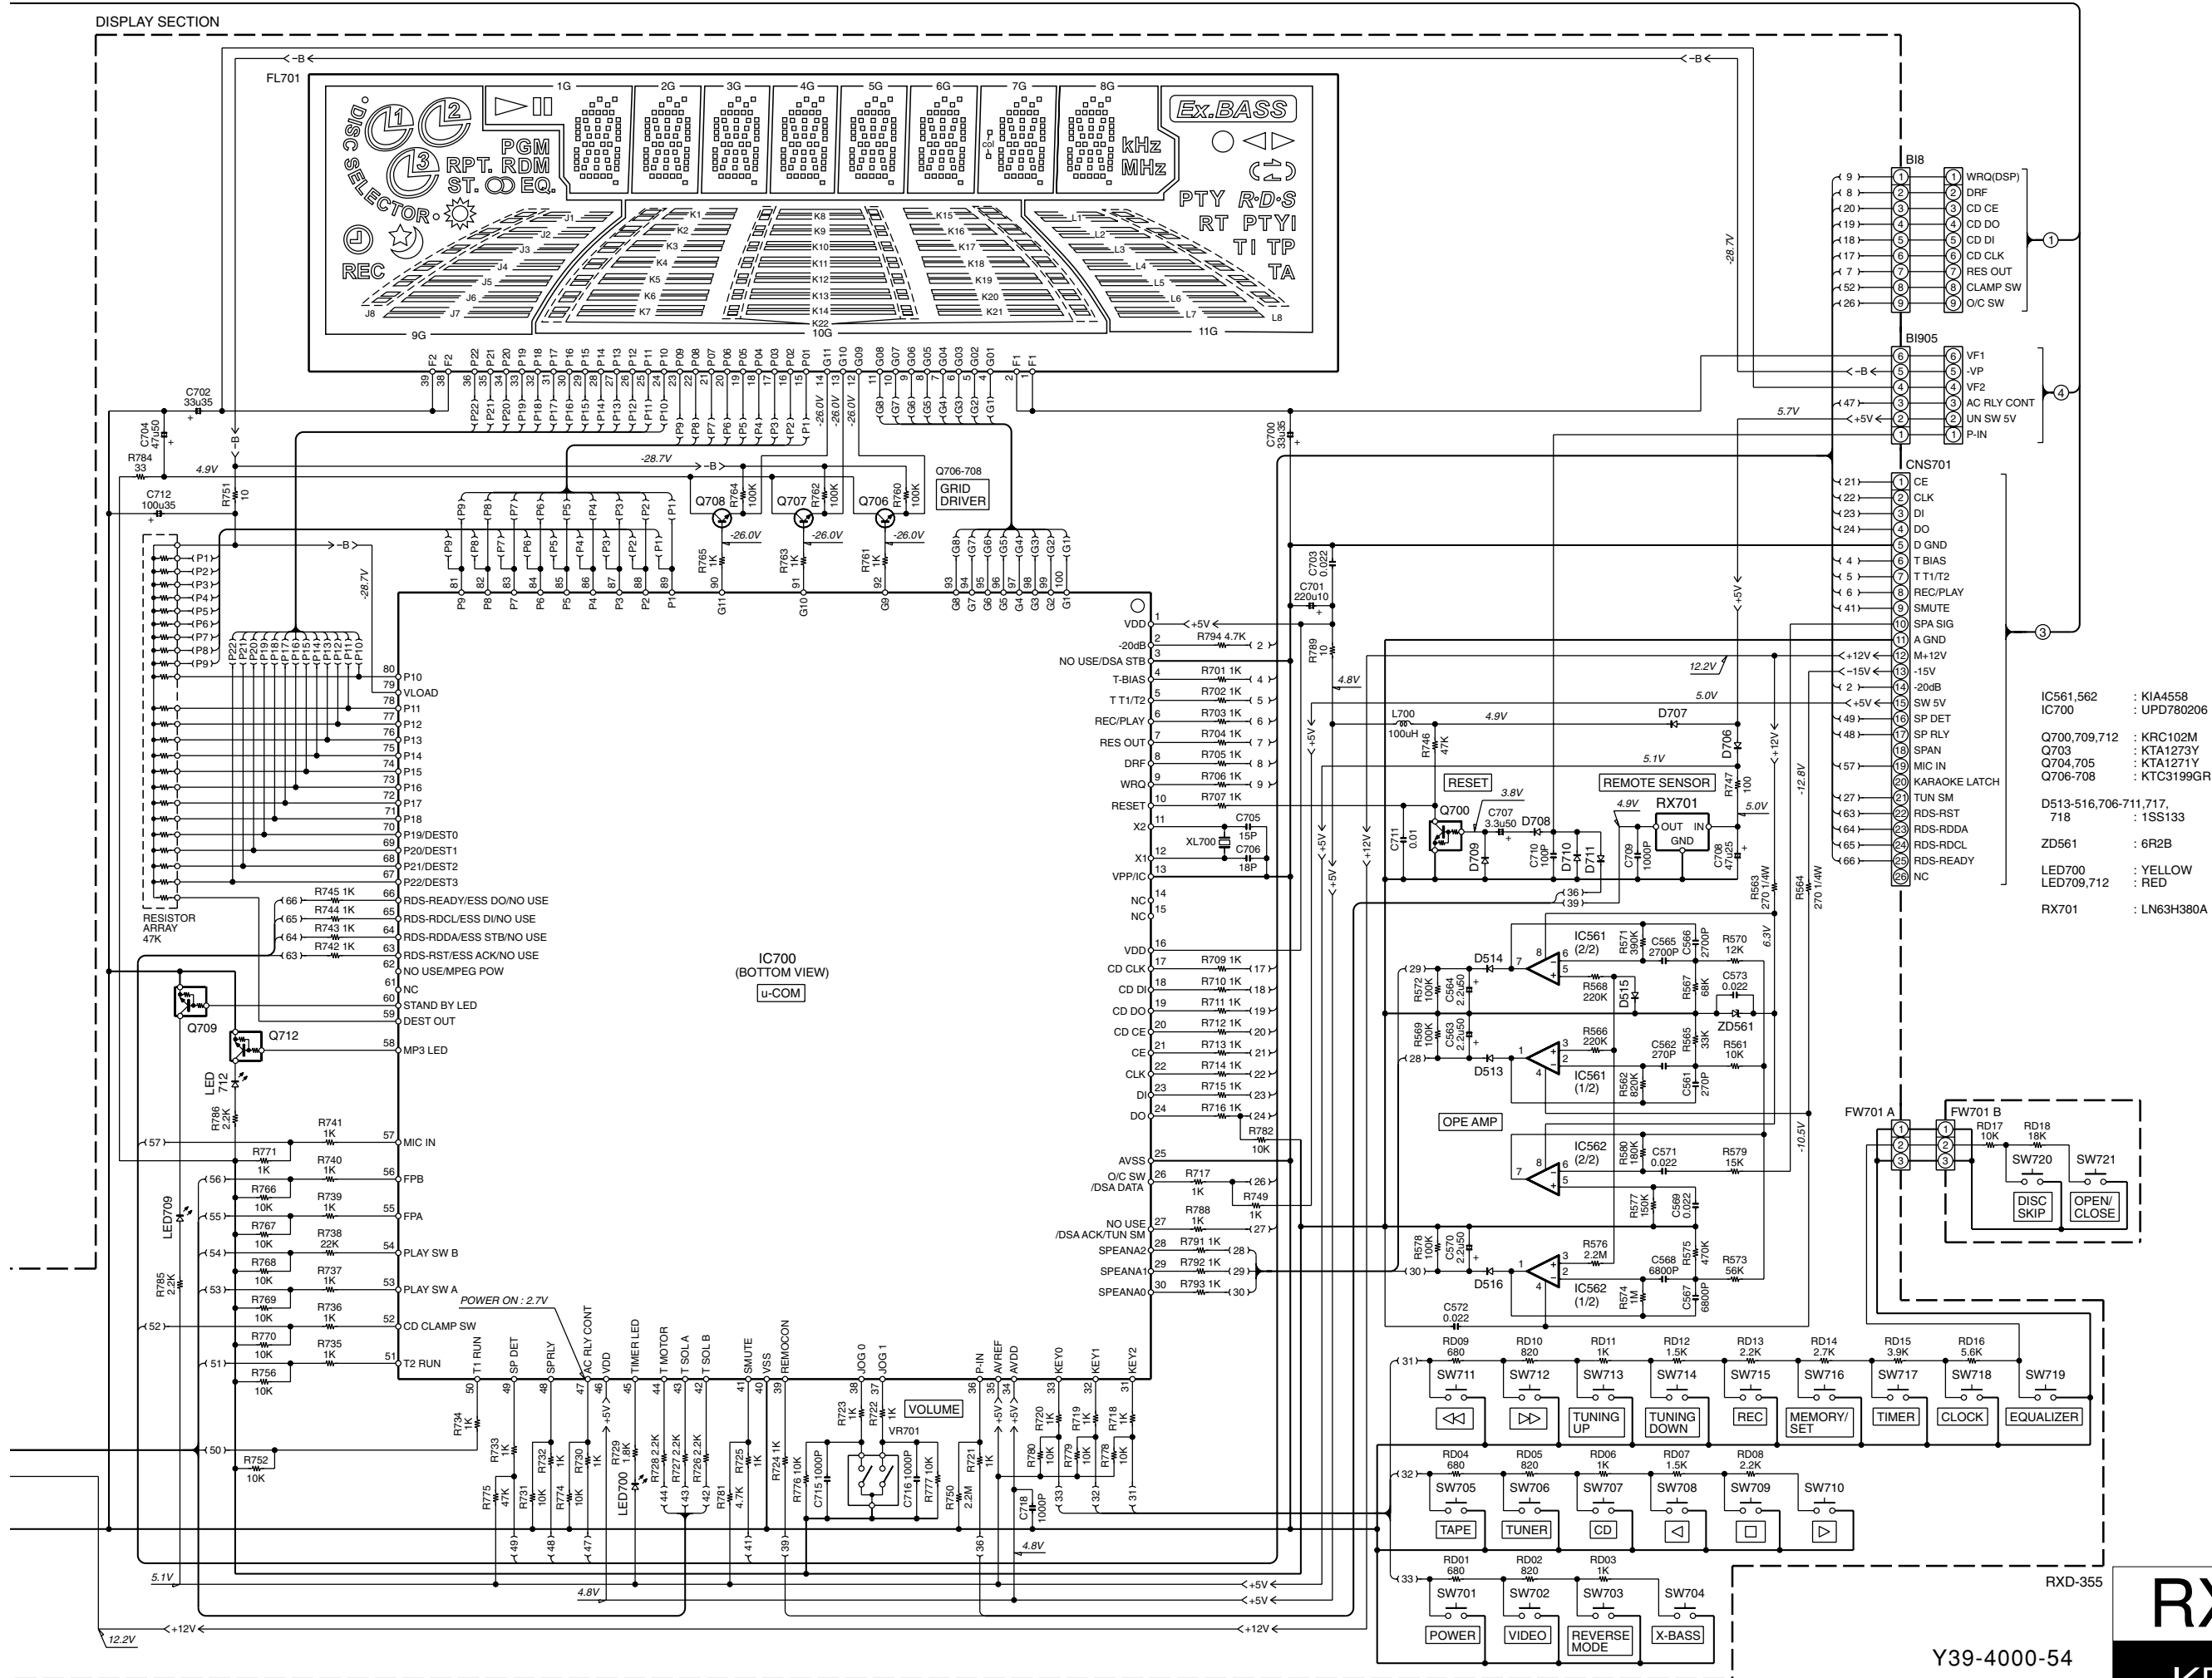

RXD-355



* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

①

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
RXD-355						
601	1C	*	A02-3014-08	CABINET(TOP)	GCAB-1195AWSA	
602	1C	*	A02-3015-08	CABINET(R)	GITAS0092AWSA	
603	1C	*	A02-3016-08	CABINET(L)	GITAS0075AWSA	
607	2C	*	A21-3966-08	DRESS RING(KNOB)	HDECQ0703AWSB	
608	2C	*	A21-3958-08	CASSETTE LID(L)	GCOVA1365AWSA	
609	2C	*	A21-3959-08	CASSETTE LID(R)	GCOVA1366AWSA	
610	2C	*	A53-2251-08	CASS HOLDER(L)	GDORF0104AWSA	
611	2C	*	A53-2252-08	CASS HOLDER(R)	GDORF0105AWSA	
612	2C	*	A53-2254-08	FG(CAS L)	HDECQ0700AWSA	EE2TMX
612	2C	*	A53-2282-08	FG(CAS L)	HDECQ0700AWSB	E1E3
612	2C	*	A53-2282-08	FG(CAS L)	HDECQ0700AWSB	M1X1Y1
613	2C	*	A53-2255-08	FG(CAS R)	HDECQ0701AWSA	EE2MXT
613	2C	*	A53-2283-08	FG(CAS R)	HDECQ0701AWSB	E1E3
613	2C	*	A53-2283-08	FG(CAS R)	HDECQ0701AWSB	M1X1Y1
614	2C	*	A60-2090-08	PANEL(CD)	GCOVA1376AWSA	
615	2D	*	A60-0000-08	PANEL ASSY	CAB3584AASY2	MX
615	2D	*	A60-0000-08	PANEL ASSY	CAB3595AASY2	E1E3
615	2D	*	A60-0000-08	PANEL ASSY	CAB3596AASY2	M1X1Y1
615	2D	*	A60-2124-08	PANEL ASSY	CAB3583AASY2	EE2T
616	1C	*	A70-1531-08	REMOTE CONTROL	RRMCG0273AWSA	MM1XX1
616	1C	*	A70-1537-08	REMOTE CONTROL	RRMCG0274AWSA	EE1E2
616	1C	*	A70-1537-08	REMOTE CONTROL	RRMCG0274AWSA	E3T
620	2C	-	-	FL PANEL	HDECQ0740AWSA	E3T
620	2C	-	-	FL PANEL	HDECQ0764AWSB	MM1XX1
620	2C	-	-	FL PANEL	HDECQ0764AWSB	Y1
620	2C		B10-3750-08	FL PANEL	HDECQ0740AWSA	EE1E2
-		*	B60-5009-08	INST MANUAL(5)	TINSZ0670AWZZ	EE3T
-		*	B60-5010-08	INST MANUAL(EN)	TINSE0370AWZZ	EE2E3T
-		*	B60-5011-08	INST MANUAL(4)	TINSZ0671AWZZ	E2E3
-		*	B60-5048-08	INST MANUAL(EN)	TINSE0372AWZZ	MM1XX1
-		*	B60-5048-08	INST MANUAL(EN)	TINSE0372AWZZ	Y1
-		*	B60-5049-08	INST MANUAL(A/T)	INSZ0688AWZZ	MM1XX1
-		*	B60-5049-08	INST MANUAL(A/T)	NSZ0688AWZZ	Y1
624	2C		D39-0355-08	DAMPER	MLIFP0008AWZZ	
BM	2D		D16-0780-08	MAIN BELT	FF19N-11	
BS1	2D		D16-0782-08	SUB BELT	FF19S-51	
BS2	2D		D16-0781-08	SUB BELT	FF19S-12	
PF	2D		D14-0821-08	PINCH ASSY	F514-134	
PR1	2D		D14-0822-08	PINCH ASSY	F514-135	
PR2	2D		D14-0820-08	PINCH ASSY	F514-133	
RPEH	2D		T39-0046-08	ROTATION HEAD	F513-853	
627	2C		E03-0115-05	AC PLUG	QPLGA0004AWZZ	
628	1E		E30-2881-08	AC POWER CORD	QACCE0008AW00	
629	2D		E35-2991-08	FFC WIRE10P	QCNWN1913AWZZ	
630	1E,2D		E35-3070-08	FFC WIRE26P	QCNWN1915AWZZ	
635	1E		F09-0163-08	FAN	NFANP0001AWZZ	
639	2D		G01-4280-08	SPRING	MSPRD0109AWFJ	
640	2E		G01-4281-08	SPRING	MSPRD0110AWFJ	
641	2C		G01-4293-08	SPRING	MSPRD0151AWFJ	
642	2C		G01-4294-08	SPRING	MSPRD0152AWFJ	
643	2C,2D		G13-2514-08	CUSHION(FOOT)	PCUSG0022AWZZ	

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

②

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
-			H10-7771-08	POLY FOAM FIXTU	SPAKA0307AWZZ	
-			H10-7772-08	P-ADD(TOP)	SPAKA0107AWZZ	
-			H10-7773-08	P-ADD(BTM)	SPAKA0108AWZZ	
-			H25-1706-08	BAG(UNIT)	SSAKH0061AWZZ	
-			H25-1707-08	BAG CAUTION	CAUT1513A	
-		*	H25-1708-08	BAG(ACCES))	SSAKA0007AWZZ	
-		*	H50-0000-08	ITEM CARTON	SPAKC1202AWZZ	MX
-		*	H50-0000-08	ITEM CARTON	SPAKC1208AWZZ	M1X1Y1
-		*	H50-0000-08	ITEM CARTON	SPAKC1231AWZZ	MX
-		*	H50-0000-08	ITEM CARTON	SPAKC1234AWZZ	M1X1Y1
-		*	H50-4218-08	ITEM CARTON	SPAKC0378AWZZ	
-		*	H50-4227-08	ITEM CARTON	SPAKC1200AWZZ	ET
-		*	H50-4228-08	ITEM CARTON	SPAKC1278AWZZ	ET
-		*	H50-4238-08	ITEM CARTON	SPAKC1201AWZZ	E2
-		*	H50-4239-08	ITEM CARTON	SPAKC1206AWZZ	E1
-		*	H50-4240-08	ITEM CARTON	SPAKC1207AWZZ	E3
655	2E		J42-0338-08	POWER CORD BUSH	LBSHC0002AWZZ	
656	1E		J69-0223-08	RING(FAN)	CSPR1431C	
660	2C		K29-8047-08	KNOB (VOLUME)	JKNBZ0794AWSB	
A			N09-5330-08	MACHINE SCREW	XEBSD30P12000	
B			N09-5331-08	MACHINE SCREW	XJBSD30P10000	
C			N09-5334-08	MACHINE SCREW	LX-BZ2222AXZZ	
D			N09-5335-08	MACHINE SCREW	LX-HZ0009AWFD	
E			N09-5338-08	MACHINE SCREW	XESSD30P10000	
F			N09-5343-08	MACHINE SCREW	XBPSD20P08000	
G			N09-5346-08	MACHINE SCREW	XBBSD20P04000	
H			N09-5347-08	MACHINE SCREW	XJBSD30P14000	
J			N09-5348-08	MACHINE SCREW	XHBSD40P08000	
K			N09-5349-08	MACHINE SCREW	XEBSD30P08000	
L			N09-5222-08	MACHINE SCREW	LX-JZ0010AFFD	
M			N09-5337-08	MACHINE SCREW	XJSSD30P10000	
P			N09-5336-08	MACHINE SCREW	XHBSD26P04000	
674	1E		T41-0142-08	MOTOR(FAN)	RMOTV0027AWZZ	
675	2C		T90-0879-08	LOOP ANTENNA	QANTL0008AWZZ	
676	2C		T90-0883-08	FM LEAD ANTENNA	FANT1535A	
681	2D		W04-0019-08	MECHANISM(CAS)	KMECB0020AWZZ	
FL701			NA11MM36	FL TUBE	VVKNA11MM36-1	
LED700			B30-2613-08	LED(YELLOW)	VHP3105UYT1-1T	
LED712			B30-2614-08	LED	VHP31URT21+-1+	
C1			CE04KW1C470M	ELECTRO	47UF	16WV
C2			CK73FB1C103K	CHIP C	0.010UF	K
C3			CE04KW1E470M	ELECTRO	47UF	25WV
C4			CK73EB1H102K	CHIP C	1000PF	K
C5			CQ93FMG1H473J	MYLAR	0.047UF	J
C6			CK45FB1C104K	CERAMIC	0.10UF	K
C7			CC45FSL1H101J	CERAMIC	100PF	J
C8			CK73EB1H472K	CHIP C	4700PF	K
C9			CE04KW1A101M	ELECTRO	100UF	10WV
C10			CE04KW1A100M	ELECTRO	10UF	10WV
C11			CE04KW1HR22M	ELECTRO	0.22UF	50WV

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

PARTS LIST

RXD-355

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.



Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C12			CC45FSL1H101J	CERAMIC	100PF	J
C13			CK73EB1E223K	CHIP C	0.022UF	K
C14			CE04KW1A101M	ELECTRO	100UF	10WV
C16			CE04KW1C331M	ELECTRO	330UF	16WV
C18			CE04KW1A101M	ELECTRO	100UF	10WV
C19, 20			CC73ECH1H150J	CHIP C	15PF	J
C23, 24			CE04KW1A100M	ELECTRO	10UF	10WV
C25, 26			CK73EB1H152K	CHIP C	1500PF	K
C27			CK73EB1E223K	CHIP C	0.022UF	K
C28			CC73ECH1H101J	CHIP C	100PF	J
C29			CK73FB1C103K	CHIP C	0.010UF	K
C30			CC73ECH1H101J	CHIP C	100PF	J
C32 - 34			CC73ECH1H101J	CHIP C	100PF	J
C35			CQ93FMG1H473J	MYLAR	0.047UF	J
C36			CE04KW1H2R2M	ELECTRO	2.2UF	50WV
C37			CK45FB1C104K	CERAMIC	0.10UF	K
C38			CK73FB1C103K	CHIP C	0.010UF	K
C39			CE04KW1A101M	ELECTRO	100UF	10WV
C40			CE04KW0J221M	ELECTRO	220UF	6.3WV
C41			CE04KW1A101M	ELECTRO	100UF	10WV
C42, 43			CK73FB1C103K	CHIP C	0.010UF	K
C44			CK73EB1H102K	CHIP C	1000PF	K
C45			CK73FB1C103K	CHIP C	0.010UF	K
C48			CK45FF1H223Z	CERAMIC	0.022UF	Z
C49			CE04KW1E470M	ELECTRO	47UF	25WV
C50			CC45FSL1H220J	CERAMIC	22PF	J
C51			CK73EB1E223K	CHIP C	0.022UF	K
C102, 103			CK73EB1H561K	CHIP C	560PF	K
C104, 105			CK73EB1H181K	CHIP C	180PF	K
C106, 107			CK73EB1H561K	CHIP C	560PF	K
C108			CE04KW1C101M	ELECTRO	100UF	16WV
C112-115			CK73EB1H331K	CHIP C	330PF	K
C116, 117			CE04KW1E101M	ELECTRO	100UF	25WV
C118, 119			CK45FB1H333K	CERAMIC	0.033UF	K
C120, 121			CK73FB1H561K	CHIP C	560PF	K
C122, 123			CE04KW1H010M	ELECTRO	1.0UF	50WV
C126, 127			CC73ECH1H271J	CHIP C	270PF	J
C128			CE04KW1H220M	ELECTRO	22UF	50WV
C129			CE04KW1E220M	ELECTRO	22UF	25WV
C130, 131			CK45FB1H223K	CERAMIC	0.022UF	K
C132, 133			CK73EB1E332K	CHIP C	3300PF	K
C134, 135			CE04KW1E470M	ELECTRO	47UF	25WV
C136			CE04KW1H220M	ELECTRO	22UF	50WV
C137			CK73EB1E223K	CHIP C	0.022UF	K
C138			CE04KW1A221M	ELECTRO	220UF	10WV
C139			CE04KW1H3R3M	ELECTRO	3.3UF	50WV
C140			C92-0248-08	MYLAR	8200PF	J
C141			CQ93FMG1H393J	MYLAR	0.039UF	J
C142			CE04KW1E470M	ELECTRO	47UF	25WV
C143-145			CK73EB1H472K	CHIP C	4700PF	K
C148			CQ93FMG1H473J	MYLAR	0.047UF	J
C150			CE04KW1E220M	ELECTRO	22UF	25WV
C321			CE04KW1C101M	ELECTRO	100UF	16WV
C323			CK73EB1E223K	CHIP C	0.022UF	K
C331			CK45FB1H473Z	CERAMIC	0.047UF	Z

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.



Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C332			CK73EB1E223K	CHIP C	0.022UF	K
C334			CC73ECH1H270J	CHIP C	27PF	J
C335			CK73EB1H561K	CHIP C	560PF	K
C339			CC73ECH1H270J	CHIP C	27PF	J
C341, 342			CK73EB1E223K	CHIP C	0.022UF	K
C345-347			CK73EB1E223K	CHIP C	0.022UF	K
C346, 347			CK73EB1E223K	CHIP C	0.022UF	K
C348			CK73EB1H103K	CHIP C	0.010UF	K
C348			CK73FB1C103K	CHIP C	0.010UF	K
C351			CK73EB1E223K	CHIP C	0.022UF	K
C352			CE04KW1C100M	ELECTRO	10UF	16WV
C353, 354			CK73EB1E223K	CHIP C	0.022UF	K
C355			CC73ECH1H220J	CHIP C	22PF	J
C356			CK73EB1H102K	CHIP C	1000PF	K
C357			CE04KW1H2R2M	ELECTRO	2.2UF	50WV
C358			CE04KW1H010M	ELECTRO	1.0UF	50WV
C361			CK73EB1E223K	CHIP C	0.022UF	K
C362			CE04KW1H3R3M	ELECTRO	3.3UF	50WV
C363			CK73EB1E223K	CHIP C	0.022UF	K
C364			CE04KW1H4R7M	ELECTRO	4.7UF	50WV
C365			CK45FB1H223K	CERAMIC	0.022UF	K
C366			CK73EB1H102K	CHIP C	1000PF	K
C367, 368			CE04KW1H010M	ELECTRO	1.0UF	50WV
C369			CC73ECH1H270J	CHIP C	27PF	J
C370-372			CE04KW1H010M	ELECTRO	1.0UF	50WV
C373, 374			CK45FB1H273K	CERAMIC	0.027UF	K
C380			CE04KW1C100M	ELECTRO	10UF	16WV
C381			CC73ECH1H120J	CHIP C	12PF	J
C382			CC73ECH1H150J	CHIP C	15PF	J
C385			CK73FB1C103K	CHIP C	0.010UF	K
C386			CK73EB1H331K	CHIP C	330PF	K
C386			CK73EB1H331K	CHIP C	330PF	K
C387			CK73EB1E223K	CHIP C	0.022UF	K
C388			CK45FB1H102K	CERAMIC	1000PF	K
C391			CE04KW1C470M	ELECTRO	47UF	16WV
C392			CK73EB1H102K	CHIP C	1000PF	K
C393			CE04KW1H010M	ELECTRO	1.0UF	50WV
C394			CE04KW1C470M	ELECTRO	47UF	16WV
C395			CK73EB1C223K	CHIP C	0.022UF	K
C396			CE04KW1A101M	ELECTRO	100UF	10WV
C397			CK73EB1E223K	CHIP C	0.022UF	K
C398			CE04KW1A101M	ELECTRO	100UF	10WV
C399			CK73EB1E223K	CHIP C	0.022UF	K
C401			CC73ECH1H150J	CHIP C	15PF	J
C401, 402			CK73EB1H102K	CHIP C	1000PF	K
C403			CE04KW1H220M	ELECTRO	22UF	50WV
C404			CE04KW1C101M	ELECTRO	100UF	16WV
C406			CE04KW1E220M	ELECTRO	22UF	25WV
C407, 408			CE04KW1H100M	ELECTRO	10UF	50WV
C409, 410			CQ93FMG1H104K	MYLAR	0.10UF	K
C411, 412			CQ93FMG1H154J	MYLAR	0.15UF	J
C413, 414			CK73FB1H152K	CHIP C	1500PF	K
C417, 418			CE04KW1H010M	ELECTRO	1.0UF	50WV
C419, 420			CE04KW1H4R7M	ELECTRO	4.7UF	50WV
C421-428			CE04KW1H010M	ELECTRO	1.0UF	50WV

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

5

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C429,430 C441,442 C443-445 C561,562 C563,564			CK73FB1H681K CC45FSL1H470J CK73FB1H221K CC73ECH1H271J CE04KW1H2R2M	CHIP C 680PF K CERAMIC 47PF J CHIP C 220PF K CHIP C 270PF J ELECTRO 2.2UF 50WV		
C565,566 C567,568 C569 C570 C571-573			CK73EB1H272K CK73EB1H682K CK73EB1E223K CE04KW1H2R2M CK73EB1E223K	CHIP C 2700PF K CHIP C 6800PF K CHIP C 0.022UF K ELECTRO 2.2UF 50WV CHIP C 0.022UF K		
C615,616 C617 C700 C701 C702			CK73EB1H102K CE04KW1H2R2M CE04KW1V330M CE04KW1A221M CE04KW1V330M	CHIP C 1000PF K ELECTRO 2.2UF 50WV ELECTRO 33UF 35WV ELECTRO 220UF 10WV ELECTRO 33UF 35WV		
C703 C704 C705 C706 C707			CK73EB1E223K CE04KW1H470M CC73ECH1H150J CC73ECH1H180J CE04KW1H3R3M	CHIP C 0.022UF K ELECTRO 47UF 50WV CHIP C 15PF J CHIP C 18PF J ELECTRO 3.3UF 50WV		
C708 C709 C710 C711 C712			CE04KW1E470M CK73EB1H102K CK73FB1H101K CK73FB1C103K CE04KW1V101M	ELECTRO 47UF 25WV CHIP C 1000PF K CHIP C 100PF K CHIP C 0.010UF K ELECTRO 100UF 35WV		
C713 C715,716 C717 C718 C801			CE04KW1H220M CK73EB1H102K CE04KW1E470M CK73EB1H102K CK73EB1H472K	ELECTRO 22UF 50WV CHIP C 1000PF K ELECTRO 47UF 25WV CHIP C 1000PF K CHIP C 4700PF K		
C802,803 C805,806 C808-810 C811,812 C813			CQ93FMG1H104K CQ93FMG1H473J CE04KW1H221M CE04KW1H470M CE04KW1V101M	MYLAR 0.10UF K MYLAR 0.047UF J ELECTRO 220UF 50WV ELECTRO 47UF 50WV ELECTRO 100UF 35WV		
C815 C816 C817 C818 C820			CE04KW1V222M CQ93FMG1H104K CK45FB1H101K CQ93FMG1H473J CE04KW1E221M	ELECTRO 2200UF 35WV MYLAR 0.10UF K CERAMIC 100PF K MYLAR 0.047UF J ELECTRO 220UF 25WV		
C849 C852 C853 C872 C873			CQ93FMG1H102J CQ93FMG1H102J CE04KW1C472M CK73EB1H473K CE04KW1C471M	MYLAR 1000PF J MYLAR 1000PF J ELECTRO 4700UF 16WV CHIP C 0.047UF K ELECTRO 470UF 16WV		
C874,875 C876 C901,902 C903,904 C905,906			CK73EB1H104K CE04KW0J102M CK45FB1H681K CC45FCH1H150J CE04KW1C220M	CHIP C 0.10UF K ELECTRO 1000UF 6.3WV CERAMIC 680PF K CERAMIC 15PF J ELECTRO 22UF 16WV		
C907,908 C909,910 C911,912 C913-916 C917			CK45FB1H223Z CE04KW1H101M CE04KW1H100M CQ93FMG1H224J CE04KW1H470M	CERAMIC 0.022UF Z ELECTRO 100UF 50WV ELECTRO 10UF 50WV MYLAR 0.22UF J ELECTRO 47UF 50WV		

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

6

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
C920-927 C928,929 C933,934 C935,936 C937,938			CK45FB1H223Z CK45FB1H102K CK45FB1H102K CE04KW1HR22M CC73ECH1H820J	CERAMIC 0.022UF Z CERAMIC 1000PF K CERAMIC 1000PF K ELECTRO 0.22UF 50WV CHIP C 82PF J		
C940 C954,955 C971 C972 C980			CE04KW1HR22M CE04KW1H332M CE04KW1H470M CE04KW1H100M CE04KW1H0R1M	ELECTRO 0.22UF 50WV ELECTRO 3300UF 50WV ELECTRO 47UF 50WV ELECTRO 10UF 50WV ELECTRO 0.1UF 50WV		
C981,982 CT21 CT22 CT22 CT23			CK45FB1H221K CE04KW1A470M CK73EB1E223K CK73EB1E223K CC73ECH1H220J	CERAMIC 220PF K ELECTRO 47UF 10WV CHIP C 0.022UF K CHIP C 0.022UF K CHIP C 22PF J		
CT24 CT25 CT26 CT26 CT26 ,27			CE04KW1C100M CC73ECH1H220J CK73EB1H561K CK73EB1H561K CK73EB1E223K	ELECTRO 10UF 16WV CHIP C 22PF J CHIP C 560PF K CHIP C 560PF K CHIP C 0.022UF K		
CT27,28 CT29 ,30 CT31 ,32 VD301			CK73EB1E223K CK73EB1E223K CE04KW1A470M C02-0303-08	CHIP C 0.022UF K CHIP C 0.022UF K ELECTRO 47UF 10WV VARICAP(AM) VHC SVC348S/-1T		
BI8 BI11 BI801 BI901 BI905		*	E40-8932-08 E35-0000-08 E35-0000-08 E40-0000-08 E35-2997-08	FLAT CABLE CON QCNWN1923AWZZ WIRE HARNESS QCNWN1842AWZZ WIRE HARNESS6P QCNWN1952AWZZ WIRE HARNESS13P QCNWN1951AWZZ WIRE HARNESS QCNWN1919AWZZ		
CNP1 CNS1A/B CNP2 CNS2A/B CNP3		*	E40-8920-08 E40-8917-08 E40-8921-08 E40-8915-08 E40-8381-08	PIN ASSY QCNCM704GAWZZ WIRE HARNESS(7) QCNWN1537AWZZ PIN ASSY QCNCM704HAWZZ WIRE HARNESS(6) QCNWN1539AWZZ PIN ASSY CONE6P53253		
CNP3A CNS3A/B CNP4 CNS4 CNP7		*	E40-8918-08 E40-8914-08 E40-8922-08 E40-8916-08 E40-8918-08	PIN ASSY CONE6P53254 WIRE HARNESS(8) QCNWN1538AWZZ PIN ASSY QCNCM705FAFZZ WIRE HARNESS(6) QCNWN1572AWZZ PIN ASSY CONE6P53254		
CNP8 CNP101 CNP302 CNP701 CNS701		*	E40-8919-08 E40-8264-08 E40-8933-08 E35-3000-08 E40-8930-08	PIN ASSY CONE9P53254 PIN ASSY QCNCM705CAFZZ MLX 2P CONE2P5268 PIN ASSY QCNWCZX20AWZZ PIN ASSY(FFC) QCNWCZY20AWZZ		
CNS702 CNP801 CNP901 CNP902 CNP905		*	E40-8929-08 E40-0000-08 E40-8381-08	PIN ASSY(FFC) QCNWCZY10AWZZ CON 13P CONEDP5267X PIN ASSY CONE6P53253		
CNS902 FW701A/B FW951 JK981 SO301		*	E40-8931-08 E35-0000-08 E11-0942-08 E70-0145-08	WIRE HARNESS QCNCW015CAWZZ WIRE HARNESS(4P) QCNWN1954AWZZ PHONE JACK QJAKM0004AWZZ FM ANT QTANC0105AWZZ		
SO401		*	E63-1219-08	PIN JACK QSOCJ0224AWZZ		

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

PARTS LIST

RXD-355

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑦

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
SO801 SO901		*	E70-0000-08	? QSOCE0008AWZZ LOCK TERMINAL QTANA0417AWZZ		
△ F801,802 △ F803,804		*	F50-0000-08 F50-0192-08	FUSE(5X20)4A250 QFS-D402DAWNI FUSE(5X20)2A250 QFS-D202DAWNI		
FH801-808		*	J19-6238-08	HOLDER(FUSE) QFSDH0001AWZZT		
CF301,302 CF351 CF352 L1 L101,102		*	L72-0641-08 L79-1287-08 L79-1286-08 L90-0387-08 L90-0390-08	CERAMIC FILTER RFILF0072AFZZ LINE FILTER RFILF0003AWZZT LINE FILTER RFILA0009AWZZ COIL VP-XHR82K0000T COIL VP-MK2R2K0000T		
L104 L341 L342 L351 L354		*	L90-0389-08 L90-0390-08 L90-0388-08	COIL VP-MK331K0000T COIL VP-MK2R2K0000T COIL VP-DH101K0000T		
L700 L920,921 LT21,22 T303 T306		*	L90-0388-08 L39-1342-08 L90-0390-08 L31-0661-08 L32-1039-08	COIL VP-DH101K0000T COIL RCILZ0137AFZZ COIL FM-RF COIL RCILA0052AWZZ OSC COIL(AM) RCILB0067AWZZ		
△ T351 T801 X351 X352 XL1		*	L30-0985-08 L77-2351-08 L77-2352-08 L78-0739-08	IFT COIL(AM) RCILI0019AWZZ POWER TRANS CRYSTAL RESONA CRSTL1425A CRYSTAL RESONA RCRSP0019AWZZ RESONATOR RCRM-0041AWZZT		
XL700 XT21		*	L77-2230-08	CRYSTAL RESONA RCRSP0003AWZZ		
R11 R12 R13 -17 R23 R24,25			RK73EB2B103J RK73EB2B331J RK73EB2B102J RK73EB2B221J RK73EB2B222J	CHIP R 10K J 1/8W CHIP R 330 J 1/8W CHIP R 1.0K J 1/8W CHIP R 220 J 1/8W CHIP R 2.2K J 1/8W		
R26,27 R39,40 R41 R42 R43			RK73EB2B103J RK73EB2B681J RK73EB2B123J RK73EB2B122J RK73EB2B101J	CHIP R 10K J 1/8W CHIP R 680 J 1/8W CHIP R 12K J 1/8W CHIP R 1.2K J 1/8W CHIP R 100 J 1/8W		
R45,46 R47,48 R101,102 R103 R104,105			RK73EB2B471J RK73EB2B101J RK73EB2B103J RK73EB2B472J RK73EB2B102J	CHIP R 470 J 1/8W CHIP R 100 J 1/8W CHIP R 10K J 1/8W CHIP R 4.7K J 1/8W CHIP R 1.0K J 1/8W		
R106,107 R108,109 R110 R111,112 R113			RK73EB2B222J RK73EB2B332J RK73EB2B473J RK73EB2B472J RK73EB2B473J	CHIP R 2.2K J 1/8W CHIP R 3.3K J 1/8W CHIP R 47K J 1/8W CHIP R 4.7K J 1/8W CHIP R 47K J 1/8W		
R118,119 R120,121 R122-125 R126 R127,128			RK73EB2B104J RK73EB2B392J RK73EB2B562J RK73EB2B683J RK73EB2B682J	CHIP R 100K J 1/8W CHIP R 3.9K J 1/8W CHIP R 5.6K J 1/8W CHIP R 68K J 1/8W CHIP R 6.8K J 1/8W		

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas △ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

⑧

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
R129,130 R131,132 R133,134 R135,136 R137			RK73EB2B472J RK73EB2B152J RK73EB2B101J RK73EB2B103J RK73EB2B153J	CHIP R 4.7K J 1/8W CHIP R 1.5K J 1/8W CHIP R 100 J 1/8W CHIP R 10K J 1/8W CHIP R 15K J 1/8W		
R141 R144 R146 R147 R148			RK73EB2B103J RK73EB2B473J RN14BK2H82R0F RK73EB2B473J RK73EB2B223J	CHIP R 10K J 1/8W CHIP R 47K J 1/8W RN 82 F 1/2W CHIP R 47K J 1/8W CHIP R 22K J 1/8W		
R301 R323 R336 R344 R345			RK73EB2B000J RK73EB2B683J RK73EB2B103J RK73EB2B471J RK73EB2B472J	CHIP R 0 J 1/8W CHIP R 68K J 1/8W CHIP R 10K J 1/8W CHIP R 470 J 1/8W CHIP R 4.7K J 1/8W		
R346 R347 R347 R348 R349			RK73EB2B331J RK73EB2B150J RK73EB2B682J RK73EB2B681J RK73EB2B330J	CHIP R 330 J 1/8W CHIP R 15 J 1/8W CHIP R 6.8K J 1/8W CHIP R 680 J 1/8W CHIP R 33 J 1/8W		
R351 R352 R353 R355 R356			RK73EB2B562J RK73EB2B102J RK73EB2B271J RK73EB2B332J RK73EB2B102J	CHIP R 5.6K J 1/8W CHIP R 1.0K J 1/8W CHIP R 270 J 1/8W CHIP R 3.3K J 1/8W CHIP R 1.0K J 1/8W		
R359 R360 R361,362 R365 R372-374			RK73EB2B182J RK73EB2B472J RK73EB2B222J RK73EB2B103J RK73EB2B102J	CHIP R 1.8K J 1/8W CHIP R 4.7K J 1/8W CHIP R 2.2K J 1/8W CHIP R 10K J 1/8W CHIP R 1.0K J 1/8W		
R376 R377 R378 R379 R380			RK73EB2B102J RK73EB2B473J RK73EB2B102J RK73EB2B222J RK73EB2B152J	CHIP R 1.0K J 1/8W CHIP R 47K J 1/8W CHIP R 1.0K J 1/8W CHIP R 2.2K J 1/8W CHIP R 1.5K J 1/8W		
R381 R383 R385 R388 R393			RK73EB2B103J RK73EB2B562J RK73EB2B562J RK73EB2B392J RK73EB2B102J	CHIP R 10K J 1/8W CHIP R 5.6K J 1/8W CHIP R 5.6K J 1/8W CHIP R 3.9K J 1/8W CHIP R 1.0K J 1/8W		
R395 R399 R401,402 R403,404 R407,408			RK73EB2B473J RK73EB2B330J RK73EB2B331J RK73EB2B392J RK73EB2B222J	CHIP R 47K J 1/8W CHIP R 33 J 1/8W CHIP R 330 J 1/8W CHIP R 3.9K J 1/8W CHIP R 2.2K J 1/8W		
R415,416 R417,418 R421,422 R424 R425			RK73EB2B392J RK73EB2B103J RK73EB2B153J RK73EB2B474J RK73EB2B223J	CHIP R 3.9K J 1/8W CHIP R 10K J 1/8W CHIP R 15K J 1/8W CHIP R 470K J 1/8W CHIP R 22K J 1/8W		
R429-431 R561 R562 R565 R566			RK73EB2B682J RK73EB2B103J RK73EB2B824J RK73EB2B333J RK73EB2B224J	CHIP R 6.8K J 1/8W CHIP R 10K J 1/8W CHIP R 820K J 1/8W CHIP R 33K J 1/8W CHIP R 220K J 1/8W		

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas △ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

9

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
R567			RK73EB2B683J	CHIP R 68K J 1/8W		
R568			RK73EB2B224J	CHIP R 220K J 1/8W		
R569			RK73EB2B104J	CHIP R 100K J 1/8W		
R570			RK73EB2B123J	CHIP R 12K J 1/8W		
R571			RK73EB2B394J	CHIP R 390K J 1/8W		
R572			RK73EB2B104J	CHIP R 100K J 1/8W		
R573			RK73EB2B563J	CHIP R 56K J 1/8W		
R574			RK73EB2B105J	CHIP R 1.0M J 1/8W		
R575			RK73EB2B474J	CHIP R 470K J 1/8W		
R576			RK73EB2B225J	CHIP R 2.2M J 1/8W		
R577			RK73EB2B154J	CHIP R 150K J 1/8W		
R578			RK73EB2B104J	CHIP R 100K J 1/8W		
R580			RK73EB2B184J	CHIP R 180K J 1/8W		
R613,614			RK73EB2B331J	CHIP R 330 J 1/8W		
R615,616			RK73EB2B222J	CHIP R 2.2K J 1/8W		
R619			RK73EB2B223J	CHIP R 22K J 1/8W		
R704-706			RK73EB2B102J	CHIP R 1.0K J 1/8W		
R731			RK73EB2B103J	CHIP R 10K J 1/8W		
R739-745			RK73EB2B102J	CHIP R 1.0K J 1/8W		
R747			RK73EB2B101J	CHIP R 100 J 1/8W		
R750			RK73EB2B225J	CHIP R 2.2M J 1/8W		
R752			RK73EB2B103J	CHIP R 10K J 1/8W		
R756-759			RK73EB2B103J	CHIP R 10K J 1/8W		
R760			RK73EB2B104J	CHIP R 100K J 1/8W		
R761			RK73EB2B102J	CHIP R 1.0K J 1/8W		
R762			RK73EB2B104J	CHIP R 100K J 1/8W		
R763			RK73EB2B102J	CHIP R 1.0K J 1/8W		
R764			RK73EB2B104J	CHIP R 100K J 1/8W		
R765			RK73EB2B102J	CHIP R 1.0K J 1/8W		
R766-770			RK73EB2B103J	CHIP R 10K J 1/8W		
R771			RK73EB2B102J	CHIP R 1.0K J 1/8W		
R774			RK73EB2B103J	CHIP R 10K J 1/8W		
R776-780			RK73EB2B103J	CHIP R 10K J 1/8W		
R786			RK73EB2B222J	CHIP R 2.2K J 1/8W		
R789			RK73EB2B100J	CHIP R 10 J 1/8W		
R811			RD14BB2H3R3J	RD 3.3 J 1/2W		
R813			RD14BB2H3R3J	RD 3.3 J 1/2W		
R816			RD14BB2H182J	RD 1.8K J 1/2W		
R903			RK73EB2B821J	CHIP R 820 J 1/8W		
R907,908		*	VRS-VV3AAR10J			
R916,917			RD14BB2H4R7J	RD 4.7 J 1/2W		
R918,919		*	R92-4565-08	FUSE R 100 J 1/4W		
R921,922			RS14GB3D3R9J	FL-PROOF RS 3.9 J 2W		
R923,924			RS14GB3D5R6J	FL-PROOF RS 5.6 J 2W		
R926,927			RD14BB2H680J	RD 68 J 1/2W		
R931,932			RK73EB2B102J	CHIP R 1.0K J 1/8W		
R935,936			RK73EB2B104J	CHIP R 100K J 1/8W		
R951,952			RD14BB2H331J	RD 330 J 1/2W		
R978-981		*	R92-4566-08	FL-PROOF RS 0.22 J 3W		
R982			RD14BB2H4R7J	RD 4.7 J 1/2W		
RD01			RK73EB2B681J	CHIP R 680 J 1/8W		
RD02			RK73EB2B821J	CHIP R 820 J 1/8W		
RD03			RK73EB2B102J	CHIP R 1.0K J 1/8W		
RD04			RK73EB2B681J	CHIP R 680 J 1/8W		
RD05			RK73EB2B821J	CHIP R 820 J 1/8W		

L : Scandinavia Y : PX(Far East,Hawaii) Y : AAFES(Europe)
K : USA T : England X : Australia
P : Canada E : Europe Q : Russia
R : Mexico G : Germany H : Korea
C : China V : China(Shanghai) M : Other Areas
I : Malaysia
⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

10

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
RD06			RK73EB2B102J	CHIP R 1.0K J 1/8W		
RD07			RK73EB2B152J	CHIP R 1.5K J 1/8W		
RD08			RK73EB2B222J	CHIP R 2.2K J 1/8W		
RD09			RK73EB2B681J	CHIP R 680 J 1/8W		
RD10			RK73EB2B821J	CHIP R 820 J 1/8W		
RD11			RK73EB2B102J	CHIP R 1.0K J 1/8W		
RD12			RK73EB2B152J	CHIP R 1.5K J 1/8W		
RD13			RK73EB2B222J	CHIP R 2.2K J 1/8W		
RD15			RK73EB2B392J	CHIP R 3.9K J 1/8W		
RD16			RK73EB2B562J	CHIP R 5.6K J 1/8W		
RD17			RK73EB2B103J	CHIP R 10K J 1/8W		
RD18			RK73EB2B183J	CHIP R 18K J 1/8W		
RT21			RK73EB2B103J	CHIP R 10K J 1/8W		
RT24			RK73EB2B563J	CHIP R 56K J 1/8W		
RT25			RK73EB2B103J	CHIP R 10K J 1/8W		
RT26			RK73EB2B563J	CHIP R 56K J 1/8W		
RT27-30			RK73EB2B102J	CHIP R 1.0K J 1/8W		
RT31			RK73EB2B103J	CHIP R 10K J 1/8W		
RT32			RK73EB2B682J	CHIP R 6.8K J 1/8W		
VR701		*	R32-0106-08	VR(JOG) QSW-Z0013AWZZ		
RL951		*	S76-0125-08	MAGNETIC RELAY RRLYD0014AWZZ		
SW701-721			S70-0091-08	TACT SWITCH SWICH1401AT		
D1,D2			1SS133	DIODE VHDDS1SS133-1T		
D101,102			1SS133	DIODE VHDDS1SS133-1T		
D513-516			1SS133	DIODE VHDDS1SS133-1T		
D706-711			1SS133	DIODE VHDDS1SS133-1T		
D717,718			1SS133	DIODE VHDDS1SS133-1T		
D801-808			1N404S	DIODE VHDDS1N404S-1T		
D809			TS6B04GM	DIODE VHDT56B04GM-1		
D831			1SS133	DIODE VHDDS1SS133-1T		
D833			1SS133	DIODE VHDDS1SS133-1T		
D851			1SS133	DIODE VHDDS1SS133-1T		
D872-875			1N404S	DIODE VHDDS1N404S-1T		
D876			1SS133	DIODE VHDDS1SS133-1T		
D901,902			1SS133	DIODE VHDDS1N404S-1T		
D903						
D951						
IC1		*	LC78645E	MI-COM IC VHILC78645E-1		
IC2		*	M63001FP	MOS-IC VHIM63001FP-1		
IC101			AN7345K	MOS-IC VHIAN7345K/-1		
IC302			LC72131	MOS-IC VHILC72131/-1		
IC303		*	LA1832S	MOS-IC VHILA1832S/-1		
IC304			LC72723	IC		
IC401		*	LC75341	MOS-IC VHILC75341/-1		
IC561,562			KIA4558P	ANALOGUE IC VHIIA4558P-1		
IC700		*	IX0451	MI-COM IC RH-IX0451AWZZ		
IC811			KIA7805AP	IC		
IC812			KIA7810AP	IC		
IC852			AN78L05	IC(VOLTAGE REGULATOR/ +5V)		
IC901			STK40270N	IC		
Q1			KTA1266GR	TRANSISTOT VSKTA1266GR-1T		
Q2			KTC3203Y	TRANSISTOR VSKTC3203Y/-1T		
Q3			KRC102M	TRANSISTOR VSKRC102M/-1T		
Q101			KTA1266GR	TRANSISTOT VSKTA1266GR-1T		

L : Scandinavia Y : PX(Far East,Hawaii) Y : AAFES(Europe)
K : USA T : England X : Australia
P : Canada E : Europe Q : Russia
R : Mexico G : Germany H : Korea
C : China V : China(Shanghai) M : Other Areas
I : Malaysia
⚠ indicates safety critical components .

PARTS LIST

RXD-355

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
Q102,103 Q104-107 Q108-111 Q112 Q113			KRC104M 2SC1845F KTC3199GR 2SA1015GR KRC104M	TRANSISTOR VS2SC1845F/-1T TRANSISTOR VSKTC3199GR-1T TRANSISTOR VS2SA1015GR-1T TRANSISTOR VSKRC104M/-1T		
Q114 Q301 Q401,402 Q603,604 Q700			KTC3203Y KTC3194Y KTC3199GR KTC3199GR KRC102M	TRANSISTOR VSKTC3203Y/-1T TRANSISTOR VSKTC3194Y/-1T TRANSISTOR VSKTC3199GR-1T TRANSISTOR VSKTC3199GR-1T TRANSISTOR VSKRC102M/-1T		
Q703 Q704,705 Q706-708 Q709 Q712			KTA1273Y KTA1271Y KTC3199GR KRC102M KRC102M	TRANSISTOR VSKTA1273Y/-1T TRANSISTOR VSKTA1271Y/-1T TRANSISTOR VSKTC3199GR-1T TRANSISTOR VSKRC102M/-1T TRANSISTOR VSKRC102M/-1T		
Q801 Q813 Q875 Q901,902 Q903,904			KTA1274Y KTC2026 KTC2026 KTC3199GR KTC3199GR	TRANSISTOR VSKTC2026/-1 TRANSISTOR VSKTC2026/-1 TRANSISTOR VSKTC3199GR-1T TRANSISTOR VSKTC3199GR-1T		
Q951 Q971 QT21 ZD1 ZD2			KRC107M KTC3203Y KTC3199GR MTZJ3R3B MTZJ3R9B	TRANSISTOR VSKRC107M/-1T TRANSISTOR VSKTC3203Y/-1T TRANSISTOR VSKTC3199GR-1T ZENER DIODE VHEDZ3R3BSB-1T ZENER DIODE VHEDZ3R9BSB-1T		
ZD561 ZD801 ZD802 ZD803 ZD810			MTZJ6R2B MTZJ30B MTZJ6R2B MTZJ11B MTZJ2R4B	ZENER DIODE VHEDZ6R2BSC-1T ZENER DIODE VHEDZ300BSB-1T ZENER DIODE VHEDZ6R2BSA-1T ZENER DIODE VHEDZ110BSB-1T ZENER DIODE VHEDZ2R4BSB-1T		
ZD871 ZD904			MTZJ2R4B MTZJ13B	ZENER DIODE VHEDZ2R4BSB-1T ZENER DIODE VHEDZ130BSB-1T		
FE301 RX701			W02-0000-08 W02-2689-08	FRONT END OPTICAL MODULE VHLN63H380A-1		
1 2 5 6 24	2A 2A 2A 2A 1A		D13-1869-08 D13-1870-08 G13-2515-08 T25-0115-08 D02-0000-08	GEAR NGERH0011AWZZ GEAR NGERH0012AWZZ GUSHION MCUSN1524A OPTICAL PICKUP HPC1LXASY TURN TABLE NTNT0008AW00		
32 34 35 38 39	2B 3B 1A 2A 2A,3A		D16-0776-08 J39-1037-08 T99-0656-08 J39-1036-08 D14-0818-08	BELT BE231616 SPACER EVA0330702 MAGNET MAG0104302 SPACER NM0305401 ROLLER PT0303002		
40 41 42 43 45	3B 2A 3B 1A 2A		D10-5013-08 D32-0370-08 D10-5012-08 J19-6229-08 D19-0329-08	LEVER(STOP) PT0304303 STOPPER PT0304304 LEVER(LOCK) PT0304305 STABILIZER PT0304306 PIN(LOCK) PT0304308		
46 47 48 49	2B 2A 2A 2A		F09-0162-08 D13-2565-08 D13-2559-08 D13-2561-08	CAP PT0304309 GEAR PT0305413 GEAR PT0309506 GEAR PT0309507		

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .

* New Parts
Parts without **Parts No.** are not supplied.
Les articles non mentionnés dans le **Parts No.** ne sont pas fournis.
Teile ohne **Parts No.** werden nicht geliefert.

Ref. No	Add-ress	New Parts	Parts No.	Description	Desti-nation	Re-marks
50 51 52 53 54	2A 2A 2B 2A 2B		D13-2563-08 D13-2560-08 D15-0445-08 D13-2562-08 D10-5014-08	GEAR PT0309508 GEAR PT0309509 PULLEY(GEAR) PT0309510 GEAR PT0309511 LEVER(CLAMP) PT0311101		
55 56 57 60 62	2A 2A 1A 3A 2A		D10-5015-08 D13-2564-08 J19-6227-08 J99-0834-08 G01-4278-08	LEVER(DISC) PT0311102 GEAR(CAM) PT0312005 HOLDER PT0320201 TRAY(SLIDE) PT0331003 SPRING(STOP) SP0304303		
63 64 66 66 AL AM	3B 2A 1A 2A 3A		G01-4277-08 G01-4279-08 D19-0330-08 N09-5335-08 N09-5332-08	SPRING(LOCK) SP0304305 SPRING SP0304306 METAL PLATE MT0304302 MACHINE SCREW LX-BZ2222AXZZ MACHINE SCREW SC0308MBZI		
AR DM FM M3			N19-1526-08 D40-0000-08 T42-1114-08 T41-0140-08	FLAT WASHER LX-WZ1070AFZZ MOTOR ASSY MMTR1651B MOTOR ASSY MMTR1854A MOTOR ASS'Y TWMEN7E6Y		

L : Scandinavia K : USA P : Canada R : Mexico C : China I : Malaysia
Y : PX(Far East,Hawaii) T : England E : Europe G : Germany V : China(Shanghai)
Y : AAFES(Europe) X : Australia Q : Russia H : Korea M : Other Areas ⚠ indicates safety critical components .