


Service Manual

SA14A /S1G
SA14-AF N (SA14/F1N)
Super Audio CD Player

SA-14

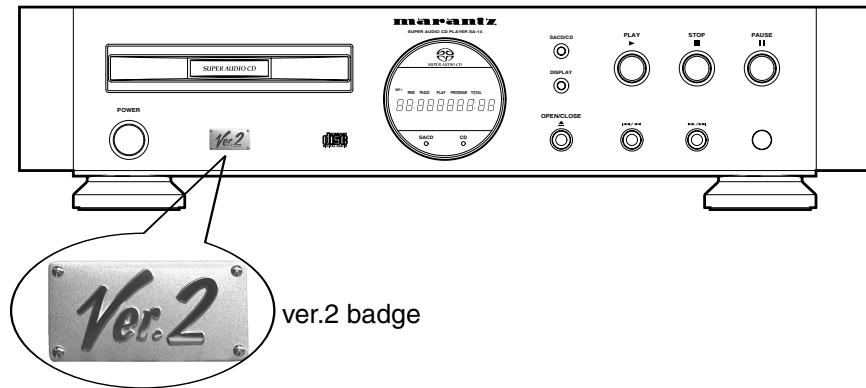

REMARK 1:

This service manual shows only the differences between the model SA-14 and the model SA-14 ver.2. The most significant changes from SA-14 to SA-14 ver.2 are the quality of sound improvement parts. All other information is described in the service manual of the model SA-14 (code number: 410K855010).

For the dispatch of the after-sales service parts, refer to those service manuals with the first priority. Therefore, please use this document with referring to the model SA14 service manual without fail.

REMARK 2:

1. Model Name on the rear panel of SA-14 and SA-14 ver.2 is same. (Indication is the following.)
MODEL NO. SA14/F1N
MODEL NO. SA14/S1G
2. As for the appearance, ver.2 badge addition on front panel and LED lighting color of SACD, CD are changed from red to blue.
3. As for the change to ver.2 model is from LOT number 26. (MZxxxxxx26xxxx)

Please use this service manual with referring to the user guide (D.F.U.) without fail.

marantz®

SA-14 ver.2

Part no. 410K855020
First Issue 2003.05
ecm

The changed parts are listed below. Not listed parts are the same to the model SA-14.

POS. NO.	VERS. COLOR	PART NO. (FOR EUR)	PART NO. (MJI)	DESCRIPTION
				PH16-POWER SW/SUB TRANS CIRCUIT BOARD
CF25	/F/S ver.2	nsp	OA22702520	ELECT. 220 μ F M 25V RA-2
CF26	/F/S ver.2	nsp	OA22702540	ELECT. 220 μ F M 25V ARS
				PP16-MAIN/DAC/AUDIO CIRCUIT BOARD
C421	/F/S ver.2	nsp	OA10702540	ELECT. 100 μ F 25V ARS
C422	/F/S ver.2	nsp	OA10702540	ELECT. 100 μ F 25V ARS
C423	/F/S ver.2	nsp	nsp	JUMPER WIRE 5MM
C424	/F/S ver.2	nsp	nsp	JUMPER WIRE 5MM
C713	/F/S ver.2	nsp	OA10702540	ELECT. 100 μ F 25V ARS
C714	/F/S ver.2	nsp	OA10702540	ELECT. 100 μ F 25V ARS
C715	/F/S ver.2	nsp	nsp	JUMPER WIRE 5MM
C716	/F/S ver.2	nsp	nsp	JUMPER WIRE 5MM
C717	/F/S ver.2	nsp	OA10702540	ELECT. 100 μ F 25V ARS
C718	/F/S ver.2	nsp	OA10702540	ELECT. 100 μ F 25V ARS
C719	/F/S ver.2	nsp	nsp	JUMPER WIRE 5MM
C720	/F/S ver.2	nsp	nsp	JUMPER WIRE 5MM
C815	/F/S ver.2	nsp	OC47701620	ELECT. 470 μ F 16V 10X12.5 ARE2
R463	/F/S ver.2	nsp	GM114681G0	RES. 68.1 Ω \pm 1% 1/4W
R464	/F/S ver.2	nsp	GM114681G0	RES. 68.1 Ω \pm 1% 1/4W
				PY16-FRONT CIRCUIT BOARD
DY05	/F/S ver.2	nsp	HI10162320	L.E.D. GL3BC802B0SC BLUE
DY06	/F/S ver.2	nsp	HI10162320	L.E.D. GL3BC802B0SC BLUE
				EXPLODED VIEW PARTS
024B	/F/S ver.2	nsp	nsp	SCREW - FRONT PANEL BOTTOM
031B	/F/S ver.2	nsp	318J251020	BADGE VER.2
032B	/F/S ver.2	nsp	nsp	SHIELD - FRONT PCB
033B	/F/S ver.2	nsp	nsp	WASHER - SHIELD
001D	/F/S ver.2	nsp	411K257110	LID TOP GOLD
	/F/S ver.2	nsp	nsp	COVER - POWER SUPPLY PCB
	/F/S ver.2	nsp	nsp	WASHER - COVER
 W001	/F ver.2	nsp	ZC02001210	MAINS CORD 15A 125V MITI
				REMOVED PARTS (EXPLODED VIEW)
031G		nsp	288K109010	HDAM CASE - MONO HDAM
032G		nsp	288K109010	HDAM CASE

NOTE : "nsp" PART IS LISTED FOR REFERENCE ONLY, MARANTZ WILL NOT SUPPLY THESE PARTS.