


MANUAL OF MOST-OFTEN-NEEDED RADIO DIAGRAMS

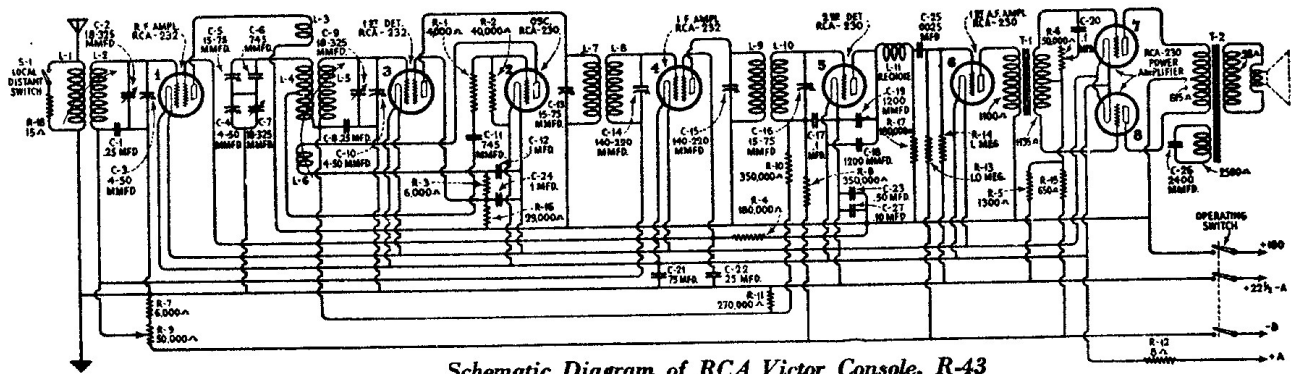

Schematic Diagram of RCA Victor Console, R-43

VOLUME CONTROL AT MINIMUM					
Tube No.	Filament to Control Grid Volts	Filament to Screen Grid Volts	Filament to Plate Volts	Plate Current M. A.	Filament Volts
1	22	55	155	0	2.0
2	—	—	50	3.0	2.0
3	0.5	65	150	0.5	2.0
4	22	55	155	0	2.0
5	5.0	—	90	0	2.0
6	2.0	—	150	2.5	2.0
7	15.0	—	150	0.5	2.0
8	15.0	—	150	0.5	2.0
VOLUME CONTROL AT MAXIMUM					
1	1.5	45	150	2.5	2.0
2	—	—	50	3.0	2.0
3	0.5	60	150	0.5	2.0
4	1.5	45	150	2.5	2.0
5	5.0	—	90	0	2.0
6	2.0	—	150	2.5	2.0
7	15.0	—	150	0.5	2.0
8	15.0	—	150	0.5	2.0

RCA Victor R-17-M

Radiotron No.	Cathode or Filament to Control Grid Volts	Cathode or Filament to Screen Grid Volts	Cathode or Filament to Plate Volts	Plate Current M. A.	Filament or Heater Volts
1. RCA-39 R. F.	3.0	105.0	105	7.0	6.0
2. RCA-36 Detector	*0.75	11.0	*60	0.025	6.0
3. RCA-38 Output	11.0	100.0	95	5.0	6.0
4. RCA-37 Rectifier	—	—	115	15.0	6.0

*Impossible to measure on ordinary voltmeter.

All Voltages on D. C. will be slightly lower

