


the **DYNAURAL** PREAMPLIFIER

TYPE 112-B

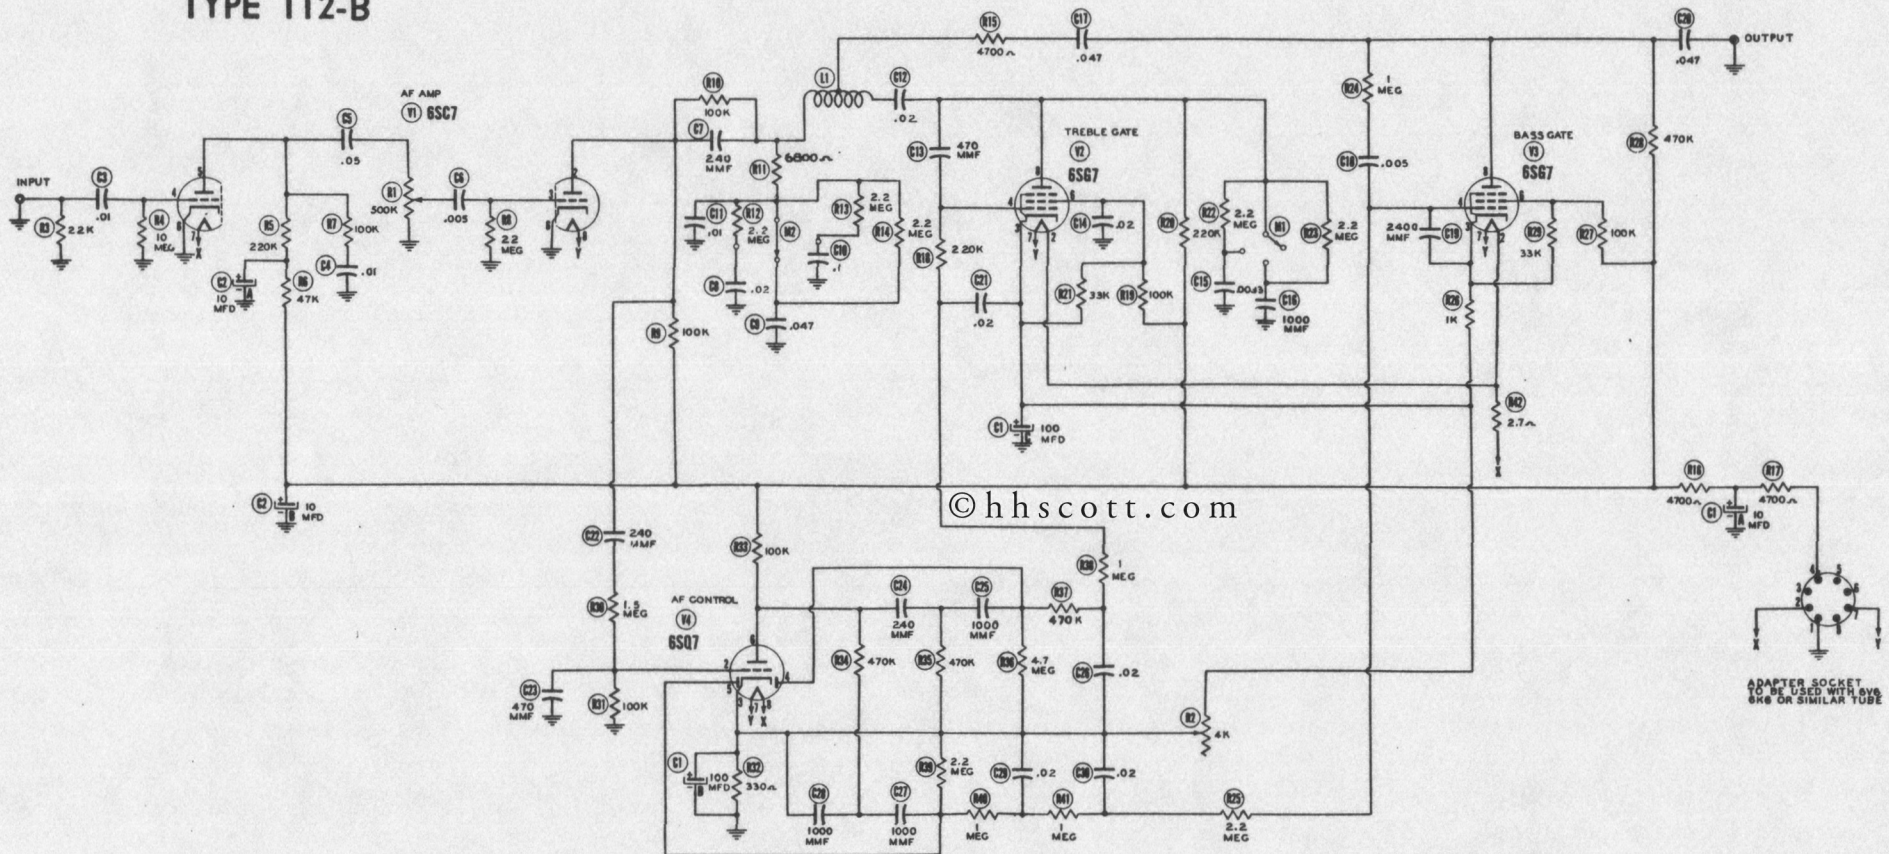

VOLTAGE READINGS

Item	Tube	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
V 1	6SC7	0V	115VDC	-.5VDC	-.4VDC	85VDC	0V	16.3VAC	16.3VAC
V 2	6SG7	0V	14.8VAC	13VDC	0V	13VDC	65VDC	14.8VAC	105VDC
V 3	6SG7	0V	14.8VAC	14VDC	0V	14VDC	85VDC	14.8VAC	185VDC
V 4	6SQ7	0V	0V	1.3VDC	0V	145VDC	16.3VAC	16.3VAC	

1 MEASURED ACROSS FILAMENTS

2 TONE SWITCH ON 3; RANGE SWITCH ON 5

THE COOPERATION OF THE MANUFACTURER OF THIS EQUIPMENT MAKES IT POSSIBLE TO BRING YOU THIS SERVICE

RESISTANCE READINGS

Item	Tube	Pin 1	Pin 2	Pin 3	Pin 4	Pin 5	Pin 6	Pin 7	Pin 8
V 1	6SC7	0Ω	1110KΩ	22Meg	10Meg	1275KΩ	0Ω	a1.7Ω	a.0Ω
V 2	6SG7	0Ω	a1.8Ω	4.3KΩ	6.3Meg	4.3KΩ	37KΩ	a1.7Ω	1230KΩ
V 3	6SG7	0Ω	a1.8Ω	5.3KΩ	6.4Meg	5.3KΩ	38KΩ	a1.7Ω	1470KΩ
V 4	6SQ7	0Ω	100KΩ	22Ω	4.7Meg	2.2Meg	1110KΩ	a1.7Ω	a.0Ω

1 MEASURED FROM PIN 4 OF ADAPTER PLUG.
2 MEASURED FROM PIN 2 OF ADAPTER PLUG.

A PHOTOFAC STANDARD NOTATION SCHEMATIC
© Howard W. Sams & Co., Inc. 1951

HERMON HOSMER SCOTT, INC.
385 Putnam Avenue Cambridge, Massachusetts