

AVR 7300 Audio/Video Receiver

SERVICE MANUAL



harman/kardon®

Power for the Digital Revolution®

Technical Specifications

Audio Section

Stereo Mode

Continuous Average Power (FTC)

125 Watts per channel, 20Hz–20kHz,
@ < 0.07% THD, both channels driven into 8 ohms

5/7 Channel Surround Modes

Power Per Individual Channel

Front L&R channels:
110 Watts per channel,
@ < 0.07% THD, 20Hz–20kHz into 8 ohms

Center channel:
110 Watts, @ < 0.07% THD, 20Hz–20kHz into 8 ohms

Surround (L & R Side, L & R Back) channels:
110 Watts per channel,
@ < 0.07% THD, 20Hz–20kHz into 8 ohms

Input Sensitivity/Impedance

Linear (High Level) 200mV/47kohms

Signal-to-Noise Ratio (IHF-A) 100dB

Surround System Adjacent Channel Separation

Analog Decoding 40dB
(Pro Logic, etc.)

Dolby Digital (AC-3) 55dB
DTS 55dB

Frequency Response

@ 1W (+0dB, -3dB) 10Hz–130kHz

High Instantaneous

Current Capability (HCC) ±75 Amps

Transient Intermodulation

Distortion (TIM) Unmeasurable

Rise Time

16 µsec

Slew Rate

40V/µsec**

FM Tuner Section

Frequency Range	87.5–108MHz
Usable Sensitivity	IHF 1.3 µV/13.2dBf
Signal-to-Noise Ratio	Mono/Stereo: 70/68dB (DIN)
Distortion	Mono/Stereo: 0.15/0.2%
Stereo Separation	40dB @ 1kHz
Selectivity	±400kHz: 70dB
Image Rejection	80dB
IF Rejection	90dB

AM Tuner Section

Frequency Range	520–1710kHz
Signal-to-Noise Ratio	45dB
Usable Sensitivity	Loop: 500 µV
Distortion	1kHz, 50% Mod: 0.8%
Selectivity	±10kHz: 30dB

Video Section

Video Format	PAL/NTSC
Input Level/Impedance	1Vp-p/75 ohms
Output Level/Impedance	1Vp-p/75 ohms
Video Frequency Response (Composite and S-Video)	10Hz–8MHz (-3dB)
Video Frequency Response (Component)	10Hz-100MHz (-3dB)

General

Power Requirement	AC 220-240V/50Hz
Power Consumption	130W idle, 1503W maximum (7 channels driven)
Dimensions (Max)	
Width	440mm
Height	192mm
Depth	520mm
Weight	28.6 kg

Depth measurement includes knobs, buttons and terminal connections.

Height measurement includes feet and chassis.

All features and specifications are subject to change without notice.

Harman Kardon and Power for the Digital Revolution are registered trademarks of Harman International Industries, Incorporated.

|||||BzSet™ is a trademark of Harman International Industries, Inc.
(Patent No. 5,386,478).

*Manufactured under license from Dolby Laboratories.

"Dolby," "Pro Logic," "Pro Logic II" and the Double-D symbol are trademarks of Dolby Laboratories. Confidential Unpublished Works. ©1992–1999 Dolby Laboratories, Inc. All rights reserved.

DTS and DTS Surround, DTS-ES and DTS Neo:6 are trademarks of Digital Theater Systems, Inc.

VMAx is a trademark of Harman International Industries, Inc., and is an implementation of Cooper Bauck Transaural Stereo under patent license.

Logic 7 is a registered trademark of Harman International Industries, Incorporated.

HDCD is a registered trademark of Pacific Microsonics, Inc.


A-BUS and A-BUS Ready are registered trademarks of Leisure Tech Electronics Pty Ltd Australia.

TiVo is a registered trademark of TiVo, Inc.

Replay TV is a registered trademark of Digital Networks North America, Inc.

**Without input anti slewing and output isolation networks.

Faroudja, DCDi and DCDi by Faroudja are registered trademarks of Genesis Microchip, Inc.

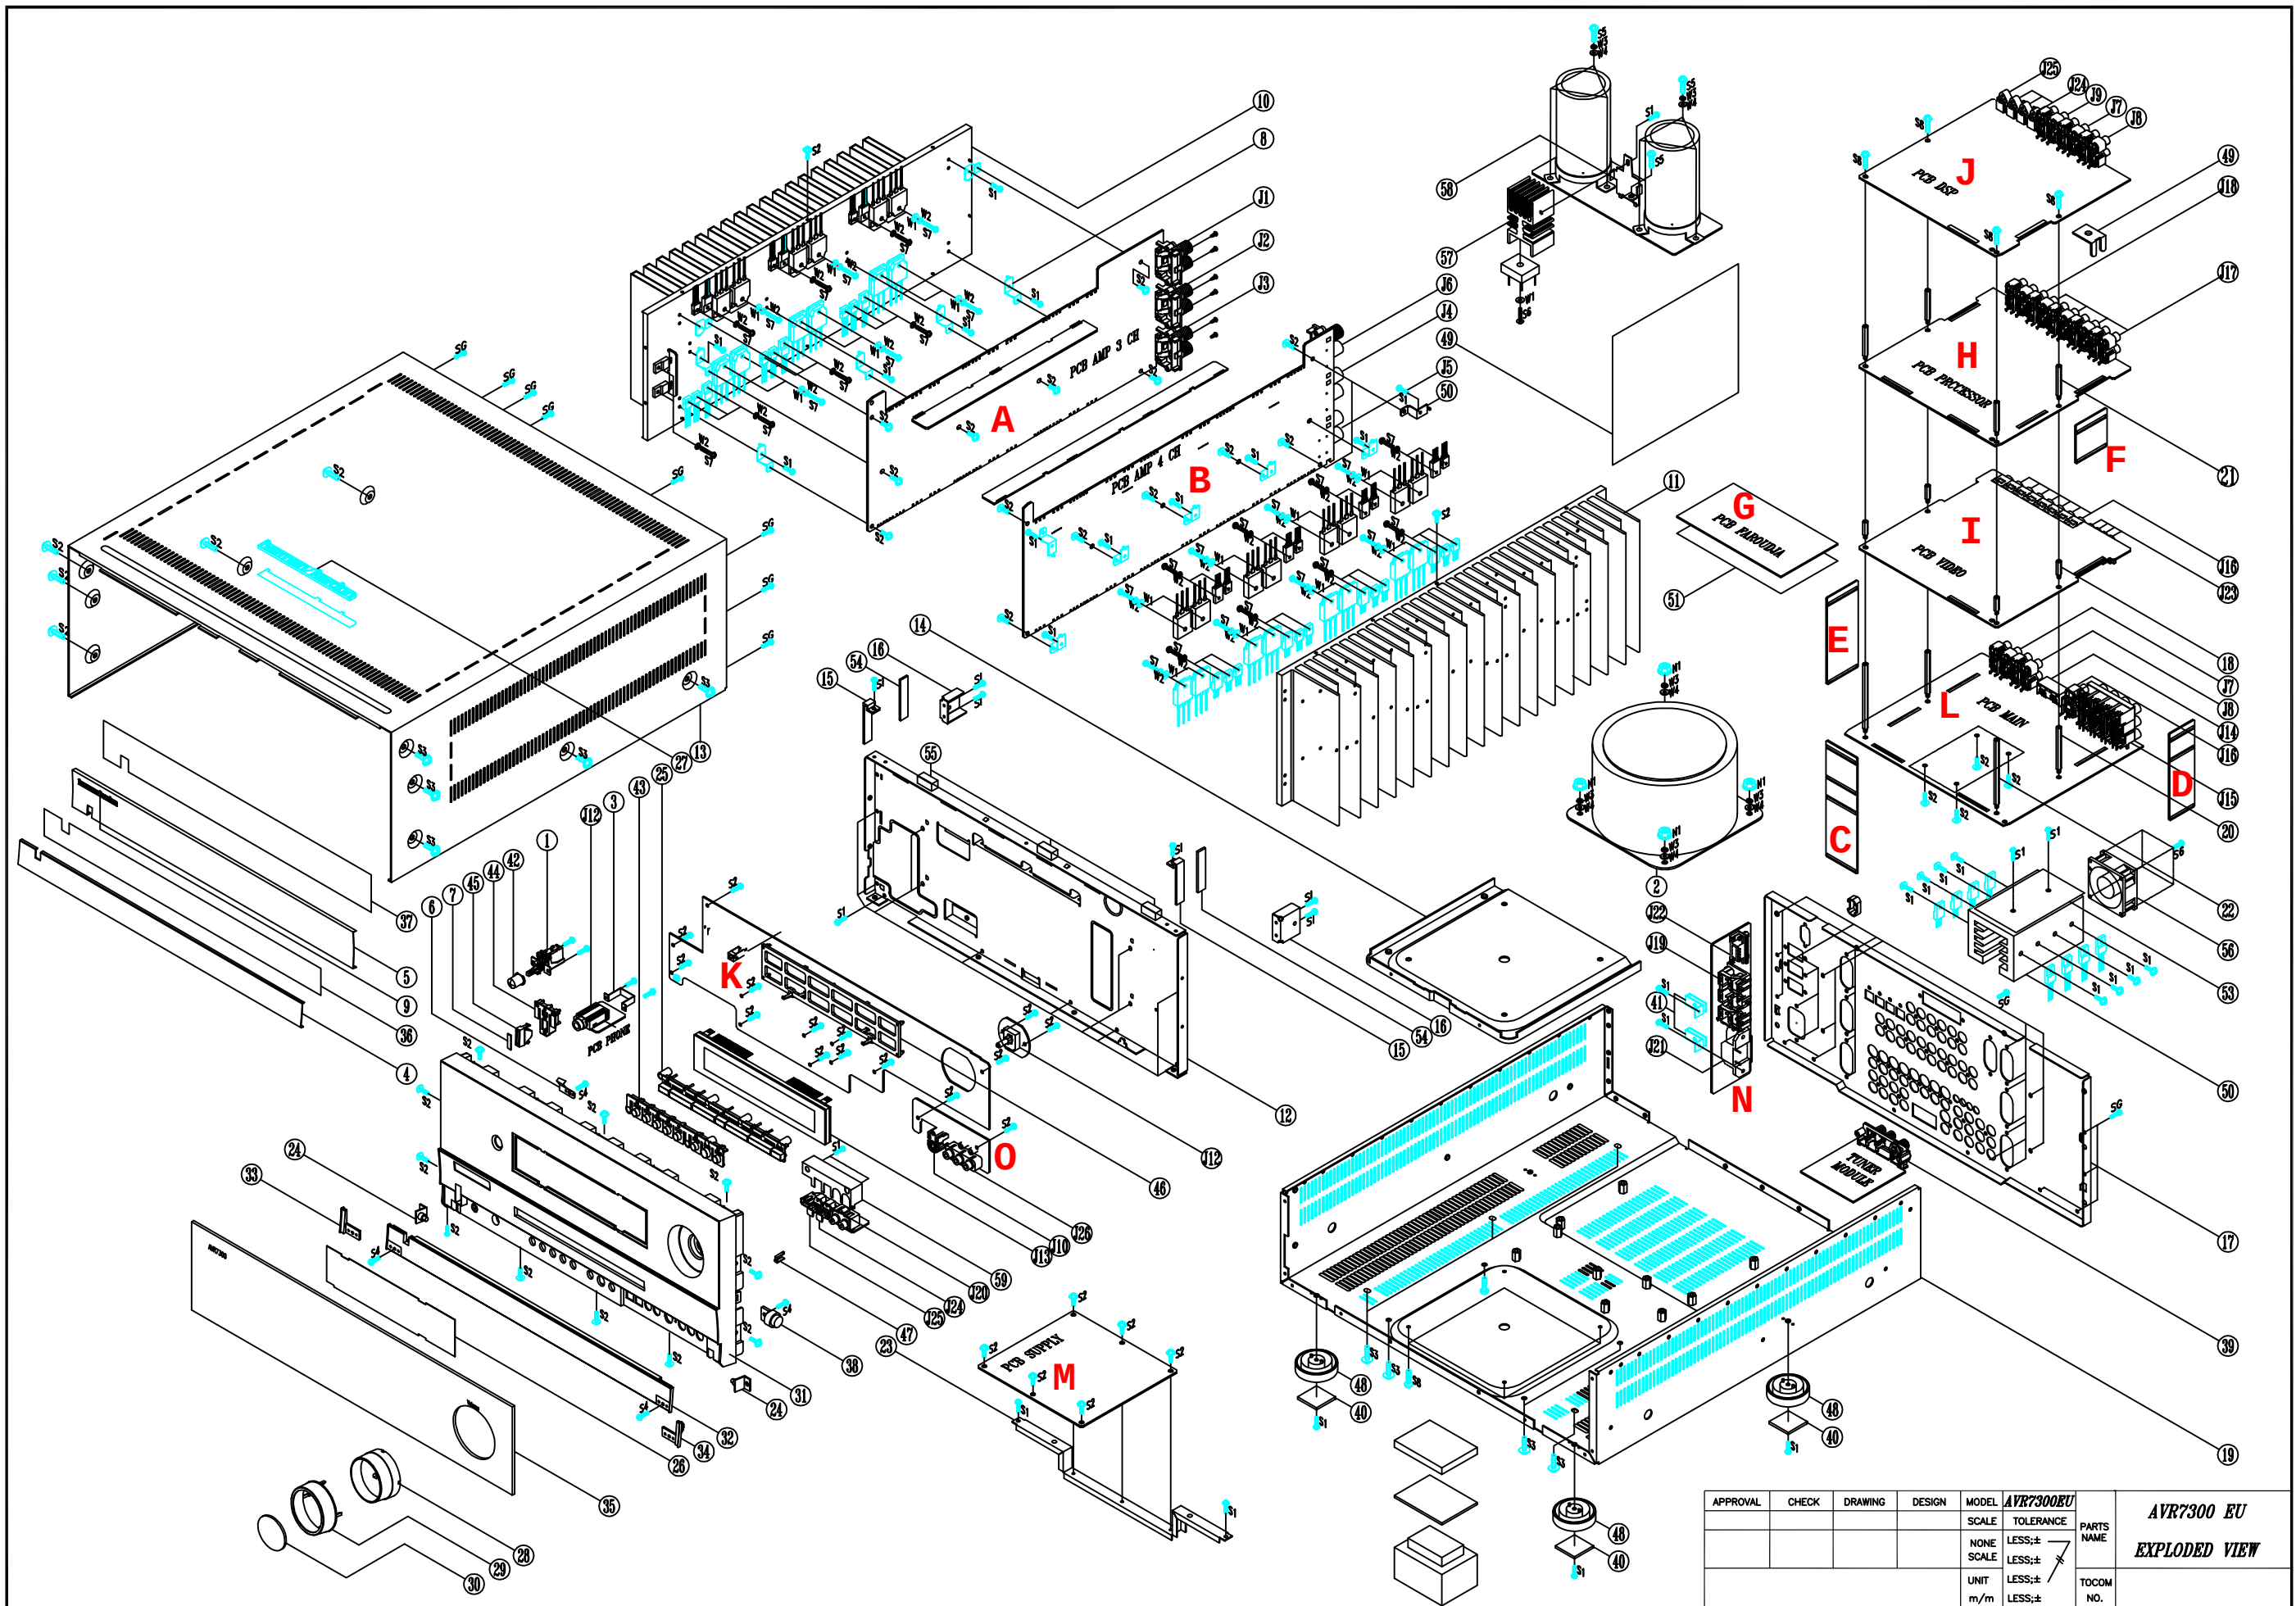

APPROVAL	CHECK	DRAWING	DESIGN	MODEL	AVR7300EU				
				SCALE	TOLERANCE	PARTS			
				NONE	LESS:±	NAME			
				SCALE	LESS:±				
				UNIT	LESS:±	TCCOM			
				m/m	LESS:±	NO.			

AVR7300 EU
EXPLODED VIEW

Harman/kardon AVR7300 Exploded View Parts List			
No.	Part No.	Description	Q'ty
1	H01-SWA2B21PDA&-7	SW PUSH POWER SDDL15700	1
2	H01-TXPWMMMD10B0-7	MN X'FORMER AVR7300EU 230V TRANSFORMER	1
3	H01-ZMB01S00100-5	BKT HEADPHONE JACK	1
4	H01-ZMD05S02A00-1	AL DOOR AVR7300	1
5	H01-ZMC11S00300-2	AL PANEL AVR430/630	1
6	H01-ZMC11S06A00-3	SPRING STOPPER AVR430/630	1
7	H01-ZMC11S12A00-8	CAP BUTTON STAND-BY AVR430/630	1
8	H01-ZMC12S09A00-4	BKT HEATSINK	15
9	H01-ZMC12S20A00-2	BADGE AL HARMAN/KARDON SILVER	1
10	H01-ZMD05S03A00-2	HEATSINK 3CH AVR7300	1
11	H01-ZMD05S04A00-3	HEATSINK 4CH AVR7300	1
12	H01-ZMD05S07A00-6	CHASSIS FRONT AVR7300	1
13	H01-ZMD05S08A00-7	COVER TOP AVR7300	1
14	H01-ZMD05S08B00-9	BKT TRANS BOTTOM AVR7300	1
15	H01-ZMD05S09A00-8	BKT TOP	2
16	H01-ZMD05S10A00-8	BKT SIDE	2
17	H01-ZMD10S11A00-5	PANEL REAR AVR7300EU	1
18	H01-ZMD05S12AYE-8	STUD STANDOFF HEX M4X0.7 6X15H	2
19	H01-ZMD05S13A00-0	CHASSIS MAIN AVR7300	1
20	H01-ZMD05S13AYE-9	STANDOFF HEX M4X0.7 6X55H	2
21	H01-ZMD05S14AYE-A	STANDOFF HEX M4X0.7 6X34H	4
22	H01-ZMD05S15AYE-0	STUD STANDOFF HEX M4X0.7 6X71.6H	2
23	H01-ZMD05S15A00-2	BKT SUPPLY	1
24	H01-ZMD05S16A00-3	BKT HINGE AVR7300	2
25	H01-ZPD0104GASG-8	BUTTON 7 KEY EU	1
26	H01-ZPC1018GART-7	FILTER VFD	1
27	H01-ZMGEN00GAGY-0	AL LOGO BADGE TOP	1
28	H01-ZPD0315GAMW-3	VOLUMN KNOB	1
29	H01-ZPD0316GASG-A	COVER KNOB	1
30	H01-ZPD0317GACR-4	CAP KNOB VOLUMN	1
31	H01-ZPD0501GAGY-9	FRONT PANEL AVR7300	1
32	H01-ZMD05S17A00-4	AL DOOR PANEL AVR7300	1
33	H01-ZPD0503GAGY-5	FRAME DOOR L	1
34	H01-ZPD0504GAGY-3	FRAME DOOR R	1
35	H01-ZPD0522GABT-3	WINDOW DISPLAY AVR7300	1
36	H01-ZVC11DWT100-3	TAPE DOOR	1
37	H01-ZVC11DWT200-5	TAPE PANEL	1
38	H01-ZVC11GEAR01-A	DAMPER GEAR DP120	1
39	H01-ZVC11TUNE01-7	TUNER MODULE KST-MB011MW0-81 US	1
40	ZFNR19720SB-5	RUBBER FOOT 19.7X19.7X2T BK	4
41	H01-ZMC12S19A00-2	BKT AC INLET	2
42	ZPC1003GAGY-5	BUTTON POWER	1
43	ZPC1005GAGY-8	BUTTON 8 KEY	1
44	ZPC1006GAWH-0	BUTTON STANDBY	1
45	ZPC1007GAMW-9	INDICATOR STAND-BY	1
46	ZPC1017GABK-6	HOLDER VFD AVR430/630	1
47	ZPC1102GAMW-1	INDICATOR VIDEO 4	1
48	ZPC1103GAGY-A	FOOT 50MM 15.8MM	4
49	H01-ZMD05S19A00-6	BRACKET SHIELD LARGE	1
50	H01-ZMD05HS0300-0	HEATSINK REG.TR AVR7300	1
51	H01-ZMD05S05A00-4	SHIELD FAROUDJA	1
52	H01-ZMD05S20A00-6	SHIELD LARGE AVR7300	1
53	H01-ZMD05S21A00-7	SHIELD SMALL AVR7300	2
54	ZFNR1450300-A	RUBBER TOP	2
55	ZQB0101AA00-4	SHIELD FOAM GASKET (WOORI)	2
56	ZUC1202AABK-3	SPONGE 145X11X2T BK	1
57	H01-ZMD05HS0100-7	HEATSINK BRIDGE AVR7300	1

58	H01-ZMD05S06A00-5	BRACKET BRIDGE H/SINK AVR7300	1
59	H01-ZMD05S18A00-5	SHIELD DIGITAL AVR7300	1
J1	H01-SOSP20117NN-6	JACK SPEAKER 2P B30290117N BK/WH	1
J2	H01-SOSP20118NN-8	JACK SPEAKER 2P B30290118N BK/BU	1
J3	H01-SOSP20119NN-A	JACK SPEAKER 2P B30290119N BK/BRN	1
J4	H01-SOSP20115NN-2	JACK SPEAKER 2P B30290115N GY/BK D/N	1
J5	H01-SOSP20116NN-4	JACK SPEAKER 2P B30290116N TAN/BK	1
J6	H01-SOSP40164NN-1	JACK SPEAKER 4P B30490164N GN/BK/R/B	1
J7	H01-SORA40RSANN-6	JACK RCA 4P JB040131ZN GN BN PP TA	2
J8	H01-SORA40RSCNN-A	JACK RCA 4P JB040131QN WH BU RD GY	3
J9	H01-SOJB04013HN-5	JACK RCA 4P OR ,OR, OR, OR JB040131HN	2
J10	H01-SORA8OSC5N8-2	JACK S-VIDEO 1P C40160261N	1
J11	H01-SOSS9CKX3NN-9	JACK PHONE 6.35 H70980110S 9P BK	1
J12	H01-SWE3AEC11S1-8	VOLUME ENCODER EC11B20203	1
J13	H01-VDHCA18LL03-7	FL HCA-18LL03	1
J14	SOMOD7400NN-6	JACK MODULAR 7400-621002	1
J15	H01-SOR12BJ12NN-3	JACK RCA 12P BJ120154JN	1
J16	H01-SORA11Y00NN-5	JACK RCA+S VIDEO C5016031DN	9
J17	H01-SORA40GNDNN-7	JACK RCA 4P JB040131PN WWRR	4
J18	H01-SORA64105NN-5	JACK RCA 6P JB060132PN	1
J19	H01-SOAC2A304NN-1	AC OUTLET A304D0071P 2P	1
J20	H01-SORA21502NN-2	CON PHONO SCKT RCA 2P W/GND CAP C.J020009VN OO	1
J21	H01-SOXA27014NN-9	CON MAINS INLET A/C INLET 7014-NGP AC05-4S020A	1
J22	SOPA96063NN-0	JACK D-SUB 9P 87204-6063 W/DUST COVER BK	1
J23	H01-SOJW2350SNN-A	JACK PHONE 3.6 EP-1401A 1P BK	4
J24	H01-SOTOR179LBA-0	D-LEM TORX-179L	4
J25	H01-SOTOT179LBA-7	D-LEM TOTX-179L	2
J26	H01-SORA3313PNN-3	CON PHONO SCKT RCA-313P 3 PINS	
S5	ZSMWM4008BZ-2	SCREW M.S M4X8 W/H ZN PLATED	11
S6	ZSTBM0318TZ-3	SCREW ST BH 3X18	3
S4	ZSTBM3008BY-1	SCREW ST BH 3X8	3
S1	ZSTBM3010BB-5	SCREW ST BH 3X10	62
S7	ZSTBM3012BY-A	SCREW ST BH 3X12 PIVOT	63
SG	ZSTGM3010BB-3	SCREW ST BH 3X10 GROUND	65
S2	ZSTWM3008BY-8	SCREW ST WPH 3X8	55
S3	ZSTWM4008BC-3	SCREW ST WPH 4X8 SILVER CHROM	20
S8	ZSMCM4014BN-6	SCREW MC4X14 NI PLATED	4
W2	ZWM623108SZ-2	WASHER SPRING 3	64
W1	ZWM803305PZ-1	WASHER PLAIN 3	31
W4	ZWMC04810PZ-5	WASHER PLAIN 4	4
W3	ZWM763109SZ-2	AC SPRING WASHER RT2250(PAV5005)	4
N1	ZNSSM4045HZ-4	NUT M4 HEXAGON CIRCULAR EXTERNAL	4
A	3SA-3152US-A3MI-1	AC EMBD IMA 3CH BD AVR7300	1
B	3SA-3152US-A4MI-1	AC EMBD IMA 4CH BD AVR7300	1
C	3SA-3152US-CNMI-1A	CONN BD DSP-PRO-MAIN AVR7300	1
D	3SA-3152US-CNMI-1B	CONN BD DSP-PRO-VIDEO-MAIN AVR7300	1
E	3SA-3152US-CNMI-1C	CONN BD PRO-MAIN AVR7300	1
F	3SA-3152US-CNMI-1D	CONN BD DSP-PRO AVR7300	1
G	3SA-3152US-FAMI-1	AC EMBD IMA FARMADJA BD AVR7300	1
H	3SA-3152US-POMI-1	AC EMBD IMA PROCESSOR BD AVR7300	1
I	3SA-3152US-VDMI-1	AC EMBD IMA VIDEO BD AVR7300	1
J	3SA-4047EU-DGMI-1	DSP BD IMA AVR7300	1
K	3SA-4047EU-FCMI-1	IMA FRONT BD AVR7300	1
L	3SA-4047EU-MAMI-1	MAIN BD IMA AVR7300	1
M	3SA-4047EU-SUMI-1	SUPPLY BD IMA AVR7300	1
N	3SA-4047EU-SUMI-1A	OUTLET BOARD (RS232) PCB ASSY AVR7300	1
O	3SA-4047EU-SUMI-1B	DIGI 4 BOARD (N824) PCB ASSY AVR7300	1

Pos	Part Number	Part name
Front		
C495	CCZID0104NA	CC 100N0F +80% -20% 50.0V F
D716	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
L701	H01-LAINB047ACR	LF 4U7H +10% 1.7 OHM 190.0A
R760	RC3DI0100IN	RCF 10R0 OHM +5% 250MI0W
R761	RC3DI0100IN	RCF 10R0 OHM +5% 250MI0W
R770	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R772	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R774	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R776	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R732	RC3DI0103IN	RCF 10K0 OHM +5% 250MI0W
R733	RC3DI0103IN	RCF 10K0 OHM +5% 250MI0W
R734	RC3DI0103IN	RCF 10K0 OHM +5% 250MI0W
R740	RC3DI0221IN	RCF 220R0 OHM +5% 250MI0W
R741	RC3DI0221IN	RCF 220R0 OHM +5% 250MI0W
R742	RC3DI0331IN	RCF 330R0 OHM +5% 250MI0W
R743	RC3DI0331IN	RCF 330R0 OHM +5% 250MI0W
R706	RC3DI033AIN	RCF 3R3 OHM +5% 250MI0W
R707	RC3DI033AIN	RCF 3R3 OHM +5% 250MI0W
C710	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C716	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C718	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C701	CPHKC0473NN	CAP POLY NON METAL 47NF 100V +20%
C702	CPHKC0473NN	CAP POLY NON METAL 47NF 100V +20%
C704	CPHKC0473NN	CAP POLY NON METAL 47NF 100V +20%
S701	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S702	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S703	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S704	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S705	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S706	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S707	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S708	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S709	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S710	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S711	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S712	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S713	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S714	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S715	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S716	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S717	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S718	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S719	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
S720	H01-SWC2A112FS1	SWITACT VERTICAL SKQNADD010 12V 50MA
Q702	H03-TRKRC107MNA	TR-SLPSWA KRC107M N
Q706	H03-TRKTA107MNA	TR-SLPSWA KRA107M P
C493	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C705	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C706	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C707	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C708	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C721	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C722	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C723	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C719	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C720	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C728	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C729	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C491	CZKII0222BC	CAP CHIP 2N2F +10% -10% 50.0V X7R 0603
C492	CZKII0222BC	CAP CHIP 2N2F +10% -10% 50.0V X7R 0603
C713	CZKII0223BC	CAP CHIP 22N0F +10% -10% 50.0V X7R 0603

Pos	Part Number	Part name
Front		
C714	CZKII0223BC	CAP CHIP 22N0F +10% -10% 50.0V X7R 0603
C494	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C703	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C715	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C717	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C724	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
D720	H03-DS05GBUSCNB	DIODE PG05GBUSC
D721	H03-DS05GBUSCNB	DIODE PG05GBUSC
D708	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D710	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D711	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D713	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D715	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
IC71	H01-ICBU4094BD3	IC CMOS BU4094BF SOP16
Q701	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q703	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q704	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q705	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
R702	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R703	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R746	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R738	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R714	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R723	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R735	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R736	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R737	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R739	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
RC727	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R704	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R705	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R751	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R2	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R715	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R724	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R716	RS3AD0152NA-A	RMGCFMIC 1K5 OHM +5% 62MI5W
R725	RS3AD0152NA-A	RMGCFMIC 1K5 OHM +5% 62MI5W
R722	RS3AD0183NA-A	RMGCFMIC 18K0 OHM +5% 62MI5W
R731	RS3AD0183NA-A	RMGCFMIC 18K0 OHM +5% 62MI5W
R717	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R726	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R718	RS3AD0272NA	RMGCFMIC 2K7 OHM +5% 62MI5W
R727	RS3AD0272NA	RMGCFMIC 2K7 OHM +5% 62MI5W
R719	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R728	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R749	RS3AD0391NA	RMGCFMIC 390R0 OHM +5% 62MI5W
R750	RS3AD0391NA	RMGCFMIC 390R0 OHM +5% 62MI5W
R747	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R748	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R720	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R729	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R721	RS3AD0822NA	RMGCFMIC 8K2 OHM +5% 62MI5W
R730	RS3AD0822NA	RMGCFMIC 8K2 OHM +5% 62MI5W
D700	H01-DL30B2015AA-A	D-LEM 30B3-20-15 GaN SUPER BLUE WATER CLEAR 15
D702	H01-DL30B2015AA-A	D-LEM 30B3-20-15 GaN SUPER BLUE WATER CLEAR 15
D704	H01-DL30B2015AA-A	D-LEM 30B3-20-15 GaN SUPER BLUE WATER CLEAR 15
D706	H01-DL30B2015AA-A	D-LEM 30B3-20-15 GaN SUPER BLUE WATER CLEAR 15
D717	H01-DL3BA05V0BA	D-LEM BLUE/AMBER 3PIE RD RND CL L-3VYMB
D714	H01-DLRED3FRDBA	D-LEM RED/GREEN 3F RD RND CL
RM71	H01-ICROMA138EC	IC-REMOTE ROM-A138TEC
NJ71	H01-SORA3313PNN	CON PHONO SCKT RCA-313P 3 PINS

Pos	Part Number	Part name
Front		
NJ72	H01-SORA8OSC5N8	JACK S-VIDEO 1P C40160261N
NJ88	H01-SOSS9CKX3NN	JACK PHONE 6.35 H70980110S 9P BK
RV71	H01-SWE3AEC11S1	VOLUME ENCODER EC11B20203
DP71	H01-VDHCA18LL03	FL HCA-18LL03
N703	H01-WG04SB809DN	WIRE ASS'Y UL1007#26 STR 90MM 2.0MM 4P WHT PIN DOWN
N704	H01-WG04SB809DN	WIRE ASS'Y UL1007#26 STR 90MM 2.0MM 4P WHT PIN DOWN
N702	H01-WG11SB83000	WIRE ASS'Y 2.0MM 11P 300MM WHT UL1007#26
P707	H01-WN10AB00000	CONN 2.0MM GIL-S-10P-S2L2-EF 10P
P701	H01-WN23AI000WH	CONN 1.25MM 23 FE ANG WH GF120-23S-LS 2794 A6
N825	H01-WS4265105EN-A	WIRE ASS'Y 2.0MM 4P 510MM UL1533#26 STR SHIELD WHT SHIELD
S1	H01-ZMB01S02200	SPRING PLATE GND C5212 0.2T
S2	H01-ZMB01S02200	SPRING PLATE GND C5212 0.2T
S3	H01-ZMB01S02200	SPRING PLATE GND C5212 0.2T
S4	H01-ZMB01S02200	SPRING PLATE GND C5212 0.2T
S5	H01-ZMB01S02200	SPRING PLATE GND C5212 0.2T
S6	H01-ZMB01S02200	SPRING PLATE GND C5212 0.2T
Pos	Part Number	Part name
DSP		
L2	H01-LAINB0470CR	LF 47U0H +10% 5.8 OHM 500MIOA
L3	H01-LAINB0470CR	LF 47U0H +10% 5.8 OHM 500MIOA
L4	H01-LAINB0470CR	LF 47U0H +10% 5.8 OHM 500MIOA
L5	H01-LAINB0470CR	LF 47U0H +10% 5.8 OHM 500MIOA
R619	RC3DI010AIN	RCF 1R0 OHM +5% 250MIOW
L600	H01-LAINB047ACR	LF 4U7H +10% 1.7 OHM 190.0A
R22	RC3DI0560IN	RCF 56 OHM +5% 250MIOW
R23	RC3DI022AIN	RCF 2R2 OHM +5% 250MIOW
C472	CEHDC0108NN	CE 1MIOF +20% 6.3V 8X11.5 85C ELITE
C473	CEHDC0108NN	CE 1MIOF +20% 6.3V 8X11.5 85C ELITE
C474	CEHDC0108NN	CE 1MIOF +20% 6.3V 8X11.5 85C ELITE
C5	CEHEC01075E	CE 100U0F +20% 10.0V 5X11 85C P5MM
C126	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C127	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C128	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C129	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C130	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C131	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C132	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C133	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C134	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C135	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C136	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C137	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C138	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C139	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C140	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C141	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C231	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C232	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C306	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C307	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C308	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C309	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C320	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C321	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C400	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C401	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C402	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C403	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C404	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C405	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C406	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C

Pos	Part Number	Part name
DSP		
C407	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C408	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C409	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C410	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C411	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C412	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C413	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C414	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C415	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C456	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C457	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C458	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C459	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C460	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C461	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C462	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C463	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C464	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C465	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C613	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C620	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C621	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C727	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C729	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C731	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C735	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C150	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C151	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C152	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C153	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C233	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C549	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C618	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C630	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C649	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C723	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C800	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C811	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C820	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C822	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C828	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C830	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
C211	CEHFC04762S	CE 47UF +20% 16V D5XL7 P2.5MM 2000hours 85C
C212	CEHFC04762S	CE 47UF +20% 16V D5XL7 P2.5MM 2000hours 85C
C213	CEHFC04762S	CE 47UF +20% 16V D5XL7 P2.5MM 2000hours 85C
C214	CEHFC04762S	CE 47UF +20% 16V D5XL7 P2.5MM 2000hours 85C
C627	CEHFC04762S	CE 47UF +20% 16V D5XL7 P2.5MM 2000hours 85C
C203	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C204	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C205	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C206	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C207	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C208	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C209	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C210	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C223	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C224	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C225	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C226	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C227	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C228	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C

Pos	Part Number	Part name
DSP		
C229	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C230	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C559	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C648	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C806	CEHIC02255E	CE 2U2F +20% 50V D5XL11 P5MM 85C
C619	CEHIC01042S	CE 100NF +20% 50V SSE TYPE D4XL7 P2.5MM 85C
C470	H01-CEMFC0108AH	CAP ELEC 1000UF 16V M 10X16 SHL SAMYOUNG
C471	H01-CEMFC0108AH	CAP ELEC 1000UF 16V M 10X16 SHL SAMYOUNG
Q611	H03-TRMPSA06NNA-A	TR-SLPLF MPSA06 N 500MIOA TO-92
C725	H01-CEMIC0475AH	CE 4.7UF 50V M 5X11 SHL SAMYOUNG
C30	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C100	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C101	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C102	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C103	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C104	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C105	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C106	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C107	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C108	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C109	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C110	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C111	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C112	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C113	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C114	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C115	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C235	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C236	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C237	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C238	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C600	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C601	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C602	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C603	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C604	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C605	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C606	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C608	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C611	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C615	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C616	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C625	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C626	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C704	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C700	CZJII0220BE	CCCFMIC 22P0F +5% -5% 50.0V NP0 0603
C702	CZJII0220BE	CCCFMIC 22P0F +5% -5% 50.0V NP0 0603
C752	CZJII0220BE	CCCFMIC 22P0F +5% -5% 50.0V NP0 0603
C890	CZJII0471BE	CCCFMIC 470P0F +5% -5% 50.0V NP0 0603
C314	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C315	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C318	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C319	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C432	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C433	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C434	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C435	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C436	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C437	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C438	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C439	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805

Pos	Part Number	Part name
DSP		
C440	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C441	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C442	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C443	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C444	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C445	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C446	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C447	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C805	CZJII0680BE	CAPACITOR CERAMIC CHIP 68PF 50V CH J NPO 0603
C243	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C244	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C721	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C18	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C19	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C20	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C21	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C24	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C25	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C32	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C33	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C34	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C35	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C37	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C38	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C39	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C41	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C43	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C711	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C713	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C804	CZKII0122BC	CAP CHIP 1N2F +10% -10% 50.0V X7R 0603
C6	CZJII0331BE	CCCFMIC 330P0F +5% -5% 50.0V NP0 0603
C8	CZJII0331BE	CCCFMIC 330P0F +5% -5% 50.0V NP0 0603
C310	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C311	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C312	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C313	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C416	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C417	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C418	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C419	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C420	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C421	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C422	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C423	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C424	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C425	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C426	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C427	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C428	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C429	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C430	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C431	CZKII0272BC	CAP CHIP 2N7F +10% -10% 50.0V X7R 0603
C13	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C116	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C117	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C118	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C119	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C120	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C121	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C122	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C123	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603

[illegible]

Pos	Part Number	Part name
DSP		
C624	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C628	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C629	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C647	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C650	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C701	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C705	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C708	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C710	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C712	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C714	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C718	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C719	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C722	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C724	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C726	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C728	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C730	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C732	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C734	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C742	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C801	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C803	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C808	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C809	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C810	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C814	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C815	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C816	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C818	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C819	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C821	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C829	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
D601	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
L700	H01-FB2K52012NN	FBEAD SURFACE MT 2500OHM FCM2012H-252T02
Q402	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q403	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q400	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MIOA SOT-23
Q401	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MIOA SOT-23
R27	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R28	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R29	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R30	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R715	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R100	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R101	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R102	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R103	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R104	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R106	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R107	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R701	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R180	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R181	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R182	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R183	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R184	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R185	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R186	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R187	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R238	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W

Pos	Part Number	Part name
DSP		
R239	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R242	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R243	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R621	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R741	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R753	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R756	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R802	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R140	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R141	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R142	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R143	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R144	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R145	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R146	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R147	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R315	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R316	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R448	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R449	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R450	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R451	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R452	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R453	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R454	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R470	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R471	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R305	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R306	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R307	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R308	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R416	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R417	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R418	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R419	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R420	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R421	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R422	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R423	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R424	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R425	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R426	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R427	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R428	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R429	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R430	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R431	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R132	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R133	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R134	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R135	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R136	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R137	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R138	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R139	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R196	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R197	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R198	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R199	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R200	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R201	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W

Pos	Part Number	Part name
DSP		
R202	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R203	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R246	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R247	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R799	RS3AD0200NA	RES.CHIP 20 OHM 1/16W +/-5% 0603
R234	RS3AD0203NA	RMGCFMIC 20K0 OHM +5% 62MI5W
R235	RS3AD0203NA	RMGCFMIC 20K0 OHM +5% 62MI5W
R24	RS3AD0221NA	RMGCFMIC 220R0 OHM +5% 62MI5W
R870	RS3AD0302NA	RMGCFMIC 3K0 OHM +5% 62MI5W
R744	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R876	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R877	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R878	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R400	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R401	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R402	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R403	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R404	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R405	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R406	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R407	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R408	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R409	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R410	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R411	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R412	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R413	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R414	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R415	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R1	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R4	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R105	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R157	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R166	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R167	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R168	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R169	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R170	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R171	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R236	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R237	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R301	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R302	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R303	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R304	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R526	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R108	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R109	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R110	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R111	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R112	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R114	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R115	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R148	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R149	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R150	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R151	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R152	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R153	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R154	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R155	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W

Pos	Part Number	Part name
DSP		
R232	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R233	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R620	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R623	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R313	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R314	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R456	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R457	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R458	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R459	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R460	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R461	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R462	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R463	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R309	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R310	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R311	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R312	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R432	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R433	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R434	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R435	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R436	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R437	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R438	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R439	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R440	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R441	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R442	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R443	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R444	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R445	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R446	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R447	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R113	RS3AD0682NA	RMGCFMIC 6K8 OHM +5% 62MI5W
R700	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R705	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R754	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R124	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R125	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R126	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R127	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R128	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R129	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R130	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R131	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
C7	CZJII0390BE	CAP CHIP 39PF 50V CH J NPO 0603
C720	CZKGI0183BC	CAP CHIP 18NF 25V +/-10% 0603 X7R
C9	CZKII0221BA	CAP CHIP 220PF 50V K SL 0603
L100	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L101	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L102	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L103	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L104	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L105	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L106	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L107	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L108	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L109	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L110	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L111	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07

Pos	Part Number	Part name
DSP		
L706	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L712	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L714	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L804	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L805	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
LR879	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
C142	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C143	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C144	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C145	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C146	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C147	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C148	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C149	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C175	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C176	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C177	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C178	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C179	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C180	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C181	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C182	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C743	CZJII0220BE	CCCFMIC 22P0F +5% -5% 50.0V NP0 0603
R735	RS3AD0391NA	RMGCFMIC 390R0 OHM +5% 62MI5W
C466	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C467	CZJII0561CE	CCCFMIN 560P0F +5% -5% 50.0V NP0 0805
C183	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C184	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C185	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C186	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C187	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C188	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C189	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C190	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C40	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C42	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C44	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C703	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C706	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C709	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C716	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C717	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C751	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C11	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C12	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C22	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C26	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C27	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C239	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C240	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C241	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C242	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C448	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C449	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C450	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C451	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C452	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C453	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C454	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C455	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
D600	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA

Pos	Part Number	Part name
DSP		
D602	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D603	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D604	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D605	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
L112	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L113	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L114	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L18	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L703	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L707	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L710	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L711	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L800	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L802	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
L803	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
IC804	H01-IC49L8192I5-A	IC-FLASH MEMORY ROM AT49LV8192A 70ns
IC17	H01-IC74V244MG5	IC-LOGIC 74VHCT244A INVERTER CMOS
IC18	H01-IC74V244MG5	IC-LOGIC 74VHCT244A INVERTER CMOS
IC25	H01-IC74V244MG5	IC-LOGIC 74VHCT244A INVERTER CMOS
IC5	H01-ICBU4053BB4	IC BU4053BCF SOP16 ANALOG MPX/DEMPX
IC16	H01-ICBU4094BD3	IC CMOS BU4094BF SOP16
IC13	H01-ICCS42528EC	IC-CODEC CS42528CQ
IC26	H01-ICCS4391AD8	IC CONV CS4391A-KZ SOP20
IC11	H01-ICCS49400ED	IC-DSP CS494003-CQ LQFP144
IC27	H01-ICCS5361KG4	IC-CONV CS5361-KZ A/D TSSOP24
IC28	H01-ICCS5361KG4	IC-CONV CS5361-KZ A/D TSSOP24
IC29	H01-ICCS5361KG4	IC-CONV CS5361-KZ A/D TSSOP24
IC30	H01-ICCS5361KG4	IC-CONV CS5361-KZ A/D TSSOP24
IC12	H01-ICD703033E1	IC-MICOM FLASH NEC UPD70F3033BGF 0228KK001 JAPAN QFP100
IC14	H01-ICK4S1616M6	IC-SDRAM K4S161622E-TC70 OR TC80
IC31	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC32	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC33	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC34	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC35	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC36	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC37	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC38	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC39	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC40	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC41	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC42	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC43	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC44	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC45	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC46	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC47	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC48	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC49	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC50	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC22	H01-ICM24C04WD2	IC-EEPROM M24C04WMN6T
IC19	H01-ICM74H04MD4	IC-LOGIC M74HCU04M1R INVERTER HCT
IC20	H01-ICM74H04MD4	IC-LOGIC M74HCU04M1R INVERTER HCT
IC24	H01-ICMM1662HI3	IC MM1662H LOW DROP VOLTAGE REGULATOR SOP-8
IC23	H01-ICNJU6324D2	IC-SPECFUNC NJU6324M SOP8 CMOS CRYSTAL
Q600	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q601	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q604	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q605	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q606	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q607	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM

Pos	Part Number	Part name
DSP		
Q608	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q609	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q612	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q613	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
R3	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R6	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R7	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R8	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R626	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R627	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R708	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R719	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R729	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R730	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R731	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R732	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R733	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R734	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R21	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R26	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R31	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R632	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R711	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R720	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R10	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R12	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R466	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R467	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R472	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R473	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R600	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R601	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R602	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R603	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R604	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R605	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R606	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R607	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R608	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R609	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R610	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R617	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R618	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R628	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R629	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R630	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R631	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R641	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R5	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R9	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R14	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R16	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R17	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R172	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R173	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R174	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R175	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R176	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R177	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R178	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R179	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W

Pos	Part Number	Part name
DSP		
R188	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R189	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R190	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R191	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R192	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R193	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R194	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R195	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R216	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R217	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R218	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R219	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R220	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R221	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R222	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R223	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R224	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R225	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R226	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R227	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R228	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R229	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R230	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R231	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R240	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R241	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R611	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R612	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R613	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R614	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R615	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R616	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R624	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R868	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R869	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R871	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R872	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R873	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R874	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R455	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R622	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R464	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R465	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R204	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R205	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R206	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R207	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R208	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R209	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R210	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R211	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R244	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R245	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R156	RS3AD0203NA	RMGCFMIC 20K0 OHM +5% 62MI5W
R158	RS3AD0203NA	RMGCFMIC 20K0 OHM +5% 62MI5W
R159	RS3AD0203NA	RMGCFMIC 20K0 OHM +5% 62MI5W
R160	RS3AD0203NA	RMGCFMIC 20K0 OHM +5% 62MI5W
R161	RS3AD0203NA	RMGCFMIC 20K0 OHM +5% 62MI5W
R162	RS3AD0203NA	RMGCFMIC 20K0 OHM +5% 62MI5W
R163	RS3AD0203NA	RMGCFMIC 20K0 OHM +5% 62MI5W
R527	RS3AD0203NA	RMGCFMIC 20K0 OHM +5% 62MI5W

Pos	Part Number	Part name
DSP		
R725	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R736	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R738	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R752	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R2	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R875	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R25	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R710	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R722	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R18	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R19	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R20	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R15	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R702	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R706	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R724	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R727	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R737	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R739	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R751	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R755	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R709	RS3AD0511NA	RMGCFMIC 510R0 OHM +5% 62MI5W
R721	RS3AD0511NA	RMGCFMIC 510R0 OHM +5% 62MI5W
R468	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R469	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R704	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R717	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R726	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R743	RS3AD0561NA	RMGCFMIC 560R0 OHM +5% 62MI5W
R723	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R625	RS3AD0822NA	RMGCFMIC 8K2 OHM +5% 62MI5W
RX21	RS3AY0103NA	RCA 10K0 OHM +5% 62M15W 4
RX23	RS3AY0103NA	RCA 10K0 OHM +5% 62M15W 4
RX25	RS3AY0103NA	RCA 10K0 OHM +5% 62M15W 4
RX26	RS3AY0103NA	RCA 10K0 OHM +5% 62M15W 4
RX27	RS3AY0103NA	RCA 10K0 OHM +5% 62M15W 4
RX22	RS3AY0332NA	RCA 3K3 OHM +5% 62M15W 4
RX24	RS3AY0332NA	RCA 3K3 OHM +5% 62M15W 4
RX11	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RX12	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RX13	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RX14	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RX15	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RX16	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RX17	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RX18	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RX19	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
R11	RS3AD0221NA	RMGCFMIC 220R0 OHM +5% 62MI5W
R13	RS3AD0221NA	RMGCFMIC 220R0 OHM +5% 62MI5W
R745	RS3AD0221NA	RMGCFMIC 220R0 OHM +5% 62MI5W
R746	RS3AD0221NA	RMGCFMIC 220R0 OHM +5% 62MI5W
C657	H01-CEZXA0479MN	CM 47MI0F +80% -20% 5.5V 70C SCDA5R5473V
IC21	H03-ICKA78R08I2-A	IC-KA78R08API TO-220IS-4PIN
TF11	H01-LF11030A2NA	TFPULSE TRANSFORMER 110UH FP-110 FERRIT MAGNET
TF12	H01-LF11030A2NA	TFPULSE TRANSFORMER 110UH FP-110 FERRIT MAGNET
Y800	H01-OSCEM24M5RU-A	VCXO 24M576 HZ +50 PPM -50 PPM 0 OHM 3.3V
Y600	H01-OSCNi20MOCU	CSTLS20MOX51-B0
NJ13	H01-SOJB04013HN	JACK RCA 4P OR ,OR, OR, OR JB040131HN
NJ12	H01-SORA40RSANN	JACK RCA 4P JB040131ZN GN BN PP TA
NJ11	H01-SORA40RSCNN-A	JACK RCA 4P JB040131QN WH BU RD GY
NJ14	H01-SOTOR179LBA	D-LEM TORX-179L

Pos	Part Number	Part name
DSP		
NJ15	H01-SOTOR179LBA	D-LEM TORX-179L
NJ16	H01-SOTOR179LBA	D-LEM TORX-179L
NJ17	H01-SOTOT179LBA	D-LEM TOTX-179L
N105	H01-WG09SB83000-A	WIRE ASS'Y 2.0MM 9P 300MM UL1007#26 WHT
P104	H01-WN04AB100WH	CONN WAFER 2.0MM 4P 35237-0410 WHT
P117	H01-WN04SB00000	CONN 2.0MM 4 MA ST NAT GT201-4P-TS
P102	H01-WN06SB00000	CONN 2.0MM 6 MA ST NAT GT201-6P-TS
P101	H01-WN08SB00000	CONN 2.0MM 8 MA ST NAT GT201-8P-TS
P106	H01-WN15AI00000	CONN FFC 1.25MM 15P SCB-1015-00-2 ANG
P1	H01-WN15SB00000	CONN 2.0MM 15 MA ST NAT GT201-15P-TS
P110	H01-WN15SB00000	CONN 2.0MM 15 MA ST NAT GT201-15P-TS
P107	H01-WN19AB00000	CONN 2.0MM 19 MA R NAT SOCKET MOLEX 35237-1910 0 0
P108	H01-WN19AB00000	CONN 2.0MM 19 MA R NAT SOCKET MOLEX 35237-1910 0 0
P103	H01-WN23SI00000	CONN FFC 1.25MM 23P SCB-1123-00-2 VER
C733	CEHFC01062S	CE 10UF +20% 16V D4XL7 P2.5MM 2000hours 85C
C807	CEHFC01072S	CE 100UF +20% 16V D6.3XL7 P2.5MM 2000hours 85C
S7	H01-ZMB01S02200	SPRING PLATE GND C5212 0.2T

Pos	Part Number	Part name
Processor		
C176	CEHDC0108NN	CE 1MI0F +20% 6.3V 8X11.5 85C ELITE
C177	CEHDC0108NN	CE 1MI0F +20% 6.3V 8X11.5 85C ELITE
C5	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C8	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C15	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C18	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C39	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C42	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C55	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C58	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C74	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C77	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C78	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C81	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C86	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C89	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C92	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C95	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C96	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C97	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C98	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C99	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C100	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C101	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C102	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C103	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C104	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C105	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C108	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C109	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C112	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C119	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C120	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C122	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C127	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C129	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C132	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C133	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C138	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C145	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C146	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C153	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C

Pos	Part Number	Part name
Processor		
C158	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C165	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C168	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C175	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C189	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C201	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C202	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C208	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C209	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C210	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C224	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C225	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C233	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C221	CEHIC04755E	CE 4U7F +20% 50.0V 85C P5MM
C222	CEHIC04755E	CE 4U7F +20% 50.0V 85C P5MM
C6	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C7	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C13	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C14	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C16	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C17	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C19	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C20	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C37	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C38	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C40	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C41	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C53	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C54	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C56	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C57	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C59	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C60	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C75	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C76	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C79	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C80	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C82	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C83	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C84	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C85	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C87	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C88	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C90	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C91	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C106	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C107	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C113	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C114	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C116	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C118	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C121	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C123	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C124	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C125	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C126	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C131	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C139	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C140	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C142	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C144	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL

Pos	Part Number	Part name
Processor		
C147	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C149	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C151	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C152	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C159	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C160	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C162	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C164	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C169	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C170	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C172	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C174	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C190	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C195	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C196	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C197	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C198	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C205	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C206	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C207	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
Q1	H03-TRKTD1302NA	TR-SLPLF KTD1302 B N 300MI0A 20V
Q18	H03-TRKTD1302NA	TR-SLPLF KTD1302 B N 300MI0A 20V
Q19	H03-TRKTD1302NA	TR-SLPLF KTD1302 B N 300MI0A 20V
Q21	H03-TRKTD1302NA	TR-SLPLF KTD1302 B N 300MI0A 20V
Q2	H03-TRMPSA06NNA-A	TR-SLPLF MPSA06 N 500MI0A TO-92
Q5	H03-TRMPSA06NNA-A	TR-SLPLF MPSA06 N 500MI0A TO-92
Q4	H03-TRMPSA56YNA	TR-SLPLF MPSA56 Y P -500MI0A -300V
Q6	H03-TRMPSA56YNA	TR-SLPLF MPSA56 Y P -500MI0A -300V
C1	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C2	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C3	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C4	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C9	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C10	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C11	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C12	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C21	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C22	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C23	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C24	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C25	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C26	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C27	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C28	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C29	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C30	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C31	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C32	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C33	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C34	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C35	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C36	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C43	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C44	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C45	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C46	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C47	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C48	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C49	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C50	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C61	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603

Pos	Part Number	Part name
Processor		
C62	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C63	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C64	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C65	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C70	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C71	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C72	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C73	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C110	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C117	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C136	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C143	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C155	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C156	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C163	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C166	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C173	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C178	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C179	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C180	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C181	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C182	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C183	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C184	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C191	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C192	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C193	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C194	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C223	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C226	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C227	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C228	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C229	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C67	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C69	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C130	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C134	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C188	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C203	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C204	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C231	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C232	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C128	CZKII0821BC	CAP CHIP 820P0F +10% -10% 50.0V X7R 0603
C135	CZKII0821BC	CAP CHIP 820P0F +10% -10% 50.0V X7R 0603
C94	CZKII0222BC	CAP CHIP 2N2F +10% -10% 50.0V X7R 0603
C148	CZKII0222BC	CAP CHIP 2N2F +10% -10% 50.0V X7R 0603
C51	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C52	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C185	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C186	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C211	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C212	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C230	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
D1	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D2	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D3	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D4	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D5	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
IC29	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC30	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC10	H01-ICTC9273NDA	IC-SWITCH TC9273F-004 SOP28 ANALOG SWITCH

Pos	Part Number	Part name
Processor		
Q54	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q24	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q26	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q27	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q28	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q29	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q30	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q31	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q33	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q36	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q38	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q39	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q40	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q42	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q44	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q45	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q46	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
R329	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R334	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R800	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R1	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R10	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R11	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R13	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R18	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R30	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R31	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R44	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R63	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R64	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R75	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R77	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R78	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R79	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R82	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R88	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R89	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R98	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R101	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R106	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R107	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R112	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R121	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R126	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R131	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R133	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R136	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R137	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R141	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R142	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R166	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R167	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R171	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R172	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R174	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R184	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R185	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R189	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R195	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R198	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R204	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W

Pos	Part Number	Part name
Processor		
R231	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R238	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R288	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R61	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R71	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R72	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R80	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R81	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R91	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R92	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R93	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R94	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R95	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R96	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R138	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R139	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R140	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R143	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R144	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R145	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R150	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R151	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R152	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R153	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R154	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R155	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R168	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R169	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R170	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R205	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R221	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R229	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R247	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R249	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R254	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R256	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R264	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R269	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R277	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R279	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R286	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R293	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R301	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R303	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R310	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R315	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R316	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R324	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R325	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R326	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R343	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R344	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R345	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R346	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R347	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R348	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R349	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R350	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R378	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R2	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R5	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W

Pos	Part Number	Part name
Processor		
R12	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R14	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R15	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R16	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R17	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R21	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R26	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R28	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R33	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R35	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R40	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R41	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R42	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R43	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R45	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R47	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R50	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R52	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R58	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R60	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R65	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R66	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R67	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R68	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R85	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R86	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R99	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R100	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R103	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R104	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R105	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R109	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R110	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R111	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R113	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R114	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R119	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R120	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R123	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R124	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R129	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R130	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R146	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R147	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R161	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R162	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R175	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R176	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R181	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R183	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R186	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R188	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R191	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R192	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R193	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R194	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R214	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R217	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R218	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R225	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R233	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W

Pos	Part Number	Part name
Processor		
R234	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R239	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R241	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R244	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R245	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R246	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R251	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R252	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R281	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R282	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R287	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R289	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R305	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R306	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R308	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R311	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R313	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R134	RS3AD0123NA	RMGCFMIC 12K0 OHM +5% 62MI5W
R163	RS3AD0123NA	RMGCFMIC 12K0 OHM +5% 62MI5W
R164	RS3AD0123NA	RMGCFMIC 12K0 OHM +5% 62MI5W
R165	RS3AD0123NA	RMGCFMIC 12K0 OHM +5% 62MI5W
R196	RS3AD0123NA	RMGCFMIC 12K0 OHM +5% 62MI5W
R203	RS3AD0123NA	RMGCFMIC 12K0 OHM +5% 62MI5W
R200	RS3AD0152NA-A	RMGCFMIC 1K5 OHM +5% 62MI5W
R202	RS3AD0152NA-A	RMGCFMIC 1K5 OHM +5% 62MI5W
R235	RS3AD0152NA-A	RMGCFMIC 1K5 OHM +5% 62MI5W
R237	RS3AD0152NA-A	RMGCFMIC 1K5 OHM +5% 62MI5W
R132	RS3AD0202NA-A	RMGCFMIC 2K0 OHM +5% 62MI5W
R255	RS3AD0202NA-A	RMGCFMIC 2K0 OHM +5% 62MI5W
R263	RS3AD0202NA-A	RMGCFMIC 2K0 OHM +5% 62MI5W
R270	RS3AD0202NA-A	RMGCFMIC 2K0 OHM +5% 62MI5W
R278	RS3AD0202NA-A	RMGCFMIC 2K0 OHM +5% 62MI5W
R294	RS3AD0202NA-A	RMGCFMIC 2K0 OHM +5% 62MI5W
R302	RS3AD0202NA-A	RMGCFMIC 2K0 OHM +5% 62MI5W
R213	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R220	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R226	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R259	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R268	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R274	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R292	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R298	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R327	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R328	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R336	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R337	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R338	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R339	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R20	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R56	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R62	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R74	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R115	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R116	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R117	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R118	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R190	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R332	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R222	RS3AD0362NA-A	RMGCFMIC 3K6 OHM +5% 62MI5W
R230	RS3AD0362NA-A	RMGCFMIC 3K6 OHM +5% 62MI5W
R177	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W

Pos	Part Number	Part name
Processor		
R179	RS3AD0432NA	RMGCFMIC 4K3 OHM +5% 62MI5W
R297	RS3AD0470NA	RMGCFMIC 47R0 OHM +5% 62MI5W
R340	RS3AD0470NA	RMGCFMIC 47R0 OHM +5% 62MI5W
R3	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R4	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R6	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R9	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R22	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R25	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R27	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R29	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R32	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R34	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R36	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R39	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R46	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R48	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R49	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R51	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R57	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R59	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R73	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R76	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R108	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R127	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R148	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R149	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R178	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R187	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R199	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R206	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R211	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R284	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R335	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R353	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R354	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R355	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R356	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R357	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R358	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R359	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R360	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R361	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R362	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R363	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R364	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R365	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R366	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R367	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R368	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R369	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R370	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R371	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R372	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R373	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R374	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R375	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R128	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R69	RS3AD0512NA	RMGCFMIC 5K1 OHM +5% 62MI5W
R70	RS3AD0512NA	RMGCFMIC 5K1 OHM +5% 62MI5W
R240	RS3AD0512NA	RMGCFMIC 5K1 OHM +5% 62MI5W

Pos	Part Number	Part name
Processor		
R250	RS3AD0512NA	RMGCFMIC 5K1 OHM +5% 62MI5W
R260	RS3AD0512NA	RMGCFMIC 5K1 OHM +5% 62MI5W
R273	RS3AD0512NA	RMGCFMIC 5K1 OHM +5% 62MI5W
R283	RS3AD0512NA	RMGCFMIC 5K1 OHM +5% 62MI5W
R285	RS3AD0512NA	RMGCFMIC 5K1 OHM +5% 62MI5W
R307	RS3AD0512NA	RMGCFMIC 5K1 OHM +5% 62MI5W
R309	RS3AD0512NA	RMGCFMIC 5K1 OHM +5% 62MI5W
R312	RS3AD0512NA	RMGCFMIC 5K1 OHM +5% 62MI5W
R102	RS3AD0821NA	RMGCFMIC 820R0 OHM +5% 62MI5W
R173	RS3AD0821NA	RMGCFMIC 820R0 OHM +5% 62MI5W
R180	RS3AD0821NA	RMGCFMIC 820R0 OHM +5% 62MI5W
R236	RS3AD0821NA	RMGCFMIC 820R0 OHM +5% 62MI5W
R248	RS3AD0912NA	RMGCFMIC 9K1 OHM +5% 62MI5W
R201	RS3AD0220NA	RMGCFMIC 22R0 OHM +5% 62MI5W
R207	RS3AD0272NA	RMGCFMIC 2K7 OHM +5% 62MI5W
R215	RS3AD0272NA	RMGCFMIC 2K7 OHM +5% 62MI5W
R351	RS3AD0242NA	RMGCFMIC 2K4 OHM +5% 62MI5W
R352	RS3AD0242NA	RMGCFMIC 2K4 OHM +5% 62MI5W
C219	CZJII0150BE	CCCFMIC 15P0F +5% -5% 50.0V NP0 0603
C220	CZJII0150BE	CCCFMIC 15P0F +5% -5% 50.0V NP0 0603
C66	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C68	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C111	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C115	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C137	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C141	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C154	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C157	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C161	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C167	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C171	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C199	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C200	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C215	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C216	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C217	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C218	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C93	CZKII0222BC	CAP CHIP 2N2F +10% -10% 50.0V X7R 0603
C150	CZKII0222BC	CAP CHIP 2N2F +10% -10% 50.0V X7R 0603
C213	CZKII0682BC	CAP CHIP 6N8F 50V X7R K 0603
C214	CZKII0682BC	CAP CHIP 6N8F 50V X7R K 0603
D8	H01-DSUDZ09V1NB	D-ZENER UDZS 9.1B 9.1V 200MI0W
D9	H01-DSUDZ09V1NB	D-ZENER UDZS 9.1B 9.1V 200MI0W
D12	H01-DSUDZ09V1NB	D-ZENER UDZS 9.1B 9.1V 200MI0W
D14	H01-DSUDZ09V1NB	D-ZENER UDZS 9.1B 9.1V 200MI0W
D21	H01-DSUDZ09V1NB	D-ZENER UDZS 9.1B 9.1V 200MI0W
DQ47	H01-DSUDZ09V1NB	D-ZENER UDZS 9.1B 9.1V 200MI0W
IC5	H01-ICKIC9162DA	IC-SWITCH KIC9162AF SOP28 ANALOG SWITCH
IC14	H01-ICKIC9162DA	IC-SWITCH KIC9162AF SOP28 ANALOG SWITCH
IC3	H01-ICKIC9163DA	IC-SWITCH KIC9163AF SOP28 ANALOG SWITCH
IC2	H01-ICKIC9459D5	IC-LOWFREQ KIC9459F SOP24 TONE/VOL/BAL/MUTE
IC18	H01-ICKIC9459D5	IC-LOWFREQ KIC9459F SOP24 TONE/VOL/BAL/MUTE
IC1	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC4	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC7	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC8	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC9	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC11	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC12	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC13	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC15	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8

Pos	Part Number	Part name
Processor		
IC16	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC17	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC20	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC21	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC22	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC23	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC24	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC25	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC26	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC27	H01-ICLM02068D2-A	IC-OPERAMP NJM2068M DUAL SOP8
IC19	H01-ICLMO9482DA	IC-LOWFREQ KIC9482F/TC9482F SOP28 TONE/VOL/BAL/MUTE
IC6	H01-ICTC9273NDA	IC-SWITCH TC9273F-004 SOP28 ANALOG SWITCH
IC28	H01-ICTC9481FDA	IC-LOWFREQ TC9481F SOP28 TONE
Q3	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q13	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q14	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q17	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q20	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q23	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q25	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q32	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q34	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q35	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q37	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q41	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q43	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q50	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q52	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q22	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q7	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q8	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q9	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q10	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q11	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q12	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q15	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q16	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q51	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q53	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q58	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
Q59	H03-TRKTD1304ND	TR-SLPSWA KTD1304 N 20V 300MI0A SOT-23
R322	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R323	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R376	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R377	RS3AD0100NA	RMGCFMIC 10R0 OHM +5% 62MI5W
R232	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R242	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R243	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R253	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R280	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R290	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R304	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R314	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R122	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R125	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R90	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R135	RS3AD0123NA	RMGCFMIC 12K0 OHM +5% 62MI5W
R158	RS3AD0123NA	RMGCFMIC 12K0 OHM +5% 62MI5W
R223	RS3AD0183NA-A	RMGCFMIC 18K0 OHM +5% 62MI5W
R262	RS3AD0183NA-A	RMGCFMIC 18K0 OHM +5% 62MI5W
R271	RS3AD0183NA-A	RMGCFMIC 18K0 OHM +5% 62MI5W

Pos	Part Number	Part name
Processor		
R295	RS3AD0183NA-A	RMGCFMIC 18K0 OHM +5% 62MI5W
R7	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R8	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R23	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R24	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R37	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R38	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R53	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R54	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R224	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R228	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R257	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R261	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R272	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R276	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R296	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R300	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R330	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R333	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R156	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R157	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R159	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R160	RS3AD0332NA	RMGCFMIC 3K3 OHM +5% 62MI5W
R19	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R55	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R83	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R84	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R87	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R219	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R265	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R266	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R267	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R291	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R182	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R320	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R321	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R341	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R342	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R227	RS3AD0474NA-A	RMGCFMIC 470K0 OHM +5% 62MI5W
R258	RS3AD0474NA-A	RMGCFMIC 470K0 OHM +5% 62MI5W
R275	RS3AD0474NA-A	RMGCFMIC 470K0 OHM +5% 62MI5W
R299	RS3AD0474NA-A	RMGCFMIC 470K0 OHM +5% 62MI5W
R331	RS3AD0474NA-A	RMGCFMIC 470K0 OHM +5% 62MI5W
R197	RS3AD0220NA	RMGCFMIC 22R0 OHM +5% 62MI5W
R209	RS3AD0153NA	RES CHIP,15K 1/16W,+5%,0603.
R210	RS3AD0153NA	RES CHIP,15K 1/16W,+5%,0603.
SK1	H01-RLL1296122A	RELAYSGNL 12.0V 960.0OHM 3.0A
NJ51	H01-SORA40GNDNN	JACK RCA 4P JB040131PN WWRR
NJ52	H01-SORA40GNDNN	JACK RCA 4P JB040131PN WWRR
NJ53	H01-SORA40GNDNN	JACK RCA 4P JB040131PN WWRR
NJ54	H01-SORA40GNDNN	JACK RCA 4P JB040131PN WWRR
NJ55	H01-SORA64105NN	JACK RCA 6P JB060132PN
P516	H01-WG04SB81100	WIRE ASS'Y DL 2.0MM 4P 110MM UL1007 #26 RED
P508	H01-WN03SD100WH	CONN WAFER 2.5MM 3P 5267-03A WHT
P2	H01-WN04AB100WH	CONN WAFER 2.0MM 4P 35237-0410 WHT
P517	H01-WN04AB100WH	CONN WAFER 2.0MM 4P 35237-0410 WHT
P513	H01-WN04SB00000	CONN 2.0MM 4 MA ST NAT GT201-4P-TS
P507	H01-WN04SD100WH	CONN WAFER 2.5MM 4P 5267-04A WHT
P512	H01-WN04SD100WH	CONN WAFER 2.5MM 4P 5267-04A WHT
P506	H01-WN05SD100WH	CONN WAFER 2.5MM 5P 5267-05A WHT
P511	H01-WN05SD100WH	CONN WAFER 2.5MM 5P 5267-05A WHT

Pos	Part Number	Part name
Processor		
P505	H01-WN06SD100WH	CONN WAFER 2.5MM 6P 5267-06A WHT
P510	H01-WN07SD00000	CNT PLUG ST 2.5mm 7P 5267-07A
P503	H01-WN14AB100WH	CONN WAFER 2.0MM 14P 35237-1410 WHT
P504	H01-WN15SI00000	CONN FFC 1.25MM 15P SCB-1115-00-2 VER
P509	H01-WN19AB00000	CONN 2.0MM 19 MA R NAT SOCKET MOLEX 35237-1910 0 0
P501	H01-WN19SB00000	CONN 2.0MM 19 MA ST NAT MOLEX 35336-1910 0 0
P1	H01-WSE261705EN	WIRE ASS'Y 15P 170MM UL2547/1533#26 RED SHIELD
D6	H01-DZMTZJ5B6NB	DIODE ZENER MTZ J5.6B 5.6V 500MW DO-34
R318	RC3DI0100IN	RCF 10R0 OHM +5% 250MIOW
R208	RC3DI0153IN	RCF 15K0 OHM +5% 250MIOW
R97	RC3DI0153IN	RCF 15K0 OHM +5% 250MIOW
Pos	Part Number	Part name
Video		
C685	CEHEC01075E	CE 100U0F +20% 10.0V 5X11 85C P5MM
C601	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C603	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C604	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C606	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C611	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C613	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C618	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C621	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C626	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C628	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C661	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C662	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C667	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C668	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C635	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C636	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C637	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C638	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C639	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C641	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C654	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C655	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C629	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C631	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C632	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C648	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C649	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C651	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C659	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C663	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C664	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C691	CEHIC01065E	CE 10U0F +20% 50.0V 85C P5MM 5X11
C692	CEHIC01065E	CE 10U0F +20% 50.0V 85C P5MM 5X11
C688	CEHIC02255E	CE 2U2F +20% 50V D5XL11 P5MM 85C
C689	CEHIC02255E	CE 2U2F +20% 50V D5XL11 P5MM 85C
C602	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C605	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C610	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C612	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C616	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C619	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C624	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C627	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C669	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
Q201	H03-TRKTA107MNA	TR-SLPSWA KRA107M P
Q202	H03-TRKTA107MNA	TR-SLPSWA KRA107M P
C1	CZJH0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603

Pos	Part Number	Part name
Video		
C609	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C614	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C615	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C617	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C622	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C623	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C625	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C681	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C682	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C683	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C686	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C687	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C684	CZKII0223BC	CAP CHIP 22N0F +10% -10% 50.0V X7R 0603
C665	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C666	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C676	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C679	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
D207	H03-DS0KDS160NB-A	D-SLP KDS160 85.0V 100MIOA
D208	H03-DS0KDS160NB-A	D-SLP KDS160 85.0V 100MIOA
D209	H03-DS0KDS160NB-A	D-SLP KDS160 85.0V 100MIOA
D601	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
D602	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
D603	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
D604	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
IC612	H01-ICBU4053BB4	IC BU4053BCF SOP16 ANALOG MPX/DEMPX
IC609	H01-ICBU4094BD3	IC CMOS BU4094BF SOP16
IC604	H01-ICLM01232D3	IC VIDEO SW MM1232 SOP16
IC601	H01-ICNJM2296D3	IC-LINEAR NJM2296
IC602	H01-ICNJM2296D3	IC-LINEAR NJM2296
IC603	H01-ICNJM2296D3	IC-LINEAR NJM2296
Q601	H03-TRKTA1504ND	TRANSISTOR PNP KTA1504Y(S)SOT-23
Q602	H03-TRKTA1504ND	TRANSISTOR PNP KTA1504Y(S)SOT-23
R636	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R637	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R638	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R251	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R606	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R611	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R612	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R616	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R621	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R622	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R626	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R631	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R632	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R639	RS3AD0123NA	RMGCFMIC 12K0 OHM +5% 62MI5W
R673	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R674	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R651	RS3AD0223NA	RMGCFMIC 22K0 OHM +5% 62MI5W
R247	RS3AD0271NA	RMGCFMIC 270R0 OHM +5% 62MI5W
R646	RS3AD0331NA-A	RMGCFMIC 330R0 OHM +5% 62MI5W
R671	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R675	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R240	RS3AD0392NA	RMGCFMIC 3K9 OHM +5% 62MI5W
R244	RS3AD0470NA	RMGCFMIC 47R0 OHM +5% 62MI5W
R248	RS3AD0470NA	RMGCFMIC 47R0 OHM +5% 62MI5W
R246	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R242	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R243	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R672	RS3AD0680NA	RMGCFMIC 68R0 OHM +5% 62MI5W
R676	RS3AD0680NA	RMGCFMIC 68R0 OHM +5% 62MI5W

Pos	Part Number	Part name
Video		
R3	RS1AD0750NA	RES CHIP 750HM 1% 1/16W 0603
R241	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R1	RS3AD0361NA	RES CHIP,360 OHM,1/16W,+/-5%,0603
D1	H03-DS05GBUSCNB	DIODE PG05GBUSC
D10	H03-DS05GBUSCNB	DIODE PG05GBUSC
D2	H03-DS05GBUSCNB	DIODE PG05GBUSC
D3	H03-DS05GBUSCNB	DIODE PG05GBUSC
D4	H03-DS05GBUSCNB	DIODE PG05GBUSC
D5	H03-DS05GBUSCNB	DIODE PG05GBUSC
D6	H03-DS05GBUSCNB	DIODE PG05GBUSC
D7	H03-DS05GBUSCNB	DIODE PG05GBUSC
D8	H03-DS05GBUSCNB	DIODE PG05GBUSC
D9	H03-DS05GBUSCNB	DIODE PG05GBUSC
C673	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C674	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C675	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C653	CZJII0181BE	CCCFMIC 180P0F +5% -5% 50.0V NP0 0603
C652	CZKII0561BC	CAP CHIP 560P0F +10% -10% 50.0V X7R 0603
C2	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C634	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C657	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
IC611	H01-ICBU4094BD3	IC CMOS BU4094BF SOP16
IC608	H01-ICLM01232D3	IC VIDEO SW MM1232 SOP16
IC614	H01-ICMM1501XDL-A	IC-VIDEO SW MM1501XNRE SOT-26B
IC605	H01-ICNJM2296D3	IC-LINEAR NJM2296
IC606	H01-ICNJM2296D3	IC-LINEAR NJM2296
IC607	H01-ICNJM2296D3	IC-LINEAR NJM2296
IC613	H01-ICTSH95IDB4	IC-VIDEOPROC TSH95ID VIDEO AMPLIFIER
Q603	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q604	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q611	H01-TRDTC114YNS	TRANSISTOR NPN DTC114YK (S) SPT/RHOM
Q612	H01-TRDTC114YNS	TRANSISTOR NPN DTC114YK (S) SPT/RHOM
Q613	H01-TRDTC114YNS	TRANSISTOR NPN DTC114YK (S) SPT/RHOM
R641	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R642	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R643	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R658	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R668	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R711	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R713	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R718	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R656	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R657	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R666	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R669	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R661	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R667	RS3AD0122NA	RMGCFMIC 1K2 OHM +5% 62MI5W
R644	RS3AD0123NA	RMGCFMIC 12K0 OHM +5% 62MI5W
R2	RS1AD1580NA	RES CHIP 158OHM 1% 1/16W 0603
R647	RS1AD1580NA	RES CHIP 158OHM 1% 1/16W 0603
R649	RS1AD1580NA	RES CHIP 158OHM 1% 1/16W 0603
R662	RS3AD0154NA	RMGCFMIC 150K0 OHM +5% 62MI5W
R712	RS3AD0154NA	RMGCFMIC 150K0 OHM +5% 62MI5W
R715	RS3AD0154NA	RMGCFMIC 150K0 OHM +5% 62MI5W
R717	RS3AD0154NA	RMGCFMIC 150K0 OHM +5% 62MI5W
R719	RS3AD0154NA	RMGCFMIC 150K0 OHM +5% 62MI5W
R659	RS3AD0223NA	RMGCFMIC 22K0 OHM +5% 62MI5W
R665	RS3AD0223NA	RMGCFMIC 22K0 OHM +5% 62MI5W
R654	RS3AD0330NA	RMGCFMIC 33R0 OHM +5% 62MI5W
R655	RS3AD0330NA	RMGCFMIC 33R0 OHM +5% 62MI5W
R607	H01-RS1AD78R7NA	RES CHIP 78.7OHM 1% 1/16W 0603

Pos	Part Number	Part name
Video		
R608	H01-RS1AD78R7NA	RES CHIP 78.7OHM 1% 1/16W 0603
R609	H01-RS1AD78R7NA	RES CHIP 78.7OHM 1% 1/16W 0603
R617	H01-RS1AD78R7NA	RES CHIP 78.7OHM 1% 1/16W 0603
R618	H01-RS1AD78R7NA	RES CHIP 78.7OHM 1% 1/16W 0603
R619	H01-RS1AD78R7NA	RES CHIP 78.7OHM 1% 1/16W 0603
R627	H01-RS1AD78R7NA	RES CHIP 78.7OHM 1% 1/16W 0603
R628	H01-RS1AD78R7NA	RES CHIP 78.7OHM 1% 1/16W 0603
R629	H01-RS1AD78R7NA	RES CHIP 78.7OHM 1% 1/16W 0603
R600	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R601	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R602	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R603	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R604	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R605	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R613	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R614	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R615	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R623	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R624	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R625	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R633	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R634	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R635	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R714	RS3AD0753NA	RES CHIP 75K 1/16W +-5% 0603.
R716	RS3AD0753NA	RES CHIP 75K 1/16W +-5% 0603.
R663	RS3AD0822NA	RMGCFMIC 8K2 OHM +5% 62MI5W
J600	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
IC1	H01-ICPC17T10B1	IC PHOTOCOUPLER PC-17T1 DIP4 KODENSHI
IC2	H01-ICPC17T10B1	IC PHOTOCOUPLER PC-17T1 DIP4 KODENSHI
NJ611	H01-SOJW2350SNN-A	JACK PHONE 3.6 EP-1401A 1P BK
NJ612	H01-SOJW2350SNN-A	JACK PHONE 3.6 EP-1401A 1P BK
NJ613	H01-SOJW2350SNN-A	JACK PHONE 3.6 EP-1401A 1P BK
NJ614	H01-SOJW2350SNN-A	JACK PHONE 3.6 EP-1401A 1P BK
NJ601	H01-SORA11Y00NN	JACK RCA+S VIDEO C5016031DN
NJ602	H01-SORA11Y00NN	JACK RCA+S VIDEO C5016031DN
NJ603	H01-SORA11Y00NN	JACK RCA+S VIDEO C5016031DN
NJ604	H01-SORA11Y00NN	JACK RCA+S VIDEO C5016031DN
NJ605	H01-SORA11Y00NN	JACK RCA+S VIDEO C5016031DN
NJ606	H01-SORA11Y00NN	JACK RCA+S VIDEO C5016031DN
NJ607	H01-SORA11Y00NN	JACK RCA+S VIDEO C5016031DN
NJ608	H01-SORA11Y00NN	JACK RCA+S VIDEO C5016031DN
N601	H01-WN04AB100WH	CONN WAFER 2.0MM 4P 35237-0410 WHT
P603	H01-WN10SB00000	CONNECT 2.0MM 10P GIL-S-10P-S2T2-EF
N602	H01-WN19AB00000	CONN 2.0MM 19 MA R NAT SOCKET MOLEX 35237-1910 0 0
C656	CEHEC01075E	CE 100U0F +20% 10.0V 5X11 85C P5MM

Pos	Part Number	Part name
FARMADJA		
C123	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM
C129	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM
C140	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM
C162	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM
C164	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM
C170	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM
C188	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM
C237	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM
C240	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM
C241	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM
C248	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM
C249	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM

Pos	Part Number	Part name
FARMADJA		
C102	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C131	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C132	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C133	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C134	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C207	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C210	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C220	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C239	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C158	CEMFC04762S	CE 47UF 16V M 5X11 SHL P2.5MM
C234	CEMFC04762S	CE 47UF 16V M 5X11 SHL P2.5MM
C235	CEMFC04762S	CE 47UF 16V M 5X11 SHL P2.5MM
C236	CEMFC04762S	CE 47UF 16V M 5X11 SHL P2.5MM
C196	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C198	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C205	CEMFC0226MN-A	CAP ELEC 22UF 16V M 5X11 P2.5MM
C233	CEMFC0226MN-A	CAP ELEC 22UF 16V M 5X11 P2.5MM
Q100	H01-TR2SA933ANW	TR-SLPLF 2SA933ASR P -3.0A -20V
Q101	H01-TR2SA933ANW	TR-SLPLF 2SA933ASR P -3.0A -20V
Q104	H01-TR2SA933ANW	TR-SLPLF 2SA933ASR P -3.0A -20V
C242	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C244	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C246	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C175	CSDIE080ABG	CAP CHIP FORM 8PF 50V +/-0.25 0603 COG
C176	CSDIE080ABG	CAP CHIP FORM 8PF 50V +/-0.25 0603 COG
C191	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C192	CZJII0330BE	CCCFMIC 33P0F +5% -5% 50.0V NP0 0603
C200	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C165	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C167	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C171	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C183	CZKII0152BC	CAP CHIP 1N5F 50V X7R K 0603
C185	CZKII0152BC	CAP CHIP 1N5F 50V X7R K 0603
C238	CZKII0152BC	CAP CHIP 1N5F 50V X7R K 0603
C184	CZKII0391BC	CAP CHIP 390PF 50V X7R K 0603
C112	CTK4I0106ZN	TANT CAP CASE-B 10UF +10%-10% 20V 3528
C113	CTK4I0106ZN	TANT CAP CASE-B 10UF +10%-10% 20V 3528
C114	CTK4I0106ZN	TANT CAP CASE-B 10UF +10%-10% 20V 3528
C115	CTK4I0106ZN	TANT CAP CASE-B 10UF +10%-10% 20V 3528
C116	CTK4I0106ZN	TANT CAP CASE-B 10UF +10%-10% 20V 3528
C193	CTK4I0106ZN	TANT CAP CASE-B 10UF +10%-10% 20V 3528
C100	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C101	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C103	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C104	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C105	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C106	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C107	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C108	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C109	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C110	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C117	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C118	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C119	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C120	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C121	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C122	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C124	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C125	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C126	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C127	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603

Pos	Part Number	Part name
FARMADJA		
C128	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C138	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C139	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C144	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C156	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C157	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C179	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C180	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C182	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C195	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C199	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C208	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C215	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C216	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C223	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C224	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C225	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C228	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C230	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C243	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C245	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C247	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C186	CZZFI0224BF	CAP CHIP 220NF 16V Y5V +80%-20% 0603
D101	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
D102	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
D103	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
L111	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L112	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L113	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
Q106	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q107	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
R129	RS1AD1870NA	RES CHIP 187 OHM 1/16W 1% 0603
R104	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R108	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R115	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R125	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R126	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R134	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R135	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R148	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R149	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R160	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R128	RS3AD0105NA	RES CHIP 1M 1/16W +5% 0603
R101	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R102	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R113	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R114	RS3AD0151NA	RMGCFMIC 150R0 OHM +5% 62MI5W
R123	RS3AD0470NA	RMGCFMIC 47R0 OHM +5% 62MI5W
R124	RS3AD0470NA	RMGCFMIC 47R0 OHM +5% 62MI5W
R105	RS3AD0511NA	RMGCFMIC 510R0 OHM +5% 62MI5W
R118	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R151	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
C159	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C160	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C161	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C137	CZJII0121BE	CAP CHIP 120PF 50V J NPO 0603
C154	CZJII0121BE	CAP CHIP 120PF 50V J NPO 0603
C136	CZJII0151BE	CAP CHIP 150PF 50V J NPO 0603
C153	CZJII0151BE	CAP CHIP 150PF 50V J NPO 0603
C142	CZJII0390BE	CAP CHIP 39PF 50V CH J NPO 0603
C146	CZJII0471BE	CCCFMIC 470P0F +5% -5% 50.0V NP0 0603

Pos	Part Number	Part name
FARMADJA		
C150	CZJII0471BE	CCCFMIC 470P0F +5% -5% 50.0V NP0 0603
C168	CZKII0102BC	CAP CHIP 1N0F +10% -10% 50.0V X7R 0603
C163	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C177	CZKII0152BC	CAP CHIP 1N5F 50V X7R K 0603
C111	CTK4I0106ZN	TANT CAP CASE-B 10UF +10%-10% 20V 3528
C190	CTK4I0106ZN	TANT CAP CASE-B 10UF +10%-10% 20V 3528
C143	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C155	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C178	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C181	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C187	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C189	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C194	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C197	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C211	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C212	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C213	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C214	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C217	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C218	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C219	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C221	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C222	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C226	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C227	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C229	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C232	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C169	CZZFI0105BF	CAP CHIP 1UF 16V Y5V +80% -20% 0603
C172	CZZFI0224BF	CAP CHIP 220NF 16V Y5V +80%-20% 0603
C173	CZZFI0224BF	CAP CHIP 220NF 16V Y5V +80%-20% 0603
C174	CZZFI0224BF	CAP CHIP 220NF 16V Y5V +80%-20% 0603
L105	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L106	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L107	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L108	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L109	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L114	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L115	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L116	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L120	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L121	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L123	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L124	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L125	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L126	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
L127	H01-FB121201208	FERRITE BEADS FCM2012K-121T08 120OHM 2012
IC15	H01-ICBU4053BB4	IC BU4053BCF SOP16 ANALOG MPX/DEMPX
IC13	H01-ICBU4094BD3	IC CMOS BU4094BF SOP16
IC11	H01-ICFLI2300NN	IC VIDEO ENHANCER FLI2300 PQFP-208
IC12	H01-ICK4S6432I6	IC 64M SDRAM K4S643232F-TD60/TC70
IC14	H01-ICMM1623XDA	IC VIDEO DRIVER MM1623X SOP-28D
IC10	H01-ICVPC3230NN	IC VIDEO DECODER VPC3230D
L101	H01-LS1002102CN	INDUCTOR COIL FCI2012-100K 100UH 0805
L102	H01-LS2U22102CN	INDUCTOR COIL FCI2012-2R2K 2U2H 0805
L103	H01-LS2U22102CN	INDUCTOR COIL FCI2012-2R2K 2U2H 0805
L100	H01-LS4U72102CN	INDUCTOR COIL FCI2012-4R7K 4U7H 0805
L104	H01-LS4U72102CN	INDUCTOR COIL FCI2012-4R7K 4U7H 0805
R162	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R119	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R120	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R121	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W

Pos	Part Number	Part name
FARMADJA		
R141	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R142	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R145	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R146	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R147	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R127	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R136	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R137	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R138	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R139	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R140	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R122	RS3AD0470NA	RMGCFMIC 47R0 OHM +5% 62MI5W
R143	RS3AD0470NA	RMGCFMIC 47R0 OHM +5% 62MI5W
R144	RS3AD0470NA	RMGCFMIC 47R0 OHM +5% 62MI5W
R133	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R106	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R107	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R109	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R110	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R116	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R117	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R130	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R131	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R132	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R152	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R153	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R157	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R158	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R159	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
RA10	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA11	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA12	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA13	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA14	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA15	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA16	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA17	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA18	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA19	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA20	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA21	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA22	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
RA23	RS3AY0470NA	RCA 47R0 OHM +5% 62M15W 4
R161	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
IC16	H01-ICPJCW3X3DG	IC VOLTAGE REGULATOR PJ1117CW-3.3 3.3V SOT-223
IC17	H01-ICPJCW1X8DG	IC VOLTAGE REGULATOR PJ1117CW-1.8 1.8V SOT-223
X100	H01-OSX13M5HZ00	CRYSTAL 13.5MHz WOOIN
X101	H01-OSX20M25H00	CRYSTAL 20.25MHz 13PF WOOIN
K101	H03-RLL0517811A	RELAY D3009(1-1462033-4)
K102	H03-RLL0517811A	RELAY D3009(1-1462033-4)
P104	H01-WG02SB81500	WIRE ASS'Y 2.0MM 2P 150MM RED UL1007#26
P103	H01-WG04SB82800	WIRE ASS'Y 2.0MM 4P 280MM RED UL1007#26
P101	H01-WG05SB84700	WIRE ASS'Y UL1007#26 470MM 5P 2.0MM STR WHT
P102	H01-WN20SC00000	CONN WAFER 2.54MM TSS-254-20P
P100	H01-WN30SC00000	CONN WAFER 2.54MM TSS-254-30P
C130	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C166	CEMFC01062S	CE 10UF 16V M 5X11 SHL P2.5MM

Pos	Part Number	Part name
MAIN		
C251	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C255	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C281	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C282	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C283	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C284	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C285	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C286	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C287	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C288	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C290	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C291	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C292	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C293	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C294	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C295	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C296	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C298	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C301	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C302	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C303	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C353	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C354	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C355	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C340	CZJII0270BE	CCCFMIC 27P0F +5% -5% 50.0V NP0 0603
C337	CSJIE0300BG	CAP,CHIP FORM 30P +/-5% 50V C0G 0603
C11	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C335	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C345	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603
C92	CZKII0153BC	CAP CHIP 15N0F +10% -10% 50.0V X7R 0603
C91	CZKII0822BC	CAP CHIP 8N2F +10% -10% 50.0V X7R 0603
C6	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C215	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C218	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C224	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C227	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C230	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C272	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C306	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C308	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C310	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C315	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C317	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C319	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C346	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C362	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
D1	H03-DS0KDS160NB-A	D-SLP KDS160 85.0V 100MIOA
D2	H03-DS0KDS160NB-A	D-SLP KDS160 85.0V 100MIOA
D205	H03-DS0KDS160NB-A	D-SLP KDS160 85.0V 100MIOA
D206	H03-DS0KDS160NB-A	D-SLP KDS160 85.0V 100MIOA
D223	H03-DS0KDS160NB-A	D-SLP KDS160 85.0V 100MIOA
D224	H03-DS0KDS160NB-A	D-SLP KDS160 85.0V 100MIOA
D225	H03-DS0KDS160NB-A	D-SLP KDS160 85.0V 100MIOA
D226	H03-DS0KDS160NB-A	D-SLP KDS160 85.0V 100MIOA
D5	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
D6	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
D7	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
D219	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
D220	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
D3	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA
D4	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MIOA

Pos	Part Number	Part name
MAIN		
D231	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
D232	H01-DS1S50094NB-A	D-SLP 1SS355 35.0V 225MI0A
Q4	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q215	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q216	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q222	H01-TRDTA114YNI	TR-SSD DTA114YKA P 10K0 OHM 47K0 OHM
Q1	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q2	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q201	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q202	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q203	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q204	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
R12	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R278	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R281	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R282	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R283	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R284	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R285	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R286	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R287	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R288	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R291	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R292	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R293	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R294	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R232	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R9	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R10	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R11	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R14	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R220	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R223	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R225	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R271	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R272	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R273	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R274	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R15	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R17	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R250	RS3AD0105NA	RES CHIP 1M 1/16W +5% 0603
R251	RS3AD0105NA	RES CHIP 1M 1/16W +5% 0603
R248	RS3AD0121NA-A	RMGCFMIC 120R0 OHM +5% 62MI5W
R249	RS3AD0121NA-A	RMGCFMIC 120R0 OHM +5% 62MI5W
R210	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R211	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
R261	RS3AD0392NA	RMGCFMIC 3K9 OHM +5% 62MI5W
R265	RS3AD0392NA	RMGCFMIC 3K9 OHM +5% 62MI5W
R260	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R264	RS3AD0471NA	RMGCFMIC 470R0 OHM +5% 62MI5W
R266	RS3AD0473NA	RMGCFMIC 47K0 OHM +5% 62MI5W
R16	RS3AD0272NA	RMGCFMIC 2K7 OHM +5% 62MI5W
R221	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R222	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R224	RS1AD0750NA	RES CHIP 75OHM 1% 1/16W 0603
R212	RS3AD0822NA	RMGCFMIC 8K2 OHM +5% 62MI5W
C262	CZDII0100BE	CAP CHIP 10PF 50V CH D NP0 0603 +-0.25P
C325	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C326	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C327	CZJII0101BE	CCCFMIC 100P0F +5% -5% 50.0V NP0 0603
C343	CZKII0103BC	CAP CHIP 10N0F +10% -10% 50.0V X7R 0603

Pos	Part Number	Part name
MAIN		
C367	CZKII0223BC	CAP CHIP 22N0F +10% -10% 50.0V X7R 0603
C8	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C221	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C234	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C236	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C328	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
IC208	H01-ICBU4094BD3	IC CMOS BU4094BF SOP16
IC209	H01-ICLC74763I4	IC OSD LC74763M SOP30
IC2	H01-ICMM1510XDL	IC-VIDEO SW MM1510XNRE SOT-26A
IC201	H01-ICMM1510XDL	IC-VIDEO SW MM1510XNRE SOT-26A
IC202	H01-ICMM1510XDL	IC-VIDEO SW MM1510XNRE SOT-26A
IC203	H01-ICMM1510XDL	IC-VIDEO SW MM1510XNRE SOT-26A
IC1	H01-ICMM1501XDL-A	IC-VIDEO SW MM1501XNRE SOT-26B
IC204	H01-ICMM1501XDL-A	IC-VIDEO SW MM1501XNRE SOT-26B
IC205	H01-ICMM1501XDL-A	IC-VIDEO SW MM1501XNRE SOT-26B
IC206	H01-ICMM1511XDL	IC-VIDEO SW MM1511XNRE SOT-26B
Q212	H01-TRDTC114YNI	TR-SSD DTC114YKA N 10K0 OHM 47K0 OHM
Q3	H03-TRKTA1504ND	TRANSISTOR PNP KTA1504Y(S)SOT-23
Q221	H03-TRKTA1504ND	TRANSISTOR PNP KTA1504Y(S)SOT-23
R228	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R229	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R230	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R233	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R244	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R245	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R246	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R252	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R20	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R235	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R243	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R8	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R234	RS3AD0121NA-A	RMGCFMIC 120R0 OHM +5% 62MI5W
R231	RS3AD0123NA	RMGCFMIC 12K0 OHM +5% 62MI5W
R241	RS3AD0124NA	RMGCFMIC 120K0 OHM +5% 62MI5W
R237	RS3AD0152NA-A	RMGCFMIC 1K5 OHM +5% 62MI5W
R239	RS3AD0154NA	RMGCFMIC 150K0 OHM +5% 62MI5W
R3	RS3AD0000NA	RMGCFMIC 0 OHM +0% 62MI5W
R304	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R6	RS3AD0223NA	RMGCFMIC 22K0 OHM +5% 62MI5W
R240	RS3AD0224NA	RMGCFMIC 220K0 OHM +5% 62MI5W
R303	RS3AD0333NA	RMGCFMIC 33K0 OHM +5% 62MI5W
R7	RS3AD0392NA	RMGCFMIC 3K9 OHM +5% 62MI5W
R4	RS1AD0471NA-A	RESISTOR CHIP 470OHM 1/16W 1% 0603
R5	RS1AD4990NA-A	RES CHIP 499OHM 1/16W 1% 0603
R238	RS3AD0513NA	RMGCFMIC 51K0 OHM +5% 62MI5W
R236	RS3AD0682NA	RMGCFMIC 6K8 OHM +5% 62MI5W
R302	RS3AD0750NA	RMGCFMIC 75R0 OHM +5% 62MI5W
R1	RS3AD0820NA	RMGCFMIC 82R0 OHM +5% 62MI5W
D8	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D9	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
L204	H01-LAINB0470CR	LF 47U0H +10% 5.8 OHM 500MI0A
L207	H01-LAINB0470CR	LF 47U0H +10% 5.8 OHM 500MI0A
L208	H01-LAINB0470CR	LF 47U0H +10% 5.8 OHM 500MI0A
L209	H01-LAINB0470CR	LF 47U0H +10% 5.8 OHM 500MI0A
L210	H01-LAINB0470CR	LF 47U0H +10% 5.8 OHM 500MI0A
L213	H01-LALNB056ACR-A	INDUCTOR COIL AL02TB5R6J 5.6UH 1.9OHM +5%
R18	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R13	RC3DI022AIN	RCF 2R2 OHM +5% 250MI0W
C348	CCJIC0390NE	CC 39P0F +5% -5% 50.0V NP0
C349	CCJIC0390NE	CC 39P0F +5% -5% 50.0V NP0
C350	CCJIC0390NE	CC 39P0F +5% -5% 50.0V NP0

Pos	Part Number	Part name
MAIN		
C351	CCJIC0390NE	CC 39P0F +5% -5% 50.0V NP0
C220	CEHDC0108NN	CE 1MI0F +20% 6.3V 8X11.5 85C ELITE
C223	CEHDC0108NN	CE 1MI0F +20% 6.3V 8X11.5 85C ELITE
C226	CEHDC0108NN	CE 1MI0F +20% 6.3V 8X11.5 85C ELITE
C339	CEHEC01075E	CE 100U0F +20% 10.0V 5X11 85C P5MM
C344	CEHEC01075E	CE 100U0F +20% 10.0V 5X11 85C P5MM
C369	CEHEC01075E	CE 100U0F +20% 10.0V 5X11 85C P5MM
C1	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C3	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C311	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C313	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C320	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C321	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C324	CEHEC02275E	CE 220UF +20% 10.0V D6.3XL11 P5MM 85C
C2	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C5	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C7	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C305	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C307	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C309	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C314	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C316	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C318	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C357	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C361	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C363	CEHFC01075E	CE 100UF +20% 16.0V D6.3XL11 P5MM 85C
C364	CEHFC04765E	CE47UF +20% 16.0V D5XL11 P5MM 85C
C213	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C216	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C219	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C222	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C225	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C228	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C231	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C232	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C341	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C352	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C9	CEHIC01065E	CE 10U0F +20% 50.0V 85C P5MM 5X11
C214	CEHIC01065E	CE 10U0F +20% 50.0V 85C P5MM 5X11
C217	CEHIC01065E	CE 10U0F +20% 50.0V 85C P5MM 5X11
C229	CEHIC01065E	CE 10U0F +20% 50.0V 85C P5MM 5X11
C370	CEHIC01065E	CE 10U0F +20% 50.0V 85C P5MM 5X11
C10	CEHIC02255E	CE 2U2F +20% 50V D5XL11 P5MM 85C
C368	CEHIC02255E	CE 2U2F +20% 50V D5XL11 P5MM 85C
C347	CEHIC0474NN	CE 470N0F +20% 50.0V 85C 5X11 ELITE
C15	CEMFC0226NN	CAP ELEC 22UF 16V M ELITE
C51	CEMFC0226NN	CAP ELEC 22UF 16V M ELITE
C52	CEMFC0226NN	CAP ELEC 22UF 16V M ELITE
C53	CEMFC0226NN	CAP ELEC 22UF 16V M ELITE
C237	CEHGC0337NN	CE 330UI0F +20% 25V 85C ELITE
C233	CEMGC0227NN	CAP ELEC 220UF 25V M 8X11.5 ELITE
C235	CEMGC0227NN	CAP ELEC 220UF 25V M 8X11.5 ELITE
C210	CFIOC0104NN	CPM 100N0F +10% 250.0V
C211	CFIOC0104NN	CPM 100N0F +10% 250.0V
C212	CFIOC0104NN	CPM 100N0F +10% 250.0V
C338	CPIIC0223NN	CPF 22N0F +10% 50.0V
C342	CPIIC0682NN	CPF 6N8F +10% 50.0V
C201	CPIKC0473NN	CPF 47N0F +10% 100.0V
C202	CPIKC0473NN	CPF 47N0F +10% 100.0V
C203	CPIKC0473NN	CPF 47N0F +10% 100.0V
C204	CPIKC0473NN	CPF 47N0F +10% 100.0V

Pos	Part Number	Part name
MAIN		
C205	CPIKC0473NN	CPF 47N0F +10% 100.0V
C206	CPIKC0473NN	CPF 47N0F +10% 100.0V
C207	CPIKC0473NN	CPF 47N0F +10% 100.0V
C208	CPIKC0473NN	CPF 47N0F +10% 100.0V
C209	CPIKC0473NN	CPF 47N0F +10% 100.0V
C312	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C322	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C323	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C330	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C261	H01-CEMIC0105AH	CE 1UF 50V M 5X11 SHL
C358	H01-CEMIC0334AH	CAP ELEC 0.33UF M 5X11 SHL 50V SAMYOUNG
F200	H01-FURN2200663	FUSE 663 SERIES 0663 002. 250V 2.0A TIMELUG
F201	H01-FURN2200663	FUSE 663 SERIES 0663 002. 250V 2.0A TIMELUG
F202	H01-FURN2200663	FUSE 663 SERIES 0663 002. 250V 2.0A TIMELUG
F203	H01-FURN2200663	FUSE 663 SERIES 0663 002. 250V 2.0A TIMELUG
F204	H01-FURN2200663	FUSE 663 SERIES 0663 002. 250V 2.0A TIMELUG
F205	H01-FURN2200663	FUSE 663 SERIES 0663 002. 250V 2.0A TIMELUG
F207	H01-FURN2200663	FUSE 663 SERIES 0663 002. 250V 2.0A TIMELUG
Q213	H01-TR2SA933ANW	TR-SLPLF 2SA933ASR P -3.0A -20V
Q214	H01-TR2SA933ANW	TR-SLPLF 2SA933ASR P -3.0A -20V
Q211	H01-TR2SC1740NW	TR-SLPLF 2SC1740S R N 150MI0A 50V
Q7	H01-TR2SC1740NW	TR-SLPLF 2SC1740S R N 150MI0A 50V
Q6	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MI0A
Q241	H03-TRKTD1302NA	TR-SLPLF KTD1302 B N 300MI0A 20V
G201	H01-ZNMSA4004SN	TERMLUG GND
C242	H01-CEMFA0159AH	CE 15000uF 16V M 20x40 MHA SAMYOUNG
C240	H01-CEMHA0828AH	CAP ELEC 8200UF 35V M 22X45 AHS SAMYOUNG
C241	H01-CEMHA0828AH	CAP ELEC 8200UF 35V M 22X45 AHS SAMYOUNG
C244	H01-CEMIA0478AH	CAP ELEC 4700UF 50V M 22X45 DL SAMYOUNG
C238	H01-CEMKA0228AH	CAP ELEC 2200UF 100V M 22X45 AHS SAMYOUNG
C239	H01-CEMKA0228AH	CAP ELEC 2200UF 100V M 22X45 AHS SAMYOUNG
D201	H01-DRBU604F0NA	DIODE BRIDGE BU6-04F FRONTIER
D203	H01-DRBU604F0NA	DIODE BRIDGE BU6-04F FRONTIER
D204	H01-DRBU604F0NA	DIODE BRIDGE BU6-04F FRONTIER
D202	H01-DRW204F00BA-A	DIODE BRIDGE W2-04F FRONTIER
L212	H03-FY0100101N8	FILTER MPX 01011-101
IC214	H01-ICBA033T0I2	IC-REGPOSFXD BA033T NORMAL
IC213	H03-ICKIA7805I2	IC-REGPOSFXD KIA7805API NORMAL TO-220IS
IC215	H03-ICKIA7805I2	IC-REGPOSFXD KIA7805API NORMAL TO-220IS
IC207	H03-ICKIA7806I2	IC KIA7806AP VOLTQAGE REGULATOR TO-220AB
IC211	H03-ICKIA7824I2	IC-REGPOSFXD KIA7824API TO-220IS NORMAL
IC212	H03-ICKIA7824I2	IC-REGPOSFXD KIA7824API TO-220IS NORMAL
IC216	H03-ICKIA7905I2	IC-REGNEGFXD KIA7905PI NORMAL
IC217	H03-ICLM07815BD	IC-REGPOSFXD KIA7815API NORMAL
IC218	H03-ICLM07915BD	IC-REGNEGFXD KIA7915API NORMAL TO-220AB
IC219	H01-ICPC17T10B1	IC PHOTOCOUPLER PC-17T1 DIP4 KODENSHI
IC220	H01-ICPC17T10B1	IC PHOTOCOUPLER PC-17T1 DIP4 KODENSHI
Y201	H01-OSXBE14M3AU	CRYSTAL 14.31818MHz WOON
Y202	H01-OSXBE17M7AU	CRYSTAL 17.734475MHz WOON
RY1	H01-RLL0517811A-A	RELAY D3009(1-1462033-4)
RY2	H01-RLL0517811A-A	RELAY D3009(1-1462033-4)
RY203	H01-RLL0517811A-A	RELAY D3009(1-1462033-4)
RY204	H01-RLL0517811A-A	RELAY D3009(1-1462033-4)
RY205	H01-RLL0517811A-A	RELAY D3009(1-1462033-4)
RY206	H01-RLL0517811A-A	RELAY D3009(1-1462033-4)
R203	H01-RM3FC010ABN	RESISTOR METAL OXIDE 1 OHM 1W 5%
R206	H01-RM3FC010ABN	RESISTOR METAL OXIDE 1 OHM 1W 5%
R201	H01-RM3GC047ACN	RESISTOR METAL OXIDE 4R7 +5% 2.0W
R202	H01-RM3GC047ACN	RESISTOR METAL OXIDE 4R7 +5% 2.0W
R204	H01-RM3GC047ACN	RESISTOR METAL OXIDE 4R7 +5% 2.0W
R207	H01-RM3GC047ACN	RESISTOR METAL OXIDE 4R7 +5% 2.0W

Pos	Part Number	Part name
MAIN		
R208	H01-RM3HA056ADN-A	RESISTOR METAL OXIDE 5R6 3W 5% RW
R209	H01-RM3HA056ADN-A	RESISTOR METAL OXIDE 5R6 3W 5% RW
R19	H01-RP3NA0101NZ	POS 100R0 OHM 16.0V RED
JA202	H01-SOR12BJ12NN	JACK RCA 12P BJ120154JN
JA201	H01-SORA11Y00NN	JACK RCA+S VIDEO C5016031DN
JA205	H01-SORA40RSANN	JACK RCA 4P JB040131ZN GN BN PP TA
JA206	H01-SORA40RSCNN-A	JACK RCA 4P JB040131QN WH BU RD GY
Q5	H01-TR2SA1145NA	TR-SLPLF 2SA1145Y TO-92MOD P -50MIOA -150V
W350	H01-WG01S011000	WIRE ASS'Y UL1007#16 STR 110MM 1P BLK TERMINAL
N203	H01-WG04SD82300	WIRE ASS'Y 2.5MM 4P 230MM UL1007#22 RED
N204	H01-WG04SD82300	WIRE ASS'Y 2.5MM 4P 230MM UL1007#22 RED
N211	H01-WG15SB82800	WIRE ASS'Y 2.0MM 15P 280MM UL1007#26 RED
P212	H01-WH20SC00000	PIN HEADER 2.54MM 20P TPH03-115-20P
P211	H01-WH30SC00000-A	PIN HEADER 2.54MM 30P TPH03-115-30P
N3	H01-WN02SB00000	CONN 2.0MM 2 MA ST NAT GT201-2P-TS
N4	H01-WN03SB00000	CONN 2.0MM 3 MA ST NAT GT201-3P-TS
P201	H01-WN06SD100WH	CONN WAFER 2.5MM 6P 5267-06A WHT
P202	H01-WN06SD100WH	CONN WAFER 2.5MM 6P 5267-06A WHT
P205	H01-WN14SB100WH	CONN WAFER 2.0MM 14P 35336-1410 WHT
P203	H01-WN19SB00000	CONN 2.0MM 19 MA ST NAT MOLEX 35336-1910 0 0
P208	H01-WN19SB00000	CONN 2.0MM 19 MA ST NAT MOLEX 35336-1910 0 0
JA204	H01-ZVD05FAN100	DC FAN TFD-4510L12B 45X45X10MM
JA203	SOMOD7400NN	JACK MODULAR 7400-621002
C243	CEMFA02285E	CE 2200UF 16V M 12.5X20 P5MM
F206	H01-FURN2200663	FUSE 663 SERIES 0663 002. 250V 2.0A TIMELUG
RY1	H03-RLL0517811A	RELAY D3009(1-1462033-4)
RY2	H03-RLL0517811A	RELAY D3009(1-1462033-4)
RY203	H03-RLL0517811A	RELAY D3009(1-1462033-4)
RY204	H03-RLL0517811A	RELAY D3009(1-1462033-4)
RY205	H03-RLL0517811A	RELAY D3009(1-1462033-4)
RY206	H03-RLL0517811A	RELAY D3009(1-1462033-4)
R138	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R139	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R238	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R239	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R338	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R339	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
D101	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D104	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D105	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D108	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D201	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D204	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D205	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D208	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D301	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D304	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D305	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D308	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D901	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D902	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D908	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D909	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D910	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D107	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D207	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D307	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
R106	RC3DI0101IN	RCF 100R0 OHM +5% 250MIOW
R107	RC3DI0101IN	RCF 100R0 OHM +5% 250MIOW
R108	RC3DI0101IN	RCF 100R0 OHM +5% 250MIOW
R206	RC3DI0101IN	RCF 100R0 OHM +5% 250MIOW

Pos	Part Number	Part name
3CH AMP		
R207	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R208	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R306	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R307	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R308	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R101	RC3DI0102IN	RCF 1K0 OHM +5% 250MI0W
R201	RC3DI0102IN	RCF 1K0 OHM +5% 250MI0W
R301	RC3DI0102IN	RCF 1K0 OHM +5% 250MI0W
R965	RC3DI0102IN	RCF 1K0 OHM +5% 250MI0W
R963	RC3DI0103IN	RCF 10K0 OHM +5% 250MI0W
R961	RC3DI0104IN	RCF 100K0 OHM +5% 250MI0W
R966	RC3DI0104IN	RCF 100K0 OHM +5% 250MI0W
R144	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R145	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R244	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R245	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R344	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R345	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R120	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R121	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R122	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R123	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R220	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R221	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R222	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R223	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R320	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R321	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R322	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R323	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R103	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R104	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R203	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R204	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R303	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R304	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R124	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R125	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R146	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R224	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R225	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R246	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R324	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R325	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R346	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R901	RC3DI0181IN	RCF 180 OHM +5% 250MI0W
R967	RC3DI0182IN	RCF 1K8 OHM 5% 1/4W
R968	RC3DI0182IN	RCF 1K8 OHM 5% 1/4W
R148	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R149	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R248	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R249	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R348	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R349	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R109	RC3DI0221IN	RCF 220R0 OHM +5% 250MI0W
R209	RC3DI0221IN	RCF 220R0 OHM +5% 250MI0W
R309	RC3DI0221IN	RCF 220R0 OHM +5% 250MI0W
R126	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R156	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R226	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R256	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W

Pos	Part Number	Part name
3CH AMP		
R326	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R356	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R969	RC3DI0332IN	RCF 3K3 OHM 5% 1/4W
R150	RC3DI0333IN	RCF 33K0 OHM +5% 250MI0W
R250	RC3DI0333IN	RCF 33K0 OHM +5% 250MI0W
R350	RC3DI0333IN	RCF 33K0 OHM +5% 250MI0W
R973	RC3DI0333IN	RCF 33K0 OHM +5% 250MI0W
R105	RC3DI0471IN	RCF 470R0 OHM +5% 250MI0W
R205	RC3DI0471IN	RCF 470R0 OHM +5% 250MI0W
R305	RC3DI0471IN	RCF 470R0 OHM +5% 250MI0W
R155	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R170	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R255	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R270	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R355	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R370	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R902	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R157	RC3DI0560IN	RCF 56 OHM +5% 250MI0W
R257	RC3DI0560IN	RCF 56 OHM +5% 250MI0W
R357	RC3DI0560IN	RCF 56 OHM +5% 250MI0W
R114	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R115	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R116	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R117	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R118	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R119	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R214	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R215	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R216	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R217	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R218	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R219	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R314	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R315	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R316	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R317	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R318	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R319	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R964	RC3DI0562IN	RCF 5K6 OHM +5% 250MI0W
R129	RC3DI0621IN	RCF 620 OHM +5% 250MI0W
R229	RC3DI0621IN	RCF 620 OHM +5% 250MI0W
R329	RC3DI0621IN	RCF 620 OHM +5% 250MI0W
R147	RC3DI0682IN	RCF 6K8 OHM +5% 250MI0W
R247	RC3DI0682IN	RCF 6K8 OHM +5% 250MI0W
R347	RC3DI0682IN	RCF 6K8 OHM +5% 250MI0W
R962	RC3DI0683IN	RCF 68K OHM 5% 1/4W
R112	H01-RC1QC2431IN	RES CARBON FILM 2K43 OHM 1/5W 1%
R212	H01-RC1QC2431IN	RES CARBON FILM 2K43 OHM 1/5W 1%
R312	H01-RC1QC2431IN	RES CARBON FILM 2K43 OHM 1/5W 1%
R102	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R111	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R202	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R211	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R302	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R311	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
B101	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B102	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B103	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B104	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B201	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B202	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550

Pos	Part Number	Part name
3CH AMP		
B203	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B204	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B301	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B302	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B303	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B304	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
D102	H01-DR01SS244NA	DIODE 1SS244 220V
D103	H01-DR01SS244NA	DIODE 1SS244 220V
D202	H01-DR01SS244NA	DIODE 1SS244 220V
D203	H01-DR01SS244NA	DIODE 1SS244 220V
D302	H01-DR01SS244NA	DIODE 1SS244 220V
D303	H01-DR01SS244NA	DIODE 1SS244 220V
R140	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R141	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R142	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R143	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R240	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R241	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R242	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R243	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R340	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R341	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R342	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R343	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R134	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R135	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R234	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R235	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R334	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R335	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R136	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R137	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R236	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R237	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R336	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R337	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R132	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R133	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R232	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R233	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R332	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R333	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R110	H01-RM3EG0820LN	RESISTOR METAL OXIDE 82 OHM 1/2W 5%
R210	H01-RM3EG0820LN	RESISTOR METAL OXIDE 82 OHM 1/2W 5%
R310	H01-RM3EG0820LN	RESISTOR METAL OXIDE 82 OHM 1/2W 5%
R113	H01-RC1QC2671IN	RES CARBON FILM 2K67 OHM 1/5W 1%
R213	H01-RC1QC2671IN	RES CARBON FILM 2K67 OHM 1/5W 1%
R313	H01-RC1QC2671IN	RES CARBON FILM 2K67 OHM 1/5W 1%
D907	H01-DZ1N05231NB	D-ZENER 1N5231B 5.1V 500MI0W
R130	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R131	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R230	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R231	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R330	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R331	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
C105	CCJIC0120NN	CAP CERAMIC 12PF 50V J CH TAP
C205	CCJIC0120NN	CAP CERAMIC 12PF 50V J CH TAP
C305	CCJIC0120NN	CAP CERAMIC 12PF 50V J CH TAP
C102	CCKIC0101NC	CAP CERAMIC 100PF 50V K X7R TAP
C202	CCKIC0101NC	CAP CERAMIC 100PF 50V K X7R TAP
C302	CCKIC0101NC	CAP CERAMIC 100PF 50V K X7R TAP

Pos	Part Number	Part name
3CH AMP		
C106	CCKIC0221NC-A	CAP CERAMIC 220PF 50V K X7R TAP
C206	CCKIC0221NC-A	CAP CERAMIC 220PF 50V K X7R TAP
C306	CCKIC0221NC-A	CAP CERAMIC 220PF 50V K X7R TAP
C103	CCKIC0681NA	CC 680P0F +10% -10% 50.0V Y5P
C203	CCKIC0681NA	CC 680P0F +10% -10% 50.0V Y5P
C303	CCKIC0681NA	CC 680P0F +10% -10% 50.0V Y5P
C118	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C218	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C318	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C901	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C918	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C104	CEHGC0107MN	CE 100U0F +20% 25.0V 6.3X11P2.5MM 85C
C204	CEHGC0107MN	CE 100U0F +20% 25.0V 6.3X11P2.5MM 85C
C304	CEHGC0107MN	CE 100U0F +20% 25.0V 6.3X11P2.5MM 85C
C902	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C113	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C114	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C213	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C214	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C313	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C314	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C917	CEMIC02265E	CAP, ELECT, 22uF, 50V +/-20%
C115	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C116	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C215	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C216	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C315	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C316	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C162	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C164	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C262	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C264	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C362	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C364	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C161	CPIKC0473NN	CPF 47N0F +10% 100.0V
C261	CPIKC0473NN	CPF 47N0F +10% 100.0V
C361	CPIKC0473NN	CPF 47N0F +10% 100.0V
C117	CPJJC0683NN-A	CAP POLY NON METAL 68NF 63V J TAP
C217	CPJJC0683NN-A	CAP POLY NON METAL 68NF 63V J TAP
C317	CPJJC0683NN-A	CAP POLY NON METAL 68NF 63V J TAP
C101	H01-CEMFC01062H	CAP ELEC 10UF 16V M 5X11 SHL P2.5MM
C201	H01-CEMFC01062H	CAP ELEC 10UF 16V M 5X11 SHL P2.5MM
C301	H01-CEMFC01062H	CAP ELEC 10UF 16V M 5X11 SHL P2.5MM
Q926	H01-TR2SC1740NW	TR-SLPLF 2SC1740S R N 150MIOA 50V
Q927	H01-TR2SC1740NW	TR-SLPLF 2SC1740S R N 150MIOA 50V
Q928	H01-TR2SC1740NW	TR-SLPLF 2SC1740S R N 150MIOA 50V
Q901	H03-TRKTA1024NA	TR-SLPLF KTA1024 Y P 50MIOA -150V
Q925	H03-TRKTA1266NA	TR-SLPLF KTA1266 Y P 150MIOA
Q107	H03-TRKTA1268NA-A	TR-SHPLF KTA1268BL P 100MIOA 120V
Q207	H03-TRKTA1268NA-A	TR-SHPLF KTA1268BL P 100MIOA 120V
Q307	H03-TRKTA1268NA-A	TR-SHPLF KTA1268BL P 100MIOA 120V
Q105	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q123	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q205	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q223	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q305	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q323	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q101	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q102	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q103	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q104	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V

Pos	Part Number	Part name
3CH AMP		
Q122	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MI0A 120V
Q201	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MI0A 120V
Q202	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MI0A 120V
Q203	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MI0A 120V
Q204	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MI0A 120V
Q222	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MI0A 120V
Q301	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MI0A 120V
Q302	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MI0A 120V
Q303	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MI0A 120V
Q304	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MI0A 120V
Q322	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MI0A 120V
C107	CFIOC0104NN	CPM 100N0F +10% 250.0V
C108	CFIOC0104NN	CPM 100N0F +10% 250.0V
C207	CFIOC0104NN	CPM 100N0F +10% 250.0V
C208	CFIOC0104NN	CPM 100N0F +10% 250.0V
C307	CFIOC0104NN	CPM 100N0F +10% 250.0V
C308	CFIOC0104NN	CPM 100N0F +10% 250.0V
C903	CFIOC0104NN	CPM 100N0F +10% 250.0V
C904	CFIOC0104NN	CPM 100N0F +10% 250.0V
G302	H01-ZNMSA4004SN	TERMLUG GND
G303	H01-ZNMSA4004SN	TERMLUG GND
Q902	H01-TRDTC114YNW	TR-SLPLF DTC114YSA N 100MI0A
N309	H01-WG03SE83800	WIRE ASS'Y 3.96MM 3P 160/300/380MM UL1007#16 STR BLU
N310	H01-WG03SE83700	WIRE ASS'Y 3.96MM 3P 140/260/370MM UL1007#16 STR RED
C109	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C110	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C111	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C112	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C209	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C210	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C211	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C212	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C309	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C310	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C311	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C312	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
L101	H03-LCNNNA050NA	LFA 1MM 10MM 5 LEFT 0.0MM NONE
L201	H03-LCNNNA050NA	LFA 1MM 10MM 5 LEFT 0.0MM NONE
L301	H03-LCNNNA050NA	LFA 1MM 10MM 5 LEFT 0.0MM NONE
R171	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R172	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R271	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R272	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R371	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R372	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
SK11	H01-RL1K124V05A	RELAY SGNL OMI-SS-224L 1K1 OHM 24V 5A
SK21	H01-RL1K124V05A	RELAY SGNL OMI-SS-224L 1K1 OHM 24V 5A
SK31	H01-RL1K124V05A	RELAY SGNL OMI-SS-224L 1K1 OHM 24V 5A
R161	H01-RM3GC0100CN	RESISTOR METAL OXIDE 10R0 OHM +5% 2.0W
R261	H01-RM3GC0100CN	RESISTOR METAL OXIDE 10R0 OHM +5% 2.0W
R361	H01-RM3GC0100CN	RESISTOR METAL OXIDE 10R0 OHM +5% 2.0W
RV12	H01-RT7EA0201NB	PR 200R0 OHM +20% 500MI0W
RV22	H01-RT7EA0201NB	PR 200R0 OHM +20% 500MI0W
RV32	H01-RT7EA0201NB	PR 200R0 OHM +20% 500MI0W
RV11	H01-RT7EA0500NB	PR 50R0 OHM +20% 500MI0W
RV21	H01-RT7EA0500NB	PR 50R0 OHM +20% 500MI0W
RV31	H01-RT7EA0500NB	PR 50R0 OHM +20% 500MI0W
NJ33	H01-SOSP20117NN	JACK SPEAKER 2P B30290117N BK/WH
NJ32	H01-SOSP20118NN	JACK SPEAKER 2P B30290118N BK/BU
NJ31	H01-SOSP20119NN-A	JACK SPEAKER 2P B30290119N BK/BRN
Q108	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V

Pos	Part Number	Part name
3CH AMP		
Q109	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q116	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q208	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q209	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q216	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q308	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q309	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q316	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q106	H01-TR2SA1370BC	TRANSISTOR PNP 2SA1370-E 100MI0A 40 320
Q206	H01-TR2SA1370BC	TRANSISTOR PNP 2SA1370-E 100MI0A 40 320
Q306	H01-TR2SA1370BC	TRANSISTOR PNP 2SA1370-E 100MI0A 40 320
Q115	H01-TR2SA1859BC	TR-SHPLF 2SA1859A P -2.0A
Q215	H01-TR2SA1859BC	TR-SHPLF 2SA1859A P -2.0A
Q315	H01-TR2SA1859BC	TR-SHPLF 2SA1859A P -2.0A
Q120	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q121	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q220	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q221	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q320	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q321	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q110	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MI0A 150V
Q111	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MI0A 150V
Q114	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MI0A 150V
Q210	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MI0A 150V
Q211	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MI0A 150V
Q214	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MI0A 150V
Q310	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MI0A 150V
Q311	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MI0A 150V
Q314	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MI0A 150V
Q112	H01-TR2SC4137BE	TR-SHPLF 2SC4137 N 100MI0A 20V
Q212	H01-TR2SC4137BE	TR-SHPLF 2SC4137 N 100MI0A 20V
Q312	H01-TR2SC4137BE	TR-SHPLF 2SC4137 N 100MI0A 20V
Q117	H01-TR2SC4883BC	TR-SHPLF 2SC4883A N 2.0A
Q217	H01-TR2SC4883BC	TR-SHPLF 2SC4883A N 2.0A
Q317	H01-TR2SC4883BC	TR-SHPLF 2SC4883A N 2.0A
Q118	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q119	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q218	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q219	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q318	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q319	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
N312	H01-WG02SE82500	WIRE ASS'Y 3.96MM 2P 170/250MM UL1007#18 BLU
P702	H01-WG02SE852BK	WIRE ASS'Y 3.96MM 2P 520MM UL1007#16 BLK
N704	H01-WG02SE852RD	WIRE ASS'Y 3.96MM 2P 520MM UL1007#16 RED
N311	H01-WG03SE82000	WIRE ASS'Y 3.96MM 3P 200MM UL1007#16 RED
N306	H01-WG03SE82300	WIRE ASS'Y 3.96MM 3P 230/200/230MM UL1007#18 WHT
P337	H01-WN02SD00000	CONN 2.5MM 2 MA ST NAT 0 0
P384	H01-WN02SD00000	CONN 2.5MM 2 MA ST NAT 0 0
P385	H01-WN02SD00000	CONN 2.5MM 2 MA ST NAT 0 0
P386	H01-WN02SD00000	CONN 2.5MM 2 MA ST NAT 0 0
P202	H01-WN04SD100WH	CONN WAFER 2.5MM 4P 5267-04A WHT
P316	H01-WN07AB100WH-A	CONN WAFER 2.0MM 7P 35237-0710 WHT
P317	H01-WN07AB100WH-A	CONN WAFER 2.0MM 7P 35237-0710 WHT
P318	H01-WN07AB100WH-A	CONN WAFER 2.0MM 7P 35237-0710 WHT
P321	H01-WN07SB100WH	CONN WAFER 2.0MM 7P 35336-0710 WHT
P322	H01-WN07SB100WH	CONN WAFER 2.0MM 7P 35336-0710 WHT
P323	H01-WN07SB100WH	CONN WAFER 2.0MM 7P 35336-0710 WHT
N303	H01-WS4242413FN	WIRE ASS'Y 2.5MM 4P 240MM UL1007/2547#24/26 SHIELD
N302	H01-WS5241523FN	WIRE ASS'Y 2.5MM 5P 150MM UL1007/2547 #24/26 SHIELD
N301	H01-WS7241543FN	WIRE ASS'Y 2.5MM 7P 150MM UL1007/2547 #24/26 SHIELD

Pos	Part Number	Part name
4CH AMP		
D401	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D404	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D405	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D408	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D501	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D504	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D505	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D508	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D601	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D604	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D605	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D608	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D701	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D704	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D705	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D708	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D801	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D802	H01-DG1N04148NB	D-SLP 1N4148 100.0V 150E-3A
D407	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D507	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D607	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D707	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
R406	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R407	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R408	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R506	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R507	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R508	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R606	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R607	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R608	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R706	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R707	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R708	RC3DI0101IN	RCF 100R0 OHM +5% 250MI0W
R401	RC3DI0102IN	RCF 1K0 OHM +5% 250MI0W
R501	RC3DI0102IN	RCF 1K0 OHM +5% 250MI0W
R601	RC3DI0102IN	RCF 1K0 OHM +5% 250MI0W
R701	RC3DI0102IN	RCF 1K0 OHM +5% 250MI0W
R444	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R445	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R544	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R545	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R644	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R645	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R744	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R745	RC3DI0122IN	RCF 1K2 OHM +5% 250MI0W
R420	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R421	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R422	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R423	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R520	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R521	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R522	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R523	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R620	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R621	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R622	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R623	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R720	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R721	RC3DI0151IN	RCF 150 OHM 5% 1/4W
R722	RC3DI0151IN	RCF 150 OHM 5% 1/4W

Pos	Part Number	Part name
4CH AMP		
R723	RC3DI0151IN	RCF 150 OHM +5% 1/4W
R403	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R404	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R503	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R504	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R603	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R604	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R703	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R704	RC3DI0152IN	RCF 1K5 OHM +5% 250MI0W
R424	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R425	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R446	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R524	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R525	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R546	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R624	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R625	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R646	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R724	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R725	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R746	RC3DI0153IN	RCF 15K0 OHM +5% 250MI0W
R801	RC3DI0181IN	RCF 180 OHM +5% 250MI0W
R448	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R449	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R548	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R549	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R648	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R649	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R748	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R749	RC3DI0220IN	RESISTOR CARBON FILM 22OHM 1/4W 5%
R409	RC3DI0221IN	RCF 220R0 OHM +5% 250MI0W
R509	RC3DI0221IN	RCF 220R0 OHM +5% 250MI0W
R609	RC3DI0221IN	RCF 220R0 OHM +5% 250MI0W
R709	RC3DI0221IN	RCF 220R0 OHM +5% 250MI0W
R426	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R456	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R526	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R556	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R626	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R656	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R726	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R756	RC3DI0222IN-A	RCF 2K2 OHM +5% 250MI0W
R450	RC3DI0333IN	RCF 33K0 OHM +5% 250MI0W
R550	RC3DI0333IN	RCF 33K0 OHM +5% 250MI0W
R650	RC3DI0333IN	RCF 33K0 OHM +5% 250MI0W
R750	RC3DI0333IN	RCF 33K0 OHM +5% 250MI0W
R405	RC3DI0471IN	RCF 470R0 OHM +5% 250MI0W
R505	RC3DI0471IN	RCF 470R0 OHM +5% 250MI0W
R605	RC3DI0471IN	RCF 470R0 OHM +5% 250MI0W
R705	RC3DI0471IN	RCF 470R0 OHM +5% 250MI0W
R455	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R470	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R555	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R570	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R655	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R670	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R755	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R770	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R802	RC3DI0473IN	RCF 47K OHM +5% 250MI0W
R457	RC3DI0560IN	RCF 56 OHM +5% 250MI0W
R557	RC3DI0560IN	RCF 56 OHM +5% 250MI0W

Pos	Part Number	Part name
4CH AMP		
R657	RC3DI0560IN	RCF 56 OHM +5% 250MI0W
R757	RC3DI0560IN	RCF 56 OHM +5% 250MI0W
R414	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R415	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R416	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R417	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R418	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R419	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R514	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R515	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R516	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R517	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R518	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R519	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R614	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R615	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R616	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R617	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R618	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R619	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R714	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R715	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R716	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R717	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R718	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R719	RC3DI0561IN-A	RCF 560R0 OHM +5% 250MI0W
R429	RC3DI0621IN	RCF 620 OHM +5% 250MI0W
R529	RC3DI0621IN	RCF 620 OHM +5% 250MI0W
R629	RC3DI0621IN	RCF 620 OHM +5% 250MI0W
R729	RC3DI0621IN	RCF 620 OHM +5% 250MI0W
R447	RC3DI0682IN	RCF 6K8 OHM +5% 250MI0W
R547	RC3DI0682IN	RCF 6K8 OHM +5% 250MI0W
R647	RC3DI0682IN	RCF 6K8 OHM +5% 250MI0W
R747	RC3DI0682IN	RCF 6K8 OHM +5% 250MI0W
R412	H01-RC1QC2431IN	RES CARBON FILM 2K43 OHM 1/5W 1%
R512	H01-RC1QC2431IN	RES CARBON FILM 2K43 OHM 1/5W 1%
R612	H01-RC1QC2431IN	RES CARBON FILM 2K43 OHM 1/5W 1%
R712	H01-RC1QC2431IN	RES CARBON FILM 2K43 OHM 1/5W 1%
R413	H01-RC1QC2671IN	RES CARBON FILM 2K67 OHM 1/5W 1%
R513	H01-RC1QC2671IN	RES CARBON FILM 2K67 OHM 1/5W 1%
R613	H01-RC1QC2671IN	RES CARBON FILM 2K67 OHM 1/5W 1%
R713	H01-RC1QC2671IN	RES CARBON FILM 2K67 OHM 1/5W 1%
R402	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R411	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R502	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R511	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R602	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R611	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R702	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
R711	RM1DI0333IN	RMF 33K0 OHM +1% 250MI0W
B401	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B402	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B403	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B404	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B501	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B502	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B503	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B504	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B601	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B602	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B603	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550

Pos	Part Number	Part name
4CH AMP		
B604	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B701	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B702	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B703	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
B704	H03-FB44HM15300-A	LF BEADS 44.1530HM 100MHZ FB-30 HC-3550
D402	H01-DR01SS244NA	DIODE 1SS244 220V
D403	H01-DR01SS244NA	DIODE 1SS244 220V
D502	H01-DR01SS244NA	DIODE 1SS244 220V
D503	H01-DR01SS244NA	DIODE 1SS244 220V
D602	H01-DR01SS244NA	DIODE 1SS244 220V
D603	H01-DR01SS244NA	DIODE 1SS244 220V
D702	H01-DR01SS244NA	DIODE 1SS244 220V
D703	H01-DR01SS244NA	DIODE 1SS244 220V
R440	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R441	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R442	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R443	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R540	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R541	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R542	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R543	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R640	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R641	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R642	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R643	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R740	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R741	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R742	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R743	H01-RM3EG0100LN-A	RMF 10R0 OHM +5% 500MI0W
R434	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R435	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R534	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R535	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R634	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R635	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R734	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R735	H01-RM3EG0101LN	RESISTOR METAL OXIDE 100 OHM 1/2W 5%
R436	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R437	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R536	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R537	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R636	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R637	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R736	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R737	H01-RM3EG0150LN	RESISTOR METAL OXIDE 15 OHM 1/2W 5%
R432	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R433	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R532	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R533	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R632	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R633	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R732	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R733	H01-RM3EG022ALN	RESISTOR METAL OXIDE 2R2 OHM 1/2W 5%
R410	H01-RM3EG0820LN	RESISTOR METAL OXIDE 82 OHM 1/2W 5%
R510	H01-RM3EG0820LN	RESISTOR METAL OXIDE 82 OHM 1/2W 5%
R610	H01-RM3EG0820LN	RESISTOR METAL OXIDE 82 OHM 1/2W 5%
R710	H01-RM3EG0820LN	RESISTOR METAL OXIDE 82 OHM 1/2W 5%
R438	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R439	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R538	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R539	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%

Pos	Part Number	Part name
4CH AMP		
R638	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R639	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R738	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R739	H01-RM3FC022ANN	RESISTOR METAL OXIDE 2R2 OHM 1W 5%
R430	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R431	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R530	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R531	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R630	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R631	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R730	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
R731	H01-RM3FC0560BN	RESISTOR METAL OXIDE 56 OHM 1W 5%
C405	CCJIC0120NN	CAP CERAMIC 12PF 50V J CH TAP
C505	CCJIC0120NN	CAP CERAMIC 12PF 50V J CH TAP
C605	CCJIC0120NN	CAP CERAMIC 12PF 50V J CH TAP
C705	CCJIC0120NN	CAP CERAMIC 12PF 50V J CH TAP
C402	CCKIC0101NC	CAP CERAMIC 100PF 50V K X7R TAP
C502	CCKIC0101NC	CAP CERAMIC 100PF 50V K X7R TAP
C602	CCKIC0101NC	CAP CERAMIC 100PF 50V K X7R TAP
C702	CCKIC0101NC	CAP CERAMIC 100PF 50V K X7R TAP
C406	CCKIC0221NC-A	CAP CERAMIC 220PF 50V K X7R TAP
C506	CCKIC0221NC-A	CAP CERAMIC 220PF 50V K X7R TAP
C606	CCKIC0221NC-A	CAP CERAMIC 220PF 50V K X7R TAP
C706	CCKIC0221NC-A	CAP CERAMIC 220PF 50V K X7R TAP
C403	CCKIC0681NA	CC 680P0F +10% -10% 50.0V Y5P
C503	CCKIC0681NA	CC 680P0F +10% -10% 50.0V Y5P
C603	CCKIC0681NA	CC 680P0F +10% -10% 50.0V Y5P
C703	CCKIC0681NA	CC 680P0F +10% -10% 50.0V Y5P
C418	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C518	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C618	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C718	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C801	CEHEC0477MN-A	CE 470U0F +20% 10.0V 6.3X11 85C ELITE
C404	CEHGC0107MN	CE 100U0F +20% 25.0V 6.3X11P2.5MM 85C
C504	CEHGC0107MN	CE 100U0F +20% 25.0V 6.3X11P2.5MM 85C
C604	CEHGC0107MN	CE 100U0F +20% 25.0V 6.3X11P2.5MM 85C
C704	CEHGC0107MN	CE 100U0F +20% 25.0V 6.3X11P2.5MM 85C
C802	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C413	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C414	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C513	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C514	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C613	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C614	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C713	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C714	CEHIC04765E	CE 47U0F +20% 50.0V 85C P5MM
C415	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C416	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C515	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C516	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C615	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C616	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C715	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C716	CPIKC0103NN	CAP POLY NON METAL 10NF 100V 10%
C562	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C564	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C662	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C664	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C762	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C764	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C862	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%

Pos	Part Number	Part name
4CH AMP		
C864	CPIKC0472NN	CAP POLY NON METAL 4N7F 100V 10%
C461	CPIKC0473NN	CPF 47N0F +10% 100.0V
C561	CPIKC0473NN	CPF 47N0F +10% 100.0V
C661	CPIKC0473NN	CPF 47N0F +10% 100.0V
C761	CPIKC0473NN	CPF 47N0F +10% 100.0V
C417	CPJJC0683NN-A	CAP POLY NON METAL 68NF 63V J TAP
C517	CPJJC0683NN-A	CAP POLY NON METAL 68NF 63V J TAP
C617	CPJJC0683NN-A	CAP POLY NON METAL 68NF 63V J TAP
C717	CPJJC0683NN-A	CAP POLY NON METAL 68NF 63V J TAP
C401	H01-CEMFC01062H	CAP ELEC 10UF 16V M 5X11 SHL P2.5MM
C501	H01-CEMFC01062H	CAP ELEC 10UF 16V M 5X11 SHL P2.5MM
C601	H01-CEMFC01062H	CAP ELEC 10UF 16V M 5X11 SHL P2.5MM
C701	H01-CEMFC01062H	CAP ELEC 10UF 16V M 5X11 SHL P2.5MM
Q801	H03-TRKTA1024NA	TR-SLPLF KTA1024 Y P 50MIOA -150V
Q407	H03-TRKTA1268NA-A	TR-SHPLF KTA1268BL P 100MIOA 120V
Q507	H03-TRKTA1268NA-A	TR-SHPLF KTA1268BL P 100MIOA 120V
Q607	H03-TRKTA1268NA-A	TR-SHPLF KTA1268BL P 100MIOA 120V
Q707	H03-TRKTA1268NA-A	TR-SHPLF KTA1268BL P 100MIOA 120V
Q405	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q423	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q505	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q523	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q605	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q623	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q705	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q723	H03-TRKTC3198NA	TR-SLPLF KTC3198BL N 150MIOA
Q401	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q402	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q403	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q404	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q422	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q501	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q502	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q503	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q504	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q522	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q601	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q602	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q603	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q604	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q622	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q701	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q702	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q703	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q704	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
Q722	H03-TRKTC3200NA	TR-SHPLF KTC3200BL N 100MIOA 120V
C407	CFIOC0104NN	CPM 100N0F +10% 250.0V
C408	CFIOC0104NN	CPM 100N0F +10% 250.0V
C507	CFIOC0104NN	CPM 100N0F +10% 250.0V
C508	CFIOC0104NN	CPM 100N0F +10% 250.0V
C607	CFIOC0104NN	CPM 100N0F +10% 250.0V
C608	CFIOC0104NN	CPM 100N0F +10% 250.0V
C707	CFIOC0104NN	CPM 100N0F +10% 250.0V
C708	CFIOC0104NN	CPM 100N0F +10% 250.0V
C803	CFIOC0104NN	CPM 100N0F +10% 250.0V
C804	CFIOC0104NN	CPM 100N0F +10% 250.0V
G401	H01-ZNMSA4004SN	TERMLUG GND
G501	H01-ZNMSA4004SN	TERMLUG GND
G601	H01-ZNMSA4004SN	TERMLUG GND
G701	H01-ZNMSA4004SN	TERMLUG GND
G802	H01-ZNMSA4004SN	TERMLUG GND

Pos	Part Number	Part name
4CH AMP		
Q802	H01-TRDTC114YNW	TR-SLPLF DTC114YSA N 100MI0A
C409	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C410	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C411	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C412	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C509	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C510	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C511	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C512	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C609	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C610	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C611	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C612	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C709	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C710	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C711	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
C712	H01-CEMKA0127AH	CAP ELEC 120UF 100V M 12X16 AHS
L401	H03-LCNNNA050NA	LFA 1MM 10MM 5 LEFT 0.0MM NONE
L501	H03-LCNNNA050NA	LFA 1MM 10MM 5 LEFT 0.0MM NONE
L601	H03-LCNNNA050NA	LFA 1MM 10MM 5 LEFT 0.0MM NONE
L701	H03-LCNNNA050NA	LFA 1MM 10MM 5 LEFT 0.0MM NONE
R471	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R472	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R571	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R572	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R671	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R672	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R771	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
R772	H01-RI3IC022BEN	RW 220MI0 OHM +5% 5.0W 100PPM/C -100PPM/C
SK41	H01-RL1K124V05A	RELAY SGNL OMI-SS-224L 1K1 OHM 24V 5A
SK51	H01-RL1K124V05A	RELAY SGNL OMI-SS-224L 1K1 OHM 24V 5A
SK61	H01-RL1K124V05A	RELAY SGNL OMI-SS-224L 1K1 OHM 24V 5A
SK71	H01-RL1K124V05A	RELAY SGNL OMI-SS-224L 1K1 OHM 24V 5A
R461	H01-RM3GC0100CN	RESISTOR METAL OXIDE 10R0 OHM +5% 2.0W
R561	H01-RM3GC0100CN	RESISTOR METAL OXIDE 10R0 OHM +5% 2.0W
R661	H01-RM3GC0100CN	RESISTOR METAL OXIDE 10R0 OHM +5% 2.0W
R761	H01-RM3GC0100CN	RESISTOR METAL OXIDE 10R0 OHM +5% 2.0W
VR42	H01-RT7EA0201NB	PR 200R0 OHM +20% 500MI0W
VR52	H01-RT7EA0201NB	PR 200R0 OHM +20% 500MI0W
VR62	H01-RT7EA0201NB	PR 200R0 OHM +20% 500MI0W
VR72	H01-RT7EA0201NB	PR 200R0 OHM +20% 500MI0W
VR41	H01-RT7EA0500NB	PR 50R0 OHM +20% 500MI0W
VR51	H01-RT7EA0500NB	PR 50R0 OHM +20% 500MI0W
VR61	H01-RT7EA0500NB	PR 50R0 OHM +20% 500MI0W
VR71	H01-RT7EA0500NB	PR 50R0 OHM +20% 500MI0W
NJ51	H01-SOSP20115NN	JACK SPEAKER 2P B30290115N GY/BK D/N
NJ61	H01-SOSP20116NN	JACK SPEAKER 2P B30290116N TAN/BK
NJ41	H01-SOSP40164NN	JACK SPEAKER 4P B30490164N GN/BK/R/B
Q408	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q409	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q416	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q508	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q509	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q516	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q608	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q609	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q616	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q708	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q709	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q716	H01-TR2SA1360BC	TRANSISTOR PNP 2SA1360-Y 50MI0A -150V
Q406	H01-TR2SA1370BC	TRANSISTOR PNP 2SA1370-E 100MI0A 40 320

Pos	Part Number	Part name
4CH AMP		
Q506	H01-TR2SA1370BC	TRANSISTOR PNP 2SA1370-E 100MIOA 40 320
Q606	H01-TR2SA1370BC	TRANSISTOR PNP 2SA1370-E 100MIOA 40 320
Q706	H01-TR2SA1370BC	TRANSISTOR PNP 2SA1370-E 100MIOA 40 320
Q415	H01-TR2SA1859BC	TR-SHPLF 2SA1859A P -2.0A
Q515	H01-TR2SA1859BC	TR-SHPLF 2SA1859A P -2.0A
Q615	H01-TR2SA1859BC	TR-SHPLF 2SA1859A P -2.0A
Q715	H01-TR2SA1859BC	TR-SHPLF 2SA1859A P -2.0A
Q420	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q421	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q520	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q521	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q620	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q621	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q720	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q721	H01-TR2SA1943RP-A	TRANSISTOR PNP 2SA1943-O TO-220
Q410	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q411	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q414	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q510	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q511	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q514	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q610	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q611	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q614	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q710	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q711	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q714	H01-TR2SC3423BC	TRANSISTOR NPN 2SC3423-Y 50MIOA 150V
Q412	H01-TR2SC4137BE	TR-SHPLF 2SC4137 N 100MIOA 20V
Q512	H01-TR2SC4137BE	TR-SHPLF 2SC4137 N 100MIOA 20V
Q612	H01-TR2SC4137BE	TR-SHPLF 2SC4137 N 100MIOA 20V
Q712	H01-TR2SC4137BE	TR-SHPLF 2SC4137 N 100MIOA 20V
Q417	H01-TR2SC4883BC	TR-SHPLF 2SC4883A N 2.0A
Q517	H01-TR2SC4883BC	TR-SHPLF 2SC4883A N 2.0A
Q617	H01-TR2SC4883BC	TR-SHPLF 2SC4883A N 2.0A
Q717	H01-TR2SC4883BC	TR-SHPLF 2SC4883A N 2.0A
Q418	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q419	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q518	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q519	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q618	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q619	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q718	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
Q719	H01-TR2SC5200RP	TRANSISTOR NPN 2SC5200-O TO-220
P1	H01-WE01S7065BK	WIRE ASS'Y DIA1.5MM 1P 70MM TUBE L=65MM BLK
P2	H01-WE01S7065BK	WIRE ASS'Y DIA1.5MM 1P 70MM TUBE L=65MM BLK
P3	H01-WE01S7065BK	WIRE ASS'Y DIA1.5MM 1P 70MM TUBE L=65MM BLK
P4	H01-WE01S7065BK	WIRE ASS'Y DIA1.5MM 1P 70MM TUBE L=65MM BLK
P5	H01-WE01S7065BK	WIRE ASS'Y DIA1.5MM 1P 70MM TUBE L=65MM BLK
P6	H01-WE01S7065BK	WIRE ASS'Y DIA1.5MM 1P 70MM TUBE L=65MM BLK
N703	H01-WG02SE81200	WIRE ASS'Y 3.96MM 2P 120MM UL1007#18 RED
N801	H01-WG02SE81700	WIRE ASS'Y 3.96MM 2P 70/170MM UL1007#18 RED
N802	H01-WG02SE82000	WIRE ASS'Y 3.96MM 2P 120/200MM UL1007#18 RED
N603	H01-WG02SE82400	WIRE ASS'Y 3.96MM 2P 240MM UL1007#18 RED
N503	H01-WG02SE83000	WIRE ASS'Y 3.96MM 2P 300MM UL1007#18 RED
N403	H01-WG02SE83800	WIRE ASS'Y 3.96MM 2P 380MM UL1007#18 RED
P702	H01-WG02SE852BK	WIRE ASS'Y 3.96MM 2P 520MM UL1007#16 BLK
N705	H01-WG02SE852RD	WIRE ASS'Y 3.96MM 2P 520MM UL1007#16 RED
N803	H01-WG04SE81800	WIRE ASS'Y 3.96MM 4P 180MM UL1007#16 RED
P401	H01-WN02SD00000	CONN 2.5MM 2 MA ST NAT 0 0
P501	H01-WN02SD00000	CONN 2.5MM 2 MA ST NAT 0 0
P601	H01-WN02SD00000	CONN 2.5MM 2 MA ST NAT 0 0

Pos	Part Number	Part name
4CH AMP		
P701	H01-WN02SD00000	CONN 2.5MM 2 MA ST NAT 0 0
P905	H01-WN02SD00000	CONN 2.5MM 2 MA ST NAT 0 0
P402	H01-WN04SD100WH	CONN WAFER 2.5MM 4P 5267-04A WHT
P416	H01-WN07AB100WH-A	CONN WAFER 2.0MM 7P 35237-0710 WHT
P417	H01-WN07AB100WH-A	CONN WAFER 2.0MM 7P 35237-0710 WHT
P418	H01-WN07AB100WH-A	CONN WAFER 2.0MM 7P 35237-0710 WHT
P419	H01-WN07AB100WH-A	CONN WAFER 2.0MM 7P 35237-0710 WHT
P406	H01-WN07SB100WH	CONN WAFER 2.0MM 7P 35336-0710 WHT
P506	H01-WN07SB100WH	CONN WAFER 2.0MM 7P 35336-0710 WHT
P606	H01-WN07SB100WH	CONN WAFER 2.0MM 7P 35336-0710 WHT
P706	H01-WN07SB100WH	CONN WAFER 2.0MM 7P 35336-0710 WHT
N406	H01-WS3262505FB	WIRE ASS'Y 2.5MM 3P 250MM UL2547#26 BLK SHIELD
N405	H01-WS4241813FN	WIRE ASS'Y 2.5MM 4P 180MM UL1007/2547 #24/26 SHIELD
N402	H01-WS5242623FN	WIRE ASS'Y 2.5MM 5P 260MM UL1007/2547#24/26 SHIELD
N401	H01-WS6242933FN	WIRE ASS'Y 2.5MM 6P 290MM UL1007/2547 #24/26 SHIELD
Pos	Part Number	Part name
Supply		
C606	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C662	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
C663	CZZFI0104BF	CAP CHIP 100N0F +80% -20% 16.0V Y5V 0603
L600	H01-FB2K52012NN	FBEAD SURFACE MT 2500OHM FCM2012H-252T02
L601	H01-FB2K52012NN	FBEAD SURFACE MT 2500OHM FCM2012H-252T02
L602	H01-FB2K52012NN	FBEAD SURFACE MT 2500OHM FCM2012H-252T02
L603	H01-FB2K52012NN	FBEAD SURFACE MT 2500OHM FCM2012H-252T02
L651	H01-FB2K52012NN	FBEAD SURFACE MT 2500OHM FCM2012H-252T02
L652	H01-FB2K52012NN	FBEAD SURFACE MT 2500OHM FCM2012H-252T02
L653	H01-FB3002012NN	FBEAD SURFACE MT 300OHM FCM2012V-301T07
IC43	H01-ICUPD4721D8	IC-SPECFUNC UPD4721 DRIVERS/RECEIVERS CMOS RS-232C
L654	H01-LS1502012NN	INDUCTOR COIL FCI2012-150K 15UH 0805
L655	H01-LS1502012NN	INDUCTOR COIL FCI2012-150K 15UH 0805
R463	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R692	RS3AD0101NA	RMGCFMIC 100R0 OHM +5% 62MI5W
R456	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R691	RS3AD0102NA	RMGCFMIC 1K0 OHM +5% 62MI5W
R464	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R468	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R470	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R473	RS3AD0103NA	RMGCFMIC 10K0 OHM +5% 62MI5W
R469	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R471	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R474	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R475	RS3AD0104NA-A	RMGCFMIC 100K0 OHM +5% 62MI5W
R472	RS3AD0222NA	RMGCFMIC 2K2 OHM +5% 62MI5W
R465	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R506	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R608	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R609	RS3AD0472NA	RMGCFMIC 4K7 OHM +5% 62MI5W
R503	RS3AD0562NA	RMGCFMIC 5K6 OHM +5% 62MI5W
C400	CCZID0104NA	CC 100N0F +80% -20% 50.0V F
C414	CCZID0104NA	CC 100N0F +80% -20% 50.0V F
C468	CCZID0104NA	CC 100N0F +80% -20% 50.0V F
C487	CCZID0104NA	CC 100N0F +80% -20% 50.0V F
D449	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D450	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D451	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D453	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D454	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D455	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D456	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D457	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D465	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A

Pos	Part Number	Part name
Supply		
D466	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D472	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D473	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D478	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D479	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D501	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D502	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D503	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D504	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D506	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D507	H01-DR1N04004NA	D-SR 1N4004 400.0V 1.0A
D458	H01-DZ1N05231NB	D-ZENER 1N5231B 5.1V 500MI0W
D476	H01-DZMTZ09V1NB	D-ZENER MTZJ 9.1V 500MI0W
D474	H01-DZMTZJ22BNB	DIODE ZENER MTZ J 22B 22V 0.5W DO-34
D475	H01-DZMTZJ22BNB	DIODE ZENER MTZ J 22B 22V 0.5W DO-34
D508	H01-DZMTZJ5B6NB	DIODE ZENER MTZ J5.6B 5.6V 500MW DO-34
L100	H01-LAINB0470CR	LF 47U0H +10% 5.8 OHM 500MI0A
R458	RC3DI0102IN	RCF 1K0 OHM +5% 250MI0W
R504	RC3DI0102IN	RCF 1K0 OHM +5% 250MI0W
R457	RC3DI0103IN	RCF 10K0 OHM +5% 250MI0W
R505	RC3DI0182IN	RCF 1K8 OHM 5% 1/4W
R461	RC3DI0330IN	RESISTOR CARBON FILM 33 OHM 1/4W 5%
R462	RC3DI0330IN	RESISTOR CARBON FILM 33 OHM 1/4W 5%
R467	RC3DI0330IN	RESISTOR CARBON FILM 33 OHM 1/4W 5%
R453	RC3DI0472IN	RCF 4K7 OHM 5% 1/4W
R454	RC3DI0472IN	RCF 4K7 OHM 5% 1/4W
D505	H01-DZMTZJ24BNB-A	DIODE ZENER MTZ J 24B 24V 500mW DO-34
C441	CCZGC0104NA	CAP CERAMIC 100NF 25V Z Z5U TAP
C442	CCZIC0473NA-A	CAP CERAMIC 47NF 50V Z Z5U TAP
C443	CCZIC0473NA-A	CAP CERAMIC 47NF 50V Z Z5U TAP
C605	CEHDC01075E	CE 100U0F +20% 6.3V 85C 5X11 PITCH 5MM
C503	CEHGC01075E	CE 100U0F +20% 25.0V 6.3X11 85C P5MM
C504	CEHGC01075E	CE 100U0F +20% 25.0V 6.3X11 85C P5MM
C412	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C413	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C467	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C472	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C474	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C475	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C476	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C486	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C505	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C600	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C601	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C602	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C603	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C604	CEHIC01055E	CE 1UF +20% 50V D5XL11 P5MM 85C
C485	CEHIC01065E	CE 10U0F +20% 50.0V 85C P5MM 5X11
C502	CEHIC01065E	CE 10U0F +20% 50.0V 85C P5MM 5X11
C484	CEMJA0107NN	CAP ELEC 100UF 63V M8*11.5 ELITE
C452	CFIOC0104NN	CPM 100N0F +10% 250.0V
C453	CFIOC0104NN	CPM 100N0F +10% 250.0V
C454	CFIOC0104NN	CPM 100N0F +10% 250.0V
C455	CFIOC0104NN	CPM 100N0F +10% 250.0V
C456	CFIOC0104NN	CPM 100N0F +10% 250.0V
C401	CPIKC0473NN	CPF 47N0F +10% 100.0V
C402	CPIKC0473NN	CPF 47N0F +10% 100.0V
C403	CPIKC0473NN	CPF 47N0F +10% 100.0V
C483	CPIKC0473NN	CPF 47N0F +10% 100.0V
C462	CPIKC0473NN	CPF 47N0F +10% 100.0V
C463	CPIKC0473NN	CPF 47N0F +10% 100.0V

Pos	Part Number	Part name
Supply		
C464	CPIKC0473NN	CPF 47N0F +10% 100.0V
C495	CPIKC0473NN	CPF 47N0F +10% 100.0V
C496	CPIKC0473NN	CPF 47N0F +10% 100.0V
C497	CPIKC0473NN	CPF 47N0F +10% 100.0V
C416	H01-CEMFC0106AH	CAP ELEC 10UF 16V M 5X11 P5MM SHL
C473	H01-CEMFC0337NN	CE 330UF 16V M 8X11.5 SHL
C501	H01-CEMHC0227AH	CAP ELEC 220UF 35V M 8X11.5 SHL SAMYOUNG
C465	H01-CEMIC0564AH	CAP ELEC 0.56UF 50V M 5X11 SHL SAMYOUNG
F454	H01-FURN2200663	FUSE 663 SERIES 0663 002. 250V 2.0A TIMELUG
F455	H01-FURN2200663	FUSE 663 SERIES 0663 002. 250V 2.0A TIMELUG
FH11	H01-SOPS1FEHDNN	TERMFUSEHLDR FUSE-HOLDER J4210020001X
FH12	H01-SOPS1FEHDNN	TERMFUSEHLDR FUSE-HOLDER J4210020001X
FH13	H01-SOPS1FEHDNN	TERMFUSEHLDR FUSE-HOLDER J4210020001X
FH14	H01-SOPS1FEHDNN	TERMFUSEHLDR FUSE-HOLDER J4210020001X
FH15	H01-SOPS1FEHDNN	TERMFUSEHLDR FUSE-HOLDER J4210020001X
FH16	H01-SOPS1FEHDNN	TERMFUSEHLDR FUSE-HOLDER J4210020001X
Q501	H01-TR2SA933ANW	TR-SLPLF 2SA933ASR P -3.0A -20V
Q452	H03-TRMPSA06NNA-A	TR-SLPLF MPSA06 N 500MI0A TO-92
Q453	H03-TRMPSA06NNA-A	TR-SLPLF MPSA06 N 500MI0A TO-92
Q454	H03-TRMPSA06NNA-A	TR-SLPLF MPSA06 N 500MI0A TO-92
Q455	H03-TRMPSA06NNA-A	TR-SLPLF MPSA06 N 500MI0A TO-92
Q456	H03-TRMPSA06NNA-A	TR-SLPLF MPSA06 N 500MI0A TO-92
Q460	H03-TRMPSA06NNA-A	TR-SLPLF MPSA06 N 500MI0A TO-92
G401	H01-ZNMSA4004SN	TERMLUG GND
C451	CCMPA0472NA	CAPACITOR CERAMIC 0.0047UF 400V M
C459	CCMPA0472NA	CAPACITOR CERAMIC 0.0047UF 400V M
C460	CCMPA0472NA	CAPACITOR CERAMIC 0.0047UF 400V M
C469	CCMPA0472NA	CAPACITOR CERAMIC 0.0047UF 400V M
C470	CCMPA0472NA	CAPACITOR CERAMIC 0.0047UF 400V M
C461	CFMVA0104NN	CPPMX 100N0F +20% -20%
C498	H01-CEHFA0688MN	CE 6MI8F +20% 16.0V 85C 16X31.5 SHL
C466	H01-CEMGA0478AH	CAP ELEC 4700UF 25V M 16X31.5 SHL
C457	H01-CEMZA0399AH	CAP ELEC 39000UF 80V M 50X120 AHS
C458	H01-CEMZA0399AH	CAP ELEC 39000UF 80V M 50X120 AHS
D452	H01-DU35A3504WF	DIODE BRIDGE BP3504WF 35A
F451	H01-FUGF201A618	FUSE 218 SERIES LF218 01.6 250V 1.6A TIMELUG
F452	H01-FUGF208A055	FUSE 55T SERIES T8H 250V 8A
F453	H01-FUGF2800M18	FUSE 218 SERIES LF218 .800 250V 800mA TIMELUG
IC45	H01-ICBA033T0I2	IC-REGPOSF XD BA033T NORMAL
IC42	H03-ICKA78R05I2	IC VOLTAGE REGULATOR KIA78R05API TO-220IS-4
IC41	H03-ICKIA7806I2	IC KIA7806AP VOLTQAGE REGULATOR TO-220AB
IC47	H03-ICKIA7806I2	IC KIA7806AP VOLTQAGE REGULATOR TO-220AB
R451	H01-RI3PA0400NN	RESISTOR CEMENT 40 OHM 15W 5% RQA-15
R452	H01-RI3PA0400NN	RESISTOR CEMENT 40 OHM 15W 5% RQA-15
SK1	H01-RLL1227111K	RELAYPWR 12.0V 270.0OHM 10.0A
SK2	H01-RLL1227111K	RELAYPWR 12.0V 270.0OHM 10.0A
SK41	H01-RLL1227111K	RELAYPWR 12.0V 270.0OHM 10.0A
R448	H01-RM3FC010ABN	RESISTOR METAL OXIDE 1 OHM 1W 5%
R459	H01-RM3FC0120BN	RESISTOR METAL OXIDE 12 OHM 1W 5%
R479	H01-RM3FC0123BN	RESISTOR METAL OXIDE 12K OHM 1W 5%
R480	H01-RM3FC0123BN	RESISTOR METAL OXIDE 12K OHM 1W 5%
R502	H01-RM3FC0470BN	RESISTOR METAL OXIDE 47OHM 1W 5%
R476	H01-RM3GC0100CN	RESISTOR METAL OXIDE 10R0 OHM +5% 2.0W
R501	H01-RM3GC0100CN	RESISTOR METAL OXIDE 10R0 OHM +5% 2.0W
R477	H01-RM3GC022ACN	RESITOR METAL OXIDE 2R2 OHM +5% 2.0W
R455	H01-RM3GC047ACN	RESISTOR METAL OXIDE 4R7 +5% 2.0W
NJ82	H01-SOAC2A304NN	AC OUTLET A304D0071P 2P
NJ85	H01-SORA21502NN	CON PHONO SCKT RCA 2P W/GNDCAP CJ020009VN OO
NJ87	H01-SOTOR179LBA	D-LEM TORX-179L
NJ86	H01-SOTOT179LBA	D-LEM TOTX-179L
NJ81	H01-SOXA27014NN	CON MAINS INLET A/C INLET 7014-NGP AC05-4S020A


Pos	Part Number	Part name
Supply		
T451	H01-TXPWMSD10A0	TRANSFORMER AVR7300SUB 230V 50Hz EI48X15
T452	H01-TXPWMT100B0	HMC REACTOR ARPT-100
W601	H01-WG01S008000	WIRE ASS'Y UL1007#16 STR 80MM 1P BLK TERMINAL
N813	H01-WG04SB83900-A	WIRE ASS'Y 390MM 4P UL1007#26 2.0MM STR WHT
N816	H01-WG06SB81500	WIRE ASS'Y 2.0MM 6P 150MM UL1007#26 WHT
N812	H01-WG06SB83500	WIRE ASS'Y 350MM 6P UL1007#26 2.0MM STR WHT
P802	H01-WN02S12MM00-A	CONNECTOR WAFER B02P-VL 12.0MM 2P
P803	H01-WN02S12MM00-A	CONNECTOR WAFER B02P-VL 12.0MM 2P
P815	H01-WN02S12MM00-A	CONNECTOR WAFER B02P-VL 12.0MM 2P
P801	H01-WN02SE00000	CON 3.96MM PITCH HEADER 2 POS MOLEX 35328-0210
N462	H01-WN02SE00001-A	CONN WAFER 3.96MM 2P YW396-02V
N466	H01-WN02SE00001-A	CONN WAFER 3.96MM 2P YW396-02V
P817	H01-WN02SE00101	CONNECT 3.96MM 2P 35313-0210
P818	H01-WN02SE00101	CONNECT 3.96MM 2P 35313-0210
P403	H01-WN03S12MM00	CONN WAFER B03P-VL 12.0MM 3P
P819	H01-WN03SE00000	CON 3.96MM PITCH MOLEX 35313-0310
P808	H01-WN04SB00000	CONN 2.0MM 4 MA ST NAT GT201-4P-TS
P820	H01-WN04SE00000	CON 3.96MM PITCH MOLEX 35313-0410
P806	H01-WN05SB00000	CONN 2.0MM 5 MA ST NAT GT201-5P-TS
P809	H01-WN06SB00000	CONN 2.0MM 6 MA ST NAT GT201-6P-TS
P807	H01-WN07SD00000	CNT PLUG ST 2.5mm 7P 5267-07A
P804	H01-WN11SB00001	CONN 2.0MM 11P GIL-S-11P-S2T2-EF
N824	H01-WS08SB870EN	WIRE ASS'Y UL1007/1533#26 700MM 2.0MM 8P WH/GRY
	H01-ZMD05HS0100	HEATSINK BRIDGE AVR7300
	H01-ZMD05S06A00	BRACKET BRIDGE H/SINK AVR7300
	H01-ZMD05S18A00	SHIELD DIGITAL AVR7300
NJ10	SOPA96063NN	JACK D-SUB 9P 87204-6063 W/DUST COVER BK

Pos	Part Number	Part name
MECH		
	H01-FBB0102AA00	FCORE FERRIT MAGNET SRH9. 9X20. 0X5. 1+CASE W5
	H01-FBD0480BR00	FCORE CLAMP FILTER LF80BR W5 SRH 16X28X9
	H01-RP42T100BNN-A	POSISTOR P42T8D100BW16
	H01-SWA2B21PDA&	SW PUSH POWER SDDL15700
	H01-TXPWMMD10B0	MN X'FORMER AVR7300EU 230V TRANSFORMER
	H01-WF15S1105FU	WIRE FFC DHCDF-15/110-P1.25-AT
	H01-WF23S4505FU	WIRE FFC DHCDF-23/450-P1.25-AT
	H01-WG02SG8342A	WIRE ASS'Y UL1617#22 3P 7.92MM 340MM RED
	H01-WG03SK8722A	WIRE ASS'Y UL1617#18 STR 720MM 6.2MM 3P BLK
	H01-WS0266005FN	WIRE ASS'Y UL1533/2547/1007#26 600MM 2.0MM 10P STR
	H01-ZMB01S00100	BKT HEADPHONE JACK
	H01-ZMB01S02200	SPRING PLATE GND C5212 0.2T
	H01-ZMC11S00300	AL PANEL AVR430/630
	H01-ZMC11S06A00	SPRING STOPPER AVR430/630
	H01-ZMC11S12A00	CAP BUTTON STAND-BY AVR430/630
	H01-ZMC12S09A00	BKT HEATSINK
	H01-ZMC12S19A00	BKT AC INLET
	H01-ZMC12S20A00	BADGE AL HARMAN/KARDON SILVER
	H01-ZMD05HS0300	HEATSINK REG.TR AVR7300
	H01-ZMD05S02A00	AL DOOR AVR7300
	H01-ZMD05S03A00	HEATSINK 3CH AVR7300
	H01-ZMD05S04A00	HEATSINK 4CH AVR7300
	H01-ZMD05S05A00	SHIELD FAROUDJA
	H01-ZMD05S07A00	CHASSIS FRONT AVR7300
	H01-ZMD05S08A00	COVER TOP AVR7300
	H01-ZMD05S08B00	BKT TRANS BOTTOM AVR7300
	H01-ZMD05S09A00	BKT TOP
	H01-ZMD05S10A00	BKT SIDE
	H01-ZMD05S12AYE	STUD STANDOFF HEX M4X0.7 6X15H
	H01-ZMD05S13A00	CHASSIS MAIN AVR7300
	H01-ZMD05S13AYE	STANDOFF HEX M4X0.7 6X55H
	H01-ZMD05S14AYE-A	STANDOFF HEX M4X0.7 6X34H


Pos	Part Number	Part name
MECH		
	H01-ZMD05S15A00	BKT SUPPLY
	H01-ZMD05S15AYE	STUD STANDOFF HEX M4X0.7 6X71.6H
	H01-ZMD05S16A00	BKT HINGE AVR7300
	H01-ZMD05S17A00	AL DOOR PANEL AVR7300
	H01-ZMD05S19A00	BRACKET SHIELD LARGE
	H01-ZMD05S20A00	SHIELD LARGE AVR7300
	H01-ZMD05S21A00	SHIELD SMALL AVR7300
	H01-ZMD10S11A00	PANEL REAR AVR7300USEU
	H01-ZMGEN00GAGY	AL LOGO BADGE TOP
	H01-ZPC1018GART	FILTER VFD
	H01-ZPD0104GASG	BUTTON 7 KEY EU
	H01-ZPD0515GAMW-A	VOLUMN KNOB AVR7300
	H01-ZPD0316GASG-A	COVER KNOB
	H01-ZPD0317GACR	CAP KNOB VOLUMN
	H01-ZPD0501GAGY	FRONT PANEL AVR7300
	H01-ZPD0503GAGY	FRAME DOOR L
	H01-ZPD0504GAGY	FRAME DOOR R
	H01-ZPD0522GABT	WINDOW DISPLAY AVR7300
	H01-ZVC11DWT100	TAPE DOOR
	H01-ZVC11DWT200	TAPE PANEL
	H01-ZVC11GEAR01-A	DAMPER GEAR DP120
	H03-ZVD01TUNE00	TUNER MODULE KST-MB114MW1-81 OEM EU
	XY1M3000000	MEMBRANE POLY TRANS W=1.3M @ROLL
	ZFNR1450300-A	RUBBER TOP
	ZFNR19720SB	RUBBER FOOT 19.7X19.7X2T BK
	ZNSSM4045HZ	NUT M4 HEXAGON CIRCULAR EXTERNAL
	ZPC1005GAGY	BUTTON 8 KEY
	ZPC1006GAWH	BUTTON STANDBY
	ZPC1007GAMW	INDICATOR STAND-BY
	ZPC1017GABK	HOLDER VFD AVR430/630
	ZPC1102GAMW	INDICATOR VIDEO 4
	ZPC1103GAGY-A	FOOT 50MM 15.8MM
	ZPD0503GAGY	BUTTON POWER
	ZQB0101AA00	SHIELD FOAM GASKET (WOORI)
	ZSMCM4014BN	SCREW MC4X14 NI PLATED
	ZSMWM4008BZ	SCREW M.S M4X8 W/H ZN PLATED
	ZSTBM0318TZ	SCREW ST BH 3X18
	ZSTBM3008BY	SCREW ST BH 3X8
	ZSTBM3010BB	SCREW ST BH 3X10
	ZSTBM3012BY-A	SCREW ST BH 3X12 PIVOT
	ZSTGM3010BB	SCREW ST BH 3X10 GROUND
	ZSTWM3008BY	SCREW ST WPH 3X8
	ZSTWM4008BC	SCREW ST WPH 4X8 SILVER CHROM
	ZTB017030AA	CABLE TIE 100MM NYLON 6
	ZV4P00030TH	HEAT SHRINK TUBE L30MM*D4.0MM*T0.5MM
	ZWM623108SZ	WASHER SPRING 3
	ZWM763109SZ	AC SPRING WASHER RT2250(PAV5005)
	ZWM803305PZ	WASHER PLAIN 3
	ZWMC04810PZ	WASHER PLAIN 4
	H01-ZPC1219ZABK	SPEAKER TER'BOARD SH08M790B0
	ZHD109402MW	SHIELD COVER REACTOR
	ZUD10005MBK	SPONGE COVER REACTOR
	ZWF793008PO	WASHER FIBER 3 0.8T

Pos	Part Number	Part name
Packing		
	BTA3A1511SF	BATTERY ALKALINE 1.5V AAA
	H03-ATALF039ABK	ANTENNA WIRE ANTENNA LOOP CT01-AM 0 0
	H01-RYC1202HA00	REMOCON ZONE 2
	H01-RYD1001HA00	REMOCON AVR7300 EU
	H03-WAD01200303	ANTENNA WIRE 75 OHM WIRE CT03-FM 00
	H01-WAD022000BK	WR002 H05VVF 0.75MMSQ 2G BLACK 2000MM
	XY0M51K5M00	MEMBRANE POLY TRANS W=0.5M L=1.5KM @ROLL
	XY1N218M3CL	GLUE TRANSPARENT W=12MM L=18.3M @ROLL
	XY7N636M5CL	Glue, Transparent,W=76mm, L=36.5m @m
	XYGLAA5K200	GLASS CLEANER,N.W=0.52KG @BOTTL
	XYJBLA4L800	WAX JUBILEE, CLEANER V=0.48LITER @BOTTLE
	ZBP00020350	POLYBAG BATTERY
	ZBP00037P51	BAG PE 379X272XT0.1
	ZBP00122051	BAG PE 330 X245 T0.05
	ZHD0501AAWH	FILM SHEET PE 1050X1050XT0.5
	ZKD1031HA00	LABEL MADE IN CHINA AVR7300EU
	ZKC1156HA00-A	CARD POST
	ZKC11H96A00	POLISHING CLOTH
	ZKC1214HA00-A	LABEL SAFETY LEAFLET
	ZKC1270HA00	LABEL "PLEASE"
	ZKD0552HA00	QUICK SETUP GUIDE AVR7300
	ZKD05H03A00-A	PAD ENDCAP PAD UPPER
	ZKD05H04A00	PAD ENDCAP PAD INNER
	ZKD1001HA00	MANUAL AVR7300EU
	ZKD1004HA00	BOX CARTON AVR7300EU
	ZKD1073HA00-A	LABEL BARCODE AVR7300EU
	ZKGEN43HA00	CARD INSERT ENVELOPE
	ZKGEN56HA00	ENVELOPE POLISHING CLOTH
	ZQD0501HA00	CUSHION POLY EPS RIGHT AVR7300
	ZQD0502HA00	CUSHION POLY EPS LEFT AVR7300
	ZQD0503HA00	CUSHION BOTTOM AVR7300
	H01-ZPD1019ZABK	SPEAKER TERMINAL KNOB CORK B3M790BO
	ZKGEN73HA00	LABEL BARCODE BLANK


FRONT

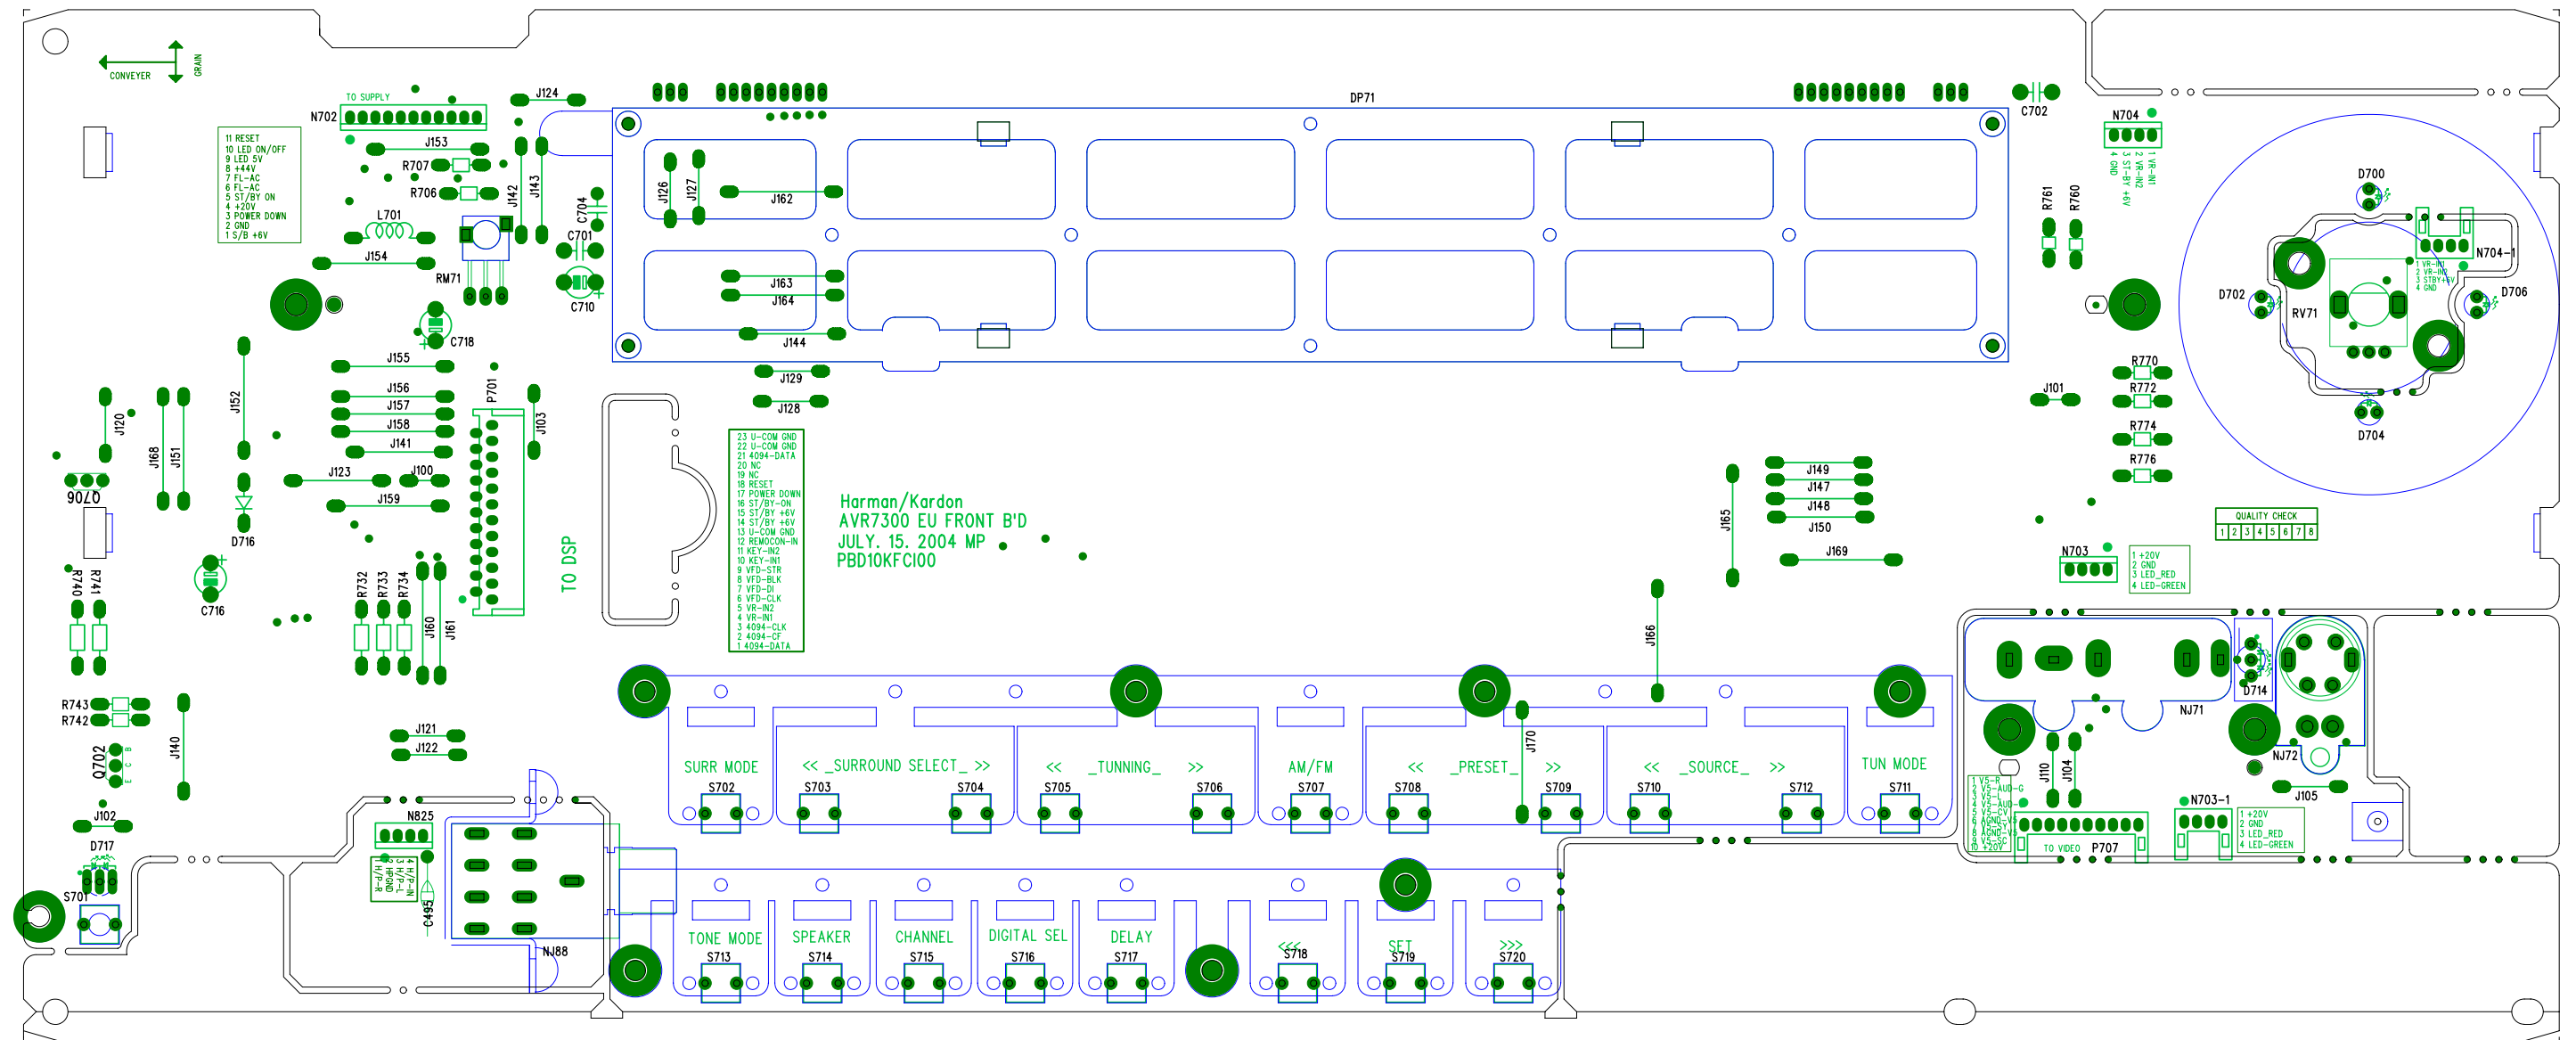


FRONT

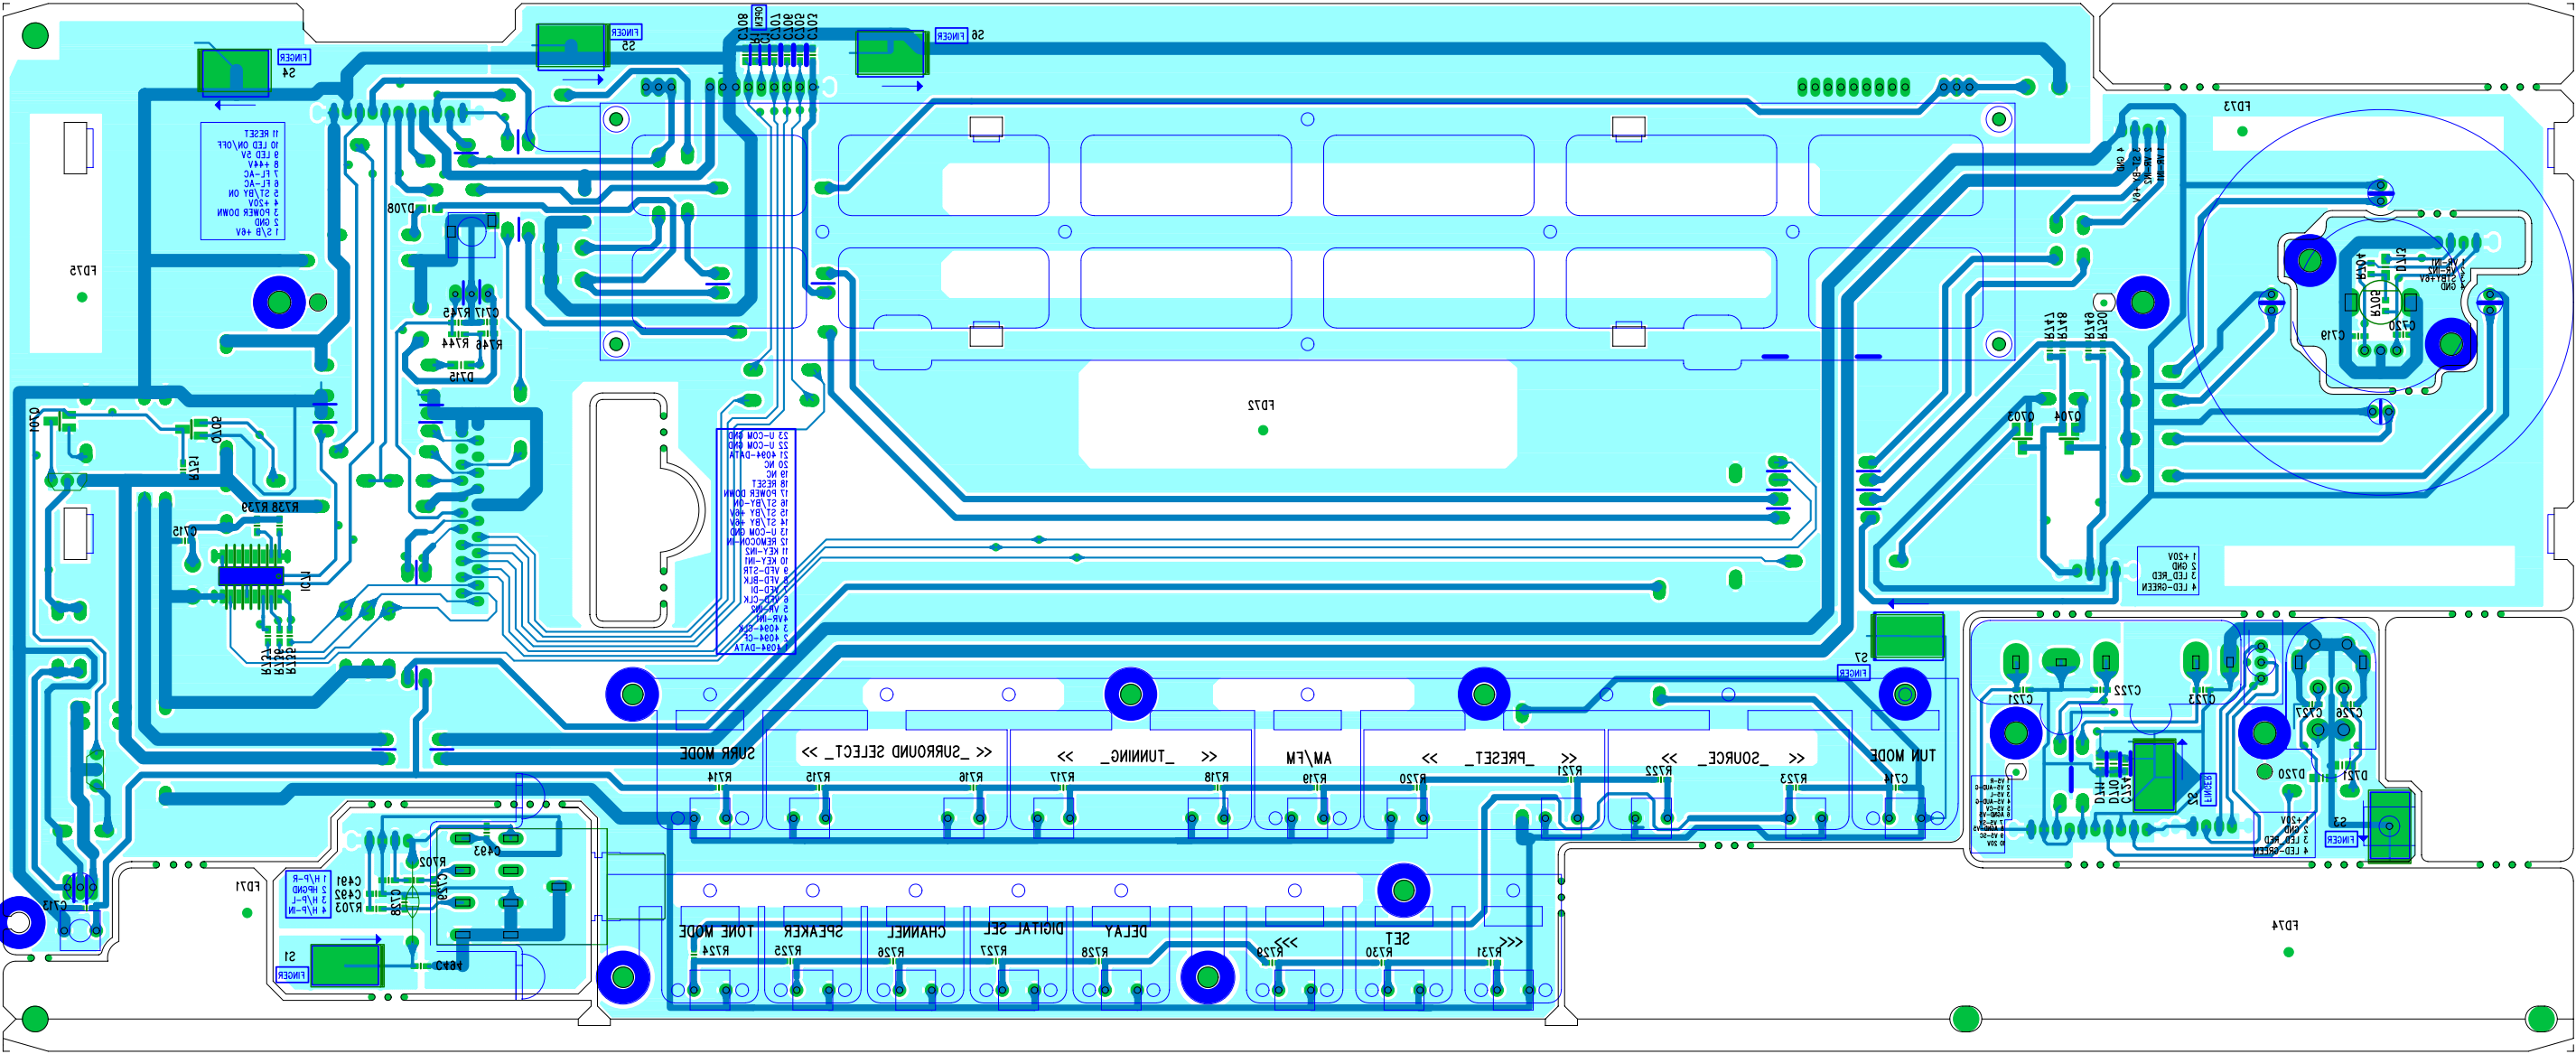


SUPPLY

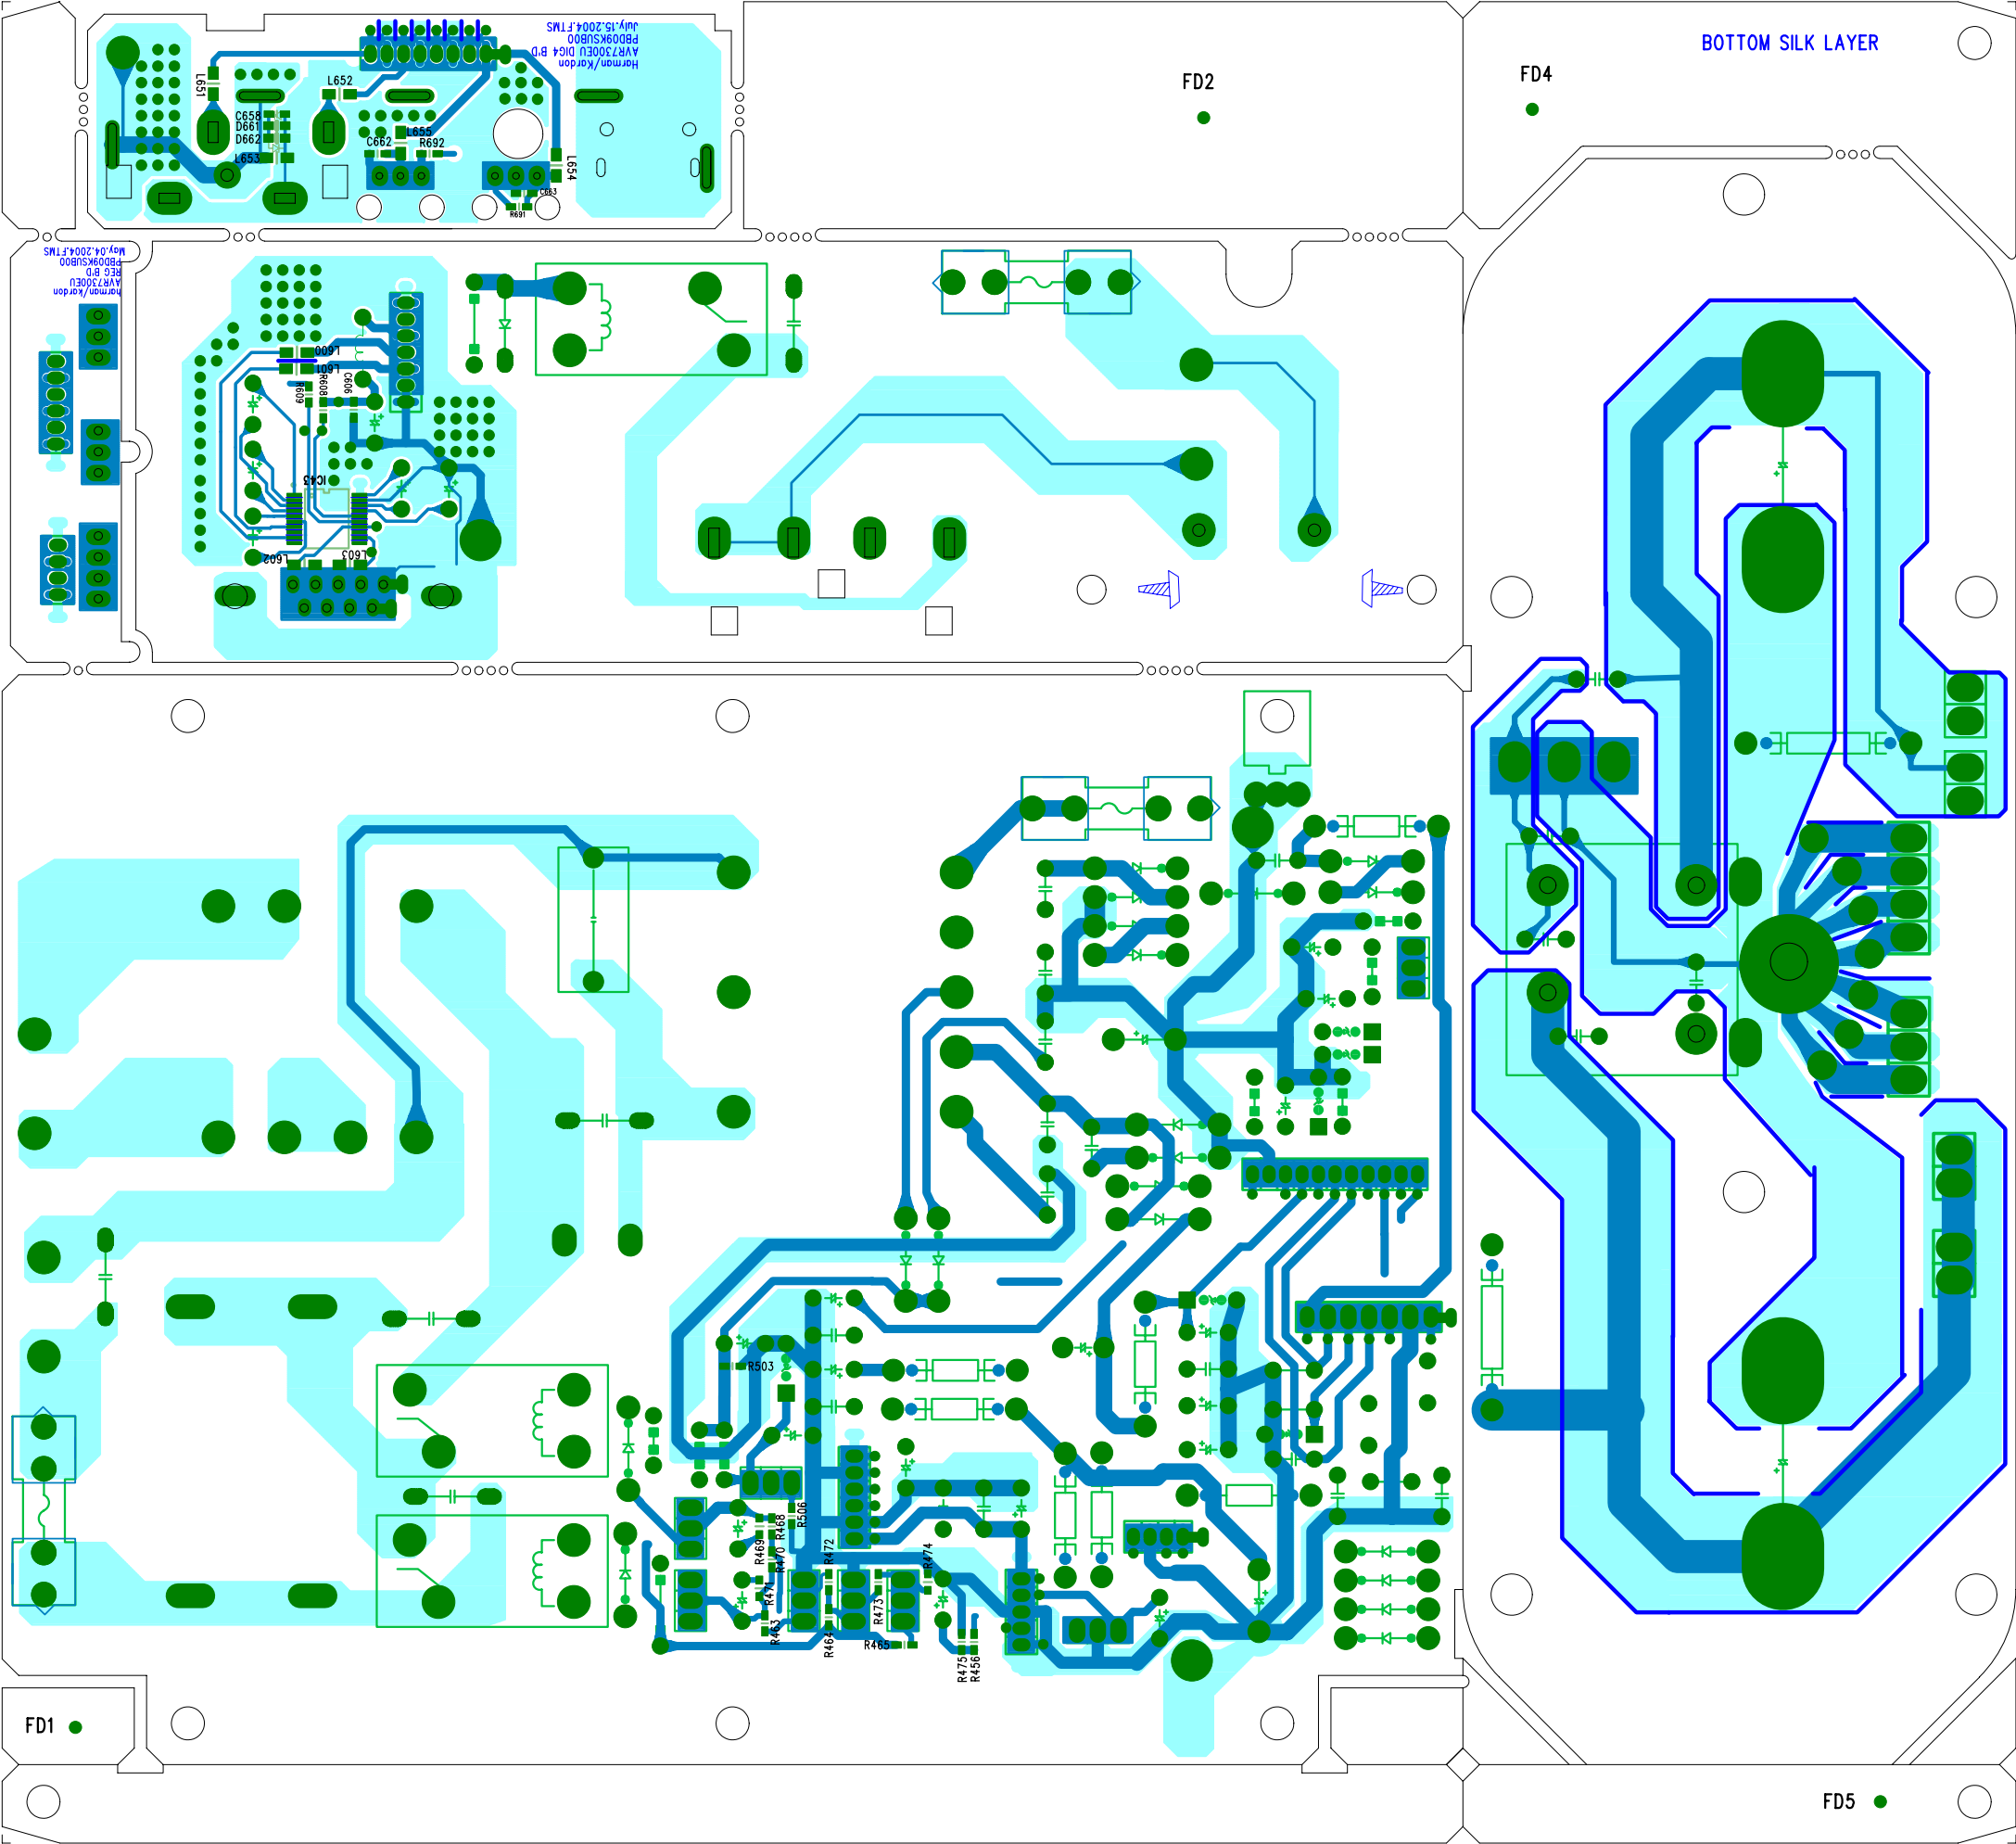


SUPPLY

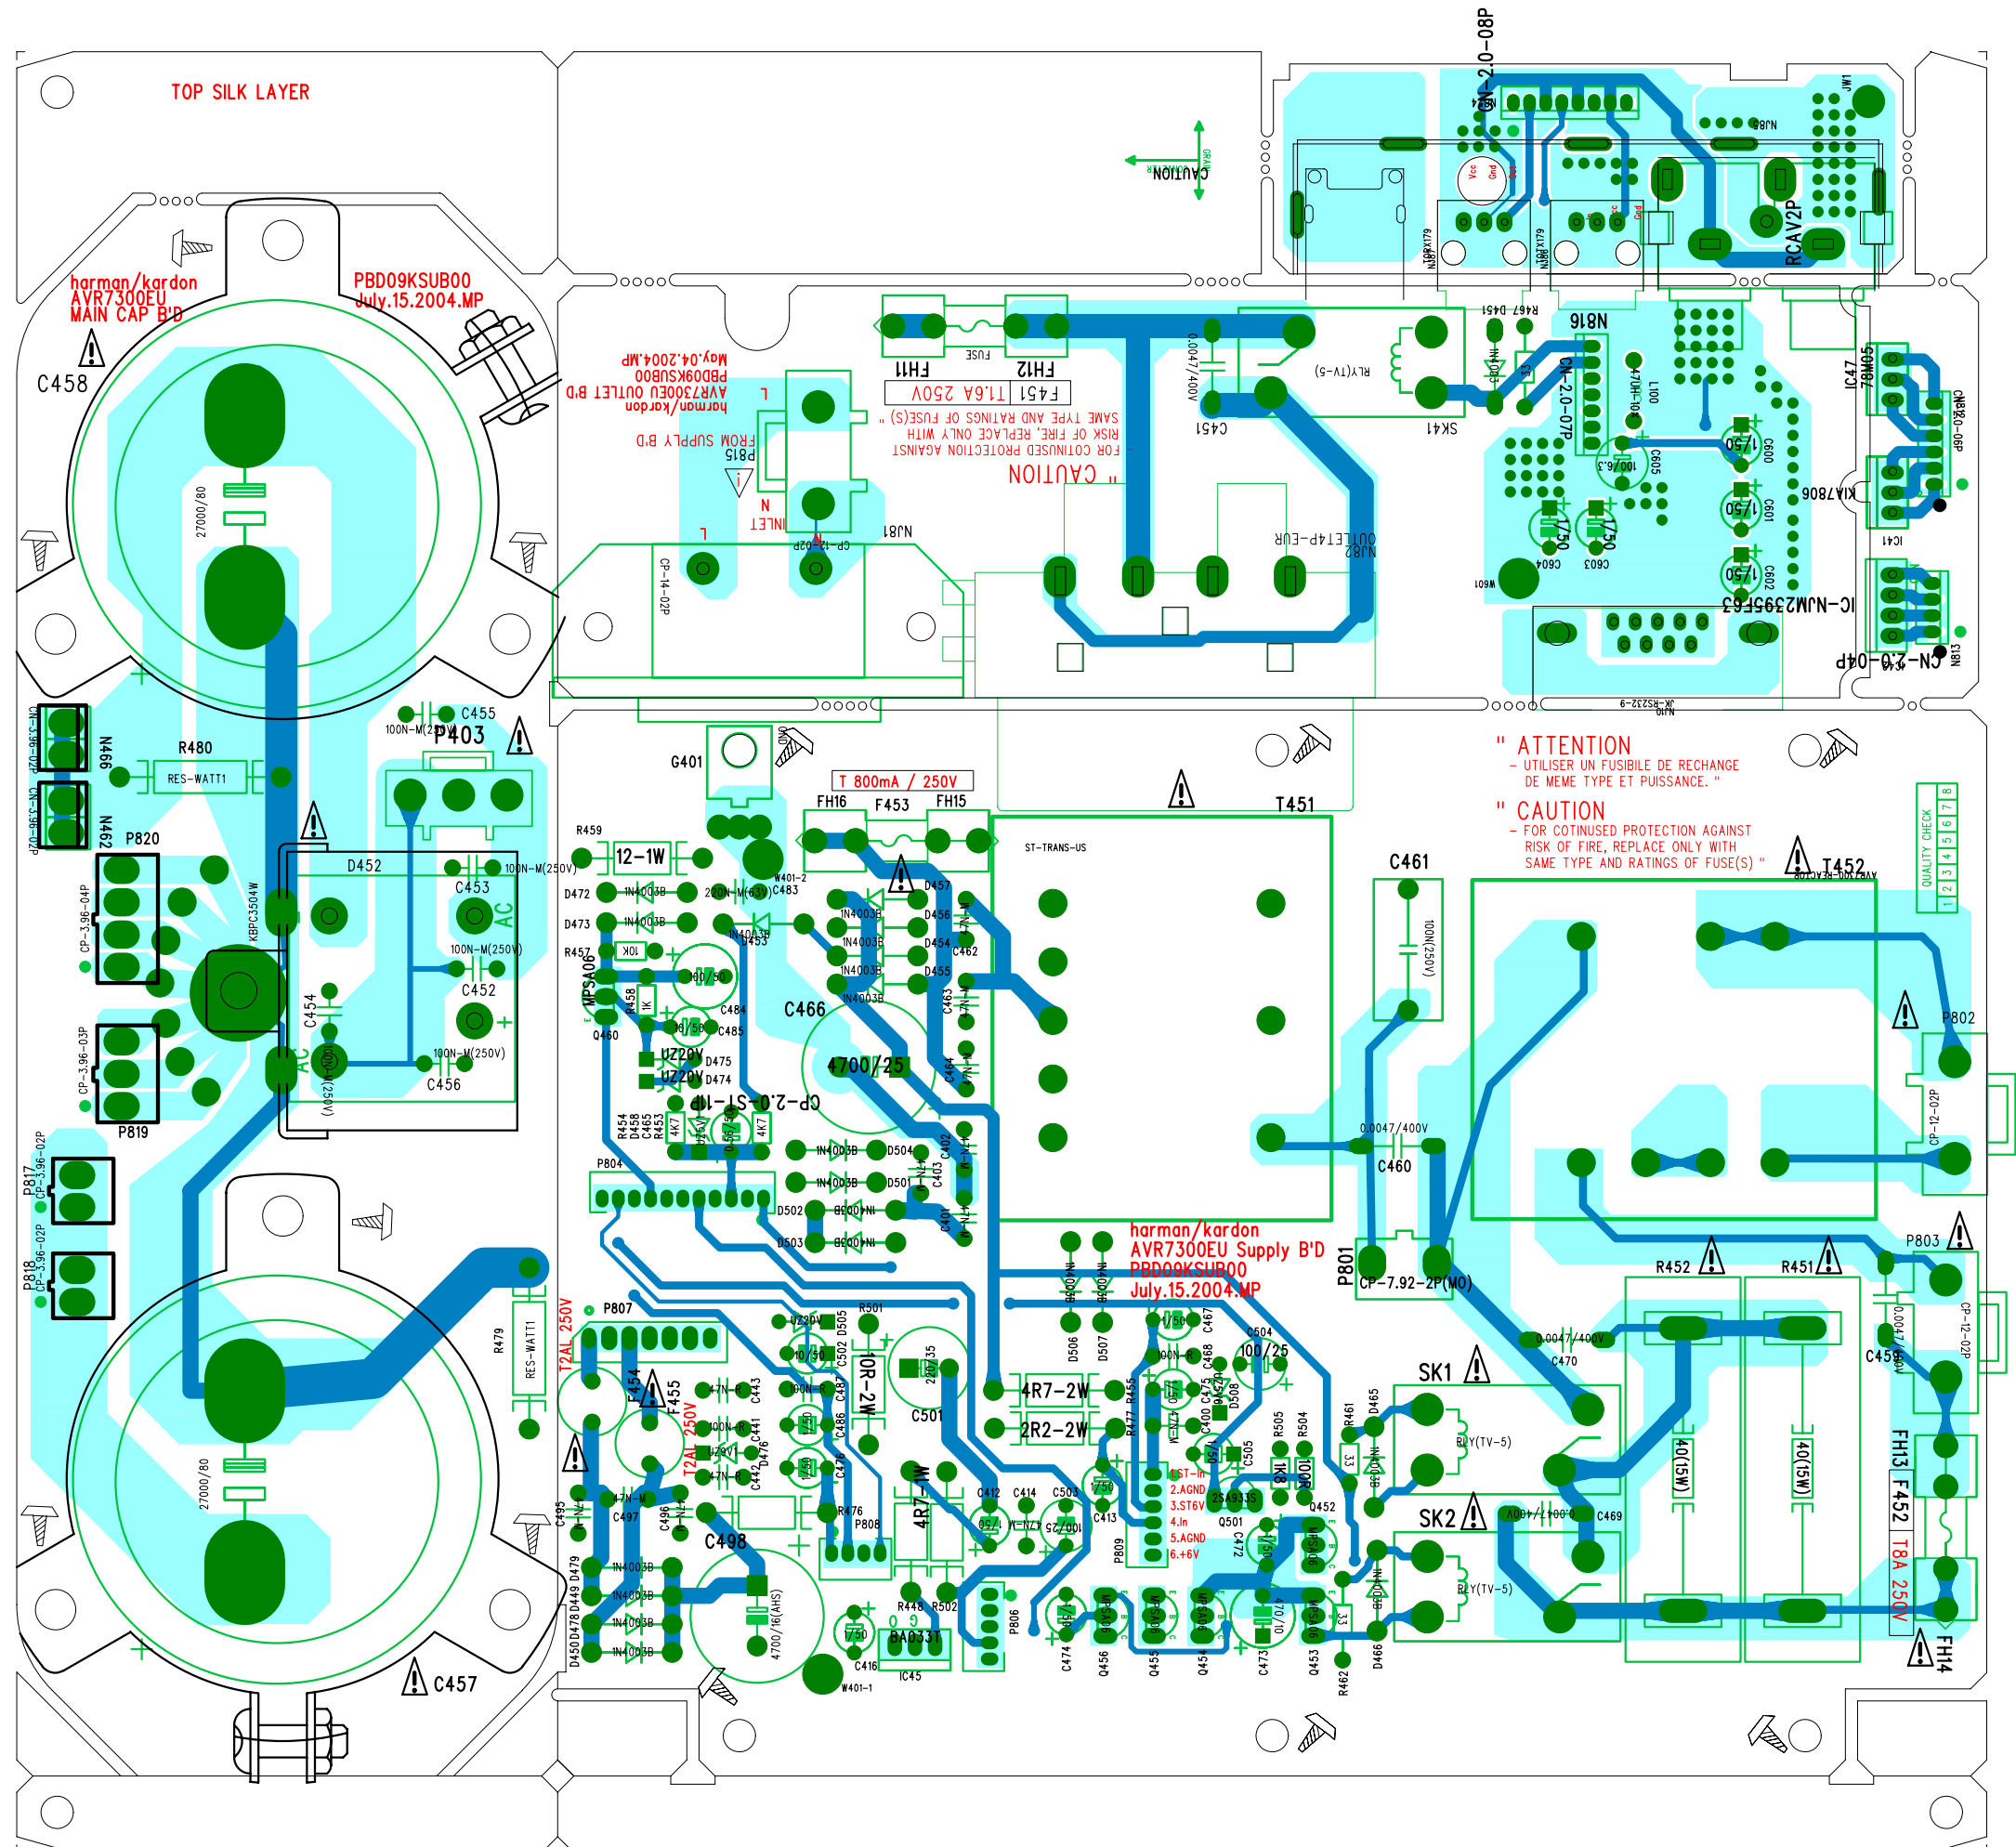


AVR7300-3CHAN

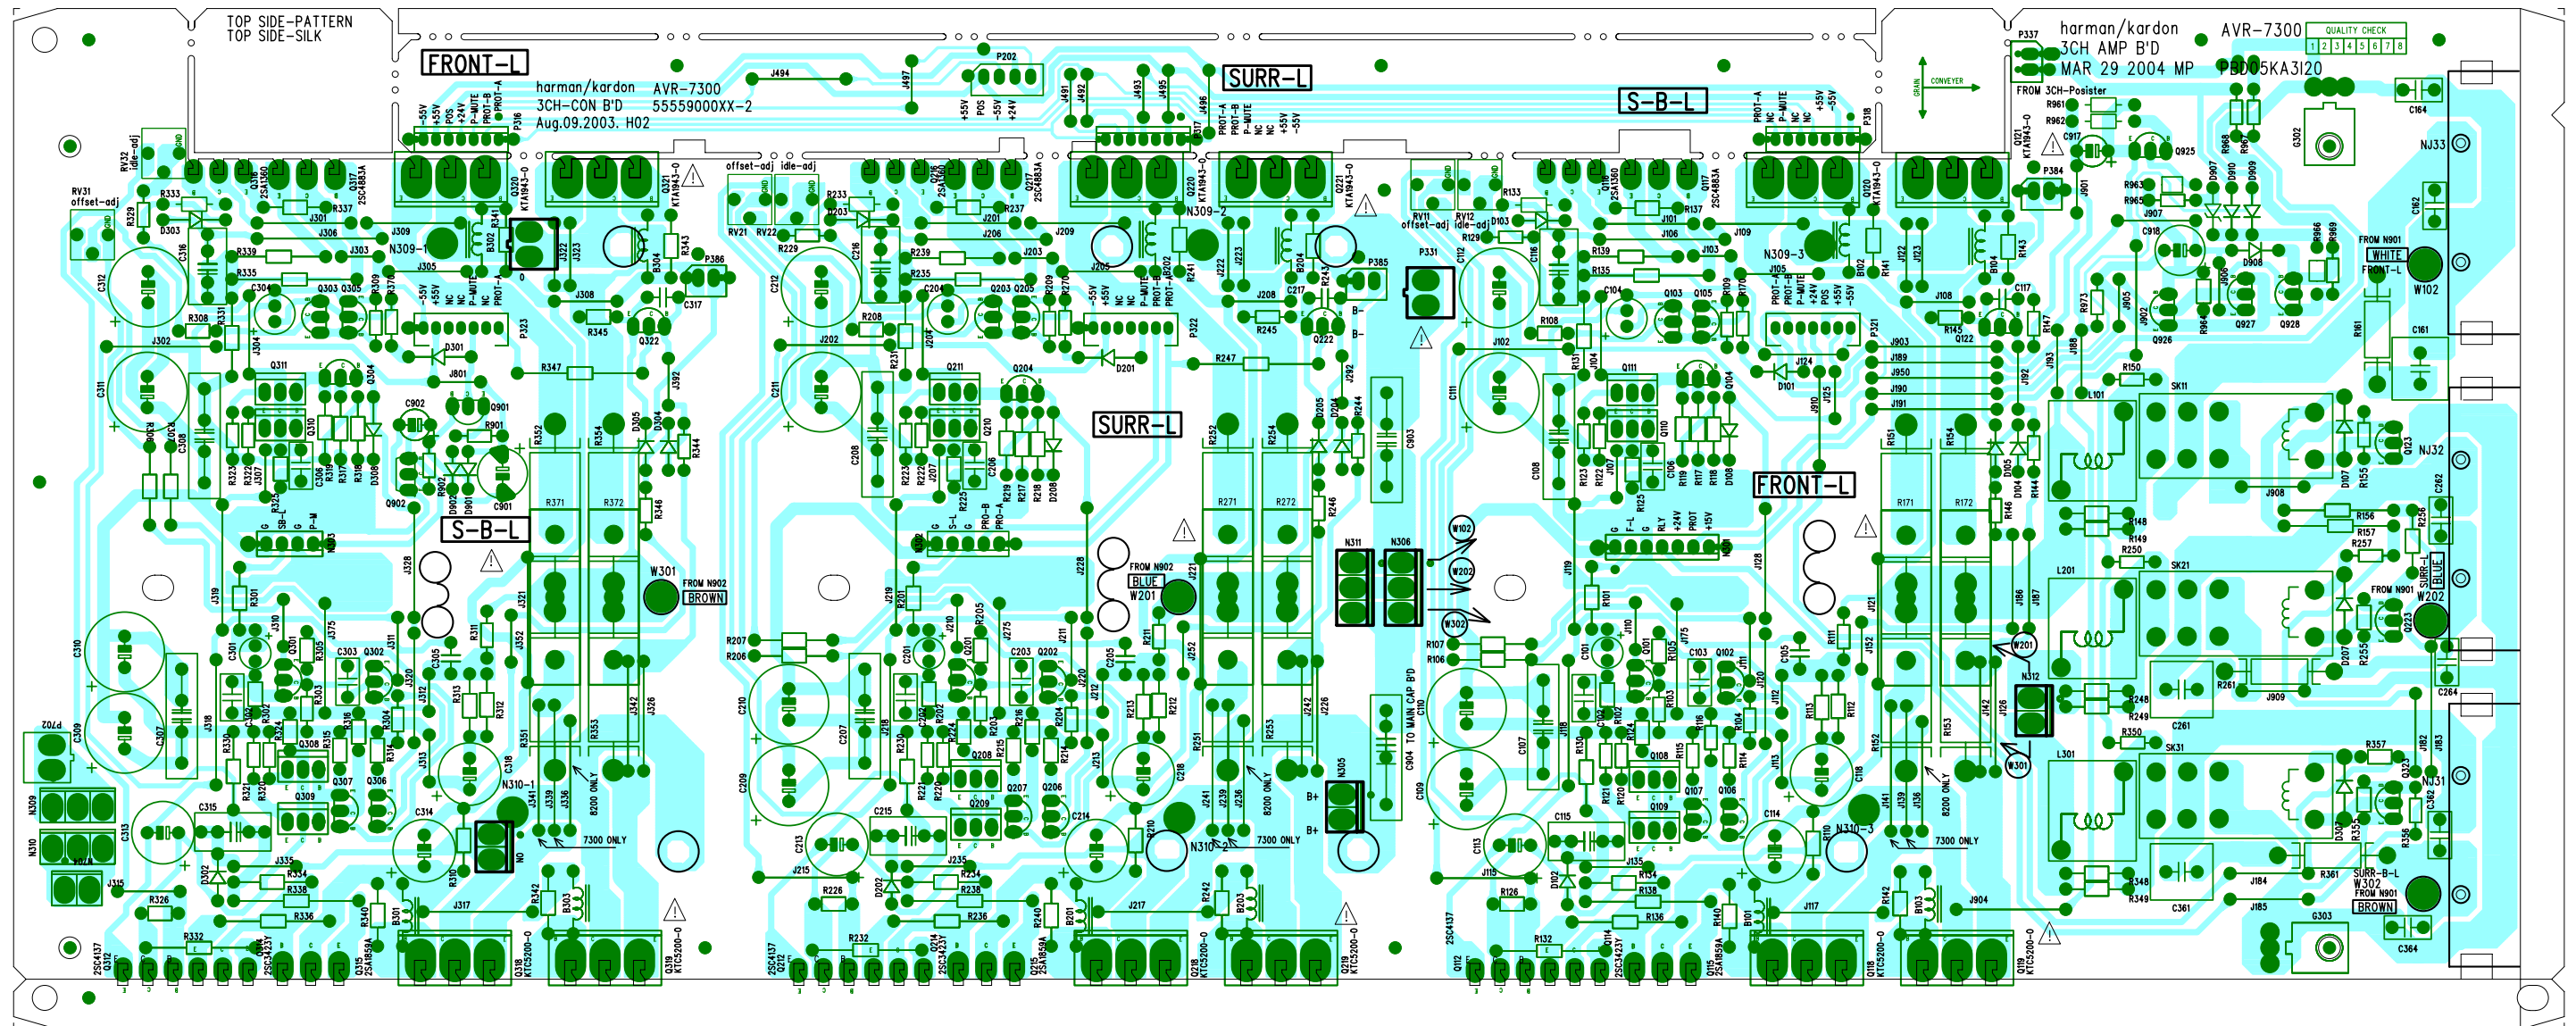


AVR7300-4CHAMГ




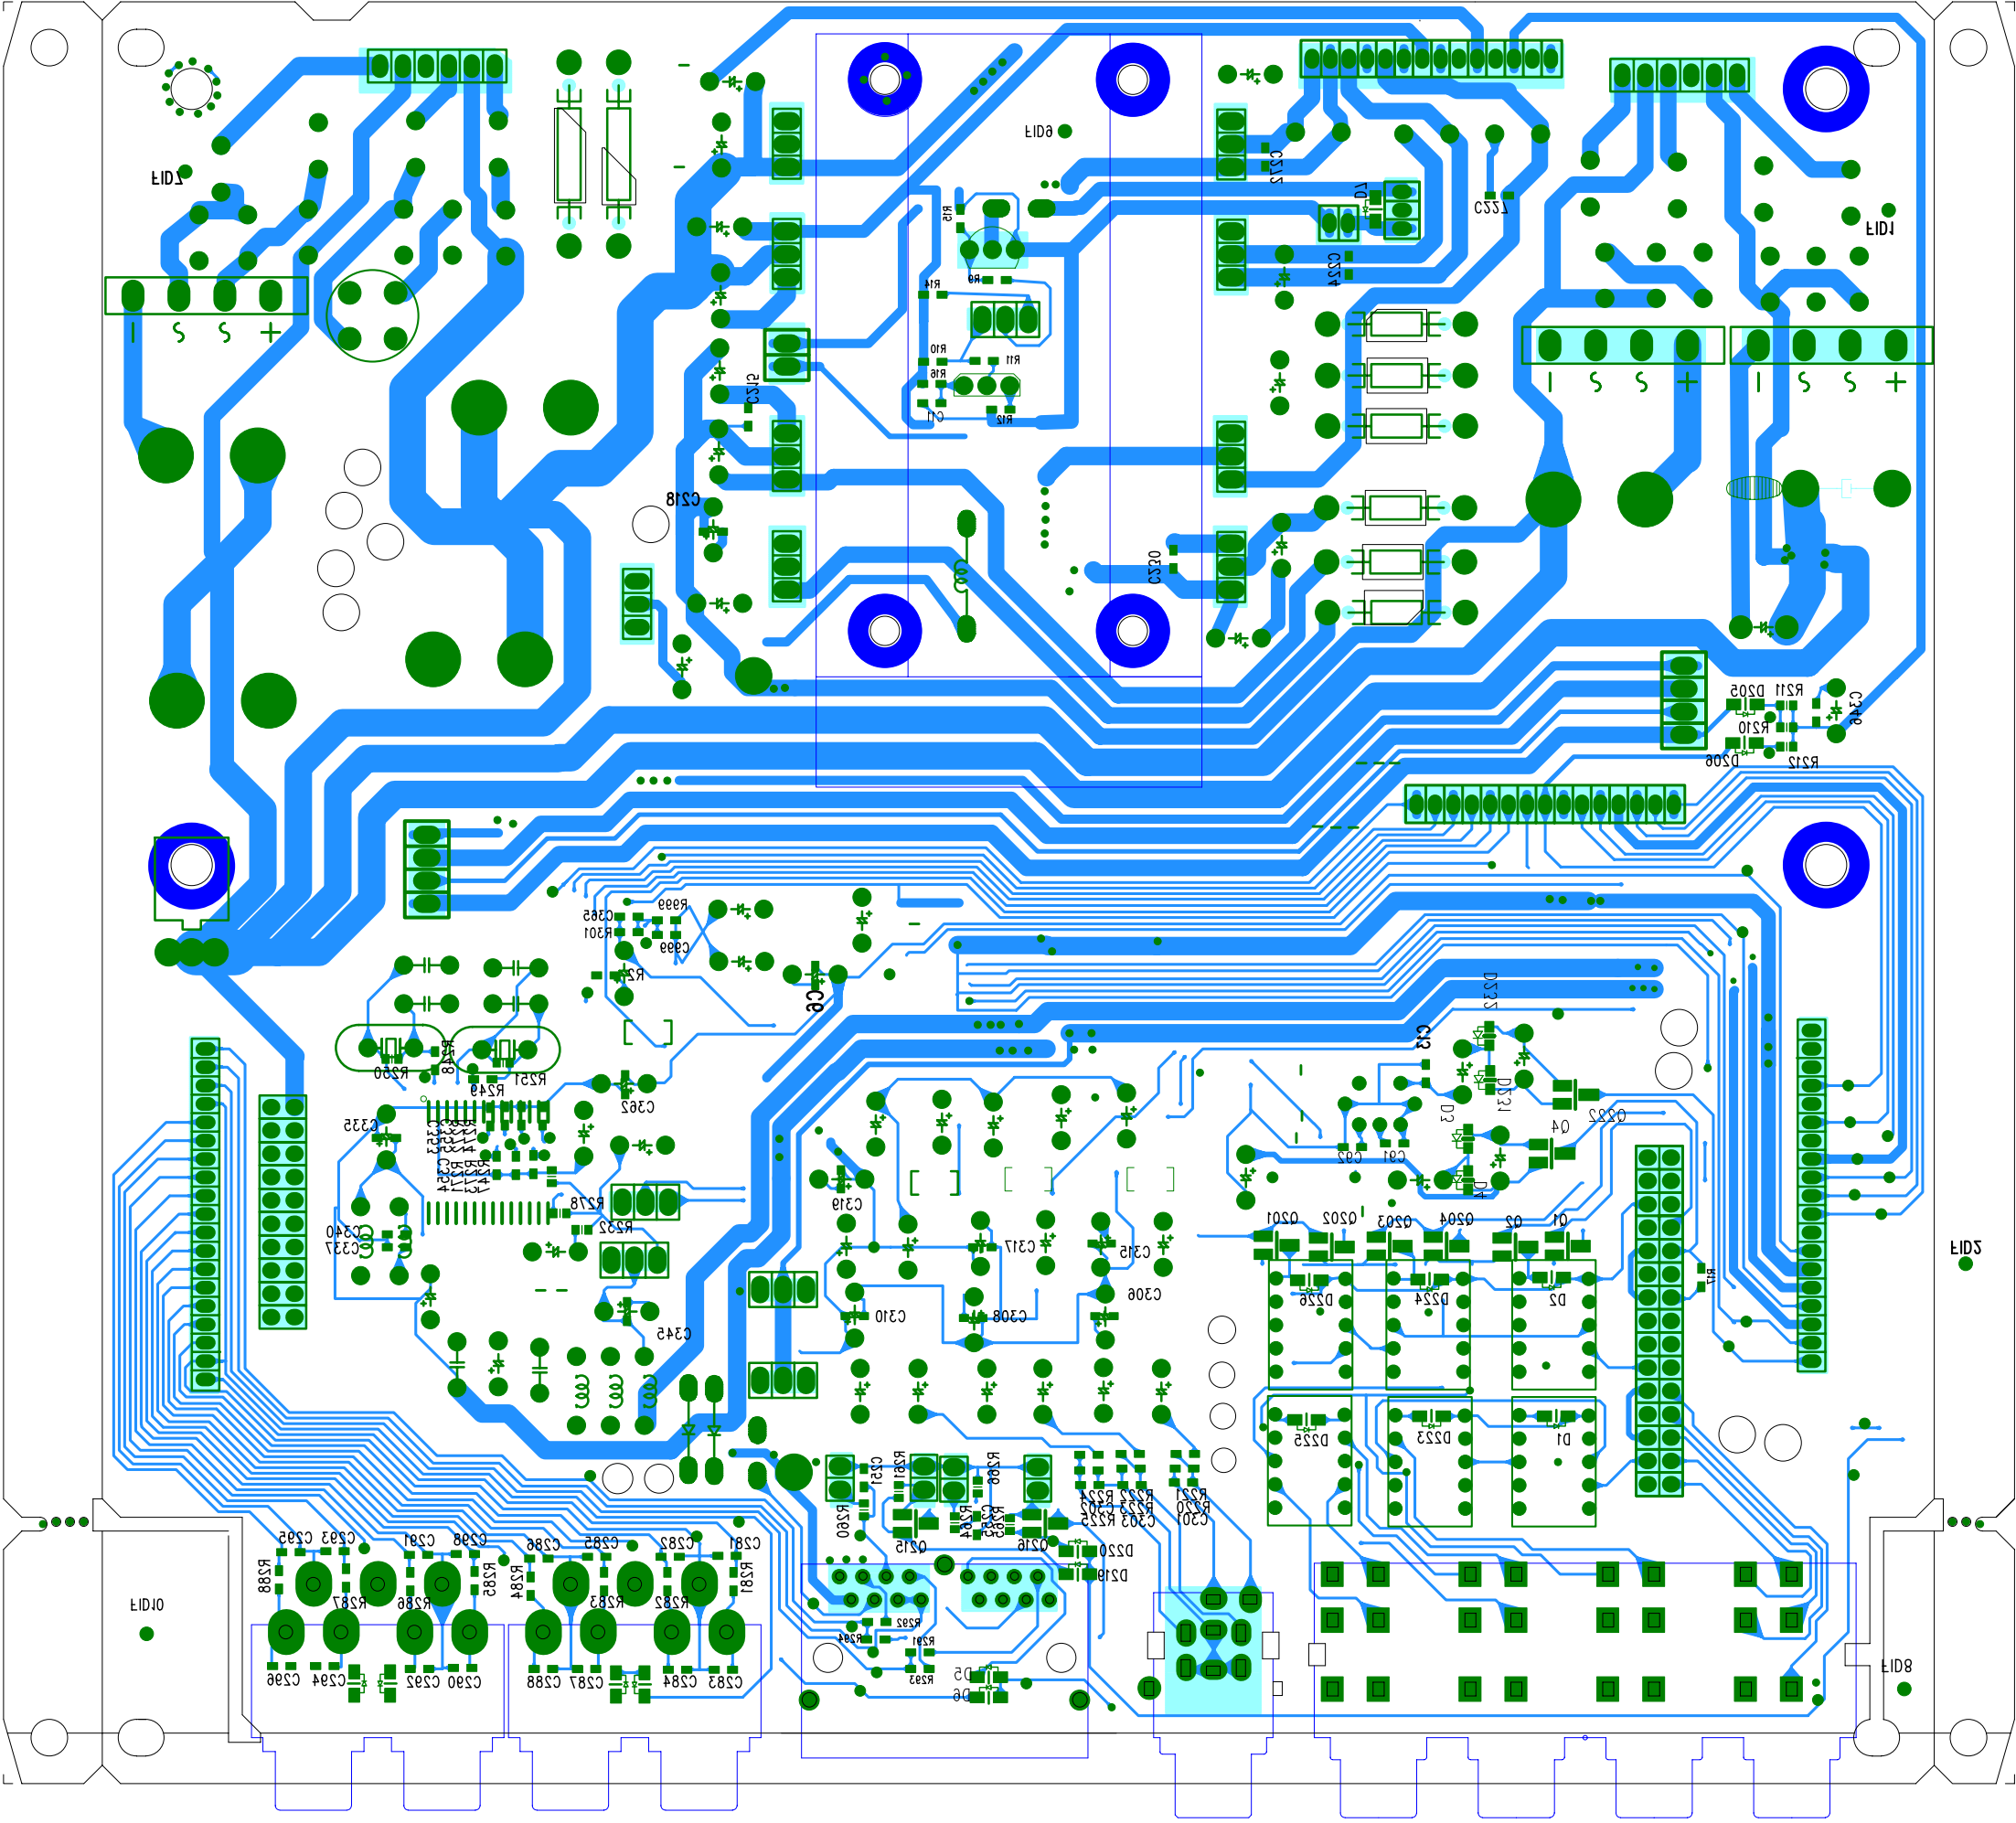


MAIN

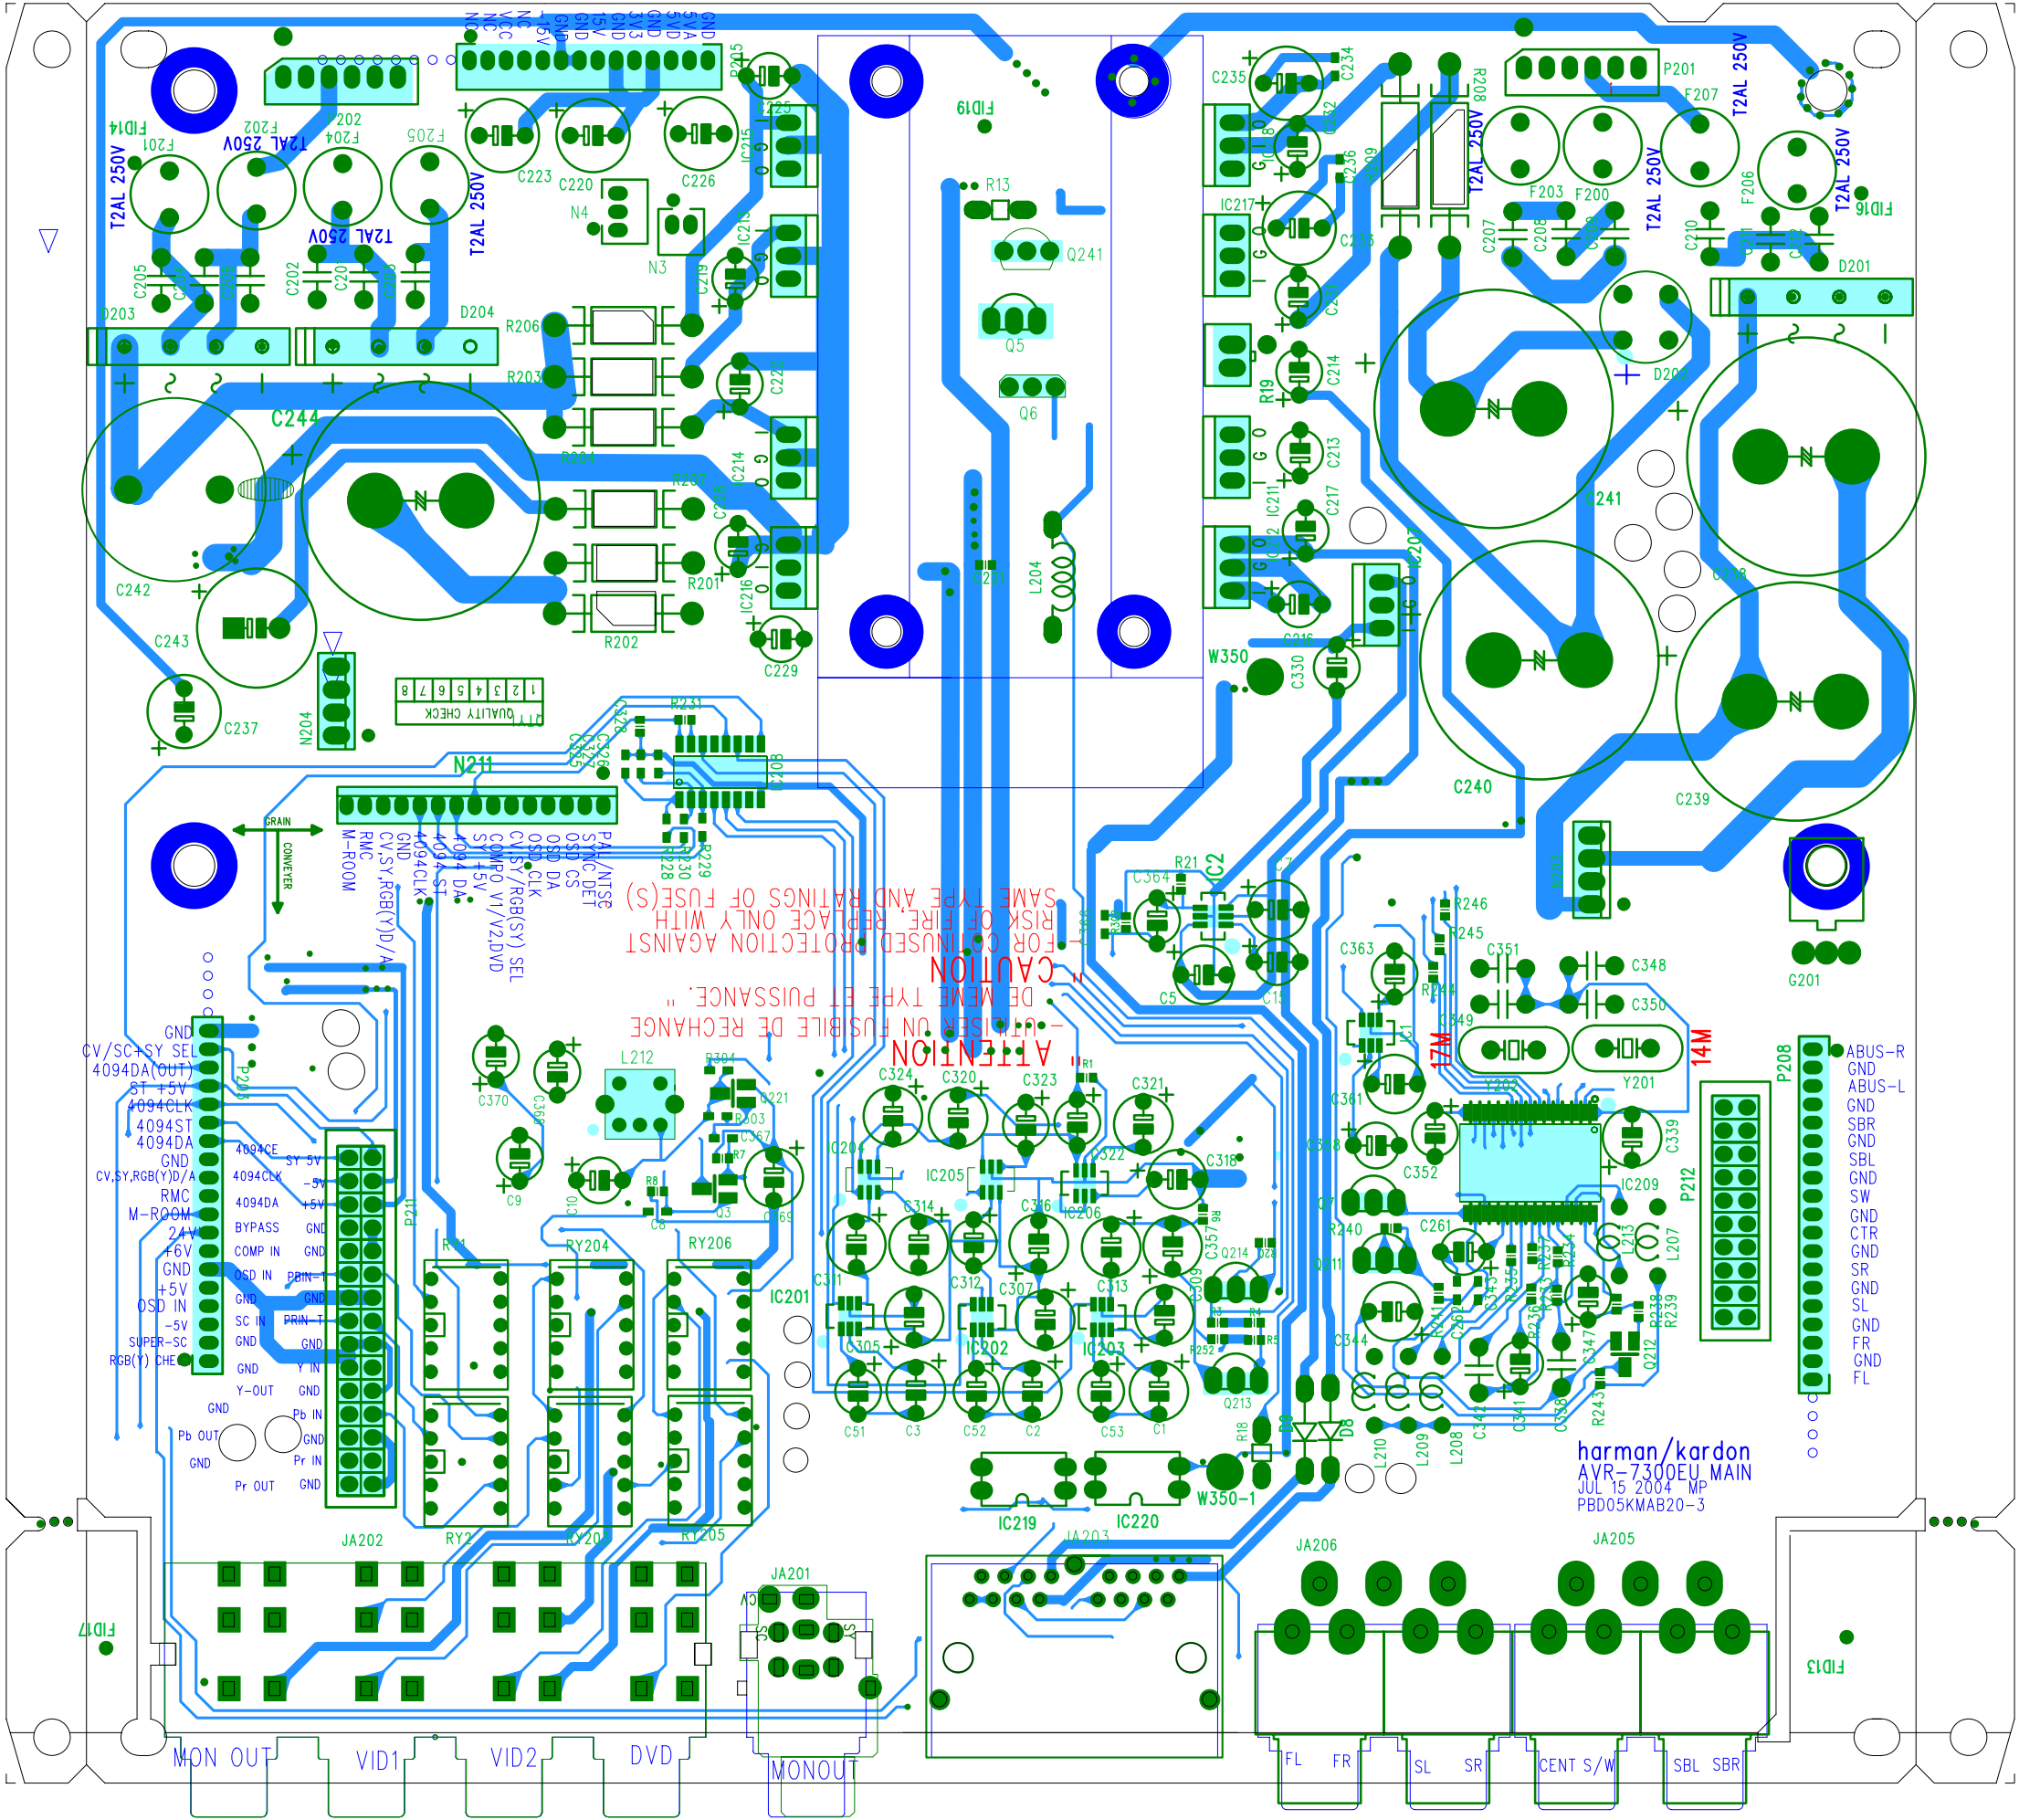


PROCESSOR

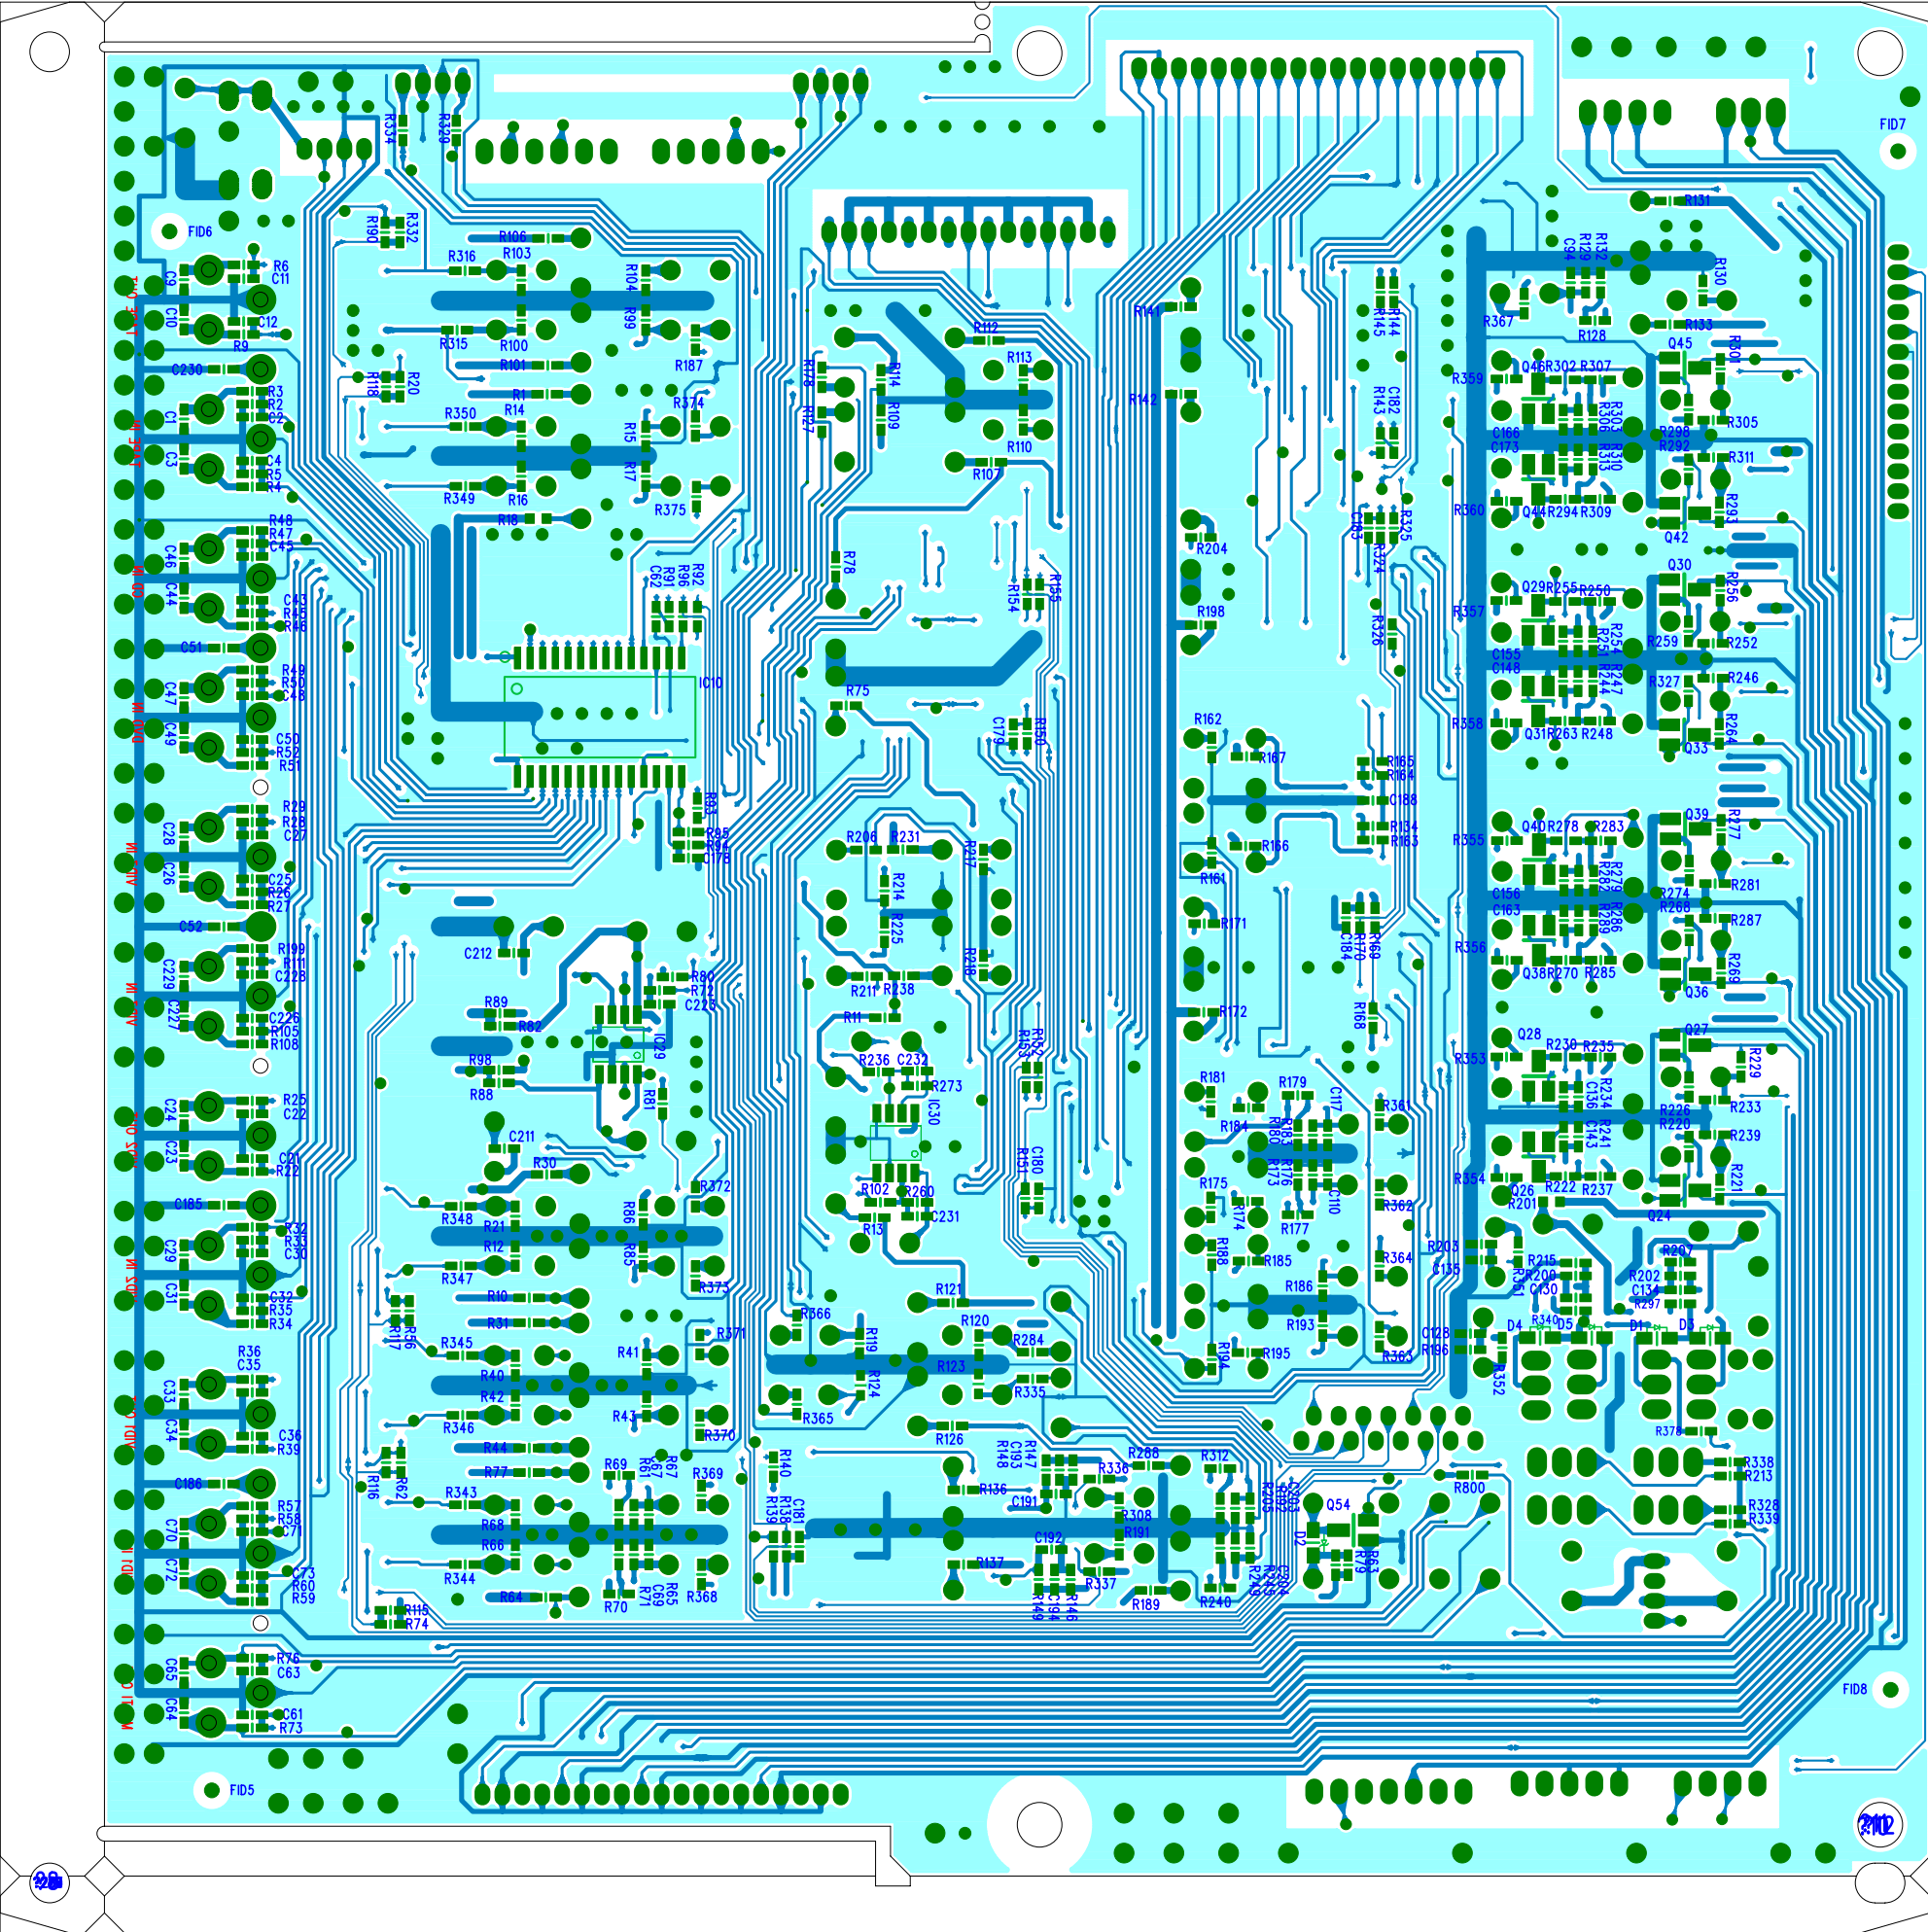




AVR7300_PROCESSOR_M

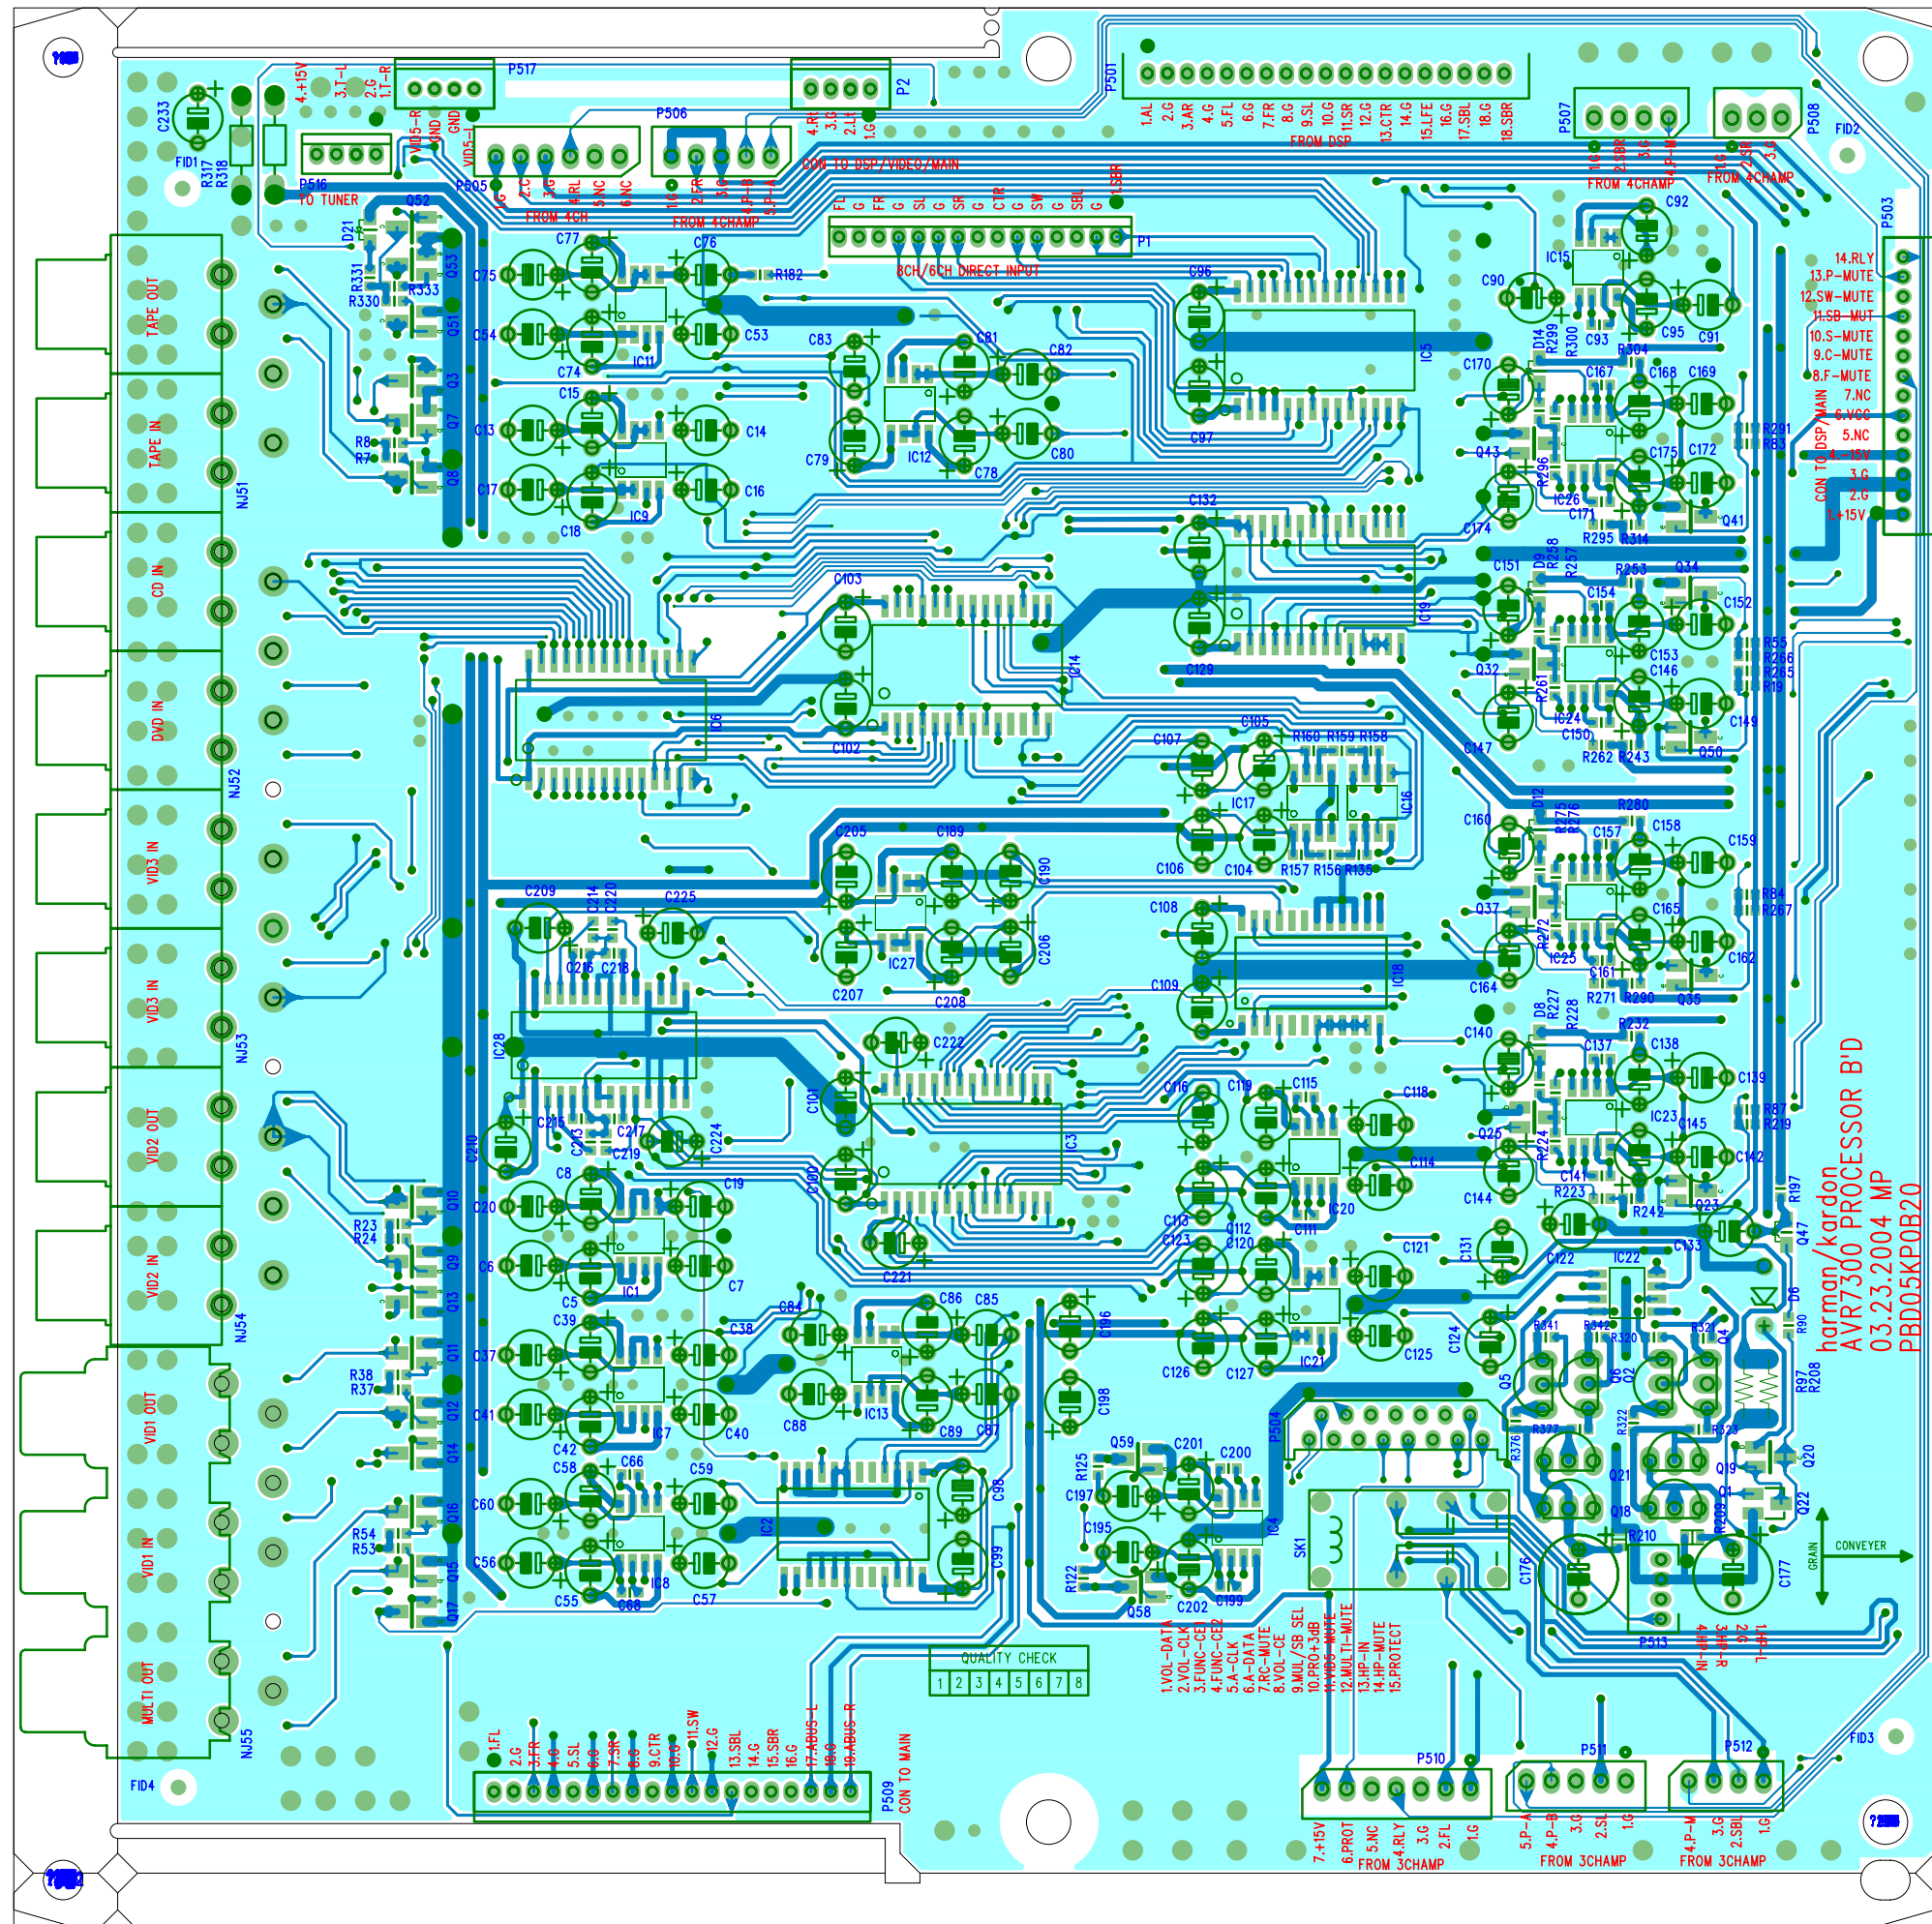

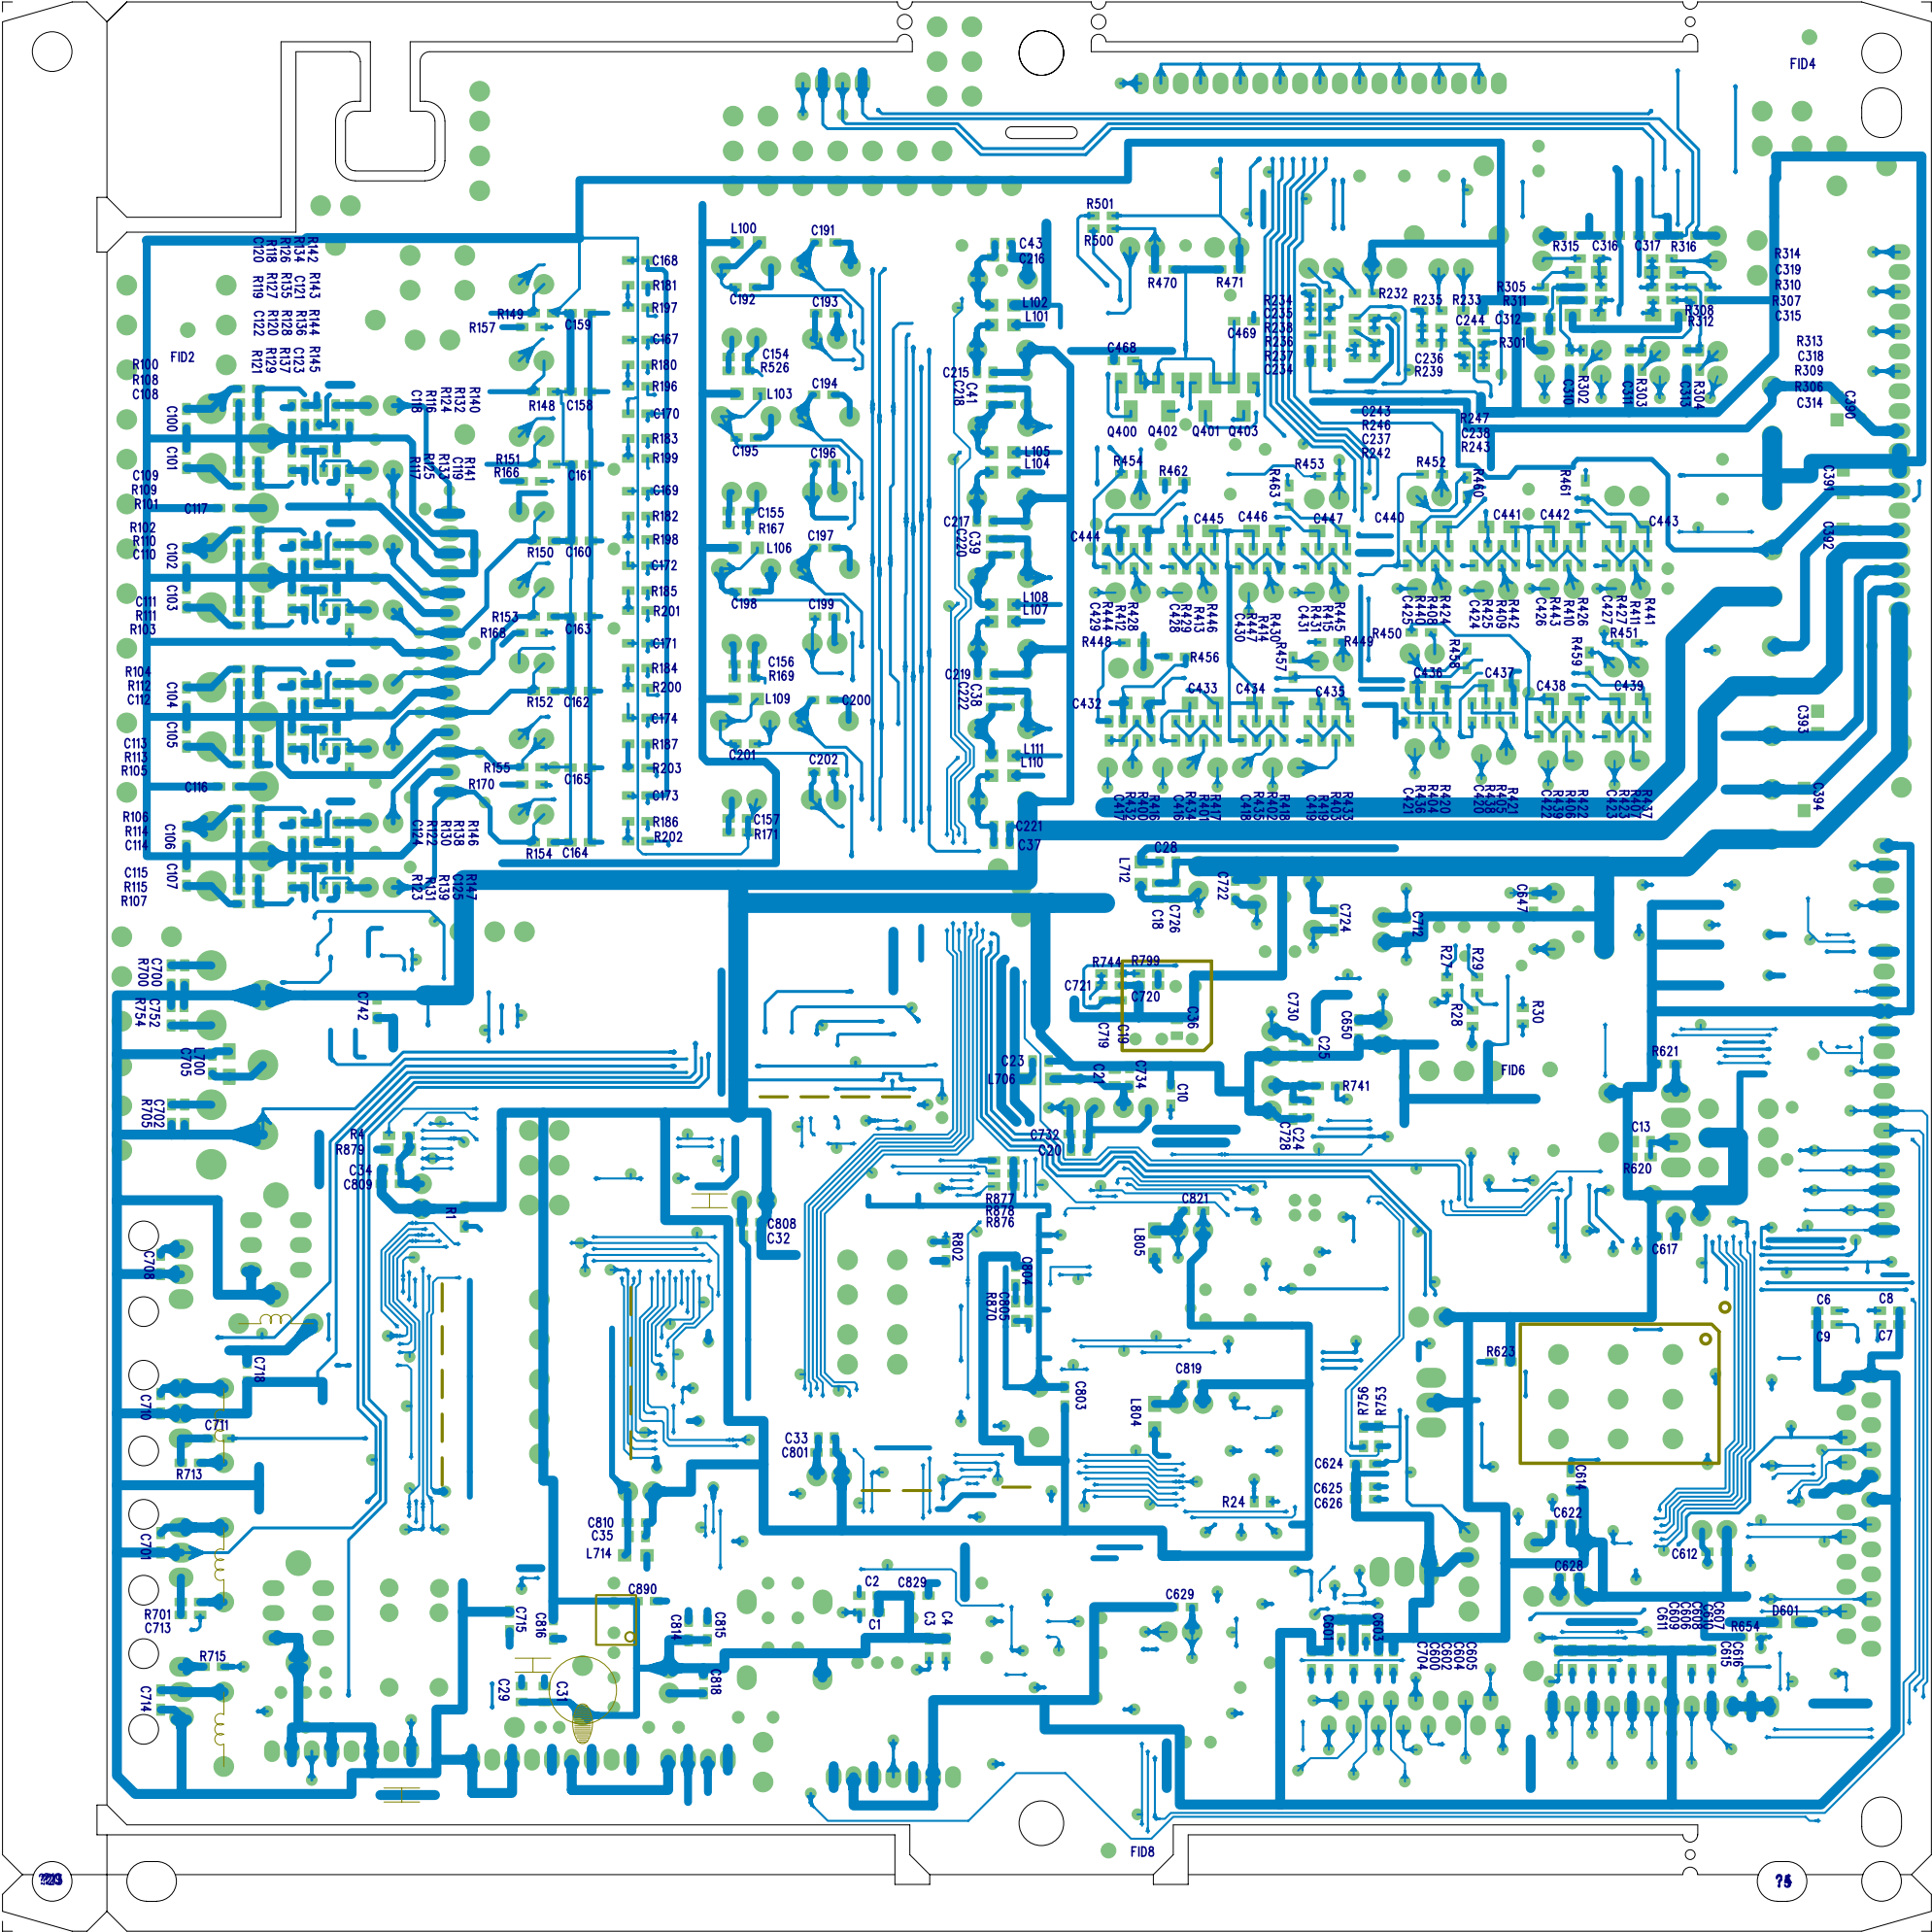

harman/kardon
AVR7300 DSP B'D
03.26.2004 MP
PBD05KDBG20

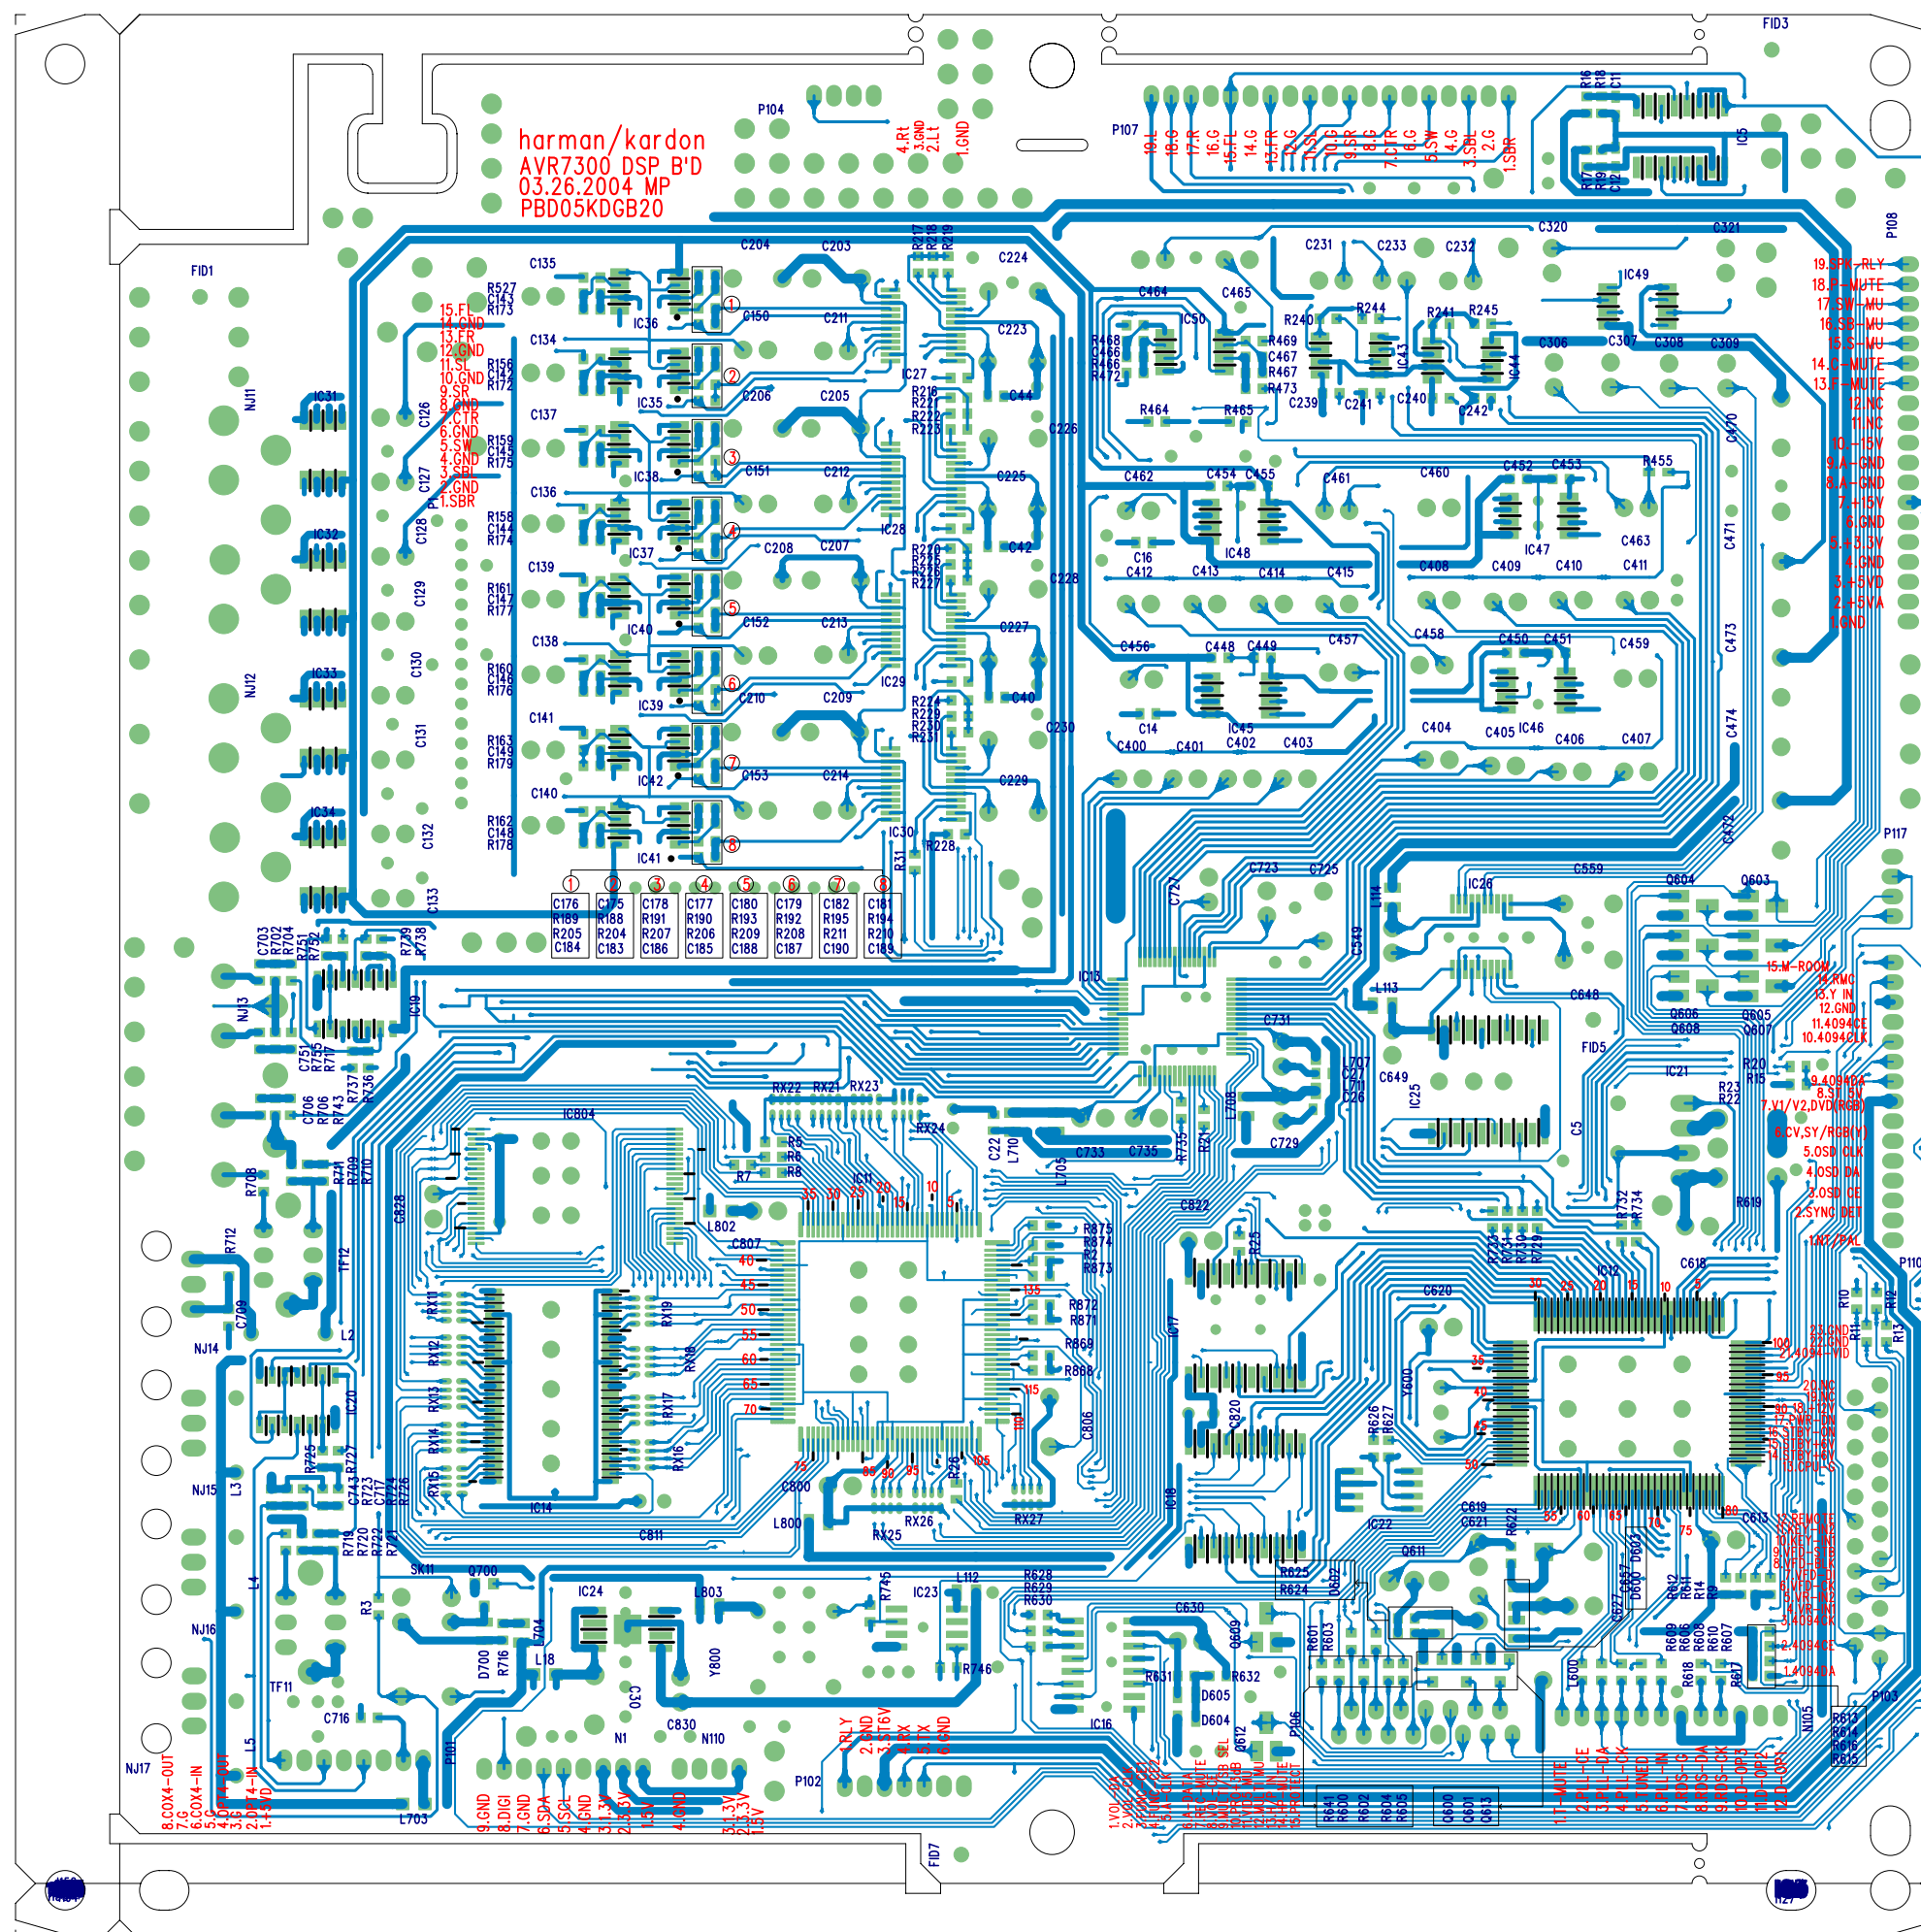

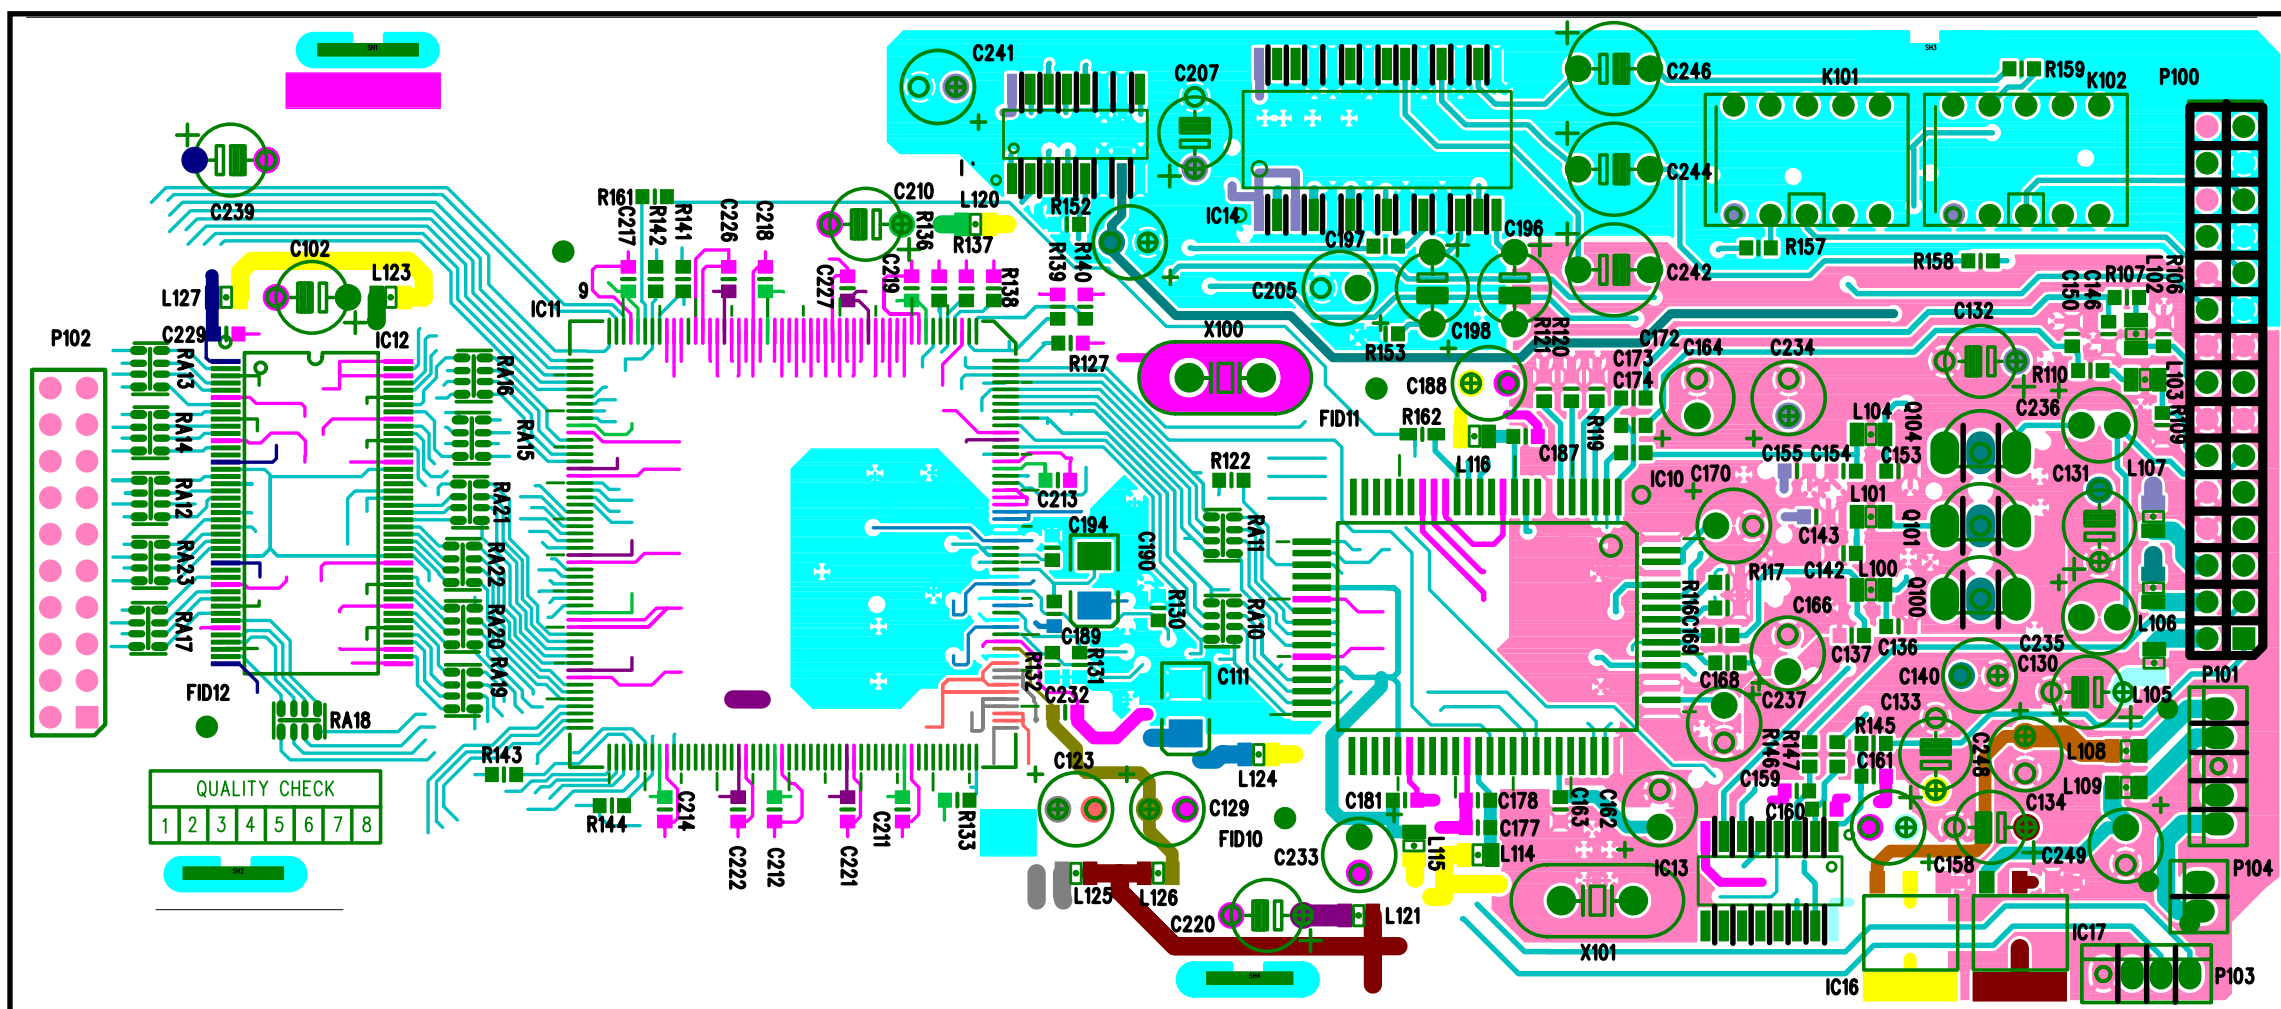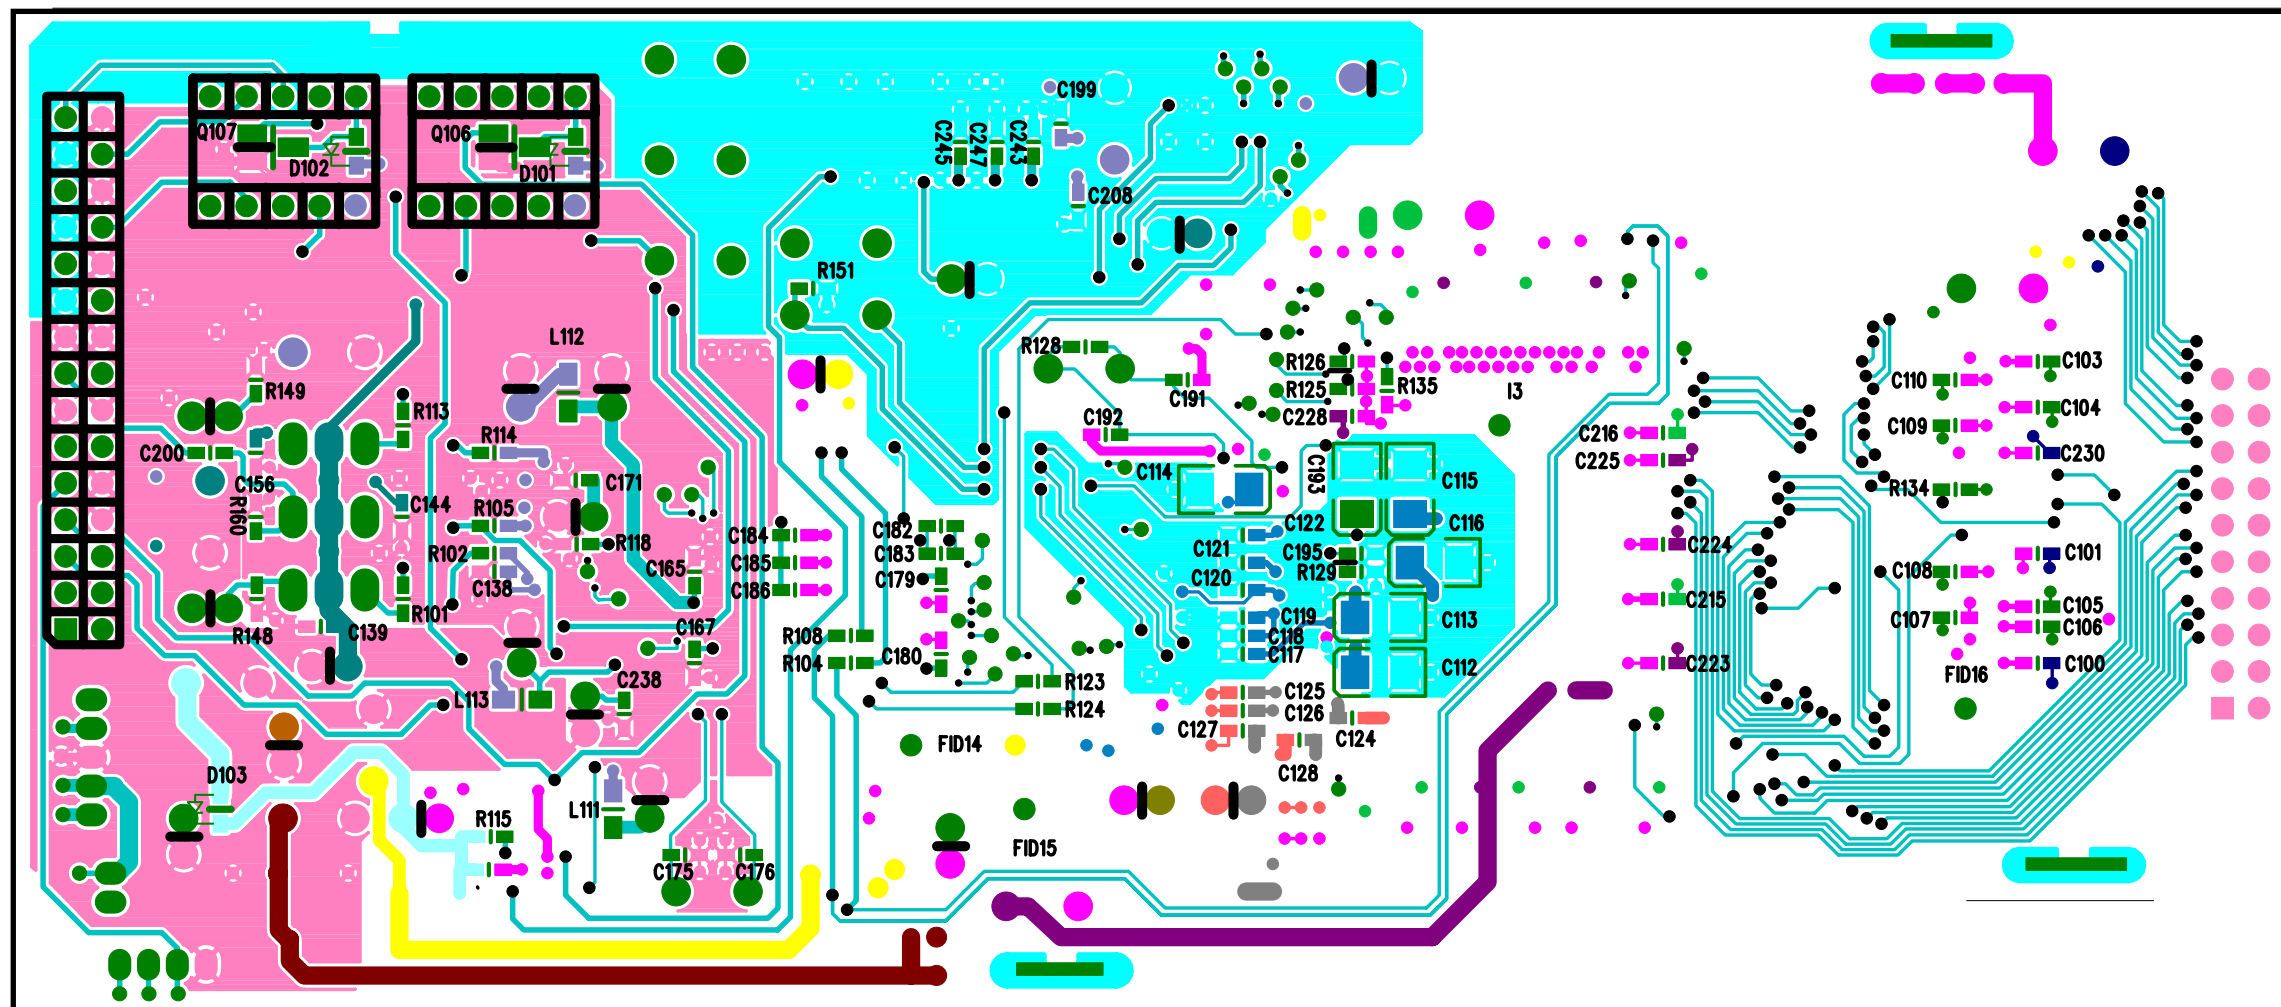

*** AVR7300 OFFSET ADJUSTMENT & IDLE CURRENT ADJUSTMENT(TMS stage)

1 Offset - Adjustment

- * .Function : 8CH DIRECT INPUT
- .Volume level : minimum
- .Test position : Speaker out terminal(between "+" and "-")->speaker jack
: unload(no dummy) status,

Adjustment flow

- a. After power on
- b. Take alignment about to $0\pm 5\text{mV}$

Channel	Check point	Adjustment position	Adjustment Limit	Note
FRONT L CH	FL SPEAKER	VR11(3channel AMP)	$0\pm 10\text{mV}$	FL
REAR L CH	SL SPEAKER	VR21(3channel AMP)	$0\pm 10\text{mV}$	SL
SURRBACK L CH	SL SPEAKER	VR31(3channel AMP)	$0\pm 10\text{mV}$	SBL
REAR R CH	SR SPEAKER	VR41(4channel AMP)	$0\pm 10\text{mV}$	SR
SURRBACK R CH	SBR SPEAKER	VR51(4channel AMP)	$0\pm 10\text{mV}$	SBR
FRONT R CH	FR SPEAKER	VR61(4channel AMP)	$0\pm 10\text{mV}$	FL
CENTER CH	CTR SPEAKER	VR71(4channel AMP)	$0\pm 10\text{mV}$	CT

c.Passed about 5 Min. Do it again as $0\pm 20\text{mV}$

2 Idle - adjustment

- * .Function : 8CH DIRECT INPUT
- .Volume level : minimum
- .Test position : refer to the below.

Adjustment flow

- a.Assemble AMP BD to Heat Sink
- b.After Power on, take alignment about $6.0\sim 7.0\text{mV}$.


Channel	Check point	Adjustment position	Adjustment Limit	Note
FRONT L CH	P101(R172)	VR12 (3channel AMP)	$12.0\text{mV}\sim 13.0\text{mV}$	FL
REAR L CH	P201(R272)	VR22 (3channel AMP)	$12.0\text{mV}\sim 13.0\text{mV}$	SL
SURRBACK L CH	P301(R372)	VR32 (3channel AMP)	$12.0\text{mV}\sim 13.0\text{mV}$	SBL
REAR R CH	P401(R472)	VR42 (4channel AMP)	$12.0\text{mV}\sim 13.0\text{mV}$	SR
SURRBACK R CH	P501(R572)	VR52 (4channel AMP)	$12.0\text{mV}\sim 13.0\text{mV}$	SBR
FRONT R CH	P601(R672)	VR62 (4channel AMP)	$12.0\text{mV}\sim 13.0\text{mV}$	FL
CENTER CH	P701(R772)	VR72 (4channel AMP)	$12.0\text{mV}\sim 13.0\text{mV}$	CT

c.Passed about 5 Min. Do it again as $12.0\text{mV}\sim 13.0\text{mV}$.

3 Adjustment Position


FL Offset Adj

FL Idle Adj

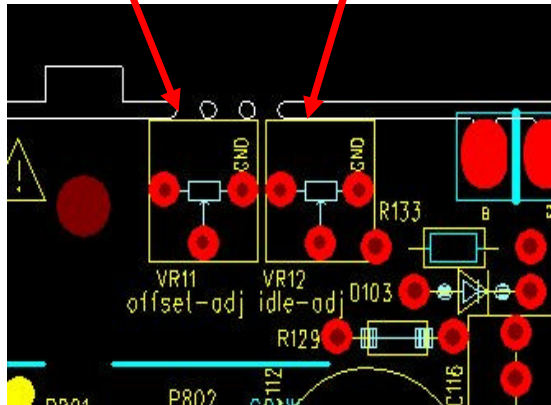


SL Offset Adj

SL Idle Adj

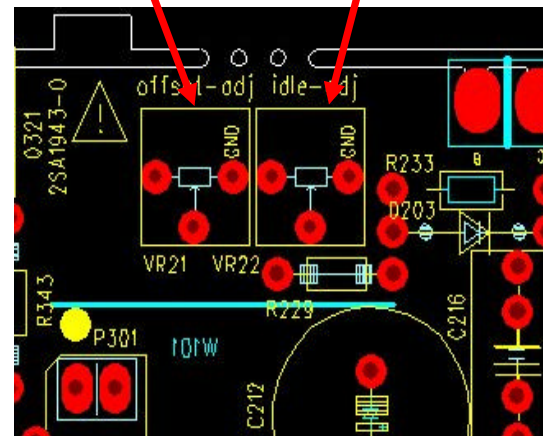


SBL Idle Adj

SBL Idle Adj

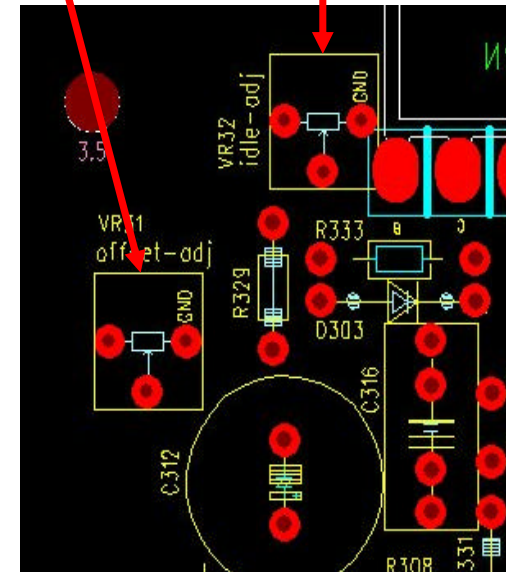


SR Offset Adj

SR Idle Adj

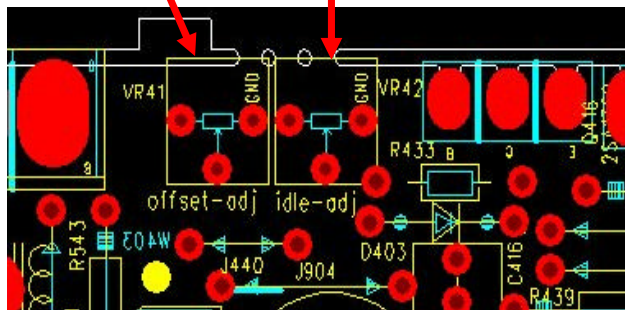


SBR Offset Adj

SBR Idle Adj

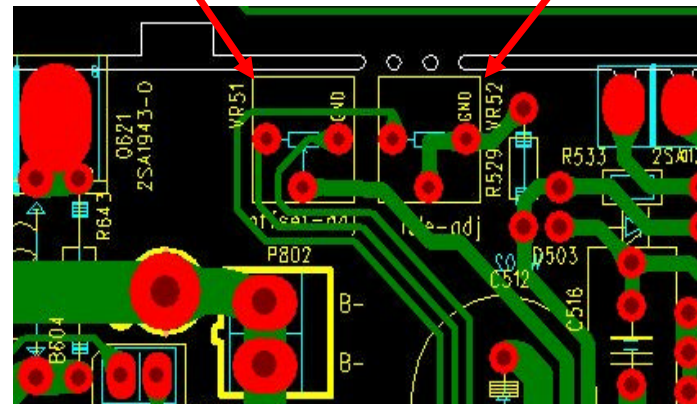


FR Offset Adj

FR Idle Adj

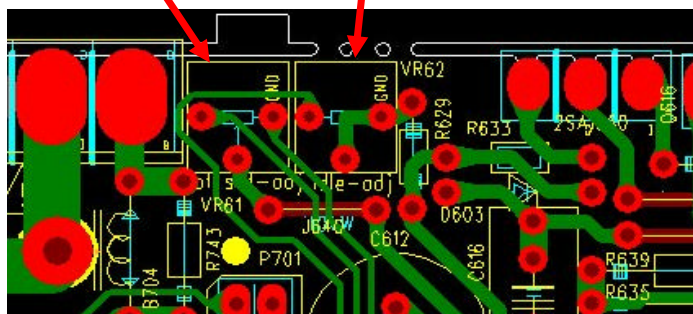


CT Offset Adj

CT Idle Adj

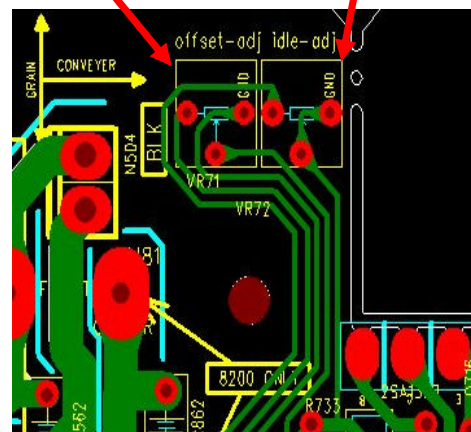


4 Check Position


FL Idle Check Position

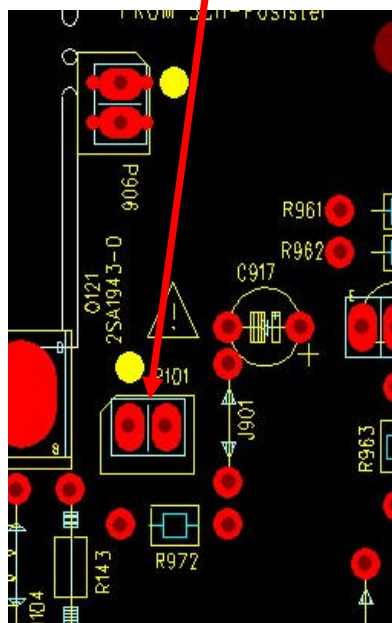


SL Idle Check Position

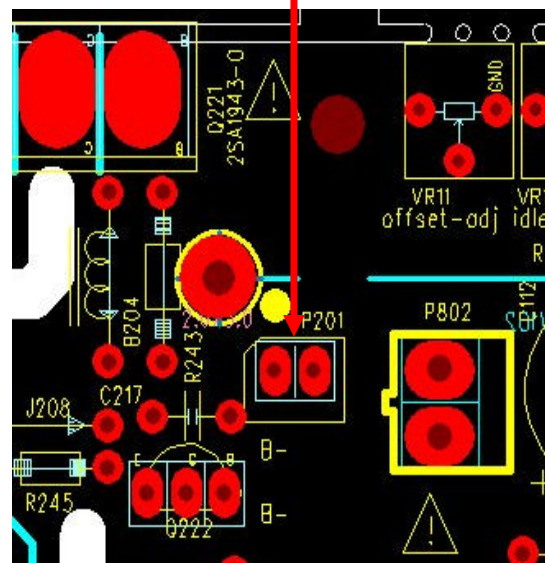


SBL Idle Check Position

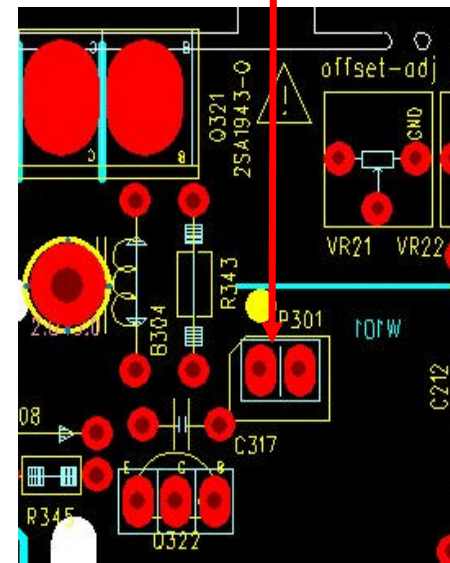


SR Idle Check Position

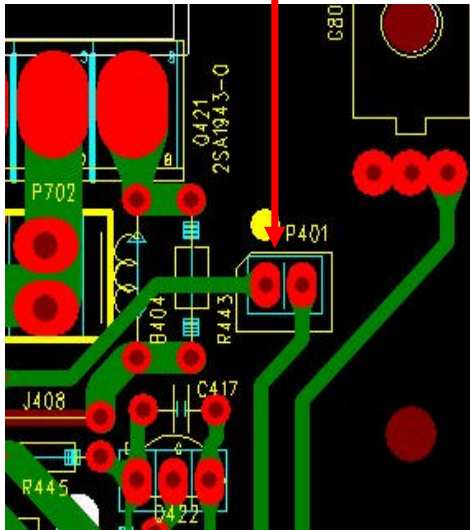


SBR Idle Check Position

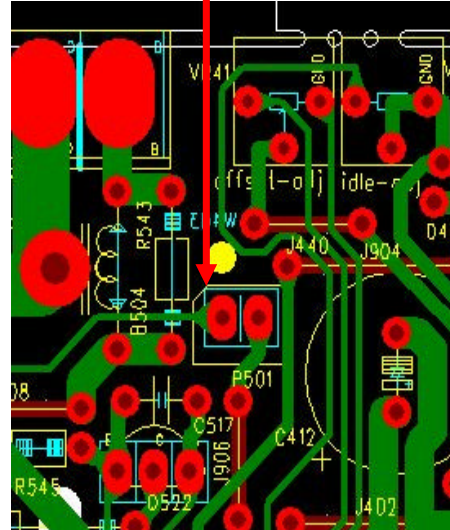



FR Idle Check Position

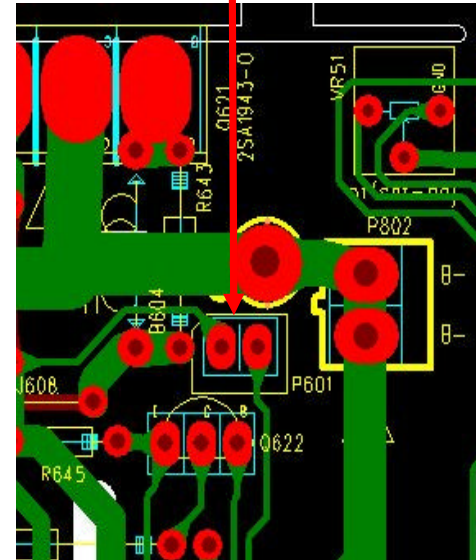



CT Idle Check Position

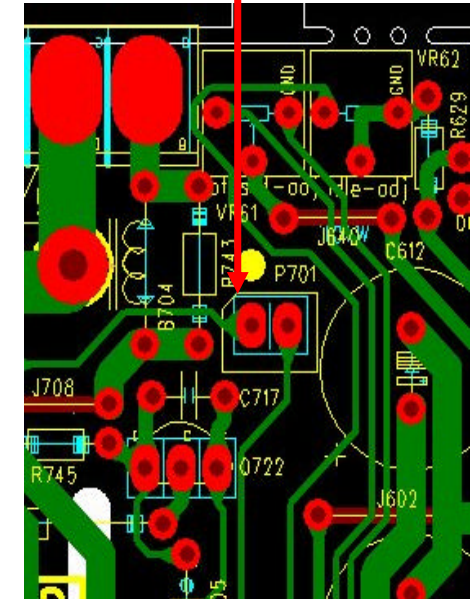

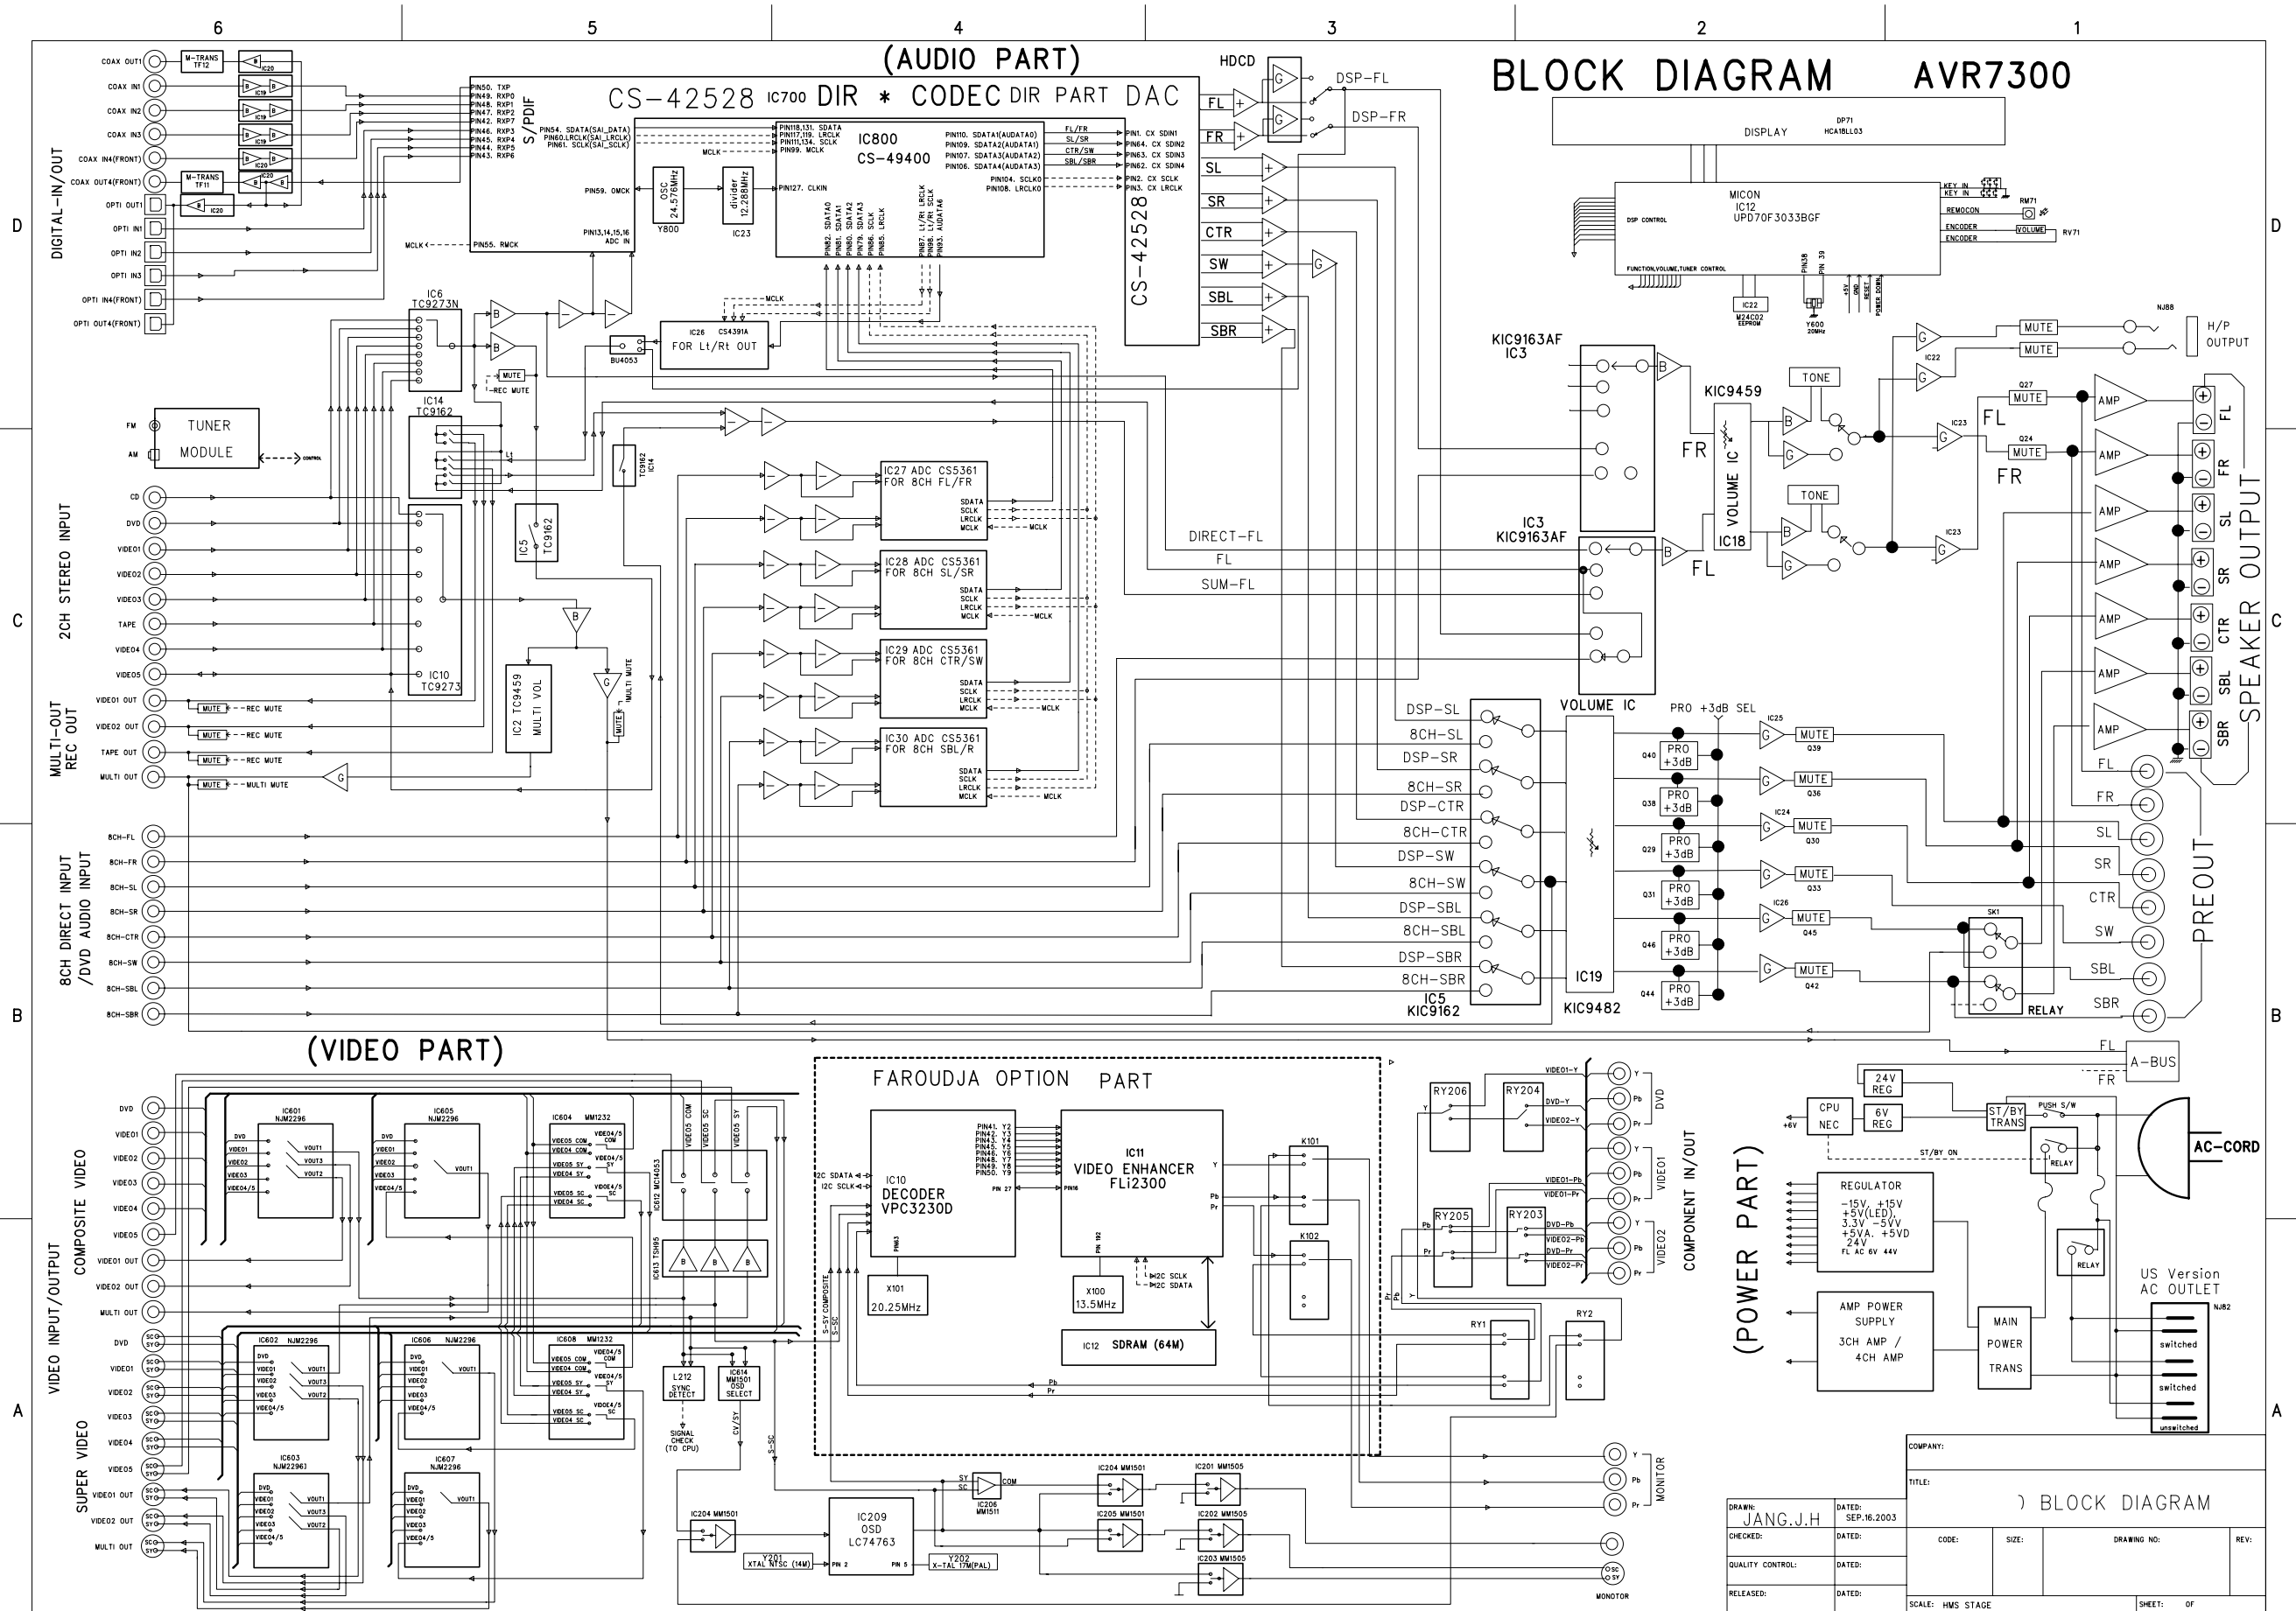

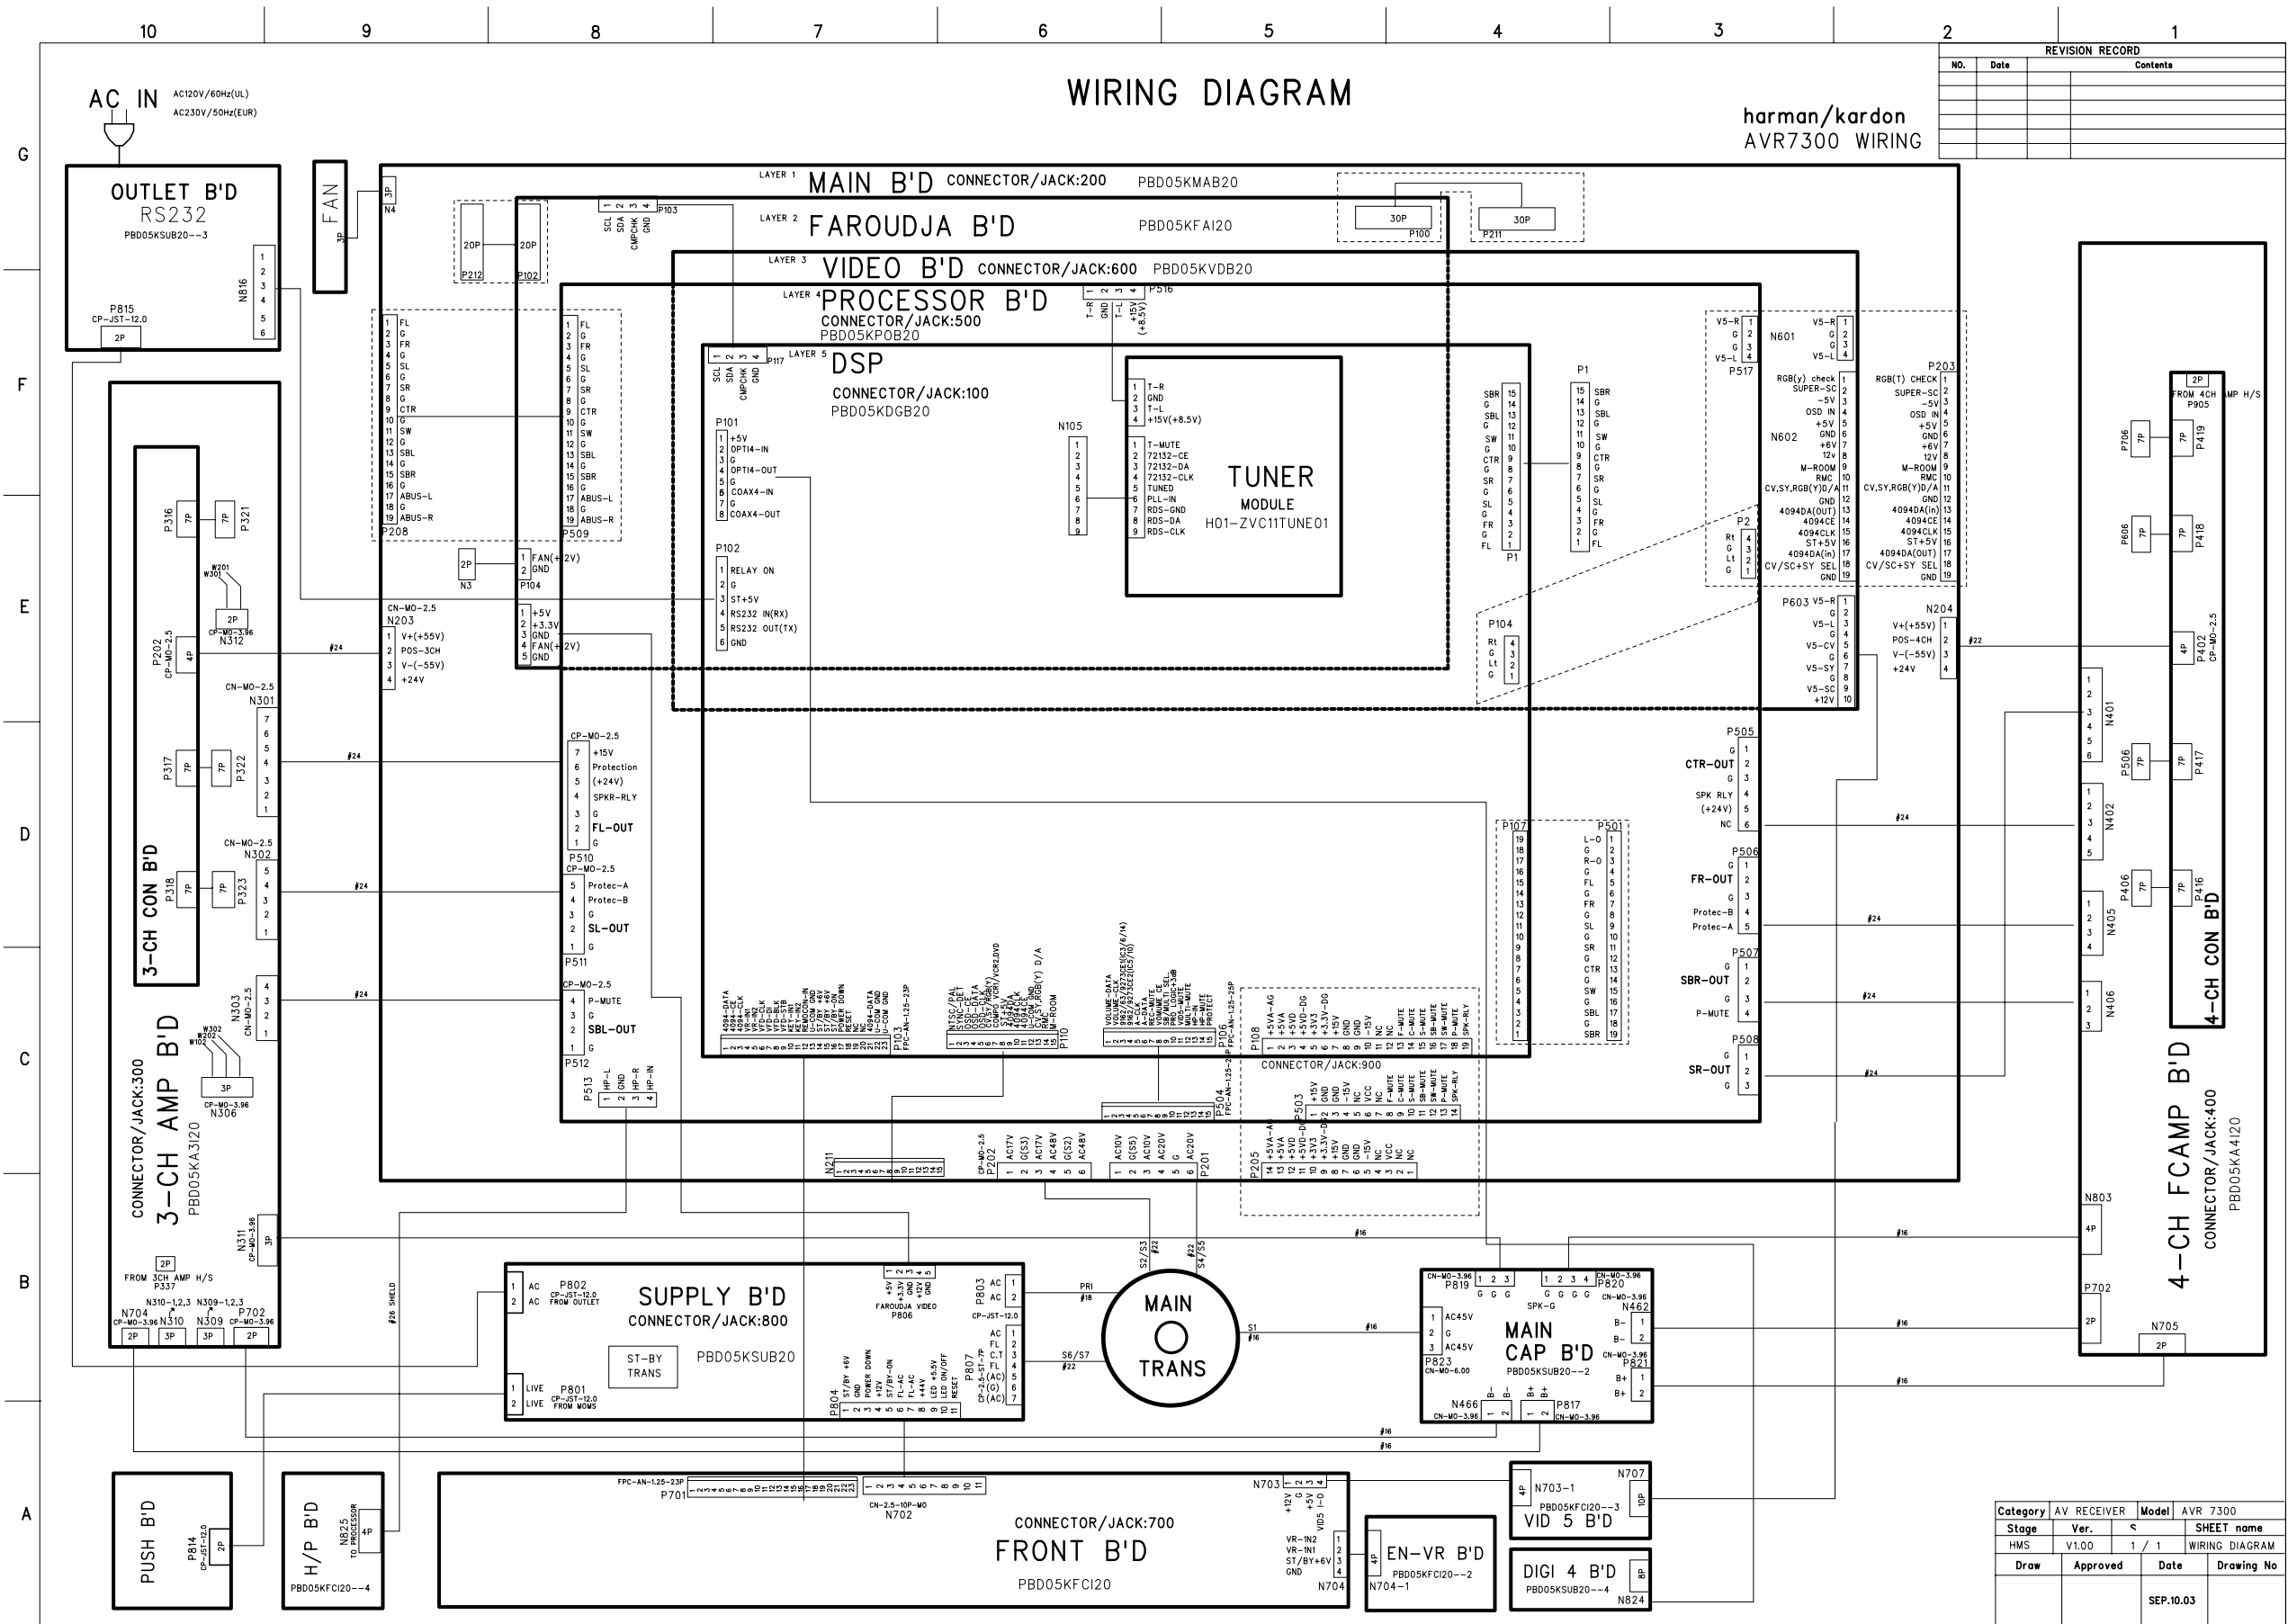

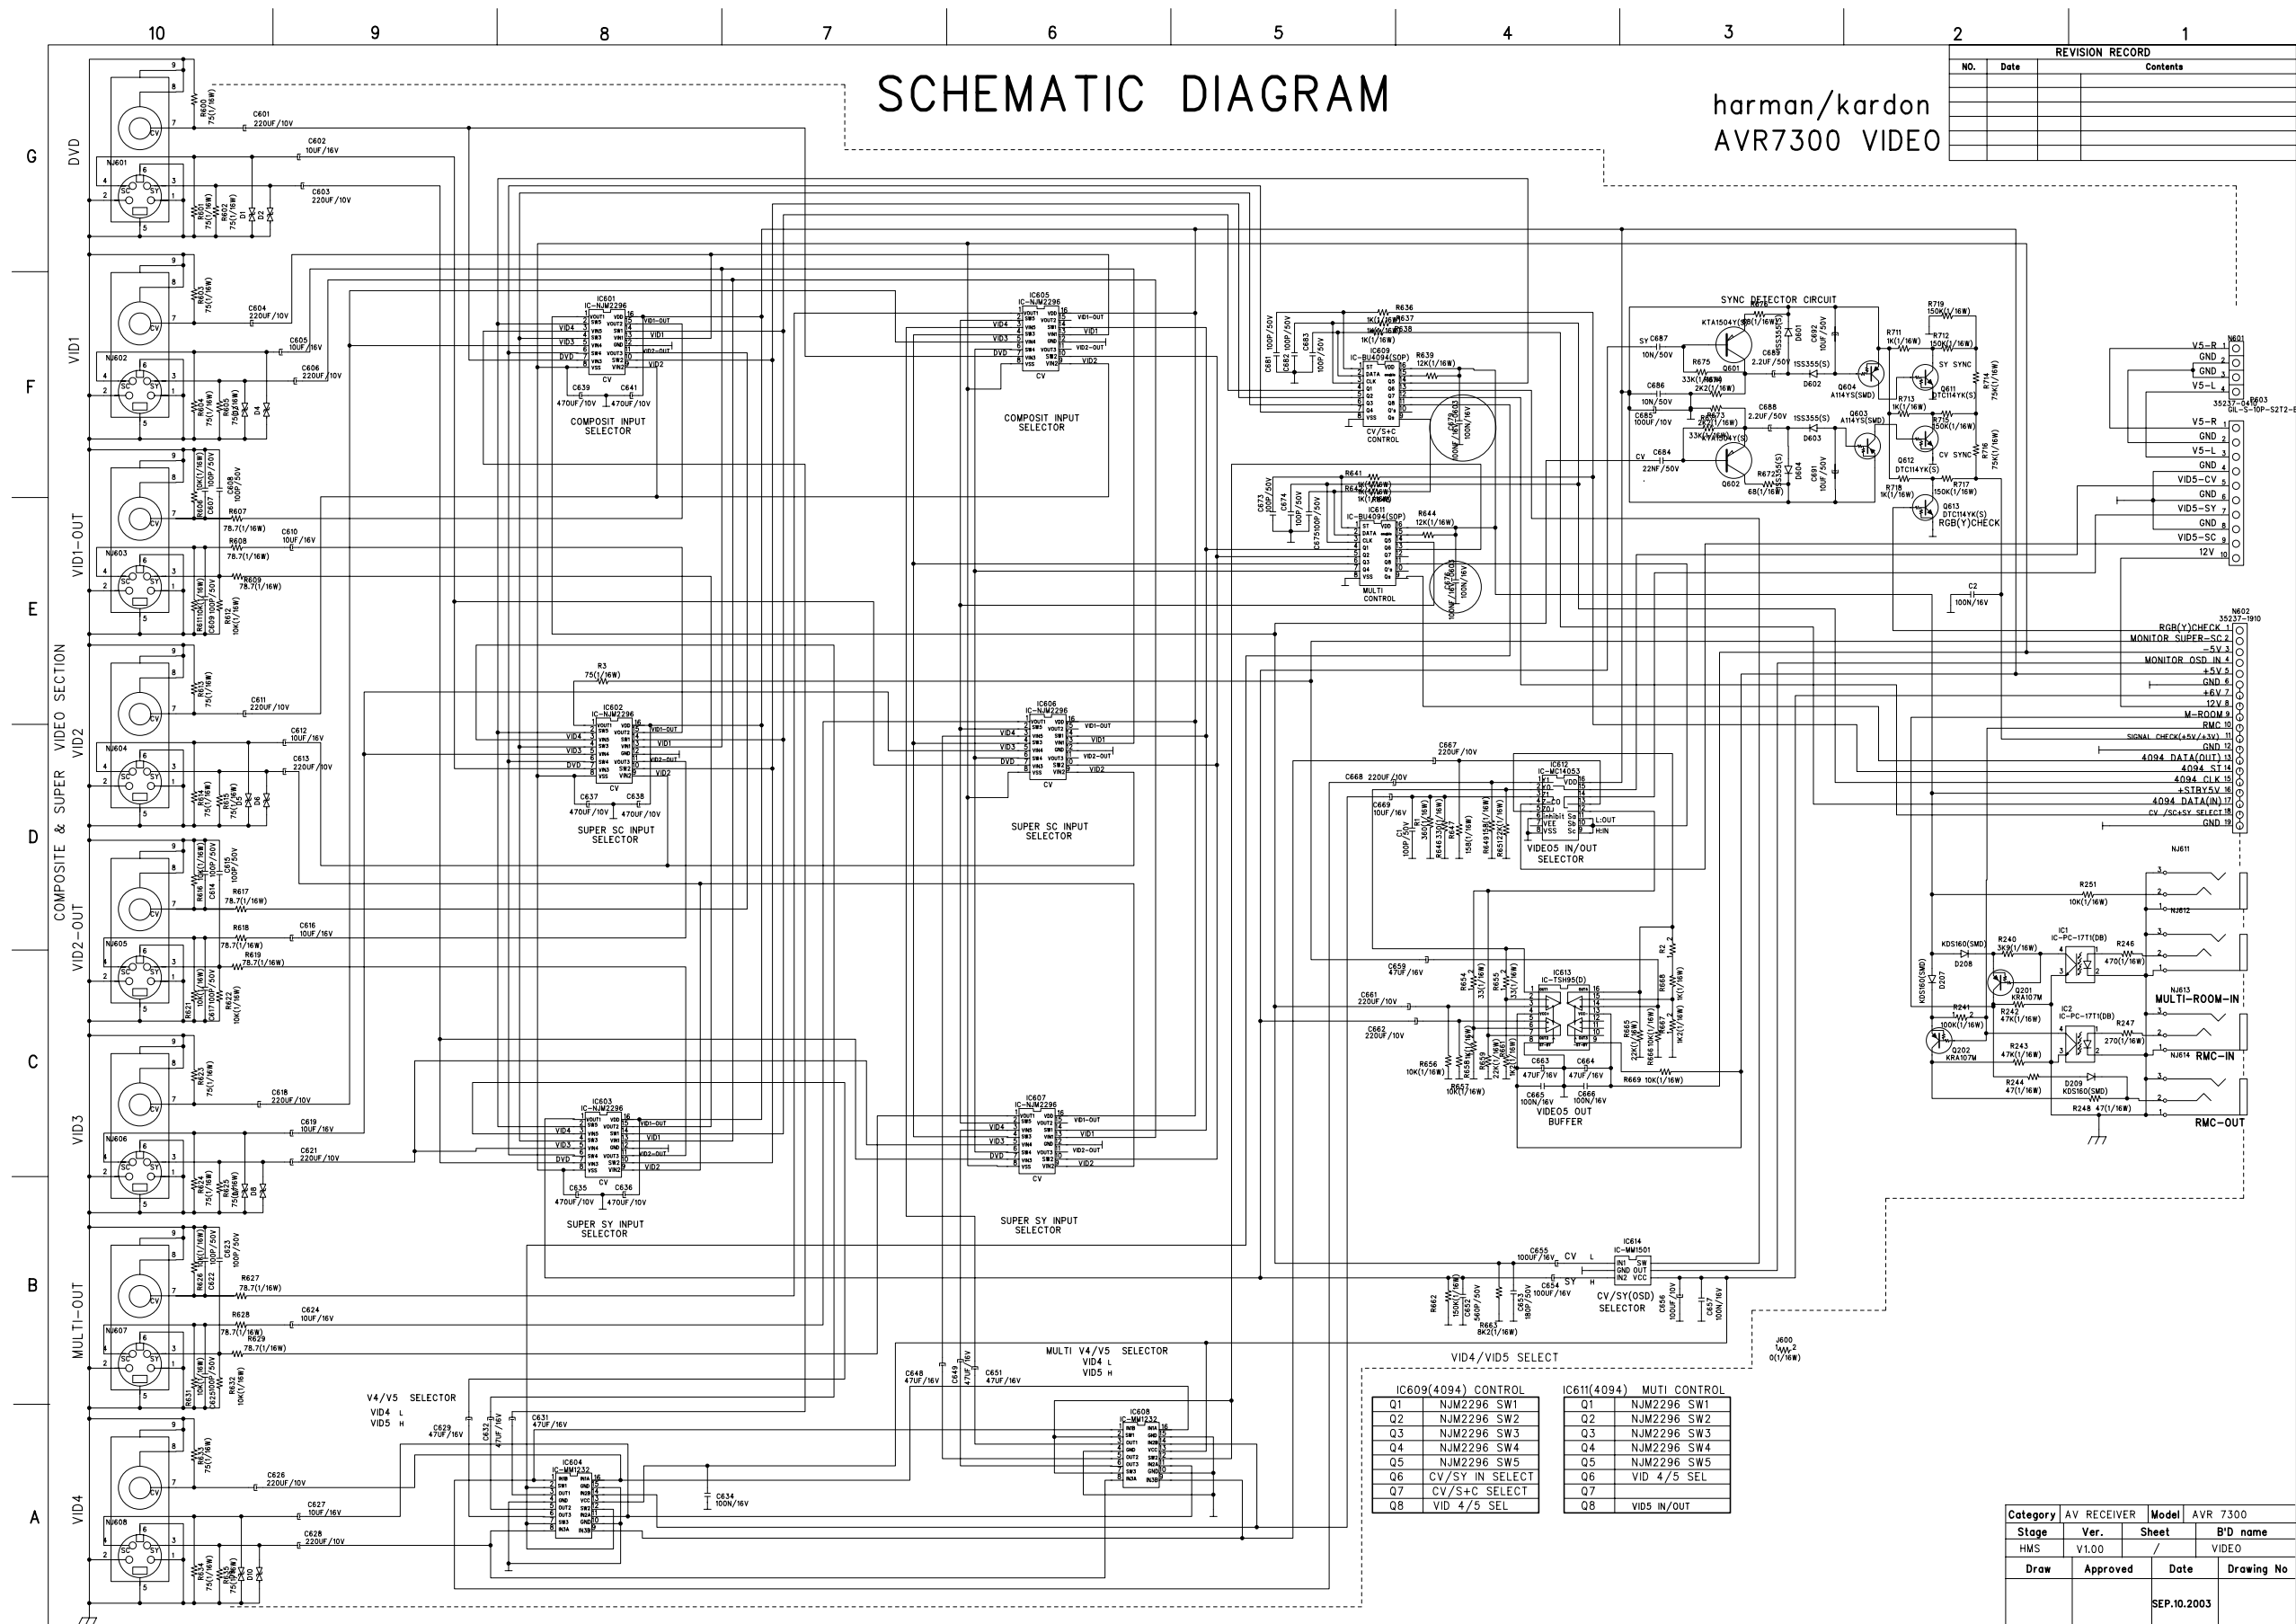


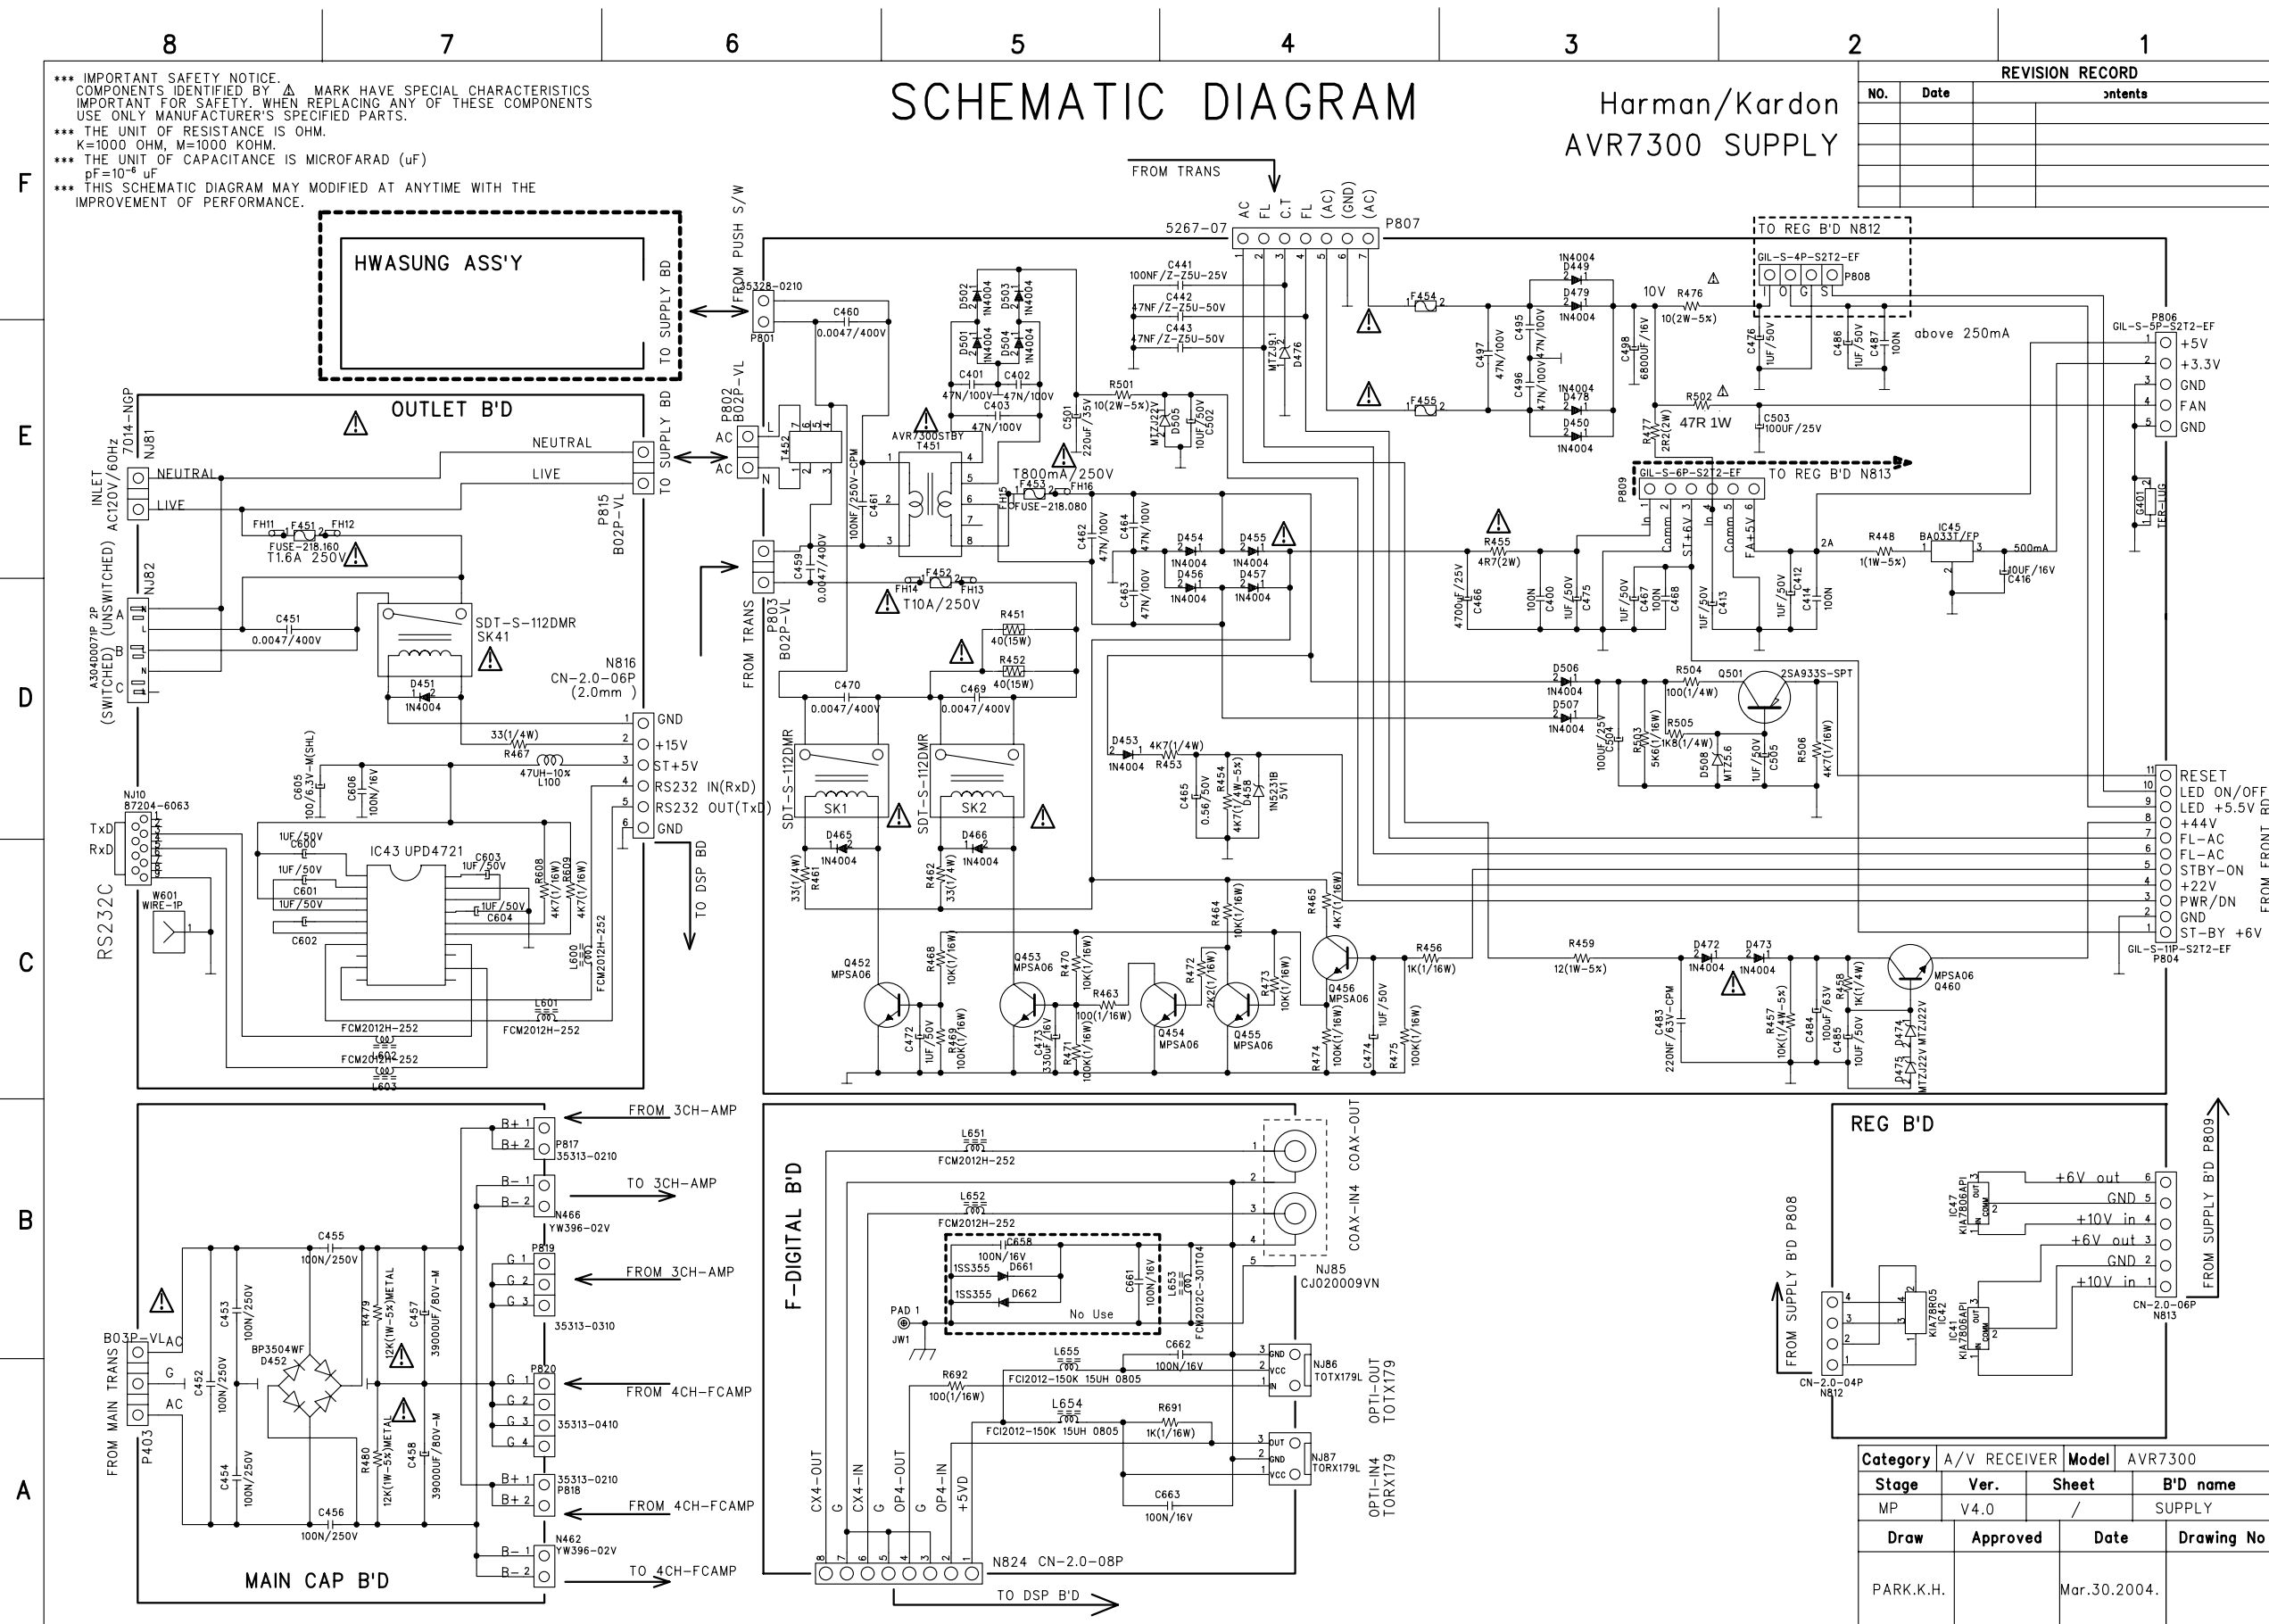


SCHEMATIC DIAGRAM

harman/kardon
AVR7300 PROCESSOR

REVISION RECORD		
NO.	Date	Contents

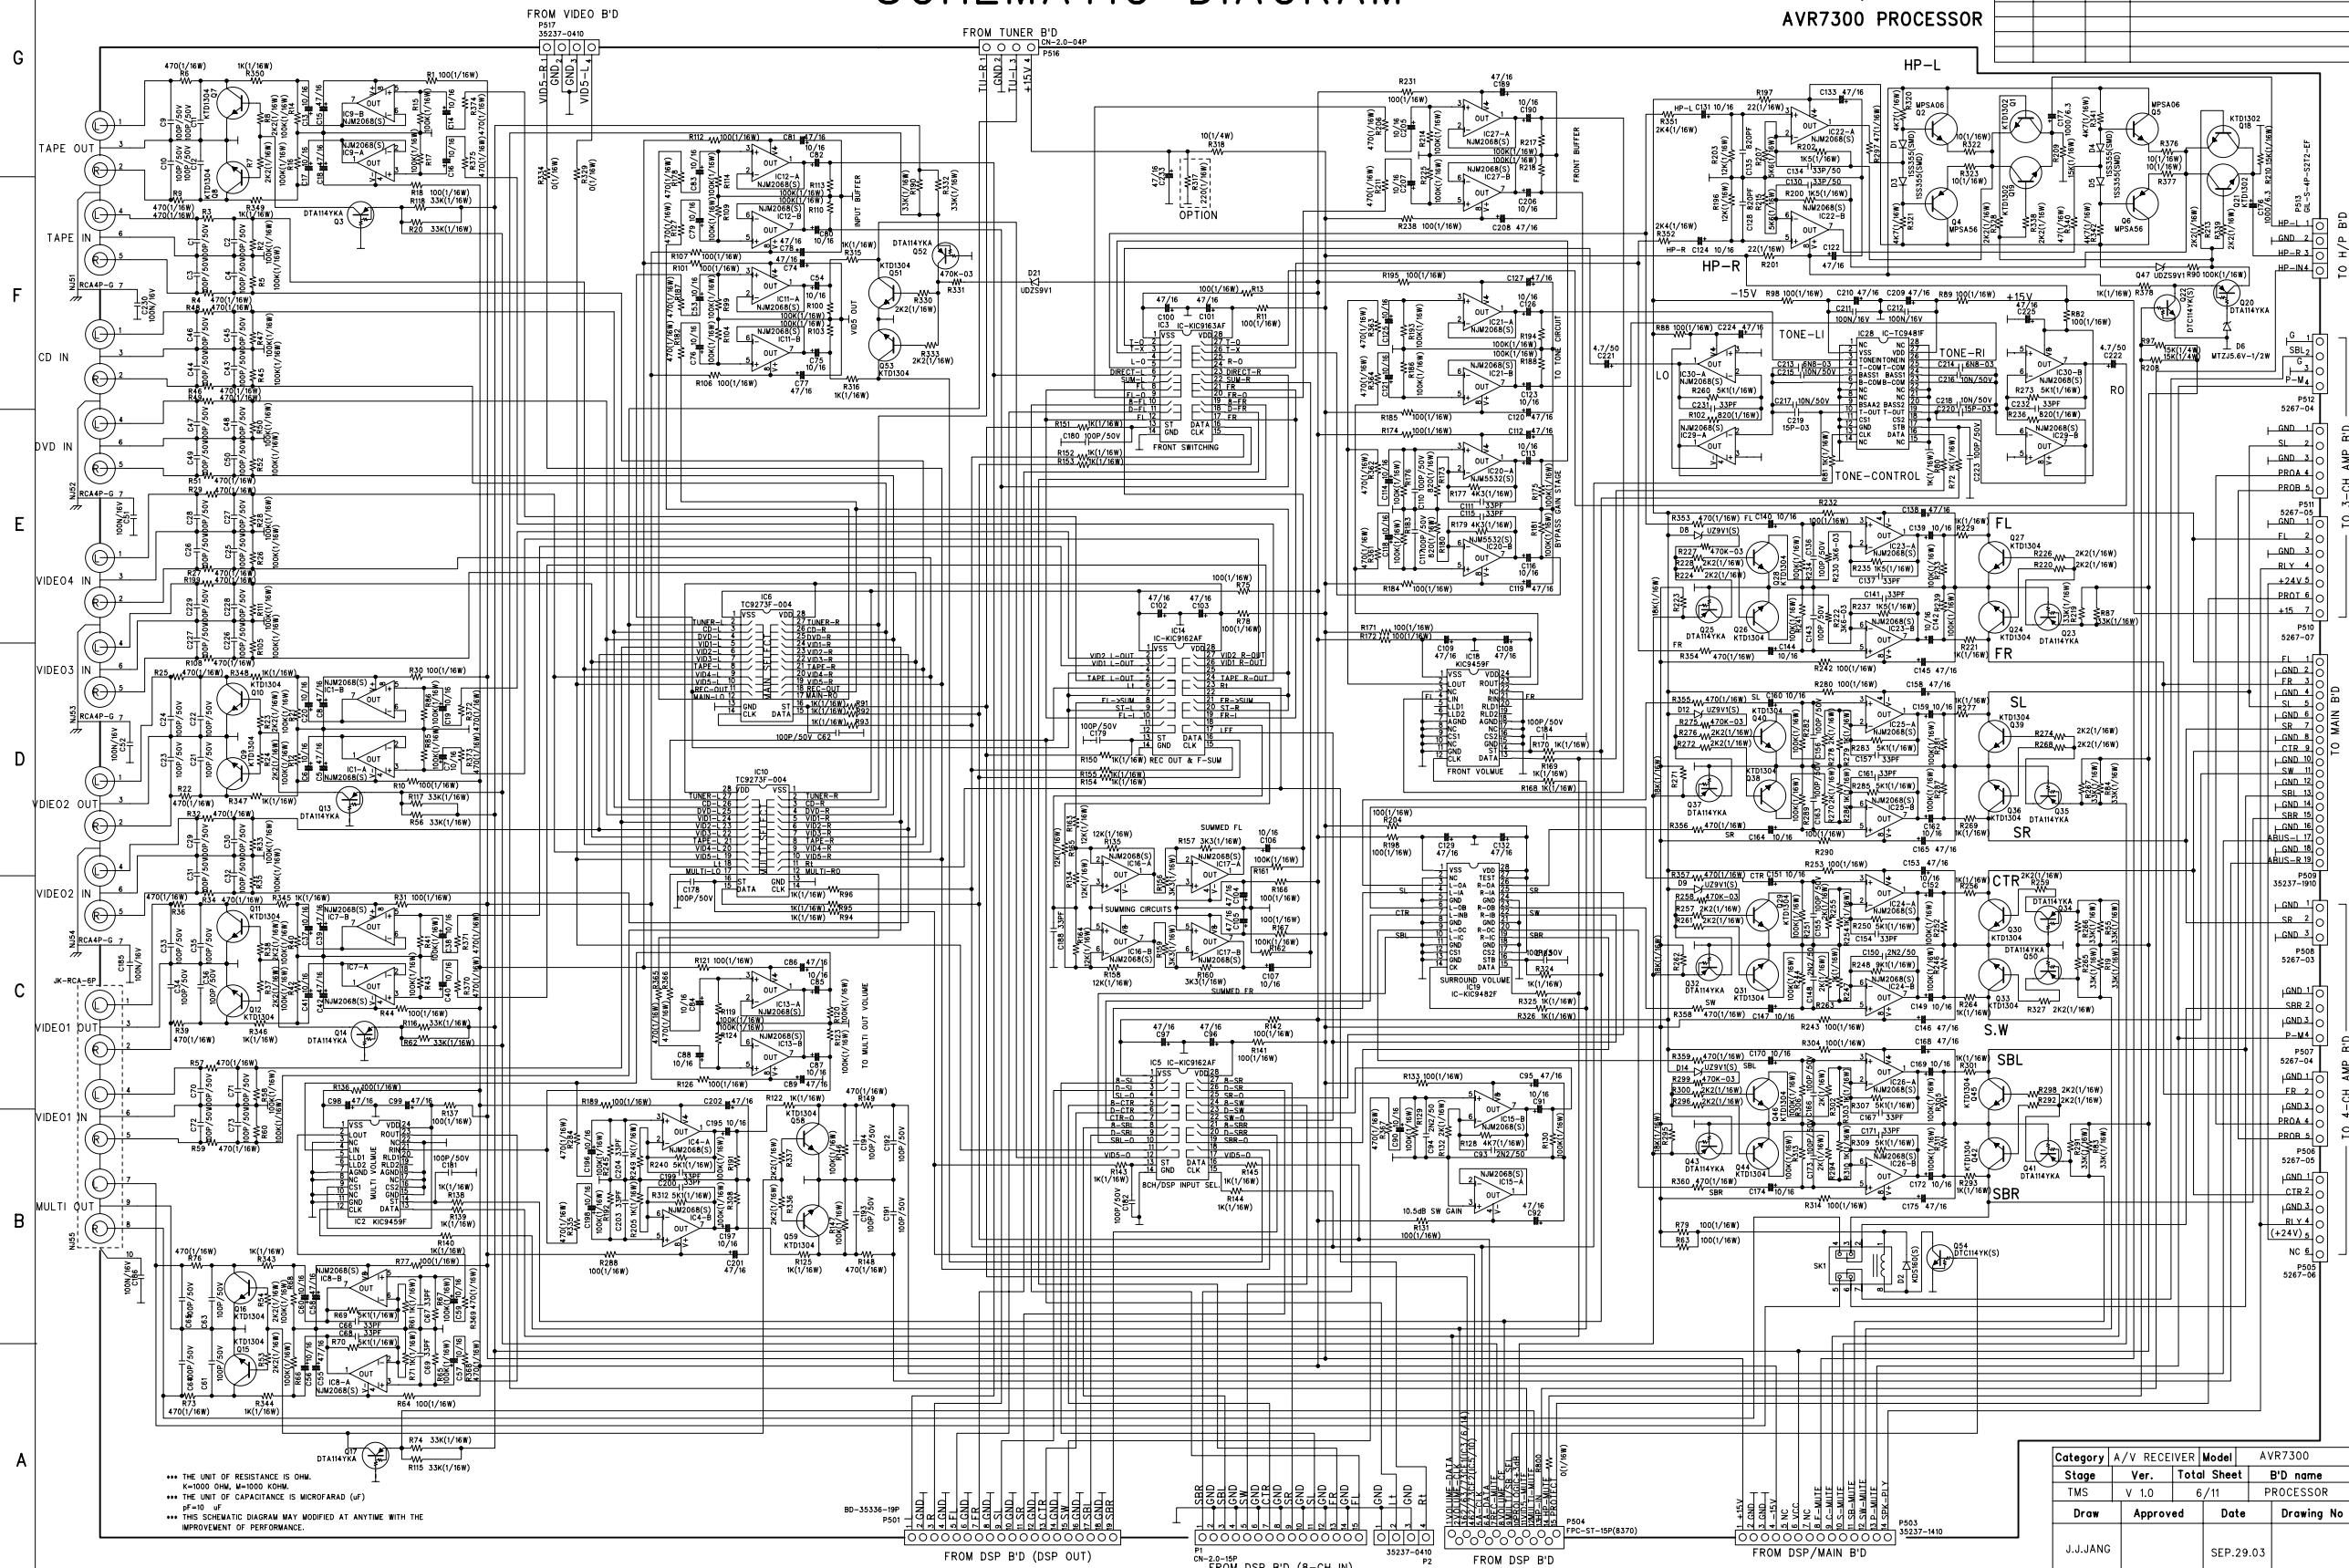

Category	A/V RECEIVER	Model	AVR7300
Stage	Ver.	Total Sheet	B'D name
TMS	V 1.0	6/11	PROCESSOR
Draw	Approved	Date	Drawing No
J.J.JANG		SEP.29.03	

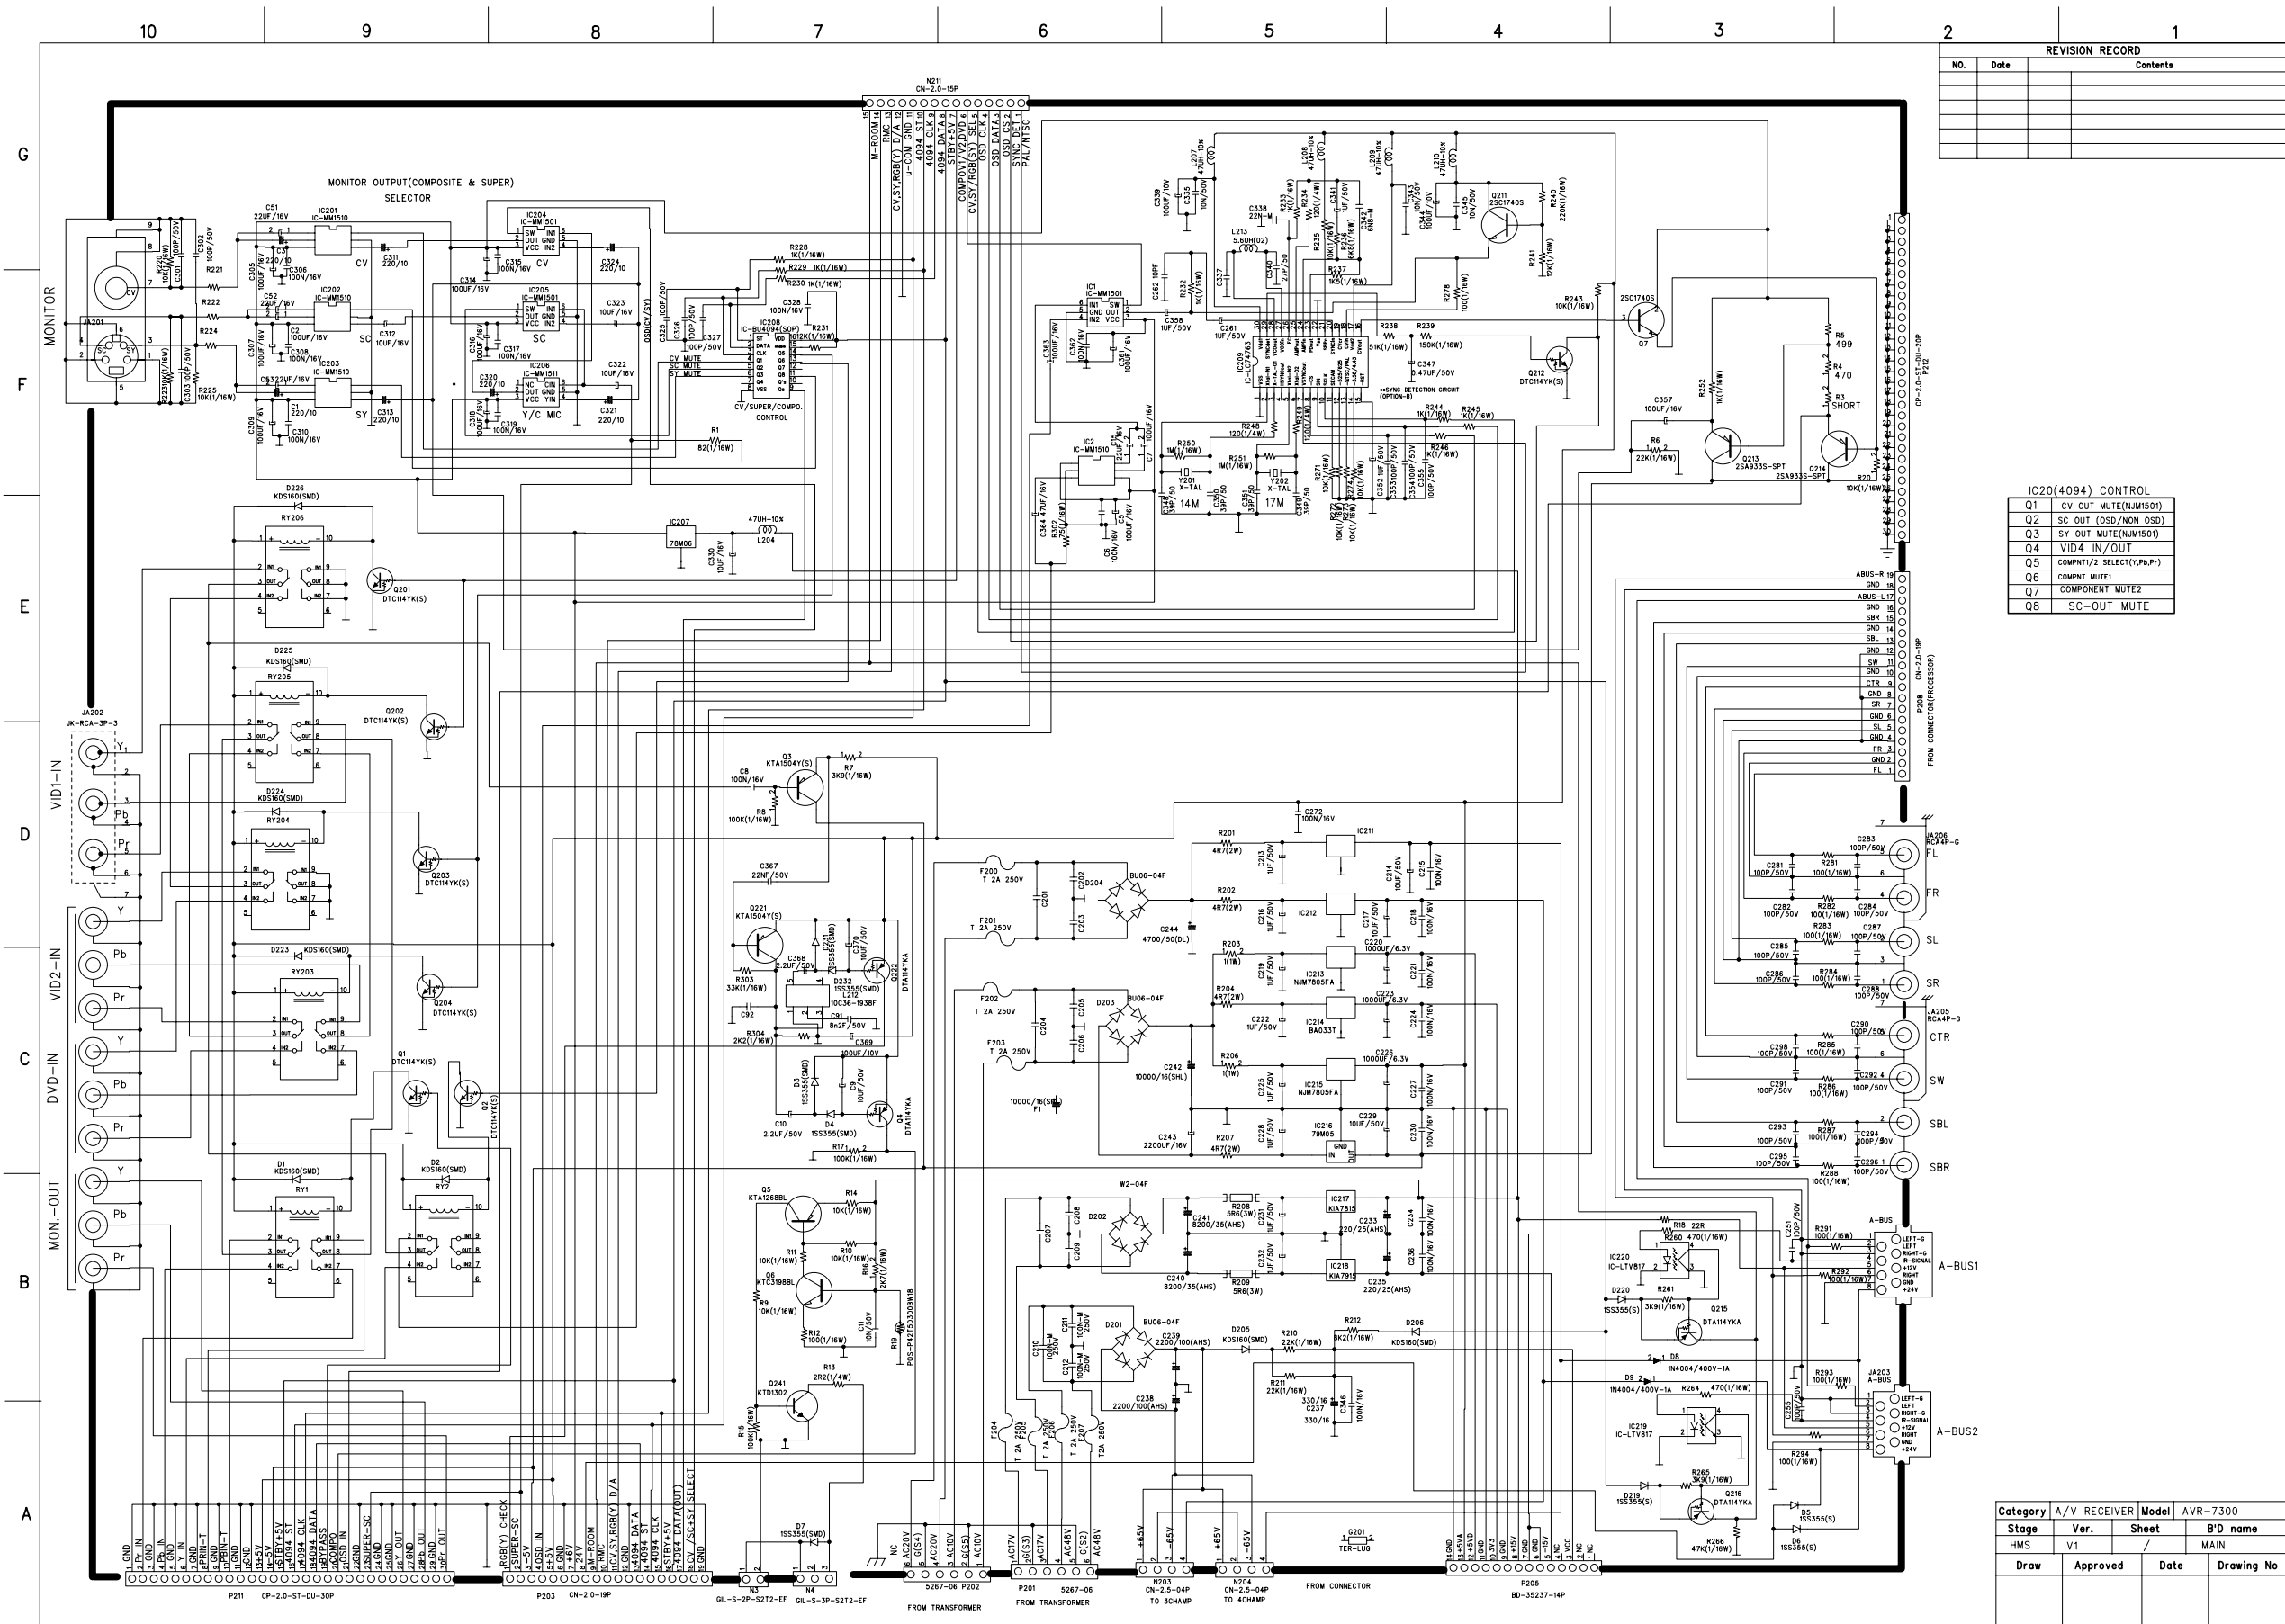




SCHEMATIC DIAGRAM

harman/kardon
AVR7300 DSP1

REVISION RECORD		
NO.	Date	Contents

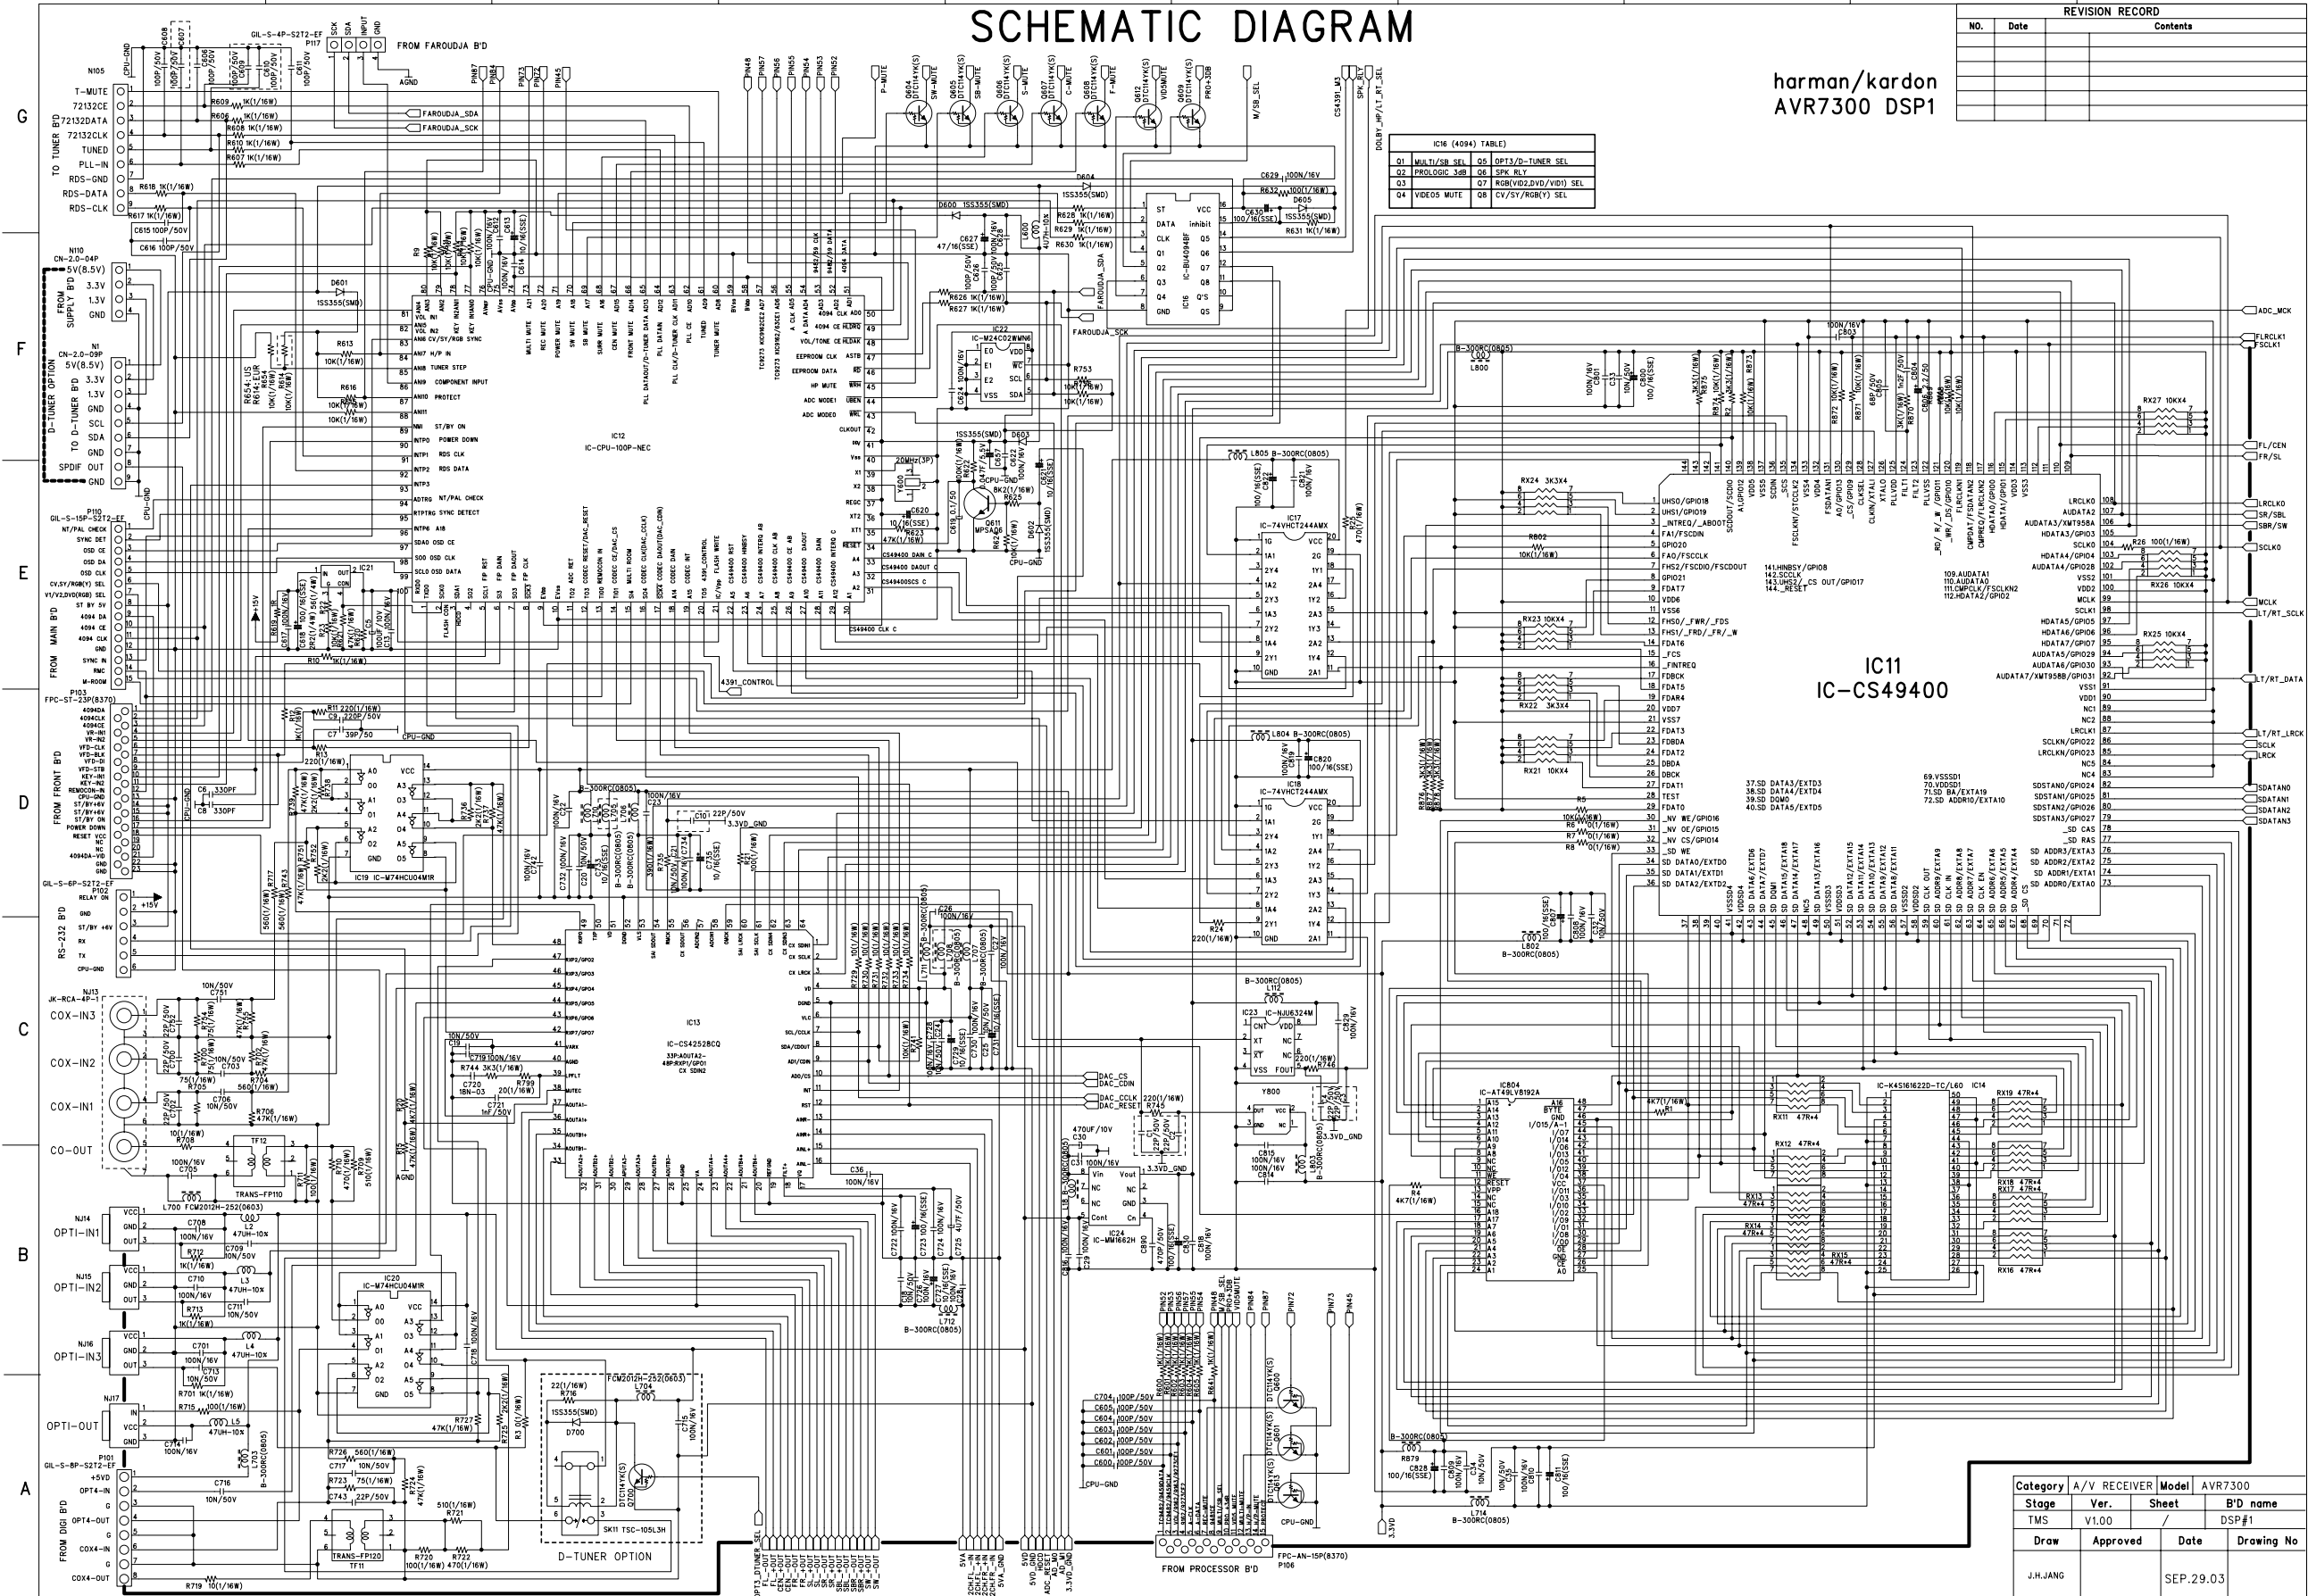


Category	A/V RECEIVER	Model	AVR7300
Stage	Ver.	Sheet	B'D name
TMS	V1.00		DSP#1
Draw	Approved	Date	Drawing No
J.H.JANG		SEP.29.03	

SCHEMATIC DIAGRAM

harman/kardon
AVR7300 DSP2

REVISION RECORD




NO.	Date	Contents

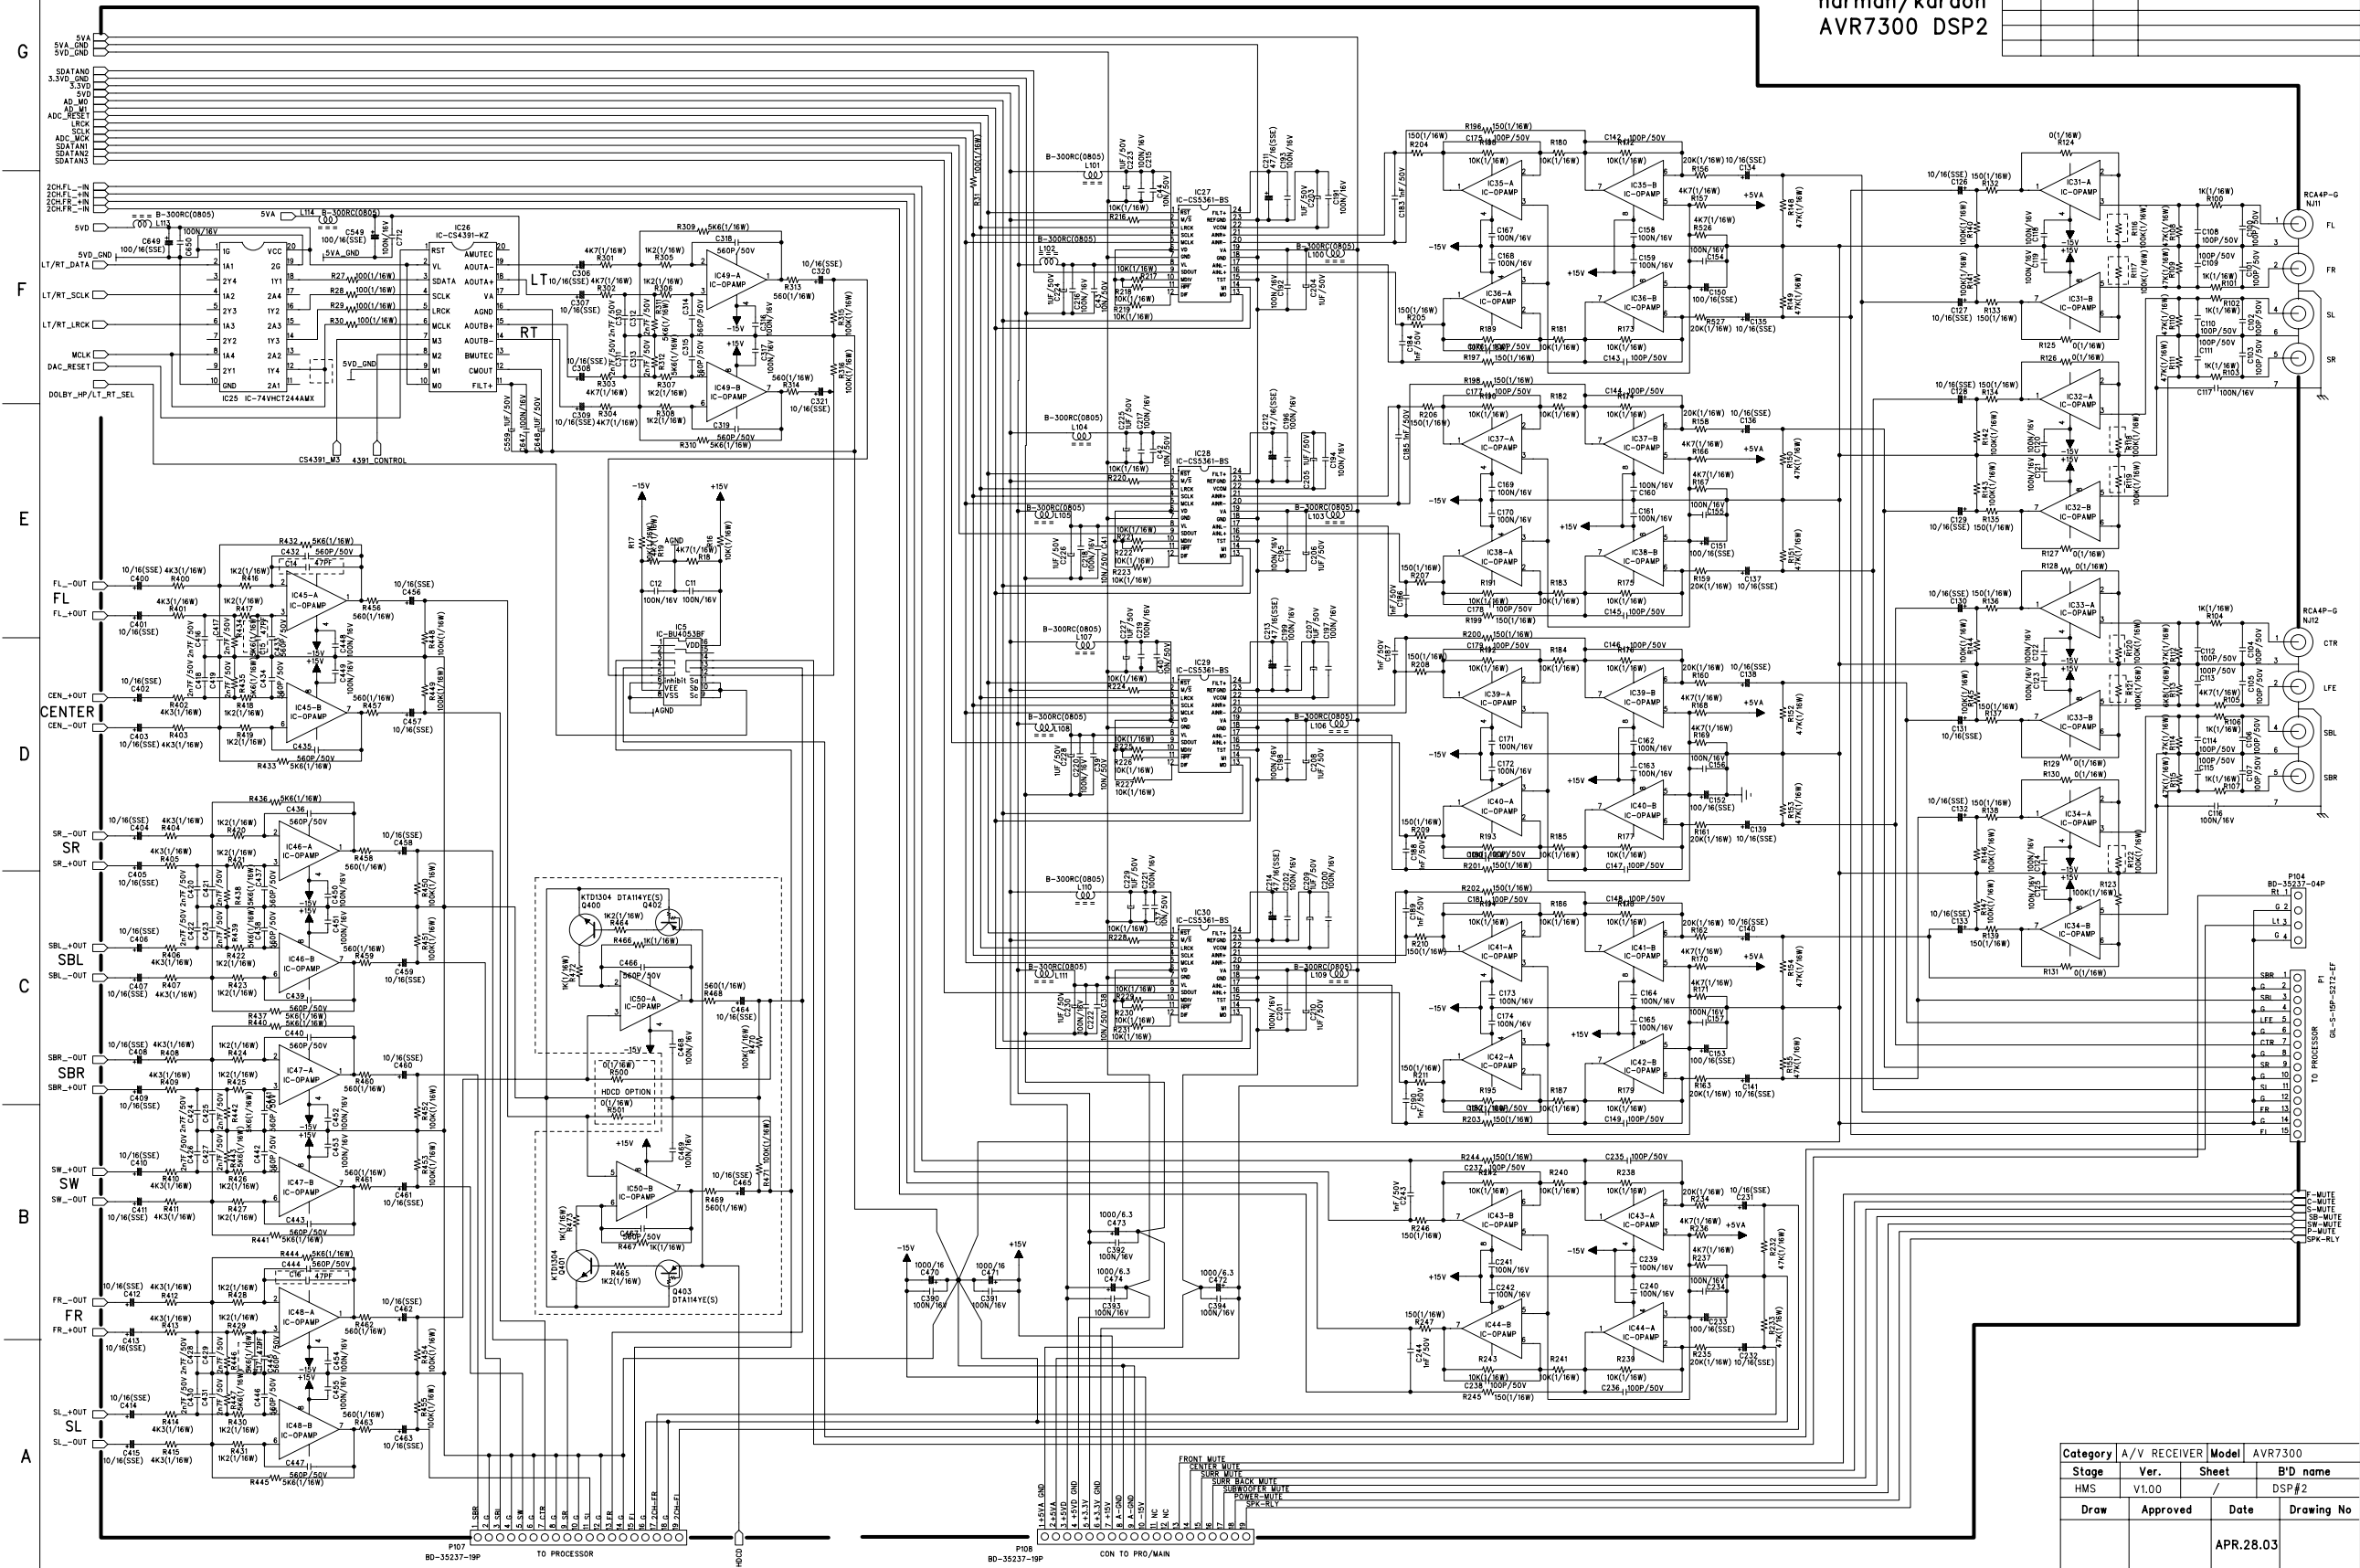

REVISION RECORD			
LTR	ECO NO:	APPROVED:	DATE:


B'DS-2.0-19P		B'D-2.0-19P	
N501		N107	
1	L-O	1	L-O
2	AN-G	2	AN-G
3	R-O	3	R-O
4	AN-G	4	AN-G
5	FL	5	FL
6	AN-G	6	AN-G
7	FR	7	FR
8	AN-G	8	AN-G
9	SL	9	SL
10	AN-G	10	AN-G
11	SR	11	SR
12	AN-G	12	AN-G
13	CTR	13	CTR
14	AN-G	14	AN-G
15	SW	15	SW
16	AN-G	16	AN-G
17	SBL	17	SBL
18	AN-G	18	AN-G
19	SRR	19	SRR

PROCESSOR-----DSP

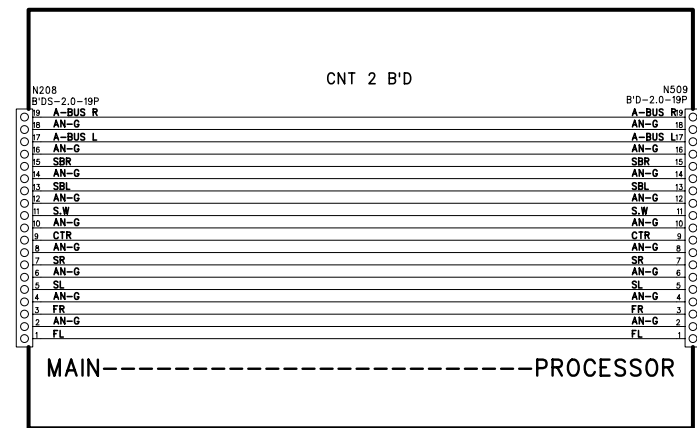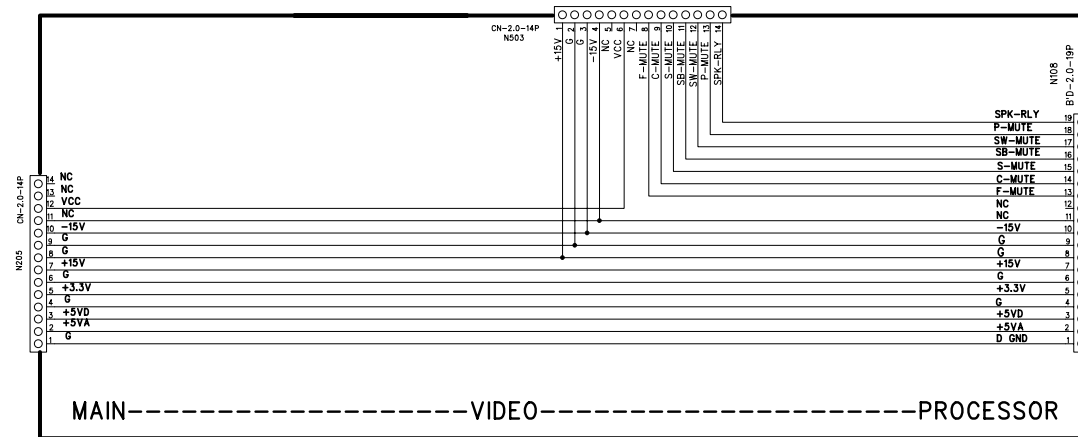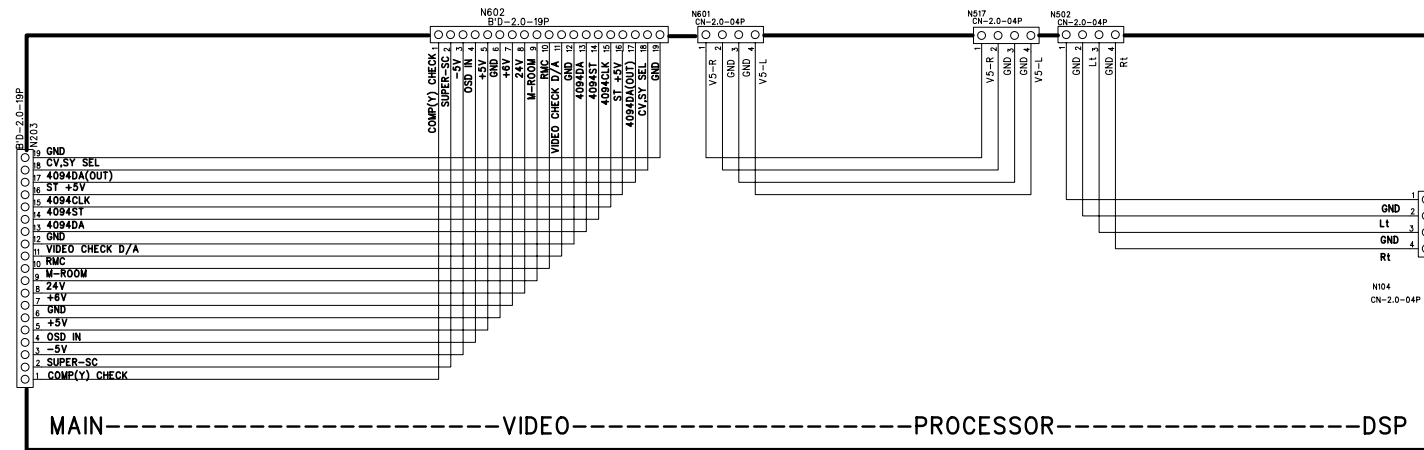

SCHEMATIC DIAGRAM harman/kardon AVR7300


3CH_AMP B'D

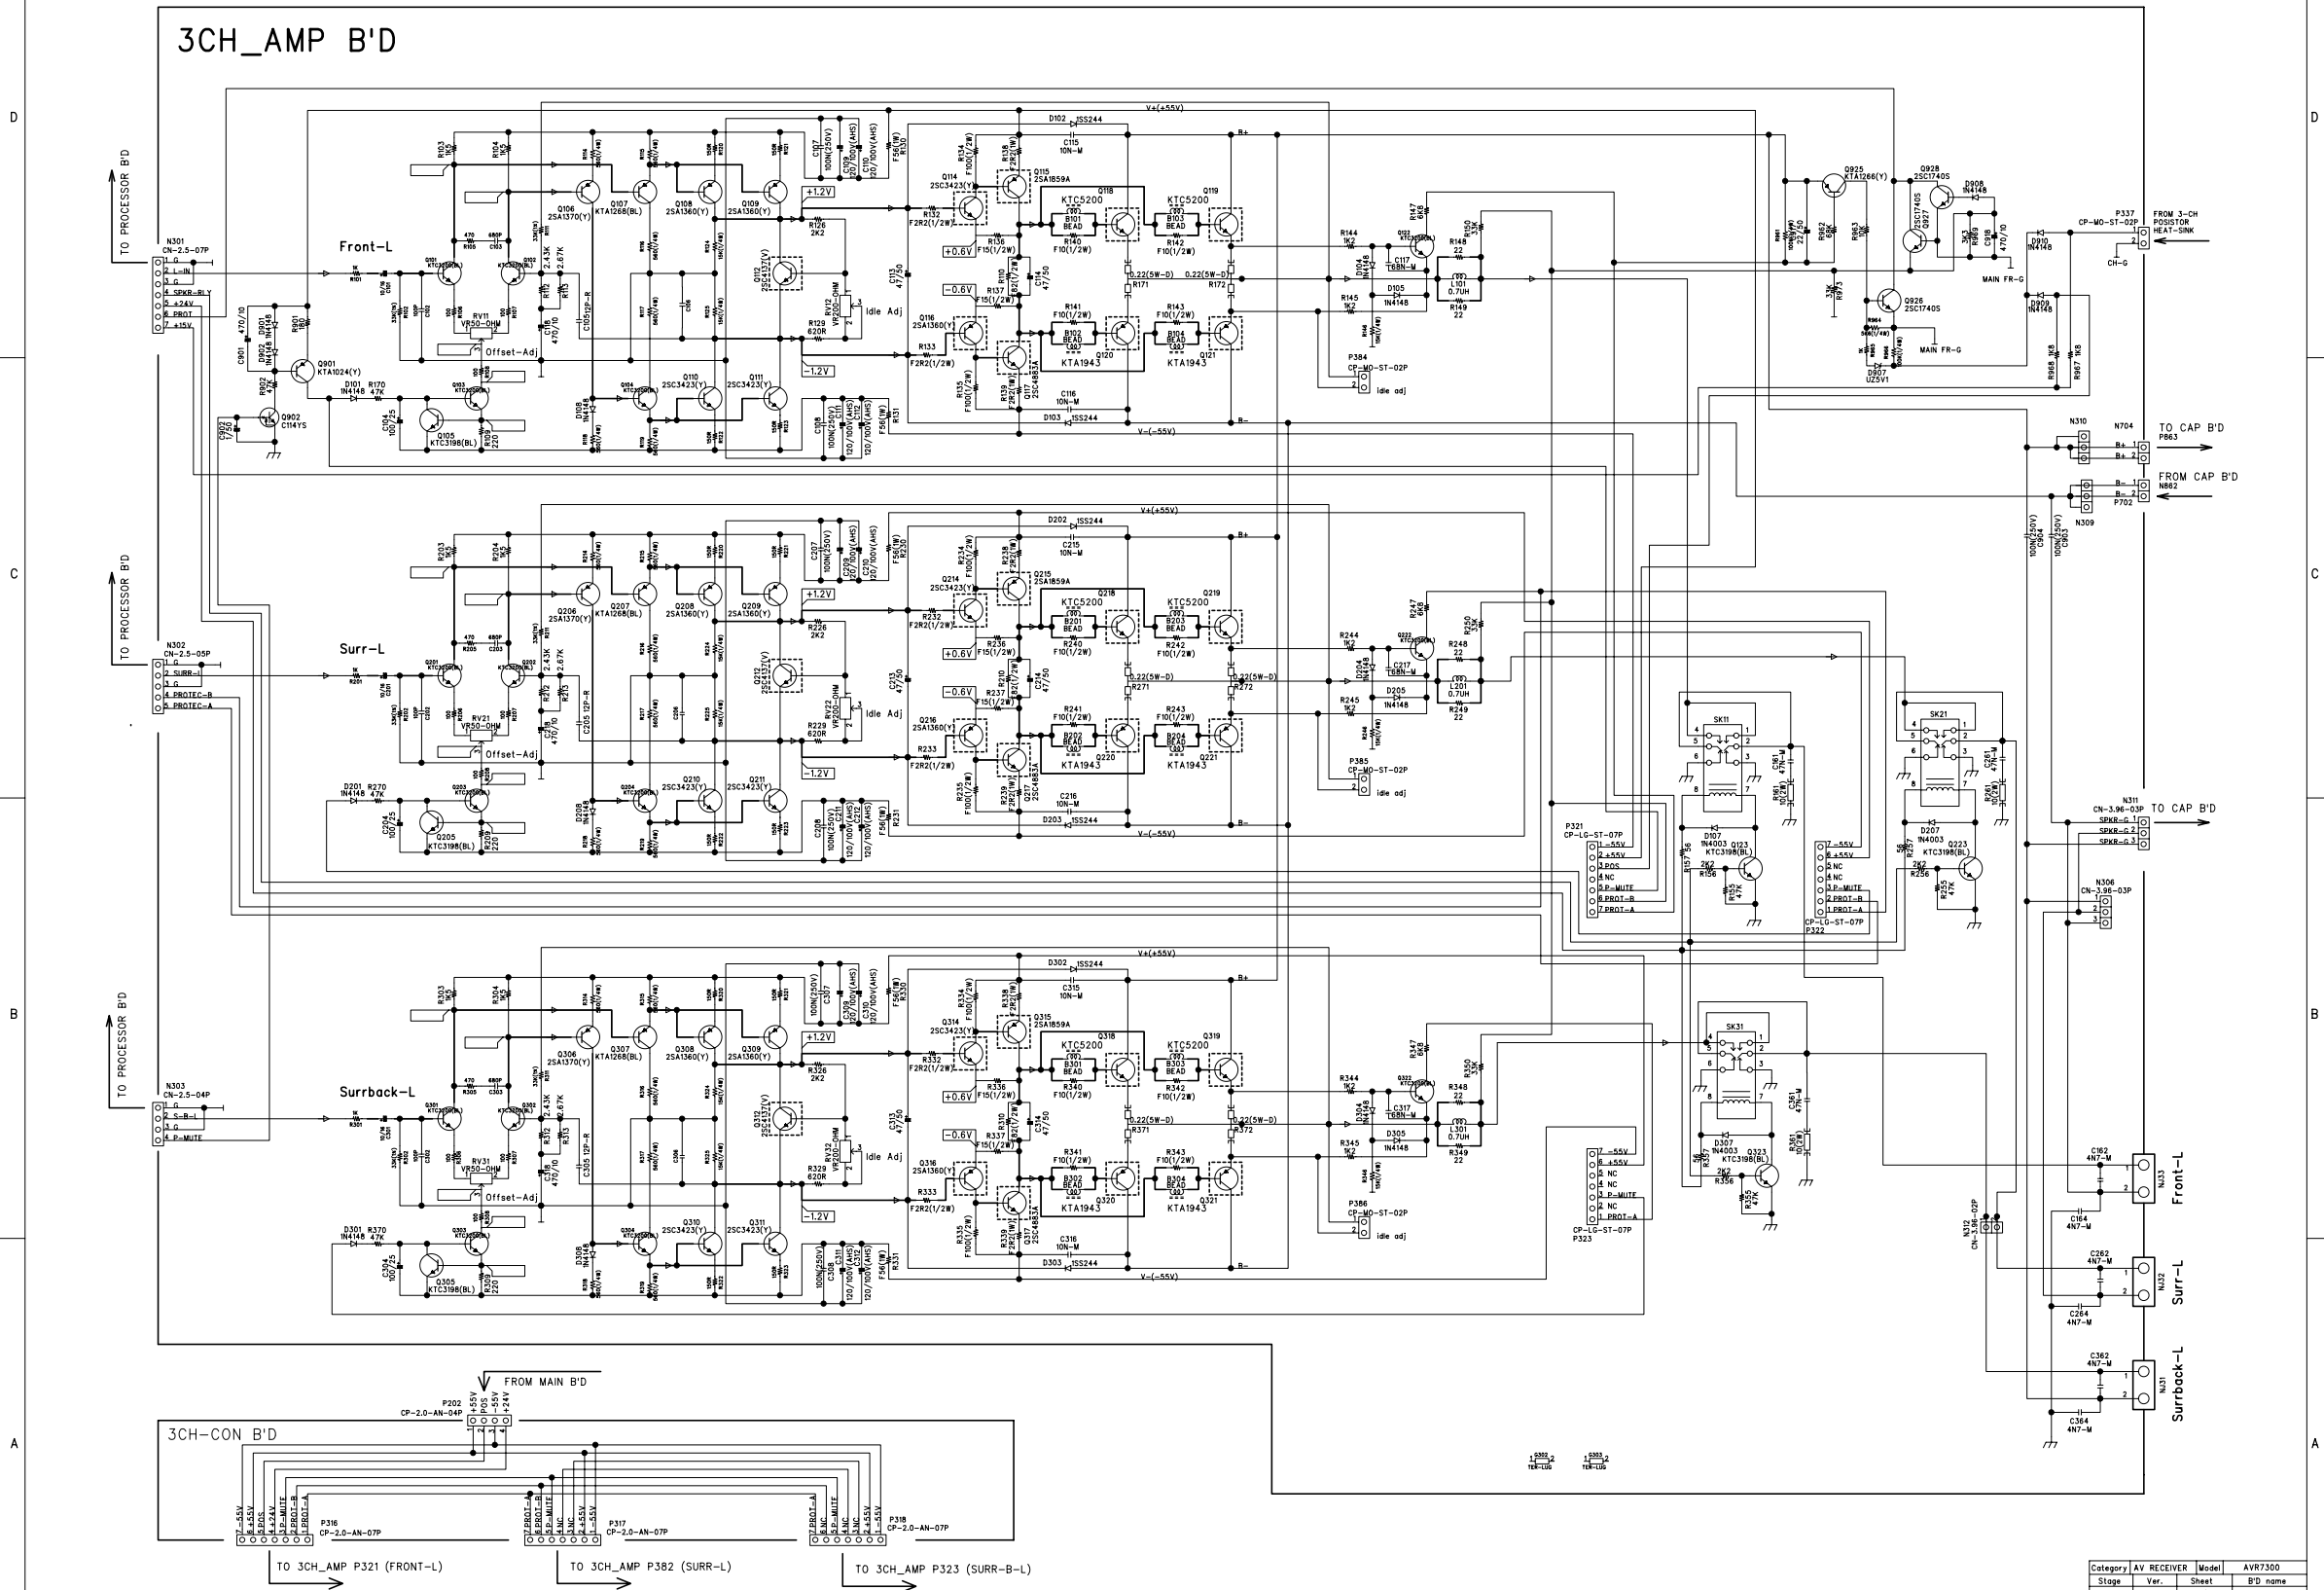

SIGN RECORD		
No.	Date	Contents

Category	AV RECEIVER	Model	AVR7300
Stage	Ver.	Sheet	B'D name
FTMS	v2.101		3CHAMP
Draw	Approved	Date	Drawing No
KIM Y.G.		May.12.2003.	

SCHEMATIC DIAGRAM harman/kardon AVR7300

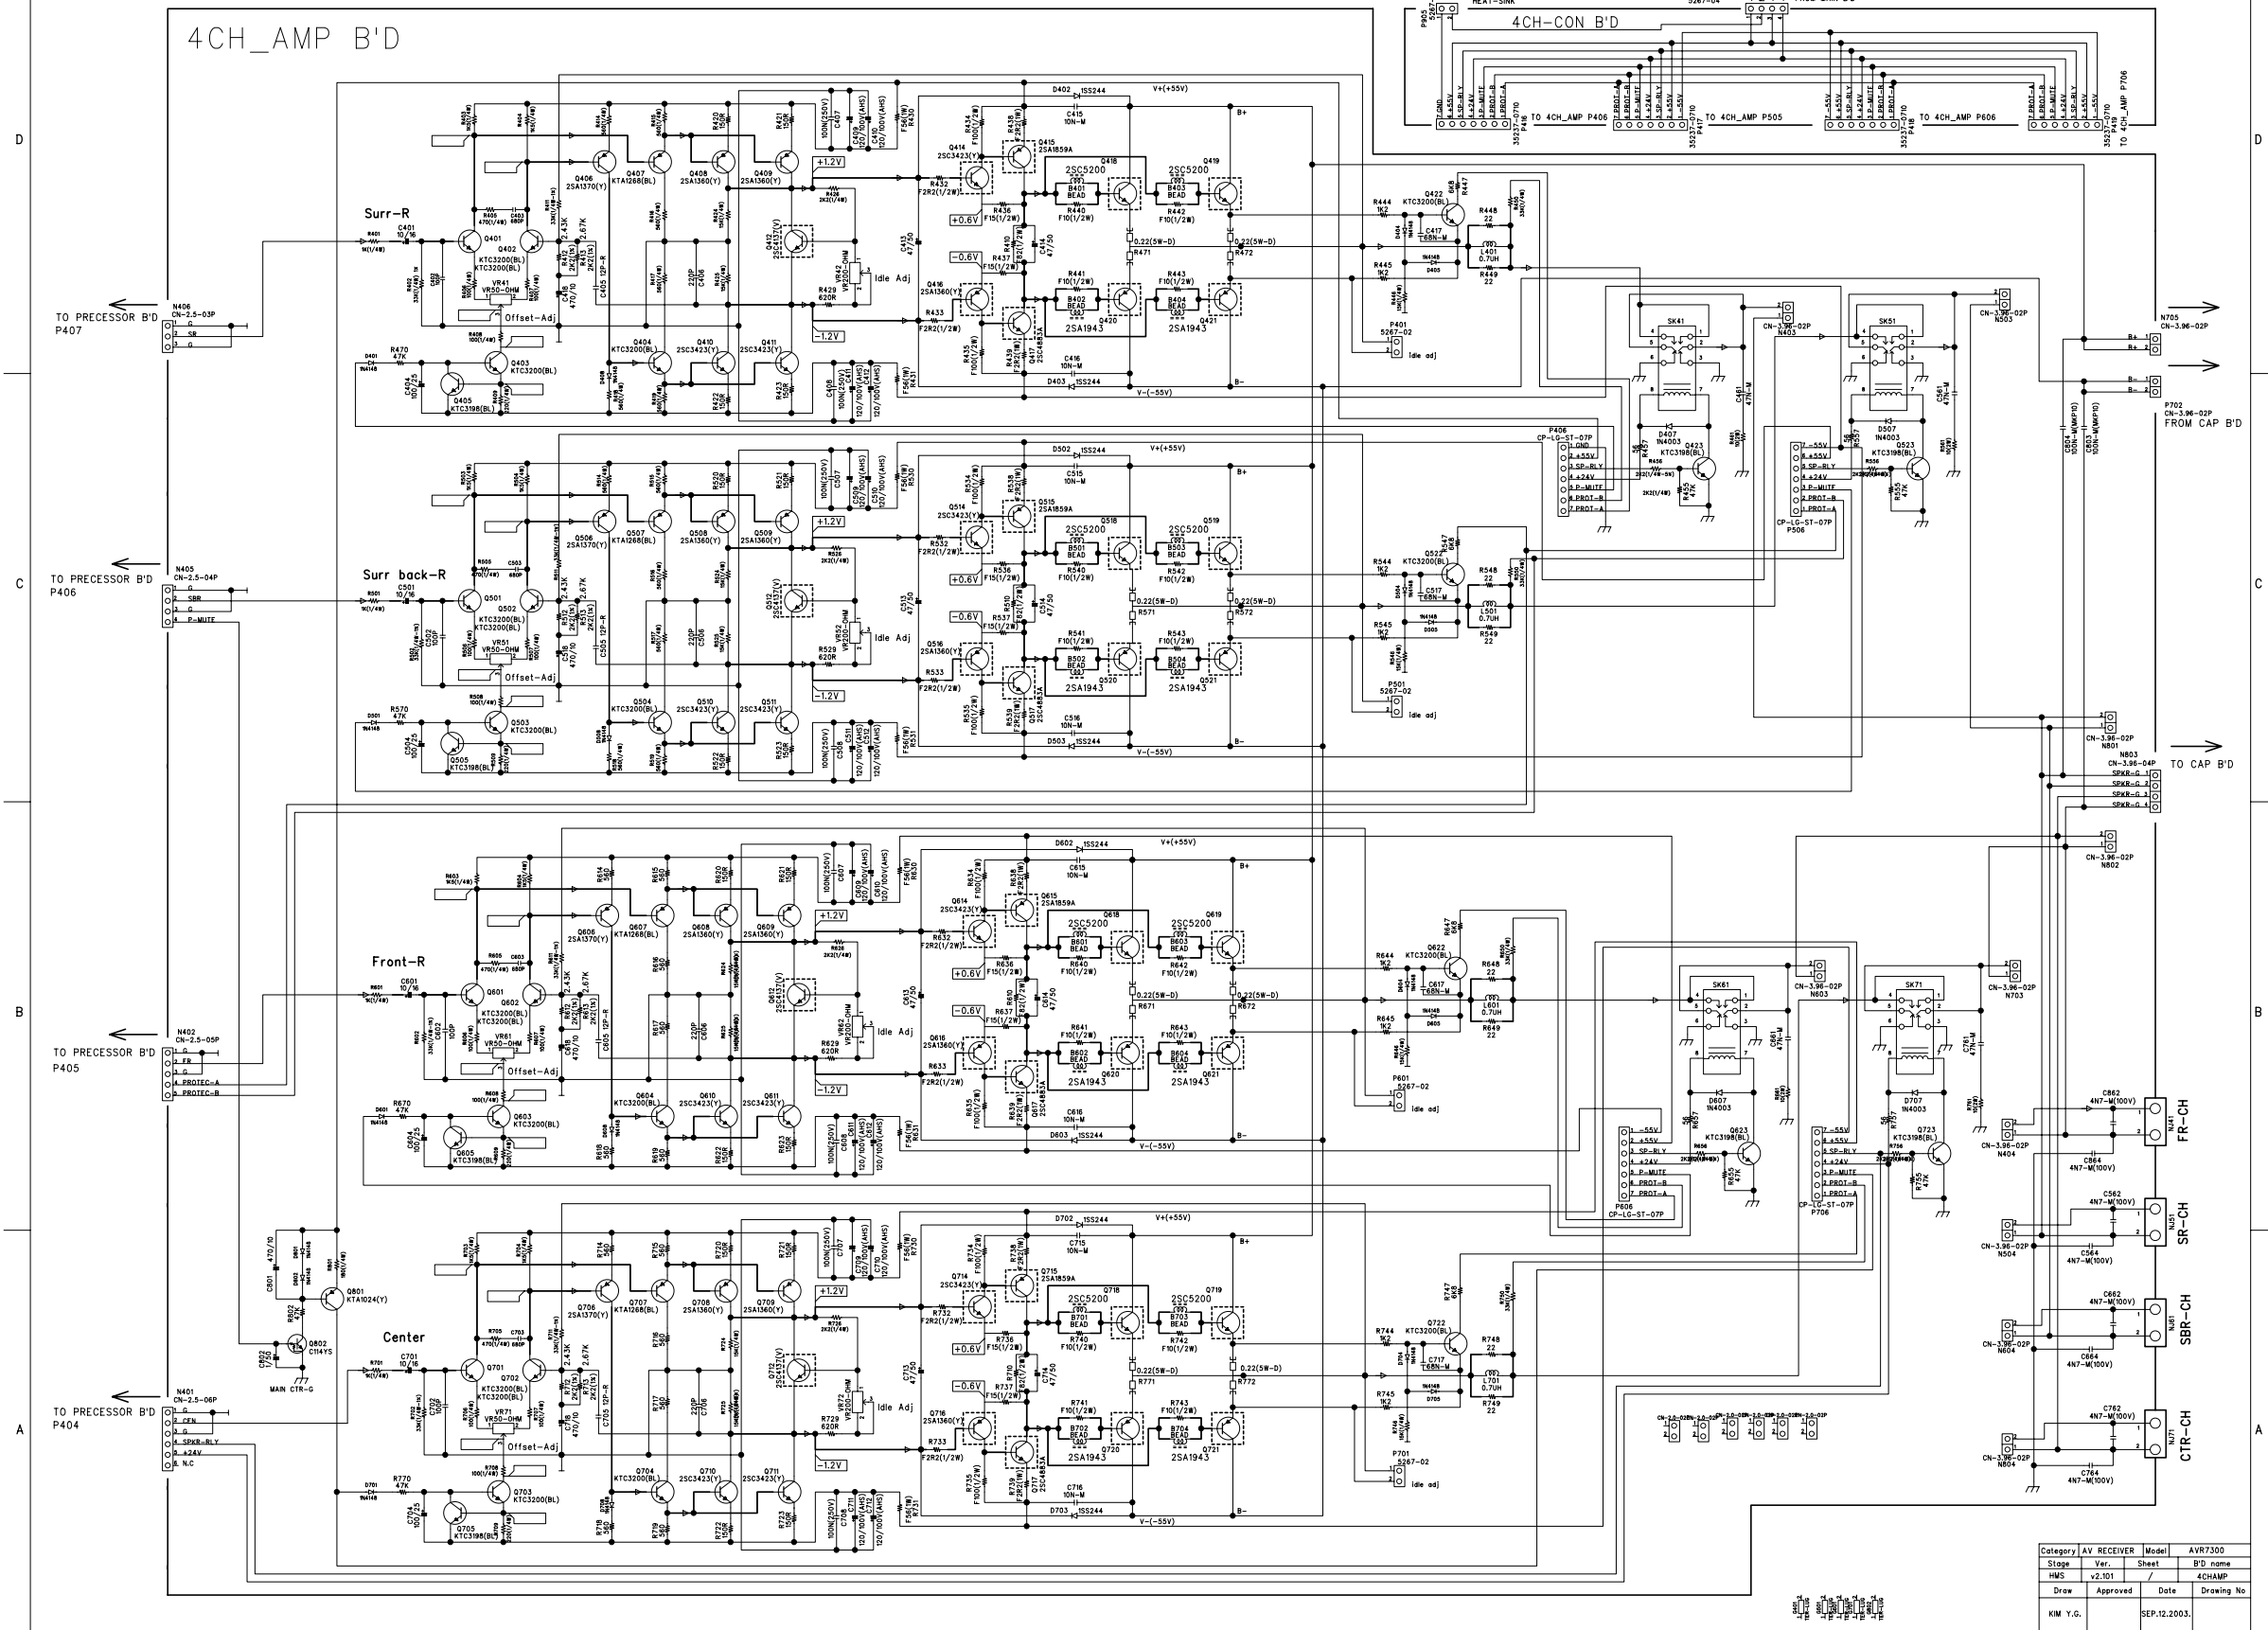

NO.	PARTS NO.	DESCRIPTION	AVR 7300US	AVR 7300EU
1-1	ZQD0501HA00	CUSHION POLY RIGHT	1	1
1-2	ZQD0502HA00	CUSHION POLY LEFT	1	1
2	ZKD0504HA00	BOX CARTON AVR7300US	1	
	ZKD1004HA00	BOX CARTON AVR7300EU		1
3	ZHD0501AAWH	SHEET PE 0.5t	1	1
4	H01-ATALF039ABK	AM ANTENNA LOOP	1	1
5	H01-WAB01200203	FM ANTENNA 75 US	1	
	H01-WAD01200303	FM ANTENNA 75 EU		1
6	H01-RYC1202HA00	ASS'Y REMOCOON ZONE II	1	1
	H01-RYD0501HA00	ASS'Y REMOCOON AVR7300US	1	
7	H01-RYD1001HA00	ASS'Y REMOCOON AVR7300EU		1
8	ZBP00037P51	POLY BAG PE 0.05t	1	
9	ZKC1156HA00	CARD POST PAPER	1	1
10	ZKC1113HA00	CARD WARRANTY PAPER	1	1
11	ZKC1214HA00	SAFETY LEAFLET PAPER	1	1
12	ZKD0501HA00	MANUAL AVR7300US	1	
	ZKD1001HA00	MANUAL AVR7300EU		1
13	BT3A31511SF	BATTERY 1.5V AAA	6	6
14	ZKD0573HA00	LABEL BARCODE AVR7300US	2	
	ZKD1073HA00	LABEL BARCODE AVR7300EU		2
15	H01-RYC1202HA00	WIRE-MCRDM 0.82MM2 1MM BK	1	1
16	ZKD05H03A00	PAD ENDCAP PAD UPPER	1	1
17	ZKD05H04A00	PAD ENDCAP PAD INNER	2	2
18	ZKGEN56HA00	ENVELOPE POLISHING CLOTH	1	1
19	ZKC11H96A00	POLISHING CLOTH	1	1
20	ZQD0503HA00	CUSHION BOTTOM AVR7300	1	1

GENERAL TOLERANCE		±0.2 MM				
DIVISION	GRADE					
	1	2	3	4	5	
UNDER 16	0.05	0.1	0.1	0.2	0.5	
16-63	0.05	0.1	0.2	0.3	0.4	
63-250	0.1	0.2	0.3	0.4	0.5	
250-1000	0.2	0.3	0.4	0.5	0.6	

										[250-1000] [A3] [A2] [A1] [A0]									
1																			
	NO.	PARTS NO.		PARTS NAME			DWG. NO.		MATERIAL		FINISH	Q'TY	MODEL NO.		MAKER				
APPROVAL	CHECK	DRAWING		DESIGN	MODEL	A177300					PARTS NAME		PACKING INSTRUCTION						
					SCALE	TOLERANCE					PARTS NO.								
					N	LESS: ±					PARTS NO.								
					S	LESS: ±					PARTS NO.								
					UNIT	LESS: ±					DWG. NO.		REV.						
					m/m	LESS: ±													