



ONKYO SERVICE MANUAL

COMPACT DISC CHANGER MODEL DX-C390(B)/(S)(Mark2)

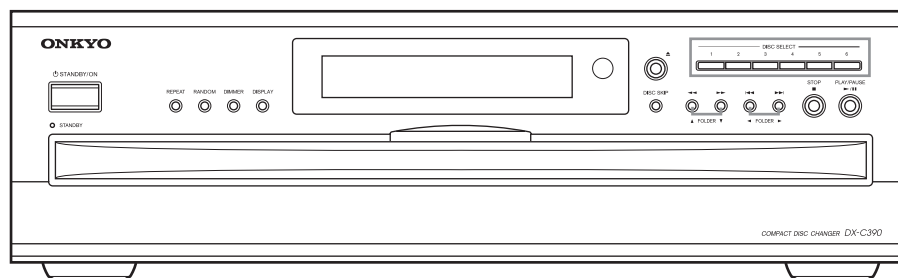

RC-777C

Note :

"Mark 2" is just an internal name.

End-users do not know whether their units are original or mark 2.

You need to check which model you are repairing to use correct documents.

For further information, see Service Note.

Black and Silver models

B MDD	120V AC, 60Hz
B MPP	230V AC, 50Hz
S MPP	230V AC, 50Hz
B MPA	230V AC, 50Hz

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

SERVICE PROCEDURE-1

PROTECTION OF EYES FROM LASER BEAM DURING SERVICING

This set employs a laser. Therefore, be sure to follow carefully the instructions below when servicing.

WARNING!!

SERVICE WARNING : DO NOT APPROACH THE LASER EXIT WITH THE EYE TOO CLOSELY. IN CASE IT IS NECESSARY TO CONFIRM LASER BEAM EMISSION, BE SURE TO OBSERVE FROM A DISTANCE OF MORE THAN 30cm FROM THE SURFACE OF THE OBJECTIVE LENS ON THE OPTICAL PICKUP BLOCK.

LASER WARNING LABEL

The labels shown below are affixed.

1. Warning label



2. Class 1 label



LUOKAN 1
LASERLAITE

KLASS 1
LASER APPARAT

Printed on rear panel

S/N MARKING

Note :

"Mark 2" is just an internal name.

End-users do not know whether their units are original or mark 2.


You need to check which model you are repairing to use correct documents.



--- Rear panel ---


S/N Mark "M (or later)" letter has been added to the end of serial numbers.

EXPLODED VIEW

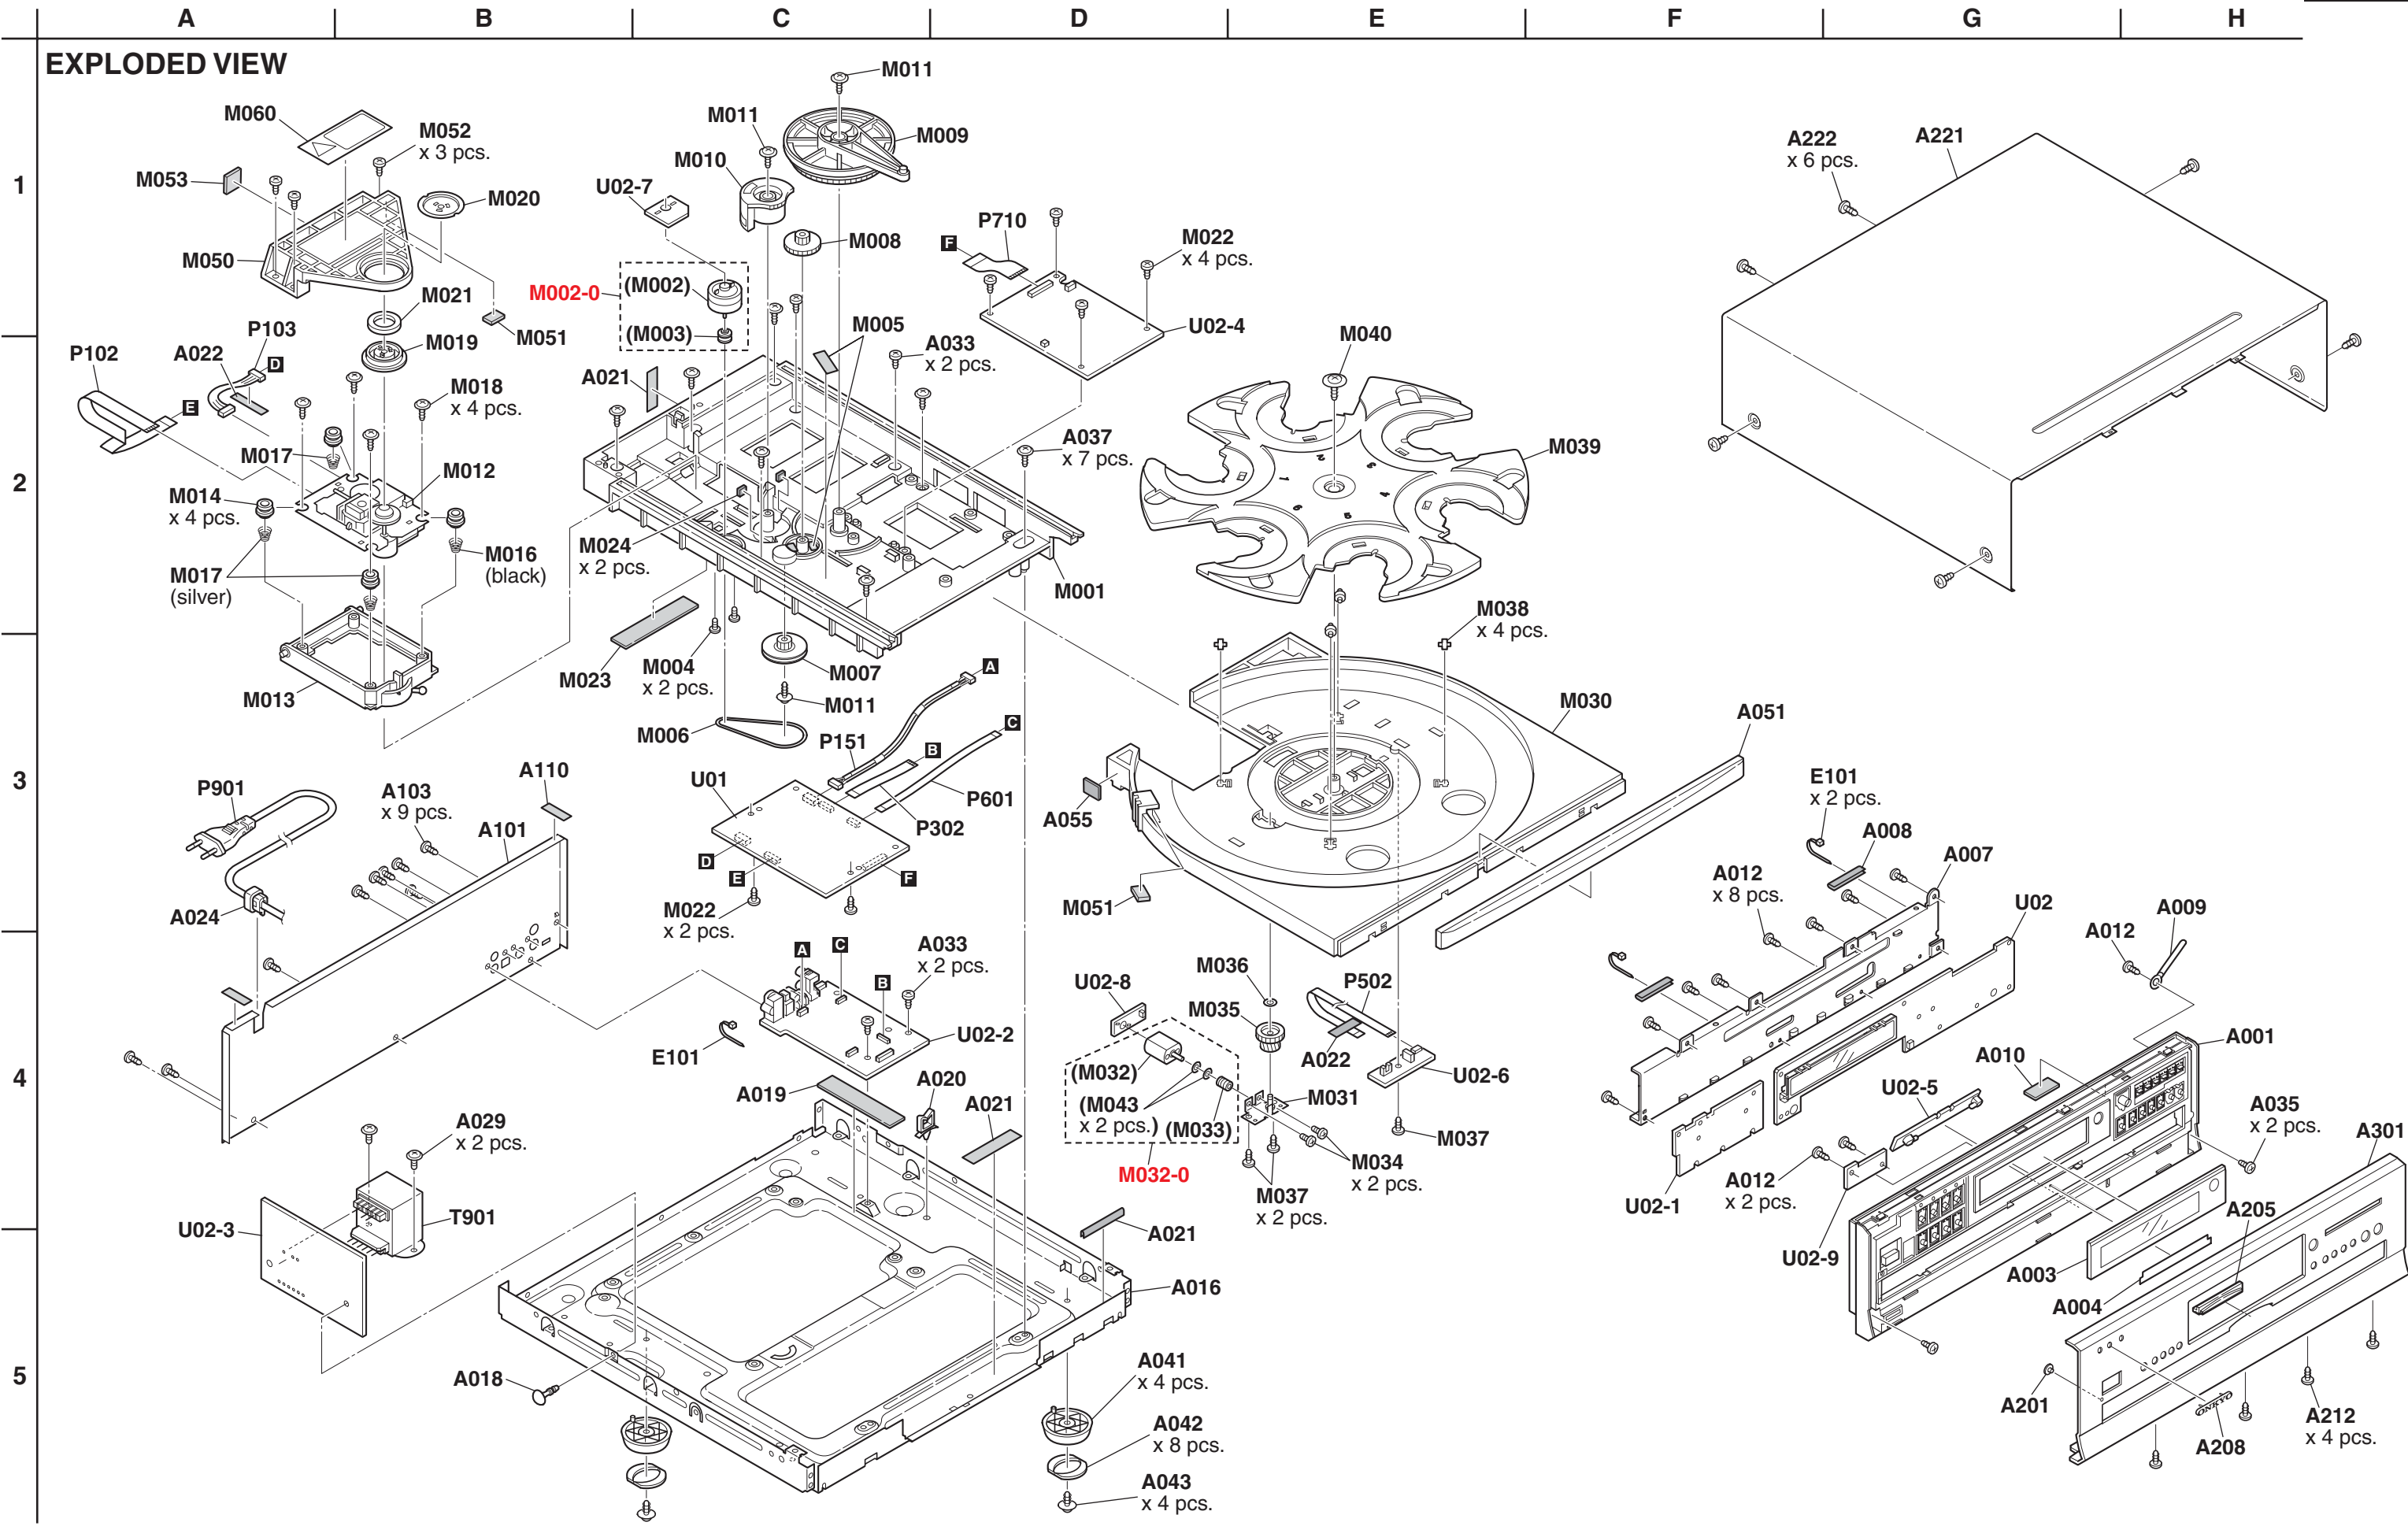

SCHEMATIC DIAGRAMS-2

AUDIO SECTION

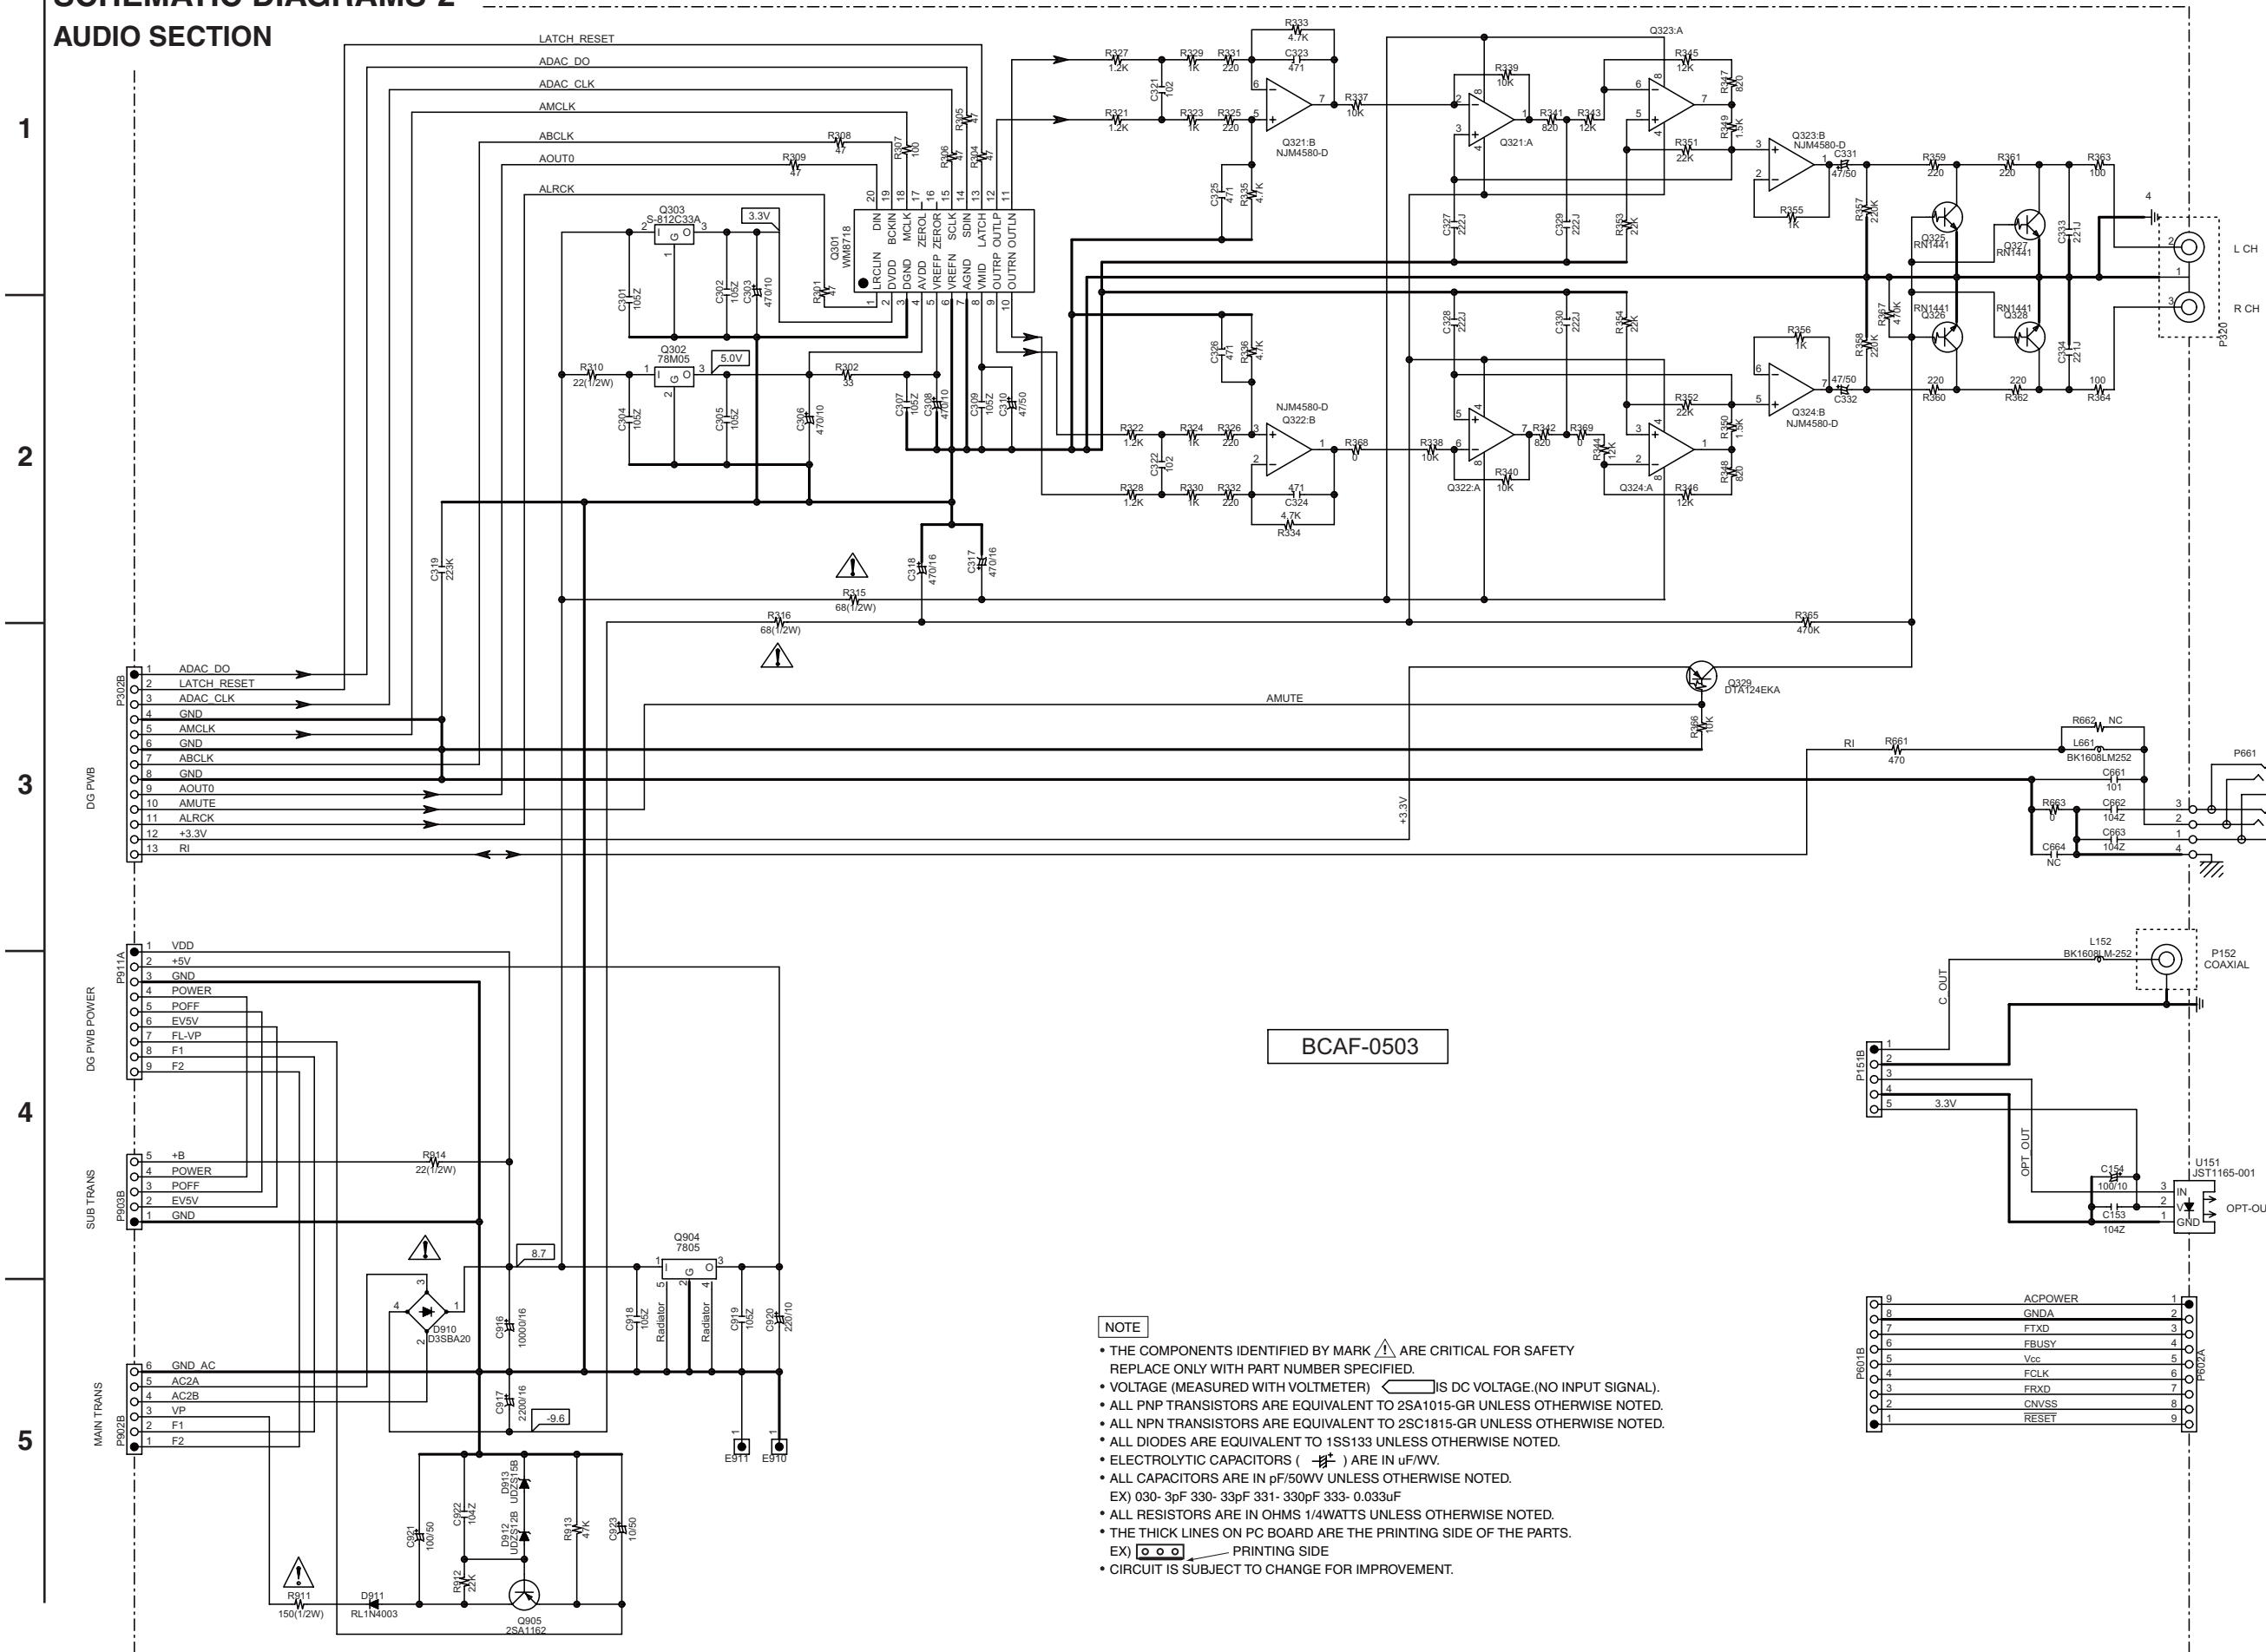

CAUTION






FOR CONTINUED PROTECTION
AGAINST FIRE HAZARD, REPLACE
ONLY WITH FUSE OF SAME TYPE
AND RATING INDICATED.

ATTENTION

AFIN D'ASSURER UNE PROTECTION
PERMANENTE CONTRE LES RISQUES
D'INCENDIE, REMPLACER UNIQUEMENT
PAR UN FUSIBLE DE MEME TYPE
ET CALIBRATION COMME INDIQUE.

THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE WITH SAME TYPE FUSE. FOR FUSE RATING REFER TO THE MARKING ADJACENT TO THE SYMBOL.

CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST
E LENT.POUR UNE PROTECTION PERMANENTE,N'UTILISER
QUE DES FUSIBLES DE MEME TYPE. CE DARNIER EST
INDIQUE LA QU LE PRESENT SYMBOL EST APPOSE.

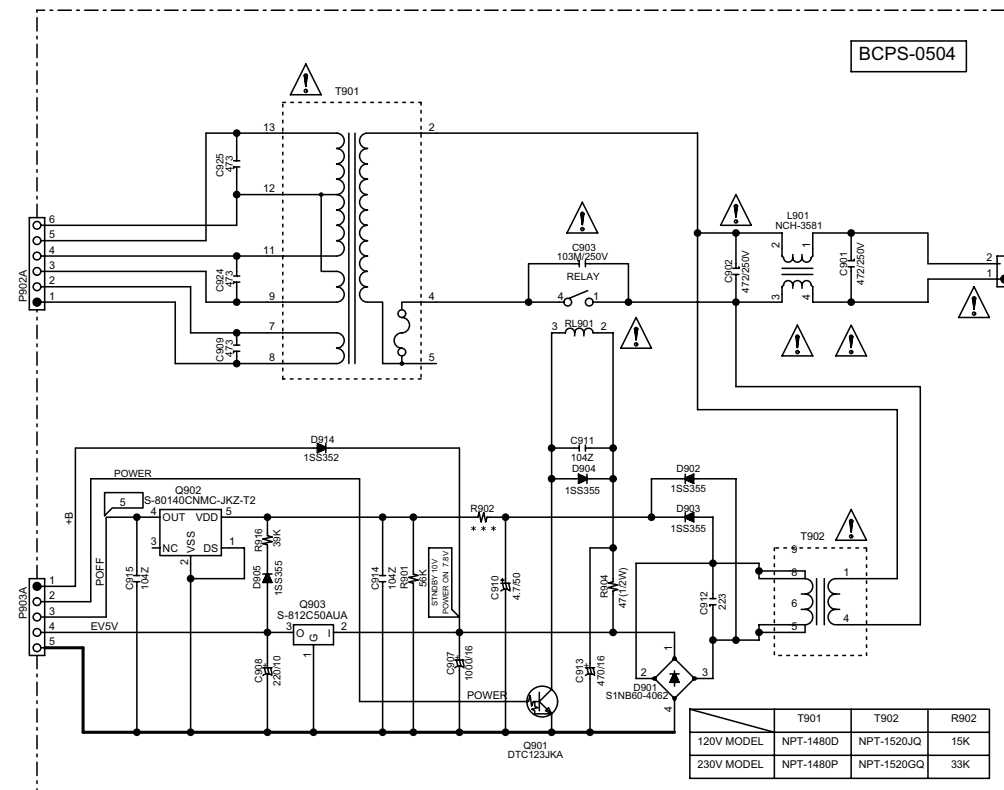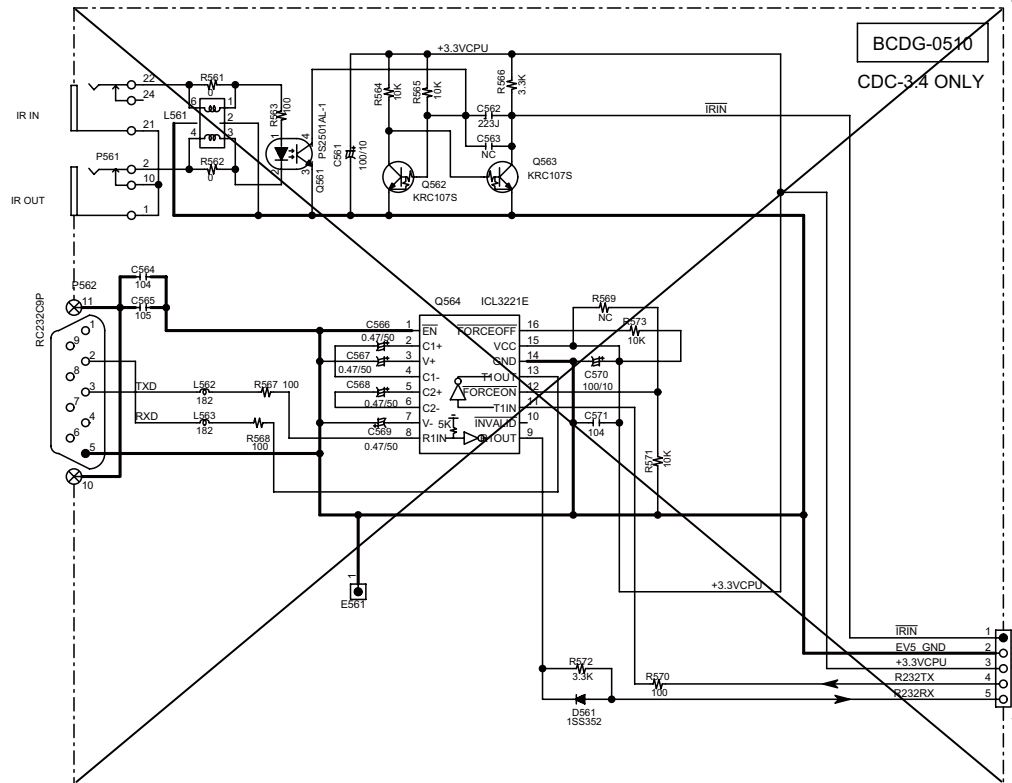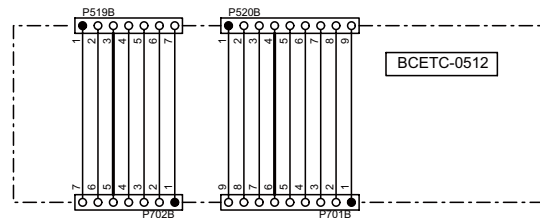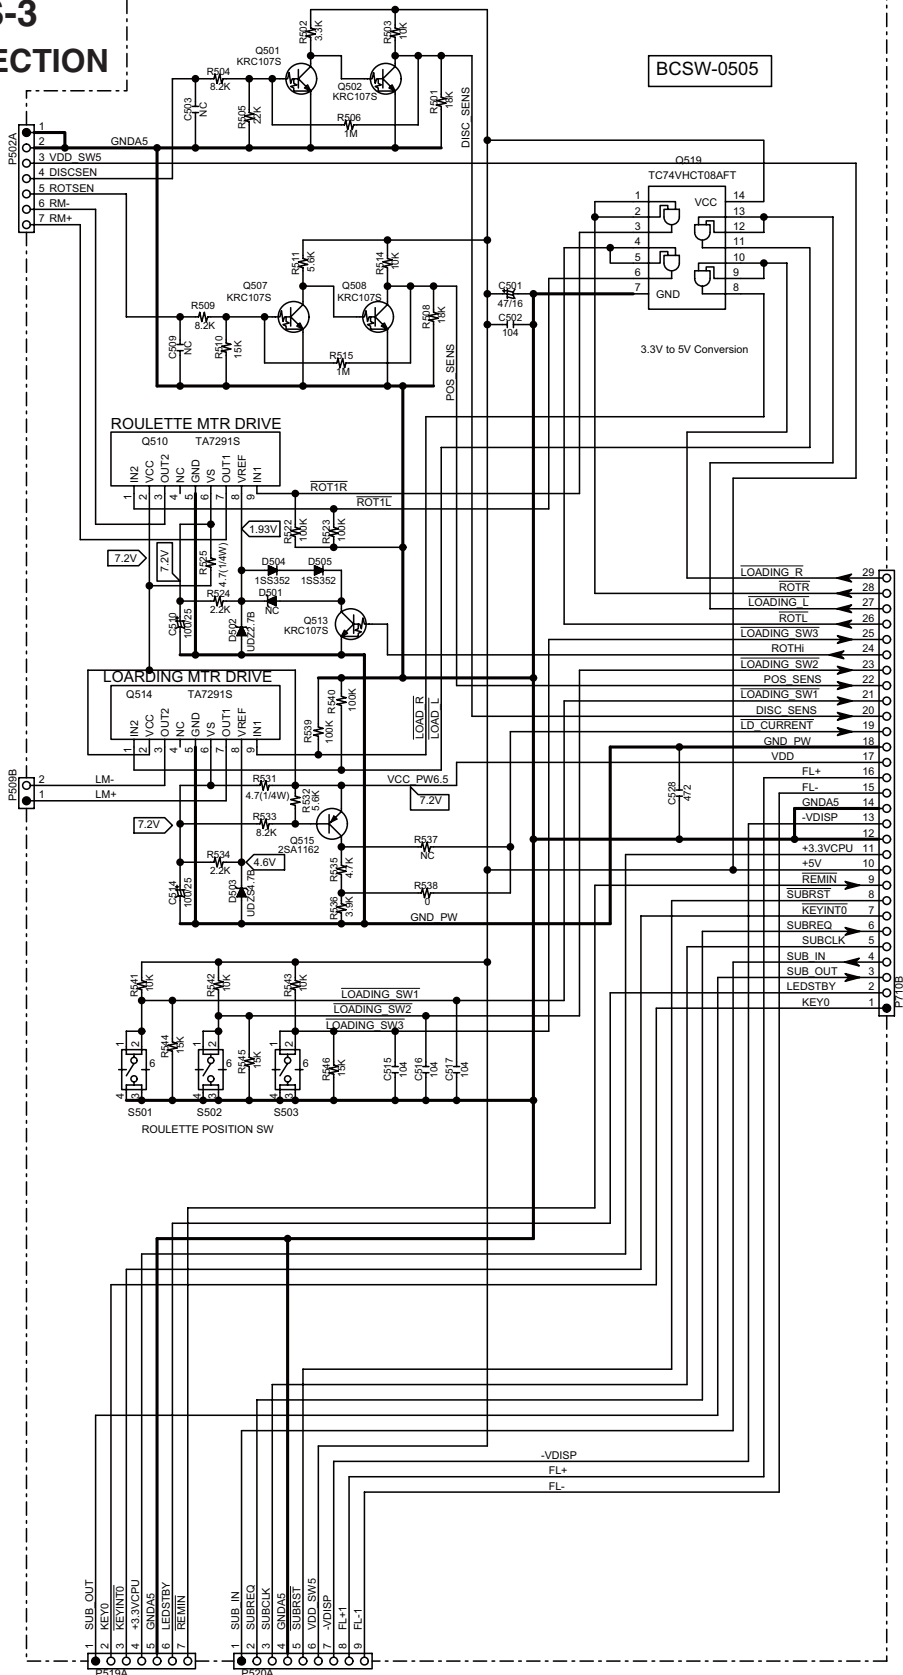

NOTE

- THE COMPONENTS IDENTIFIED BY MARK  ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLT METER)  IS DC VOLTAGE. (NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS () ARE IN $\mu\text{F}/\text{VW}$.
- ALL CAPACITORS ARE IN $\text{pF}/50\text{VW}$ UNLESS OTHERWISE NOTED.
EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033 μF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
EX)  PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

CAUTION



FOR CONTINUED PROTECTION
AGAINST FIRE HAZARD, REPLACE
ONLY WITH FUSE OF SAME TYPE
AND RATING INDICATED.

ATTENTION

AFIN D'ASSURER UNE PROTECTION
PERMANENTE CONTRE LES RISQUES
D'INCENDIE, REMPLACER UNIQUEMENT
PAR UN FUSIBLE DE MEME TYPE
ET CALIBRATION COMME INDIQUE.

THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE WITH SAME TYPE FUSE. FOR FUSE RATING REFER TO THE MARKING ADJACENT TO THE SYMBOL.

CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST
E LENT.POUR UNE PROTECTION PERMANENTE,N'UTILISER
QUE DES FUSIBLES DE MEME TYPE. CE DARNIER EST
INDIQUE LA QU LE PRESENT SYMBOL EST APPOSE.



	T901	T902	R902
120V MODEL	NPT-1480D	NPT-1520JQ	15K
230V MODEL	NPT-1480P	NPT-1520GQ	33K

SCHEMATIC DIAGRAMS-4
DISPLAY SECTION

1

2


3

4

5

TOP/7.9
RIGHT ANG. 706

TOP/7.9
RIGHT ANG. 706

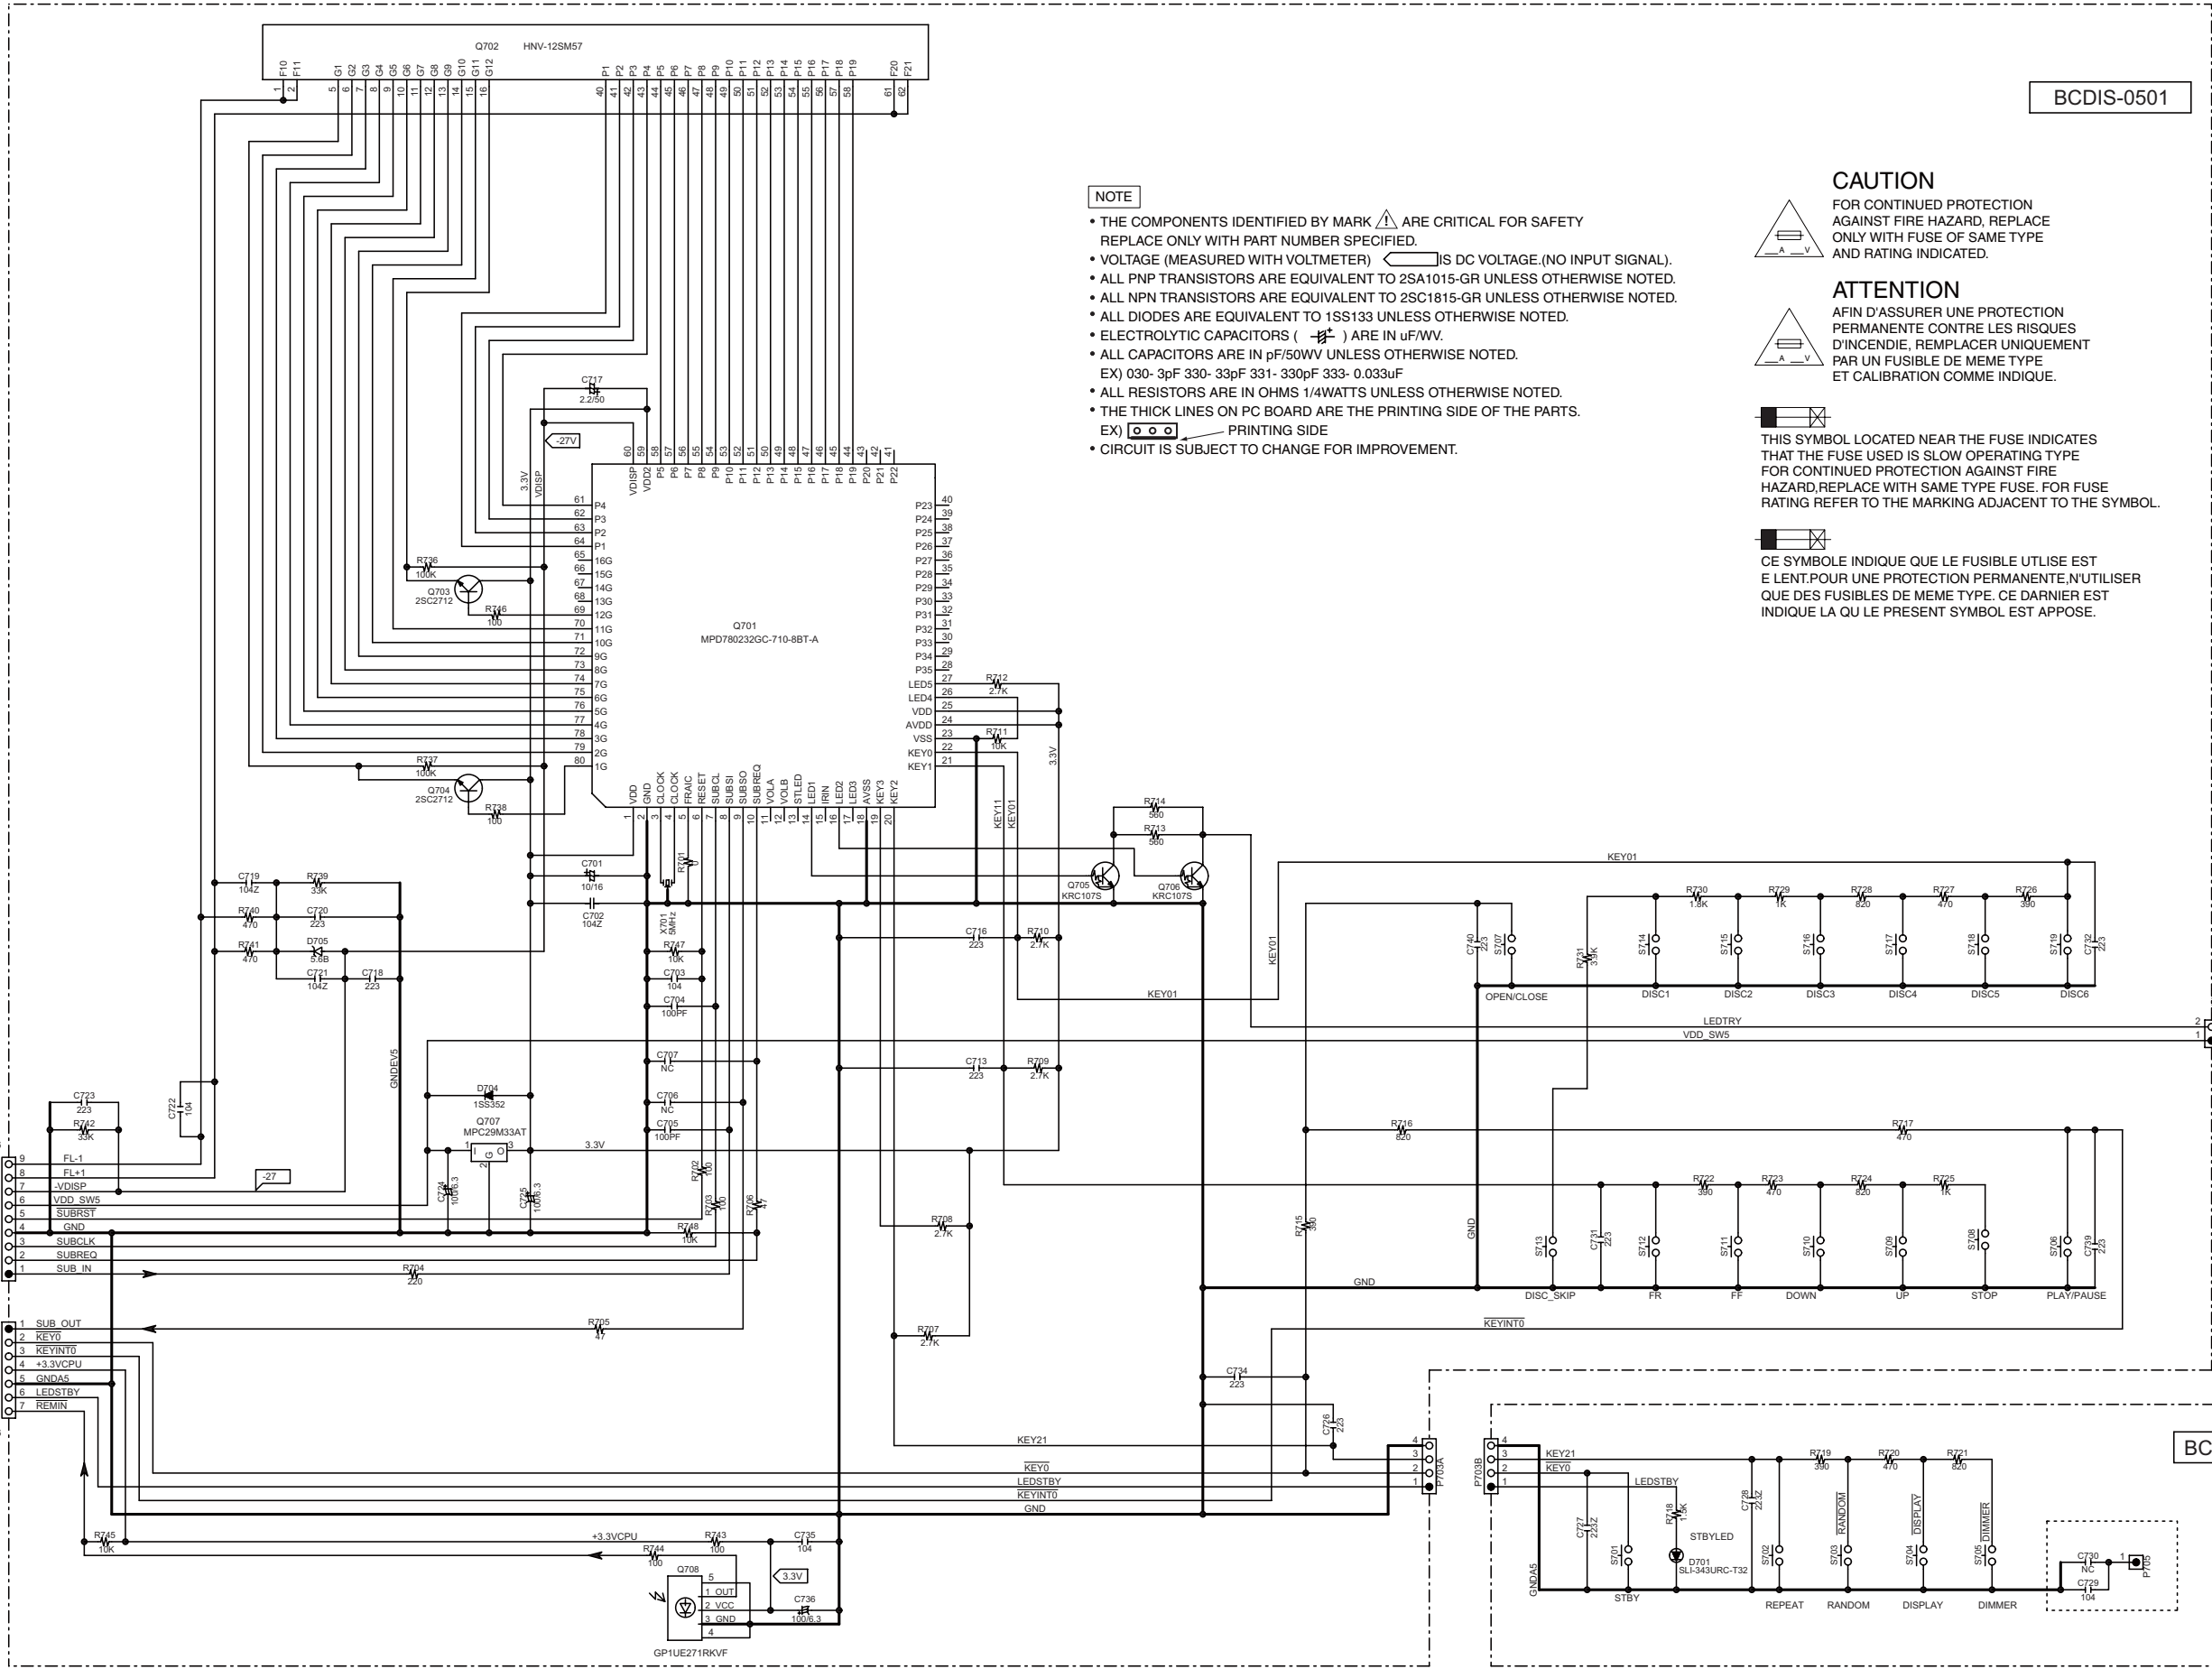

NOTE

- THE COMPONENTS IDENTIFIED BY MARK  ARE CRITICAL FOR SAFETY. REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER)  IS DC VOLTAGE (NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS () ARE IN μ F/VV.
- ALL CAPACITORS ARE IN pF/50VV UNLESS OTHERWISE NOTED.
EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033 μ F
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
EX)  PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

CAUTION

FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.



ATTENTION

AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE, REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE.




THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE WITH SAME TYPE FUSE. FOR FUSE RATING REFER TO THE MARKING ADJACENT TO THE SYMBOL.




CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST E LENT. POUR UNE PROTECTION PERMANENTE, UTILISER QUE DES FUSIBLES DE MEME TYPE. CE DARNIER EST INDIQUE LA QU LE PRESENT SYMBOLE EST APPOSE.

BCLED-0506

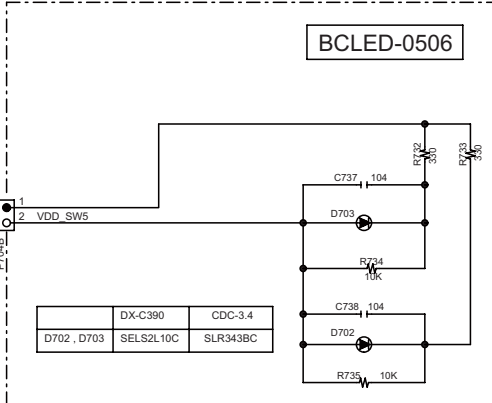

BCSW-0502

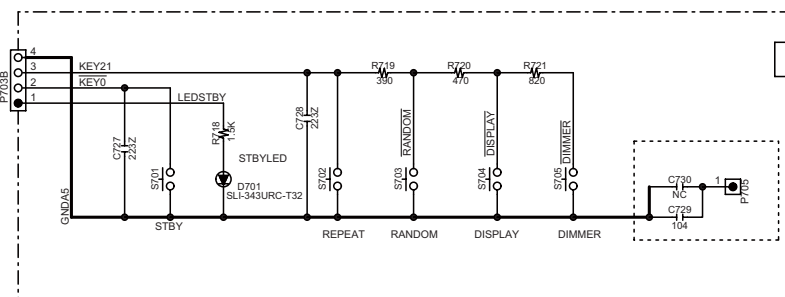

DX-C390(M2)**<Note>**

Parts marked by 'NSP' are generally unavailable because they are not in our Master Spare Parts List.

**NOTE : THE COMPONENTS IDENTIFIED BY THE MARK
! ARE CRITICAL FOR RISK OF FIRE AND
ELECTRIC SHOCK. REPLACE ONLY WITH PART
NUMBER SPECIFIED.**

<Notes>

(B) : Black model

(S) : Silver model

<MDD> : USA model

<MPP> : European model

<MPA> : Australian model

EXPLODED VIEW PARTS LIST

EXPLODED	REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
EXPLODED	[CHASSIS SCREW]					
EXPLODED	A001	F BRACKET	---	1	27111335C	N
EXPLODED	A001	F BRACKET	DX-C390M2(S)	1	27111583	N <S>
EXPLODED	A003	CLEAR PLT	---	1	28192296	N
EXPLODED	A003	CLEAR PLT	---	1	28192084	<S>
EXPLODED	A004	SHEET	(F)	1	29095947-1	
EXPLODED	A007	BRACKET	(F)	1	27130911A	
EXPLODED	A008	TAPE	TAPE(CLOTH-8U)	1	29110082	
EXPLODED	A009	CLIP	CS-1U	1	27255004	
EXPLODED	A010	CUSHION	---	1	28141597-1	
EXPLODED	A012	SCREW	3TTB+8B(3CM)SR	11	801637	
EXPLODED	A016	CHASSIS	---	1	27100437B	
EXPLODED	A018	HOLDER	KGLS-10RT	1	27190428A	
EXPLODED	A019	CUSHION	105x25x0.5	1	28141551-1	
EXPLODED	A020	WS CLAMP	CLAMP WS-2W	1	27300243	
EXPLODED	A021	TAPE	TAPE(CLOTH-16U)	1	29110083	
EXPLODED	A022	TAPE	TAPE(CLOTH-8U)	1	29110082	
EXPLODED	A024	BUSHING	S-RELIEF #2271	1	27300750	
EXPLODED	A029	SCREW	4TTC+6C(3BC)	2	830440069GR	
EXPLODED	A033	SCREW	3TTB+8B(3CM)SR	4	801637	
EXPLODED	A035	SCREW	3TTB+8B(3CM)SR	2	801637	
EXPLODED	A037	SCREW	3TTW+8B(3BC)	7	831430088GR	
EXPLODED	A041	LEG	LEG	4	27175316C	
EXPLODED	A042	CUSHION	---	8	28141494	

EXPLODED	A043	SCREW	3TTW+8B(3BC)	4	831430088GR	
EXPLODED	A051	DOOR	(TRAY)	1	28148537C	
EXPLODED	A051	DOOR	TRAY(S)	1	28148787	N <S>
EXPLODED	A055	SHEET	(BUTYL)	1	29095953-1	
EXPLODED	A101	REAR PANEL	DX-C390M2 MDD	1	27124123A	N <MDD>
EXPLODED	A101	REAR PANEL	DX-C390M2 PP/PA	1	27124124A	N <MPP / MPA>
EXPLODED	A103	SCREW	3TTB+8B(3BC)	9	838430088GR	
EXPLODED	A110	TAPE	TAPE(CLOTH-8U)	1	29110082	
EXPLODED	[CABINET]					
EXPLODED	A201	FACET	(S)	1	28198972	
EXPLODED	A205	FACET	(LIGHT)	1	28198971A	
EXPLODED	A208	BADGE	BADGE	1	28135244	
EXPLODED	A208	BADGE	---	1	28135298	<S>
EXPLODED	A212	SCREW	3TTB+8B(3BC)	4	838430088GR	
EXPLODED	A221	COVER	DX-C390M2(B) (Bent)	1	28210056	
EXPLODED	A221	COVER	DX-C390M2(S) (Bent)	1	28210057	N <S>
EXPLODED	A221	COVER	DX-C390M2(B) (Not Bent)	1	28210056Z	
EXPLODED	A221	COVER	DX-C390M2(S) (Not Bent)	1	28210057Z	N <S>
EXPLODED	A222	SCREW	3TTB+8B(3BC)	6	838430088GR	
EXPLODED	A222	SCREW	3TTB+8B(3CM)SR	6	801637	<S>
EXPLODED	A301	F PANEL	---	1	27212536A	
EXPLODED	A301	F PANEL	DX-C390M2(S)	1	27213366	N <S>
EXPLODED	[TRANS COIL]					

EXPLODED	T901	P TRANS	NPT-1480D	1	2301712GR	! <MDD>
EXPLODED	T901	P TRANS	NPT-1480P	1	2301713GR	! <MPP / MPA>
EXPLODED	[SW TRM]					
EXPLODED	E101	WIRE TIE	BSK-1	3	260208	
EXPLODED	P102	FFC	NCFC2-162512	1	2042162512	
EXPLODED	P103	SOCKET AS	NSAS-12P0960	1	20022391210UL	
EXPLODED	P151	SOCKET AS	NSAS-10P1838	1	2009991183UL	
EXPLODED	P302	FFC	NCFC5-131022	1	2045131022	
EXPLODED	P502	FFC	NCFC5-073012	1	2045073012	N
EXPLODED	P601	FFC	NCFC5-092012	1	2045092012	
EXPLODED	P710	FFC	NCFC5-290522	1	2045290522	
EXPLODED	P901	AC CORD	AS-CEE	1	253336VOL	! <MPP / MPP>
EXPLODED	P901	AC CORD	AS-UC-2	1	253368BLTK	! <MDD>
EXPLODED	P901 or	AC CORD	AS-UC-2	(1)	253368AYUN	! <MDD>
EXPLODED	[MECHANISM]					
EXPLODED	M001	RAIL	---	1	24840157C	
EXPLODED	M002-0	MOTOR ASS'Y	MOTOR + PULLEY	1	1H498602A	
EXPLODED	(M002)	MOTOR	CCM07B-045R1-1A	(1)	24804046A	
EXPLODED	(M003)	PULLEY	---	(1)	24810084-1	
EXPLODED	M004	SCREW	2.6P+4FN	2	82112604	
EXPLODED	M005	TAPE	TAPE(CLOTH-8U)	1	29110082	
EXPLODED	M006	RBR BELT	DVCP701	1	24816039	
EXPLODED	M007	GEAR	(PULLEY)	1	24810085	
EXPLODED	M008	GEAR	(A)	1	24810086	
EXPLODED	M009	GEAR	(MAIN)	1	24810087B	
EXPLODED	M010	GEAR	(CAM)	1	24810088	
EXPLODED	M011	SCREW	3*8*w11	3	801633	
EXPLODED	M012	MECHA UNIT	DA11VFGP	1	24800060	
EXPLODED	M013	CHASSIS	(SUB)	1	24802051B	
EXPLODED	M014	INSULATOR	(CDC-A)	4	24818058	
EXPLODED	M016	SPRING	(CDC-A)	1	24820059A	
EXPLODED	M017	SPRING	(CDC-B)	3	24820060A	
EXPLODED	M018	SCREW	3*8*w11	4	801633	
EXPLODED	M019	CAP	(SAN)	1	24824033A	
EXPLODED	M020	YOKE	(CHB)	1	24830004	
EXPLODED	M021	MAGNET	(CHB)	1	24832006	
EXPLODED	M022	SCREW	3TTB+8B(3CM)SR	6	801637	

EXPLODED	M023	CUSHION	105x25x0.5	1	28141551-1	
EXPLODED	M024	CUSHION	8x8x1.5	2	28141556-1	
EXPLODED	M030	TRAY	---	1	24840158I	
EXPLODED	M031	BRACKET AS	(M)	1	24840160B	
EXPLODED	M032-0	MOTOR ASS'Y	MOTOR + GEAR + WASHERx2	1	1H498603A	
EXPLODED	(M032)	MOTOR	PWN10EA02D	(1)	24804047	
EXPLODED	(M033)	GEAR	(WORM)	(1)	24810090	
EXPLODED	(M043)	WASHER	0.5t*2.1*6	(2)	24834048	
EXPLODED	M034	SCREW	2P+3FN(3CM)	2	82112003GR	
EXPLODED	M035	GEAR	(WHEEL)	1	24810089	
EXPLODED	M036	WASHER	(B)	1	24834040	
EXPLODED	M037	SCREW	3TTB+8B(3CM)SR	3	801637	
EXPLODED	M038	ROLLER	DVCP701	4	24840162	
EXPLODED	M039	ROULETTE	---	1	24840159C	
EXPLODED	M040	SCREW	3*8*w11	1	801633	
EXPLODED	M050	ARM	---	1	24814025B	
EXPLODED	M051	CUSHION	---	2	28141561-1	
EXPLODED	M052	SCREW	3TTB+8B(3BC)	3	838430088GR	
EXPLODED	M053	SHEET	(BUTYL)t0.75x20x20	1	29095952-1	
EXPLODED	M060	LABEL	(DVD3)	1	29364728	
EXPLODED	[TUNER UNIT]					
EXPLODED	U01	CD SERVO PC board ass'y	BADG-0500-1A*	1	1H559500-1A	N <MDD>
EXPLODED	U01	CD SERVO PC board ass'y	BADG-0500-1B*	1	1H559500-1B	N <MPP / MPA>

EXPLODED	U02	DISPLAY PC board ass'y	BADIS-0501-1A*	1	1H559501-1A	N <MDD>
EXPLODED	U02	DISPLAY PC board ass'y	BADIS-0501-1B*	1	1H559501-1B	N <MPP / MPA>
EXPLODED	U02-1	SWITCH PC board ass'y	BASW-0502-1A	1	1H559502-1A	N <MDD>
EXPLODED	U02-1	SWITCH PC board ass'y	BASW-0502-1B	1	1H559502-1B	N <MPP / MPA>
EXPLODED	U02-2	AUDIO PC board ass'y	BAAF-0503-1A	1	1H559503-1A	N <MDD>
EXPLODED	U02-2	AUDIO PC board ass'y	BAAF-0503-1B	1	1H559503-1B	N <MPP / MPA>
EXPLODED	U02-3	POWER TRANS. PC board ass'y	BAPS-0504-1A	1	1H559504-1A	N <MDD>
EXPLODED	U02-3	POWER TRANS. PC board ass'y	BAPS-0504-1B	1	1H559504-1B	N <MPP / MPA>
EXPLODED	U02-4	MOTOR DRIVE PC board ass'y	BASW-0505-1A	1	1H559505-1A	N <MDD>
EXPLODED	U02-4	MOTOR DRIVE PC board ass'y	BASW-0505-1B	1	1H559505-1B	N <MPP / MPA>
EXPLODED	U02-5	LED PC board ass'y	BALED-0506-1A	1	1H559506-1A	N <MDD>
EXPLODED	U02-5	LED PC board ass'y	BALED-0506-1B	1	1H559506-1B	N <MPP / MPA>
EXPLODED	U02-6	SENSOR PC board ass'y	BAETC-0507-1A	1	1H559507-1A	N <MDD>
EXPLODED	U02-6	SENSOR PC board ass'y	BAETC-0507-1B	1	1H559507-1B	N <MPP / MPA>
EXPLODED	U02-7	LO-MOTOR PC board ass'y	BAETC-0508-1A	1	---	N <MDD>
EXPLODED	U02-7	LO-MOTOR PC board ass'y	BAETC-0508-1B	1	---	N <MPP / MPA>
EXPLODED	U02-8	RO-MOTOR PC board ass'y	BAETC-0509-1A	1	---	N <MDD>
EXPLODED	U02-8	RO-MOTOR PC board ass'y	BAETC-0509-1B	1	---	N <MPP / MPA>
EXPLODED	U02-9	TERMINAL PC board ass'y	BAETC-0512-1A	1	1H559512-1A	N <MDD>
EXPLODED	U02-9	TERMINAL PC board ass'y	BAETC-0512-1B	1	1H559512-1B	N <MPP / MPA>

DX-C390(M2)

PRINTED CIRCUIT BOARD PARTS LIST

PWB1	U01	CD SERVO PC board ass'y (BADG-0500-1A / -1B)				
PWB1	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PWB1	[SEMI CONDUCTOR]					
PWB1	D251	C-DIODE	1SS355	1	223269R2	
PWB1	D251 or	C-DIODE	1SS352	(1)	223234R2	
PWB1	D251 or	C-DIODE	MA2J111	(1)	223279R2	
PWB1	D251 or	C-DIODE	KDS4148U	(1)	223283R2	
PWB1	D601	C-DIODE	1SS352	1	223234R2	
PWB1	D601 or	C-DIODE	1SS355	(1)	223269R2	
PWB1	D601 or	C-DIODE	MA2J111	(1)	223279R2	
PWB1	D601 or	C-DIODE	KDS4148U	(1)	223283R2	
PWB1	D602	ZENER D	UDZ55.1B	1	224550510R2	
PWB1	Q101	IC	LA6565	1	22242339R2	

PWB1	Q151	IC	TC74VHCU04FT	1	22274004HR2	
PWB1	Q151 or	IC	TC74VHCU04FT	(1)	22274004HR2TO	
PWB1	Q201	IC	TC94A92FG	1	22242658R3	N
PWB1	Q202	IC	MPC29M33AT-E1-A	1	22278033EAR2NE	
PWB1	Q203	IC	MPD120N15T1B-E1-AZ	1	22278002NR2	N
PWB1	Q251	TR	2SA1162-GR	1	2214375R2	
PWB1	Q251 or	TR	2SA1162-Y(TE85R_F)	(1)	2214374R2	
PWB1	Q261	IC	TC74VHCU04FT	1	22274004HR2	
PWB1	Q261 or	IC	TC74VHCU04FT	(1)	22274004HR2TO	
PWB1	Q601	IC	R5F364AKNFA	1	222W0111R3	N
PWB1	Q602	IC	S-24CS16A0I-J8V1G	1	22242326R2	
PWB1	Q602 or	IC	R1EX24016ASAS0A	(1)	22242675R2	
PWB1	Q603	TR	DTA114YKA	1	2216480R2	
PWB1	Q604	TR	DTC114EKA	1	2216250R2	
PWB1	Q605	IC	NJU7202U33	1	22278033CR2JR	
PWB1	Q607	IC	S-80127CNMC-JKM-T2	1	22241642R2	
PWB1	[TRANS COIL]					
PWB1	L101	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
PWB1	L151	EMIFIL	BK1608LM252-T	1	230956R2	
PWB1	L201	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
PWB1	L202	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
PWB1	L203	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
PWB1	L251	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	

PWB1	L261	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
PWB1	L262	EMIFIL	BK1608LM252-T	1	230956R2	
PWB1	L601	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
PWB1	T151	MPX COIL	NSRF-2113	1	232202	
PWB1	X261	CRYSTAL	FCX-04C16.9344MHz	1	3010496R2	N
PWB1	X601	CERA LOCK	CSTCR6M0055-R0	1	3010397R2	
PWB1	[CAPACITOR]					
PWB1	C101	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB1	C103	CHIP ELECT C	CEWX6.3V-330M	1	398123317R2	
PWB1	C105	C-CERA C	CK725B1H-332K1	1	332103325R1	
PWB1	C106	C-CERA C	CK725B1H-332K1	1	332103325R1	
PWB1	C107	C-CERA C	CK725B1H-473K1	1	332104735R1	
PWB1	C108	C-CERA C	CK725B1H-473K1	1	332104735R1	
PWB1	C151	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C152	CHIP ELECT C	CEWT6.3V-100M	1	395721017R2	
PWB1	C156	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB1	C157	C-CERA C	CK725F1C-224Z1	1	332172240R1	
PWB1	C201	CHIP ELECT C	CEWX6.3V-330M	1	398123317R2	
PWB1	C202	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB1	C203	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB1	C204	CHIP ELECT C	CEWT6.3V-100M	1	395721017R2	
PWB1	C205	CHIP ELECT C	CEWX6.3V-330M	1	398123317R2	
PWB1	C206	CHIP ELECT C	CEWT6.3V-100M	1	395721017R2	
PWB1	C207	C-FILM C	ECHU50V-222J	1	373022224R2	
PWB1	C208	C-FILM C	ECHU16V-104J	1	373041044R2	
PWB1	C209	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C210	C-FILM C	ECHU16V-103J	1	373041034R2	
PWB1	C211	C-CERA C	CK725B1H-472K1	1	332104725R1	
PWB1	C212	C-CERA C	CK725B1C-104K1	1	332121045R1	
PWB1	C213	C-FILM C	ECHU16V-153J	1	373041534R2	
PWB1	C214	C-CERA C	CK725B1C-104K1	1	332121045R1	
PWB1	C215	CHIP ELECT C	CEWT6.3V-220M	1	395722217R2	N
PWB1	C216	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C217	C-FILM C	ECHU16V-333J	1	373043334R2	
PWB1	C218	C-FILM C	ECHU16V-562J	1	373045624R2	
PWB1	C219	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C220	C-CERA C	CC725CH1H-471J1	1	342104714R1	

PWB1	C221	C-CERA C	CK725B1H-473K1	1	332104735R1	
PWB1	C222	C-CERA C	CK725B1H-473K1	1	332104735R1	
PWB1	C223	C-CERA C	CK725B1H-473K1	1	332104735R1	
PWB1	C224	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C225	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C226	CHIP ELECT C	CEWT6.3V-220M	1	395722217R2	N
PWB1	C227	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C228	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C229	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB1	C230	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C231	C-FILM C	ECHU16V-153J	1	373041534R2	
PWB1	C232	C-CERA C	CC725CH1H-470J1	1	342104704R1	
PWB1	C233	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C234	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PWB1	C235	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C236	C-FILM C	ECHU16V-103J	1	373041034R2	
PWB1	C240	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C241	CHIP ELECT C	CEWT6.3V-220M	1	395722217R2	N
PWB1	C242	CHIP ELECT C	CEWT6.3V-220M	1	395722217R2	N
PWB1	C243	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C244	CHIP ELECT C	CEWX6.3V-330M	1	398123317R2	
PWB1	C245	CHIP ELECT C	CEWT6.3V-220M	1	395722217R2	N
PWB1	C251	CHIP ELECT C	CEWT6.3V-100M	1	395721017R2	

PWB1	C261	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C262	CHIP ELECT C	CEWT6.3V-220M	1	395722217R2	N
PWB1	C263	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C264	C-CERA C	CK725B1C-104K1	1	332121045R1	
PWB1	C265	C-CERA C	CC725CH1H-120J1	1	342101204R1	
PWB1	C266	C-CERA C	CC725CH1H-120J1	1	342101204R1	
PWB1	C601	CHIP ELECT C	CEWT6.3V-220M	1	395722217R2	N
PWB1	C602	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C603	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C604	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C605	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C606	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C607	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C608	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C609	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB1	C610	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB1	C611	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C612	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB1	C613	CHIP ELECT C	CEWT6.3V-100M	1	395721017R2	
PWB1	[RESISTOR]					
PWB1	R101	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PWB1	R103	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R104	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R105	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PWB1	R106	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PWB1	R107	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PWB1	R108	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PWB1	R109	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PWB1	R110	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PWB1	R111	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R112	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R113	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PWB1	R114	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PWB1	R115	C-CARBON R	RN72K1J-153JE	1	435031534R1	
PWB1	R116	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PWB1	R117	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PWB1	R130	C-CARBON R	RN72K1J-000JE	1	435030004R1	

PWB1	R131	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R151	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PWB1	R152	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PWB1	R154	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R155	C-CARBON R	RN72K1J-151JE	1	435031514R1	
PWB1	R156	C-CARBON R	RN72K1J-151JE	1	435031514R1	
PWB1	R201	C-CARBON R	RN72K1J-221FE	1	435032212R1	
PWB1	R202	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R203	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R204	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R205	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R206	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R207	C-CARBON R	RN72K1J-000JE	1	435030004R1	
PWB1	R208	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R209	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R210	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R211	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R212	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R213	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R214	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R215	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R216	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R217	C-CARBON R	RN72K1J-470JE	1	435034704R1	

PWB1	R218	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB1	R219	C-CARBON R	RN72K1J-100JE	1	435031004R1
PWB1	R220	C-CARBON R	RN72K1J-105JE	1	435031054R1
PWB1	R229	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB1	R230	C-CARBON R	RN72K1J-223JE	1	435032234R1
PWB1	R231	C-CARBON R	RN72K1J-223JE	1	435032234R1
PWB1	R232	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB1	R233	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB1	R234	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB1	R235	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB1	R236	C-CARBON R	RN72K1J-103JE	1	435031034R1
PWB1	R238	C-CARBON R	RN72K1J-223JE	1	435032234R1
PWB1	R240	C-CARBON R	RN72K1J-223JE	1	435032234R1
PWB1	R241	C-CARBON R	RN72K1J-334JE	1	435033344R1
PWB1	R242	C-CARBON R	RN72K1J-153JE	1	435031534R1
PWB1	R243	C-CARBON R	RN72K1J-473JE	1	435034734R1
PWB1	R251	C-CARBON R	RN72K1J-330JE	1	435033304R1
PWB1	R252	C-CARBON R	RN72K1J-330JE	1	435033304R1
PWB1	R261	C-CARBON R	RN72K1J-224JE	1	435032244R1
PWB1	R262	C-CARBON R	RN72K1J-224JE	1	435032244R1
PWB1	R263	C-CARBON R	RN72K1J-471JE	1	435034714R1
PWB1	R264	C-CARBON R	RN72K1J-821JE	1	435038214R1
PWB1	R265	C-CARBON R	RN72K1J-272JE	1	435032724R1
PWB1	R266	C-CARBON R	RN72K1J-105JE	1	435031054R1
PWB1	R267	C-CARBON R	RN72K1J-221JE	1	435032214R1
PWB1	R268	C-CARBON R	RN72K1J-471JE	1	435034714R1
PWB1	R269	C-CARBON R	RN72K1J-471JE	1	435034714R1
PWB1	R601	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB1	R602	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB1	R603	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB1	R604	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB1	R605	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB1	R606	C-CARBON R	RN72K1J-154JE	1	435031544R1
PWB1	R607	C-CARBON R	RN72K1J-103JE	1	435031034R1
PWB1	R608	C-CARBON R	RN72K1J-101JE	1	435031014R1
PWB1	R609	C-CARBON R	RN72K1J-101JE	1	435031014R1
PWB1	R610	C-CARBON R	RN72K1J-101JE	1	435031014R1

PWB1	R611	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PWB1	R612	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PWB1	R613	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PWB1	R614	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PWB1	R615	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R616	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R617	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R618	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R619	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PWB1	R620	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R621	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PWB1	R622	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R623	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R624	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R625	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R626	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R627	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R628	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R629	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PWB1	R630	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PWB1	R631	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R632	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R633	C-CARBON R	RN72K1J-470JE	1	435034704R1	

PWB1	R634	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R635	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R636	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R637	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R638	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R639	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R640	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R641	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R642	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R643	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R645	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R646	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R647	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PWB1	R648	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PWB1	R649	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R650	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PWB1	R651	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PWB1	R652	C-CARBON R	RN72K1J-273JE	1	435032734R1	<MPP / MPA>
PWB1	R653	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PWB1	R654	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PWB1	R655	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PWB1	R656	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB1	R657	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R658	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R659	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB1	R664	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PWB1	R665	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PWB1	R666	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PWB1	R667	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PWB1	R668	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PWB1	R669	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PWB1	[SW TRM]					
PWB1	P102B	SOCKET	16FMN-SMT-A-TF	1	25052833R2	
PWB1	P103	PLUG	NPLG-6P932	1	25055979R2	
PWB1	P151A	PLUG	NPLG-5P931	1	25055978R2	
PWB1	P201	PLUG	NPLG-2P645	1	25055689	
PWB1	P302A	SOCKET	13FMN-SMT-A-TF	1	25052830R2	

PWB1	P601A	SOCKET	09FMN-SMT-A-TF	1	25052826R2	
PWB1	P710A	SOCKET	29FMN-SMT-A-TF	1	25052846R2	N
PWB1	P911B	SOCKET AS	NSAS-18P1766	1	2002E391815AUL	
PWB2	U02	DISPLAY PC board ass'y (BADIS-0501-1A / -1B)				
PWB2	U02-1	SWITCH PC board ass'y (BASW-0502-1A / -1B)				
PWB2	U02-2	AUDIO PC board ass'y (BAAF-0503-1A / -1B)				
PWB2	U02-3	POWER TRANS. PC board ass'y (BAPS-0504-1A / -1B)				
PWB2	U02-4	MOTOR DRIVE PC board ass'y (BASW-0505-1A / -1B)				
PWB2	U02-5	LED PC board ass'y (BALED-0506-1A / -1B)				
PWB2	U02-6	SENSOR PC board ass'y (BAETC-0507-1A / -1B)				
PWB2	U02-7	LO-MOTOR PC board ass'y (BAETC-0508-1A / -1B)				
PWB2	U02-8	RO-MOTOR PC board ass'y (BAETC-0509-1A / -1B)				
PWB2	U02-9	TERMINAL PC board ass'y (BAETC-0512-1A / -1B)				
PWB2	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PWB2	[SEMI CONDUCTOR]					
PWB2	D502	ZENER D	UDZ2.7B	1	224490270R2	
PWB2	D503	ZENER D	UDZS4.7B	1	224550470R2	
PWB2	D504	C-DIODE	1SS352	1	223234R2	
PWB2	D504 or	C-DIODE	1SS355	(1)	223269R2	
PWB2	D504 or	C-DIODE	MA2J111	(1)	223279R2	
PWB2	D504 or	C-DIODE	KDS4148U	(1)	223283R2	
PWB2	D505	C-DIODE	1SS352	1	223234R2	

PWB2	D505 or	C-DIODE	1SS355	(1)	223269R2
PWB2	D505 or	C-DIODE	MA2J111	(1)	223279R2
PWB2	D505 or	C-DIODE	KDS4148U	(1)	223283R2
PWB2	D701	LED	SLI-343URC3F(S,T,U,V)	1	225483
PWB2	D702	LED	SELS2L10C-S	1	225475
PWB2	D702A	HOLDER	(LED)LA-5-6	1	27191190
PWB2	D703	LED	SELS2L10C-S	1	225475
PWB2	D703A	HOLDER	(LED)LA-5-6	1	27191190
PWB2	D704	C-DIODE	1SS352	1	223234R2
PWB2	D704 or	C-DIODE	1SS355	(1)	223269R2
PWB2	D704 or	C-DIODE	MA2J111	(1)	223279R2
PWB2	D704 or	C-DIODE	KDS4148U	(1)	223283R2
PWB2	D705	ZENER D	UDZS5.6B	1	224550560R2
PWB2	D901	C-DIODE	S1NB60-4062	1	22380318R2
PWB2	D902	C-DIODE	1SS355	1	223269R2
PWB2	D902 or	C-DIODE	1SS352	(1)	223234R2
PWB2	D902 or	C-DIODE	MA2J111	(1)	223279R2
PWB2	D902 or	C-DIODE	KDS4148U	(1)	223283R2
PWB2	D903	C-DIODE	1SS355	1	223269R2
PWB2	D903 or	C-DIODE	1SS352	(1)	223234R2
PWB2	D903 or	C-DIODE	MA2J111	(1)	223279R2
PWB2	D903 or	C-DIODE	KDS4148U	(1)	223283R2
PWB2	D904	C-DIODE	1SS355	1	223269R2
PWB2	D904 or	C-DIODE	1SS352	(1)	223234R2
PWB2	D904 or	C-DIODE	MA2J111	(1)	223279R2
PWB2	D904 or	C-DIODE	KDS4148U	(1)	223283R2
PWB2	D905	C-DIODE	1SS355	1	223269R2
PWB2	D905 or	C-DIODE	1SS352	(1)	223234R2
PWB2	D905 or	C-DIODE	MA2J111	(1)	223279R2
PWB2	D905 or	C-DIODE	KDS4148U	(1)	223283R2
PWB2	D910	DIODE	D3SBA20	1	22380271F
PWB2	D910 or	DIODE	D3SBA60	(1)	22380272F
PWB2	D911	DIODE	RL1N4003	1	22380260T
PWB2	D912	ZENER D	UDZS12B	1	224551200R2
PWB2	D913	ZENER D	UDZS15B	1	224551500R2
PWB2	D914	C-DIODE	1SS355	1	223269R2
PWB2	D914 or	C-DIODE	1SS352	(1)	223234R2

PWB2	D914 or	C-DIODE	MA2J111	(1)	223279R2	
PWB2	D914 or	C-DIODE	KDS4148U	(1)	223283R2	
PWB2	Q301	IC	WM8718SEDS/RV	1	22241991R2	
PWB2	Q302	IC	78M05AHF(MPC78M05AHF)	1	222780055NEC	
PWB2	Q303	IC	S-812C33AUA-C2N	1	22242222R2	
PWB2	Q321	IC	NJM4580M-D	1	22241448R2	
PWB2	Q322	IC	NJM4580M-D	1	22241448R2	
PWB2	Q323	IC	NJM4580M-D	1	22241448R2	
PWB2	Q324	IC	NJM4580M-D	1	22241448R2	
PWB2	Q325	TR	RN1441	1	2215410R2	
PWB2	Q326	TR	RN1441	1	2215410R2	
PWB2	Q327	TR	RN1441	1	2215410R2	
PWB2	Q328	TR	RN1441	1	2215410R2	
PWB2	Q329	TR	DTA124EKA	1	2216240R2	
PWB2	Q501	TR	RN1407	1	2216260R2	
PWB2	Q501 or	TR	KRC107S	(1)	2216340R2	
PWB2	Q502	TR	RN1407	1	2216260R2	
PWB2	Q502 or	TR	KRC107S	(1)	2216340R2	
PWB2	Q503	PHT INT	SG128IR	1	24120161	N
PWB2	Q507	TR	RN1407	1	2216260R2	
PWB2	Q507 or	TR	KRC107S	(1)	2216340R2	
PWB2	Q508	TR	RN1407	1	2216260R2	
PWB2	Q508 or	TR	KRC107S	(1)	2216340R2	

PWB2	Q509	PHT CP	RPI-576	1	24120107	
PWB2	Q510	IC	TA7291SG(5_J)	1	22240239	
PWB2	Q513	TR	RN1407	1	2216260R2	
PWB2	Q513 or	TR	KRC107S	(1)	2216340R2	
PWB2	Q514	IC	TA7291SG(5_J)	1	22240239	
PWB2	Q515	TR	2SA1162-GR	1	2214375R2	
PWB2	Q515 or	TR	2SA1162-Y(TE85R_F)	(1)	2214374R2	
PWB2	Q519	IC	TC74VHCT08AFT	1	22274008GR2TO	
PWB2	Q519 or	IC	TC74VHCT08AFT (EKJ)	(1)	22274008G1R2TO	
PWB2	Q701	IC	MPD780232GC-710-8BT-A	1	22242286R3	
PWB2	Q702	FL TUBE	HNV-12SM57	1	212244	
PWB2	Q703	TR	2SC2712-GR	1	2213145R2	
PWB2	Q703 or	TR	2SC2712-Y(TE85L_F)	(1)	2213144R2	
PWB2	Q704	TR	2SC2712-GR	1	2213145R2	
PWB2	Q704 or	TR	2SC2712-Y(TE85L_F)	(1)	2213144R2	
PWB2	Q705	TR	RN1407	1	2216260R2	
PWB2	Q705 or	TR	KRC107S	(1)	2216340R2	
PWB2	Q706	TR	RN1407	1	2216260R2	
PWB2	Q706 or	TR	KRC107S	(1)	2216340R2	
PWB2	Q707	IC	MPC29M33AT-E1-A	1	22278033EAR2NE	
PWB2	Q708	REMO SENS	GP1UE271RKVF	1	24130016	
PWB2	Q901	TR	DTC123JKA	1	2216690R2	
PWB2	Q902	IC	S-80140CNMC-JKZ-T2	1	22242238R2	
PWB2	Q903	IC	S-812C50AUA-C3E	1	22242240R2	
PWB2	Q904	IC	UPC7805AHF-AZ	1	222780054NEC	
PWB2	Q904 or	IC	7805A(NJM7805A)	(1)	222780050JRC	
PWB2	Q904 or	IC	7805(MPC7805H)	(1)	222780050NEC	
PWB2	Q904 or	IC	7805FA(NJM7805FA)	(1)	222780054JRC	
PWB2	Q905	TR	2SA1162-GR	1	2214375R2	
PWB2	Q905 or	TR	2SA1162-Y(TE85R_F)	(1)	2214374R2	
PWB2	[TRANS COIL]					
PWB2	L152	EMIFIL	BK1608LM252-T	1	230956R2	
PWB2	L661	EMIFIL	BK1608LM252-T	1	230956R2	
PWB2	L901	CHOKE COIL	NCH-3581	1	231301	
PWB2	T902	P TRANS	NPT-1520JQ	1	2301812A	<MDD>
PWB2	T902	P TRANS	NPT-1520GQ	1	2301813A	<MPP / MPA>
PWB2	X701	CERA LOCK	CSTLS5M00G56-A0	1	3010406T	

PWB2	[CAPACITOR]					
PWB2	C153	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB2	C154	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PWB2	C301	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB2	C302	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB2	C303	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PWB2	C304	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB2	C305	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB2	C306	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PWB2	C307	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB2	C308	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	
PWB2	C309	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB2	C310	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PWB2	C317	UTSP C	CE04W16V-470M(UTSP)	1	397544717T	
PWB2	C318	UTSP C	CE04W16V-470M(UTSP)	1	397544717T	
PWB2	C319	C-CERA C	CK725B1H-223K1	1	332102235R1	
PWB2	C321	MKT C	B32529C0102J289	1	376491024T	
PWB2	C322	MKT C	B32529C0102J289	1	376491024T	
PWB2	C323	UPZ C	2AUPZTF471JE	1	376334714T	
PWB2	C324	UPZ C	2AUPZTF471JE	1	376334714T	
PWB2	C325	UPZ C	2AUPZTF471JE	1	376334714T	
PWB2	C326	UPZ C	2AUPZTF471JE	1	376334714T	
PWB2	C327	MKT C	B32529C0222J289	1	376492224T	

PWB2	C328	MKT C	B32529C0222J289	1	376492224T
PWB2	C329	MKT C	B32529C0222J289	1	376492224T
PWB2	C330	MKT C	B32529C0222J289	1	376492224T
PWB2	C331	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
PWB2	C332	UTSP C	CE04W50V 47M(UTSP)	1	397584707T
PWB2	C333	C-CERA C	CC725CH1H-221J1	1	342102214R1
PWB2	C334	C-CERA C	CC725CH1H-221J1	1	342102214R1
PWB2	C501	ELECT C	CE04W16V-47M	1	355744709T
PWB2	C502	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C505	C-CERA C	CK725B1H-223K1	1	332102235R1
PWB2	C506	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C510	ELECT C	CE04W16V-100M	1	355741019T
PWB2	C511	C-CERA C	CK725B1H-223K1	1	332102235R1
PWB2	C514	ELECT C	CE04W16V-100M	1	355741019T
PWB2	C515	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C516	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C517	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C521	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C523	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C528	MKT C	B32529C0472J289	1	376494724T
PWB2	C661	C-CERA C	CC725CH1H-101J1	1	342101014R1
PWB2	C662	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C663	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C701	ELECT C	CE04W16V-10M	1	355741009T
PWB2	C702	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C703	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C704	C-CERA C	CC725CH1H-101J1	1	342101014R1
PWB2	C705	C-CERA C	CC725CH1H-101J1	1	342101014R1
PWB2	C713	C-CERA C	CK725B1H-223K1	1	332102235R1
PWB2	C716	C-CERA C	CK725B1H-223K1	1	332102235R1
PWB2	C717	ELECT C	CE04W50V-2.2M	1	355780229T
PWB2	C718	C-CERA C	CK725B1H-223K1	1	332102235R1
PWB2	C719	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C720	C-CERA C	CK725B1H-223K1	1	332102235R1
PWB2	C721	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C722	C-CERA C	CK725F1E-104Z1	1	332161040R1
PWB2	C723	C-CERA C	CK725B1H-223K1	1	332102235R1

PWB2	C724	ELECT C	CE04W6.3V-100M	1	355721019T	
PWB2	C725	ELECT C	CE04W6.3V-100M	1	355721019T	
PWB2	C726	C-CERA C	CK725B1H-223K1	1	332102235R1	
PWB2	C727	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB2	C728	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB2	C731	C-CERA C	CK725B1H-223K1	1	332102235R1	
PWB2	C732	C-CERA C	CK725B1H-223K1	1	332102235R1	
PWB2	C734	C-CERA C	CK725B1H-223K1	1	332102235R1	
PWB2	C735	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB2	C736	ELECT C	CE04W6.3V-100M	1	355721019T	
PWB2	C737	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB2	C738	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB2	C739	C-CERA C	CK725B1H-223K1	1	332102235R1	
PWB2	C740	C-CERA C	CK725B1H-223K1	1	332102235R1	
PWB2	C901	IS C	DE1307E472M-KH	1	3300030	
PWB2	C902	IS C	DE1307E472M-KH	1	3300030	
PWB2	C903	IS C	MKP R46 103M	1	3500202S	
PWB2	C907	UTSK C	CE04W16V-1000M(UTSK)	1	398341027S	
PWB2	C907 or	VX C	CE04W16V-1000M(VX_BLK)	(1)	397341027S	
PWB2	C908	UTSP C	CE04W10V-220M(UTSP)	1	397532217T	
PWB2	C909	TF C	ECQ-V50V-473J	1	374724734T	
PWB2	C910	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T	
PWB2	C911	C-CERA C	CK725F1E-104Z1	1	332161040R1	

PWB2	C912	TF C	ECQ-V50V-223J	1	374722234T	
PWB2	C913	UTSP C	CE04W16V-470M(UTSP)	1	397544717T	
PWB2	C914	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB2	C915	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB2	C916	UTSK C	CE04W16V-10000M(UTSK)	1	398341037S	N
PWB2	C916 or	VX C	CE04W16V-10000M(VX_BLK)	(1)	397341037S	
PWB2	C917	UTSK C	CE04W16V-2200M(UTSK)	1	398342227S	
PWB2	C917 or	VX C	CE04W16V-2200M(VX_BLK)	(1)	397342227S	
PWB2	C918	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB2	C919	C-CERA C	CK725F1A-105Z1	1	332181050R1	
PWB2	C920	UTSP C	CE04W10V-220M(UTSP)	1	397532217T	
PWB2	C921	UTSP C	CE04W50V-100M(UTSP)	1	397581017T	
PWB2	C922	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PWB2	C923	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PWB2	C924	TF C	ECQ-V50V-473J	1	374724734T	
PWB2	C925	TF C	ECQ-V50V-473J	1	374724734T	
PWB2	[RESISTOR]					
PWB2	R301	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB2	R302	C-CARBON R	RN72K1J-330JE	1	435033304R1	
PWB2	R304	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB2	R305	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB2	R306	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB2	R307	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB2	R308	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB2	R309	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PWB2	R310	METAL O R	RS1/2WBJ-22	1	443522204T	
PWB2	R315	METAL O R	RS1/2WBJ-68	1	443526804T	
PWB2	R316	METAL O R	RS1/2WBJ-68	1	443526804T	
PWB2	R321	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PWB2	R322	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PWB2	R323	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PWB2	R324	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PWB2	R325	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PWB2	R326	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PWB2	R327	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PWB2	R328	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PWB2	R329	C-CARBON R	RN72K1J-102JE	1	435031024R1	

PWB2	R330	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PWB2	R331	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PWB2	R332	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PWB2	R333	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PWB2	R334	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PWB2	R335	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PWB2	R336	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PWB2	R337	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PWB2	R338	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PWB2	R339	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PWB2	R340	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PWB2	R341	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PWB2	R342	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PWB2	R343	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PWB2	R344	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PWB2	R345	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PWB2	R346	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PWB2	R347	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PWB2	R348	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PWB2	R349	C-CARBON R	RN72K1J-152JE	1	435031524R1	
PWB2	R350	C-CARBON R	RN72K1J-152JE	1	435031524R1	
PWB2	R351	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PWB2	R352	C-CARBON R	RN72K1J-223JE	1	435032234R1	

PWB2	R353	C-CARBON R	RN72K1J-223JE	1	435032234R1
PWB2	R354	C-CARBON R	RN72K1J-223JE	1	435032234R1
PWB2	R355	C-CARBON R	RN72K1J-102JE	1	435031024R1
PWB2	R356	C-CARBON R	RN72K1J-102JE	1	435031024R1
PWB2	R357	C-CARBON R	RN72K1J-224JE	1	435032244R1
PWB2	R358	C-CARBON R	RN72K1J-224JE	1	435032244R1
PWB2	R359	C-CARBON R	RN72K1J-221JE	1	435032214R1
PWB2	R360	C-CARBON R	RN72K1J-221JE	1	435032214R1
PWB2	R361	C-CARBON R	RN72K1J-221JE	1	435032214R1
PWB2	R362	C-CARBON R	RN72K1J-221JE	1	435032214R1
PWB2	R363	C-CARBON R	RN72K1J-101JE	1	435031014R1
PWB2	R364	C-CARBON R	RN72K1J-101JE	1	435031014R1
PWB2	R365	C-CARBON R	RN72K1J-474JE	1	435034744R1
PWB2	R366	C-CARBON R	RN72K1J-103JE	1	435031034R1
PWB2	R367	C-CARBON R	RN72K1J-474JE	1	435034744R1
PWB2	R368	C-CARBON R	RN72K1J-000JE	1	435030004R1
PWB2	R369	C-CARBON R	RN72K1J-000JE	1	435030004R1
PWB2	R501	C-CARBON R	RN72K1J-183JE	1	435031834R1
PWB2	R502	C-CARBON R	RN72K1J-332JE	1	435033324R1
PWB2	R503	C-CARBON R	RN72K1J-103JE	1	435031034R1
PWB2	R504	C-CARBON R	RN72K1J-822JE	1	435038224R1
PWB2	R505	C-CARBON R	RN72K1J-223JE	1	435032234R1
PWB2	R506	C-CARBON R	RN72K1J-105JE	1	435031054R1
PWB2	R507	C-CARBON R	RN72K1J-181JE	1	435031814R1
PWB2	R508	C-CARBON R	RN72K1J-183JE	1	435031834R1
PWB2	R509	C-CARBON R	RN72K1J-822JE	1	435038224R1
PWB2	R510	C-CARBON R	RN72K1J-153JE	1	435031534R1
PWB2	R511	C-CARBON R	RN72K1J-562JE	1	435035624R1
PWB2	R512	C-CARBON R	RN72K1J-154JE	1	435031544R1
PWB2	R513	C-CARBON R	RN72K1J-000JE	1	435030004R1
PWB2	R514	C-CARBON R	RN72K1J-103JE	1	435031034R1
PWB2	R515	C-CARBON R	RN72K1J-105JE	1	435031054R1
PWB2	R517	C-CARBON R	RN72K1J-391JE	1	435033914R1
PWB2	R521	C-CARBON R	RN72K1J-474JE	1	435034744R1
PWB2	R522	C-CARBON R	RN72K1J-104JE	1	435031044R1
PWB2	R523	C-CARBON R	RN72K1J-104JE	1	435031044R1
PWB2	R524	C-CARBON R	RN72K1J-222JE	1	435032224R1

PWB2	R525	NF CARBON R	R25J-4.7	1	415470474T
PWB2	R531	NF CARBON R	R25J-4.7	1	415470474T
PWB2	R532	C-CARBON R	RN72K1J-562JE	1	435035624R1
PWB2	R533	C-CARBON R	RN72K1J-822JE	1	435038224R1
PWB2	R534	C-CARBON R	RN72K1J-222JE	1	435032224R1
PWB2	R535	C-CARBON R	RN72K1J-472JE	1	435034724R1
PWB2	R536	C-CARBON R	RN72K1J-392JE	1	435033924R1
PWB2	R538	C-CARBON R	RN72K1J-000JE	1	435030004R1
PWB2	R539	C-CARBON R	RN72K1J-104JE	1	435031044R1
PWB2	R540	C-CARBON R	RN72K1J-104JE	1	435031044R1
PWB2	R541	C-CARBON R	RN72K1J-103JE	1	435031034R1
PWB2	R542	C-CARBON R	RN72K1J-103JE	1	435031034R1
PWB2	R543	C-CARBON R	RN72K1J-103JE	1	435031034R1
PWB2	R544	C-CARBON R	RN72K1J-153JE	1	435031534R1
PWB2	R545	C-CARBON R	RN72K1J-153JE	1	435031534R1
PWB2	R546	C-CARBON R	RN72K1J-153JE	1	435031534R1
PWB2	R661	C-CARBON R	RN72K1J-471JE	1	435034714R1
PWB2	R663	C-CARBON R	RN72K1J-000JE	1	435030004R1
PWB2	R701	C-CARBON R	RN72K1J-000JE	1	435030004R1
PWB2	R702	C-CARBON R	RN72K1J-101JE	1	435031014R1
PWB2	R703	C-CARBON R	RN72K1J-101JE	1	435031014R1
PWB2	R704	C-CARBON R	RN72K1J-221JE	1	435032214R1
PWB2	R705	C-CARBON R	RN72K1J-470JE	1	435034704R1

PWB2	R706	C-CARBON R	RN72K1J-470JE	1	435034704R1
PWB2	R707	C-CARBON R	RN72K1J-272JE	1	435032724R1
PWB2	R708	C-CARBON R	RN72K1J-272JE	1	435032724R1
PWB2	R709	C-CARBON R	RN72K1J-272JE	1	435032724R1
PWB2	R710	C-CARBON R	RN72K1J-272JE	1	435032724R1
PWB2	R711	C-CARBON R	RN72K1J-103JE	1	435031034R1
PWB2	R712	C-CARBON R	RN72K1J-272JE	1	435032724R1
PWB2	R713	C-CARBON R	RN72K1J-561JE	1	435035614R1
PWB2	R714	C-CARBON R	RN72K1J-561JE	1	435035614R1
PWB2	R715	C-CARBON R	RN72K1J-391JE	1	435033914R1
PWB2	R716	C-CARBON R	RN72K1J-821JE	1	435038214R1
PWB2	R717	C-CARBON R	RN72K1J-471JE	1	435034714R1
PWB2	R718	C-CARBON R	RN72K1J-152JE	1	435031524R1
PWB2	R719	C-CARBON R	RN72K1J-391JE	1	435033914R1
PWB2	R720	C-CARBON R	RN72K1J-471JE	1	435034714R1
PWB2	R721	C-CARBON R	RN72K1J-821JE	1	435038214R1
PWB2	R722	C-CARBON R	RN72K1J-391JE	1	435033914R1
PWB2	R723	C-CARBON R	RN72K1J-471JE	1	435034714R1
PWB2	R724	C-CARBON R	RN72K1J-821JE	1	435038214R1
PWB2	R725	C-CARBON R	RN72K1J-102JE	1	435031024R1
PWB2	R726	C-CARBON R	RN72K1J-391JE	1	435033914R1
PWB2	R727	C-CARBON R	RN72K1J-471JE	1	435034714R1
PWB2	R728	C-CARBON R	RN72K1J-821JE	1	435038214R1
PWB2	R729	C-CARBON R	RN72K1J-102JE	1	435031024R1
PWB2	R730	C-CARBON R	RN72K1J-182JE	1	435031824R1
PWB2	R731	C-CARBON R	RN72K1J-392JE	1	435033924R1
PWB2	R732	C-CARBON R	RN72K1J-331JE	1	435033314R1
PWB2	R733	C-CARBON R	RN72K1J-331JE	1	435033314R1
PWB2	R734	C-CARBON R	RN72K1J-103JE	1	435031034R1
PWB2	R735	C-CARBON R	RN72K1J-103JE	1	435031034R1
PWB2	R736	C-CARBON R	RN72K1J-104JE	1	435031044R1
PWB2	R737	C-CARBON R	RN72K1J-104JE	1	435031044R1
PWB2	R738	C-CARBON R	RN72K1J-101JE	1	435031014R1
PWB2	R739	C-CARBON R	RN72K1J-333JE	1	435033334R1
PWB2	R740	C-CARBON R	RN72K1J-471JE	1	435034714R1
PWB2	R741	C-CARBON R	RN72K1J-471JE	1	435034714R1
PWB2	R742	C-CARBON R	RN72K1J-333JE	1	435033334R1

PWB2	R743	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB2	R744	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB2	R745	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PWB2	R746	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PWB2	R747	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PWB2	R748	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PWB2	R901	C-CARBON R	RN72K1J-563JE	1	435035634R1	
PWB2	R902	C-CARBON R	RN72K1J-153JE	1	435031534R1	<MDD>
PWB2	R902	C-CARBON R	RN72K1J-333JE	1	435033334R1	<MPP / MPA>
PWB2	R904	METAL O R	RS1/2WBJ-47	1	443524704T	
PWB2	R911	METAL O R	RS1/2WBJ-150	1	443521514T	
PWB2	R912	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PWB2	R913	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PWB2	R914	METAL O R	RS1/2WBJ-22	1	443522204T	
PWB2	R916	C-CARBON R	RN72K1J-393JE	1	435033934R1	
PWB2	[SW TRM]					
PWB2	E701	HOLDER	(CLAMP) WS-1NS	1	27190541	
PWB2	E910	WS CLAMP	CB-71694(L=30)	1	260260	
PWB2	E911	WS CLAMP	CB-71694(L=30)	1	260260	
PWB2	P151B	PLUG	NPLG-5P133	1	25055149	
PWB2	P152	PIN JACK	NPJ-1PDOR369	1	25045548	
PWB2	P152 or	PIN JACK	NPJ-1PDO596	(1)	25045816	
PWB2	P152 or	PIN JACK	NPJ-1PDOR607	(1)	25045827	

PWB2	P302B	SOCKET	NSCT-13P2210	1	25052313	
PWB2	P320	PIN JACK	NPJ-2PDRW435	1	25045628	
PWB2	P320 or	PIN JACK	NPJ-2PDRW595	(1)	25045815	
PWB2	P320 or	PIN JACK	NPJ-2PDRW608	(1)	25045828	
PWB2	P502A	SOCKET	NSCT-7P2204	1	25052307	
PWB2	P502B	SOCKET	NSCT-7P2241	1	25052344	
PWB2	P505A	SOCKET AS	NSAS-4P1127	1	2002E390415UL	
PWB2	P505B	PLUG	NPLG-2P130	1	25055146	
PWB2	P509A	SOCKET AS	NSAS-4P0900	1	2002E390420	
PWB2	P509B	PLUG	NPLG-2P349	1	25055366	
PWB2	P519A	SOCKET AS	NSAS-14P1875	1	2002E391418UL	N
PWB2	P519B	PLUG	NPLG-7P135	1	25055151	
PWB2	P520A	SOCKET AS	NSAS-18P1876	1	2002E391818UL	N
PWB2	P520B	PLUG	NPLG-9P137	1	25055153	
PWB2	P601B	SOCKET	NSCT-9P2206	1	25052309	
PWB2	P602A	SOCKET	NSCT-9P2243	1	25052346	
PWB2	P661	ST JACK	SM0505-0021	1	25045857	
PWB2	P701	SOCKET AS	NSAS-18P1840	1	200AE391832UL	N
PWB2	P702	SOCKET AS	NSAS-14P1842	1	200AE391432UL	N
PWB2	P703A	SOCKET AS	NSAS-08P0292	1	2006320815	
PWB2	P703B	PLUG	NPLG-4P351	1	25055368	
PWB2	P704A	PLUG	NPLG-2P349	1	25055366	
PWB2	P704B	SOCKET AS	NSAS-4P1845	1	2002E320405UL	N
PWB2	P710B	SOCKET	NSCT-29P2263	1	25052366	
PWB2	P901	PLUG	NPLG-2P631	1	25055675	
PWB2	P902A	SOCKET AS	NSAS-12P1233	1	2003B191240UL	
PWB2	P902B	PLUG	2531P0600T	1	25056490	
PWB2	P902Bor	PLUG	NPLG-6P120	(1)	25055136	
PWB2	P903A	SOCKET AS	NSAS-10P1843	1	2002A391045UL	N
PWB2	P903B	PLUG	NPLG-5P133	1	25055149	
PWB2	P911A	PLUG	NPLG-9P137	1	25055153	
PWB2	Q702A	HOLDER	(FL)	1	27191217	
PWB2	Q904A	HEAT SINK	RAD-141	1	27160472	
PWB2	Q904B	SCREW	3P+10FN(3BC)	1	82143010GR	
PWB2	RL901	RELAY	NRL-1P5A-DC9-179	1	25065669	
PWB2	S501	PUSH SW	NPS-111-S679	1	25035716	
PWB2	S502	PUSH SW	NPS-111-S679	1	25035716	

PWB2	S503	PUSH SW	NPS-111-S679	1	25035716	
PWB2	S701	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S702	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S703	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S704	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S705	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S706	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S707	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S708	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S709	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S710	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S711	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S712	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S713	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S714	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S715	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S716	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S717	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S718	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	S719	PUSH SW	NPS-111-S681	1	25035718T	
PWB2	[TUNER UNIT]					
PWB2	U151	PHT CP	JST1165-001transmitting	1	24120142	

DX-C390(M2)

PACKING PROCEDURE PARTS LIST

PACKING	REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PACKING	[PACKING]					
PACKING	A601	CARTON	DX-C390M2(B)MDD	1	29055109	N <B MDD>
PACKING	A601	CARTON	DX-C390M2(B)MPP	1	29055110	N <B MPP>
PACKING	A601	CARTON	DX-C390M2(B)MPA	1	29055111	N <B MPA>
PACKING	A601	CARTON	DX-C390M2(S)MPP	1	29055112	N <S MPP>
PACKING	A603	PAD	AS	1	29092185-1	
PACKING	A604	SHEET	(DR)	1	29095795	
PACKING	A605	SHEET	---	1	29095847	
PACKING	A607	POLY BAG	(W600xD700)	1	29100252	
PACKING	A608	TAPE	(SEROHAN)NITTO NO.29	1	29110149	
PACKING	A610	PP TAPE	W50 SBT-70	1	29110200	
PACKING	A651A	UPC LABEL	DX-C390M2(B)MDD	{ 1 }	29391146A	N <B MDD>
PACKING	A651A	EAN LABEL	DXC390M2B_PP/PA	{ 1 }	29391147A	N <B MPA / B MPP>
PACKING	A651A	EAN LABEL	DX-C390M2(S)MPP	{ 1 }	29391149A	N <S MPP>
PACKING	A652	WRNTY CARD	(ONKYO)	1	29365135	<MDD>
PACKING	[ACCESSARY]					
PACKING	A701	POLY BAG	w250xd350	1	29100250A	
PACKING	A702	TAPE	(SEROHAN)NITTO NO.29	1	29110149	
PACKING	A801	CORD AS	PIN CORD AS	1	2010381	
PACKING	A801 or	CORD AS	PIN CORD AS	(1)	2010326	
PACKING	A802	PLUG CORD	3.5-MINI PLUG (RI)	1	2010200	
PACKING	A803	REMO CON	RC-777C	1	24140777	N
PACKING	A804	BATTERY	R6/AA(UM-3)	2	3010194	
PACKING	A804 or	BATTERY	R6/AA(UM-3)	(2)	3010054	
PACKING	A811	INS MANUAL	En(DXC390M2)	1	29400286	N
PACKING	A812	INS MANUAL	U3DeNISv(DXC390M2)	1	29400287	N <MPP>
PACKING	A813	INS MANUAL	U3FrEsIt(DXC390M2)	1	29400288	N <MPP>
PACKING	A815	INST SHEET	WEEE	1	29355793	<MPP>

ONKYO CORPORATION

Service Dept. Technical Support : 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN
Tel: 072-831-8023 Fax: 072-831-8163

ONKYO U.S.A. CORPORATION

18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.
Tel: 800-229-1687, 201-785-2600 Fax: 201-785-2650 <http://www.us.onkyo.com/>

ONKYO EUROPE ELECTRONICS GmbH

Liegnitzerstrasse 6, 82194 Groebenzell, GERMANY
Tel: +49-8142-4401-0 Fax: +49-8142-4401-555 <http://www.eu.onkyo.com/>

ONKYO EUROPE ELECTRONICS GmbH (UK BRANCH)

The Coach House 81A High Street, Marlow, Buckinghamshire, SL7 1AB, UK
Tel: +44-(0)1628-473-350 Fax: +44-(0)1628-401-700

ONKYO CHINA LIMITED

Unit 1&12, 9/F, Ever Gain Plaza Tower 1, 88, Container Port Road, Kwai Chung,
N.T., Hong Kong. Tel: 852-2429-3118 Fax: 852-2428-9039
<http://www.ch.onkyo.com/>

