
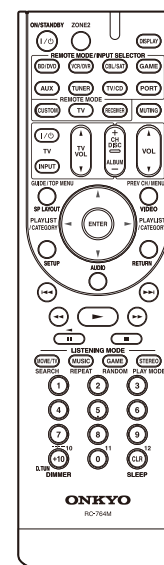


ONKYO SERVICE MANUAL

AV RECIEVER MODEL HT-RC260 (B)

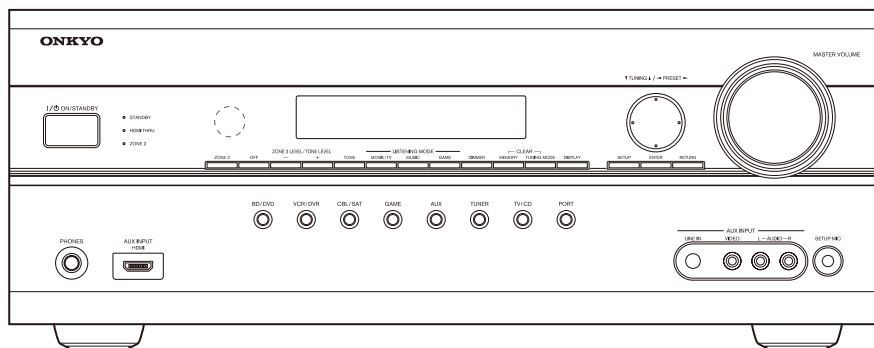

RC-764M

Black model

BMDC	120V AC, 60Hz
------	---------------


SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

SERVICE PROCEDURE

1. Replacing the fuses



This symbol located near the fuse indicates that the fuse used is slow operating type. For continued protection against fire hazard, replace with same type fuse. For fuse rating, refer to the marking adjacent to the symbol.



Ce symbole indique que le fusible utilise est e lent. Pour une protection permanente, n'utiliser que des fusibles de meme type. Ce dernier est indique la qu le present symbol est apposre.

<Notes>

<MDC>: Canadian model

REF No.	PART NAME	DESCRIPTION	PART N O.	REMARKS
F6901	FUSE	12A-TUL-250V	252301GR 1	
F6902	FUSE	12A-TUL-250V	252301GR 1	
F901	FUSE	10A-UL/T-233	252330GR 1	<B MDC>
F901or	FUSE	10A-T/UL-ST2	252333GR (1)	<B MDC>

2. To initialize the unit

1. Press and hold down VCR/DVR button, then press ON/STANDBY button when the unit is powered on.
2. After "Clear" is displayed, the preset memory and each mode stored in the memory are initialized and will return to the factory settings, and turn to Standby mode.
3. Remove the AC cord from power line.

3. Safety check out

(U.S.A. model only)

After correcting the original service problem, perform the following safety check before releasing the unit to the customer.

Leakage current Check

Measure the leakage current to a known earth ground (water pipe or conduct etc.) by connecting a leakage current tester between the earth ground and exposed metal parts of the unit (input/output ground terminals, screw heads or metal overlays etc.).

Plug the power supply cord directly into a 120Vac 60Hz wall socket and turn ON/STANDBY button on.

Any current measured must not exceed 0.5mA.


4. Memory Backup

This model uses a EE-PROM IC in order to retain radio presets and other settings. So, memory contents will be kept eternally with no care.

TROUBLE SHOOT-1


No Power

This is just for general reference and does not including every single case.

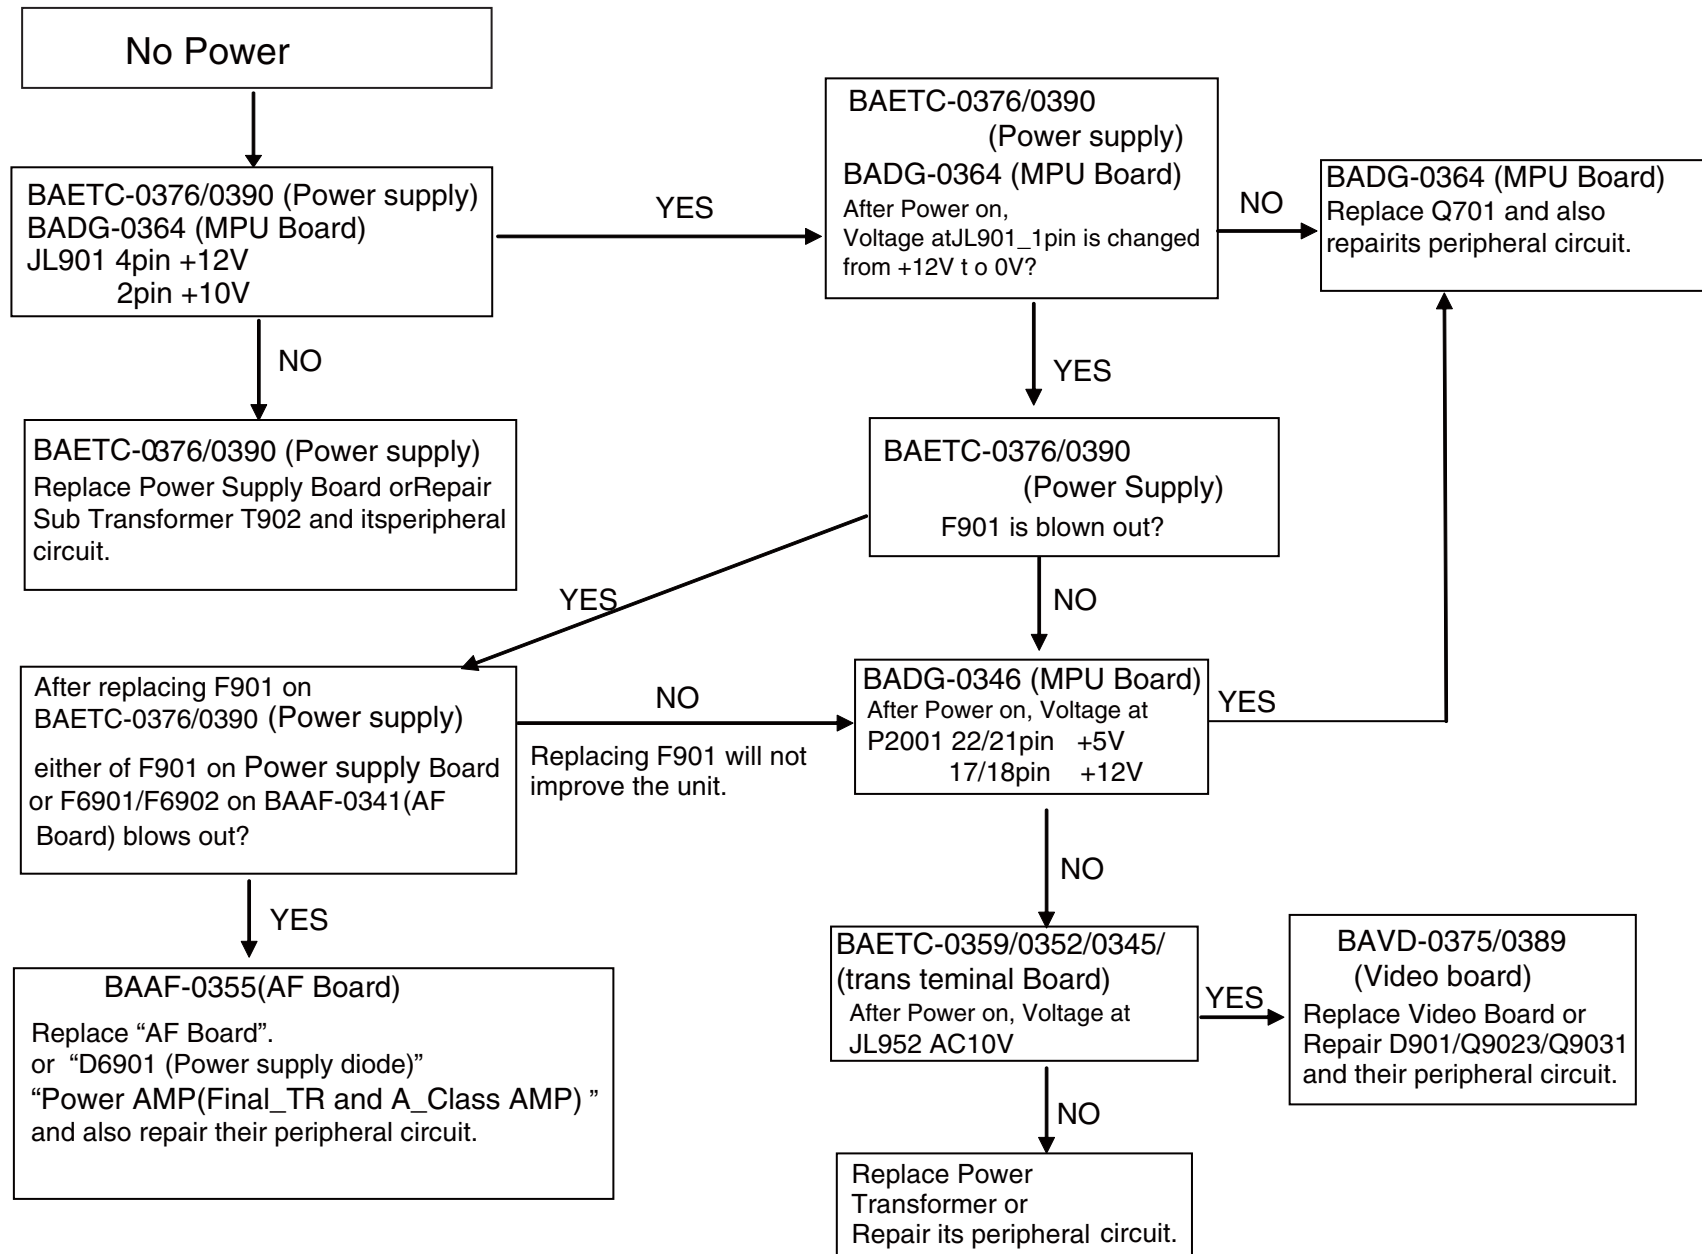


TROUBLE SHOOT- 2
No Display

This is just for general reference and does not include every single case.
The above waveforms are got by Oscilloscope of Maximum Horizontal Sensitivity: 100MHz.
The results depend on the oscilloscope.

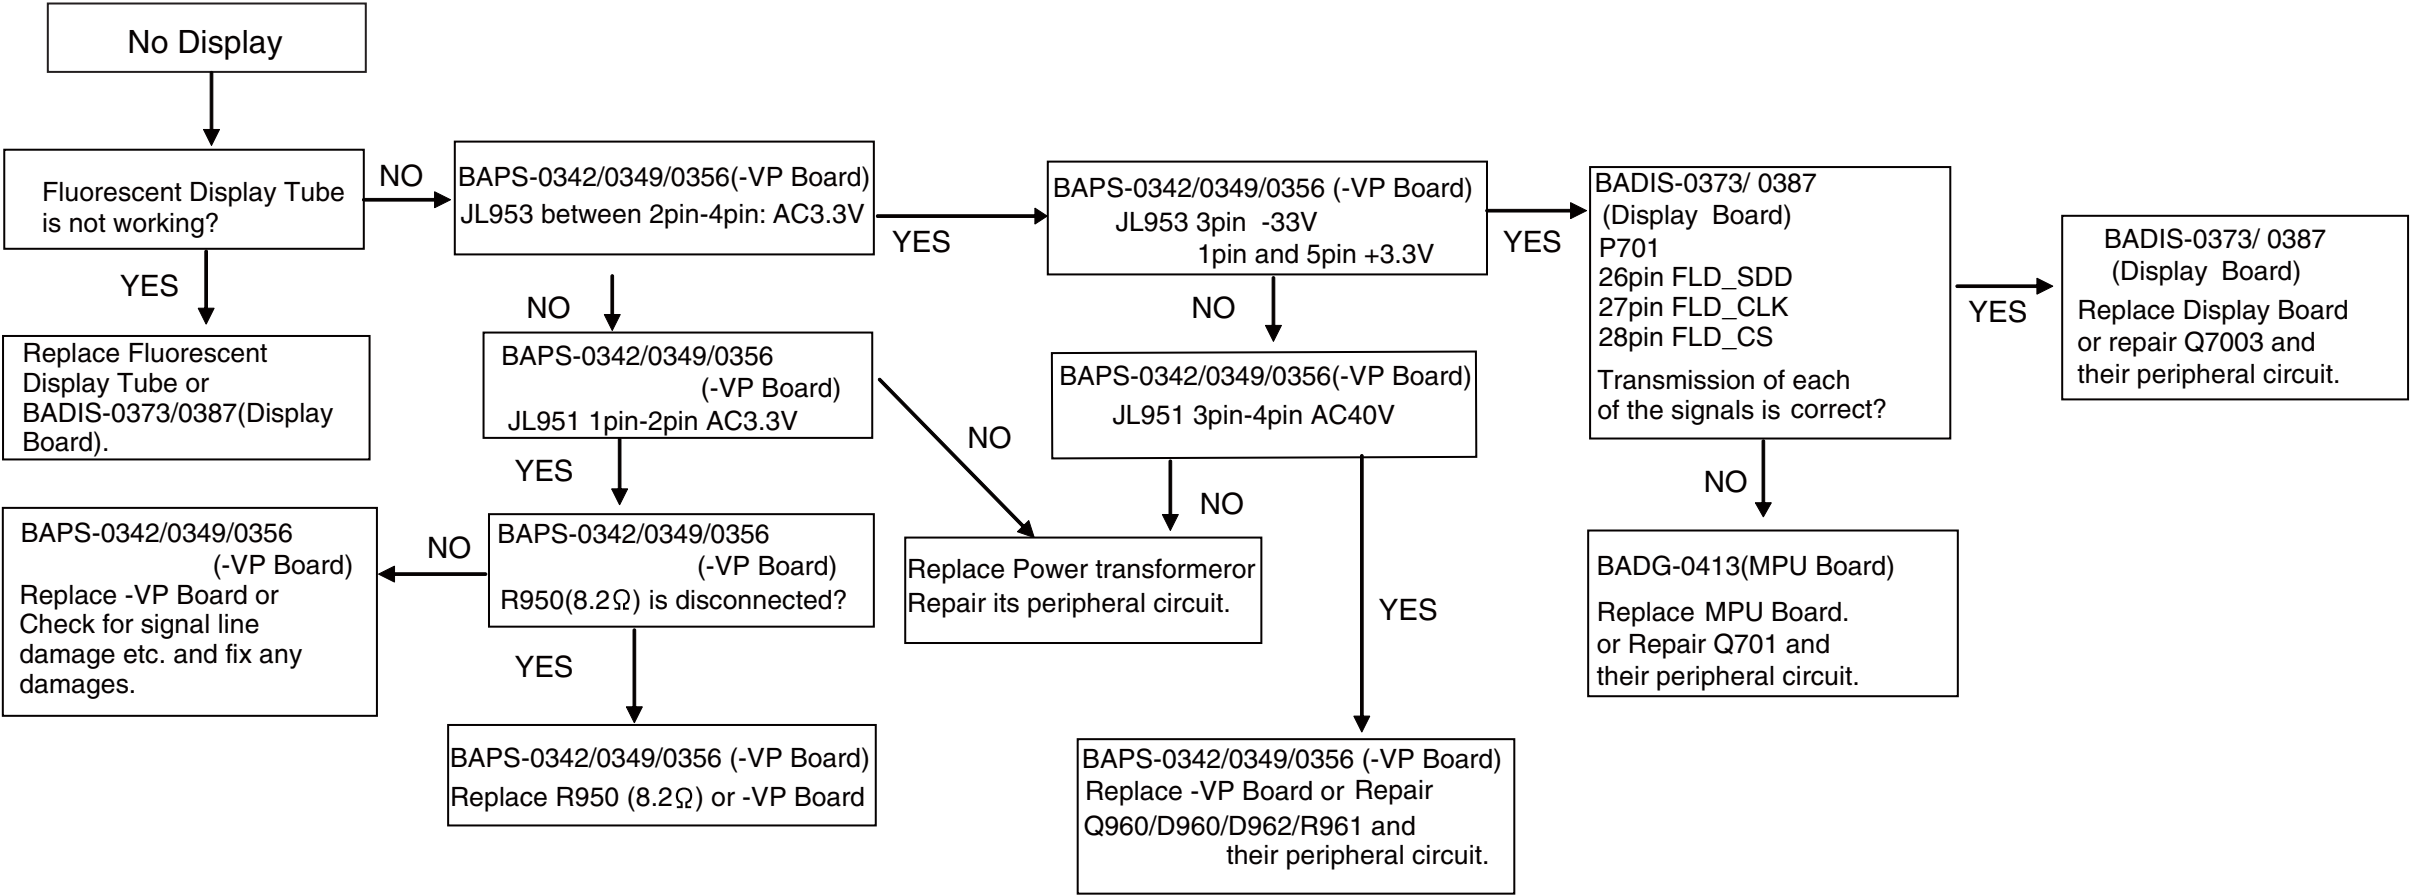


Timing of Serial Communication

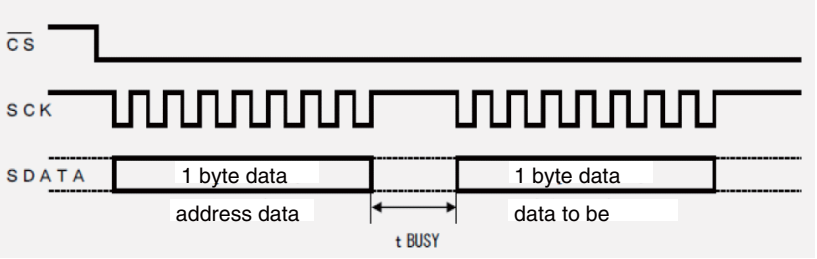


	FLD_CLK	FLD_SDD(DATA)	FLD_CS
V:1V/cm H:02Msec/cm			
V:1V/cm H:10μsec/cm			
V:1V/cm H:1μsec/cm			

TROUBLE SHOOT-3
No Sound

Note:
This is just for general reference and does not include every single case.
The above waveforms are got by Oscilloscope of Maximum Horizontal Sensitivity: 100MHz.
The results depend on the oscilloscope.

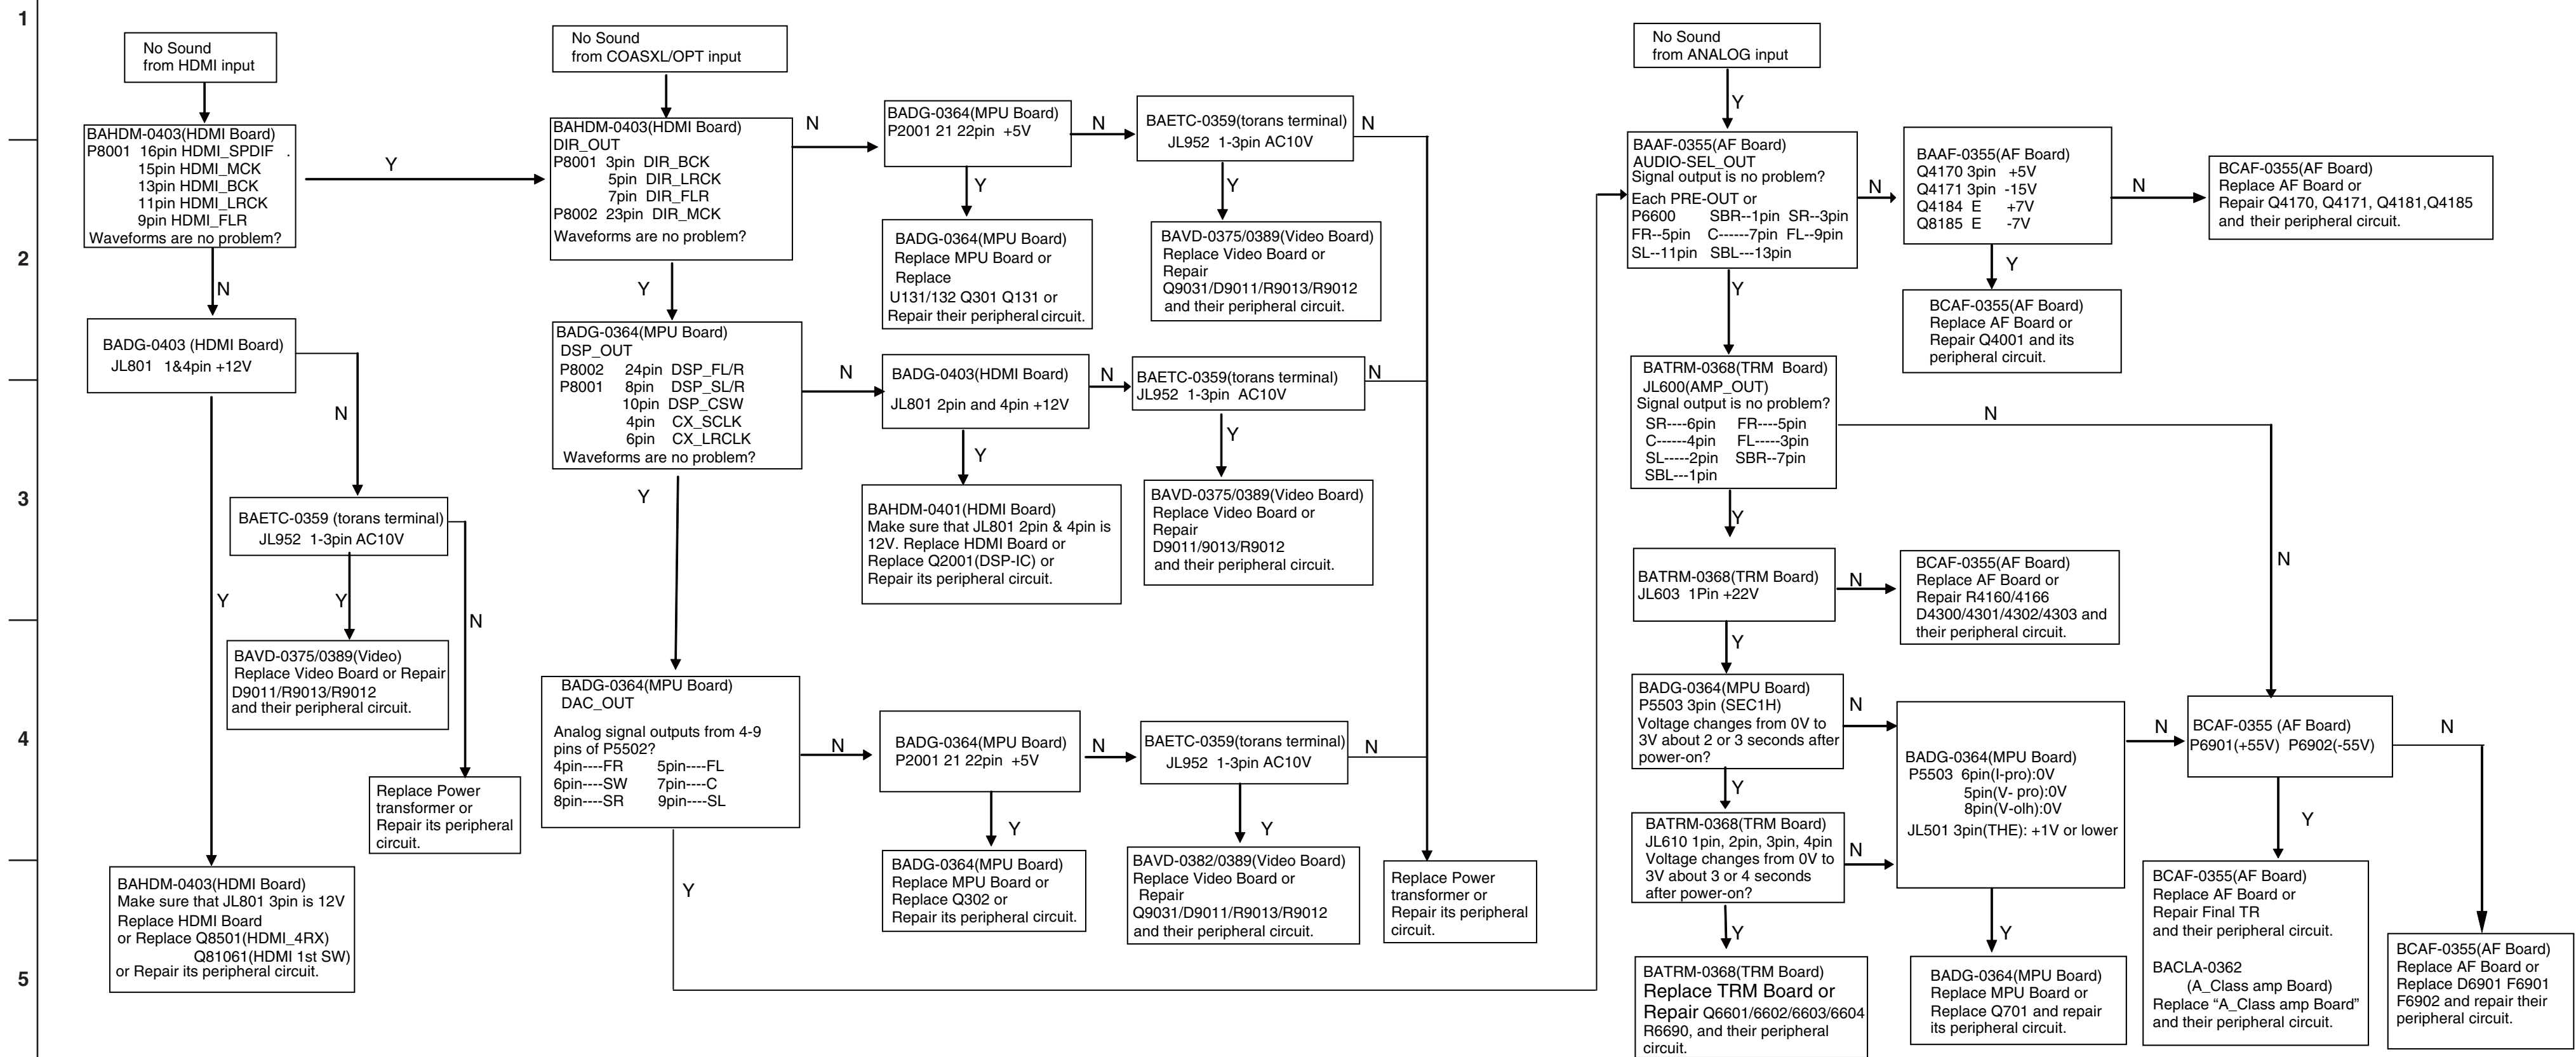


Repair

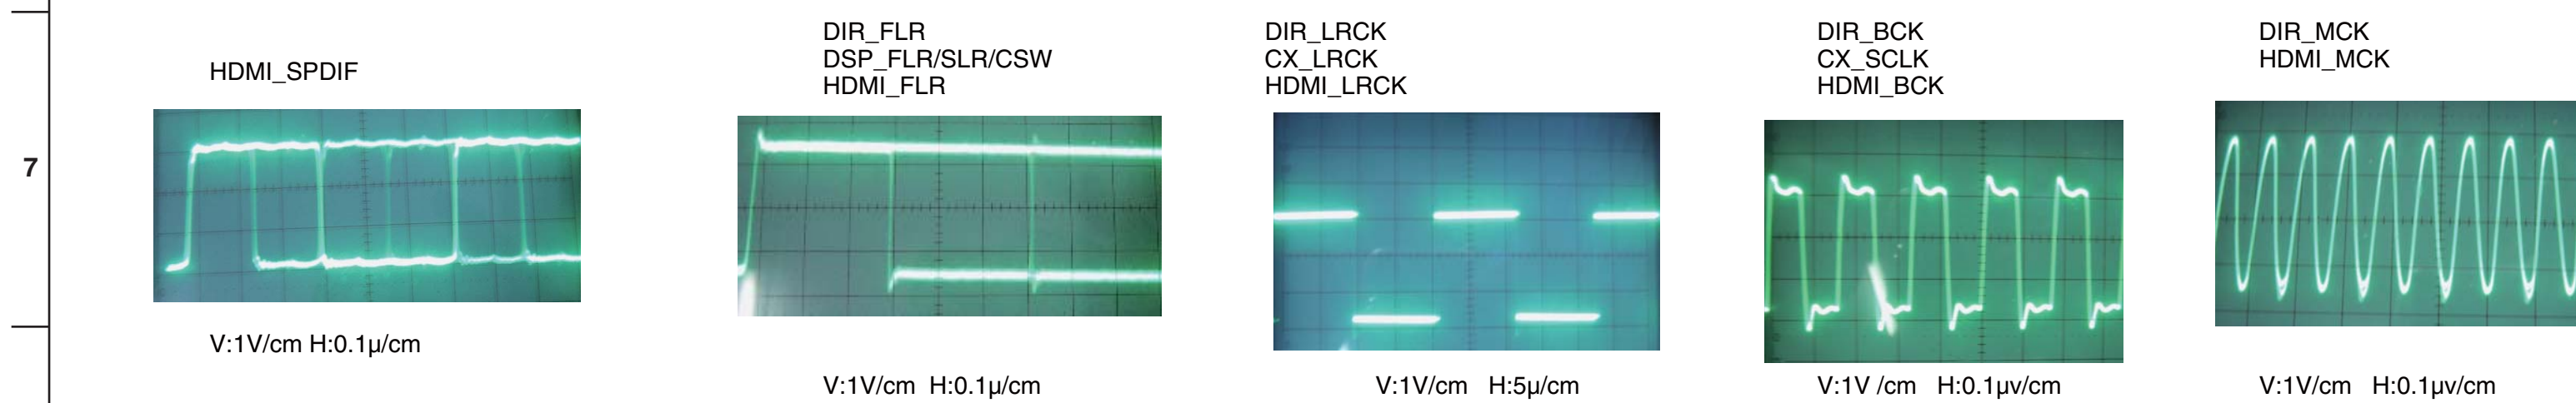

8

TROUBLE SHOOT-4
No Pictuer

Note:
This is just for general reference and does not include every single case.

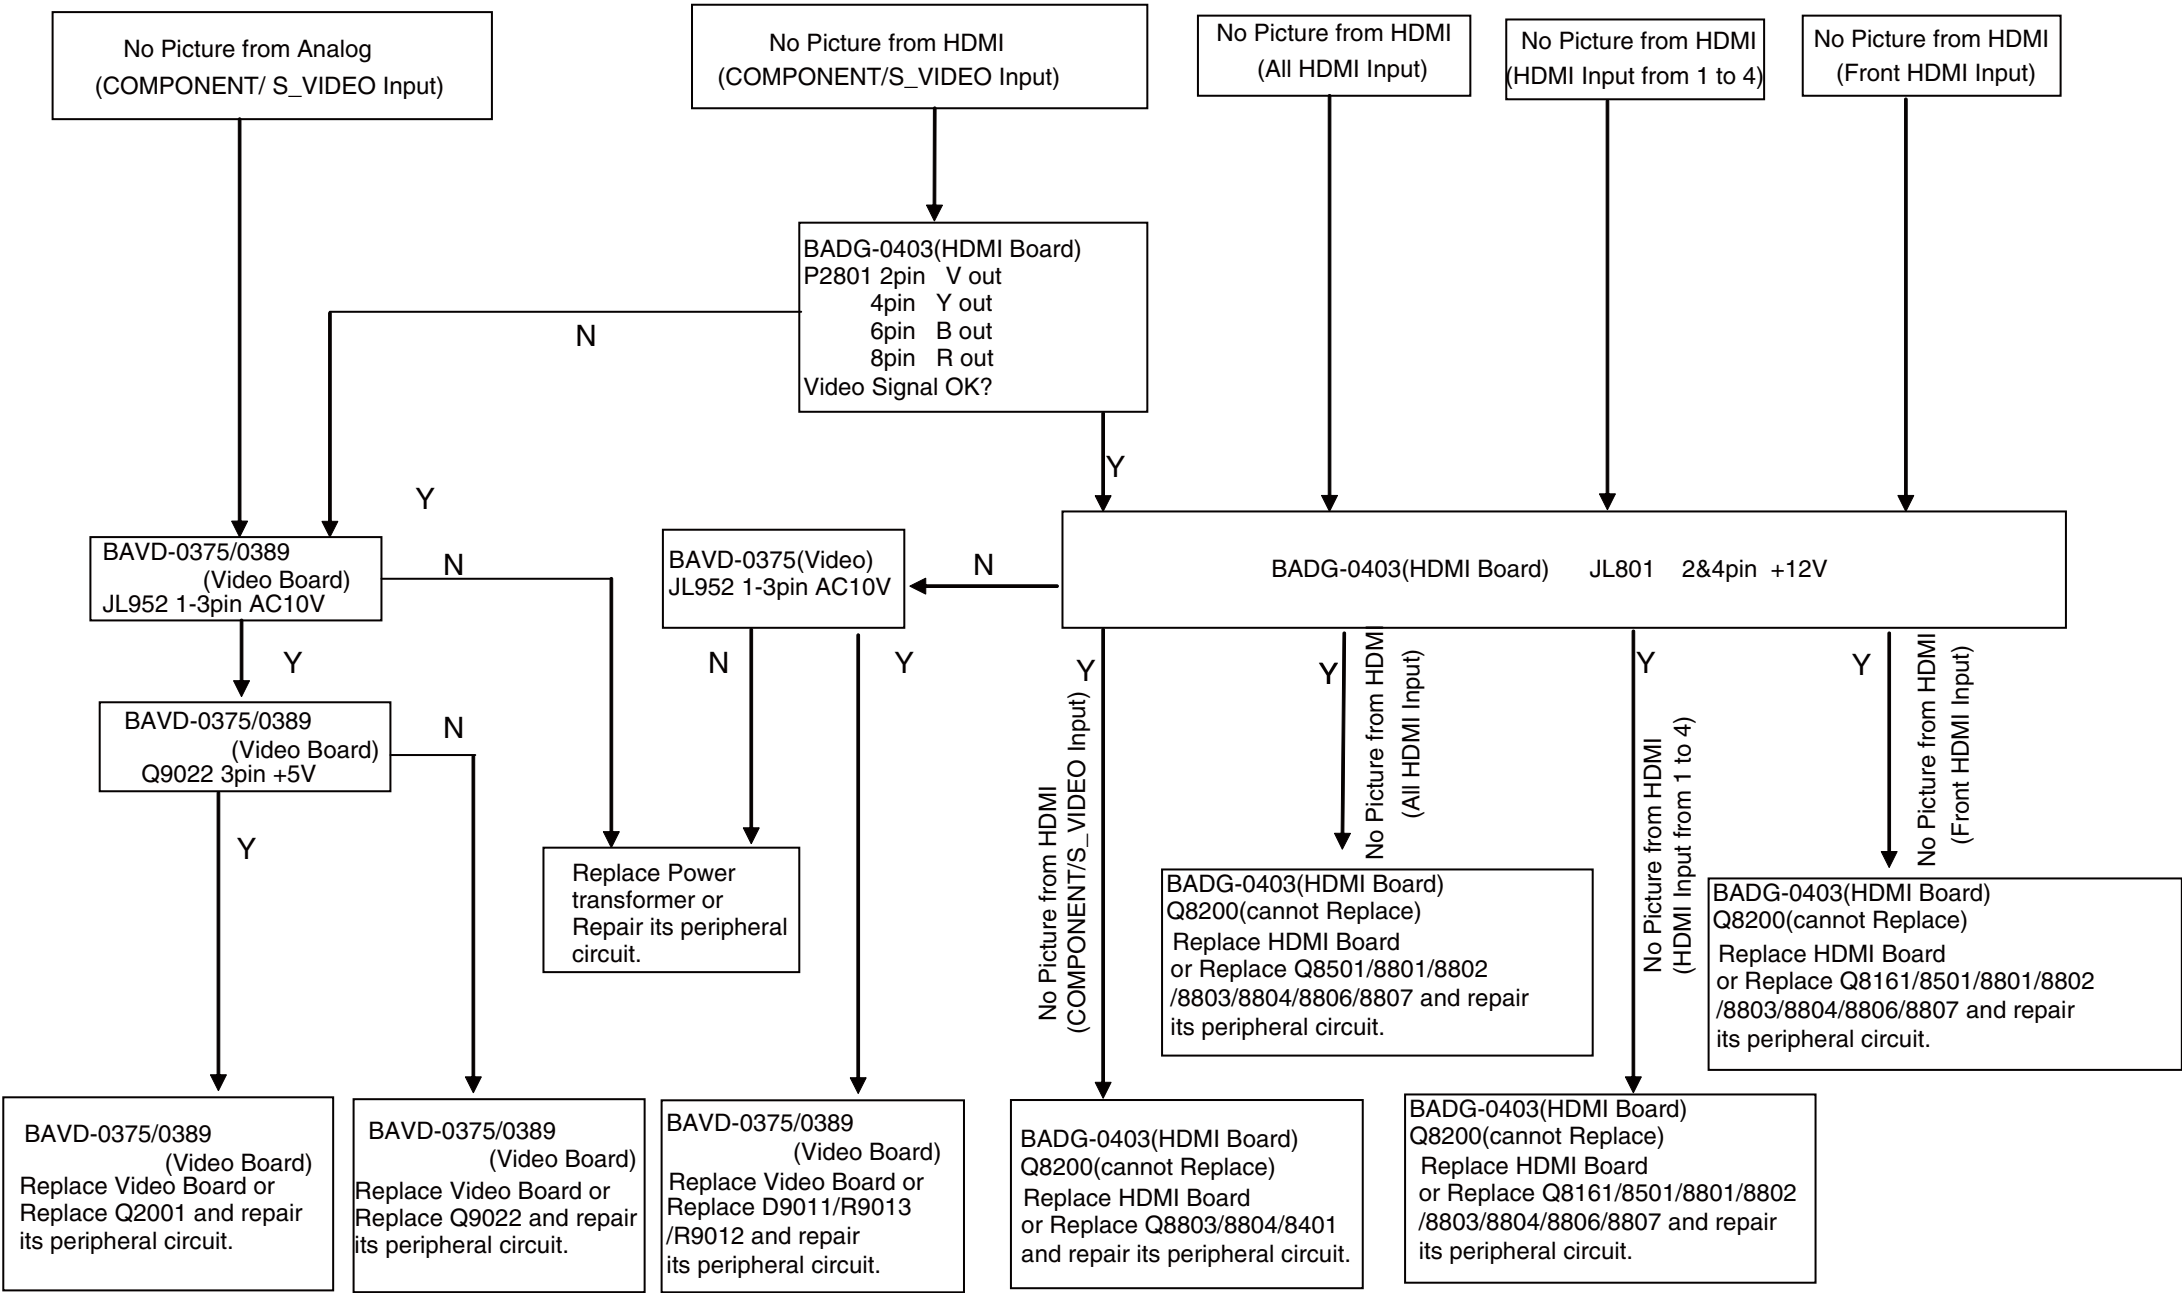


MMPU/ VMPU/ DSP Update Procedure-1

Preparation for Update-1

1. PC (Personal Computer) which can play back wav files and output digital audio signal under Windows XP.
 2. Software: Given wav-formatted FW Store it in the PC in advance (PC Update) or burn a CD-R with it as a music disc (CD Update).
 3. Connection: DIGITAL (OPTICAL/COAXIAL) output of PC/CD Player --> DIGITAL (OPTICAL-1/COAXIAL-1) INPUT of TX-SR608 etc.
- * PC needs to be able to handle wav files and output digital audio signal.
 - * For wav-compatible PCs which do not output audio signal at the above specification, use a commercially-available USB-AUDIO interface unit. e.g. Onkyo-made ND-S1
 - * PC needs to run Windows XP. Windows Vista and Windows 7 do not work.
 - * Set wave Volume to Maximum including Volume Control in Control Panel.
For further information, please see Owner's manual of your PC.
 - * Instead of PC, CD players with DIGITAL output terminal can be used.
- Note: CD players need to output digital audio signal .
Some CD players and DVD players are not suitable for update because they process audio signal to output.
Burn a CD-R as music disc.

Control Panel
--> Sounds and Audio Devices
--> Volume tab
--> Advanced
--> Turn all the levels to Max.

Connection Example

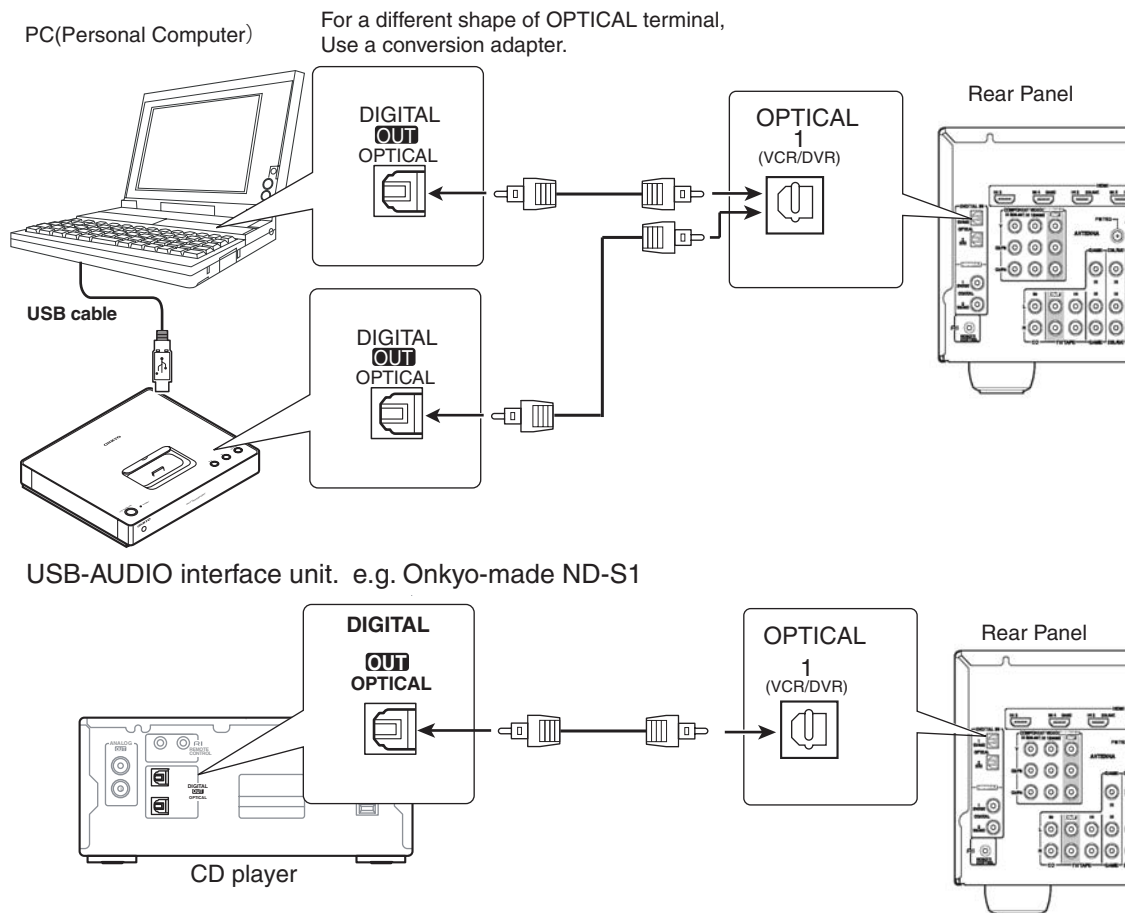

<NOTE 1>

When not display it about 20 seconds later "Writing" .
right digital audio signal is not output.
Check the connection and settings and try again.
When another try results in failure again, use the other update method.

<NOTE 2>

DURING FW UPGRADE, DO NOT TURN OFF THE UNIT. DO NOT REMOVE ANY CONNECTIONS.
These operation will not allow FW Upgrade any more, and the whole board or IC will need replacing.

MMPU/ VMPU/ DSP Update Procedure-2

Update Procedure

- While the unit is on, hold down [DISPLAY] and then press [ON/STANDBY].
Main FW Version will be shown on Front Display.

e.g. M:1.02/10323AE — * It depends on the version.

- While Main FW Version is shown, press [+(TONE)].
DSP FW Version will be shown on Front Display.

e.g. D:1.02/10416a38 — * It depends on the version.

- While DSP FW Version is shown, press [RETURN].

AUTO → ALL

* ▲ TUNING ▼ key changes “AUTO ▼ COAX1 ▼ OPT1.”

(“AUTO” means “COAX1” or “OPT1” will be automatically detected.

* ◀ TUNING ▶ key changes “ALL ▶ MMPU ▶ VMPU ▶ DSP ▶ VSP ▶ PORT”.
(TOTAL = MMPU+VMPU+DSP+VSP+PORT)

- When MMPU VMPU and DSP FWs are upgraded at the same time, select “AUTO → ALL” and press “ENTER.”

*The FW data please use Package Wev file.

For separate upgrade, select “MMPU” “VMPU” or “DSP”
and please “ENTER.”

*The partial renewal cannot use Package Wev file.
Please use individual Wav File.

S/PDIF Update..

- PC upgrade: Play back the stored wav file in your PC.

CD upgrade: Play back the FW CD-R with the connected CD player. It takes about 15 minutes.

[NOTE] Make sure that “**dolby dts**” is shown before starting playback.

About 20 seconds later, the message will change from **S/PDIF Update...** to **Writing...**

When “Writing...” will not be shown, the output music data is not correct.

Check the connection and settings.

S/PDIF Update..

Playback starts. (Playback time: about 20 minutes)

↓ (about 20 seconds)

DSP Writing...

↓

VMPU Writing

↓

MMPU Setting

↓

FW-Update 00000

After playback finishes, update will start.

↓

FW-Update FF000

(just after “FF000” is shown)

↓

OK:Sum=*****


“*****” depends on the version.

- Unplug AC cord and plug it again. Press [ON/STANDBY].

Clear

- Make sure that “Clear” is shown and the unit is turned into the Standby mode.

- Make sure that the FW versions are the latest.

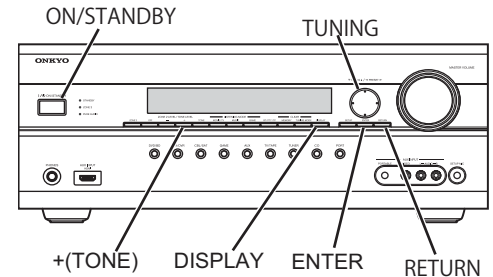

VSP Update Procedure-1




Click the Gprobe exe and begin installation

1



Click


2

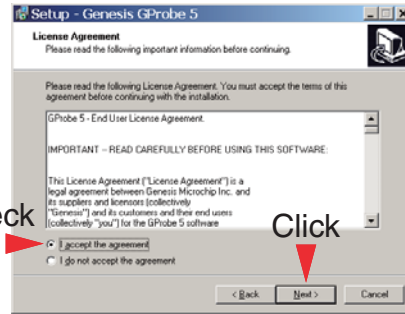

Check


Click

3

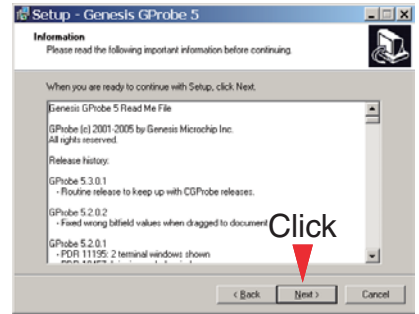


Click

4

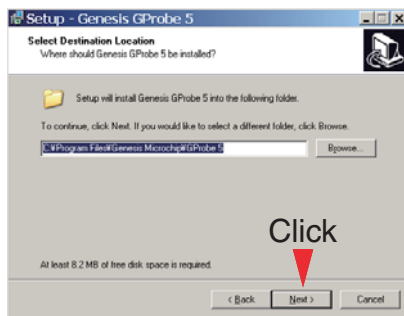

Click


5

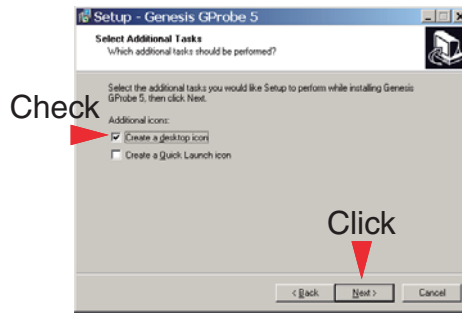

Check


Click

6

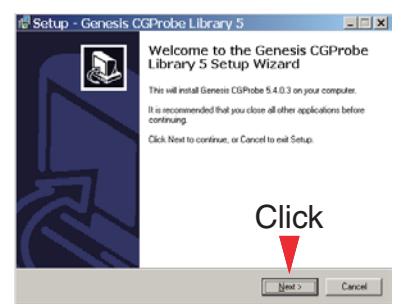


Click

7

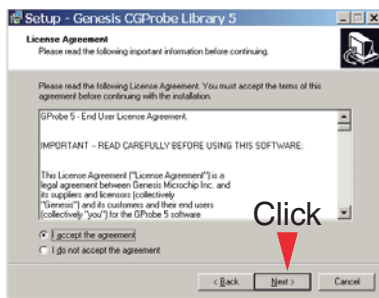

Click

8

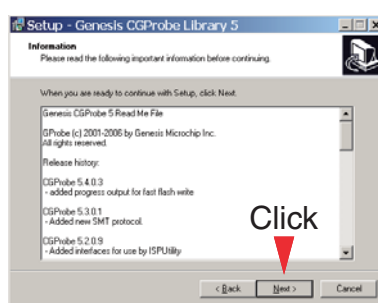

Click

9



Click

10



Click



Icon is displayed to a desktop.

VSP Update Procedure-2

1 Making Batch file

1.1 Creat a folder that Batch file and Object files are put.

In the example below, the folder named Sequoia(Arbitrariness) is made under C drive.

1.1.1 In this folder, put the txt file and the hex files such as below.

isp_spi_ext_64M.txt
isp_spi_ext_64M.hex
AE_Sig_BF.hex
SequoiaONK_10305a.hex

Please download these files from the Release data base server.

Please change the name of the hex file (underlined in the example below) in 'isp_spi_ext_64M.txt' properly according to the version.

The example below explains the name partitions of the hex file:

SequoiaONK_10305a.hex
Sequoia : acronym for the Video Processor Chip Sequoia
10305a: The firmware release date. The fifth of march 2010

VSP Update Procedure-3

2. Connection

2.1 PC(RS232C COM Port) Connection

Connect PC and RS232C straight cable.

Connect Conversion board to flat cable and that RS232C straight cable.



2.2 Unit(Rear Panel Slit) Connection

Connect the flat cable into the connector in the slit of the rear panel..



VSP Update Procedure-4


3 Execution of Gprobe

3.1 Click the Gprobe icon and start it.



3.2 Turn on the power supply of AVR.

If a Log message comes out the red icon shown below appears, it is connected properly.

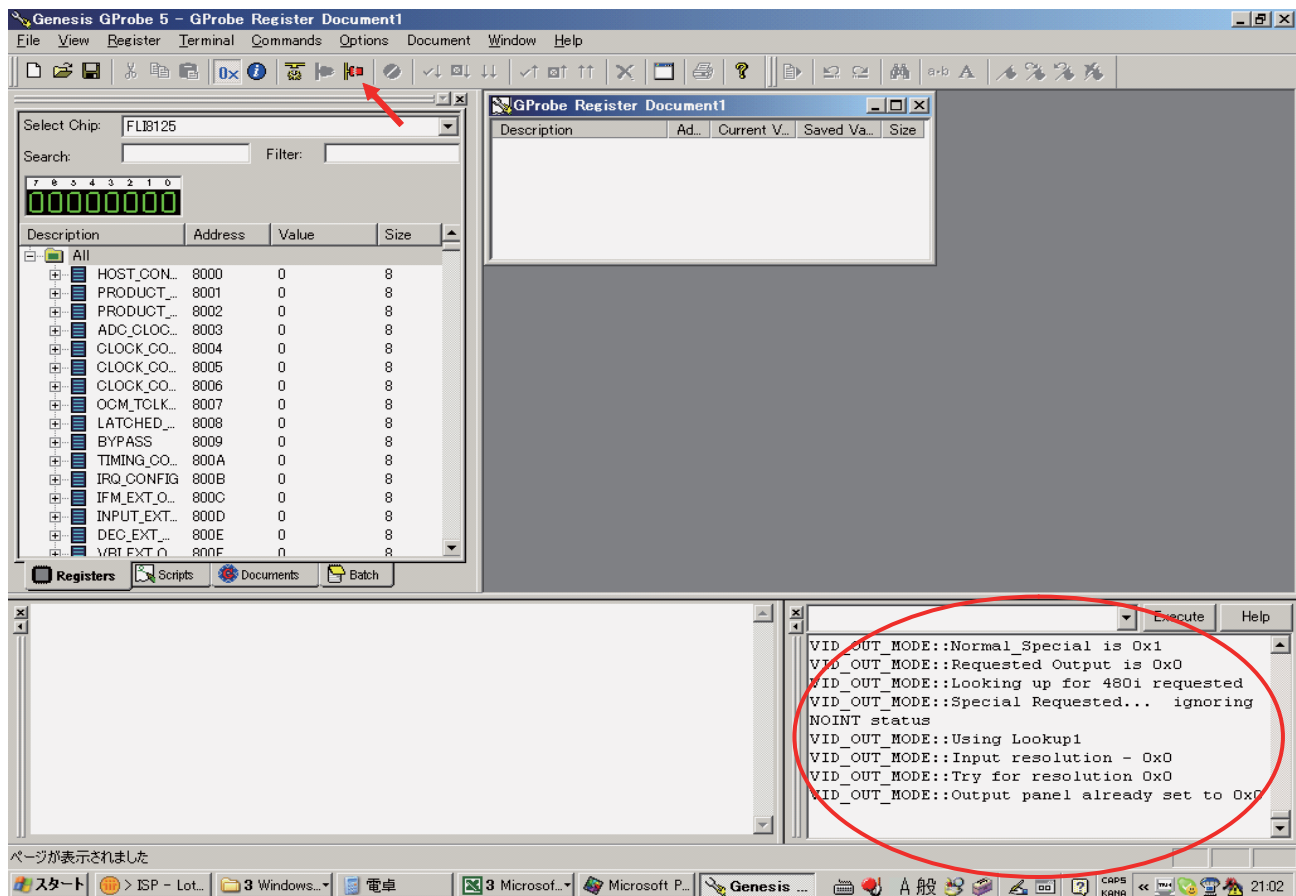

Please wait for the output of a message to stop before writing the FW.


3.3 Batch

3.3.1 To click [Commands] in top tool bar.




VSP Update Procedure-5

3.3.2 Click [Batch] in [Commands].

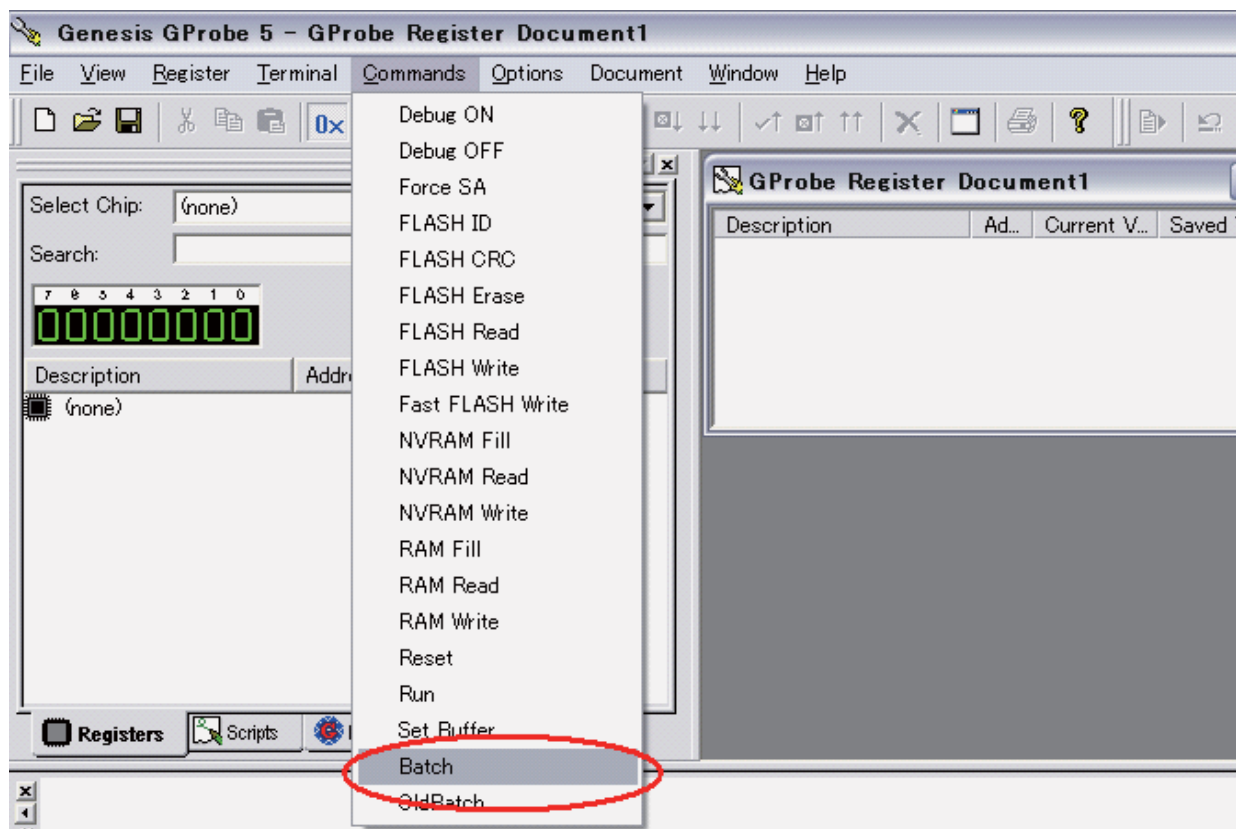


3.3.3 Choose the batch file that you should write in and click OK.

The file to choose then is text file "isp_spi_ext_64M.txt" in "Sequoia folder" which you made some time ago.

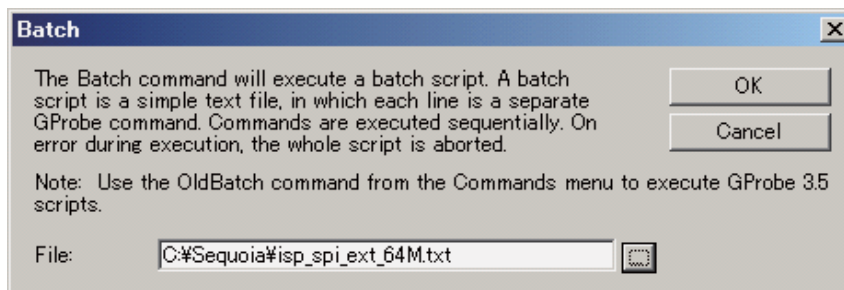


VSP Update Procedure-6

2.3.4 Writing begins when "Command Successful. Writing FLASH. . ." is displayed

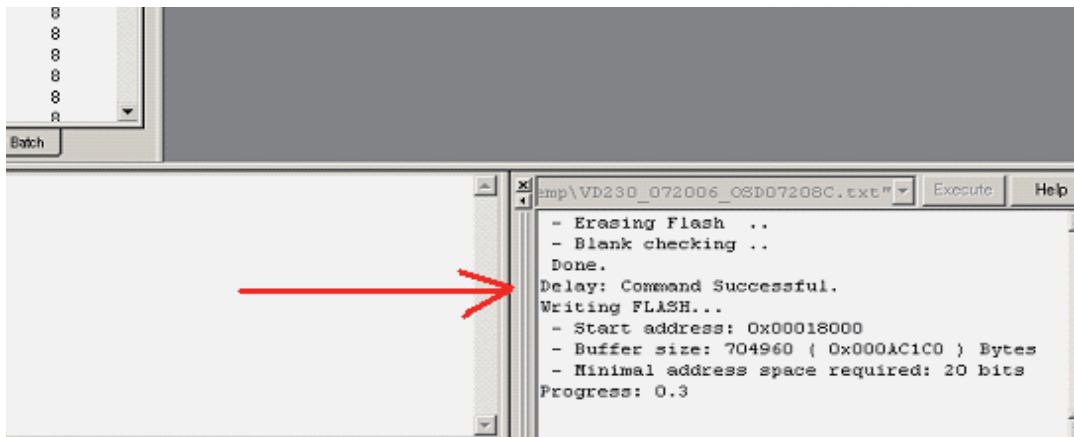


If the below message appears, the writing process has failed. Please try again.

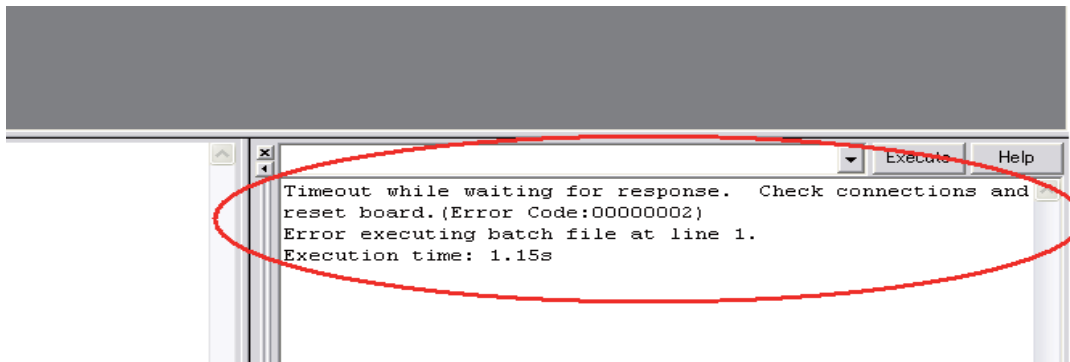


3.3.5 Batch completion (writing completion).

If the message named "Command Successful" appears as follows, the writing process is done. Please OFF/ON the power supply.

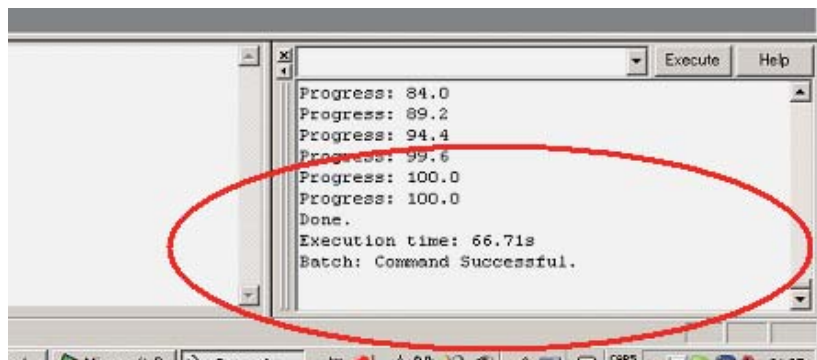


EXPLODED VIEWS-2

<Fig-1>

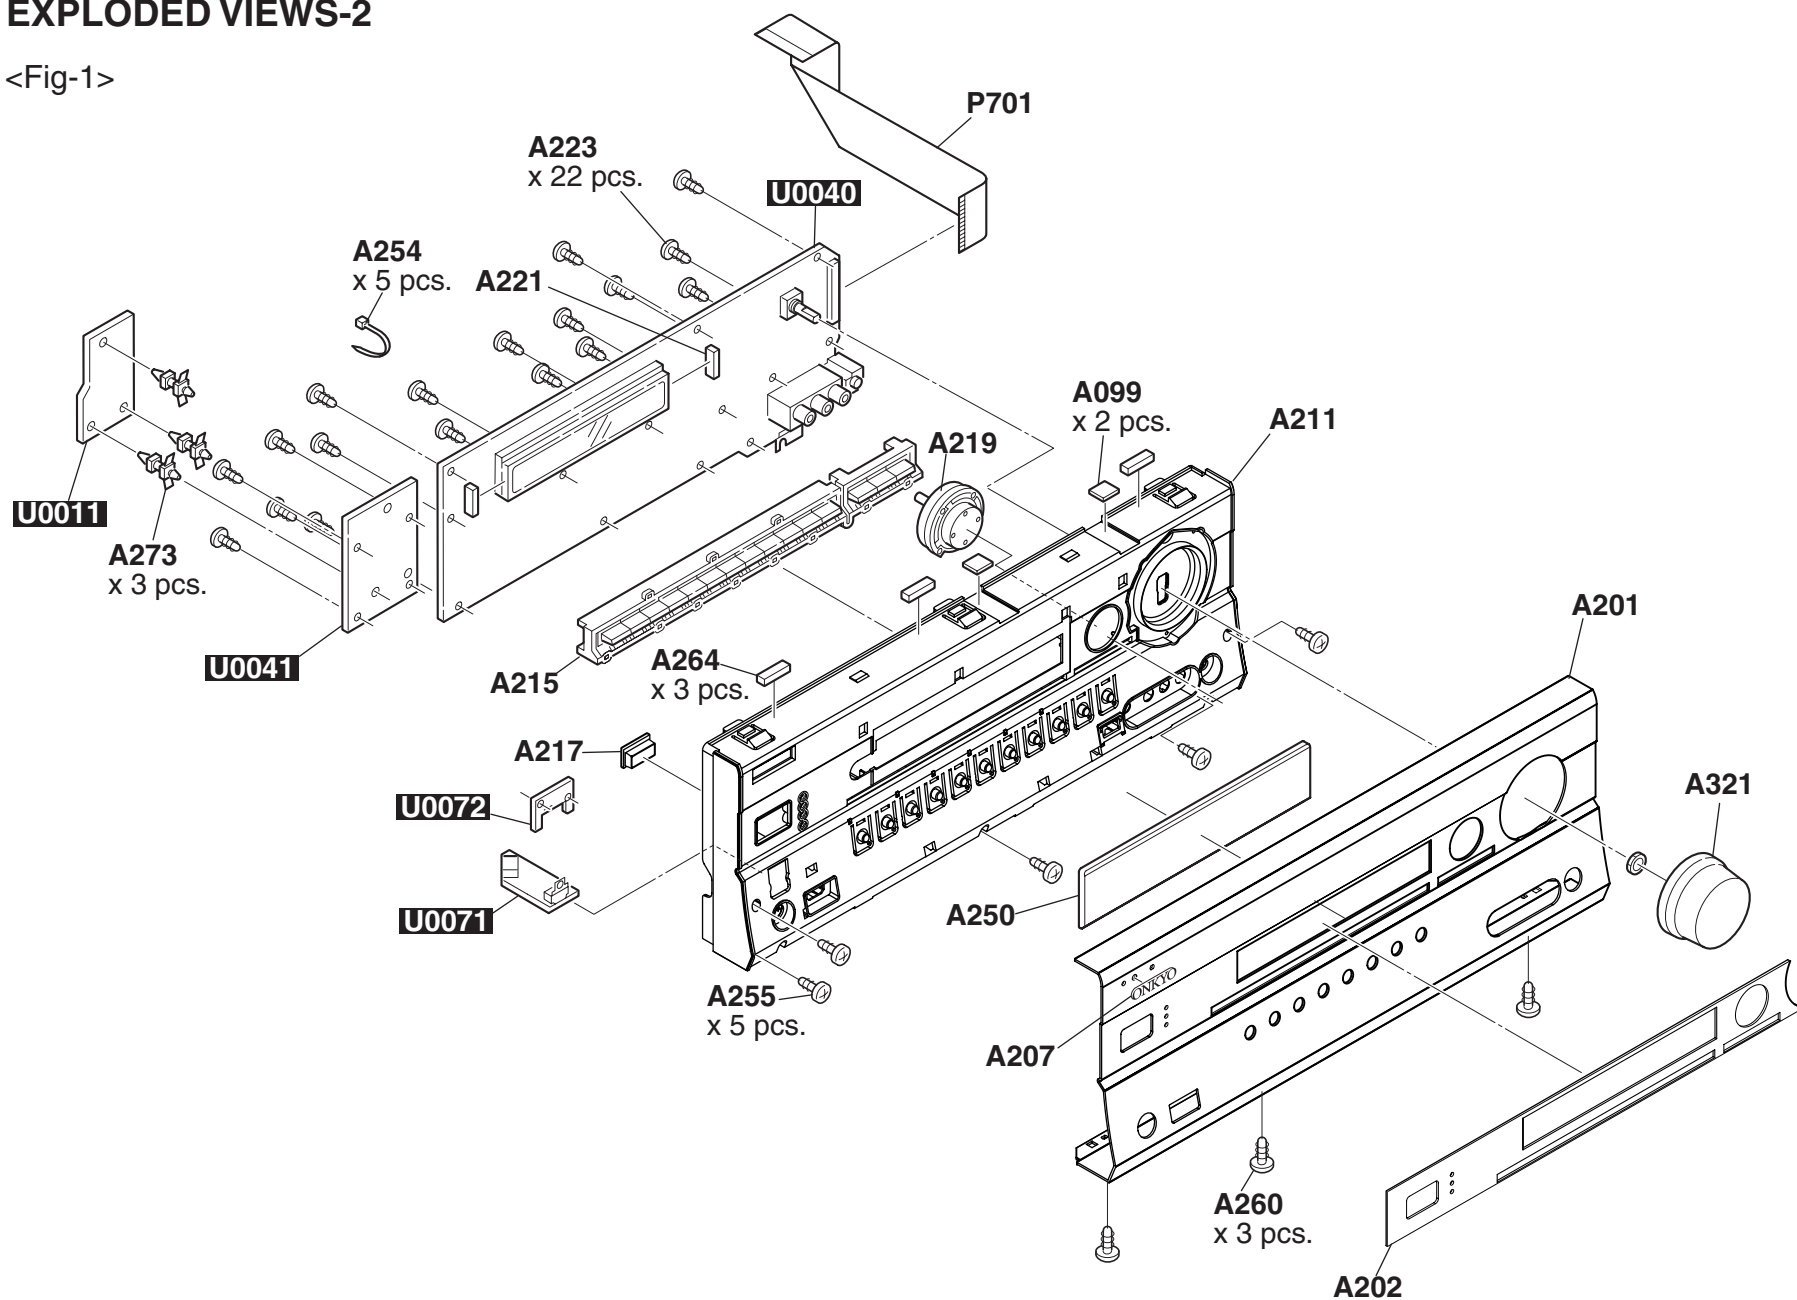


EXPLODED VIEWS-3

<Fig-2>

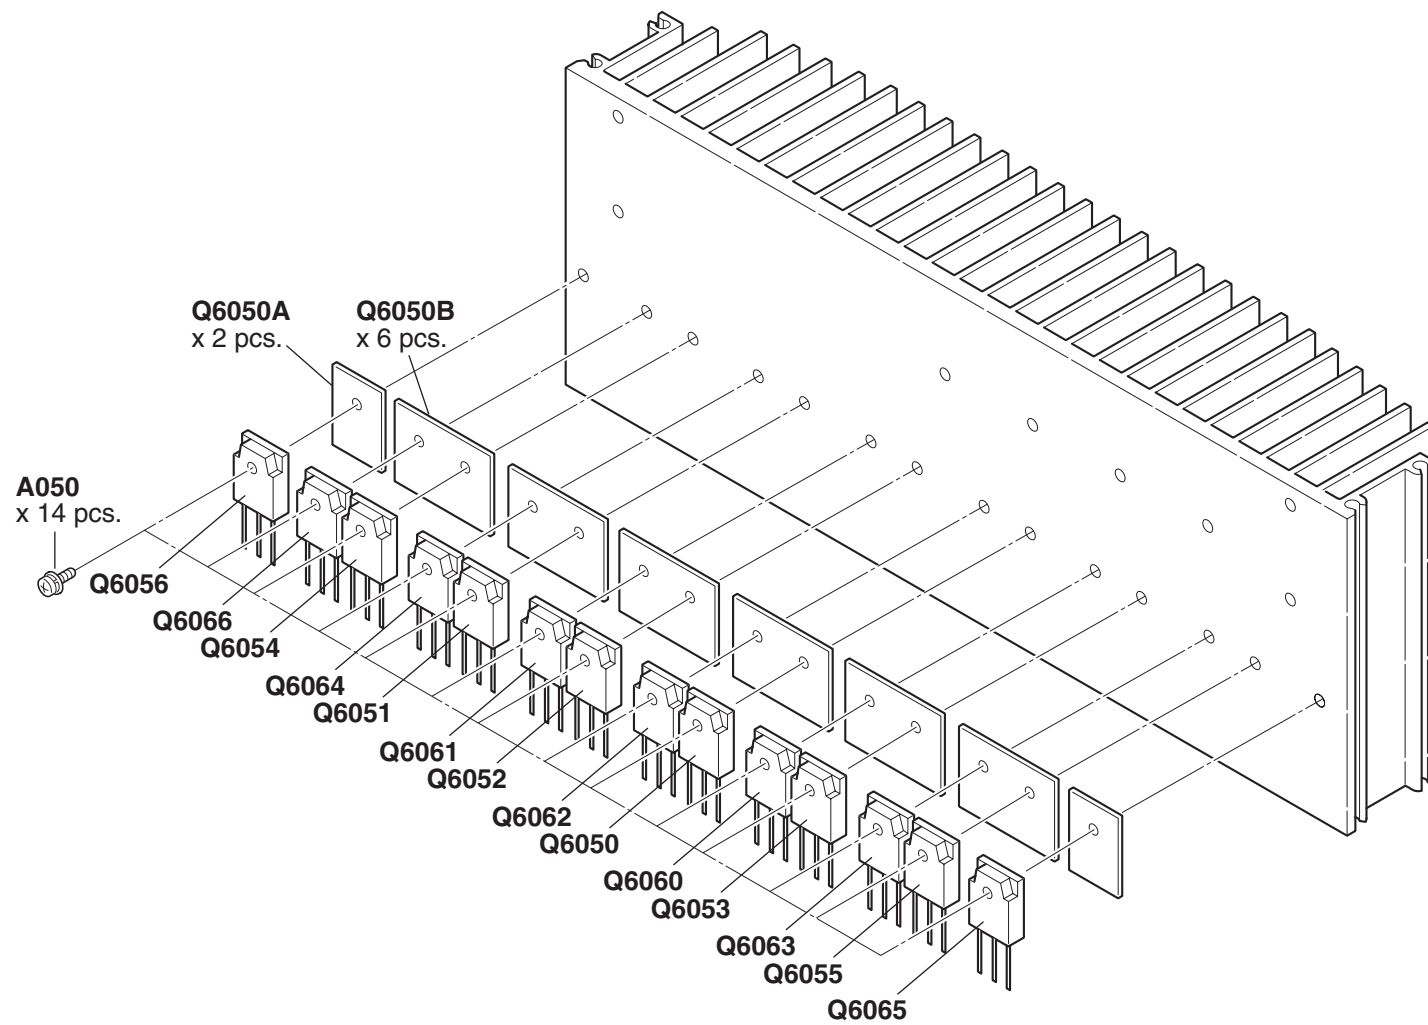


WIRING DIAGRAM

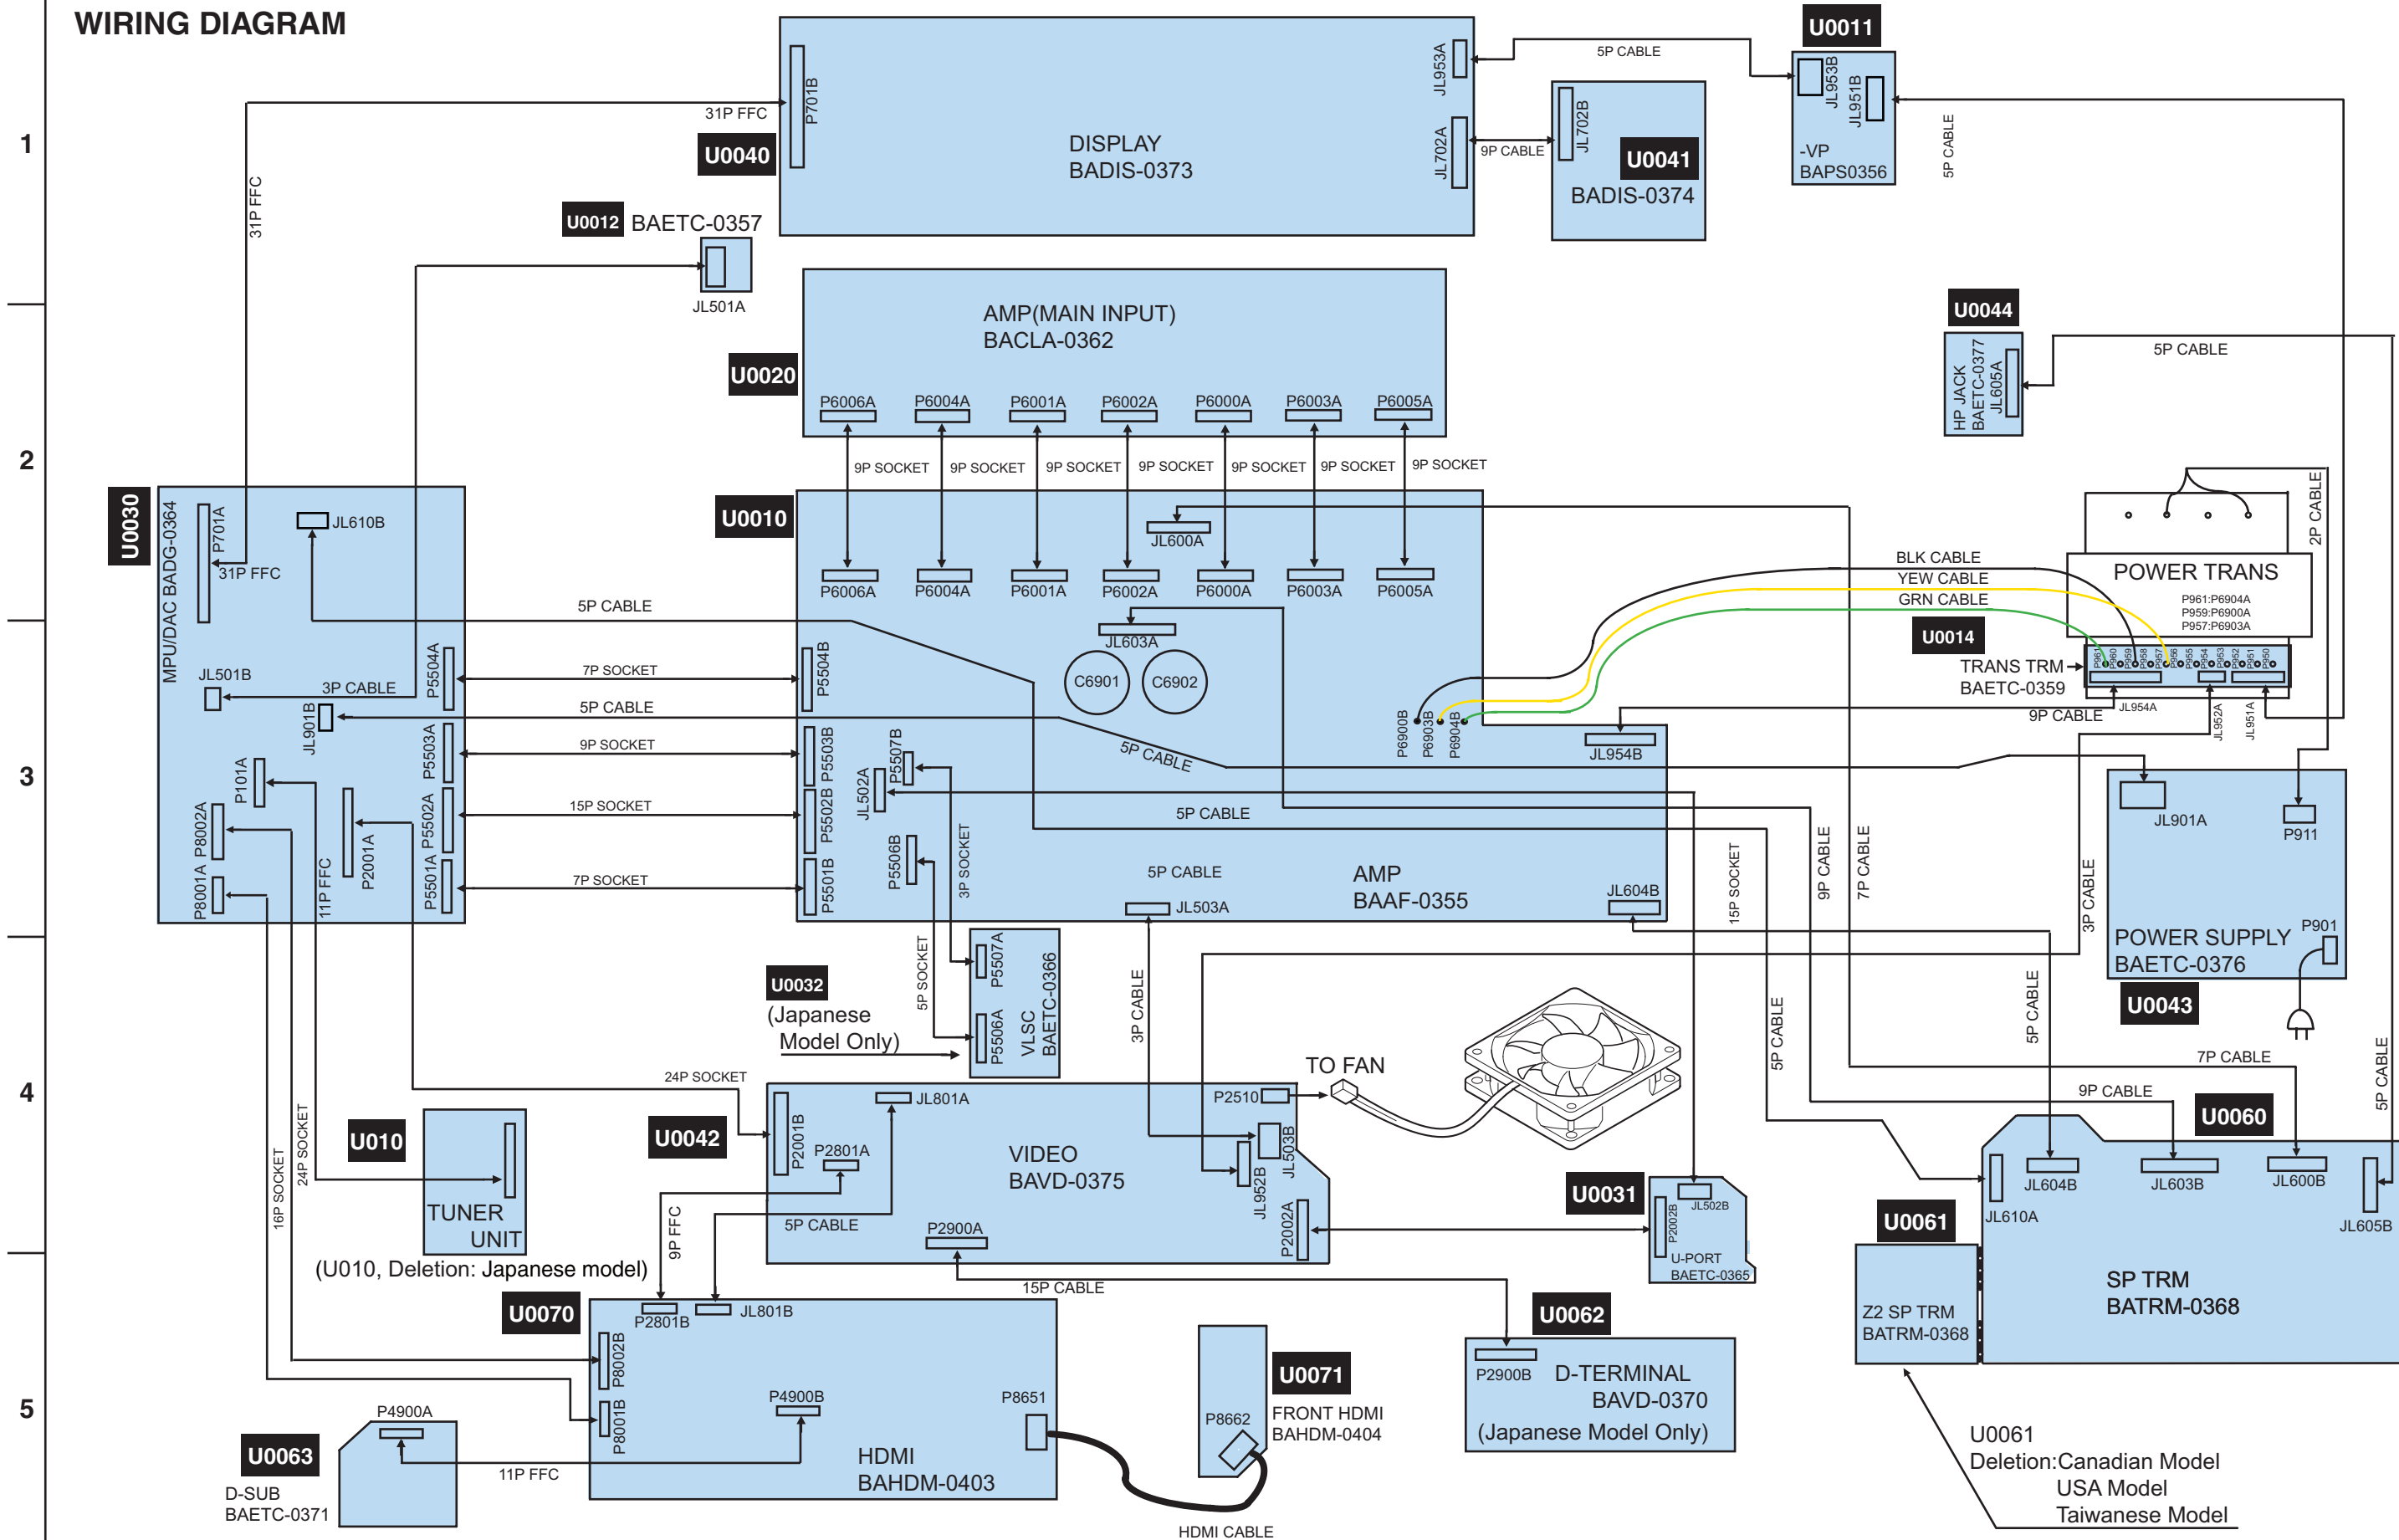


AUDIO ANALOG SIGNAL(TV/CD)
 FRONT L
 FRONT R

DIGITAL AUDIO SIGNAL(OPT-1)

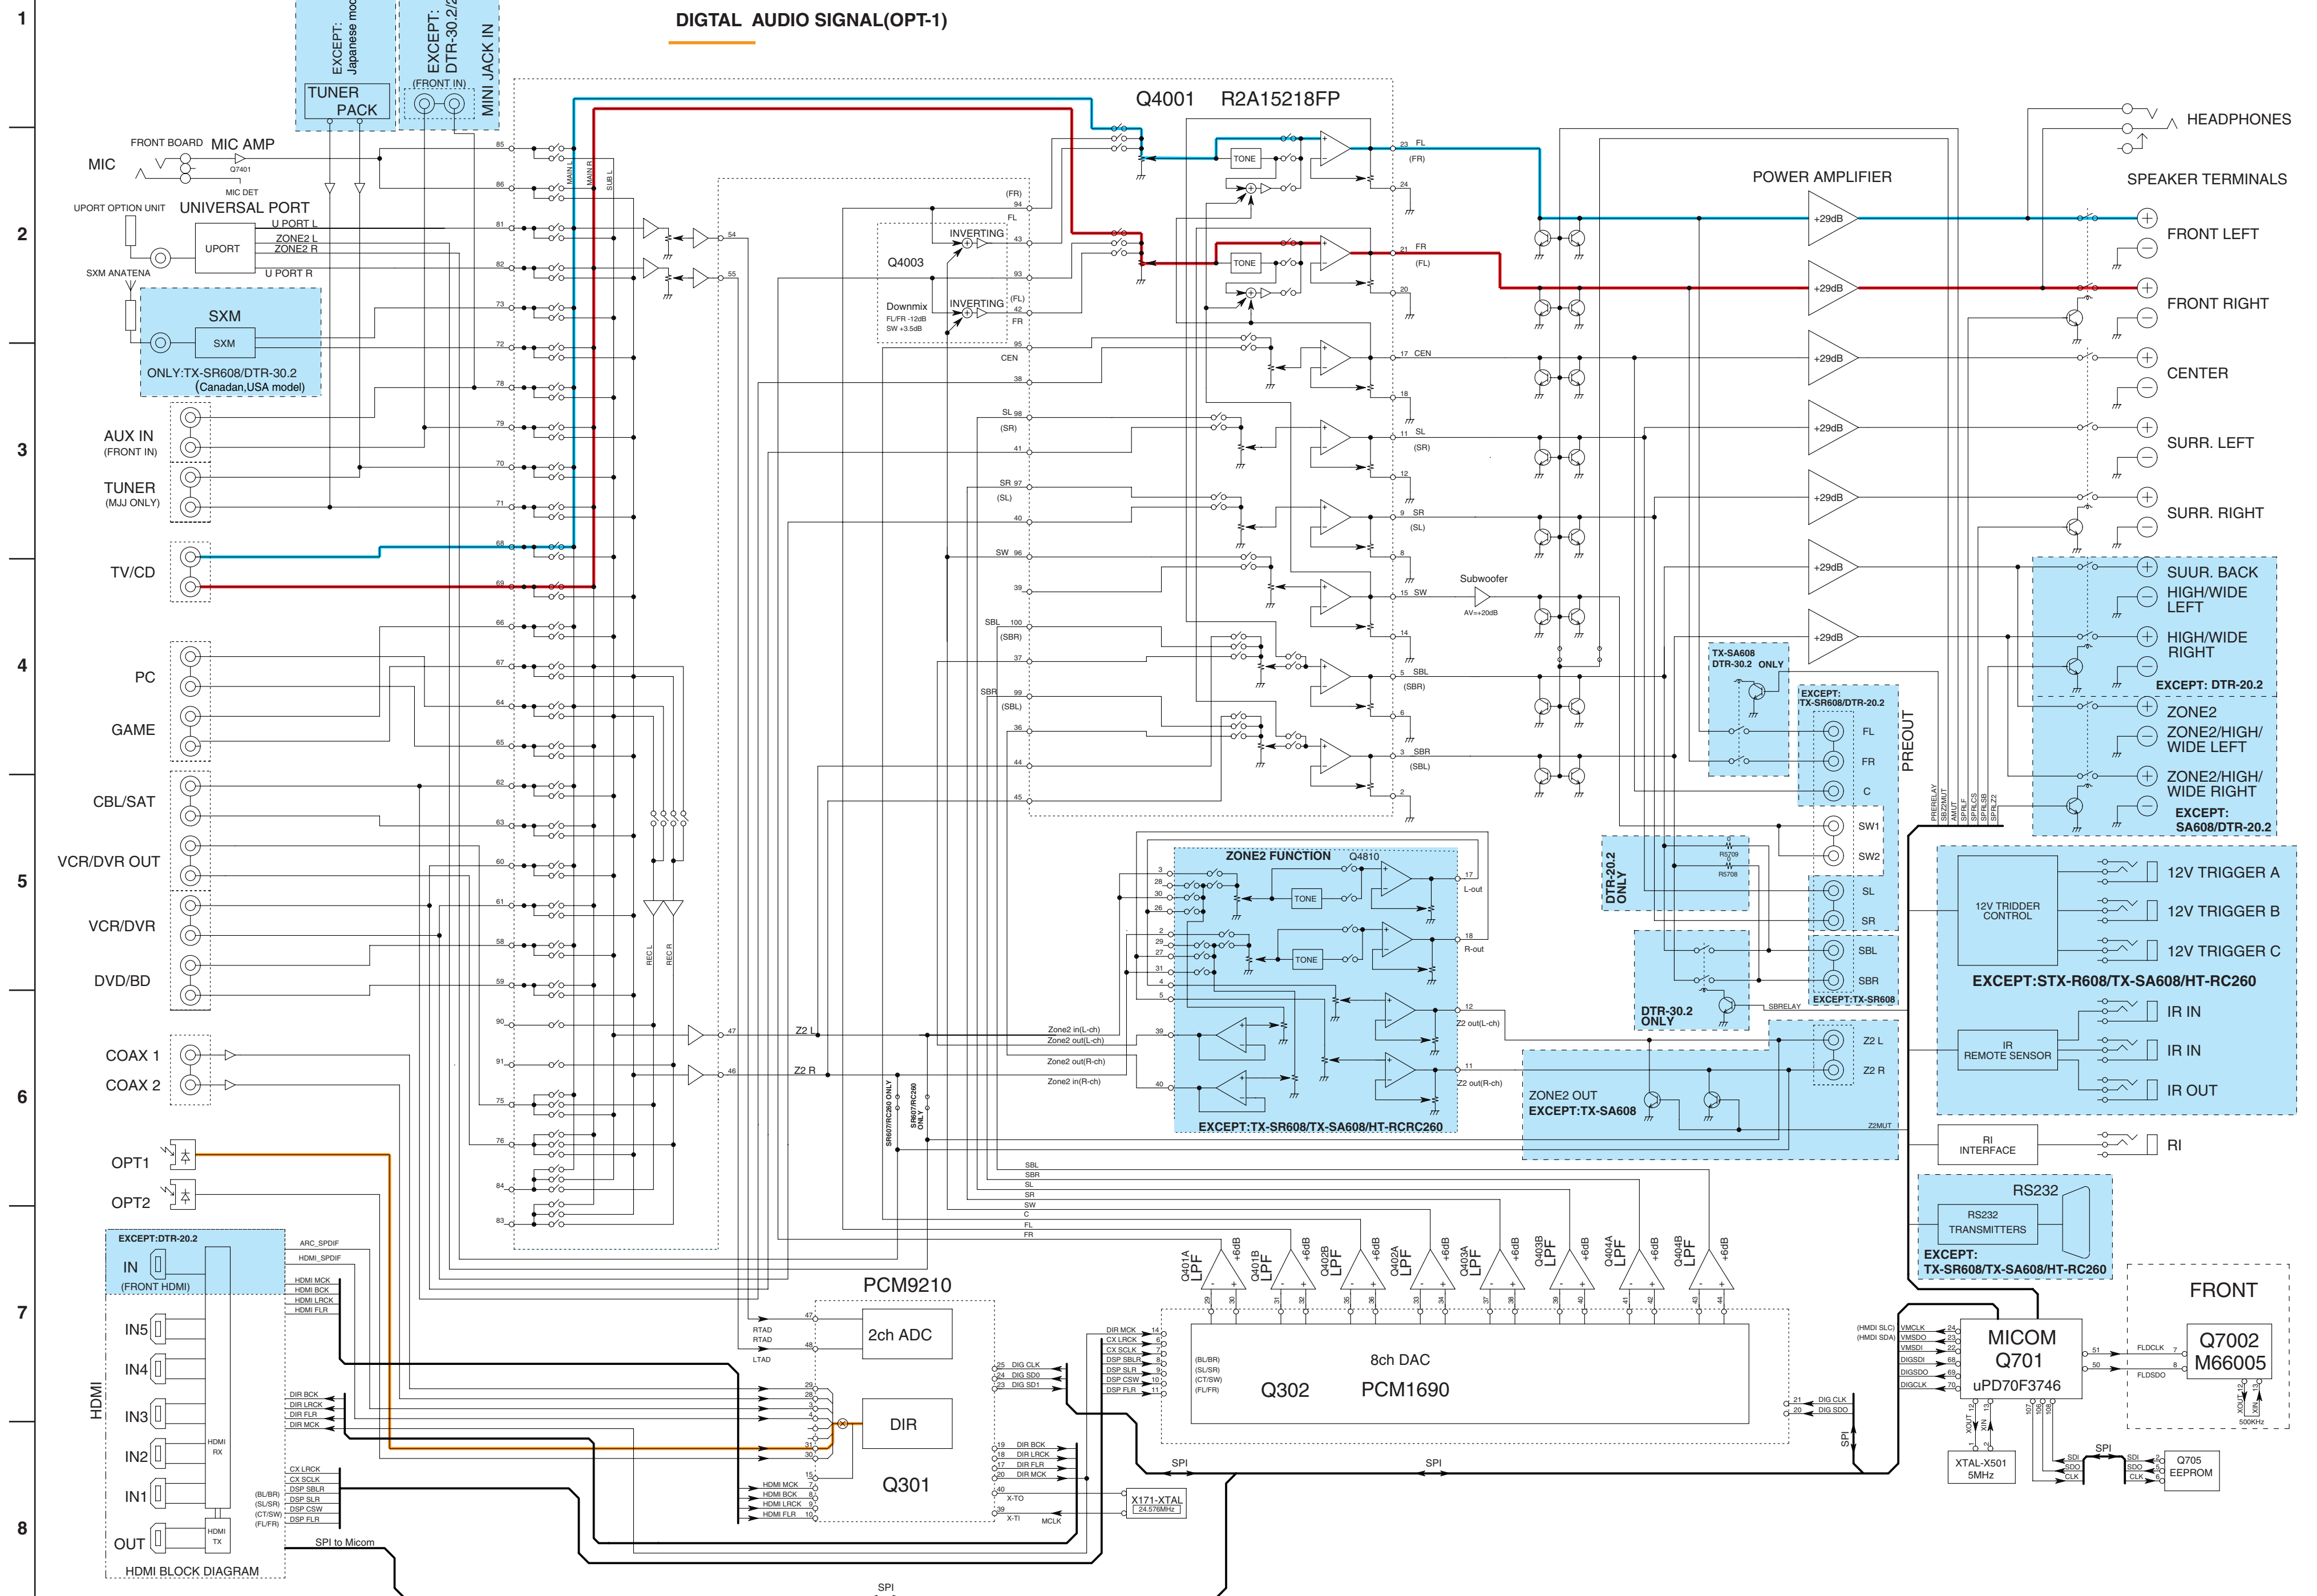


SCHEMATIC DIAGRAMS-2

Video BLK Section

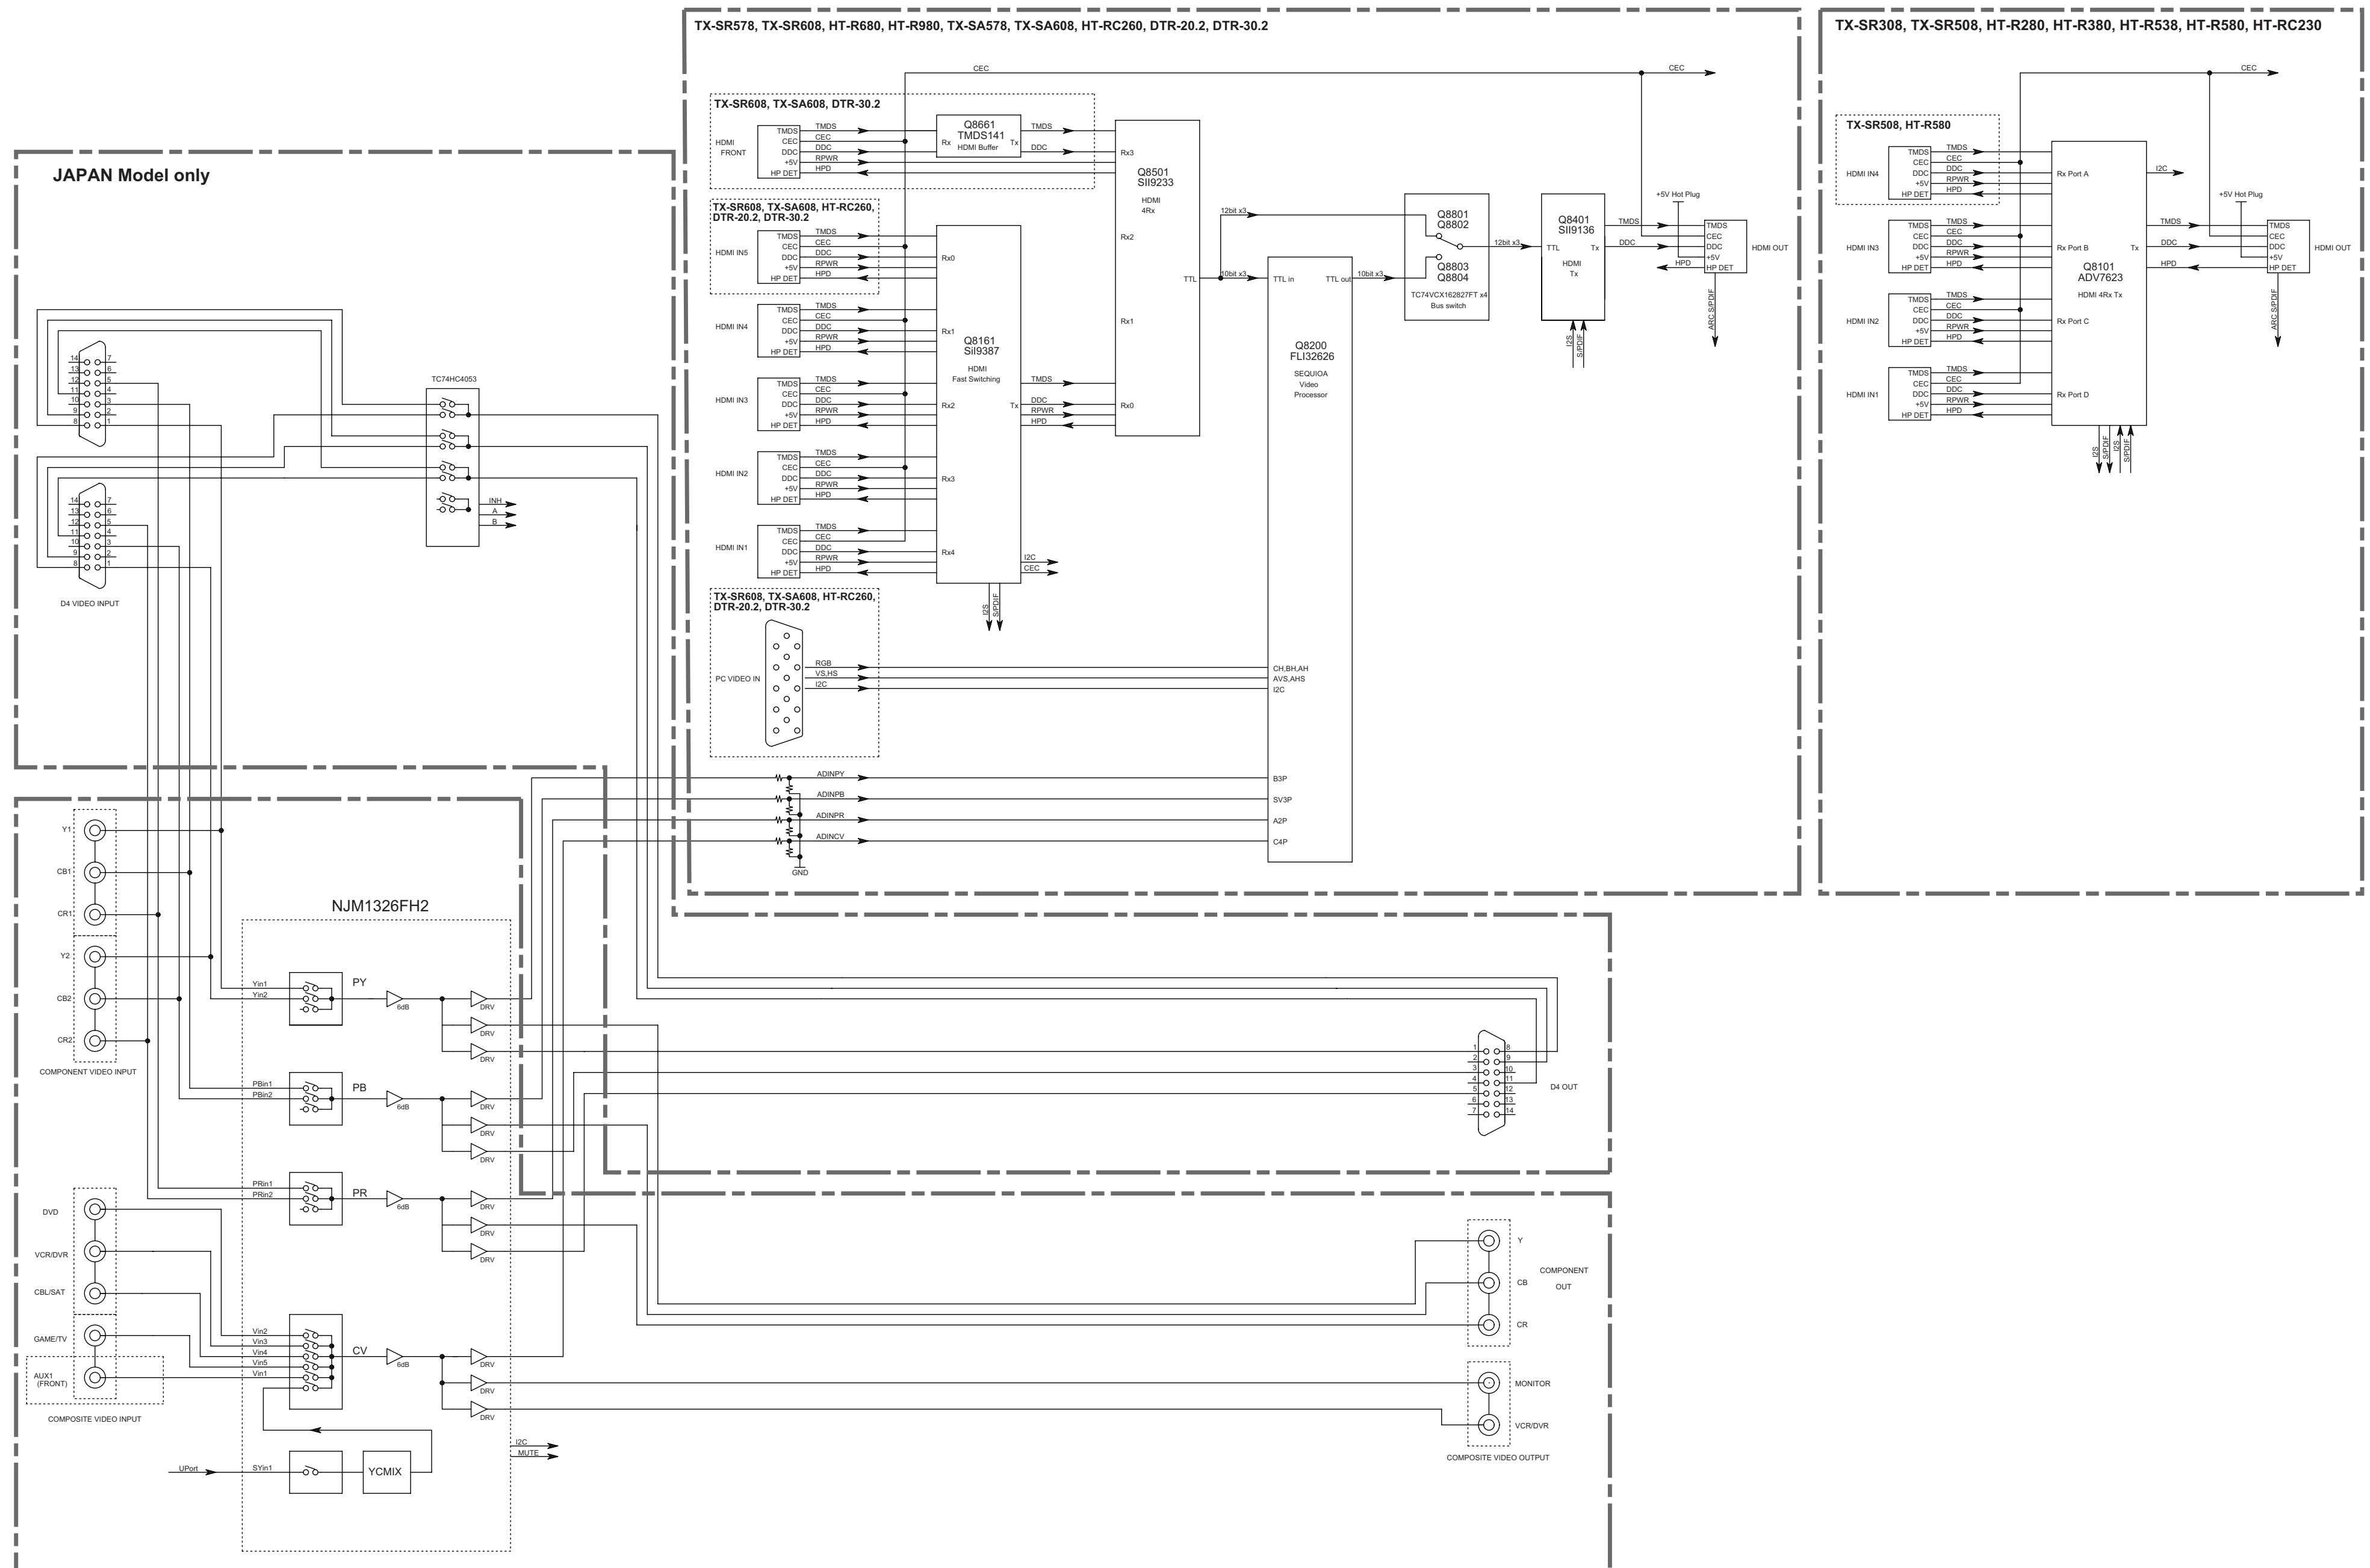

FRONT L
FRONT R

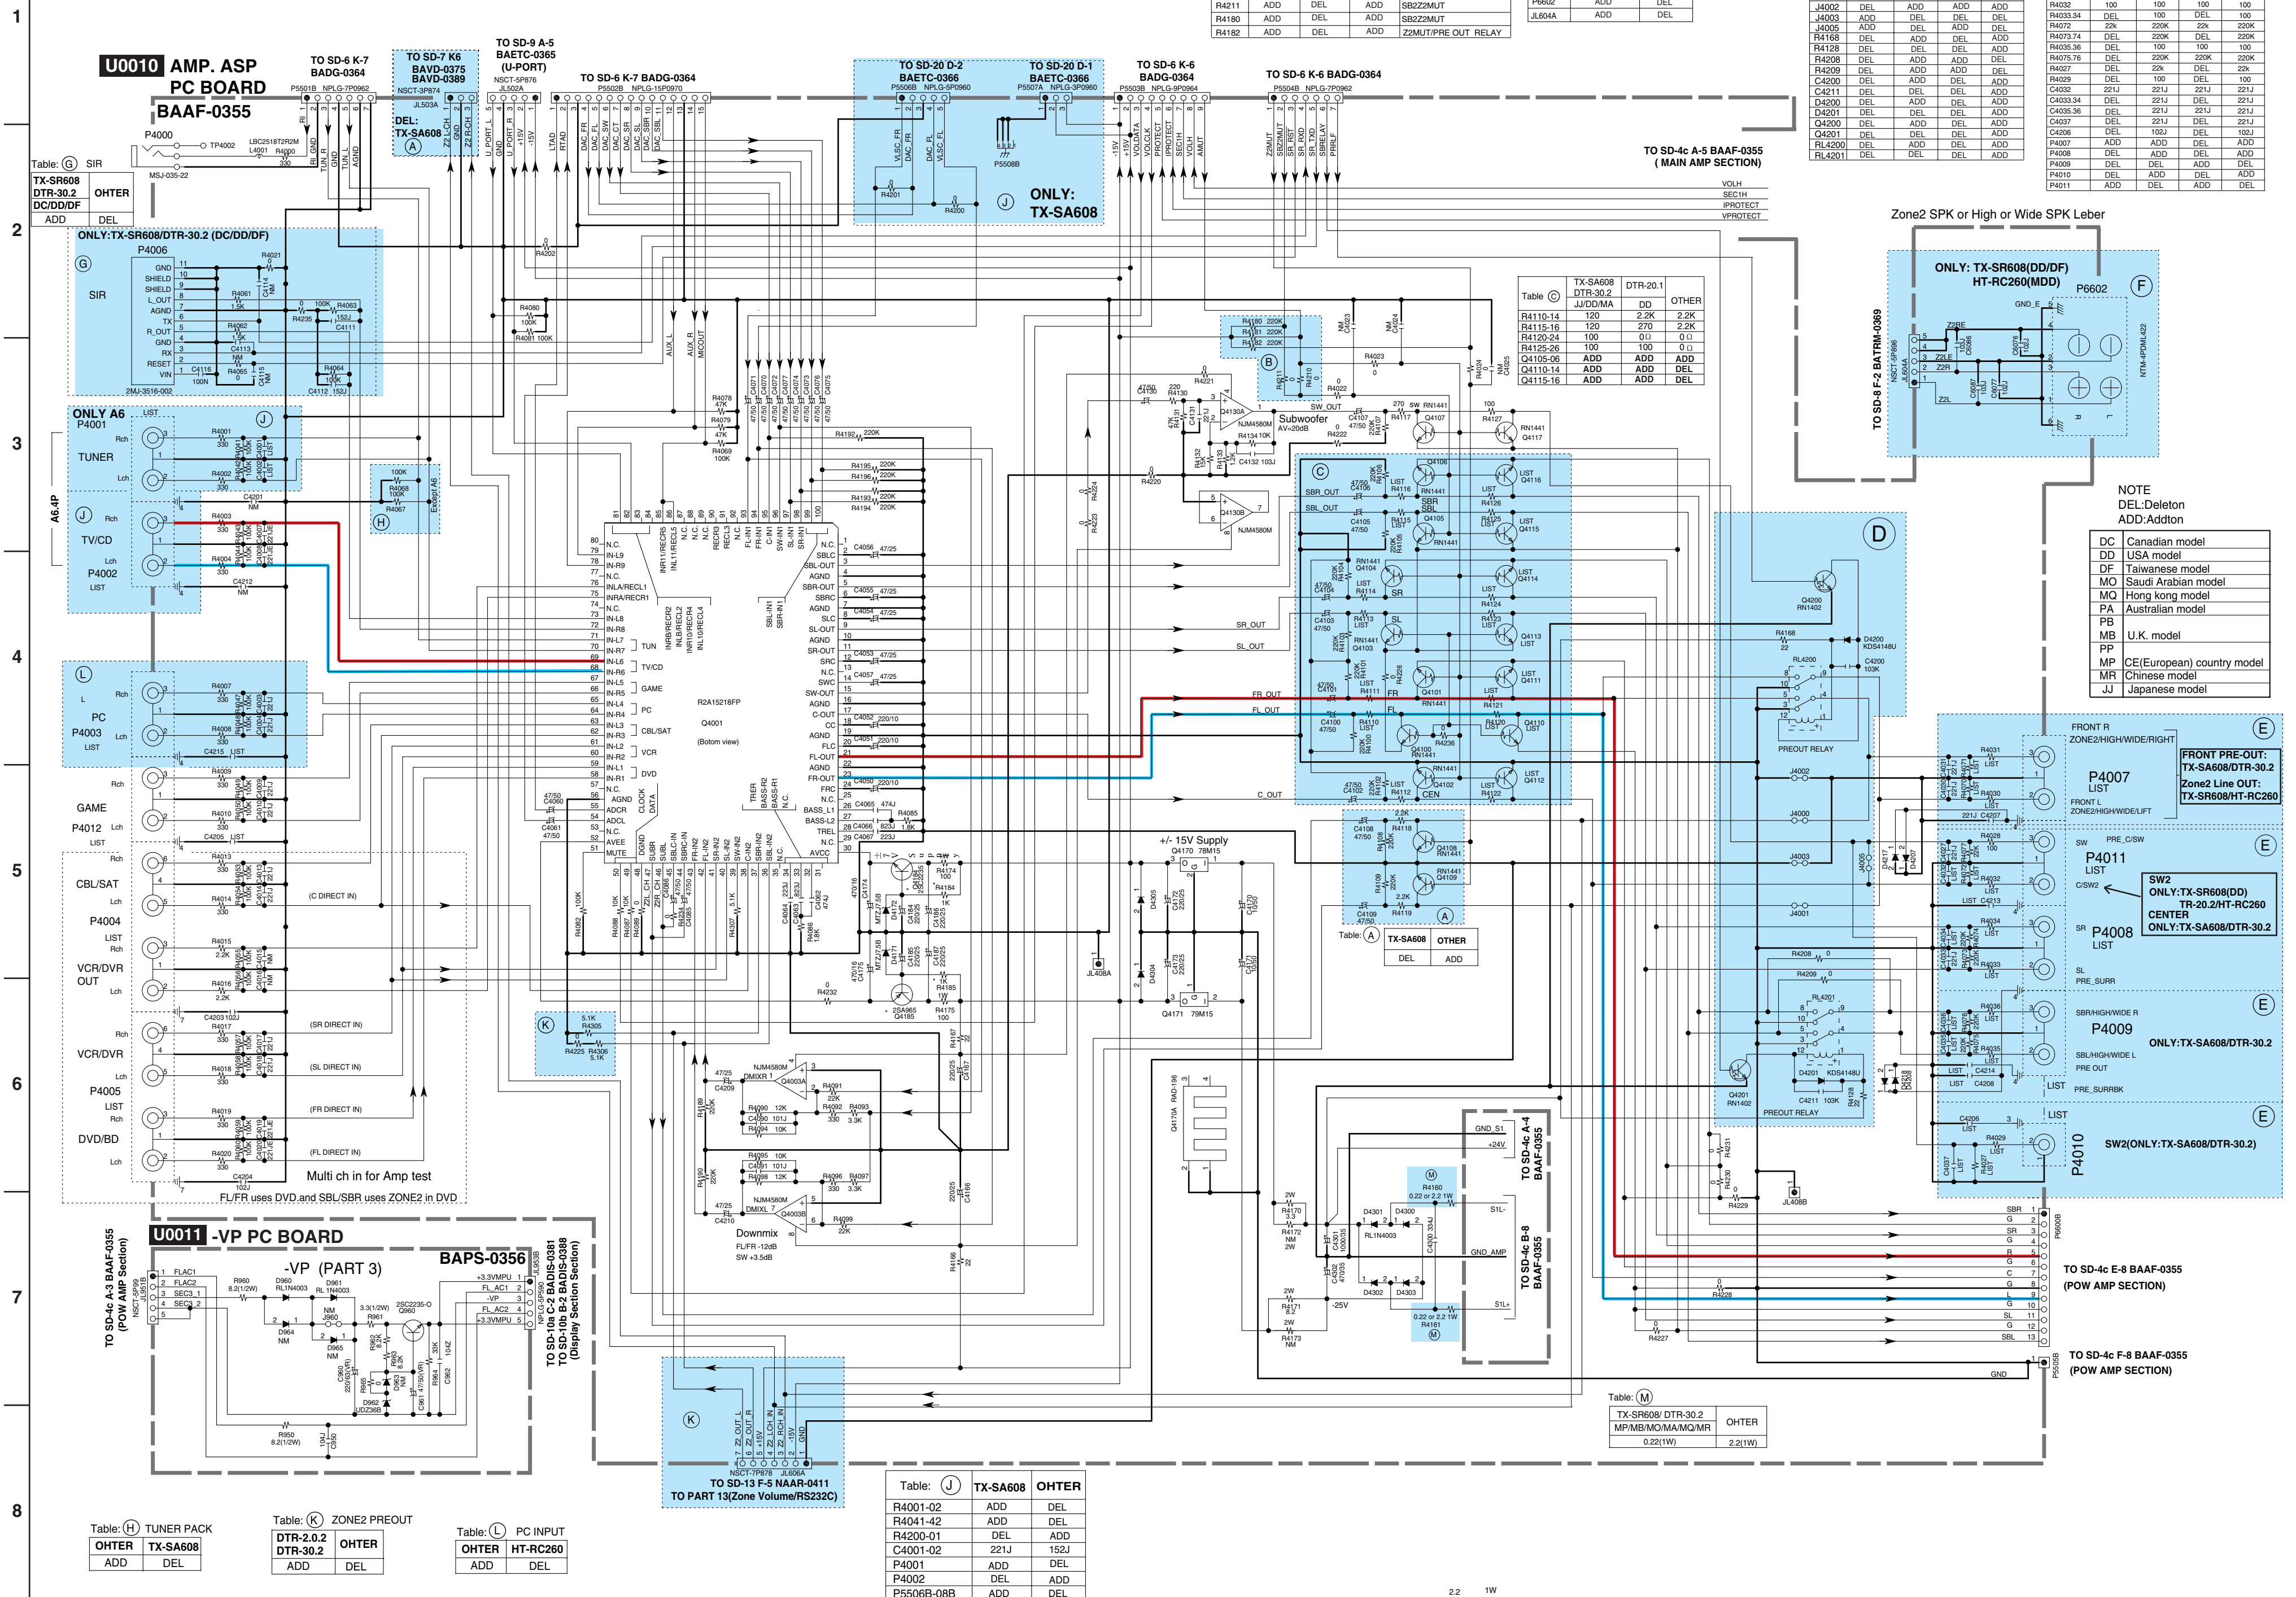


AUDIO ANALOG SIGNAL

FRONT L




FRONT R

Power Tr	TX-SR608 EXCEPT:PP	HT-RC250 DTR-30.2	TX-SA608	TX-SR608 ONLY:PP	DTR-20.2
Q6050-52	2SC4468	2SC4468	2SC5242	2SC5242	2SC4468
Q6053-54	2SC4468	2SC4468	2SC5242	2SC5242	2SC4468
Q6055-56	2SC4468	2SC4468	2SC5242	2SC5242	--
Q6060-62	2SA1695	2SA1695	2SA1962	2SA1962	2SA1695
Q6063-64	2SA1695	2SA1695	2SA1962	2SA1962	2SA1695
Q6065-66	2SA1695	2SA1695	2SA1962	2SA1962	--

U0012
THERMAL SENSER PC BOARD



TO SD-7 C-8
BAVD-0382

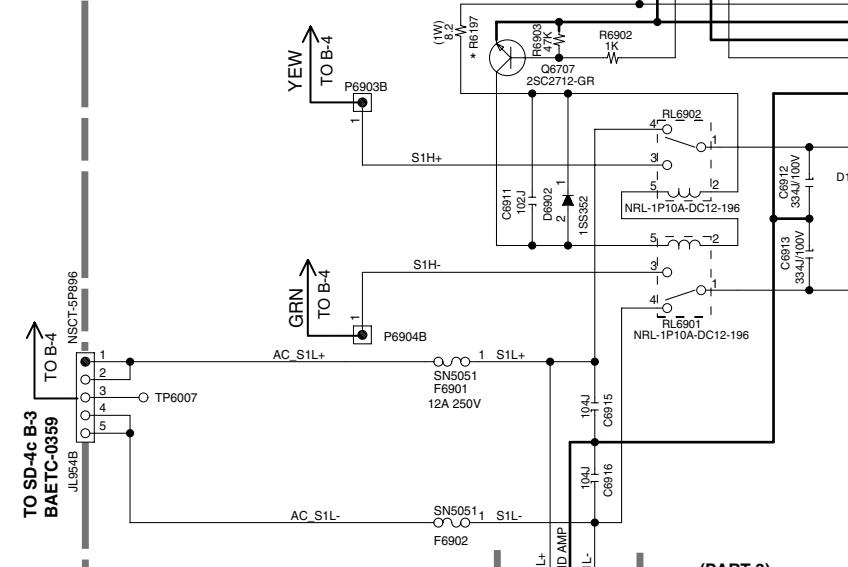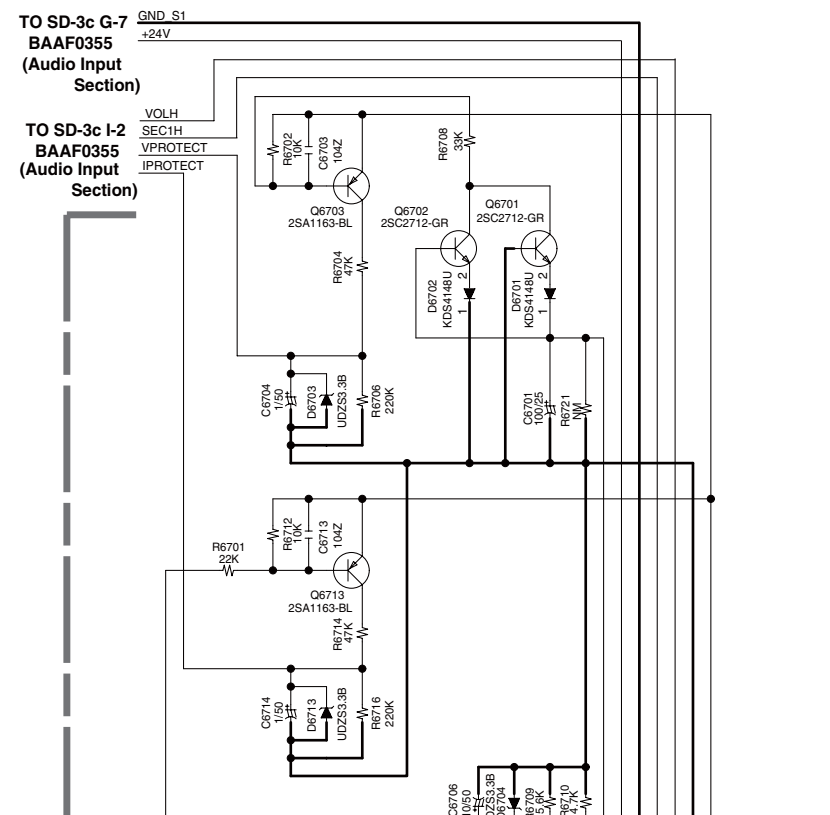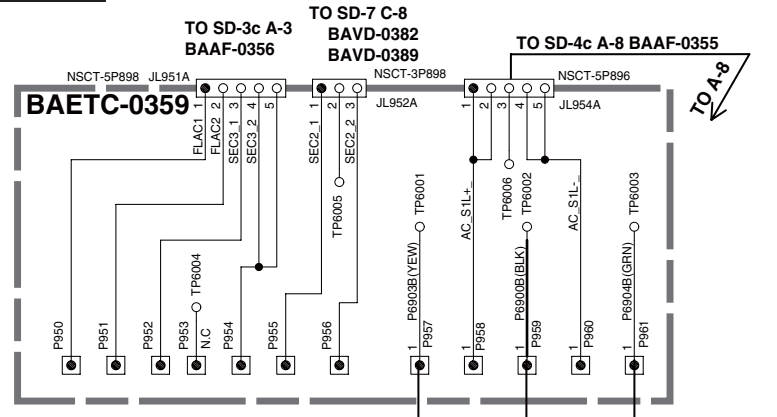

TO SD-3c G-7 BAAF-0355
(Audio Input Section)

TO SD-8 D-5	TO SD-8 F-2
BATRM-0368	BATRM-0368
(SP TRM Section)	(SP TRM Section)

TO SD-8 F-2
BATRM-0368
(SP TBM Section)

TO SD-3c J-7
BAAF-0355
(Audio Input Section)

BAAP-0355
(Audio Input Section)

TO PART 8(SP TRM)
TO BATRM-0368

SCHEMATIC DIAGRAMS-5

MAIN AMP (Input Stage) SECTION


IDLING CURRENT ADJUSTMENT

- Set the voltages at P6080~6086 to 1.5mV by adjusting R6040~6046, under the condition of no input and no load, immediately after POWER ON.
- 4~6 minutes of heat running.
- Re-adjust by following procedure.


All		
Below 7mV	Return to 'c', after it adjusted to 7mV.	
Between 7~8mV	8mV	
Between 8~10mV	Leave it as it is.	
Over 10mV	10mV	

*Set R6040~6046 to minimum position before POWER ON.

*Equip series 1/4W 100-ohm resistors near the terminal respectively in the each poles of the jig used for P6080-6086 terminals.

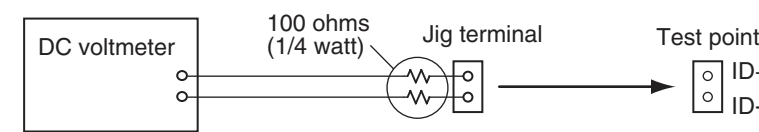


U0020 AMP. (INPUT) PC BOARD BACLA-0362

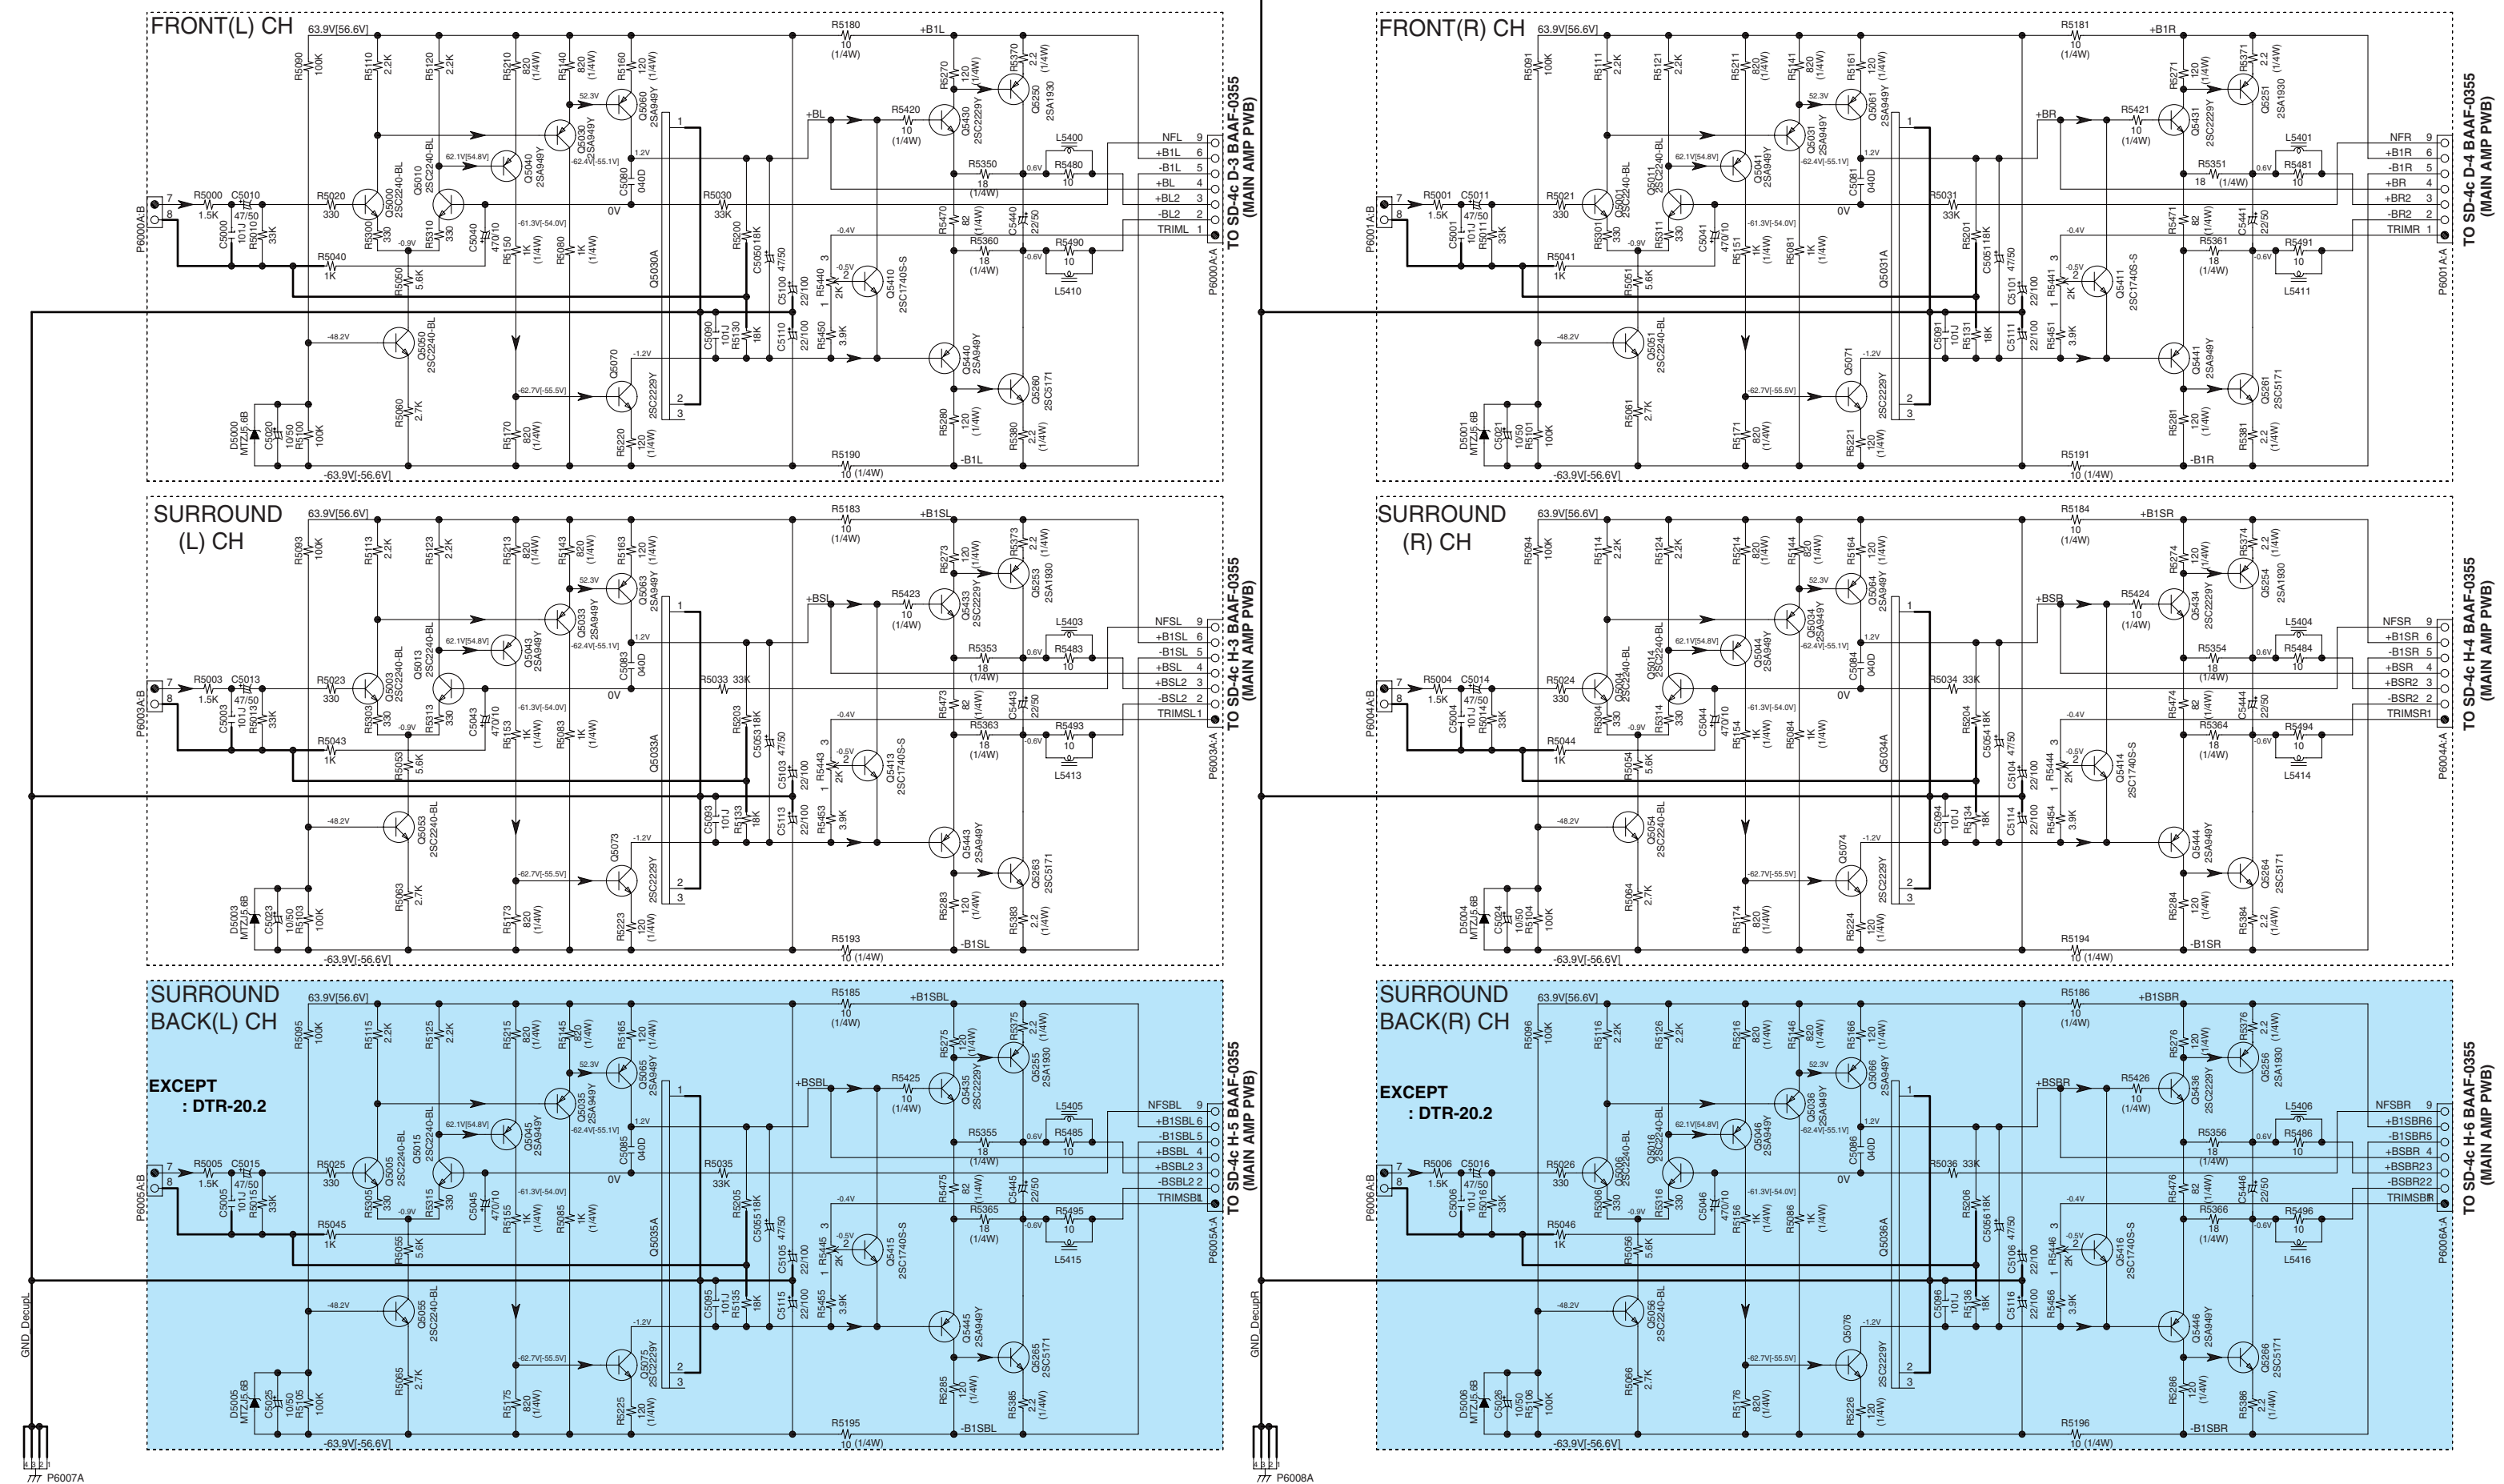



BACLA-0362

Video Section





SCHEMATIC DIAGRAMS-8
SPEAKER OUTPUT SECTION

U0060 SP TERMINAL PC BOARD BATRM-0368

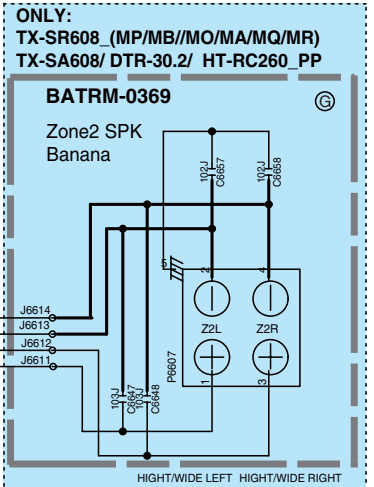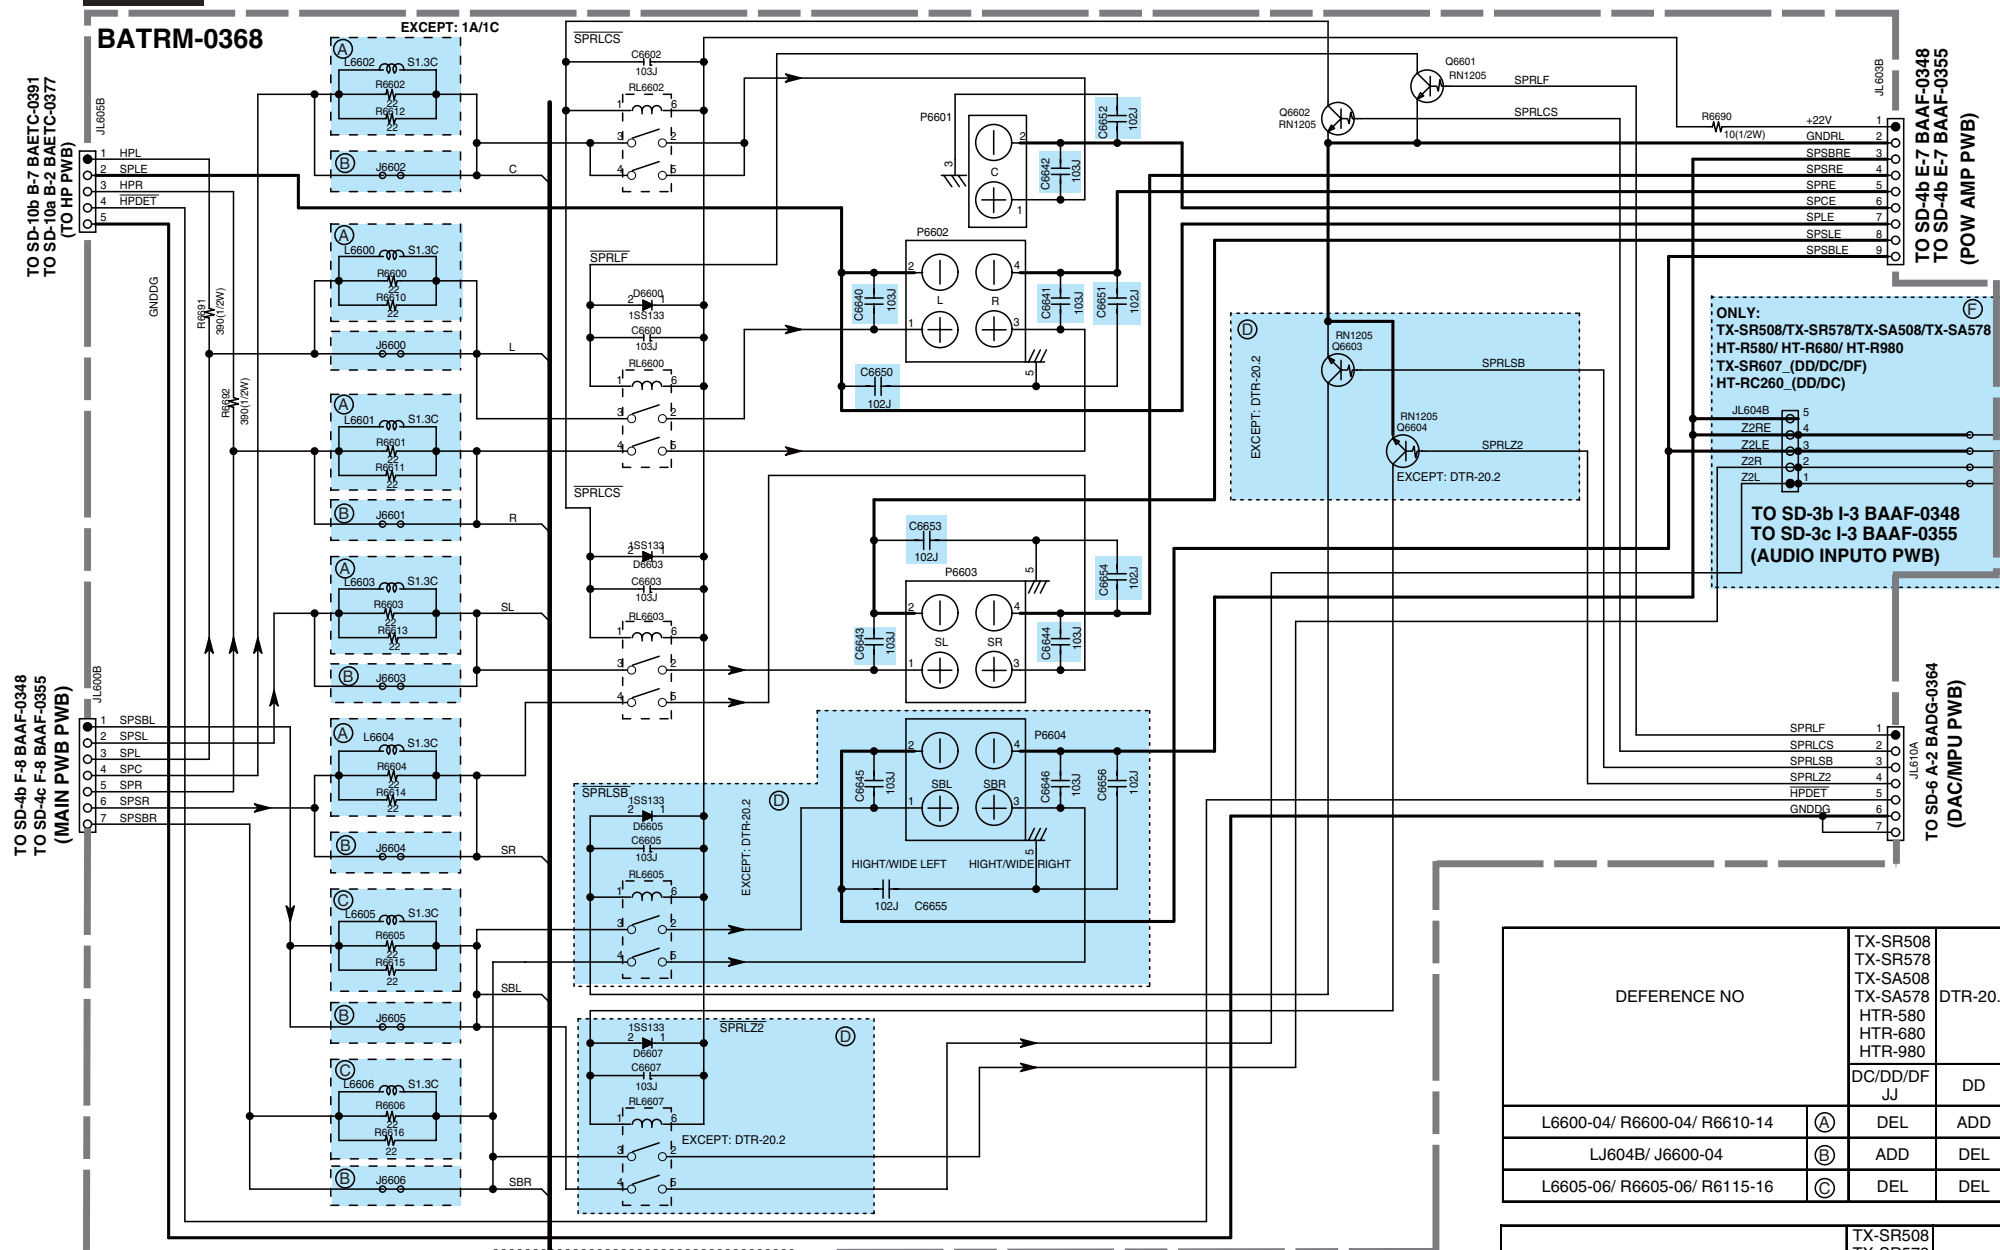

NOTE
DEL: Deleton
ADD: Addton

DC	Canadian model
DD	USA model
DF	Taiwanese model
MO	Saudi Arabian model
MQ	Hong kong model
PA	Australian model
PB	
MB	U.K. model
PP	CE(European) country model
MR	Chinese model
JJ	Japanese model

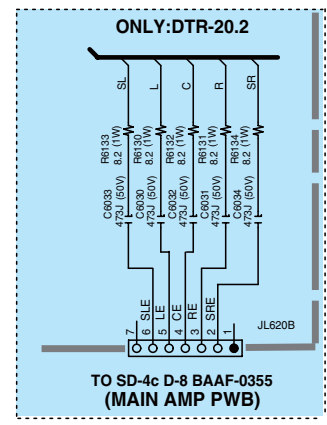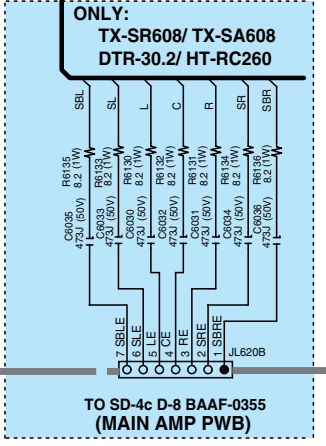

DEFERENCE NO	TX-SR508 TX-SR578 TX-SA508 TX-SA578 HTR-580 HTR-680 HTR-980	DTR-20.2	OTHER
L6600-04/ R6600-04/ R6610-14	(A)	DEL	ADD
LJ604B/ J6600-04	(B)	ADD	DEL
L6605-06/ R6605-06/ R6115-16	(C)	DEL	ADD

DEFERENCE NO	TX-SR508 TX-SR578 TX-SA508 TX-SA578 HTR-580 HTR-680 HTR-980	DTR-20.2	OTHER
JL620B/ C6030-36/ R6103-36	(E)	DEL	ADD
JL620B/ C6030-34/ R6103-34	(H)	DEL	ADD


DEFERENCE NO	TX-SR508 TX-SR578 TX-SA508 TX-SA578 HTR-580 HTR-680 HTR-980	TX-SR608 HT-RC260	DTR-20.2	OTHER
JL604B	(F)	ADD	ADD	DEL
P6607/ J6611-14B C6647/ C6648/ C6657/ C6658	(G)	DEL	DEL	ADD

DEFERENCE NO	DT-R20.2	OTHER
Q6603 Q6604 RL6605/ C6605/ D6605/ P6604 C6645/ C6646/ C6655/ C6656 RL6607/ C6607/ D6607	(D)	DEL

DEFERENCE NO	TX-SR508 TX-SR578 TX-SR608 DTR-30.2 HT-RC260 HTR-680 HTR-980	OTHER
C6640-44/ C6650-54	ADD	DEL

U0061 Z2 SP TERMINAL (Banana) PC BOARD
BATRM-0369

U. Port Unit Section



TOSD-7 K-5 BCVD-0375/BCVD0389
TO VIDEO PWB


SCHEMATIC DIAGRAMS-10a

Display Section

1

U0044 HP PC BOARD BAETC-0377

BAETC-0377

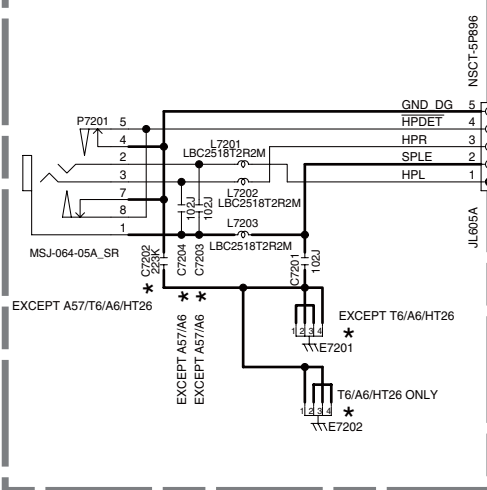

TO SD-8 B-1 BAPM-0368
FROM SP-OUT PWB


TO SD-4a K-4 BAAF-0341
FROM AMP PWB

NOTE
DEL: Deletion
ADD: Addition

DC	Canadian model
DD	USA model
DF	Taiwanese model
MO	Saudi Arabian model
MQ	Hong kong model
PA	Australian model
PB	U.K. model
PP	CE(European) country model
MR	Chinese model
JU	Japanese model

4

U0041 KEY SWITCH PC BOARD BADIS-0374

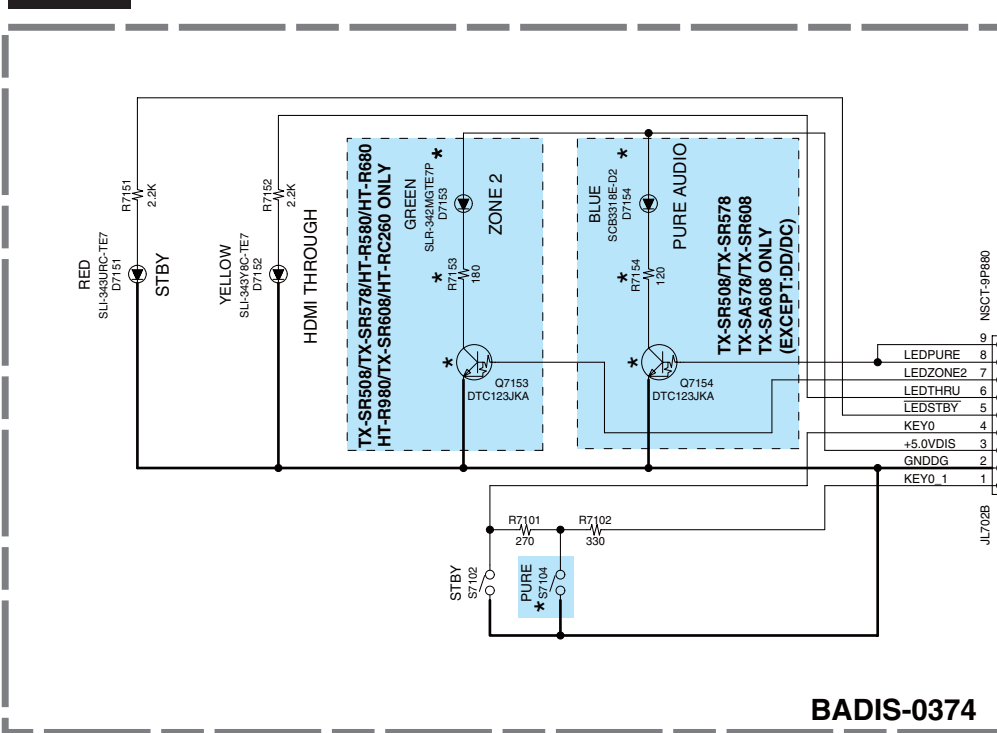

BADIS-0374


CODE	S7104
HT-R980	THX
TX-SR308/HT-R280/HT-R380/HT-R538 HT-R580/HT-R680/C230	MUSIC OPTIMIZER
TX-SR508/HT-R578 (DC,DD)	PURE AUDIO
TX-SR508/HT-R578/HT-R580/HT-R538 (EXCEPT DC,DD)	DEL
TX-SA578/HT-SA608	
TX-SR608/HT-RC260 (DC,DD)	

7

8

U0040 DISPLAY PC BOARD BADIS-0373

BADIS-0373

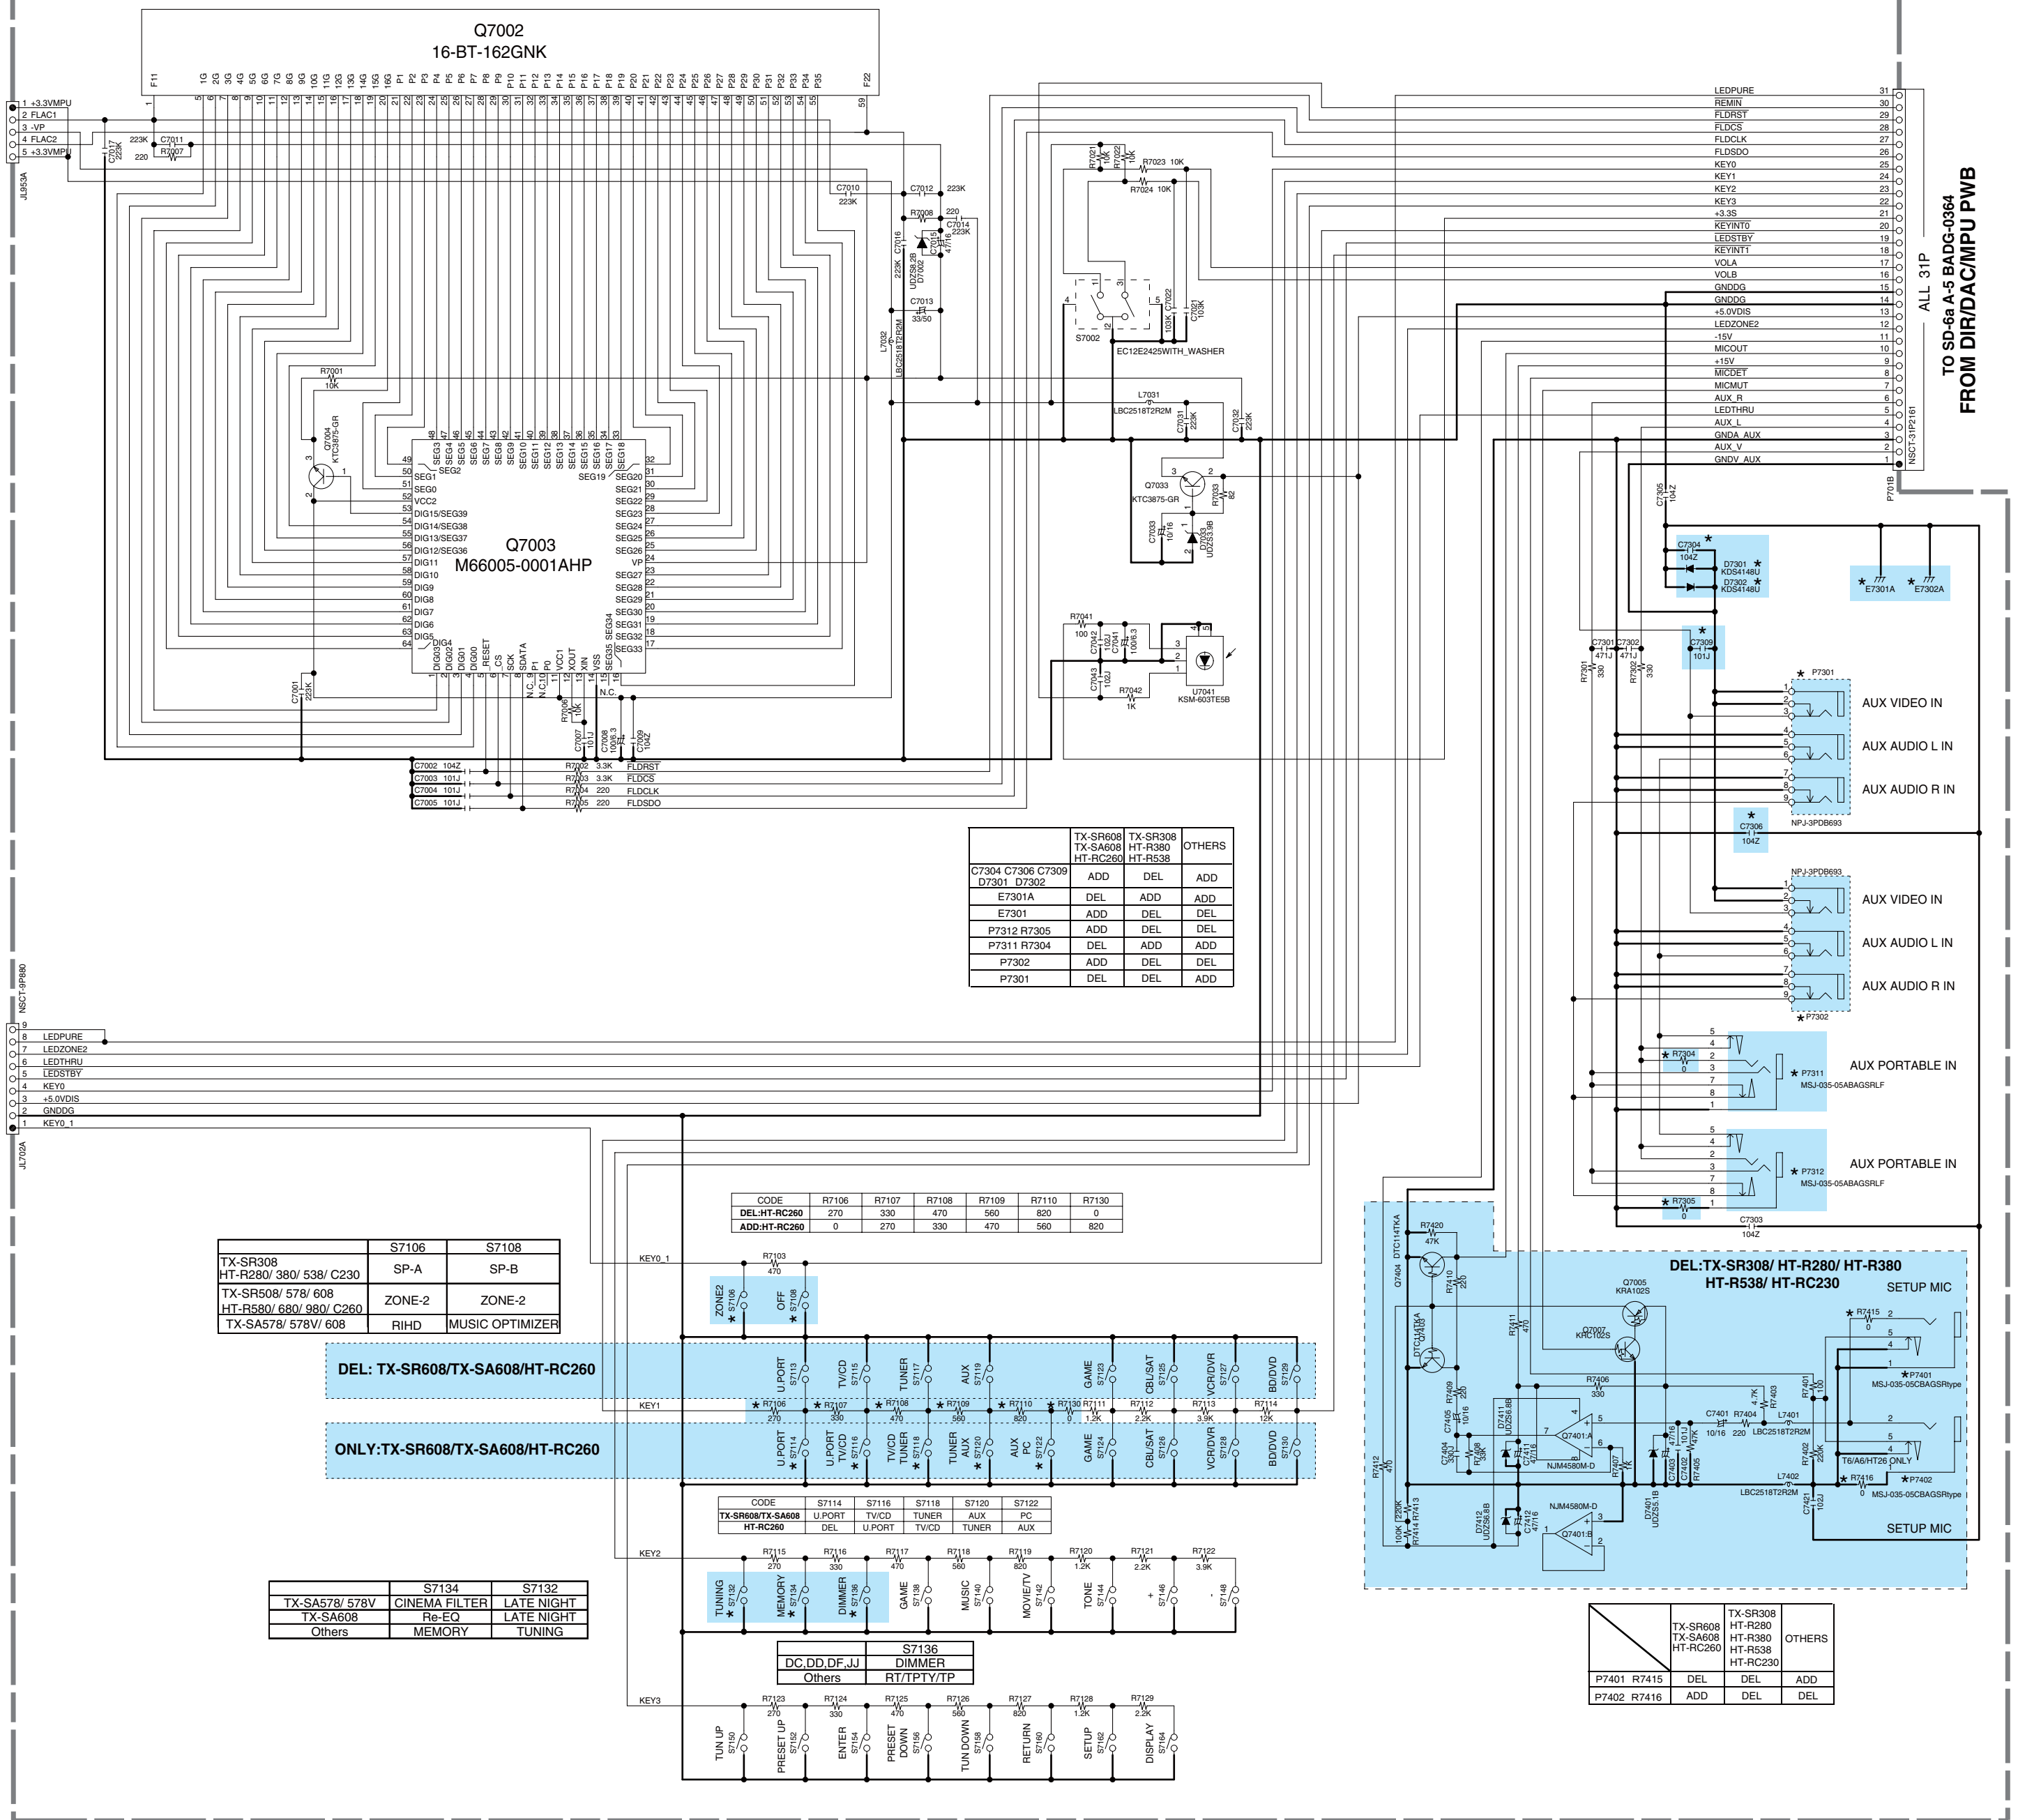

	TX-SR608 TX-SA608 HT-RC260	TX-SR308 HT-R380 HT-R538	OTHERS
C7304 C7306 C7309	ADD	DEL	ADD
D7301 D7302	DEL	DEL	ADD
E7301A	DEL	ADD	DEL
E7301	ADD	DEL	DEL
P7312 R7305	ADD	DEL	DEL
P7311 R7304	DEL	ADD	ADD
P7302	ADD	DEL	DEL
P7301	DEL	DEL	ADD

	S7106	S7108
TX-SR308 HT-R280/380/538/C230	SP-A	SP-B
TX-SR508/578/608 HT-R580/680/980/C260	ZONE-2	ZONE-2
TX-SA578/578V/608	RIHD	MUSIC OPTIMIZER

DEL: TX-SR608/TX-SA608/HT-RC260

ONLY: TX-SR608/TX-SA608/HT-RC260

	S7134	S7132
TX-SA578/578V TX-SA608	CINEMA FILTER Re-EO	LATE NIGHT
Others	MEMORY	TUNING

CODE	R7106	R7107	R7108	R7109	R7110	R7130
DEL:HT-RC260	270	330	470	560	820	0
ADD:HT-RC260	0	270	330	470	560	820

CODE	S7114	S7116	S7118	S7130	S7122
TX-SR608/HT-SA608 HT-RC260	U.PORT	TV/CD	TUNER	AUX	PC

	S7136
DC,DD,DF,JJ	DIMMER
Others	RT/PTV/TP

	TX-SR608 TX-SA608 HT-RC260	TX-SR308 HT-R380 HT-R538 HT-RC230	OTHERS
P7401 R7415	DEL	DEL	ADD
P7402 R7416	ADD	DEL	DEL

SCHEMATIC DIAGRAMS-11

Power Supply Section

U0043 POWER SUPPLY PC BOARD BAETC-0376/ BAETC-0390

- ・印は火災、感電の危険に關する部品の為、必ず指定部品を使用の事。
 ・電圧表示は無信号時に測定した直流電圧を示す。
 (単位 V、入力抵抗 100KΩ/V以上の電圧計)
 ・記入なき電解コンデンサの単位は $\mu F/50V$ である。
 例 030 $\rightarrow$ 3 pF 330 $\rightarrow$ 3 pF 331 $\rightarrow$ 330 pF 333 $\rightarrow$ 0.033 μF
 ・本配線図は基本配線図につき性能改善等により予告なく変更する事がある。

- * THE COMPONENTS IDENTIFIED BY MARK  ARE CRITICAL FOR SAFETY.
 REPLACE ONLY WITH PART NUMBER SPECIFIED.
 * VOLTAGE (MEASURED WITH VOLT METER) IS DC VOLTAGE. (NO INPUT SIGNAL)
 * ELECTROLYTIC CAPACITORS () ARE IN $\mu F/V$.
 * ALL CAPACITORS ARE IN pF/50V UNLESS OTHERWISE NOTED.
 EX) 030 $\rightarrow$ 3 pF 330 $\rightarrow$ 3 pF 331 $\rightarrow$ 330 pF 333 $\rightarrow$ 0.033 μF
 * CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

CAUTION



FOR CONTINUED PROTECTION
 AGAINST FIRE HAZARD, REPLACE
 ONLY WITH FUSE OF SAME TYPE
 AND RATING INDICATED.

ATTENTION




AFIN D'ASSURER UNE PROTECTION
 PERMANENTE CONTRE LES RISQUES
 D'INCENDIE, REMPLACER UNIQUEMENT
 PAR UN FUSIBLE DE MEME TYPE
 ET CALIBRATION COMME INDIQUE.



THIS SYMBOL LOCATED NEAR THE FUSE INDICATES
 THAT THE FUSE USED IS SLOW OPERATING TYPE
 FOR CONTINUED PROTECTION AGAINST FIRE FUSE
 HAZARD, REPLACE WITH SAME TYPE FUSE. FOR FUSE
 RATING REFER TO THE MAKING ADJACENT TO THE SYMBOL.



CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST
 A LENT, E POUR UNE PROTECTION PERMANENTE. UTILISER
 QUE DES FUSIBLES DE MEME TYPE. CE DERNIER EST
 INDIQUE LA QU LE PRESENT SYMBOLE EST APPOSE.

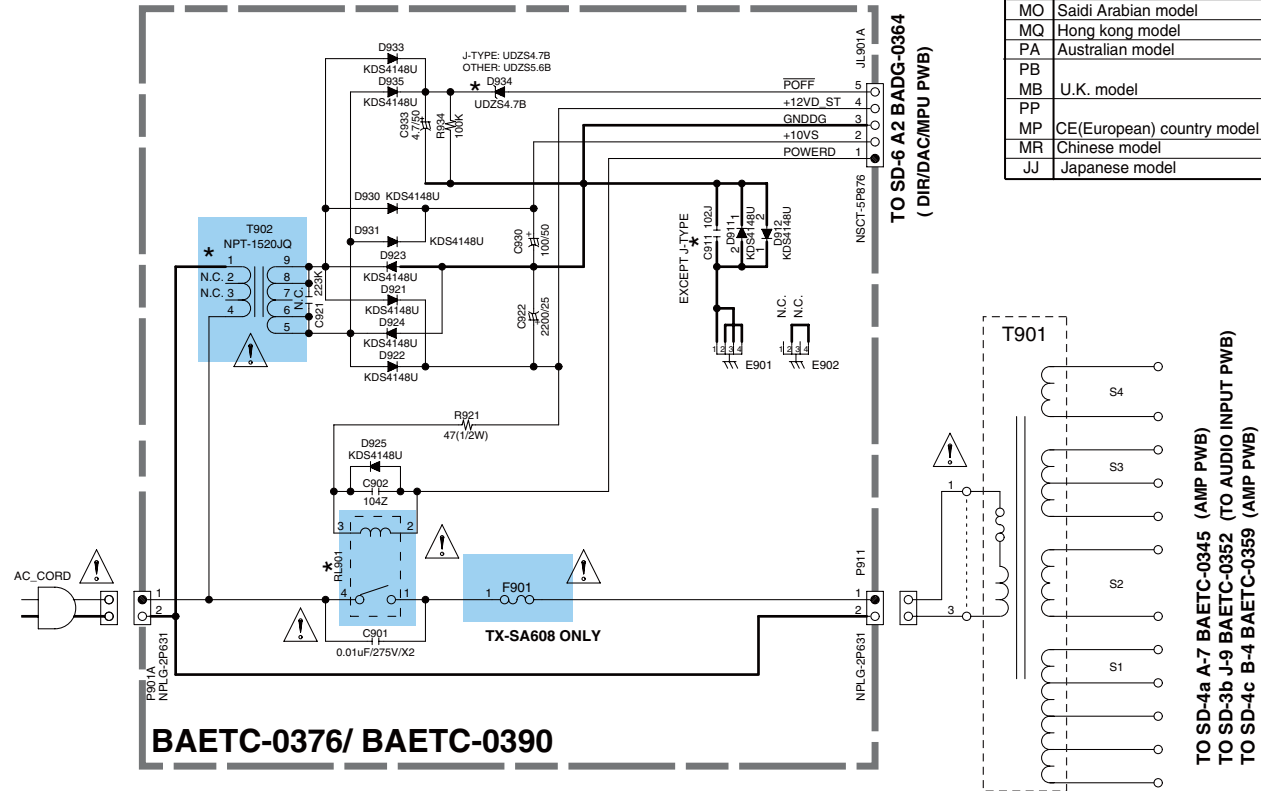

<NOTE>

DC	Canadian model
DD	USA model
DF	Taiwanese model
MO	Saudi Arabian model
MQ	Hong kong model
PA	Australian model
PB	
MB	U.K. model
PP	
MP	CE(European) country model
MR	Chinese model
JJ	Japanese model

<T902>

TYPE	TX-SR308/HT-R380 TX-SR508/HT-R580 TX-SR578/TX-SR608 DTR-30.2	HT-R680/HTR-980 HT-RC260 DTR20.2	HT-R538	TXSA578 TX-SA608
DC/ DD/ DF	NPT-1520JQ	NPT-1520JQ	---	---
MO/ MQ/ MR/ PA/ PP/ PB	NPT-1520GQ	---	NPT-1520GQ	---
JJ	---	---	---	NPT-1520JQ

<F901>

TYPE	8A 125V	8A 125V	---	---
DC/ DD/ DF	8A 125V	8A 125V	---	---
MO/ MQ/ MR/ PA/ PP/ PB	T4A L250V	---	T4A L250V	---
JJ	---	---	---	10A 125V

<RL901>

TYPE	NRL-1P5A	NRL-1P5A	---	---
DC/ DD/ DF	NRL-1P5A	NRL-1P5A	---	---
MO/ MQ/ MR/ PA/ PP/ PB	NRL-1P5A	---	NRL-1P5A	---
JJ	---	---	---	NRL-1P10A

<T901>


TYPE	DD/ DC/ DF	PA/ PP/ PB	MO/ MQ/ MR	JJ
TX-SR308 HT-R380 HT-R538	NPT-1589D	NPT-1589P	NPT-1589M	---
TX-SR508 TX-SR578 TX-SA578 HT-R580 HT-R680 HT-R980	NPT-1594D	NPT-1594P	NPT-1594M	NPT-1594J
TX-SR608 HT-RC260 DTR-20.2 DTR-30.2	NPT-1592D	NPT-1592M	NPT-1592M	NPT-1592J

TO SD-4a A-7 BAETC-0345 (AMP PWB)
 TO SD-3b J-9 BAETC-0352 (TO AUDIO INPUT PWB)
 TO SD-4c B-4 BAETC-0359 (AMP PWB)

SCHEMATIC DIAGRAMS-14

FRONT HDMI SECTION

U0071 FRONT HDMI PC BOARD
BAHDM-0404

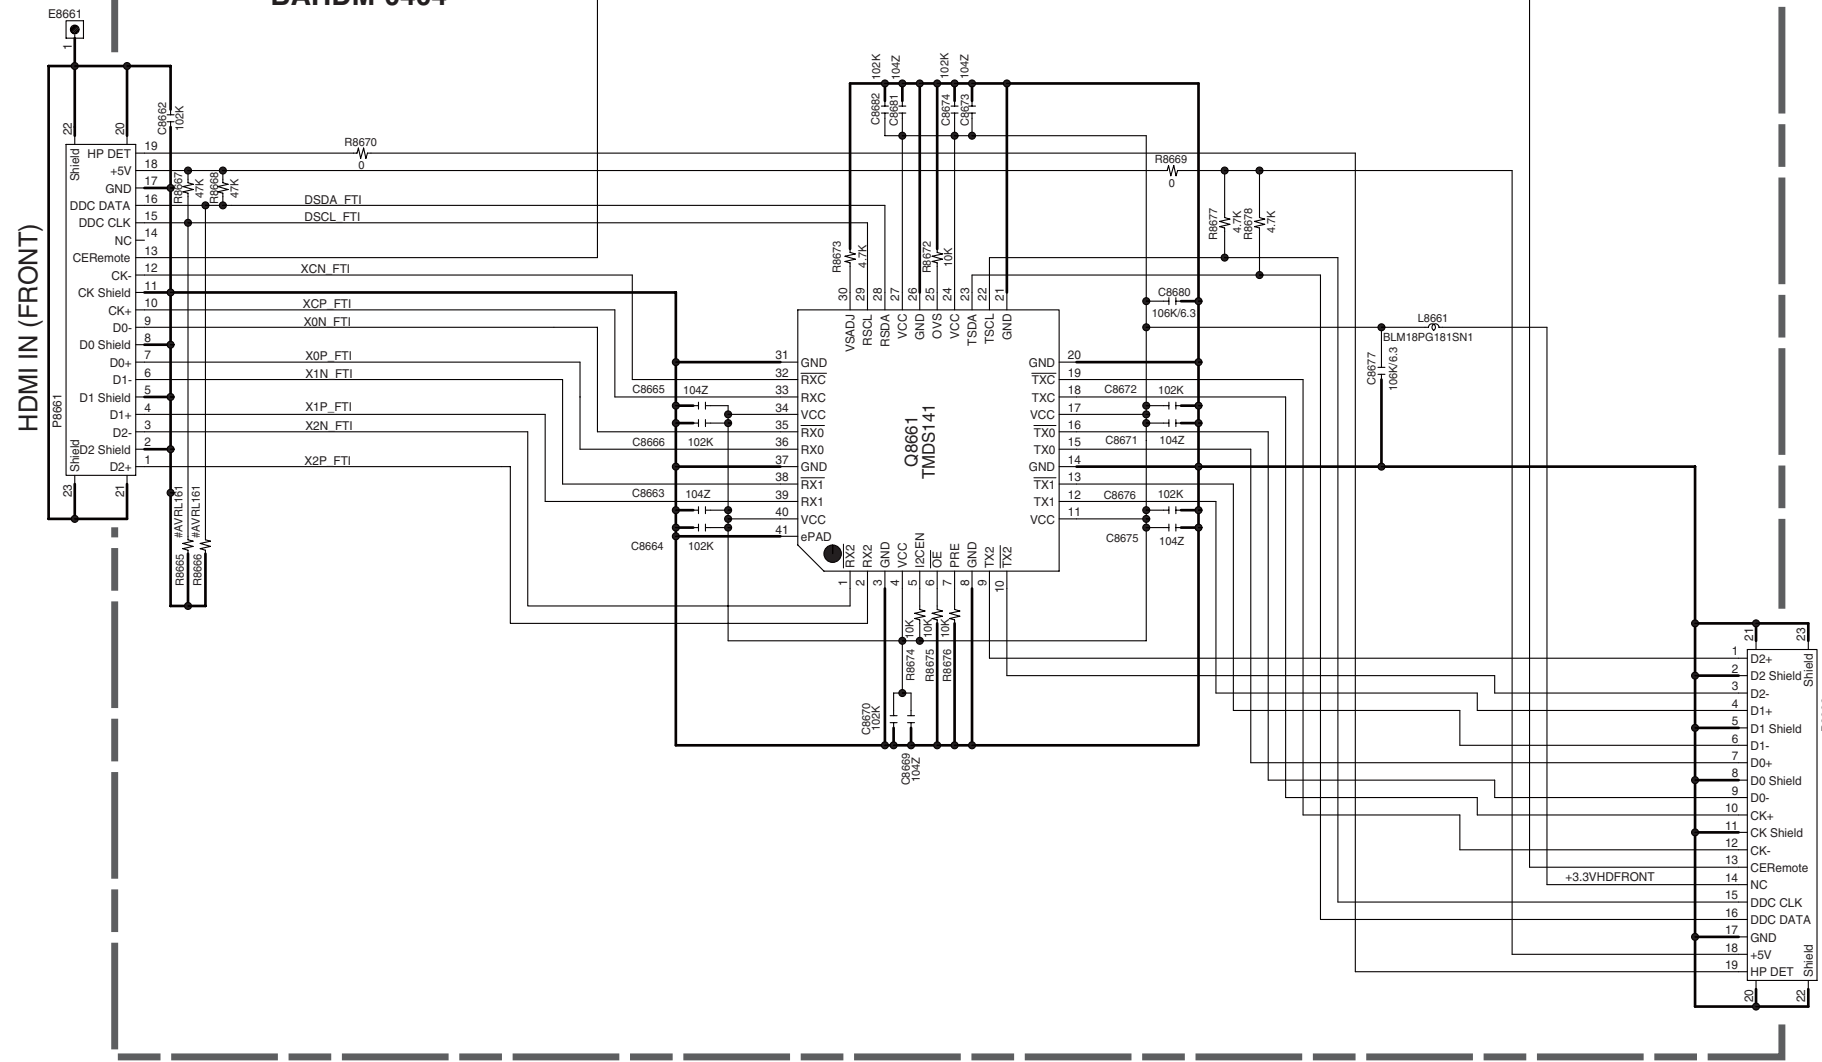

TO SD-15 D-2 BAHDM-0403

SCHEMATIC DIAGRAMS-15

HDMI RX_TX SECTION

1

2

3


4

5

6


7

8

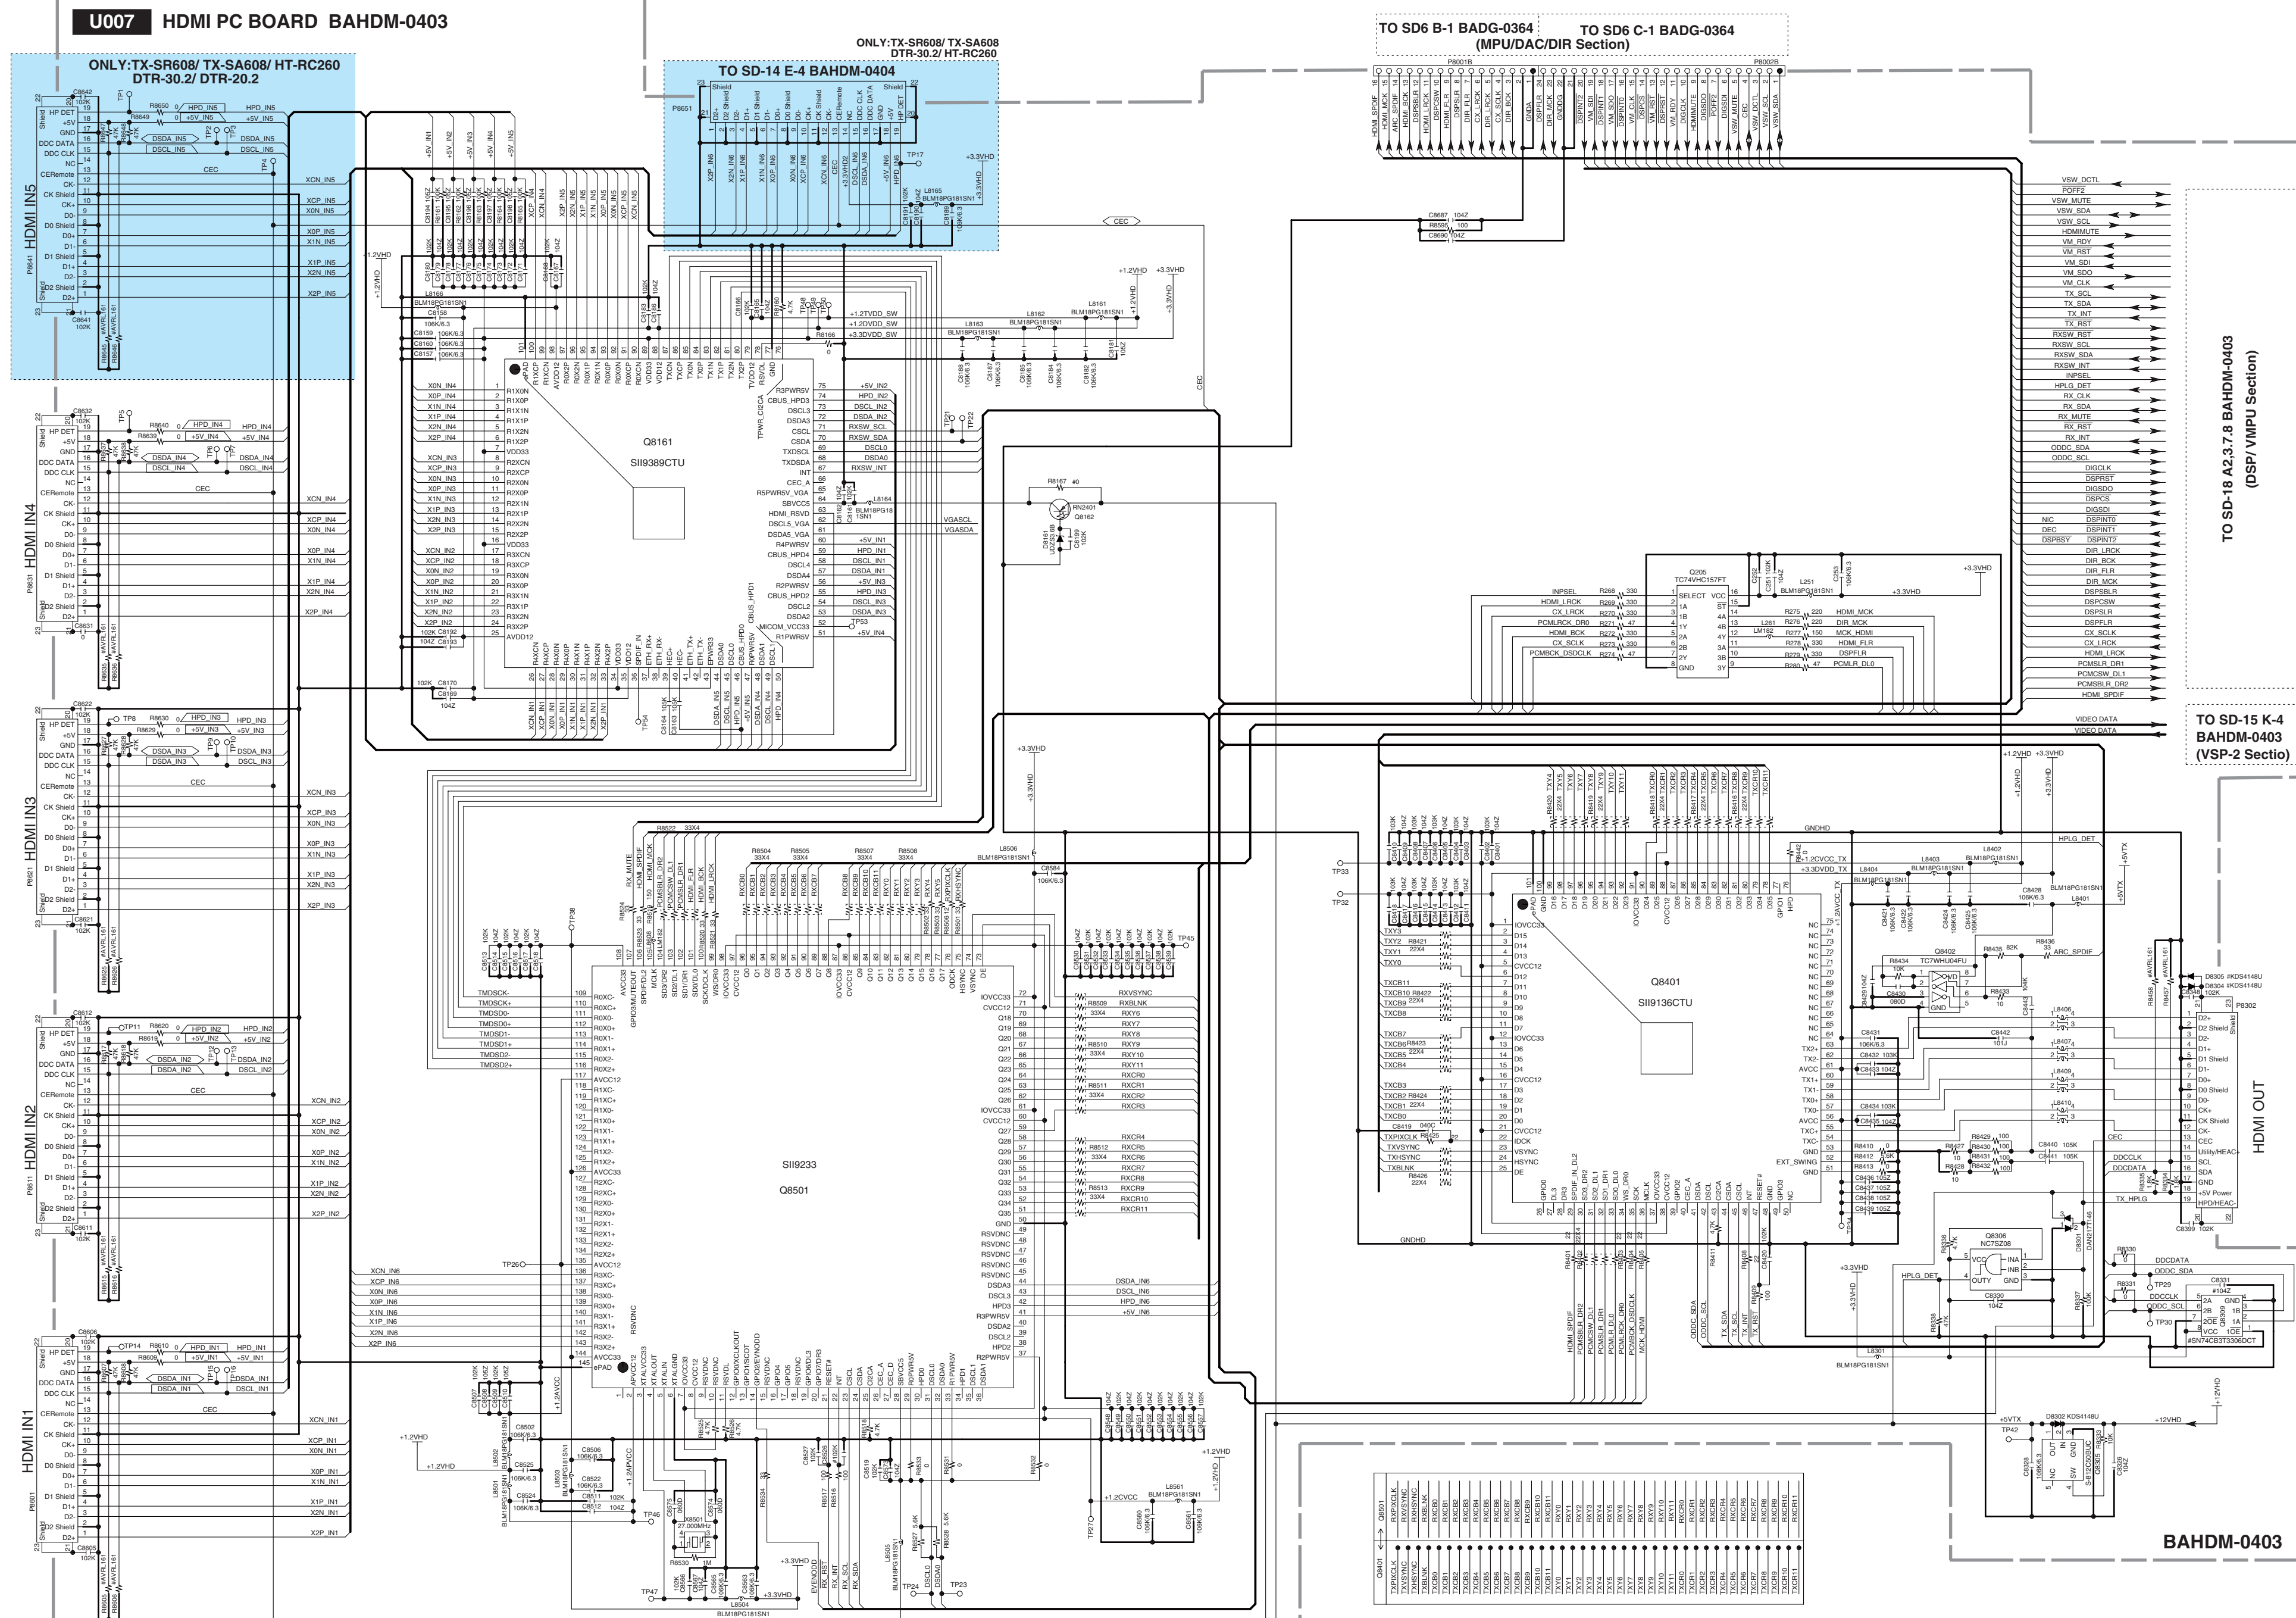

SCHEMATIC DIAGRAMS-16


HDMI VSP-1 SECTION

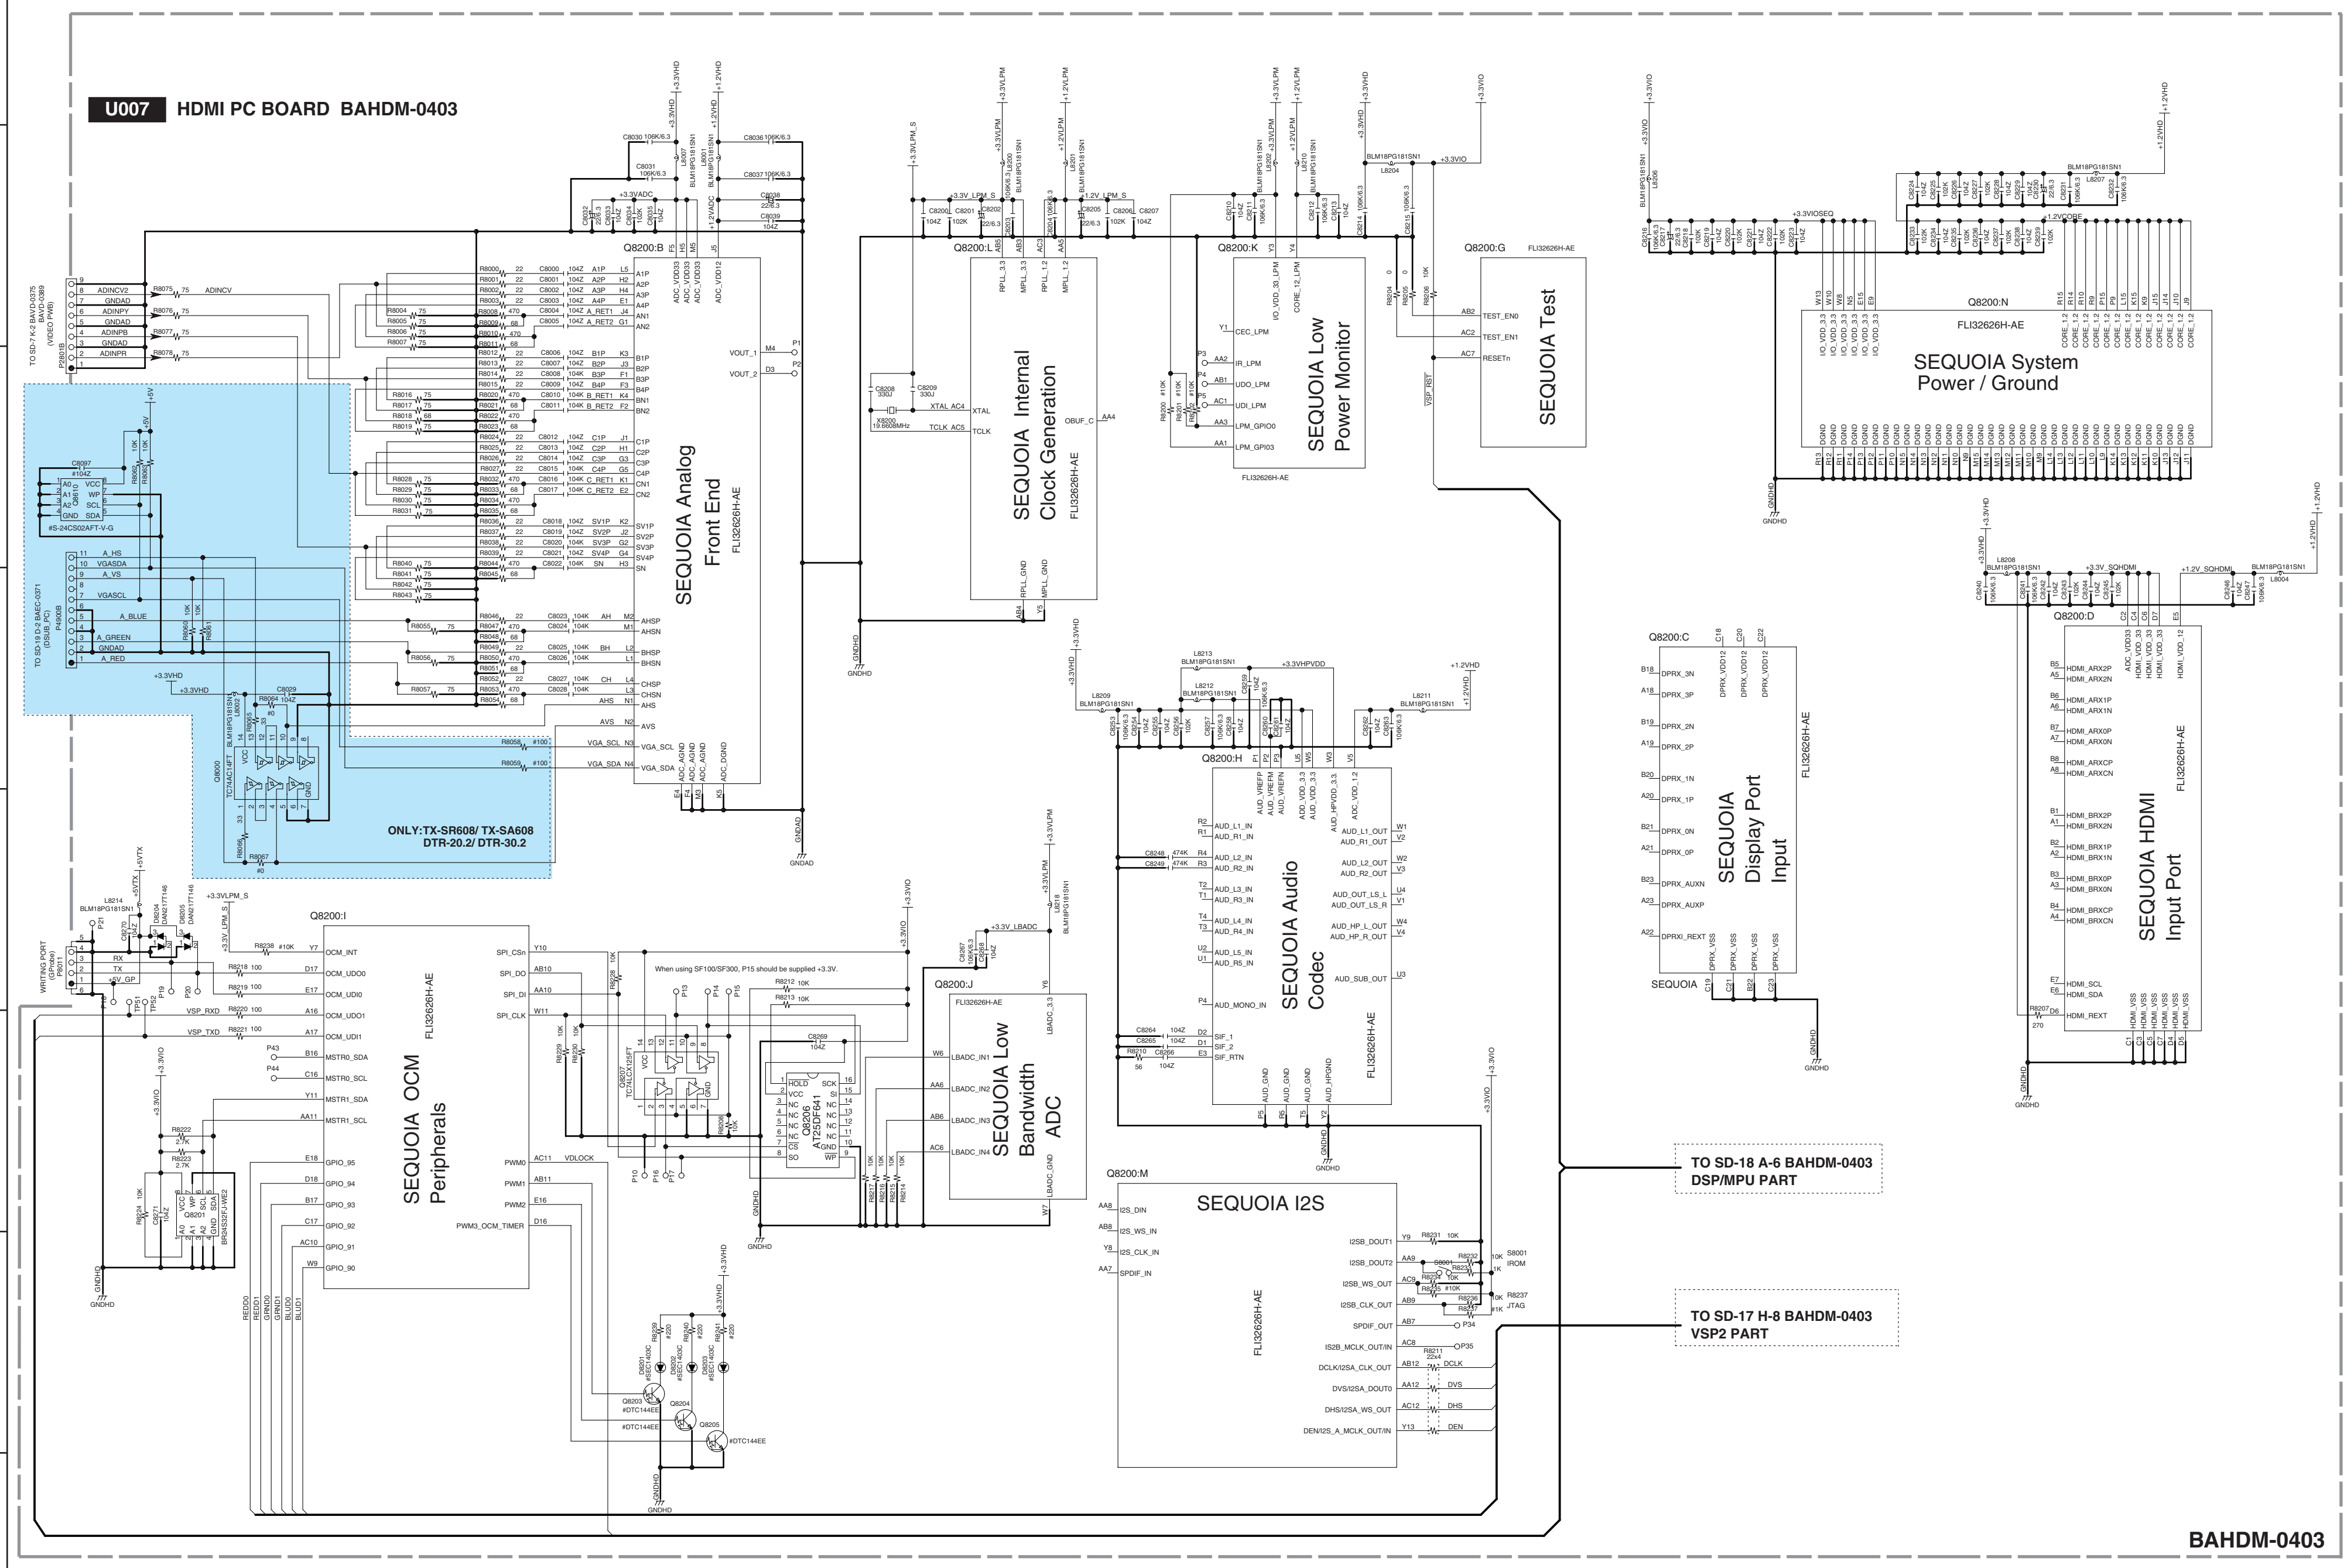

SCHEMATIC DIAGRAMS-17

HDMI VSP 2 SECTION


U007 HDMI PC BOARD BAHDM-0403

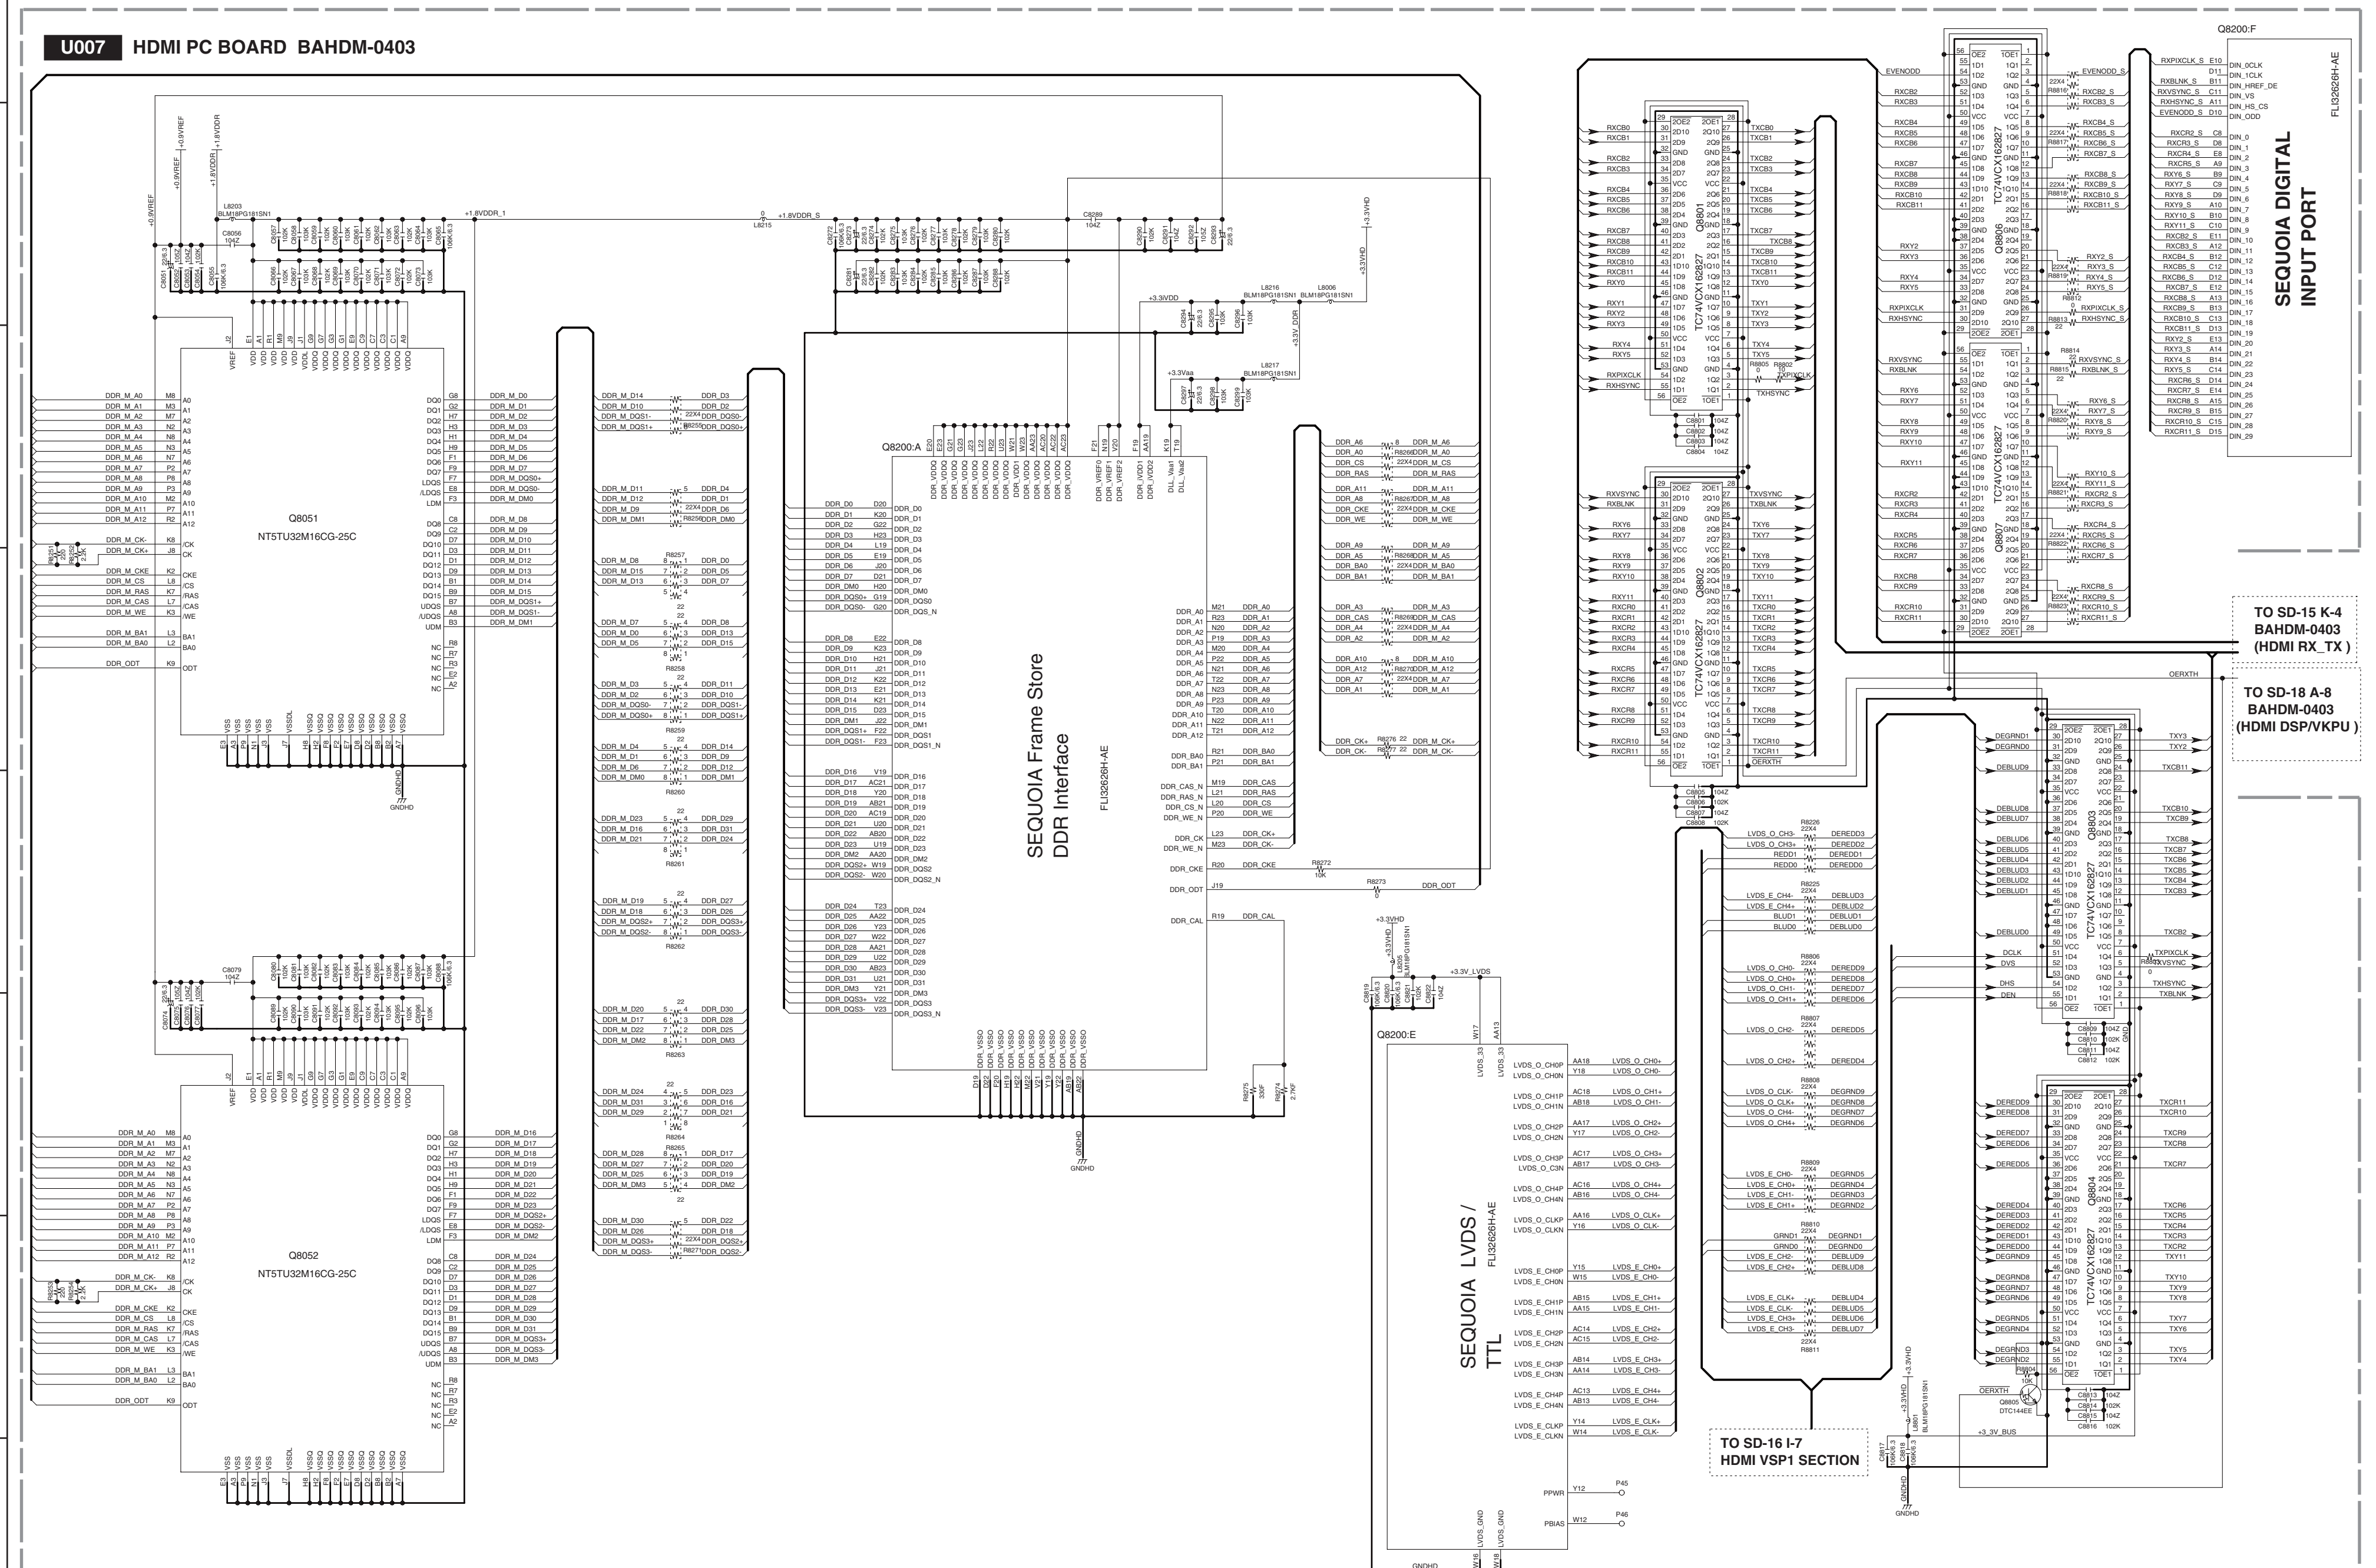

SCHEMATIC DIAGRAMS-18

DSP/VMPU SECTION

U007 HDMI PC BOARD BAHDM-0403

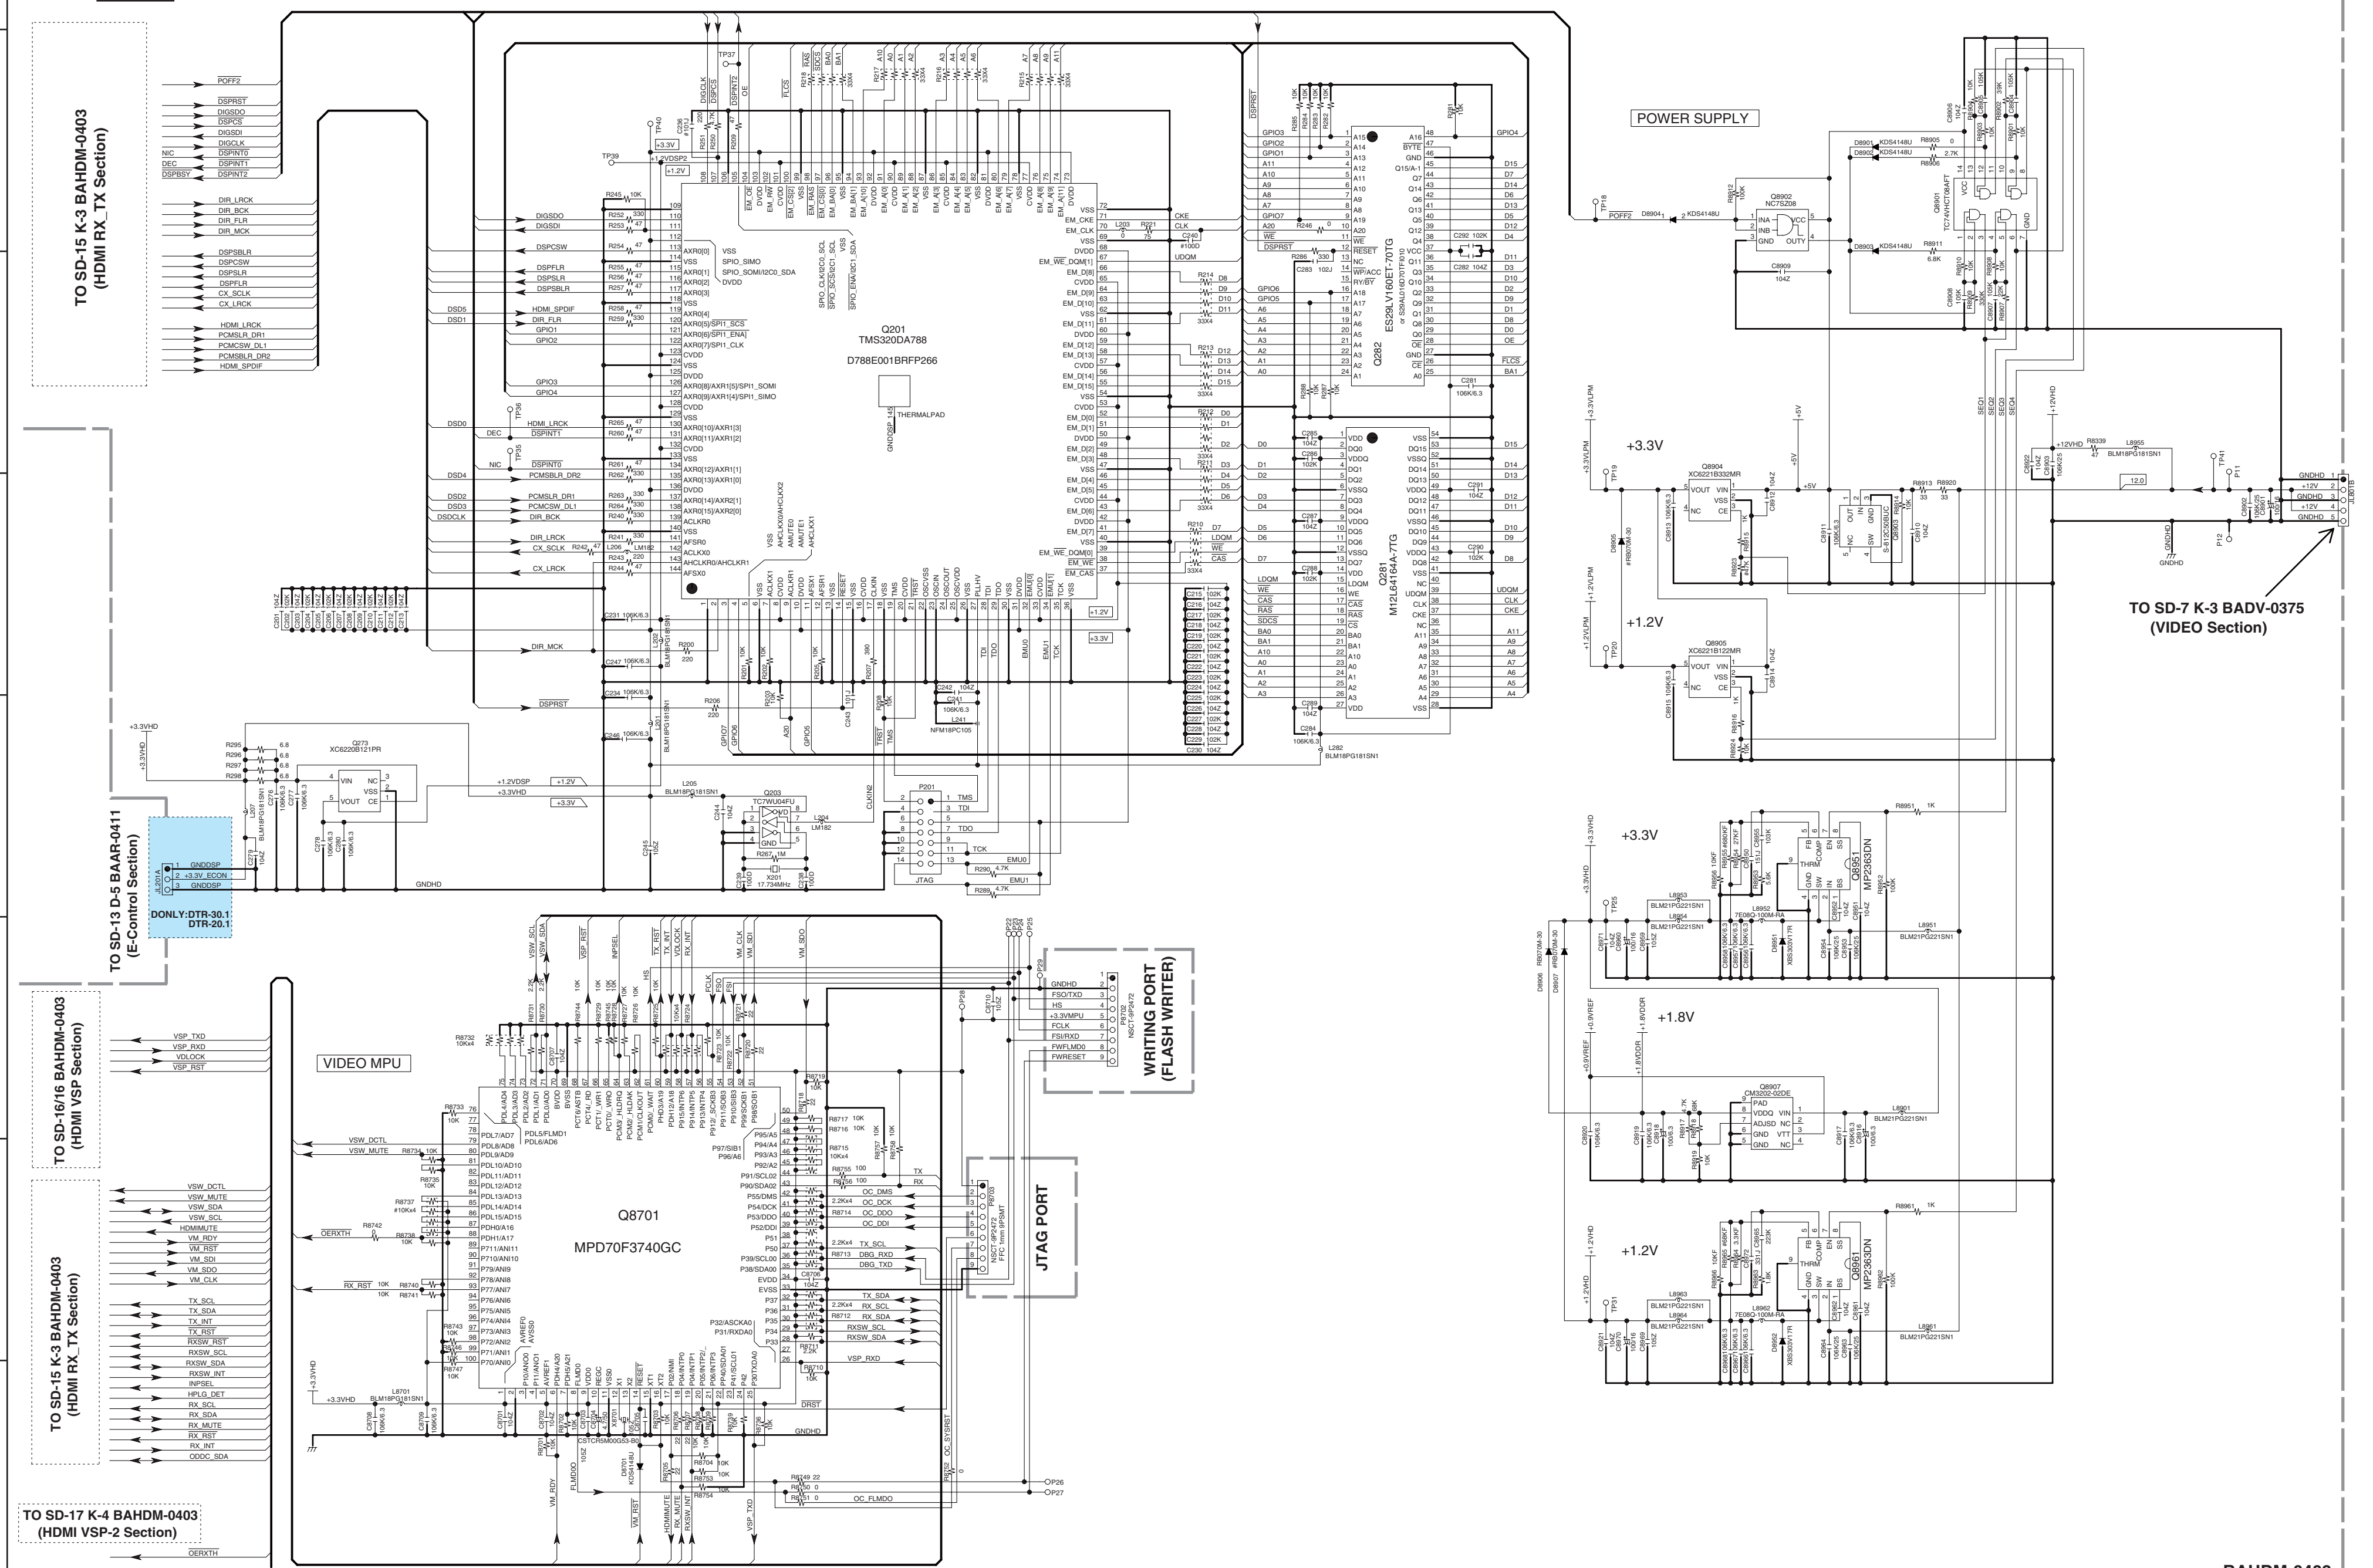


PRINTED CIRCUIT BOARD VIEWS-1_2
AMPLIFIER SECTION

1

U0011


BAPS-0356 (FL TUBE -VP PC BOARD)
B-side(Soldering side)

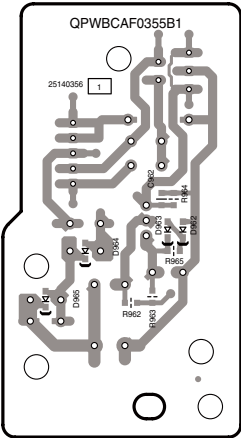

2

U0014


BAETC-0359 (TRANS TRM PC BOARD)
B-side(Soldering side)

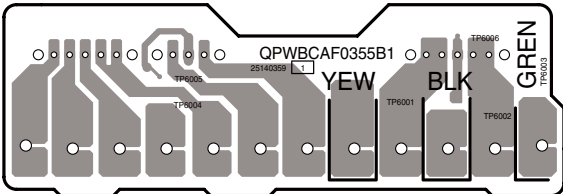

3

U0012

BAETC-0357 (THERMAL SEN PC BOARD)
B-side(Soldering side)




4

5

U0010


BAAF-0355 (AMPLIFIER PC BOARD)
B-side(Soldering side)

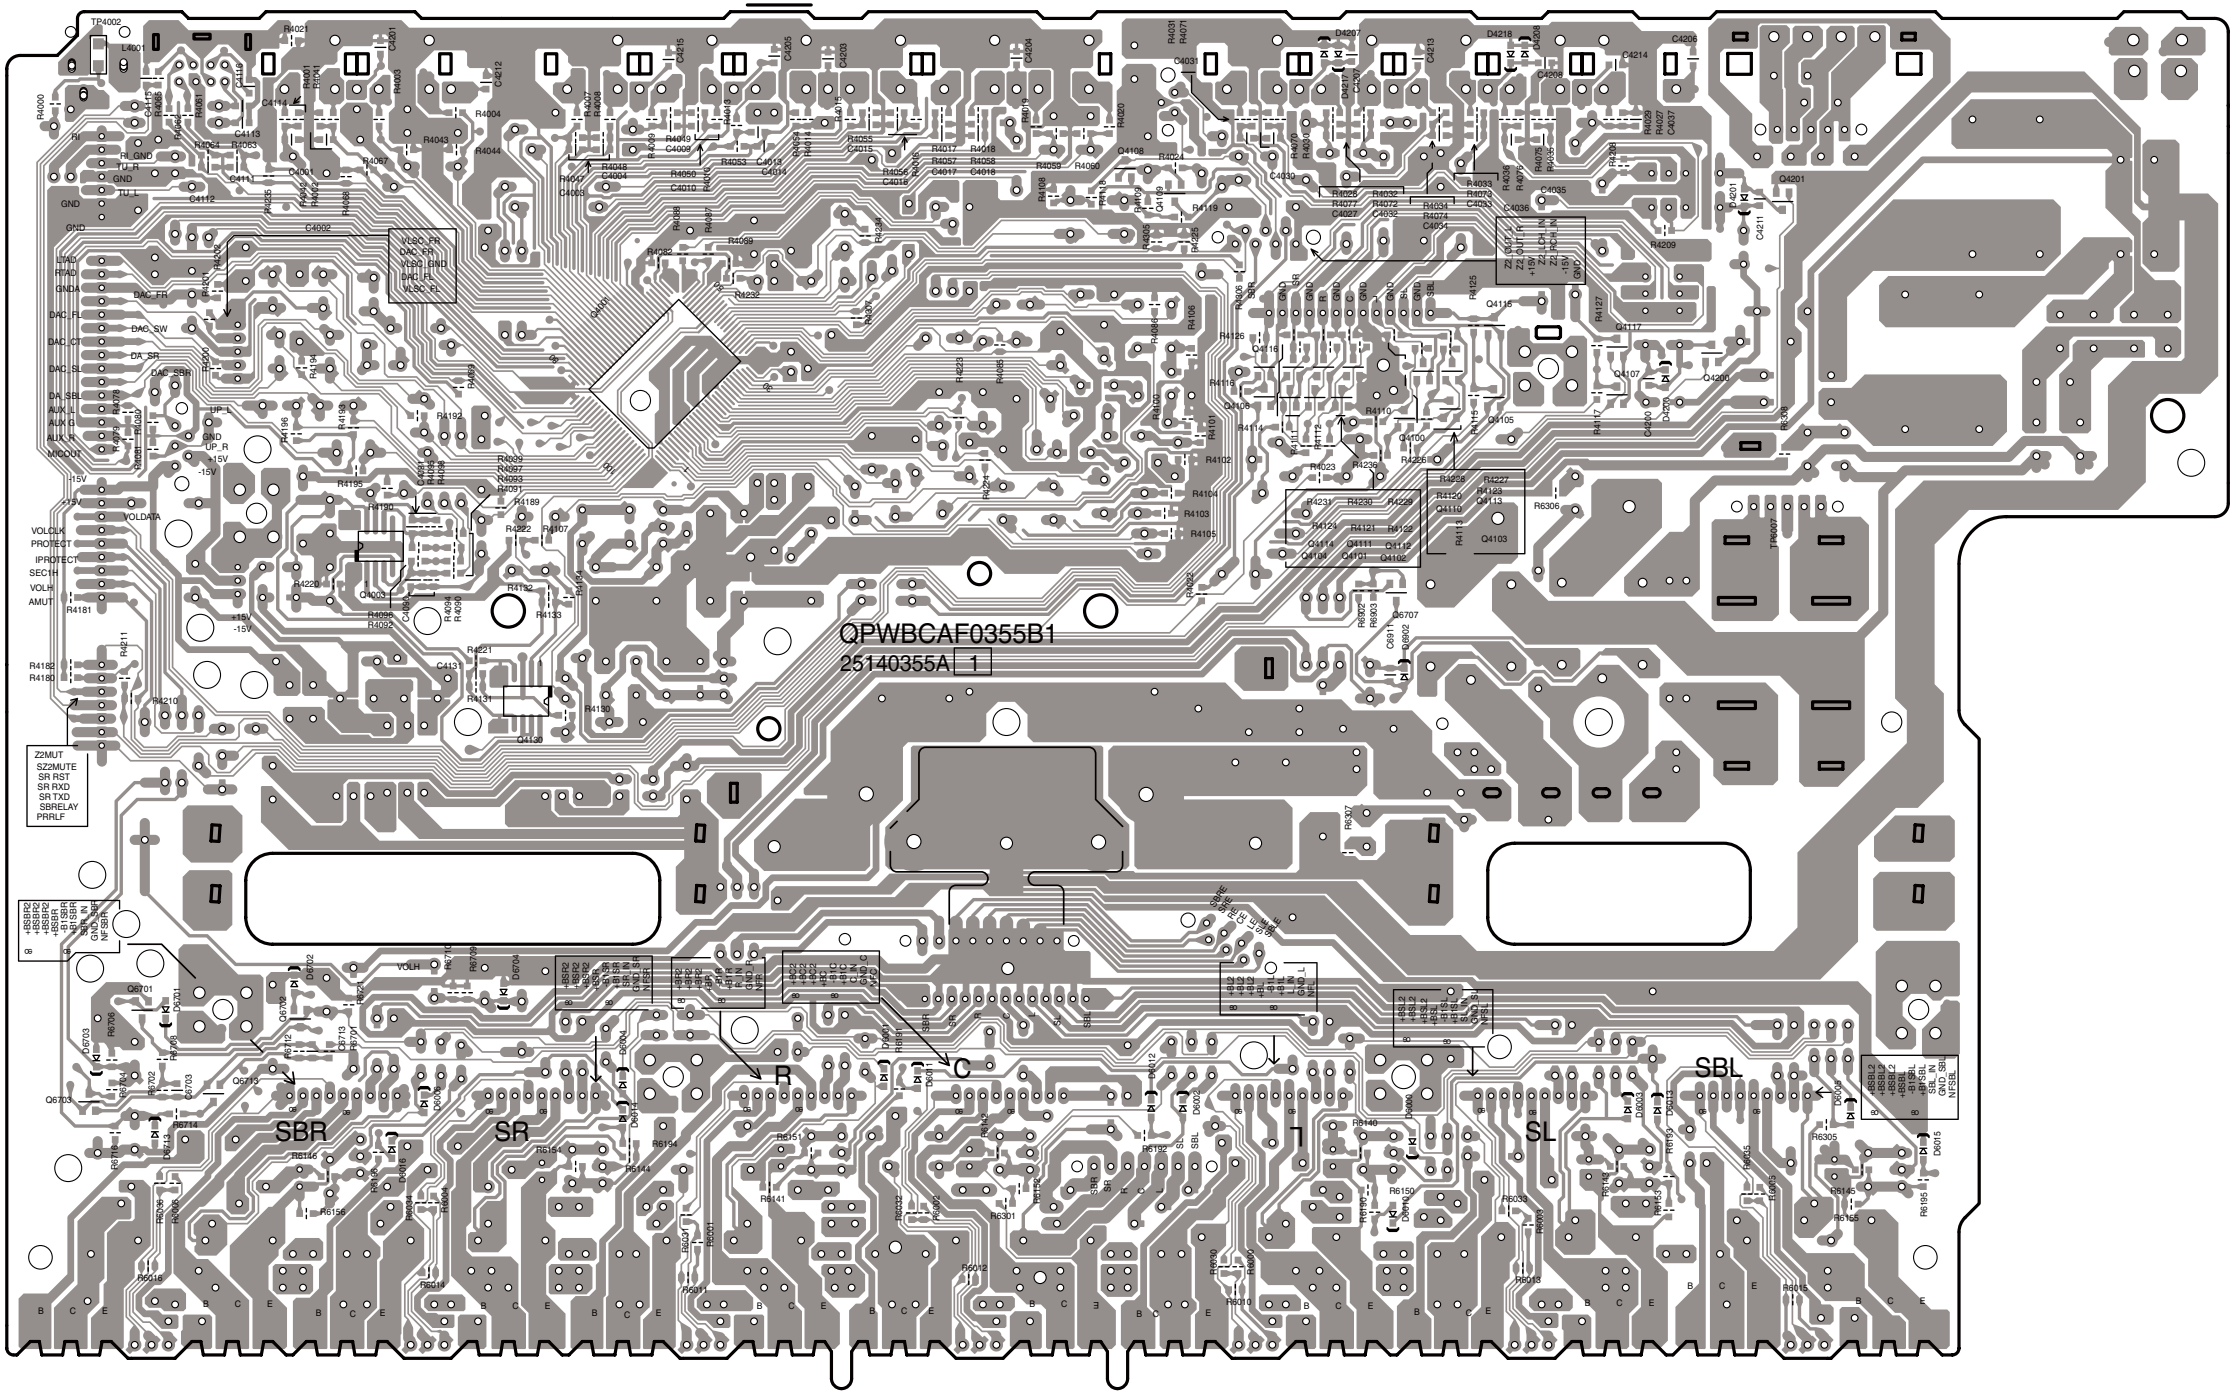

PRINTED CIRCUIT BOARD VIEWS-2 AMPLIFIER SECTION

U0020


BACLA-0362 (AMPLIFIER_CLA PC BOARD)
Side-B (Soldering side)

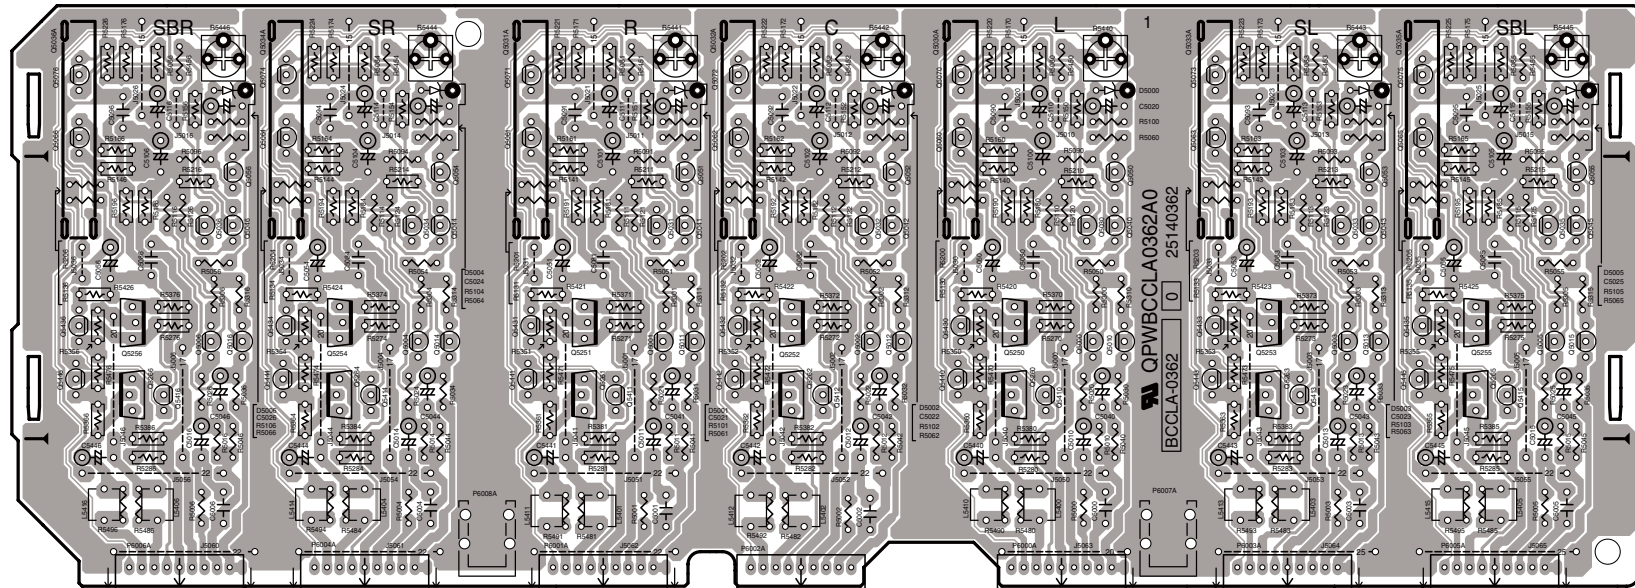

PRINTED CIRCUIT BOARD VIEWS-3
DAC/ MPU SECTION


U0031

BAETC-0365 (U-PORT PC BOARD)
A-side(Component side)

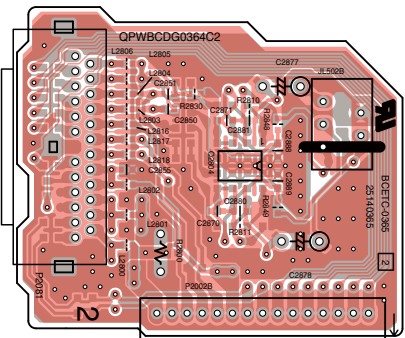

U0031


BAETC-0365 (U-PORT PC BOARD)
B-side(Soldering side)

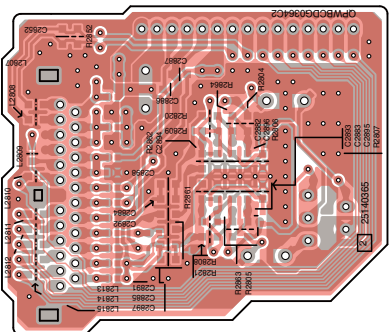

U0032

Japanese Model Only


BAETC-0366 (VLSC PC BOARD)
A-side(Component side)

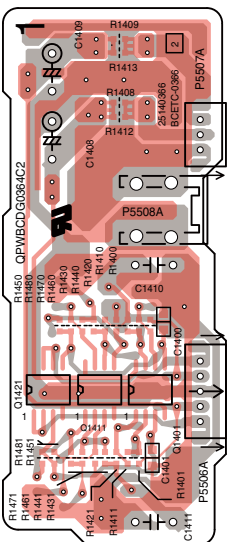

U0032


Japanese Model Only

BAETC-0366 (VLSC PC BOARD)
B-side(Soldering side)

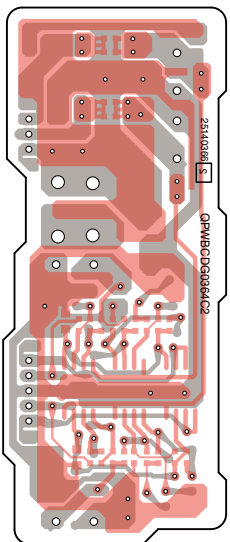


U0030

BADG-0364 (MPU/DAC PC BOARD)
B-side(Soldering side)

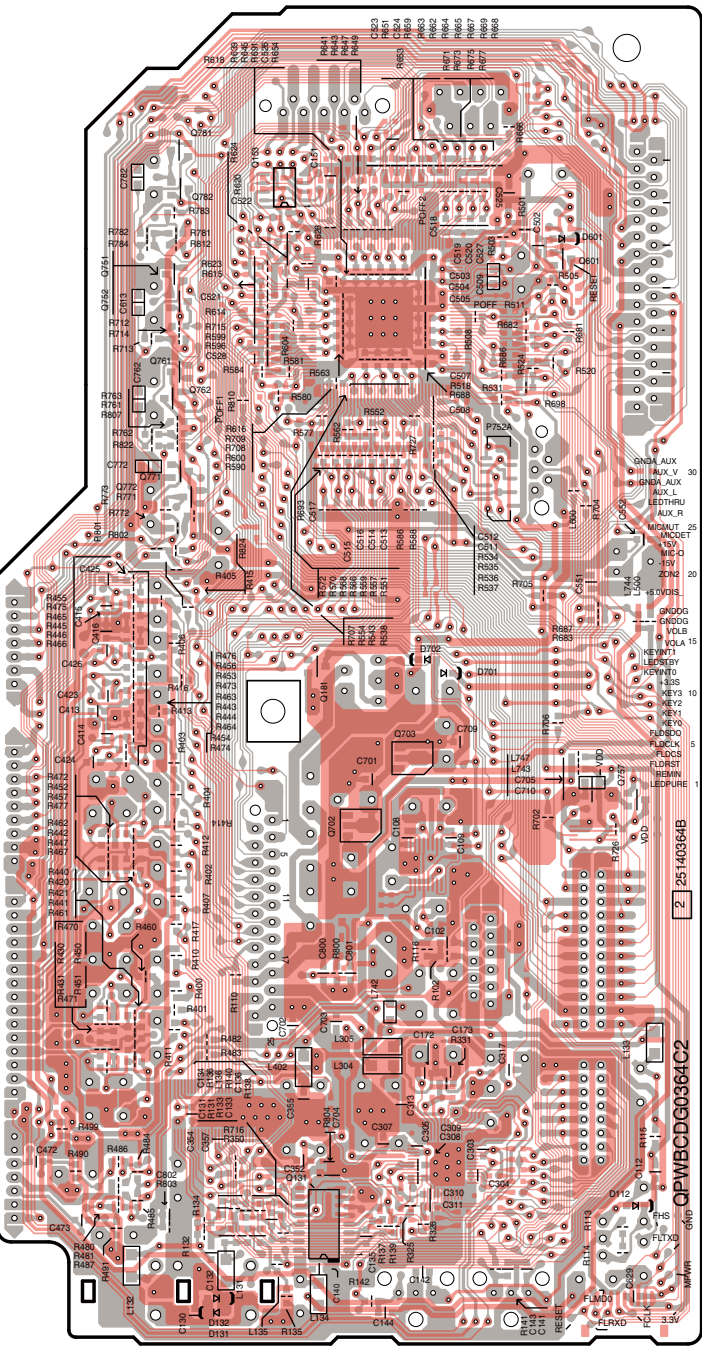

U0030


BADG-0364 (MPU/DAC PC BOARD)
A-side(Component side)

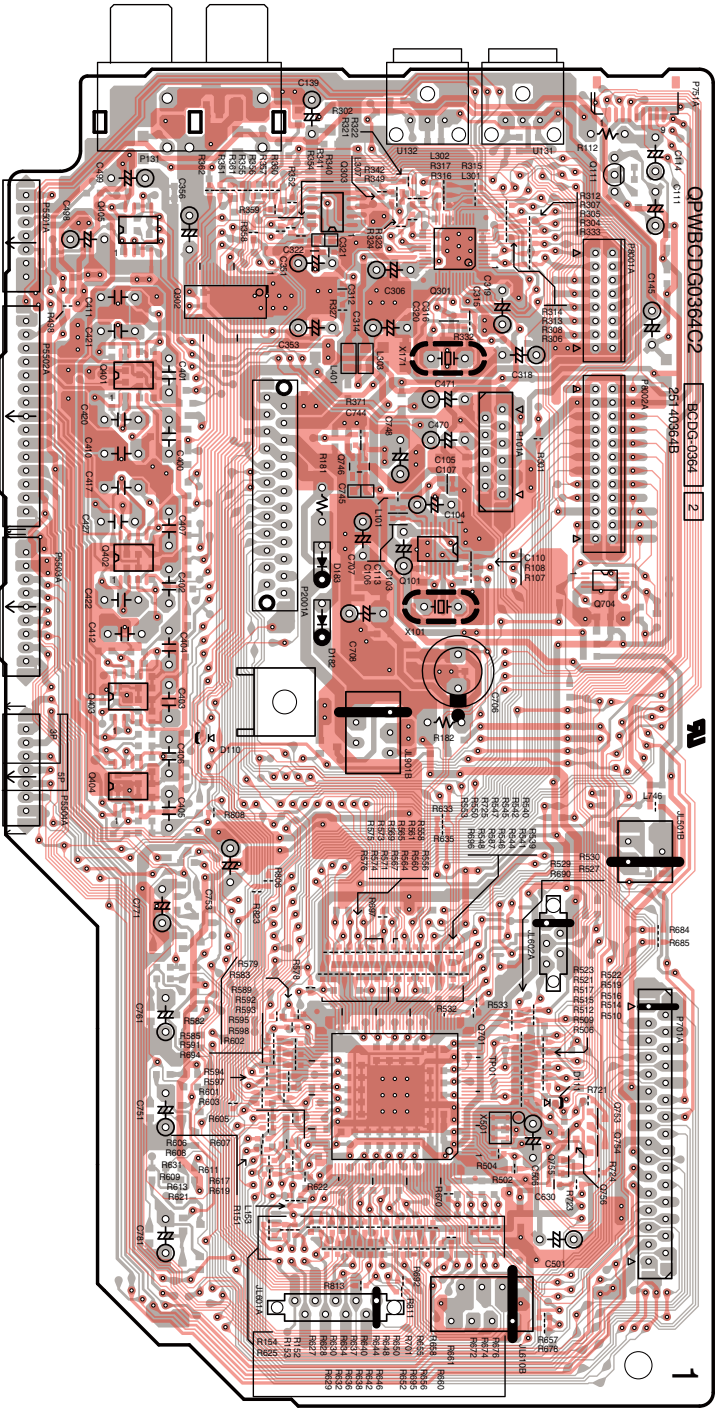


A B C D E F G H

PRINTED CIRCUIT BOARD VIEW-4_1
DISPLAY SECTION


U0040 BADIS-0373 (DISPLAY PC BOARD)
A-side(Component side)

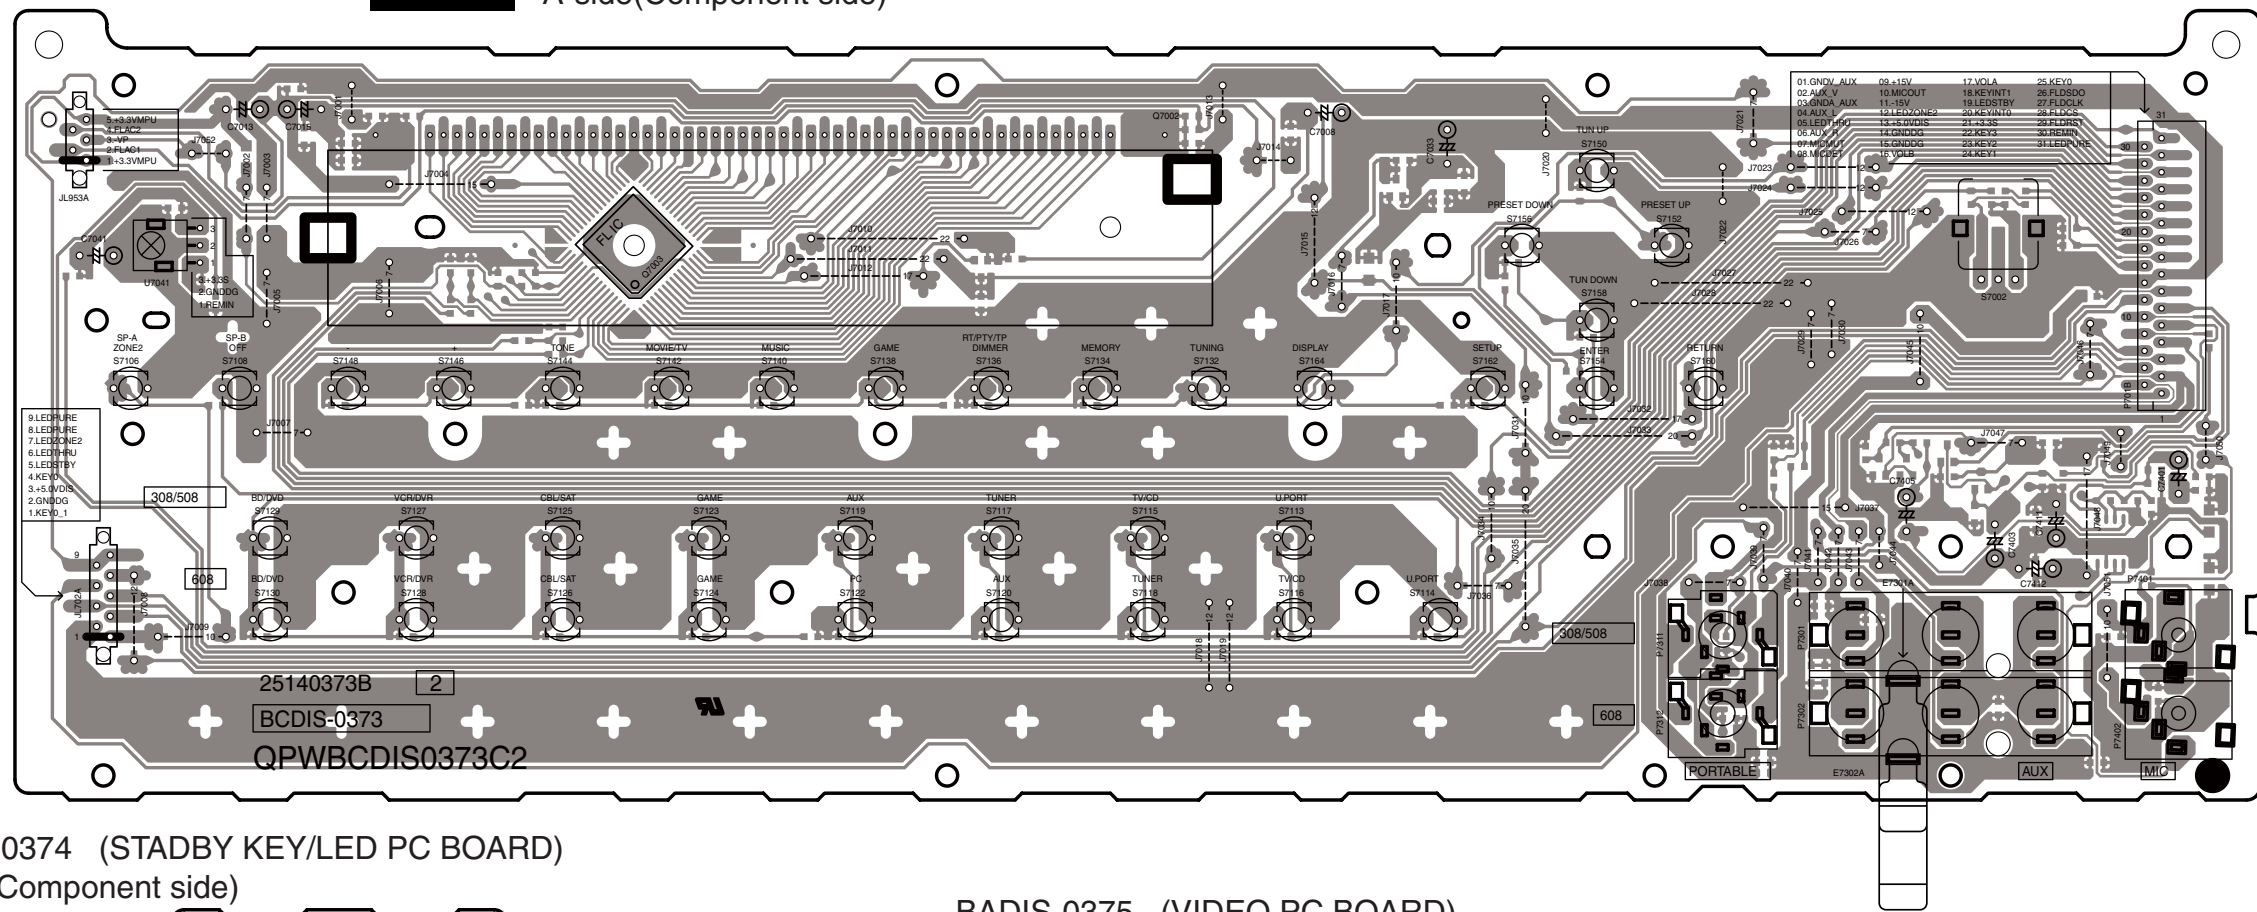


U0041 BADIS-0374 (STADBY KEY/LED PC BOARD)
A-side(Component side)

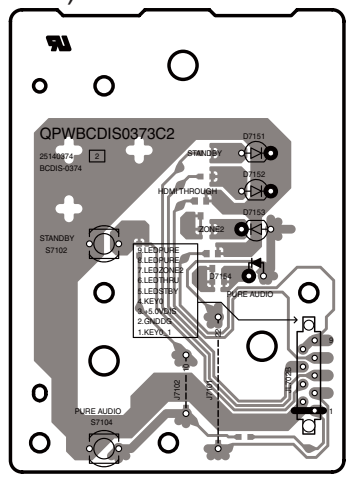


U0044 BAETC-0377 (HP JACK PC BOARD)
A-side(Component side)

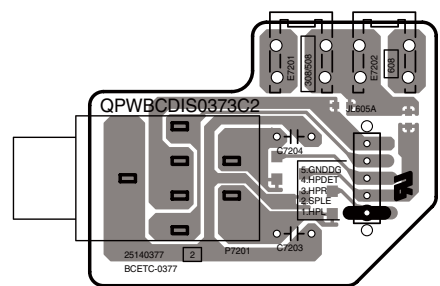

U0042 BADIS-0375 (VIDEO PC BOARD)
A-side(Component side)

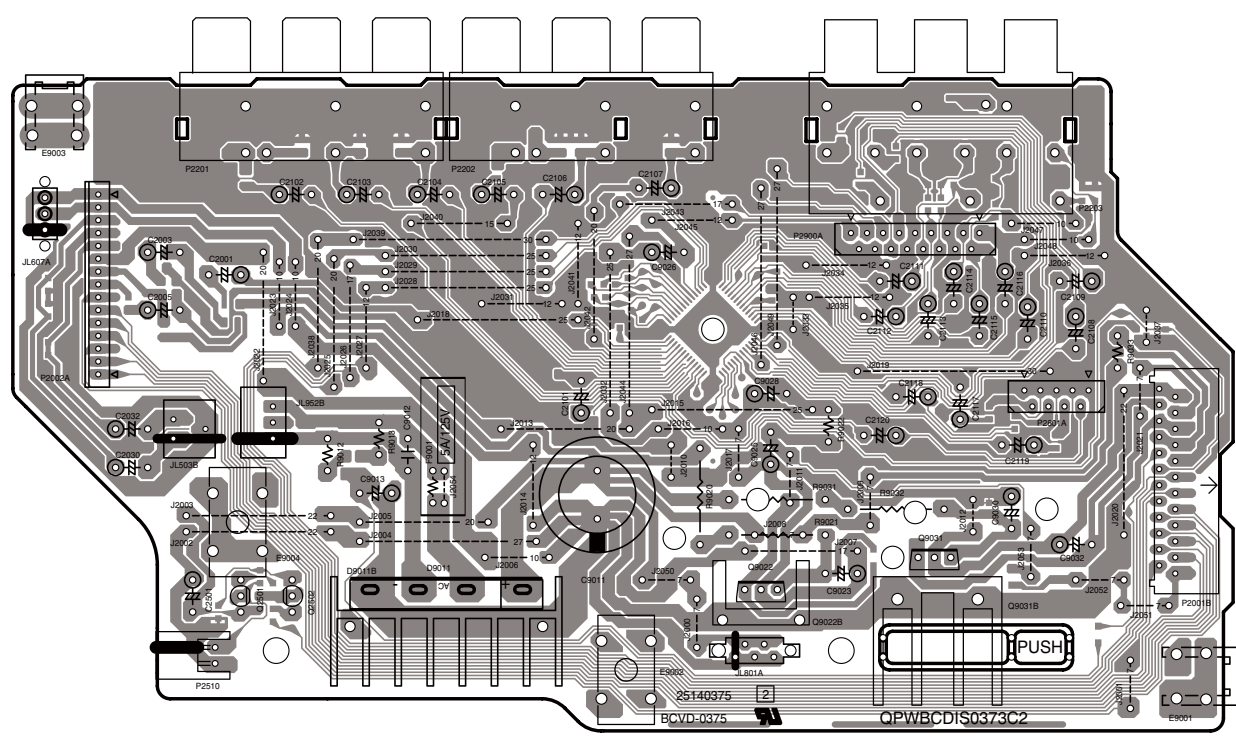


U0043 BAETC-0376 (POW SUPPLY PC BOARD)
A-side(Component side)

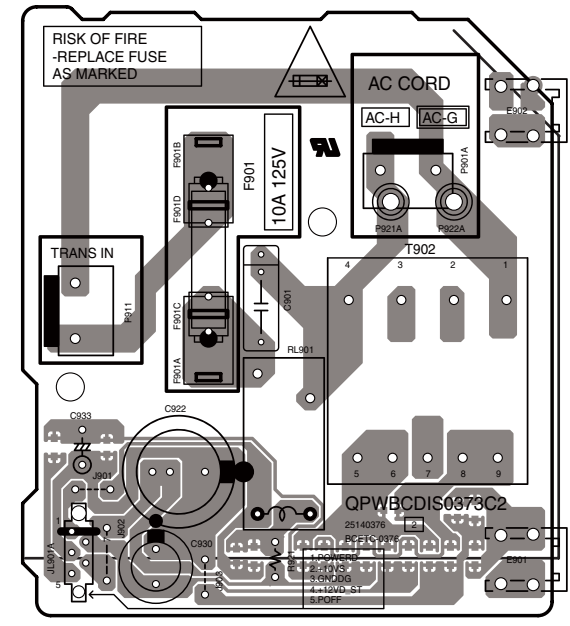

PRINTED CIRCUIT BOARD VIEWS-4_2 DISPLAY SECTION


U0040

BADIS-0373 (DISPLAY PC BOARD)
B-side(Soldering side)

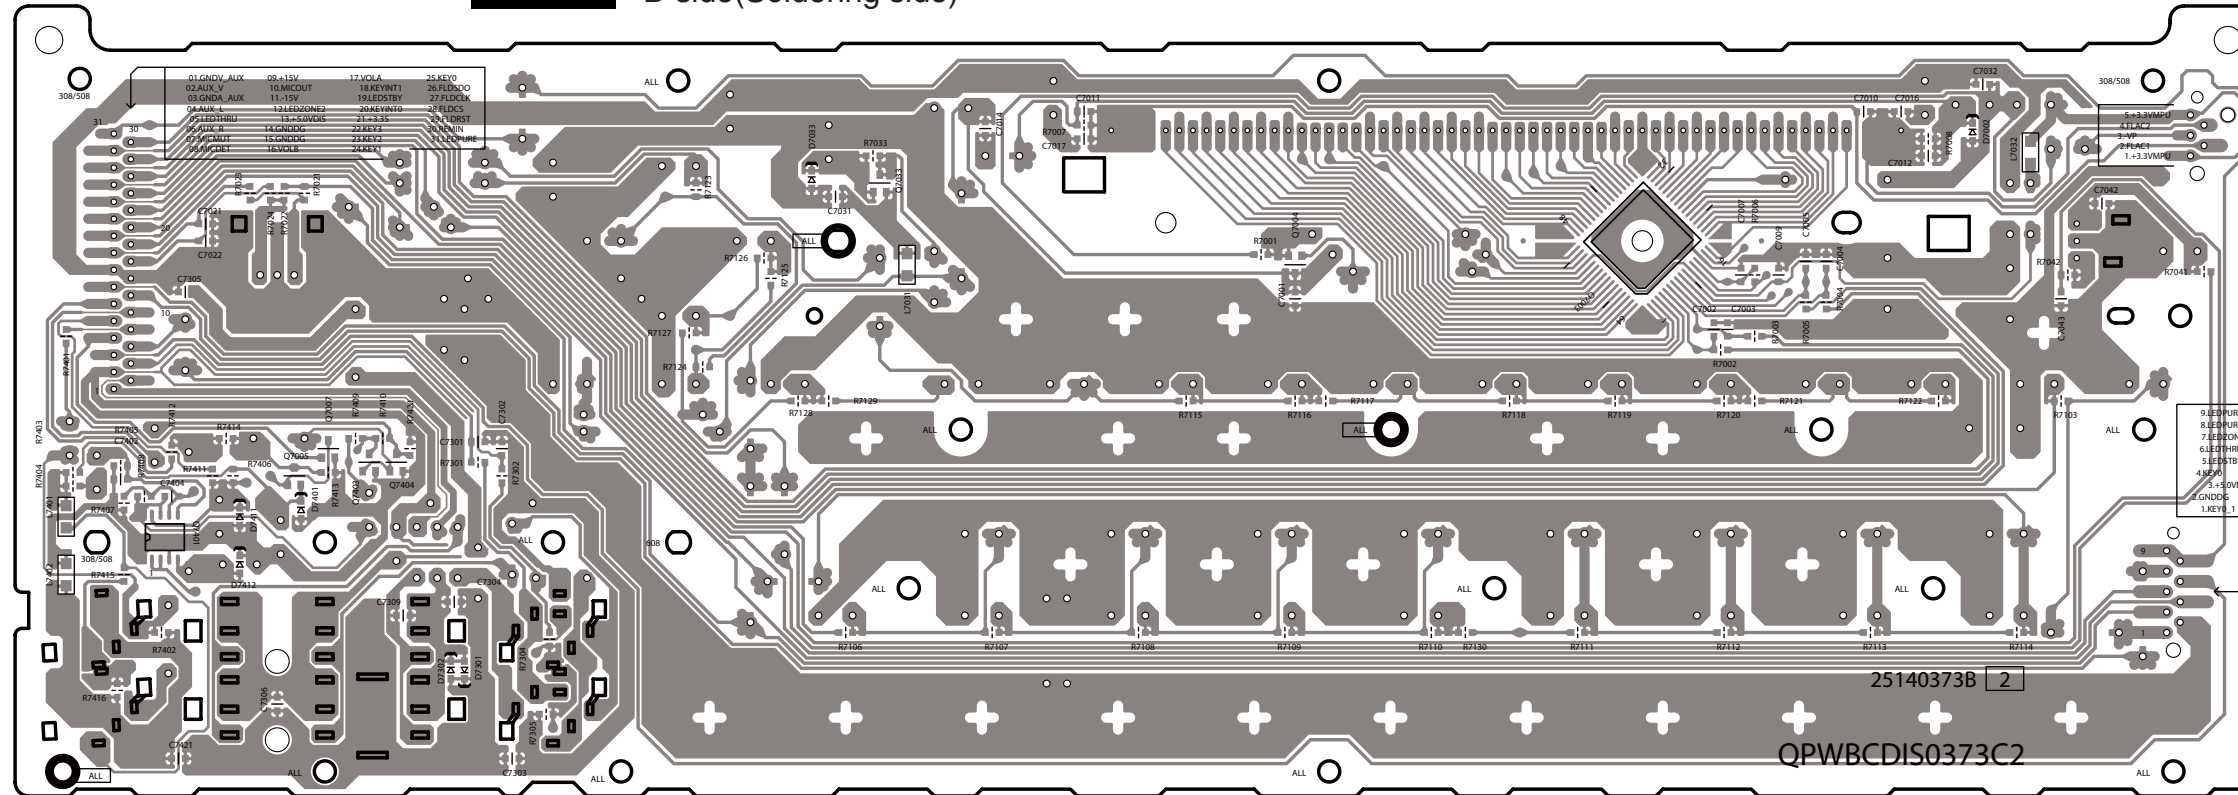


U0042

BADIS-0375 (VIDEO PC BOARD)
B-side(Soldering side)

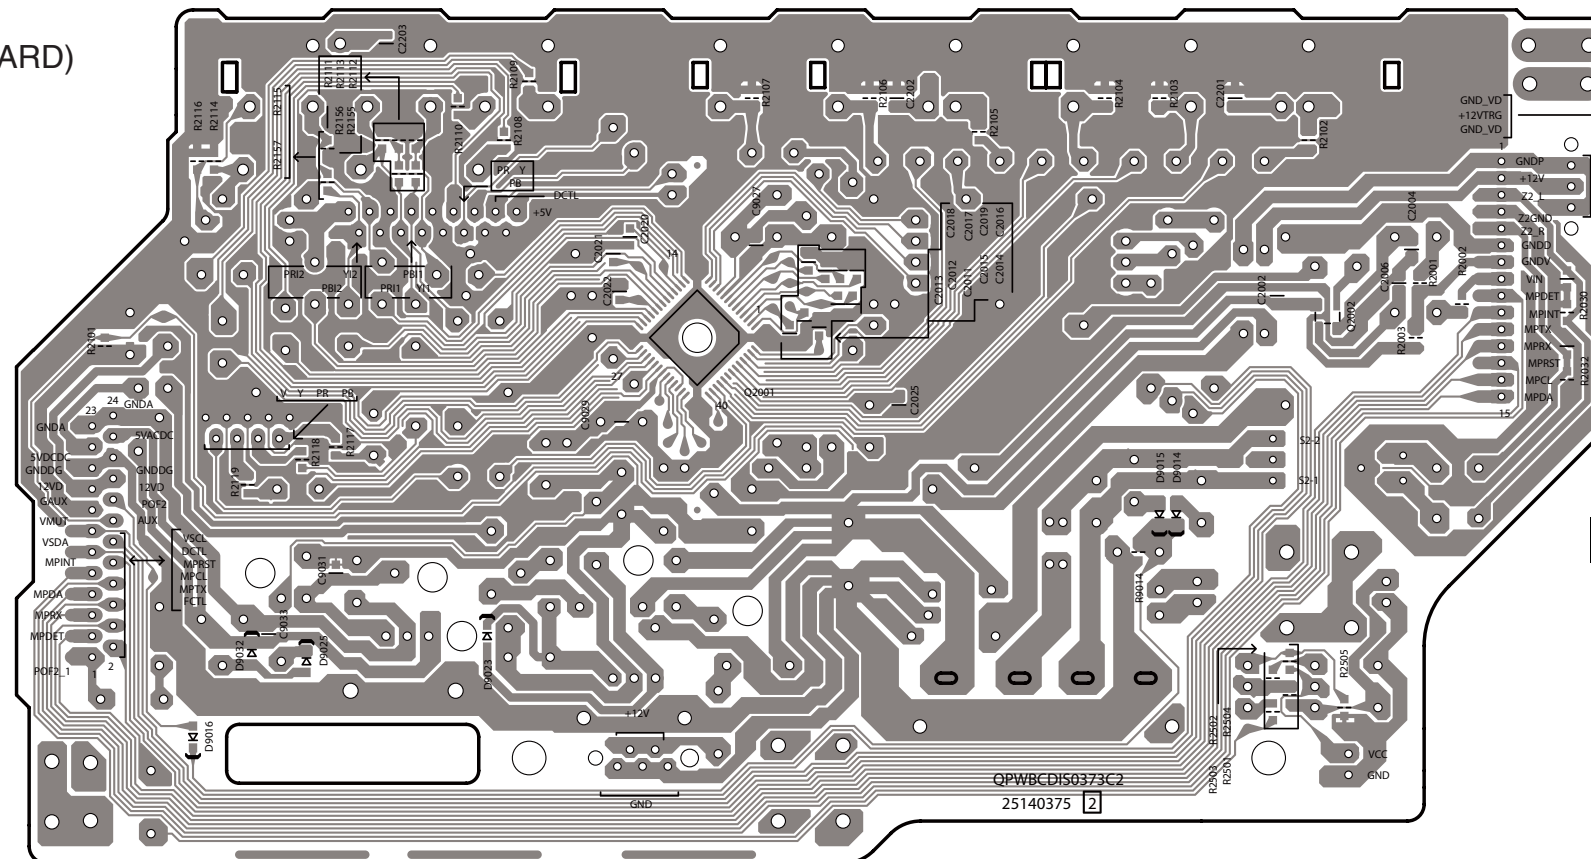


U0041

BADIS-0376 (STADBY KEY/LED PC BOARD)
B-side(Soldering side)

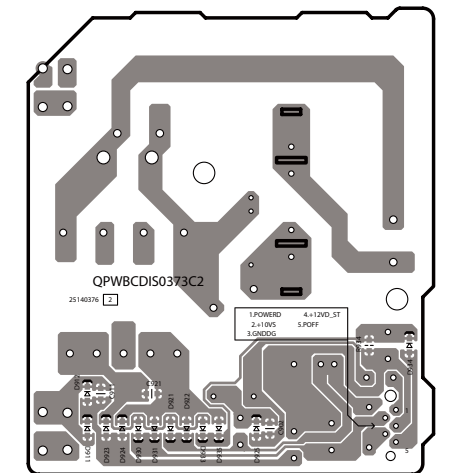


U0044

BAETC-0377 (HP JACK PC BOARD)
B-side(Soldering side)



U0043


BAETC-0374 (POW SUPPLY PC BOARD)
B-side(Soldering side)

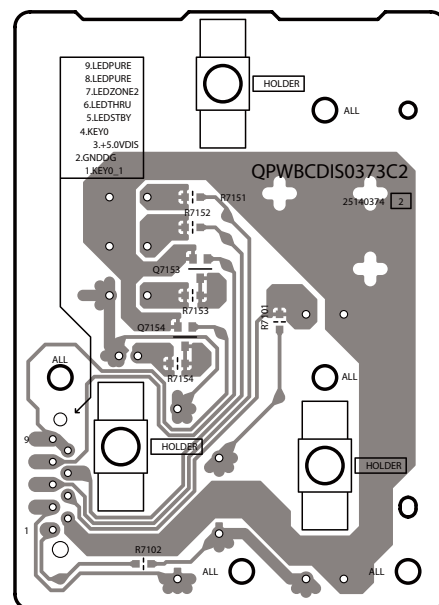

PRINTED CIRCUIT BOARD VIEWS-7
HDMI SECTION


U0070

BAHDM-0403 (HDMI PC BOARD)
A-side(Component side)

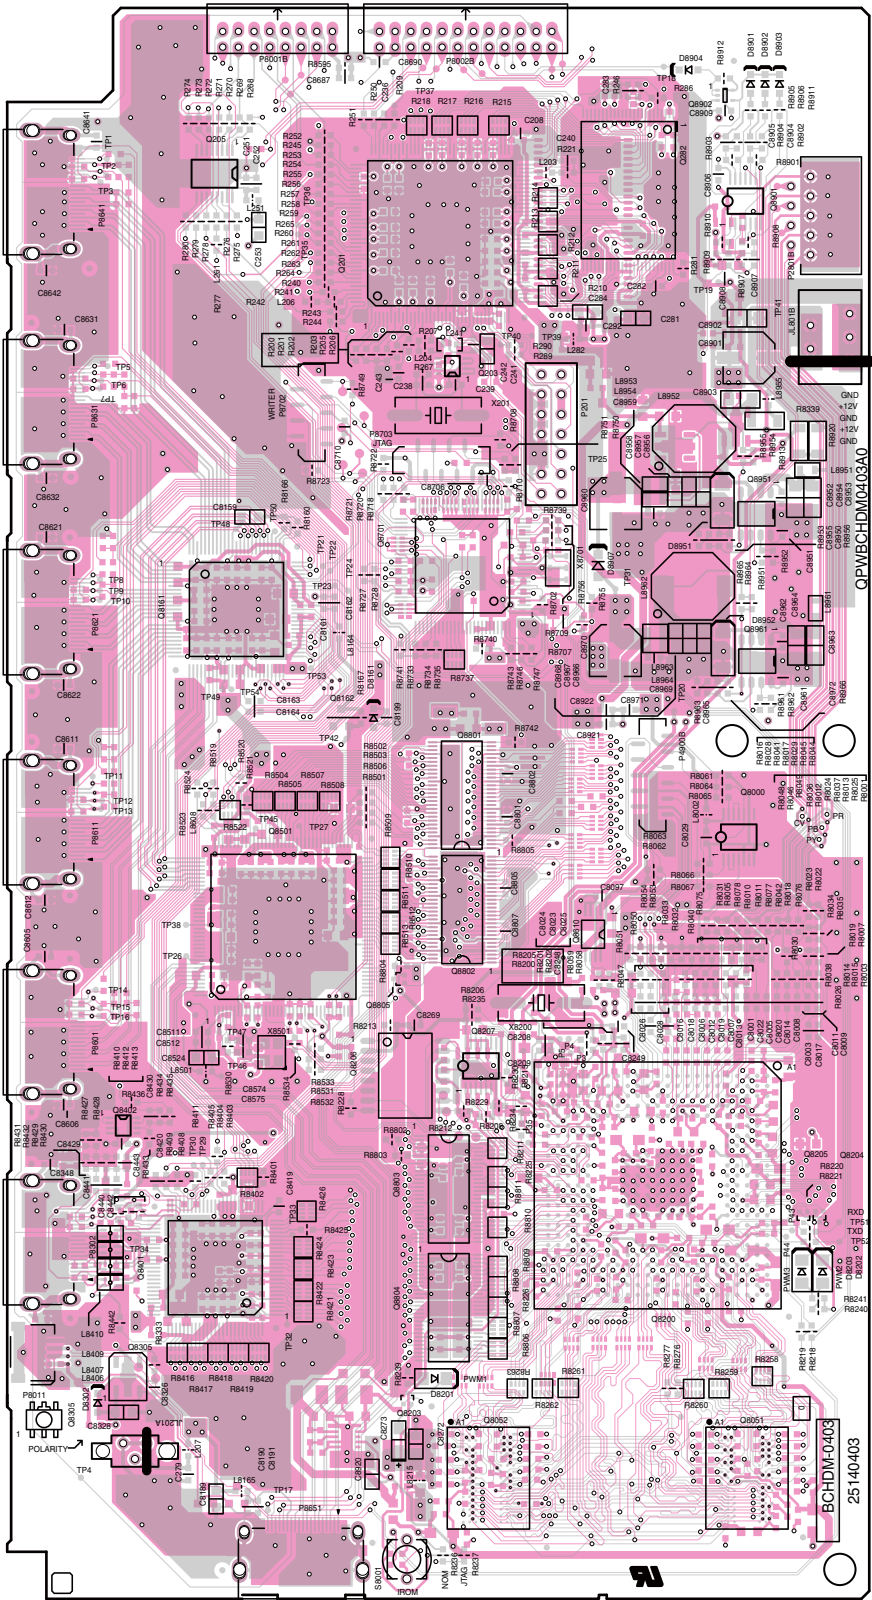


U0071

BAHDM-0404
(FRONT HDMI PC BOARD)
A-side(Component side)

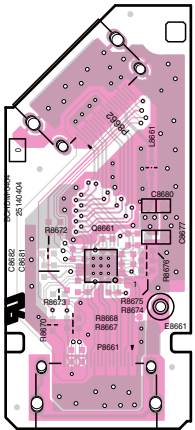


U0070

BAHDM-0403 (HDMI PC BOARD)
B-side(Soldering side)

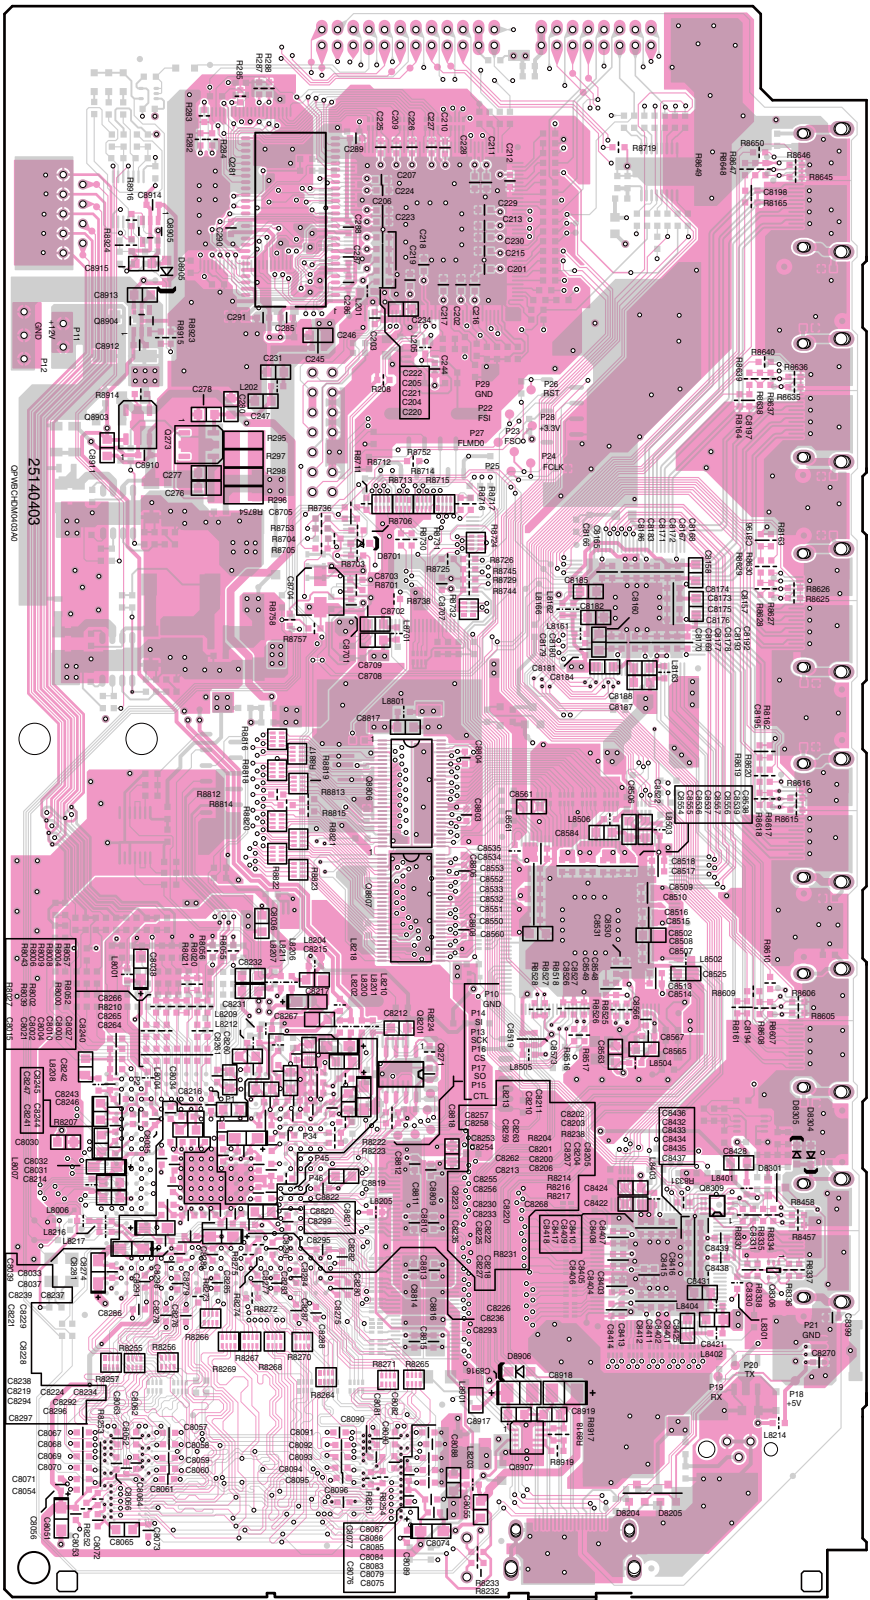


U0071

BAHDM-0404
(FRONT HDMI PC BOARD)
B-side(Soldering side)

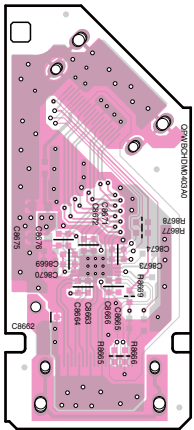

PACKING PROCEDURE

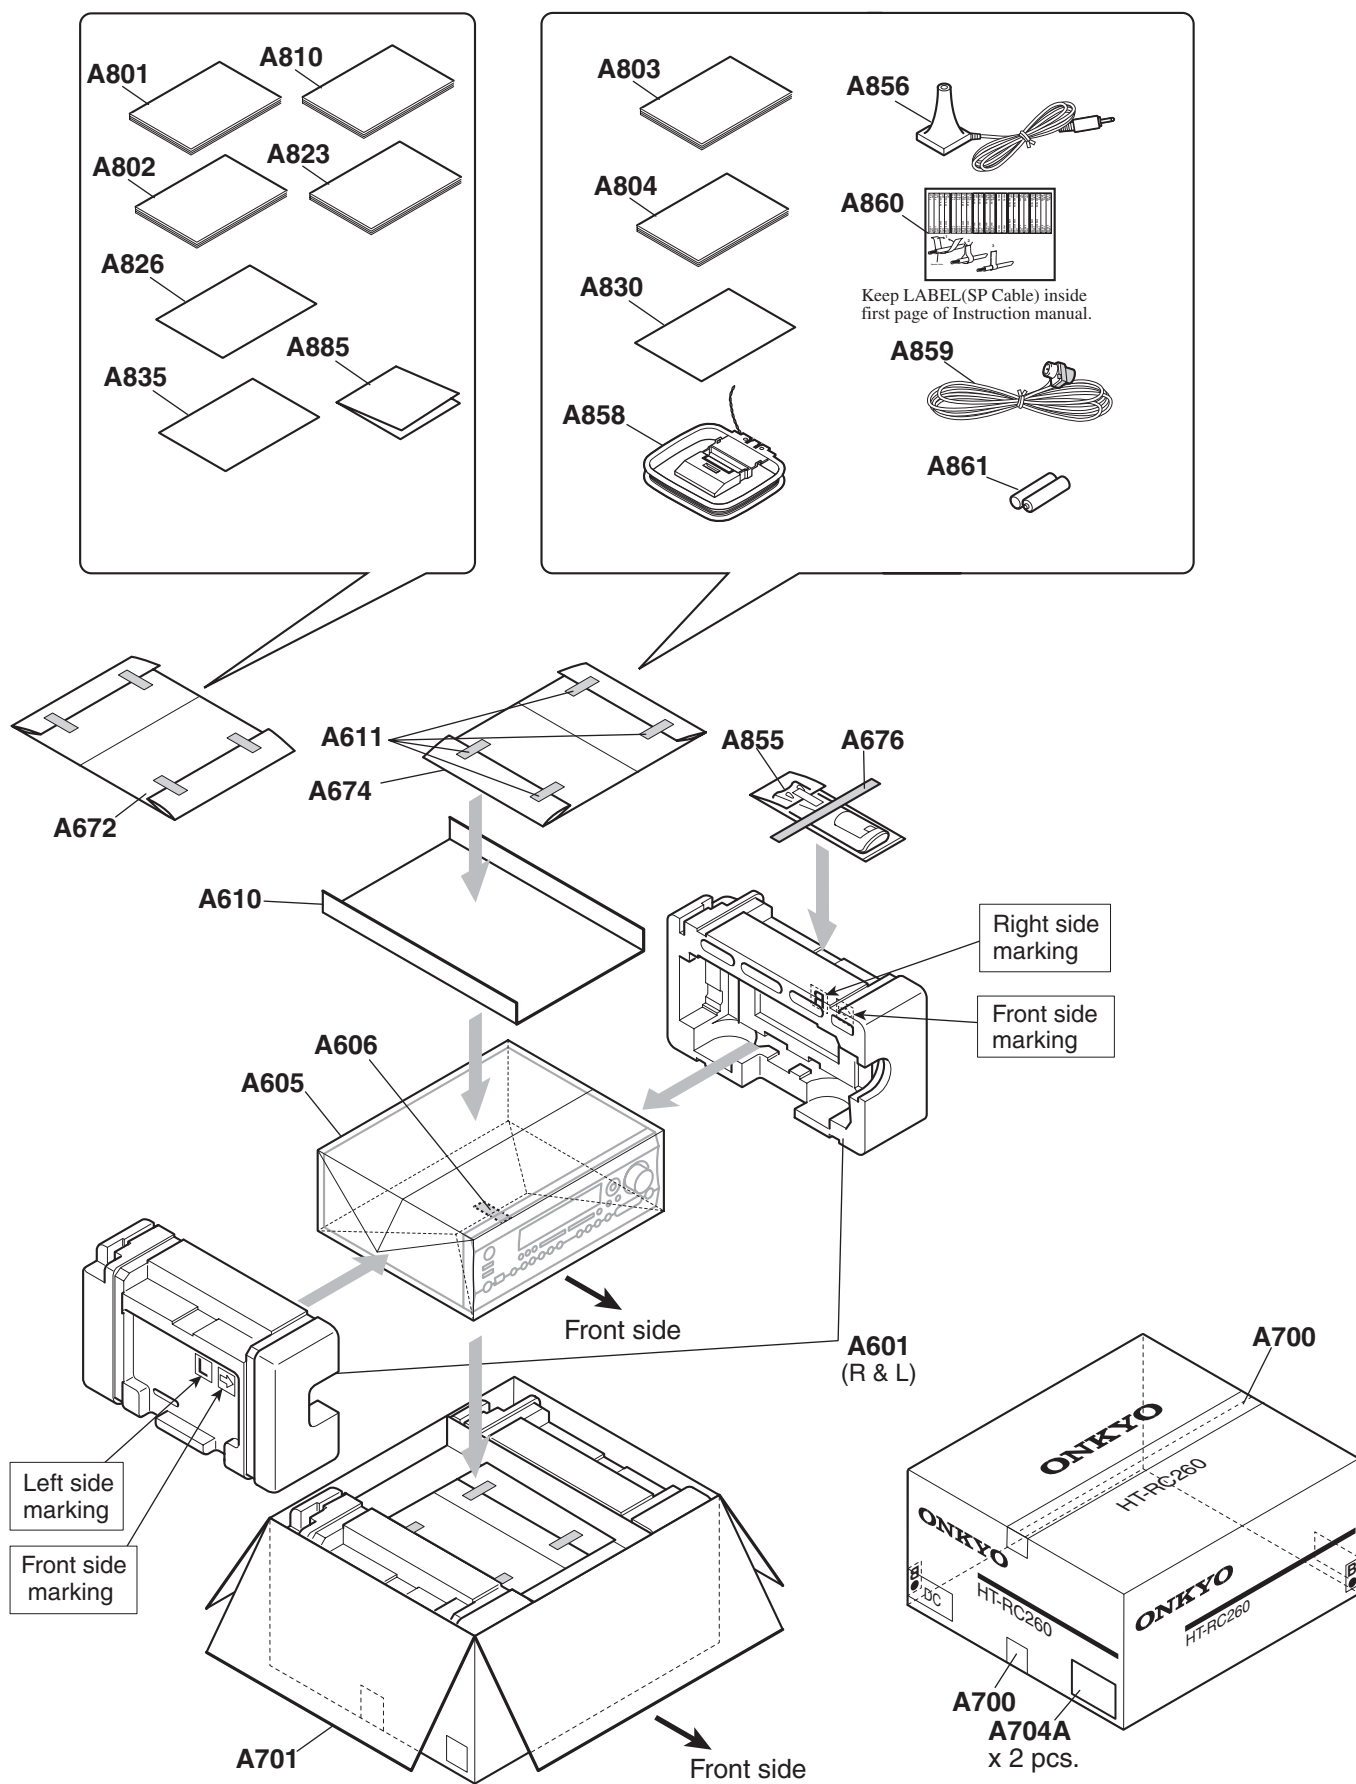

HT-RC260

<Note>

Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

NOTE : THE COMPONENTS IDENTIFIED BY THE MARK
! ARE CRITICAL FOR RISK OF FIRE AND
ELECTRIC SHOCK. REPLACE ONLY WITH PART
NUMBER SPECIFIED.

<Notes>

 : Black model

<MDC> : 120V, Canadian model

HT-RC260

EXPLODED VIEW PARTS LIST

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[SEMI CONDUCTOR]					
Q6050	TR	2SC4468-P	1	2202526	<B MDC>
Q6050 or	TR	2SC4468-O	(1)	2202523	<B MDC>
Q6050 or	TR	2SC4468-Y	(1)	2202524	<B MDC>
Q6050A	ISO SHEET	AC238	2	223024	<B MDC>
Q6050B	ISO SHEET	ISO SHEET	6	223050	<B MDC>
Q6051	TR	2SC4468-P	1	2202526	<B MDC>
Q6051 or	TR	2SC4468-O	(1)	2202523	<B MDC>
Q6051 or	TR	2SC4468-Y	(1)	2202524	<B MDC>
Q6052	TR	2SC4468-P	1	2202526	<B MDC>
Q6052 or	TR	2SC4468-O	(1)	2202523	<B MDC>
Q6052 or	TR	2SC4468-Y	(1)	2202524	<B MDC>
Q6053	TR	2SC4468-P	1	2202526	<B MDC>
Q6053 or	TR	2SC4468-O	(1)	2202523	<B MDC>
Q6053 or	TR	2SC4468-Y	(1)	2202524	<B MDC>
Q6054	TR	2SC4468-P	1	2202526	<B MDC>
Q6054 or	TR	2SC4468-O	(1)	2202523	<B MDC>
Q6054 or	TR	2SC4468-Y	(1)	2202524	<B MDC>
Q6055	TR	2SC4468-P	1	2202526	<B MDC>
Q6055 or	TR	2SC4468-O	(1)	2202523	<B MDC>
Q6055 or	TR	2SC4468-Y	(1)	2202524	<B MDC>
Q6056	TR	2SC4468-P	1	2202526	<B MDC>
Q6056 or	TR	2SC4468-O	(1)	2202523	<B MDC>
Q6056 or	TR	2SC4468-Y	(1)	2202524	<B MDC>
Q6060	TR	2SA1695-P	1	2202516	<B MDC>
Q6060 or	TR	2SA1695-O	(1)	2202513	<B MDC>
Q6060 or	TR	2SA1695-Y	(1)	2202514	<B MDC>
Q6061	TR	2SA1695-P	1	2202516	<B MDC>
Q6061 or	TR	2SA1695-O	(1)	2202513	<B MDC>
Q6061 or	TR	2SA1695-Y	(1)	2202514	<B MDC>
Q6062	TR	2SA1695-P	1	2202516	<B MDC>
Q6062 or	TR	2SA1695-O	(1)	2202513	<B MDC>

Q6062 or	TR	2SA1695-Y	(1)	2202514		<B MDC>
Q6063	TR	2SA1695-P	1	2202516		<B MDC>
Q6063 or	TR	2SA1695-O	(1)	2202513		<B MDC>
Q6063 or	TR	2SA1695-Y	(1)	2202514		<B MDC>
Q6064	TR	2SA1695-P	1	2202516		<B MDC>
Q6064 or	TR	2SA1695-O	(1)	2202513		<B MDC>
Q6064 or	TR	2SA1695-Y	(1)	2202514		<B MDC>
Q6065	TR	2SA1695-P	1	2202516		<B MDC>
Q6065 or	TR	2SA1695-O	(1)	2202513		<B MDC>
Q6065 or	TR	2SA1695-Y	(1)	2202514		<B MDC>
Q6066	TR	2SA1695-P	1	2202516		<B MDC>
Q6066 or	TR	2SA1695-O	(1)	2202513		<B MDC>
Q6066 or	TR	2SA1695-Y	(1)	2202514		<B MDC>
[CHASSIS SCREW]						
A001	CHASSIS	TX-SR507	1	27100533B	NSP	
A002	TAPE	TAPE(CLOTH-8U)	1	29110082	NSP	
A003	BOTTOM LEG	---	4	27175432C		
A005	CUSHION	(CORK)t2xΦ20	4	28141839	N	
A006	CUSHION	(BUTYL)	2	28141748	NSP	
A007	SCREW	3TTB+8B(3CM)SR	4	801637	NSP	
A009	HOLDER	KGLS-8RT	2	27190503A	NSP	
A010	HOLDER	KGPS-8RF	2	27191044	NSP	
A011	HOLDER	KGLS-10RT	1	27190428A	NSP	
A013	HOLDER	KGPS-14RF	2	27190802	NSP	
A017	HOLDER	KGLS-16S	1	27190607	NSP	
A019	HOLDER	KGPS-16RF	1	27190991	NSP	
A021	HOLDER	KGLS-22S	2	27190369	NSP	
A023	HOLDER	KGLS-22S	1	27190369	NSP	
A025	SCREW	4TTC+8C(3BC)	4	830440089GR	NSP	
A027	SPACER	---	1	27270439	NSP	
A030	HEAT SINK	251	1	27160630A	NSP	
A032	RETAINER	(HL)	1	27142138A	NSP	
A034	RETAINER	(HR)	1	27142139B	NSP	
A036	SCREW	3TTB+8B(3CM)SR	4	801637	NSP	
A038	SCREW	3TTB+8B(3CM)SR	2	801637	NSP	
A040	SCREW	3TTB+8B(3CM)SR	4	801637	NSP	
A042	SCREW	3TTB+8B(3CM)SR	2	801637	NSP	
A044	HOLDER	KGLS-8RT	1	27190503A	NSP	
A050	SCREW	3SMS8W.SW+14B(CU)	14	801634	NSP	
A051	ISO PLT	(HT-R)	1	28175339A	NSP	
A052	RIVET	P3535	3	880051	NSP	
A054	SCREW	3TTB+8B(3CM)SR	1	801637	NSP	
A056	BUSHING	S-RELIEF #2271	1	27300750	NSP	

A058	LABEL	(PT)	1	29363379-1	NSP	
A060	WIRE TIE	BSK-1	2	260208	NSP	
A068	SCREW	3TTB+8B(3CM)SR	4	801637	NSP	
A069	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP	
A071	LABEL	(SP)570	1	29390690A	N, NSP	<B MDC>
A090	CUSHION	(BUTYL)	1	28141748	NSP	
A091	BRACKET	(FAN-L)	1	27131077	NSP	
A093	BRACKET	(FAN-R)	1	27131078	NSP	
A095	BUSHING	(FAN-L)	4	28170091A	NSP	
A096	TAPE	TAPE(CLOTH-16U)	1	29110083	NSP	
A097	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP	
A098	Cu TAPE	(30x5)	2	29110210	NSP	
A099	CUSHION	(t2x13x10)FELT	3	28141829	NSP	
A101	REAR PANEL	HT-RC260DC	1	27124111B	N	<B MDC>
A102	CUSHION	--	2	28141799	NSP	
A103	SCREW	3P+6FN(3BC)	6	82143006GR	NSP	<B MDC>
A104	CUSHION	(BUTYL)	1	28141748	NSP	
A105	SCREW	3TTB+8B(3BC)	29	838430088GR	NSP	<B MDC>
A109	SCREW	3P+6FN(3BC)	2	82143006GR	NSP	<B MDC>
A115	IB CUSHION	W15*3t TAPE	1	28141585	NSP	
[CABINET]						
A201	F PANEL	HT-RC260(B)DC	1	27213348		<B MDC>
A202	CLEAR PLT	(AS)508D	1	28192283		<B MDC>
A207	BADGE	BADGE	1	28135244		
A211	F BRACKET	(B)	1	27111530D	N	
A215	KNOB	(SEL)	1	28326665		
A217	KNOB	(STNBY)	1	28326663A		
A219	KNOB	(CUR)	1	28326664A		
A221	IB CUSHION	W15*3t TAPE	1	28141585	NSP	
A223	SCREW	2.6TTB+8B(3BC)	22	838426088GR	NSP	
A250	B PLATE	(B)	1	28133428	NSP	
A254	WIRE TIE	BSK-1	9	260208	NSP	
A255	SCREW	3TTB+8B(3CM)SR	5	801637	NSP	
A256	SCREW	3TTB+8B(3CM)SR	1	801637	NSP	
A260	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP	
A261	TAPE	TAPE(CLOTH-16U)	1	29110083	NSP	
A262	TAPE	TAPE(CLOTH-8U)	1	29110082	NSP	
A264	CUSHION	---	1	28141681	NSP	
A267	SPACER	SPACER 8X3X0.188ホリヤ	1	27270147	NSP	
A273	HOLDER	KGLS-4S	3	27190009	NSP	
A281	RETAINER	(HDMI)	1	27142172	NSP	
A283	SCREW	3P+6FN(3BC)	1	82143006GR	NSP	
A285	TAPE	TAPE(CLOTH-16U)	1	29110083	NSP	

A287	CUSHION	(BUTYL)	1	28141748	NSP	
A317	IB CUSHION	W15*3t TAPE	1	28141585	NSP	
A321	KNOB	(VOL)AS RC260	1	28326831		
A323	TAPE	TAPE(CLOTH-8U)	1	29110082	NSP	
A340	COVER	(B) (Bent)	1	28210034		
A340	COVER	(B) (Not Bent)	1	28210034Z		
A342	SCREW	3TTB+8B(3BC)	7	838430088GR	NSP	
A360	LABEL	(COVER)	1	29390767	NSP	
A362	LABEL	HOOKUP-ONKYO	1	29363194	NSP	<B MDC>
[TRANS COIL]						
T901	P TRANS	NPT-1592D	1	2301982	!	<B MDC>
[SW TRM]						
F6901	FUSE	12A-TUL-250V	1	252301GR	!	
F6902	FUSE	12A-TUL-250V	1	252301GR	!	
F901	FUSE	10A-UL/T-233	1	252330GR	!	<B MDC>
F901 or	FUSE	10A-T/UL-ST2	(1)	252333GR	!	<B MDC>
P101	FFC	NCFC7-111512	1	2047111512		
P2510	FAN	4710KL-04W-B10-EA2	1	24502332		
P2801	FFC	NCFC7-091012	1	2047091012		
P701	FFC	NCFC7-312012	1	2047312012		
P8651	CORD AS	HDMI 0.45M	1	2010475	!	
P901	AC CORD	AS-UC-2	1	253368AYUN	!	<B MDC>
P901 or	AC CORD	AS-UC-2	(1)	253368BLTK	!	<B MDC>
[TUNER UNIT]						
U001	AF-AS(Amplifier Asy) U0010+U0011+U0012+U0013+U0014	BAAF-0355-1E *	1	1B247555-1E	N	<B MDC>
U0010	AF-AS(Amplifier Asy)	BAAF-0355-1E	1	1B2475355-1E	N	<B MDC>
U0011	PWB(FL Tube -VP)	BAPS-0356-1E	1	1B2475356-1E	N	<B MDC>
U0012	PWB(Thermal Sensor)	BAETC-0357-1E	1	1B2475357-1E	N	<B MDC>
U0013	PWB(Thermal Sensor FIX)	BAETC-0358-1E	1	1B2475358-1E	N, NSP	<B MDC>
U0014	PWB(Trans Terminal FIX)	BAETC-0359-1E	1	1B2475359-1E	N	<B MDC>
U002	CLA-AS(Amplifier Class_A Asy) U0020+U0021	BACLA-0362-1A *	1	1B247562-1A	N	<B MDC>
U0020	CLA-AS(Amplifier Class_A Asy)	BACLA-0362-1A	1	1B2475362-1A	N	<B MDC>
U0021	PWB(etc reserve)	BAETC-0363-1A	1	1B2475363-1A	N, NSP	<B MDC>
U003	DG-AS (MPU/DAC Asy) U0030+U0031	BADG-0364-1Z *	1	1B247564-1Z	N	<B MDC>
U0030	DG-AS (MPU/DAC Asy)	BADG-0364-1Z	1	1B2475364-1Z	N	<B MDC>
U0031	PWB(U port)	BAETC-0365-1Z	1	1B2475365-1Z	N	<B MDC>
U004	DIS- AS (Display Asy) U0040+U0041+U0042+U004 3+U0044	BADIS-0373-1M *	1	1B247573-1M	N	<B MDC>
U0040	DIS-AS (Display Asy)	BADIS-0373-1M	1	1B2475373-1M	N	<B MDC>

U0041	PWB (Standby key/LED Asy)	BADIS-0374-1M	1	Included in "REF. NO. U0040"	N	<B MDC>
U0042	PWB (Video Asy)	BAVD-0375-1M	1	1B2475375-1M	N	<B MDC>
U0043	PWB(Power Supply Asy)	BAETC-0376-1M	1	1B2475376-1M	N	<B MDC>
U0044	PWB(HP Jack)	BAETC-0377-1M	1	1B2475377-1M	N	<B MDC>
U006	TRM-AS(SP Terminal Asy) U0060+U0061+U0062+U0063	BATRM-0368-1J *	1	1B247568-1J	N	<B MDC>
U0060	TRM-AS(SP Terminal Asy)	BATRM-0368-1J	1	1B2475368-1J	N	<B MDC>
U0063	PWB(D SUB)	BAETC-0371-1J	1	1B2475371-1J	N	<B MDC>
U0064	PWB(etc reserve)	BAETC-0372-1J	1	1B2475372-1J	N, NSP	<B MDC>
U007	HDM-AS(HDMI Asy) U0070+U0071+U0072	BAHDM-0403-1E *	1	1B247503-1E	N	<B MDC>
U0070	HDM-AS(HDMI Asy)	BAHDM-0403-1E	1	1B2475403-1E	N	<B MDC>
U0071	PWB(Front HDMI Asy)	BAHDM-0404-1E	1	1B2475404-1E	N	<B MDC>
U0072	PWB(Front HDMI Asy FIX)	BAETC-0405-1E	1	1B2475405-1E	N, NSP	<B MDC>
U010	TUNER UNIT	FAEH06-A01US	1	240166		<B MDC>

HT-RC260

PACKING PROCEDURES PARTS LIST

REF. NO	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[PACKING]					
A601	PAD	(AS)608	1	29092500	
A605	POLY BAG	w850xd650	1	29100245	
A606	TAPE	(SEROHAN)NITTO NO.29	1	29110149	
A610	SHEET	(PAD)	1	29096095	
A611	TAPE	(SEROHAN)NITTO NO.29	1	29110149	
A700	PP TAPE	W50 SBT-70	1	29110200	<B MDC>
A701	CARTON	260DC	1	29055101	N <B MDC>
A704A	UPC LABEL	260BMDC	{ 1}	29391079	N <B MDC>
A760	PP TAPE	W50 SBT-70	1	29110200	
[ACCESSARY]					
A674	POLY BAG	D250xd300xW300(t0.04)	1	29100256A	
A676	TAPE	(SEROHAN)NITTO NO.29	1	29110149	
A801	INS MANUAL	En(HT-RC260)	1	29400276	N
A802	INS MANUAL	U2FrEs(HT-RC260)	1	29400277	N <B MDC>
A810	INS MANUAL	En(QSS HT-RC260)	1	29400280	N
A823	INS MANUAL	U9(2010 Prepro)	1	29400269	
A826	INST SHEET	U11(2010 RIHD)	1	29355782	
A835	HANDBILL	(UP-A1)US	1	29380155A	<B MDC>
A855	REMO CON	RC-764M	1	24140764	
A856	MIC	MIC-7000	1	245044	
A858	ANT COIL	NMA-3057	1	232140	
A859	FM ANT AS	Type W	1	292191	
A860	LABEL	(SPCABLE)2009	1	29390881	

A861	BATTERY	R6/AA(UM-3)	2	3010194		<B MDC>
A861 or	BATTERY	R6/AA(UM-3)	(2)	3010054		<B MDC>
A885	WRNTY CARD	(ONKYO)	1	29365135		<B MDC>

HT-RC260						
PC BOARD PARTS LIST						

U001	AF-AS(Amplifier Asy) U0010+U0011+U0012+U0013+U0014	BAAF-0355-1E *	1	1B247555-1E	N	<B MDC>
U0010	AF-AS(Amplifier Asy)	BAAF-0355-1E	1	1B2475355-1E	N	<B MDC>
U0011	PWB(FL Tube -VP)	BAPS-0356-1E	1	1B2475356-1E	N	<B MDC>
U0012	PWB(Thermal Sensor)	BAETC-0357-1E	1	1B2475357-1E	N	<B MDC>
U0013	PWB(Thermal Sensor FIX)	BAETC-0358-1E	1	1B2475358-1E	N, NSP	<B MDC>
U0014	PWB(Trans Terminal FIX)	BAETC-0359-1E	1	1B2475359-1E	N	<B MDC>

CIRCUIT	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[SEMI CONDUCTOR]					
D4171	ZENER D	MTZJ7.5B	1	224470752T	
D4172	ZENER D	MTZJ7.5B	1	224470752T	
D4207	C-DIODE	KDS4148U	1	223283R2	NSP <B MDC>
D4207 or	C-DIODE	1SS352	(1)	223234R2	NSP <B MDC>
D4207 or	C-DIODE	MA2J111	(1)	223279R2	NSP <B MDC>
D4217	C-DIODE	KDS4148U	1	223283R2	NSP <B MDC>
D4217 or	C-DIODE	1SS352	(1)	223234R2	NSP <B MDC>
D4217 or	C-DIODE	MA2J111	(1)	223279R2	NSP <B MDC>
D4300	DIODE	RL1N4003	1	22380260T	
D4301	DIODE	RL1N4003	1	22380260T	
D4302	DIODE	RL1N4003	1	22380260T	
D4303	DIODE	RL1N4003	1	22380260T	
D4304	DIODE	RL1N4003	1	22380260T	
D4305	DIODE	RL1N4003	1	22380260T	
D6000	C-DIODE	KDS4148U	1	223283R2	NSP
D6000 or	C-DIODE	1SS352	(1)	223234R2	NSP
D6000 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D6001	C-DIODE	KDS4148U	1	223283R2	NSP
D6001 or	C-DIODE	1SS352	(1)	223234R2	NSP
D6001 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D6002	C-DIODE	KDS4148U	1	223283R2	NSP
D6002 or	C-DIODE	1SS352	(1)	223234R2	NSP
D6002 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D6003	C-DIODE	KDS4148U	1	223283R2	NSP
D6003 or	C-DIODE	1SS352	(1)	223234R2	NSP
D6003 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D6004	C-DIODE	KDS4148U	1	223283R2	NSP
D6004 or	C-DIODE	1SS352	(1)	223234R2	NSP

D6004 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D6005	C-DIODE	KDS4148U	1	223283R2	NSP	<B MDC>
D6005 or	C-DIODE	1SS352	(1)	223234R2	NSP	<B MDC>
D6005 or	C-DIODE	MA2J111	(1)	223279R2	NSP	<B MDC>
D6006	C-DIODE	KDS4148U	1	223283R2	NSP	<B MDC>
D6006 or	C-DIODE	1SS352	(1)	223234R2	NSP	<B MDC>
D6006 or	C-DIODE	MA2J111	(1)	223279R2	NSP	<B MDC>
D6701	C-DIODE	KDS4148U	1	223283R2	NSP	
D6701 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D6701 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D6702	C-DIODE	KDS4148U	1	223283R2	NSP	
D6702 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D6702 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D6703	ZENER D	UDZS3.3B	1	224550330R2		
D6704	ZENER D	UDZS3.3B	1	224550330R2		
D6713	ZENER D	UDZS3.3B	1	224550330R2		
D6901	DIODE	D10XB60H	1	22380337		
D6901A	HEAT SINK	RAD-196	1	27160545	NSP	
D6901C	SCREW	3P+10FN(3BC)	1	82143010GR	NSP	
D6902	C-DIODE	KDS4148U	1	223283R2	NSP	
D6902 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D6902 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D960	DIODE	RL1N4003	1	22380260T		
D961	DIODE	RL1N4003	1	22380260T		
D962	ZENER D	UDZS36B	1	224553600R2		
Q4001	IC	R2A15218FP	1	22242605R3		
Q4003	IC	NJM4580M-D	1	22241448R2		
Q4100	TR	RN1441	1	2215410R2		
Q4101	TR	RN1441	1	2215410R2		
Q4102	TR	RN1441	1	2215410R2		
Q4103	TR	RN1441	1	2215410R2		
Q4104	TR	RN1441	1	2215410R2		
Q4105	TR	RN1441	1	2215410R2		<B MDC>
Q4106	TR	RN1441	1	2215410R2		<B MDC>
Q4107	TR	RN1441	1	2215410R2		
Q4108	TR	RN1441	1	2215410R2		<B MDC>
Q4109	TR	RN1441	1	2215410R2		<B MDC>
Q4117	TR	RN1441	1	2215410R2		
Q4130	IC	NJM4580M-D	1	22241448R2		
Q4170	IC	78M15HF(NJM78M15FA)	1	222780155JRC		
Q4170 or	IC	UPC78M15AHF-AZ	(1)	222780155NEC		
Q4170A	HEAT SINK	RAD-196	1	27160545		
Q4170B	SCREW	3P+10FN(3BC)	1	82143010GR		

Q4171	IC	79M15HF(NJM79M15FA)	1	222790155JRC		
Q4171 or	IC	UPC79M15HF-AZ	(1)	222790155NEC		
Q4171B	SCREW	3P+10FN(3BC)	1	82143010GR		
Q4184	TR	2SC2235-Y(TPE6_F)	1	2211654T		
Q4185	TR	2SA965-O(TPE6_F)	1	2211643T		
Q6000	TR	2SC1740S-S	1	2213285T		
Q6001	TR	2SC1740S-S	1	2213285T		
Q6002	TR	2SC1740S-S	1	2213285T		
Q6003	TR	2SC1740S-S	1	2213285T		
Q6004	TR	2SC1740S-S	1	2213285T		
Q6005	TR	2SC1740S-S	1	2213285T		<B MDC>
Q6006	TR	2SC1740S-S	1	2213285T		<B MDC>
Q6070	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q6071	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q6072	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q6073	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q6074	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q6075	TR	2SC2229-Y(TPE6_F)	1	2211634T		<B MDC>
Q6076	TR	2SC2229-Y(TPE6_F)	1	2211634T		<B MDC>
Q6380	IC	LM61CIZ	1	22242212		
Q6380A	RETAINER	(PTH)	1	27141884-1		
Q6701	TR	2SC2712-GR	1	2213145R2		
Q6701 or	TR	KTC3875-GR	(1)	2216175R2		
Q6702	TR	2SC2712-GR	1	2213145R2		
Q6702 or	TR	KTC3875-GR	(1)	2216175R2		
Q6703	TR	2SA1163-BL(TE85L_F)	1	2216756R2		
Q6707	TR	2SC2712-GR	1	2213145R2		
Q6707 or	TR	KTC3875-GR	(1)	2216175R2		
Q6713	TR	2SA1163-BL(TE85L_F)	1	2216756R2		
Q960	TR	2SC2235-Y(TPE6_F)	1	2211654T		
Q960 or	TR	2SC2235-O(TPE6_F)	(1)	2211653T		
[TRANS COIL]						
L4001	CHOKE COIL	LBC2518T2R2M	1	231364M022R2		
[CAPACITOR]						
C4001	C-CERA C	CC725CH1H-152J1	1	342101524R1	NSP	<B MDC>
C4002	C-CERA C	CC725CH1H-152J1	1	342101524R1	NSP	<B MDC>
C4007	UPZ C	2AUPZTF221JE	1	376332214T		
C4008	UPZ C	2AUPZTF221JE	1	376332214T		
C4009	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	
C4010	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	
C4013	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	
C4014	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	
C4017	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	

C4018	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	
C4019	UPZ C	2AUPZTF221JE	1	376332214T		
C4020	UPZ C	2AUPZTF221JE	1	376332214T		
C4027	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	
C4030	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	<B MDC>
C4031	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	<B MDC>
C4032	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	
C4050	UTSP C	CE04W10V-220M(UTSP)	1	397532217T		
C4051	UTSP C	CE04W10V-220M(UTSP)	1	397532217T		
C4052	UTSP C	CE04W10V-220M(UTSP)	1	397532217T		
C4053	UTSP C	CE04W25V-47M(UTSP)	1	397554707T		
C4054	UTSP C	CE04W25V-47M(UTSP)	1	397554707T		
C4055	UTSP C	CE04W25V-47M(UTSP)	1	397554707T		
C4056	UTSP C	CE04W25V-47M(UTSP)	1	397554707T		
C4057	UTSP C	CE04W25V-47M(UTSP)	1	397554707T		
C4060	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4061	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4062	TF C	ECQ-V50V-474J	1	374724744T		
C4063	TF C	ECQ-V50V-823J	1	374728234T		
C4064	TF C	ECQ-V50V-223J	1	374722234T		
C4065	TF C	ECQ-V50V-474J	1	374724744T		
C4066	TF C	ECQ-V50V-823J	1	374728234T		
C4067	TF C	ECQ-V50V-223J	1	374722234T		
C4070	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4071	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4072	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4073	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4074	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4075	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4076	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4077	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4085	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4086	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4090	C-CERA C	CC725CH1H-101J1	1	342101014R1		
C4091	C-CERA C	CC725CH1H-101J1	1	342101014R1		
C4100	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4101	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4102	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4103	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4104	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4105	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4106	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C4107	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		

C4108	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		<B MDC>
C4109	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		<B MDC>
C4130	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		
C4131	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	
C4132	TF C	ECQ-V50V-103J	1	374721034T		
C4166	UTSP C	CE04W25V-220M(UTSP)	1	397552217T		
C4167	UTSP C	CE04W25V-220M(UTSP)	1	397552217T		
C4170	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		
C4171	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		
C4172	UTSP C	CE04W25V-220M(UTSP)	1	397552217T		
C4173	UTSP C	CE04W25V-220M(UTSP)	1	397552217T		
C4174	UTSP C	CE04W16V-470M(UTSP)	1	397544717T		
C4175	UTSP C	CE04W16V-470M(UTSP)	1	397544717T		
C4184	UTSP C	CE04W25V-220M(UTSP)	1	397552217T		
C4185	UTSP C	CE04W25V-220M(UTSP)	1	397552217T		
C4186	UTSP C	CE04W25V-220M(UTSP)	1	397552217T		
C4187	UTSP C	CE04W25V-220M(UTSP)	1	397552217T		
C4203	C-CERA C	CC725CH1H-102J1	1	342101024R1	NSP	
C4204	C-CERA C	CC725CH1H-102J1	1	342101024R1	NSP	
C4205	C-CERA C	CC725CH1H-102J1	1	342101024R1	NSP	<B MDC>
C4207	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	<B MDC>
C4209	UTSP C	CE04W25V-47M(UTSP)	1	397554707T		
C4210	UTSP C	CE04W25V-47M(UTSP)	1	397554707T		
C4300	TF C	ECQ-V50V-334J	1	374723344T		
C4301	VR C	CE04W35V-1000M(VR)	1	394661027S		
C4302	VR C	CE04W35V-470M(VR)	1	394664717T		
C6050	TF C	ECQ-V50V-103J	1	374721034T		
C6051	TF C	ECQ-V50V-103J	1	374721034T		
C6052	TF C	ECQ-V50V-103J	1	374721034T		
C6053	TF C	ECQ-V50V-103J	1	374721034T		
C6054	TF C	ECQ-V50V-103J	1	374721034T		
C6055	TF C	ECQ-V50V-103J	1	374721034T		<B MDC>
C6056	TF C	ECQ-V50V-103J	1	374721034T		<B MDC>
C6630	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C6701	UTSP C	CE04W25V-100M(UTSP)	1	397551017T		
C6703	C-CERA C	CK725F1H-104Z1	1	332151040R1		
C6704	UTSP C	CE04W50V-1M(UTSP)	1	397580107T		
C6706	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		
C6713	C-CERA C	CK725F1H-104Z1	1	332151040R1	NSP	
C6714	UTSP C	CE04W50V-1M(UTSP)	1	397580107T		
C6901	ELECT C	CE69W69V-10000MA	1	3504425		
C6901A	IB CUSHION	W15*3t TAPE	1	28141585		
C6902	ELECT C	CE69W69V-10000MA	1	3504425		

C6911	C-CERA C	CC725CH1H-102J1	1	342101024R1	NSP	
C6912	TF C	ECQ-V100V-334J	1	374733344T		
C6913	TF C	ECQ-V100V-334J	1	374733344T		
C950	TF C	ECQ-V50V-104J	1	374721044T		
C960	VR C	CE04W63V-220M(VR)	1	394672217T		
C961	VR C	CE04W50V-47M(VR)	1	394684707T		
C962	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
[RESISTOR]						
R4000	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4003	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4004	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4009	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4010	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4013	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4014	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4015	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	
R4016	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	
R4017	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4018	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4019	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4020	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4022	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4023	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4024	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R4028	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R4030	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	<B MDC>
R4031	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	<B MDC>
R4032	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R4043	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4044	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4049	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4050	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4053	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4054	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4055	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4056	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4057	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4058	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4059	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4060	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4067	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	<B MDC>
R4068	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	<B MDC>
R4069	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	

R4070	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R4071	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R4072	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	<B MDC>
R4077	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R4078	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R4079	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R4080	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4081	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4082	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R4085	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R4086	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R4087	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R4088	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R4089	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4090	C-CARBON R	RN72K1J-123JE	1	435031234R1	NSP	
R4091	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R4092	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4093	C-CARBON R	RN72K1J-332JE	1	435033324R1	NSP	
R4094	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R4095	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R4096	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R4097	C-CARBON R	RN72K1J-332JE	1	435033324R1	NSP	
R4098	C-CARBON R	RN72K1J-123JE	1	435031234R1	NSP	
R4099	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R4100	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4101	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4102	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4103	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4104	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4105	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4106	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4107	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4108	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	<B MDC>
R4109	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	<B MDC>
R4110	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R4111	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R4112	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R4113	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R4114	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R4115	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R4116	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R4117	C-CARBON R	RN72K1J-271JE	1	435032714R1	NSP	
R4118	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>

R4119	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R4120	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R4121	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R4122	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R4123	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R4124	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R4125	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R4126	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R4127	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R4130	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R4131	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R4132	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R4133	C-CARBON R	RN72K1J-122JE	1	435031224R1	NSP	
R4134	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R4160	METAL R	RNU1WCJ-2.2	1	453630224T		<B MDC>
R4161	METAL R	RNU1WCJ-2.2	1	453630224T		<B MDC>
R4166	CARBON R	R16J-22	1	417342204T		
R4167	CARBON R	R16J-22	1	417342204T		
R4170	METAL O R	RS2WBJ-3.3	1	441720334F		
R4171	METAL O R	RS2WBJ-8.2	1	441720824F		
R4174	METAL O R	RS1WBJ-100	1	443621014T		
R4175	METAL O R	RS1WBJ-100	1	443621014T		
R4180	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	<B MDC>
R4181	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4182	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	<B MDC>
R4184	CARBON R	R16J-1K	1	417341024T		
R4185	CARBON R	R16J-1K	1	417341024T		
R4189	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4190	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4192	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4193	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4194	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4195	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4196	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R4200	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R4201	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R4211	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R4220	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4221	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4222	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4223	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4224	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4225	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	

R4226	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4227	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4228	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4229	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4230	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4231	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4232	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4234	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4236	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R4305	C-CARBON R	RN72K1J-512JE	1	435035124R1	NSP	<B MDC>
R4306	C-CARBON R	RN72K1J-512JE	1	435035124R1	NSP	<B MDC>
R4307	C-CARBON R	RN72K1J-512JE	1	435035124R1	NSP	
R6000	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	
R6001	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	
R6002	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	
R6003	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	
R6004	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	
R6005	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	<B MDC>
R6006	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	<B MDC>
R6010	C-CARBON R	RN72K1J-392JE	1	435033924R1	NSP	
R6011	C-CARBON R	RN72K1J-392JE	1	435033924R1	NSP	
R6012	C-CARBON R	RN72K1J-392JE	1	435033924R1	NSP	
R6013	C-CARBON R	RN72K1J-392JE	1	435033924R1	NSP	
R6014	C-CARBON R	RN72K1J-392JE	1	435033924R1	NSP	
R6015	C-CARBON R	RN72K1J-392JE	1	435033924R1	NSP	<B MDC>
R6016	C-CARBON R	RN72K1J-392JE	1	435033924R1	NSP	<B MDC>
R6030	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	
R6031	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	
R6032	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	
R6033	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	
R6034	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	
R6035	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	<B MDC>
R6036	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	<B MDC>
R6100	METAL PR	MPR5W+5W 0R22	1	4000233		
R6100 or	METAL P R	RF-5EGPJR22	(1)	4000244		
R6101	METAL PR	MPR5W+5W 0R22	1	4000233		
R6101 or	METAL P R	RF-5EGPJR22	(1)	4000244		
R6102	METAL PR	MPR5W+5W 0R22	1	4000233		
R6102 or	METAL P R	RF-5EGPJR22	(1)	4000244		
R6103	METAL PR	MPR5W+5W 0R22	1	4000233		
R6103 or	METAL P R	RF-5EGPJR22	(1)	4000244		
R6104	METAL PR	MPR5W+5W 0R22	1	4000233		
R6104 or	METAL P R	RF-5EGPJR22	(1)	4000244		

R6105	METAL PR	MPR5W+5W 0R22	1	4000233		<B MDC>
R6105 or	METAL P R	RF-5EGPJR22	(1)	4000244		<B MDC>
R6106	METAL PR	MPR5W+5W 0R22	1	4000233		<B MDC>
R6106 or	METAL P R	RF-5EGPJR22	(1)	4000244		<B MDC>
R6140	C-CARBON R	RN72K1J-563JE	1	435035634R1	NSP	
R6141	C-CARBON R	RN72K1J-563JE	1	435035634R1	NSP	
R6142	C-CARBON R	RN72K1J-563JE	1	435035634R1	NSP	
R6143	C-CARBON R	RN72K1J-563JE	1	435035634R1	NSP	
R6144	C-CARBON R	RN72K1J-563JE	1	435035634R1	NSP	
R6145	C-CARBON R	RN72K1J-563JE	1	435035634R1	NSP	<B MDC>
R6146	C-CARBON R	RN72K1J-563JE	1	435035634R1	NSP	<B MDC>
R6150	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R6151	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R6152	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R6153	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R6154	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R6155	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R6156	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R6160	CARBON R	R16J-33K	1	417343334T		
R6161	CARBON R	R16J-33K	1	417343334T		
R6162	CARBON R	R16J-33K	1	417343334T		
R6163	CARBON R	R16J-33K	1	417343334T		
R6164	CARBON R	R16J-33K	1	417343334T		
R6165	CARBON R	R16J-33K	1	417343334T		<B MDC>
R6166	CARBON R	R16J-33K	1	417343334T		<B MDC>
R6170	CARBON R	R16J-47K	1	417344734T		
R6171	CARBON R	R16J-47K	1	417344734T		
R6172	CARBON R	R16J-47K	1	417344734T		
R6173	CARBON R	R16J-47K	1	417344734T		
R6174	CARBON R	R16J-47K	1	417344734T		
R6175	CARBON R	R16J-47K	1	417344734T		<B MDC>
R6176	CARBON R	R16J-47K	1	417344734T		<B MDC>
R6180	CARBON R	R16J-47K	1	417344734T		
R6181	CARBON R	R16J-47K	1	417344734T		
R6182	CARBON R	R16J-47K	1	417344734T		
R6183	CARBON R	R16J-47K	1	417344734T		
R6184	CARBON R	R16J-47K	1	417344734T		
R6185	CARBON R	R16J-47K	1	417344734T		<B MDC>
R6186	CARBON R	R16J-47K	1	417344734T		<B MDC>
R6197	METAL R	RNU1WCJ-8.2	1	453630824T		
R6301	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R6305	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R6306	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	

R6307	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R6701	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R6702	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R6704	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R6706	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R6708	C-CARBON R	RN72K1J-333JE	1	435033334R1	NSP	
R6709	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	
R6710	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R6712	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R6714	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R6716	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	
R6902	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	
R6903	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R950	METAL O R	RS1WBJ-10	1	443621004T		
R960	METAL R	RNU1/2WCJ-8.2	1	453530824T		
R961	METAL R	RNU1/2WCJ-3.3	1	453530334T		
R962	C-CARBON R	RN72K1J-822JE	1	435038224R1	NSP	
R963	C-CARBON R	RN72K1J-822JE	1	435038224R1	NSP	
R964	C-CARBON R	RN72K1J-333JE	1	435033334R1	NSP	
R965	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
[SW TRM]						
F6901A	FUSE HOLDER	SN5051	1	250113		
F6901B	FUSE HOLDER	SN5051	1	250113		
F6902A	FUSE HOLDER	SN5051	1	250113		
F6902B	FUSE HOLDER	SN5051	1	250113		
JL501A	WIRE HOL	NSCT-3P874	1	25051087		
JL502A	WIRE HOL	NSCT-5P876	1	25051089		
JL503A	WIRE HOL	NSCT-3P874	1	25051087		<B MDC>
JL600A	WIRE HOL	NSCT-7P898	1	25051111		
JL603A	WIRE HOL	NSCT-9P900	1	25051113		
JL604A	WIRE HOL	NSCT-5P896	1	25051109		<B MDC>
JL620A	WIRE HOL	NSCT-7P878	1	25051091		
JL951A	WIRE HOL	NSCT-5P896	1	25051109		
JL951B	SOCKET	NSCT-5P97	1	25050269		
JL952A	WIRE HOL	NSCT-3P894	1	25051107		
JL953B	WIRE TRAP	NPLG-5P588	1	25055626		
JL954A	WIRE HOL	NSCT-5P896	1	25051109		
JL954B	WIRE HOL	NSCT-5P896	1	25051109		
P4000	ST JACK	MSJ-035-22	1	25045887		
P4000 or	JACK	YKB21-5130	(1)	25045387		
P4002	PIN JACK	NPJ-2PDWR595	1	25045815		<B MDC>
P4004	PIN JACK	NPJ-4PDWWRR624	1	25045845		<B MDC>
P4004 or	PIN JACK	NPJ-4PDBL162	(1)	25045303		<B MDC>

P4005	PIN JACK	NPJ-4PDWWR624	1	25045845		<B MDC>
P4005 or	PIN JACK	NPJ-4PDBL162	(1)	25045303		<B MDC>
P4007	PIN JACK	NPJ-4PDWRP682	1	25045914		<B MDC>
P4012	PIN JACK	NPJ-2PDWR558	1	25045776		<B MDC>
P4012 or	PIN JACK	NPJ-2PDBL185	(1)	25045333		<B MDC>
P5501B	PLUG	NPLG-7P0962	1	25056012		
P5502B	PLUG	NPLG-15P0970	1	25056020		
P5503B	PLUG	NPLG-9P0964	1	25056014		
P5504B	PLUG	NPLG-7P0962	1	25056012		
P5505	CRIMP AS	CRIMP AS	1	2069955200UL		
P5510	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	NSP	
P6000B	PLUG	NPLG-9P0964	1	25056014		
P6001B	PLUG	NPLG-9P0964	1	25056014		
P6002B	PLUG	NPLG-9P0964	1	25056014		
P6003B	PLUG	NPLG-9P0964	1	25056014		
P6004B	PLUG	NPLG-9P0964	1	25056014		
P6005B	PLUG	NPLG-9P0964	1	25056014		<B MDC>
P6006B	PLUG	NPLG-9P0964	1	25056014		<B MDC>
P6007B	TRM	NTM-1P232(M1700)	1	25060301		
P6008B	TRM	NTM-1P232(M1700)	1	25060301		
P6009B	TRM	NTM-1P232(M1700)	1	25060301		
P6010B	TRM	NTM-1P232(M1700)	1	25060301		
P6011A	RETAINER	(BUS-D)TX-SR606	1	27142100	NSP	
P6080	PLUG	NPLG-2P29	1	25055038		
P6081	PLUG	NPLG-2P29	1	25055038		
P6082	PLUG	NPLG-2P29	1	25055038		
P6083	PLUG	NPLG-2P29	1	25055038		
P6084	PLUG	NPLG-2P29	1	25055038		
P6085	PLUG	NPLG-2P29	1	25055038		<B MDC>
P6086	PLUG	NPLG-2P29	1	25055038		<B MDC>
P6102	HOLDER	(CRAMP) UA-0 V0	1	27190608-1		
P6103	HOLDER	HOLDER(CLAMP)	1	27190540-1		
P6600A	SOCKET AS	NSAS-26P1775	1	2009991135UL		
P6602	TRM	NTM-4PDML422	1	25060494		<B MDC>
P6605	WS CLAMP	CB-71683(L=50)	1	260261		
P6606	WS CLAMP	CB-71683(L=50)	1	260261		
P6900	CRIMP AS	UL1015#18SIN-SVH 300 BLK	1	20799177UL		
P6901	CRIMP AS	CRIMP AS	1	2069925119UL		
P6902	CRIMP AS	CRIMP AS	1	2069925188UL		
P6903	CRIMP AS	UL1015#18SIN-SVH 200 YEL	1	20799172UL		
P6904	CRIMP AS	UL1015#18SIN-SVH 200 GRN	1	20799173UL		
RL6901	RELAY	NRL-1P10A-DC12-196	1	25065707		
RL6901 or	RELAY	NRL-1P10A-DC12-197	(1)	25065708		

RL6901	RELAY	NRL-1P10A-DC12-198	(1)	25065709		
RL6902	RELAY	NRL-1P10A-DC12-196	1	25065707		
RL6902	RELAY	NRL-1P10A-DC12-197	(1)	25065708		
RL6902	RELAY	NRL-1P10A-DC12-198	(1)	25065709		

HT-RC260

PC BOARD PARTS LIST

U002	CLA-AS(Amplifier Class_A Asy) U0020+U0021	BACLA-0362-1A *	1	1B247562-1A	N	<B MDC>
U0020	CLA-AS(Amplifier Class_A Asy)	BACLA-0362-1A	1	1B2475362-1A	N	<B MDC>
U0021	PWB(etc reserve)	BAETC-0363-1A	1	1B2475363-1A	N, NSP	<B MDC>

CIRCUIT	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[SEMI CONDUCTOR]					
D5000	ZENER D	MTZJ5.6B	1	224470562T	
D5001	ZENER D	MTZJ5.6B	1	224470562T	
D5002	ZENER D	MTZJ5.6B	1	224470562T	
D5003	ZENER D	MTZJ5.6B	1	224470562T	
D5004	ZENER D	MTZJ5.6B	1	224470562T	
D5005	ZENER D	MTZJ5.6B	1	224470562T	<B MDC>
D5006	ZENER D	MTZJ5.6B	1	224470562T	<B MDC>
Q5000	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5001	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5002	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5003	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5004	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5005	TR	2SC2240-BL(TPE2_F)	1	2211406T	<B MDC>
Q5006	TR	2SC2240-BL(TPE2_F)	1	2211406T	<B MDC>
Q5010	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5011	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5012	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5013	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5014	TR	2SC2240-BL(TPE2_F)	1	2211406T	
Q5015	TR	2SC2240-BL(TPE2_F)	1	2211406T	<B MDC>
Q5016	TR	2SC2240-BL(TPE2_F)	1	2211406T	<B MDC>
Q5030	TR	2SA949-Y(TPE6_F)	1	2211354T	
Q5030A	RETAINER	(CLA2)	1	27142140	
Q5031	TR	2SA949-Y(TPE6_F)	1	2211354T	
Q5031A	RETAINER	(CLA2)	1	27142140	
Q5032	TR	2SA949-Y(TPE6_F)	1	2211354T	
Q5032A	RETAINER	(CLA2)	1	27142140	
Q5033	TR	2SA949-Y(TPE6_F)	1	2211354T	
Q5033A	RETAINER	(CLA2)	1	27142140	

Q5034	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5034A	RETAINER	(CLA2)	1	27142140		
Q5035	TR	2SA949-Y(TPE6_F)	1	2211354T		<B MDC>
Q5035A	RETAINER	(CLA2)	1	27142140		<B MDC>
Q5036	TR	2SA949-Y(TPE6_F)	1	2211354T		<B MDC>
Q5036A	RETAINER	(CLA2)	1	27142140		<B MDC>
Q5040	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5041	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5042	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5043	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5044	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5045	TR	2SA949-Y(TPE6_F)	1	2211354T		<B MDC>
Q5046	TR	2SA949-Y(TPE6_F)	1	2211354T		<B MDC>
Q5050	TR	2SC2240-BL(TPE2_F)	1	2211406T		
Q5051	TR	2SC2240-BL(TPE2_F)	1	2211406T		
Q5052	TR	2SC2240-BL(TPE2_F)	1	2211406T		
Q5053	TR	2SC2240-BL(TPE2_F)	1	2211406T		
Q5054	TR	2SC2240-BL(TPE2_F)	1	2211406T		
Q5055	TR	2SC2240-BL(TPE2_F)	1	2211406T		<B MDC>
Q5056	TR	2SC2240-BL(TPE2_F)	1	2211406T		<B MDC>
Q5060	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5061	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5062	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5063	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5064	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5065	TR	2SA949-Y(TPE6_F)	1	2211354T		<B MDC>
Q5066	TR	2SA949-Y(TPE6_F)	1	2211354T		<B MDC>
Q5070	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q5071	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q5072	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q5073	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q5074	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q5075	TR	2SC2229-Y(TPE6_F)	1	2211634T		<B MDC>
Q5076	TR	2SC2229-Y(TPE6_F)	1	2211634T		<B MDC>
Q5250	TR	2SA1930(ONK_Q)	1	2203000		
Q5251	TR	2SA1930(ONK_Q)	1	2203000		
Q5252	TR	2SA1930(ONK_Q)	1	2203000		
Q5253	TR	2SA1930(ONK_Q)	1	2203000		
Q5254	TR	2SA1930(ONK_Q)	1	2203000		
Q5255	TR	2SA1930(ONK_Q)	1	2203000		<B MDC>
Q5256	TR	2SA1930(ONK_Q)	1	2203000		<B MDC>
Q5260	TR	2SC5171(ONK_Q)	1	2203010		
Q5261	TR	2SC5171(ONK_Q)	1	2203010		

Q5262	TR	2SC5171(ONK_Q)	1	2203010		
Q5263	TR	2SC5171(ONK_Q)	1	2203010		
Q5264	TR	2SC5171(ONK_Q)	1	2203010		
Q5265	TR	2SC5171(ONK_Q)	1	2203010		<B MDC>
Q5266	TR	2SC5171(ONK_Q)	1	2203010		<B MDC>
Q5410	TR	2SC1740S-S	1	2213285T		
Q5411	TR	2SC1740S-S	1	2213285T		
Q5412	TR	2SC1740S-S	1	2213285T		
Q5413	TR	2SC1740S-S	1	2213285T		
Q5414	TR	2SC1740S-S	1	2213285T		
Q5415	TR	2SC1740S-S	1	2213285T		<B MDC>
Q5416	TR	2SC1740S-S	1	2213285T		<B MDC>
Q5430	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q5430 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T		
Q5431	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q5431 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T		
Q5432	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q5432 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T		
Q5433	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q5433 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T		
Q5434	TR	2SC2229-Y(TPE6_F)	1	2211634T		
Q5434 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T		
Q5435	TR	2SC2229-Y(TPE6_F)	1	2211634T		<B MDC>
Q5435 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T		<B MDC>
Q5436	TR	2SC2229-Y(TPE6_F)	1	2211634T		<B MDC>
Q5436 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T		<B MDC>
Q5440	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5440 or	TR	2SA949-O(TPE6_F)	(1)	2211353T		
Q5441	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5441 or	TR	2SA949-O(TPE6_F)	(1)	2211353T		
Q5442	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5442 or	TR	2SA949-O(TPE6_F)	(1)	2211353T		
Q5443	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5443 or	TR	2SA949-O(TPE6_F)	(1)	2211353T		
Q5444	TR	2SA949-Y(TPE6_F)	1	2211354T		
Q5444 or	TR	2SA949-O(TPE6_F)	(1)	2211353T		
Q5445	TR	2SA949-Y(TPE6_F)	1	2211354T		<B MDC>
Q5445 or	TR	2SA949-O(TPE6_F)	(1)	2211353T		<B MDC>
Q5446	TR	2SA949-Y(TPE6_F)	1	2211354T		<B MDC>
Q5446 or	TR	2SA949-O(TPE6_F)	(1)	2211353T		<B MDC>
[TRANS COIL]						
L5400	FR CORE	*	1	5597-45502		
L5401	FR CORE	*	1	5597-45502		

L5402	FR CORE	*	1	5597-45502		
L5403	FR CORE	*	1	5597-45502		
L5404	FR CORE	*	1	5597-45502		
L5405	FR CORE	*	1	5597-45502		<B MDC>
L5406	FR CORE	*	1	5597-45502		<B MDC>
L5410	FR CORE	*	1	5597-45502		
L5411	FR CORE	*	1	5597-45502		
L5412	FR CORE	*	1	5597-45502		
L5413	FR CORE	*	1	5597-45502		
L5414	FR CORE	*	1	5597-45502		
L5415	FR CORE	*	1	5597-45502		<B MDC>
L5416	FR CORE	*	1	5597-45502		<B MDC>
[CAPACITOR]						
C5000	UPZ C	2AUPZTF101JE	1	376331014T		
C5001	UPZ C	2AUPZTF101JE	1	376331014T		
C5002	UPZ C	2AUPZTF101JE	1	376331014T		
C5003	UPZ C	2AUPZTF101JE	1	376331014T		
C5004	UPZ C	2AUPZTF101JE	1	376331014T		
C5005	UPZ C	2AUPZTF101JE	1	376331014T		<B MDC>
C5006	UPZ C	2AUPZTF101JE	1	376331014T		<B MDC>
C5010	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		
C5011	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		
C5012	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		
C5013	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		
C5014	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		
C5015	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		<B MDC>
C5016	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		<B MDC>
C5020	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		
C5021	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		
C5022	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		
C5023	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		
C5024	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		
C5025	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		<B MDC>
C5026	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		<B MDC>
C5040	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C5041	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C5042	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C5043	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C5044	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C5045	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		<B MDC>
C5046	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		<B MDC>
C5050	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		
C5051	UTSP C	CE04W50V-47M(UTSP)	1	397584707T		

C5052	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C5053	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C5054	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		
C5055	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		<B MDC>
C5056	UTSP C	CE04W50V 47M(UTSP)	1	397584707T		<B MDC>
C5080	CERA C	CC45SL50V-040C	1	345020401T		
C5081	CERA C	CC45SL50V-040C	1	345020401T		
C5082	CERA C	CC45SL50V-040C	1	345020401T		
C5083	CERA C	CC45SL50V-040C	1	345020401T		
C5084	CERA C	CC45SL50V-040C	1	345020401T		
C5085	CERA C	CC45SL50V-040C	1	345020401T		<B MDC>
C5086	CERA C	CC45SL50V-040C	1	345020401T		<B MDC>
C5090	UPZ C	2AUPZTF101JE	1	376331014T		
C5091	UPZ C	2AUPZTF101JE	1	376331014T		
C5092	UPZ C	2AUPZTF101JE	1	376331014T		
C5093	UPZ C	2AUPZTF101JE	1	376331014T		
C5094	UPZ C	2AUPZTF101JE	1	376331014T		
C5095	UPZ C	2AUPZTF101JE	1	376331014T		<B MDC>
C5096	UPZ C	2AUPZTF101JE	1	376331014T		<B MDC>
C5100	VR C	CE04W100V-22M(VR)	1	394692207T		
C5101	VR C	CE04W100V-22M(VR)	1	394692207T		
C5102	VR C	CE04W100V-22M(VR)	1	394692207T		
C5103	VR C	CE04W100V-22M(VR)	1	394692207T		
C5104	VR C	CE04W100V-22M(VR)	1	394692207T		
C5105	VR C	CE04W100V-22M(VR)	1	394692207T		<B MDC>
C5106	VR C	CE04W100V-22M(VR)	1	394692207T		<B MDC>
C5110	VR C	CE04W100V-22M(VR)	1	394692207T		
C5111	VR C	CE04W100V-22M(VR)	1	394692207T		
C5112	VR C	CE04W100V-22M(VR)	1	394692207T		
C5113	VR C	CE04W100V-22M(VR)	1	394692207T		
C5114	VR C	CE04W100V-22M(VR)	1	394692207T		
C5115	VR C	CE04W100V-22M(VR)	1	394692207T		<B MDC>
C5116	VR C	CE04W100V-22M(VR)	1	394692207T		<B MDC>
C5440	UTSP C	CE04W50V-22M(UTSP)	1	397582207T		
C5441	UTSP C	CE04W50V-22M(UTSP)	1	397582207T		
C5442	UTSP C	CE04W50V-22M(UTSP)	1	397582207T		
C5443	UTSP C	CE04W50V-22M(UTSP)	1	397582207T		
C5444	UTSP C	CE04W50V-22M(UTSP)	1	397582207T		
C5445	UTSP C	CE04W50V-22M(UTSP)	1	397582207T		<B MDC>
C5446	UTSP C	CE04W50V-22M(UTSP)	1	397582207T		<B MDC>
[RESISTOR]						
R5000	CARBON R	R16J-1.5K	1	417341524T		
R5001	CARBON R	R16J-1.5K	1	417341524T		

R5002	CARBON R	R16J-1.5K	1	417341524T		
R5003	CARBON R	R16J-1.5K	1	417341524T		
R5004	CARBON R	R16J-1.5K	1	417341524T		
R5005	CARBON R	R16J-1.5K	1	417341524T		<B MDC>
R5006	CARBON R	R16J-1.5K	1	417341524T		<B MDC>
R5010	CARBON R	R16J-33K	1	417343334T		
R5011	CARBON R	R16J-33K	1	417343334T		
R5012	CARBON R	R16J-33K	1	417343334T		
R5013	CARBON R	R16J-33K	1	417343334T		
R5014	CARBON R	R16J-33K	1	417343334T		
R5015	CARBON R	R16J-33K	1	417343334T		<B MDC>
R5016	CARBON R	R16J-33K	1	417343334T		<B MDC>
R5020	CARBON R	R16J-330	1	417343314T		
R5021	CARBON R	R16J-330	1	417343314T		
R5022	CARBON R	R16J-330	1	417343314T		
R5023	CARBON R	R16J-330	1	417343314T		
R5024	CARBON R	R16J-330	1	417343314T		
R5025	CARBON R	R16J-330	1	417343314T		<B MDC>
R5026	CARBON R	R16J-330	1	417343314T		<B MDC>
R5030	CARBON R	R16J-33K	1	417343334T		
R5031	CARBON R	R16J-33K	1	417343334T		
R5032	CARBON R	R16J-33K	1	417343334T		
R5033	CARBON R	R16J-33K	1	417343334T		
R5034	CARBON R	R16J-33K	1	417343334T		
R5035	CARBON R	R16J-33K	1	417343334T		<B MDC>
R5036	CARBON R	R16J-33K	1	417343334T		<B MDC>
R5040	CARBON R	R16J-1K	1	417341024T		
R5041	CARBON R	R16J-1K	1	417341024T		
R5042	CARBON R	R16J-1K	1	417341024T		
R5043	CARBON R	R16J-1K	1	417341024T		
R5044	CARBON R	R16J-1K	1	417341024T		
R5045	CARBON R	R16J-1K	1	417341024T		<B MDC>
R5046	CARBON R	R16J-1K	1	417341024T		<B MDC>
R5050	CARBON R	R16J-5.6K	1	417345624T		
R5051	CARBON R	R16J-5.6K	1	417345624T		
R5052	CARBON R	R16J-5.6K	1	417345624T		
R5053	CARBON R	R16J-5.6K	1	417345624T		
R5054	CARBON R	R16J-5.6K	1	417345624T		
R5055	CARBON R	R16J-5.6K	1	417345624T		<B MDC>
R5056	CARBON R	R16J-5.6K	1	417345624T		<B MDC>
R5060	CARBON R	R16J-2.7K	1	417342724T		
R5061	CARBON R	R16J-2.7K	1	417342724T		
R5062	CARBON R	R16J-2.7K	1	417342724T		

R5063	CARBON R	R16J-2.7K	1	417342724T		
R5064	CARBON R	R16J-2.7K	1	417342724T		
R5065	CARBON R	R16J-2.7K	1	417342724T		<B MDC>
R5066	CARBON R	R16J-2.7K	1	417342724T		<B MDC>
R5080	NF CARBON R	R25J-1.0K	1	415471024T		
R5081	NF CARBON R	R25J-1.0K	1	415471024T		
R5082	NF CARBON R	R25J-1.0K	1	415471024T		
R5083	NF CARBON R	R25J-1.0K	1	415471024T		
R5084	NF CARBON R	R25J-1.0K	1	415471024T		
R5085	NF CARBON R	R25J-1.0K	1	415471024T		<B MDC>
R5086	NF CARBON R	R25J-1.0K	1	415471024T		<B MDC>
R5090	CARBON R	R16J-100K	1	417341044T		
R5091	CARBON R	R16J-100K	1	417341044T		
R5092	CARBON R	R16J-100K	1	417341044T		
R5093	CARBON R	R16J-100K	1	417341044T		
R5094	CARBON R	R16J-100K	1	417341044T		
R5095	CARBON R	R16J-100K	1	417341044T		<B MDC>
R5096	CARBON R	R16J-100K	1	417341044T		<B MDC>
R5100	CARBON R	R16J-100K	1	417341044T		
R5101	CARBON R	R16J-100K	1	417341044T		
R5102	CARBON R	R16J-100K	1	417341044T		
R5103	CARBON R	R16J-100K	1	417341044T		
R5104	CARBON R	R16J-100K	1	417341044T		
R5105	CARBON R	R16J-100K	1	417341044T		<B MDC>
R5106	CARBON R	R16J-100K	1	417341044T		<B MDC>
R5110	CARBON R	R16J-2.2K	1	417342224T		
R5111	CARBON R	R16J-2.2K	1	417342224T		
R5112	CARBON R	R16J-2.2K	1	417342224T		
R5113	CARBON R	R16J-2.2K	1	417342224T		
R5114	CARBON R	R16J-2.2K	1	417342224T		
R5115	CARBON R	R16J-2.2K	1	417342224T		<B MDC>
R5116	CARBON R	R16J-2.2K	1	417342224T		<B MDC>
R5120	CARBON R	R16J-2.2K	1	417342224T		
R5121	CARBON R	R16J-2.2K	1	417342224T		
R5122	CARBON R	R16J-2.2K	1	417342224T		
R5123	CARBON R	R16J-2.2K	1	417342224T		
R5124	CARBON R	R16J-2.2K	1	417342224T		
R5125	CARBON R	R16J-2.2K	1	417342224T		<B MDC>
R5126	CARBON R	R16J-2.2K	1	417342224T		<B MDC>
R5130	CARBON R	R16J-18K	1	417341834T		
R5131	CARBON R	R16J-18K	1	417341834T		
R5132	CARBON R	R16J-18K	1	417341834T		
R5133	CARBON R	R16J-18K	1	417341834T		

R5134	CARBON R	R16J-18K	1	417341834T		
R5135	CARBON R	R16J-18K	1	417341834T		<B MDC>
R5136	CARBON R	R16J-18K	1	417341834T		<B MDC>
R5140	NF CARBON R	R25J-820	1	415478214T		
R5141	NF CARBON R	R25J-820	1	415478214T		
R5142	NF CARBON R	R25J-820	1	415478214T		
R5143	NF CARBON R	R25J-820	1	415478214T		
R5144	NF CARBON R	R25J-820	1	415478214T		
R5145	NF CARBON R	R25J-820	1	415478214T		<B MDC>
R5146	NF CARBON R	R25J-820	1	415478214T		<B MDC>
R5150	NF CARBON R	R25J-1.0K	1	415471024T		
R5151	NF CARBON R	R25J-1.0K	1	415471024T		
R5152	NF CARBON R	R25J-1.0K	1	415471024T		
R5153	NF CARBON R	R25J-1.0K	1	415471024T		
R5154	NF CARBON R	R25J-1.0K	1	415471024T		
R5155	NF CARBON R	R25J-1.0K	1	415471024T		<B MDC>
R5156	NF CARBON R	R25J-1.0K	1	415471024T		<B MDC>
R5160	NF CARBON R	R25J-120	1	415471214T		
R5161	NF CARBON R	R25J-120	1	415471214T		
R5162	NF CARBON R	R25J-120	1	415471214T		
R5163	NF CARBON R	R25J-120	1	415471214T		
R5164	NF CARBON R	R25J-120	1	415471214T		
R5165	NF CARBON R	R25J-120	1	415471214T		<B MDC>
R5166	NF CARBON R	R25J-120	1	415471214T		<B MDC>
R5170	NF CARBON R	R25J-820	1	415478214T		
R5171	NF CARBON R	R25J-820	1	415478214T		
R5172	NF CARBON R	R25J-820	1	415478214T		
R5173	NF CARBON R	R25J-820	1	415478214T		
R5174	NF CARBON R	R25J-820	1	415478214T		
R5175	NF CARBON R	R25J-820	1	415478214T		<B MDC>
R5176	NF CARBON R	R25J-820	1	415478214T		<B MDC>
R5180	NF CARBON R	R25J-10	1	415471004T		
R5181	NF CARBON R	R25J-10	1	415471004T		
R5182	NF CARBON R	R25J-10	1	415471004T		
R5183	NF CARBON R	R25J-10	1	415471004T		
R5184	NF CARBON R	R25J-10	1	415471004T		
R5185	NF CARBON R	R25J-10	1	415471004T		<B MDC>
R5186	NF CARBON R	R25J-10	1	415471004T		<B MDC>
R5190	NF CARBON R	R25J-10	1	415471004T		
R5191	NF CARBON R	R25J-10	1	415471004T		
R5192	NF CARBON R	R25J-10	1	415471004T		
R5193	NF CARBON R	R25J-10	1	415471004T		
R5194	NF CARBON R	R25J-10	1	415471004T		

R5195	NF CARBON R	R25J-10	1	415471004T	<B MDC>
R5196	NF CARBON R	R25J-10	1	415471004T	<B MDC>
R5200	CARBON R	R16J-18K	1	417341834T	
R5201	CARBON R	R16J-18K	1	417341834T	
R5202	CARBON R	R16J-18K	1	417341834T	
R5203	CARBON R	R16J-18K	1	417341834T	
R5204	CARBON R	R16J-18K	1	417341834T	
R5205	CARBON R	R16J-18K	1	417341834T	<B MDC>
R5206	CARBON R	R16J-18K	1	417341834T	<B MDC>
R5210	NF CARBON R	R25J-820	1	415478214T	
R5211	NF CARBON R	R25J-820	1	415478214T	
R5212	NF CARBON R	R25J-820	1	415478214T	
R5213	NF CARBON R	R25J-820	1	415478214T	
R5214	NF CARBON R	R25J-820	1	415478214T	
R5215	NF CARBON R	R25J-820	1	415478214T	<B MDC>
R5216	NF CARBON R	R25J-820	1	415478214T	<B MDC>
R5220	NF CARBON R	R25J-120	1	415471214T	
R5221	NF CARBON R	R25J-120	1	415471214T	
R5222	NF CARBON R	R25J-120	1	415471214T	
R5223	NF CARBON R	R25J-120	1	415471214T	
R5224	NF CARBON R	R25J-120	1	415471214T	
R5225	NF CARBON R	R25J-120	1	415471214T	<B MDC>
R5226	NF CARBON R	R25J-120	1	415471214T	<B MDC>
R5270	NF CARBON R	R25J-120	1	415471214T	
R5271	NF CARBON R	R25J-120	1	415471214T	
R5272	NF CARBON R	R25J-120	1	415471214T	
R5273	NF CARBON R	R25J-120	1	415471214T	
R5274	NF CARBON R	R25J-120	1	415471214T	
R5275	NF CARBON R	R25J-120	1	415471214T	<B MDC>
R5276	NF CARBON R	R25J-120	1	415471214T	<B MDC>
R5280	NF CARBON R	R25J-120	1	415471214T	
R5281	NF CARBON R	R25J-120	1	415471214T	
R5282	NF CARBON R	R25J-120	1	415471214T	
R5283	NF CARBON R	R25J-120	1	415471214T	
R5284	NF CARBON R	R25J-120	1	415471214T	
R5285	NF CARBON R	R25J-120	1	415471214T	<B MDC>
R5286	NF CARBON R	R25J-120	1	415471214T	<B MDC>
R5300	CARBON R	R16J-330	1	417343314T	
R5301	CARBON R	R16J-330	1	417343314T	
R5302	CARBON R	R16J-330	1	417343314T	
R5303	CARBON R	R16J-330	1	417343314T	
R5304	CARBON R	R16J-330	1	417343314T	
R5305	CARBON R	R16J-330	1	417343314T	<B MDC>

R5306	CARBON R	R16J-330	1	417343314T		<B MDC>
R5310	CARBON R	R16J-330	1	417343314T		
R5311	CARBON R	R16J-330	1	417343314T		
R5312	CARBON R	R16J-330	1	417343314T		
R5313	CARBON R	R16J-330	1	417343314T		
R5314	CARBON R	R16J-330	1	417343314T		
R5315	CARBON R	R16J-330	1	417343314T		<B MDC>
R5316	CARBON R	R16J-330	1	417343314T		<B MDC>
R5350	NF CARBON R	R25J-18	1	415471804T		
R5351	NF CARBON R	R25J-18	1	415471804T		
R5352	NF CARBON R	R25J-18	1	415471804T		
R5353	NF CARBON R	R25J-18	1	415471804T		
R5354	NF CARBON R	R25J-18	1	415471804T		
R5355	NF CARBON R	R25J-18	1	415471804T		<B MDC>
R5356	NF CARBON R	R25J-18	1	415471804T		<B MDC>
R5360	NF CARBON R	R25J-18	1	415471804T		
R5361	NF CARBON R	R25J-18	1	415471804T		
R5362	NF CARBON R	R25J-18	1	415471804T		
R5363	NF CARBON R	R25J-18	1	415471804T		
R5364	NF CARBON R	R25J-18	1	415471804T		
R5365	NF CARBON R	R25J-18	1	415471804T		<B MDC>
R5366	NF CARBON R	R25J-18	1	415471804T		<B MDC>
R5370	NF CARBON R	R25J-2.2	1	415470224T		
R5371	NF CARBON R	R25J-2.2	1	415470224T		
R5372	NF CARBON R	R25J-2.2	1	415470224T		
R5373	NF CARBON R	R25J-2.2	1	415470224T		
R5374	NF CARBON R	R25J-2.2	1	415470224T		
R5375	NF CARBON R	R25J-2.2	1	415470224T		<B MDC>
R5376	NF CARBON R	R25J-2.2	1	415470224T		<B MDC>
R5380	NF CARBON R	R25J-2.2	1	415470224T		
R5381	NF CARBON R	R25J-2.2	1	415470224T		
R5382	NF CARBON R	R25J-2.2	1	415470224T		
R5383	NF CARBON R	R25J-2.2	1	415470224T		
R5384	NF CARBON R	R25J-2.2	1	415470224T		
R5385	NF CARBON R	R25J-2.2	1	415470224T		<B MDC>
R5386	NF CARBON R	R25J-2.2	1	415470224T		<B MDC>
R5420	NF CARBON R	R25J-10	1	415471004T		
R5421	NF CARBON R	R25J-10	1	415471004T		
R5422	NF CARBON R	R25J-10	1	415471004T		
R5423	NF CARBON R	R25J-10	1	415471004T		
R5424	NF CARBON R	R25J-10	1	415471004T		
R5425	NF CARBON R	R25J-10	1	415471004T		<B MDC>
R5426	NF CARBON R	R25J-10	1	415471004T		<B MDC>

R5440	TRIM R	N06HR2KBB	1	5211402T		
R5441	TRIM R	N06HR2KBB	1	5211402T		
R5442	TRIM R	N06HR2KBB	1	5211402T		
R5443	TRIM R	N06HR2KBB	1	5211402T		
R5444	TRIM R	N06HR2KBB	1	5211402T		
R5445	TRIM R	N06HR2KBB	1	5211402T		<B MDC>
R5446	TRIM R	N06HR2KBB	1	5211402T		<B MDC>
R5450	CARBON R	R16J-3.9K	1	417343924T		
R5451	CARBON R	R16J-3.9K	1	417343924T		
R5452	CARBON R	R16J-3.9K	1	417343924T		
R5453	CARBON R	R16J-3.9K	1	417343924T		
R5454	CARBON R	R16J-3.9K	1	417343924T		
R5455	CARBON R	R16J-3.9K	1	417343924T		<B MDC>
R5456	CARBON R	R16J-3.9K	1	417343924T		<B MDC>
R5470	NF CARBON R	R25J-82	1	415478204T		
R5471	NF CARBON R	R25J-82	1	415478204T		
R5472	NF CARBON R	R25J-82	1	415478204T		
R5473	NF CARBON R	R25J-82	1	415478204T		
R5474	NF CARBON R	R25J-82	1	415478204T		
R5475	NF CARBON R	R25J-82	1	415478204T		<B MDC>
R5476	NF CARBON R	R25J-82	1	415478204T		<B MDC>
R5480	CARBON R	R16J-10	1	417341004T		
R5481	CARBON R	R16J-10	1	417341004T		
R5482	CARBON R	R16J-10	1	417341004T		
R5483	CARBON R	R16J-10	1	417341004T		
R5484	CARBON R	R16J-10	1	417341004T		
R5485	CARBON R	R16J-10	1	417341004T		<B MDC>
R5486	CARBON R	R16J-10	1	417341004T		<B MDC>
R5490	CARBON R	R16J-10	1	417341004T		
R5491	CARBON R	R16J-10	1	417341004T		
R5492	CARBON R	R16J-10	1	417341004T		
R5493	CARBON R	R16J-10	1	417341004T		
R5494	CARBON R	R16J-10	1	417341004T		
R5495	CARBON R	R16J-10	1	417341004T		<B MDC>
R5496	CARBON R	R16J-10	1	417341004T		<B MDC>
[SW TRM]						
P6000A	SOCKET	NSCT-9P2189	1	25052292		
P6001A	SOCKET	NSCT-9P2189	1	25052292		
P6002A	SOCKET	NSCT-9P2189	1	25052292		
P6003A	SOCKET	NSCT-9P2189	1	25052292		
P6004A	SOCKET	NSCT-9P2189	1	25052292		
P6005A	SOCKET	NSCT-9P2189	1	25052292		<B MDC>
P6006A	SOCKET	NSCT-9P2189	1	25052292		<B MDC>

P6007A	TRM	NTM-1P233(M1969)	1	25060302		
P6008A	TRM	NTM-1P233(M1969)	1	25060302		
P6009A	TRM	NTM-1P233(M1969)	1	25060302		<B MDC>
P6010A	TRM	NTM-1P233(M1969)	1	25060302		<B MDC>

HT-RC260

PC BOARD PARTS LIST

U003	DG-AS (MPU/DAC Asy) U0030+U0031	BADG-0364-1Z *	1	1B247564-1Z	N	<B MDC>
U0030	DG-AS (MPU/DAC Asy)	BADG-0364-1Z	1	1B2475364-1Z	N	<B MDC>
U0031	PWB(U port)	BAETC-0365-1Z	1	1B2475365-1Z	N	<B MDC>

CIRCUIT	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[SEMI CONDUCTOR]					
D110	C-DIODE	KDS4148U	1	223283R2	NSP
D110 or	C-DIODE	1SS352	(1)	223234R2	NSP
D110 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D111	C-DIODE	KDS4148U	1	223283R2	NSP
D111 or	C-DIODE	1SS352	(1)	223234R2	NSP
D111 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D112	ZENER D	UDZS10B	1	224551000R2	<B MDC>
D131	C-DIODE	KDS4148U	1	223283R2	NSP
D131 or	C-DIODE	1SS352	(1)	223234R2	NSP
D131 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D132	C-DIODE	KDS4148U	1	223283R2	NSP
D132 or	C-DIODE	1SS352	(1)	223234R2	NSP
D132 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D182	DIODE	RL1N4003	1	22380260T	
D183	DIODE	RL1N4003	1	22380260T	
D601	C-DIODE	KDS4148U	1	223283R2	NSP
D601 or	C-DIODE	1SS352	(1)	223234R2	NSP
D601 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D701	C-DIODE	KDS4148U	1	223283R2	NSP
D701 or	C-DIODE	1SS352	(1)	223234R2	NSP
D701 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D702	C-DIODE	KDS4148U	1	223283R2	NSP
D702 or	C-DIODE	1SS352	(1)	223234R2	NSP
D702 or	C-DIODE	MA2J111	(1)	223279R2	NSP
Q111	TR	2SC2235-Y(TPE6_F)	1	2211654T	<B MDC>
Q131	IC	TC74HCU04AF	1	222740046R2TO	
Q131 or	IC	74HCU04F	(1)	222740046R2	
Q153	IC	R1EX25064ASA00A	1	22242581R2	

Q153 or	IC	M95640-WMN6TP	(1)	22242643R2	N	
Q181	TR	KRC105S	1	2217290R2		
Q181 or	TR	RN1405	(1)	2214500R2		
Q2804	IC	NJM4580M-D	1	22241448R2		
Q301	IC	PCM9210PTR	1	22242629R2	N	
Q302	IC	PCM1690DCAR	1	22242599R2		
Q401	IC	NJM4580M-D	1	22241448R2		
Q402	IC	NJM4580M-D	1	22241448R2		
Q403	IC	NJM4580M-D	1	22241448R2		
Q404	IC	NJM4580M-D	1	22241448R2		<B MDC>
Q405	IC	NJM4580M-D	1	22241448R2		<B MDC>
Q601	TR	KRC104S	1	2216210R2		
Q601 or	TR	RN1404	(1)	2214490R2		
Q701	IC (MMPU)	MPD70F3746(03530)IC(FLASH	1	222W0079R303530		
Q702	IC	S-812C33AUA-C2N	1	22242222R2		
Q703	IC	S-812C56AUA-C3K	1	22242207R2		
Q704	IC	SN74CB3Q3305PWR	1	22242258R2		
Q746	IC	XC6221B332MR	1	22242633R2		
Q751	TR	KRC104S	1	2216210R2		
Q751 or	TR	RN1404	(1)	2214490R2		
Q752	TR	KRA102S	1	2216220R2		
Q752 or	TR	RN2402	(1)	2214530R2		
Q753	TR	KRA107S	1	2216350R2		
Q753 or	TR	RN2407(TE85L_F)	(1)	2216360R2		
Q754	TR	KRC102S	1	2216190R2		
Q754 or	TR	RN1402	(1)	2214470R2		
Q755	TR	KRA107S	1	2216350R2		
Q755 or	TR	RN2407(TE85L_F)	(1)	2216360R2		
Q756	TR	KRC102S	1	2216190R2		
Q756 or	TR	RN1402	(1)	2214470R2		
Q757	TR	KRC107S	1	2216340R2		
Q757 or	TR	RN1407	(1)	2216260R2		
Q761	TR	KRC104S	1	2216210R2		<B MDC>
Q761 or	TR	RN1404	(1)	2214490R2		<B MDC>
Q762	TR	KRA102S	1	2216220R2		<B MDC>
Q762 or	TR	RN2402	(1)	2214530R2		<B MDC>
Q771	TR	KRC104S	1	2216210R2		<B MDC>
Q771 or	TR	RN1404	(1)	2214490R2		<B MDC>
Q772	TR	KRA102S	1	2216220R2		<B MDC>
Q772 or	TR	RN2402	(1)	2214530R2		<B MDC>
[TRANS COIL]						
L131	CHOKE COIL	LBC2518T2R2M	1	231364M022R2		
L132	CHOKE COIL	LBC2518T2R2M	1	231364M022R2		<B MDC>

L133	CHOKE COIL	LBC2518T470M	1	231364M470R2		
L134	CHOKE COIL	LBC2518T470M	1	231364M470R2		
L135	C-CARBON R	RN72K1J-000JE	1	435030004R1		
L136	C-CARBON R	RN72K1J-000JE	1	435030004R1		<B MDC>
L153	CORE	BLM18PG181SN1D	1	2350005R1		
L2800	CORE	BLM18PG181SN1D	1	2350005R1		
L2801	CORE	BLM18PG181SN1D	1	2350005R1		
L2802	CORE	BLM18PG181SN1D	1	2350005R1		
L2803	EMIFIL	BK1608LM182-T	1	230958R1		
L2804	EMIFIL	BK1608LM182-T	1	230958R1		
L2805	EMIFIL	BK1608LM182-T	1	230958R1		
L2806	EMIFIL	BK1608LM182-T	1	230958R1		
L2807	EMIFIL	BK1608LM182-T	1	230958R1		
L2808	EMIFIL	BK1608LM182-T	1	230958R1		
L2809	EMIFIL	BK1608LM182-T	1	230958R1		
L2810	EMIFIL	BK1608LM182-T	1	230958R1		
L2811	EMIFIL	BK1608LM182-T	1	230958R1		
L2812	EMIFIL	BK1608LM182-T	1	230958R1		
L2813	EMIFIL	BK1608LM182-T	1	230958R1		
L2814	EMIFIL	BK1608LM182-T	1	230958R1		
L2815	EMIFIL	BK1608LM182-T	1	230958R1		
L2816	EMIFIL	BK1608LM182-T	1	230958R1		
L2817	EMIFIL	BK1608LM182-T	1	230958R1		
L2818	EMIFIL	BK1608LM182-T	1	230958R1		
L301	EMIFIL	BK1608LM182-T	1	230958R1		
L302	EMIFIL	BK1608LM182-T	1	230958R1		
L303	CHOKE COIL	LBC2518T4R7M	1	231364M047R2		
L304	CHOKE COIL	LBC2518T4R7M	1	231364M047R2		
L305	CHOKE COIL	LBC2518T4R7M	1	231364M047R2		
L307	C-CARBON R	RN72K1J-000JE	1	435030004R1		
L401	CHOKE COIL	LBC2518T4R7M	1	231364M047R2		
L402	CHOKE COIL	LBC2518T4R7M	1	231364M047R2		
L500	CORE	BLM18PG181SN1D	1	2350005R1		
L742	CHOKE COIL	BLM21PG221SN1	1	230949R2		
L743	CORE	BLM18PG181SN1D	1	2350005R1		
L744	CORE	BLM18PG181SN1D	1	2350005R1		
L746	CORE	BLM18PG181SN1D	1	2350005R1		
L747	CORE	BLM18PG181SN1D	1	2350005R1		
X171	CRYSTAL	HC-49US24.576MHz	1	3010490T	N	
X501	CERA LOCK	CSTCR5M00G53-B0	1	3010356R2		
[CAPACITOR]						
C102	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C111	UTSP C	CE04W25V-47M(UTSP)	1	397554707T		<B MDC>

C112	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C114	UTSP C	CE04W25V-47M(UTSP)	1	397554707T		<B MDC>
C130	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C131	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C132	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	<B MDC>
C133	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C134	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	<B MDC>
C135	C-CERA C	CC725CH1H-080D1	1	342100802R1	NSP	
C136	C-CERA C	CC725CH1H-080D1	1	342100802R1	NSP	<B MDC>
C139	UTSP C	CE04W10V-220M(UTSP)	1	397532217T		
C140	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C141	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C142	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C143	C-CERA C	CC725CH1H-330J1	1	342103304R1	NSP	
C144	C-CERA C	CC725CH1H-330J1	1	342103304R1	NSP	
C145	UTSP C	CE04W10V-220M(UTSP)	1	397532217T		
C151	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C172	C-CERA C	CC725CH1H-180J1	1	342101804R1	NSP	
C173	C-CERA C	CC725CH1H-180J1	1	342101804R1	NSP	
C2850	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	
C2851	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	
C2852	C-CERA C	CC725CH1H-470J1	1	342104704R1	NSP	
C2855	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C2870	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C2871	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C2877	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		
C2878	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		
C2880	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C2881	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C2882	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C2883	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C2884	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	
C2885	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	
C2886	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	
C2887	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	
C2888	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C2889	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C2891	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	
C2892	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	
C2893	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	
C2894	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	
C2895	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	
C2896	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	

C2897	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	
C2898	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	
C305	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C306	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C307	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C312	C-CERA C	CC725CH1H-221J1	1	342102214R1	NSP	
C313	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C314	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C315	C-CERA C	CK725B1H-472K1	1	332104725R1	NSP	
C316	C-CERA C	CK725B1H-473K1	1	332104735R1	NSP	
C317	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C318	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C319	UTSJ C	CE04W25V-47M(UTSJ)	1	398054707AT		<B MDC>
C320	C-CERA C	CK725B1H-223K1	1	332102235R1	NSP	
C351	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C352	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C353	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C354	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C355	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C356	UTSJ C	CE04W25V-47M(UTSJ)	1	398054707AT		<B MDC>
C357	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C400	UPZ C	2AUPZTF471JE	1	376334714T		<B MDC>
C401	UPZ C	2AUPZTF471JE	1	376334714T		<B MDC>
C402	UPZ C	2AUPZTF471JE	1	376334714T		
C403	UPZ C	2AUPZTF471JE	1	376334714T		
C404	UPZ C	2AUPZTF471JE	1	376334714T		
C405	UPZ C	2AUPZTF471JE	1	376334714T		<B MDC>
C406	UPZ C	2AUPZTF471JE	1	376334714T		<B MDC>
C407	UPZ C	2AUPZTF471JE	1	376334714T		
C410	UPZ C	2AUPZTF101JE	1	376331014T		<B MDC>
C411	UPZ C	2AUPZTF101JE	1	376331014T		<B MDC>
C412	UPZ C	2AUPZTF101JE	1	376331014T		
C413	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C414	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C415	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	<B MDC>
C416	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	<B MDC>
C417	UPZ C	2AUPZTF101JE	1	376331014T		
C420	UPZ C	2AUPZTF101JE	1	376331014T		<B MDC>
C421	UPZ C	2AUPZTF101JE	1	376331014T		<B MDC>
C422	UPZ C	2AUPZTF101JE	1	376331014T		
C423	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C424	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C425	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	<B MDC>

C426	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	<B MDC>
C427	UPZ C	2AUPZTF101JE	1	376331014T		
C470	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		<B MDC>
C471	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		<B MDC>
C472	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	<B MDC>
C473	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	<B MDC>
C498	UTSP C	CE04W25V-100M(UTSP)	1	397551017T		
C499	UTSP C	CE04W25V-100M(UTSP)	1	397551017T		
C501	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T		
C502	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C503	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C504	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C505	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C507	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C508	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C509	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C511	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C512	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C513	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C514	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C515	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	<B MDC>
C516	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	<B MDC>
C517	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C518	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C519	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C520	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C522	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C523	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C524	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C525	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C526	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C527	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C528	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C551	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C552	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C613	C-CERA C	CK732B1C-474K	1	337394745R1	NSP	
C629	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C701	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C705	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C706	UTSP C	CE04W16V-470M(UTSP)	1	397544717T		
C707	UTSP C	CE04W10V-100M(UTSP)	1	397531017T		
C708	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C709	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	

C710	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C744	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C745	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C748	UTSP C	CE04W10V-100M(UTSP)	1	397531017T		
C751	UTSP C	CE04W50V-0.47M(UTSP)	1	397584797T		
C753	UTSP C	CE04W10V-470M(UTSP)	1	397534717T		
C761	UTSP C	CE04W50V-0.47M(UTSP)	1	397584797T		<B MDC>
C762	C-CERA C	CK732B1C-474K	1	337394745R1	NSP	<B MDC>
C771	UTSP C	CE04W50V-0.47M(UTSP)	1	397584797T		<B MDC>
C772	C-CERA C	CK732B1C-474K	1	337394745R1		<B MDC>
C800	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C801	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP	
C802	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
[RESISTOR]						
R110	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R112	METAL O R	RS1/2WBJ-10	1	443521004T		<B MDC>
R113	C-CARBON R	RN72K1J-221JE	1	435032214R1		<B MDC>
R114	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	<B MDC>
R115	C-CARBON R	RN72K1J-333JE	1	435033334R1	NSP	<B MDC>
R131	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R132	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	<B MDC>
R133	C-CARBON R	RN72K1J-100JE	1	435031004R1	NSP	
R134	C-CARBON R	RN72K1J-100JE	1	435031004R1	NSP	<B MDC>
R137	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R138	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R139	C-CARBON R	RN72K1J-823JE	1	435038234R1	NSP	
R140	C-CARBON R	RN72K1J-823JE	1	435038234R1	NSP	<B MDC>
R141	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R142	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R151	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R152	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R153	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	
R154	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R181	METAL R	RNU1/2WCJ-4.7	1	453530474T		
R182	METAL R	RNU1/2WCJ-1	1	453530104T		
R2800	THERMISTOR	FUSB090F	1	4000252T		
R2804	C-CARBON R	RN72K1J-123JE	1	435031234R1	NSP	
R2805	C-CARBON R	RN72K1J-123JE	1	435031234R1	NSP	
R2806	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R2807	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R2808	C-CARBON R	RN72K1J-123JE	1	435031234R1	NSP	
R2809	C-CARBON R	RN72K1J-123JE	1	435031234R1	NSP	
R2810	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	

R2811	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R2820	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	
R2821	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	
R2830	C-CARBON R	RN72K1J-105JE	1	435031054R1	NSP	
R2848	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R2849	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R2852	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2861	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R2862	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R2863	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R2864	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R301	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R302	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R304	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R305	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R306	C-CARBON R	RN72K1J-330JE	1	435033304R1	NSP	
R307	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R308	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R312	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R313	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R314	C-CARBON R	RN72K1J-151JE	1	435031514R1	NSP	
R315	C-CARBON R	RN72K1J-151JE	1	435031514R1	NSP	
R316	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R317	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R321	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R322	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R323	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	<B MDC>
R324	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R325	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R326	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R327	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R331	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R332	C-CARBON R	RN72K1J-681JE	1	435036814R1	NSP	
R333	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R341	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R350	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R351	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R352	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R354	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R355	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R356	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R357	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R358	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	

R359	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R360	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R361	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R362	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R371	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	
R400	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R401	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R402	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R403	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R404	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R405	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	<B MDC>
R406	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	<B MDC>
R407	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R410	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R411	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R412	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R413	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R414	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R415	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	<B MDC>
R416	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	<B MDC>
R417	C-CARBON R	RN72K1J-153JE	1	435031534R1	NSP	
R420	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R421	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R430	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R431	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R440	C-CARBON R	RN72K1J-123JE	1	435031234R1	NSP	<B MDC>
R441	C-CARBON R	RN72K1J-123JE	1	435031234R1	NSP	<B MDC>
R442	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R443	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R444	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R445	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	<B MDC>
R446	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	<B MDC>
R447	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R450	C-CARBON R	RN72K1J-123JE	1	435031234R1	NSP	<B MDC>
R451	C-CARBON R	RN72K1J-123JE	1	435031234R1	NSP	<B MDC>
R452	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R453	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R454	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R455	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	<B MDC>
R456	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	<B MDC>
R457	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R460	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	<B MDC>
R461	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	<B MDC>

R462	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R463	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R464	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R465	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	<B MDC>
R466	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	<B MDC>
R467	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R470	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	<B MDC>
R471	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	<B MDC>
R472	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R473	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R474	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R475	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	<B MDC>
R476	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	<B MDC>
R477	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R480	C-CARBON R	RN72K1J-273JE	1	435032734R1	NSP	<B MDC>
R481	C-CARBON R	RN72K1J-273JE	1	435032734R1	NSP	<B MDC>
R482	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	<B MDC>
R483	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	<B MDC>
R484	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R485	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R486	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R487	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R490	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	<B MDC>
R491	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	<B MDC>
R498	C-CARBON R	RN72K1J-100JE	1	435031004R1	NSP	
R499	C-CARBON R	RN72K1J-100JE	1	435031004R1	NSP	
R501	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R502	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	<B MDC>
R503	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R504	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R505	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R506	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R508	C-CARBON R	RN72K1J-105JE	1	435031054R1	NSP	
R509	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R510	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R511	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R512	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R514	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R515	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R516	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R517	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R518	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R519	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	

R520	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R521	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R522	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R523	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R524	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R527	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R529	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R530	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R531	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R532	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R533	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R534	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R535	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R536	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R537	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	
R538	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R543	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R544	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R545	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R546	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R547	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R548	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R550	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R551	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R552	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R553	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R554	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R556	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R557	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R558	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R559	C-CARBON R	RN72K1J-272JE	1	435032724R1	NSP	
R562	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R563	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R565	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	<B MDC>
R566	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R567	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	<B MDC>
R568	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R569	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	<B MDC>
R570	C-CARBON R	RN72K1J-273JE	1	435032734R1	NSP	<B MDC>
R571	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	<B MDC>
R572	C-CARBON R	RN72K1J-273JE	1	435032734R1	NSP	<B MDC>
R573	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R574	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	

R575	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R576	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R578	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R579	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R580	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R581	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R582	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R583	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R584	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R585	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R586	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R587	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R588	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R589	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R590	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R591	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R592	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R593	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R594	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R595	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R596	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R597	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R598	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R599	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R600	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R601	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R602	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R603	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R604	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R605	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R606	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R607	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R608	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R609	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP
R611	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP
R613	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP
R614	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R616	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R617	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R618	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R619	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R620	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R621	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP

R622	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R623	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R625	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R626	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R627	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R628	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R629	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R630	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R631	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R632	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R634	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R636	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R638	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R639	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R640	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R641	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R642	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R643	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R644	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R645	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R646	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R647	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R648	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R650	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R651	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R652	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	
R653	C-CARBON R	RN72K1J-105JE	1	435031054R1	NSP	
R654	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R655	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R656	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R658	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R659	C-CARBON R	RN72K1J-273JE	1	435032734R1	NSP	
R660	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R661	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R662	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R664	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R666	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R667	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R668	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R669	C-CARBON R	RN72K1J-333JE	1	435033334R1	NSP	<B MDC>
R670	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R671	C-CARBON R	RN72K1J-272JE	1	435032724R1	NSP	
R672	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	

R673	C-CARBON R	RN72K1J-272JE	1	435032724R1	NSP	
R674	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R675	C-CARBON R	RN72K1J-272JE	1	435032724R1	NSP	
R676	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R677	C-CARBON R	RN72K1J-272JE	1	435032724R1	NSP	
R681	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R682	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R683	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R684	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R685	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R686	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R687	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R688	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R691	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R693	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R694	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R695	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R696	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R697	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R701	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R702	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R705	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R708	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R709	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R712	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	
R713	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	
R714	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R715	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R716	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R721	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R723	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R724	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R725	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R726	C-CARBON R	RN72K1J-273JE	1	435032734R1	NSP	
R761	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R762	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R763	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	<B MDC>
R771	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R772	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	<B MDC>
R773	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	<B MDC>
R801	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R806	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R808	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>

R810	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R822	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
[SW TRM]						
JL501B	WIRE TRAP	NPLG-3P586	1	25055624		
JL502B	WIRE TRAP	NPLG-5P588	1	25055626		
JL610B	WIRE TRAP	NPLG-7P590	1	25055628		<B MDC>
JL901B	WIRE TRAP	NPLG-5P588	1	25055626		
P101A	SOCKET	NSCT-11P2104	1	25052207		<B MDC>
P131	PIN JACK	NPJ-2PDOO626	1	25045847		<B MDC>
P131 or	PIN JACK	NPJ-2PDO445	(1)	25045640		<B MDC>
P2001A	SOCKET	IMSA-9142S-24A	1	25053234		
P2002B	SOCKET	NSCT-15P2195	1	25052298		
P2081	SOCKET	NNA1-01-006	1	25053357		
P5501A	SOCKET	NSCT-7P2187	1	25052290		
P5502A	SOCKET	NSCT-15P2195	1	25052298		
P5503A	SOCKET	NSCT-9P2189	1	25052292		
P5504A	SOCKET	NSCT-7P2187	1	25052290		<B MDC>
P701A	SOCKET	NSCT-31P2124	1	25052227		
P751A	SOCKET	IMSA-9618S-09A	1	25053334R2		
P8001A	PLUG	IMSA-9111B-16	1	25056620		
P8002A	PLUG	IMSA-9111B-24	1	25056625		
[TUNER UNIT]						
U131	PHT CP	JSR1165-001recieving	1	24120143		
U132	PHT CP	JSR1165-001recieving	1	24120143		

HT-RC260

PC BOARD PARTS LIST

U004	DIS- AS (Display Asy) U0040+U0041+U0042+U0043+U0044	BADIS-0373-1M *	1	1B247573-1M	N	<B MDC>
U0040	DIS-AS (Display Asy)	BADIS-0373-1M	1	1B2475373-1M	N	<B MDC>
U0041	PWB (Standby key/LED Asy)	BADIS-0374-1M	1	Included in "REF. NO. U0040"	N	<B MDC>
U0042	PWB (Video Asy)	BAVD-0375-1M	1	1B2475375-1M	N	<B MDC>
U0043	PWB(Power Supply Asy)	BAETC-0376-1M	1	1B2475376-1M	N	<B MDC>
U0044	PWB(HP Jack)	BAETC-0377-1M	1	1B2475377-1M	N	<B MDC>

CIRCUIT PART NAME		DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS	
[SEMI CONDUCTOR]						
D7002	ZENER D	UDZS8.2B	1	224550820R2		
D7033	ZENER D	UDZS3.9B	1	224550390R2		
D7151	LED	SLI-343URC-TE7	1	225449T		
D7152	LED	SLI-343Y8C-TE7	1	225490T	N	
D7153	LED	SLR-342MGTE7P	1	225455T		<B MDC>

D7301	C-DIODE	KDS4148U	1	223283R2	NSP	<B MDC>
D7301 or	C-DIODE	1SS352	(1)	223234R2	NSP	<B MDC>
D7301 or	C-DIODE	MA2J111	(1)	223279R2	NSP	<B MDC>
D7302	C-DIODE	KDS4148U	1	223283R2	NSP	<B MDC>
D7302 or	C-DIODE	1SS352	(1)	223234R2	NSP	<B MDC>
D7302 or	C-DIODE	MA2J111	(1)	223279R2	NSP	<B MDC>
D7401	ZENER D	UDZS5.1B	1	224550510R2		<B MDC>
D7411	ZENER D	UDZS6.8B	1	224550680R2		<B MDC>
D7412	ZENER D	UDZS6.8B	1	224550680R2		<B MDC>
D9011	DIODE	D5SBA20	1	22380130		<B MDC>
D9011A	SCREW	3P+10FN(3BC)	1	82143010GR	NSP	<B MDC>
D9011B	HEAT SINK	RAD-083	1	27160271	NSP	<B MDC>
D9014	C-DIODE	KDS4148U	1	223283R2	NSP	
D9014 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D9014 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D9015	C-DIODE	KDS4148U	1	223283R2	NSP	
D9015 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D9015 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D9016	ZENER D	UDZS6.2B	1	224550620R2		<B MDC>
D9023	C-DIODE	KDS4148U	1	223283R2	NSP	
D9023 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D9023 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D9025	C-DIODE	KDS4148U	1	223283R2	NSP	
D9025 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D9025 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D9032	C-DIODE	KDS4148U	1	223283R2	NSP	
D9032 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D9032 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D911	C-DIODE	KDS4148U	1	223283R2	NSP	
D911 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D911 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D912	C-DIODE	KDS4148U	1	223283R2	NSP	
D912 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D912 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D921	C-DIODE	KDS4148U	1	223283R2	NSP	
D921 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D921 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D922	C-DIODE	KDS4148U	1	223283R2	NSP	
D922 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D922 or	C-DIODE	MA2J111	(1)	223279R2	NSP	
D923	C-DIODE	KDS4148U	1	223283R2	NSP	
D923 or	C-DIODE	1SS352	(1)	223234R2	NSP	
D923 or	C-DIODE	MA2J111	(1)	223279R2	NSP	

L7031	CHOKE COIL	LBC2518T2R2M	1	231364M022R2		
L7032	CHOKE COIL	LBC2518T2R2M	1	231364M022R2		
L7201	CHOKE COIL	LBC2518T2R2M	1	231364M022R2		
L7202	CHOKE COIL	LBC2518T2R2M	1	231364M022R2		
L7203	CHOKE COIL	LBC2518T2R2M	1	231364M022R2		
L7401	CHOKE COIL	LBC2518T2R2M	1	231364M022R2		<B MDC>
L7402	CHOKE COIL	LBC2518T2R2M	1	231364M022R2		<B MDC>
T902	P TRANS	NPT-1520JQ	1	2301812A	!	<B MDC>
[CAPACITOR]						
C2001	VR C	CE04W50V-10M(VR)	1	394681007T		<B MDC>
C2002	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C2003	VR C	CE04W6.3V-470M(VR)	1	394624717T		<B MDC>
C2004	C-CERA C	CC725CH1H-470J1	1	342104704R1	NSP	<B MDC>
C2005	VR C	CE04W6.3V-470M(VR)	1	394624717T		<B MDC>
C2006	C-CERA C	CC725CH1H-470J1	1	342104704R1	NSP	<B MDC>
C2011	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2012	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2013	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2014	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2015	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2016	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2017	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2018	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2019	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2020	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2021	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2022	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C2030	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		<B MDC>
C2031	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	<B MDC>
C2032	UTSP C	CE04W50V-10M(UTSP)	1	397581007T		<B MDC>
C2033	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	<B MDC>
C2101	VR C	CE04W50V-10M(VR)	1	394681007T		<B MDC>
C2102	VR C	CE04W6.3V-470M(VR)	1	394624717T		
C2103	VR C	CE04W50V-10M(VR)	1	394681007T		
C2104	VR C	CE04W50V-10M(VR)	1	394681007T		
C2105	VR C	CE04W6.3V-470M(VR)	1	394624717T		
C2106	VR C	CE04W50V-10M(VR)	1	394681007T		
C2107	VR C	CE04W50V-10M(VR)	1	394681007T		
C2108	VR C	CE04W6.3V-470M(VR)	1	394624717T		
C2109	VR C	CE04W6.3V-470M(VR)	1	394624717T		
C2110	VR C	CE04W6.3V-470M(VR)	1	394624717T		
C2111	VR C	CE04W50V-1M(VR)	1	394680107T		
C2112	VR C	CE04W50V-1M(VR)	1	394680107T		

C2113	VR C	CE04W50V-1M(VR)	1	394680107T		
C2114	VR C	CE04W50V-1M(VR)	1	394680107T		
C2115	VR C	CE04W50V-1M(VR)	1	394680107T		
C2116	VR C	CE04W50V-1M(VR)	1	394680107T		
C2117	VR C	CE04W6.3V-470M(VR)	1	394624717T		<B MDC>
C2118	VR C	CE04W6.3V-470M(VR)	1	394624717T		<B MDC>
C2119	VR C	CE04W6.3V-470M(VR)	1	394624717T		<B MDC>
C2120	VR C	CE04W6.3V-470M(VR)	1	394624717T		<B MDC>
C2201	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C2202	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C2203	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP	
C2501	VR C	CE04W25V-220M(VR)	1	394652217T		<B MDC>
C7001	C-CERA C	CK725B1H-223K1	1	332102235R1	NSP	
C7002	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C7003	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C7004	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C7005	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C7007	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	
C7008	ELECT C	CE04W6.3V-100M	1	355721019T		
C7009	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C7010	C-CERA C	CK725B1H-223K1	1	332102235R1	NSP	
C7011	C-CERA C	CK725B1H-223K1	1	332102235R1	NSP	
C7012	C-CERA C	CK725B1H-223K1	1	332102235R1	NSP	
C7013	ELECT C	CE04W50V-33M	1	355783309T		
C7014	C-CERA C	CK725B1H-223K1	1	332102235R1	NSP	
C7015	ELECT C	CE04W16V-47M(S)	1	353744709T		
C7016	C-CERA C	CK725B1H-223K1	1	332102235R1	NSP	
C7017	C-CERA C	CK725B1H-223K1	1	332102235R1	NSP	
C7021	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP	
C7022	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP	
C7031	C-CERA C	CK725B1H-223K1	1	332102235R1	NSP	
C7032	C-CERA C	CK725B1H-223K1	1	332102235R1	NSP	
C7033	ELECT C	CE04W16V-10M(S)	1	353741009T		
C7041	ELECT C	CE04W6.3V-100M(S)	1	353721019T		
C7042	C-CERA C	CC725CH1H-102J1	1	342101024R1	NSP	
C7043	C-CERA C	CC725CH1H-102J1	1	342101024R1	NSP	
C7201	C-CERA C	CC725CH1H-102J1	1	342101024R1	NSP	
C7203	MKT C	B32529C0102J289	1	376491024T		<B MDC>
C7204	MKT C	B32529C0102J289	1	376491024T		<B MDC>
C7301	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	
C7302	C-CERA C	CC725CH1H-471J1	1	342104714R1	NSP	
C7303	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C7304	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>

C7305	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C7306	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C7309	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	<B MDC>
C7401	ELECT C	CE04W16V-10M(S)	1	353741009T		<B MDC>
C7402	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP	<B MDC>
C7403	ELECT C	CE04W16V-47M(S)	1	353744709T		<B MDC>
C7404	C-CERA C	CC725CH1H-330J1	1	342103304R1	NSP	<B MDC>
C7405	ELECT C	CE04W16V-10M(S)	1	353741009T		<B MDC>
C7411	ELECT C	CE04W16V-47M(S)	1	353744709T		<B MDC>
C7412	ELECT C	CE04W16V-47M(S)	1	353744709T		<B MDC>
C7421	C-CERA C	CC725CH1H-102J1	1	342101024R1	NSP	<B MDC>
C901	IS C	LE103-C3.5	1	3800042S		
C901 or	IS C	ECQU2A103MLC	(1)	3800039S		
C9011	VR C	CE04W16V-10000M(VR)	1	394641037S		
C9012	TF C	ECQ-V50V-334J	1	374723344T		
C9013	VR C	CE04W50V-4.7M(VR)	1	394680477T		
C902	C-CERA C	CK725F1E-104Z1	1	332161040R1		
C9023	VR C	CE04W50V-10M(VR)	1	394681007T		
C9025	VR C	CE04W6.3V-470M(VR)	1	394624717T		
C9026	VR C	CE04W6.3V-470M(VR)	1	394624717T		
C9027	C-CERA C	CK725F1E-104Z1	1	332161040R1		
C9028	VR C	CE04W6.3V-470M(VR)	1	394624717T		
C9029	C-CERA C	CK725F1E-104Z1	1	332161040R1		
C9030	VR C	CE04W25V-220M(VR)	1	394652217T		
C9031	C-CERA C	CK725F1E-104Z1	1	332161040R1		
C9032	VR C	CE04W6.3V-470M(VR)	1	394624717T		
C911	C-CERA C	CC725CH1H-102J1	1	342101024R1		<B MDC>
C921	C-CERA C	CK725B1H-223K1	1	332102235R1		
C922	VR C	CE04W25V-2200M(VR)	1	394652227S		
C930	UTSP C	CE04W50V-100M(UTSP)	1	397581017T		
C933	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T		
[RESISTOR]						
R2001	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	<B MDC>
R2002	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	<B MDC>
R2003	C-CARBON R	RN72K1J-105JE	1	435031054R1	NSP	<B MDC>
R2030	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	<B MDC>
R2032	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	<B MDC>
R2101	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	<B MDC>
R2102	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2103	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2104	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2105	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2106	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	

R2107	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2108	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2109	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2110	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2111	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2112	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2113	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2114	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2115	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2116	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R2117	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R2118	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R2119	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R2155	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R2156	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R2157	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R2501	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP	<B MDC>
R2502	C-CARBON R	RN72K1J-122JE	1	435031224R1	NSP	<B MDC>
R2503	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	<B MDC>
R2504	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	<B MDC>
R2505	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	<B MDC>
R7001	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R7002	C-CARBON R	RN72K1J-332JE	1	435033324R1	NSP	
R7003	C-CARBON R	RN72K1J-332JE	1	435033324R1	NSP	
R7004	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R7005	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R7006	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R7007	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R7008	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R7021	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R7022	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R7023	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R7024	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R7033	C-CARBON R	RN72K1J-820JE	1	435038204R1	NSP	
R7041	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R7042	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	
R7101	C-CARBON R	RN72K1J-271JE	1	435032714R1	NSP	
R7102	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R7103	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	
R7106	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R7107	C-CARBON R	RN72K1J-271JE	1	435032714R1	NSP	<B MDC>
R7108	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	<B MDC>
R7109	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	<B MDC>

R7110	C-CARBON R	RN72K1J-561JE	1	435035614R1	NSP	<B MDC>
R7111	C-CARBON R	RN72K1J-122JE	1	435031224R1	NSP	
R7112	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	
R7113	C-CARBON R	RN72K1J-392JE	1	435033924R1	NSP	
R7114	C-CARBON R	RN72K1J-123JE	1	435031234R1	NSP	
R7115	C-CARBON R	RN72K1J-271JE	1	435032714R1	NSP	
R7116	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R7117	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	
R7118	C-CARBON R	RN72K1J-561JE	1	435035614R1	NSP	
R7119	C-CARBON R	RN72K1J-821JE	1	435038214R1	NSP	
R7120	C-CARBON R	RN72K1J-122JE	1	435031224R1	NSP	
R7121	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	
R7122	C-CARBON R	RN72K1J-392JE	1	435033924R1	NSP	
R7123	C-CARBON R	RN72K1J-271JE	1	435032714R1	NSP	
R7124	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R7125	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	
R7126	C-CARBON R	RN72K1J-561JE	1	435035614R1	NSP	
R7127	C-CARBON R	RN72K1J-821JE	1	435038214R1	NSP	
R7128	C-CARBON R	RN72K1J-122JE	1	435031224R1	NSP	
R7129	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	
R7130	C-CARBON R	RN72K1J-821JE	1	435038214R1	NSP	<B MDC>
R7151	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	
R7152	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	
R7153	C-CARBON R	RN72K1J-181JE	1	435031814R1	NSP	<B MDC>
R7301	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R7302	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R7305	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R7401	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	<B MDC>
R7402	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	<B MDC>
R7403	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	<B MDC>
R7404	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	<B MDC>
R7405	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	<B MDC>
R7406	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	<B MDC>
R7407	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	<B MDC>
R7408	C-CARBON R	RN72K1J-333JE	1	435033334R1	NSP	<B MDC>
R7409	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	<B MDC>
R7410	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	<B MDC>
R7411	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	<B MDC>
R7412	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP	<B MDC>
R7413	C-CARBON R	RN72K1J-224JE	1	435032244R1	NSP	<B MDC>
R7414	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	<B MDC>
R7416	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R7420	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	<B MDC>

R9012	METAL R	RNU1/2WCJ-1	1	453530104T		
R9013	METAL R	RNU1/2WCJ-1	1	453530104T		
R9014	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R9020	METAL O R	RS1WBJ-8.2	1	441620824F		
R9021	METAL O R	RS1WBJ-8.2	1	441620824F		
R9022	METAL R	RNU1/2WCJ-1	1	453530104T		
R9031	METAL R	RNU2WCJ-3.3	1	452730334F		
R9032	METAL R	RNU2WCJ-3.3	1	452730334F		
R9033	METAL R	RNU1/2WCJ-1	1	453530104T		
R921	METAL O R	RS1/2WBJ-47	1	443524704T		
R934	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
[SW TRM]						
E7202	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	NSP	<B MDC>
E7302A	RETAINER	(EARTH)	1	27142136B	NSP	<B MDC>
E9001	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	NSP	
E9002	RETAINER	(JOINT)	1	27142069	NSP	<B MDC>
E9003	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	NSP	
E901	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	NSP	
E902	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	NSP	
F9001	FUSE	5A-UL-125V	1	252385T		<B MDC>
F901C	FUSE HOL	NSCT-1P2031	1	25052133T		<B MDC>
F901D	FUSE HOL	NSCT-1P2031	1	25052133T		<B MDC>
JL503B	WIRE TRAP	NPLG-3P586	1	25055624		<B MDC>
JL605A	WIRE HOL	NSCT-5P896	1	25051109		
JL702A	WIRE HOL	NSCT-9P880	1	25051093		
JL702B	WIRE HOL	NSCT-9P880	1	25051093		
JL801A	WIRE HOL	NSCT-5P876	1	25051089		
JL901A	WIRE HOL	NSCT-5P876	1	25051089		
JL952B	SOCKET	NSCT-3P95	1	25050267		
JL953A	WIRE HOL	NSCT-5P876	1	25051089		
P2001B	PLUG	IMSA-9142B-24A	1	25056602		
P2002A	PLUG	NPLG-15P0970	1	25056020		<B MDC>
P2201	PIN JACK	NPJ-3PDYYY560	1	25045778		
P2202	PIN JACK	NPJ-3PDYYY560	1	25045778		
P2203	PIN JACK	NPJ-9PDGLRGLRGLR563	1	25045781		
P2203 or	PIN JACK	NPJ-9PDGLR519	(1)	25045731		
P2510	PLUG	NPLG-2P568	1	25055600		<B MDC>
P2801A	SOCKET	NSCT-9P2102	1	25052205		<B MDC>
P701B	SOCKET	NSCT-31P2161	1	25052264		
P7201	ST JACK	MSJ-064-05A SR	1	25045783		
P7201 or	ST JACK	YKB21-5005	(1)	25045724		
P7302	PIN JACK	NPJ-3PDB693	1	25045925		<B MDC>
P7312	ST JACK	MSJ-035-05A BAG SR LF	1	25045927		<B MDC>

P7402	ST JACK	MSJ-035-05C B AG SR type	1	25045879		<B MDC>
P901A	PLUG	NPLG-2P631	1	25055675		
P901Aor	PLUG	1-1123724-2	(1)	25056402		
P911	PLUG	NPLG-2P631	1	25055675		
P911 or	PLUG	1-1123724-2	(1)	25056402		
RL901	RELAY	NRL-1P10A-DC9-186	1	25065683		<B MDC>
S7002	R ENCODE	EC12E2425WITH WASHER	1	25065655W		
S7102	PUSH SW	NPS-111-S681	1	25035718T		
S7106	PUSH SW	NPS-111-S681	1	25035718T		
S7108	PUSH SW	NPS-111-S681	1	25035718T		
S7116	PUSH SW	NPS-111-S681	1	25035718T		<B MDC>
S7118	PUSH SW	NPS-111-S681	1	25035718T		<B MDC>
S7120	PUSH SW	NPS-111-S681	1	25035718T		<B MDC>
S7122	PUSH SW	NPS-111-S681	1	25035718T		<B MDC>
S7124	PUSH SW	NPS-111-S681	1	25035718T		<B MDC>
S7126	PUSH SW	NPS-111-S681	1	25035718T		<B MDC>
S7128	PUSH SW	NPS-111-S681	1	25035718T		<B MDC>
S7130	PUSH SW	NPS-111-S681	1	25035718T		<B MDC>
S7132	PUSH SW	NPS-111-S681	1	25035718T		
S7134	PUSH SW	NPS-111-S681	1	25035718T		
S7136	PUSH SW	NPS-111-S681	1	25035718T		
S7138	PUSH SW	NPS-111-S681	1	25035718T		
S7140	PUSH SW	NPS-111-S681	1	25035718T		
S7142	PUSH SW	NPS-111-S681	1	25035718T		
S7144	PUSH SW	NPS-111-S681	1	25035718T		
S7146	PUSH SW	NPS-111-S681	1	25035718T		
S7148	PUSH SW	NPS-111-S681	1	25035718T		
S7150	PUSH SW	NPS-111-S681	1	25035718T		
S7152	PUSH SW	NPS-111-S681	1	25035718T		
S7154	PUSH SW	NPS-111-S681	1	25035718T		
S7156	PUSH SW	NPS-111-S681	1	25035718T		
S7158	PUSH SW	NPS-111-S681	1	25035718T		
S7160	PUSH SW	NPS-111-S681	1	25035718T		
S7162	PUSH SW	NPS-111-S681	1	25035718T		
S7164	PUSH SW	NPS-111-S681	1	25035718T		
[TUNER UNIT]						
U7041	REMO SENS	KSM-603TE5B	1	24130019		
				HT-RC260		
PC BOARD PARTS LIST						
U006	TRM-AS(SP Terminal Asy)	BATRM-0368-1J *	1	1B247568-1J	N	<B MDC>
U0060	U0060+U0061+U0062+U0063	BATRM-0368-1J	1	1B2475368-1J	N	<B MDC>
U0060	TRM-AS(SP Terminal Asv)	BATRM-0368-1J	1	1B2475368-1J	N	<B MDC>

U0063	PWB(D SUB)	BAETC-0371-1J	1	1B2475371-1J	N	<B MDC>
U0064	PWB(etc reserve)	BAETC-0372-1J	1	1B2475372-1J	N, NSP	<B MDC>
CIRCUIT PART NAME DESCRIPTION Q'TYPART NO. (SN) REMARKS						
[SEMI CONDUCTOR]						
D6600	DIODE	1SS133	1	223163T		
D6603	DIODE	1SS133	1	223163T		
D6605	DIODE	1SS133	1	223163T		<B MDC>
D6607	DIODE	1SS133	1	223163T		<B MDC>
Q6601	TR	KRC105M	1	2215830T		
Q6601 or	TR	RN1205	(1)	2214660T		
Q6602	TR	KRC105M	1	2215830T		
Q6602 or	TR	RN1205	(1)	2214660T		
Q6603	TR	KRC105M	1	2215830T		<B MDC>
Q6603 or	TR	RN1205	(1)	2214660T		<B MDC>
Q6604	TR	KRC105M	1	2215830T		<B MDC>
Q6604 or	TR	RN1205	(1)	2214660T		<B MDC>
[TRANS COIL]						
L6600	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S		<B MDC>
L6601	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S		<B MDC>
L6602	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S		<B MDC>
L6603	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S		<B MDC>
L6604	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S		<B MDC>
L6605	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S		<B MDC>
L6606	S COIL	SC-0.8X11.5X12.5T-6.5L	1	231393S		<B MDC>
[CAPACITOR]						
C6030	TF C	ECQ-V50V-473J	1	374724734T		<B MDC>
C6031	TF C	ECQ-V50V-473J	1	374724734T		<B MDC>
C6032	TF C	ECQ-V50V-473J	1	374724734T		<B MDC>
C6033	TF C	ECQ-V50V-473J	1	374724734T		<B MDC>
C6034	TF C	ECQ-V50V-473J	1	374724734T		<B MDC>
C6035	TF C	ECQ-V50V-473J	1	374724734T		<B MDC>
C6036	TF C	ECQ-V50V-473J	1	374724734T		<B MDC>
C6600	TF C	ECQ-V50V-103J	1	374721034T		
C6602	TF C	ECQ-V50V-103J	1	374721034T		
C6603	TF C	ECQ-V50V-103J	1	374721034T		
C6605	TF C	ECQ-V50V-103J	1	374721034T		<B MDC>
C6607	TF C	ECQ-V50V-103J	1	374721034T		<B MDC>
[RESISTOR]						
R6130	METAL R	RNU1WCJ-8.2	1	453630824T		<B MDC>
R6131	METAL R	RNU1WCJ-8.2	1	453630824T		<B MDC>
R6132	METAL R	RNU1WCJ-8.2	1	453630824T		<B MDC>
R6133	METAL R	RNU1WCJ-8.2	1	453630824T		<B MDC>
R6134	METAL R	RNU1WCJ-8.2	1	453630824T		<B MDC>

R6135	METAL R	RNU1WCJ-8.2	1	453630824T		<B MDC>
R6136	METAL R	RNU1WCJ-8.2	1	453630824T		<B MDC>
R6600	CARBON R	R16J-22	1	417342204T		<B MDC>
R6601	CARBON R	R16J-22	1	417342204T		<B MDC>
R6602	CARBON R	R16J-22	1	417342204T		<B MDC>
R6603	CARBON R	R16J-22	1	417342204T		<B MDC>
R6604	CARBON R	R16J-22	1	417342204T		<B MDC>
R6605	CARBON R	R16J-22	1	417342204T		<B MDC>
R6606	CARBON R	R16J-22	1	417342204T		<B MDC>
R6610	CARBON R	R16J-22	1	417342204T		<B MDC>
R6611	CARBON R	R16J-22	1	417342204T		<B MDC>
R6612	CARBON R	R16J-22	1	417342204T		<B MDC>
R6613	CARBON R	R16J-22	1	417342204T		<B MDC>
R6614	CARBON R	R16J-22	1	417342204T		<B MDC>
R6615	CARBON R	R16J-22	1	417342204T		<B MDC>
R6616	CARBON R	R16J-22	1	417342204T		<B MDC>
R6690	METAL O R	RS1/2WBJ-10	1	443521004T		<B MDC>
R6691	METAL O R	RS1/2WBJ-390	1	443523914T		
R6692	METAL O R	RS1/2WBJ-390	1	443523914T		
[SW TRM]						
JL600B	SOCKET	NSCT-7P99	1	25050271		
JL603B	SOCKET	NSCT-9P101	1	25050273		
JL604B	SOCKET	NSCT-5P97	1	25050269		<B MDC>
JL605B	SOCKET	NSCT-5P97	1	25050269		
JL610A	WIRE HOL	NSCT-7P878	1	25051091		
JL620B	WIRE TRAP	NPLG-7P590	1	25055628		<B MDC>
P6601	TRM	NTM-2PDMCR400	1	25060472		
P6602	TRM	NTM-4PDMNRR420	1	25060492		
P6603	TRM	NTM-4PDMNRR420	1	25060492		
P6604	TRM	NTM-4PDMNRR420	1	25060492		<B MDC>
RL6600	RELAY	NRL-2P5A-DC24-129	1	25065563A		
RL6600	RELAY	NRL-2P5A-DC24-193	(1)	25065703		
RL6602	RELAY	NRL-2P5A-DC24-129	1	25065563A		
RL6602	RELAY	NRL-2P5A-DC24-193	(1)	25065703		
RL6603	RELAY	NRL-2P5A-DC24-129	1	25065563A		
RL6603	RELAY	NRL-2P5A-DC24-193	(1)	25065703		
RL6605	RELAY	NRL-2P5A-DC24-129	1	25065563A		<B MDC>
RL6605	RELAY	NRL-2P5A-DC24-193	(1)	25065703		<B MDC>
RL6607	RELAY	NRL-2P5A-DC24-129	1	25065563A		<B MDC>
RL6607	RELAY	NRL-2P5A-DC24-193	(1)	25065703		<B MDC>

U007	HDM-AS(HDMI Asy) U0070+U0071+U0072	BAHDM-0403-1E *	1	1B247503-1E	N	<B MDC>
U0070	HDM-AS(HDMI Asy)	BAHDM-0403-1E	1	1B2475403-1E	N	<B MDC>
U0071	PWB(Front HDMI Asy)	BAHDM-0404-1E	1	1B2475404-1E	N	<B MDC>
U0072	PWB(Front HDMI Asy FIX)	BAETC-0405-1E	1	1B2475405-1E	N, NSP	<B MDC>

CIRCUIT	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[SEMI CONDUCTOR]					
D8161	ZENER D	UDZS3.6B	1	224550360R2	
D8204	DIODE	DAN217T146	1	223285R2	
D8204 or	C-DIODE	1SS226(TE85L_F)	(1)	223266R2	NSP
D8205	DIODE	DAN217T146	1	223285R2	
D8205 or	C-DIODE	1SS226(TE85L_F)	(1)	223266R2	NSP
D8301	DIODE	DAN217T146	1	223285R2	
D8301 or	C-DIODE	1SS226(TE85L_F)	(1)	223266R2	NSP
D8302	C-DIODE	KDS4148U	1	223283R2	NSP
D8302 or	C-DIODE	1SS352	(1)	223234R2	NSP
D8302 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D8302 or	C-DIODE	MA2J1110GL	(1)	223302R2	NSP
D8701	C-DIODE	KDS4148U	1	223283R2	NSP
D8701 or	C-DIODE	1SS352	(1)	223234R2	NSP
D8701 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D8701 or	C-DIODE	MA2J1110GL	(1)	223302R2	NSP
D8901	C-DIODE	KDS4148U	1	223283R2	NSP
D8901 or	C-DIODE	1SS352	(1)	223234R2	NSP
D8901 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D8901 or	C-DIODE	MA2J1110GL	(1)	223302R2	NSP
D8902	C-DIODE	KDS4148U	1	223283R2	NSP
D8902 or	C-DIODE	1SS352	(1)	223234R2	NSP
D8902 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D8902 or	C-DIODE	MA2J1110GL	(1)	223302R2	NSP
D8903	C-DIODE	KDS4148U	1	223283R2	NSP
D8903 or	C-DIODE	1SS352	(1)	223234R2	NSP
D8903 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D8903 or	C-DIODE	MA2J1110GL	(1)	223302R2	NSP
D8904	C-DIODE	KDS4148U	1	223283R2	NSP
D8904 or	C-DIODE	1SS352	(1)	223234R2	NSP
D8904 or	C-DIODE	MA2J111	(1)	223279R2	NSP
D8904 or	C-DIODE	MA2J1110GL	(1)	223302R2	NSP
D8906	DIODE	RB070M-30	1	22380361R2	
D8906 or	C-DIODE	CRS09(TE85L_Q)	(1)	223274R2	NSP
D8951	DIODE	XBS303V17R	1	22380365R2	N
D8952	DIODE	XBS303V17R	1	22380365R2	N
Q201	IC	D788E001BRFP266Z	1	22242502R3	

Q203	IC	TC7WU04FU(TE12L_F)	1	22240935R2		
Q205	IC	TC74VHC157FT	1	22274157ER2TO		
Q273	IC	XC6220B121PR	1	22242626R2		
Q281	IC	K4S641632N-LC60	1	22242603R2		
Q281 or	IC	EM638165TS-7G	(1)	22242607R2		
Q282	IC (DSP, Flash memory)	ES29LV160ET(03736)	1	222W0069R303736		
Q282 or	IC (DSP, Flash memory)	S29AL016J70(03736)	(1)	222W0100R303736		
Q282 or	IC (DSP, Flash memory)	ES29LV160FT7(03736)	(1)	222W0101R303736		
Q282 or	IC (DSP, Flash memory)	MX29LV160D(03736)	(1)	222W0104R303736		
Q8051	IC	NT5TU32M16CG-25C	1	22242635R3	N	
Q8052	IC	NT5TU32M16CG-25C	1	22242635R3	N	
Q8161	IC	SI9389CTU	1	22242628R3	N	
Q8162	TR	RN2401(TE85L_F)	1	2214520R2		
Q8200	IC	FLI32626H-AE	1	22242634R3	N	
Q8201	IC	BR24S32FJ-WE2	1	22242569R2		
Q8201 or	IC	M24C32-WMN6TP	(1)	22242644R2	N	
Q8201 or	IC	R1EX24032ASAS0A	(1)	22242668R2	N	
Q8206	IC (VSP sequoia, Flash memory)	AT25DF641S3(0355)	1	222W0110R20355	N	
Q8206 or	IC	EN25P64-100FIP	(1)	222W0114R2	N	
Q8207	IC	TC74LCX125FT(EL_K)	1	22274125BR2TO		
Q8305	IC	S-812C50BUC-C5ET2G	1	22242407R2		
Q8306	IC	NC7SZ08P5X_F042	1	22242482R2		
Q8306 or	IC	TC7SZ08FU(TE85L_F)	(1)	22242071R2TO		
Q8401	IC	SI9136CTU	1	22242630R3	N	
Q8402	IC	TC7WHU04FU(TE12L)	1	22242231R2		
Q8501	IC	SI9233ACTU	1	22242582R3		
Q8661	IC	TMDS141RHARG4	1	22242586R2		<B MDC>
Q8701	IC (VMPU)	MPD70F3740GC(03545)	1	222W0096R303545		
Q8801	IC	TC74VCX162827	1	22242395R2		
Q8802	IC	TC74VCX162827	1	22242395R2		
Q8803	IC	TC74VCX162827	1	22242395R2		
Q8804	IC	TC74VCX162827	1	22242395R2		
Q8805	TR	DTC144EE	1	2216390R2		
Q8805 or	TR	KRC404E	(1)	2216450R2		
Q8806	IC	TC74VCX162827	1	22242395R2		
Q8807	IC	TC74VCX162827	1	22242395R2		
Q8901	IC	TC74VHCT08AFT	1	22274008GR2TO		
Q8901 or	IC	TC74VHCT08AFT (EKJ)	(1)	22274008G1R2TO		
Q8902	IC	NC7SZ08P5X_F042	1	22242482R2		
Q8903	IC	S-812C50BUC-C5ET2G	1	22242407R2		
Q8904	IC	XC6221B332MR	1	22242633R2	N	
Q8905	IC	XC6221B122MR	1	22242631R2	N	
Q8907	IC	CM3202-02DE	1	22242641R2	N	

Q8951	IC	MP2363DN-LF-Z	1	22242627R2		
Q8961	IC	MP2363DN-LF-Z	1	22242627R2		
[TRANS COIL]						
L201	CORE	BLM18PG181SN1D	1	2350005R1		
L202	CORE	BLM18PG121SN1D	1	2350006R1		
L203	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
L204	EMIFIL	BK1608LM182-T	1	230958R1		
L205	CORE	BLM18PG181SN1D	1	2350005R1		
L206	EMIFIL	BK1608LM182-T	1	230958R1		
L207	CORE	BLM18PG181SN1D	1	2350005R1		
L241	CORE	NFM18PC105R0J3D	1	2350014R1		
L251	CORE	BLM18PG181SN1D	1	2350005R1		
L261	EMIFIL	BK1608LM182-T	1	230958R1		
L282	CORE	BLM18PG181SN1D	1	2350005R1		
L8001	CORE	BLM18PG181SN1D	1	2350005R1		
L8004	CORE	BLM18PG181SN1D	1	2350005R1		
L8006	CORE	BLM18PG181SN1D	1	2350005R1		
L8007	CORE	BLM18PG181SN1D	1	2350005R1		
L8161	CORE	BLM18PG181SN1D	1	2350005R1		
L8162	CORE	BLM18PG181SN1D	1	2350005R1		
L8163	CORE	BLM18PG181SN1D	1	2350005R1		
L8164	CORE	BLM18PG181SN1D	1	2350005R1		
L8165	CORE	BLM18PG181SN1D	1	2350005R1		<B MDC>
L8166	CORE	BLM18PG181SN1D	1	2350005R1		
L8200	CORE	BLM18PG181SN1D	1	2350005R1		
L8201	CORE	BLM18PG181SN1D	1	2350005R1		
L8202	CORE	BLM18PG181SN1D	1	2350005R1		
L8203	CORE	BLM18PG181SN1D	1	2350005R1		
L8204	CORE	BLM18PG181SN1D	1	2350005R1		
L8205	CORE	BLM18PG181SN1D	1	2350005R1		
L8206	CORE	BLM18PG181SN1D	1	2350005R1		
L8207	CORE	BLM18PG121SN1D	1	2350006R1		
L8208	CORE	BLM18PG181SN1D	1	2350005R1		
L8209	CORE	BLM18PG181SN1D	1	2350005R1		
L8210	CORE	BLM18PG181SN1D	1	2350005R1		
L8211	CORE	BLM18PG181SN1D	1	2350005R1		
L8212	CORE	BLM18PG181SN1D	1	2350005R1		
L8213	CORE	BLM18PG181SN1D	1	2350005R1		
L8214	CORE	BLM18PG181SN1D	1	2350005R1		
L8215	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
L8216	CORE	BLM18PG181SN1D	1	2350005R1		
L8217	CORE	BLM18PG181SN1D	1	2350005R1		
L8218	CORE	BLM18PG181SN1D	1	2350005R1		

L8301	CORE	BLM18PG181SN1D	1	2350005R1		
L8401	CORE	BLM18PG181SN1D	1	2350005R1		
L8402	CORE	BLM18PG181SN1D	1	2350005R1		
L8403	CORE	BLM18PG181SN1D	1	2350005R1		
L8404	CORE	BLM18PG181SN1D	1	2350005R1		
L8406	C-R NET	MNR12E0APJ000	1	43464900002R2		
L8407	C-R NET	MNR12E0APJ000	1	43464900002R2		
L8409	C-R NET	MNR12E0APJ000	1	43464900002R2		
L8410	C-R NET	MNR12E0APJ000	1	43464900002R2		
L8501	CORE	BLM18PG181SN1D	1	2350005R1		
L8502	CORE	BLM18PG181SN1D	1	2350005R1		
L8503	CORE	BLM18PG181SN1D	1	2350005R1		
L8504	CORE	BLM18PG181SN1D	1	2350005R1		
L8505	CORE	BLM18PG181SN1D	1	2350005R1		
L8506	CORE	BLM18PG181SN1D	1	2350005R1		
L8561	CORE	BLM18PG181SN1D	1	2350005R1		
L8608	EMIFIL	BK1608LM182-T	1	230958R1		
L8661	CORE	BLM18PG181SN1D	1	2350005R1		<B MDC>
L8701	CORE	BLM18PG181SN1D	1	2350005R1		
L8801	CORE	BLM18PG181SN1D	1	2350005R1		
L8901	CHOKE COIL	BLM21PG221SN1	1	230949R2		
L8951	CHOKE COIL	BLM21PG221SN1	1	230949R2		
L8952	CHOKE COIL	0182-7E08Q-100M-RA	1	231396M100R2		
L8953	CHOKE COIL	BLM21PG221SN1	1	230949R2		
L8954	CHOKE COIL	BLM21PG221SN1	1	230949R2		
L8955	CORE	BLM18PG181SN1D	1	2350005R1		
L8961	CHOKE COIL	BLM21PG221SN1	1	230949R2		
L8962	CHOKE COIL	0182-7E08Q-100M-RA	1	231396M100R2		
L8963	CHOKE COIL	BLM21PG221SN1	1	230949R2		
L8964	CHOKE COIL	BLM21PG221SN1	1	230949R2		
X201	CRYSTAL	HC-49USSMD17.734MHz	1	3010488R2	N	
X8200	CRYSTAL	HC-49USSMD19.6608MHz	1	3010489R2	N	
X8501	CRYSTAL	DSX321G-27MHz	1	3010487R2	N	
X8701	CERA LOCK	CSTCR5M00G53-B0	1	3010356R2		
[CAPACITOR]						
C201	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C202	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C203	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C204	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C205	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C206	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C207	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C208	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	

C209	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C210	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C211	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C212	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C213	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C215	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C216	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C217	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C218	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C219	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C220	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C221	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C222	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C223	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C224	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C225	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C226	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C227	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C228	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C229	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C230	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C231	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C234	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C238	C-CERA C	CC725CH1H-100D1	1	342101002R1	NSP
C239	C-CERA C	CC725CH1H-100D1	1	342101002R1	NSP
C241	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C242	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C243	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP
C244	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C245	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP
C246	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C247	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C251	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C252	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C253	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C276	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C277	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C278	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C279	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C280	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C281	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C282	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C283	C-CERA C	CC725CH1H-102J1	1	342101024R1	NSP

C284	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C285	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C286	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C287	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C288	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C289	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C290	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C291	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C292	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8000	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8001	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8002	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8003	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8004	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8005	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8006	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8007	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8008	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8009	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8010	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8011	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8012	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8013	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8014	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8015	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8016	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8017	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8018	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8019	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8020	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8021	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8022	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8023	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8024	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8025	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8026	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8027	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8028	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP	
C8030	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8031	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8032	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2		
C8032 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2		
C8032 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2		

C8033	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8034	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8035	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8036	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8037	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8038	CHIP TANTAL	TCSCSJ226MAAR	1	396522207R2	
C8038 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
C8038 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2	
C8039	C-CERA C	CK725F1E-104Z1	1	332161040R1	
C8051	CHIP TANTAL	TCSCSJ226MAAR	1	396522207R2	
C8051 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
C8051 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2	
C8052	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP
C8053	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8054	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8055	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8056	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8057	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8058	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8059	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8060	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8061	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8062	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8063	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8064	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8065	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8066	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8067	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8068	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8069	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8070	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8071	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8072	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8073	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8074	CHIP TANTAL	TCSCSJ226MAAR	1	396522207R2	
C8074 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
C8074 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2	
C8075	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP
C8076	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8077	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8079	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8080	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8081	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP

C8082	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8083	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8084	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8085	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8086	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8087	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8088	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8089	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8090	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8091	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8092	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8093	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8094	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8095	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8096	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8157	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8158	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8159	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8160	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8161	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8162	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8163	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP
C8164	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP
C8165	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8166	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8167	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8168	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8169	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8170	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8171	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8172	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8173	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8174	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8175	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8176	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8177	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8178	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8179	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8180	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8181	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP
C8182	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8183	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8184	C-CERA C	CK725B0J-106K	1	332091065R2	NSP

C8185	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8186	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8187	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8188	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8189	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8190	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C8191	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	<B MDC>
C8192	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8193	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8194	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C8195	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C8196	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C8197	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C8198	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C8199	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8200	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8201	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8202	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2		
C8202 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2		
C8202 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2		
C8203	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8204	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8205	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2		
C8205 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2		
C8205 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2		
C8206	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8207	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8208	C-CERA C	CC725CH1H-330J1	1	342103304R1	NSP	
C8209	C-CERA C	CC725CH1H-330J1	1	342103304R1	NSP	
C8210	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8211	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8212	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8213	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8214	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8215	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8216	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8217	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2		
C8217 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2		
C8217 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2		
C8218	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8219	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8220	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8221	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	

C8222	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8223	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8224	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8225	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8226	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8227	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8228	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8229	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8230	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
C8230 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
C8230 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2	
C8231	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8232	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8233	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8234	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8235	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8236	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8237	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8238	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8239	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8240	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8241	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8242	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8243	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8244	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8245	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8246	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8247	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8253	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8254	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8255	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8256	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8257	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8258	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8259	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8260	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8261	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8262	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8263	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8264	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8265	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8266	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8267	C-CERA C	CK725B0J-106K	1	332091065R2	NSP

C8268	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8269	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8270	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8271	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8272	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8273	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
C8273 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
C8273 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2	
C8274	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8275	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8276	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8277	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8278	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8279	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8280	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8281	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
C8281 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
C8281 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2	
C8282	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8283	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8284	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8285	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8286	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8287	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8288	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8289	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8290	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8291	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8292	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP
C8293	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
C8293 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
C8293 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2	
C8294	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
C8294 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
C8294 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2	
C8295	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8296	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8297	CHIP TANTAL	TCSCS0J226MAAR	1	396522207R2	
C8297 or	CHIP TANTAL	F93-6.3V-22M	(1)	395522207R2	
C8297 or	CHIP TANTAL	TEESVA0J226M8R	(1)	398422207R2	
C8298	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8299	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8326	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP

C8328	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8330	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8348	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8399	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8401	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8402	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8403	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8404	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8405	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8406	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8407	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8408	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8409	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8410	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8411	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8412	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8413	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8414	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8415	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8416	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8417	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8418	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8419	C-CERA C	CC725CH1H-040C1	1	342100401R1	NSP
C8420	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8421	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8422	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8424	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8425	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8428	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8429	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8430	C-CERA C	CC725CH1H-080D1	1	342100802R1	NSP
C8431	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8432	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8433	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8434	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP
C8435	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8436	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP
C8437	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP
C8438	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP
C8439	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP
C8440	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP
C8441	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP
C8442	C-CERA C	CC725CH1H-101J1	1	342101014R1	NSP

C8443	C-CERA C	CK725B1C-104K1	1	332121045R1	NSP
C8502	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8506	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8507	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8508	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP
C8509	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8510	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP
C8511	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8512	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8513	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8514	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8515	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8516	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8517	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8518	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8519	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8522	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8524	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8525	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8527	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8530	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8531	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8532	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8533	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8534	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8535	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8536	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8537	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8538	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8539	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8548	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8549	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8550	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8551	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8552	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8553	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8554	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8555	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8556	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP
C8557	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP
C8560	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8561	C-CERA C	CK725B0J-106K	1	332091065R2	NSP
C8563	C-CERA C	CK725B0J-106K	1	332091065R2	NSP

C8565	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8566	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8567	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8573	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8574	C-CERA C	CC725CH1H-060D1	1	342100602R1	NSP	
C8575	C-CERA C	CC725CH1H-060D1	1	342100602R1	NSP	
C8584	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8605	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8606	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8611	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8612	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8621	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8622	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8631	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
C8632	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8641	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	<B MDC>
C8642	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	<B MDC>
C8662	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
C8663	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C8664	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	<B MDC>
C8665	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C8666	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	<B MDC>
C8669	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C8670	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	<B MDC>
C8671	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C8672	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	<B MDC>
C8673	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C8674	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	<B MDC>
C8675	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C8676	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	<B MDC>
C8677	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	<B MDC>
C8680	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	<B MDC>
C8681	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	<B MDC>
C8682	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	<B MDC>
C8687	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8690	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8701	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8702	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8703	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C8704	CHIP ELECT C	CEWX50V-4.7M	1	398180477R2		
C8705	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C8706	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8707	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	

C8708	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8709	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8710	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C8801	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8802	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8803	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8804	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8805	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8806	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8807	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8808	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8809	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8810	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8811	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8812	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8813	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8814	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8815	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8816	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8817	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8818	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8819	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8820	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8821	C-CERA C	CK725B1H-102K1	1	332101025R1	NSP	
C8822	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8901	CHIP ELECT C	CEWX16V-100M	1	398141017R2		
C8902	C-CERA C	CK725B1E-106K	1	332221065R2	NSP	
C8903	C-CERA C	CK725B1E-106K	1	332221065R2	NSP	
C8904	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	
C8905	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	
C8906	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8907	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	
C8908	C-CERA C	CK725B1A-105K1	1	332131055R1	NSP	
C8909	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8910	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8911	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8912	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8913	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8914	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8915	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8916	CHIP TANTAL	TCSCS0J107MBAR	1	396521017R2		
C8916 or	CHIP TANTAL	F93-6.3V-100M	(1)	395521017R2		
C8916 or	CHIP TANTAL	TEESVB20J107M8R	(1)	398421017R2		

C8917	C-CERA C	CK725B0J-106K	1	332091065R2		
C8918	CHIP TANTAL	TCSCS0J107MBAR	1	396521017R2		
C8918 or	CHIP TANTAL	F93-6.3V-100M	(1)	395521017R2		
C8918 or	CHIP TANTAL	TEESVB20J107M8R	(1)	398421017R2		
C8919	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8920	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8921	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8922	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8950	C-CERA C	CC725CH1H-151J1	1	342101514R1	NSP	
C8951	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8952	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8953	C-CERA C	CK725B1E-106K	1	332221065R2	NSP	
C8954	C-CERA C	CK725B1E-106K	1	332221065R2	NSP	
C8955	C-CERA C	CK725B1H-103K1	1	332101035R1	NSP	
C8956	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8957	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8958	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8959	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C8960	CHIP ELECT C	CEWX16V-100M	1	398141017R2		
C8961	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8962	C-CERA C	CK725F1E-104Z1	1	332161040R1	NSP	
C8963	C-CERA C	CK725B1E-106K	1	332221065R2	NSP	
C8964	C-CERA C	CK725B1E-106K	1	332221065R2	NSP	
C8965	C-CERA C	CK725B1H-223K1	1	332102235R1	NSP	
C8966	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8967	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8968	C-CERA C	CK725B0J-106K	1	332091065R2	NSP	
C8969	C-CERA C	CK725F1A-105Z1	1	332181050R1	NSP	
C8970	CHIP ELECT C	CEWX16V-100M	1	398141017R2	NSP	
C8971	C-CERA C	CK725F1E-104Z1	1	332161040R1		
C8972	C-CERA C	CC725CH1H-331J1	1	342103314R1	NSP	
[RESISTOR]						
R200	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R201	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R202	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R203	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R205	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R206	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R207	C-CARBON R	RN72K1J-391JE	1	435033914R1	NSP	
R208	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R209	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R210	C-R NET	RM7LJ330X04	1	43484733004R2		
R211	C-R NET	RM7LJ330X04	1	43484733004R2		

R212	C-R NET	RM7LJ330X04	1	43484733004R2		
R213	C-R NET	RM7LJ330X04	1	43484733004R2		
R214	C-R NET	RM7LJ330X04	1	43484733004R2		
R215	C-R NET	RM7LJ330X04	1	43484733004R2		
R216	C-R NET	RM7LJ330X04	1	43484733004R2		
R217	C-R NET	RM7LJ330X04	1	43484733004R2		
R218	C-R NET	RM7LJ330X04	1	43484733004R2		
R221	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP	
R240	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R241	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R242	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R243	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R244	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R245	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R246	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R250	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R251	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R252	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R253	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R254	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R255	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R256	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R257	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R258	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R259	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R260	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R261	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R262	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R263	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R264	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R265	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R267	C-CARBON R	RN72K1J-105JE	1	435031054R1	NSP	
R268	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R269	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R270	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R271	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R272	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R273	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	
R274	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP	
R275	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R276	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP	
R277	C-CARBON R	RN72K1J-151JE	1	435031514R1	NSP	
R278	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP	

R279	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP
R280	C-CARBON R	RN72K1J-470JE	1	435034704R1	NSP
R281	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R282	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R283	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R284	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R285	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R286	C-CARBON R	RN72K1J-331JE	1	435033314R1	NSP
R287	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R288	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R289	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP
R290	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP
R295	C-CARBON R	RN72K2E-068JE	1	435220684R1	NSP
R296	C-CARBON R	RN72K2E-068JE	1	435220684R1	NSP
R297	C-CARBON R	RN72K2E-068JE	1	435220684R1	NSP
R298	C-CARBON R	RN72K2E-068JE	1	435220684R1	NSP
R8000	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8001	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8002	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8003	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8004	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8005	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8006	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8007	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8008	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP
R8009	C-CARBON R	RN72K1J-680JE	1	435036804R1	NSP
R8010	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP
R8011	C-CARBON R	RN72K1J-680JE	1	435036804R1	NSP
R8012	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8013	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8014	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8015	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8016	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8017	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8018	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8019	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8020	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP
R8021	C-CARBON R	RN72K1J-680JE	1	435036804R1	NSP
R8022	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP
R8023	C-CARBON R	RN72K1J-680JE	1	435036804R1	NSP
R8024	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8025	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8026	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP

R8027	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8028	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8029	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8030	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8031	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8032	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP
R8033	C-CARBON R	RN72K1J-680JE	1	435036804R1	NSP
R8034	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP
R8035	C-CARBON R	RN72K1J-680JE	1	435036804R1	NSP
R8036	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8037	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8038	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8039	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8040	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8041	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8042	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8043	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8044	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP
R8045	C-CARBON R	RN72K1J-680JE	1	435036804R1	NSP
R8046	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8047	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP
R8048	C-CARBON R	RN72K1J-680JE	1	435036804R1	NSP
R8049	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8050	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP
R8051	C-CARBON R	RN72K1J-680JE	1	435036804R1	NSP
R8052	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8053	C-CARBON R	RN72K1J-471JE	1	435034714R1	NSP
R8054	C-CARBON R	RN72K1J-680JE	1	435036804R1	NSP
R8055	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8056	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8057	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8075	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8076	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8077	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8078	C-CARBON R	RN72K1J-750JE	1	435037504R1	NSP
R8160	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP
R8161	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP
R8162	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP
R8163	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP
R8164	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP
R8165	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP
R8166	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP
R8204	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP

R8205	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP
R8206	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8207	C-CARBON R	RN72K1J-271JE	1	435032714R1	NSP
R8208	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8210	C-CARBON R	RN72K1J-560JE	1	435035604R1	NSP
R8211	C-R NET	RM7LJ220X04	1	43484722004R2	
R8212	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8213	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8214	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8215	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8216	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8217	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8218	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP
R8219	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP
R8220	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP
R8221	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP
R8222	C-CARBON R	RN72K1J-272JE	1	435032724R1	NSP
R8223	C-CARBON R	RN72K1J-272JE	1	435032724R1	NSP
R8224	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8225	C-R NET	RM7LJ220X04	1	43484722004R2	
R8226	C-R NET	RM7LJ220X04	1	43484722004R2	
R8228	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8229	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8230	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8231	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8232	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8233	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP
R8234	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8236	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8251	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R8252	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP
R8253	C-CARBON R	RN72K1J-221JE	1	435032214R1	NSP
R8254	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP
R8255	C-R NET	RM7LJ220X04	1	43484722004R2	
R8256	C-R NET	RM7LJ220X04	1	43484722004R2	
R8257	C-R NET	RM7LJ220X04	1	43484722004R2	
R8258	C-R NET	RM7LJ220X04	1	43484722004R2	
R8259	C-R NET	RM7LJ220X04	1	43484722004R2	
R8260	C-R NET	RM7LJ220X04	1	43484722004R2	
R8261	C-R NET	RM7LJ220X04	1	43484722004R2	
R8262	C-R NET	RM7LJ220X04	1	43484722004R2	
R8263	C-R NET	RM7LJ220X04	1	43484722004R2	
R8264	C-R NET	RM7LJ220X04	1	43484722004R2	

R8265	C-R NET	RM7LJ220X04	1	43484722004R2		
R8266	C-R NET	RM7LJ220X04	1	43484722004R2		
R8267	C-R NET	RM7LJ220X04	1	43484722004R2		
R8268	C-R NET	RM7LJ220X04	1	43484722004R2		
R8269	C-R NET	RM7LJ220X04	1	43484722004R2		
R8270	C-R NET	RM7LJ220X04	1	43484722004R2		
R8271	C-R NET	RM7LJ220X04	1	43484722004R2		
R8272	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8273	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8274	C-CARBON R	RN72K1J-272FE	1	435032722R1	NSP	
R8275	C-CARBON R	RN72K1J-331FE	1	435033312R1	NSP	
R8276	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8277	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8330	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8331	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8333	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8334	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R8335	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R8336	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R8337	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R8338	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R8339	C-CARBON R	RN72K2E-470JE	1	435224704R1	NSP	
R8401	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8402	C-R NET	RM7LJ220X04	1	43484722004R2		
R8403	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8404	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8405	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8408	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8409	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R8410	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8411	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R8412	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	
R8413	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8416	C-R NET	RM7LJ220X04	1	43484722004R2		
R8417	C-R NET	RM7LJ220X04	1	43484722004R2		
R8418	C-R NET	RM7LJ220X04	1	43484722004R2		
R8419	C-R NET	RM7LJ220X04	1	43484722004R2		
R8420	C-R NET	RM7LJ220X04	1	43484722004R2		
R8421	C-R NET	RM7LJ220X04	1	43484722004R2		
R8422	C-R NET	RM7LJ220X04	1	43484722004R2		
R8423	C-R NET	RM7LJ220X04	1	43484722004R2		
R8424	C-R NET	RM7LJ220X04	1	43484722004R2		
R8425	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	

R8426	C-R NET	RM7LJ220X04	1	43484722004R2		
R8427	C-CARBON R	RN72K1J-100JE	1	435031004R1	NSP	
R8428	C-CARBON R	RN72K1J-100JE	1	435031004R1	NSP	
R8429	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R8430	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R8431	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R8432	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R8433	C-CARBON R	RN72K1J-100JE	1	435031004R1	NSP	
R8434	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8435	C-CARBON R	RN72K1J-823JE	1	435038234R1	NSP	
R8436	C-CARBON R	RN72K1J-330JE	1	435033304R1	NSP	
R8442	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8501	C-CARBON R	RN72K1J-330JE	1	435033304R1	NSP	
R8502	C-CARBON R	RN72K1J-330JE	1	435033304R1	NSP	
R8503	C-CARBON R	RN72K1J-330JE	1	435033304R1	NSP	
R8504	C-R NET	RM7LJ330X04	1	43484733004R2		
R8505	C-R NET	RM7LJ330X04	1	43484733004R2		
R8506	C-CARBON R	RN72K1J-120JE	1	435031204R1	NSP	
R8507	C-R NET	RM7LJ330X04	1	43484733004R2		
R8508	C-R NET	RM7LJ330X04	1	43484733004R2		
R8509	C-R NET	RM7LJ330X04	1	43484733004R2		
R8510	C-R NET	RM7LJ330X04	1	43484733004R2		
R8511	C-R NET	RM7LJ330X04	1	43484733004R2		
R8512	C-R NET	RM7LJ330X04	1	43484733004R2		
R8513	C-R NET	RM7LJ330X04	1	43484733004R2		
R8516	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R8517	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R8518	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R8519	C-CARBON R	RN72K1J-151JE	1	435031514R1	NSP	
R8520	C-CARBON R	RN72K1J-330JE	1	435033304R1	NSP	
R8521	C-CARBON R	RN72K1J-330JE	1	435033304R1	NSP	
R8522	C-R NET	RM7LJ330X04	1	43484733004R2		
R8523	C-CARBON R	RN72K1J-330JE	1	435033304R1	NSP	
R8524	C-CARBON R	RN72K1J-330JE	1	435033304R1	NSP	
R8525	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R8526	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	
R8527	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	
R8528	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	
R8530	C-CARBON R	RN72K1J-105JE	1	435031054R1	NSP	
R8531	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8532	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8533	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8534	C-CARBON R	RN72K1J-330JE	1	435033304R1	NSP	

R8595	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R8607	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R8608	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R8609	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8610	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8617	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R8618	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R8619	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8620	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8627	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R8628	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R8629	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8630	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8637	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R8638	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	
R8639	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8640	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8647	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	<B MDC>
R8648	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	<B MDC>
R8649	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R8650	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R8667	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	<B MDC>
R8668	C-CARBON R	RN72K1J-473JE	1	435034734R1	NSP	<B MDC>
R8669	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R8670	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	<B MDC>
R8672	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R8673	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	<B MDC>
R8674	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R8675	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R8676	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	<B MDC>
R8677	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	<B MDC>
R8678	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP	<B MDC>
R8701	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8702	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8703	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8704	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8705	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8706	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8707	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8708	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8709	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8710	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8711	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	

R8712	C-R NET	RM7LJ222X04	1	43484722204R2		
R8713	C-R NET	RM7LJ222X04	1	43484722204R2		
R8714	C-R NET	RM7LJ222X04	1	43484722204R2		
R8715	C-R NET	RM7LJ103X04	1	43484710304R2		
R8716	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8717	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8718	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8719	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8720	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8721	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8722	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8723	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8724	C-R NET	RM7LJ103X04	1	43484710304R2		
R8725	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8726	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8727	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8728	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8729	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8730	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	
R8731	C-CARBON R	RN72K1J-222JE	1	435032224R1	NSP	
R8732	C-R NET	RM7LJ103X04	1	43484710304R2		
R8733	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8734	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8735	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8736	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8738	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8739	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8740	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8741	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8742	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8743	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8744	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8745	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8746	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8747	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8749	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP	
R8750	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8751	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8752	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP	
R8753	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8754	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8755	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	
R8756	C-CARBON R	RN72K1J-101JE	1	435031014R1	NSP	

R8757	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8758	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8802	C-CARBON R	RN72K1J-100JE	1	435031004R1	NSP
R8803	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP
R8804	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8805	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP
R8806	C-R NET	RM7LJ220X04	1	43484722004R2	
R8807	C-R NET	RM7LJ220X04	1	43484722004R2	
R8808	C-R NET	RM7LJ220X04	1	43484722004R2	
R8809	C-R NET	RM7LJ220X04	1	43484722004R2	
R8810	C-R NET	RM7LJ220X04	1	43484722004R2	
R8811	C-R NET	RM7LJ220X04	1	43484722004R2	
R8812	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP
R8813	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8814	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8815	C-CARBON R	RN72K1J-220JE	1	435032204R1	NSP
R8816	C-R NET	RM7LJ220X04	1	43484722004R2	
R8817	C-R NET	RM7LJ220X04	1	43484722004R2	
R8818	C-R NET	RM7LJ220X04	1	43484722004R2	
R8819	C-R NET	RM7LJ220X04	1	43484722004R2	
R8820	C-R NET	RM7LJ220X04	1	43484722004R2	
R8821	C-R NET	RM7LJ220X04	1	43484722004R2	
R8822	C-R NET	RM7LJ220X04	1	43484722004R2	
R8823	C-R NET	RM7LJ220X04	1	43484722004R2	
R8901	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8902	C-CARBON R	RN72K1J-393JE	1	435033934R1	NSP
R8903	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8904	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8905	C-CARBON R	RN72K1J-000JE	1	435030004R1	NSP
R8906	C-CARBON R	RN72K1J-272JE	1	435032724R1	NSP
R8907	C-CARBON R	RN72K1J-223JE	1	435032234R1	NSP
R8908	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8909	C-CARBON R	RN72K1J-334JE	1	435033344R1	NSP
R8910	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8911	C-CARBON R	RN72K1J-682JE	1	435036824R1	NSP
R8912	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP
R8913	C-CARBON R	RN72K2E-330JE	1	435223304R1	NSP
R8914	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP
R8915	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP
R8916	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP
R8917	C-CARBON R	RN72K1J-472JE	1	435034724R1	NSP
R8918	C-CARBON R	RN72K1J-683JE	1	435036834R1	NSP
R8919	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP

R8920	C-CARBON R	RN72K2E-330JE	1	435223304R1	NSP	
R8924	C-CARBON R	RN72K1J-103JE	1	435031034R1	NSP	
R8951	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	
R8952	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R8953	C-CARBON R	RN72K1J-562JE	1	435035624R1	NSP	
R8954	C-CARBON R	RN72K1J-273FE	1	435032732R1	NSP	
R8956	C-CARBON R	RN72K1J-103FE	1	435031032R1	NSP	
R8961	C-CARBON R	RN72K1J-102JE	1	435031024R1	NSP	
R8962	C-CARBON R	RN72K1J-104JE	1	435031044R1	NSP	
R8963	C-CARBON R	RN72K1J-182JE	1	435031824R1	NSP	
R8964	C-CARBON R	RN72K1J-392FE	1	435033922R1	NSP	
R8965	C-CARBON R	RN72K1J-563FE	1	435035632R1	NSP	
R8966	C-CARBON R	RN72K1J-103FE	1	435031032R1	NSP	
[SW TRM]						
JL801B	WIRE TRAP	NPLG-5P588	1	25055626		
P2801B	SOCKET	NSCT-9P2139	1	25052242		
P8001B	SOCKET	IMSA-9111S-16L	1	25053258		
P8002B	SOCKET	IMSA-9111S-24L	1	25053259		
P8011	SOCKET	IMSA-9618S-04A	1	25053329R2		
P8302	SOCKET	HDMI(47266-4101)	1	25053389R3		
P8302 or	SOCKET	YKF45-7037V	(1)	25053253R3		
P8601	SOCKET	HDMI(47266-4101)	1	25053389R3		
P8601 or	SOCKET	YKF45-7037V	(1)	25053253R3		
P8611	SOCKET	HDMI(47266-4101)	1	25053389R3		
P8611 or	SOCKET	YKF45-7037V	(1)	25053253R3		
P8621	SOCKET	HDMI(47266-4101)	1	25053389R3		
P8621 or	SOCKET	YKF45-7037V	(1)	25053253R3		
P8631	SOCKET	HDMI(47266-4101)	1	25053389R3		
P8631 or	SOCKET	YKF45-7037V	(1)	25053253R3		
P8641	SOCKET	HDMI(47266-4101)	1	25053389R3		<B MDC>
P8641 or	SOCKET	YKF45-7037V	(1)	25053253R3		<B MDC>
P8651	SOCKET	HDMI(47266-4101)	1	25053389R3		<B MDC>
P8651 or	SOCKET	YKF45-7037V	(1)	25053253R3		<B MDC>
P8661	SOCKET	YKF45-7037V	1	25053253R3		<B MDC>
P8662	SOCKET	HDMI(47266-4101)	1	25053389R3		<B MDC>
P8662 or	SOCKET	YKF45-7037V	(1)	25053253R3		<B MDC>
P8702	SOCKET	NSCT-9P2472	1	25052575R2		

ONKYO CORPORATION

Service Dept. Technical Support : 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN
Tel: 072-831-8023 Fax: 072-831-8163

ONKYO U.S.A. CORPORATION

18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.
Tel: 800-229-1687, 201-785-2600 Fax: 201-785-2650 <http://www.us.onkyo.com/>

ONKYO EUROPE ELECTRONICS GmbH

Liegnitzerstrasse 6, 82194 Groebenzell, GERMANY
Tel: +49-8142-4401-0 Fax: +49-8142-4401-555 <http://www.eu.onkyo.com/>

ONKYO EUROPE ELECTRONICS GmbH (UK BRANCH)

The Coach House 81A High Street, Marlow, Buckinghamshire, SL7 1AB, UK
Tel: +44-(0)1628-473-350 Fax: +44-(0)1628-401-700

ONKYO CHINA LIMITED

Unit 1&12, 9/F, Ever Gain Plaza Tower 1, 88, Container Port Road, Kwai Chung,
N.T., Hong Kong. Tel: 852-2429-3118 Fax: 852-2428-9039
<http://www.ch.onkyo.com/>

