


AV RECEIVER

Service Manual

TX-RZ3100

✓ Pre Issue (2016-Oct)

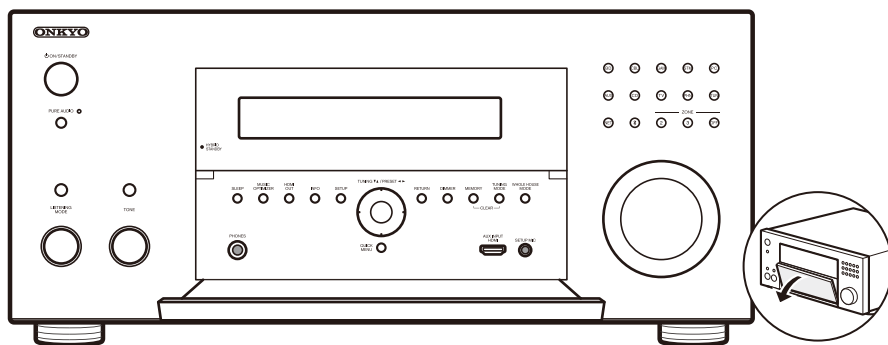

CONTENTS

- ✓ [Title Page \(This page\)](#)
- ✓ [Note for Parts List](#)
- ✓ [Panel](#)
- ✓ [Reset](#)
- ✓ [Protection](#)
- ✓ [Model and Destination](#)
- ✓ [WiFi 5GHz Setting](#)
- ✓ [Firmware](#)
- Hookup and Setting
- Trouble Shoot
- Disassembly
- ✓ [Schematic Diagram](#)
- ✓ [Exploded View](#)
- Appendix

SAFETY-RELATED COMPONENT WARNING!! : COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL. MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.



This service manual is intended for qualified service technicians; it is not meant for the casual do-it-yourselfer. Qualified technicians have the necessary test equipment and tools, and have been trained to properly and safely repair complex products such as those covered by this manual. Improperly performed repairs can adversely affect the safety and reliability of the product and may void the warranty. If you are not qualified to perform the repair of this product properly and safely, you should not risk trying to do so and refer the repair to a qualified service technician.


ONKYO®

Published by Onkyo & Pioneer Corporation Global CS Department

File Name of Parts List File (EXCEL File)

Note for Parts List

When parts list is EXCEL file, please refer to the following explanation about file name.

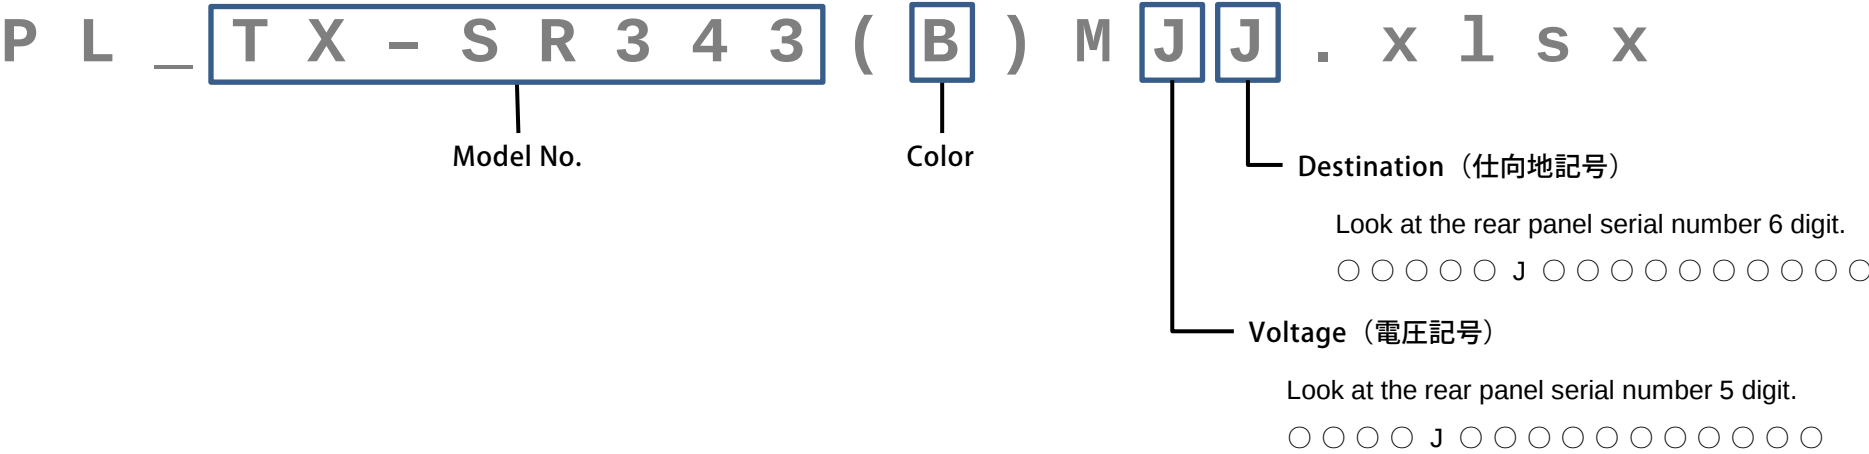


Color (色記号)			
(X)	Not related to color		
(B)	Black	(M)	Wood
(BR)	Brown	(O)	Orange
(C)	Cherry	(P)	Pink
(G)	Gold	(R)	Red
(GR)	Green	(S)	Silver
(H)	Gray	(V)	Violet
(K)	Black	(W)	White
(L)	Blue	(Y)	Yellow
(LB)	Light Blue		


Voltage (電圧記号)	
D	120V AC
G	220~230V
H	220~230／240V
J	100V AC
M	220~240V AC
P	230V AC
U	100~240V AC
V	110~240V
W	120V／220~240V
Speaker System (without AMP.) :	
0	Passive Subwoofer
F	Front Speaker
C	Center Speaker
R	Rear Speaker
B	Back Speaker

Destination (仕向地記号)		
A	Australia	Speaker System (without AMP.) :
B	United Kingdom	
C	North American	
D	USA	
F	Taiwan	
J	Japan	
K	Korea	
L	Russia	
P	Europe	
Q	Hong Kong	
R	China	
S	Brazil	L Left channel
T	Thai	
U	Worldwide	
		R Right channel
		0 Center channel

Front Panel

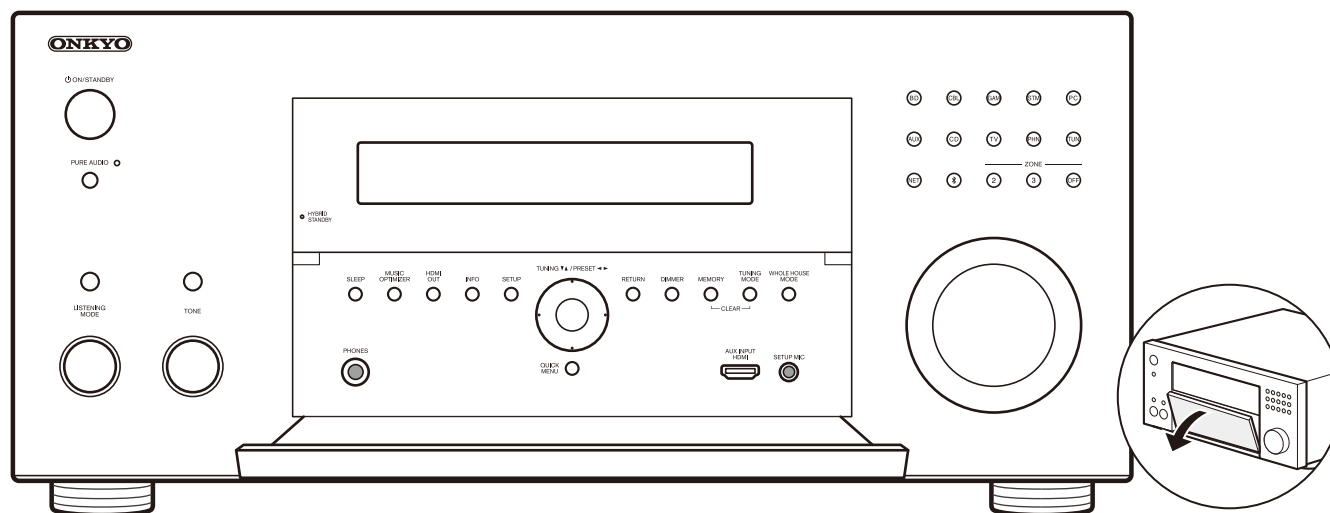


Rear Panel

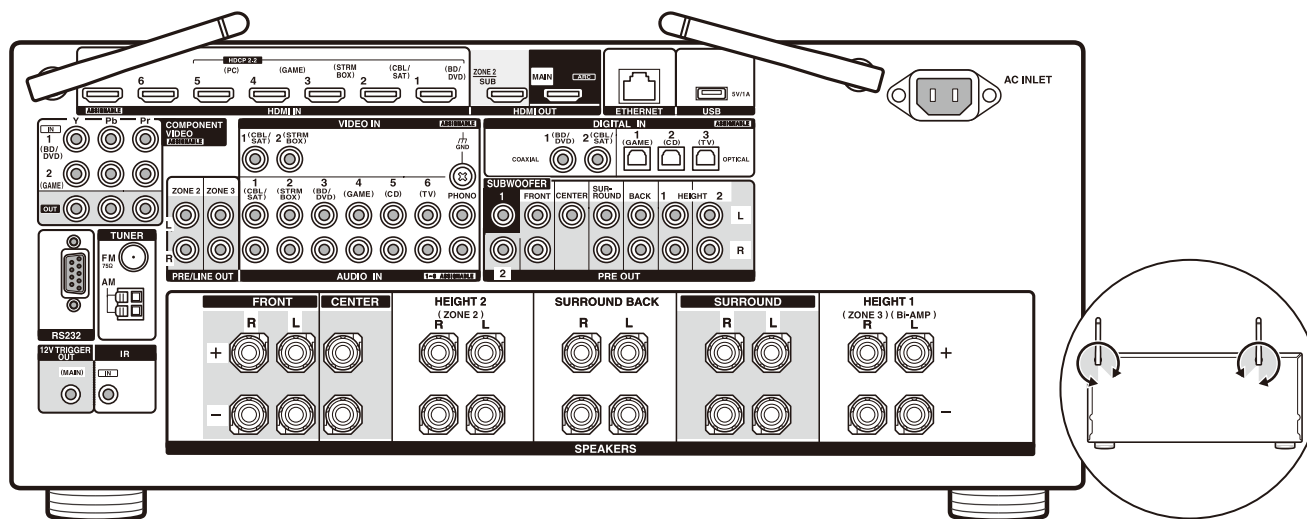

Panel

Remote Control Unit RC-926R

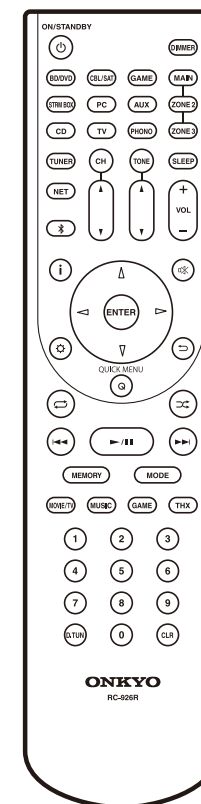

Accessory

1. Remote controller (RC-926R) ×1
- Batteries (AA/R6) ×2
2. Indoor FM antenna ×1
3. AM loop antenna ×1
4. Speaker setup microphone ×1
5. Power cord ×1

How to Reset the Unit

- Step1.

STORE (To save user preferences.)
While pressing [SETUP] button, press [ENTER] button twice.
- Step2.

RESET
While pressing [CBL] or [CBL/SAT] button, press [ON/STANDBY] button.
※) "Clear" appears on the display and the unit returns to standby. Do not
unplug the power cord until "Clear" disappears from the display.
- Step3.

RECALL (To load user preferences.)
While pressing [SETUP] button, press [RETURN] button twice.

Process List

Protection

Item (signal name)	Detection Method	Status of Equipment	Warning Indication	Service information display	Recovery Procedure
DC detection (XDCERR)	Observe with 20 msec interval and Decide by 2 times continuously low level detection.	Case A) When detect XDCERR continuously after previously shutdown by XDCERR. (At the start of power on) 1) MUTE on and Speaker Relay off. 2) Flashes "AMP ERR". 3) Shuts down when abnormality continues for more than 3 seconds. *Operation (except recovery procedure) is disabled. Case B) When detect XDCERR while normal operation. 1) MUTE on and Speaker Relay off. 2) Flashes "AMP ERR". 3) Shuts down when abnormality continues for more than 3 seconds. *Operation (except recovery procedure) is disabled for 1 minute.	Case A) Blinks Hybrid standby LED indicator. (2Hz) Case B) Blinks Hybrid standby LED indicator. (1Hz)	DC	INFO + ZONE(long press)
Over Current Detection (XOLERR)	Observe with 20 msec interval and Decide by low level detection.	Shut down	N/A	OL	POWER ON
Combination of DC and Overcurrent	Decide by Over Current detection within 3 seconds after DC detection.	Shut down	N/A	COM	POWER ON
Overheat Detection (TEMPERR5)	Observe with 20 msec interval and Decide by 2 times continuously low level detection.	1) Flashes "AMP OVERHEAT". 2) Shuts down when abnormality continues for more than 3 seconds. *Operation (except recovery procedure) is disabled for 1 minute.	Blinks Hybrid standby LED indicator. (1Hz)	STMP	INFO + ZONE(long press)
XVDDERR failure Detection (XVDDERR)	Observe with 20 msec interval and Decide by 10 times continuously low level detection.	Shut down	N/A	DERR	POWER ON
Amplifier Power Supply Failure Detection (XBERR)	A/D conversion with 5 msec interval and Decide by 8 times continuously low level detection.	Shut down *Operation (except recovery procedure) is disabled.	Blinks Hybrid standby LED indicator. (2Hz)	BERR	INFO + ZONE(long press)
AC Pulse failure Detection (ACWP)	Observe with 1~ 2 msec interval.	1) There are no change of signal(low or high) among 32 msec. Turn on the mute. 2) There are change of signal among 32msec to 42msec. Turn off the mute and reset the count. 3) There are no change of signal among 42msec. Shutdown.	N/A	N/A	POWER ON
Fan Abnormality Detection (XFANERR)	Observe with 20 msec interval and Decide by 2 times continuously low level detection.	1) Flashes "FAN STOP". 2) Shuts down when abnormality continues for more than 3 seconds.	N/A	FAN	POWER ON

Service information (Detected protection history)

Protection

Purpose

The number of detections for various protection processes are displayed.

How to enter to service information mode.

Step1 :
[INFO] + [ON/STANDBY] x 2

M1.xx / xxxxxAxx — The version of main microprocessor.


Step2 :
[SETUP]

DC : * * DERR : * *

DC : DC Detection DERR : XVDERR failure Detection

Count of each protect

Step3 :
[TUNING UP] or [TUNING DOWN]

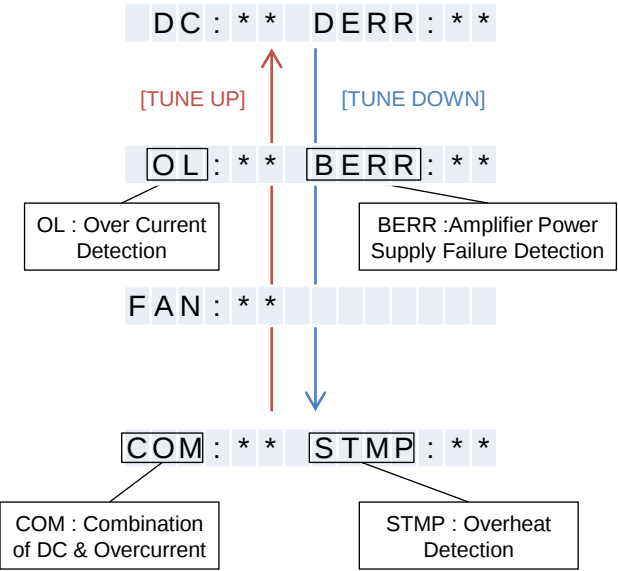

How to exit the service information mode.

Step :
[INFO]

Normal Display

How to initialize the data in the service information.

Step :
[RETURN]


ProtectDataCLR

*Unit will once become standby and then turn on again automatically.

Detection circuit


DC Detection

Protection

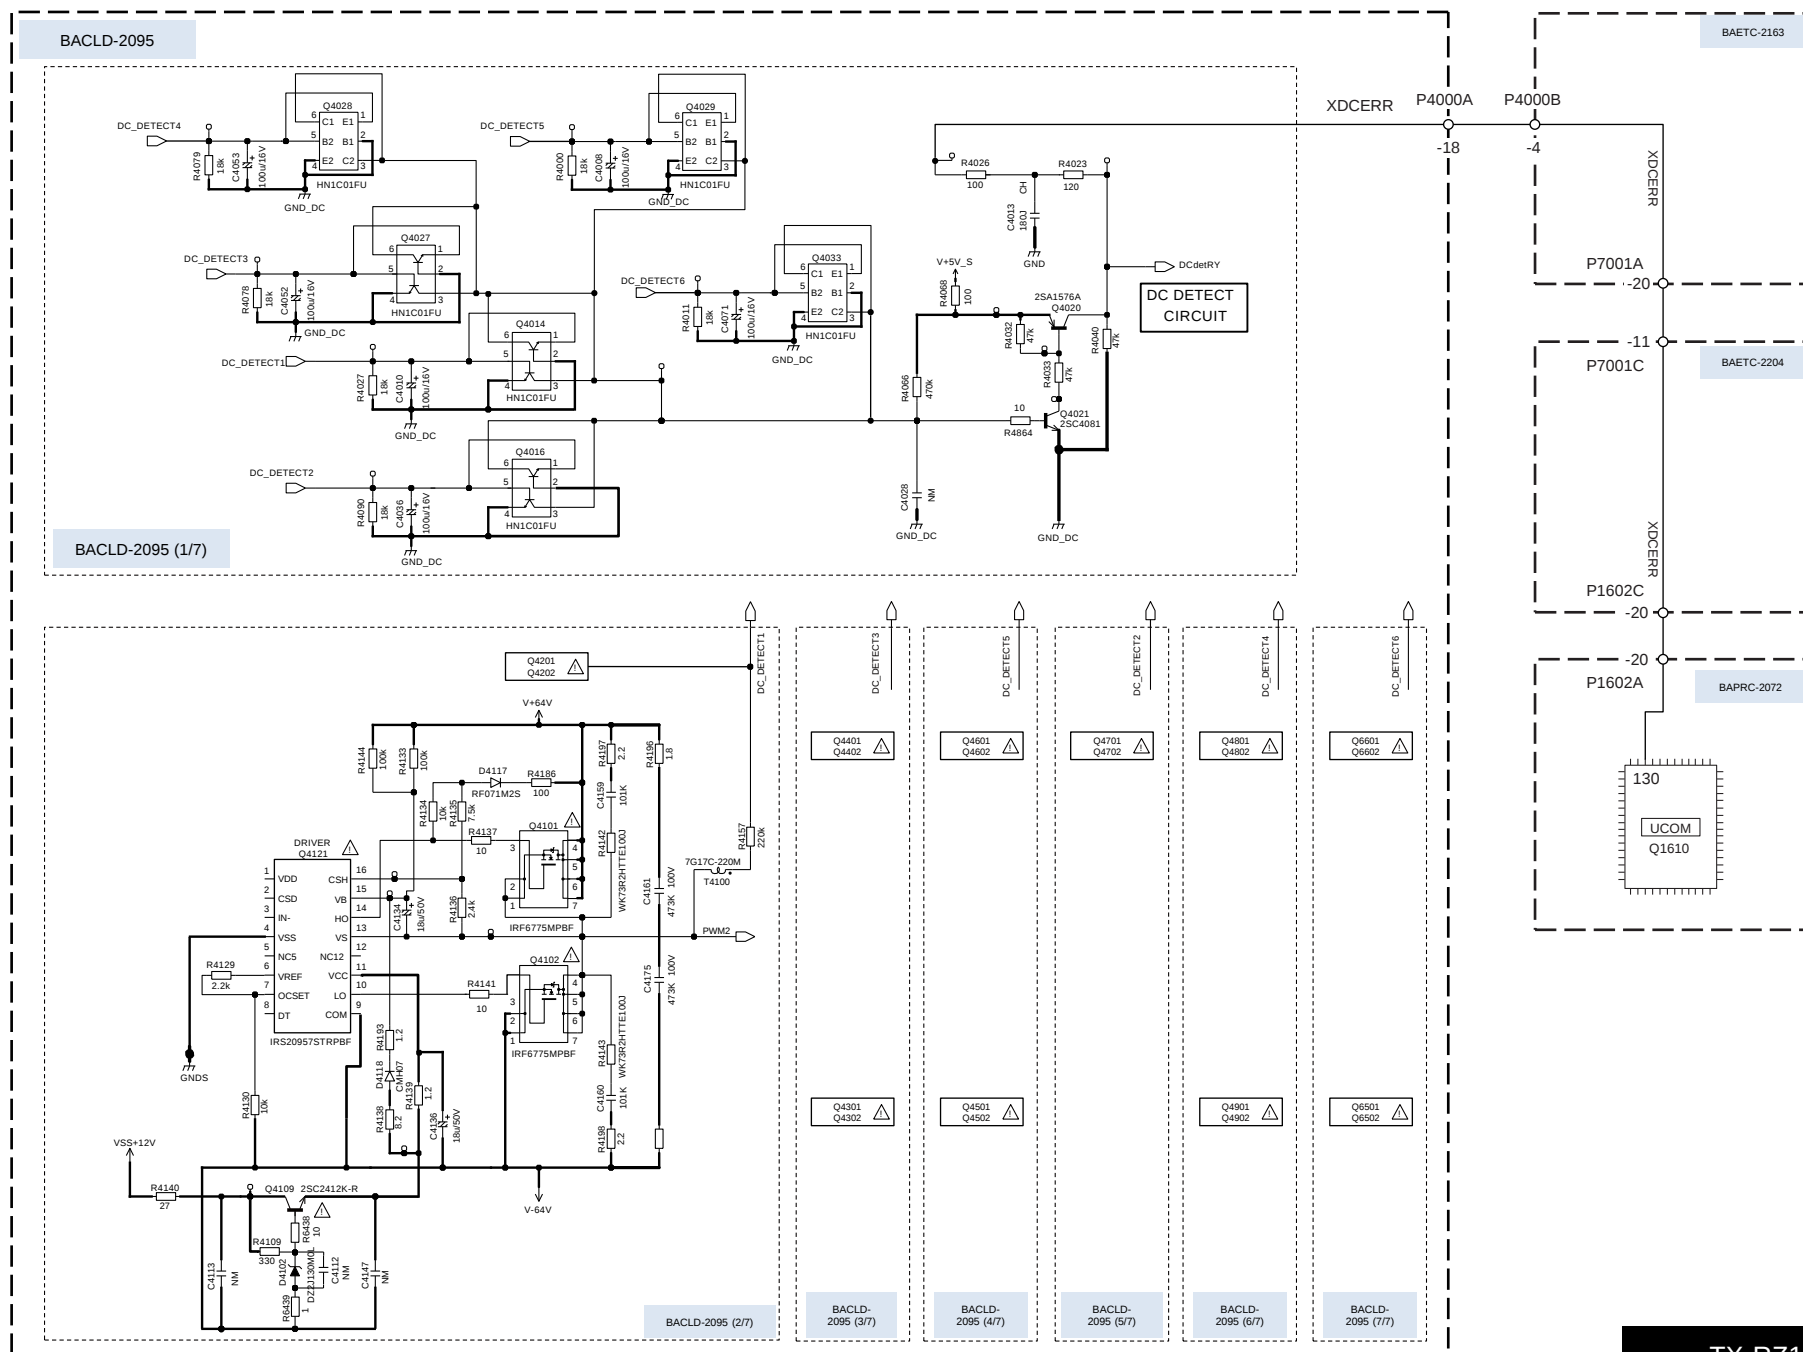

TX-RZ1100/3100


Over Current Detection of MOS FET in Output Stage

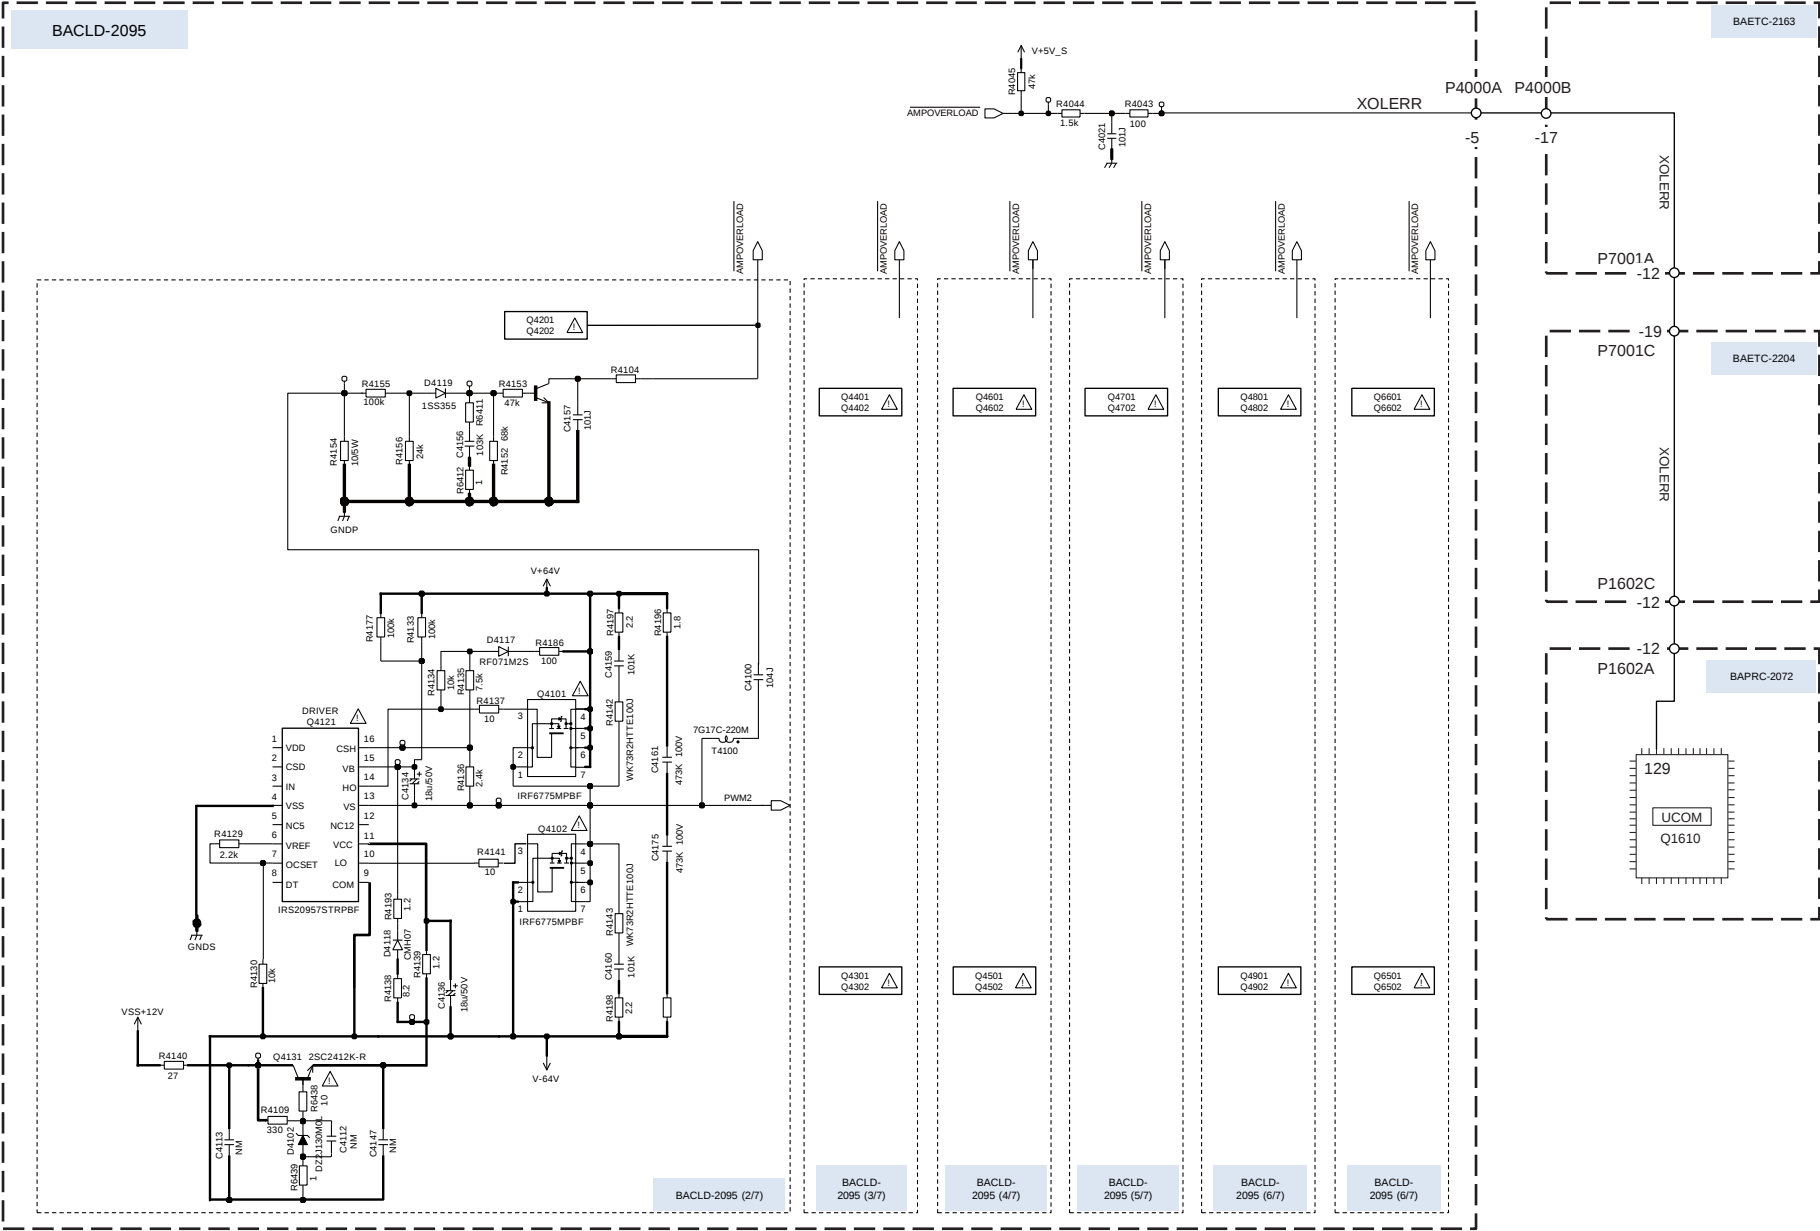

Detection circuit


Fan Abnormality Detection

Protection

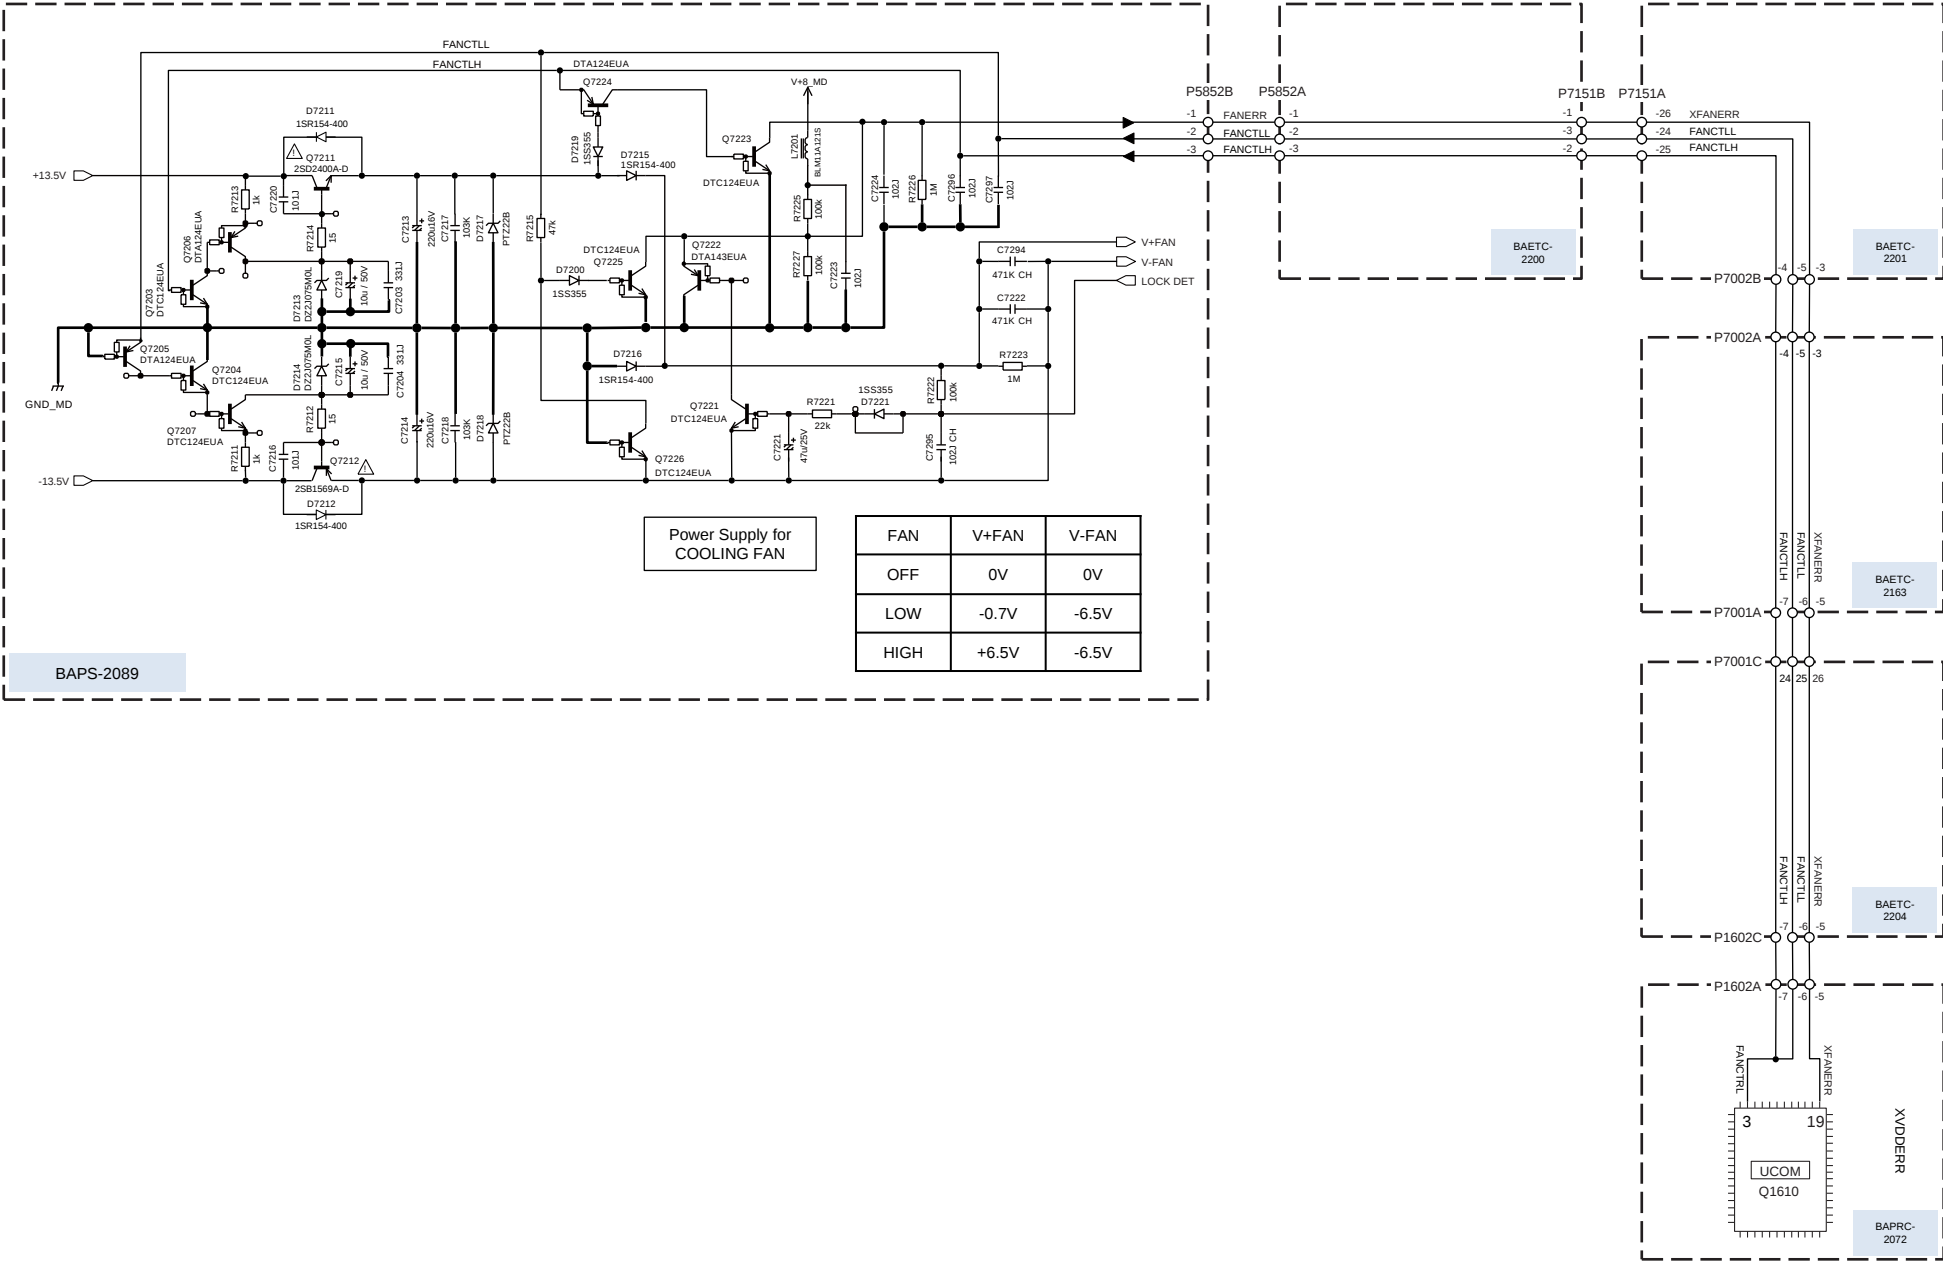

Overheat Detection


TX-RZ1100/3100

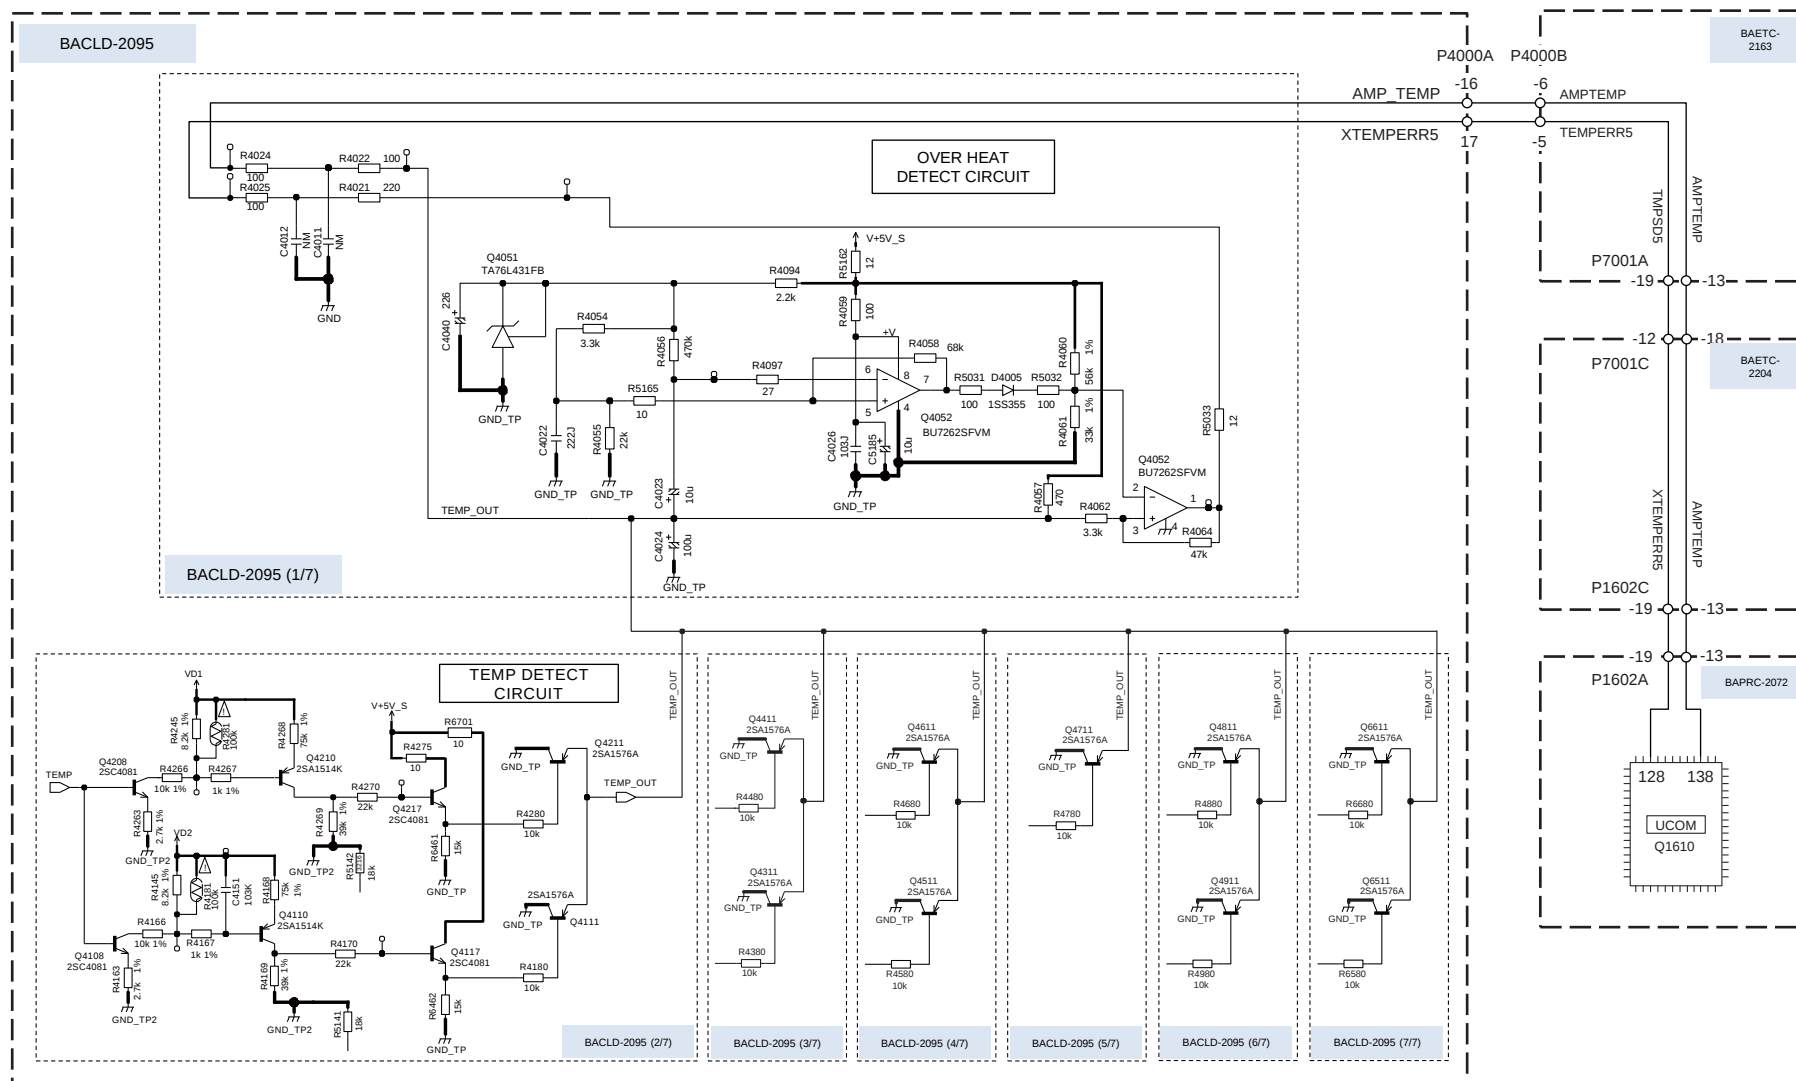


Detection circuit

Protection


XVDDERR Detection

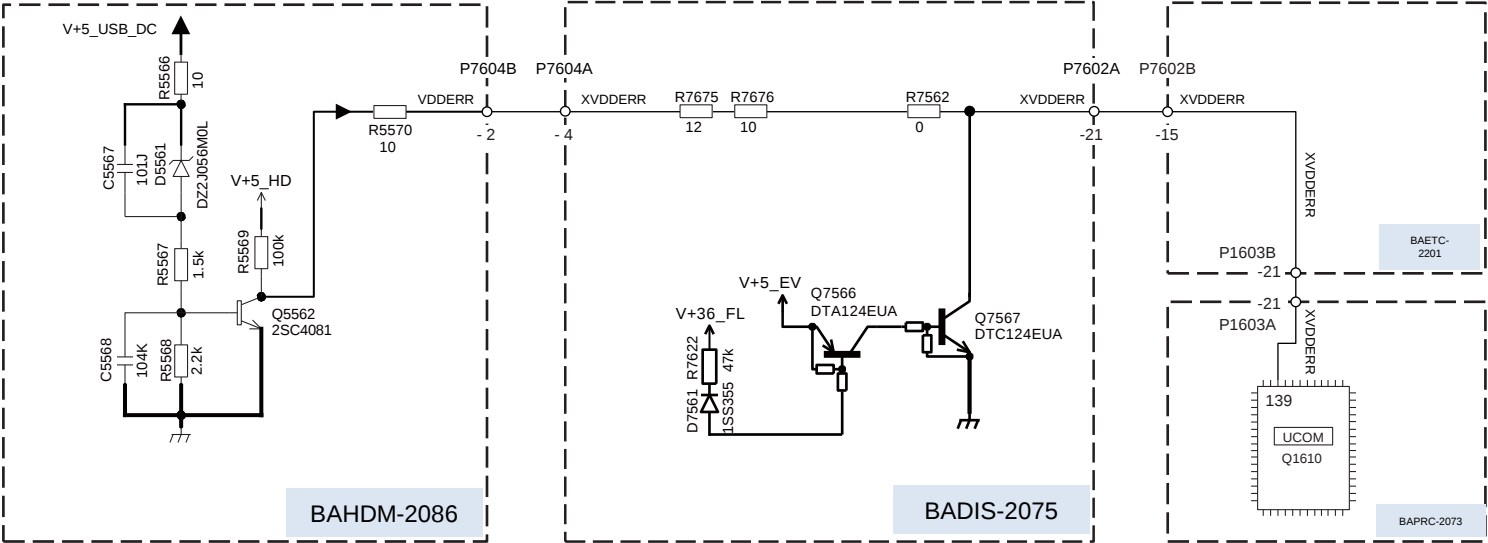

AC Pulse failure Detection

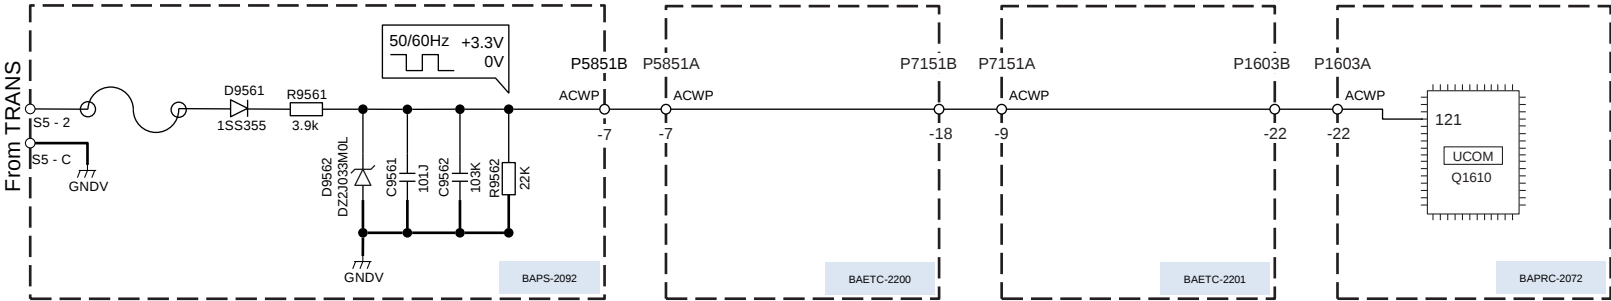

Amplifier Power Supply Failure Detection

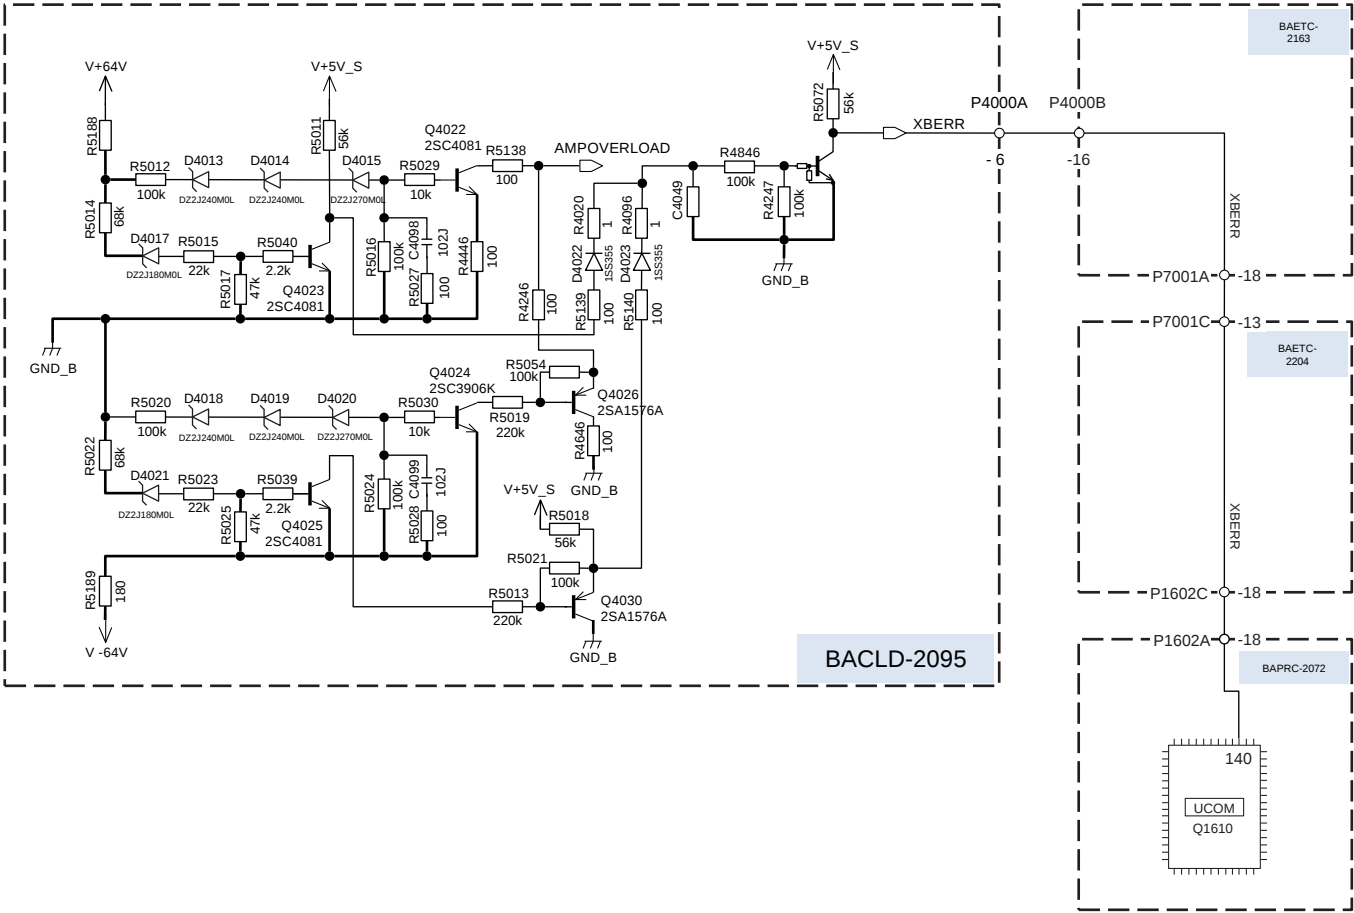

How to check Model & Destination

Model & Destination

- Step1 : Set VOL Level = 40
- Step2 : [TV] + [ON/STANDBY] → [DIMMER] → [TONE+] x 5

Model Name	Distination	FL Display													
TX-RZ1100	DC	R	Z	1	1	0	0		D	C		0	7	0	0
TX-RZ1100	xx	R	Z	1	1	0	0		x	x		0	7	1	0
TX-RZ1100	xR	R	Z	1	1	0	0		x	R		0	7	5	0
DRX-7	DD	D	R	X	-	7			D	D		1	7	0	0
DRX-7	xA	D	R	X	-	7			x	A		1	7	4	0
TX-RZ3100	DC	R	Z	3	1	0	0		D	C		0	8	0	0
TX-RZ3100	xx	R	Z	3	1	0	0		x	x		0	8	1	0
TX-RZ3100	xR	R	Z	3	1	0	0		x	R		0	8	5	0
DRX-R1	DD	D	R	X	-	R	1		D	D		1	8	0	0
DRX-R1	xx	D	R	X	-	R	1		x	x		1	8	1	0
DRX-R1	JJ	D	R	X	-	R	1		J	J		1	8	2	0
DRX-R1	xR	D	R	X	-	R	1		x	R		1	8	5	0
PR-RZ5100	DC	R	Z	5	1	0	0		D	C		0	9	0	0
PR-RZ5100	xx	R	Z	5	1	0	0		x	x		0	9	1	0
PR-RZ5100	xR	R	Z	5	1	0	0		x	R		0	9	5	0
DRC-R1	DD	D	R	C	-	R	1		D	D		1	9	0	0
DRC-R1	JJ	D	R	C	-	R	1		J	J		1	9	2	0
DRC-R1	xA	D	R	C	-	R	1		x	A		1	9	4	0
DRC-R1	xR	D	R	C	-	R	1		x	R		1	9	5	0

This list is MCU internal value,
And The destination code of this list,
it is different from Wi-Fi 5GHz setting Destination Code

IMPORTANT!!

Back Ground:

It is totally different from Radio Law at the each country on 5GHz band.
It means it is totally different from enabled Channel of 5GHz band at the each country.
We define the “Country Code” for 5GHz band.
You must set up the appropriate country code to the product.

Example;

Case1:
When you use the “P” destination products and bring move to Russia or Israel,
If you did not setup change country code and use in Russia and Israel,
You will be on the illegal Radio Law in Russia and Israel.
Case2;
When you use “C” or “D” destination product bring move to Japan or Taiwan,
If you did not setup change country code and use in Japan and Taiwan,
You will be on the illegal Radio Law in Japan and Taiwan.

Service Parts information:

The default country code is set on “Processing Circuit Board(PRC board)”.
You must make sure and set up the “Country Code” when you replace the processing circuit pc board (i.e. BAPRC-2072).
Otherwise You and your customer should be on the illegal Radio Law and

IT HAS POSSIBILITY TO HAVE A RISK OF
PUNISHMENT FROM EACH COUNTRY GOVERNMENT.

If you did not make sure country code and no setup code and face any trouble,
We does not have any responsibility.

For setting up the Country Code,
Please ask the procedure of changing country code
to your distributor or our sales.
It is no described the procedure of changing Country Code on this Service Manual

If you have any trouble of unclear procedure for update country code,
Please contact our sales department.

PRC Board Default Value of Country Code

The PRC board is already set default Country Code by the representative destination.
To confirm the default country code, Please refer to the "How to read PRC Board part
number and Default value of Country Code" section.

IMPOTANT!!**Make sure and Setup Country Code**


You have to make sure country code for using or replacing “Processing Circuit PC Board”.

It means that you have to make sure [country code](#) between using Processing Circuit PC board(PRC Board) and your customer’s country code.


When it is not match PRC board default country code and customer’s country, you have to setup [Country Code](#).

Case3;


When you repair the “P” destination products and replace “P” destination PRC Board and the customer live in UK, It is no necessary to setup Country Code
Because “P” destination PRC board already setup “EU” country code.

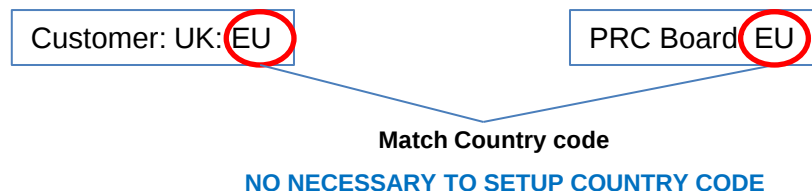**Case4;**


When you repair the “P” destination products and replace “P” destination PRC board and the customer live in Russia, It is necessary to setup Country Code
Because “P” destination PRC Board already setup “EU” country code.
However, the customer’s country code is “RU”. It means no match PRC Board code and Customer’s code.

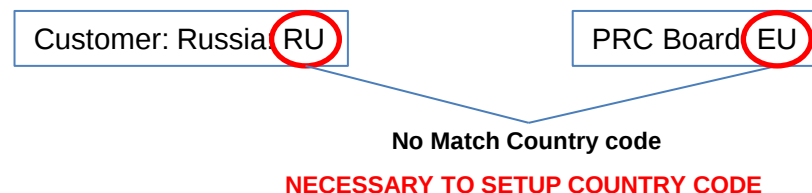**Case5;**

When you repair the “C” destination products and replace “C” destination PRC board and the customer live in US, it is no necessary to setup Country Code
Because “C” destination PRC board already setup “US” country code.

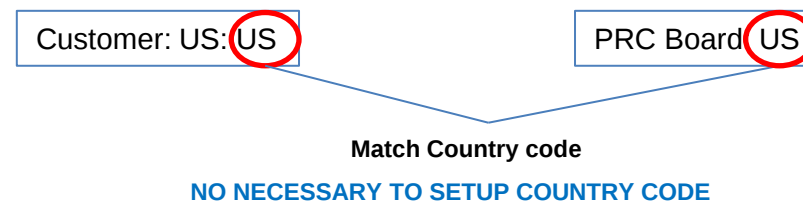**Case6;**

When you repair the “C” destination product and replace “C” destination PRC board and the customer live in Taiwan, It is necessary to setup Country Code.
Because “C” destination PRC Board already setup “US” country code as default.
However, the customer’s country code is “TW”. It means no match PRC Board code and the customer’s country code

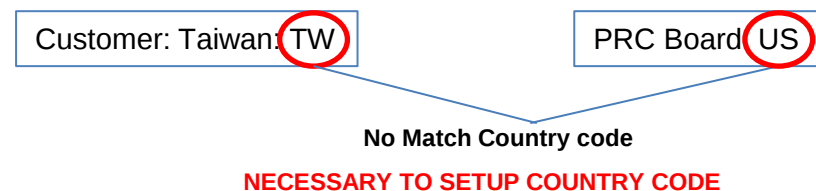

Region	Country	Code
America	USA	US
	Canada	US
	Mexico	US
	Brazil	US
	Chile	CL
	Guatemala	US
	Puerto Rico	US
	Trinidad	TT
	Dominican Rep	US
	Argentina	AR
	Ecuador	US
	Paraguay	PY
	Colombia	US
	Guam	US
	Panama	US
	Costa Rica	US
	Uruguay	UY
	Peru	PE

Region	Country	Code
Asia / Oceania	Japan	JP
	China	CN
	Hong Kong	EU
	Korea	KR
	Taiwan	TW
	Singapore	SG
	Malaysia	MY
	Philippines	EU
	Vietnam	EU
	Indonesia	ID
	Sri Lanka	EU
	Australia	AU
	New Zealand	AU
	Thailand	EU
	India	IN
	Pakistan	PK

Region	Country	Code
Middle East	UAE	EU
	Bahrain	BH
	Kuwait	KW
	Oman	EU
	Qatar	QA
	Lebanon	EU
	Jordan	JO
	Saudi Arabia	EU

Region	Country	Code
Europe / Africa	Germany	EU
	UK	EU
	France	EU
	Netherlands	EU
	Italy	EU
	Switzerland	EU
	Denmark	EU
	Sweden	EU
	Austria	EU
	Belgium	EU
	Spain	EU
	Norway	EU
	Finland	EU
	Czech	EU
	Israel	IL
	Ukraine	EU
	Hungary	EU
	Slovakia	EU
	Luxembourg	EU
	Turkey	EU
	Portugal	EU
	Malta	EU
	Latvia	EU
	Poland	EU

Region	Country	Code
Europe / Africa	Cyprus	EU
	Estonia	EU
	Slovenia	EU
	Bulgaria	EU
	Greece	EU
	Romania	EU
	Lithuania	EU
	Serbia	EU
	Croatia	EU
	Ireland	EU
	Macedonia	EU
	Moldova	EU
	Russia	RU
	Andorra	EU
	Armenia	EU
	Azerbaijan	EU
	Belarus	EU
	Bosnia and Herzegovina	EU
	Northern Cyprus(Turkey)	EU
	Georgia	EU
	Iceland	EU
	Kazakhstan	EU

Region	Country	Code
Europe / Africa	Liechtenstein	EU
	Monaco	EU
	Montenegro	EU
	San Marino	EU
	Vatican City	EU
	Kosovo	EU
	Kaliningrad(Russia)	RU
	Gibraltar(UK)	EU
	Canary Islands(Spain)	EU
	Ceuta	EU
	Melilla	EU
	Morocco	MA
	Algeria	EU
	Tunisia	TN
	Egypt	EG
	Mauritius	US
	South Africa	EU

1B5142072-1A310MDC

Board No.

Suffix No.

Model Number Last 3 Digit

- 110 : TX-RZ1100
- 310 : TX-RZ3100
- 100 : PR-RZ5100

Destination

PRC Board Default setting Country Code

Dst	Code	Main Country
C	US	North America
D	US	United State
S	US	Brazil
P	EU	Europe
B	EU	United Kingdom
Q	EU	Hong Kong
T	EU	Thai
L	RU	Russia
A	AU	Australia / New Zealand
R	CN	China
F	TW	Taiwan
K	KR	Korea
J	JP	Japan

How to check Firmware Version & Preparation of Update

Firmware

- Step1** : [INFO] + [ON/STANDBY] x 2
Main Firmware Version will appear on the main unit's display.
- Step2** : [TONE +1] (Rotate "TONE" knob right 1 click)
NET Firmware Version will appear on the main unit's display.
- Step3** : [TONE +2] (Rotate "TONE" knob right 2 click)
DSP1 Firmware Version will appear on the main unit's display.
- Step4** : [TONE +3] (Rotate "TONE" knob right 3 click)
DSP2 Firmware Version will appear on the main unit's display.
- Step5** : [TONE +4] (Rotate "TONE" knob right 4 click)
DSP2 Firmware Version will appear on the main unit's display.
- Step6** : [TONE +5] (Rotate "TONE" knob right 5 click)
Video Firmware Version will appear on the main unit's display.
- Step7** : [TONE +6] (Rotate "TONE" knob right 6 click)
OSD Firmware Version will appear on the main unit's display.
- Step8** : [TONE +7 over] (Push Up Key 7 click over)
Return to Display Main Firmware Version (Return Step1)
- When it is rotated TONE knob to left , the order will be reversed.

[Preparation of Update]

1. Connect the USB storage device to your PC. If there is any data in the USB storage device, remove it.
2. Download the firmware file (package file) from the service website normally accessed.

Filename is as follows: ONKAVR0022*****.zip

Unzip the downloaded file. A following file is created.

ONKAVR0022*****.of0
ONKAVR0022*****.of1
ONKAVR0022*****.of2
ONKAVR0022*****.of3
ONKAVR0022*****.of4

3. Copy it to the USB storage device. Be careful not to copy the zip file.
4. Remove the USB storage device from your PC.

How to Update (service mode) 1/2

Overwriting is also possible.

1. Connect the USB storage to the USB port on the unit.



2. Turn on the unit. It takes some time to start after you switch on the unit.

Press: [INFO] + [ON/STANDBY] x 2

3. Press [RETURN] button, Then it is displayed as below



If you need each module of the firmware update, you can select the module by pressing PRESET < and > button.

If you need change source NET or USB, you can select the source by pressing TUNING UP and Down key

It should be updated firmware by selecting USB -> ALL normally.

Please do NOT choose T-SRV(it is test server)

Firmware

USB -> ALL: ALL firmware update (default)

USB -> DSP1: DSP1 firmware update

USB -> DSP2: DSP2 firmware update

USB -> DSP3: DSP3 firmware update

USB -> OSD: OSD firmware update

USB -> VMPU: VMPU firmware update

USB -> NET: NET firmware update

USB -> MMPU: Main MPU firmware update

USB -> WORK: Compare between AVR and USB, Only update new version firmware

NET -> ALL: ALL firmware update (default)

NET -> DSP1: DSP1 firmware update

NET -> DSP2: DSP2 firmware update

NET -> DSP3: DSP3 firmware update

NET -> OSD: OSD firmware update

NET -> VMPU: VMPU firmware update

NET -> NET: NET firmware update

NET -> MMPU: Main MPU firmware update

NET -> WORK: Compare between AVR and server, Only update new version firmware

The default setting is " ALL"



**CAUTION: When you will update each module firmware,
you have to keep combination of firmware.**

TX-RZ1100/3100/PR-RZ5100

4. Press [ENTER] button. Start update firmware.



5. Wait until update is completed. When the update ends, "Completed!" is displayed. When " Completed!" message appeared, you can power off by pressing " ON/STANDBY" button.



6. Press [ON/STANDBY] button, and the unit turns on.

7. Check the new FW version number.


<Note>

If the procedure might not be successful, please select "USB -> ALL".

BAPRC-2072 (1/14)

F/W
MAIN_UPG
P1604

To BAPRC-2072(6/14)

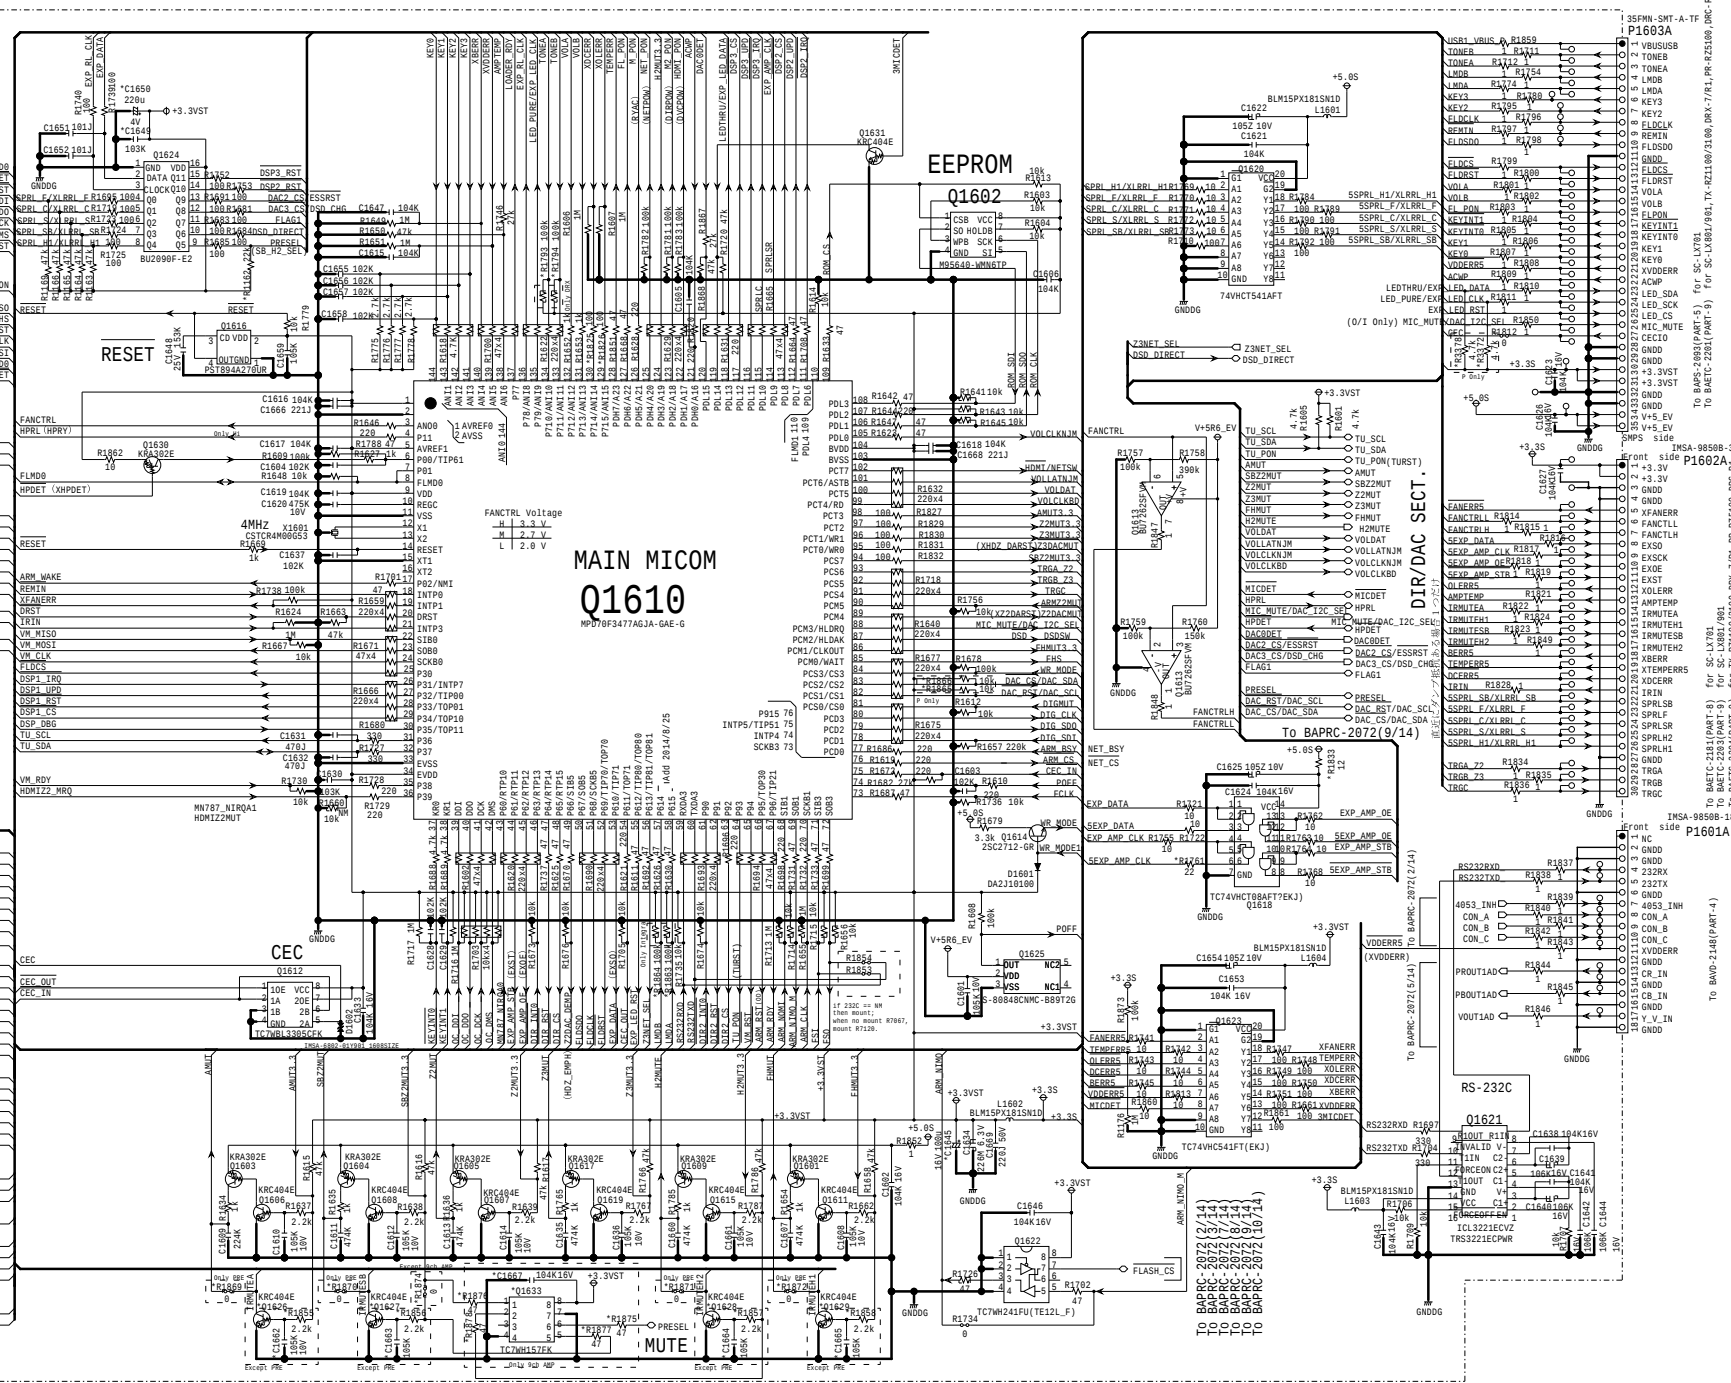To BAPRC-2072(3/14)
To BAPRC-2072(7/14)
To BAPRC-2072(8/14)
To BAPRC-2072(9/14)
To BAPRC-2072(10/14)To BAPRC-2072(2/14)
To BAPRC-2072(4/14)
To BAPRC-2072(5/14)
To BAPRC-2072(6/14)
To BAPRC-2072(7/14)
To BAPRC-2072(8/14)
To BAPRC-2072(9/14)
To BAPRC-2072(10/14)To BAPRC-2072(3/14)
To BAPRC-2072(7/14)
To BAPRC-2072(8/14)
To BAPRC-2072(9/14)
To BAPRC-2072(10/14)

Schematic Diagram

A	B	C	D	E
---	---	---	---	---

A



Schematic Diagram

MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM(PART-1) VSP SECTION

BAPRC-2072 (3/14)

To BAPRC-2072(4/14)

To BAPRC-2072(5/14)

To BAPRC-2072(10/14)


To BAPRC-2072(1/14)

To BAPRC-2072(2/14)

To BAPRC-2072(7/14)

To BAPRC-2072(8/14)

To BAPRC-2072(10/14)

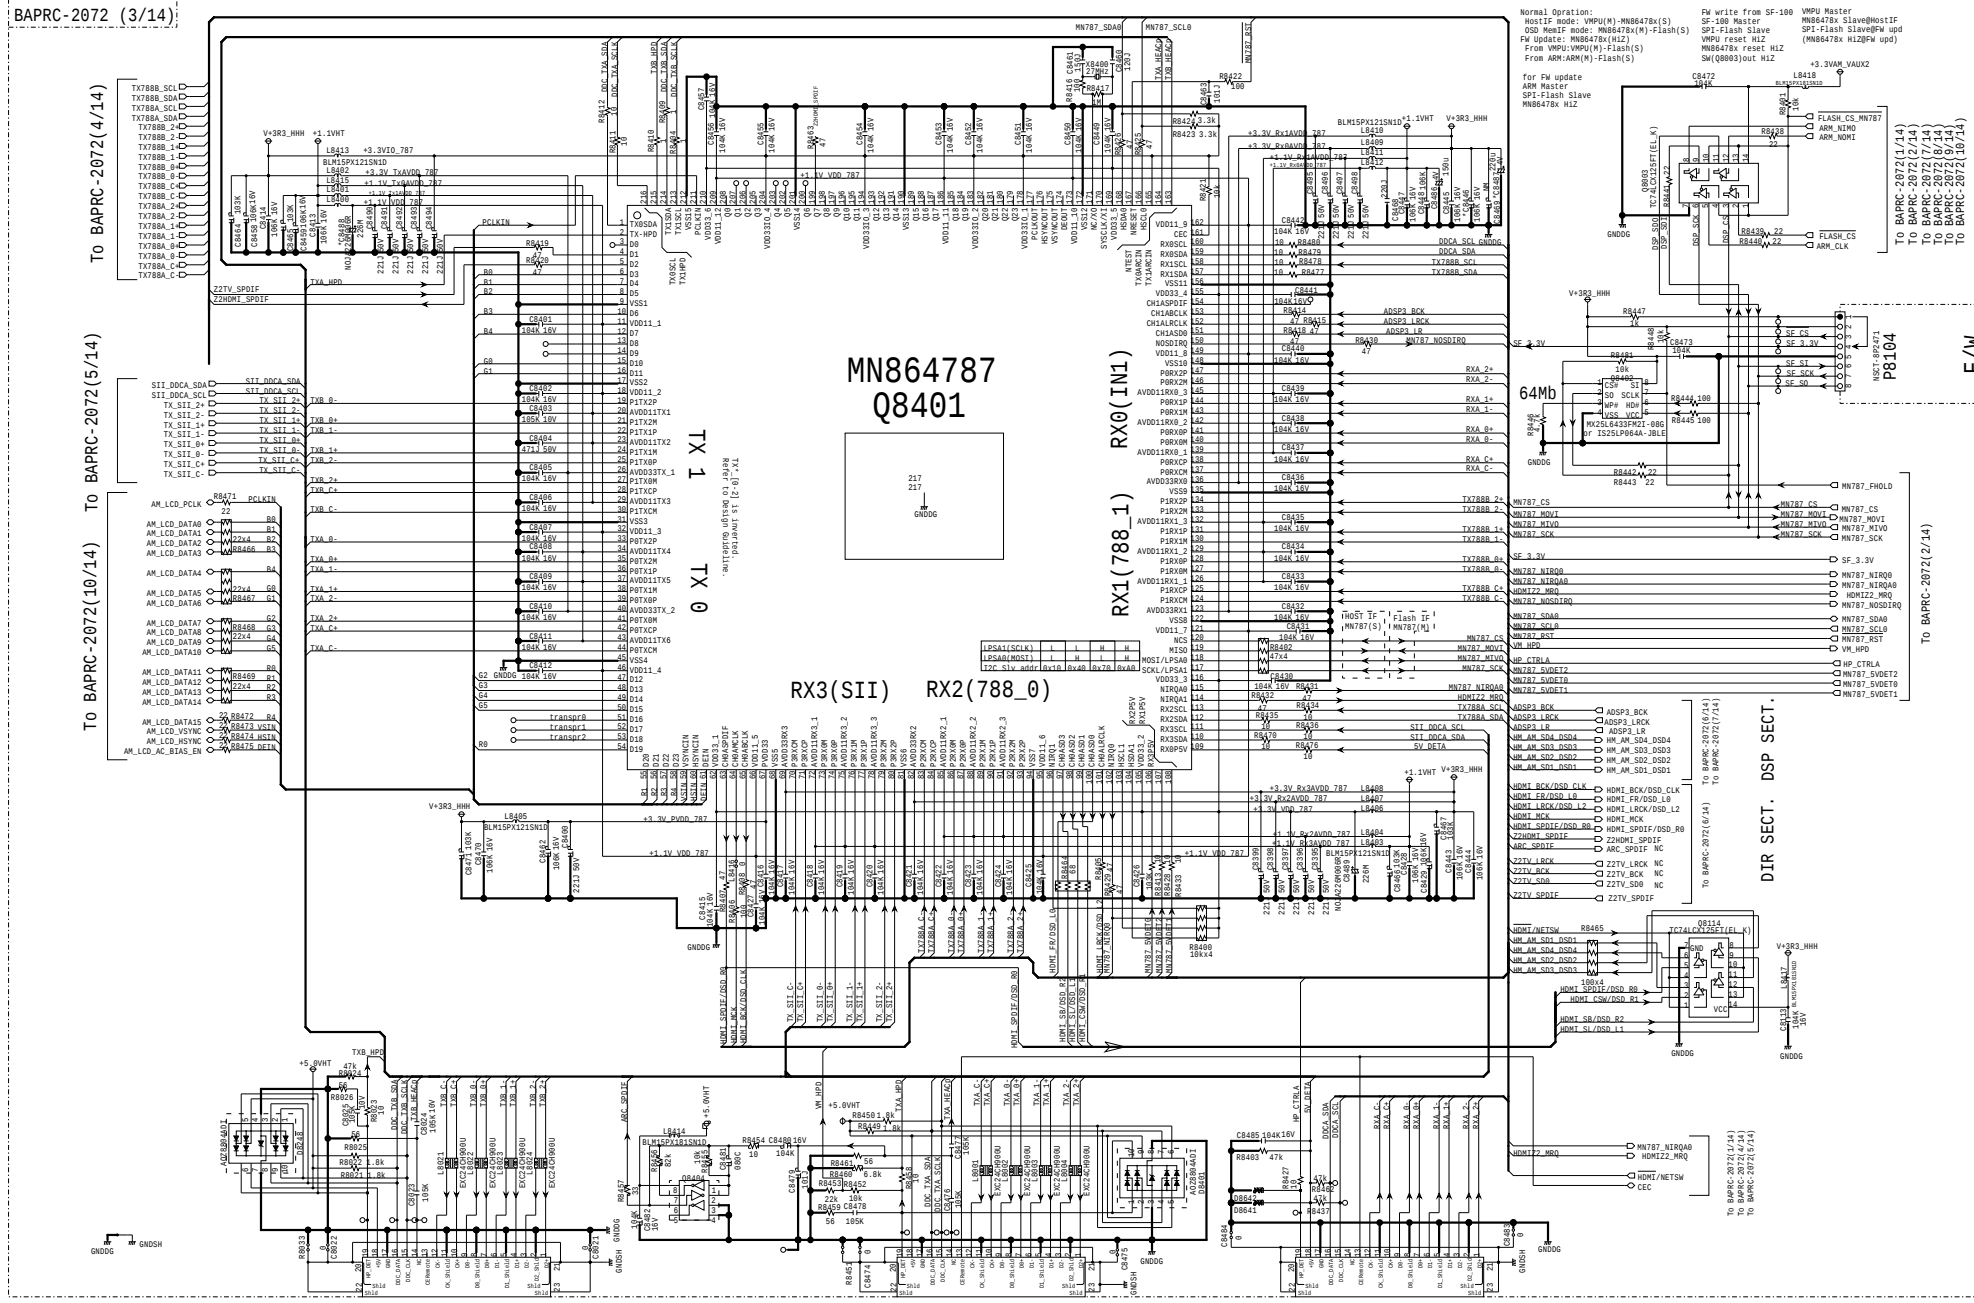

HDMI OUT Z2

HDMI OUT MAIN


HDMI IN 1

Schematic Diagram

MODEL No.SC-LX701/801/901,TX-RZ1100/3100,
DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM(PART-1) HDMI RX1 SECTION

BAPRC-2072 (4/14)

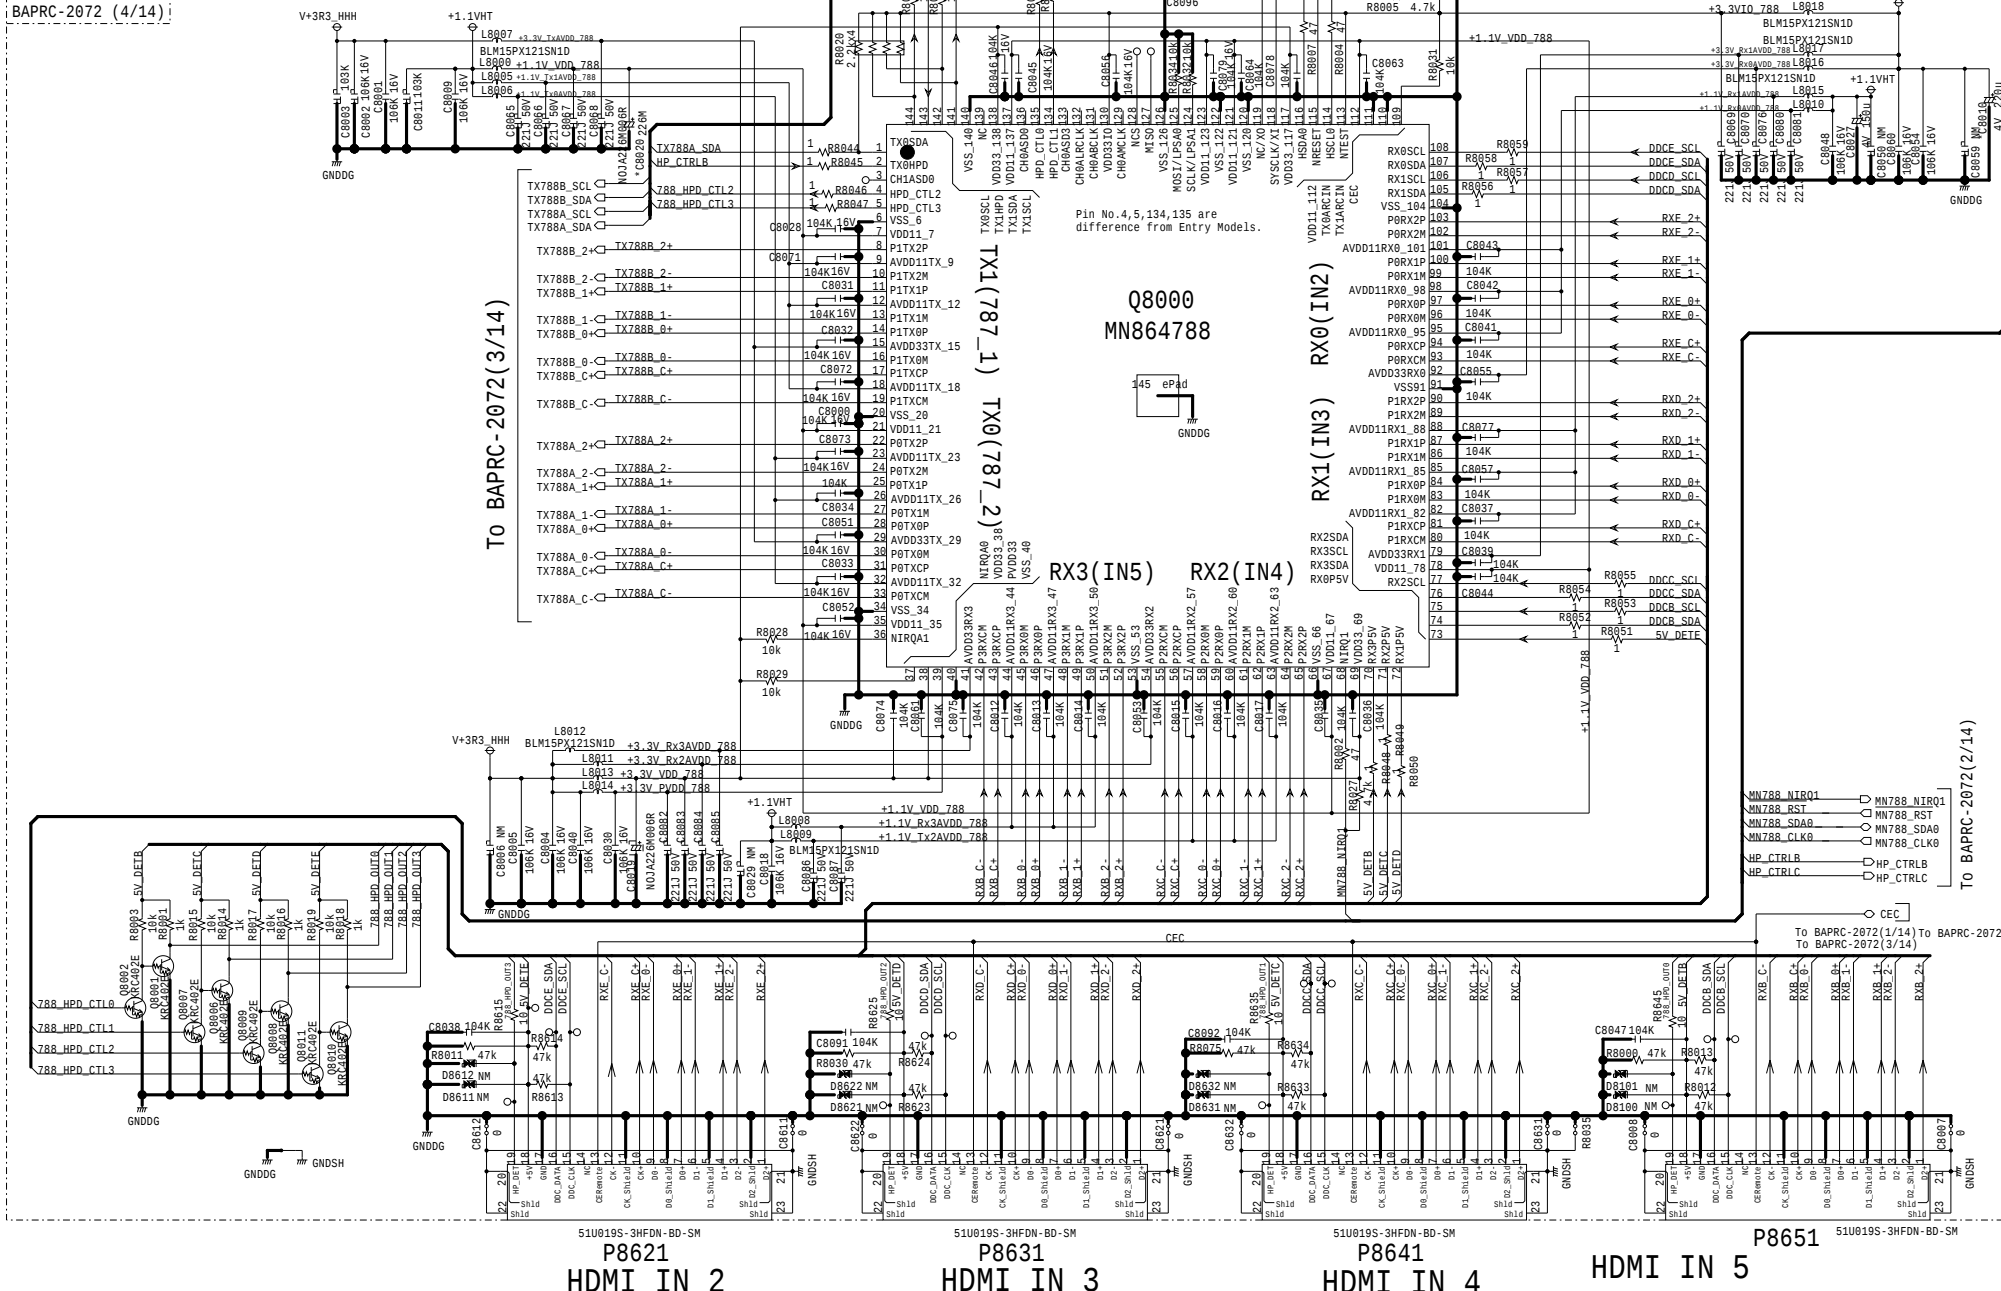

Schematic Diagram

E

D

C

B


A

HDMI IN 7

BAHDM-2086 (PART-6) for TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1
BAHDM-2087 (PART-6) for SC-LX501/701/801/901

SCHEMATIC DIAGRAM (PART-1) DIR SECTION

BAPRC-2072 (6/14)

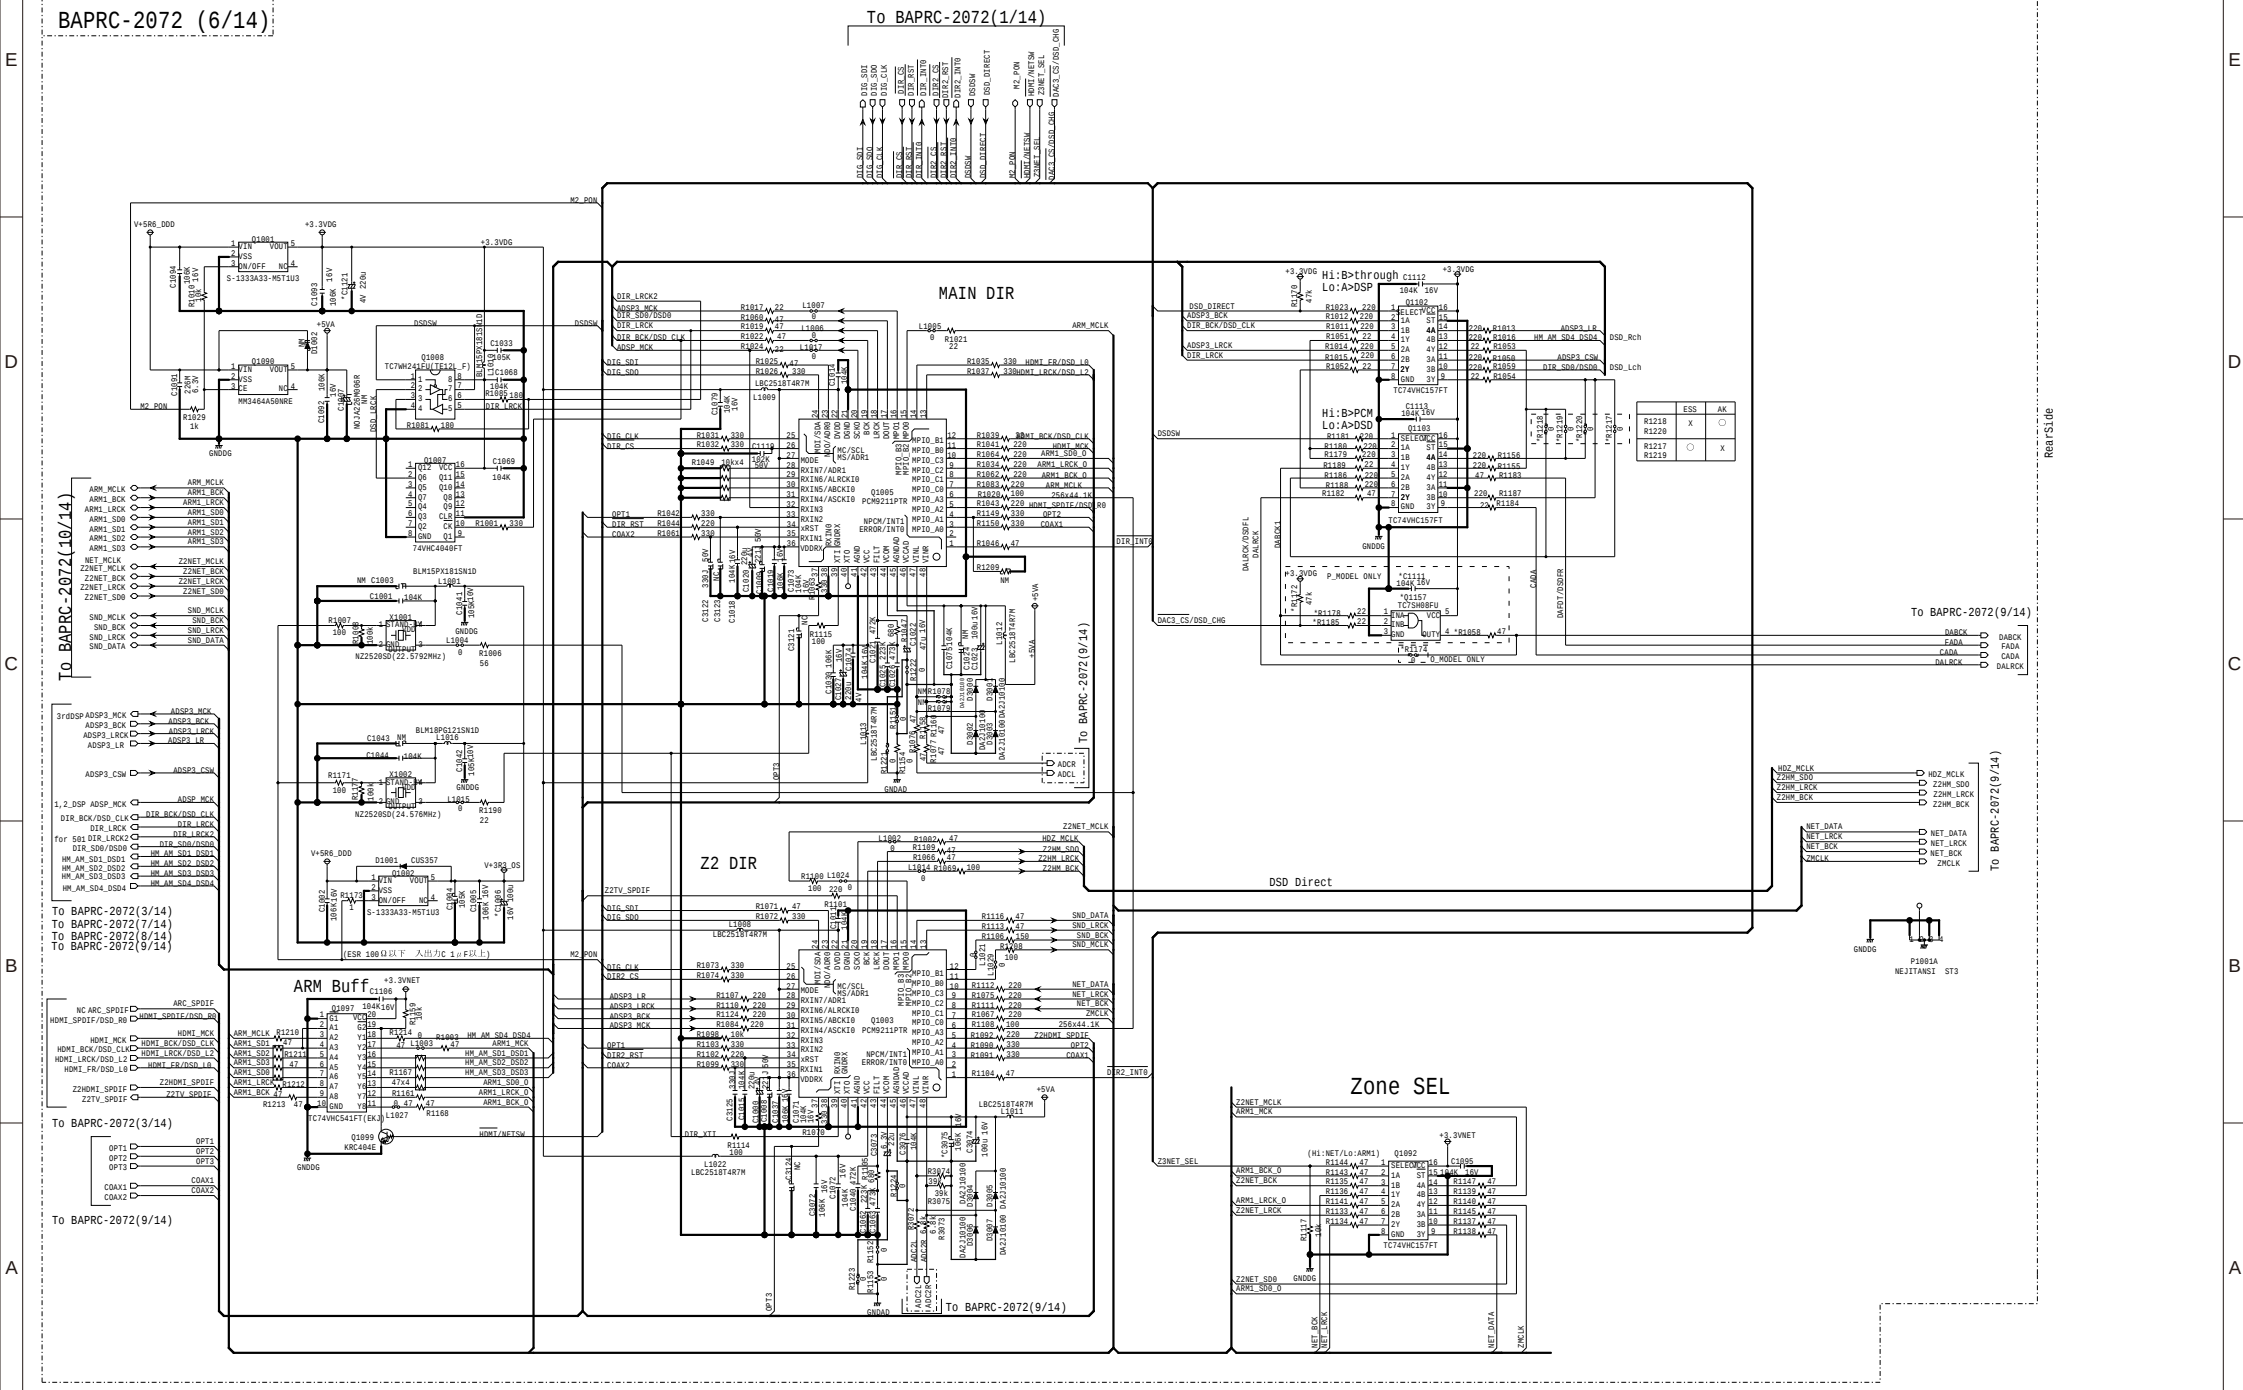


Schematic Diagram

MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM (PART-1) 1stDSP SECTION

BAPRC-2072 (7/14)

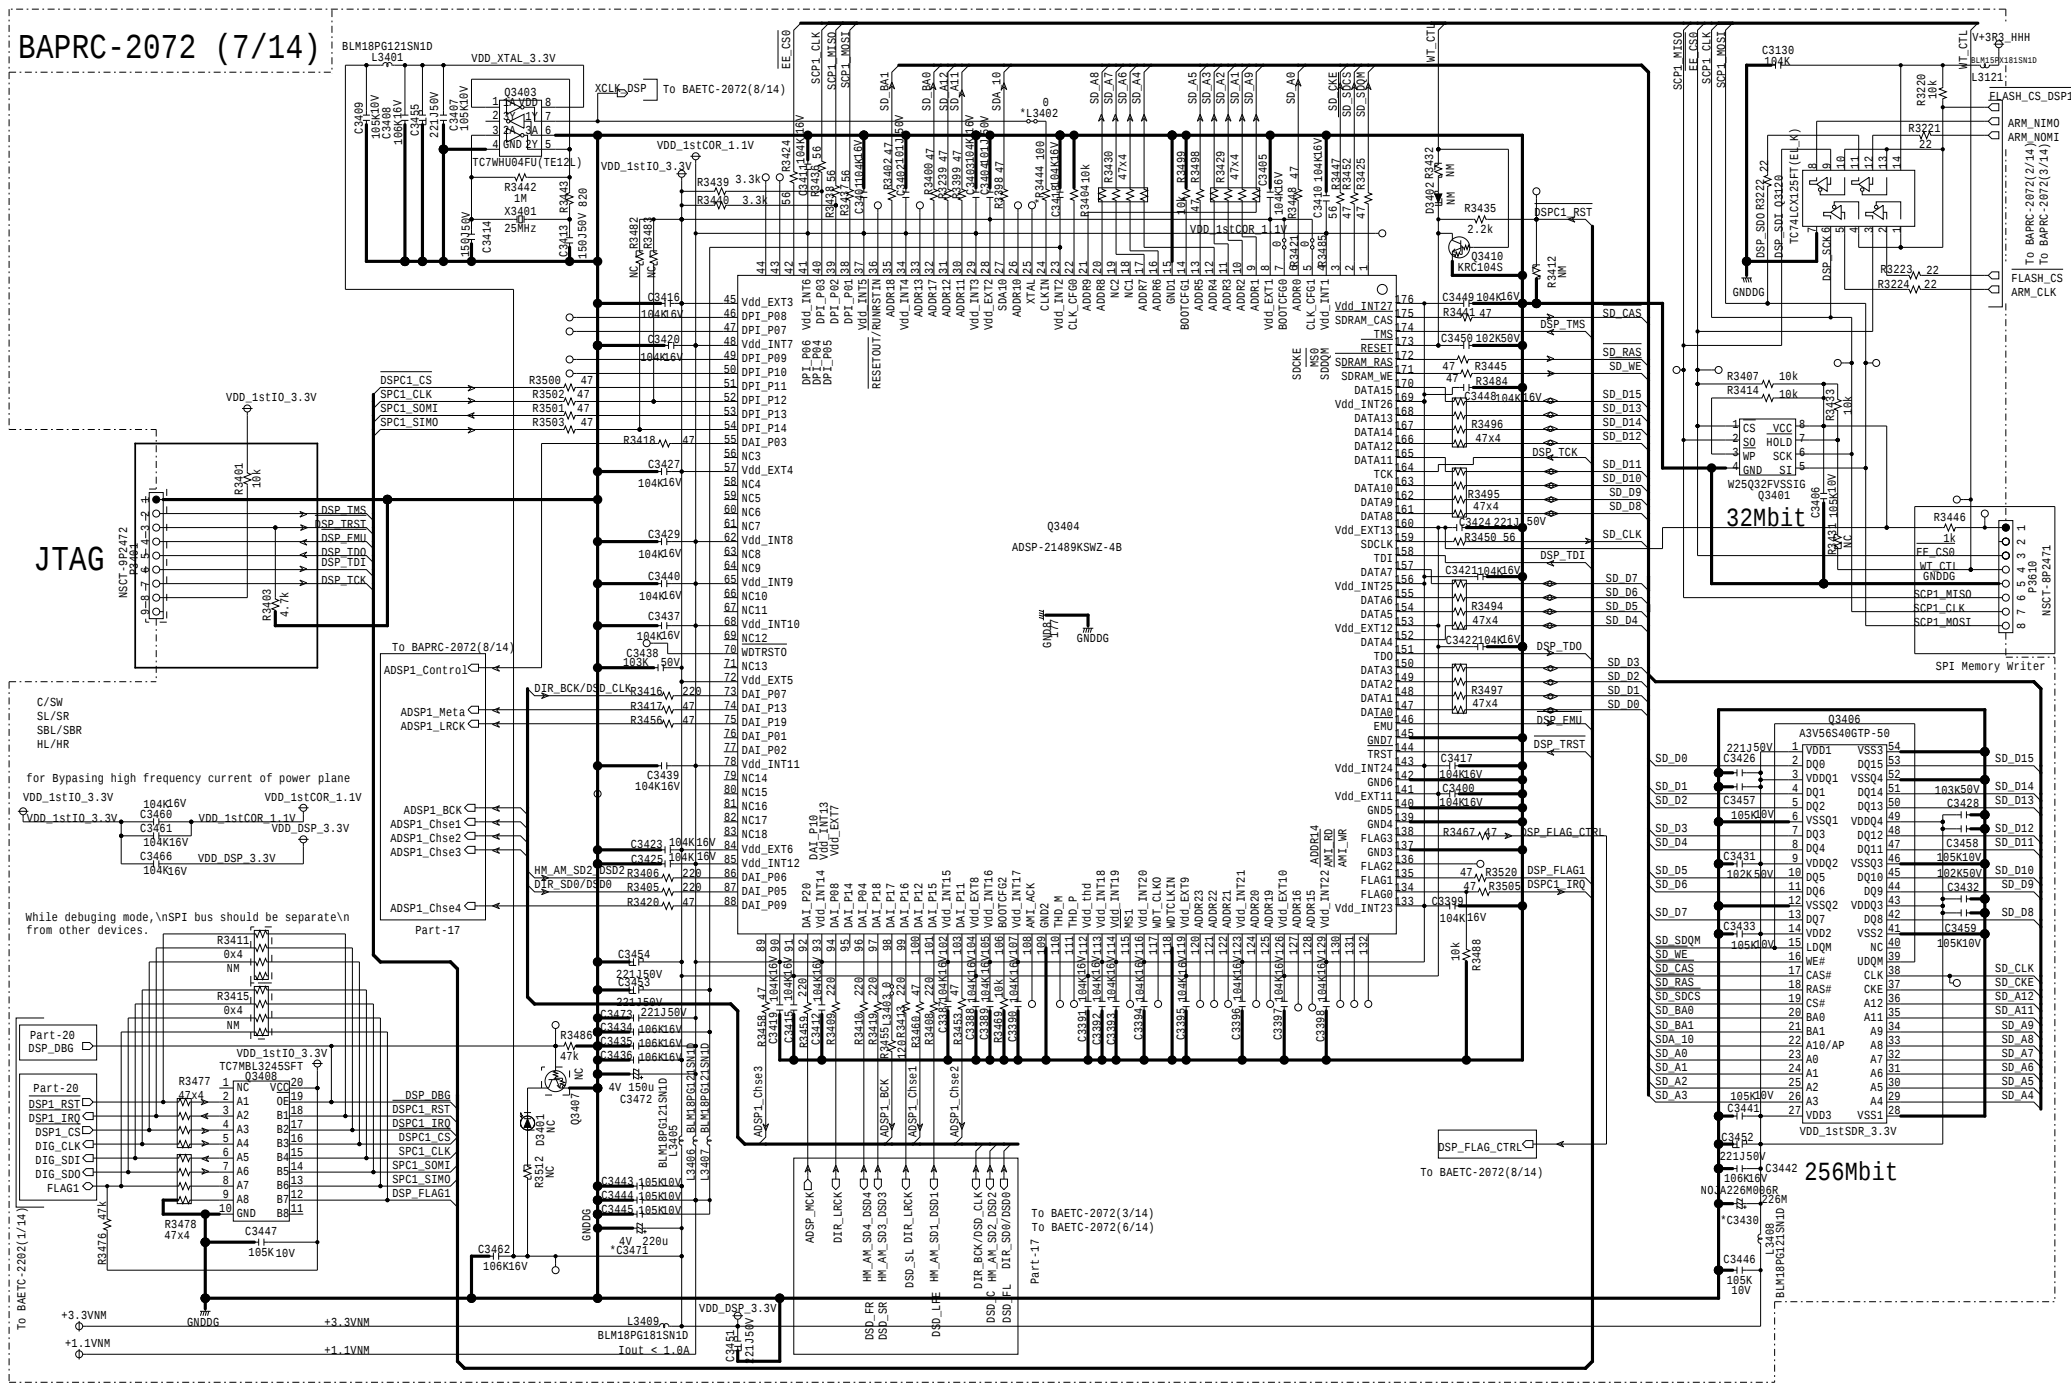


Schematic Diagram

MODEL No.SC-LX701/801/901,TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM (PART-1) 2ndDSP SECTION

BAPRC-2072 (8/14)

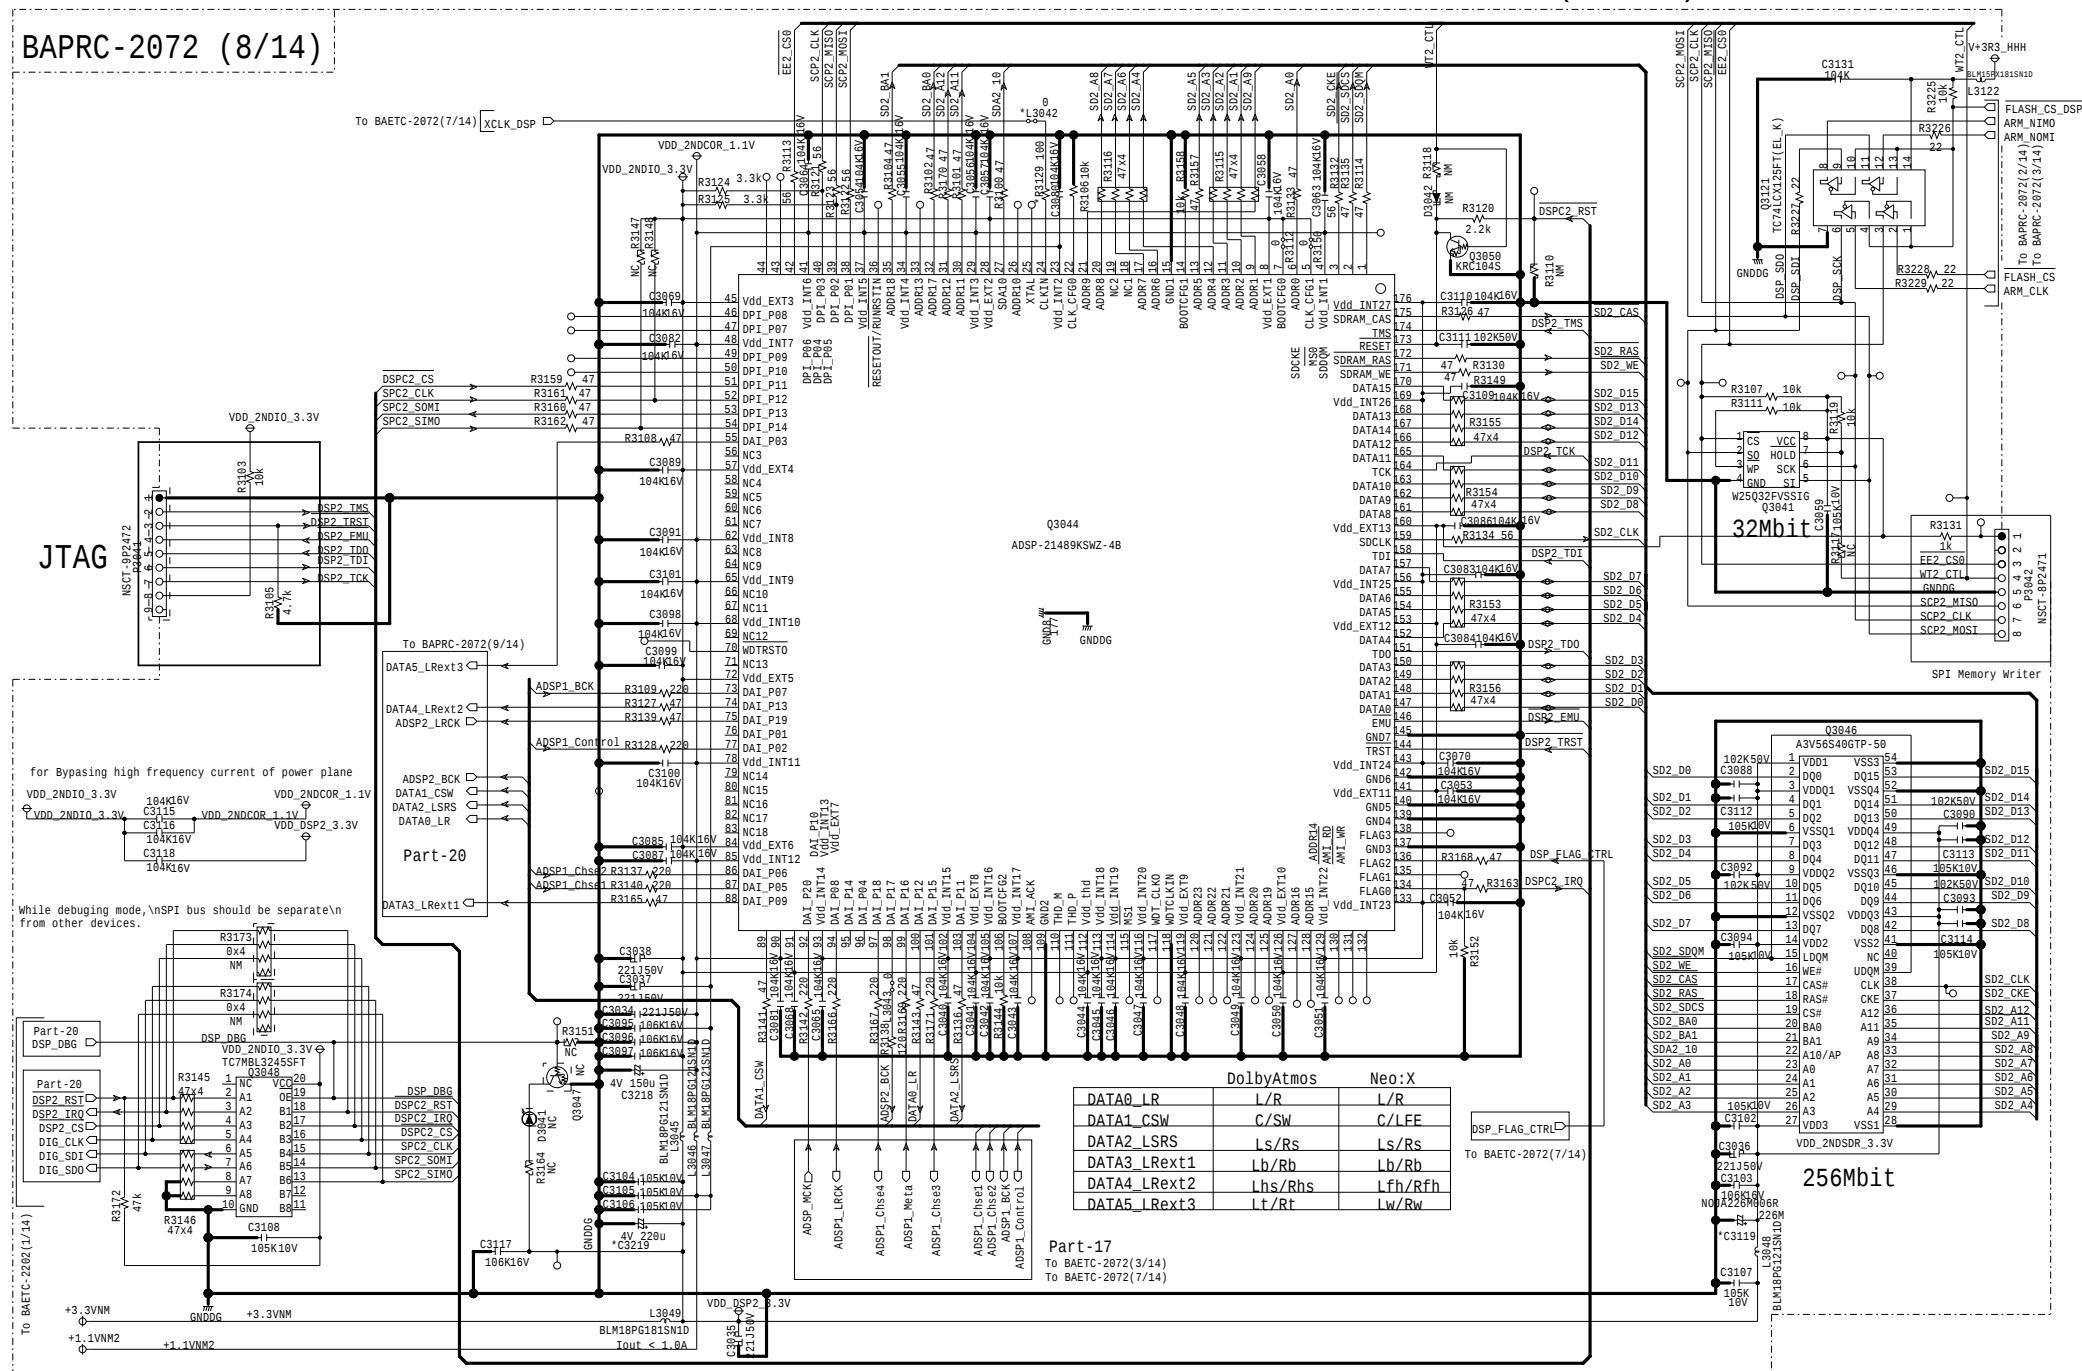


Schematic Diagram

MODEL No.SC-LX701/801/901,TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1

SCHEMATIC DIAGRAM (PART-1) 3rdDSP SECTION

BAPRC-2072 (9/14)

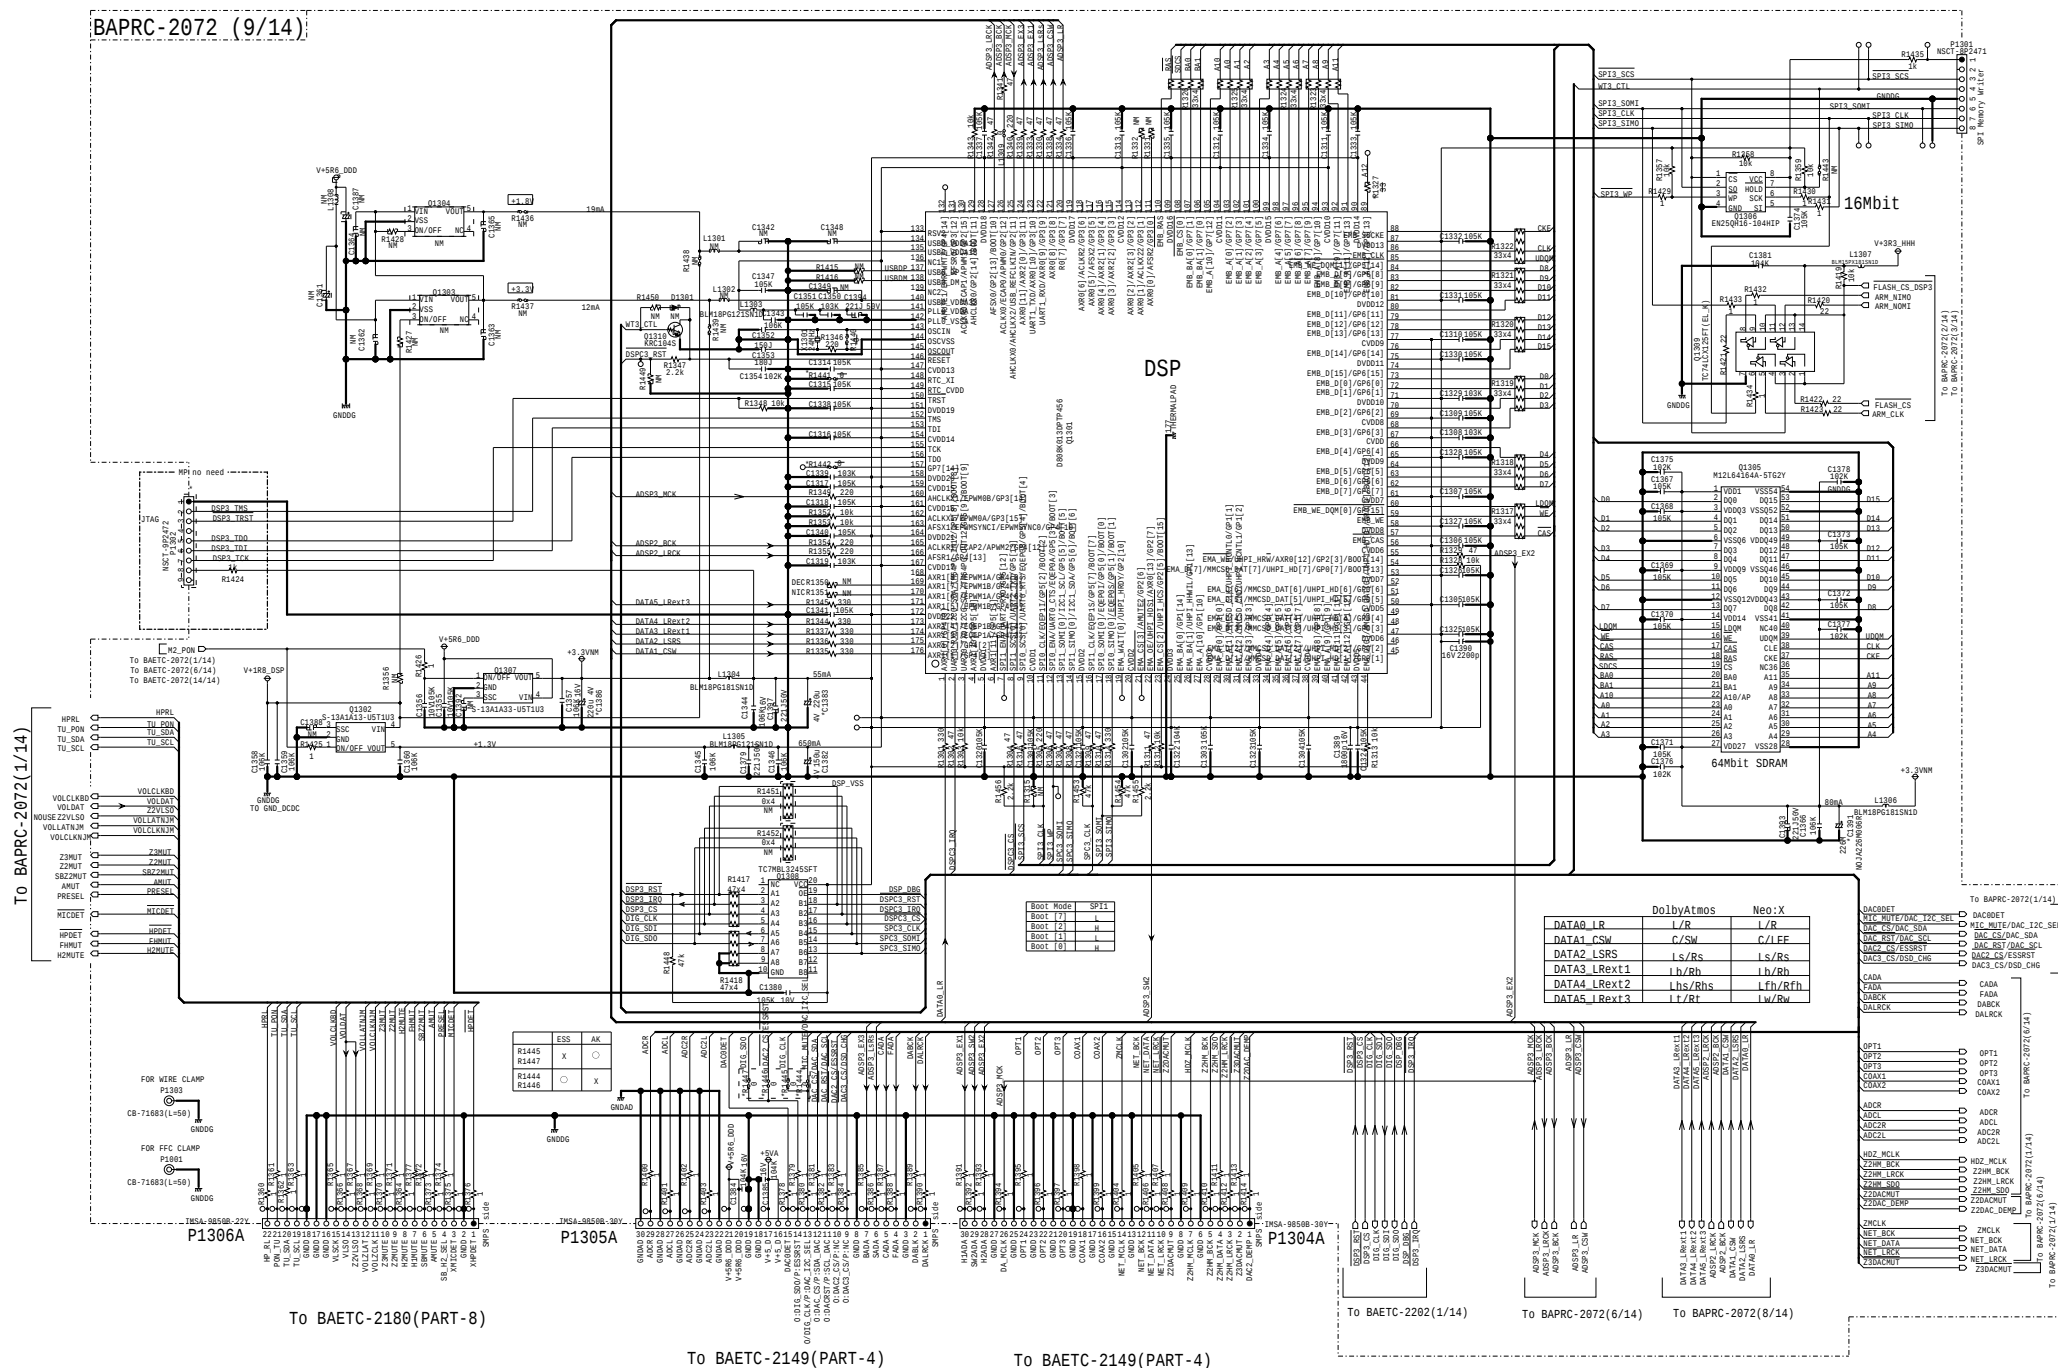


Schematic Diagram

MODEL No. SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM (PART-1) ARM IO SECTION

BAPRC-2072 (10/14)

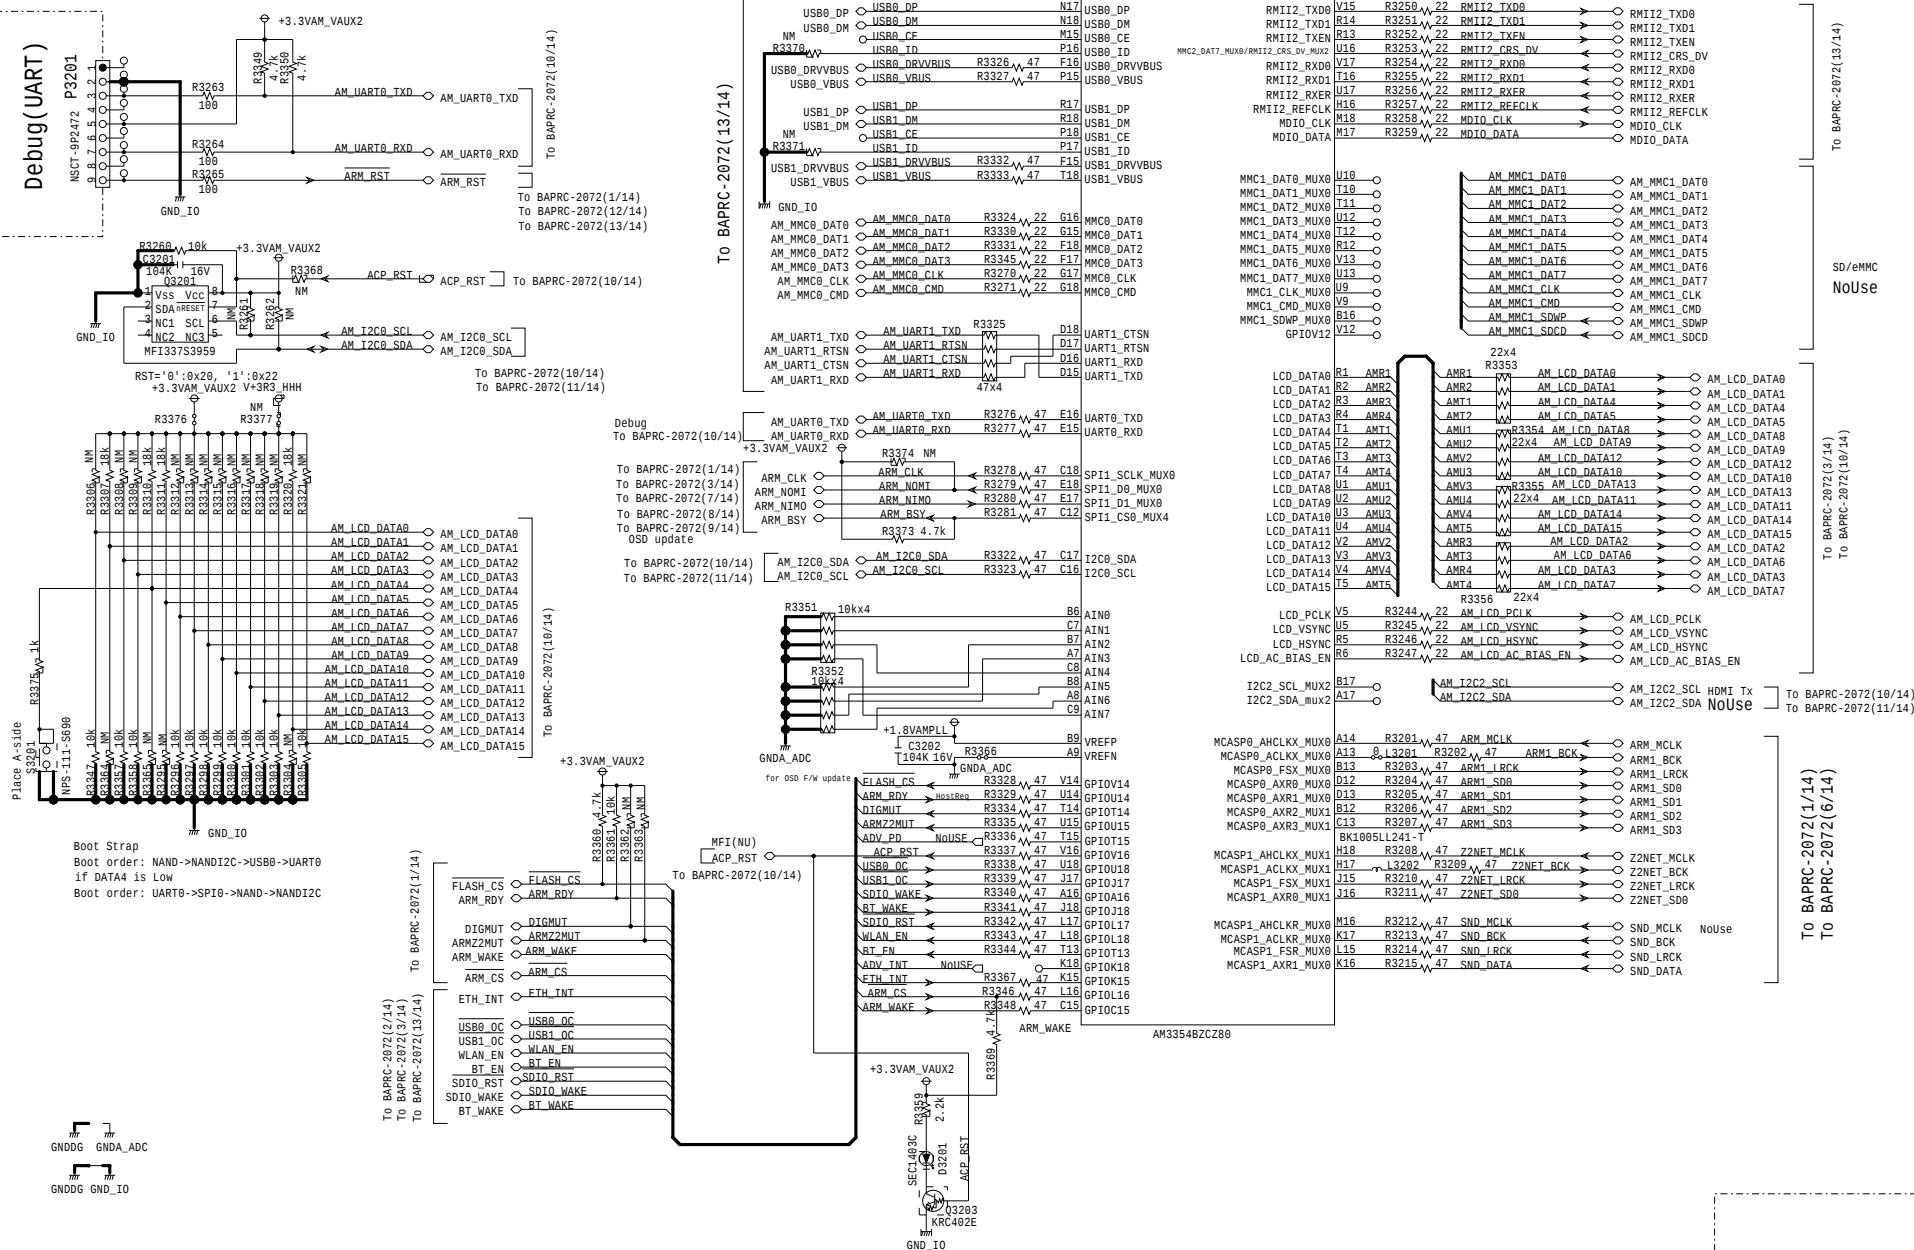


Schematic Diagram

MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1


SCHEMATIC DIAGRAM (PART-1) ARM PS SECTION

BAPRC-2072 (11/14)

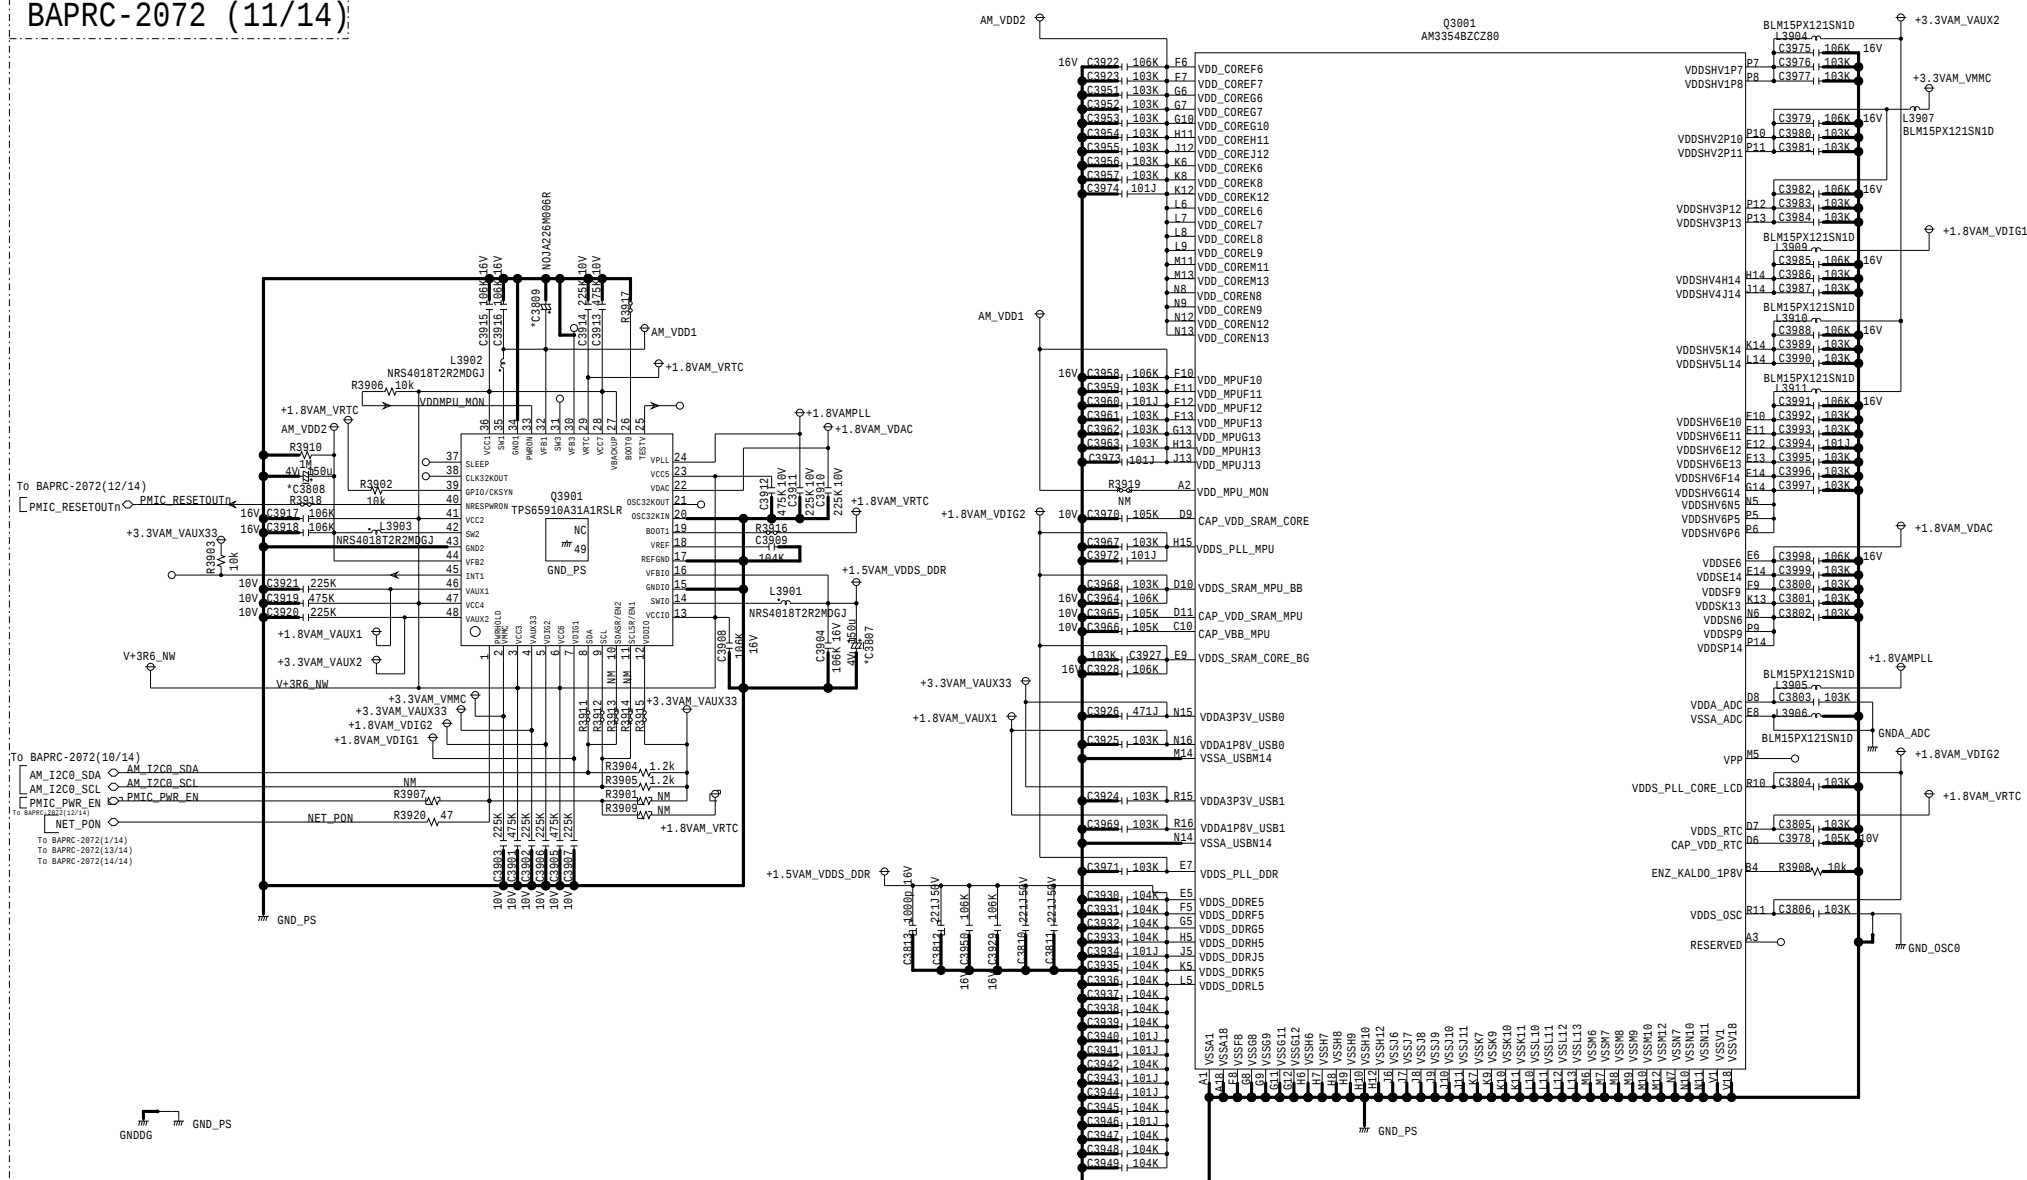

SCHEMATIC DIAGRAM (PART-1)


BAPRC-2072 (12/14)

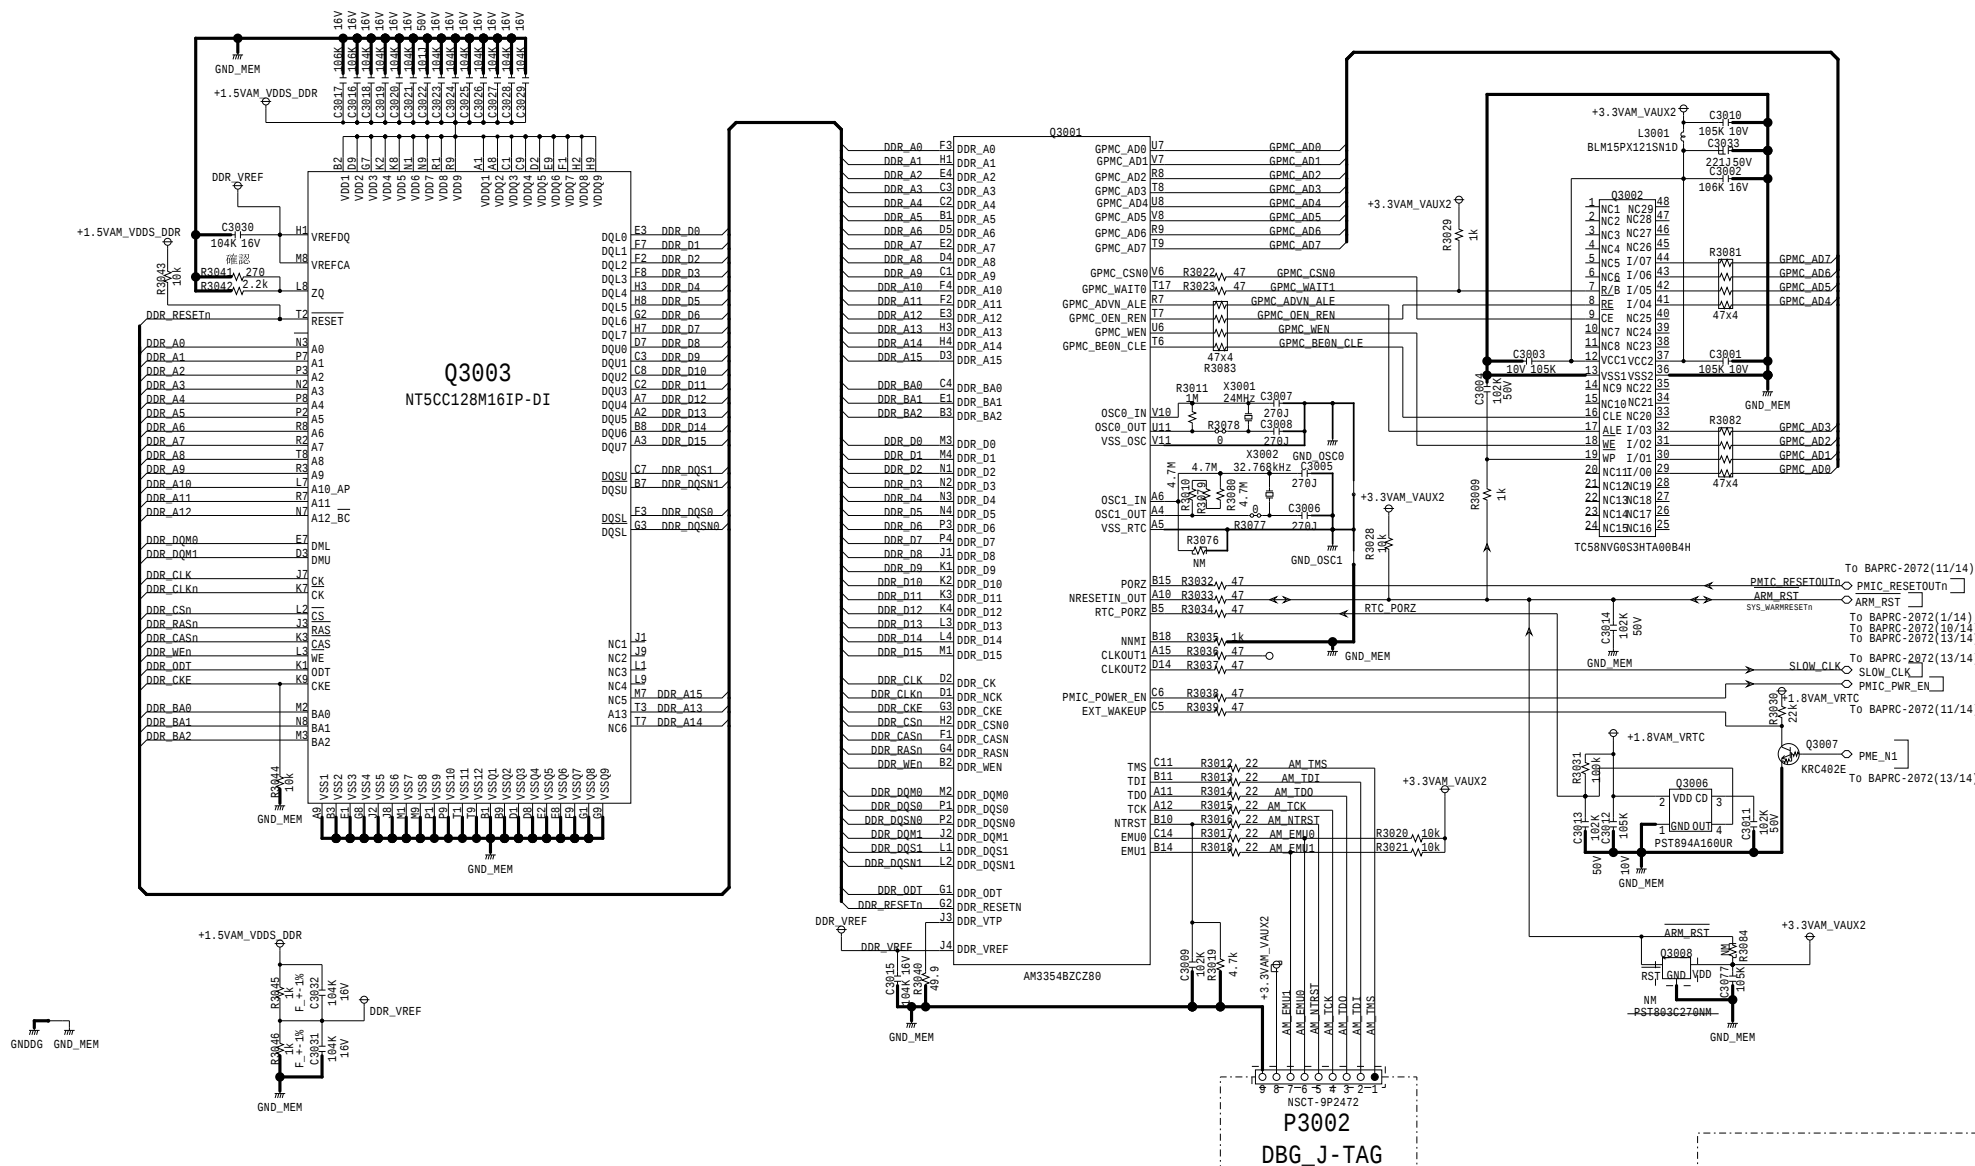

Schematic Diagram

ARM USB/Ethernet/WiFi SECTION


BAPRC-2072 (13/14)

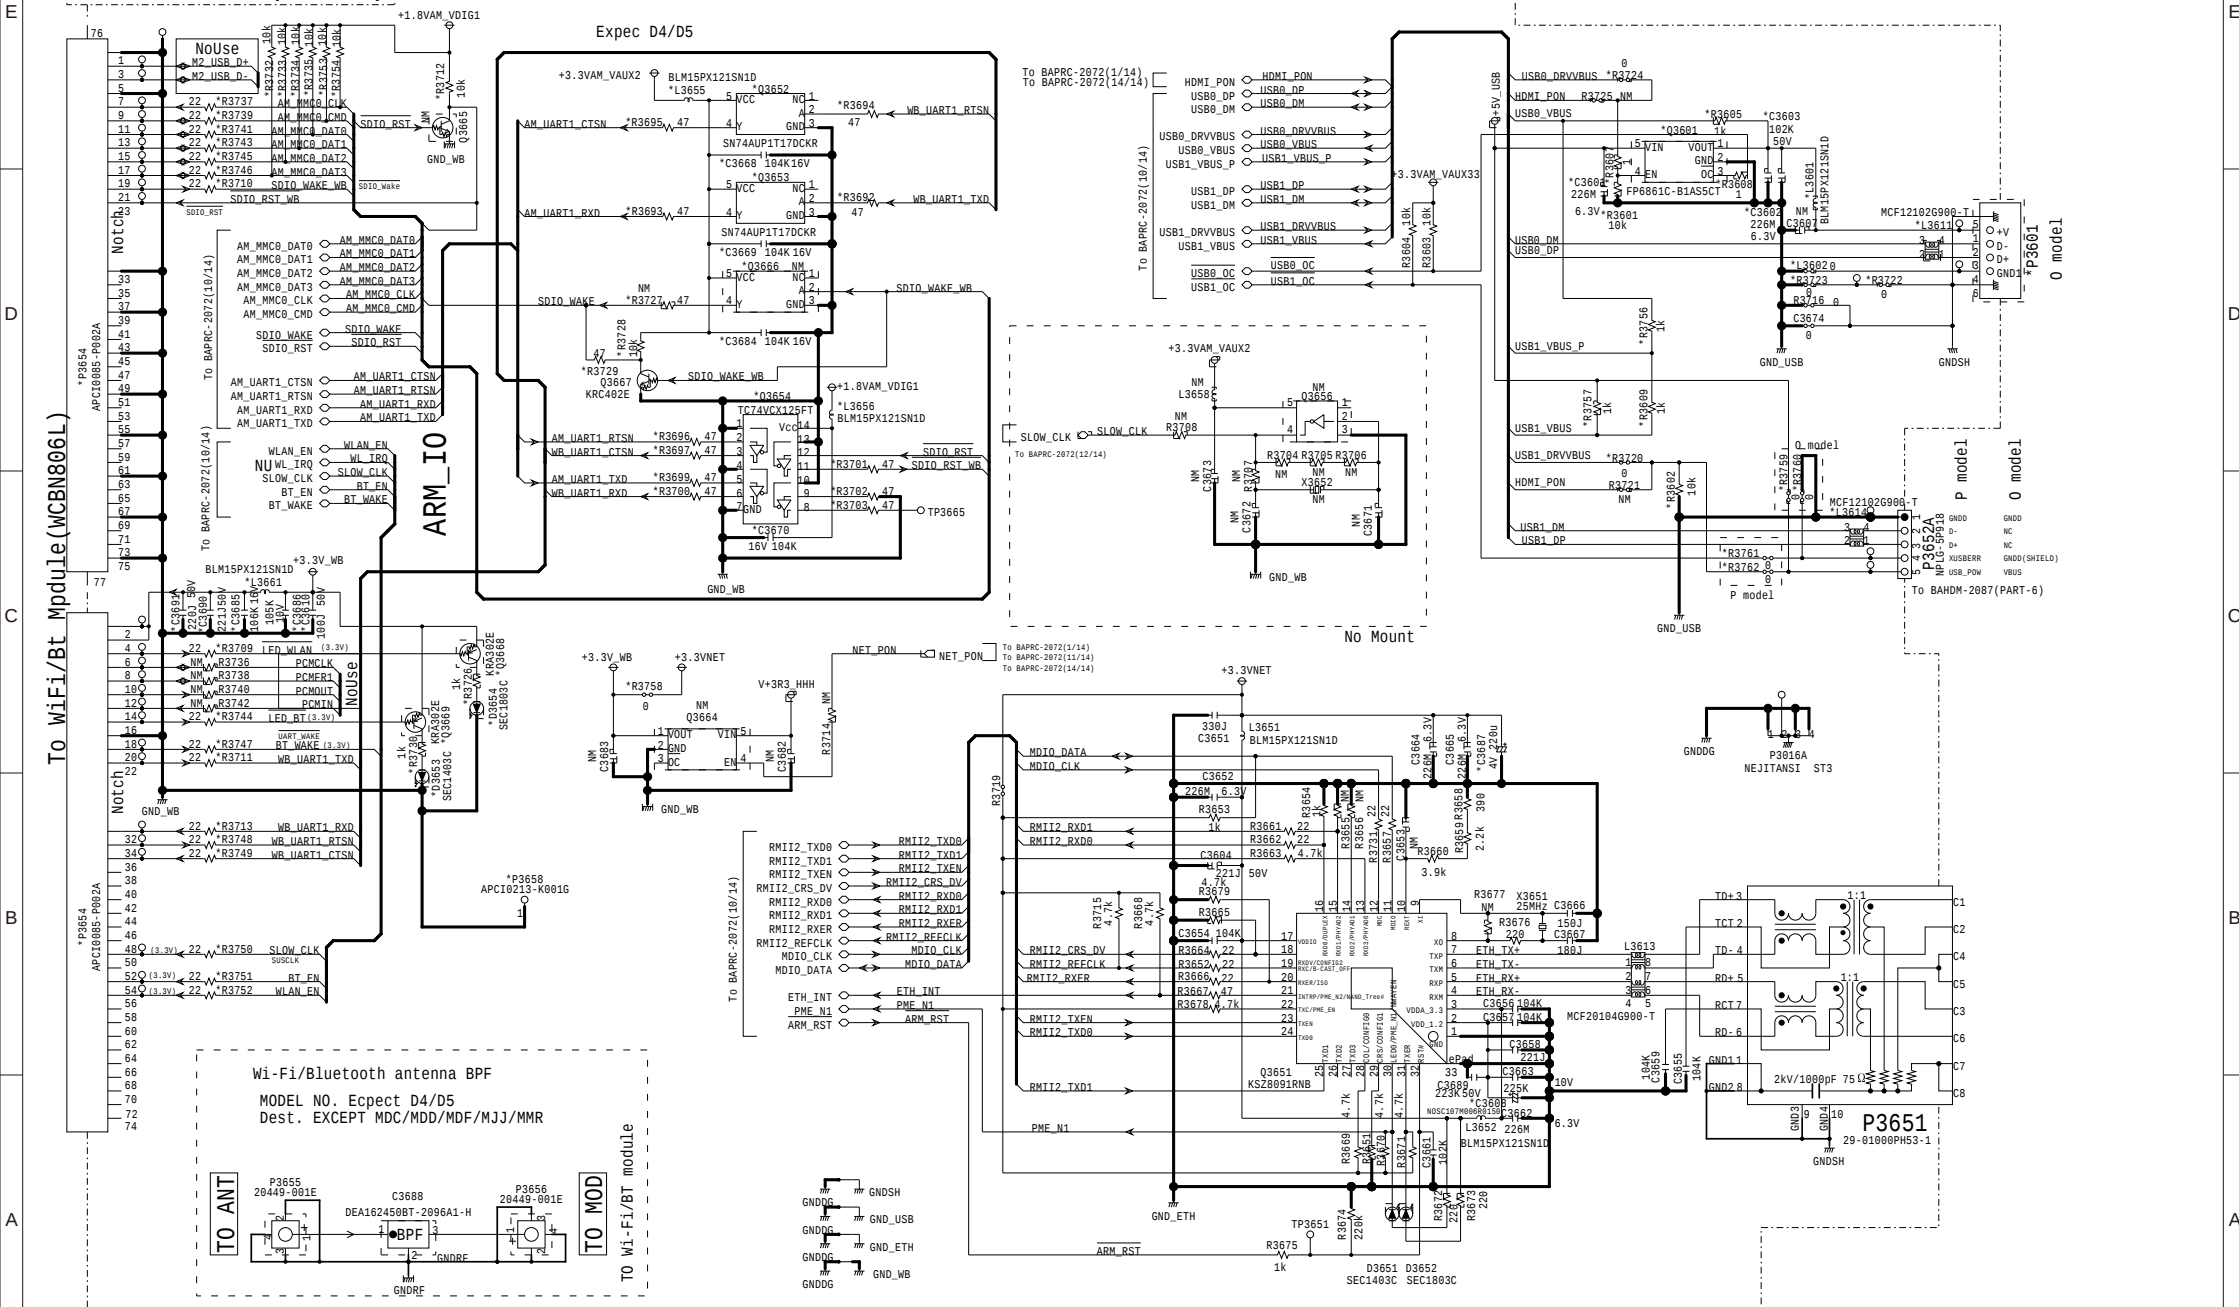

Schematic Diagram

MODEL NO. TX-RZ1100/3100, PR-RZ5100

SCHEMATIC DIAGRAM (PART-2) DISPLAY SECTION

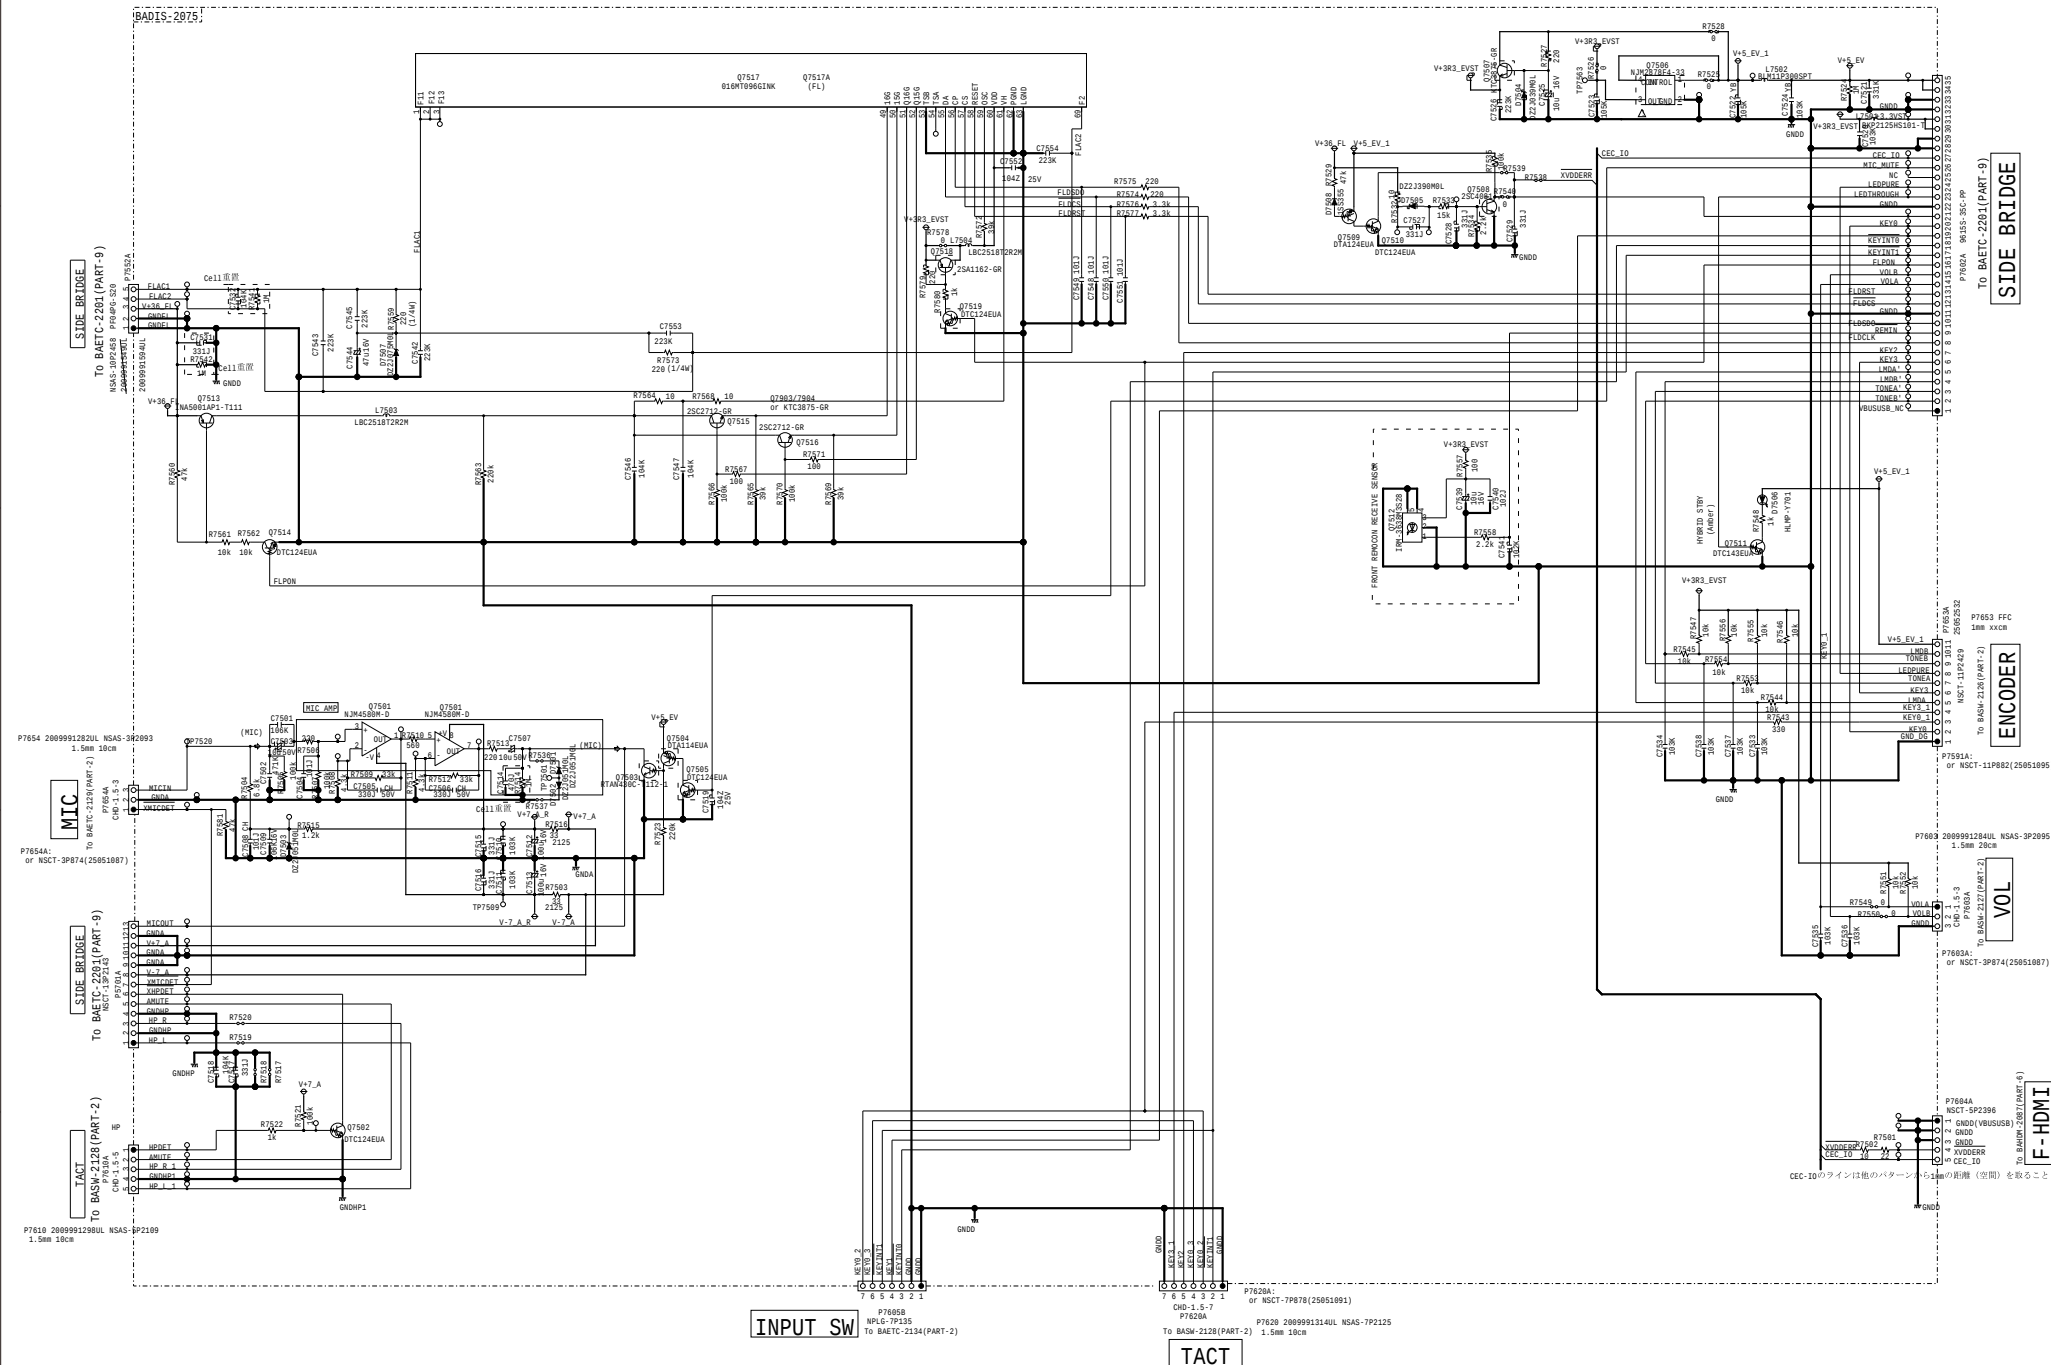

Schematic Diagram

MODEL NO. TX-RZ1100/3100, PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) ENCODER SECTION

BASW-2126

ENCODER (KEY)

D7751A
27191336
(LED)LH-5-2

PURE AUDIO(Blue)
SCB3318E-D2

D7751 R7751
3.9k

Q7751
DTC143EUA

V+5V_EV_1
LMD8
TONEB
LEDPURE
TONEA
KEY3
LMDA
KEY3_1
KEY0_1
KEY0
GND_DG

To BADIS-2075(PART-2)
P7591B:or NSCT-12P883(25051095)

STANDBY
S7601

NPS-111-S681

PURE AUDIO
S7602

NPS-111-S681

TONE
S7631

NPS-111-S681

LISTENING MODE
S7632

NPS-111-S681

R7601
270

R7631
270

TONE

S7740

LISTENING MODE

S7774

XREB125(9X11.5)PVB30FINB1-2-24
or EVEHD1F3024B
(SN:25065695W)

XREB125(9X11.5)PVB30FINB1-2-24
or EVEHD1F3024B
(SN:25065695W)

C7740
102K

D7742


D7741

Chassis GND
レジスト剥ぎ

DISPLAY


NSCT-11P2429

P7653B

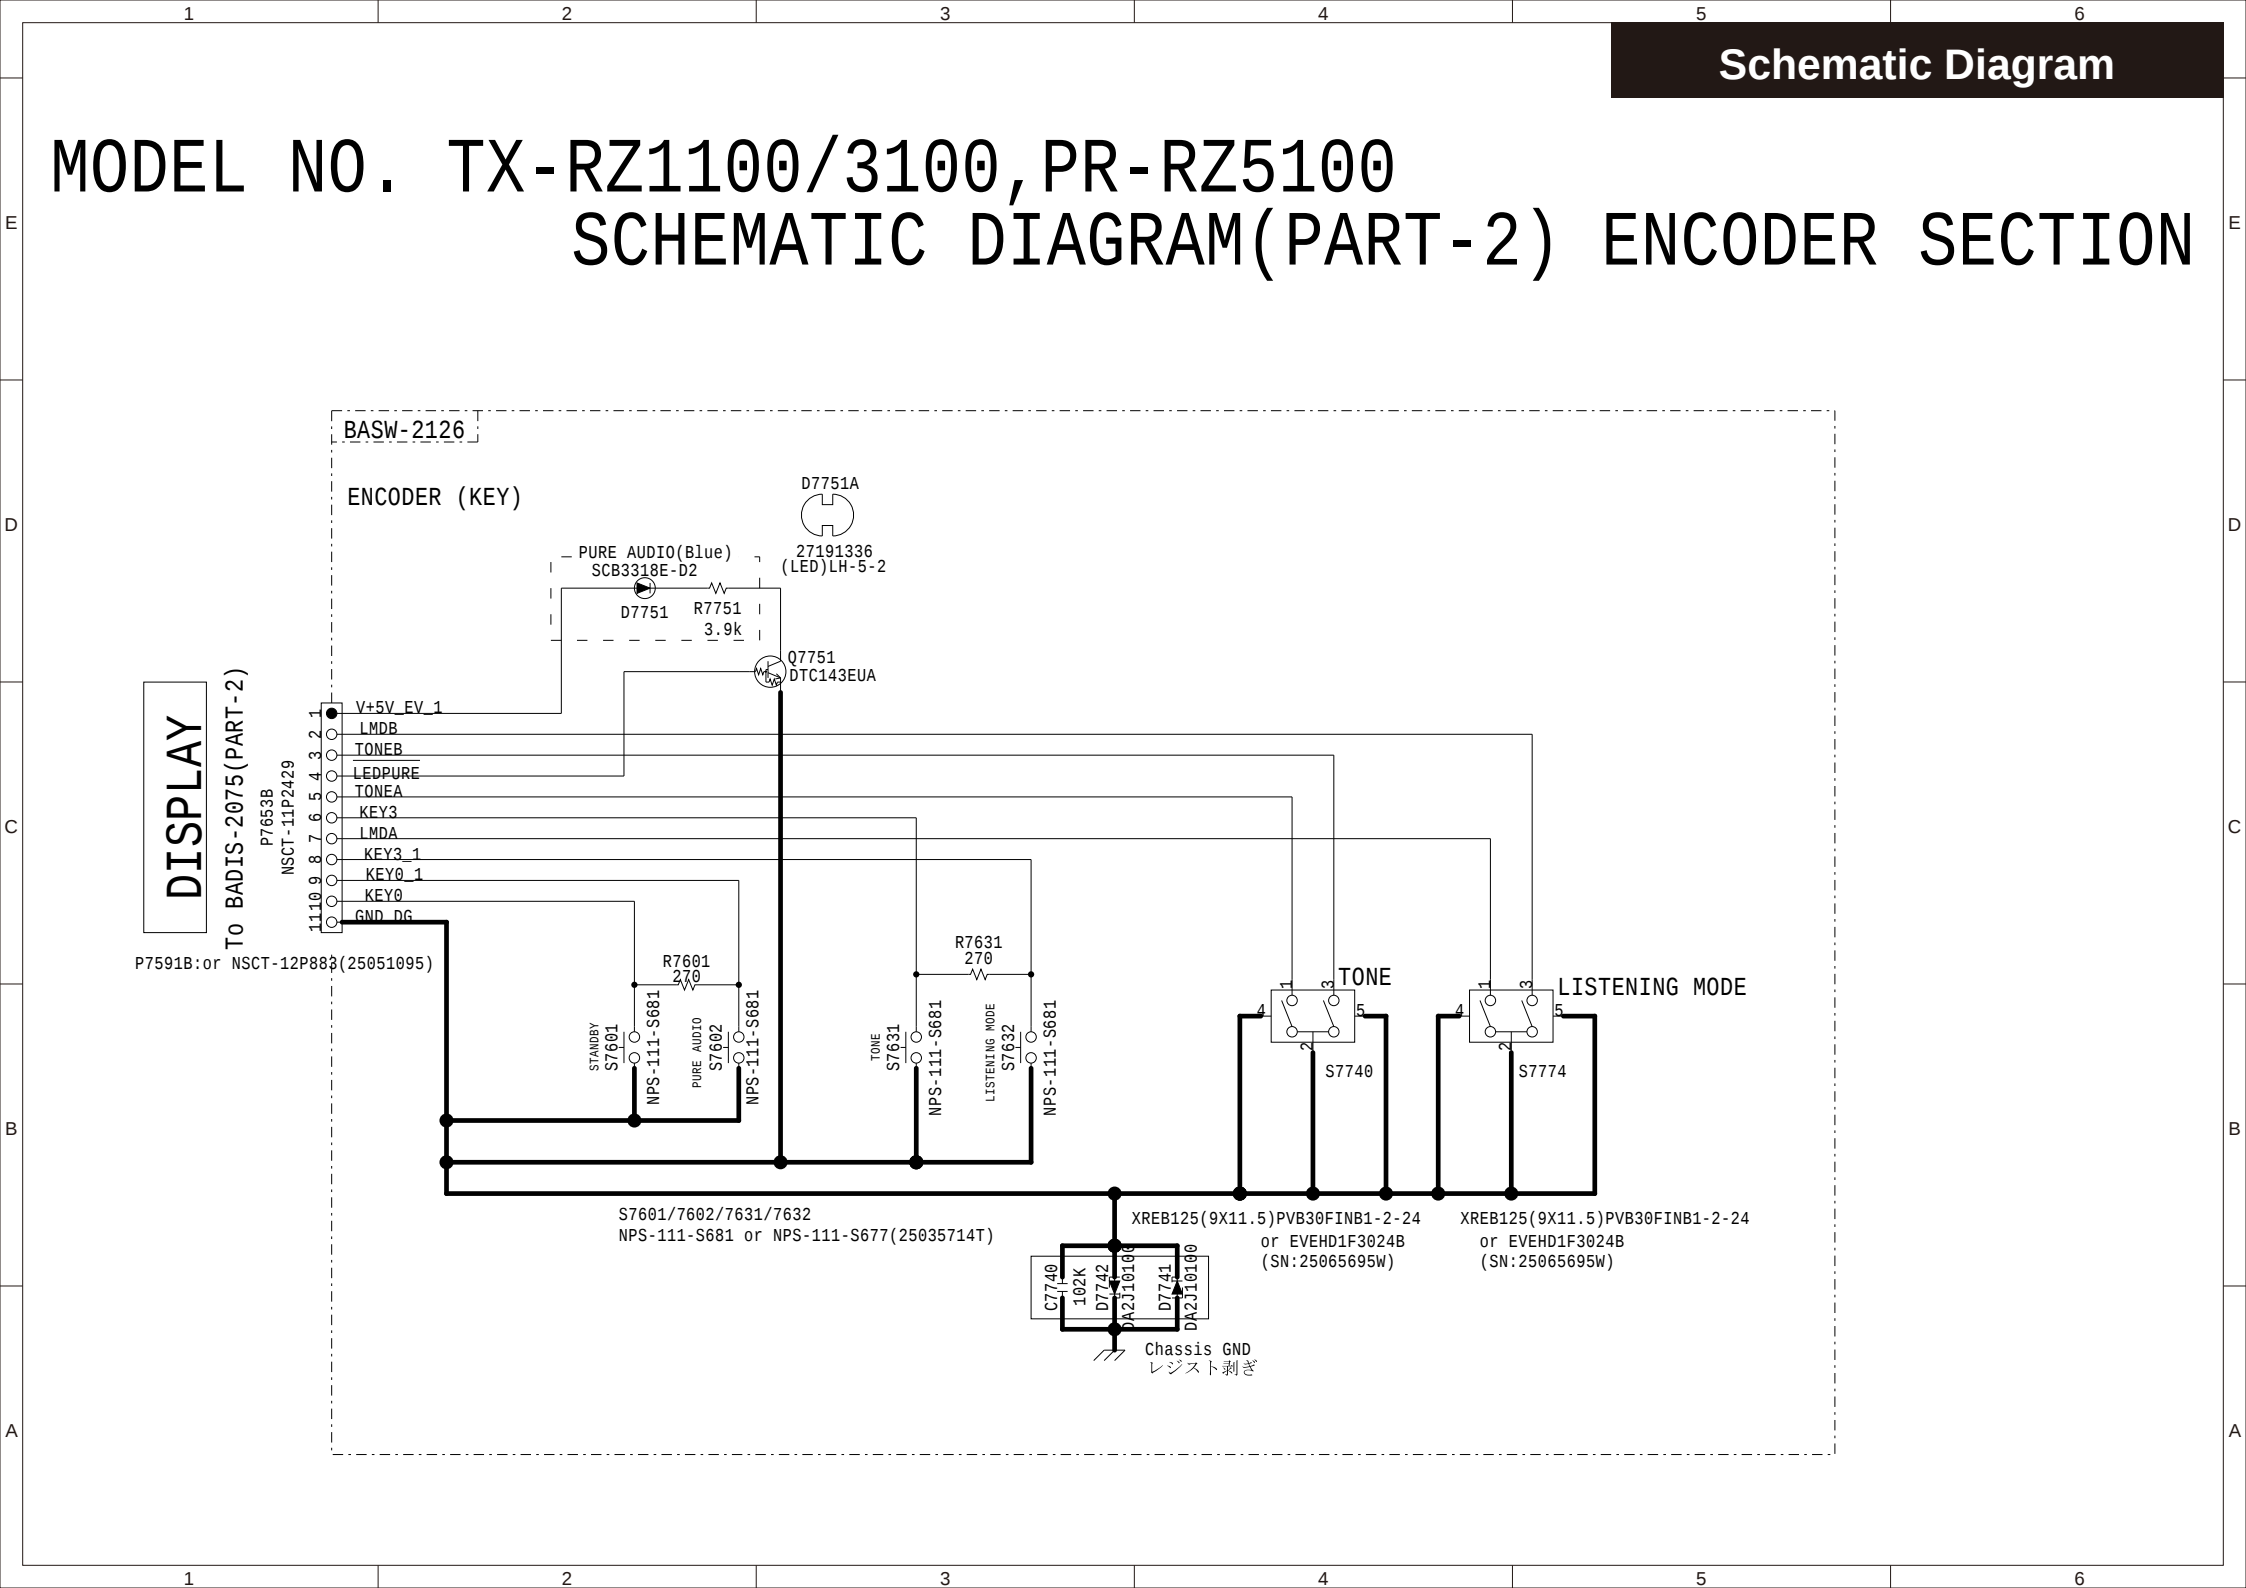


MODEL NO.TX-RZ1100/3100,PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) VOL SECTION

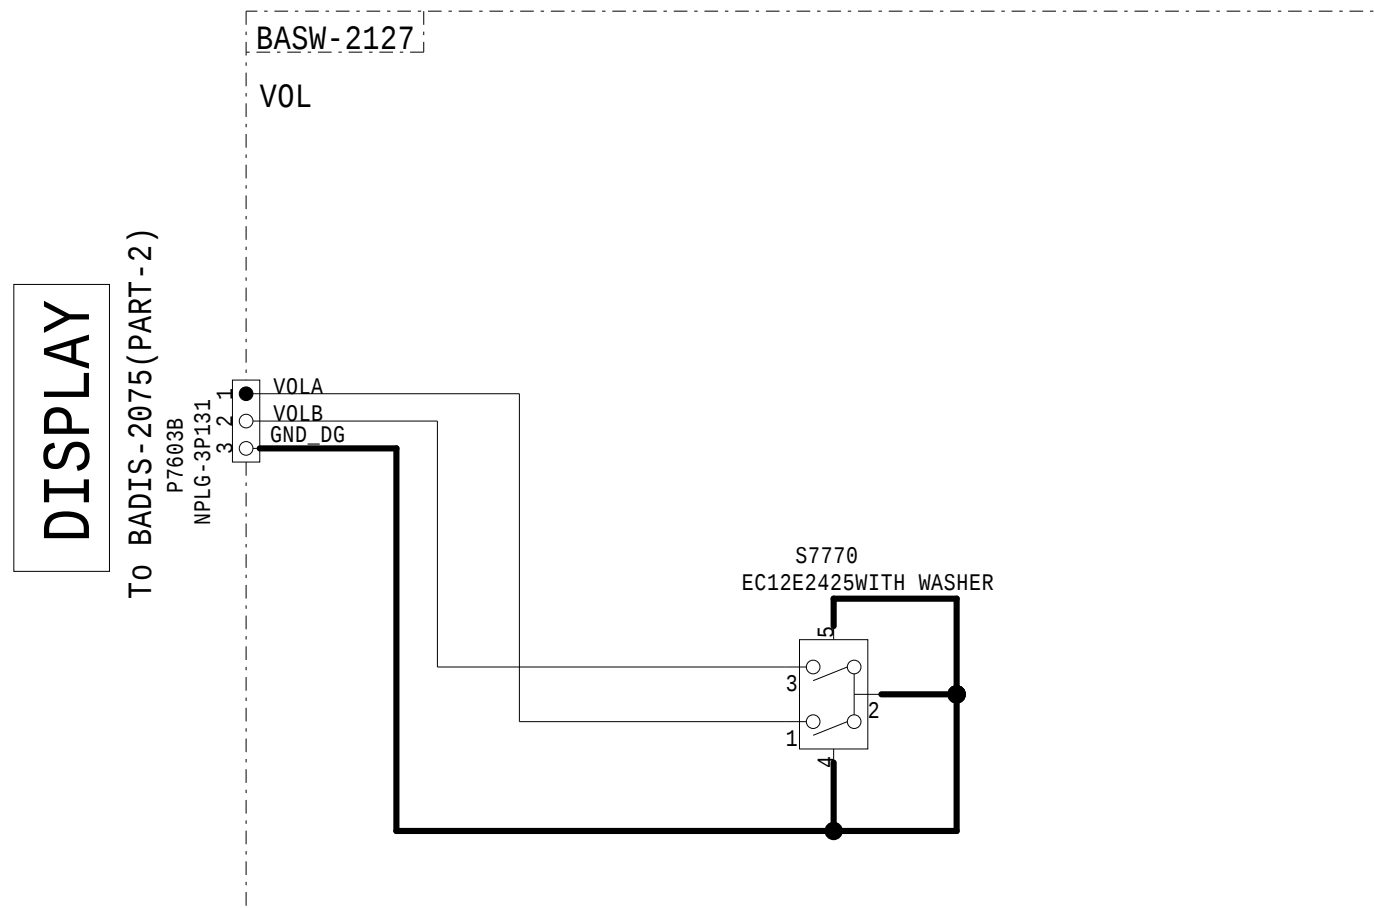


MODEL NO.TX-RZ1100/3100,PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) TACT SECTION

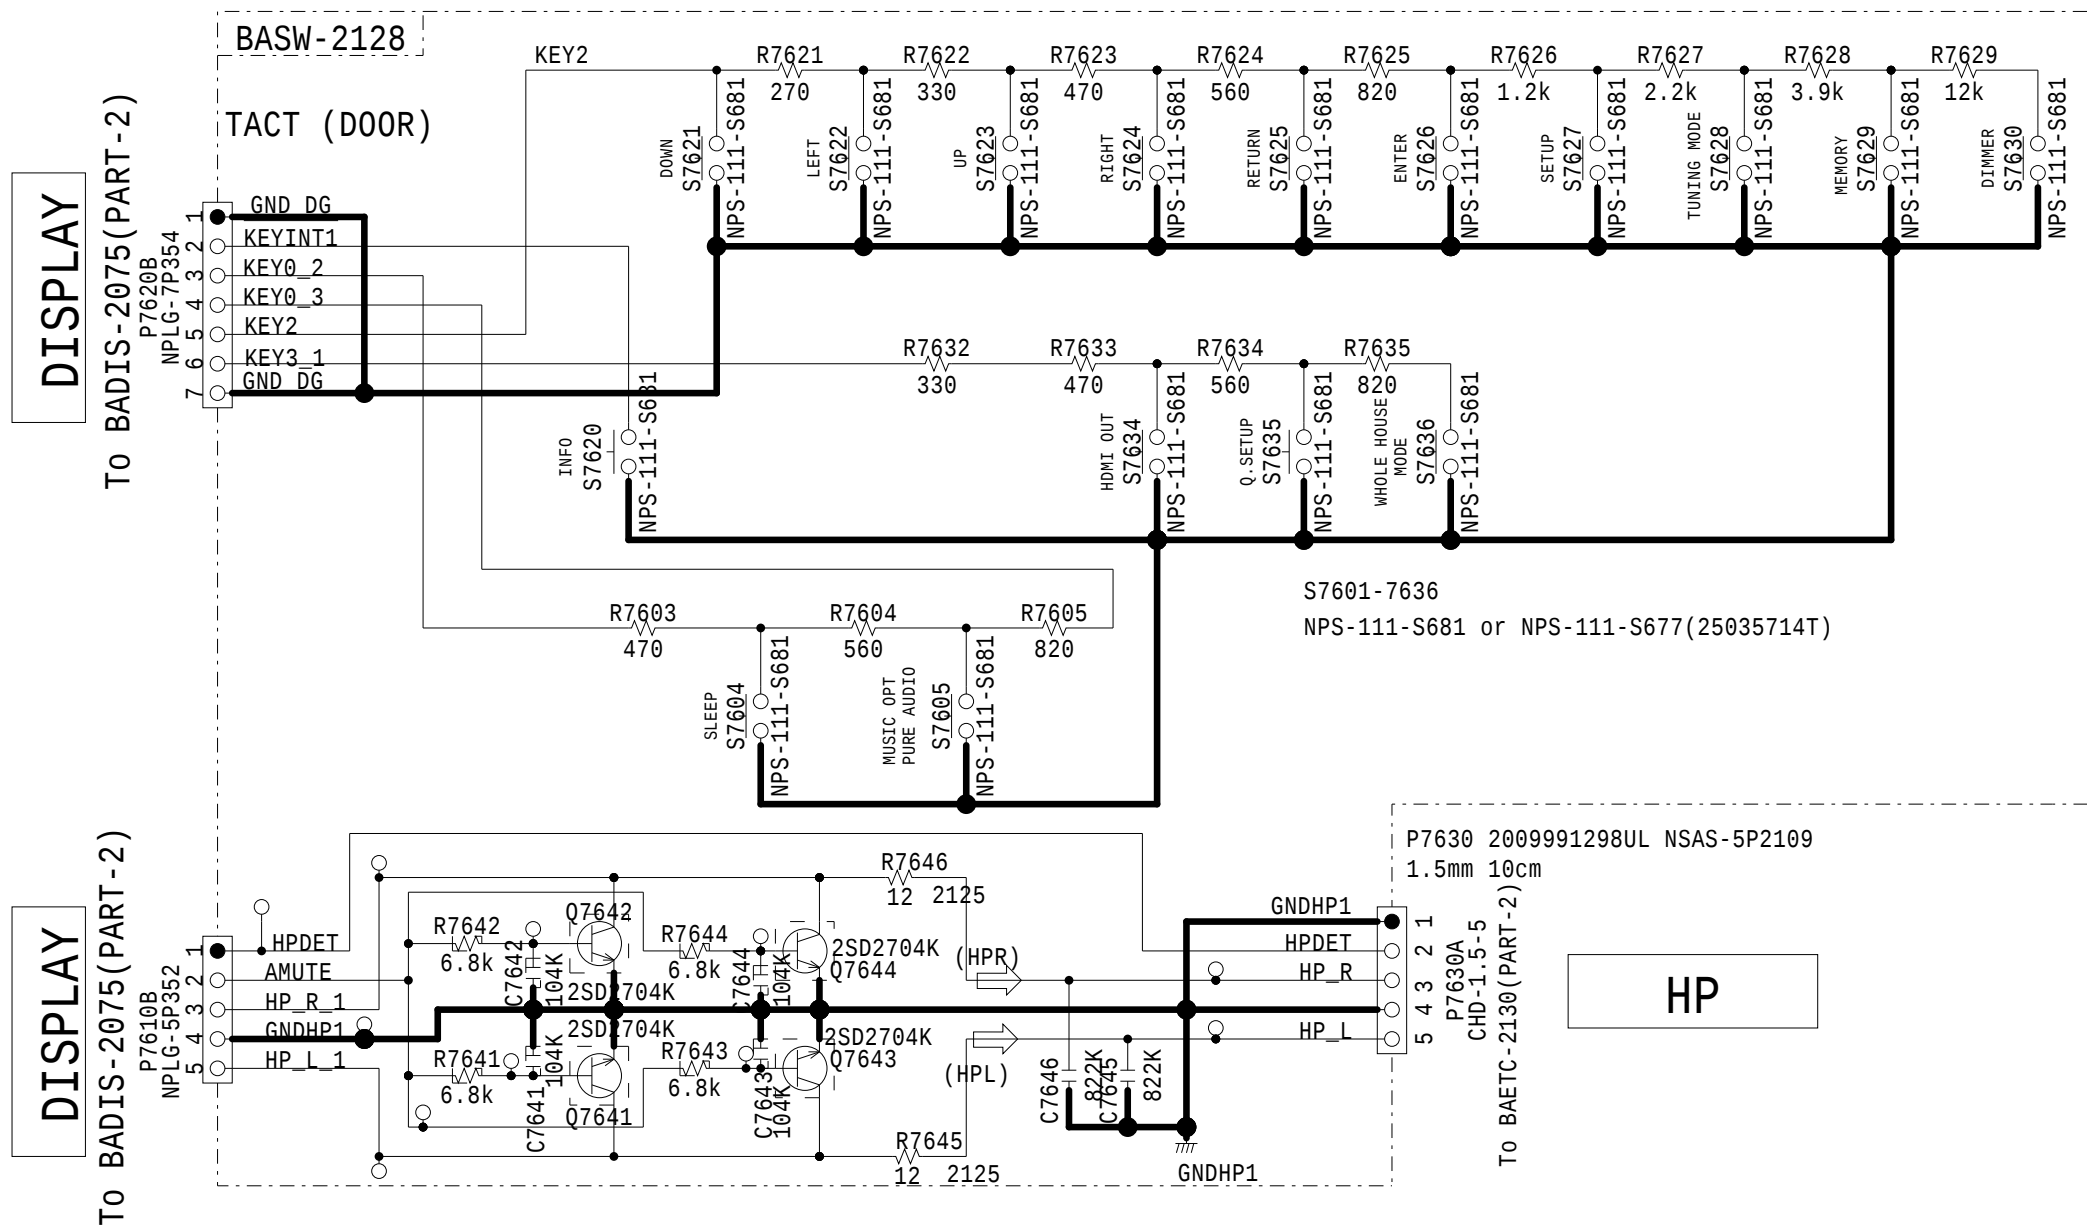

MODEL NO. TX-RZ1100/3100, PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) MIC SECTION

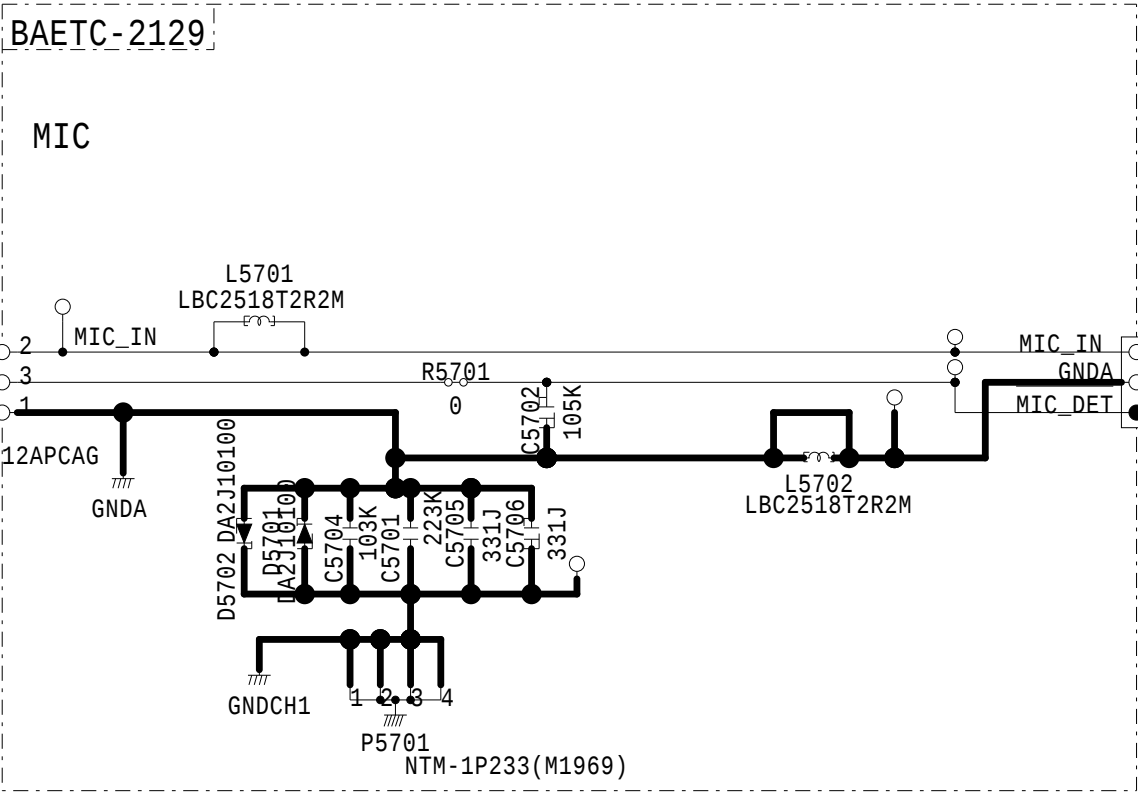


TO BADIS-2075(PART-2)

DISPLAY

MODEL NO.TX-RZ1100/3100,PR-RZ5100

SCHEMATIC DIAGRAM(PART-2) HP SECTION

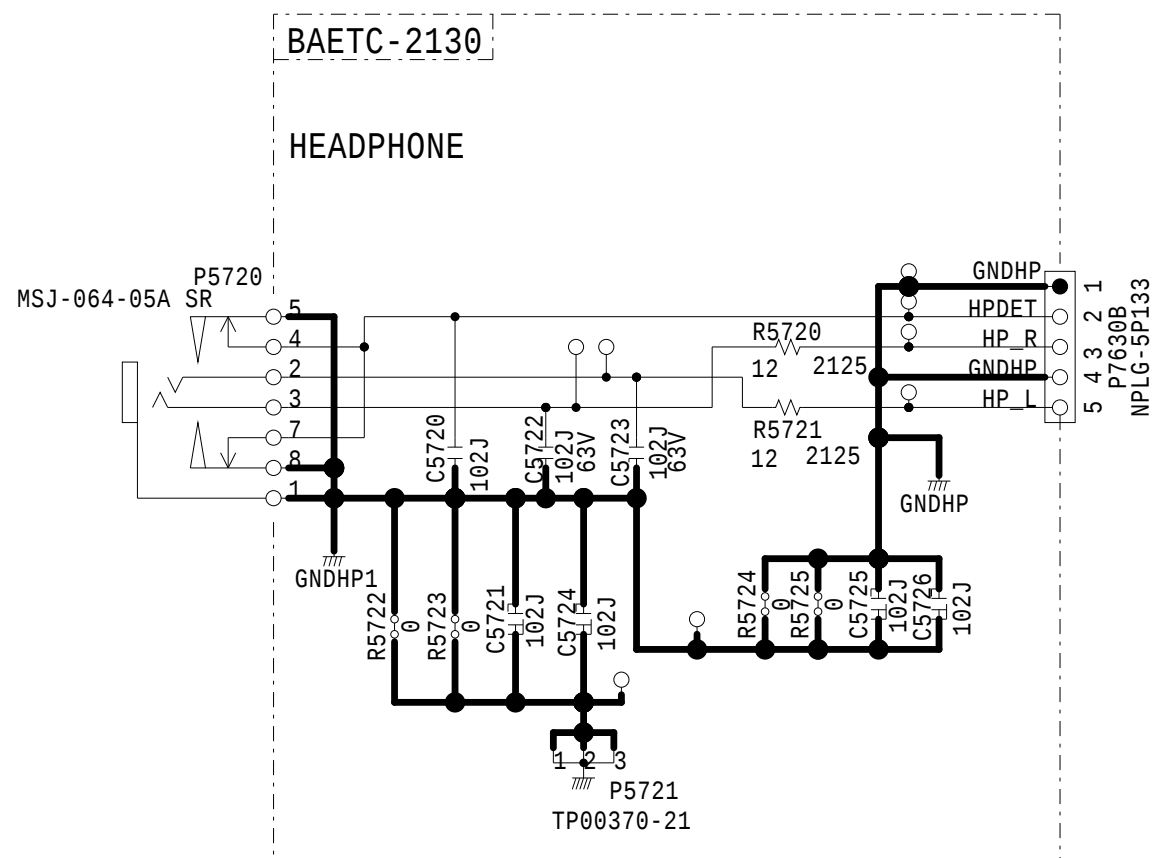

TO BASW-2128(PART-2)

TO TACT

E

E



TO BAPPC 2072 (PART 1)

THE COMPONENTS IDENTIFIED MARK Δ ARE CRITICAL FOR SAFETY, REPLACE ONLY WITH PART NUMBER SPECIFIED.
VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)
ELECTRILYTIC CAPACITORS (∇) ARE IN $\mu F/WV$.
ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030 -> 3pF, 330 -> 33pF, 331 -> 330pF, 333 -> 0.033uF
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

△印は火災、感電の危険に関する部品の為、必ず指定部品を使用の事。
電圧表示は無信号時に測定した直流電圧を示す。
記入なき電解コンデンサの単位は $\mu\text{F}/\text{WV}$ である。
記入なきコンデンサの単位は $\text{pF}/50\text{WV}$ である。
例) 630 → 3PF, 330 → 33PF, 331 → 330pF, 333 → 0.033 μF
本機図面は基本配線図につき性能改善等により予告なく変更する事がある。

CAUTION
 FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
 REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.


ATTENTION
 AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE,
 REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRAGE COMME INDIQUE

THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE
FOR CONTINUED PROTECTION AGAINST FIRE FUSE HAZARD, REPLACE WITH SAME TYPE FUSE.
RATING REFER TO THE MAKING ADJACENT TO THE SYMBOL.

CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST A LENT, E POUR UNE PROTECTION PERMANENT,
N'UTILISER QUE DES FUSIBLES DE MEME TYPE.
CE DERNIER EST INDIQUE LA OU LE PRESENT SYMBOL EST APPOSE.

A

MODEL NO. TX-RZ1100/3100, PR-RZ5100
SCHEMATIC DIAGRAM(PART-2) INPUT SW SECTION

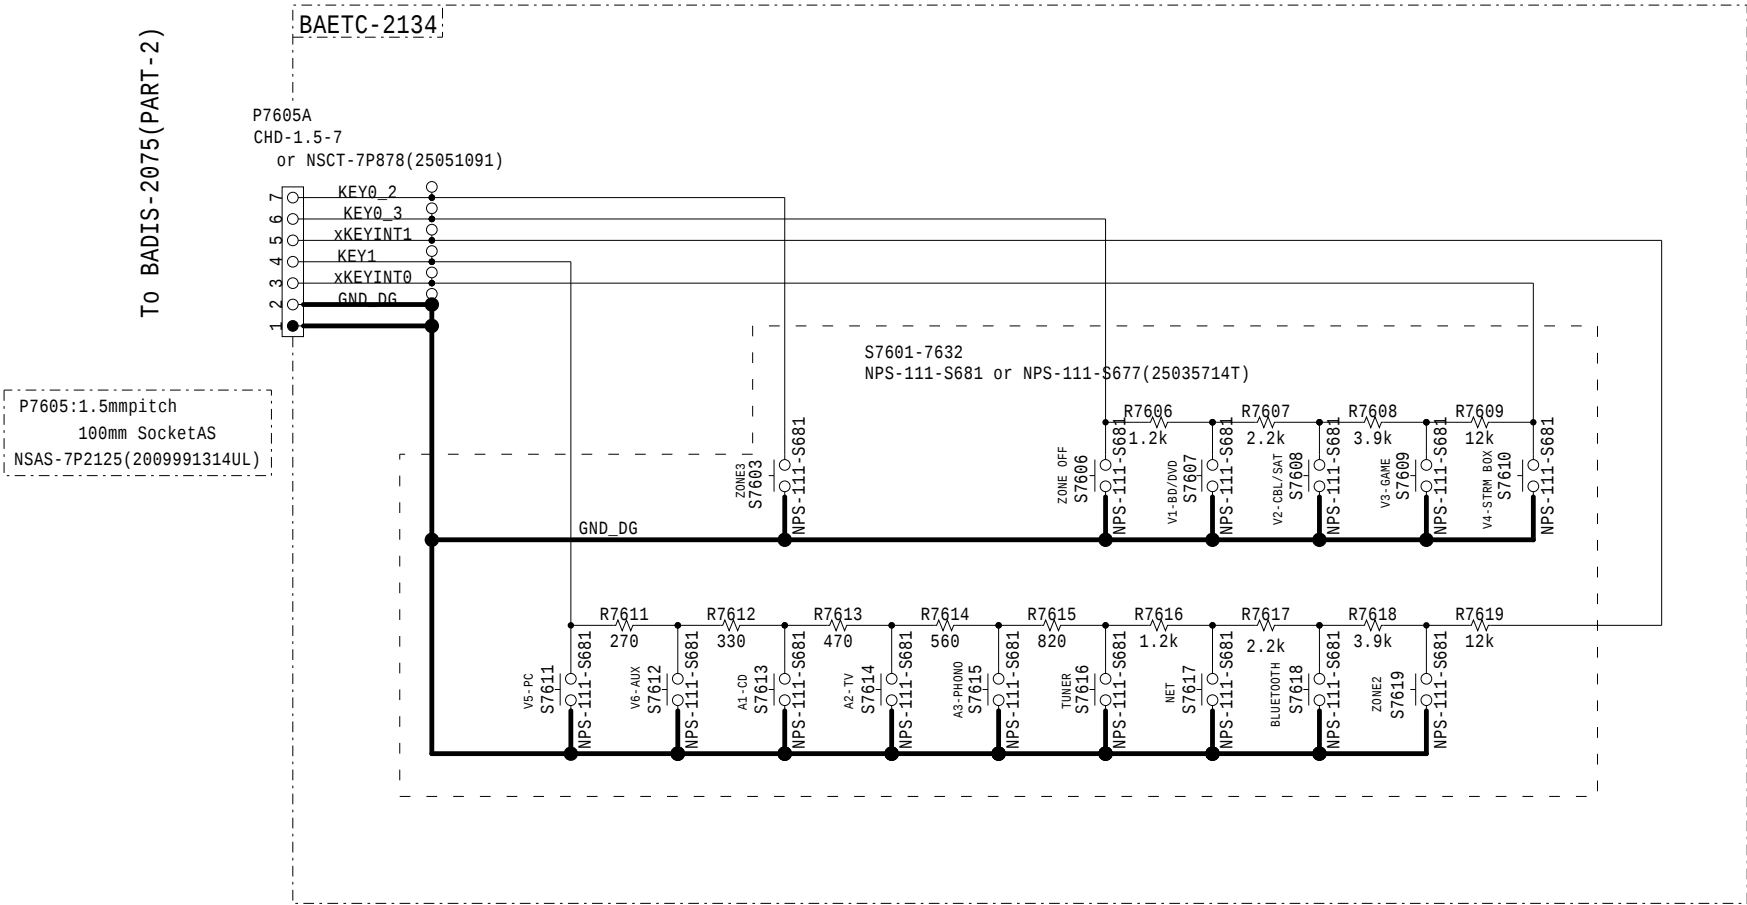

MODEL No. TX-RZ1100/3100, PR-RZ5100
SCHEMATIC DIAGRAM(PART-2) BIND_DM_CABLE SECTION

BAETC-2141




P5901
260261
CB-71683(L=50)

Schematic Diagram

MODEL NO. TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM(PART-3) DAC_0 SECTION

BADG-2078(3/4)

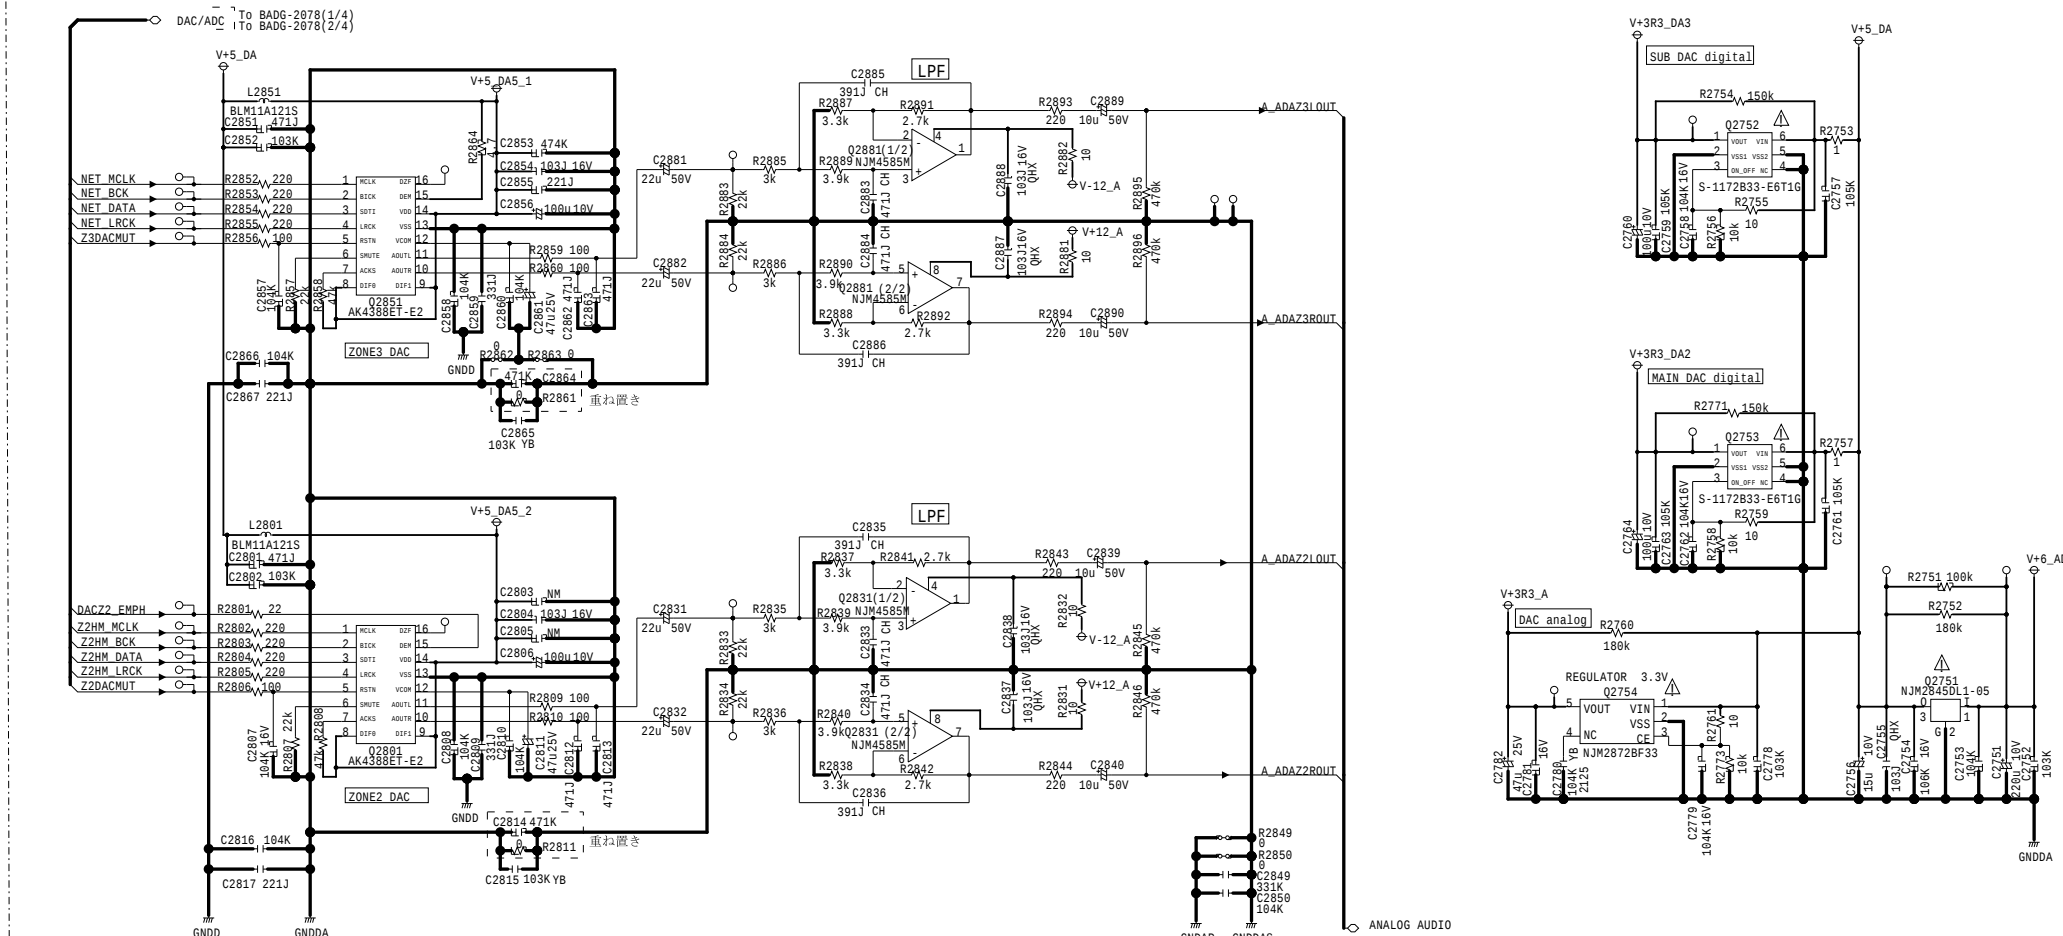


THE COMPONENTS IDENTIFIED MARK Δ ARE CRITICAL FOR SAFETY, REPLACE ONLY WITH PART NUMBER SPECIFIED.
VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)
ELECTROLYTIC CAPACITORS (E) ARE IN $\mu F/WV$.
ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030 -> 3pF, 330 -> 33pF, 331 -> 330pF, 333 -> 0.033 μF
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

Δ 印は火災、感電の危険に関与する部品の為、必ず指定部品を使用の事。
電圧表示は無信号時に測定した直流電圧を示す。
記入なき電解コンデンサの単位は $\mu F/WV$ である。
記入なきコンデンサの単位はpF/50WVである。
例) 030 -> 3pF, 330 -> 33pF, 331 -> 330pF, 333 -> 0.033 μF
本配線図は基本配線図につき性能改善等により予告なく変更する事がある。


MODEL NO. TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

AM(PART-3) DAC_0 SECTION

BADG-2078(4/4)

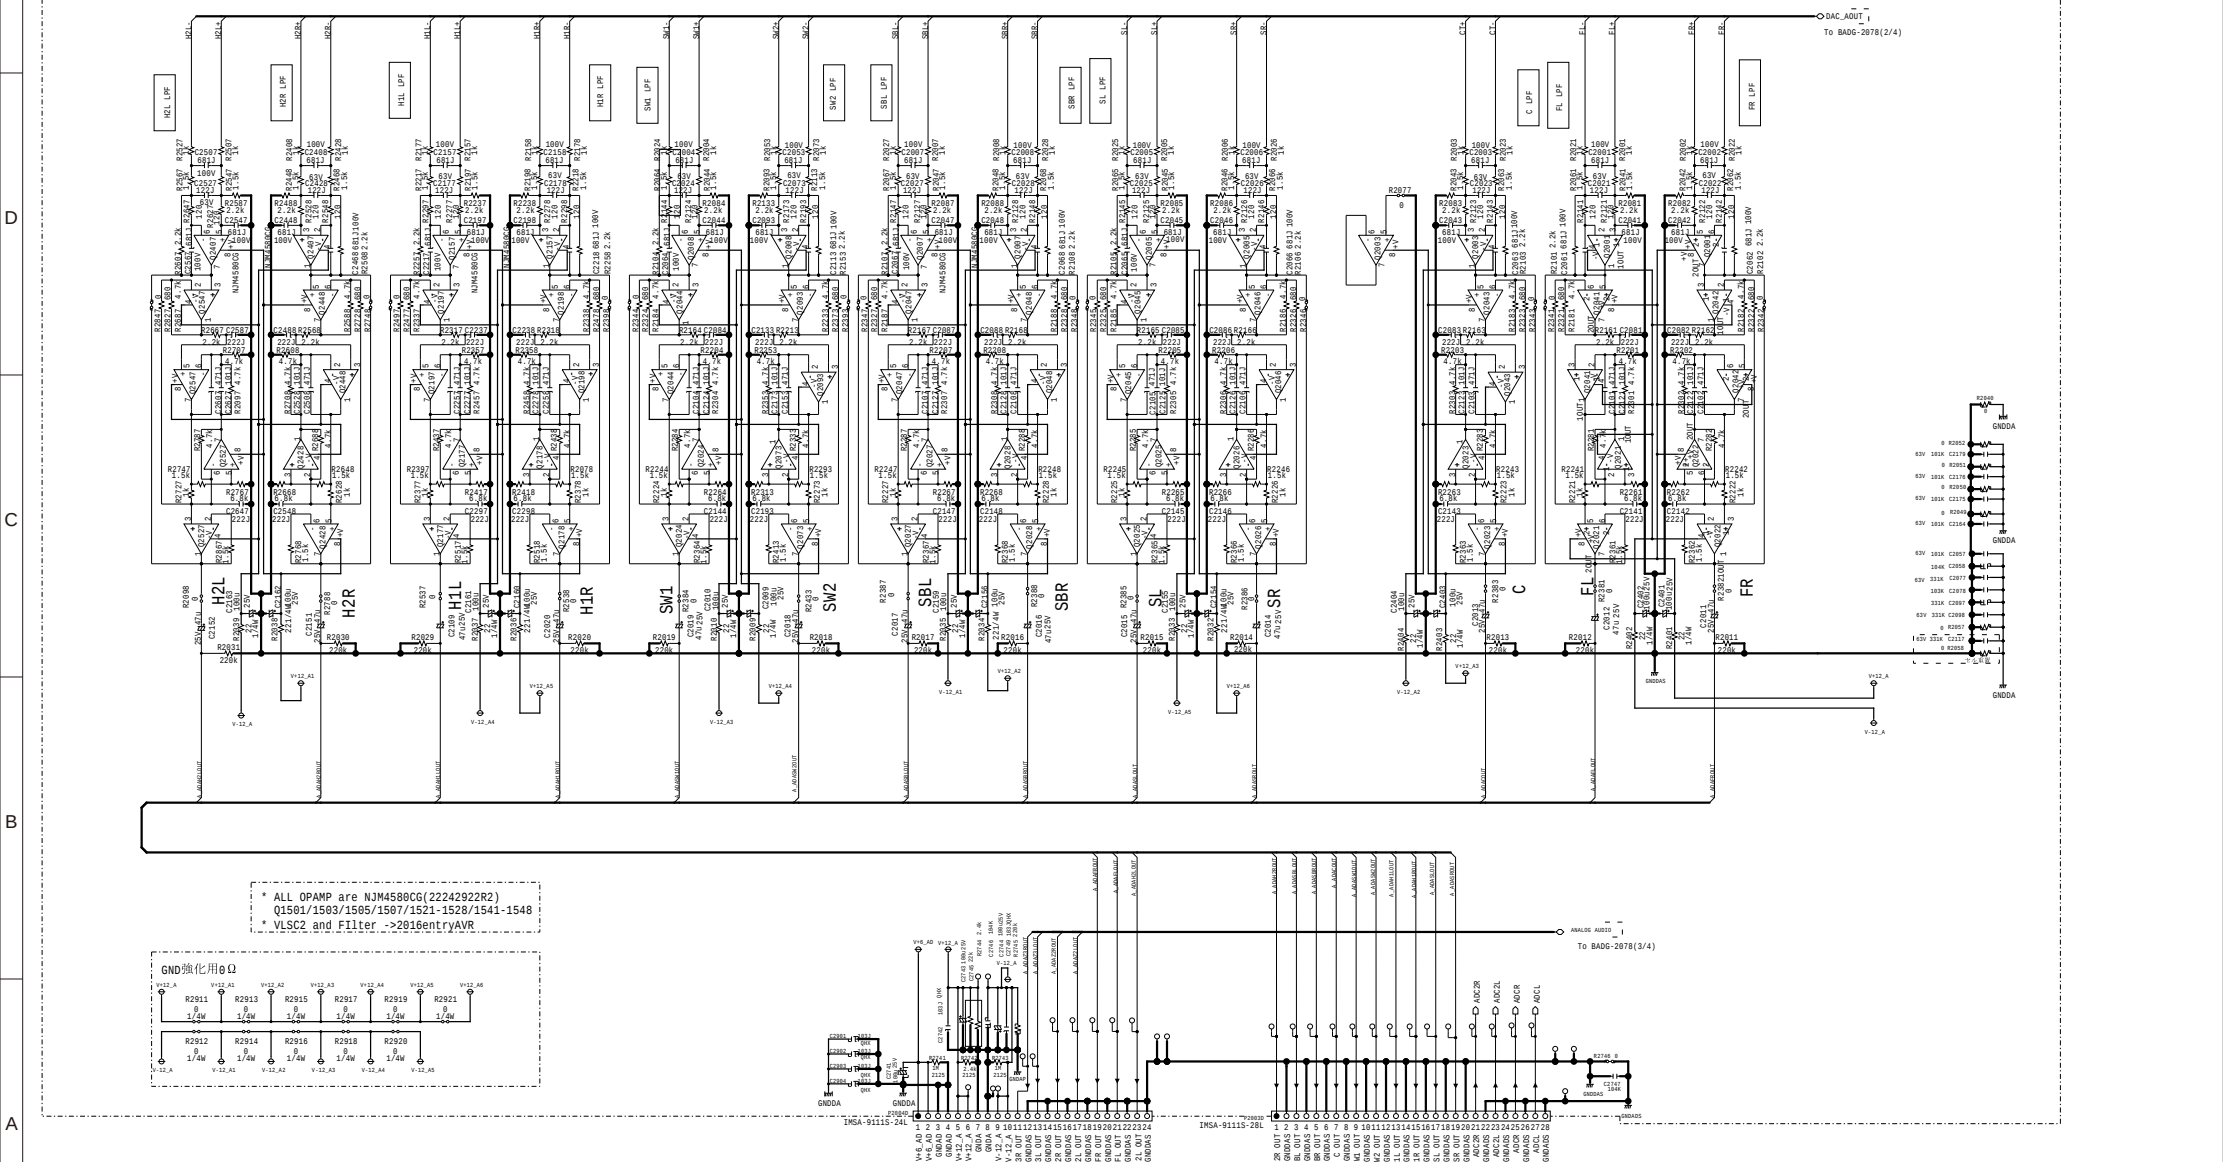

To BAETC-2150(PART-4)

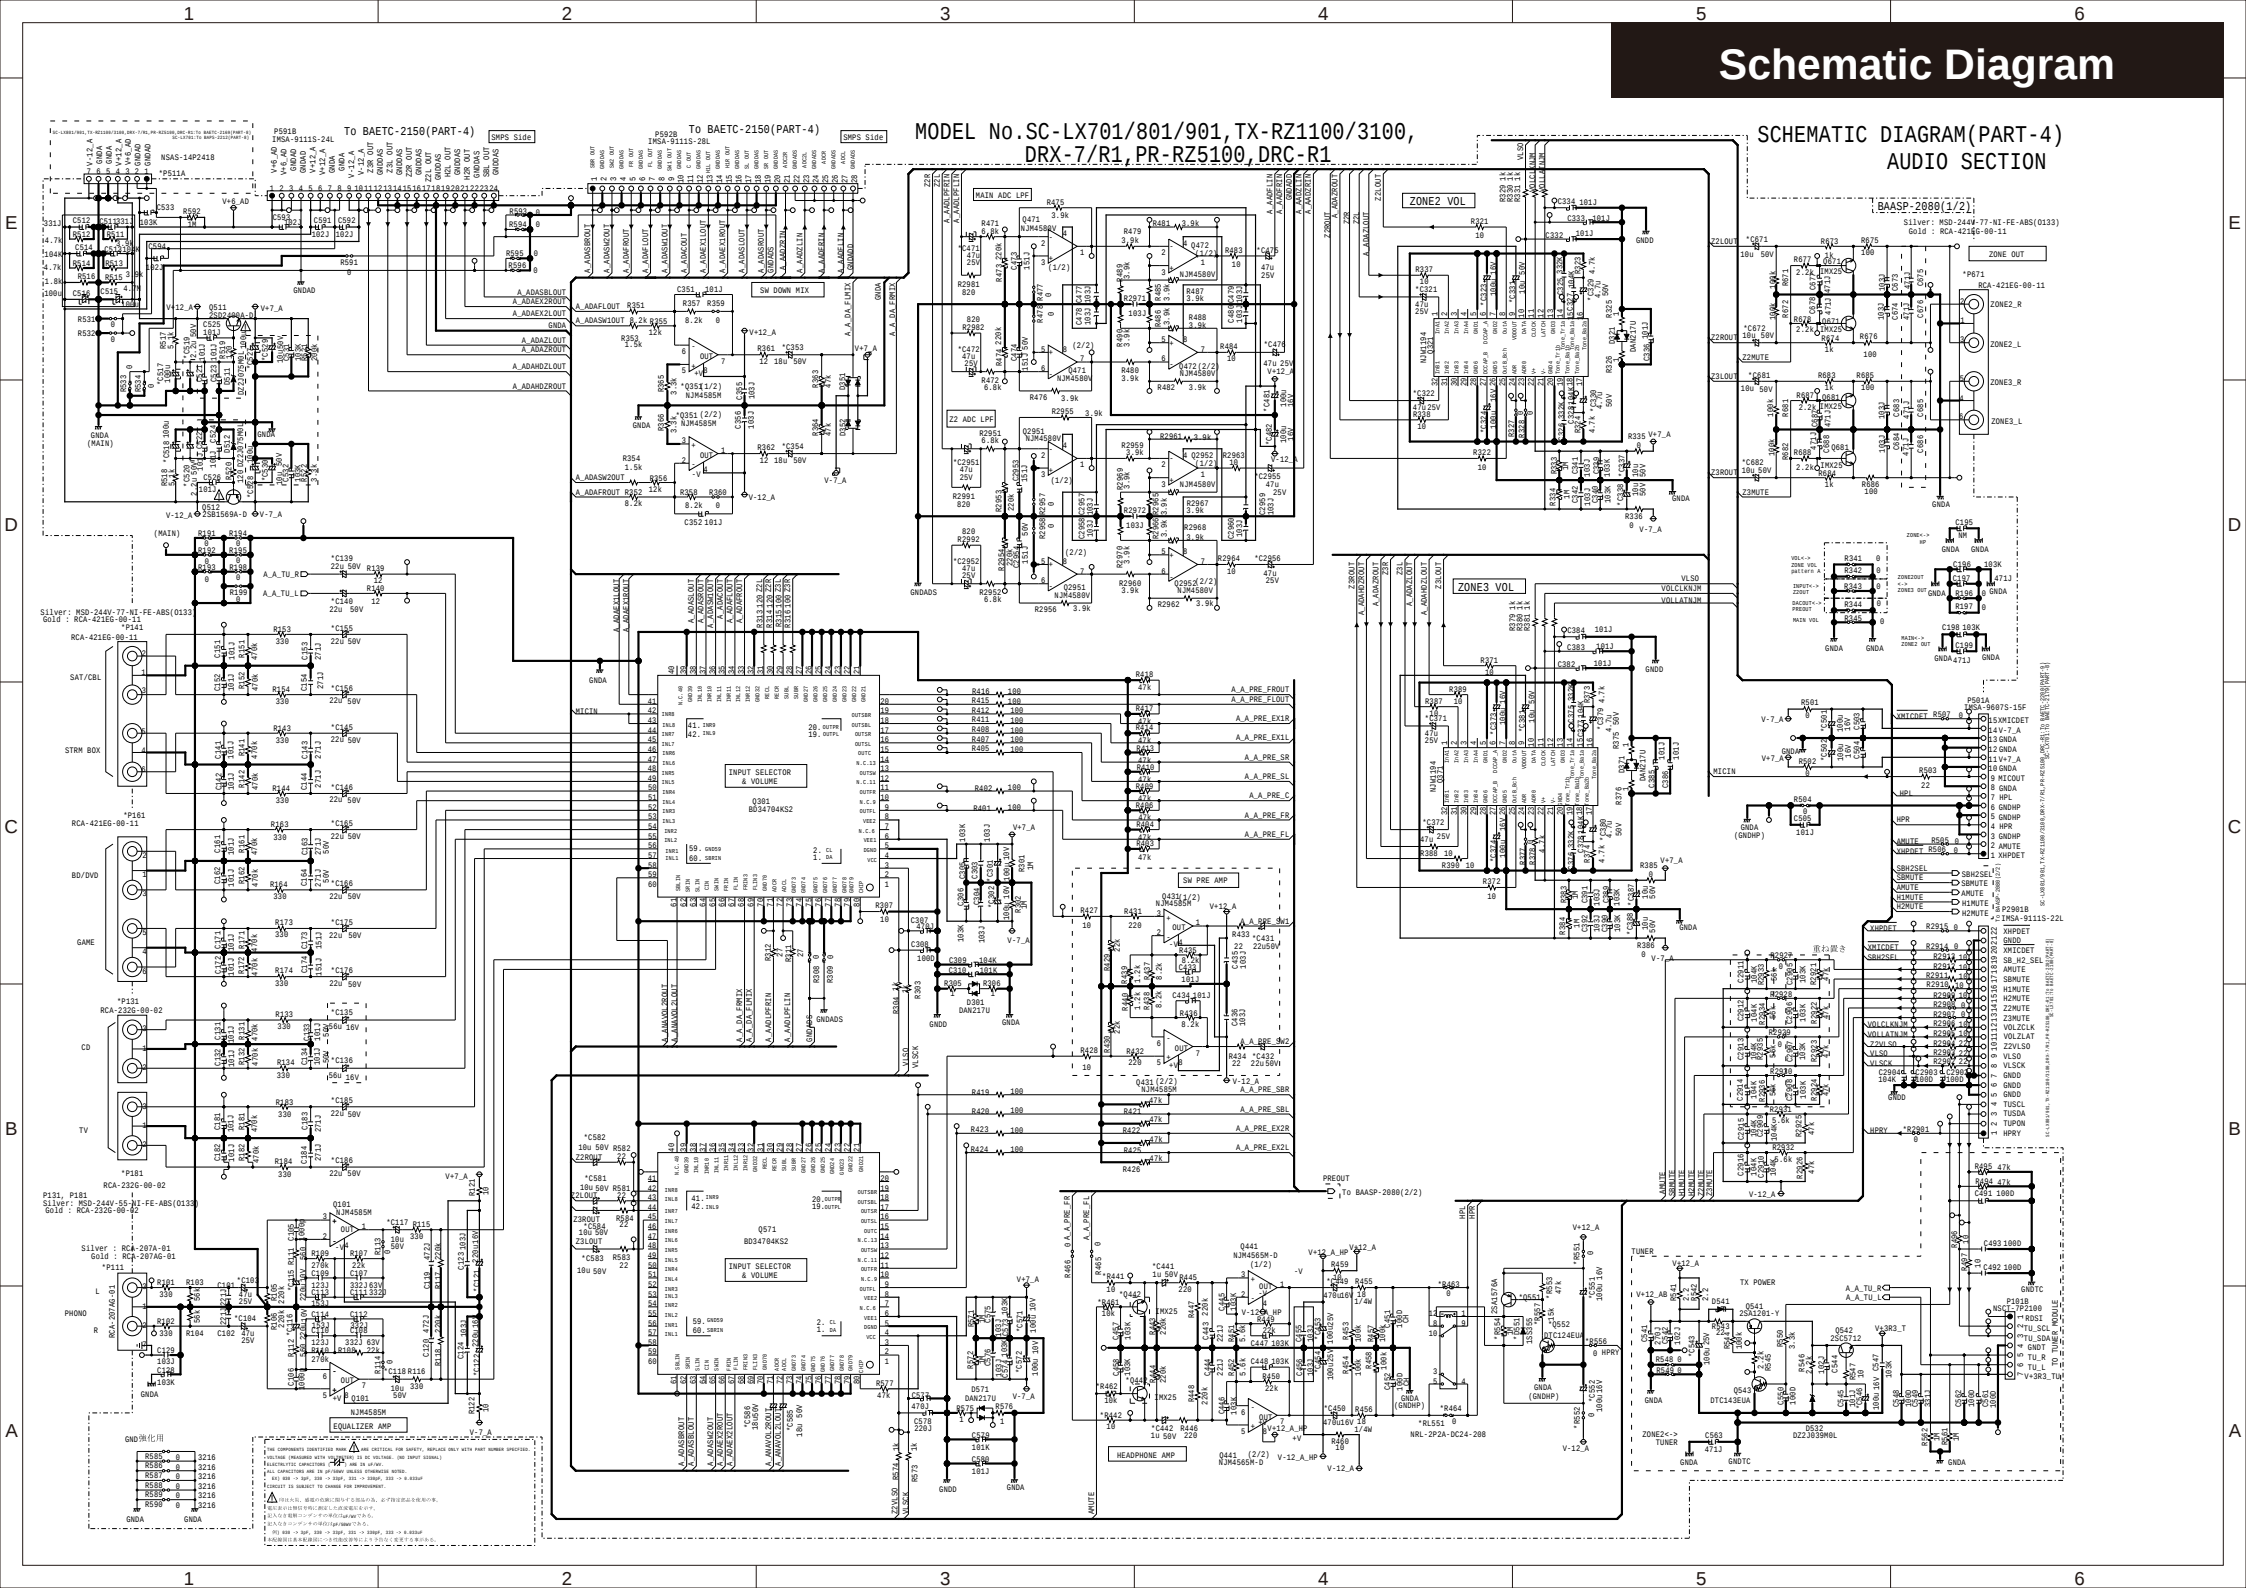

Schematic Diagram

MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

PRE BUFFER

SCHEMATIC DIAGRAM(PART-4) AUDIO SECTION

E

D

C

B

A



E

D

C


B

A

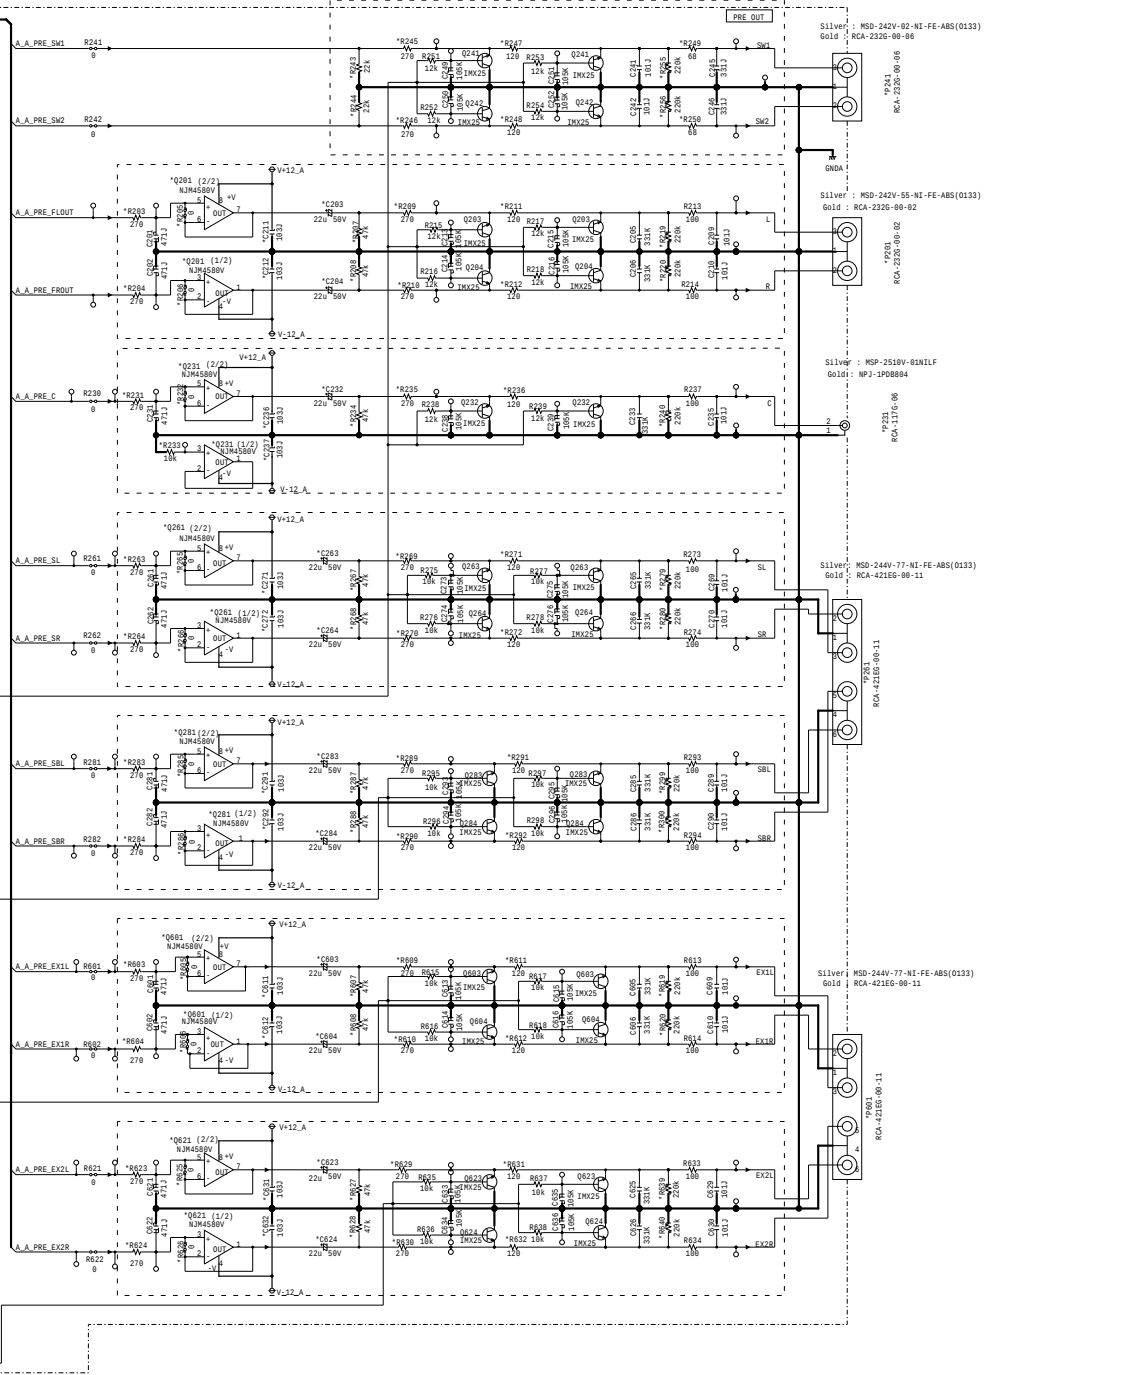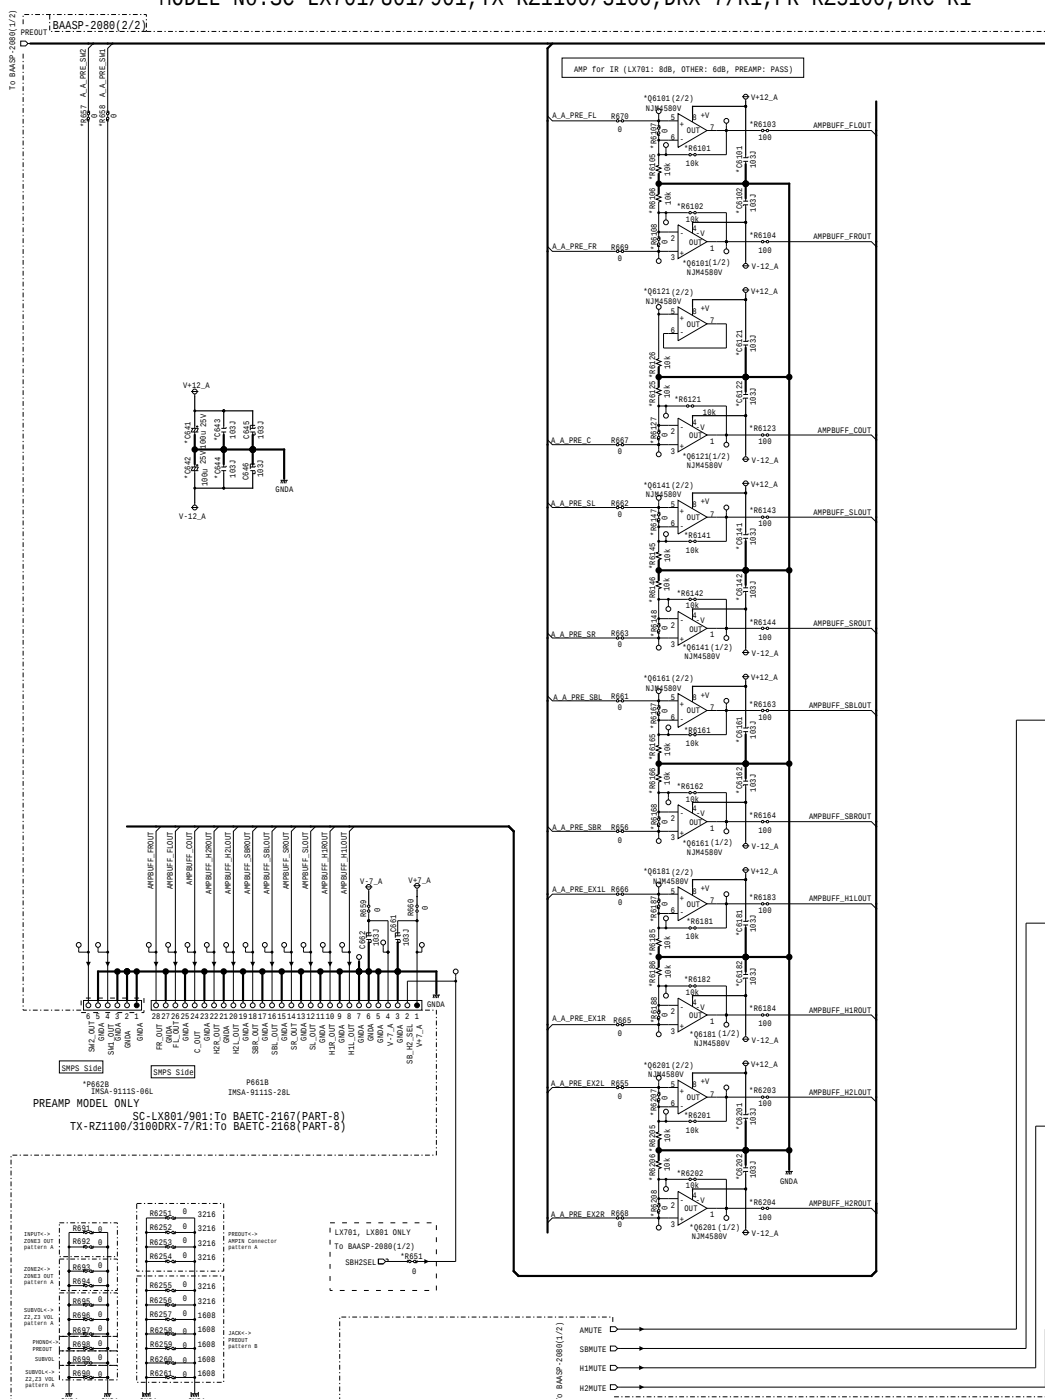

Schematic Diagram

MODEL No.SC-LX701/801/901,TX-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1 SCHEMATIC DIAGRAM(PART-4) COMPOSITE SECTION

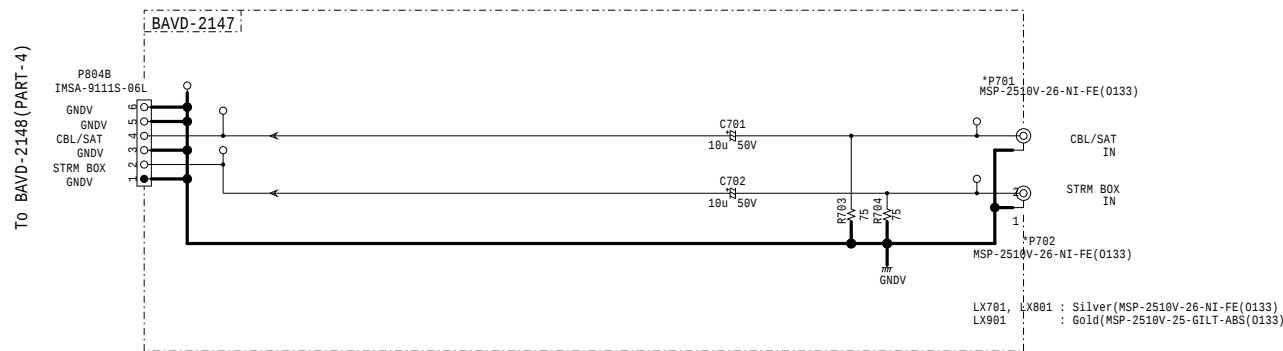

Reference 1A 1B 1C 1D 1E 1F 1G 1H 1I 1J 1K 1L 1M 1N 1P 1Q 1R

*P701 - MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-25-GILT-ABS(0133)

*P702 - MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-25-GILT-ABS(0133)

*P701 - MSP-2510V-25-GILT-ABS(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-25-GILT-ABS(0133)

*P702 - MSP-2510V-25-GILT-ABS(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-26-NI-FE(0133) MSP-2510V-25-GILT-ABS(0133)

*P701 - MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133)

*P702 - MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133) MSP-2510V-25-GILT-ABS(0133)

NOTE

1. RESISTORS
UNIT: k, M, or U unless
otherwise noted.
Rated Power: 1/8W unless
otherwise noted.
Tolerance: 1% unless
otherwise noted.

2. CAPACITORS
UNIT: p, uF or uF unless
otherwise noted.
Ratings: Capacity(F)/Voltage(V)
unless otherwise noted.
Co: COBOL


NO MARKED: CDSVB

3. UN: No Mount

Schematic Diagram


MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM(PART-4) COMPONENT SECTION

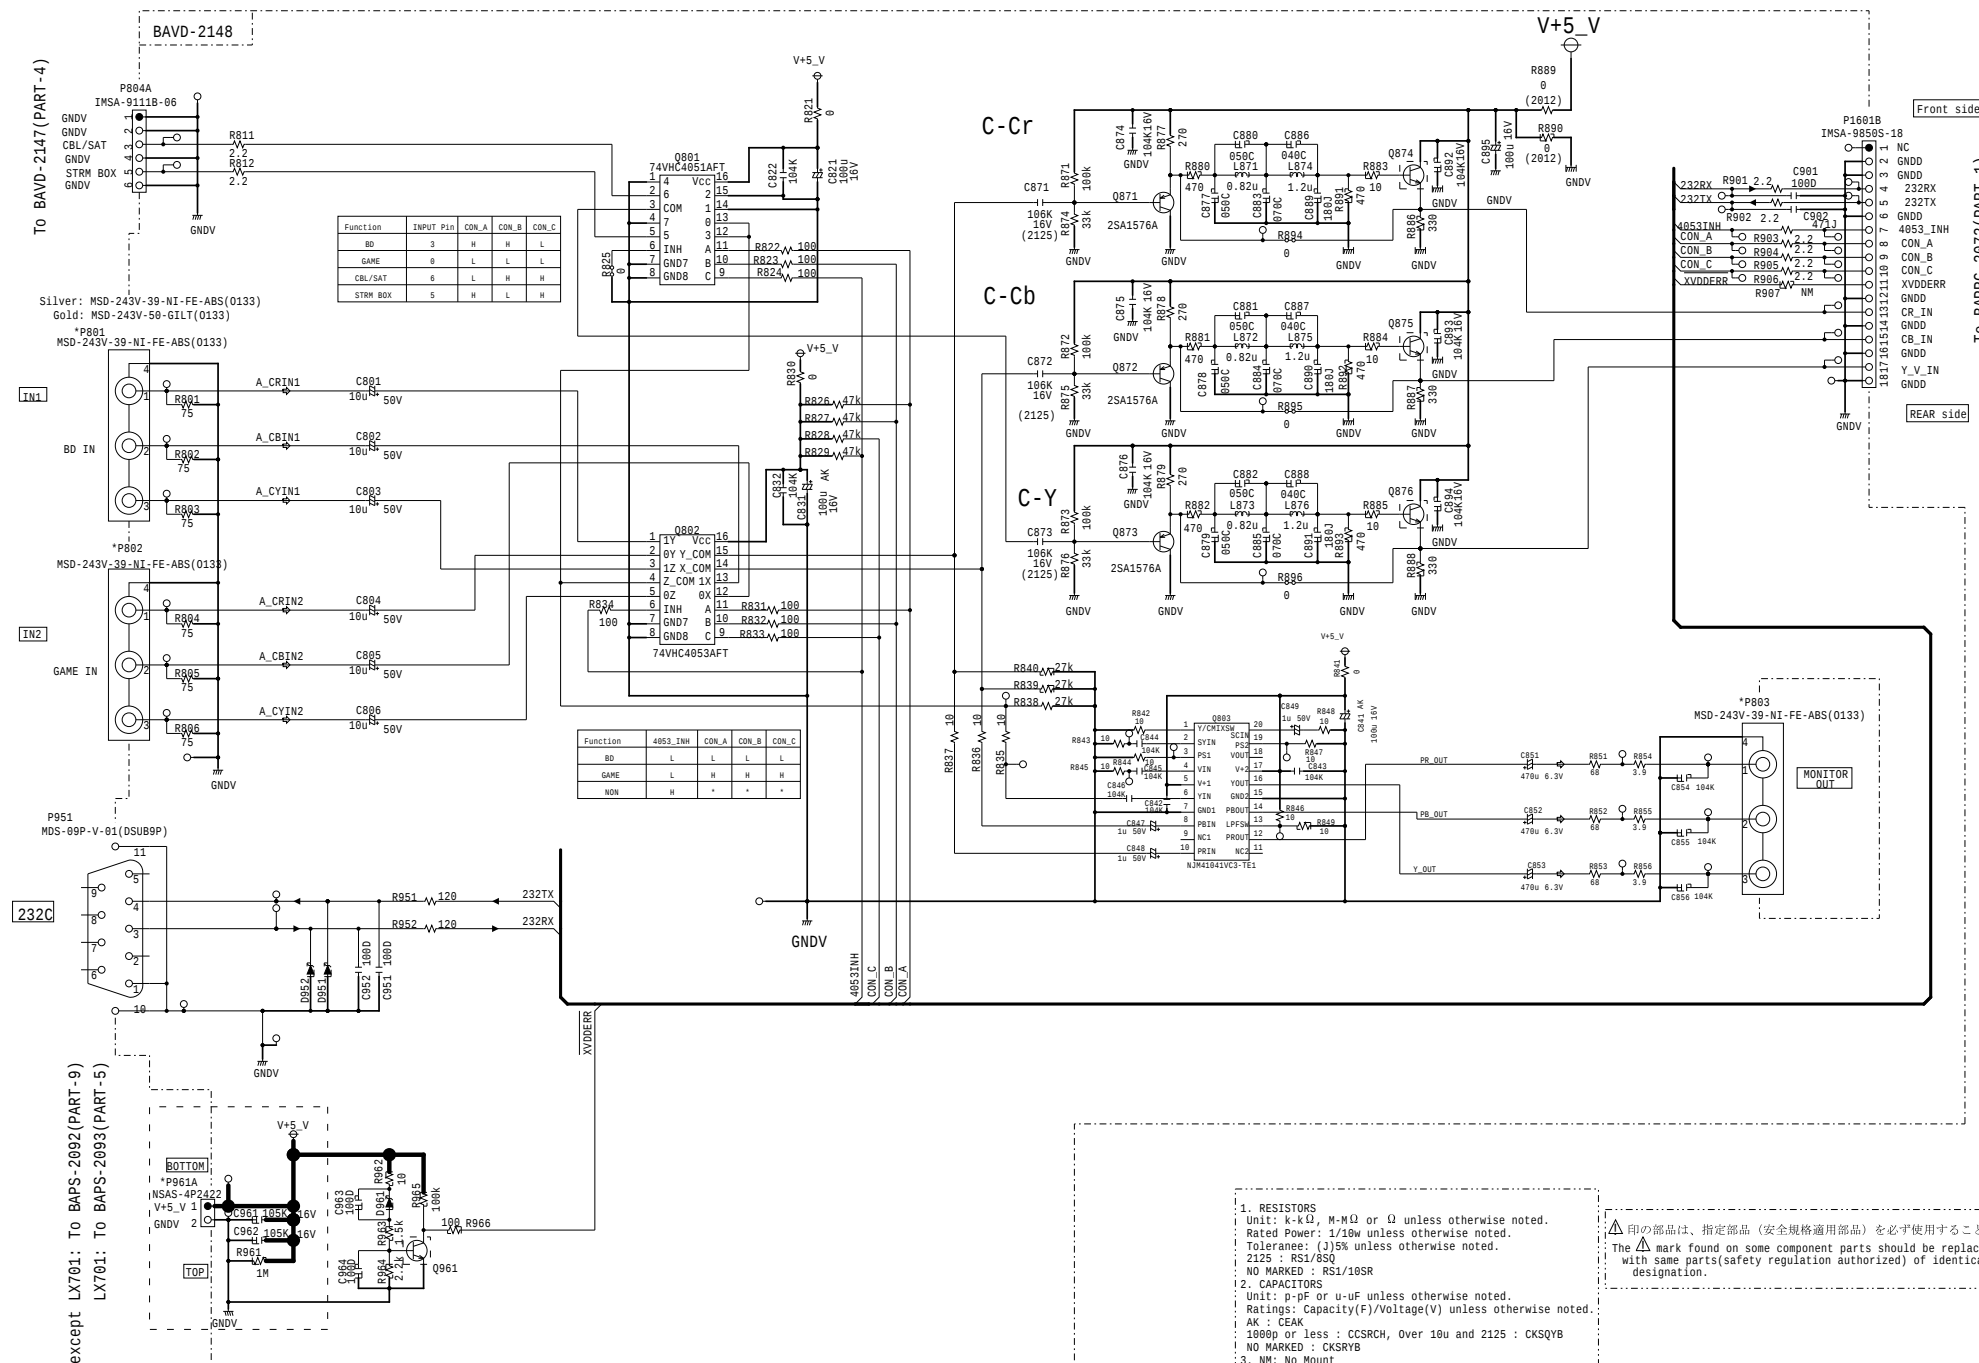



Schematic Diagram

MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DCR-R1 SCHEMATIC DIAGRAM(PART-4) D-DAC BRIDGE SECTION

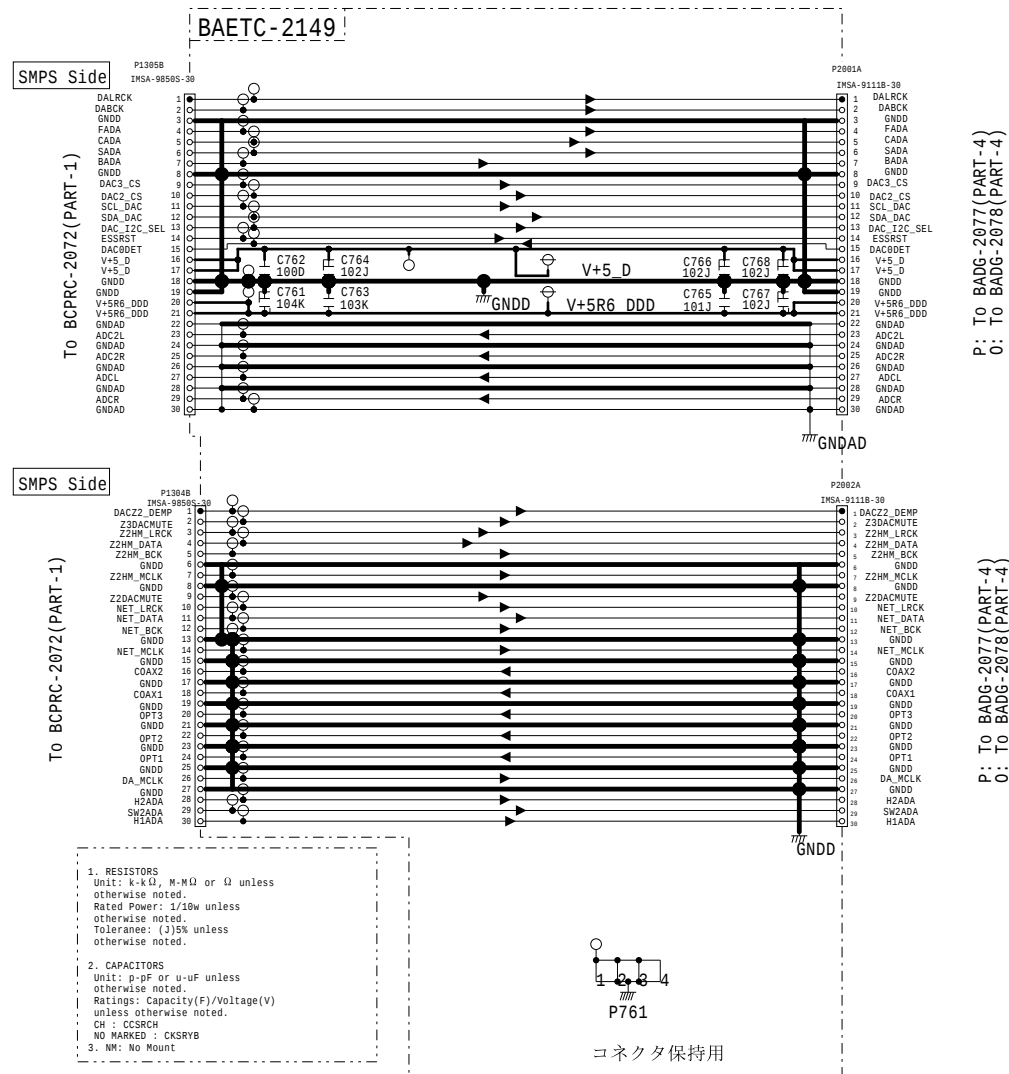

MODEL No. SC-LX801/901/TX-RZ1100/DRX-7/TX-RZ3100/DRX-R1

SCHEMATIC DIAGRAM(PART-5) IR_INTERFACE_M5 SECTION

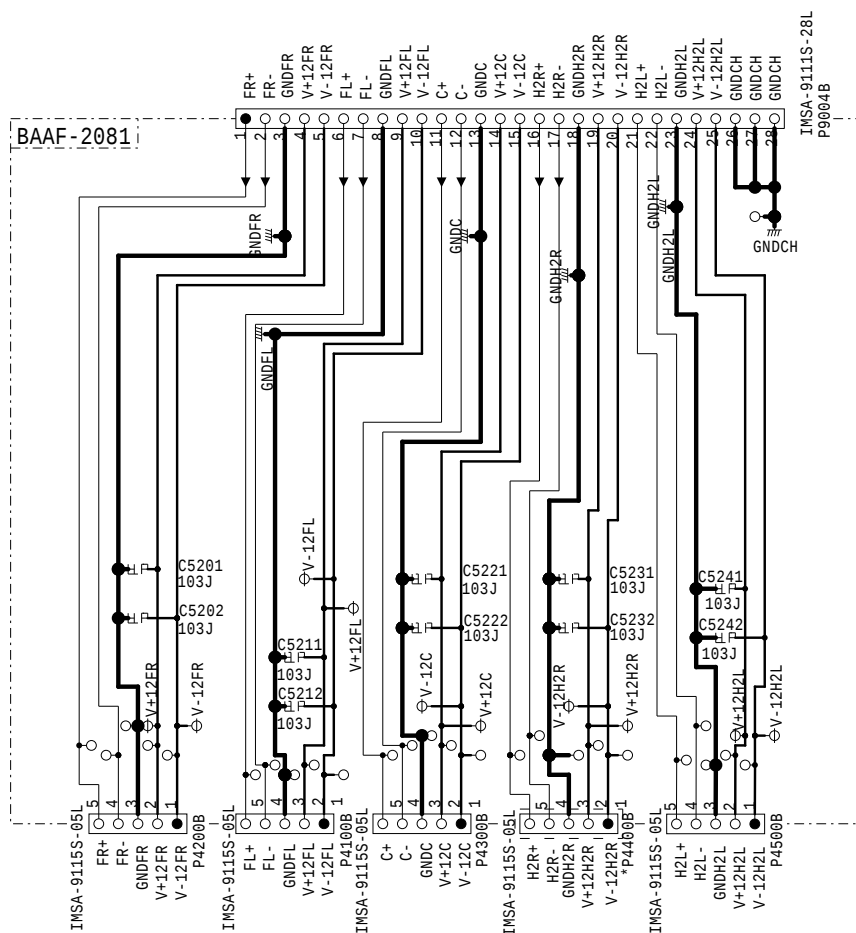

reference	1A	1B	1C	1D
*P4400B	-	IMSA-9115S-05L	-	IMSA-9115S-05L

1A	SC-LX801(B)MDC	
	SC-LX801(B)MGP	
	SC-LX801(B)MJJ	
1B	SC-LX901(B)MDC	
	SC-LX901(B)MGP	SC-LX901(S)MGP
	SC-LX901(B)MHB	
	SC-LX901(B)MJJ	
1C	TX-RZ1100(B)MDC	
	TX-RZ1100(B)MGP	TX-RZ1100(S)MGP
	TX-RZ1100(B)MHB	
	TX-RZ1100(B)MGR	
	DRX-7(B)MDD	
	DRX-7(B)MGA	
1D	TX-RZ3100(B)MDC	
	TX-RZ3100(B)MGP	TX-RZ3100(S)MGP
	TX-RZ3100(B)MHB	
	TX-RZ3100(B)MGR	
	DRX-R1(B)MDD	
	DRX-R1(B)MGR	
	DRX-R1(B)MGA	
	DRX-R1(B)MJJ	

NOTE

```


1. RESISTORS
  Unit: k-kΩ, M-MΩ or Ω unless otherwise noted.
  Rated Power: 1/16w unless otherwise noted.
  Tolerance: (J)5% unless otherwise noted.
2. CAPACITORS
  Unit: p-pF or u-uF unless otherwise noted.
  Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
  YB: CKSRBY,CH:CCSRCH
3. NM: No Mount

```

MODEL No.SC-LX801/901/TX-RZ1100/DRX-7/TX-RZ3100/DRX-R1

SCHEMATIC DIAGRAM(PART-5) IR_INTERFACE_M6 SECTION

To BAAF-2083(PART-5)

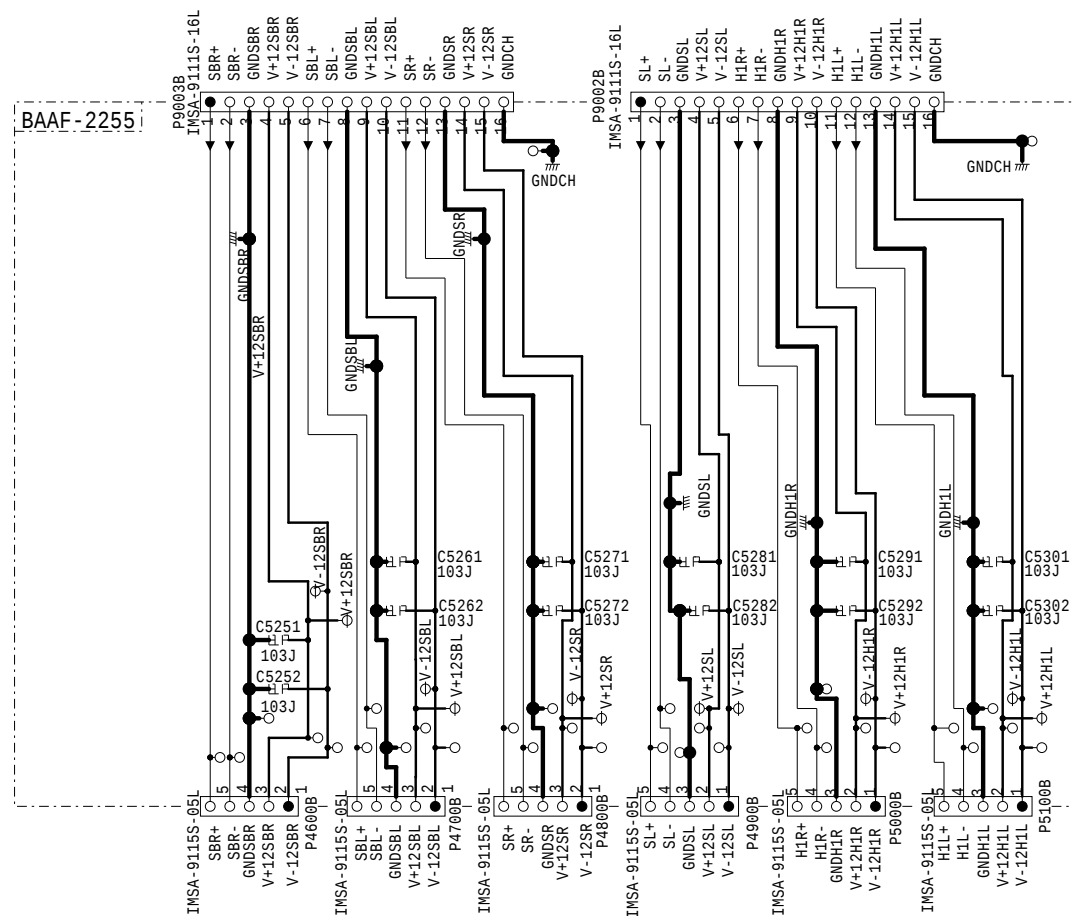

To BACLD-2095(PART-10)


NOTE

1. RESISTORS
Unit: k-k Ω , M-M Ω or Ω unless otherwise noted.
Rated Power: 1/16w unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
2. CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
YB:CKSR YB,CH:CCSRCH
3. NM: No Mount

1608 SIZE	2125 SIZE	3216 SIZE
RS1/16S*** RS1/16S***	RS1/10S*** RS1/8SQ***	RS1/8S*** RS1/4SA***
CCSR*** CKSR***	1/8W CCSQ*** CKSQ***	1/4W CCS*** CKS***

MODEL No. SC-LX801/901/TX-RZ1100/DRX-7/TX-RZ3100/DRX-R1

SCHMATIC DIAGRAM(PART-5) BUFFER GND_M SECTION

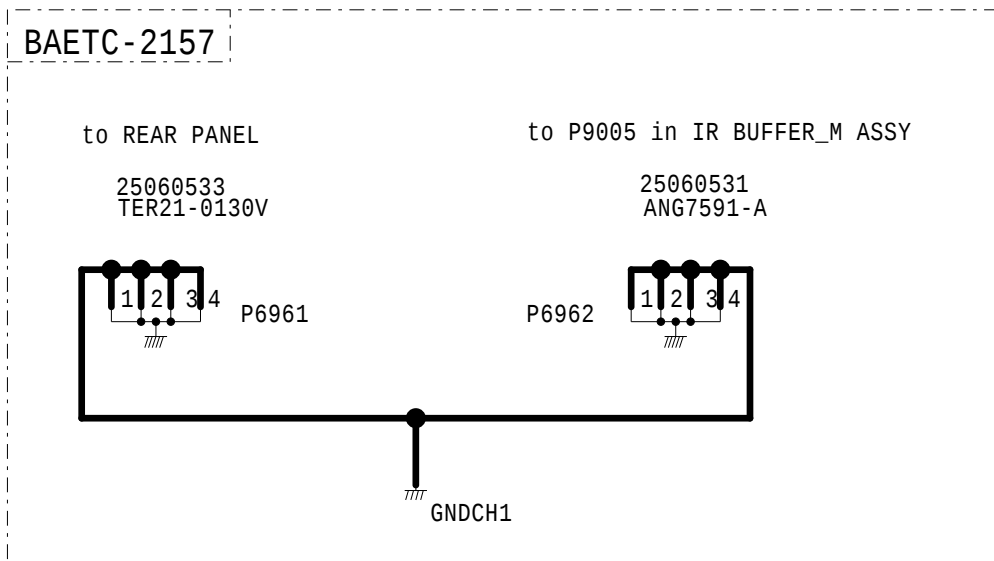

Schematic Diagram

E

E



D

D

C

B


A

B

A

reference	1A	1B	1C	1D
*P5597	-	-	INTM-1P233(M1969)	INTM-1P233(M1969)
*P5599	NTM-1P233(M1969)	NTM-1P233(M1969)	-	-

SCHEMATIC DIAGRAM (PART-6) A-DAC BRIDGE_0 SECTION

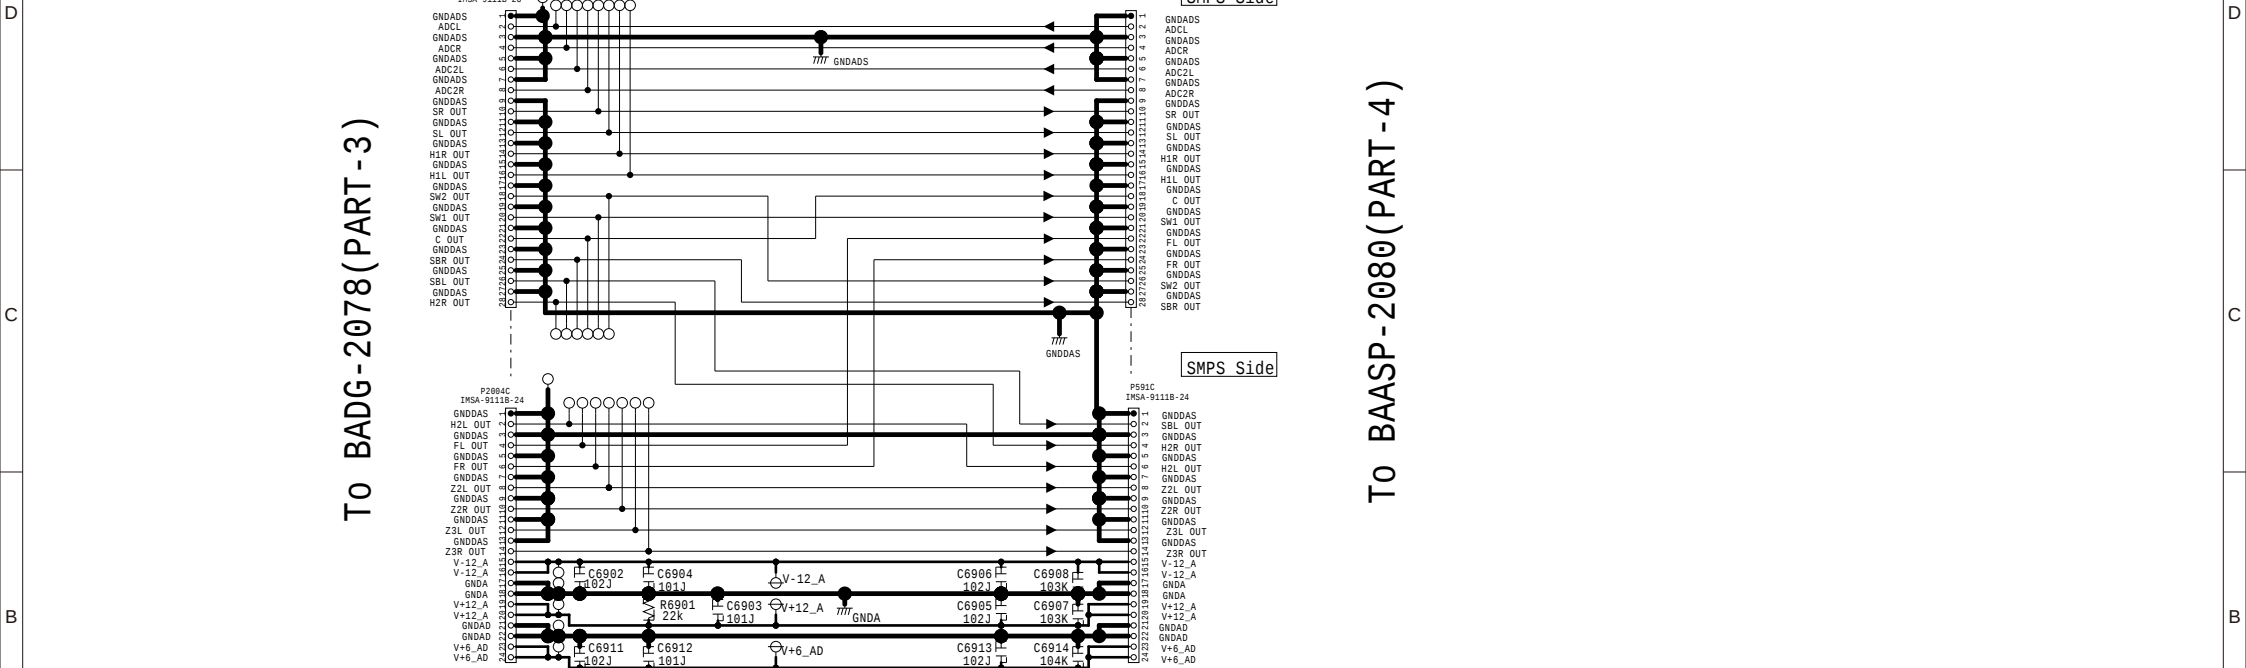


MODEL No.SC-LX801/901,TZ-RZ1100/3100,PR-RZ5100

SCHEMATIC DIAGRAM(PART-8) PRIMARY SHIELD SECTION

reference	1A	1B	1C	1D	1E	1F	1G	1H
*P5751	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V
*P5752	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V
*P5753	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V	TER21-0130V

reference	1J	1K	1L	1M	1N	1P	1Q	1R	1T	1W	1X	1Z
*P5751	-	-	-	-	TER21-0130V	TER21-0130V	-	-	TER21-0130V	TER21-0130V	-	-
*P5752	-	-	-	-	TER21-0130V	TER21-0130V	-	-	TER21-0130V	TER21-0130V	-	-
*P5753	-	-	-	-	TER21-0130V	TER21-0130V	-	-	TER21-0130V	TER21-0130V	-	TER21-0130V

BAETC-2165

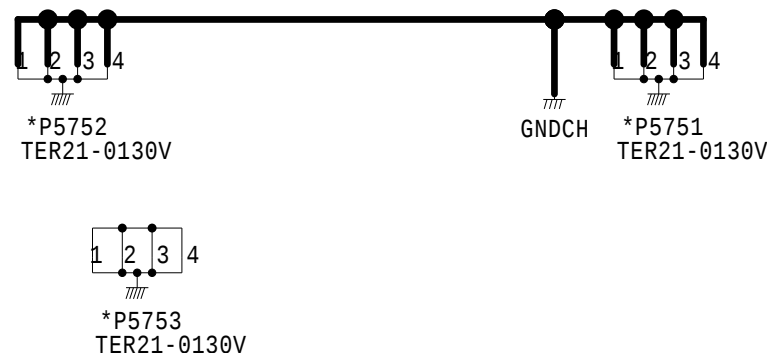

1A	SC-LX801(B)MDC
1B	SC-LX801(B)MGP
1T	SC-LX801(B)MJJ
1C	SC-LX901(B)MDC
1D	SC-LX901(B)MGP
1D	SC-LX901(S)MGP
1D	SC-LX901(B)MHB
1W	SC-LX901(B)MJJ
1E	TX-RZ1100(B)MDC
1F	TX-RZ1100(B)MGP
1F	TX-RZ1100(S)MGP
1F	TX-RZ1100(B)MHB
1F	TX-RZ1100(B)MGR
1G	TX-RZ3100(B)MDC
1H	TX-RZ3100(B)MGP
1H	TX-RZ3100(S)MGP
1H	TX-RZ3100(B)MHB
1H	TX-RZ3100(B)MGR
1N	PR-RZ5100(B)MDC
1P	PR-RZ5100(B)MGP
1P	PR-RZ5100(B)MHB
1P	PR-RZ5100(B)MGR


MODEL No.TZ-RZ1100/3100, DRX-7/R1

SCHEMATIC DIAGRAM(PART-8) PRE BRIDGE_M_0 SECTION

reference	1A	1B	1C	1D	1E	1F	1G	1H	1J
*P661C	-	-	-	-	IMSA-9111B-28	IMSA-9111B-28	IMSA-9111B-28	IMSA-9111B-28	IMSA-9111B-28
*P9001C	-	-	-	-	IMSA-9111B-28	IMSA-9111B-28	IMSA-9111B-28	IMSA-9111B-28	IMSA-9111B-28

reference	1K	1L	1M	1N	1P	1Q	1R	1T	1W	1X	1Z
*P661C	IMSA-9111B-28	IMSA-9111B-28	IMSA-9111B-28	-	-	-	-	-	IMSA-9111B-28	-	-
*P9001C	IMSA-9111B-28	IMSA-9111B-28	IMSA-9111B-28	-	-	-	-	-	IMSA-9111B-28	-	-


TO BAAF-2083(PART-5)

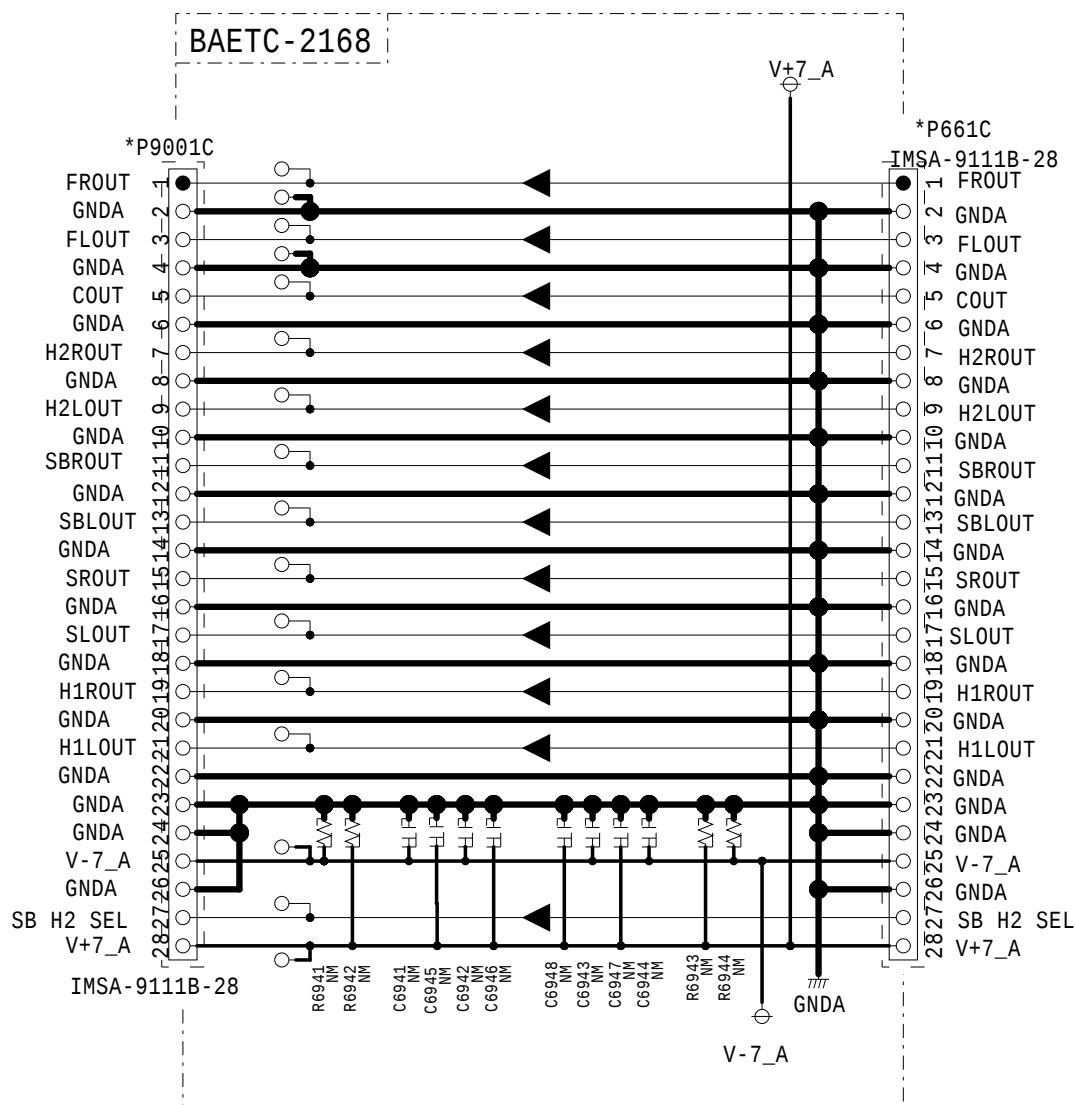

TO BAASP-2080(PART-4)

1E	TX-RZ1100(B)	MDC
1F	TX-RZ1100(B)	MGP
1F	TX-RZ1100(S)	MGP
1F	TX-RZ1100(B)	MHB
1F	TX-RZ1100(B)	MGR
1G	TX-RZ3100(B)	MDC
1H	TX-RZ3100(B)	MGP
1H	TX-RZ3100(S)	MGP
1H	TX-RZ3100(B)	MHB
1H	TX-RZ3100(B)	MGR
1J	DRX-7(B)	MDD
1K	DRX-7(B)	MGA
1L	DRX-8(B)	MDD
1M	DRX-8(B)	MGR
1M	DRX-8(B)	MGA
1X	DRX-8(B)	MJJ

MODEL No. SC-LX801/901, TZ-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1
SCHEMATIC DIAGRAM(PART-8) A REG BRIDGE SECTION

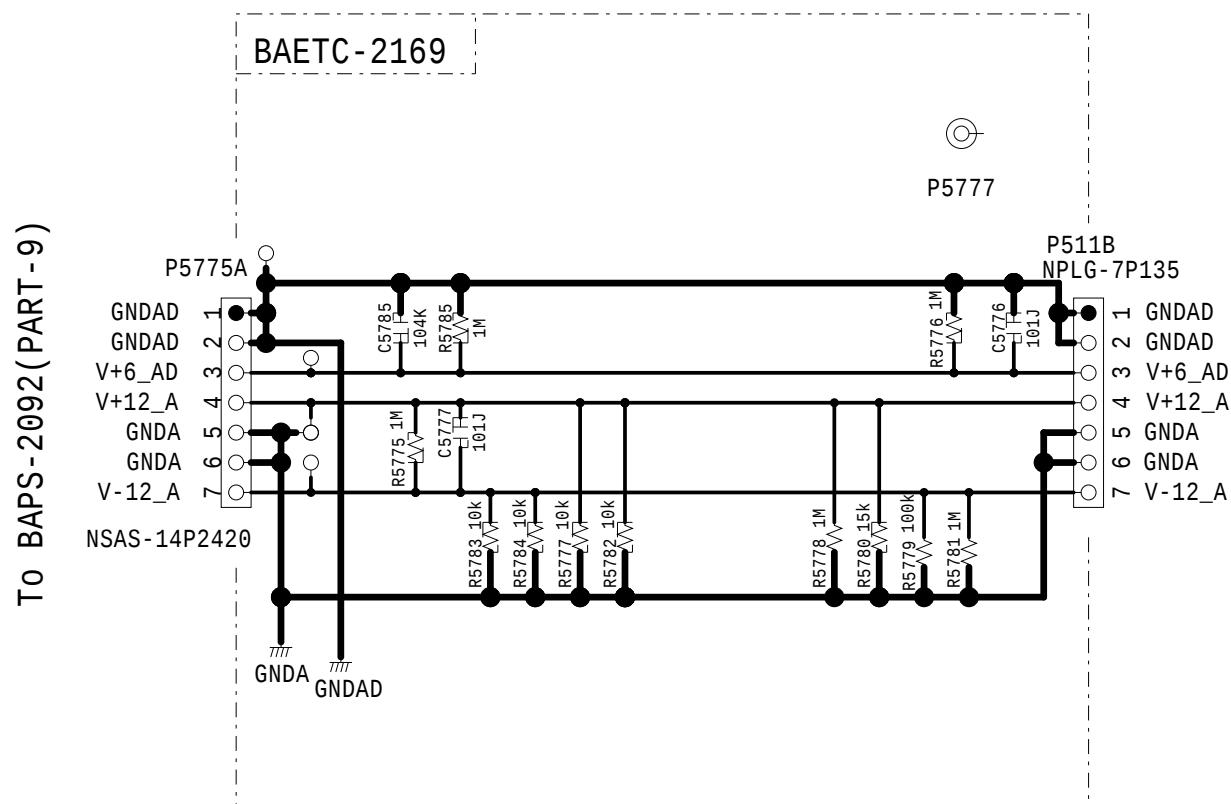

1A	SC-LX801(B)MDC
1B	SC-LX801(B)MGP
1T	SC-LX801(B)MJJ
1C	SC-LX901(B)MDC
1D	SC-LX901(B)MGP
1D	SC-LX901(S)MGP
1D	SC-LX901(B)MHB
1W	SC-LX901(B)MJJ
1E	TX-RZ1100(B)MDC
1F	TX-RZ1100(B)MGP
1F	TX-RZ1100(S)MGP
1F	TX-RZ1100(B)MHB
1F	TX-RZ1100(B)MGR
1G	TX-RZ3100(B)MDC
1H	TX-RZ3100(B)MGP
1H	TX-RZ3100(S)MGP
1H	TX-RZ3100(B)MHB
1H	TX-RZ3100(B)MGR
1J	DRX-7(B)MDD
1K	DRX-7(B)MGA
1L	DRX-8(B)MDD
1M	DRX-8(B)MGR
1M	DRX-8(B)MGA
1X	DRX-8(B)MJJ
1N	PR-RZ5100(B)MDC
1P	PR-RZ5100(B)MGP
1P	PR-RZ5100(B)MHB
1P	PR-RZ5100(B)MGR
1Q	DRC-8(B)MDD
1R	DRC-8(B)MGR
1R	DRC-8(B)MGA
1Z	DRC-8(B)MJJ

MODEL No.SC-LX801/901,TZ-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1
SCHEMATIC DIAGRAM(PART-8) IR AMP FFC GUARD SECTION

BAETC-2170

PR-RZ5100,DRC-8=NM


*P6071
260261
CB-71683(L=50)

- 1A SC-LX801(B)MDC
- 1B SC-LX801(B)MGP
- 1T SC-LX801(B)MJJ
- 1C SC-LX901(B)MDC
- 1D SC-LX901(B)MGP
- 1D SC-LX901(S)MGP
- 1D SC-LX901(B)MHB
- 1W SC-LX901(B)MJJ
- 1E TX-RZ1100(B)MDC
- 1F TX-RZ1100(B)MGP
- 1F TX-RZ1100(S)MGP
- 1F TX-RZ1100(B)MHB
- 1F TX-RZ1100(B)MGR
- 1G TX-RZ3100(B)MDC
- 1H TX-RZ3100(B)MGP
- 1H TX-RZ3100(S)MGP
- 1H TX-RZ3100(B)MHB
- 1H TX-RZ3100(B)MGR
- 1J DRX-7(B)MDD
- 1K DRX-7(B)MGA
- 1L DRX-8(B)MDD
- 1M DRX-8(B)MGR
- 1M DRX-8(B)MGA
- 1X DRX-8(B)MJJ
- 1N PR-RZ5100(B)MDC
- 1P PR-RZ5100(B)MGP
- 1P PR-RZ5100(B)MHB
- 1P PR-RZ5100(B)MGR
- 1Q DRC-8(B)MDD
- 1R DRC-8(B)MGR
- 1R DRC-8(B)MGA
- 1Z DRC-8(B)MJJ

reference	1A	1B	1C	1D	1E	1F	1G	1H				
*P6071	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)				
reference	1J	1K	1L	1M	1N	1P	1Q	1R	1T	1W	1X	1Z
*P6071	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	-	-	-	-	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	-

MODEL No.SC-LX801/901,TZ-RZ1100/3100,DRX-7/R1

SCHEMATIC DIAGRAM(PART-8) B CABLE GUARD SECTION

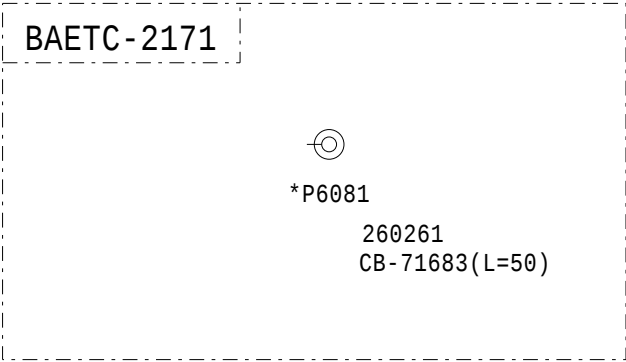


- 1A SC-LX801(B)MDC
- 1B SC-LX801(B)MGP
- 1T SC-LX801(B)MJJ
- 1C SC-LX901(B)MDC
- 1D SC-LX901(B)MGP
- 1D SC-LX901(S)MGP
- 1D SC-LX901(B)MHB
- 1W SC-LX901(B)MJJ
- 1E TX-RZ1100(B)MDC
- 1F TX-RZ1100(B)MGP
- 1F TX-RZ1100(S)MGP
- 1F TX-RZ1100(B)MHB
- 1F TX-RZ1100(B)MGR
- 1G TX-RZ3100(B)MDC
- 1H TX-RZ3100(B)MGP
- 1H TX-RZ3100(S)MGP
- 1H TX-RZ3100(B)MHB
- 1H TX-RZ3100(B)MGR
- 1J DRX-7(B)MDD
- 1K DRX-7(B)MGA
- 1L DRX-8(B)MDD
- 1M DRX-8(B)MGR
- 1M DRX-8(B)MGA
- 1X DRX-8(B)MJJ

reference	1A	1B	1C	1D	1E	1F	1G	1H				
*P6081	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)				
reference	1J	1K	1L	1M	1N	1P	1Q	1R	1T	1W	1X	1Z
*P6081	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	-	-	-	-	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	-

MODEL No. SC-LX801/901, TX-RZ-1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM(PART-8) D-AUDIO BRIDGE SECTION

To BAPRC-2072(PART-1)

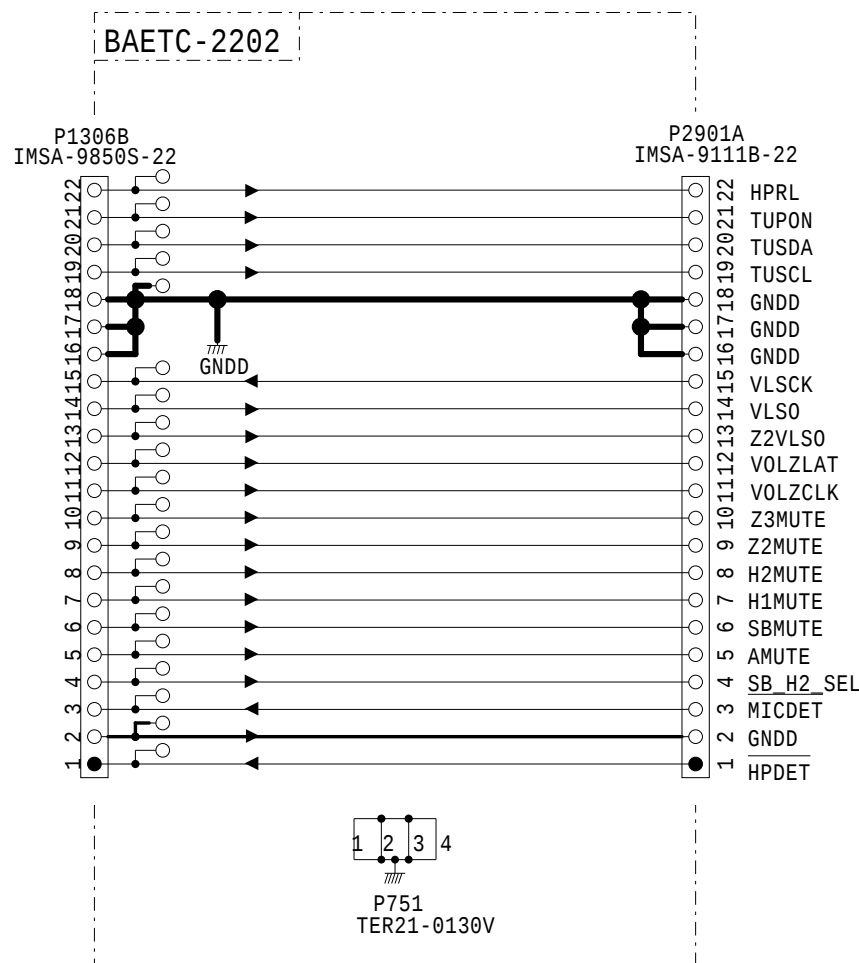

To BAASP-2080(PART-4)

1A SC-LX801(B)MDC
1B SC-LX801(B)MGP
1T SC-LX801(B)MJJ
1C SC-LX901(B)MDC
1D SC-LX901(B)MGP
1D SC-LX901(S)MGP
1D SC-LX901(B)MHB
1W SC-LX901(B)MJJ


Schematic Diagram

MODEL No.SC-LX801/901,TZ-RZ1100/3100,DRX-7/R1,PR-RZ5100,DRC-R1 SCHEMATIC DIAGRAM(PART-8) TUNER SECTION

reference	1A	1B	1C	1D	1E	1F	1G	1H	1I
*Q1	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2
*P1	NTM-1PDC437	NTM-1PDC438	NTM-1PDC437	NTM-1PDC438	NTM-1PDC437	NTM-1PDC438	NTM-1PDC437	NTM-1PDC438	NTM-1PDC437

reference	1K	1L	1M	1N	1P	1Q	1R	1T	1W
*Q1	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0002E2	RZ5B801-0001E2	RZ5B801-0002E2
*P1	NTM-1PDC438	NTM-1PDC437	NTM-1PDC438	NTM-1PDC437	NTM-1PDC438	NTM-1PDC437	NTM-1PDC438	NTM-1PDC437	NTM-1PDC438

reference	1X	1Z
*Q1	RZ5B801-0001E2	RZ5B801-0002E2
*P1	NTM-1PDC437	NTM-1PDC438

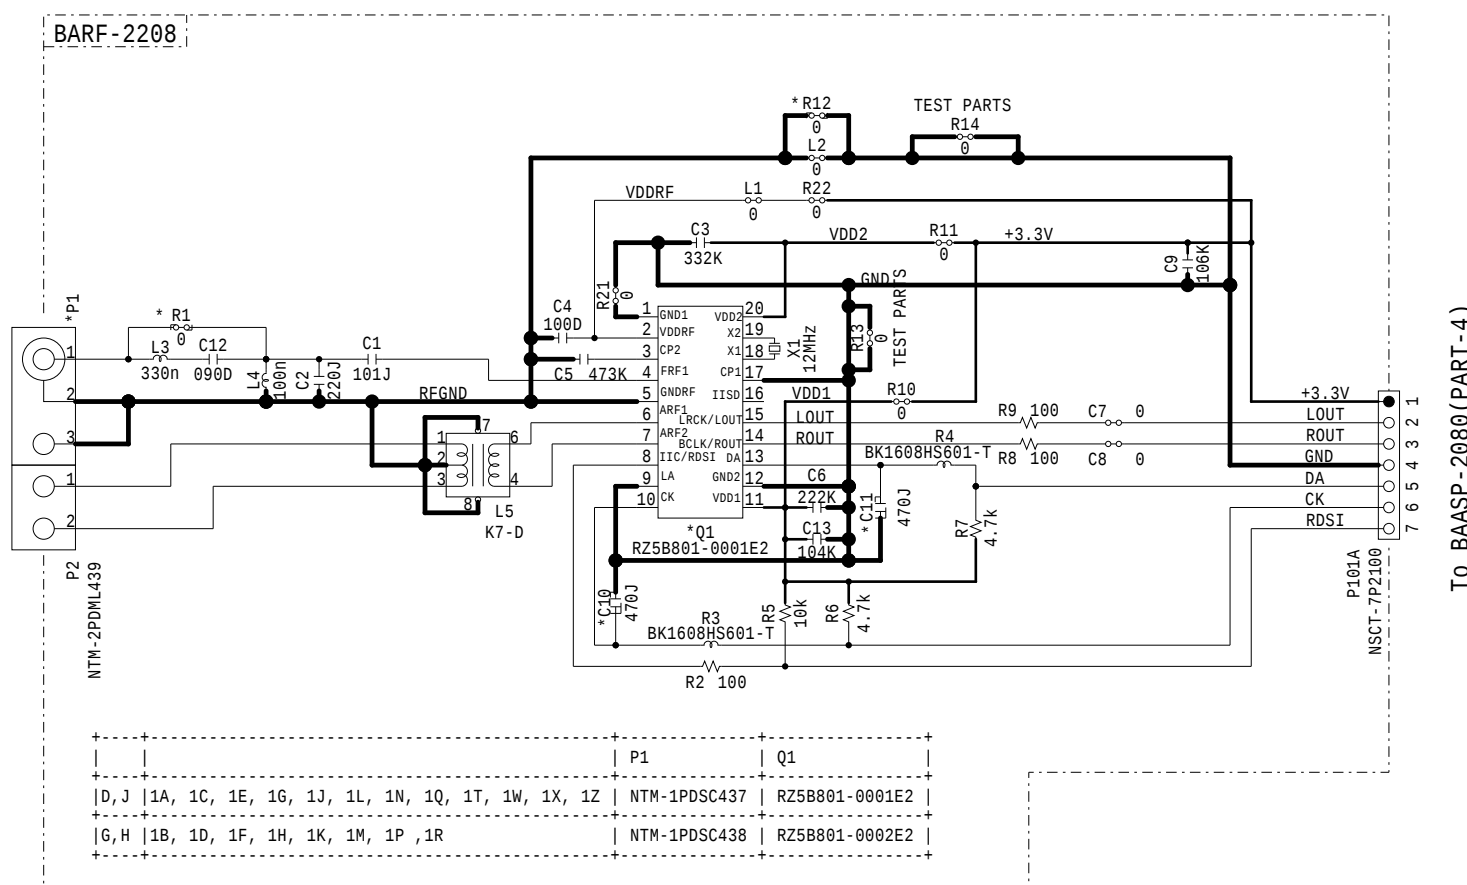

1A	SC-LX801(B)MDC
1B	SC-LX801(B)MGP
1T	SC-LX801(B)MJJ
1C	SC-LX901(B)MDC
1D	SC-LX901(B)MGP
1D	SC-LX901(S)MGP
1D	SC-LX901(B)MHB
1W	SC-LX901(B)MJJ
1E	TX-RZ1100(B)MDC
1F	TX-RZ1100(B)MGP
1F	TX-RZ1100(S)MGP
1F	TX-RZ1100(B)MHB
1F	TX-RZ1100(B)MGR
1G	TX-RZ3100(B)MDC
1H	TX-RZ3100(B)MGP
1H	TX-RZ3100(S)MGP
1H	TX-RZ3100(B)MHB
1H	TX-RZ3100(B)MGR
1J	DRX-7(B)MDD
1K	DRX-7(B)MGA
1L	DRX-8(B)MDD
1M	DRX-8(B)MGR
1M	DRX-8(B)MGA
1X	DRX-8(B)MJJ
1N	PR-RZ5100(B)MDC
1P	PR-RZ5100(B)MGP
1P	PR-RZ5100(B)MHB
1P	PR-RZ5100(B)MGR
1Q	DRC-8(B)MDD
1R	DRC-8(B)MGR
1R	DRC-8(B)MGA
1Z	DRC-8(B)MJJ


To BAASP-2080(PART-4)

MODEL No. SC-LX801/901, TZ-RZ1100/3100, DRX-7/R1

SCHEMATIC DIAGRAM(PART-8) FAN_CONNECT SECTION

reference	1A	1B	1C	1D	1E	1F	1G	1H	1J
*P5931	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131
*P5932	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)
*P5933	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)
*P7201B	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131	NPLG-3P131

reference	1K	1L	1M	1N	1P	1Q	1R	1T	1W	1X	1Z
*P5931	NPLG-3P131	NPLG-3P131	NPLG-3P131	-	-	-	-	NPLG-3P131	NPLG-3P131	NPLG-3P131	-
*P5932	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	-	-	-	-	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	-
*P5933	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	-	-	-	-	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	-
*P7201B	NPLG-3P131	NPLG-3P131	NPLG-3P131	-	-	-	-	NPLG-3P131	NPLG-3P131	NPLG-3P131	-

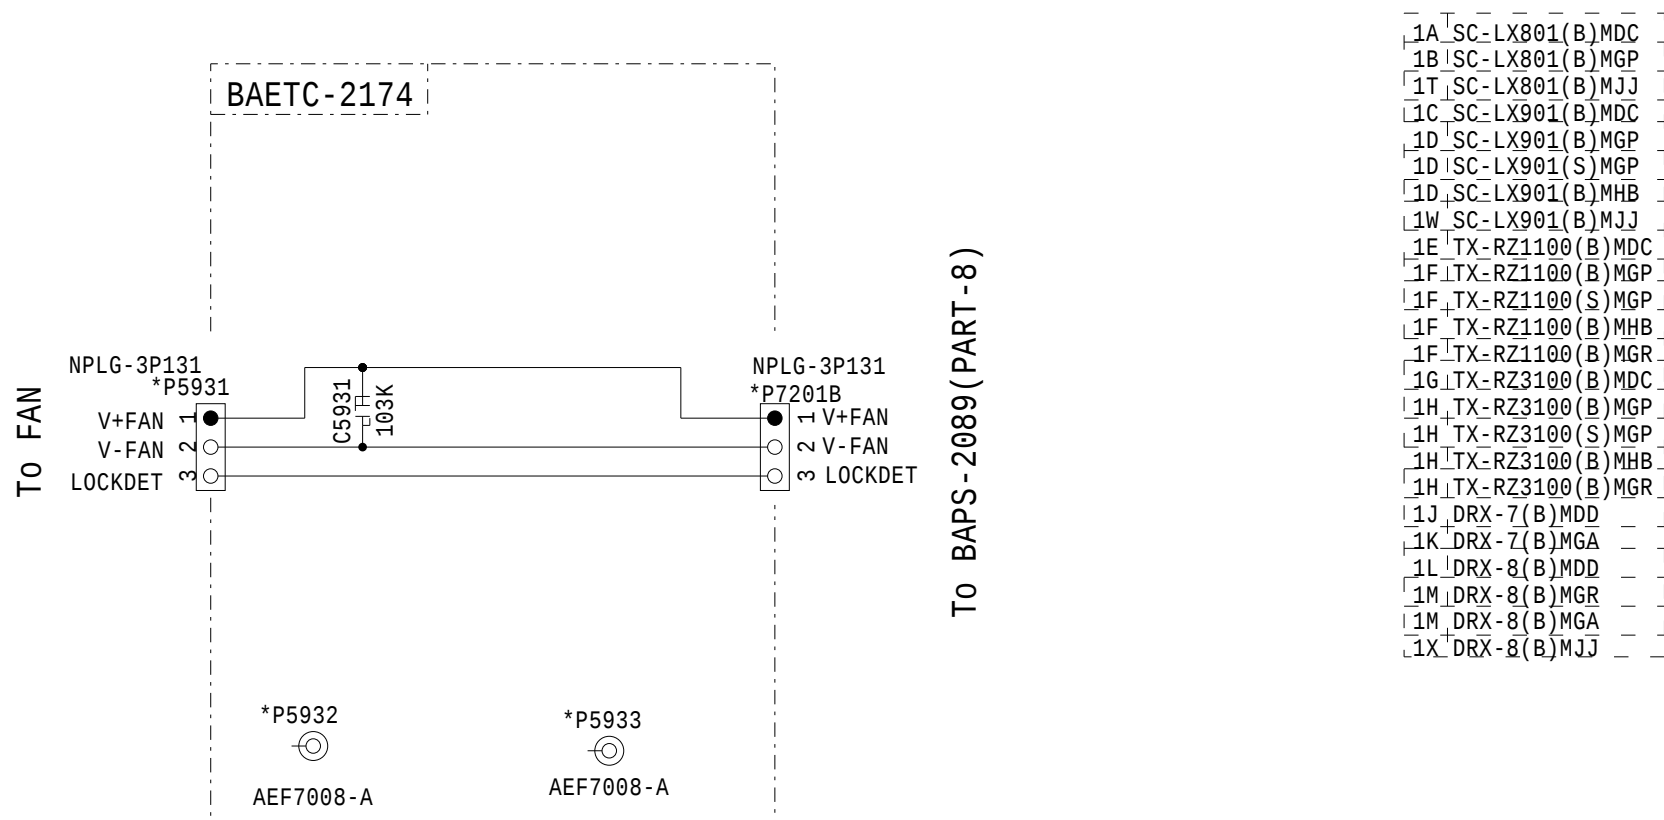


Schematic Diagram

MODEL No.SC-LX801/901/TX-RZ1100/3100/DRX-7/R1/PR-RZ5100/DCR-R1

SCHEMATIC DIAGRAM (PART-9) REG SECTION

FROM MAIN TRANS

FROM MAIN TRANS

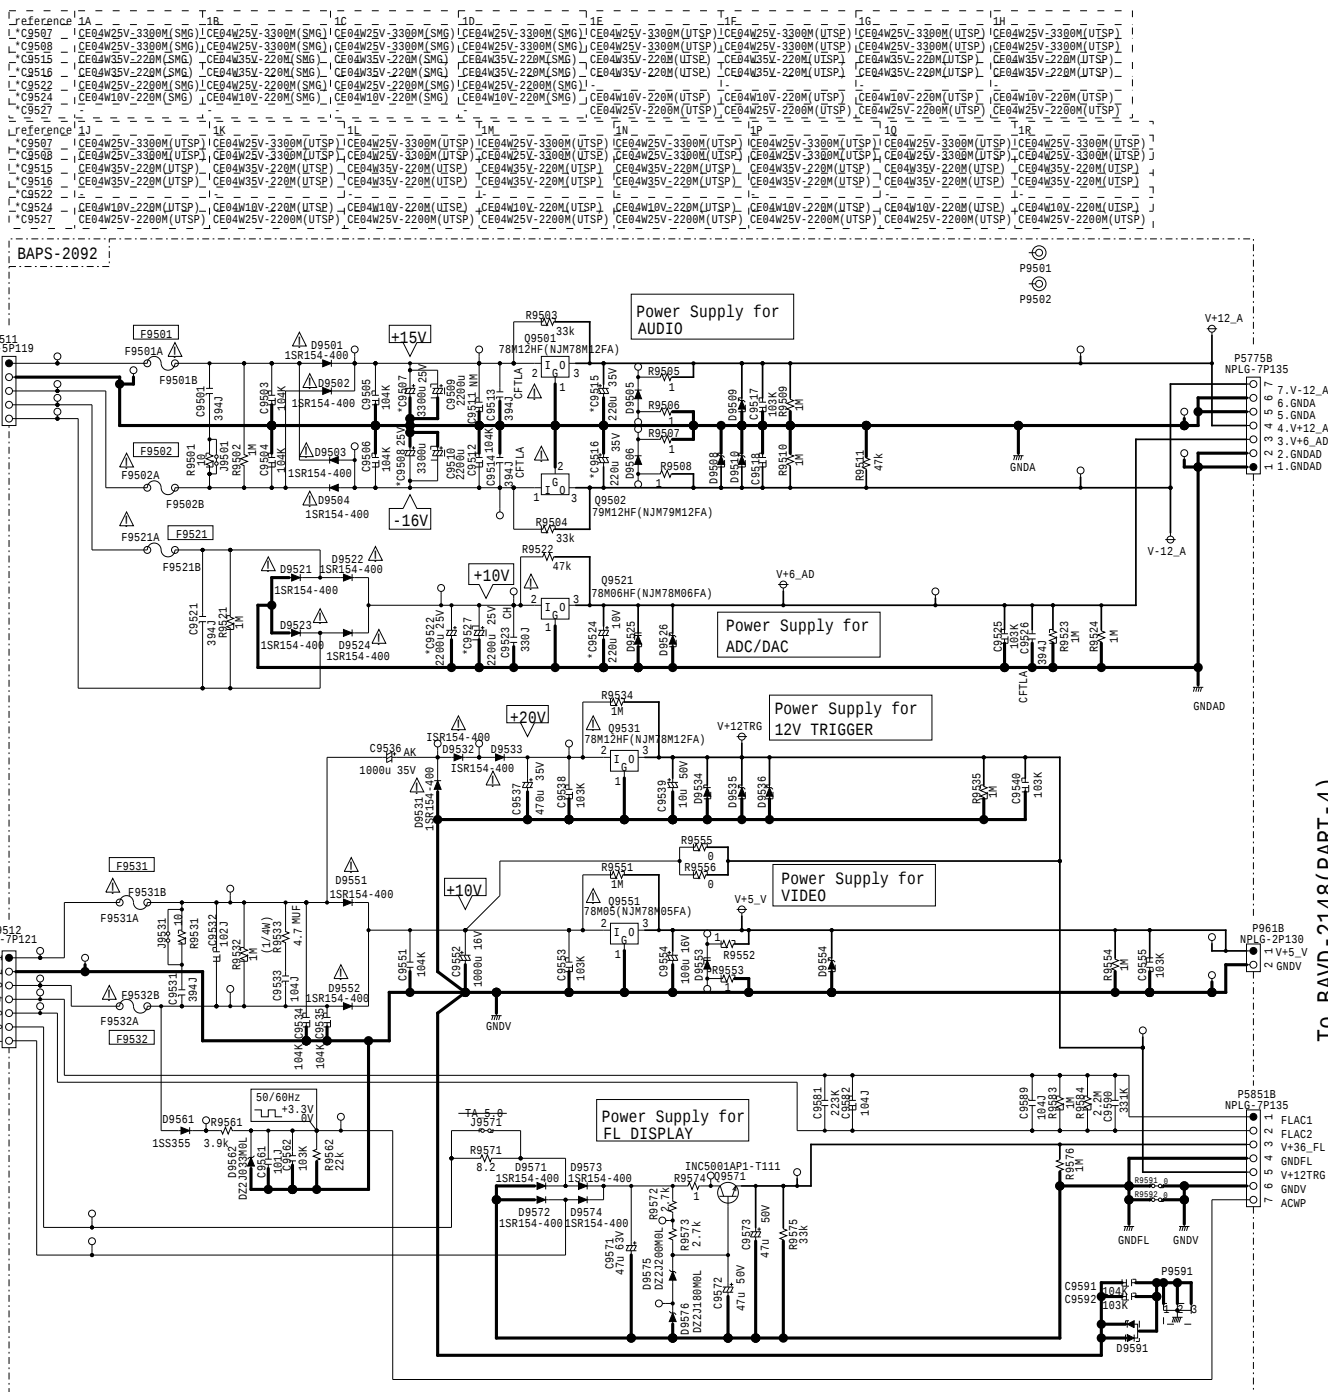

- RESISTORS
Unit: k- Ω , M- Ω or Ω unless otherwise noted.
Rated Power: 1/16W unless otherwise noted.
Tolerance: (J)5% unless otherwise noted.
MUF: RD1/4MUF
- CAPACITORS
Unit: p-pF or u-uF unless otherwise noted.
Ratings: Capacity(F)/Voltage(V) unless otherwise noted.
CH: CCSRCH, CFTLA: CFTLA
NP: CEANP, AK: CEAK
NO MARKED: CCSRBY or CEAT
3. NM: No Mount

TO BAETC-2169(PART-8)

TO BAETC-2148(PART-4)

TO BAETC-2200(PART-9)

THE COMPONENTS IDENTIFIED MARK Δ ARE CRITICAL FOR SAFETY, REPLACE ONLY WITH PART NUMBER SPECIFIED.
VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)
ELECTRIC CAPACITORS Δ ARE IN uF/MV
ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 800 $\rightarrow$ 20p, 200 $\rightarrow$ 20p, 331 $\rightarrow$ 330p, 333 $\rightarrow$ 0.033uF
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

Δ 印は火災、感電の危険に関与する部品の為、必ず指定部品を使用の事。
電圧表示は無負荷時に測定した直流電圧を示す。
記入なき電解コンデンサの単位はuF/MVである。
記入なきコンデンサの単位はpF/50WVである。
例) 800 $\rightarrow$ 20p, 200 $\rightarrow$ 20p, 331 $\rightarrow$ 330p, 333 $\rightarrow$ 0.033uF
A. 本図面は基本図面に付いては電圧表示に上り下りなく変更する事がある。

CAUTION
FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,
REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.


ATTENTION
AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE,
REPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE.

THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE
FOR CONTINUED PROTECTION AGAINST FIRE FUSE HAZARD, REPLACE WITH SAME TYPE FUSE.
RATING REFER TO THE MARKING ADJACENT TO THE SYMBOL.

CE SYMBOLE INDIQUE QUE LE FUSIBLE UTILISE EST A LENT, E POUR UNE PROTECTION PERMANENT,
N'UTILISER QUE DES FUSIBLES DE MEME TYPE.
CE DERNIER EST INDIQUE LA OU LE PRESENT SYMBOLE EST APPOSE.

MODEL No. SC-LX801/901/TX-RZ1100/3100/DRX-7/R1/PR-RZ5100/DRC-R1

SCHEMATIC DIAGRAM (PART-9) FRONT BRIDGE SECTION

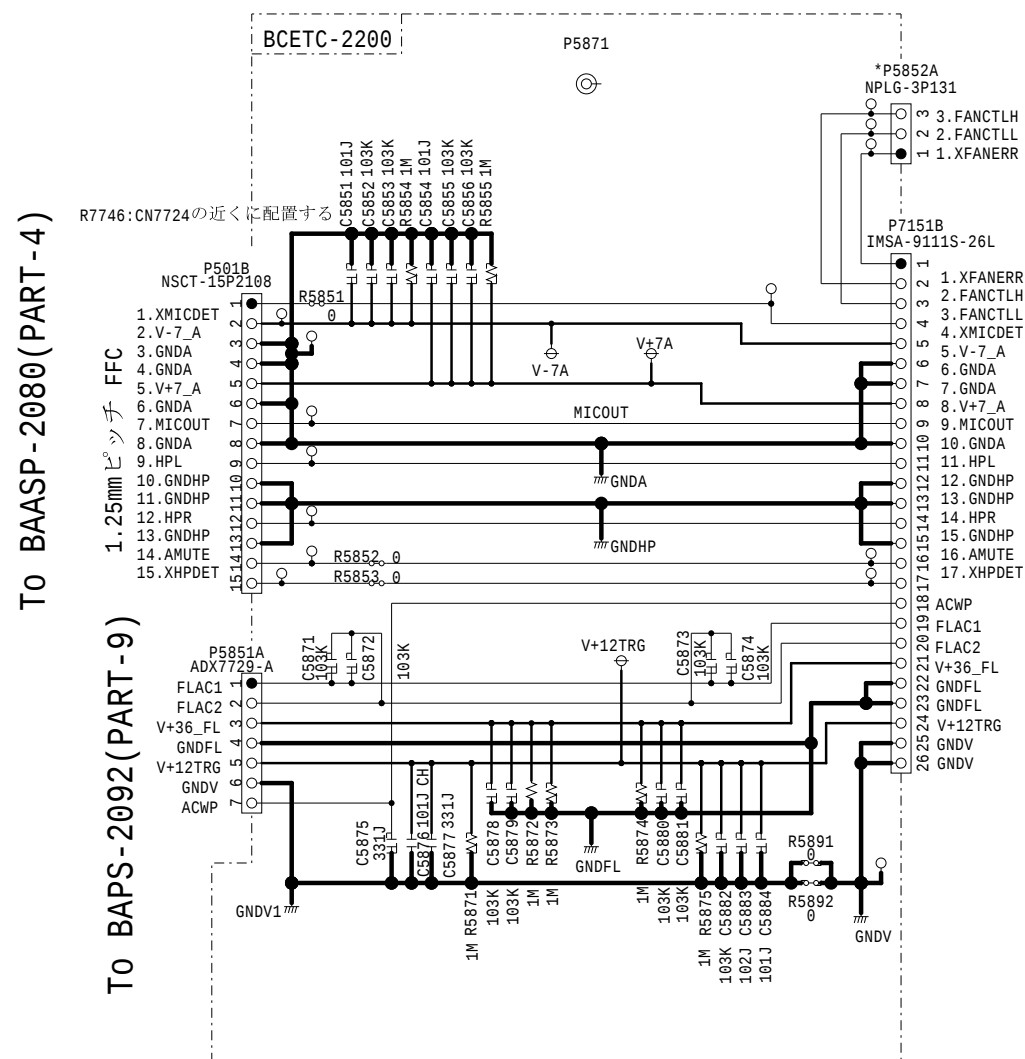


TO BAPS-2089(PART-8)

TO BAETC-2201(PART-9)

reference	1A	1B	1C	1D	1E	1F	1G	1H	1J	1K	1L	1M	1N	1P	1Q	1R
*P5852A	INPLG-3P131	INPLG-3P131	INPLG-3P131	INPLG-3P131	INPLG-3P131	INPLG-3P131	INPLG-3P131	INPLG-3P131	INPLG-3P131	INPLG-3P131	INPLG-3P131	INPLG-3P131	INPLG-3P131	-	-	-

Schematic Diagram

MODEL No.SC-LX701/801/901, TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1 SCHEMATIC DIAGRAM (PART-9) USB RECT_M SECTION

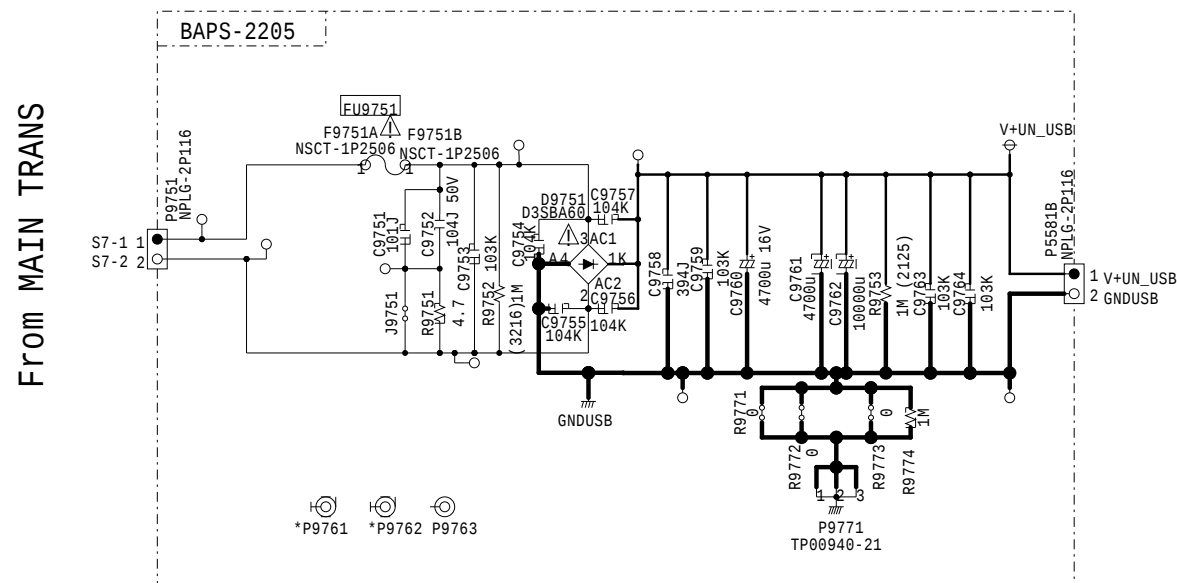

SC-LX801/901:TO BAHDM-2086(PART-6)
TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1:TO BAHDM-2087(PART-6)

reference	1A	1B	1C	1D	1E	1F	1G	1H	1J	1K	1L	1M	1N	1P	1Q	1R
*P9761										CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)
*P9762										CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)	CB-71683(L=50)

THE COMPONENTS IDENTIFIED MARK Δ ARE CRITICAL FOR SAFETY, REPLACE ONLY WITH PART NUMBER SPECIFIED.
VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE. (NO INPUT SIGNAL)
ELECTRLYTIC CAPACITORS (㏒) ARE IN uF/WV.
ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030 -> 3pF, 330 -> 33pF, 331 -> 330pF, 333 -> 0.033uF
CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.


Δ 印は火災、感電の危険に関与する部品の為、必ず指定部品を使用の事。
電圧表示は無信号時に測定した直流電圧を示す。
記入なき電解コンデンサの単位はuF/WVである。
記入なきコンデンサの単位はpF/50WVである。
例) 030 -> 3pF, 330 -> 33pF, 331 -> 330pF, 333 -> 0.033uF
本配線図は基本配線図につき性能改善等により予告なく変更する事がある。

MODEL No.TX-RZ1100/3100, DRX-7/R1, PR-RZ5100, DRC-R1

SCHEMATIC DIAGRAM(PART-9) CONTROL_0 SECTION

reference	1A	1B	1C	1D	1E	1F	1G	1H	1J	1K	1L	1M	1N	1P	1Q	1R
*L5821									BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S			BLM11A121S	BLM11A121S
*L5822									BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S			BLM11A121S	BLM11A121S
*L5823									BLM11A121S	BLM11A121S	BLM11A121S	BLM11A121S			BLM11A121S	BLM11A121S
*C5823						CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K			CK725B1H-103K	CK725B1H-103K
*C5824									CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K			CK725B1H-103K	CK725B1H-103K
*C5825									CK725B1H-103K	CK725B1H-103K	CK725B1H-103K	CK725B1H-103K			CK725B1H-103K	CK725B1H-103K
*P5821									HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010			HSJ1002-016010	HSJ1002-016010
*P5822						HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010			HSJ1002-016010	HSJ1002-016010
*P5823									HSJ1002-016010	HSJ1002-016010	HSJ1002-016010	HSJ1002-016010			HSJ1002-016010	HSJ1002-016010
*P7061C						NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191	NSCT-11P2191			NSCT-11P2191	NSCT-11P2191
*TP5821						CAD PART	CAD PART	CAD PART	CAD PART	CAD PART	CAD PART	CAD PART			CAD PART	CAD PART

TBAETC-2163(PART-8)

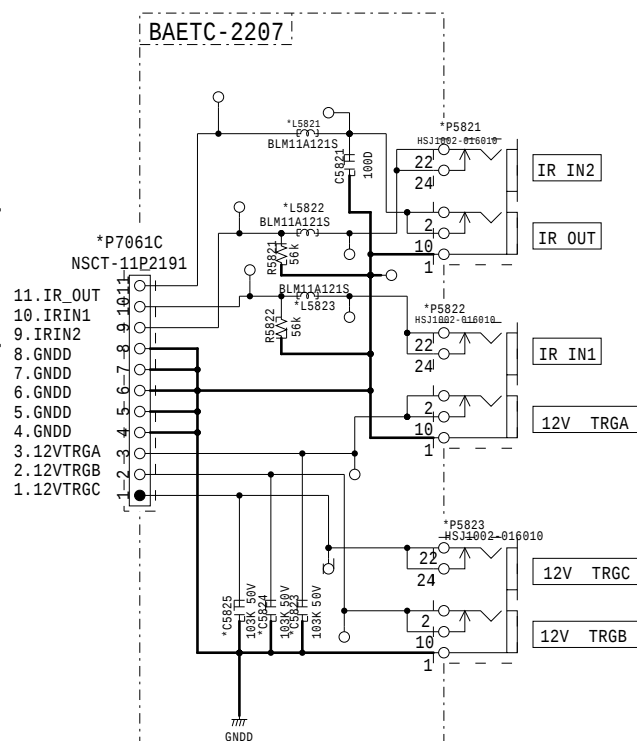

Schematic Diagram


MODEL No. SC-LX801/SC-LX901/TX-RZ1100/TX-RZ3100/DRX-7/DRX-R1

SCHEMATIC DIAGRAM(PART-10) D-AMP SECTION

FR FL ch

MODULATOR & MOS FET Driver

Output Power Stage and LP Filter

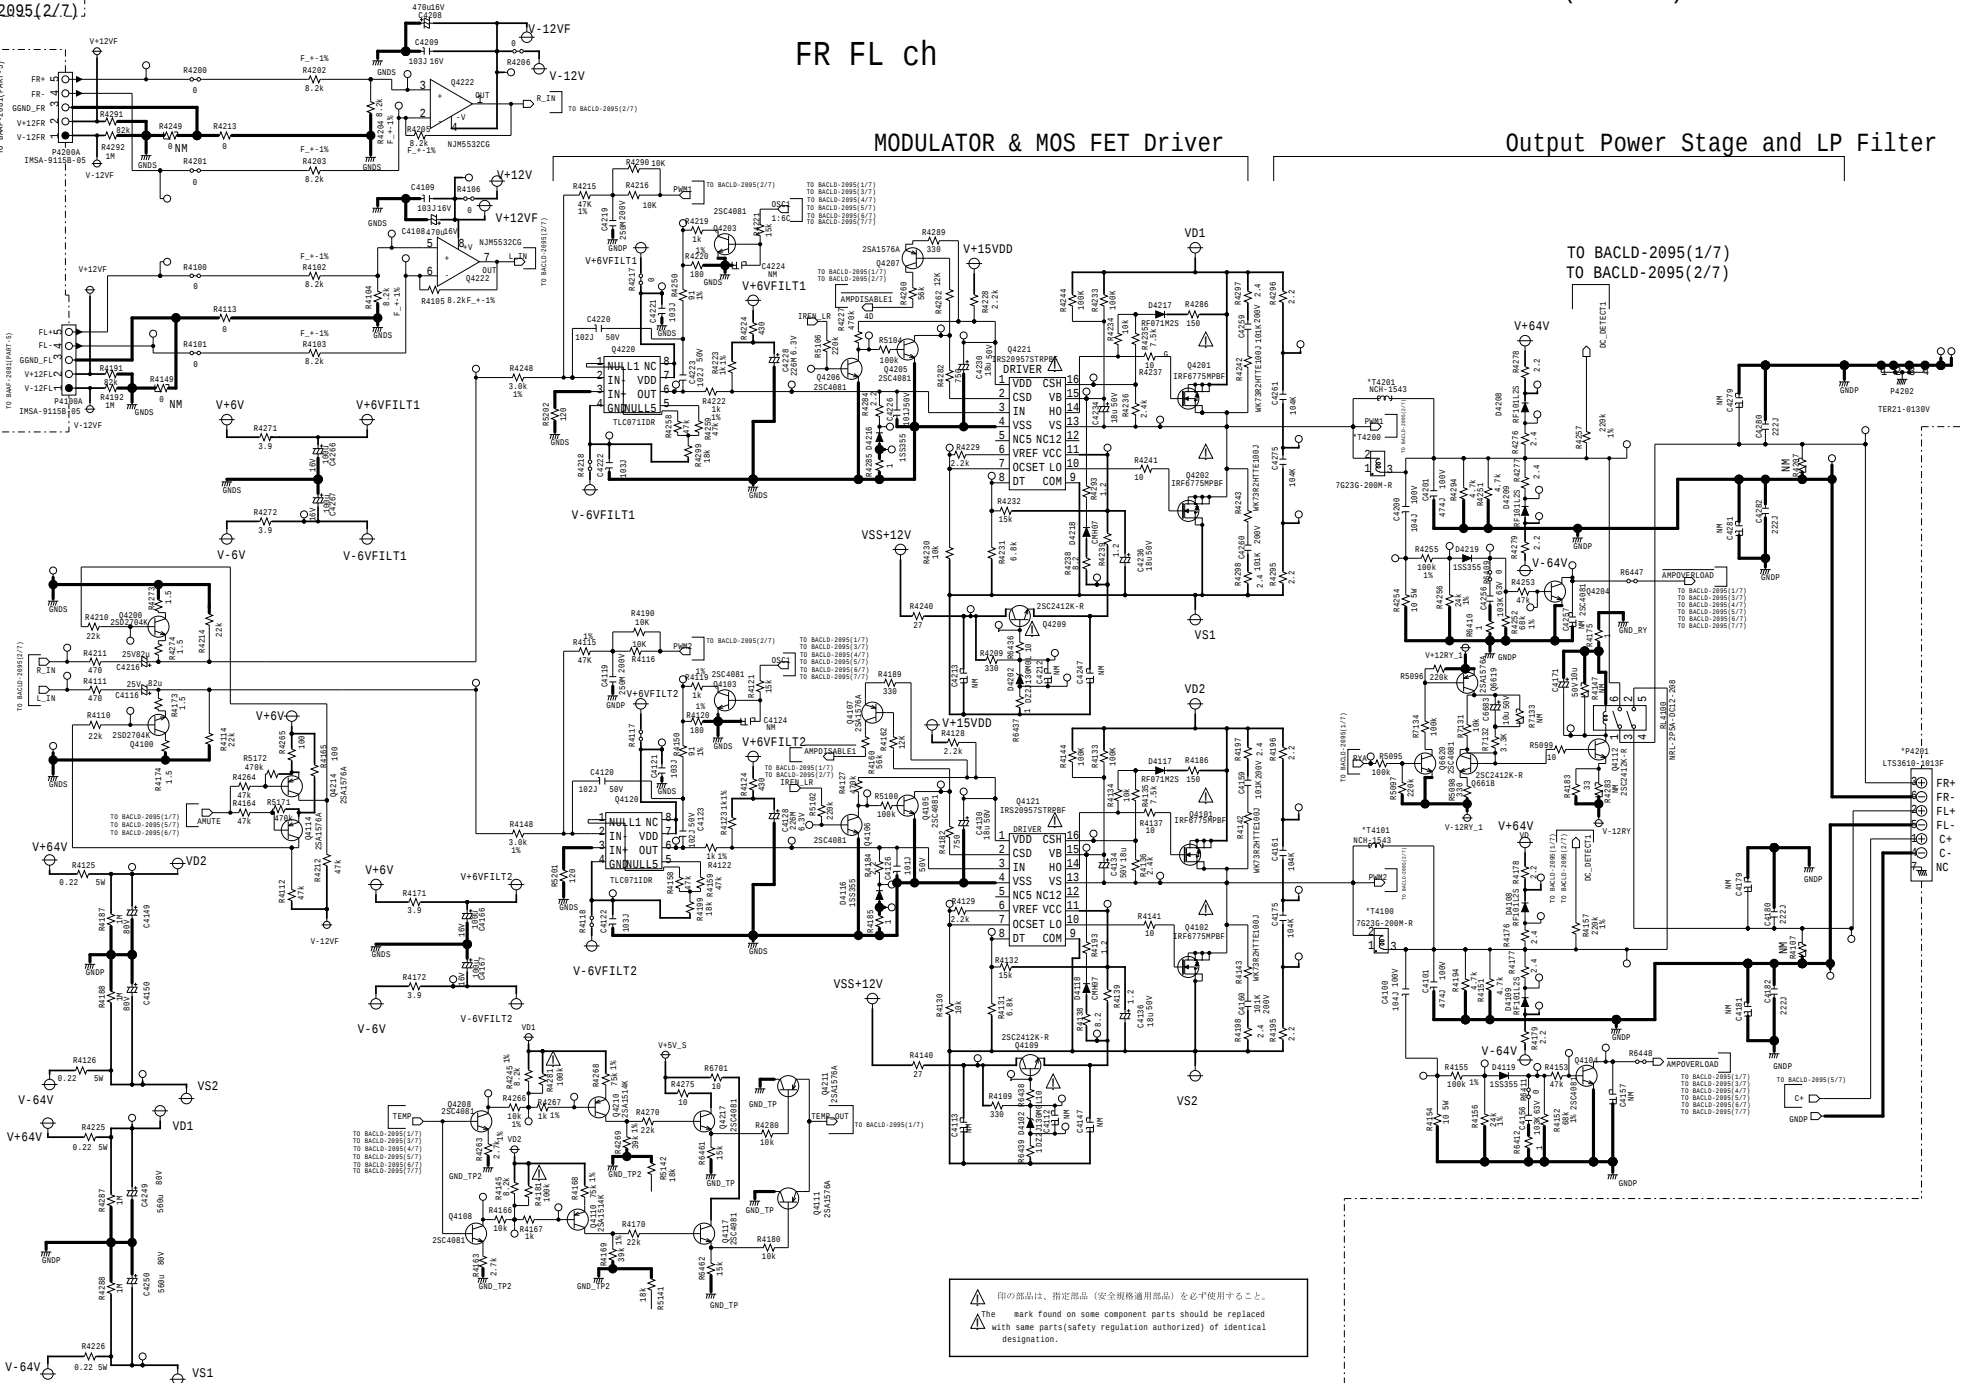

△印の部品は、指定部品（安全規格適用部品）を必ず使用すること。
△The mark found on some component parts should be replaced with same parts (safety regulation authorized) of identical designation.

Schematic Diagram

MODEL No.SC-LX801/SC-LX901/TX-RZ1100/TX-RZ3100/DRX-7/DRX-R1


SCHEMATIC DIAGRAM(PART-10) D-AMP SECTION

BACL0-2095(5/7)

C ch

MODULATOR & MOS FET Driver

Output Power Stage and LP Filter

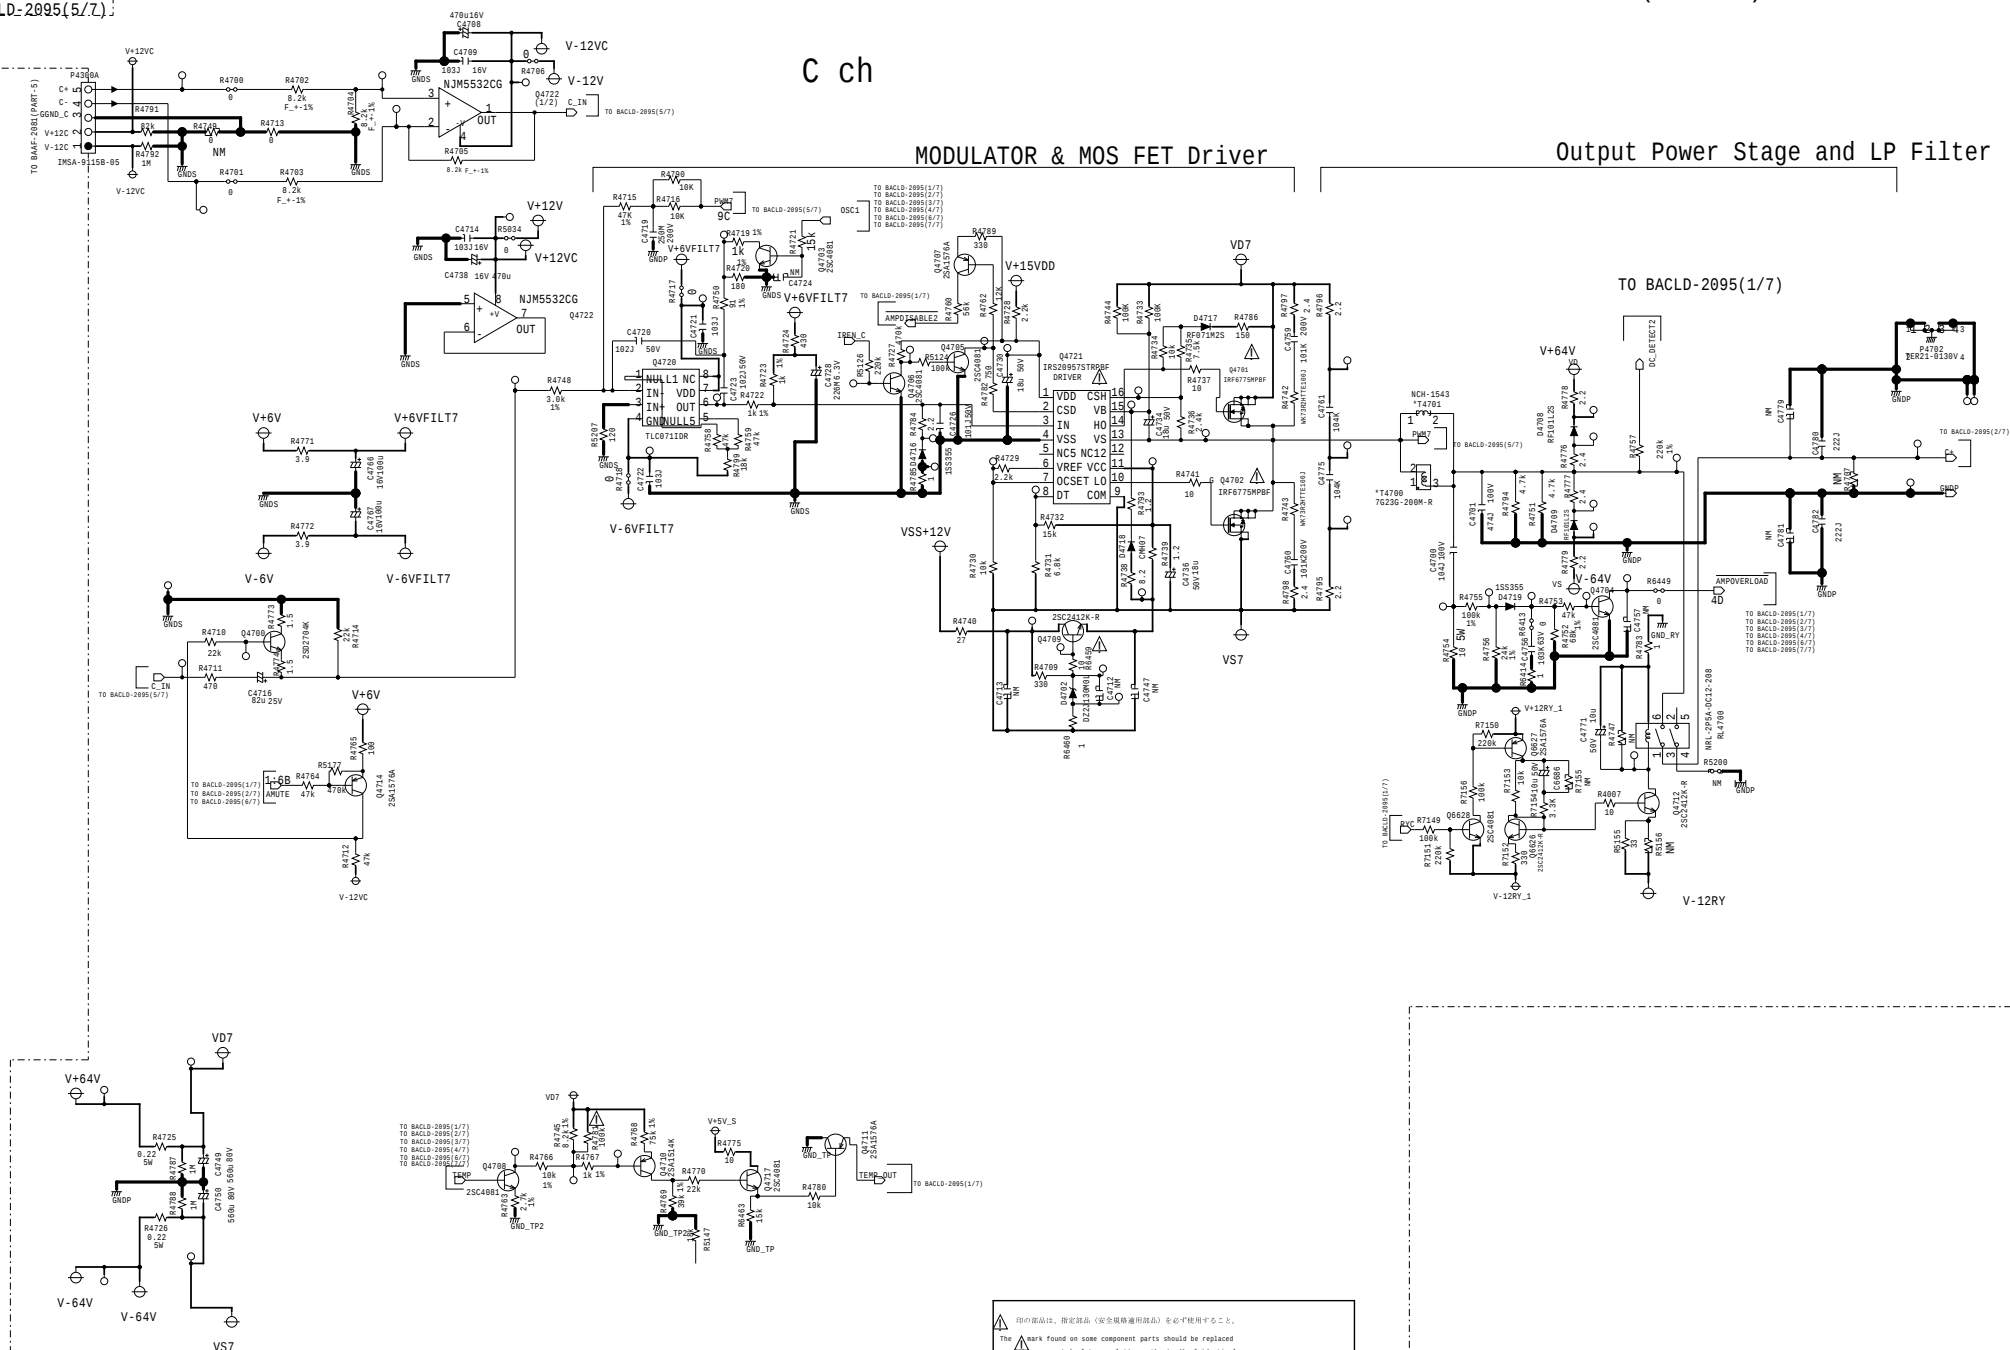

⚠ 用の部品は、指定部品（安全規格適用部品）を必ず使用すること。
The mark found on some component parts should be replaced with same parts(safety regulation authorized) of identical designation.

Schematic Diagram

MODEL No. SC-LX801/SC-LX901/TX-RZ1100/TX-RZ3100/DRX-7/DRX-R1

SCHEMATIC DIAGRAM(PART-10). D-AMP SECTION

FROM/TO IR INTERFACE ASSY

BACLD-2095(7/7)

H1R+
H1R-
GGND_H1R
V+12H1R
V-12H1R

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B

V+12V7B
V-12V7B


V+12V7B
V-12V7B

V+12V7B
V-12V7B


H1R H1L ch

MODULATOR & MOS FET Driver

Output Power Stage and LP Filter

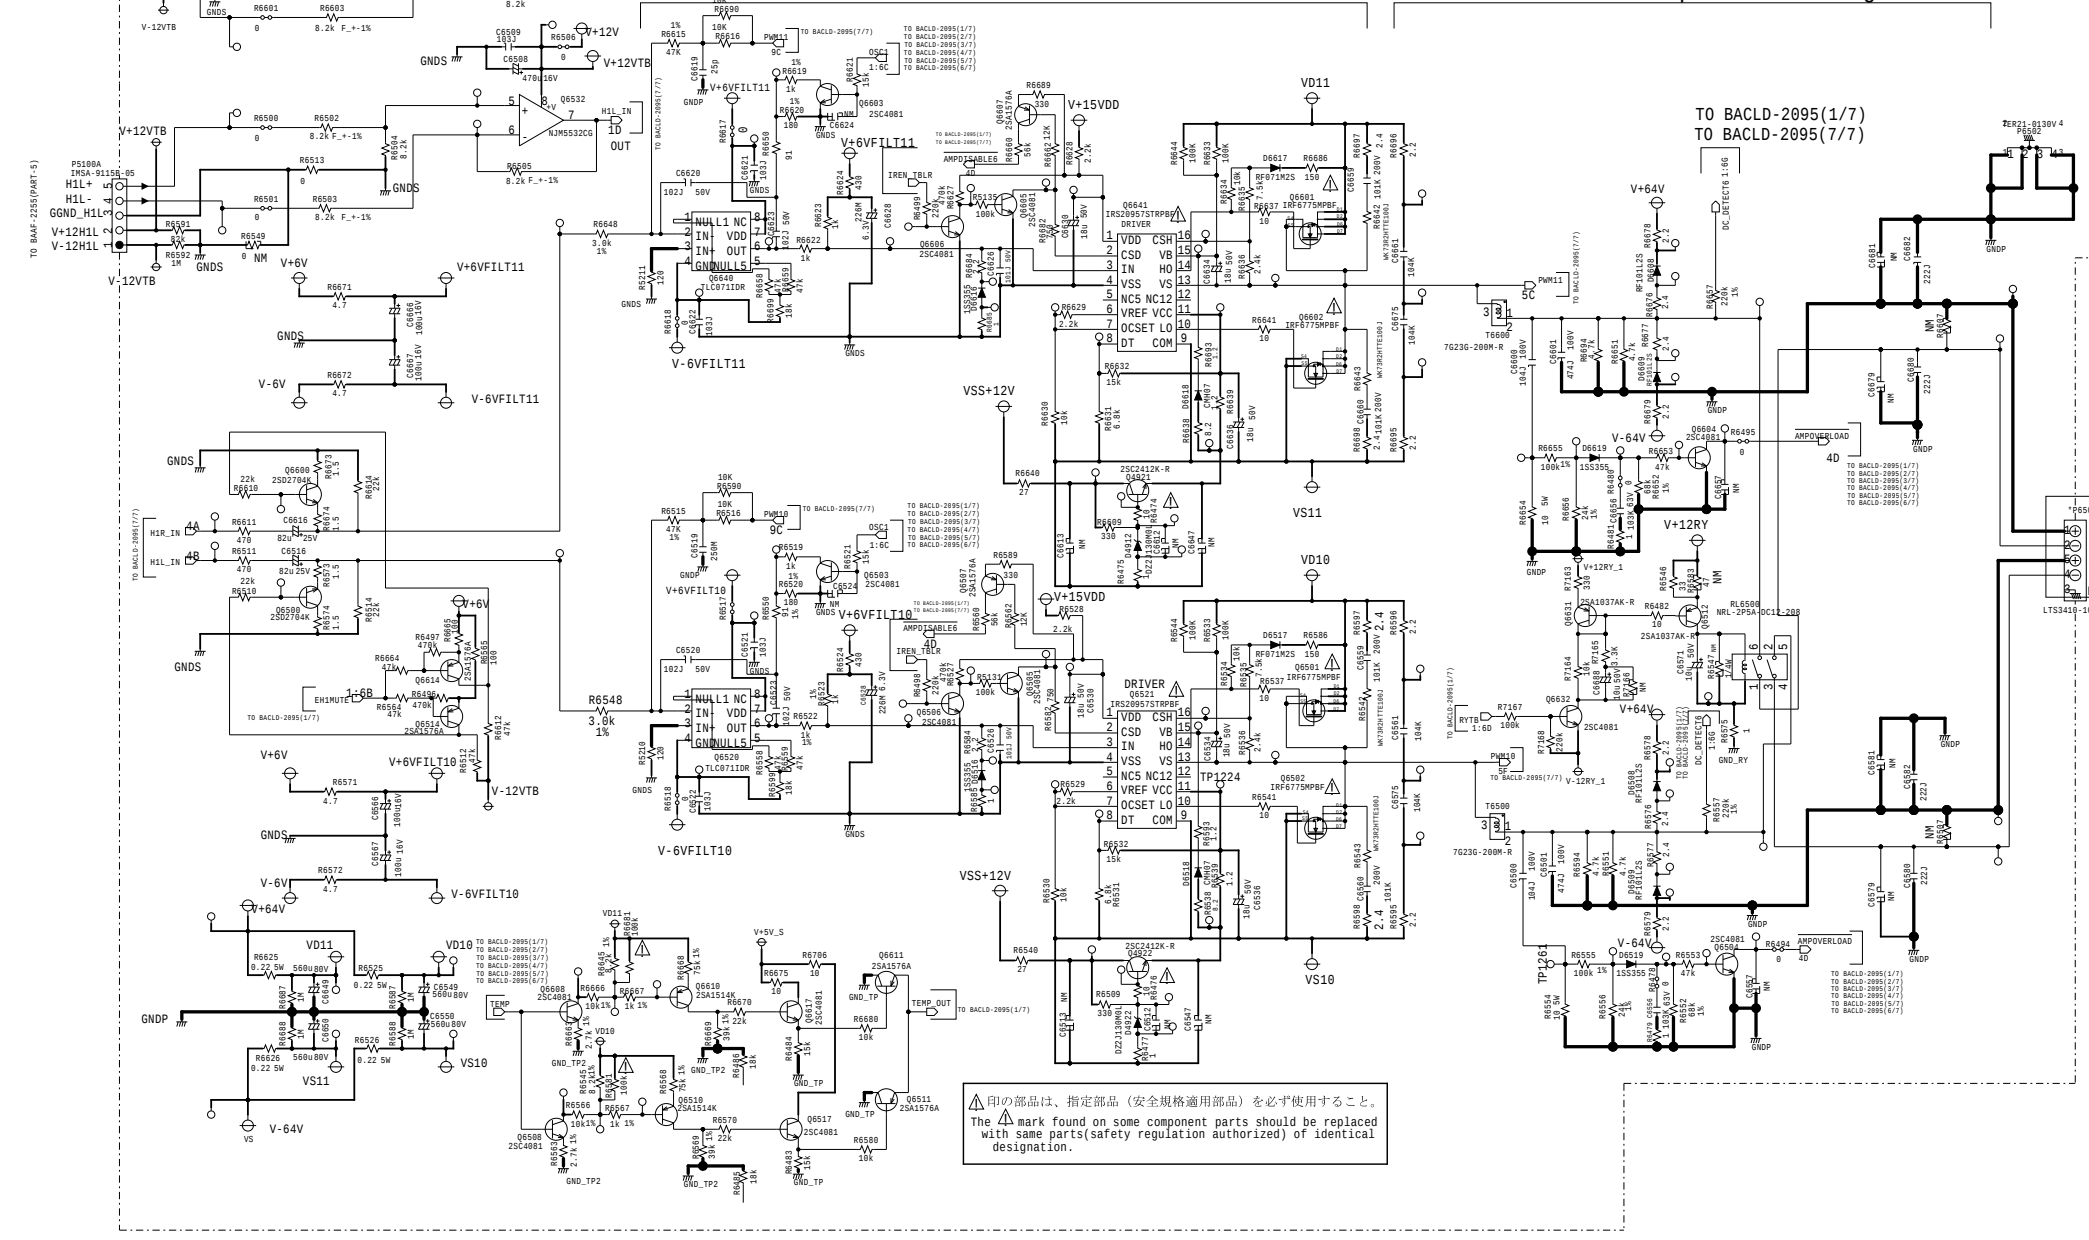


△印の部品は、指定部品（安全規格適用部品）を必ず使用すること。
The △ mark found on some component parts should be replaced
with same parts(safety regulation authorized) of identical
designation.

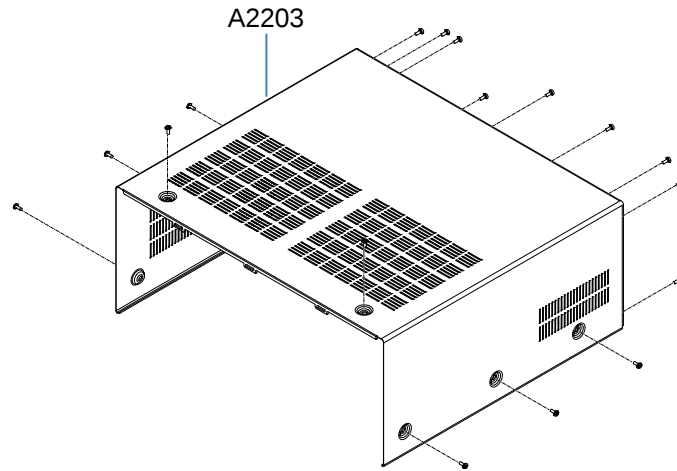

P3654A : WiFi/Bluetooth Module

* This module transmitter does not have RF shielding, therefore it will be equipped only the tested Audio system mentioning this document.
Additional test will be required if it will be equipped to the other devices

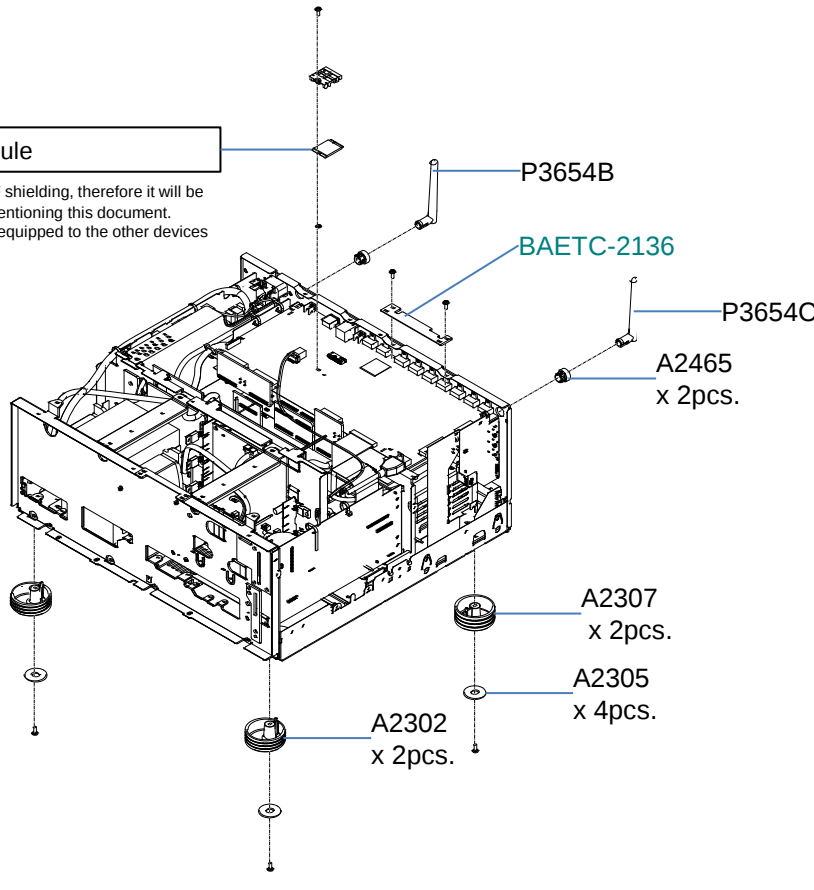

***WiFi & Bluetooth Module has already been certificated by FCC and IC.**

Information to the user.

Indicate "Contains FCC ID: TX2-RTL8821AE", "Contains IC: 6317A-RTL8821AE" and following information to the host device installed.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Describe the following sentence to a user's manual of the host device.

[For FCC]
FCC CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment and meets the FCC radio frequency (RF) Exposure Guidelines in Supplement C to OET65. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles).


[For IC]
CAN ICES-3 B/NMB-3 B

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts d'licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.


This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment and meets RSS-102 of the IC radio frequency (RF) Exposure rules. This equipment has very low levels of RF energy that it deemed to comply without maximum permissive exposure evaluation (MPE). But it is desirable that it should be installed and operated keeping the radiator at least 20cm or more away from person's body (excluding extremities: hands, wrists, feet and ankles).

Cet équipement est conforme aux limites d'exposition aux rayonnements énoncées pour un environnement non contrôlé et respecte les règles d'exposition aux fréquences radioélectriques (RF) CNR-102 de l'IC. Cet équipement émet une énergie RF très faible qui est considérée conforme sans évaluation de l'exposition maximale autorisée. Cependant, cet équipement doit être installé et utilisé en gardant une distance de 20 cm ou plus entre le dispositif rayonnant et le corps (à l'exception des extrémités : mains, poignets, pieds et chevilles).

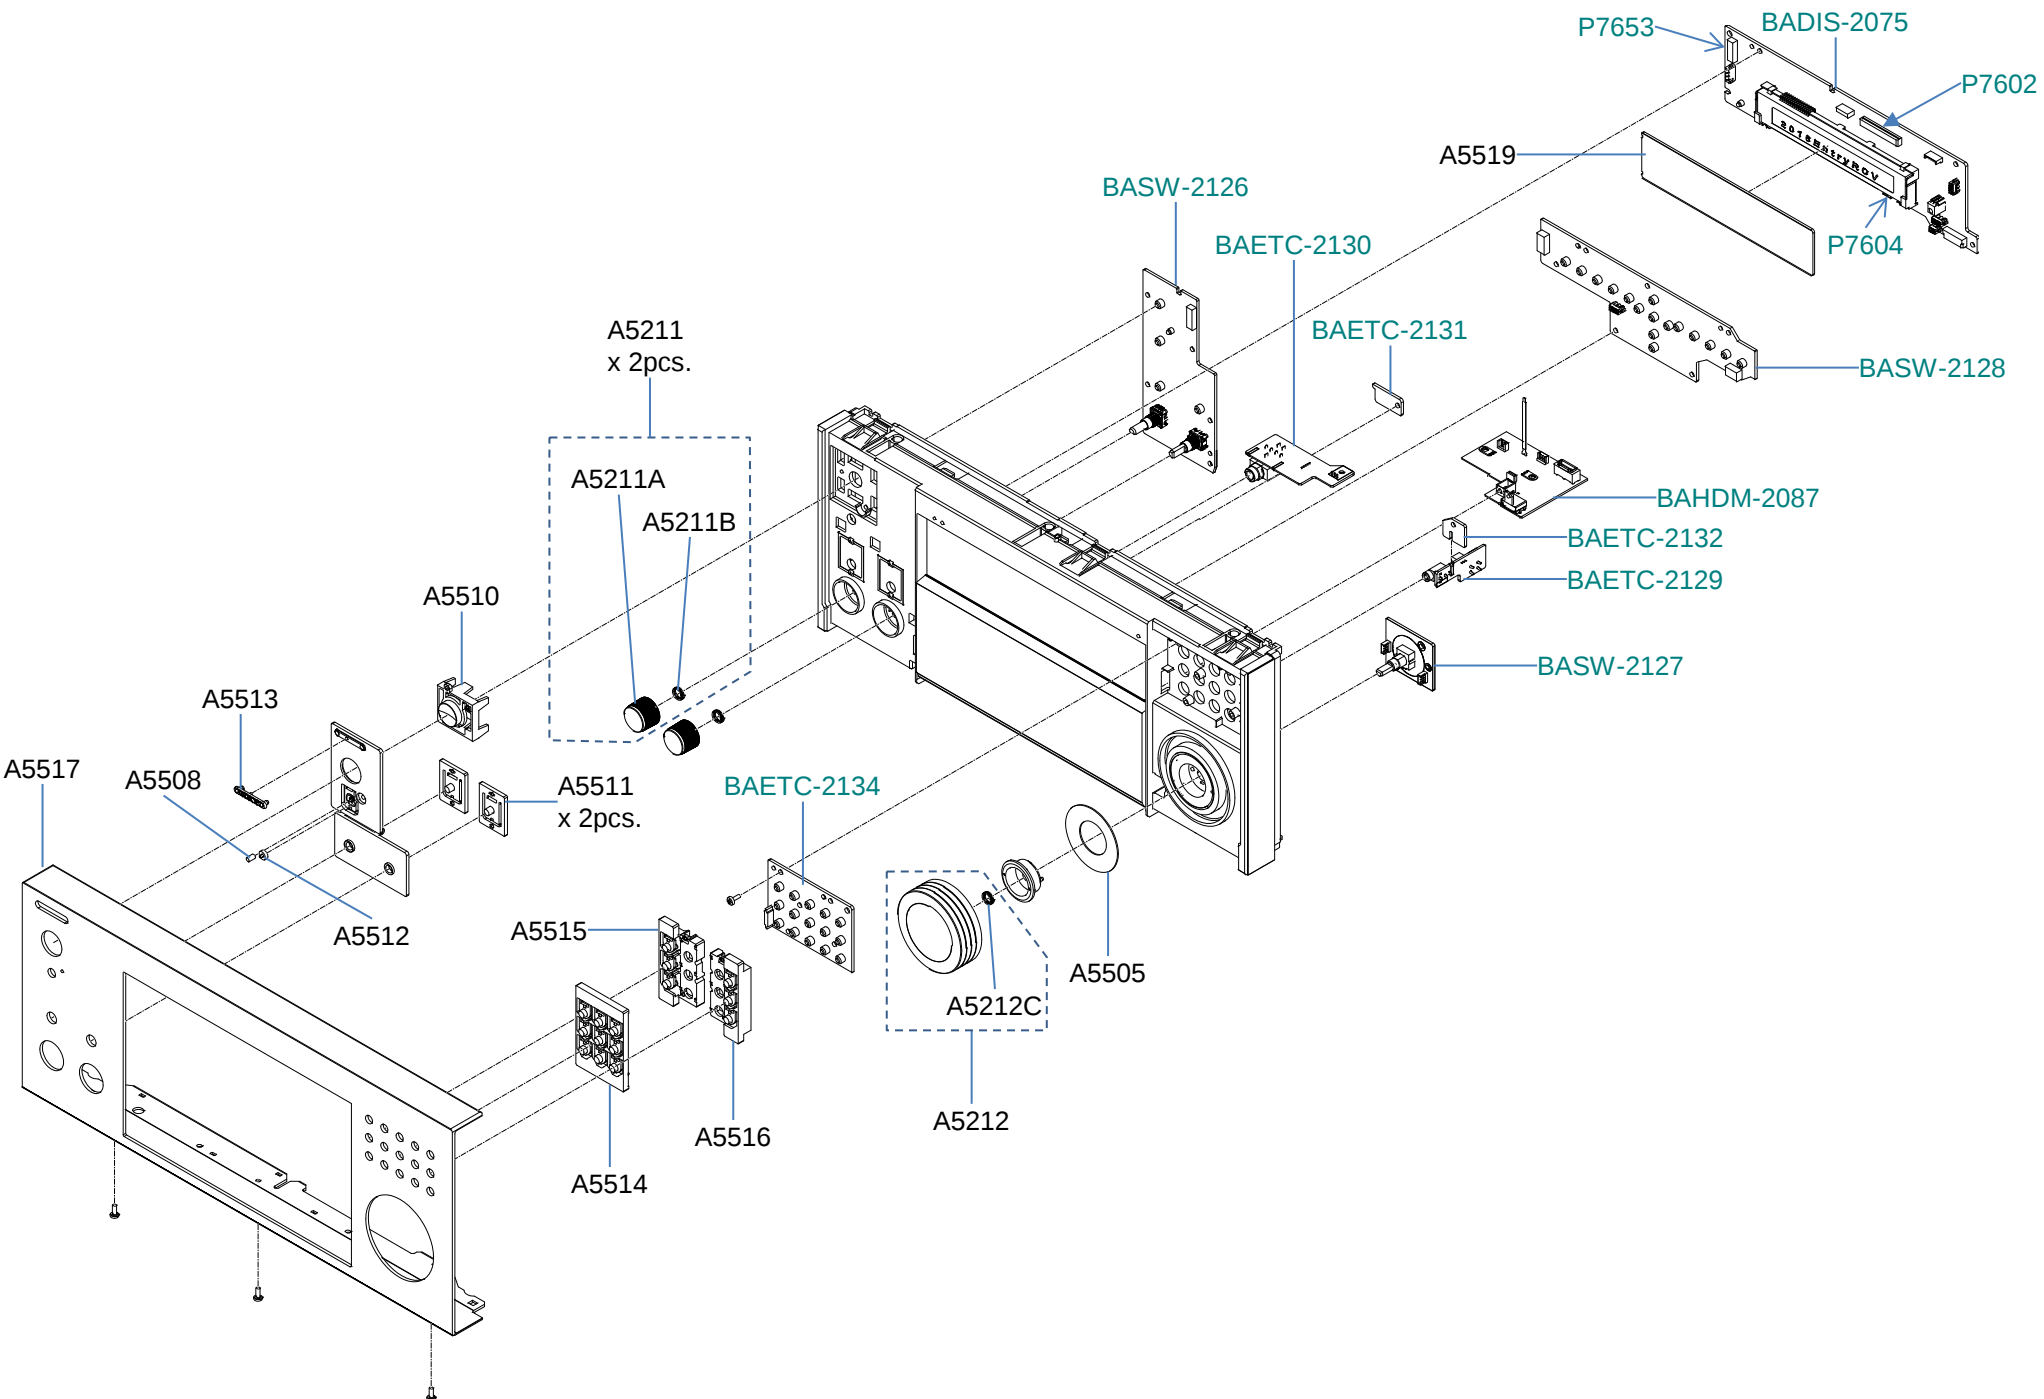

Front2


Exploded View

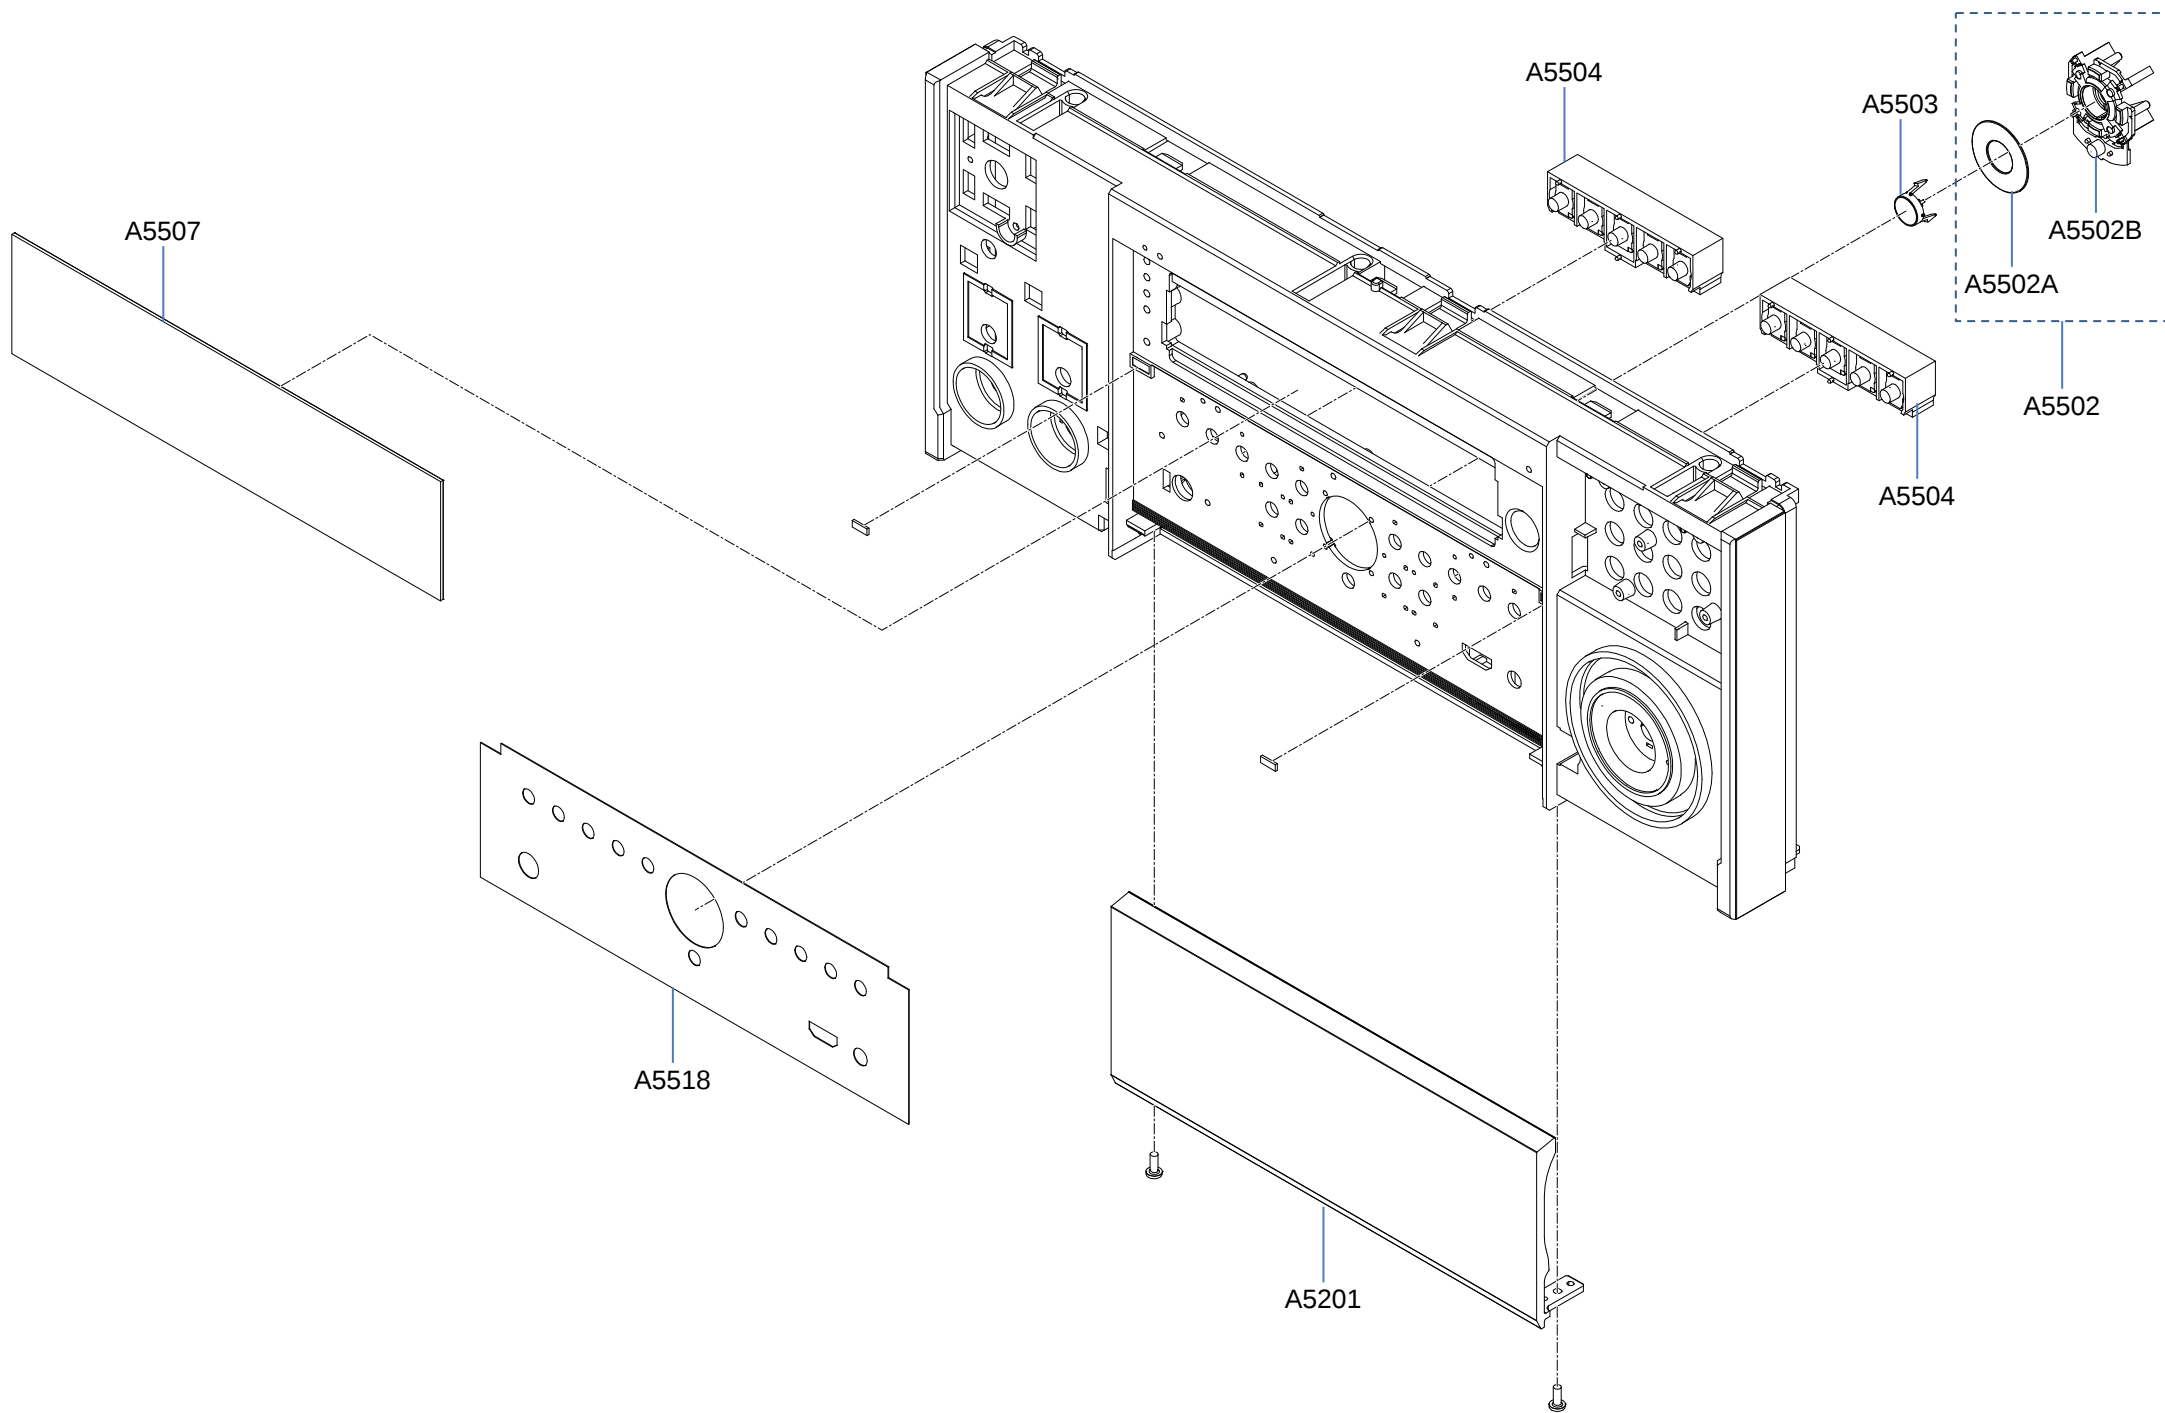


TX-RZ1100/3100


Front3


Exploded View

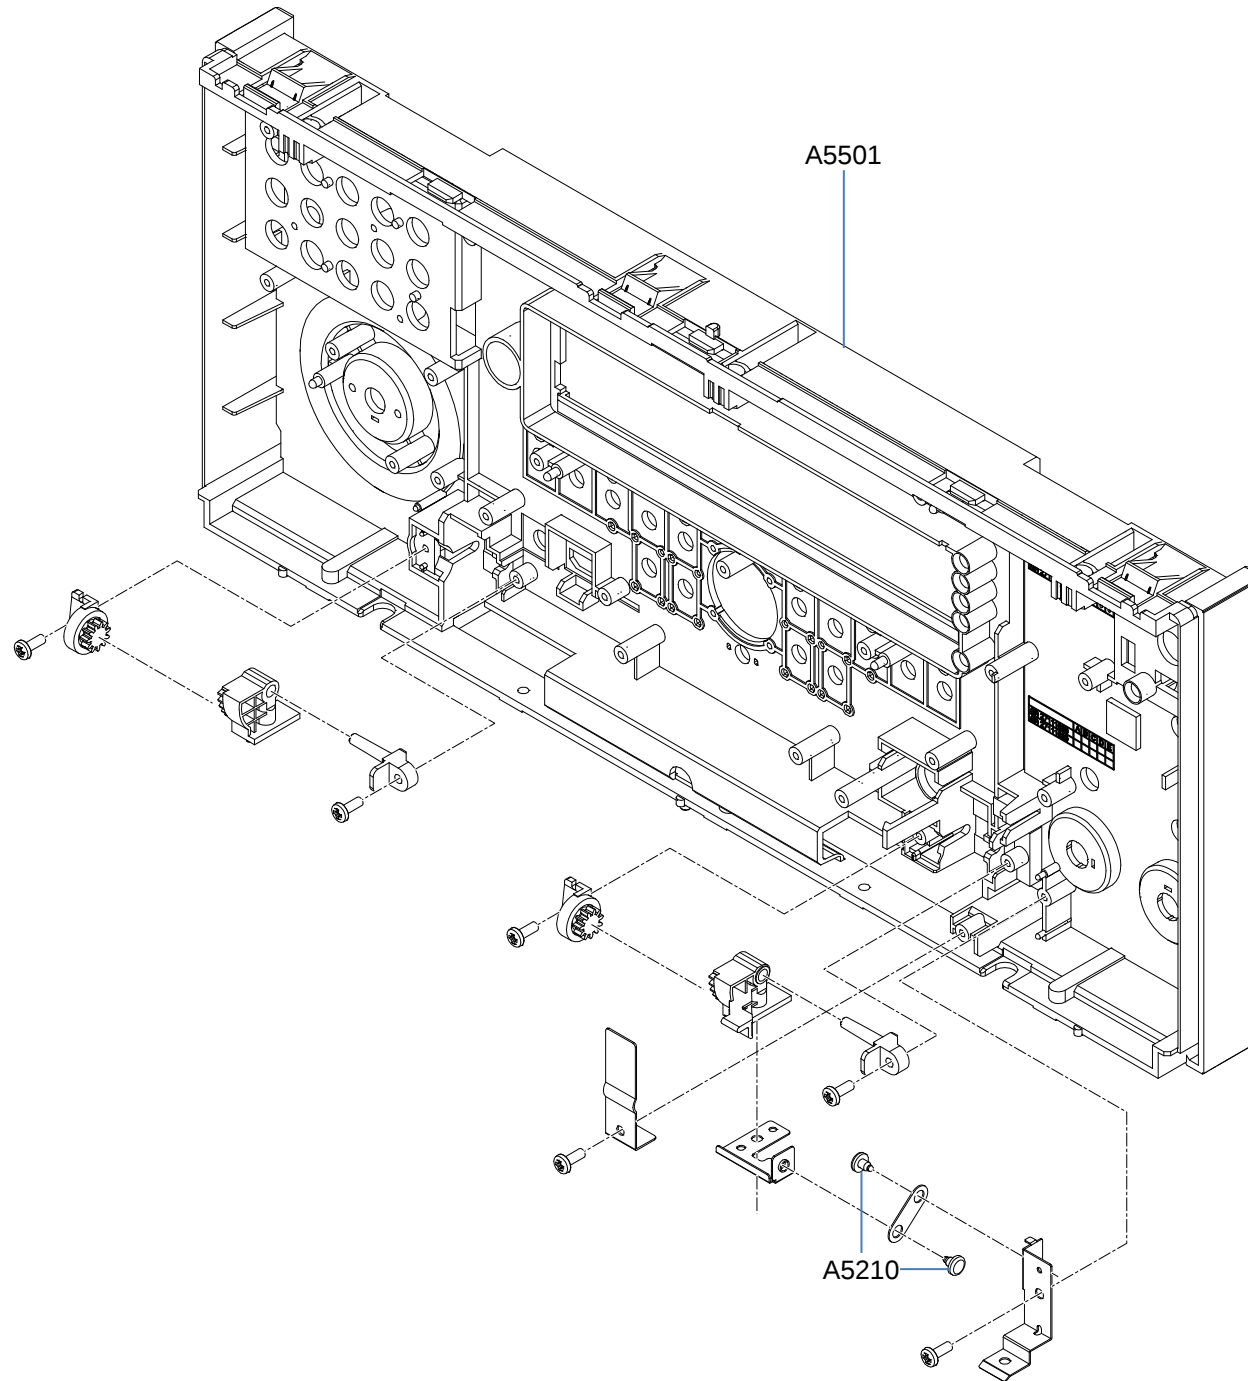




TX-RZ1100/3100

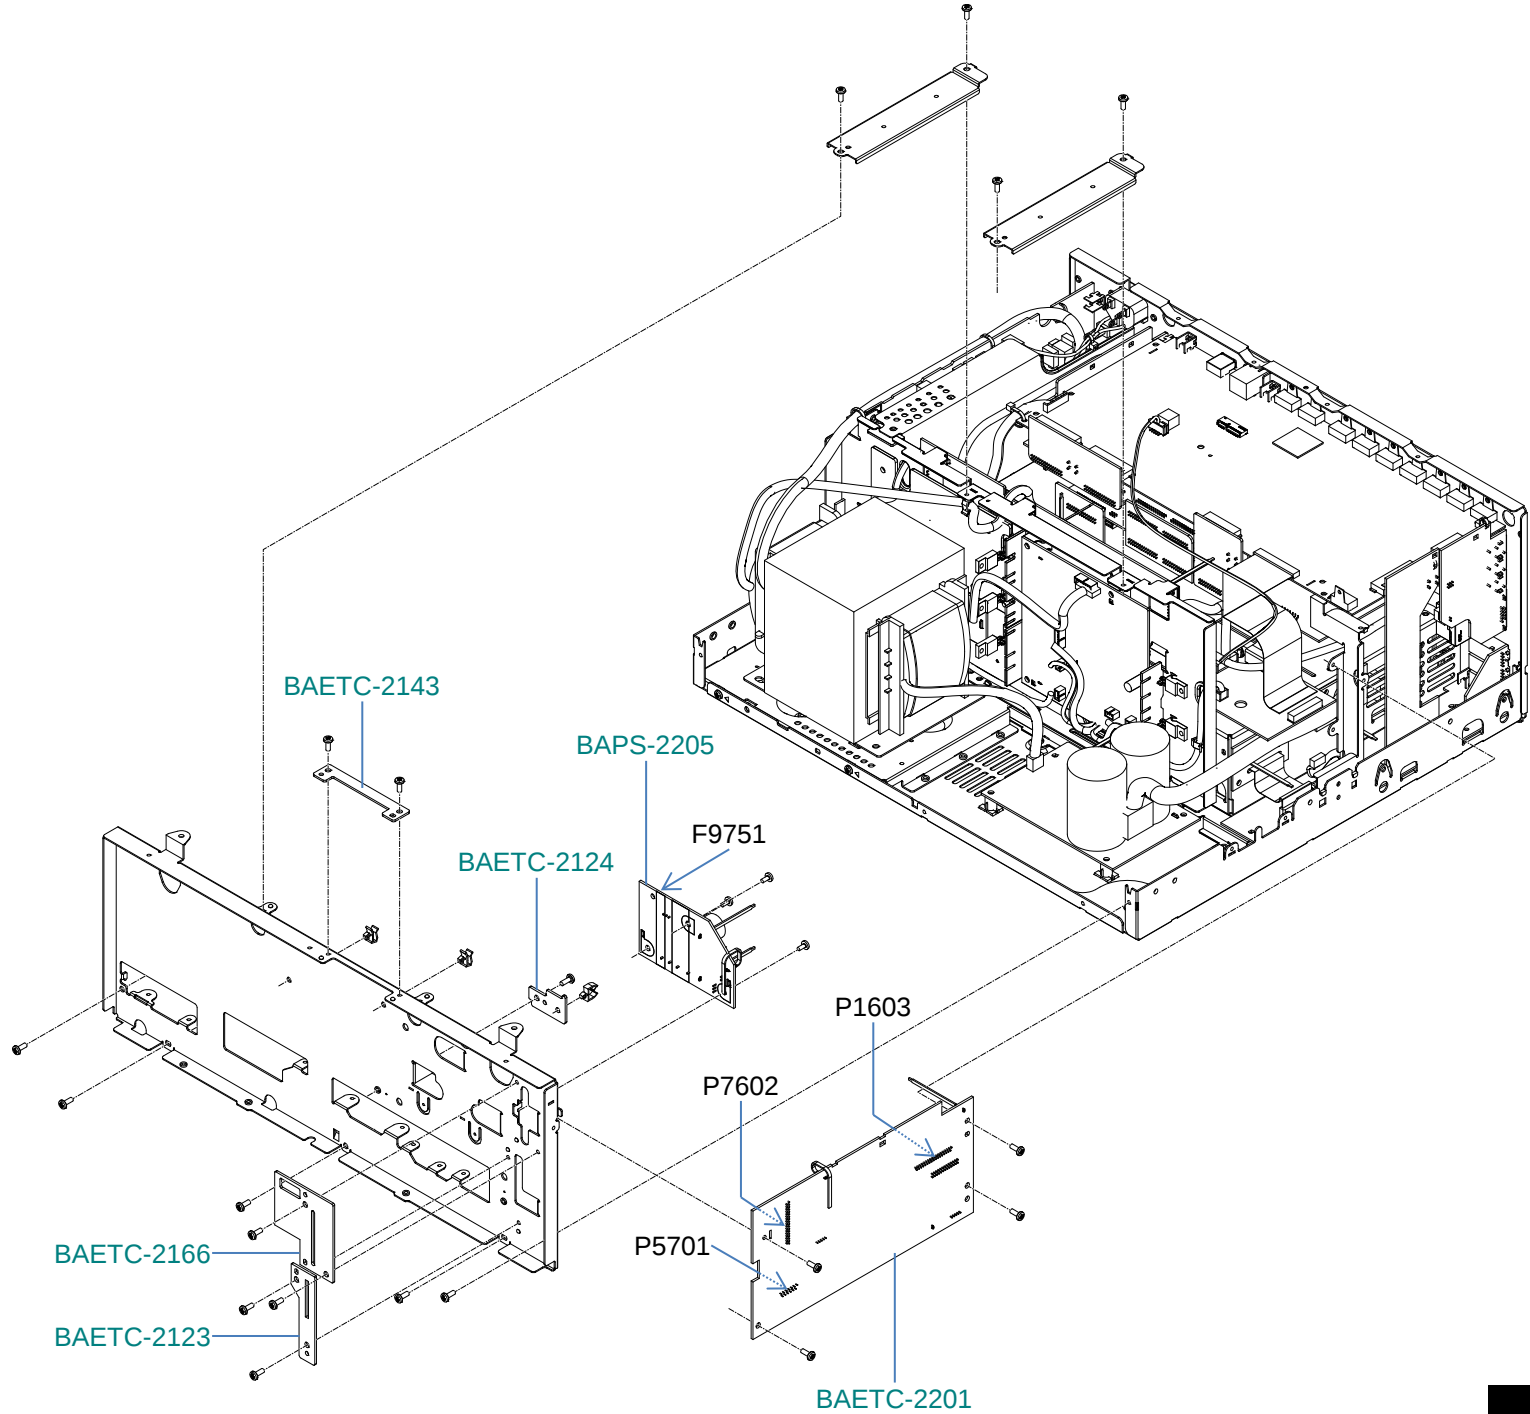

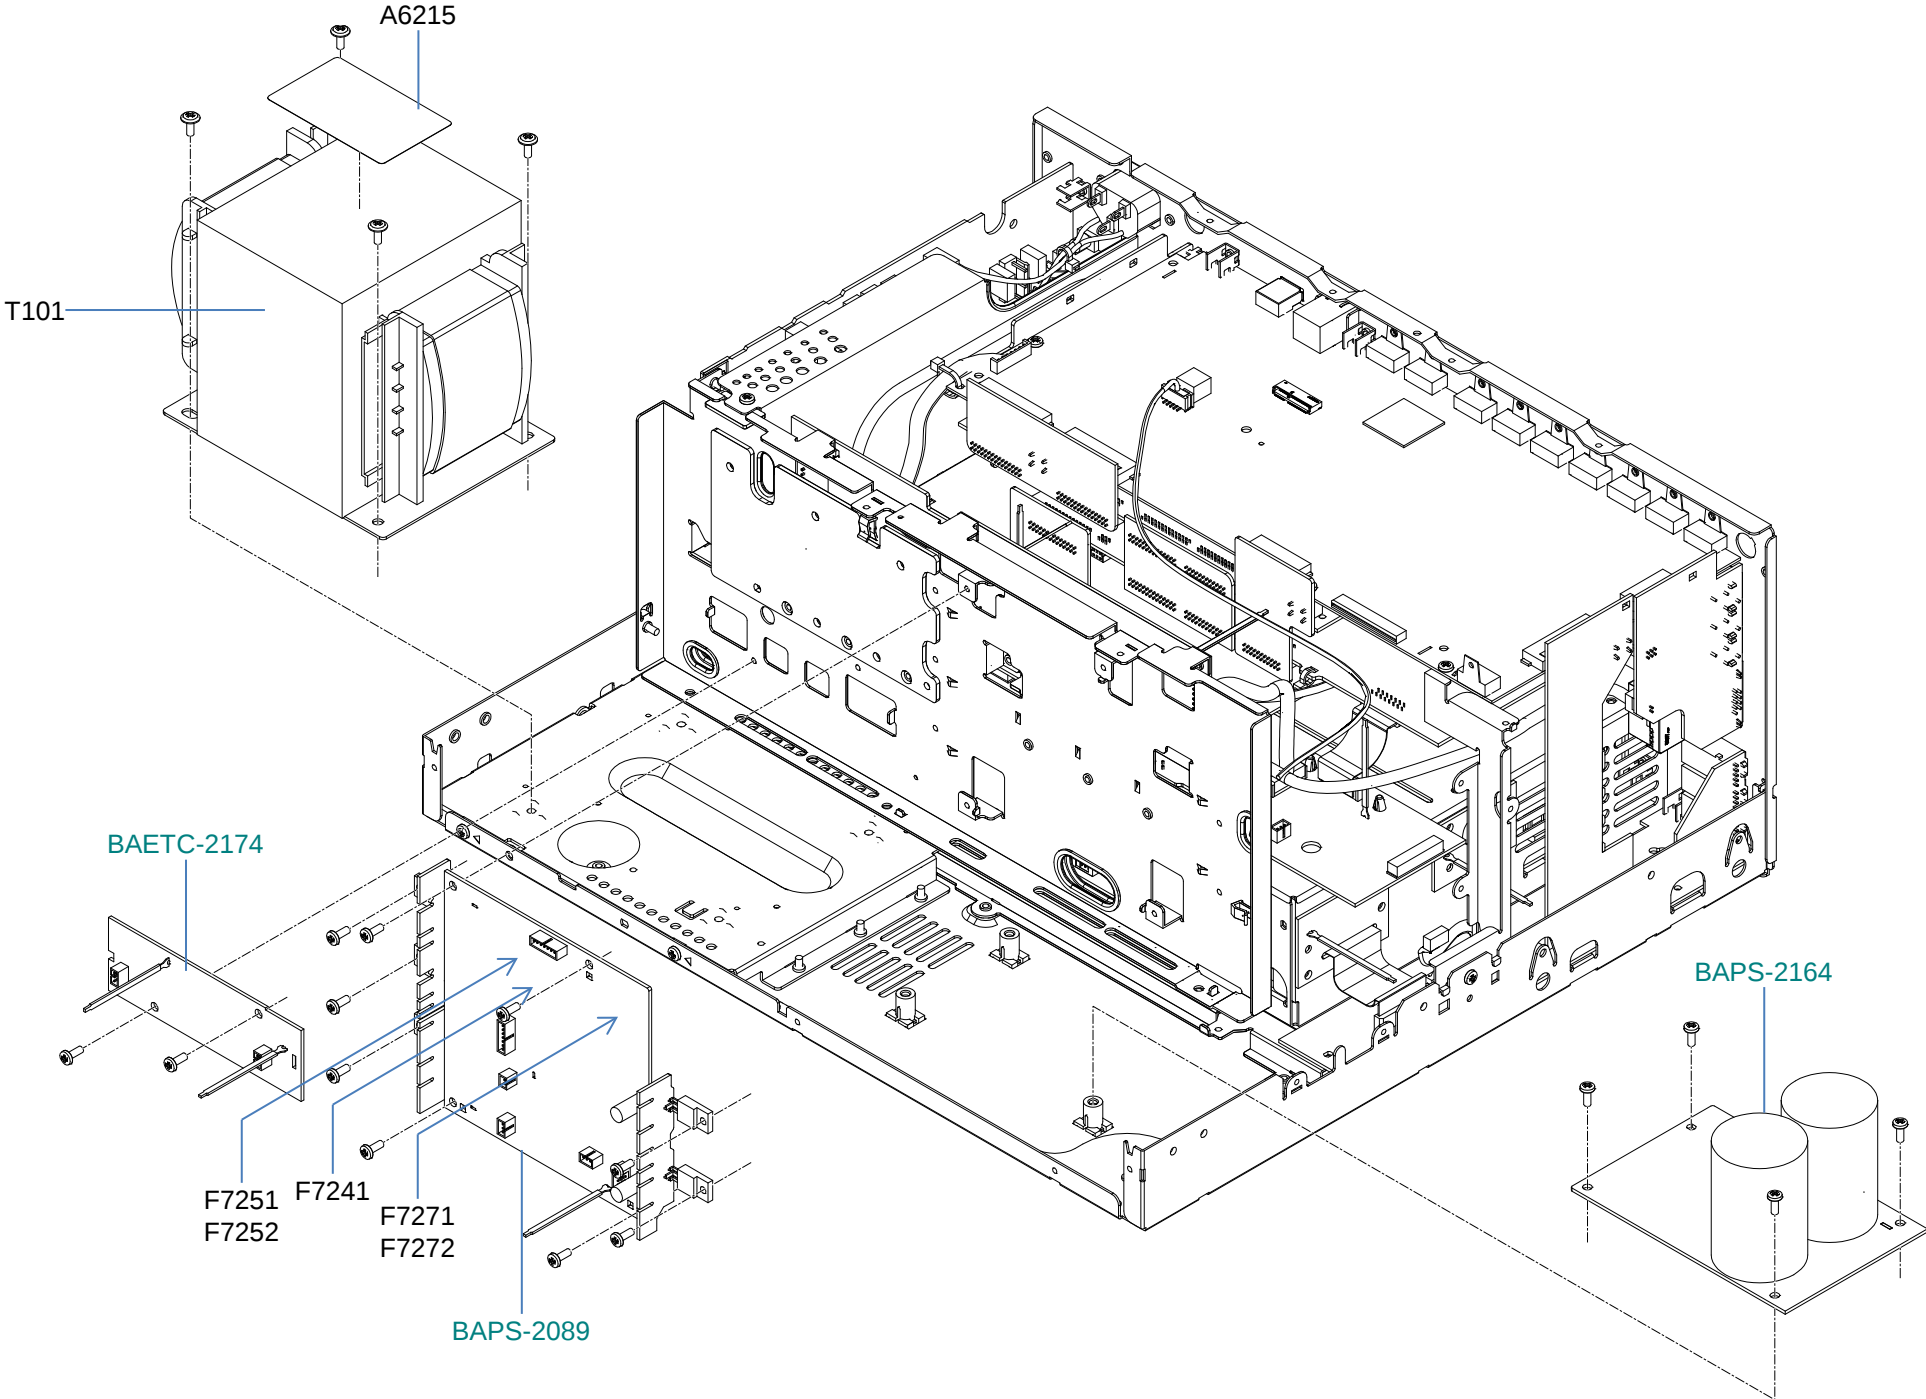

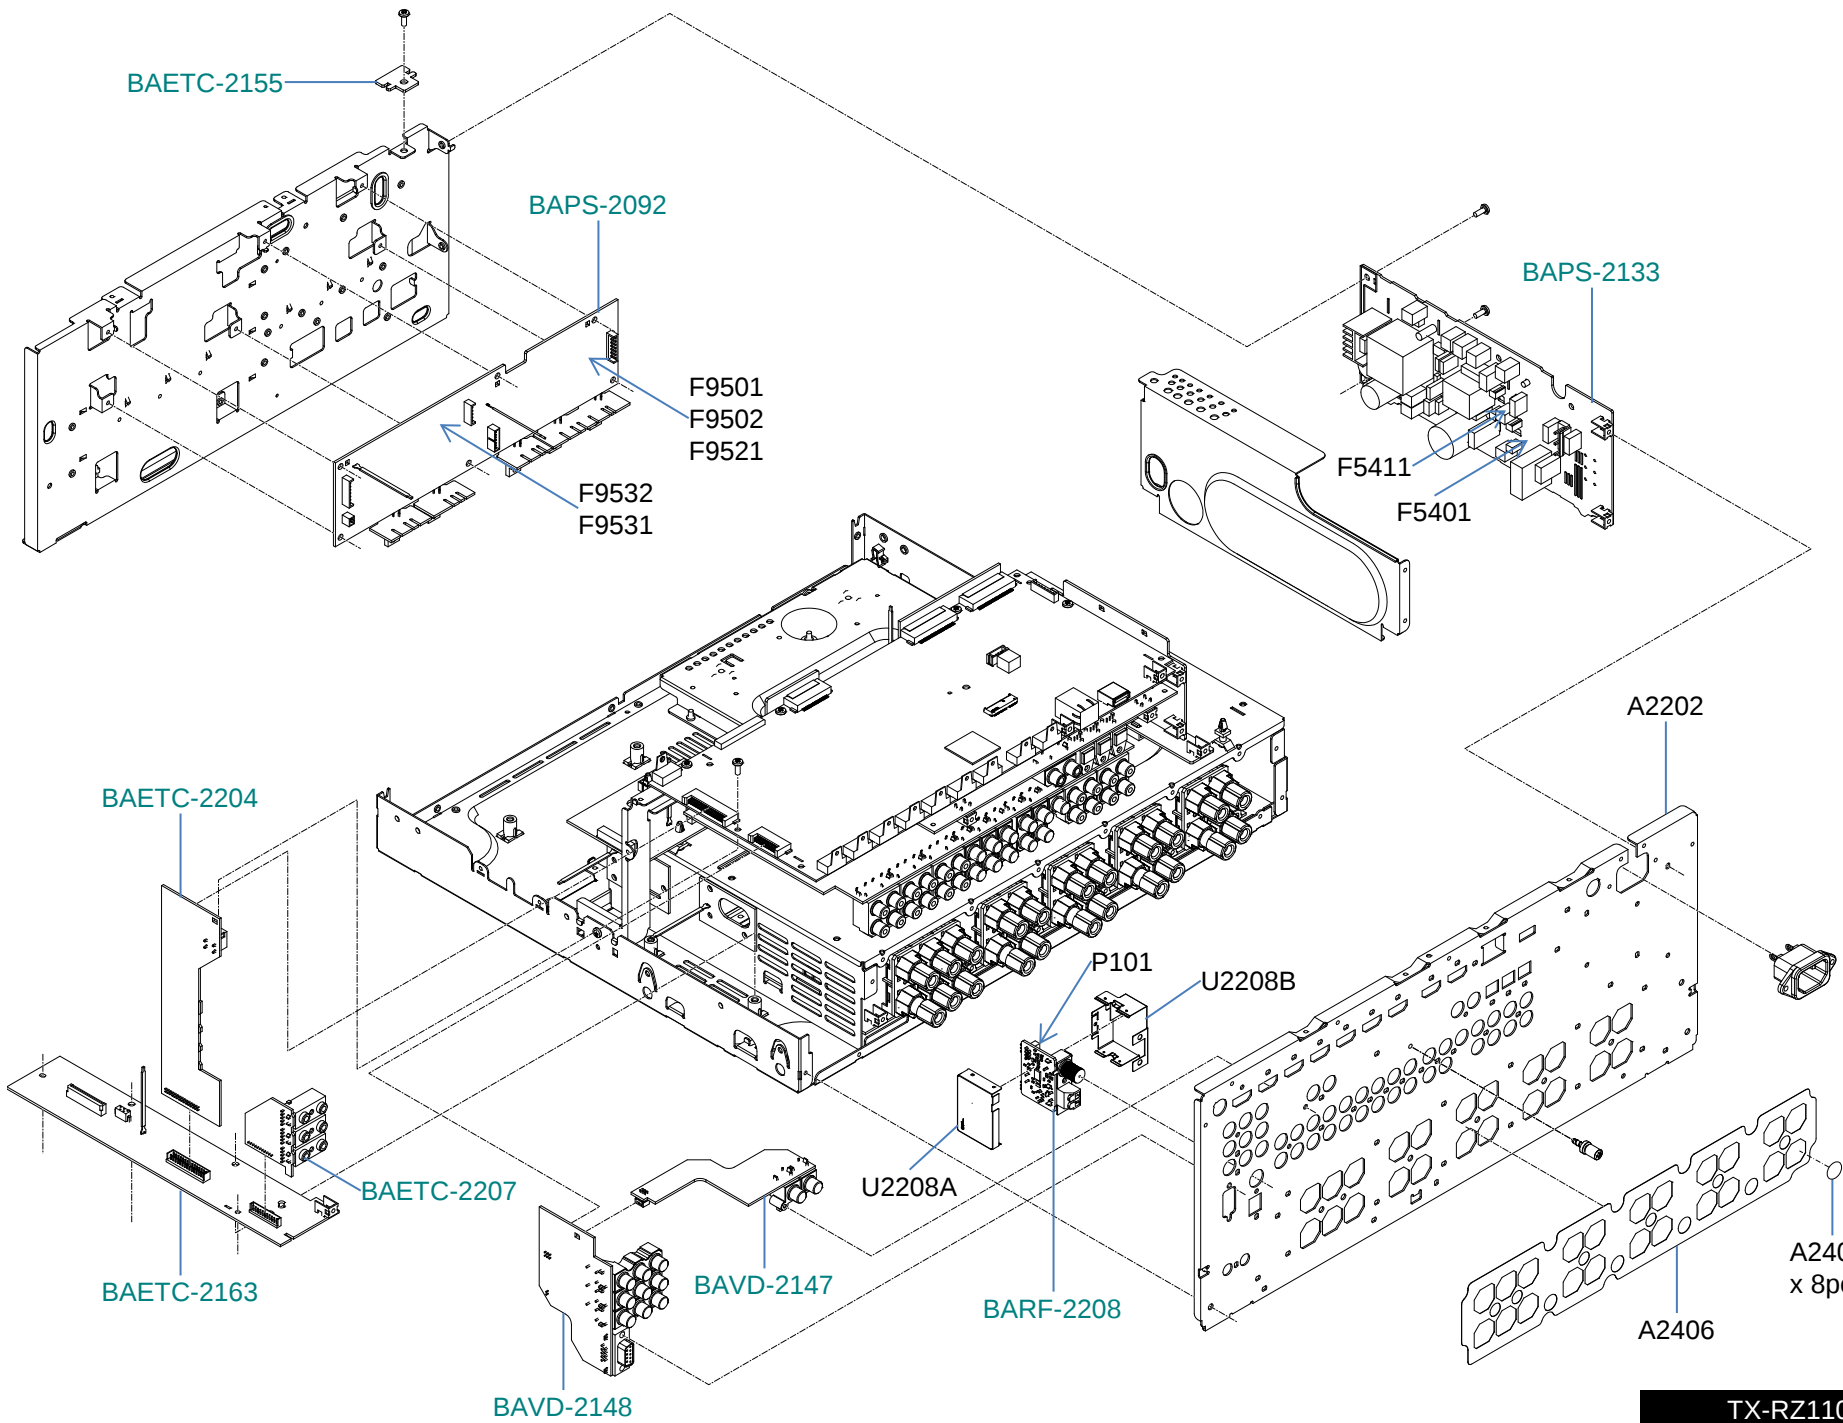

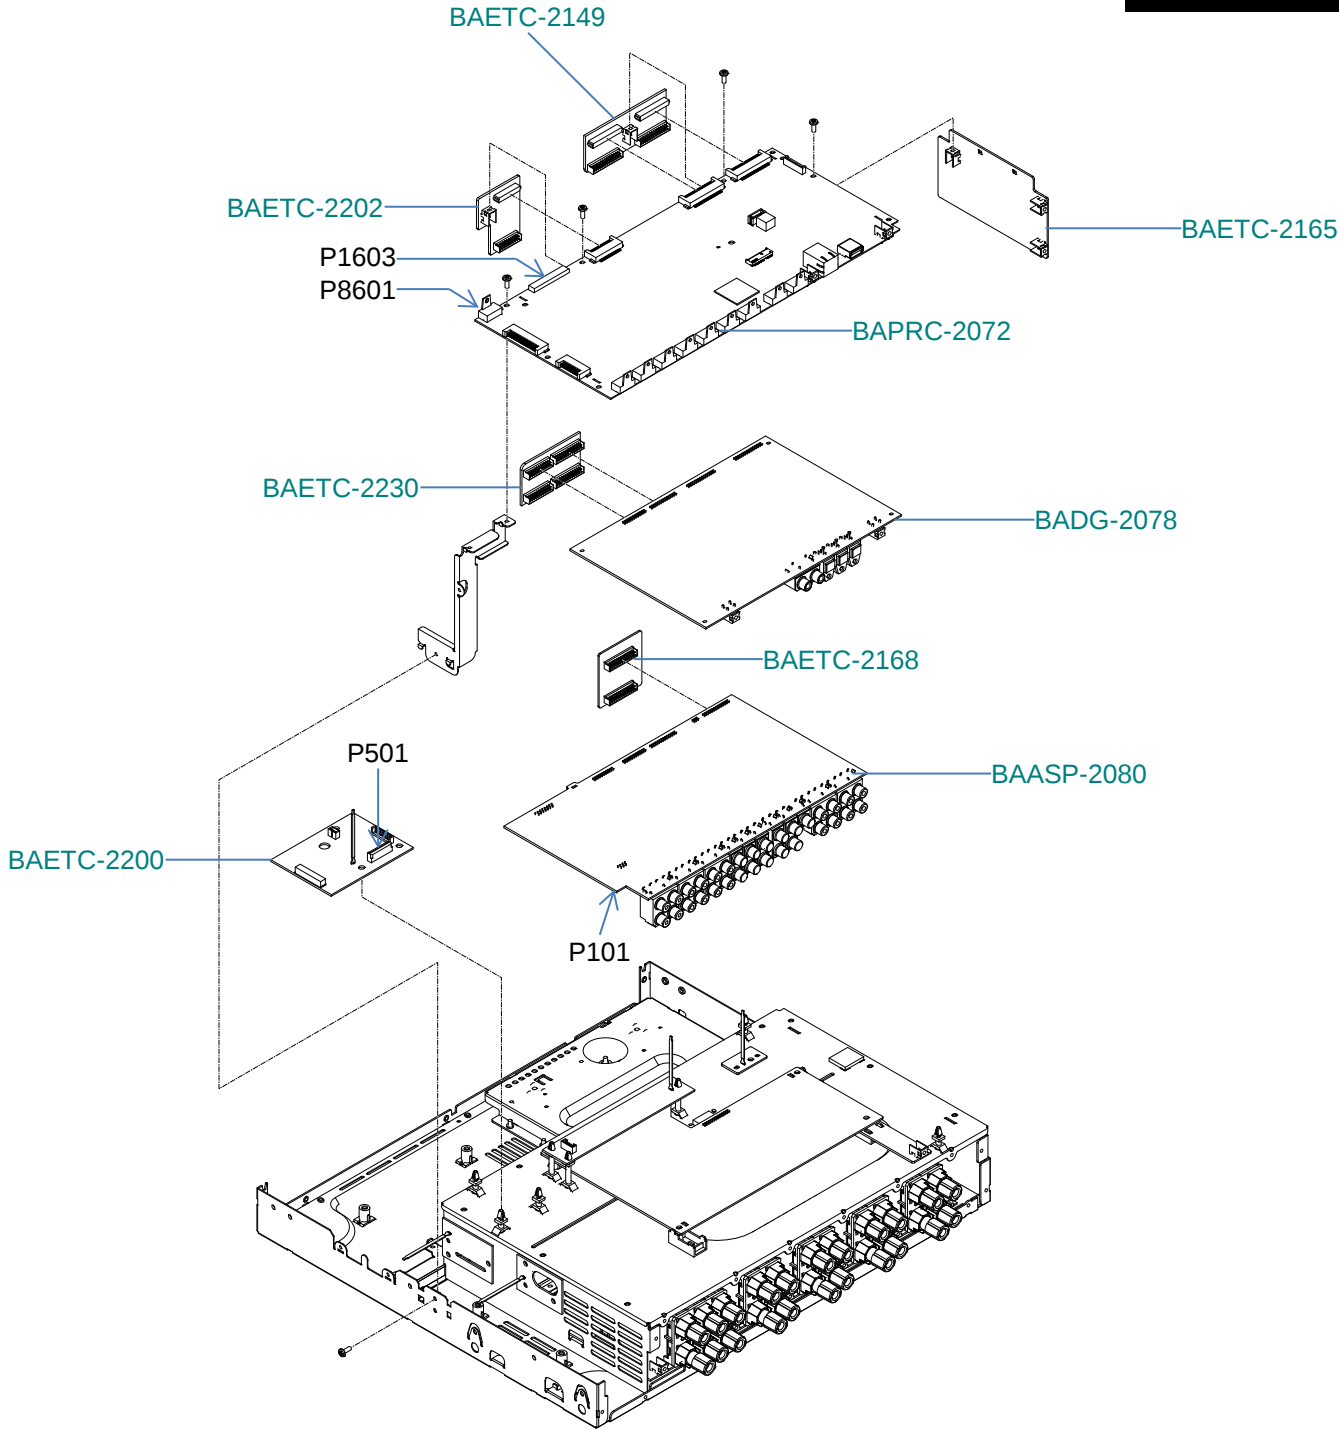

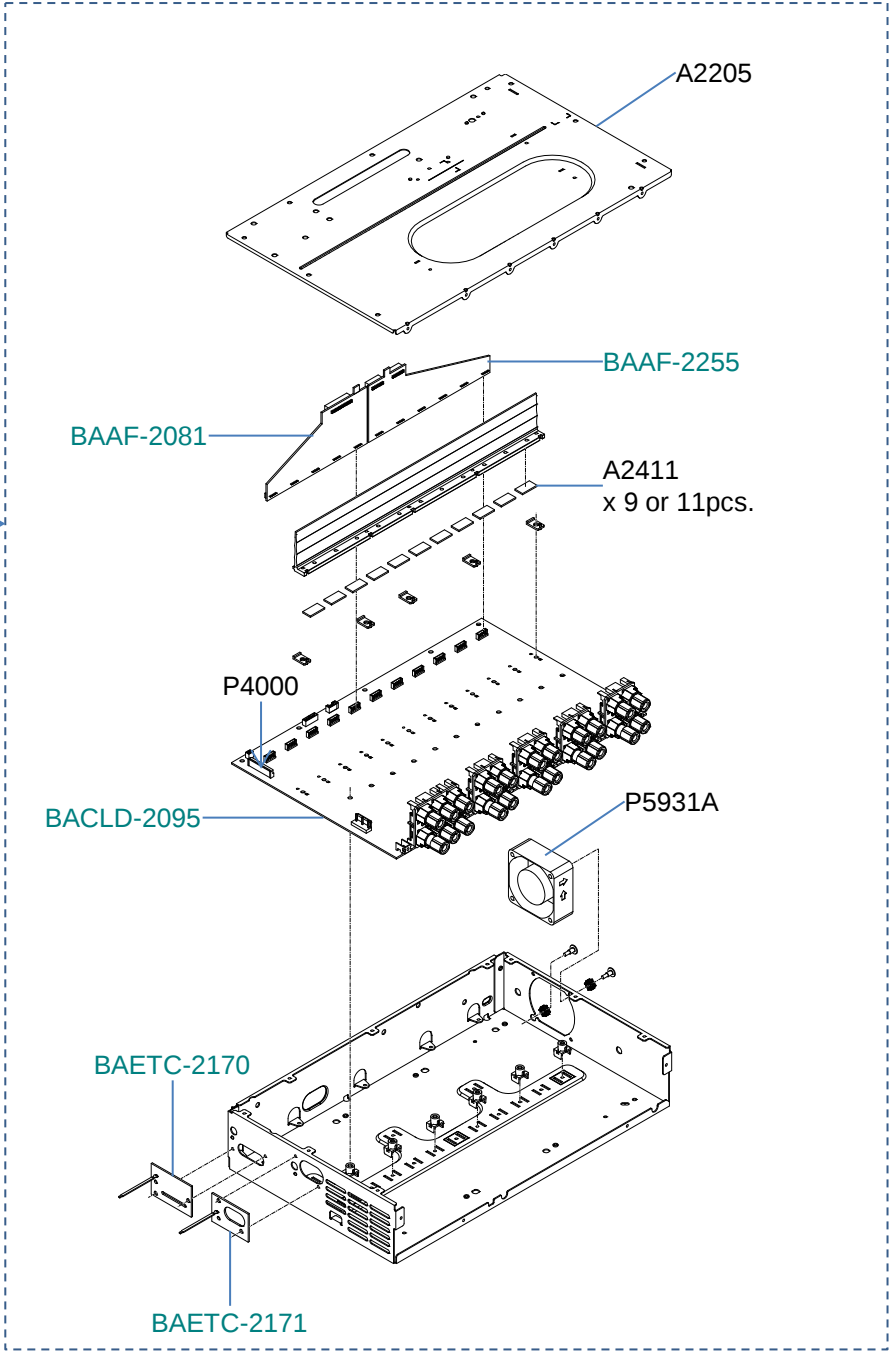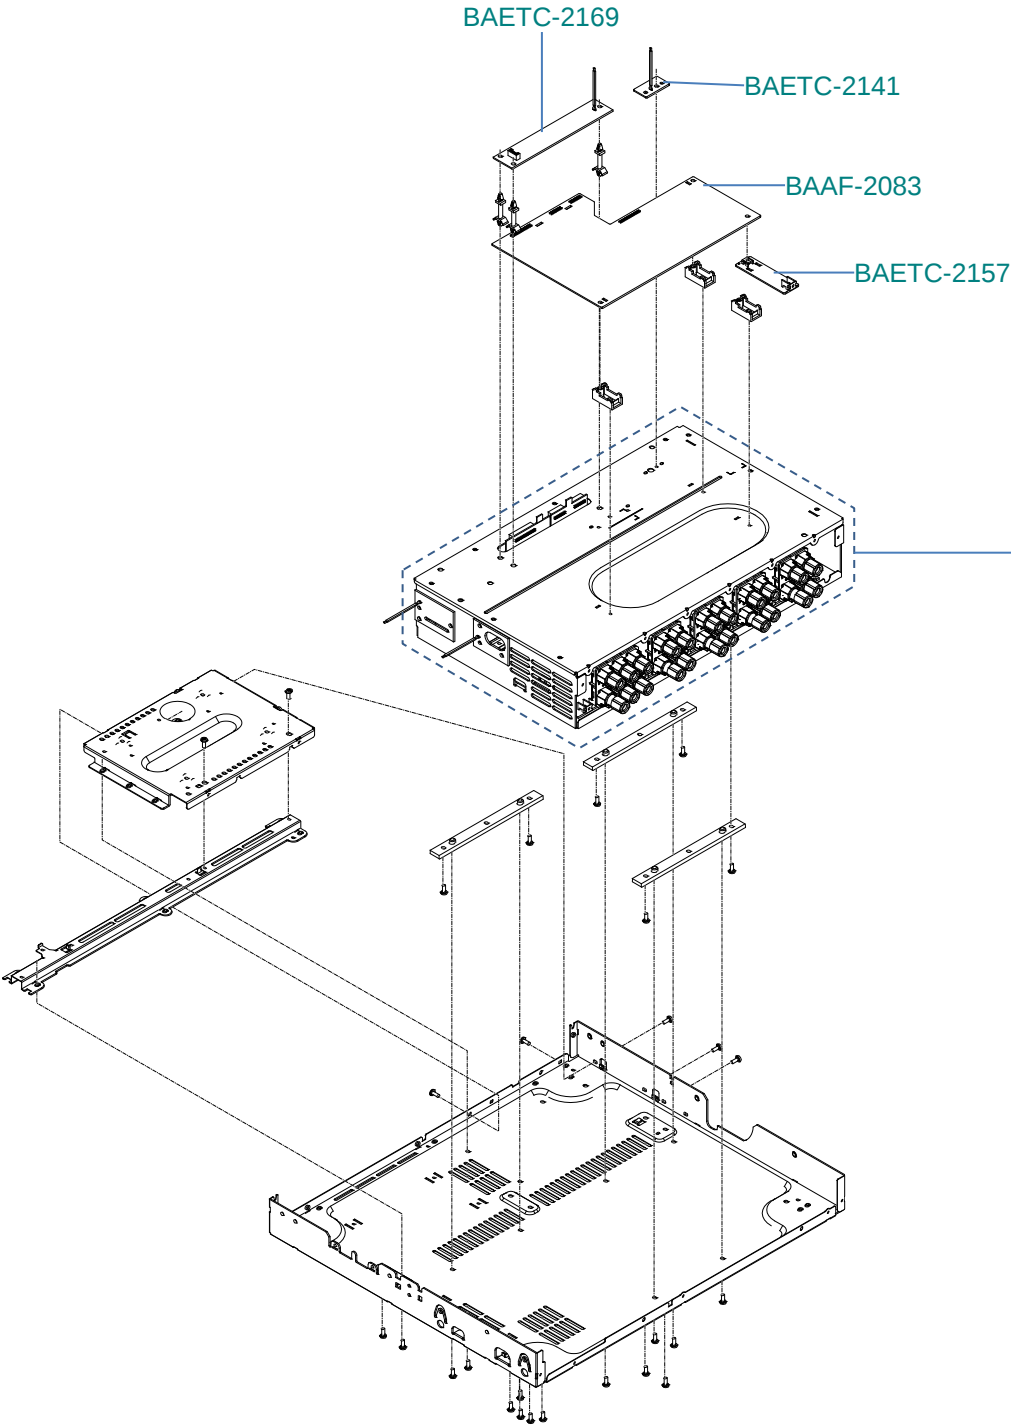

TX-RZ3100(B)MDC

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
 2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
- Therefore, when replacing, be sure to use parts of identical designation.

(B) : Black color model

<MDC> : 120V

Canadian/USA/(Mexico) model

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Cabinet, Chassis, Screws, Nuts]					
A2201	CHASSIS	(OI)AS	1	27100619A	NSP
A2202	REAR PANEL	RZ3100MDC	1	27124778A	N
A2203	COVER	(B)1100 (Bent)	1	28210173A	
A2203	COVER	(B)1100 (Not Bent)	1	28210173AZ	
A2204	CHASSIS	(SUB)LX901	1	27100613A	NSP
A2205	COVER	(IR)LX901	1	28210161B	
A2209	BRACKET	(F)OI	1	27131166A	N NSP
A2211	TOP BEAM	85(MTL)	2	ANG7726-B	N NSP
A2215	BRACKET	(REG)	1	27131168A	NSP
A2216	HEAT SINK	LX901	1	27160708	NSP
A2232	BRACKET	(RIGHT)LX901	1	27131170	NSP
A2233	SHIELD PLATE	(PRIMARY)	1	27150545	NSP
A2234	HEAT SINK	(REG)	1	27160717	NSP
A2301	PCB MOLD(PP)	.	5	AMR2533-B	NSP
A2302	BOTTOM LEG	(FRONT)	2	27175477A	N
A2303	INSULATOR ICE(PLS)	.	3	AMR7523-A	NSP
A2304	PCB MOLD(PP)	.	6	AMR7536-B	NSP
A2305	CUSHION	(CORK)D25*9*T2	4	28141968	
A2307	BOTTOM LEG	(REAR)	2	27175478A	
A2401	DAMPER BUSHING 83	.	2	AEB7425-A	NSP
A2402	CUSHION 5X8	.	1	AEB7397-A	NSP
A2406	SHEET	SP_LX901	1	29096191	
A2409	CUSHION CIRCLE 14B	.	8	AED7081-A	
A2411	HEAT COND SHEET	.	11	AEB7434-A	
A2412	MINI CLAMP	.	2	VEC1597-A	N NSP
A2413	HOLDER	KGLS-6S	5	27190011	NSP
A2414	HEAT SINK SPACER(PLS)	.	5	AMR7568-A	N NSP
A2416	PCB SPACER	.	3	AEC1446-A	N NSP
A2454	CUSHION/T3	.	6	AEB7448-A	NSP
A2455	CUSHION	t4.0x20x17	1	28142010	NSP
A2459	CORD CLAMPER/HL	.	1	AEC7653-A	N NSP
A2465	BUSH/ANT	.	2	AMR7706-B	
A2468	CUSHION/T8	.	1	AEB7442-A	N NSP
A2469	HOLDER	(PLUG)	1	27191418A	NSP
A2470	SPACER	(BUFFER)	3	27270578	NSP
A2471	CLAMPER	YMC-10-0 V0	2	27301970	N NSP
A2472	RIVET	P4050	1	880057	N NSP
A2472or	RIVET	R4050B	(1)	880064	N NSP
A2474	HOLDER	(クランプ) UA-0	1	27190432	NSP
A2481	TAPE	TAPE(CLOTH-8U)	0.26	29110082	NSP
A2482	IB CUSHION	W15*3t TAPE	0.03	28141585A	NSP
A2483	CUSHION	(PORON)10*15*T1.5	2	28142018	N NSP
A2484	CUSHION	(FELT)170*10*T1.0	1	28142020	N NSP
A5201	DOOR	(B)	1	28148858	

A5202	HOLDER	(L)	1	27191411B	NSP
A5203	HOLDER	(R)	1	27191412A	NSP
A5204	SHAFT	.	2	27260383	NSP
A5205	DAMPER	(11.3)	2	27301969	NSP
A5206	RETAINER	(SPRING)	1	27142345A	NSP
A5207	RETAINER	(DOOR)	1	27142341	NSP
A5208	RETAINER	(LINK)	1	27142342	NSP
A5209	RETAINER	(ERH-L)	1	27142343	NSP
A5210	PLASTIC RIVET	P3035B	2	880016	
A5210or	RIVET	R3035B	(2)	880062	N NSP
A5211	KNOB	(TONE)(B)AS	2	28327232	
A5211A	KNOB	(TONE)(B)	{2}	28327211	N
A5211B	SPRING	.	{2}	27180575	
A5212	KNOB	(VOL)AS(B)	1	28327219	
A5212A	KNOB	(VOL)CAP(B)	{1}	28327221	N
A5212B	KNOB	(VOL)BASE	{1}	28327223	N
A5212C	SPRING	.	{1}	27180575	
A5213	CUSHION	(PORON)8*3*T1.5	3	28141969	NSP
A5214	SPACER	(PC)D7*d4*t0.25	1	27270575	NSP
A5501	FRONT BRACKET	810(B)	1	27111638	
A5502	KNOB	(CUR)AS BLACK	1	28326994C	
A5502A	KNOB	(CUR) BLK	{1}	28326988A	
A5502B	KNOB	(CUR-BASE) BLK	{1}	28326986C	N
A5503	KNOB	(ENTER) BLK	1	28326990	
A5504	KNOB	(5)(B)	2	28327225	
A5505	PLATE	(VOL)	1	27262931A	
A5506	HOLDER	(PLT)	1	27191413A	N NSP
A5507	CLEAR PLATE	TX-RZ810	1	28192475	
A5508	KNOB	(PURE)	1	28327208	N
A5509	GUIDE	(STBY)(B)	1	27268323	NSP
A5510	KNOB	(STBY)(B)	1	28327234	
A5511	KNOB	(1)(B)	2	28327209	
A5512	FACET	.	1	28198905	
A5513	BADGE	.	1	28135317	
A5514	KNOB	(INP-C)(B)	1	28327272A	N
A5515	KNOB	(INP-L)(B)	1	28327274A	N
A5516	KNOB	(INP-R)(B)	1	28327276A	N
A5517	FRONT PANEL	TXRZ3100(B)	1	27213855	N
A5518	PLATE	(DOOR)(B)US_TXRZ810	1	27262934A	
A5519	BACK PLATE	.(B)	1	28133428	
A5520	IB CUSHION	W15*3t TAPE	0.01	28141585A	NSP
A5550	SCREW	3TTB+8B(3BC)	4	838430088GR	NSP
A5551	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A5552	SCREW	3TTB+8B(3BC)	6	838430088GR	NSP
A5553	SCREW	3TTB+8B(3BC)	4	838430088GR	NSP
A5554	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5555	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5556	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5557	SCREW	3TTB+8B(3BC)	5	838430088GR	NSP
A5558	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A5559	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5560	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A5561	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A5562	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5563	SCREW	3TTB+10B(3BC)	2	838430108GR	NSP

A5564	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A5565	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A5566	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A5567	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A6215	LABEL	(PT)ONK	1	29392650	
A7913	SCREW	3TTB+6B(3BC)	6	838430068GR	NSP
A7914	SCREW	3TTB+6B(3BC)	6	838430068GR	NSP
A7915	SCREW	SCREW(3*11.6)	2	801661	NSP
A7916	SCREW	3TTB+8B(3CM)SR	5	801637	NSP
A7917	SCREW	SCREW	5	801665	NSP
A7918	SCREW	SCREW	6	801663	NSP
A7919	SCREW	SCREW	9	801666	N NSP
A7920	SCREW	3TTB+6B(3BC)	1	838430068GR	NSP
A7921	SCREW	3TTB+6B(3BC)	3	838430068GR	NSP
A7922	SCREW	3TTB+8B(3CM)SR	2	801637	NSP
A7923	SCREW	3TTB+8B(3CM)SR	1	801637	NSP
A7924	SCREW	BBZ30P060FCC	4	838630068	N NSP
A7925	SCREW	BBZ30P060FCC	5	838630068	N NSP
A7926	SCREW	BBZ30P060FCC	6	838630068	N NSP
A7927	SCREW	BBZ30P060FCC	5	838630068	N NSP
A7928	SCREW	BBZ30P060FCC	2	838630068	N NSP
A7929	SCREW	BMZ30P040FTB	9	82543004GR	NSP
A7930	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7932	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A7933	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A7934	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7935	SCREW	3TTB+8B(3BC)	11	838430088GR	NSP
A7936	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7937	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A7939	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7940	SCREW	3TTB+6B(3BC)	4	838430068GR	NSP
A7941	SCREW	3TTB+8B(3BC)	3	838430088GR	NSP
A7942	SCREW	3TTB+8B(3BC)	4	838430088GR	NSP
A7943	SCREW	3TTB+8B(3BC)	6	838430088GR	NSP
A7944	SCREW	3TTB+8B(3BC)	6	838430088GR	NSP
A7945	SCREW	3TTB+10P(3CM)	6	838130100GR	N NSP
A7946	SCREW	BPZ30P080FNI	6	838230080	NSP
A7947	SCREW	3TTB+8B(3CM)SR	1	801637	NSP
A7948	SCREW	BBZ30P180FCC	2	838630188	NSP
A7949	SCREW	3TTB+8B(3CM)SR	1	801637	NSP
A7950	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7951	SCREW	3TTB+8B(3CM)SR	3	801637	NSP
A7952	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7954	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7955	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7956	SCREW	3TTB+6B(3BC)	6	838430068GR	NSP
A7957	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7958	SCREW	3TTB+6B(3BC)	3	838430068GR	NSP
A7959	SCREW	SCREW 4X12(FE)	4	801660	NSP
A7960	WASHER	WH40FNI	1	87324009	N NSP
A7961	SCREW	3TTB+6B(3BC)	1	838430068GR	NSP
A7962	SCREW	3TTB+6B(3BC)	3	838430068GR	NSP
A7963	SCREW	BBZ30P180FCC	3	838630188	NSP
A7964	SCREW	3TTB+8B(3CM)SR	1	801637	NSP
A7965	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP

A7966	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7967	SCREW	3TTB+6B(3BC)	1	838430068GR	NSP
A7968	SCREW	3TTB+8B(3CM)SR	1	801637	NSP
A7969	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A7970	SCREW	3TTB+6B(3BC)	5	838430068GR	NSP
A7971	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A7972	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A7973	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A7975	SCREW	3TTF+8B(BC)	2	835430088	N NSP
A7977	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A7981	SCREW	3TTB+8B(3CM)SR	2	801637	NSP
A7982	SCREW	3TTB+8B(3CM)SR	2	801637	NSP
A7983	SCREW	3TTB+8B(3BC)	8	838430088GR	NSP
A7984	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
A7985	SCREW	BCZ40P060FTB	2	838440069GR	NSP
A7986	SCREW	BCZ40P060FTB	3	838440069GR	NSP
A7987	SCREW	BCZ40P060FTB	3	838440069GR	NSP
A7988	TERMINAL	Eターミナル	1	25060151	NSP
A7990	BINDER(BK-1)	.	15	ZCA-BK1	NSP
A7996	SCREW	2B+5FN(3CM)	1	82512005	NSP
A7997	SCREW	3TTB+8B(3CM)SR	2	801637	NSP
A8000	WASHER	W3*10F(3BC)	1	87643010GR	NSP
A8002	SCREW	3TTB+8B(3CM)SR	4	801637	NSP
A8003	SCREW	BBZ30P060FCC	7	838630068	N NSP
A8004	SCREW	3TTB+8B(3BC)	2	838430088GR	NSP
A8005	SCREW	3TTB+6B(3BC)	2	838430068GR	NSP
A8006	SCREW	3TTB+8B(3CM)SR	1	801637	NSP
[Transformers, Coils]					
T101	POWER TRANSFORMER	NPT-1676D	1	2302172	!, N
[Switches, Terminals, Wires]					
F5401	FUSE	10A-UL/T-233	1	252330GR	!
F5411	FUSE	215002.MXP	1	252400	!
F7241	FUSE	1.25A-UL/T-233	1	252318GR	!
F7251	FUSE	1A-UL/T-233	1	252317GR	!
F7252	FUSE	1A-UL/T-233	1	252317GR	!
F7271	FUSE	1.25A-UL/T-233	1	252318GR	!
F7272	FUSE	1.25A-UL/T-233	1	252318GR	!
F9501	FUSE	1.25A-UL/T-233	1	252318GR	!
F9502	FUSE	1.25A-UL/T-233	1	252318GR	!
F9521	FUSE	1.25A-UL/T-233	1	252318GR	!
F9531	FUSE	1.25A-UL/T-233	1	252318GR	!
F9532	FUSE	1.25A-UL/T-233	1	252318GR	!
F9751	FUSE	2A-UL/T-233	1	252320GR	!
P101	FLEXIBLE FLAT CABLE	NCFC7-070712	1	2047070712	N
P1603	FLEXIBLE FLAT CABLE	NCFC5-351512	1	2045351512	N
P3652	WIRE HARNESS ASSEMBLY	NSAS-8P2463	1	2009991599UL	N NSP
P3654A	ASSEMBLED PWB	WCBN806L	1	24150135	N
P3654B	WIFI BT ANTENNA	RFDPA870918EMLB302	1	2050102	N
P3654C	WIFI BT ANTENNA	RFDPA870940EMLB303	1	2050103	N
P4000	FLEXIBLE FLAT CABLE	NCFC7-210812	1	204321045	N
P4001	WIRE HARNESS ASSEMBLY	NSAS-8P2462	1	2009991598UL	N NSP
P4002	WIRE HARNESS ASSEMBLY	NSAS-4P2434	1	2009991570UL	N NSP
P4003	WIRE HARNESS ASSEMBLY	NSAS-10P2435	1	2009991571UL	N NSP
P4004	WIRE HARNESS ASSEMBLY	NSAS-14P2436	1	2009991572UL	N NSP
P501	FLEXIBLE FLAT CABLE	ADD7725-A	1	204315043	

P5701	FLEXIBLE FLAT CABLE	NCFC7-131512	1	2047131512	
P5852	WIRE HARNESS ASSEMBLY	ADX7759-A	1	2009991538UL	NSP
P5931A	FAN	2410RL-04W-S29-C07	1	24502340	
P7201	WIRE HARNESS ASSEMBLY	ADX7766-A	1	2009991539UL	NSP
P7602	FLEXIBLE FLAT CABLE	NCFC4-35067	1	204435067	N
P7604	FLEXIBLE FLAT CABLE	NCFC4-05071	1	204405071	N
P7653	FLEXIBLE FLAT CABLE	NCFC4-11068	1	204411068	N
P8601	CORD ASSEMBLY	TYX1622-114047	1	2010519	
[Frontend, Units]					
U080	PARENT PC BOARD AS	BAPRC-2072-1J-P	1	1B5142072-1J310MDC	N Parent
BAPRC-2072	Processing circuit pc board AS	BAPRC-2072-1J	1	1B5142072-1J-C310MDC	N Child
U190	PARENT PC BOARD AS	BADIS-2075-1A-P	1	1B5142075-1A	N Parent
BADIS-2075	Display circuit pc board AS	BADIS-2075-1A	1	1B5142075-1A-C	Child
BAETC-2123	Et cetra pc board AS	BAETC-2123-1A	1	1B5142123-1A-C	Child
BAETC-2124	Et cetra pc board AS	BAETC-2124-1A	1	1B5142124-1A-C	Child
BASW-2126	Switch circuit pc board AS	BASW-2126-1A	1	1B5142126-1A-C	Child
BASW-2127	Switch circuit pc board AS	BASW-2127-1A	1	1B5142127-1A-C	Child
BASW-2128	Switch circuit pc board AS	BASW-2128-1A	1	1B5142128-1A-C	Child
BAETC-2129	Et cetra pc board AS	BAETC-2129-1A	1	1B5142129-1A-C	Child
BAETC-2130	Et cetra pc board AS	BAETC-2130-1A	1	1B5142130-1A-C	Child
BAETC-2131	Et cetra pc board AS	BAETC-2131-1A	1	1B5142131-1A-C	Child
BAETC-2132	Et cetra pc board AS	BAETC-2132-1A	1	1B5142132-1A-C	Child
BAPS-2133	Power supply circuit pc board AS	BAPS-2133-1A	1	1B5142133-1A-C	Child
BAETC-2134	Et cetra pc board AS	BAETC-2134-1A	1	1B5142134-1A-C	Child
BAETC-2136	Et cetra pc board AS	BAETC-2136-1A	1	1B5142136-1A-C	Child
BAETC-2141	Et cetra pc board AS	BAETC-2141-1A	1	1B5142141-1A-C	Child
BAETC-2143	Et cetra pc board AS	BAETC-2143-1A	1	1B5142143-1A-C	Child
BAETC-2155	Et cetra pc board AS	BAETC-2155-1A	1	1B5142155-1A-C	Child
U200	PARENT PC BOARD AS	BADG-2078-1C-P	1	1B5142078-1C	N Parent
BADG-2078	Digital circuit pc board AS	BADG-2078-1C	1	1B5142078-1C-C	N Child
U100	PARENT PC BOARD AS	BAASP-2080-1J-P	1	1B5142080-1J	N Parent
BAASP-2080	Audio signal processor circuit pc board AS	BAASP-2080-1J	1	1B5142080-1J-C	N Child
BAVD-2147	Video circuit pc board AS	BAVD-2147-1J	1	1B5142147-1J-C	N Child
BAVD-2148	Video circuit pc board AS	BAVD-2148-1J	1	1B5142148-1J-C	N Child
BAETC-2149	Et cetra pc board AS	BAETC-2149-1J	1	1B5142149-1J-C	N Child
U140	PARENT PC BOARD AS	BAAF-2081-1D-P	1	1B5142081-1D	N Parent
BAAF-2081	Audio frequency circuit pc board AS	BAAF-2081-1D	1	1B5142081-1D-C	Child
BAETC-2157	Et cetra pc board AS	BAETC-2157-1D	1	1B5142157-1D-C	Child
BAAF-2255	Audio frequency circuit pc board AS	BAAF-2255-1D	1	1B5142255-1D-C	Child
U150	PARENT PC BOARD AS	BAAF-2083-1G-P	1	1B5142083-1G	N Parent
BAAF-2083	Audio frequency circuit pc board AS	BAAF-2083-1G	1	1B5142083-1G-C	N Child
U210	PARENT PC BOARD AS	BAHDM-2087-1A-P	1	1B5142087-1A	N Parent
BAHDM-2087	HDMI circuit pc board AS	BAHDM-2087-1A	1	1B5142087-1A-C	N Child
BAETC-2230	Et cetra pc board AS	BAETC-2230-1A	1	1B5142230-1A-C	N Child
U160	PARENT PC BOARD AS	BAPS-2089-1G-P	1	1B5142089-1G	N Parent
BAPS-2089	Power supply circuit pc board AS	BAPS-2089-1G	1	1B5142089-1G-C	N Child
BAETC-2163	Et cetra pc board AS	BAETC-2163-1G	1	1B5142163-1G-C	N Child
BAPS-2164	Power supply circuit pc board AS	BAPS-2164-1G	1	1B5142164-1G-C	N Child
BAETC-2165	Et cetra pc board AS	BAETC-2165-1G	1	1B5142165-1G-C	N Child
BAETC-2166	Et cetra pc board AS	BAETC-2166-1G	1	1B5142166-1G-C	N Child
BAETC-2168	Et cetra pc board AS	BAETC-2168-1G	1	1B5142168-1G-C	N Child
BAETC-2169	Et cetra pc board AS	BAETC-2169-1G	1	1B5142169-1G-C	N Child
BAETC-2170	Et cetra pc board AS	BAETC-2170-1G	1	1B5142170-1G-C	N Child
BAETC-2171	Et cetra pc board AS	BAETC-2171-1G	1	1B5142171-1G-C	N Child
BAETC-2174	Et cetra pc board AS	BAETC-2174-1G	1	1B5142174-1G-C	N Child

BAETC-2202 Et cetra pc board AS	BAETC-2202-1G	1	1B5142202-1G-C	N	Child
BARF-2208 Radio frequency circuit pc board AS	BARF-2208-1G	1	1B5142208-1G-C	N	Child
U170 PARENT PC BOARD AS	BAPS-2092-1G-P	1	1B5142092-1G	N	Parent
BAPS-2092 Power supply circuit pc board AS	BAPS-2092-1G	1	1B5142092-1G-C	N	Child
BAETC-2200 Et cetra pc board AS	BAETC-2200-1G	1	1B5142200-1G-C	N	Child
BAETC-2201 Et cetra pc board AS	BAETC-2201-1G	1	1B5142201-1G-C	N	Child
BAETC-2204 Et cetra pc board AS	BAETC-2204-1G	1	1B5142204-1G-C	N	Child
BAPS-2205 Power supply circuit pc board AS	BAPS-2205-1G	1	1B5142205-1G-C	N	Child
BAETC-2207 Et cetra pc board AS	BAETC-2207-1G	1	1B5142207-1G-C	N	Child
U180 PARENT PC BOARD AS	BACLD-2095-1J-P	1	1B5142095-1J	N	Parent
BACLD-2095 ClassD amplifier circuit pc board AS	BACLD-2095-1J	1	1B5142095-1J-C	N	Child
U2208A SHIELD CASE	(TUNER-BTM)	1	27225207A	N	
U2208B SHIELD CASE	(UPPER)	1	27225208		
[Packing]					
A6901 PAD	(AS)1100	1	29092773A		
A6901A PAD	(F)1100	{1}	29092774A	N	
A6901B PAD	(R)1100	{1}	29092775	N	
A6903A UPC LABEL	TXRZ3100(B)MDC	1	29393295	N	
A6904 CARTON	TXRZ3100DC	1	29055659		
A6905 PACKING SHEET	.	1	RHC1023-A		NSP
A6909 CUSHION	(EVA)20*40*T7.5	2	28141973		NSP
A6910 POLYPROPYLENE TAPE	W50 SBT-70	1.8	29110200		NSP
A6913 TAPE	FIXLON #813N W12	0.1	29110230	N	NSP
A6921 LABEL	(fwup-wo-dtsx)CNT_ONK	1	29393452	N	
[Accessories]					
A6301 FM ANT AS	Type W	1	292191		
A6302 POLYETHYLENE BAG	.	1	AHG7117-A		NSP
A6303 MIC	KHM0018-010010	1	245051		
A6305 CAUTION CARD/SPE	.	1	ARM7161-A		NSP
A6306 WARRANTY CARD	(ONKYO RZ-SERIES)	1	29365230A	N	
A6307 ANTENNA COIL	AM LOOP-ANTENNA	1	232207		
A6307or ANTENNA COIL	AM LOOP ANTENNA (S&O)	(1)	232216		
A6308 REMOTE CONTROL TRANSMITTER	RC-926R	1	24140926		
A6309 BATTERY	R6/AA(UM-3)	2	3010194		NSP
A6311 POWER SUPPLY CORD	ADG7118-A(122111/16)	1	253454VOL	!	
A6340 INSTRUCTION MANUAL	En(TXRZ3100)_BAS	1	29402420		
A6341 INSTRUCTION MANUAL	U2FrEs(TXRZ3100)_BAS	1	29402421		
A6345 INSTRUCTION MANUAL	SAFETY_ONK_16HI_U3(EnFrE	1	29402488		
A6346 INSTRUCTION SHEET	(Google cast)	1	29355956		
A6347 INSTRUCTION SHEET	(internet radio-2016)	1	29355957		
A6350 SHEET	(FLYER-US AVR 2015)	1	29380164		
A6352 INSTRUCTION SHEET	(FWupdate-Fireconnect)	1	29355967		

BAAF-2081-1D**<Note>**

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Switches, Terminals, Wires]					
P140	PRINTED WIRING BOARD	BCAF-2081	{1}	25142081	NSP
P140	PRINTED WIRING BOARD	BCETC-2157	{1}	25142157	N NSP
P140	PRINTED WIRING BOARD	BCAF-2255	{1}	25142255	N NSP
P4100B	SOCKET	IMSA-9115S-05L	1	25052985	NSP
P4200B	SOCKET	IMSA-9115S-05L	1	25052985	NSP
P4300B	SOCKET	IMSA-9115S-05L	1	25052985	NSP
P4400B	SOCKET	IMSA-9115S-05L	1	25052985	NSP
P4500B	SOCKET	IMSA-9115S-05L	1	25052985	NSP
P4600B	SOCKET	IMSA-9115S-05L	1	25052985	NSP
P4700B	SOCKET	IMSA-9115S-05L	1	25052985	NSP
P4800B	SOCKET	IMSA-9115S-05L	1	25052985	NSP
P4900B	SOCKET	IMSA-9115S-05L	1	25052985	NSP
P5000B	SOCKET	IMSA-9115S-05L	1	25052985	NSP
P5100B	SOCKET	IMSA-9115S-05L	1	25052985	NSP
P6961	TRM(SCREW)	TER21-0130V	1	25060533	N NSP
P6962	TRM(SCREW)	ANG7591-A	1	25060531	N NSP
P9002B	SOCKET	IMSA-9111S-16L	1	25053258	NSP
P9003B	SOCKET	IMSA-9111S-16L	1	25053258	NSP
P9004B	SOCKET	IMSA-9111S-28L	1	25053567	N NSP

BAAF-2083-1G

<Note>

1. Parts marked by "**NSP**" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
Q9001	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q9021	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q9041	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q9061	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q9081	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q9101	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q9121	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q9141	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q9161	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q9181	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q9201	HYBRID IC	NJM5532CG	1	22243204R2	NSP
[Capacitors]					
C9001	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C9001or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C9002	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C9002or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C9010	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C9010or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C9021	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP

[illegible]

C9202	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C9202or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C9210	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C9210or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
[Resistors]					
R9001	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9002	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9003	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R9004	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9005	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R9006	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R9007	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9008	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9009	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9010	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9011	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9012	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9013	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9014	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9021	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9022	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9023	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R9024	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9025	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R9026	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R9027	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9028	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9029	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9030	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9031	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9032	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9033	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9034	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9041	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9042	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9043	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R9044	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9045	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R9046	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R9047	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9048	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9049	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9050	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9051	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9052	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9053	C-METAL R	RN72K2B-274JE2	1	435112744R1	NSP
R9054	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9061	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9062	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9063	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R9064	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9065	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R9066	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R9067	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9068	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP

[illegible]

R9154	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9161	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9162	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9163	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R9164	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9165	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R9166	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R9167	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9168	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R9169	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9170	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9171	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9172	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9173	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9174	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9181	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R9182	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R9184	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9187	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9188	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9189	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9190	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9191	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9192	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9193	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9194	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9201	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R9202	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R9204	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9207	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9208	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9209	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9210	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R9211	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9212	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9213	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9214	C-METAL R	RN72K2B-225JE2	1	435112254R1	NSP
R9301	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R9302	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R9309	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9310	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
[Switches, Terminals, Wires]					
P150	PRINTED WIRING BOARD	BCAF-2083	{1}	25142083	N NSP
P9001B	SOCKET	IMSA-9111S-28L	1	25053567	NSP
P9002A	PLUG	IMSA-9111B-16	1	25056620	NSP
P9003A	PLUG	IMSA-9111B-16	1	25056620	NSP
P9004A	PLUG	IMSA-9111B-28	1	25056742	NSP
P9005	TRM(EARTH)	OG-RM30HF	1	25060534R2	NSP

BAASP-2080-1J

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.

2. The ! mark found on some component parts indicates the importance of the safety factor of the part.

Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D301	CHIP TYPE DIODE	DAN217U	1	223323R2	NSP
D321	CHIP TYPE DIODE	DAN217U	1	223323R2	NSP
D371	CHIP TYPE DIODE	DAN217U	1	223323R2	NSP
D511	ZENER DIODE	DZ2J075M0L	1	224760750R2	NSP
D512	ZENER DIODE	DZ2J075M0L	1	224760750R2	NSP
D532	ZENER DIODE	DZ2J039M0L	1	224760390R2	NSP
D551	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D571	CHIP TYPE DIODE	DAN217U	1	223323R2	NSP
Q101	HYBRID IC	NJM4585M	1	22242981R2	NSP
Q201	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q203	TRANSISTOR	IMX25	1	2218600R2	NSP
Q204	TRANSISTOR	IMX25	1	2218600R2	NSP
Q231	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q232	TRANSISTOR	IMX25	1	2218600R2	NSP
Q241	TRANSISTOR	IMX25	1	2218600R2	NSP
Q242	TRANSISTOR	IMX25	1	2218600R2	NSP
Q261	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q263	TRANSISTOR	IMX25	1	2218600R2	NSP
Q264	TRANSISTOR	IMX25	1	2218600R2	NSP
Q281	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q283	TRANSISTOR	IMX25	1	2218600R2	NSP
Q284	TRANSISTOR	IMX25	1	2218600R2	NSP
Q2951	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q2952	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q301	HYBRID IC	BD34704KS2	1	22242977R3	
Q321	HYBRID IC	NJW1194	1	22242893R2	
Q351	HYBRID IC	NJM4585M	1	22242981R2	NSP
Q371	HYBRID IC	NJW1194	1	22242893R2	
Q431	HYBRID IC	NJM4585M	1	22242981R2	NSP
Q441	HYBRID IC	NJM4565M-D	1	22241383R2	NSP
Q471	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q472	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q511	TRANSISTOR	2SD2400A-D	1	2202734	
Q512	TRANSISTOR	2SB1569A-D	1	2202724	
Q541	TRANSISTOR	2SA1201-Y	1	2217554AR2	NSP
Q542	TRANSISTOR	2SC5712	1	2217310R2	NSP
Q543	TRANSISTOR	DTC143EUA	1	2218520R2	NSP
Q551	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q552	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q571	HYBRID IC	BD34704KS2	1	22242977R3	
Q601	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q603	TRANSISTOR	IMX25	1	2218600R2	NSP
Q604	TRANSISTOR	IMX25	1	2218600R2	NSP
Q6101	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q6121	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q6141	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q6161	HYBRID IC	NJM4580V	1	22242130R2	NSP

Q6181	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q6201	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q621	HYBRID IC	NJM4580V	1	22242130R2	NSP
Q623	TRANSISTOR	IMX25	1	2218600R2	NSP
Q624	TRANSISTOR	IMX25	1	2218600R2	NSP
Q671	TRANSISTOR	IMX25	1	2218600R2	NSP
Q681	TRANSISTOR	IMX25	1	2218600R2	NSP
Q801	HYBRID IC	74VHC4051AFT	1	22274051ER2TO	NSP
Q802	HYBRID IC	74VHC4053AFT	1	22274053ER2TO	NSP
Q803	HYBRID IC	NJM41041VC3-TE1	1	22242931R2	NSP
Q871	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q872	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q873	TRANSISTOR	2SA1576A	1	2218540R2	NSP
[Capacitors]					
C101	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C102	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C103	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C104	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C105	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-102J	1	373041024R2	NSP
C105or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-102J	(1)	376641024R2	N NSP
C106	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-102J	1	373041024R2	NSP
C106or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-102J	(1)	376641024R2	N NSP
C107	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTEF332JE	1	376593324T	NSP
C108	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTEF332JE	1	376593324T	NSP
C109	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTEF123JE	1	376591234T	NSP
C110	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTEF123JE	1	376591234T	NSP
C115	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C116	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C117	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C118	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C119	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-472J	1	373044724R2	NSP
C119or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-472J	(1)	376644724R2	NSP
C120	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-472J	1	373044724R2	NSP
C120or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-472J	(1)	376644724R2	NSP
C121	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C122	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C123	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C123or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C124	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C124or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C129	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C129or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C133	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C133or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C134	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C134or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C135	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C136	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C139	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C140	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C143	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C144	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C145	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C146	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C153	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP

C154	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C155	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C156	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C163	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C164	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C165	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C166	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C173	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-151J	1	3400046R1	NSP
C174	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-151J	1	3400046R1	NSP
C175	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C176	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C183	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C184	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-271J	1	3400044R1	NSP
C185	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C186	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C203	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C204	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C205	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C206	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C209	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C210	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C211	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C211or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C212	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C212or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C232	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C233	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C235	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C236	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C236or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C237	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C237or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C241	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C241or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C242	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C242or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C245	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-331J	1	373023314R2	NSP
C245or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-331J	(1)	376623314R2	NSP
C246	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-331J	1	373023314R2	NSP
C246or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-331J	(1)	376623314R2	NSP
C263	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C264	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C265	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C266	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C269	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C270	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C271	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C271or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C272	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C272or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C283	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C284	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C285	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C286	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C289	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP

C290	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C291	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C291or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C292	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C292or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2955	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2956	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2957	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2957or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2958	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2958or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C301	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C302	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C303	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C303or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C304	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C304or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C321	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C322	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C323	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C324	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C325	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-332K1	1	332103325R1	NSP
C326	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-332K1	1	332103325R1	NSP
C327	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C328	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C329	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-4.7M(UTSP)	1	397580477ST	N
C330	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-4.7M(UTSP)	1	397580477ST	N
C331	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C337	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C338	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C341	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C341or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C342	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C342or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C353	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C354	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C355	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C355or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C356	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C356or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C371	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C372	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C373	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C374	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C375	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-332K1	1	332103325R1	NSP
C376	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-332K1	1	332103325R1	NSP
C377	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C378	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C379	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-4.7M(UTSP)	1	397580477ST	N
C380	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-4.7M(UTSP)	1	397580477ST	N
C381	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C387	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C388	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C391	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C391or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP

C392	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C392or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C431	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C432	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C435	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C435or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C436	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C436or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C441	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-1M(UTSP)	1	397580107ST	N
C442	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-1M(UTSP)	1	397580107ST	N
C449	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-470M(UTSP)	1	397544717T	
C450	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-470M(UTSP)	1	397544717T	
C453	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C454	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C455	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C455or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C456	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C456or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C475	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C476	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C477	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C477or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C478	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C478or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C481	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C482	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C492	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C493	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C501	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C502	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C519	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-2.2M(UTSP)	1	397580227ST	N
C520	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-2.2M(UTSP)	1	397580227ST	N
C529	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C530	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C543	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C545	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C546	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C547	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C547or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C551	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C552	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W16V-100M(UTSP)	1	397541017ST	N
C571	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C572	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C575	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C575or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C576	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C576or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C581	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C582	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C583	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C584	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C585	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C586	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C603	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C604	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N

C605	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C606	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C609	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C610	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C6101	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6101or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6102	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6102or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C611	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C611or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C612	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C612or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6121	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6121or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6122	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6122or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6141	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6141or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6142	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6142or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6161	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6161or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6162	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6162or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6181	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6181or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6182	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6182or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6201	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6201or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6202	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6202or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C623	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C624	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C625	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C626	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C629	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C630	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C631	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C631or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C632	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C632or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C641	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C642	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C643	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C643or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C644	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C644or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C671	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C672	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C675	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C676	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C681	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C682	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C685	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP

C686	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C701	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C702	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C801	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C802	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C803	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C804	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C805	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C806	SMG C	CE04W50V-10M(SMG)	1	395081007ST	
C821	SMG C	CE04W16V-100M(SMG)	1	395041017ST	
C822	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C831	SMG C	CE04W16V-100M(SMG)	1	395041017ST	
C832	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C841	SMG C	CE04W16V-100M(SMG)	1	395041017ST	
C842	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C843	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C846	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C847	SMG C	CE04W50V-1M(SMG)	1	395080107ST	
C848	SMG C	CE04W50V-1M(SMG)	1	395080107ST	
C849	SMG C	CE04W50V-1M(SMG)	1	395080107ST	
C851	SMG C	CE04W6.3V-470M(SMG)	1	395024717T	
C852	SMG C	CE04W6.3V-470M(SMG)	1	395024717T	
C853	SMG C	CE04W6.3V-470M(SMG)	1	395024717T	
C871	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C872	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C873	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C874	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C875	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C876	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C895	SMG C	CE04W16V-100M(SMG)	1	395041017ST	
C901	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C902	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C951	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C952	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
[Resistors]					
R101	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R102	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R103	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R104	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R105	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R106	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R107	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R108	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R109	CHIP TYPE CARBON RESISTOR	RN72K1J-274JE	1	435032744R1	NSP
R110	CHIP TYPE CARBON RESISTOR	RN72K1J-274JE	1	435032744R1	NSP
R111	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R112	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R113	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R114	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R115	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R116	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R117	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R118	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R121	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP
R122	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP

[illegible]

R2912	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2913	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2914	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2915	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R292	CHIP TYPE CARBON RESISTOR	RN72K1J-101FE	1	435031012R1	NSP
R2925	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R2926	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R2927	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2928	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2929	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R293	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2930	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2931	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R2932	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R2933	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R2934	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R2935	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R2936	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R294	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R295	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R2951	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R2952	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R2955	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2956	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2957	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2958	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2959	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R296	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R2960	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2961	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2962	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2963	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2964	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2965	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2966	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2969	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R297	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R2970	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R2971	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
R2971or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
R2972	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
R2972or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
R298	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R2981	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R2982	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R299	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2991	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R2992	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R300	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R301	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R302	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R303	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R304	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R305	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R306	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP

R307	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R311	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R312	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R313	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R314	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R315	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R316	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R321	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R322	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R323	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R324	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R325	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R326	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R327	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R328	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R329	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R330	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R331	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R335	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R336	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R337	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R338	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R345	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R351	CHIP TYPE CARBON RESISTOR	RN72K1J-822JE	1	435038224R1	NSP
R352	CHIP TYPE CARBON RESISTOR	RN72K1J-822JE	1	435038224R1	NSP
R353	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R354	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R355	CHIP TYPE CARBON RESISTOR	RN72K1J-123JE	1	435031234R1	NSP
R356	CHIP TYPE CARBON RESISTOR	RN72K1J-123JE	1	435031234R1	NSP
R357	CHIP TYPE CARBON RESISTOR	RN72K1J-822JE	1	435038224R1	NSP
R358	CHIP TYPE CARBON RESISTOR	RN72K1J-822JE	1	435038224R1	NSP
R359	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R360	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R361	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R362	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R365	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R366	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R371	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R372	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R373	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R374	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R375	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R376	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R377	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R378	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R379	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R380	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R381	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R385	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R386	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R387	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R388	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R389	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R390	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R401	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP

[illegible]

R490	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R496	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R497	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R501	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R502	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R503	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R505	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R506	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R507	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R511	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R512	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R513	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R514	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R515	C-METAL R	RN72K2B-475JE2	1	435114754R1	NSP
R516	C-METAL R	RN72K2B-182JE2	1	435111824R1	NSP
R517	CHIP TYPE CARBON RESISTOR	RN72K1J-512JE	1	435035124R1	NSP
R518	CHIP TYPE CARBON RESISTOR	RN72K1J-512JE	1	435035124R1	NSP
R519	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R520	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R522	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R531	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R532	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R541	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R542	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R543	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R544	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R545	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R546	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R547	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R550	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R551	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R552	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R553	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R556	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R557	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R561	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R562	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R573	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R574	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R575	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R576	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R577	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R581	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R582	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R583	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R584	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R585	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R586	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R587	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R588	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R589	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R590	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R591	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R601	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R602	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP

[illegible]

[illegible]

R823	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R824	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R825	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R826	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R827	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R828	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R829	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R830	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R831	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R832	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R833	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R834	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R835	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R836	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R837	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R838	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R841	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R842	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R844	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R846	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R847	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R848	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R851	CHIP TYPE CARBON RESISTOR	RN72K1J-680FE	1	435036802R1	NSP
R852	CHIP TYPE CARBON RESISTOR	RN72K1J-680FE	1	435036802R1	NSP
R853	CHIP TYPE CARBON RESISTOR	RN72K1J-680FE	1	435036802R1	NSP
R854	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R855	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R856	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R871	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R872	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R873	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R874	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R875	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R876	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R877	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R878	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R879	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R889	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R894	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R895	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R896	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R901	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R902	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R903	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R904	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R905	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R906	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R951	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R952	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
[Switches, Terminals, Wires]					
P100	PRINTED WIRING BOARD	BCASP-2080	{1}	25142080	N NSP
P100	PRINTED WIRING BOARD	BCASP-2080	1	25142080A	N NSP
P100	PRINTED WIRING BOARD	BCVD-2147	{1}	25142147	N NSP
P100	PRINTED WIRING BOARD	BCVD-2148	{1}	25142148	N NSP
P100	PRINTED WIRING BOARD	BCETC-2149	{1}	25142149	N NSP

P100	PRINTED WIRING BOARD	BCETC-2150	{1}	25142150	N	NSP
P101B	SOCKET	NSCT-7P2100	1	25052203		NSP
P111	PIN JACK	RCA-207A-01	1	25046059		
P1304B	SOCKET	IMSA-9850S-30	1	25053215		NSP
P1305B	SOCKET	IMSA-9850S-30	1	25053215		NSP
P131	PIN JACK	MSD-242V-55-NI-FE-ABS(O13	1	25046039		
P141	PIN JACK	MSD-244V-77-NI-FE-ABS(O13	1	25046038		
P1601B	SOCKET	IMSA-9850S-18	1	25053209		NSP
P161	PIN JACK	MSD-244V-77-NI-FE-ABS(O13	1	25046038		
P181	PIN JACK	MSD-242V-55-NI-FE-ABS(O13	1	25046039		
P2001A	PLUG	IMSA-9111B-30	1	25056700		NSP
P2002A	PLUG	IMSA-9111B-30	1	25056700		NSP
P201	PIN JACK	MSD-242V-55-NI-FE-ABS(O13	1	25046039		
P231	PIN JACK	MSP-2510V-01NILF	1	25046042		
P241	PIN JACK	MSD-242V-02-NI-FE-ABS(O13	1	25046041		
P261	PIN JACK	MSD-244V-77-NI-FE-ABS(O13	1	25046038		
P2901B	SOCKET	IMSA-9111S-22L	1	25053565		NSP
P501A	SOCKET	IMSA-9607S-15F	1	25053582		NSP
P511A	WIRE HARNESS ASSEMBLY	NSAS-14P2417	1	2009991553UL		NSP
P591B	SOCKET	IMSA-9111S-24L	1	25053259		NSP
P592B	SOCKET	IMSA-9111S-28L	1	25053567		NSP
P601	PIN JACK	MSD-244V-77-NI-FE-ABS(O13	1	25046038		
P661B	SOCKET	IMSA-9111S-28L	1	25053567		NSP
P671	PIN JACK	MSD-244V-77-NI-FE-ABS(O13	1	25046038		
P701	PIN JACK	MSP-2510V-26-NI-FE(O133)	1	25046037		
P702	PIN JACK	MSP-2510V-26-NI-FE(O133)	1	25046037		
P761	TRM(SCREW)	TER21-0130V	1	25060533		NSP
P801	PIN JACK	MSD-243V-39-NI-FE-ABS(O13	1	25046043		
P802	PIN JACK	MSD-243V-39-NI-FE-ABS(O13	1	25046043		
P803	PIN JACK	MSD-243V-39-NI-FE-ABS(O13	1	25046043		
P804A	PLUG	IMSA-9111B-06	1	25056733		NSP
P804B	SOCKET	IMSA-9111S-06L	1	25053558		NSP
P951	SOCKET	MDS-09P-V-01(DSUB9P)	1	25053363		NSP
P961A	WIRE HARNESS ASSEMBLY	NSAS-4P2421	1	2009991557UL		NSP
RL551	RELAY	NRL-2P2A-DC24-208	1	25065728		

BACLD-2095-1J

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D4005	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4011	CHIP TYPE DIODE	DAN202U	1	223322R2	NSP
D4012	CHIP TYPE DIODE	DAN202U	1	223322R2	NSP
D4013	ZENER DIODE	DZ2J240M0L	1	224762400R2	NSP
D4014	ZENER DIODE	DZ2J240M0L	1	224762400R2	NSP

D4015	ZENER DIODE	DZ2J270M0L	1	224762700R2	NSP
D4016	CHIP TYPE DIODE	DAN202U	1	223322R2	NSP
D4017	ZENER DIODE	DZ2J180M0L	1	224761800R2	NSP
D4018	ZENER DIODE	DZ2J240M0L	1	224762400R2	NSP
D4019	ZENER DIODE	DZ2J240M0L	1	224762400R2	NSP
D4020	ZENER DIODE	DZ2J270M0L	1	224762700R2	NSP
D4021	ZENER DIODE	DZ2J180M0L	1	224761800R2	NSP
D4022	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4023	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4102	ZENER DIODE	DZ2J130M0L	1	224761300R2	NSP
D4108	DIODE	RF101L2S	1	22380394R2	NSP
D4109	DIODE	RF101L2S	1	22380394R2	NSP
D4116	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4117	DIODE	RF071M2S	1	22380393R2	NSP
D4118	DIODE	CMH07	1	22380395R2	NSP
D4119	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4202	ZENER DIODE	DZ2J130M0L	1	224761300R2	NSP
D4208	DIODE	RF101L2S	1	22380394R2	NSP
D4209	DIODE	RF101L2S	1	22380394R2	NSP
D4216	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4217	DIODE	RF071M2S	1	22380393R2	NSP
D4218	DIODE	CMH07	1	22380395R2	NSP
D4219	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4302	ZENER DIODE	DZ2J130M0L	1	224761300R2	NSP
D4308	DIODE	RF101L2S	1	22380394R2	NSP
D4309	DIODE	RF101L2S	1	22380394R2	NSP
D4316	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4317	DIODE	RF071M2S	1	22380393R2	NSP
D4318	DIODE	CMH07	1	22380395R2	NSP
D4319	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4402	ZENER DIODE	DZ2J130M0L	1	224761300R2	NSP
D4408	DIODE	RF101L2S	1	22380394R2	NSP
D4409	DIODE	RF101L2S	1	22380394R2	NSP
D4416	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4417	DIODE	RF071M2S	1	22380393R2	NSP
D4418	DIODE	CMH07	1	22380395R2	NSP
D4419	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4502	ZENER DIODE	DZ2J130M0L	1	224761300R2	NSP
D4508	DIODE	RF101L2S	1	22380394R2	NSP
D4509	DIODE	RF101L2S	1	22380394R2	NSP
D4516	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4517	DIODE	RF071M2S	1	22380393R2	NSP
D4518	DIODE	CMH07	1	22380395R2	NSP
D4519	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4602	ZENER DIODE	DZ2J130M0L	1	224761300R2	NSP
D4608	DIODE	RF101L2S	1	22380394R2	NSP
D4609	DIODE	RF101L2S	1	22380394R2	NSP
D4616	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4617	DIODE	RF071M2S	1	22380393R2	NSP
D4618	DIODE	CMH07	1	22380395R2	NSP
D4619	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4702	ZENER DIODE	DZ2J130M0L	1	224761300R2	NSP
D4708	DIODE	RF101L2S	1	22380394R2	NSP
D4709	DIODE	RF101L2S	1	22380394R2	NSP
D4716	CHIP TYPE DIODE	1SS355	1	223269R2	NSP

D4717	DIODE	RF071M2S	1	22380393R2	NSP
D4718	DIODE	CMH07	1	22380395R2	NSP
D4719	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4802	ZENER DIODE	DZ2J130M0L	1	224761300R2	NSP
D4808	DIODE	RF101L2S	1	22380394R2	NSP
D4809	DIODE	RF101L2S	1	22380394R2	NSP
D4816	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4817	DIODE	RF071M2S	1	22380393R2	NSP
D4818	DIODE	CMH07	1	22380395R2	NSP
D4819	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4902	ZENER DIODE	DZ2J130M0L	1	224761300R2	NSP
D4908	DIODE	RF101L2S	1	22380394R2	NSP
D4909	DIODE	RF101L2S	1	22380394R2	NSP
D4912	ZENER DIODE	DZ2J130M0L	1	224761300R2	NSP
D4916	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4917	DIODE	RF071M2S	1	22380393R2	NSP
D4918	DIODE	CMH07	1	22380395R2	NSP
D4919	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D4922	ZENER DIODE	DZ2J130M0L	1	224761300R2	NSP
D6508	DIODE	RF101L2S	1	22380394R2	NSP
D6509	DIODE	RF101L2S	1	22380394R2	NSP
D6516	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D6517	DIODE	RF071M2S	1	22380393R2	NSP
D6518	DIODE	CMH07	1	22380395R2	NSP
D6519	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D6608	DIODE	RF101L2S	1	22380394R2	NSP
D6609	DIODE	RF101L2S	1	22380394R2	NSP
D6616	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D6617	DIODE	RF071M2S	1	22380393R2	NSP
D6618	DIODE	CMH07	1	22380395R2	NSP
D6619	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
Q4000	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q4001	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4002	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q4003	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q4004	TRANSISTOR	DTA124EUA	1	2218450R2	NSP
Q4005	TRANSISTOR	DTC114TUA	1	2218480R2	NSP
Q4006	TRANSISTOR	DTA124EUA	1	2218450R2	NSP
Q4007	TRANSISTOR	DTC114TUA	1	2218480R2	NSP
Q4008	TRANSISTOR	DTA124EUA	1	2218450R2	NSP
Q4009	TRANSISTOR	DTC114TUA	1	2218480R2	NSP
Q4010	TRANSISTOR	DTA124EUA	1	2218450R2	NSP
Q4011	TRANSISTOR	DTC114TUA	1	2218480R2	NSP
Q4012	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4013	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4014	TRANSISTOR	HN1C01FU	1	2218570R2	NSP
Q4015	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4016	TRANSISTOR	HN1C01FU	1	2218570R2	NSP
Q4017	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4018	TRANSISTOR	DTA124EUA	1	2218450R2	NSP
Q4019	TRANSISTOR	DTC114TUA	1	2218480R2	NSP
Q4020	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4021	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4022	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4023	TRANSISTOR	2SC4081	1	2218560R2	NSP

Q4024	TRANSISTOR	2SC3906K	1	2218550R2	NSP
Q4025	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4026	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4027	TRANSISTOR	HN1C01FU	1	2218570R2	NSP
Q4028	TRANSISTOR	HN1C01FU	1	2218570R2	NSP
Q4029	TRANSISTOR	HN1C01FU	1	2218570R2	NSP
Q4030	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4031	TRANSISTOR	DTA124EUA	1	2218450R2	NSP
Q4032	TRANSISTOR	DTC114TUA	1	2218480R2	NSP
Q4033	TRANSISTOR	HN1C01FU	1	2218570R2	NSP
Q4035	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4036	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q4037	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4038	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4041	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4042	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q4050	HYBRID IC	BU4094BCFV	1	22242982R2	NSP
Q4051	HYBRID IC	TA76L431FB	1	22242986R2	NSP
Q4052	HYBRID IC	BU7262SFVM	1	22242983R2	NSP
Q4053	HYBRID IC	TC74VHCT08AFK	1	22242987R2	NSP
Q4054	HYBRID IC	TC74VHCT08AFK	1	22242987R2	NSP
Q4055	HYBRID IC	78M05HF(NJM78M05DL1A-TE	1	222780055R2JR	NSP
Q4056	HYBRID IC	78M06HF(NJM78M06DL1A)	1	222780065R2JR	NSP
Q4057	HYBRID IC	79M06(NJM79M06DL1A)	1	222790065R2JR	NSP
Q4100	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q4101	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4102	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4103	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4104	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4105	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4106	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4107	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4108	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4109	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4110	TRANSISTOR	2SA1514K	1	2218530R2	NSP
Q4111	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4112	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4114	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4117	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4120	HYBRID IC	TLC071IDR	1	22243071R2	NSP
Q4121	HYBRID IC	IRS20957STRPBF	1	22243072R2	NSP
Q4200	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q4201	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4202	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4203	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4204	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4205	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4206	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4207	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4208	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4209	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4210	TRANSISTOR	2SA1514K	1	2218530R2	NSP
Q4211	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4214	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4217	TRANSISTOR	2SC4081	1	2218560R2	NSP

Q4220	HYBRID IC	TLC071IDR	1	22243071R2	NSP
Q4221	HYBRID IC	IRS20957STRPBF	1	22243072R2	NSP
Q4222	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q4300	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q4301	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4302	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4303	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4304	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4305	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4306	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4307	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4308	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4309	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4310	TRANSISTOR	2SA1514K	1	2218530R2	NSP
Q4311	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4312	TRANSISTOR	2SA1037AK-R	1	2217043R2	NSP
Q4314	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4317	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4320	HYBRID IC	TLC071IDR	1	22243071R2	NSP
Q4321	HYBRID IC	IRS20957STRPBF	1	22243072R2	NSP
Q4400	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q4401	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4402	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4403	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4404	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4405	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4406	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4407	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4408	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4409	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4410	TRANSISTOR	2SA1514K	1	2218530R2	NSP
Q4411	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4414	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4417	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4420	HYBRID IC	TLC071IDR	1	22243071R2	NSP
Q4421	HYBRID IC	IRS20957STRPBF	1	22243072R2	NSP
Q4422	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q4500	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q4501	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4502	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4503	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4504	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4505	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4506	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4507	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4508	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4509	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4510	TRANSISTOR	2SA1514K	1	2218530R2	NSP
Q4511	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4512	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4514	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4517	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4520	HYBRID IC	TLC071IDR	1	22243071R2	NSP
Q4521	HYBRID IC	IRS20957STRPBF	1	22243072R2	NSP
Q4600	TRANSISTOR	2SD2704K	1	2218130R2	NSP

Q4601	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4602	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4603	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4604	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4605	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4606	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4607	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4608	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4609	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4610	TRANSISTOR	2SA1514K	1	2218530R2	NSP
Q4611	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4614	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4617	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4620	HYBRID IC	TLC071IDR	1	22243071R2	NSP
Q4621	HYBRID IC	IRS20957STRPBF	1	22243072R2	NSP
Q4622	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q4700	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q4701	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4702	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4703	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4704	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4705	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4706	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4707	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4708	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4709	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4710	TRANSISTOR	2SA1514K	1	2218530R2	NSP
Q4711	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4712	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4714	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4717	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4720	HYBRID IC	TLC071IDR	1	22243071R2	NSP
Q4721	HYBRID IC	IRS20957STRPBF	1	22243072R2	NSP
Q4722	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q4800	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q4801	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4802	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4803	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4804	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4805	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4806	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4807	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4808	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4809	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4810	TRANSISTOR	2SA1514K	1	2218530R2	NSP
Q4811	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4814	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4817	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4820	HYBRID IC	TLC071IDR	1	22243071R2	NSP
Q4821	HYBRID IC	IRS20957STRPBF	1	22243072R2	NSP
Q4822	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q4900	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q4901	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4902	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q4903	TRANSISTOR	2SC4081	1	2218560R2	NSP

Q4904	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4905	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4906	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4907	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4908	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4909	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4910	TRANSISTOR	2SA1514K	1	2218530R2	NSP
Q4911	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4912	TRANSISTOR	2SA1037AK-R	1	2217043R2	NSP
Q4914	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q4917	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q4921	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4922	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q4940	HYBRID IC	TLC071IDR	1	22243071R2	NSP
Q4941	HYBRID IC	IRS20957STRPBF	1	22243072R2	NSP
Q6500	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q6501	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q6502	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q6503	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6504	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6505	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6506	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6507	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q6508	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6510	TRANSISTOR	2SA1514K	1	2218530R2	NSP
Q6511	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q6512	TRANSISTOR	2SA1037AK-R	1	2217043R2	NSP
Q6514	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q6517	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6520	HYBRID IC	TLC071IDR	1	22243071R2	NSP
Q6521	HYBRID IC	IRS20957STRPBF	1	22243072R2	NSP
Q6532	HYBRID IC	NJM5532CG	1	22243204R2	NSP
Q6600	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q6601	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q6602	TRANSISTOR	IRF6775MPBF	1	2204290AR2	NSP
Q6603	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6604	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6605	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6606	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6607	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q6608	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6610	TRANSISTOR	2SA1514K	1	2218530R2	NSP
Q6611	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q6614	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q6617	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6618	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q6619	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q6620	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6621	TRANSISTOR	2SA1037AK-R	1	2217043R2	NSP
Q6622	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6623	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q6624	TRANSISTOR	2SA1576A	1	2218540R2	NSP
Q6625	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6626	TRANSISTOR	2SC2412K-R	1	2214653R2	NSP
Q6627	TRANSISTOR	2SA1576A	1	2218540R2	NSP

Q6628	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6629	TRANSISTOR	2SA1037AK-R	1	2217043R2	NSP
Q6630	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6631	TRANSISTOR	2SA1037AK-R	1	2217043R2	NSP
Q6632	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q6640	HYBRID IC	TLC071IDR	1	22243071R2	NSP
Q6641	HYBRID IC	IRS20957STRPBF	1	22243072R2	NSP
[Transformers, Coils]					
T4101	CHOKE COIL	NCH-1543	1	231368K220	
T4101or	CHOKE COIL	PI-OR002-0395	(1)	231480K220	
T4201	CHOKE COIL	NCH-1543	1	231368K220	
T4201or	CHOKE COIL	PI-OR002-0395	(1)	231480K220	
T4300	COIL	7G23G-200M-R	1	231519	
T4400	COIL	7G23G-200M-R	1	231519	
T4500	COIL	7G23G-200M-R	1	231519	
T4600	COIL	7G23G-200M-R	1	231519	
T4701	CHOKE COIL	NCH-1543	1	231368K220	
T4701or	CHOKE COIL	PI-OR002-0395	(1)	231480K220	
T4800	COIL	7G23G-200M-R	1	231519	
T4900	COIL	7G23G-200M-R	1	231519	
T6500	COIL	7G23G-200M-R	1	231519	
T6600	COIL	7G23G-200M-R	1	231519	
[Capacitors]					
C4006	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-101J	1	373041014R2	NSP
C4006or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-101J	(1)	376641014R2	N NSP
C4008	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4009	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J1	1	342101504R1	NSP
C4010	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4013	CHIP TYPE PLASTIC FILM CAPACITOR	50MU101KY11608	1	376921015R2	NSP
C4016	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-120J1	1	342101204R1	NSP
C4022	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4023	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C4024	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4026	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4026or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4029	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4029or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4035	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4035or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4036	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4040	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C4040or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C4044	CHIP TYPE PLASTIC FILM CAPACITOR	50MU101KY11608	1	376921015R2	NSP
C4048	CHIP TYPE PLASTIC FILM CAPACITOR	50MU101KY11608	1	376921015R2	NSP
C4052	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4053	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4057	ELECTROLYTIC CAPACITOR	CE69W80V-2700M_LGU1K27	1	3504536	
C4058	ELECTROLYTIC CAPACITOR	CE69W80V-2700M_LGU1K27	1	3504536	
C4059	ELECTROLYTIC CAPACITOR	CE69W80V-2700M_LGU1K27	1	3504536	
C4060	ELECTROLYTIC CAPACITOR	CE69W80V-2700M_LGU1K27	1	3504536	
C4061	ELECTROLYTIC CAPACITOR	CE69W80V-2700M_LGU1K27	1	3504536	
C4062	ELECTROLYTIC CAPACITOR	CE69W80V-2700M_LGU1K27	1	3504536	
C4063	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C4065	ELECTROLYTIC CAPACITOR	CE04W16V-56M(LXY)	1	3500244T	
C4066	ELECTROLYTIC CAPACITOR	CE04W16V-56M(LXY)	1	3500244T	

C4069	ELECTROLYTIC CAPACITOR	CE04W16V-56M(LXY)	1	3500244T	
C4070	ELECTROLYTIC CAPACITOR	CE04W16V-56M(LXY)	1	3500244T	
C4071	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4073	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4073or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4074	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4074or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4077	CHIP TYPE PLASTIC FILM CAPACITOR	50MU331KY11608	1	376923315R2	NSP
C4078	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4079	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4081	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4083	MICA CAPACITOR	DM15C201J5	1	3600032	
C4084	MICA CAPACITOR	DM15C201J5	1	3600032	
C4091	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-101J	1	373041014R2	NSP
C4091or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-101J	(1)	376641014R2	N NSP
C4097	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C4098	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4098or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4099	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4099or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4100	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-104J	1	374731044T	NSP
C4101	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C4108	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C4109	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4109or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4116	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C4119	CHIP TYPE PLASTIC FILM CAPACITOR	200MU250MA13216	1	3769B2507R2	NSP
C4120	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4120or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4121	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4121or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4122	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4122or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4123	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4123or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4126	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C4126or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C4128	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C4128or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C4130	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4134	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4136	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4149	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4150	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4156	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C4159	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4160	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4161	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4166	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4167	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4171	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C4175	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4180	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4182	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4200	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-104J	1	374731044T	NSP

C4201	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C4208	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C4209	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4209or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4216	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C4219	CHIP TYPE PLASTIC FILM CAPACITOR	200MU250MA13216	1	3769B2507R2	NSP
C4220	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4220or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4221	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4221or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4222	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4222or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4223	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4223or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4226	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C4226or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C4228	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C4228or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C4230	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4234	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4236	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4249	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4250	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4256	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C4259	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4260	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4261	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4266	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4267	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4275	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4280	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4282	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4300	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-104J	1	374731044T	NSP
C4301	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C4308	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C4309	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4309or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4316	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C4319	CHIP TYPE PLASTIC FILM CAPACITOR	200MU250MA13216	1	3769B2507R2	NSP
C4320	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4320or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4321	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4321or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4322	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4322or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4323	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4323or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4326	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C4326or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C4328	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C4328or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C4330	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4334	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4336	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4349	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	

C4350	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4356	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C4359	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4360	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4361	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4366	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4367	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4371	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C4375	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4380	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4382	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4400	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-104J	1	374731044T	NSP
C4401	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C4408	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C4409	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4409or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4416	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C4419	CHIP TYPE PLASTIC FILM CAPACITOR	200MU250MA13216	1	3769B2507R2	NSP
C4420	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4420or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4421	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4421or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4422	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4422or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4423	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4423or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4426	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C4426or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C4428	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C4428or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C4430	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4434	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4436	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4449	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4450	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4456	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C4459	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4460	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4461	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4466	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4467	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4475	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4480	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4482	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4500	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-104J	1	374731044T	NSP
C4501	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C4508	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C4509	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4509or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4516	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C4519	CHIP TYPE PLASTIC FILM CAPACITOR	200MU250MA13216	1	3769B2507R2	NSP
C4520	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4520or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4521	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4521or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP

C4522	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4522or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4523	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4523or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4526	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C4526or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C4528	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C4528or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C4530	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4534	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4536	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4549	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4550	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4556	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C4559	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4560	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4561	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4566	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4567	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4571	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C4575	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4580	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4582	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4600	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-104J	1	374731044T	NSP
C4601	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C4608	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C4609	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4609or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4616	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C4619	CHIP TYPE PLASTIC FILM CAPACITOR	200MU250MA13216	1	3769B2507R2	NSP
C4620	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4620or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4621	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4621or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4622	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4622or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4623	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4623or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4626	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C4626or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C4628	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C4628or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C4630	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4634	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4636	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4649	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4650	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4656	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C4659	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4660	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4661	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4666	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4667	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4675	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4680	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP

C4682	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4700	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-104J	1	374731044T	NSP
C4701	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C4708	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C4709	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4709or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4714	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4714or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4716	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C4719	CHIP TYPE PLASTIC FILM CAPACITOR	200MU250MA13216	1	3769B2507R2	NSP
C4720	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4720or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4721	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4721or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4722	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4722or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4723	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4723or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4726	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C4726or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C4728	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C4728or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C4730	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4734	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4736	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4738	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C4749	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4750	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4756	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C4759	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4760	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4761	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4766	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4767	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4771	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C4775	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4780	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4782	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4800	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-104J	1	374731044T	NSP
C4801	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C4808	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C4809	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4809or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4816	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C4819	CHIP TYPE PLASTIC FILM CAPACITOR	200MU250MA13216	1	3769B2507R2	NSP
C4820	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4820or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4821	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4821or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4822	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4822or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4823	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4823or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4826	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C4826or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP

C4828	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C4828or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C4830	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4834	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4836	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4849	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4850	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4856	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C4859	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4860	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4861	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4866	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4867	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4875	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4880	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4882	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4900	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-104J	1	374731044T	NSP
C4901	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C4908	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C4909	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4909or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4916	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C4919	CHIP TYPE PLASTIC FILM CAPACITOR	200MU250MA13216	1	3769B2507R2	NSP
C4920	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4920or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4921	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4921or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4922	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C4922or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C4923	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C4923or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C4926	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C4926or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C4928	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C4928or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C4930	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4934	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4936	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C4949	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4950	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C4956	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C4959	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4960	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C4961	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4966	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4967	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C4971	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C4975	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C4980	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C4982	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C5000	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C5000or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C5071	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C5072	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C5184	ELECTROLYTIC CAPACITOR	CE04W16V-56M(LXY)	1	3500244T	

C5185	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C5186	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C5186or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6400	ELECTROLYTIC CAPACITOR	CE69W80V-2700M_LGU1K27	1	3504536	
C6401	ELECTROLYTIC CAPACITOR	CE69W80V-2700M_LGU1K27	1	3504536	
C6500	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-104J	1	374731044T	NSP
C6501	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C6508	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C6509	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6509or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6516	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C6519	CHIP TYPE PLASTIC FILM CAPACITOR	200MU250MA13216	1	3769B2507R2	NSP
C6520	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C6520or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C6521	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6521or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6522	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6522or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6523	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C6523or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C6526	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C6526or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C6528	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C6528or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C6530	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C6534	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C6536	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C6549	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C6550	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C6556	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C6559	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C6560	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C6561	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C6566	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C6567	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C6571	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C6575	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C6580	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C6582	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C6600	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-104J	1	374731044T	NSP
C6601	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C6608	ELECTROLYTIC CAPACITOR	CE04W16V-470M(KY_H15)	1	3500274	
C6609	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6609or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6616	ELECTROLYTIC CAPACITOR	CE04W25V-82M(LXY)	1	3500245T	
C6619	CHIP TYPE PLASTIC FILM CAPACITOR	200MU250MA13216	1	3769B2507R2	NSP
C6620	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C6620or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C6621	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6621or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6622	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C6622or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C6623	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-102J	1	373021024R2	NSP
C6623or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-102J	(1)	376621024R2	NSP
C6626	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP

C6626or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C6628	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C6628or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C6630	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C6634	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C6636	ELECTROLYTIC CAPACITOR	CE04W50V-18M(LXY)	1	3500246ST	
C6649	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C6650	ELECTROLYTIC CAPACITOR	UKT1K561MHMAPDCV	1	3500254S	
C6656	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C6659	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C6660	CHIP TYPE PLASTIC FILM CAPACITOR	200MU101KA13216	1	3769B1015R2	NSP
C6661	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C6666	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C6667	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C6675	CHIP TYPE PLASTIC FILM CAPACITOR	100MU104KB23225	1	376931045R2	NSP
C6680	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C6682	CHIP TYPE PLASTIC FILM CAPACITOR	ECWU1222JX5	1	3700115R2	NSP
C6683	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C6684	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C6685	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C6686	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C6687	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C6688	SMG C	CE04W50V-10M(SMG)	1	395081007T	
[Resistors]					
R4000	CHIP TYPE CARBON RESISTOR	RN72K1J-183FE	1	435031832R1	NSP
R4001	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4002	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4003	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4004	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4006	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4007	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4008	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4009	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R4010	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4011	CHIP TYPE CARBON RESISTOR	RN72K1J-183FE	1	435031832R1	NSP
R4012	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4013	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R4014	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R4015	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R4016	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R4017	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4018	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4020	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4021	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R4022	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4023	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4024	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4025	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4026	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4027	CHIP TYPE CARBON RESISTOR	RN72K1J-183FE	1	435031832R1	NSP
R4028	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4029	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4030	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4031	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R4032	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP

R4033	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4034	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4035	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4036	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4037	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4038	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4039	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4040	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4041	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R4042	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4043	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4044	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R4045	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4046	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4048	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4049	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4050	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4051	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4052	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4053	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4054	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R4055	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4056	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4057	C-METAL R	RN72K2B-471JE2	1	435114714R1	NSP
R4058	CHIP TYPE CARBON RESISTOR	RN72K1J-683JE	1	435036834R1	NSP
R4059	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4060	CHIP TYPE CARBON RESISTOR	RN72K1J-563FE	1	435035632R1	NSP
R4061	CHIP TYPE CARBON RESISTOR	RN72K1J-333FE	1	435033332R1	NSP
R4062	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R4064	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4066	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4068	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4070	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4072	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R4073	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R4075	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R4076	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R4078	CHIP TYPE CARBON RESISTOR	RN72K1J-183FE	1	435031832R1	NSP
R4079	CHIP TYPE CARBON RESISTOR	RN72K1J-183FE	1	435031832R1	NSP
R4081	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R4084	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4085	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4086	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4087	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R4088	CHIP TYPE CARBON RESISTOR	RN72K1J-124JE	1	435031244R1	NSP
R4089	CHIP TYPE CARBON RESISTOR	RN72K1J-154JE	1	435031544R1	NSP
R4090	CHIP TYPE CARBON RESISTOR	RN72K1J-183FE	1	435031832R1	NSP
R4091	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4092	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R4093	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4094	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R4096	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4097	CHIP TYPE CARBON RESISTOR	RN72K1J-270JE	1	435032704R1	NSP
R4098	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4100	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP

R4101	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4102	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4103	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4104	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4105	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4106	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4109	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R4110	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R4111	CHIP TYPE CARBON RESISTOR	RN72K1J-471FE	1	435034712R1	NSP
R4112	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R4113	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R4114	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4115	C-METAL R	LTR18EZPF4702	1	4300028R1	NSP
R4116	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4117	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4118	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4119	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4120	CHIP TYPE CARBON RESISTOR	RN72K1J-181FE	1	435031812R1	NSP
R4121	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R4122	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4123	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4124	CHIP TYPE CARBON RESISTOR	RN72K1J-431JE	1	435034314R1	NSP
R4125	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4126	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4127	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4128	CHIP TYPE CARBON RESISTOR	RN72K2E-222JE	1	435222224R1	NSP
R4129	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R4130	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4131	C-METAL R	RN72K2B-682JE2	1	435116824R1	NSP
R4132	C-METAL R	RN72K2B-153JE2	1	435111534R1	NSP
R4133	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4134	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4135	C-METAL R	RN72K2B-752JE2	1	435117524R1	NSP
R4136	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R4137	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4138	C-METAL R	RN72K2B-082JE2	1	435110824R1	NSP
R4139	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4140	CHIP TYPE CARBON RESISTOR	RN72K2E-270JE	1	435222704R1	NSP
R4141	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4142	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4143	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4144	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4145	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4146	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4148	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R4150	CHIP TYPE CARBON RESISTOR	RN72K1J-910FE	1	435039102R1	NSP
R4151	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4152	CHIP TYPE CARBON RESISTOR	RN72K1J-683FE	1	435036832R1	NSP
R4153	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4154	CEMENT RESISTOR	MNS05N100JW	1	4800083	
R4155	CHIP TYPE CARBON RESISTOR	RN72K1J-104FE	1	435031042R1	NSP
R4156	CHIP TYPE CARBON RESISTOR	RN72K1J-243FE	1	435032432R1	NSP
R4157	CHIP TYPE CARBON RESISTOR	RN72K1J-224FE	1	435032242R1	NSP
R4158	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4159	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP

R4160	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R4162	CHIP TYPE CARBON RESISTOR	RN72K2E-123JE	1	435221234R1	NSP
R4163	CHIP TYPE CARBON RESISTOR	RN72K1J-272FE	1	435032722R1	NSP
R4164	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4165	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4166	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R4167	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4168	CHIP TYPE CARBON RESISTOR	RN72K1J-753FE	1	435037532R1	NSP
R4169	CHIP TYPE CARBON RESISTOR	RN72K1J-393FE	1	435033932R1	NSP
R4170	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4171	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4172	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4173	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4174	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4175	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4176	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4177	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4178	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4179	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4180	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4181	THERMISTOR	NTCG104KF104FT	1	4000282R1	NSP
R4182	CHIP TYPE CARBON RESISTOR	RN72K1J-751JE	1	435037514R1	NSP
R4183	CHIP TYPE CARBON RESISTOR	RN72K2E-330JE	1	435223304R1	NSP
R4184	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R4185	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4186	C-METAL R	RN72K2B-151JE2	1	435111514R1	NSP
R4187	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4188	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4189	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R4190	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4191	C-METAL R	RN72K2B-823JE2	1	435118234R1	NSP
R4192	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R4193	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4194	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4195	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4196	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4197	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4198	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4199	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R4200	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4201	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4202	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4203	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4204	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4205	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4206	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4209	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R4210	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R4211	CHIP TYPE CARBON RESISTOR	RN72K1J-471FE	1	435034712R1	NSP
R4212	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R4213	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R4214	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4215	C-METAL R	LTR18EZPF4702	1	4300028R1	NSP
R4216	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4217	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP

R4218	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4219	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4220	CHIP TYPE CARBON RESISTOR	RN72K1J-181FE	1	435031812R1	NSP
R4221	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R4222	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4223	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4224	CHIP TYPE CARBON RESISTOR	RN72K1J-431JE	1	435034314R1	NSP
R4225	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4226	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4227	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4228	CHIP TYPE CARBON RESISTOR	RN72K2E-222JE	1	435222224R1	NSP
R4229	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R4230	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4231	C-METAL R	RN72K2B-682JE2	1	435116824R1	NSP
R4232	C-METAL R	RN72K2B-153JE2	1	435111534R1	NSP
R4233	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4234	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4235	C-METAL R	RN72K2B-752JE2	1	435117524R1	NSP
R4236	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R4237	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4238	C-METAL R	RN72K2B-082JE2	1	435110824R1	NSP
R4239	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4240	CHIP TYPE CARBON RESISTOR	RN72K2E-270JE	1	435222704R1	NSP
R4241	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4242	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4243	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4244	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4245	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4246	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4247	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R4248	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R4250	CHIP TYPE CARBON RESISTOR	RN72K1J-910FE	1	435039102R1	NSP
R4251	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4252	CHIP TYPE CARBON RESISTOR	RN72K1J-683FE	1	435036832R1	NSP
R4253	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4254	CEMENT RESISTOR	MNS05N100JW	1	4800083	
R4255	CHIP TYPE CARBON RESISTOR	RN72K1J-104FE	1	435031042R1	NSP
R4256	CHIP TYPE CARBON RESISTOR	RN72K1J-243FE	1	435032432R1	NSP
R4257	CHIP TYPE CARBON RESISTOR	RN72K1J-224FE	1	435032242R1	NSP
R4258	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4259	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4260	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R4262	CHIP TYPE CARBON RESISTOR	RN72K2E-123JE	1	435221234R1	NSP
R4263	CHIP TYPE CARBON RESISTOR	RN72K1J-272FE	1	435032722R1	NSP
R4264	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4265	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4266	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R4267	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4268	CHIP TYPE CARBON RESISTOR	RN72K1J-753FE	1	435037532R1	NSP
R4269	CHIP TYPE CARBON RESISTOR	RN72K1J-393FE	1	435033932R1	NSP
R4270	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4271	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4272	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4273	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4274	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP

R4275	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R4276	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4277	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4278	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4279	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4280	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4281	THERMISTOR	NTCG104KF104FT	1	4000282R1	NSP
R4282	CHIP TYPE CARBON RESISTOR	RN72K1J-751JE	1	435037514R1	NSP
R4284	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R4285	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4286	C-METAL R	RN72K2B-151JE2	1	435111514R1	NSP
R4287	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4288	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4289	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R4290	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4291	C-METAL R	RN72K2B-823JE2	1	435118234R1	NSP
R4292	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R4293	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4294	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4295	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4296	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4297	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4298	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4299	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R4300	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4301	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4302	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4303	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4304	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4305	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4306	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4309	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R4310	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R4311	CHIP TYPE CARBON RESISTOR	RN72K1J-471FE	1	435034712R1	NSP
R4312	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R4313	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R4314	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4315	C-METAL R	LTR18EZPF4702	1	4300028R1	NSP
R4316	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4317	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4318	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4319	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4320	CHIP TYPE CARBON RESISTOR	RN72K1J-181FE	1	435031812R1	NSP
R4321	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R4322	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4323	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4324	CHIP TYPE CARBON RESISTOR	RN72K1J-431JE	1	435034314R1	NSP
R4325	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4326	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4327	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4328	CHIP TYPE CARBON RESISTOR	RN72K2E-222JE	1	435222224R1	NSP
R4329	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R4330	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4331	C-METAL R	RN72K2B-682JE2	1	435116824R1	NSP
R4332	C-METAL R	RN72K2B-153JE2	1	435111534R1	NSP

R4333	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4334	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4335	C-METAL R	RN72K2B-752JE2	1	435117524R1	NSP
R4336	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R4337	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4338	C-METAL R	RN72K2B-082JE2	1	435110824R1	NSP
R4339	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4340	CHIP TYPE CARBON RESISTOR	RN72K2E-270JE	1	435222704R1	NSP
R4341	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4342	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4343	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4344	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4345	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4346	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4348	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R4350	CHIP TYPE CARBON RESISTOR	RN72K1J-910FE	1	435039102R1	NSP
R4351	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4352	CHIP TYPE CARBON RESISTOR	RN72K1J-683FE	1	435036832R1	NSP
R4353	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4354	CEMENT RESISTOR	MNS05N100JW	1	4800083	
R4355	CHIP TYPE CARBON RESISTOR	RN72K1J-104FE	1	435031042R1	NSP
R4356	CHIP TYPE CARBON RESISTOR	RN72K1J-243FE	1	435032432R1	NSP
R4357	CHIP TYPE CARBON RESISTOR	RN72K1J-224FE	1	435032242R1	NSP
R4358	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4359	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4360	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R4362	CHIP TYPE CARBON RESISTOR	RN72K2E-123JE	1	435221234R1	NSP
R4363	CHIP TYPE CARBON RESISTOR	RN72K1J-272FE	1	435032722R1	NSP
R4364	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4365	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4366	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R4367	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4368	CHIP TYPE CARBON RESISTOR	RN72K1J-753FE	1	435037532R1	NSP
R4369	CHIP TYPE CARBON RESISTOR	RN72K1J-393FE	1	435033932R1	NSP
R4370	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4371	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4372	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4373	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4374	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4375	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4376	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4377	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4378	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4379	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4380	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4381	THERMISTOR	NTCG104KF104FT	1	4000282R1	NSP
R4382	CHIP TYPE CARBON RESISTOR	RN72K1J-751JE	1	435037514R1	NSP
R4383	CHIP TYPE CARBON RESISTOR	RN72K2E-330JE	1	435223304R1	NSP
R4384	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R4385	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4386	C-METAL R	RN72K2B-151JE2	1	435111514R1	NSP
R4387	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4388	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4389	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R4390	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP

R4391	C-METAL R	RN72K2B-823JE2	1	435118234R1	NSP
R4392	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R4393	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4394	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4395	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4396	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4397	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4398	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4399	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R4400	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4401	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4402	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4403	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4404	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4405	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4406	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4409	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R4410	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R4411	CHIP TYPE CARBON RESISTOR	RN72K1J-471FE	1	435034712R1	NSP
R4412	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R4413	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R4414	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4415	C-METAL R	LTR18EZPF4702	1	4300028R1	NSP
R4416	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4417	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4418	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4419	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4420	CHIP TYPE CARBON RESISTOR	RN72K1J-181FE	1	435031812R1	NSP
R4421	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R4422	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4423	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4424	CHIP TYPE CARBON RESISTOR	RN72K1J-431JE	1	435034314R1	NSP
R4425	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4426	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4427	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4428	CHIP TYPE CARBON RESISTOR	RN72K2E-222JE	1	435222224R1	NSP
R4429	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R4430	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4431	C-METAL R	RN72K2B-682JE2	1	435116824R1	NSP
R4432	C-METAL R	RN72K2B-153JE2	1	435111534R1	NSP
R4433	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4434	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4435	C-METAL R	RN72K2B-752JE2	1	435117524R1	NSP
R4436	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R4437	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4438	C-METAL R	RN72K2B-082JE2	1	435110824R1	NSP
R4439	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4440	CHIP TYPE CARBON RESISTOR	RN72K2E-270JE	1	435222704R1	NSP
R4441	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4442	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4443	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4444	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4445	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4446	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4447	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP

R4448	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R4450	CHIP TYPE CARBON RESISTOR	RN72K1J-910FE	1	435039102R1	NSP
R4451	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4452	CHIP TYPE CARBON RESISTOR	RN72K1J-683FE	1	435036832R1	NSP
R4453	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4454	CEMENT RESISTOR	MNS05N100JW	1	4800083	
R4455	CHIP TYPE CARBON RESISTOR	RN72K1J-104FE	1	435031042R1	NSP
R4456	CHIP TYPE CARBON RESISTOR	RN72K1J-243FE	1	435032432R1	NSP
R4457	CHIP TYPE CARBON RESISTOR	RN72K1J-224FE	1	435032242R1	NSP
R4458	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4459	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4460	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R4462	CHIP TYPE CARBON RESISTOR	RN72K2E-123JE	1	435221234R1	NSP
R4463	CHIP TYPE CARBON RESISTOR	RN72K1J-272FE	1	435032722R1	NSP
R4464	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4465	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4466	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R4467	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4468	CHIP TYPE CARBON RESISTOR	RN72K1J-753FE	1	435037532R1	NSP
R4469	CHIP TYPE CARBON RESISTOR	RN72K1J-393FE	1	435033932R1	NSP
R4470	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4471	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4472	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4473	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4474	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4475	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R4476	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4477	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4478	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4479	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4480	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4481	THERMISTOR	NTCG104KF104FT	1	4000282R1	NSP
R4482	CHIP TYPE CARBON RESISTOR	RN72K1J-751JE	1	435037514R1	NSP
R4484	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R4485	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4486	C-METAL R	RN72K2B-151JE2	1	435111514R1	NSP
R4487	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4488	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4489	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R4490	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4491	C-METAL R	RN72K2B-823JE2	1	435118234R1	NSP
R4492	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R4493	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4494	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4495	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4496	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4497	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4498	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4499	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R4500	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4501	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4502	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4503	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4504	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4505	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP

R4506	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4509	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R4510	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R4511	CHIP TYPE CARBON RESISTOR	RN72K1J-471FE	1	435034712R1	NSP
R4512	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R4513	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R4514	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4515	C-METAL R	LTR18EZPF4702	1	4300028R1	NSP
R4516	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4517	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4518	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4519	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4520	CHIP TYPE CARBON RESISTOR	RN72K1J-181FE	1	435031812R1	NSP
R4521	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R4522	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4523	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4524	CHIP TYPE CARBON RESISTOR	RN72K1J-431JE	1	435034314R1	NSP
R4525	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4526	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4527	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4528	CHIP TYPE CARBON RESISTOR	RN72K2E-222JE	1	435222224R1	NSP
R4529	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R4530	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4531	C-METAL R	RN72K2B-682JE2	1	435116824R1	NSP
R4532	C-METAL R	RN72K2B-153JE2	1	435111534R1	NSP
R4533	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4534	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4535	C-METAL R	RN72K2B-752JE2	1	435117524R1	NSP
R4536	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R4537	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4538	C-METAL R	RN72K2B-082JE2	1	435110824R1	NSP
R4539	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4540	CHIP TYPE CARBON RESISTOR	RN72K2E-270JE	1	435222704R1	NSP
R4541	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4542	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4543	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4544	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4545	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4546	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4548	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R4550	CHIP TYPE CARBON RESISTOR	RN72K1J-910FE	1	435039102R1	NSP
R4551	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4552	CHIP TYPE CARBON RESISTOR	RN72K1J-683FE	1	435036832R1	NSP
R4553	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4554	CEMENT RESISTOR	MNS05N100JW	1	4800083	
R4555	CHIP TYPE CARBON RESISTOR	RN72K1J-104FE	1	435031042R1	NSP
R4556	CHIP TYPE CARBON RESISTOR	RN72K1J-243FE	1	435032432R1	NSP
R4557	CHIP TYPE CARBON RESISTOR	RN72K1J-224FE	1	435032242R1	NSP
R4558	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4559	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4560	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R4562	CHIP TYPE CARBON RESISTOR	RN72K2E-123JE	1	435221234R1	NSP
R4563	CHIP TYPE CARBON RESISTOR	RN72K1J-272FE	1	435032722R1	NSP
R4564	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4565	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP

R4566	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R4567	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4568	CHIP TYPE CARBON RESISTOR	RN72K1J-753FE	1	435037532R1	NSP
R4569	CHIP TYPE CARBON RESISTOR	RN72K1J-393FE	1	435033932R1	NSP
R4570	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4571	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4572	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4573	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4574	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4575	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4576	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4577	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4578	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4579	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4580	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4581	THERMISTOR	NTCG104KF104FT	1	4000282R1	NSP
R4582	CHIP TYPE CARBON RESISTOR	RN72K1J-751JE	1	435037514R1	NSP
R4583	CHIP TYPE CARBON RESISTOR	RN72K2E-330JE	1	435223304R1	NSP
R4584	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R4585	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4586	C-METAL R	RN72K2B-151JE2	1	435111514R1	NSP
R4587	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4588	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4589	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R4590	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4591	C-METAL R	RN72K2B-823JE2	1	435118234R1	NSP
R4592	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R4593	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4594	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4595	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4596	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4597	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4598	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4599	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R4600	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4601	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4602	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4603	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4604	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4605	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4606	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4609	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R4610	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R4611	CHIP TYPE CARBON RESISTOR	RN72K1J-471FE	1	435034712R1	NSP
R4612	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R4613	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R4614	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4615	C-METAL R	LTR18EZPF4702	1	4300028R1	NSP
R4616	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4617	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4618	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4619	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4620	CHIP TYPE CARBON RESISTOR	RN72K1J-181FE	1	435031812R1	NSP
R4621	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R4622	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP

R4623	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4624	CHIP TYPE CARBON RESISTOR	RN72K1J-431JE	1	435034314R1	NSP
R4625	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4626	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4627	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4628	CHIP TYPE CARBON RESISTOR	RN72K2E-222JE	1	435222224R1	NSP
R4629	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R4630	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4631	C-METAL R	RN72K2B-682JE2	1	435116824R1	NSP
R4632	C-METAL R	RN72K2B-153JE2	1	435111534R1	NSP
R4633	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4634	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4635	C-METAL R	RN72K2B-752JE2	1	435117524R1	NSP
R4636	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R4637	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4638	C-METAL R	RN72K2B-082JE2	1	435110824R1	NSP
R4639	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4640	CHIP TYPE CARBON RESISTOR	RN72K2E-270JE	1	435222704R1	NSP
R4641	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4642	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4643	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4644	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4645	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4646	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4648	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R4650	CHIP TYPE CARBON RESISTOR	RN72K1J-910FE	1	435039102R1	NSP
R4651	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4652	CHIP TYPE CARBON RESISTOR	RN72K1J-683FE	1	435036832R1	NSP
R4653	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4654	CEMENT RESISTOR	MNS05N100JW	1	4800083	
R4655	CHIP TYPE CARBON RESISTOR	RN72K1J-104FE	1	435031042R1	NSP
R4656	CHIP TYPE CARBON RESISTOR	RN72K1J-243FE	1	435032432R1	NSP
R4657	CHIP TYPE CARBON RESISTOR	RN72K1J-224FE	1	435032242R1	NSP
R4658	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4659	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4660	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R4662	CHIP TYPE CARBON RESISTOR	RN72K2E-123JE	1	435221234R1	NSP
R4663	CHIP TYPE CARBON RESISTOR	RN72K1J-272FE	1	435032722R1	NSP
R4664	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4665	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4666	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R4667	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4668	CHIP TYPE CARBON RESISTOR	RN72K1J-753FE	1	435037532R1	NSP
R4669	CHIP TYPE CARBON RESISTOR	RN72K1J-393FE	1	435033932R1	NSP
R4670	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4671	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4672	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4673	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4674	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4675	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R4676	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4677	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4678	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4679	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4680	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP

R4681	THERMISTOR	NTCG104KF104FT	1	4000282R1	NSP
R4682	CHIP TYPE CARBON RESISTOR	RN72K1J-751JE	1	435037514R1	NSP
R4684	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R4685	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4686	C-METAL R	RN72K2B-151JE2	1	435111514R1	NSP
R4687	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4688	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4689	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R4690	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4691	C-METAL R	RN72K2B-823JE2	1	435118234R1	NSP
R4692	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R4693	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4694	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4695	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4696	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4697	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4698	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4699	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R4700	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4701	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4702	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4703	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4704	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4705	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4706	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4709	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R4710	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R4711	CHIP TYPE CARBON RESISTOR	RN72K1J-471FE	1	435034712R1	NSP
R4712	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R4713	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R4714	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4715	C-METAL R	LTR18EZPF4702	1	4300028R1	NSP
R4716	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4717	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4718	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4719	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4720	CHIP TYPE CARBON RESISTOR	RN72K1J-181FE	1	435031812R1	NSP
R4721	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R4722	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4723	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4724	CHIP TYPE CARBON RESISTOR	RN72K1J-431JE	1	435034314R1	NSP
R4725	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4726	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4727	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4728	CHIP TYPE CARBON RESISTOR	RN72K2E-222JE	1	435222224R1	NSP
R4729	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R4730	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4731	C-METAL R	RN72K2B-682JE2	1	435116824R1	NSP
R4732	C-METAL R	RN72K2B-153JE2	1	435111534R1	NSP
R4733	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4734	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4735	C-METAL R	RN72K2B-752JE2	1	435117524R1	NSP
R4736	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R4737	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4738	C-METAL R	RN72K2B-082JE2	1	435110824R1	NSP

R4739	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4740	CHIP TYPE CARBON RESISTOR	RN72K2E-270JE	1	435222704R1	NSP
R4741	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4742	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4743	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4744	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4745	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4746	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4748	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R4750	CHIP TYPE CARBON RESISTOR	RN72K1J-910FE	1	435039102R1	NSP
R4751	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4752	CHIP TYPE CARBON RESISTOR	RN72K1J-683FE	1	435036832R1	NSP
R4753	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4754	CEMENT RESISTOR	MNS05N100JW	1	4800083	
R4755	CHIP TYPE CARBON RESISTOR	RN72K1J-104FE	1	435031042R1	NSP
R4756	CHIP TYPE CARBON RESISTOR	RN72K1J-243FE	1	435032432R1	NSP
R4757	CHIP TYPE CARBON RESISTOR	RN72K1J-224FE	1	435032242R1	NSP
R4758	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4759	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4760	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R4762	CHIP TYPE CARBON RESISTOR	RN72K2E-123JE	1	435221234R1	NSP
R4763	CHIP TYPE CARBON RESISTOR	RN72K1J-272FE	1	435032722R1	NSP
R4764	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4765	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4766	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R4767	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4768	CHIP TYPE CARBON RESISTOR	RN72K1J-753FE	1	435037532R1	NSP
R4769	CHIP TYPE CARBON RESISTOR	RN72K1J-393FE	1	435033932R1	NSP
R4770	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4771	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4772	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4773	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4774	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4775	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R4776	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4777	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4778	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4779	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4780	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4781	THERMISTOR	NTCG104KF104FT	1	4000282R1	NSP
R4782	CHIP TYPE CARBON RESISTOR	RN72K1J-751JE	1	435037514R1	NSP
R4783	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4784	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R4785	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4786	C-METAL R	RN72K2B-151JE2	1	435111514R1	NSP
R4787	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4788	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4789	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R4790	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4791	C-METAL R	RN72K2B-823JE2	1	435118234R1	NSP
R4792	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R4793	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4794	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4795	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4796	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP

R4797	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4798	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4799	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R4800	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4801	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4802	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4803	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4804	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4805	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4806	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4809	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R4810	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R4811	CHIP TYPE CARBON RESISTOR	RN72K1J-471FE	1	435034712R1	NSP
R4812	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R4813	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R4814	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4815	C-METAL R	LTR18EZPF4702	1	4300028R1	NSP
R4816	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4817	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4818	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4819	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4820	CHIP TYPE CARBON RESISTOR	RN72K1J-181FE	1	435031812R1	NSP
R4821	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R4822	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4823	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4824	CHIP TYPE CARBON RESISTOR	RN72K1J-431JE	1	435034314R1	NSP
R4825	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4826	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4827	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4828	CHIP TYPE CARBON RESISTOR	RN72K2E-222JE	1	435222224R1	NSP
R4829	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R4830	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4831	C-METAL R	RN72K2B-682JE2	1	435116824R1	NSP
R4832	C-METAL R	RN72K2B-153JE2	1	435111534R1	NSP
R4833	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4834	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4835	C-METAL R	RN72K2B-752JE2	1	435117524R1	NSP
R4836	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R4837	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4838	C-METAL R	RN72K2B-082JE2	1	435110824R1	NSP
R4839	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4840	CHIP TYPE CARBON RESISTOR	RN72K2E-270JE	1	435222704R1	NSP
R4841	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4842	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4843	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4844	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4845	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4846	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R4848	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R4850	CHIP TYPE CARBON RESISTOR	RN72K1J-910FE	1	435039102R1	NSP
R4851	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4852	CHIP TYPE CARBON RESISTOR	RN72K1J-683FE	1	435036832R1	NSP
R4853	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4854	CEMENT RESISTOR	MNS05N100JW	1	4800083	
R4855	CHIP TYPE CARBON RESISTOR	RN72K1J-104FE	1	435031042R1	NSP

R4856	CHIP TYPE CARBON RESISTOR	RN72K1J-243FE	1	435032432R1	NSP
R4857	CHIP TYPE CARBON RESISTOR	RN72K1J-224FE	1	435032242R1	NSP
R4858	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4859	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4860	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R4862	CHIP TYPE CARBON RESISTOR	RN72K2E-123JE	1	435221234R1	NSP
R4863	CHIP TYPE CARBON RESISTOR	RN72K1J-272FE	1	435032722R1	NSP
R4864	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4865	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4866	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R4867	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4868	CHIP TYPE CARBON RESISTOR	RN72K1J-753FE	1	435037532R1	NSP
R4869	CHIP TYPE CARBON RESISTOR	RN72K1J-393FE	1	435033932R1	NSP
R4870	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4871	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4872	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4873	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4874	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4875	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R4876	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4877	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4878	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4879	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4880	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4881	THERMISTOR	NTCG104KF104FT	1	4000282R1	NSP
R4882	CHIP TYPE CARBON RESISTOR	RN72K1J-751JE	1	435037514R1	NSP
R4883	CHIP TYPE CARBON RESISTOR	RN72K2E-330JE	1	435223304R1	NSP
R4884	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R4885	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4886	C-METAL R	RN72K2B-151JE2	1	435111514R1	NSP
R4887	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4888	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4889	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R4890	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4891	C-METAL R	RN72K2B-823JE2	1	435118234R1	NSP
R4892	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R4893	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4894	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4895	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4896	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4897	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4898	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4899	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R4900	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4901	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4902	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4903	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4904	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4905	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4906	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4909	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R4910	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R4911	CHIP TYPE CARBON RESISTOR	RN72K1J-471FE	1	435034712R1	NSP
R4912	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R4913	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP

R4914	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4915	C-METAL R	LTR18EZPF4702	1	4300028R1	NSP
R4916	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4917	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4918	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R4919	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4920	CHIP TYPE CARBON RESISTOR	RN72K1J-181FE	1	435031812R1	NSP
R4921	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R4922	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4923	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4924	CHIP TYPE CARBON RESISTOR	RN72K1J-431JE	1	435034314R1	NSP
R4925	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4926	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R4927	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R4928	CHIP TYPE CARBON RESISTOR	RN72K2E-222JE	1	435222224R1	NSP
R4929	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R4930	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4931	C-METAL R	RN72K2B-682JE2	1	435116824R1	NSP
R4932	C-METAL R	RN72K2B-153JE2	1	435111534R1	NSP
R4933	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4934	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R4935	C-METAL R	RN72K2B-752JE2	1	435117524R1	NSP
R4936	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R4937	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4938	C-METAL R	RN72K2B-082JE2	1	435110824R1	NSP
R4939	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4940	CHIP TYPE CARBON RESISTOR	RN72K2E-270JE	1	435222704R1	NSP
R4941	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R4942	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4943	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R4944	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R4945	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R4946	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4948	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R4950	CHIP TYPE CARBON RESISTOR	RN72K1J-910FE	1	435039102R1	NSP
R4951	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4952	CHIP TYPE CARBON RESISTOR	RN72K1J-683FE	1	435036832R1	NSP
R4953	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4954	CEMENT RESISTOR	MNS05N100JW	1	4800083	
R4955	CHIP TYPE CARBON RESISTOR	RN72K1J-104FE	1	435031042R1	NSP
R4956	CHIP TYPE CARBON RESISTOR	RN72K1J-243FE	1	435032432R1	NSP
R4957	CHIP TYPE CARBON RESISTOR	RN72K1J-224FE	1	435032242R1	NSP
R4958	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4959	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4960	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R4962	CHIP TYPE CARBON RESISTOR	RN72K2E-123JE	1	435221234R1	NSP
R4963	CHIP TYPE CARBON RESISTOR	RN72K1J-272FE	1	435032722R1	NSP
R4964	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R4965	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R4966	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R4967	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R4968	CHIP TYPE CARBON RESISTOR	RN72K1J-753FE	1	435037532R1	NSP
R4969	CHIP TYPE CARBON RESISTOR	RN72K1J-393FE	1	435033932R1	NSP
R4970	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R4971	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP

R4972	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R4973	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4974	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R4975	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4976	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4977	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R4978	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4979	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R4980	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R4981	THERMISTOR	NTCG104KF104FT	1	4000282R1	NSP
R4982	CHIP TYPE CARBON RESISTOR	RN72K1J-751JE	1	435037514R1	NSP
R4984	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R4985	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R4986	C-METAL R	RN72K2B-151JE2	1	435111514R1	NSP
R4987	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4988	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R4989	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R4990	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R4991	C-METAL R	RN72K2B-823JE2	1	435118234R1	NSP
R4992	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R4993	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R4994	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R4995	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4996	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R4997	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4998	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R4999	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R5000	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R5001	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R5002	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R5003	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R5004	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R5006	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R5007	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R5008	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R5009	CHIP TYPE CARBON RESISTOR	RN72K2E-751JE	1	435227514R1	NSP
R5010	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R5011	C-METAL R	RN72K2B-563JE2	1	435115634R1	NSP
R5012	C-METAL R	RN72K2B-104JE2	1	435111044R1	NSP
R5013	C-METAL R	RN72K2B-224JE2	1	435112244R1	NSP
R5014	C-METAL R	RN72K2B-683JE2	1	435116834R1	NSP
R5015	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R5016	C-METAL R	RN72K2B-104JE2	1	435111044R1	NSP
R5017	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R5018	C-METAL R	RN72K2B-563JE2	1	435115634R1	NSP
R5019	C-METAL R	RN72K2B-224JE2	1	435112244R1	NSP
R5020	C-METAL R	RN72K2B-104JE2	1	435111044R1	NSP
R5021	C-METAL R	RN72K2B-104JE2	1	435111044R1	NSP
R5022	C-METAL R	RN72K2B-683JE2	1	435116834R1	NSP
R5023	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R5024	C-METAL R	RN72K2B-104JE2	1	435111044R1	NSP
R5025	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R5026	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R5027	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R5028	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP

R5029	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R5030	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R5031	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R5032	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R5033	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R5034	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5036	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R5039	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R5040	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R5041	CHIP TYPE CARBON RESISTOR	RN72K2E-015JE	1	435220154R1	NSP
R5042	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R5045	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R5048	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R5054	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R5056	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R5057	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R5058	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R5064	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R5065	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R5067	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R5069	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R5070	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R5072	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R5073	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R5074	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R5075	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R5076	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R5077	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R5078	CHIP TYPE CARBON RESISTOR	RN72K1J-124JE	1	435031244R1	NSP
R5080	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R5081	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R5082	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R5083	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R5084	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R5085	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R5086	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R5087	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R5088	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R5089	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R5091	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R5095	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R5096	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R5097	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R5098	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R5099	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R5100	CHIP TYPE CARBON RESISTOR	RN72K2E-104JE	1	435221044R1	NSP
R5102	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R5104	CHIP TYPE CARBON RESISTOR	RN72K2E-104JE	1	435221044R1	NSP
R5106	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R5108	CHIP TYPE CARBON RESISTOR	RN72K2E-104JE	1	435221044R1	NSP
R5110	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R5112	CHIP TYPE CARBON RESISTOR	RN72K2E-104JE	1	435221044R1	NSP
R5114	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R5116	CHIP TYPE CARBON RESISTOR	RN72K2E-104JE	1	435221044R1	NSP
R5118	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP

[illegible]

[illegible]

R6450	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6451	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6452	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6453	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6454	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6455	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6456	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6457	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R6458	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6459	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R6460	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6461	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6462	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6463	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6464	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6465	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6466	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6467	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6468	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6469	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6470	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R6471	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6472	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R6473	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6474	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R6475	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6476	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R6477	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6478	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6479	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6480	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6481	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6482	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R6483	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6484	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6485	CHIP TYPE CARBON RESISTOR	RN72K2E-183JE	1	435221834R1	NSP
R6486	CHIP TYPE CARBON RESISTOR	RN72K2E-183JE	1	435221834R1	NSP
R6487	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R6488	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R6489	CHIP TYPE CARBON RESISTOR	RN72K1J-151JE	1	435031514R1	NSP
R6490	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R6491	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R6492	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R6494	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6495	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6496	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R6497	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R6498	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R6499	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R6500	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6501	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6502	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R6503	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R6504	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R6505	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP

R6506	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6509	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R6510	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R6511	CHIP TYPE CARBON RESISTOR	RN72K1J-471FE	1	435034712R1	NSP
R6512	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R6513	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R6514	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R6515	C-METAL R	LTR18EZPF4702	1	4300028R1	NSP
R6516	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R6517	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6518	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6519	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R6520	CHIP TYPE CARBON RESISTOR	RN72K1J-181FE	1	435031812R1	NSP
R6521	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6522	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R6523	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R6524	CHIP TYPE CARBON RESISTOR	RN72K1J-431JE	1	435034314R1	NSP
R6525	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R6526	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R6527	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R6528	CHIP TYPE CARBON RESISTOR	RN72K2E-222JE	1	435222224R1	NSP
R6529	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R6530	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R6531	C-METAL R	RN72K2B-682JE2	1	435116824R1	NSP
R6532	C-METAL R	RN72K2B-153JE2	1	435111534R1	NSP
R6533	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R6534	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R6535	C-METAL R	RN72K2B-752JE2	1	435117524R1	NSP
R6536	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R6537	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R6538	C-METAL R	RN72K2B-082JE2	1	435110824R1	NSP
R6539	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R6540	CHIP TYPE CARBON RESISTOR	RN72K2E-270JE	1	435222704R1	NSP
R6541	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R6542	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R6543	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R6544	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R6545	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R6546	CHIP TYPE CARBON RESISTOR	RN72K2E-330JE	1	435223304R1	NSP
R6548	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R6550	CHIP TYPE CARBON RESISTOR	RN72K1J-910FE	1	435039102R1	NSP
R6551	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R6552	CHIP TYPE CARBON RESISTOR	RN72K1J-683FE	1	435036832R1	NSP
R6553	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R6554	CEMENT RESISTOR	MNS05N100JW	1	4800083	
R6555	CHIP TYPE CARBON RESISTOR	RN72K1J-104FE	1	435031042R1	NSP
R6556	CHIP TYPE CARBON RESISTOR	RN72K1J-243FE	1	435032432R1	NSP
R6557	CHIP TYPE CARBON RESISTOR	RN72K1J-224FE	1	435032242R1	NSP
R6558	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R6559	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R6560	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R6562	CHIP TYPE CARBON RESISTOR	RN72K2E-123JE	1	435221234R1	NSP
R6563	CHIP TYPE CARBON RESISTOR	RN72K1J-272FE	1	435032722R1	NSP
R6564	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R6565	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP

R6566	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R6567	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R6568	CHIP TYPE CARBON RESISTOR	RN72K1J-753FE	1	435037532R1	NSP
R6569	CHIP TYPE CARBON RESISTOR	RN72K1J-393FE	1	435033932R1	NSP
R6570	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R6571	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R6572	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R6573	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R6574	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R6575	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6576	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R6577	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R6578	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R6579	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R6580	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R6581	THERMISTOR	NTCG104KF104FT	1	4000282R1	NSP
R6582	CHIP TYPE CARBON RESISTOR	RN72K1J-751JE	1	435037514R1	NSP
R6584	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R6585	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6586	C-METAL R	RN72K2B-151JE2	1	435111514R1	NSP
R6587	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R6588	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R6589	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R6590	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R6591	C-METAL R	RN72K2B-823JE2	1	435118234R1	NSP
R6592	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R6593	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R6594	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R6595	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R6596	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R6597	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R6598	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R6599	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R6600	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6601	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6602	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R6603	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R6604	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R6605	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R6606	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6609	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R6610	C-METAL R	RN72K2B-223JE2	1	435112234R1	NSP
R6611	CHIP TYPE CARBON RESISTOR	RN72K1J-471FE	1	435034712R1	NSP
R6612	C-METAL R	RN72K2B-473JE2	1	435114734R1	NSP
R6613	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R6614	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R6615	C-METAL R	LTR18EZPF4702	1	4300028R1	NSP
R6616	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R6617	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6618	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R6619	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R6620	CHIP TYPE CARBON RESISTOR	RN72K1J-181FE	1	435031812R1	NSP
R6621	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R6622	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R6623	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP

R6624	CHIP TYPE CARBON RESISTOR	RN72K1J-431JE	1	435034314R1	NSP
R6625	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R6626	METAL PLATE RESISTOR	RGC5-0.22-OHM-K	1	4000284	
R6627	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R6628	CHIP TYPE CARBON RESISTOR	RN72K2E-222JE	1	435222224R1	NSP
R6629	C-METAL R	RN72K2B-222JE2	1	435112224R1	NSP
R6630	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R6631	C-METAL R	RN72K2B-682JE2	1	435116824R1	NSP
R6632	C-METAL R	RN72K2B-153JE2	1	435111534R1	NSP
R6633	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R6634	C-METAL R	RN72K2B-103JE2	1	435111034R1	NSP
R6635	C-METAL R	RN72K2B-752JE2	1	435117524R1	NSP
R6636	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R6637	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R6638	C-METAL R	RN72K2B-082JE2	1	435110824R1	NSP
R6639	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R6640	CHIP TYPE CARBON RESISTOR	RN72K2E-270JE	1	435222704R1	NSP
R6641	CHIP TYPE CARBON RESISTOR	RN72K2E-100JE	1	435221004R1	NSP
R6642	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R6643	C-METAL R	WK73R2HTTE100J	1	4300031R2	NSP
R6644	C-METAL R	LTR18EZPJ104	1	4300029R1	NSP
R6645	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R6648	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R6650	CHIP TYPE CARBON RESISTOR	RN72K1J-910FE	1	435039102R1	NSP
R6651	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R6652	CHIP TYPE CARBON RESISTOR	RN72K1J-683FE	1	435036832R1	NSP
R6653	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R6654	CEMENT RESISTOR	MNS05N100JW	1	4800083	
R6655	CHIP TYPE CARBON RESISTOR	RN72K1J-104FE	1	435031042R1	NSP
R6656	CHIP TYPE CARBON RESISTOR	RN72K1J-243FE	1	435032432R1	NSP
R6657	CHIP TYPE CARBON RESISTOR	RN72K1J-224FE	1	435032242R1	NSP
R6658	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R6659	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R6660	CHIP TYPE CARBON RESISTOR	RN72K1J-563JE	1	435035634R1	NSP
R6662	CHIP TYPE CARBON RESISTOR	RN72K2E-123JE	1	435221234R1	NSP
R6663	CHIP TYPE CARBON RESISTOR	RN72K1J-272FE	1	435032722R1	NSP
R6664	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R6665	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R6666	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R6667	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R6668	CHIP TYPE CARBON RESISTOR	RN72K1J-753FE	1	435037532R1	NSP
R6669	CHIP TYPE CARBON RESISTOR	RN72K1J-393FE	1	435033932R1	NSP
R6670	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R6671	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R6672	CHIP TYPE CARBON RESISTOR	RN72K1J-039JE	1	435030394R1	NSP
R6673	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R6674	CHIP TYPE CARBON RESISTOR	RN72K1J-015JE	1	435030154R1	NSP
R6675	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R6676	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R6677	CHIP TYPE CARBON RESISTOR	RN72K2E-024JE	1	435220244R1	NSP
R6678	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R6679	CHIP TYPE CARBON RESISTOR	RN72K2E-022JE	1	435220224R1	NSP
R6680	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R6681	THERMISTOR	NTCG104KF104FT	1	4000282R1	NSP
R6682	CHIP TYPE CARBON RESISTOR	RN72K1J-751JE	1	435037514R1	NSP

R6684	CHIP TYPE CARBON RESISTOR	RN72K1J-022JE	1	435030224R1	NSP
R6685	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R6686	C-METAL R	RN72K2B-151JE2	1	435111514R1	NSP
R6687	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R6688	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R6689	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R6690	C-METAL R	ERJB1AJ103U	1	4300030R2	NSP
R6691	C-METAL R	RN72K2B-823JE2	1	435118234R1	NSP
R6692	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R6693	C-METAL R	RN72K2B-012JE2	1	435110124R1	NSP
R6694	CHIP TYPE CARBON RESISTOR	RN72K2E-472JE	1	435224724R1	NSP
R6695	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R6696	C-METAL R	RN72K2B-022JE2	1	435110224R1	NSP
R6697	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R6698	C-METAL R	RN72K2B-024JE2	1	435110244R1	NSP
R6699	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R6701	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R6702	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R6703	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R6705	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R6706	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7107	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R7129	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R7130	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R7131	CHIP TYPE CARBON RESISTOR	RN72K2E-103JE	1	435221034R1	NSP
R7132	CHIP TYPE CARBON RESISTOR	RN72K2E-332JE	1	435223324R1	NSP
R7134	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7135	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R7136	CHIP TYPE CARBON RESISTOR	RN72K2E-103JE	1	435221034R1	NSP
R7137	CHIP TYPE CARBON RESISTOR	RN72K2E-332JE	1	435223324R1	NSP
R7139	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7140	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R7141	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7142	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R7143	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R7144	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R7145	CHIP TYPE CARBON RESISTOR	RN72K2E-103JE	1	435221034R1	NSP
R7146	CHIP TYPE CARBON RESISTOR	RN72K2E-332JE	1	435223324R1	NSP
R7148	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7149	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7150	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R7151	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R7152	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R7153	CHIP TYPE CARBON RESISTOR	RN72K2E-103JE	1	435221034R1	NSP
R7154	CHIP TYPE CARBON RESISTOR	RN72K2E-332JE	1	435223324R1	NSP
R7156	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7157	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R7158	CHIP TYPE CARBON RESISTOR	RN72K2E-103JE	1	435221034R1	NSP
R7159	CHIP TYPE CARBON RESISTOR	RN72K2E-332JE	1	435223324R1	NSP
R7161	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7162	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R7163	C-METAL R	RN72K2B-331JE2	1	435113314R1	NSP
R7164	CHIP TYPE CARBON RESISTOR	RN72K2E-103JE	1	435221034R1	NSP
R7165	CHIP TYPE CARBON RESISTOR	RN72K2E-332JE	1	435223324R1	NSP
R7167	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP

R7168	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
[Switches, Terminals, Wires]					
P180	PRINTED WIRING BOARD	BCCLD-2095	{1}	25142095	N NSP
P180	PRINTED WIRING BOARD	BCCLD-2095	1	25142095A	N NSP
P4000A	SOCKET	NSCT-21P2114	1	25052217	NSP
P4001A	PLUG	NPLG-4P151	1	25055167	NSP
P4002A	PLUG	NPLG-2P130	1	25055146	NSP
P4003A	PLUG	NPLG-5P133	1	25055149	NSP
P4004A	PLUG	NPLG-7P135	1	25055151	NSP
P4005	TRM(EARTH)	OG-RM30HF	1	25060534R2	NSP
P4100A	PLUG	IMSA-9115B-05	1	25056335	NSP
P4200A	PLUG	IMSA-9115B-05	1	25056335	NSP
P4201	TERMINAL	LTS3610-1011F	1	25060536	
P4202	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P4300A	PLUG	IMSA-9115B-05	1	25056335	NSP
P4400A	PLUG	IMSA-9115B-05	1	25056335	NSP
P4401	TERMINAL	LTS3410-1020F	1	25060537	
P4402	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P4500A	PLUG	IMSA-9115B-05	1	25056335	NSP
P4550	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P4600A	PLUG	IMSA-9115B-05	1	25056335	NSP
P4601	TERMINAL	LTS3410-1020F	1	25060537	
P4700A	PLUG	IMSA-9115B-05	1	25056335	NSP
P4702	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P4800A	PLUG	IMSA-9115B-05	1	25056335	NSP
P4900A	PLUG	IMSA-9115B-05	1	25056335	NSP
P4901	TERMINAL	LTS3410-1020F	1	25060537	
P4902	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P5000A	PLUG	IMSA-9115B-05	1	25056335	NSP
P5100A	PLUG	IMSA-9115B-05	1	25056335	NSP
P6501	TERMINAL	LTS3410-1020F	1	25060537	
P6502	TRM(SCREW)	TER21-0130V	1	25060533	NSP
RL4100	RELAY	NRL-2P5A-DC12-208	1	25065733	
RL4300	RELAY	NRL-2P5A-DC12-208	1	25065733	
RL4500	RELAY	NRL-2P5A-DC12-208	1	25065733	
RL4700	RELAY	NRL-2P5A-DC12-208	1	25065733	
RL4900	RELAY	NRL-2P5A-DC12-208	1	25065733	
RL6500	RELAY	NRL-2P5A-DC12-208	1	25065733	

BADG-2078-1C

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D2004	PHOTO COUPLER	JSR1165-001recieving	1	24120143	
D2005	PHOTO COUPLER	JSR1165-001recieving	1	24120143	

D2006	PHOTO COUPLER	JSR1165-001recieving	1	24120143	
Q2001	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q2003	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2004	HYBRID IC	AK4458VN	1	22242927R2	NSP
Q2005	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2006	HYBRID IC	AK4458VN	1	22242927R2	NSP
Q2007	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2008	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2016	HYBRID IC	AK4490EQ	1	22242907R2	NSP
Q2018	HYBRID IC	NJM2881F33	1	22242520R2	NSP
Q2019	HYBRID IC	TC7SH32FU	1	22243127R2	NSP
Q2020	HYBRID IC	TC74VHC32FK	1	22243048R2	NSP
Q2021	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q2022	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q2023	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2024	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2025	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2026	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2027	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2028	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2029	HYBRID IC	TC74VHC32FK	1	22243048R2	NSP
Q2030	HYBRID IC	TC7SH32FU	1	22243127R2	NSP
Q2031	HYBRID IC	TC7WU04FU(TE12L_F)	1	22240935R2	NSP
Q2032	HYBRID IC	TC7WU04FU(TE12L_F)	1	22240935R2	NSP
Q2041	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q2042	HYBRID IC	NE5532APSR	1	22242283R2	NSP
Q2043	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2044	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2045	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2046	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2047	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2048	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2073	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2093	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2157	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2177	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2178	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2197	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2198	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2200	HYBRID IC	TC7SH08FU	1	22241830R2TO	N NSP
Q2407	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2428	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2448	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2527	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2547	HYBRID IC	NJM4580CG	1	22242922R2	NSP
Q2751	HYBRID IC	NJM2845DL1-05	1	22243042R2	NSP
Q2752	HYBRID IC	S-1172B33-E6T1G	1	22243037R2	NSP
Q2753	HYBRID IC	S-1172B33-E6T1G	1	22243037R2	NSP
Q2754	HYBRID IC	NJM2872BF33	1	22243041R2	NSP
Q2801	HYBRID IC	AK4388ET-E2	1	22242519R2	NSP
Q2831	HYBRID IC	NJM4585M	1	22242981R2	NSP
Q2851	HYBRID IC	AK4388ET-E2	1	22242519R2	NSP
Q2881	HYBRID IC	NJM4585M	1	22242981R2	NSP
[Transformers, Coils]					
L2001	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP

L2002	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L2003	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L2004	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L2005	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L2011	CORE	BLM11A121S	1	2350050R1	NSP
L2012	CORE	BLM11A121S	1	2350050R1	NSP
L2013	CORE	BLM11A121S	1	2350050R1	NSP
L2014	CORE	BLM11A121S	1	2350050R1	NSP
L2015	CORE	BLM11A121S	1	2350050R1	NSP
L2801	CORE	BLM11A121S	1	2350050R1	NSP
L2851	CORE	BLM11A121S	1	2350050R1	NSP
[Capacitors]					
C2001	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2002	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2003	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2004	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2005	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2006	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2007	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2008	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2009	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2010	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2011	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2012	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2013	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2014	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2015	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2016	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2017	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2018	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2019	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2020	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2021	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2022	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2023	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2024	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2025	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2026	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2027	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2028	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2029	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2030	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2031	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2032	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2033	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2034	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2035	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2036	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2037	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2038	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2039	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2040	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2041	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2042	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2043	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP

C2044	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2045	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2046	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2047	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2048	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2049	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2050	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2051	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2052	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2053	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2054	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2055	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2056	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C2057	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2059	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C2060	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C2061	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2062	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2063	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2064	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2065	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2066	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2067	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2068	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2069	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C2070	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2071	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2072	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2073	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2074	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2075	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2076	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2077	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2078	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C2079	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2080	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2081	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2081or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2082	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2082or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2083	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2083or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2084	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2084or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2085	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2085or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2086	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2086or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2087	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2087or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2088	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2088or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2089	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2090	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2092	CHIP TYPE PLASTIC FILM CAPACITOR	50MU331KY11608	1	376923315R2	NSP

C2093	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2094	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2098	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2101	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2101or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2102	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2102or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2103	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2103or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2104	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2104or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2105	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2105or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2106	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2106or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2107	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2107or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2108	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2108or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2109	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2110	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2111	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2112	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C2113	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2114	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2115	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2116	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2117	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2119	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2120	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2121	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2121or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2122	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2122or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2123	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2123or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2124	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2124or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2125	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2125or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2126	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2126or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2127	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2127or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2128	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2128or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2129	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2130	CHIP TYPE PLASTIC FILM CAPACITOR	50ST104MA13216	1	376721047R2	NSP
C2131	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K1	1	332121045R1	NSP
C2132	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2133	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2133or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2134	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2135	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2136	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N

C2141	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2141or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2142	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2142or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2143	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2143or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2144	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2144or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2145	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2145or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2146	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2146or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2147	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2147or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2148	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2148or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2149	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2150	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K1	1	332121045R1	NSP
C2151	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2152	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2153	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2153or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2154	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2155	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2156	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2157	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2158	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2159	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2160	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2161	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2162	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2163	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2164	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2165	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2166	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2170	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2171	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2172	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2173	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2173or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2175	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2176	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2177	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2178	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2179	CHIP TYPE PLASTIC FILM CAPACITOR	63MU101KZ12012	1	376991015R2	NSP
C2180	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2181	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2182	CHIP TYPE PLASTIC FILM CAPACITOR	63MU331KZ12012	1	376993315R2	NSP
C2193	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2193or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2197	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2198	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2200	SMG C	CE04W16V-1000M(SMG)	1	395041027S	
C2201	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C2205	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N

C2207	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J	1	3400037R1	NSP
C2211	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C2213	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C2216	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C2217	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2218	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2221	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C2224	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C2226	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C2227	CHIP TYPE PLASTIC FILM CAPACITOR	35MU104KZ22012	1	3769A1045R2	NSP
C2228	CHIP TYPE PLASTIC FILM CAPACITOR	63MU103KZ12012	1	376991035R2	NSP
C2229	CHIP TYPE PLASTIC FILM CAPACITOR	35MU104KZ22012	1	3769A1045R2	NSP
C2230	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2231	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J1	1	342103314R1	NSP
C2234	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2235	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J1	1	342103314R1	NSP
C2237	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2237or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2238	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2238or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2240	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2241	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2242	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C2243	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2244	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C2245	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2246	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2257	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2257or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2258	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2258or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2277	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2277or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2278	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2278or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2297	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2297or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2298	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2298or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2401	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2402	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2403	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2404	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2408	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2428	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2448	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2468	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2488	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2488or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2507	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2508	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2508or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2527	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF122JE	1	376591224T	NSP
C2528	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2528or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP

C2547	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2548	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2548or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2567	UPZ TYPE PLASTIC FILM CAPACITOR	2AUPZTF681JE	1	376336814T	NSP
C2587	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2587or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2607	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-471J	1	373024714R2	NSP
C2607or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-471J	(1)	376624714R2	NSP
C2627	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-101J	1	373021014R2	NSP
C2627or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-101J	(1)	376621014R2	NSP
C2647	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-222J	1	373022224R2	NSP
C2647or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-222J	(1)	376622224R2	NSP
C2742	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2742or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2743	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2744	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-100M(UTSP)	1	397551017ST	N
C2745	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
C2747	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2749	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2749or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2751	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217ST	N
C2755	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2755or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2756	CAPACITOR	NOJA156M010	1	3000134R2	NSP
C2760	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2764	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2780	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2782	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2804	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2804or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2806	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2809	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-331J	1	373023314R2	NSP
C2809or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-331J	(1)	376623314R2	NSP
C2811	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2815	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C2816	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2817	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J	1	3400042R1	NSP
C2831	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C2832	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C2833	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C2834	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C2835	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-391J1	1	342103914R1	NSP
C2836	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-391J1	1	342103914R1	NSP
C2837	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2837or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2838	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2838or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2839	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2840	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2849	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C2850	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2854	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2854or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2856	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-100M(UTSP)	1	397531017ST	N
C2859	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU50V-331J	1	373023314R2	NSP

C2859or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX50V-331J	(1)	376623314R2	NSP
C2861	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-47M(UTSP)	1	397554707ST	N
C2865	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C2866	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C2867	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J	1	3400042R1	NSP
C2881	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C2882	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-22M(UTSP)	1	397582207ST	N
C2883	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C2884	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J1	1	342104714R1	NSP
C2885	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-391J1	1	342103914R1	NSP
C2886	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-391J1	1	342103914R1	NSP
C2887	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2887or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2888	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-103J	1	373041034R2	NSP
C2888or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-103J	(1)	376641034R2	NSP
C2889	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
C2890	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W50V-10M(UTSP)	1	397581007ST	N
[Resistors]					
R2001	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2002	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2003	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2004	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2005	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2006	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2007	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2008	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2009	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2010	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2011	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2012	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2013	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2014	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2015	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2016	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2017	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2018	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2019	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2020	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2021	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2022	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2023	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2024	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2025	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2026	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2027	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2028	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2029	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2030	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2031	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R2032	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2033	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2034	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2035	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2036	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP
R2037	CHIP TYPE CARBON RESISTOR	RN72K2E-220JE	1	435222204R1	NSP

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

[illegible]

R2481	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R2482	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R2483	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R2484	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2485	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2486	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2487	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2488	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2489	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2490	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2491	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2492	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2493	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2494	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2495	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2496	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2498	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2499	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2500	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2501	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2502	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2503	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2504	CHIP TYPE CARBON RESISTOR	RN72K1J-750JE	1	435037504R1	NSP
R2505	CHIP TYPE CARBON RESISTOR	RN72K1J-750JE	1	435037504R1	NSP
R2506	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R2507	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2508	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2509	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R2510	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2511	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R2512	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2513	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R2514	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2515	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2516	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R2517	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2518	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2519	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R2520	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R2521	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R2522	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2523	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2524	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R2525	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2526	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2527	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2528	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R2529	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2530	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R2531	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R2532	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2537	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2538	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2547	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2548	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP

R2567	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2568	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2587	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2588	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2607	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2608	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2627	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R2628	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2647	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R2648	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2667	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R2668	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R2687	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2688	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2707	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2708	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2727	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R2728	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R2741	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R2742	C-METAL R	RN72K2B-242JE2	1	435112424R1	NSP
R2743	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R2744	CHIP TYPE CARBON RESISTOR	RN72K1J-242JE	1	435032424R1	NSP
R2747	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2752	CHIP TYPE CARBON RESISTOR	RN72K1J-184JE	1	435031844R1	NSP
R2753	CHIP TYPE CARBON RESISTOR	RN72K2E-010JE	1	435220104R1	NSP
R2754	C-METAL R	RN72K2B-154JE2	1	435111544R1	NSP
R2755	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2757	CHIP TYPE CARBON RESISTOR	RN72K2E-010JE	1	435220104R1	NSP
R2759	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2760	C-METAL R	RN72K2B-184JE2	1	435111844R1	NSP
R2761	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R2767	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R2768	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2771	C-METAL R	RN72K2B-154JE2	1	435111544R1	NSP
R2787	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R2788	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2801	C-METAL R	RN72K1J-220JE0	1	435012204R1	NSP
R2802	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2803	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2804	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2805	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2806	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2807	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2808	C-METAL R	RN72K1J-473JE0	1	435014734R1	NSP
R2809	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2810	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2827	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R2831	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP
R2832	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP
R2833	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2834	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2835	CHIP TYPE CARBON RESISTOR	RN72K1J-302JE	1	435033024R1	NSP
R2836	CHIP TYPE CARBON RESISTOR	RN72K1J-302JE	1	435033024R1	NSP
R2837	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R2838	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP

R2839	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2840	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2841	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R2842	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R2843	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2844	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2845	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R2846	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R2852	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2853	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2854	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2855	C-METAL R	RN72K1J-221JE0	1	435012214R1	NSP
R2856	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2857	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2858	C-METAL R	RN72K1J-473JE0	1	435014734R1	NSP
R2859	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2860	C-METAL R	RN72K1J-101JE0	1	435011014R1	NSP
R2862	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2867	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R2881	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP
R2882	C-METAL R	RN72K2B-100JE2	1	435111004R1	NSP
R2883	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2884	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R2885	CHIP TYPE CARBON RESISTOR	RN72K1J-302JE	1	435033024R1	NSP
R2886	CHIP TYPE CARBON RESISTOR	RN72K1J-302JE	1	435033024R1	NSP
R2887	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R2888	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R2889	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2890	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R2891	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R2892	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R2893	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2894	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R2895	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R2896	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R2902	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2903	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2911	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2912	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2913	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2914	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2915	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2916	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2917	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2918	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2919	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2920	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2921	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2951	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2952	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2953	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2954	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2955	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2956	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2957	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP

R2958	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2959	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R2960	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
[Switches, Terminals, Wires]					
P200	PRINTED WIRING BOARD	BCDG-2078	1	25142078A	N NSP
P2003D	SOCKET	IMSA-9111S-28L	1	25053567	NSP
P2004D	SOCKET	IMSA-9111S-24L	1	25053259	NSP
P2006	SOCKET	IMSA-9111S-30L	1	25056701	NSP
P2007	SOCKET	IMSA-9111S-30L	1	25056701	NSP
P2008	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P2009	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P200A	PRINTED WIRING BOARD	BCDG-2078	{1}	25142078	N NSP
P2201	PIN JACK	NPJ-2PDO762	1	25046018	

BADIS-2075-1A

<Note>

1. Parts marked by "**NSP**" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D5411	DIODE	D2SB60A	1	22380366F	
D5412	DIODE	SARS01	1	22380397	
D5413	DIODE	SARS01	1	22380397	
D5414	DIODE	SJPL-D2	1	22380398R2	NSP
D5415	ZENER DIODE	KDZ36B	1	224990585R2	NSP
D5451	DIODE	FMEN-220A	1	22380396	
D5451A	HEAT SINK	ANH7224-A	1	27160701	NSP
D5451B	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
D5481	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D5482	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D7501	ZENER DIODE	DZ2J051M0L	1	224760510R2	NSP
D7502	ZENER DIODE	DZ2J051M0L	1	224760510R2	NSP
D7503	ZENER DIODE	DZ2J051M0L	1	224760510R2	NSP
D7506	LED	HLMP-Y701	1	225528	
D7507	ZENER DIODE	DZ2J075M0L	1	224760750R2	NSP
D7508	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D7751	LED	SCB3318E-D2	1	225487	
D7751A	HOLDER	(LED-LH5-2)	1	27191336	N NSP
Q5411	HYBRID IC	STR2A153	1	22242995	
Q5412	PHOTO COUPLER	TLP781(GR)	1	24120175	
Q5451	HYBRID IC	NJM1431AF	1	22242979R2	NSP
Q5481	TRANSISTOR	2SD2704K	1	2218130R2	NSP
Q7501	HYBRID IC	NJM4580M-D	1	22241448R2	NSP
Q7502	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7509	TRANSISTOR	DTA124EUA	1	2218450R2	NSP
Q7510	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7511	TRANSISTOR	DTC143EUA	1	2218520R2	NSP

Q7512	REMOTE SENSOR	IRM-3638M3S28	1	24130026	N
Q7513	TRANSISTOR	INA5001AP1-T111	1	2218030R2	N NSP
Q7514	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7515	TRANSISTOR	2SC2712-GR	1	2213145R2	NSP
Q7516	TRANSISTOR	2SC2712-GR	1	2213145R2	NSP
Q7517	FLUORESCENT TUBE	016MT096GINYK	1	212285A	
Q7517A	HOLDER	(FL)	1	27191414	NSP
Q7751	TRANSISTOR	DTC143EUA	1	2218520R2	NSP
[Transformers, Coils]					
L5401	CHOKE COIL	PFC2225C	1	231490	
L5411	LINE FILTER	HF2318-A213Y0R8-01	1	231492	
L5451	CHOKE COIL	RP1315BNP-100M	1	231466M100	
L7501	CORE	BKP2125HS101-T	1	2350048R1	NSP
L7502	CORE	BLM11P300SPT	1	2350049R1	NSP
L7503	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	NSP
L7504	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	NSP
T5411	POWER TRANSFORMER	ATK7006-A	1	2302140	!
[Capacitors]					
C5403	CERAMIC CAPACITOR	DE2F3KY103MA4BM02	1	3300083	
C5411	IS TYPE CAPACITOR	LE104-MX-C3.5	1	3800049S	!
C5412	ELECTROLYTIC CAPACITOR	CE69W400V-100M(KMM)	1	3504524	
C5413	ELECTROLYTIC CAPACITOR	CE04W50V-22M(LXZ)	1	3500248T	N
C5414	FILM C	ECQE6222KF	1	3700116	
C5415	CHIP TYPE CERAMIC CAPACITOR	GRM188R72A153KAC4D	1	3300084R1	NSP
C5421	IS TYPE CAPACITOR	DE1E3KX152MB5BA01	1	3300062S	!
C5422	IS TYPE CAPACITOR	DE1E3KX152MB5BA01	1	3300062S	!
C5451	ELECTROLYTIC CAPACITOR	CE04W10V-4700M(LXZ)	1	3500247S	
C5453	PW TYPE ELECTROLYTIC CAPACITOR	CE04W10V-470M(PW)	1	393734717T	
C5454	CHIP TYPE CERAMIC CAPACITOR	GRM31A7U3A470JW31D	1	3400039R1	NSP
C5455	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J	1	3400035R1	NSP
C5458	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C5459	CHIP TYPE PLASTIC FILM CAPACITOR	35MU104KZ22012	1	3769A1045R2	NSP
C5701	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K	1	332242235R1	NSP
C5704	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C5705	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J1	1	342103314R1	NSP
C5720	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-102J1	1	342101024R1	NSP
C5722	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF102JE	1	376591024T	NSP
C5723	UMXR TYPE PLASTIC FILM CAPACITOR	1JUMXRTF102JE	1	376591024T	NSP
C7501	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C7502	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J	1	3400037R1	N NSP
C7504	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J	1	3400034R1	N NSP
C7505	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J1	1	342103304R1	NSP
C7506	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J1	1	342103304R1	NSP
C7507	ELECTROLYTIC CAPACITOR	CE04W50V-10M	1	355781009T	
C7508	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C7509	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C7512	ELECTROLYTIC CAPACITOR	CE04W16V-100M	1	355741019T	
C7513	ELECTROLYTIC CAPACITOR	CE04W16V-100M	1	355741019T	
C7514	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-470J1	1	342104704R1	NSP
C7520	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C7521	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	N NSP
C7524	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C7533	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C7534	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C7535	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP

C7536	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C7537	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C7538	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C7539	ELECTROLYTIC CAPACITOR	CE04W16V-10M(S)	1	353741009T	
C7540	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-102J1	1	342101024R1	NSP
C7542	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C7543	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C7544	ELECTROLYTIC CAPACITOR	CE04W16V-47M(S)	1	353744709T	
C7545	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C7546	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C7547	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C7548	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C7549	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C7550	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C7551	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C7552	CHIP TYPE CERAMIC CAPACITOR	CK725F1E-104Z1	1	332161040R1	NSP
C7553	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C7554	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C7645	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-822K	1	332248225R1	NSP
C7646	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-822K	1	332248225R1	NSP
C7740	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K1	1	332101025R1	NSP
[Resistors]					
R5411	C-METAL R	MCR18EZPJ105	1	4300040R1	NSP
R5412	C-METAL R	MCR18EZPJ105	1	4300040R1	NSP
R5413	C-METAL R	MCR18EZPJ105	1	4300040R1	NSP
R5414	RESISTOR	ERG1DJ154P	1	4000283F	
R5415	METAL OXIDE FILM RESISTOR	ERG1SJ680P	1	4400045	
R5416	METAL RESISTOR	ERX1SJR68H	1	4500343	
R5418	C-METAL R	RN72K2B-120JE2	1	435111204R1	NSP
R5419	C-METAL R	RN72K2B-102JE2	1	435111024R1	NSP
R5451	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R5453	CHIP TYPE CARBON RESISTOR	RN72K1J-390JE	1	435033904R1	NSP
R5454	CHIP TYPE CARBON RESISTOR	RN72K1J-181JE	1	435031814R1	NSP
R5457	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R5458	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R5459	CHIP TYPE CARBON RESISTOR	RN72K1J-302FE	1	435033022R1	NSP
R5460	CHIP TYPE CARBON RESISTOR	RN72K1J-752FE	1	435037522R1	NSP
R5461	CHIP TYPE CARBON RESISTOR	RN72K1J-152JE	1	435031524R1	NSP
R5462	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R5463	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R5464	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R5465	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R5482	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R5483	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R5484	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R5701	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5720	C-METAL R	RN72K2B-120JE2	1	435111204R1	NSP
R5721	C-METAL R	RN72K2B-120JE2	1	435111204R1	NSP
R5722	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5723	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5724	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5725	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7501	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R7502	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7503	C-METAL R	RN72K2B-330JE2	1	435113304R1	N NSP

R7504	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R7505	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7506	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R7507	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7508	CHIP TYPE CARBON RESISTOR	RN72K1J-432JE	1	435034324R1	NSP
R7509	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R7510	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R7511	CHIP TYPE CARBON RESISTOR	RN72K1J-432JE	1	435034324R1	NSP
R7512	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R7513	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R7515	CHIP TYPE CARBON RESISTOR	RN72K1J-122JE	1	435031224R1	NSP
R7516	C-METAL R	RN72K2B-330JE2	1	435113304R1	N NSP
R7517	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7518	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7519	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R7520	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R7521	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7522	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R7523	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R7524	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R7529	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R7536	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7537	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7538	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7539	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7543	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R7544	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7545	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7546	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7547	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7548	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R7549	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7550	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7551	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7552	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7553	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7554	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7555	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7556	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7557	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R7558	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R7559	CHIP TYPE CARBON RESISTOR	RN72K2E-221JE	1	435222214R1	NSP
R7560	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R7561	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7562	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R7563	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R7564	NON-FLAMMABLE CARBON FILM RESISTOR R25J-10		1	415471004T	
R7565	CHIP TYPE CARBON RESISTOR	RN72K1J-393JE	1	435033934R1	NSP
R7566	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7567	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R7568	NON-FLAMMABLE CARBON FILM RESISTOR R25J-10		1	415471004T	
R7569	CHIP TYPE CARBON RESISTOR	RN72K1J-393JE	1	435033934R1	NSP
R7570	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7571	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R7572	CHIP TYPE CARBON RESISTOR	RN72K1J-393JE	1	435033934R1	NSP

R7573	CHIP TYPE CARBON RESISTOR	RN72K2E-221JE	1	435222214R1	NSP
R7574	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R7575	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R7576	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R7577	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R7578	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7581	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R7601	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R7603	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R7604	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R7605	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R7606	CHIP TYPE CARBON RESISTOR	RN72K1J-122JE	1	435031224R1	NSP
R7607	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R7608	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R7609	CHIP TYPE CARBON RESISTOR	RN72K1J-123JE	1	435031234R1	NSP
R7611	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R7612	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R7613	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R7614	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R7615	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R7616	CHIP TYPE CARBON RESISTOR	RN72K1J-122JE	1	435031224R1	NSP
R7617	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R7618	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R7619	CHIP TYPE CARBON RESISTOR	RN72K1J-123JE	1	435031234R1	NSP
R7621	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R7622	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R7623	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R7624	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R7625	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R7626	CHIP TYPE CARBON RESISTOR	RN72K1J-122JE	1	435031224R1	NSP
R7627	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R7628	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R7629	CHIP TYPE CARBON RESISTOR	RN72K1J-123JE	1	435031234R1	NSP
R7631	CHIP TYPE CARBON RESISTOR	RN72K1J-271JE	1	435032714R1	NSP
R7632	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R7633	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R7634	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R7635	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R7645	C-METAL R	RN72K2B-120JE2	1	435111204R1	NSP
R7646	C-METAL R	RN72K2B-120JE2	1	435111204R1	NSP
R7751	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
[Switches, Terminals, Wires]					
F5401A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F5401B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F5411A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F5411B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
P190	PRINTED WIRING BOARD	BCDIS-2075	{1}	25142075	NSP
P190	PRINTED WIRING BOARD	BCETC-2123	{1}	25142123	N NSP
P190	PRINTED WIRING BOARD	BCETC-2124	{1}	25142124	N NSP
P190	PRINTED WIRING BOARD	BCSW-2126	{1}	25142126	N NSP
P190	PRINTED WIRING BOARD	BCSW-2127	{1}	25142127	N NSP
P190	PRINTED WIRING BOARD	BCSW-2128	{1}	25142128	N NSP
P190	PRINTED WIRING BOARD	BCETC-2129	{1}	25142129	N NSP
P190	PRINTED WIRING BOARD	BCETC-2130	{1}	25142130	N NSP
P190	PRINTED WIRING BOARD	BCETC-2131	{1}	25142131	N NSP

P190	PRINTED WIRING BOARD	BCETC-2132	{1}	25142132	N	NSP
P190	PRINTED WIRING BOARD	BCPS-2133	{1}	25142133	N	NSP
P190	PRINTED WIRING BOARD	BCETC-2134	{1}	25142134	N	NSP
P190	PRINTED WIRING BOARD	BCETC-2136	{1}	25142136	N	NSP
P190	PRINTED WIRING BOARD	BCETC-2141	{1}	25142141	N	NSP
P190	PRINTED WIRING BOARD	BCETC-2143	{1}	25142143	N	NSP
P190	PRINTED WIRING BOARD	BCETC-2155	{1}	25142155	N	NSP
P5401	WIRE HARNESS ASSEMBLY	ADX7513-A	1	2009991520UL		NSP
P5402	PLUG	NPLG-2P631	1	25055675		NSP
P5451A	WIRE HARNESS ASSEMBLY	ADX7812-A	1	2009991534UL		NSP
P5452	TRM(SCREW)	TER21-0130V	1	25060533		NSP
P5453	TRM(SCREW)	TER21-0130V	1	25060533		NSP
P5454	TRM(EARTH)	TP00940-21	1	25065732T		NSP
P5455	TRM(EARTH)	TP00940-21	1	25065732T		NSP
P5701	TERMINAL	NTM-1P233(M1969)	1	25060302		NSP
P5701A	SOCKET	NSCT-13P2143	1	25052246	N	NSP
P5702	ST JACK	MSJ-035-12APCAG	1	25046035		
P5720	ST JACK	MSJ-064-05A SR	1	25045783		
P5721	TRM (SCREW)	TP00370-21	1	25065668T		NSP
P5901	WS CLAMP	CB-71683(L=50)	1	260261		NSP
P7552A	WIRE HARNESS ASSEMBLY	NSAS-10P2458	1	2009991594UL	N	NSP
P7602A	SOCKET	9615S-35C-PP	1	25053323		NSP
P7603	WIRE HARNESS ASSEMBLY	NSAS-3P2095	1	2009991284UL		NSP
P7603A	WIRE HOL	CHD-1.5-3	1	25053535	N	NSP
P7603B	PLUG	NPLG-3P131	1	25055147		NSP
P7604A	SOCKET	NSCT-5P2396	1	25052499		NSP
P7605	WIRE HARNESS ASSEMBLY	NSAS-7P2125	1	2009991314UL		NSP
P7605A	WIRE HOL	CHD-1.5-7	1	25053537	N	NSP
P7605B	PLUG	NPLG-7P135	1	25055151		NSP
P7610	WIRE HARNESS ASSEMBLY	NSAS-5P2109	1	2009991298UL		NSP
P7610A	WIRE HOL	CHD-1.5-5	1	25053536	N	NSP
P7610B	PLUG	NPLG-5P352	1	25055369		NSP
P7620	WIRE HARNESS ASSEMBLY	NSAS-7P2125	1	2009991314UL		NSP
P7620A	WIRE HOL	CHD-1.5-7	1	25053537	N	NSP
P7620B	PLUG	NPLG-7P354	1	25055371		NSP
P7630	WIRE HARNESS ASSEMBLY	NSAS-5P2109	1	2009991298UL		NSP
P7630A	WIRE HOL	CHD-1.5-5	1	25053536		NSP
P7630B	PLUG	NPLG-5P133	1	25055149		NSP
P7653A	SOCKET	NSCT-11P2429	1	25052532		NSP
P7653B	SOCKET	NSCT-11P2429	1	25052532		NSP
P7654	WIRE HARNESS ASSEMBLY	NSAS-3P2093	1	2009991282UL		NSP
P7654A	WIRE HOL	CHD-1.5-3	1	25053535	N	NSP
P7654B	PLUG	NPLG-3P131	1	25055147		NSP
RL5401	RELAY	NRL-1P10A-DC5-207	1	25065731		
S7601	PUSH SWITCH	NPS-111-S681	1	25035718T		NSP
S7602	PUSH SWITCH	NPS-111-S681	1	25035718T		NSP
S7603	PUSH SWITCH	NPS-111-S681	1	25035718T		NSP
S7604	PUSH SWITCH	NPS-111-S681	1	25035718T		NSP
S7605	PUSH SWITCH	NPS-111-S681	1	25035718T		NSP
S7606	PUSH SWITCH	NPS-111-S681	1	25035718T		NSP
S7607	PUSH SWITCH	NPS-111-S681	1	25035718T		NSP
S7608	PUSH SWITCH	NPS-111-S681	1	25035718T		NSP
S7609	PUSH SWITCH	NPS-111-S681	1	25035718T		NSP
S7610	PUSH SWITCH	NPS-111-S681	1	25035718T		NSP
S7611	PUSH SWITCH	NPS-111-S681	1	25035718T		NSP

S7612	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7613	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7614	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7615	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7616	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7617	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7618	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7619	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7620	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7621	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7622	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7623	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7624	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7625	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7626	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7627	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7628	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7629	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7630	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7631	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7632	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7634	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7635	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7636	PUSH SWITCH	NPS-111-S681	1	25035718T	NSP
S7740	ROTARY ENCODER	XREB125(9X11.5)PVB30FINB1	1	25065737	N
S7770	ROTARY ENCODER	EC12E2425WITH WASHER	1	25065655W	
S7774	ROTARY ENCODER	XREB125(9X11.5)PVB30FINB1	1	25065737	N

BAHDM-2087-1A

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
 2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
- Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D5561	ZENER DIODE	DZ2J056M0L	1	224760560R2	NSP
Q5501	HYBRID IC	PCA9517DGKR	1	22243011R2	NSP
Q5562	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q5581	HYBRID IC	BD9329EFJ	1	22242985R2	NSP
[Transformers, Coils]					
L5581	CORE	BKP2125HS101-T	1	2350048R1	NSP
L5582	CORE	BKP2125HS101-T	1	2350048R1	NSP
L5583	CHOKE COIL	#B966AS-100M	1	231493M100R2	NSP
[Capacitors]					
C5501	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J0	1	342033314R1	NSP
C5516	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C5517	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C5518	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J1	1	342103314R1	NSP

C5527	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J0	1	342033314R1	NSP
C5529	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J0	1	342033314R1	NSP
C5581	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C5582	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	NSP
C5583	ELECTROLYTIC CAPACITOR	CE04W16V-56M(LXY)	1	3500244T	NSP
C5584	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C5585	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-390J1	1	342103904R1	NSP
C5588	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C5589	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C5590	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C5590or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C5591	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C5593	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C5594	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C5597	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-222J1	1	342102224R1	NSP
[Resistors]					
R5503	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R5504	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
R5506	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R5507	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5512	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
R5513	C-METAL R	RN72K1J-105JE0	1	435011054R1	NSP
R5566	C-METAL R	RN72K1J-100JE0	1	435011004R1	NSP
R5567	C-METAL R	RN72K1J-152JE0	1	435011524R1	NSP
R5568	C-METAL R	RN72K1J-222JE0	1	435012224R1	NSP
R5569	C-METAL R	RN72K1J-104JE0	1	435011044R1	NSP
R5570	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R5581	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R5582	C-METAL R	RN72K1J-822FE0	1	435018222R1	NSP
R5583	C-METAL R	RN72K1J-221FE0	1	435012212R1	NSP
R5584	C-METAL R	RN72K1J-182FE0	1	435011822R1	NSP
R5589	CHIP TYPE CARBON RESISTOR	RN72K1J-113JE	1	435031134R1	NSP
R5591	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R5592	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5593	C-METAL R	RN72K1J-102JE0	1	435011024R1	NSP
[Switches, Terminals, Wires]					
P2003C	PLUG	IMSA-9111B-28	1	25056742	NSP
P2004C	PLUG	IMSA-9111B-24	1	25056625	NSP
P210	PRINTED WIRING BOARD	BCHDM-2087	{1}	25142087	NSP
P210	PRINTED WIRING BOARD	BCHDM-2087	1	25142087A	N NSP
P210	PRINTED WIRING BOARD	BCETC-2230	{1}	25142230	N NSP
P3652B	PLUG	NPLG-3P916	1	25055963R2	NSP
P5501	SOCKET	HD043-F19G1BY-A	1	25053585R3	NSP
P5503	TRM(EARTH)	TP00940-21	1	25065732T	NSP
P5506	TRM(EARTH)	TP00940-21	1	25065732T	NSP
P5508	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P5509	TERMINAL	NTM-1P233(M1969)	1	25060302	NSP
P5581A	WIRE HARNESS ASSEMBLY	NSAS-4P2415	1	2009991551UL	NSP
P591C	PLUG	IMSA-9111B-24	1	25056625	NSP
P592C	PLUG	IMSA-9111B-28	1	25056742	NSP
P7604B	SOCKET	NSCT-5P2468	1	25052571R2	NSP
P8601B	SOCKET	TCX3255-611187	1	25053413R3	NSP

BAPRC-2072-1J

<Note>

1. Parts marked by "NSP" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D1001	DIODE	CUS357	1	223320R2	NSP
D1601	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D1602	ESD	IMSA-6802-01Y901_1608SIZE	1	4000255AR1	NSP
D3000	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3001	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3002	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3003	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3004	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3005	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3006	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D3007	CHIP TYPE DIODE	DA2J10100	1	223303R2	NSP
D8301	ZENER DIODE	DZ2J036M0L	1	224760360R2	NSP
D8902	DIODE	RBR3MM30ATR	1	22380401R2	NSP
D8903	DIODE	RBR3MM30ATR	1	22380401R2	NSP
Q1001	HYBRID IC	S-1333A33-M5T1U3	1	22242934R2	NSP
Q1002	HYBRID IC	S-1333A33-M5T1U3	1	22242934R2	NSP
Q1003	HYBRID IC	PCM9211PTR	1	22242703R2	NSP
Q1005	HYBRID IC	PCM9211PTR	1	22242703R2	NSP
Q1007	HYBRID IC	74VHC4040FT	1	22274040E1R2TO	NSP
Q1008	HYBRID IC	TC7WH241FU(TE12L_F)	1	22242076R2TO	NSP
Q1090	HYBRID IC	MM3464A50NRE	1	22243073R2	NSP
Q1092	HYBRID IC	74VHC157FT	1	22274157ER2TO	NSP
Q1097	HYBRID IC	74VHC541FT	1	22274541E1R2TO	NSP
Q1099	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1102	HYBRID IC	74VHC157FT	1	22274157ER2TO	NSP
Q1103	HYBRID IC	74VHC157FT	1	22274157ER2TO	NSP
Q1301	HYBRID IC	D808K013DPTP456	1	22243009R3	NSP
Q1302	HYBRID IC	S-13A1A13-U5T1U3	1	22242848R2	NSP
Q1305	HYBRID IC	M12L64164A-5TG2Y	1	22243019R3	NSP
Q1306	HYBRID IC	EN25QH16-104HIP	1	222W0130R2	NSP
Q1306or	HYBRID IC	EN25QH16A-104HIP	(1)	222W0130AR2	NSP
Q1307	HYBRID IC	S-13A1A33-U5T1U3	1	22242844R2	NSP
Q1308	HYBRID IC	TC7MBL3245SFT	1	22242539R2TO	NSP
Q1309	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP
Q1310	TRANSISTOR	KRC104S	1	2216210R2	NSP
Q1601	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1602	HYBRID IC	M95640-WMN6TP	1	22242643R2	NSP
Q1603	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1604	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1605	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1606	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1607	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1608	TRANSISTOR	KRC404E	1	2216450R2	NSP

Q1609	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1610	HYBRID IC	MPD70F3477AGJA-GAE-G	1	222W0117R3	NSP
Q1611	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1612	HYBRID IC	TC7WBL3305CFK	1	22242965R2	NSP
Q1613	HYBRID IC	BU7262SFVM	1	22242983R2	NSP
Q1614	TRANSISTOR	2SC2712-GR	1	2213145R2	NSP
Q1615	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1616	HYBRID IC	PST894A270UR	1	22243198R2	NSP
Q1617	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1618	HYBRID IC	74VHCT08AFT	1	22274008G1R2TO	NSP
Q1619	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1620	HYBRID IC	74VHCT541AFT	1	22274541GR2TO	NSP
Q1621	HYBRID IC	ICL3221ECVZ	1	22242268R2	NSP
Q1622	HYBRID IC	TC7WH241FU(TE12L_F)	1	22242076R2TO	NSP
Q1623	HYBRID IC	74VHC541FT	1	22274541E1R2TO	NSP
Q1624	HYBRID IC	BU2090F-E2	1	22242686R2	NSP
Q1625	HYBRID IC	S-80848CNMC-B89T2G	1	22243004R2	NSP
Q1626	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1627	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1628	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1629	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q1630	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q1631	TRANSISTOR	KRC404E	1	2216450R2	NSP
Q3001	HYBRID IC	AM3354BZCZ80	1	22243021R3	NSP
Q3002	HYBRID IC	TC58NVG1S3HTA00B4H	1	222W0155R3	NSP
Q3003	HYBRID IC	NT5CC128M16IP-DI	1	22243076R3	NSP
Q3006	HYBRID IC	PST894A160UR	1	22243226R2	NSP
Q3007	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q3041	HYBRID IC	W25Q32FVSSIG	1	222W0135R2	NSP
Q3044	HYBRID IC	ADSP-21489KSWZ-4B	1	22242846R3	NSP
Q3046	HYBRID IC	A3V56S40GTP-50	1	22243236R2	N NSP
Q3048	HYBRID IC	TC7MBL3245SFT	1	22242539R2TO	NSP
Q3050	TRANSISTOR	KRC104S	1	2216210R2	NSP
Q3120	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP
Q3121	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP
Q3201	HYBRID IC	MFI337S3959	1	22242820R2	NSP
Q3401	HYBRID IC	W25Q32FVSSIG	1	222W0135R2	NSP
Q3403	HYBRID IC	TC7WHU04FU(TE12L)	1	22242231R2	NSP
Q3404	HYBRID IC	ADSP-21489KSWZ-4B	1	22242846R3	NSP
Q3406	HYBRID IC	A3V56S40GTP-50	1	22243236R2	N NSP
Q3408	HYBRID IC	TC7MBL3245SFT	1	22242539R2TO	NSP
Q3410	TRANSISTOR	KRC104S	1	2216210R2	NSP
Q3601	HYBRID IC	FP6861C-B1AS5CT	1	22242840R2	NSP
Q3651	HYBRID IC	KSZ8091RNB	1	22243023R2	NSP
Q3652	HYBRID IC	SN74AUP1T17DCKR	1	222740170R2	NSP
Q3653	HYBRID IC	SN74AUP1T17DCKR	1	222740170R2	NSP
Q3654	HYBRID IC	TC74VCX125FT	1	22274125DR2TO	NSP
Q3667	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q3901	HYBRID IC	TPS65910A31A1RSLR	1	22243022R2	NSP
Q7017	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q7018	HYBRID IC	S-1333A33-M5T1U3	1	22242934R2	NSP
Q8000	HYBRID IC	MN864788	1	22242929R3	NSP
Q8001	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8002	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8003	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP

Q8006	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8007	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8008	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8009	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8010	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8011	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8114	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP
Q8202	HYBRID IC	ADV7180KCP32Z-RL	1	22242763R2	NSP
Q8202or	HYBRID IC	ADV7180KCP32Z	(1)	22242763R3	NSP
Q8203	HYBRID IC	MM3411A18URE	1	22243075R2	NSP
Q8205	HYBRID IC	MM3411A18URE	1	22243075R2	NSP
Q8300	HYBRID IC	S-13A1A13-U5T1U3	1	22242848R2	NSP
Q8302	HYBRID IC	SII9573CTUC	1	22242762R3	NSP
Q8303	TRANSISTOR	2SA1162-GR	1	2214375R2	NSP
Q8307	HYBRID IC	MM3411A13URE	1	22243074R2	NSP
Q8401	HYBRID IC	MN864787	1	22242944R3	NSP
Q8402	HYBRID IC	MX25L6433FM2I-08G	1	222W0156R2	NSP
Q8402or	HYBRID IC	IS25LP064A-JBLE	(1)	222W0160R2	NSP
Q8701	HYBRID IC	TMPM361F10FG	1	222W0115R3	NSP
Q8702	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8703	TRANSISTOR	RE1C001UNTCL	1	2218160R2	NSP
Q8704	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q8705	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8706	HYBRID IC	74LCX125FT	1	22274125BR2TO	NSP
Q8707	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q8708	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8709	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8710	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8711	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q8712	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8713	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8714	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8715	TRANSISTOR	KRA302E	1	2218360R2	NSP
Q8716	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8725	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8727	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8729	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8730	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8731	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8732	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8733	TRANSISTOR	KRC402E	1	2218330R2	NSP
Q8901	HYBRID IC	MM3464A50NRE	1	22243073R2	NSP
Q8902	HYBRID IC	TPS65251RHAR	1	22243010R2	NSP
Q8903	HYBRID IC	S-13A1A11-U5T1U3	1	22242847R2	NSP
Q8904	HYBRID IC	S-13A1A11-U5T1U3	1	22242847R2	NSP
Q8905	HYBRID IC	S-13A1A33-U5T1U3	1	22242844R2	NSP
Q8921	HYBRID IC	FR9888CSPCTR	1	22242839R2	NSP
Q8965	HYBRID IC	MM3464A50NRE	1	22243073R2	NSP
X1001	CRYSTAL	NZ2520SD(22.5792MHz)	1	3010548R2	NSP
X1002	CRYSTAL	NZ2520SD(24.576MHz)	1	3010542R2	NSP
X1301	CRYSTAL	HC-49S 9C24.0000M	1	3010515R2	NSP
X1601	CRYSTAL	CSTCR4M00G53-R0	1	3010536R2	NSP
X3001	CRYSTAL	HC-49S 9C24.0000M	1	3010515R2	NSP
X3002	CRYSTAL	FC-135 -32.768K	1	3010532R2	NSP
X3401	CRYSTAL	HC-49S 9C25.0000M	1	3010517R2	NSP

X3651	CRYSTAL	HC-49S 9C25.0000M	1	3010517R2	NSP
X8031	CRYSTAL	HC-49S 9C27.0000M	1	3010518R2	NSP
X8201	CRYSTAL	HC-49S 9C28.6363M	1	3010519R2	NSP
X8301	CRYSTAL	HC-49S 9C27.0000M	1	3010518R2	NSP
X8400	CRYSTAL	HC-49S 9C27.0000M	1	3010518R2	NSP
X8701	CERAMIC RESONATOR	CSTCE8M00G55-R0	1	3010416R2	NSP
[Transformers, Coils]					
L1001	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1002	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1003	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1004	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1005	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1006	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1007	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1008	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L1009	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L1010	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1011	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L1012	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L1013	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L1014	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1015	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1016	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L1017	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1021	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1022	CHOKE COIL	LBC2518T4R7M	1	231364M047R2	NSP
L1024	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1027	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1029	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L1303	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L1304	CORE	BLM18PG181SN1D	1	2350005R1	NSP
L1305	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L1306	CORE	BLM18PG181SN1D	1	2350005R1	NSP
L1307	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1309	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L1601	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1602	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1603	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L1604	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L3001	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3042	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L3043	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L3045	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3046	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3047	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3048	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3049	CORE	BLM18PG181SN1D	1	2350005R1	NSP
L3121	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L3122	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L3201	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L3202	CORE	BK1005LL241-T	1	2350032R1	NSP
L3401	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3402	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L3403	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L3405	CORE	BLM18PG121SN1D	1	2350006R1	NSP

L3406	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3407	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3408	CORE	BLM18PG121SN1D	1	2350006R1	NSP
L3409	CORE	BLM18PG181SN1D	1	2350005R1	NSP
L3601	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3602	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L3611	CORE	MCF12102G900-T	1	2350041R2	NSP
L3613	CORE	MCF20104G900-T	1	2350040R2	NSP
L3651	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3652	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3655	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3656	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3661	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3901	CHOKE COIL	NRS4018T2R2MDGJ	1	231494R2	NSP
L3902	CHOKE COIL	NRS4018T2R2MDGJ	1	231494R2	NSP
L3903	CHOKE COIL	NRS4018T2R2MDGJ	1	231494R2	NSP
L3904	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3905	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3906	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3907	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3909	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3910	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L3911	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8000	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8001	CORE	EXC24CH900U	1	2350039R2	NSP
L8002	CORE	EXC24CH900U	1	2350039R2	NSP
L8003	CORE	EXC24CH900U	1	2350039R2	NSP
L8004	CORE	EXC24CH900U	1	2350039R2	NSP
L8005	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8006	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8007	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8008	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8009	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8010	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8011	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8012	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8013	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8014	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8015	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8016	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8017	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8018	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8021	CORE	EXC24CH900U	1	2350039R2	NSP
L8022	CORE	EXC24CH900U	1	2350039R2	NSP
L8023	CORE	EXC24CH900U	1	2350039R2	NSP
L8024	CORE	EXC24CH900U	1	2350039R2	NSP
L8202	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8205	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8207	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8210	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8300	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8302	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8303	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8304	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8305	CORE	BLM15PX181SN1D	1	2350033R1	NSP

L8306	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8307	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8308	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8400	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8401	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8402	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8403	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8404	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8405	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8406	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8407	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8408	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8409	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8410	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8411	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8412	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8413	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8415	CORE	BLM15PX121SN1D	1	2350034R1	NSP
L8416	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
L8417	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8418	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8702	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8703	CORE	BLM15PX181SN1D	1	2350033R1	NSP
L8901	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8902	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8903	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8904	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8905	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8906	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8909	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8910	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8911	CORE	BKP2125HS101-T	1	2350048R1	NSP
L8921	CHOKE COIL	BLM21PG221SN1	1	230949R2	NSP
L8925	COIL	ATH7108-A-TFB	1	231509R2	NSP
L8926	COIL	ATH7110-A-TFB	1	231511R2	NSP
L8927	COIL	ATH7109-A-TFB	1	231510R2	NSP
L8928	COIL	ATH7109-A-TFB	1	231510R2	NSP
[Capacitors]					
C1000	CHIP ELECT C	CECS4V-220M	1	3986G2217R2	NSP
C1001	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1002	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1005	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1006	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C1011	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1014	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1015	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1018	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1019	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1020	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C1021	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-472K0	1	332034725R1	NSP
C1022	CHIP ELECT C	CE32W16V-47M(EC-PC)	1	3500238R2	NSP
C1023	CHIP ELECT C	CECS16V-100M	1	398641017R2	NSP
C1025	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K0	1	332032235R1	NSP
C1026	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-473K0	1	332024735R1	NSP
C1027	CHIP ELECT C	CECS4V-220M	1	3986G2217R2	NSP

C1033	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1037	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1040	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-472K0	1	332034725R1	NSP
C1041	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1042	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1044	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1062	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K0	1	332032235R1	NSP
C1063	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-473K0	1	332024735R1	NSP
C1068	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1069	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1071	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1072	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1073	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1074	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1075	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1091	CHIP TYPE CERAMIC CAPACITOR	CK725B0J-226M	1	332092267R2	NSP
C1092	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1093	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1094	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1095	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1106	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1112	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1113	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1119	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1121	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C1301	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1302	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1303	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1304	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1305	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1306	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1307	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1308	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C1309	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1310	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1311	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1312	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C1313	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1314	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1315	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1316	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1317	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1318	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1319	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C1320	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1321	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1322	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1323	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1324	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1325	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1326	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1327	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1328	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1329	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C1330	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP

C1331	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1332	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1333	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1334	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1335	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1336	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1337	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1338	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1339	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C1340	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1341	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1343	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1344	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1345	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1346	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1347	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1350	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C1351	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1352	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C1353	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-180J0	1	342031804R1	NSP
C1354	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1355	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1356	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1357	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1358	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1359	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1360	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1366	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1367	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1368	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C1369	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1370	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1371	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1372	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1373	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1374	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1375	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1376	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1377	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1378	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1379	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C1380	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1381	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1382	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C1383	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C1384	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1385	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1386	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C1389	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-182J	1	373041824R2	NSP
C1389or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-182J	(1)	376641824R2	N NSP
C1390	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-222J	1	373042224R2	NSP
C1390or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-222J	(1)	376642224R2	N NSP
C1391	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C1391or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C1601	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP

C1602	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1603	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1604	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1605	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1606	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1607	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1608	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1609	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1610	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1611	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1612	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1613	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1614	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1615	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1616	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1617	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1618	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1619	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1620	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-475K1	1	332134755R1	NSP
C1621	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1623	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1624	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1626	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1627	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1628	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1629	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1630	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C1631	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-470J0	1	342034704R1	NSP
C1632	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-470J0	1	342034704R1	NSP
C1633	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1635	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1636	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1637	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1638	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1641	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1642	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1643	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1644	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C1645	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C1646	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1647	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1648	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-153K0	1	332021535R1	NSP
C1649	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP
C1650	CHIP ELECT C	CECS4V-220M	1	3986G2217R2	NSP
C1651	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C1652	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C1653	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C1655	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1656	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1657	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1658	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C1659	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1660	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-224K	1	332242245R1	NSP
C1661	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C1662	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP

[illegible]

C3056	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3057	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3058	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3059	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3063	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3064	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3065	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3068	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3069	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3070	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3073	CHIP ELECT C	CECS6.3V-22M	1	398622207R2	NSP
C3074	CHIP ELECT C	CECS16V-100M	1	398641017R2	NSP
C3076	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3077	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3080	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3081	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3082	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3083	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3084	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3085	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3086	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3087	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3088	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3089	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3090	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3091	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3092	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3093	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3094	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3095	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3096	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3097	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3098	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3099	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3100	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3101	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3102	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3103	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3104	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3105	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3106	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3107	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3108	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3109	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3110	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3111	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3112	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3113	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3114	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3115	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3116	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3117	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3118	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3119	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C3119or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP

C3130	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3131	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3201	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3202	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3218	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3219	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3387	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3388	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3389	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3390	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3391	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3392	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3393	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3394	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3395	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3396	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3397	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3398	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3399	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3400	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3401	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3402	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3403	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3404	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3405	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3406	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3407	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3408	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3409	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3410	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3411	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3412	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3413	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C3414	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C3415	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J0	1	342033314R1	NSP
C3416	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3417	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3418	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3419	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3420	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3421	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3422	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3423	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3424	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C3425	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3426	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C3427	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3428	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3429	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3430	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C3430or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C3431	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3432	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3433	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3434	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP

C3435	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3436	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3437	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3438	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3439	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3440	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3441	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3442	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3443	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3444	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3445	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3446	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3447	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3448	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3449	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3450	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3457	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3458	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3459	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3460	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3461	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3462	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3466	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3471	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3472	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3473	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C3601	CHIP TYPE CERAMIC CAPACITOR	CK725B0J-226M	1	332092267R2	NSP
C3602	CHIP TYPE CERAMIC CAPACITOR	CK725B0J-226M	1	332092267R2	NSP
C3603	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3608	CAPACITOR	NOSC107M006R0150	1	3000133R2	NSP
C3610	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100J0	1	342031004R1	NSP
C3651	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J0	1	342033304R1	NSP
C3652	CHIP TYPE CERAMIC CAPACITOR	CK725B0J-226M	1	332092267R2	NSP
C3654	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3655	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3656	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3657	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3658	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J	1	3400042R1	NSP
C3659	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3661	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C3662	CHIP TYPE CERAMIC CAPACITOR	CK725B0J-226M	1	332092267R2	NSP
C3663	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3666	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C3667	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-180J0	1	342031804R1	NSP
C3668	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3669	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3670	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3674	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C3684	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3685	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3686	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C3687	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3689	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K0	1	332032235R1	NSP
C3690	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C3691	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-220J0	1	342032204R1	NSP

C3800	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3801	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3802	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3803	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3804	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3805	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3806	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3807	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3808	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C3809	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C3809or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C3810	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J1	1	342102214R1	NSP
C3811	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C3901	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-475K1	1	332134755R1	NSP
C3902	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3903	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3904	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3905	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-475K1	1	332134755R1	NSP
C3906	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3907	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3908	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3909	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3910	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3911	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3912	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-475K1	1	332134755R1	NSP
C3913	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-475K1	1	332134755R1	NSP
C3914	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3915	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3916	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3917	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3918	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3919	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-475K1	1	332134755R1	NSP
C3920	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3921	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-225K1	1	332132255R1	NSP
C3922	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3923	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3924	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3925	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3926	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J0	1	342034714R1	NSP
C3927	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C3928	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3929	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3930	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3931	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3932	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3933	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3934	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3935	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3936	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3937	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3938	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3939	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C3940	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3941	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C3942	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP

[illegible]

C3998	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C3999	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C7038	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C7039	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8000	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8001	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8004	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8005	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8007	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8008	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8009	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8010	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8012	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8013	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8014	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8015	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8016	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8017	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8018	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8020	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C8020or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C8021	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8022	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8023	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8024	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8025	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8027	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8028	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8030	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8031	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8032	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8033	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8034	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8035	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8036	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8037	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8038	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8039	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8040	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8041	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8042	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8043	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8044	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8045	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8046	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8047	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8048	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8051	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8052	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8053	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8054	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8055	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8056	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8057	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8060	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP

C8061	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8063	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8064	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8071	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8072	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8073	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8074	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8075	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8077	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8078	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8079	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8091	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8092	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8094	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C8095	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100J0	1	342031004R1	NSP
C8096	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-120J0	1	342031204R1	NSP
C8113	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8206	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8207	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8208	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8210	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8211	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8219	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8220	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8221	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8222	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8223	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8224	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8225	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8229	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8230	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8231	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8232	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8236	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C8237	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-120J0	1	342031204R1	NSP
C8239	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8240	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-683K0	1	332016835R1	NSP
C8241	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-153K0	1	332021535R1	NSP
C8255	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8257	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8260	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8261	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8301	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8303	CHIP TYPE CERAMIC CAPACITOR	CK725B0J-226M	1	332092267R2	NSP
C8304	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-220J0	1	342032204R1	NSP
C8305	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C8306	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8307	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C8308	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8309	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8310	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8311	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8312	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8313	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8314	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP

C8315	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C8316	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8317	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8318	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8319	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8320	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8321	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-090D0	1	342030902R1	NSP
C8322	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C8323	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8324	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8325	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-090D0	1	342030902R1	NSP
C8326	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8327	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J0	1	342034714R1	NSP
C8328	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8329	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8330	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8331	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8332	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8333	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8334	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8335	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J0	1	342034714R1	NSP
C8336	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8338	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8339	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8340	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8341	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C8342	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8343	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8344	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8345	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8349	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8353	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8354	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8356	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8358	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8359	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8360	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8361	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-102K0	1	332031025R1	NSP
C8362	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8363	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-470J0	1	342034704R1	NSP
C8365	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8366	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8367	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8368	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8369	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8384	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8388	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-221J0	1	342032214R1	NSP
C8401	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8402	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8403	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8404	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J0	1	342034714R1	NSP
C8405	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8406	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8407	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8408	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP

C8409	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8410	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8411	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8412	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8413	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8414	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8415	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8416	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8417	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8418	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8419	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8420	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8421	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8422	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8423	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8424	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8425	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8426	CHIP TYPE PLASTIC FILM CAPACITOR	50MU103KY11608	1	376921035R2	NSP
C8427	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8428	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8430	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8431	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8432	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8433	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8434	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8435	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8436	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8437	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8438	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8439	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8440	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8441	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8442	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8443	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8444	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8445	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8449	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8450	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8451	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8452	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8453	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8454	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8455	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8456	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8457	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8460	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-120J0	1	342031204R1	NSP
C8461	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-150J0	1	342031504R1	NSP
C8463	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J0	1	342031014R1	NSP
C8468	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-220J0	1	342032204R1	NSP
C8470	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8472	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8473	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8474	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8475	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8476	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP

C8477	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8478	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8483	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8484	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8485	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8486	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8487	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8488	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C8488or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C8489	CAPACITOR	NOJA226M006R	1	3000131R2	NSP
C8489or	CAPACITOR	NMCA0J226MTRF	(1)	3000136R2	N NSP
C8611	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8612	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8621	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8622	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8631	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8632	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8661	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8662	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
C8700	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8701	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8702	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8703	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8704	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8705	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8706	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8707	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8709	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8710	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8713	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8890	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8891	CHIP TYPE CERAMIC CAPACITOR	CK725B0J-226M	1	332092267R2	NSP
C8901	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8905	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C8906	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-680J0	1	342036804R1	NSP
C8907	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-473K1	1	332104735R1	NSP
C8908	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-473K1	1	332104735R1	NSP
C8909	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-473K1	1	332104735R1	NSP
C8910	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8911	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8912	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-040C0	1	342030401R1	NSP
C8913	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-050C0	1	342030501R1	NSP
C8921	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8922	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K0	1	332011045R1	NSP
C8923	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-106K	1	332221065R2	NSP
C8924	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-106K	1	332221065R2	NSP
C8925	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8927	CHIP TYPE CERAMIC CAPACITOR	CK725B0J-226M	1	332092267R2	NSP
C8931	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J0	1	342033304R1	NSP
C8932	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-270J0	1	342032704R1	NSP
C8936	SMG C	CE04W16V-1000M(SMG)	1	395041027S	NSP
C8937	SMG C	CE04W16V-1000M(SMG)	1	395041027S	NSP
C8939	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8940	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K0	1	332032235R1	NSP
C8941	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-473K0	1	332024735R1	NSP

C8942	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K0	1	332031035R1	NSP
C8943	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-102J1	1	342101024R1	NSP
C8945	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D0	1	342031002R1	NSP
C8946	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D0	1	342031002R1	NSP
C8947	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8949	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8950	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8952	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
C8959	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-222J1	1	342102224R1	NSP
C8960	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-222J1	1	342102224R1	NSP
C8961	CHIP TYPE CERAMIC CAPACITOR	CK725B1E-106K	1	332221065R2	NSP
C8962	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8963	CHIP ELECT C	CECS4V-220M	1	3986G2217R2	NSP
C8964	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8965	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8970	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J0	1	342033304R1	NSP
C8971	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C8972	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C8973	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C8975	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C8976	CHIP TYPE CERAMIC CAPACITOR	GMK316BJ106KLMB	1	3300079R1	NSP
C8979	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J	1	3400035R1	NSP
C8981	CHIP TYPE PLASTIC FILM CAPACITOR	35MU104KZ22012	1	3769A1045R2	NSP
C8983	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J	1	3400035R1	NSP
C8984	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-470J0	1	342034704R1	NSP
C8989	CHIP TYPE PLASTIC FILM CAPACITOR	ECHU16V-101J	1	373041014R2	NSP
C8989or	CHIP TYPE PLASTIC FILM CAPACITOR	ECHUX16V-101J	(1)	376641014R2	N NSP
C8991	CHIP TYPE CERAMIC CAPACITOR	CK725B1A-105K0	1	332001055R1	NSP
C8994	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8995	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
C8996	CHIP TYPE CERAMIC CAPACITOR	CK725B0J-226M	1	332092267R2	NSP
C8997	CHIP ELECT C	CECS16V-100M	1	398641017R2	NSP
C8999	CHIP ELECT C	CE32W4V-150M(CS)	1	3500253R2	NSP
[Resistors]					
R1001	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1002	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1003	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1006	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R1007	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1008	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1010	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1011	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1012	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1013	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1014	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1015	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1016	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1017	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1019	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1020	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1021	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1022	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1023	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1024	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1025	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP

R1026	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1029	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1031	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1032	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1034	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1035	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1037	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1039	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R1041	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1042	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1043	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1044	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1046	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1047	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R1049	CHIP RESISTOR NETWORK	YCN104-103-JK	1	43464C10304R1	NSP
R1050	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1051	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1052	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1053	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1054	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1059	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1060	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1061	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1062	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1063	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1064	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1066	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1067	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1069	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1070	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1071	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1072	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1073	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1074	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1075	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1076	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1077	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1081	CHIP TYPE CARBON RESISTOR	RN72K1J-181JE	1	435031814R1	NSP
R1083	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1084	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1085	CHIP TYPE CARBON RESISTOR	RN72K1J-181JE	1	435031814R1	NSP
R1090	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1091	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1092	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1098	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1099	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1100	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1101	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1102	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1103	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1104	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1105	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R1106	CHIP TYPE CARBON RESISTOR	RN72K1J-151JE	1	435031514R1	NSP
R1107	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1108	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP

R1109	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1110	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1111	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1112	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1113	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1114	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1115	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1116	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1117	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1124	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1133	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1134	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1135	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1136	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1137	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1138	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1139	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1140	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1141	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1143	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1144	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1145	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1147	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1149	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1150	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1151	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1152	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1153	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R1154	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R1155	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1156	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1158	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1159	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1160	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1161	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1162	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1163	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1164	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1165	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1166	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1167	CHIP RESISTOR NETWORK	YCN104-470-JK	1	43464C47004R1	NSP
R1168	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1169	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1170	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1171	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1173	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1174	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1176	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1177	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1179	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1180	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1181	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1182	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1183	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1184	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP

R1186	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1187	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1188	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1189	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1190	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1208	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1210	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1211	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1211or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1212	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1213	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1214	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1218	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1220	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1222	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1224	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1301	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1302	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1303	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1304	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1305	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1306	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1307	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1308	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1309	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1310	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1311	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1312	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1313	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1314	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1316	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1317	CHIP RESISTOR NETWORK	RM7LJ330X04	1	43484733004R2	NSP
R1317or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R1318	CHIP RESISTOR NETWORK	RM7LJ330X04	1	43484733004R2	NSP
R1318or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R1319	CHIP RESISTOR NETWORK	RM7LJ330X04	1	43484733004R2	NSP
R1319or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R1320	CHIP RESISTOR NETWORK	RM7LJ330X04	1	43484733004R2	NSP
R1320or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R1321	CHIP RESISTOR NETWORK	RM7LJ330X04	1	43484733004R2	NSP
R1321or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R1322	CHIP RESISTOR NETWORK	RM7LJ330X04	1	43484733004R2	NSP
R1322or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R1323	CHIP RESISTOR NETWORK	RM7LJ330X04	1	43484733004R2	NSP
R1323or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R1324	CHIP RESISTOR NETWORK	RM7LJ330X04	1	43484733004R2	NSP
R1324or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R1325	CHIP RESISTOR NETWORK	RM7LJ330X04	1	43484733004R2	NSP
R1325or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R1326	CHIP RESISTOR NETWORK	RM7LJ330X04	1	43484733004R2	NSP
R1326or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R1328	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1329	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1330	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1333	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP

[illegible]

R1392	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1393	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1394	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1395	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1396	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1397	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1398	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1399	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1400	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1401	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1402	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1403	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1404	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1405	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1406	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1407	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1408	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1409	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1410	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1411	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1412	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1413	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1414	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1417	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R1417or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1418	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R1418or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1419	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1420	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1421	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1422	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1423	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R1424	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1425	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1426	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1429	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1430	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1431	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1432	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1433	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1434	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1435	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1445	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1447	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1448	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1453	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1454	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1455	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1456	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1601	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R1602	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1602or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1603	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1604	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1605	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP

R1606	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1607	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1608	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1609	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1610	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1611	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1612	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1613	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1614	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1615	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1616	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1617	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1618	CHIP RESISTOR NETWORK	MNR04MRAPJ472	1	43464747204R2	NSP
R1618or	CHIP RESISTOR NETWORK	YCN104-472-JK	(1)	43464C47204R1	NSP
R1619	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1620	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1620or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1621	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1622	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1622or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1623	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1624	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1625	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1626	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1627	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1628	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1629	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1629or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1630	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1631	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1631or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1632	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1632or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1633	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1634	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1635	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1636	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1637	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1638	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1639	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1640	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1640or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1642	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1644	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1646	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1647	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1648	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1649	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1650	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1651	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1652	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1653	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1654	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1657	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R1658	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP

R1659	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1659or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1661	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1662	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R1663	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1664	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1665	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1665or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1666	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1666or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1667	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1668	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1669	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R1670	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1671	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1671or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1672	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1673	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1674	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1675	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1675or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1676	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1677	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1677or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1678	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1679	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R1680	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1681	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1682	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R1683	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1684	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1685	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1686	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1687	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1688	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R1689	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R1690	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1690or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1691	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1692	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1693	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1693or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1694	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1694or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1695	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1696	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1697	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1698	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1699	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1700	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R1700or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R1701	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1702	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1703	CHIP RESISTOR NETWORK	MNR04MRAPJ103	1	43464710304R2	NSP
R1703or	CHIP RESISTOR NETWORK	YCN104-103-JK	(1)	43464C10304R1	NSP

R1704	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1705	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1706	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1707	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1708	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1709	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1710	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1711	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1712	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1716	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1717	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R1718	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R1718or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R1719	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1720	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R1721	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1722	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1723	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1724	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1725	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1727	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R1728	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1729	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1730	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1731	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1732	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R1733	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1734	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R1735	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1736	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1737	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R1738	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1739	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1740	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1741	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1742	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1743	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1744	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1745	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1746	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R1747	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1748	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1749	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1750	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1751	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1752	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1753	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R1754	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R1755	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R1756	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R1757	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1758	CHIP TYPE CARBON RESISTOR	RN72K1J-394JE	1	435033944R1	NSP
R1759	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R1760	CHIP TYPE CARBON RESISTOR	RN72K1J-154JE	1	435031544R1	NSP
R1761	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP

[illegible]

[illegible]

R3016	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3017	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3018	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3019	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3020	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3021	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3022	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3023	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3028	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3029	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3030	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R3031	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R3032	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3033	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3034	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3035	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3036	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3037	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3038	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3039	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3040	CHIP TYPE CARBON RESISTOR	MCR03EZPF49R9(49.9_1%)	1	4100037R2	NSP
R3041	CHIP TYPE CARBON RESISTOR	RN72K1J-271FE	1	435032712R1	NSP
R3042	CHIP TYPE CARBON RESISTOR	RN72K1J-222FE	1	435032222R1	NSP
R3043	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R3044	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R3045	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R3046	CHIP TYPE CARBON RESISTOR	RN72K1J-102FE	1	435031022R1	NSP
R3072	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R3073	CHIP TYPE CARBON RESISTOR	RN72K1J-682JE	1	435036824R1	NSP
R3074	CHIP TYPE CARBON RESISTOR	RN72K1J-393JE	1	435033934R1	NSP
R3075	CHIP TYPE CARBON RESISTOR	RN72K1J-393JE	1	435033934R1	NSP
R3077	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3078	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3079	CHIP TYPE CARBON RESISTOR	RN72K1J-475JE	1	435034754R1	NSP
R3080	CHIP TYPE CARBON RESISTOR	RN72K1J-475JE	1	435034754R1	NSP
R3081	CHIP RESISTOR NETWORK	YCN104-470-JK	1	43464C47004R1	NSP
R3082	CHIP RESISTOR NETWORK	YCN104-470-JK	1	43464C47004R1	NSP
R3083	CHIP RESISTOR NETWORK	YCN104-470-JK	1	43464C47004R1	NSP
R3100	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3101	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3102	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3103	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3104	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3105	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3106	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3107	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3108	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3109	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3111	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3112	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3113	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3114	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3115	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3115or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3116	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP

R3116or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3119	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3120	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R3121	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3122	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3123	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3124	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R3125	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R3126	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3127	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3128	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3129	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R3130	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3131	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3132	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3133	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3134	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3135	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3136	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3137	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3138	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R3139	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3140	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3141	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3142	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3143	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3144	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3145	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3145or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3146	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3146or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3149	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3150	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3152	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3153	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3153or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3154	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3154or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3155	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3155or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3156	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3156or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3157	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3158	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R3159	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3160	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3161	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3162	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3163	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3165	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3166	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3167	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3168	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3169	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3170	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP

[illegible]

R3297	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3298	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3299	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3300	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3301	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3302	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3303	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3305	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3307	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R3310	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R3311	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R3320	CHIP TYPE CARBON RESISTOR	RN72K1J-183JE	1	435031834R1	NSP
R3322	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3323	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3324	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3325	CHIP RESISTOR NETWORK	YCN104-470-JK	1	43464C47004R1	NSP
R3326	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3327	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3328	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3329	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3330	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3331	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3332	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3333	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3334	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3335	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3336	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3337	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3338	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3339	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3340	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3341	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3342	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3343	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3344	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3345	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3346	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3347	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3348	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3349	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3350	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3351	CHIP RESISTOR NETWORK	YCN104-103-JK	1	43464C10304R1	NSP
R3352	CHIP RESISTOR NETWORK	YCN104-103-JK	1	43464C10304R1	NSP
R3353	CHIP RESISTOR NETWORK	RM7LJ220X04	1	43484722004R2	NSP
R3353or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R3354	CHIP RESISTOR NETWORK	RM7LJ220X04	1	43484722004R2	NSP
R3354or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R3355	CHIP RESISTOR NETWORK	RM7LJ220X04	1	43484722004R2	NSP
R3355or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R3356	CHIP RESISTOR NETWORK	RM7LJ220X04	1	43484722004R2	NSP
R3356or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R3357	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3358	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3360	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3361	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP

R3366	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3367	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3369	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3373	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3376	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3398	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3399	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3400	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3401	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3402	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3403	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3404	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3405	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3406	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3407	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3408	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3409	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3410	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3413	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3414	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3416	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3417	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3418	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3419	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3420	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3421	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3424	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3425	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3429	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3429or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3430	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3430or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3433	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3435	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R3436	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3437	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3438	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3439	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R3440	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R3441	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3442	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R3443	CHIP TYPE CARBON RESISTOR	RN72K1J-821JE	1	435038214R1	NSP
R3444	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R3445	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3446	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3447	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3448	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3450	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R3452	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3453	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3455	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R3456	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3458	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3459	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3460	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP

R3467	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3469	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3476	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R3477	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3477or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3478	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3478or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3484	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3485	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3486	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R3488	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3494	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3494or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3495	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3495or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3496	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3496or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3497	CHIP RESISTOR NETWORK	RM7LJ470X04	1	43484747004R2	NSP
R3497or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R3498	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3499	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R3500	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3501	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3502	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3503	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3505	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3520	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3601	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3603	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3604	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R3605	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3607	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R3608	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R3652	CHIP TYPE CARBON RESISTOR	RN72K1J-750JE	1	435037504R1	NSP
R3653	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3654	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3657	CHIP TYPE CARBON RESISTOR	RN72K1J-151JE	1	435031514R1	NSP
R3658	CHIP TYPE CARBON RESISTOR	RN72K1J-391FE	1	435033912R1	NSP
R3659	CHIP TYPE CARBON RESISTOR	RN72K1J-222FE	1	435032222R1	NSP
R3660	CHIP TYPE CARBON RESISTOR	RN72K1J-392FE	1	435033922R1	NSP
R3661	CHIP TYPE CARBON RESISTOR	RN72K1J-750JE	1	435037504R1	NSP
R3662	CHIP TYPE CARBON RESISTOR	RN72K1J-750JE	1	435037504R1	NSP
R3663	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3664	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3666	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R3667	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R3668	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3669	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3670	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3671	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3674	CHIP TYPE CARBON RESISTOR	RN72K1J-224JE	1	435032244R1	NSP
R3675	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R3676	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R3678	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R3679	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP

[illegible]

R3911	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3912	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3915	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3916	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3917	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3918	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R3920	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8000	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8001	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8002	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8003	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8004	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8005	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8006	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8007	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8008	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8009	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8010	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R8011	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8012	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8013	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8014	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8015	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8016	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8017	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8018	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8019	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8020	CHIP RESISTOR NETWORK	MNR04MRAPJ222	1	43464722204R2	NSP
R8020or	CHIP RESISTOR NETWORK	YCN104-222-JK	(1)	43464C22204R1	NSP
R8021	CHIP TYPE CARBON RESISTOR	RN72K1J-182JE	1	435031824R1	NSP
R8022	CHIP TYPE CARBON RESISTOR	RN72K1J-182JE	1	435031824R1	NSP
R8023	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8024	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8025	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R8026	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R8027	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8028	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8029	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8030	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8031	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8032	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8033	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8034	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8035	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8036	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8039	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8040	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8041	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8042	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8043	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8044	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8045	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8046	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8047	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8048	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP

R8049	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8050	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8051	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8052	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8053	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8054	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8055	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8056	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8057	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8058	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8059	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8075	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8204	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8208	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R8209	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8215	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R8218	CHIP TYPE CARBON RESISTOR	RN72K1J-561JE	1	435035614R1	NSP
R8220	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R8221	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R8223	CHIP TYPE CARBON RESISTOR	RN72K1J-471JE	1	435034714R1	NSP
R8225	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8226	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8228	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8237	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R8238	CHIP TYPE CARBON RESISTOR	RN72K1J-331JE	1	435033314R1	NSP
R8240	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R8243	CHIP TYPE CARBON RESISTOR	RN72K1J-681JE	1	435036814R1	NSP
R8244	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8300	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8301	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8302	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8303	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R8304	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8306	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R8307	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8308	CHIP TYPE CARBON RESISTOR	RN72K1J-562JE	1	435035624R1	NSP
R8312	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8317	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8318	CHIP RESISTOR NETWORK	MNR04MRAPJ222	1	43464722204R2	NSP
R8318or	CHIP RESISTOR NETWORK	YCN104-222-JK	(1)	43464C22204R1	NSP
R8319	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8320	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8321	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8322	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8323	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8324	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8325	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8327	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8328	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8329	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8330	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8331	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8332	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8333	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8334	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP

R8335	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8336	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8337	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8338	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8339	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R8340	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8341	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8342	CHIP RESISTOR NETWORK	MNR04MRAPJ220	1	43464722004R2	NSP
R8342or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R8343	CHIP RESISTOR NETWORK	MNR04MRAPJ220	1	43464722004R2	NSP
R8343or	CHIP RESISTOR NETWORK	YCN104-220-JK	(1)	43464C22004R1	NSP
R8344	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8345	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8346	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8347	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8348	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8350	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8353	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8354	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8355	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8356	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8357	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8358	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8359	CHIP TYPE CARBON RESISTOR	RN72K1J-124JE	1	435031244R1	NSP
R8361	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8362	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8363	CHIP RESISTOR NETWORK	MNR04MRAPJ330	1	43464733004R2	NSP
R8363or	CHIP RESISTOR NETWORK	YCN104-330-JK	(1)	43464C33004R1	NSP
R8365	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8372	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8373	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8374	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8386	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R8400	CHIP RESISTOR NETWORK	MNR04MRAPJ103	1	43464710304R2	NSP
R8400or	CHIP RESISTOR NETWORK	YCN104-103-JK	(1)	43464C10304R1	NSP
R8401	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8402	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R8402or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R8403	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8404	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8405	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8406	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8407	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8408	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8409	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8410	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8411	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8412	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8413	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8414	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8415	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8416	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8417	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R8418	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8419	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP

R8420	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8421	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8422	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8423	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R8424	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R8425	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8426	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8427	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8428	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8429	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8430	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8431	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8432	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8433	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8434	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8435	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8436	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8437	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8438	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8439	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8440	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8441	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8442	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8443	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8444	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8445	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8446	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8447	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8448	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8449	CHIP TYPE CARBON RESISTOR	RN72K1J-182JE	1	435031824R1	NSP
R8450	CHIP TYPE CARBON RESISTOR	RN72K1J-182JE	1	435031824R1	NSP
R8451	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8452	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R8453	CHIP TYPE CARBON RESISTOR	RN72K1J-223FE	1	435032232R1	NSP
R8458	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8459	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R8461	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R8462	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8463	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8464	CHIP RESISTOR NETWORK	MNR04MRAPJ680	1	43464768004R2	NSP
R8464or	CHIP RESISTOR NETWORK	YCN104-680-JK	(1)	43464C68004R1	NSP
R8465	CHIP RESISTOR NETWORK	MNR04MRAPJ101	1	43464710104R2	NSP
R8465or	CHIP RESISTOR NETWORK	YCN104-101-JK	(1)	43464C10104R1	NSP
R8466	CHIP RESISTOR NETWORK	YCN104-220-JK	1	43464C22004R1	NSP
R8467	CHIP RESISTOR NETWORK	YCN104-220-JK	1	43464C22004R1	NSP
R8468	CHIP RESISTOR NETWORK	YCN104-220-JK	1	43464C22004R1	NSP
R8469	CHIP RESISTOR NETWORK	YCN104-220-JK	1	43464C22004R1	NSP
R8470	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8471	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8472	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8473	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8474	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8475	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R8476	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8477	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP

R8478	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8479	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8480	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8481	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8600	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8603	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8604	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8605	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8606	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8613	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8614	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8615	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8623	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8624	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8625	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8633	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8634	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8635	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8645	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8663	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8664	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8665	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R8702	CHIP RESISTOR NETWORK	MNR04MRAPJ221	1	43464722104R2	NSP
R8702or	CHIP RESISTOR NETWORK	YCN104-221-JK	(1)	43464C22104R1	NSP
R8703	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8704	CHIP RESISTOR NETWORK	YCN104-103-JK	1	43464C10304R1	NSP
R8705	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8707	CHIP RESISTOR NETWORK	MNR04MRAPJ103	1	43464710304R2	NSP
R8707or	CHIP RESISTOR NETWORK	YCN104-103-JK	(1)	43464C10304R1	NSP
R8709	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8710	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8711	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8712	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8713	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R8715	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8716	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R8717	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R8718	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R8719	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R8720	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8721	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R8721or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R8723	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8724	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8725	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8726	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8727	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R8728	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8729	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R8730	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8731	CHIP RESISTOR NETWORK	MNR04MRAPJ103	1	43464710304R2	NSP
R8731or	CHIP RESISTOR NETWORK	YCN104-103-JK	(1)	43464C10304R1	NSP
R8732	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R8733	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R8734	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP

R8735	CHIP TYPE CARBON RESISTOR	RN72K1J-221JE	1	435032214R1	NSP
R8736	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8737	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1	NSP
R8738	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8739	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8740	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8741	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8742	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8743	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8744	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8745	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8746	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8747	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8748	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8749	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8750	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8751	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8752	CHIP RESISTOR NETWORK	MNR04MRAPJ101	1	43464710104R2	NSP
R8752or	CHIP RESISTOR NETWORK	YCN104-101-JK	(1)	43464C10104R1	NSP
R8753	CHIP RESISTOR NETWORK	MNR04MRAPJ470	1	43464747004R2	NSP
R8753or	CHIP RESISTOR NETWORK	YCN104-470-JK	(1)	43464C47004R1	NSP
R8754	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8755	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8756	CHIP TYPE CARBON RESISTOR	RN72K1J-470JE	1	435034704R1	NSP
R8757	CHIP RESISTOR NETWORK	MNR04MRAPJ101	1	43464710104R2	NSP
R8757or	CHIP RESISTOR NETWORK	YCN104-101-JK	(1)	43464C10104R1	NSP
R8758	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8759	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8760	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8761	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8762	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8763	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8764	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8765	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8766	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8767	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8768	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8769	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8770	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8801	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8802	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8803	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8804	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8805	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8806	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8807	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8808	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8809	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8810	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8811	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8812	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8813	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8814	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8815	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R8816	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP

[illegible]

R8883	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8884	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8885	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8900	CHIP TYPE CARBON RESISTOR	RN72K1J-474JE	1	435034744R1	NSP
R8901	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8902	CHIP TYPE CARBON RESISTOR	RN72K1J-153JE	1	435031534R1	NSP
R8903	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8904	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R8905	CHIP TYPE CARBON RESISTOR	RN72K1J-154JE	1	435031544R1	NSP
R8906	CHIP TYPE CARBON RESISTOR	RN72K1J-154JE	1	435031544R1	NSP
R8907	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R8908	CHIP TYPE CARBON RESISTOR	RN72K1J-273JE	1	435032734R1	NSP
R8911	CHIP TYPE CARBON RESISTOR	RN72K1J-823FE	1	435038232R1	NSP
R8912	CHIP TYPE CARBON RESISTOR	RN72K1J-153FE	1	435031532R1	NSP
R8913	CHIP TYPE CARBON RESISTOR	RN72K1J-473FE	1	435034732R1	NSP
R8914	CHIP TYPE CARBON RESISTOR	RN72K1J-273FE	1	435032732R1	NSP
R8915	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R8916	CHIP TYPE CARBON RESISTOR	RN72K1J-473FE	1	435034732R1	NSP
R8917	CHIP TYPE CARBON RESISTOR	RN72K1J-473FE	1	435034732R1	NSP
R8918	CHIP TYPE CARBON RESISTOR	RN72K1J-332FE	1	435033322R1	NSP
R8920	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R8921	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R8922	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R8923	CHIP TYPE CARBON RESISTOR	RN72K1J-332JE	1	435033324R1	NSP
R8924	CHIP TYPE CARBON RESISTOR	RN72K1J-682FE	1	435036822R1	NSP
R8925	CHIP TYPE CARBON RESISTOR	RN72K1J-332FE	1	435033322R1	NSP
R8926	CHIP TYPE CARBON RESISTOR	RN72K1J-103FE	1	435031032R1	NSP
R8927	CHIP TYPE CARBON RESISTOR	RN72K1J-822FE	1	435038222R1	NSP
R8928	C-METAL R	RN72K2B-475JE2	1	435114754R1	NSP
R8930	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8931	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8932	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8933	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8934	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8935	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8936	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8938	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8939	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R8941	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8942	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R8945	C-METAL R	RN72K1J-000JE0_SIMUKE	1	435010004R1_SIMUKE	NSP
R8946	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8947	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8950	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8951	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8952	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R8961	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8962	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R8982	CHIP TYPE CARBON RESISTOR	RN72K1J-102JE	1	435031024R1	NSP
R8983	CHIP TYPE CARBON RESISTOR	RN72K1J-222JE	1	435032224R1	NSP
R8987	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
[Switches, Terminals, Wires]					
P010	PRINTED WIRING BOARD	BCPRC-2072	{1}	25142072	NSP
P080	PRINTED WIRING BOARD	BCPRC-2072	1	25142072B	N NSP
P1001	WS CLAMP	CB-71683(L=50)	1	260261	NSP

P1001A	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	NSP
P1301	SOCKET	NSCT-8P2471	1	25052574R2	NSP
P1303	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P1304A	PLUG	IMSA-9850B-30Y	1	25056329R2	NSP
P1305A	PLUG	IMSA-9850B-30Y	1	25056329R2	NSP
P1306A	PLUG(B to B)	IMSA-9850B-22Y	1	25056206R2	NSP
P1601A	PLUG(B to B)	IMSA-9850B-18Y	1	25056204R2	NSP
P1602A	PLUG	IMSA-9850B-30Y	1	25056329R2	NSP
P1603A	SOCKET	35FMN-SMT-A-TF	1	25052852R2	NSP
P1604	SOCKET	NSCT-9P2472	1	25052575R2	NSP
P1605	SOCKET	NSCT-9P2472	1	25052575R2	NSP
P3016A	TRM-423(SCREW)	NEJITANSI ST3	1	25060495	NSP
P3042	SOCKET	NSCT-8P2471	1	25052574R2	NSP
P3201	SOCKET	NSCT-9P2472	1	25052575R2	NSP
P3601	SOCKET	UJA01SB4090-72R	1	25053533R2	NSP
P3610	SOCKET	NSCT-8P2471	1	25052574R2	NSP
P3651	SOCKET	29-01000PH53-1	1	25053526R3	NSP
P3652A	PLUG	NPLG-5P918	1	25055965R2	NSP
P3654	SOCKET	APCI0085-P012A	1	25053616R2	NSP
P3658	TERMINAL	APCI0213-K001G	1	25060548R2	NSP
P5451B	PLUG	NPLG-7P121	1	25055137	NSP
P8001	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8021	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8104	SOCKET	NSCT-8P2471	1	25052574R2	NSP
P8601A	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8611	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8621	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8631	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8641	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8651	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8661	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8671	SOCKET	51U019S-3HFDN-BD-SM	1	25053549R3	NSP
P8702	SOCKET	NSCT-9P2472	1	25052575R2	NSP
P8900	PLUG	NPLG-2P915	1	25055962R2	NSP

BAPS-2089-1G

<Note>

1. Parts marked by "**NSP**" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D7062	CHIP TYPE DIODE	DAN202U	1	223322R2	N NSP
D7063	CHIP TYPE DIODE	RB501VM-40	1	223324R2	N NSP
D7213	ZENER DIODE	DZ2J075M0L	1	224760750R2	NSP
D7214	ZENER DIODE	DZ2J075M0L	1	224760750R2	NSP
D7215	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7216	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP

D7219	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D7220	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D7241	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7242	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7243	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7244	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7251	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7252	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7253	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7254	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7271	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7272	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7273	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7274	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D7401	DIODE	LN6SB60	1	22380399	
D7401A	HEAT SINK	.	1	ANH7250-A	NSP
D7401B	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
D7402	DIODE	LN6SB60	1	22380399	
D7402A	HEAT SINK	.	1	ANH7250-A	NSP
D7402B	SCREW	3TTB+8B(3BC)	1	838430088GR	NSP
Q1	HYBRID IC	RZ5B801-0001E2	1	22242835R2	NSP
Q7063	TRANSISTOR	DTA124EUA	1	2218450R2	N NSP
Q7064	TRANSISTOR	DTC124EUA	1	2218510R2	N NSP
Q7081	TRANSISTOR	KTA1040D	1	2218210R2	NSP
Q7082	TRANSISTOR	2SA1162-GR	1	2214375R2	NSP
Q7083	TRANSISTOR	2SA1162-GR	1	2214375R2	NSP
Q7084	TRANSISTOR	2SC2712-GR	1	2213145R2	NSP
Q7203	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7204	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7205	TRANSISTOR	DTA124EUA	1	2218450R2	NSP
Q7206	TRANSISTOR	DTA124EUA	1	2218450R2	NSP
Q7207	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7211	TRANSISTOR	2SD2400A-D	1	2202734	
Q7212	TRANSISTOR	2SB1569A-D	1	2202724	
Q7221	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7222	TRANSISTOR	DTA143EUA	1	2218460R2	NSP
Q7223	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7224	TRANSISTOR	DTA124EUA	1	2218450R2	NSP
Q7225	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7226	TRANSISTOR	DTC124EUA	1	2218510R2	NSP
Q7241	HYBRID IC	78M15HF(NJM78M15FA)	1	222780155JRC	
Q7251	HYBRID IC	78M12HF(NJM78M12FA)	1	222780125JRC	
Q7252	HYBRID IC	79M12HF(NJM79M12FA)	1	222790125JRC	
Q7271	HYBRID IC	78M08HF(NJM78M08FA)	1	222780085JRC	
Q7272	HYBRID IC	79M08HF(NJM79M08FA)	1	222790085JRC	
Q7273	HYBRID IC	78M15HF(NJM78M15FA)	1	222780155JRC	
X1	CRYSTAL	HC-49S 9B12.000MHz	1	3010533	
[Transformers, Coils]					
L1	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L2	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
L3	RF COIL	SDCL1608CR33JTDF	1	233557R1	NSP
L4	RF COIL	SDCL1608CR10JTDF	1	233556R1	NSP
L5	ANTENNA COIL	K7-D	1	232212	
[Capacitors]					
C1	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP

C12	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-090D1	1	342100902R1	NSP
C13	CHIP TYPE CERAMIC CAPACITOR	CK725B1C-104K1	1	332121045R1	NSP
C2	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-220J1	1	342102204R1	NSP
C3	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-332K1	1	332103325R1	NSP
C4	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C5	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-473K1	1	332104735R1	NSP
C6	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-222K1	1	332102225R1	NSP
C7	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
C7006	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J	1	3400034R1	N NSP
C7061	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	N NSP
C7062	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	N NSP
C7064	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-153K1	1	332101535R1	NSP
C7213	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C7214	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C7215	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C7219	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C7221	SMG C	CE04W25V-47M(SMG)	1	395054707T	
C7222	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J	1	3400037R1	NSP
C7225	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-471J	1	3400037R1	NSP
C7240	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C7241	SMG C	CE04W25V-2200M(SMG)	1	395052227S	
C7244	SMG C	CE04W50V-22M(SMG)	1	395082207T	
C7246	SMG C	CE04W35V-220M(SMG)	1	395062217T	
C7250	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C7251	SMG C	CE04W25V-2200M(SMG)	1	395052227S	
C7252	SMG C	CE04W25V-2200M(SMG)	1	395052227S	
C7255	SMG C	CE04W35V-220M(SMG)	1	395062217T	
C7256	SMG C	CE04W35V-220M(SMG)	1	395062217T	
C7270	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-474J	1	374734744T	NSP
C7271	SMG C	CE04W16V-2200M(SMG)	1	395042227S	
C7272	SMG C	CE04W16V-2200M(SMG)	1	395042227S	
C7278	C-METAL R	RN72K2B-152JE2	1	435111524R1	N NSP
C7293	SMG C	CE04W16V-220M(SMG)	1	395042217T	
C7294	SMG C	CE04W16V-220M(SMG)	1	395042217T	
C7298	SMG C	CE04W35V-220M(SMG)	1	395062217T	
C7401	ELECTROLYTIC CAPACITOR	CE69W80V-10000MBN	1	3504543	N
C7402	ELECTROLYTIC CAPACITOR	CE69W80V-10000MBN	1	3504543	N
C7405	FILM C	C282A334J20A21A	1	376833344T	NSP
C7405or	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-334J	(1)	374733344T	NSP
C7406	FILM C	C282A334J20A21A	1	376833344T	NSP
C7406or	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V100V-334J	(1)	374733344T	NSP
C8	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
C9	CHIP TYPE CERAMIC CAPACITOR	CK732B16V-106K	1	332071065R2	NSP
[Resistors]					
R10	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R11	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R13	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R14	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R2	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R21	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R22	CHIP TYPE CARBON RESISTOR	RN72K2E-000JE	1	435220004R1	NSP
R3	EMI SUPPRESSION FILTER	BK1608HS601-T	1	230984R1	NSP
R4	EMI SUPPRESSION FILTER	BK1608HS601-T	1	230984R1	NSP
R5	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1	NSP
R5778	C-METAL R	RN72K2B-105JE2	1	435111054R1	N NSP

R5779	C-METAL R	RN72K2B-104JE2	1	435111044R1	N	NSP
R5781	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R6	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1		NSP
R7	CHIP TYPE CARBON RESISTOR	RN72K1J-472JE	1	435034724R1		NSP
R7001	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7002	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7003	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7004	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7005	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7006	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7007	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7008	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7009	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7010	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7011	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7012	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7013	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7014	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7015	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7016	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7017	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7018	C-METAL R	RN72K2B-105JE2	1	435111054R1	N	NSP
R7019	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7020	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7021	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7022	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7023	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7024	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R7025	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R7026	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R7027	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R7028	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1		NSP
R7061	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7062	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1		NSP
R7068	CHIP TYPE CARBON RESISTOR	RN72K1J-622JE	1	435036224R1		NSP
R7070	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R7071	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1		NSP
R7081	CHIP TYPE CARBON RESISTOR	RN72K1J-180JE	1	435031804R1		NSP
R7082	CHIP TYPE CARBON RESISTOR	RN72K1J-180JE	1	435031804R1		NSP
R7083	CHIP TYPE CARBON RESISTOR	RN72K1J-180JE	1	435031804R1		NSP
R7084	CHIP TYPE CARBON RESISTOR	RN72K1J-180JE	1	435031804R1		NSP
R7085	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1		NSP
R7086	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1		NSP
R7087	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1		NSP
R7088	CHIP TYPE CARBON RESISTOR	RN72K1J-103JE	1	435031034R1		NSP
R7211	NON-FLAMMABLE CARBON FILM RESISTOR	R25J-1.0K	1	415471024T		
R7212	CHIP TYPE CARBON RESISTOR	RN72K1J-150JE	1	435031504R1		NSP
R7213	NON-FLAMMABLE CARBON FILM RESISTOR	R25J-1.0K	1	415471024T		
R7214	CHIP TYPE CARBON RESISTOR	RN72K1J-150JE	1	435031504R1		NSP
R7215	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1		NSP
R7221	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1		NSP
R7222	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1		NSP
R7245	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1		NSP
R7251	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1		NSP
R7255	C-METAL R	RN72K2B-015JE2	1	435110154R1		NSP

R7256	C-METAL R	RN72K2B-010JE2	1	435110104R1	NSP
R7258	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R7259	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R7260	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R7271	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7272	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R7273	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R7274	CHIP TYPE CARBON RESISTOR	RN72K2E-102JE	1	435221024R1	NSP
R7401	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R7402	C-METAL R	KTR18EZPJ105	1	435231054R1	NSP
R7403	NON-FLAMMABLE CARBON FILM RESISTOR	R25J-10	1	415471004T	
R7405	CHIP TYPE CARBON RESISTOR	RN72K2E-154JE	1	435221544R1	NSP
R7406	CHIP TYPE CARBON RESISTOR	RN72K2E-154JE	1	435221544R1	NSP
R7408	CHIP TYPE CARBON RESISTOR	RN72K2E-913JE	1	435229134R1	NSP
R8	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
R9	CHIP TYPE CARBON RESISTOR	RN72K1J-101JE	1	435031014R1	NSP
[Switches, Terminals, Wires]					
F7241A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F7241B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F7251A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F7251B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F7252A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F7252B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F7271A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F7271B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F7272A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F7272B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
P1	TERMINAL	NTM-1PDSC437	1	25060515	
P101A	SOCKET	NSCT-7P2100	1	25052203	NSP
P1306B	SOCKET	IMSA-9850S-22	1	25053211	NSP
P160	PRINTED WIRING BOARD	BCPS-2089	{1}	25142089	NSP
P160	PRINTED WIRING BOARD	BCPS-2089	1	25142089A	N NSP
P160	PRINTED WIRING BOARD	BCETC-2163	{1}	25142163	N NSP
P160	PRINTED WIRING BOARD	BCPS-2164	{1}	25142164	N NSP
P160	PRINTED WIRING BOARD	BCETC-2165	{1}	25142165	N NSP
P160	PRINTED WIRING BOARD	BCETC-2166	{1}	25142166	NSP
P160	PRINTED WIRING BOARD	BCETC-2167	{1}	25142167	N NSP
P160	PRINTED WIRING BOARD	BCETC-2168	{1}	25142168	N NSP
P160	PRINTED WIRING BOARD	BCETC-2169	{1}	25142169	N NSP
P160	PRINTED WIRING BOARD	BCETC-2170	{1}	25142170	NSP
P160	PRINTED WIRING BOARD	BCETC-2171	{1}	25142171	N NSP
P160	PRINTED WIRING BOARD	BCETC-2174	{1}	25142174	N NSP
P160	PRINTED WIRING BOARD	BCETC-2202	{1}	25142202	N NSP
P160	PRINTED WIRING BOARD	BCRF-2208	{1}	25142208	NSP
P2	TERMINAL	NTM-2PDML439	1	25060517	
P2901A	PLUG	IMSA-9111B-22	1	25056740	N NSP
P4000B	SOCKET	NSCT-21P2114	1	25052217	NSP
P4001B	PLUG	NPLG-4P151	1	25055167	NSP
P4002B	PLUG	NPLG-2P130	1	25055146	NSP
P4003B	PLUG	NPLG-5P133	1	25055149	NSP
P4004B	PLUG	NPLG-7P135	1	25055151	NSP
P511B	PLUG	NPLG-7P135	1	25055151	NSP
P5751	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P5752	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P5753	TRM(SCREW)	TER21-0130V	1	25060533	NSP

P5775A	WIRE HARNESS ASSEMBLY	NSAS-14P2420	1	2009991556UL	N NSP
P5777	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P5852B	PLUG	NPLG-3P131	1	25055147	NSP
P5931	PLUG	NPLG-3P131	1	25055147	NSP
P5932	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P5933	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P6071	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P6081	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P661C	PLUG	IMSA-9111B-28	1	25056742	N NSP
P7001A	PLUG	IMSA-9111B-30	1	25056700	NSP
P7002	WIRE HARNESS ASSEMBLY	NSAS-5P2109	1	2009991298UL	NSP
P7002A	WIRE HOL	CHD-1.5-5	1	25053536	N NSP
P7003	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P7031	TRM(EARTH)	TP00940-21	1	25065732T	N NSP
P7032	TRM(EARTH)	TP00940-21	1	25065732T	N NSP
P7033	TRM(EARTH)	TP00940-21	1	25065732T	N NSP
P7034	TRM(EARTH)	TP00940-21	1	25065732T	N NSP
P7036	TRM(SCREW)	TER21-0130V	1	25060533	N NSP
P7061A	PLUG	NPLG-11P0966	1	25056016	NSP
P7201	PLUG	NPLG-9P123	1	25055139	NSP
P7201A	PLUG	NPLG-3P131	1	25055147	NSP
P7201B	PLUG	NPLG-3P131	1	25055147	NSP
P7251	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P7252	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P7253	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P7401	PLUG	NPLG-3P150	1	25055166	NSP
P751	TRM(SCREW)	TER21-0130V	1	25060533	N NSP
P9001C	PLUG	IMSA-9111B-28	1	25056742	N NSP

BAPS-2092-1G

<Note>

1. Parts marked by "**NSP**" are generally unavailable because they are not in our Master Spare Parts List.
2. The ! mark found on some component parts indicates the importance of the safety factor of the part.
Therefore, when replacing, be sure to use parts of identical designation.

: NSP

REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
[Semi-conductors]					
D7181	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D7182	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D9501	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9502	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9503	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9504	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9505	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D9506	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D9521	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9522	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9523	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9524	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP

D9531	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9532	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9533	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9551	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9552	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9561	CHIP TYPE DIODE	1SS355	1	223269R2	NSP
D9562	ZENER DIODE	DZ2J033M0L	1	224760330R2	NSP
D9571	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9572	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9573	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9574	CHIP TYPE DIODE	1SR154-400	1	22380284R2	NSP
D9575	ZENER DIODE	DZ2J200M0L	1	224762000R2	NSP
D9576	ZENER DIODE	DZ2J180M0L	1	224761800R2	NSP
D9751	DIODE	D3SBA60	1	22380272F	
Q7181	TRANSISTOR	2SC4081	1	2218560R2	NSP
Q9501	HYBRID IC	78M12HF(NJM78M12FA)	1	222780125JRC	
Q9502	HYBRID IC	79M12HF(NJM79M12FA)	1	222790125JRC	
Q9521	HYBRID IC	78M06HF(NJM78M06FA)	1	222780065JRC	
Q9531	HYBRID IC	78M12HF(NJM78M12FA)	1	222780125JRC	
Q9551	HYBRID IC	78M05(NJM78M05FA)	1	222780055JRC	
Q9571	TRANSISTOR	INC5001AP1-T111	1	2218100R2	N NSP
[Transformers, Coils]					
L5823	CORE	BLM11A121S	1	2350050R1	NSP
[Capacitors]					
C5823	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K	1	332241035R1	NSP
C5876	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C5877	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J1	1	342103314R1	NSP
C7166	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C7170	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J1	1	342103304R1	NSP
C7851	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C7856	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C7931	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-100D1	1	342101002R1	NSP
C7934	CHIP TYPE CERAMIC CAPACITOR	CK725B50V-104K	1	332241045R1	NSP
C9501	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9507	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-3300M(UTSP)	1	397553327S	N
C9508	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-3300M(UTSP)	1	397553327S	N
C9513	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9514	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9515	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W35V-220M(UTSP)	1	397562217T	
C9516	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W35V-220M(UTSP)	1	397562217T	
C9521	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9523	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-330J1	1	342103304R1	NSP
C9524	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W10V-220M(UTSP)	1	397532217AT	N
C9526	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9527	UTSP TYPE ELECTROLYTIC CAPACITOR	CE04W25V-2200M(UTSP)	1	397552227S	N
C9531	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-394J	1	374723944T	NSP
C9533	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-104J	1	374721044T	NSP
C9536	SMG C	CE04W35V-1000M(SMG)	1	395061027S	N
C9537	SMG C	CE04W35V-470M(SMG)	1	395064717S	N
C9539	SMG C	CE04W50V-10M(SMG)	1	395081007T	
C9551	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-104K1	1	332101045R1	NSP
C9552	SMG C	CE04W16V-1000M(SMG)	1	395041027S	N
C9554	SMG C	CE04W16V-100M(SMG)	1	395041017T	
C9561	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-101J1	1	342101014R1	NSP
C9562	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-103K1	1	332101035R1	NSP

C9571	SMG C	CE04W63V-47M(SMG)	1	395074707T	N
C9572	SMG C	CE04W50V-47M(SMG)	1	395084707T	
C9573	SMG C	CE04W50V-47M(SMG)	1	395084707T	
C9581	CHIP TYPE CERAMIC CAPACITOR	CK725B1H-223K1	1	332102235R1	NSP
C9589	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-104J	1	374721044T	NSP
C9590	CHIP TYPE CERAMIC CAPACITOR	CC725CH1H-331J	1	3400036R1	N NSP
C9752	TF TYPE PLASTIC FILM CAPACITOR	ECQ-V50V-104J	1	374721044T	NSP
C9760	SMG C	CE04W16V-4700M(SMG)	1	395044727S	N
[Resistors]					
R5851	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5852	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5853	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R5872	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R7151	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7152	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7153	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7157	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7158	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7159	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7163	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R7164	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R7165	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R7168	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R7181	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R7182	CHIP TYPE CARBON RESISTOR	RN72K1J-560JE	1	435035604R1	NSP
R7183	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R7185	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R7186	CHIP TYPE CARBON RESISTOR	RN72K1J-121JE	1	435031214R1	NSP
R7187	CHIP TYPE CARBON RESISTOR	RN72K1J-104JE	1	435031044R1	NSP
R7190	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7853	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7854	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7855	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R7856	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R7857	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7858	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7859	CHIP TYPE CARBON RESISTOR	RN72K1J-330JE	1	435033304R1	NSP
R7862	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7863	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7864	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7865	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7866	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R7867	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7868	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7869	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7870	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7871	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7872	CHIP TYPE CARBON RESISTOR	RN72K1J-220JE	1	435032204R1	NSP
R7873	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP
R7874	CHIP TYPE CARBON RESISTOR	RN72K1J-100JE	1	435031004R1	NSP
R7875	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7876	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7877	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7878	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7879	CHIP TYPE CARBON RESISTOR	RN72K1J-120JE	1	435031204R1	NSP

R7932	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R7933	C-METAL R	RN72K2B-105JE2	1	435111054R1	NSP
R7941	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R7942	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9502	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R9505	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R9506	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R9507	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R9508	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R9509	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R9510	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R9511	CHIP TYPE CARBON RESISTOR	RN72K1J-473JE	1	435034734R1	NSP
R9522	C-METAL R	RN72K2B-473JE2	1	435114734R1	N NSP
R9524	C-METAL R	RN72K2B-105JE2	1	435111054R1	N NSP
R9533	NON-FLAMMABLE CARBON FILM RESISTOR	R25J-4.7	1	415470474T	
R9554	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R9561	CHIP TYPE CARBON RESISTOR	RN72K1J-392JE	1	435033924R1	NSP
R9562	CHIP TYPE CARBON RESISTOR	RN72K1J-223JE	1	435032234R1	NSP
R9571	METAL RESISTOR	RNU1/2WCJ-8.2	1	453530824T	NSP
R9572	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R9573	CHIP TYPE CARBON RESISTOR	RN72K1J-272JE	1	435032724R1	NSP
R9574	CHIP TYPE CARBON RESISTOR	RN72K1J-010JE	1	435030104R1	NSP
R9575	CHIP TYPE CARBON RESISTOR	RN72K1J-333JE	1	435033334R1	NSP
R9576	CHIP TYPE CARBON RESISTOR	RN72K1J-105JE	1	435031054R1	NSP
R9752	CHIP TYPE CARBON RESISTOR	RN72K2E-105JE	1	435221054R1	NSP
R9753	C-METAL R	RN72K2B-105JE2	1	435111054R1	N NSP
R9771	C-METAL R	RN72K2B-000JE2	1	435110004R1	NSP
R9772	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
R9773	CHIP TYPE CARBON RESISTOR	RN72K1J-000JE	1	435030004R1	NSP
[Switches, Terminals, Wires]					
F9501A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9501B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9502A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9502B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9521A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9521B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9531A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9531B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9532A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9532B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9751A	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
F9751B	FUSE HOLDER	NSCT-1P2506	1	25052609T	! NSP
P1602C	SOCKET	IMSA-9850S-30	1	25053215	NSP
P1603B	SOCKET	9615S-35A-PP	1	25053313	NSP
P170	PRINTED WIRING BOARD	BCPS-2092	{1}	25142092	N NSP
P170	PRINTED WIRING BOARD	BCPS-2092	1	25142092A	N NSP
P170	PRINTED WIRING BOARD	BCETC-2200	{1}	25142200	N NSP
P170	PRINTED WIRING BOARD	BCETC-2201	{1}	25142201	N NSP
P170	PRINTED WIRING BOARD	BCETC-2203	{1}	25142203	N NSP
P170	PRINTED WIRING BOARD	BCETC-2204	{1}	25142204	N NSP
P170	PRINTED WIRING BOARD	BCPS-2205	{1}	25142205	N NSP
P170	PRINTED WIRING BOARD	BCETC-2206	{1}	25142206	N NSP
P170	PRINTED WIRING BOARD	BCETC-2207	{1}	25142207	N NSP
P501B	SOCKET	NSCT-15P2108	1	25052211	NSP
P5581B	PLUG	NPLG-2P116	1	25055132	NSP

P5701B	SOCKET	NSCT-13P2106	1	25052209	NSP
P5775B	PLUG	NPLG-7P135	1	25055151	NSP
P5822	ST JACK	HSJ1002-016010	1	25046044	
P5851A	WIRE HARNESS ASSEMBLY	ADX7729-A	1	2009991542UL	NSP
P5851B	PLUG	NPLG-7P135	1	25055151	NSP
P5852A	PLUG	NPLG-3P131	1	25055147	NSP
P5871	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P7001C	SOCKET	IMSA-9111S-30L	1	25056701	NSP
P7002B	PLUG	NPLG-5P352	1	25055369	NSP
P7061C	SOCKET	NSCT-11P2191	1	25052294	NSP
P7151A	PLUG	IMSA-9111B-26	1	25056741	NSP
P7151B	SOCKET	IMSA-9111S-26L	1	25053566	N NSP
P7552B	PLUG	NPLG-5P133	1	25055149	NSP
P7602B	SOCKET	9615S-35A-PP	1	25053313	NSP
P7851	TRM(SCREW)	TER21-0130V	1	25060533	NSP
P7941	TRM(EARTH)	TP00940-21	1	25065732T	NSP
P7942	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P7943	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P9501	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P9502	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P9511	PLUG	NPLG-5P119	1	25055135	NSP
P9512	PLUG	NPLG-7P121	1	25055137	NSP
P961B	PLUG	NPLG-2P130	1	25055146	NSP
P9751	PLUG	NPLG-2P116	1	25055132	NSP
P9763	WS CLAMP	CB-71683(L=50)	1	260261	NSP
P9771	TRM(EARTH)	TP00940-21	1	25065732T	NSP