
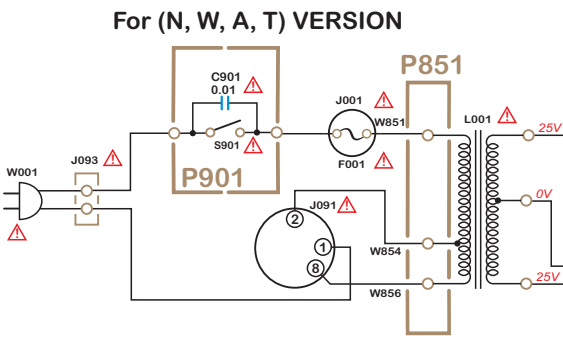
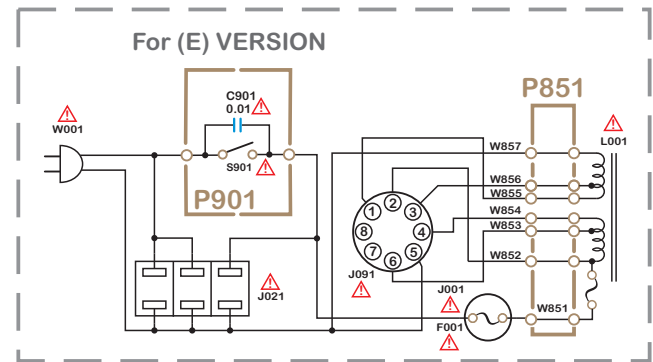


SCHEMATIC DIAGRAM FOR Model PM-35

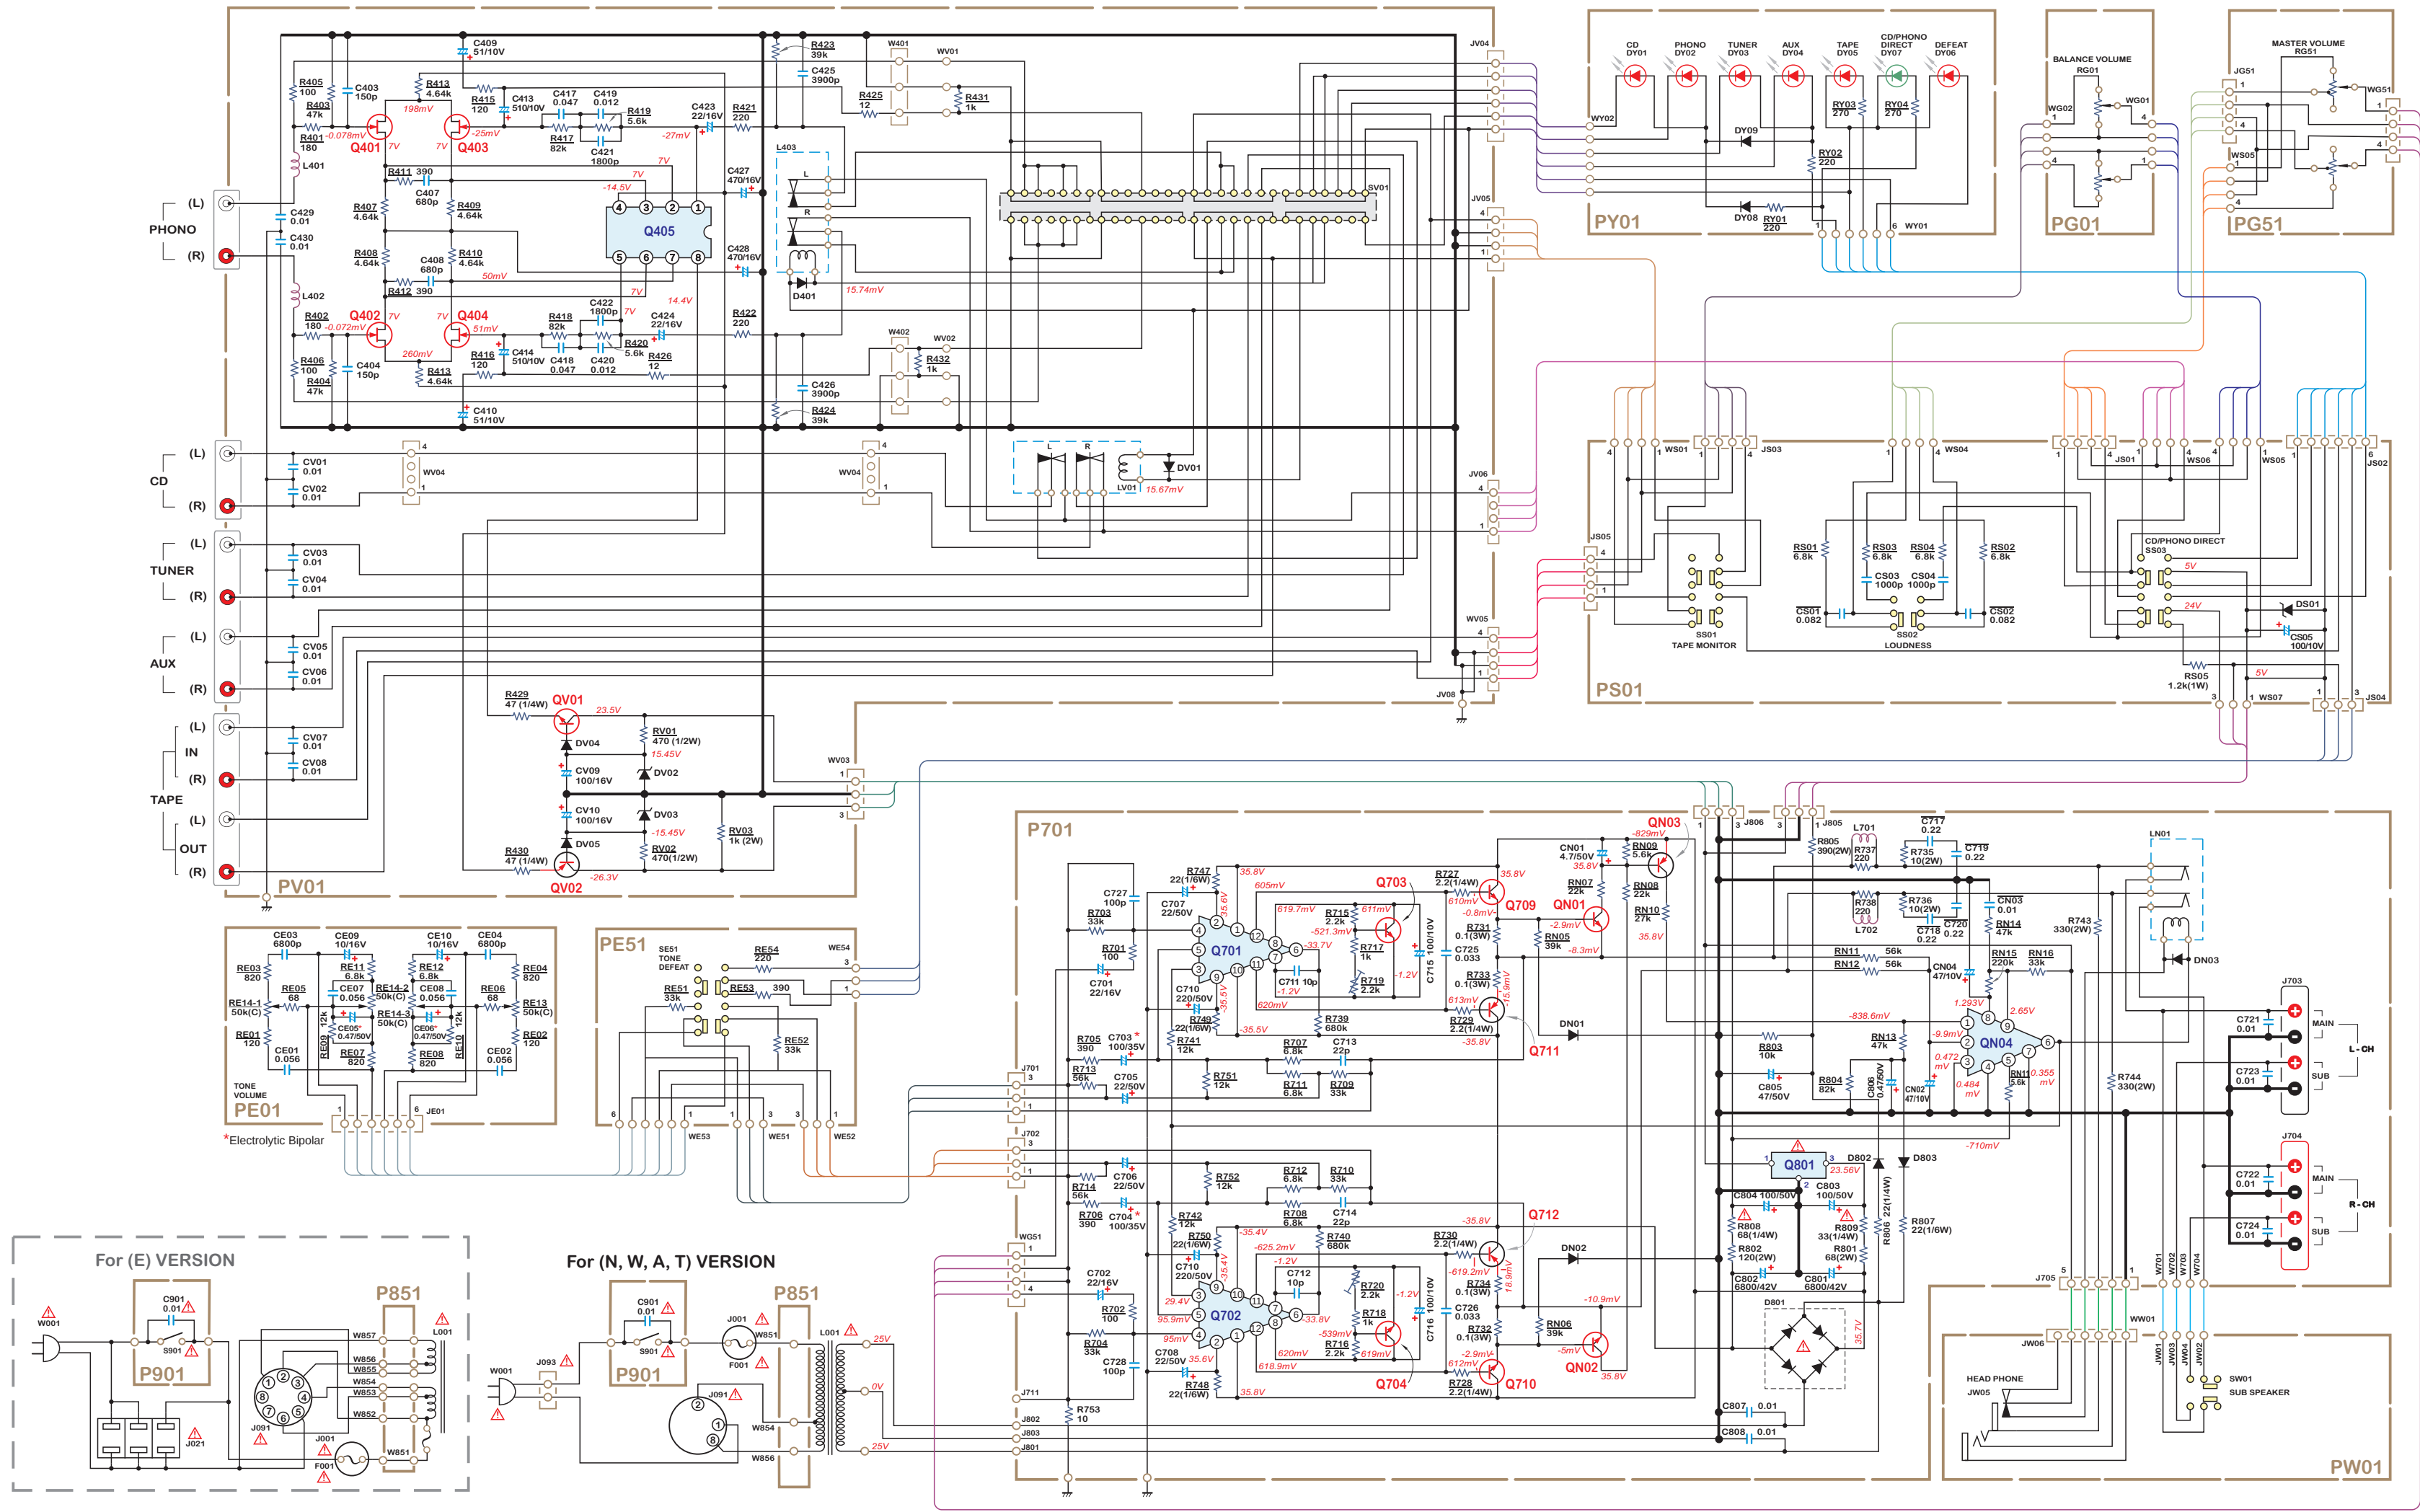

NOTE ON PARTS :			
BOARD	PART	IN SCHEMATIC	ON BOARD
P701	R801, R808	68 (2W)	47 (2W)
	R809	33 (1/4W)	220 (1/4W)
	C806	0.47/50V	4.7/50
	C703, C704	Elco. polar	Elco. bipolar
PS01	RS01, RS02	6.8k	5.6k
	RS03, RS04	6.8k	47k
	CS01, CS02	0.082uF	0.056uF
	CS03, CS04	1000p	470p
PE01	CE05, CE06	Elco. polar	Elco. bipolar

NOTE ON SAFETY :
Symbol ⚡ Fire or electrical shock hazard. Only original parts should be used to replace any part marked with symbol ⚡. Any other component substitution (other than original type), may increase risk of fire or electrical shock hazard.

"SERVICE INFORMATION IS FOR USE BY QUALIFIED PERSONEL ONLY - ANY MISADJUSTMENT OR MISALIGNMENT MAY BE TREATED AS NON-WARRANTY REPAIR BY ANY MARANTZ SERVICE CENTRE."

Kind of Common Parts		
RESISTOR		
R***	(1) GD05 - - 140,	Carbon film fixed resistor, ±5% 1/4W
R***	(2) GD05 - - 140,	Carbon film fixed resistor, ±5% 1/6W
C***	: CERAMIC CAP.	
C***	(1) DD1 - - 370,	Ceramic condenser, disc type (titan condenser) Temp. coeff. P350 ~ N1000 50V
C***	: CERAMIC CAP.	
C***	(1) DK16 - - 300,	High dielectric constant ceramic condenser, disc type (titan variable) Temp. chara. 2B4 50V

ELECTROLYTIC CAP. (E) / FILM CAP. (F)		
(1) EA - - - 10,	Electrolytic condenser, one-way lead type, tolerance ±20%	
(2) DF15 - - 350,	Plastic film condenser, one-way type, Mylar, ±5% 50V	

In case of ordering the common parts, please establish the correct parts number of 10 figures by the procedure "ASSIGNMENT OF COMMON PARTS CODES"

Q401~Q404
2SK369
Q405
NJM2041DD
QV01
2SC1627 (0,Y)
QV02
2SA817 (0,Y)
QN01, QN02,
2SC2240
QN03
2SA970
QN04
TA7317P
Q701, Q702,
uPC1270H
Q703, Q704,
2SC3419Y
Q709, Q710,
2SC3180 (R,0)
Q711, Q712,
2SA1263 (R,0)
Q801
NJM78M24A

DS01
5.1V
DV04, DV05
DV08, DV09, DN03,
D401, DV01, D803
1S133 etc.
DV02, DV03
15V
DY01 ~ DY06
LT3D8B
DY07
LT3G8B
DN01, DN02,
1SS81
D801
S4VB20
D802
DSF10C

TOP VIEW
1 8
4 5
NJM2041DD

SIDE VIEW
1 9
TA7317P

INPUT / OUTPUT
GND
NJM78M24A

INPUT
OUTPUT
GND
NJM78M24A

FRONT VIEW
1 12
uPC1270H

2SK369
2SC1627 (0,Y)
2SC2240
2SA817 (0,Y)
2SA970
TA7317P
2SC3419Y
2SC3180 (R,0)
2SA1263 (R,0)