
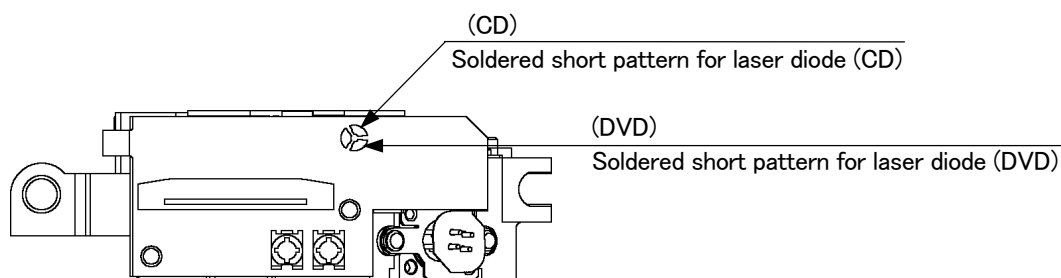


CD MECHANISM CONNECTOR

Connector terminal pin assignments and Electric circuit block diagram

PIN No.	PIN name
1	F-
2	F+
3	T+
4	T-
5	C/c
6	D/d
7	CD/DVD SW
8	RF
9	A/a
10	B/b
11	F
12	GND-PD
13	Vc(Vref)
14	Vcc
15	E
16	(N.C.)
17	VR-CD
18	VR-DVD
19	CD-LD </td
20	MD
21	HFM
22	(N.C.)
23	DVD-LD
24	GND-LD

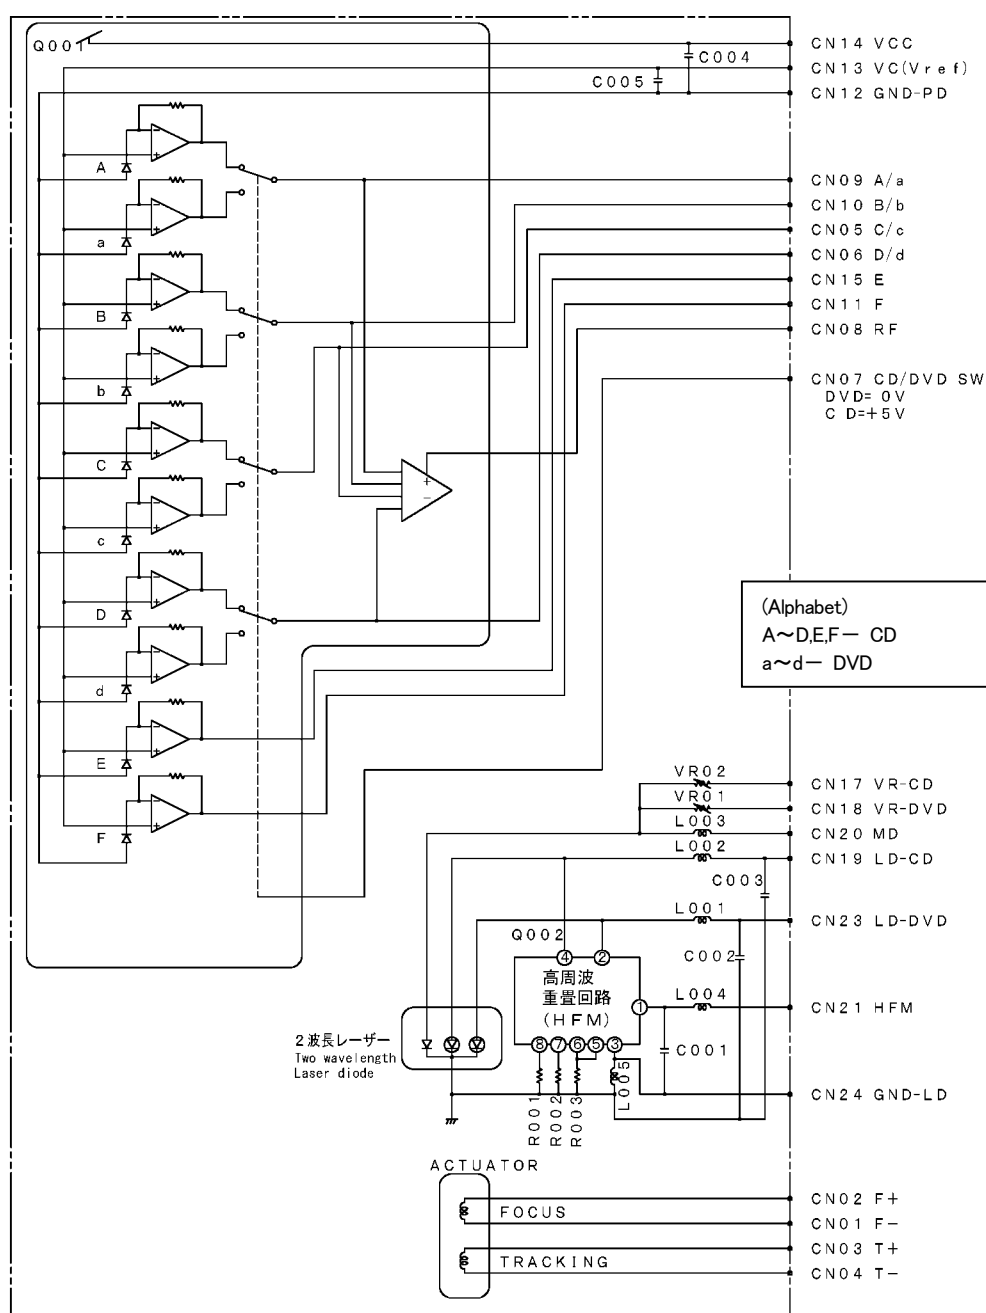

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
0030	266179	CABLE 5 PIN	DVD ASSEMBLY	RTD120		55832920	
0040	266180	CABLE 6P 150MM UL1	DVD ASSEMBLY	RTD120		55913990	
0040	266162	CABINET FRONT RT120	INSTRUMENT ASSEMBLY	RTD120		55689700	
0050	266163	DOOR CD RTD120	INSTRUMENT ASSEMBLY	RTD120		55925840	
0050	266185	REMOTE RCR311AA1 RTD120	INSTRUMENT ASSEMBLY	RTD120		21299050	
0060	266164	BUTTON TREE RTD120	INSTRUMENT ASSEMBLY	RTD120		55925850	
0080	266165	KNOB VOLUME RTD120	INSTRUMENT ASSEMBLY	RTD120		55925860	
0090	266183	SPEAKER BOX RTD120	INSTRUMENT ASSEMBLY	RTD120		55784420	
0090	266166	CRYSTAL VOLUME RING RTD120	INSTRUMENT ASSEMBLY	RTD120		55729820	
0100	266167	LIGHTPIPE POWER RTD120	INSTRUMENT ASSEMBLY	RTD120		55729830	
0105	265238	BRACKET, STANDBY TRANS PCB	INSTRUMENT ASSEMBLY	RTD120		5516498A	
0120	266168	METAL SUPPORT A RTD120	INSTRUMENT ASSEMBLY	RTD120		55799520	
0130	266169	METAL SUPPORT B RTD120	INSTRUMENT ASSEMBLY	RTD120		55799530	
0140	266170	CABINET BOTTOM RTD120	INSTRUMENT ASSEMBLY	RTD120		55771320	
0140	266184	CABINET BOTTOM RTD120B	INSTRUMENT ASSEMBLY	RTD120		55937280	
0150	266171	CABINET TOP RTD120	INSTRUMENT ASSEMBLY	RTD120		55771420	
0180	266172	FOOT RUBBER SQUAREV 7.0MM	INSTRUMENT ASSEMBLY	RTD120		55027990	
0200	246888	CLAMP AC CORD	INSTRUMENT ASSEMBLY	RTD120		55125180	
0210	246416	CORD AC POWER	INSTRUMENT ASSEMBLY	RTD120	S	2093646A	
0220	263058	TOROID CORE	INSTRUMENT ASSEMBLY	RTD120		55089730	
0300	255425	CABLE 1P VIDEO YELLOW	INSTRUMENT ASSEMBLY	RTD120		55139610	
0440	266173	POWER-TRANSFORMER 120V	INSTRUMENT ASSEMBLY	RTD120	S	55782720	
0450	266174	RING RUBBER 6.0MM*4.5MM	INSTRUMENT ASSEMBLY	RTD120		55903790	
C1	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C10	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN BOARD	RTD120		20718370	
C100	263024	CAP CD 100NF +80% -20% 25V Z5V	MAIN BOARD	RTD120		20246470	
C101	260627	CAPCD .1UF Z Z5V 50V	MAIN BOARD	RTD120		20246460	
C101	249336	CAPCC 1NF 10% 50V X7R	KEYBOARD	RTD120		10138550	
C102	260627	CAPCD .1UF Z Z5V 50V	MAIN BOARD	RTD120		20246460	
C102	249336	CAPCC 1NF 10% 50V X7R	KEYBOARD	RTD120		10138550	
C103	189981	CAP LYTC 10UF M 50V	KEYBOARD	RTD120		20268880	
C103	260627	CAPCD .1UF Z Z5V 50V	MAIN BOARD	RTD120		20246460	
C104	253796	CAPCC .1UF 10% 16V	KEYBOARD	RTD120		20947390	
C104	261086	CAP CE 1000UF +20% 35.0V 85C	MAIN BOARD	RTD120		55642260	
C105	261086	CAP CE 1000UF +20% 35.0V 85C	MAIN BOARD	RTD120		55642260	
C106	261086	CAP CE 1000UF +20% 35.0V 85C	MAIN BOARD	RTD120		55642260	
C109	260659	CAP LYTC 2.2FU +20% 50V 85C	MAIN BOARD	RTD120		20268850	
C11	253796	CAPCC .1UF 10% 16V	MAIN BOARD	RTD120		20947390	
C110	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN BOARD	RTD120		20718370	
C111	260627	CAPCD .1UF Z Z5V 50V	MAIN BOARD	RTD120		20246460	
C115	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C116	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C117	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C118	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C119	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN BOARD	RTD120		20718370	
C120	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN BOARD	RTD120		20718370	
C121	261176	CAP LYTC 470UF +20% 6.3V 85C	MAIN BOARD	RTD120		20268620	
C122	261176	CAP LYTC 470UF +20% 6.3V 85C	MAIN BOARD	RTD120		20268620	
C123	261176	CAP LYTC 470UF +20% 6.3V 85C	MAIN BOARD	RTD120		20268620	
C124	261176	CAP LYTC 470UF +20% 6.3V 85C	MAIN BOARD	RTD120		20268620	
C125	261176	CAP LYTC 470UF +20% 6.3V 85C	MAIN BOARD	RTD120		20268620	
C13	254542	CAP LYTC 6800UF 20% 16V 85C	MAIN BOARD	RTD120	S	55126160	
C131	256770	CAP CC 100PF +10% -10% 50V NPO	MAIN BOARD	RTD120		10137380	
C132	256770	CAP CC 100PF +10% -10% 50V NPO	MAIN BOARD	RTD120		10137380	
C133	256770	CAP CC 100PF +10% -10% 50V NPO	MAIN BOARD	RTD120		10137380	
C134	256770	CAP CC 100PF +10% -10% 50V NPO	MAIN BOARD	RTD120		10137380	
C135	260632	CAP LYTC 100UF +20% 16.0V 85C	MAIN BOARD	RTD120		20269020	
C136	266144	CAP 47U0F +20% 16.0V 85C	MAIN BOARD	RTD120		10142030	
C137	266144	CAP 47U0F +20% 16.0V 85C	MAIN BOARD	RTD120		10142030	
C138	266144	CAP 47U0F +20% 16.0V 85C	MAIN BOARD	RTD120		10142030	
C139	266144	CAP 47U0F +20% 16.0V 85C	MAIN BOARD	RTD120		10142030	
C14	263024	CAP CD 100NF +80% -20% 25V Z5V	MAIN BOARD	RTD120		20246470	
C140	266144	CAP 47U0F +20% 16.0V 85C	MAIN BOARD	RTD120		10142030	
C141	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C142	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C143	261768	CAP LYTC 220UF 20% 10V 85C	MAIN BOARD	RTD120		20269080	
C144	266144	CAP 47U0F +20% 16.0V 85C	MAIN BOARD	RTD120		10142030	
C145	261768	CAP LYTC 220UF 20% 10V 85C	MAIN BOARD	RTD120		20269080	
C146	266144	CAP 47U0F +20% 16.0V 85C	MAIN BOARD	RTD120		10142030	
C147	261768	CAP LYTC 220UF 20% 10V 85C	MAIN BOARD	RTD120		20269080	
C148	261768	CAP LYTC 220UF 20% 10V 85C	MAIN BOARD	RTD120		20269080	
C149	256770	CAP CC 100PF +10% -10% 50V NPO	MAIN BOARD	RTD120		10137380	
C15	253796	CAPCC .1UF 10% 16V	MAIN BOARD	RTD120		20947390	
C16	260632	CAP LYTC 100UF +20% 16.0V 85C	MAIN BOARD	RTD120		20269020	
C17	260632	CAP LYTC 100UF +20% 16.0V 85C	MAIN BOARD	RTD120		20269020	
C170	194673	CAP LYTC 1UF M 50V	MAIN BOARD	RTD120		20268840	
C19	253796	CAPCC .1UF 10% 16V	MAIN BOARD	RTD120		20947390	
C2	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C20	253796	CAPCC .1UF 10% 16V	MAIN BOARD	RTD120		20947390	
C201	266145	CAP 100U0F +20% 35.0V 85C	MAIN BOARD	RTD120		13039350	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
C21	253796	CAPCC .1UF 10% 16V	MAIN BOARD	RTD120		20947390	
C22	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C23	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C24	261086	CAP CE 1000UF +20% 35.0V 85C	MAIN BOARD	RTD120		55642260	
C25	261086	CAP CE 1000UF +20% 35.0V 85C	MAIN BOARD	RTD120		55642260	
C26	261086	CAP CE 1000UF +20% 35.0V 85C	MAIN BOARD	RTD120		55642260	
C27	261086	CAP CE 1000UF +20% 35.0V 85C	MAIN BOARD	RTD120		55642260	
C28	261086	CAP CE 1000UF +20% 35.0V 85C	MAIN BOARD	RTD120		55642260	
C29	261086	CAP CE 1000UF +20% 35.0V 85C	MAIN BOARD	RTD120		55642260	
C3	257175	CAP LYTC 4700UF 20% 50V 85C	MAIN BOARD	RTD120		20692930	
C30	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C301	194673	CAP LYTC 1UF M 50V	MAIN BOARD	RTD120		20268840	
C302	253796	CAPCC .1UF 10% 16V	MAIN BOARD	RTD120		20947390	
C303	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN BOARD	RTD120		20718370	
C32	260668	CAP POLY 100NF +10% 50V	MAIN BOARD	RTD120		20266460	
C33	266146	CAP 10U0F +20% 16.0V 85C	MAIN BOARD	RTD120		55884360	
C34	266146	CAP 10U0F +20% 16.0V 85C	MAIN BOARD	RTD120		55884360	
C35	266146	CAP 10U0F +20% 16.0V 85C	MAIN BOARD	RTD120		55884360	
C36	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C37	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C38	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C39	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C4	249989	CAP LYTC 2200UF 35V	MAIN BOARD	RTD120		40433130	
C40	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C41	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C42	260645	CAPCC 33PF +10% -10% 50.0V	MAIN BOARD	RTD120		10137280	
C43	260645	CAPCC 33PF +10% -10% 50.0V	MAIN BOARD	RTD120		10137280	
C44	260645	CAPCC 33PF +10% -10% 50.0V	MAIN BOARD	RTD120		10137280	
C45	260645	CAPCC 33PF +10% -10% 50.0V	MAIN BOARD	RTD120		10137280	
C46	260645	CAPCC 33PF +10% -10% 50.0V	MAIN BOARD	RTD120		10137280	
C47	260645	CAPCC 33PF +10% -10% 50.0V	MAIN BOARD	RTD120		10137280	
C48	261030	CAPCC 220PF 10% 50V X7R	MAIN BOARD	RTD120		10138310	
C49	261030	CAPCC 220PF 10% 50V X7R	MAIN BOARD	RTD120		10138310	
C5	249989	CAP LYTC 2200UF 35V	MAIN BOARD	RTD120		40433130	
C50	261030	CAPCC 220PF 10% 50V X7R	MAIN BOARD	RTD120		10138310	
C51	261030	CAPCC 220PF 10% 50V X7R	MAIN BOARD	RTD120		10138310	
C52	261030	CAPCC 220PF 10% 50V X7R	MAIN BOARD	RTD120		10138310	
C53	261030	CAPCC 220PF 10% 50V X7R	MAIN BOARD	RTD120		10138310	
C54	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C55	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C56	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C57	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C58	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C59	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C6	266145	CAP 100U0F +20% 35.0V 85C	MAIN BOARD	RTD120		13039350	
C60	263024	CAP CD 100NF +80% -20% 25V Z5V	MAIN BOARD	RTD120		20246470	
C61	263024	CAP CD 100NF +80% -20% 25V Z5V	MAIN BOARD	RTD120		20246470	
C62	260645	CAPCC 33PF +10% -10% 50.0V	MAIN BOARD	RTD120		10137280	
C63	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C64	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C65	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C66	262526	CAP LYTC 470UF 20% 25V 85C	MAIN BOARD	RTD120		20269190	
C67	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C68	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C69	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C7	266145	CAP 100U0F +20% 35.0V 85C	MAIN BOARD	RTD120		13039350	
C70	189981	CAP LYTC 10UF M 50V	MAIN BOARD	RTD120		20268880	
C72	194673	CAP LYTC 1UF M 50V	MAIN BOARD	RTD120		20268840	
C74	260668	CAP POLY 100NF +10% 50V	MAIN BOARD	RTD120		20266460	
C75	260668	CAP POLY 100NF +10% 50V	MAIN BOARD	RTD120		20266460	
C76	260668	CAP POLY 100NF +10% 50V	MAIN BOARD	RTD120		20266460	
C77	260668	CAP POLY 100NF +10% 50V	MAIN BOARD	RTD120		20266460	
C78	260668	CAP POLY 100NF +10% 50V	MAIN BOARD	RTD120		20266460	
C79	260668	CAP POLY 100NF +10% 50V	MAIN BOARD	RTD120		20266460	
C8	263024	CAP CD 100NF +80% -20% 25V Z5V	MAIN BOARD	RTD120		20246470	
C80	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN BOARD	RTD120		20718370	
C81	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN BOARD	RTD120		20718370	
C82	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN BOARD	RTD120		20718370	
C83	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN BOARD	RTD120		20718370	
C84	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN BOARD	RTD120		20718370	
C85	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN BOARD	RTD120		20718370	
C88	265962	CAP 470UF +20% 6.3V 85C	MAIN BOARD	RTD120		13051580	
C9	263024	CAP CD 100NF +80% -20% 25V Z5V	MAIN BOARD	RTD120		20246470	
C90	253796	CAPCC .1UF 10% 16V	MAIN BOARD	RTD120		20947390	
C93	256817	CAPCC 47PF K NPO 50V	MAIN BOARD	RTD120		10137310	
C95	256817	CAPCC 47PF K NPO 50V	MAIN BOARD	RTD120		10137310	
C96	256817	CAPCC 47PF K NPO 50V	MAIN BOARD	RTD120		10137310	
C97	256817	CAPCC 47PF K NPO 50V	MAIN BOARD	RTD120		10137310	
C98	256817	CAPCC 47PF K NPO 50V	MAIN BOARD	RTD120		10137310	
C99	263024	CAP CD 100NF +80% -20% 25V Z5V	MAIN BOARD	RTD120		20246470	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
CIRCUIT	266181	DSP/DECODER BOARD	DSP	RTD120		55905980	
CIRCUIT	266181	DSP/DECODER BOARD	DSP	NSM		55905980	
CN1	249354	CONNECTOR HEADER 2 POS	MAIN BOARD	RTD120		5504884A	
CN2	265130	CONNECTOR, 5 PIN	MAIN BOARD	RTD120		55123640	
CP302	266151	CONNECTOR 10 PIN 260MM	MAIN BOARD	RTD120		20365780	
CP401	261194	CABLE 15P 60MM	MAIN BOARD	RTD120		5530283A	
CP403	257112	CABLE 15P 50MM	MAIN BOARD	RTD120		55177060	
D1	249217	DIODE 1N5402 200.0V 3.0A	MAIN BOARD	RTD120		55041640	
D10	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
D101	254521	DIODE, LTL-1CHE	KEYBOARD	RTD120		55125510	
D102	265965	LED, CT-3SGTA	KEYBOARD	RTD120		55199400	
D103	265965	LED, CT-3SGTA	KEYBOARD	RTD120		55199400	
D104	265965	LED, CT-3SGTA	KEYBOARD	RTD120		55199400	
D105	266175	LED GRN RND	KEYBOARD	RTD120		55859410	
D106	266175	LED GRN RND	KEYBOARD	RTD120		55859410	
D107	266175	LED GRN RND	KEYBOARD	RTD120		55859410	
D108	266175	LED GRN RND	KEYBOARD	RTD120		55859410	
D109	266175	LED GRN RND	KEYBOARD	RTD120		55859410	
D11	244835	DIODE ZENER 27V .5W	MAIN BOARD	RTD120		20475330	
D110	266175	LED GRN RND	KEYBOARD	RTD120		55859410	
D111	266175	LED GRN RND	KEYBOARD	RTD120		55859410	
D12	198589	DIODE 1N4148	MAIN BOARD	RTD120		70436540	
D13	249217	DIODE 1N5402 200.0V 3.0A	MAIN BOARD	RTD120		55041640	
D14	249217	DIODE 1N5402 200.0V 3.0A	MAIN BOARD	RTD120		55041640	
D15	249217	DIODE 1N5402 200.0V 3.0A	MAIN BOARD	RTD120		55041640	
D16	249217	DIODE 1N5402 200.0V 3.0A	MAIN BOARD	RTD120		55041640	
D2	249217	DIODE 1N5402 200.0V 3.0A	MAIN BOARD	RTD120		55041640	
D3	249217	DIODE 1N5402 200.0V 3.0A	MAIN BOARD	RTD120		55041640	
D32	198602	DIODE ZENER 5.1V .5W	MAIN BOARD	RTD120		80444140	
D33	198602	DIODE ZENER 5.1V .5W	MAIN BOARD	RTD120		80444140	
D34	198602	DIODE ZENER 5.1V .5W	MAIN BOARD	RTD120		80444140	
D4	249217	DIODE 1N5402 200.0V 3.0A	MAIN BOARD	RTD120		55041640	
D5	257370	DIODE 1N4002 100.0V 1A	MAIN BOARD	RTD120		20415050	
D6	257370	DIODE 1N4002 100.0V 1A	MAIN BOARD	RTD120		20415050	
D7	257370	DIODE 1N4002 100.0V 1A	MAIN BOARD	RTD120		20415050	
D8	257370	DIODE 1N4002 100.0V 1A	MAIN BOARD	RTD120		20415050	
D9	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
DVD MECH	266178	DVD MECH ASSEMBLY WITH LASER	DVD ASSEMBLY	RTD120		55905990	
DVD MODULE	266186	COMPLETE DVD MECH/WITH DECODER	DVD ASSEMBLY	RTD120		55788820	
EN101	266176	ENCODER ROTARY 5V 1MI0A	KEYBOARD	RTD120		55780920	
F1	249401	FUSE SB 1A/125V	MAIN BOARD	RTD120	S	55127130	
F2	261445	FUSE 3A 250	MAIN BOARD	RTD120	S	20870650	
F3	252837	FUSE 4.0 A 125.0 V	MAIN BOARD	RTD120	S	20828770	
F4	249401	FUSE SB 1A/125V	MAIN BOARD	RTD120	S	55127130	
FB1	261109	FBEAD BEAD 95OHM FERRITE BEAD	MAIN BOARD	RTD120		55128610	
FH1	252836	HOLDER FUSE	MAIN BOARD	RTD120		55017140	
FH2	252836	HOLDER FUSE	MAIN BOARD	RTD120		55017140	
FH3	252836	HOLDER FUSE	MAIN BOARD	RTD120		55017140	
FH4	252836	HOLDER FUSE	MAIN BOARD	RTD120		55017140	
IC1	238708	IC BA4558F	MAIN BOARD	RTD120		20976940	
IC11	266147	IC-LOGIC CD4053BM	MAIN BOARD	RTD120		55668960	
IC12	238708	IC BA4558F	MAIN BOARD	RTD120		20976940	
IC2	238708	IC BA4558F	MAIN BOARD	RTD120		20976940	
IC3	238708	IC BA4558F	MAIN BOARD	RTD120		20976940	
IC4	265187	LOWFREQ TDA7448 VOLUME CONT	MAIN BOARD	RTD120		55784750	
IC5	266152	IC-POWAMP TDA7497	MAIN BOARD	RTD120		55784740	
IC6	248142	IC POWER AMP TDA7269	MAIN BOARD	RTD120		55057540	
IC7	248142	IC POWER AMP TDA7269	MAIN BOARD	RTD120		55057540	
IR101	265123	IC, REMOTE RECEIVER	KEYBOARD	RTD120		55488350	
J101	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J102	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J103	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J104	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J105	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J106	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J107	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J108	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J109	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J110	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J111	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J112	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J113	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		55210010	
J201	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20329200	
J201	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329200	
J202	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20329200	
J202	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329200	
J203	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20329200	
J203	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329200	
J204	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329200	
J204	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20329200	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
J205	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329200	
J206	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329200	
J207	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329200	
J208	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329200	
J209	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329200	
J210	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329200	
J301	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J301	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J302	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J302	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J303	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J303	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J304	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J304	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J305	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J305	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J306	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J306	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J307	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J307	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J308	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J308	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J309	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J309	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J310	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J310	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J311	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J311	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J312	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J312	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J313	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J313	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J314	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J315	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J315	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J316	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181860	
J401	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20329290	
J401	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329290	
J402	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329290	
J402	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20329290	
J403	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
J403	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20329290	
J404	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20329290	
J501	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181870	
J501	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J502	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J502	NONSTK	WIRE JUMPER	KEYBOARD	RTD120		20181870	
J503	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J504	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J505	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J506	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J507	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J508	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J509	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J510	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J511	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J512	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181870	
J601	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J602	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J603	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J604	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J605	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J606	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J607	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J608	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J609	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J610	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J611	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J613	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J614	266153	RES 220MI0 OHM +5% 1.0W	MAIN BOARD	RTD120		55928240	
J615	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J616	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
J617	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20637320	
JACK1	266154	SPEAKER JACK	MAIN BOARD	RTD120		55842180	
JACK2	266155	S-VIDEO/INPUT JACK	MAIN BOARD	RTD120		55785120	
JACK3	266156	VIDEO/AUDIO INPUT JACKS	MAIN BOARD	RTD120		55843080	
JACK4	266157	AUDIO IN/OUT JACKS	MAIN BOARD	RTD120		55176330	
JP101	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
JP102	NONSTK	WIRE JUMPER	MAIN BOARD	RTD120		20181860	
L1	260674	FERRITE BEADT 1000OHM	MAIN BOARD	RTD120		55126670	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
L102	260674	FERRITE BEADT 1000OHM	MAIN BOARD	RTD120		55126670	
L2	266148	FBEAD SURFACE MT 300OHM GZ2012	MAIN BOARD	RTD120		55700360	
L3	266148	FBEAD SURFACE MT 300OHM GZ2012	MAIN BOARD	RTD120		55700360	
L4	266148	FBEAD SURFACE MT 300OHM GZ2012	MAIN BOARD	RTD120		55700360	
L5	266148	FBEAD SURFACE MT 300OHM GZ2012	MAIN BOARD	RTD120		55700360	
L6	266148	FBEAD SURFACE MT 300OHM GZ2012	MAIN BOARD	RTD120		55700360	
L7	266148	FBEAD SURFACE MT 300OHM GZ2012	MAIN BOARD	RTD120		55700360	
L8	250600	COIL AIR 1MM 10MM 7 TURNS	MAIN BOARD	RTD120		21070690	
P101	257109	CABLE 11P 200MM	KEYBOARD	RTD120		55177140	
P102	257109	CABLE 11P 200MM	KEYBOARD	RTD120		55177140	
P103	266177	CABLE 26 RIBBON 220MM	KEYBOARD	RTD120		55808580	
Q1	224487	TRANSISTOR 2SD1328	MAIN BOARD	RTD120		20496900	
Q1	266149	TR-KTC2875 N 300MI0A	MAIN BOARD	RTD120		55884260	
Q101	248089	TRANSISTOR KTA1504GR	KEYBOARD	RTD120		20779750	
Q102	248089	TRANSISTOR KTA1504GR	KEYBOARD	RTD120		20779750	
Q103	248089	TRANSISTOR KTA1504GR	KEYBOARD	RTD120		20779750	
Q104	248089	TRANSISTOR KTA1504GR	KEYBOARD	RTD120		20779750	
Q105	248089	TRANSISTOR KTA1504GR	KEYBOARD	RTD120		20779750	
Q106	248089	TRANSISTOR KTA1504GR	KEYBOARD	RTD120		20779750	
Q107	248089	TRANSISTOR KTA1504GR	KEYBOARD	RTD120		20779750	
Q108	248089	TRANSISTOR KTA1504GR	KEYBOARD	RTD120		20779750	
Q109	248089	TRANSISTOR KTA1504GR	KEYBOARD	RTD120		20779750	
Q110	248089	TRANSISTOR KTA1504GR	KEYBOARD	RTD120		20779750	
Q111	248089	TRANSISTOR KTA1504GR	KEYBOARD	RTD120		20779750	
Q13	266182	TRANS 2SC1623*L 150MI0A	MAIN BOARD	RTD120		55943460	
Q13	266150	TR- 2SC2412K 150MI0	MAIN BOARD	RTD120		55812680	
Q14	266150	TR- 2SC2412K 150MI0	MAIN BOARD	RTD120		55812680	
Q14	266182	TRANS 2SC1623*L 150MI0A	MAIN BOARD	RTD120		55943460	
Q15	266182	TRANS 2SC1623*L 150MI0A	MAIN BOARD	RTD120		55943460	
Q15	266150	TR- 2SC2412K 150MI0	MAIN BOARD	RTD120		55812680	
Q16	266150	TR- 2SC2412K 150MI0	MAIN BOARD	RTD120		55812680	
Q16	266182	TRANS 2SC1623*L 150MI0A	MAIN BOARD	RTD120		55943460	
Q17	266150	TR- 2SC2412K 150MI0	MAIN BOARD	RTD120		55812680	
Q17	266182	TRANS 2SC1623*L 150MI0A	MAIN BOARD	RTD120		55943460	
Q18	266150	TR- 2SC2412K 150MI0	MAIN BOARD	RTD120		55812680	
Q18	266182	TRANS 2SC1623*L 150MI0A	MAIN BOARD	RTD120		55943460	
Q19	248092	TRANSISTOR KRC107S	MAIN BOARD	RTD120		55051240	
Q2	178650	TRANSISTOR	MAIN BOARD	RTD120		20678120	
Q20	248092	TRANSISTOR KRC107S	MAIN BOARD	RTD120		55051240	
Q21	248092	TRANSISTOR KRC107S	MAIN BOARD	RTD120		55051240	
Q22	248092	TRANSISTOR KRC107S	MAIN BOARD	RTD120		55051240	
Q23	266158	TR-KTB1370 -7.0A -80V	MAIN BOARD	RTD120		55858590	
Q24	220229	TRANSISTOR	MAIN BOARD	RTD120		20508040	
Q25	220229	TRANSISTOR	MAIN BOARD	RTD120		20508040	
Q26	246536	TRANSISTOR DTC3223TK	MAIN BOARD	RTD120		55039430	
Q27	246536	TRANSISTOR DTC3223TK	MAIN BOARD	RTD120		55039430	
Q28	246536	TRANSISTOR DTC3223TK	MAIN BOARD	RTD120		55039430	
Q29	246536	TRANSISTOR DTC3223TK	MAIN BOARD	RTD120		55039430	
Q3	266149	TR-KTC2875 N 300MI0A	MAIN BOARD	RTD120		55884260	
Q3	224487	TRANSISTOR 2SD1328	MAIN BOARD	RTD120		20496900	
Q30	246536	TRANSISTOR DTC3223TK	MAIN BOARD	RTD120		55039430	
Q31	246536	TRANSISTOR DTC3223TK	MAIN BOARD	RTD120		55039430	
Q4	224487	TRANSISTOR 2SD1328	MAIN BOARD	RTD120		20496900	
Q4	266149	TR-KTC2875 N 300MI0A	MAIN BOARD	RTD120		55884260	
Q5	224487	TRANSISTOR 2SD1328	MAIN BOARD	RTD120		20496900	
Q5	266149	TR-KTC2875 N 300MI0A	MAIN BOARD	RTD120		55884260	
R1	266159	RES 100MI0 OHM +5% 1.0W	MAIN BOARD	RTD120	S	55798170	
R10	260305	RES CHIP 1K 5% 1/16W	MAIN BOARD	RTD120		10135770	
R100	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R101	256735	RES CMF 330 OHM 5% 1/16W	KEYBOARD	RTD120		10134870	
R101	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R102	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R102	256735	RES CMF 330 OHM 5% 1/16W	KEYBOARD	RTD120		10134870	
R103	175351	RES CF 1/4W 5% 20K	MAIN BOARD	RTD120		40435660	
R103	256735	RES CMF 330 OHM 5% 1/16W	KEYBOARD	RTD120		10134870	
R104	256735	RES CMF 330 OHM 5% 1/16W	KEYBOARD	RTD120		10134870	
R105	256735	RES CMF 330 OHM 5% 1/16W	KEYBOARD	RTD120		10134870	
R106	256735	RES CMF 330 OHM 5% 1/16W	KEYBOARD	RTD120		10134870	
R107	256735	RES CMF 330 OHM 5% 1/16W	KEYBOARD	RTD120		10134870	
R108	256735	RES CMF 330 OHM 5% 1/16W	KEYBOARD	RTD120		10134870	
R109	256735	RES CMF 330 OHM 5% 1/16W	KEYBOARD	RTD120		10134870	
R11	223673	RES CF 1/4W 5% 4.7 OHM	MAIN BOARD	RTD120		20472530	
R110	256735	RES CMF 330 OHM 5% 1/16W	KEYBOARD	RTD120		10134870	
R111	256735	RES CMF 330 OHM 5% 1/16W	KEYBOARD	RTD120		10134870	
R112C	256783	RES CMF 0 OHM 0% 1/16W	KEYBOARD	RTD120		10328750	
R115	260305	RES CHIP 1K 5% 1/16W	MAIN BOARD	RTD120		10135770	
R116	260305	RES CHIP 1K 5% 1/16W	MAIN BOARD	RTD120		10135770	
R117	256744	RES CMF 18K OHM 5% 1/16W	MAIN BOARD	RTD120		10135080	
R118	256754	RES CMF 100K OHM 5% 1/16W	MAIN BOARD	RTD120		10135340	
R119	256754	RES CMF 100K OHM 5% 1/16W	MAIN BOARD	RTD120		10135340	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
R12	266141	RCF 120R0 OHM +5% 250MI0W	MAIN BOARD	RTD120		55198810	
R120	256744	RES CMF 18K OHM 5% 1/16W	MAIN BOARD	RTD120		10135080	
R121	256754	RES CMF 100K OHM 5% 1/16W	MAIN BOARD	RTD120		10135340	
R122	256754	RES CMF 100K OHM 5% 1/16W	MAIN BOARD	RTD120		10135340	
R123	256737	RES CMF 470 OHM 5% 1/16W	MAIN BOARD	RTD120		10134910	
R124	256737	RES CMF 470 OHM 5% 1/16W	MAIN BOARD	RTD120		10134910	
R125	256741	RES CMF 10K OHM 5% 1/16W	KEYBOARD	RTD120		10135010	
R125	256737	RES CMF 470 OHM 5% 1/16W	MAIN BOARD	RTD120		10134910	
R126	256737	RES CMF 470 OHM 5% 1/16W	MAIN BOARD	RTD120		10134910	
R127	256737	RES CMF 470 OHM 5% 1/16W	MAIN BOARD	RTD120		10134910	
R128	256741	RES CMF 10K OHM 5% 1/16W	KEYBOARD	RTD120		10135010	
R128	260940	RES CMF 39R OHM +5% 1/10W	MAIN BOARD	RTD120		10134630	
R129	256727	RES CMF 68 OHM +5% 1/16W	MAIN BOARD	RTD120		10134700	
R129	256741	RES CMF 10K OHM 5% 1/16W	KEYBOARD	RTD120		10135010	
R13	256738	RES CMF 560 OHM 5% 1/16W	MAIN BOARD	RTD120		10134930	
R130	256741	RES CMF 10K OHM 5% 1/16W	KEYBOARD	RTD120		10135010	
R130	256727	RES CMF 68 OHM +5% 1/16W	MAIN BOARD	RTD120		10134700	
R131	256741	RES CMF 10K OHM 5% 1/16W	KEYBOARD	RTD120		10135010	
R131	256727	RES CMF 68 OHM +5% 1/16W	MAIN BOARD	RTD120		10134700	
R132	260685	RES CMF 56R +5% 1/16W	MAIN BOARD	RTD120		10134680	
R134	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R135	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R136	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R137	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R138	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R139	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R14	256738	RES CMF 560 OHM 5% 1/16W	MAIN BOARD	RTD120		10134930	
R141	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN BOARD	RTD120		10135880	
R142	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN BOARD	RTD120		10135880	
R143	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN BOARD	RTD120		10135880	
R144	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN BOARD	RTD120		10135880	
R145	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN BOARD	RTD120		10135880	
R146	256746	RES CMF 22K OHM 5% 1/16W	MAIN BOARD	RTD120		10135120	
R147	256746	RES CMF 22K OHM 5% 1/16W	MAIN BOARD	RTD120		10135120	
R148	256746	RES CMF 22K OHM 5% 1/16W	MAIN BOARD	RTD120		10135120	
R149	256746	RES CMF 22K OHM 5% 1/16W	MAIN BOARD	RTD120		10135120	
R15	256738	RES CMF 560 OHM 5% 1/16W	MAIN BOARD	RTD120		10134930	
R150	256746	RES CMF 22K OHM 5% 1/16W	MAIN BOARD	RTD120		10135120	
R151	256730	RES CMF 100 OHM 5% 1/16W	MAIN BOARD	RTD120		10134740	
R152	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN BOARD	RTD120		10135880	
R153	256746	RES CMF 22K OHM 5% 1/16W	MAIN BOARD	RTD120		10135120	
R154	256737	RES CMF 470 OHM 5% 1/16W	MAIN BOARD	RTD120		10134910	
R155	192100	RES CMF 1/10W 5% 1K	MAIN BOARD	RTD120		20471950	
R156	256730	RES CMF 100 OHM 5% 1/16W	MAIN BOARD	RTD120		10134740	
R157	256765	RES CMF 5.6K OHM 5% 1/16W	MAIN BOARD	RTD120		10135960	
R158	256730	RES CMF 100 OHM 5% 1/16W	MAIN BOARD	RTD120		10134740	
R159	256765	RES CMF 5.6K OHM 5% 1/16W	MAIN BOARD	RTD120		10135960	
R16	256738	RES CMF 560 OHM 5% 1/16W	MAIN BOARD	RTD120		10134930	
R160	260305	RES CHIP 1K 5% 1/16W	MAIN BOARD	RTD120		10135770	
R161	243375	RES CMF 4.7K 5% 1/10W	MAIN BOARD	RTD120		10135940	
R162	256730	RES CMF 100 OHM 5% 1/16W	MAIN BOARD	RTD120		10134740	
R163	243375	RES CMF 4.7K 5% 1/10W	MAIN BOARD	RTD120		10135940	
R164	256730	RES CMF 100 OHM 5% 1/16W	MAIN BOARD	RTD120		10134740	
R165	244090	RES CMF 7.5K 5% 1/10W	MAIN BOARD	RTD120		10135990	
R166	244090	RES CMF 7.5K 5% 1/10W	MAIN BOARD	RTD120		10135990	
R167	244090	RES CMF 7.5K 5% 1/10W	MAIN BOARD	RTD120		10135990	
R168	249041	RES CMF 1.2K 5% 1/10W	MAIN BOARD	RTD120		10135790	
R169	249041	RES CMF 1.2K 5% 1/10W	MAIN BOARD	RTD120		10135790	
R17	256754	RES CMF 100K OHM 5% 1/16W	MAIN BOARD	RTD120		10135340	
R170	249041	RES CMF 1.2K 5% 1/10W	MAIN BOARD	RTD120		10135790	
R171	244090	RES CMF 7.5K 5% 1/10W	MAIN BOARD	RTD120		10135990	
R172	244090	RES CMF 7.5K 5% 1/10W	MAIN BOARD	RTD120		10135990	
R173	249041	RES CMF 1.2K 5% 1/10W	MAIN BOARD	RTD120		10135790	
R174	249041	RES CMF 1.2K 5% 1/10W	MAIN BOARD	RTD120		10135790	
R175	244090	RES CMF 7.5K 5% 1/10W	MAIN BOARD	RTD120		10135990	
R176	256760	RES CMF 2K OHM 5% 1/16W	MAIN BOARD	RTD120		10135850	
R177	256737	RES CMF 470 OHM 5% 1/16W	MAIN BOARD	RTD120		10134910	
R178	256737	RES CMF 470 OHM 5% 1/16W	MAIN BOARD	RTD120		10134910	
R179	256737	RES CMF 470 OHM 5% 1/16W	MAIN BOARD	RTD120		10134910	
R18	249338	RESMF 47K OHM +5% 62.5MW	MAIN BOARD	RTD120		10135220	
R180	256737	RES CMF 470 OHM 5% 1/16W	MAIN BOARD	RTD120		10134910	
R181	176629	RES CF 1/4W 5% 560R	MAIN BOARD	RTD120		60441560	
R182	249338	RESMF 47K OHM +5% 62.5MW	MAIN BOARD	RTD120		10135220	
R19	249338	RESMF 47K OHM +5% 62.5MW	MAIN BOARD	RTD120		10135220	
R190	261152	RES CMF 1/10W 5% 150R	MAIN BOARD	RTD120		10134780	
R191	261152	RES CMF 1/10W 5% 150R	MAIN BOARD	RTD120		10134780	
R192	261152	RES CMF 1/10W 5% 150R	MAIN BOARD	RTD120		10134780	
R193	261152	RES CMF 1/10W 5% 150R	MAIN BOARD	RTD120		10134780	
R194	261152	RES CMF 1/10W 5% 150R	MAIN BOARD	RTD120		10134780	
R195	261152	RES CMF 1/10W 5% 150R	MAIN BOARD	RTD120		10134780	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
R2	266159	RES 100MIO OHM +5% 1.0W	MAIN BOARD	RTD120	S	55798170	
R20	249338	RESMF 47K OHM +5% 62.5MW	MAIN BOARD	RTD120		10135220	
R201	256743	RES CMF 15K OHM 5% 1/16W	MAIN BOARD	RTD120		10135050	
R21	249338	RESMF 47K OHM +5% 62.5MW	MAIN BOARD	RTD120		10135220	
R22	249338	RESMF 47K OHM +5% 62.5MW	MAIN BOARD	RTD120		10135220	
R24	176629	RES CF 1/4W 5% 560R	MAIN BOARD	RTD120		60441560	
R25	176629	RES CF 1/4W 5% 560R	MAIN BOARD	RTD120		60441560	
R26	176629	RES CF 1/4W 5% 560R	MAIN BOARD	RTD120		60441560	
R27	176629	RES CF 1/4W 5% 560R	MAIN BOARD	RTD120		60441560	
R28	176629	RES CF 1/4W 5% 560R	MAIN BOARD	RTD120		60441560	
R29	176629	RES CF 1/4W 5% 560R	MAIN BOARD	RTD120		60441560	
R3	256738	RES CMF 560 OHM 5% 1/16W	MAIN BOARD	RTD120		10134930	
R30	256754	RES CMF 100K OHM 5% 1/16W	MAIN BOARD	RTD120		10135340	
R301	175317	RES CF 1/4W 5% 10K	MAIN BOARD	RTD120		30939480	
R302	175317	RES CF 1/4W 5% 10K	MAIN BOARD	RTD120		30939480	
R303	175045	RES CF 1/4W 5% 330R	MAIN BOARD	RTD120		60441550	
R31	256754	RES CMF 100K OHM 5% 1/16W	MAIN BOARD	RTD120		10135340	
R32	256754	RES CMF 100K OHM 5% 1/16W	MAIN BOARD	RTD120		10135340	
R33	256754	RES CMF 100K OHM 5% 1/16W	MAIN BOARD	RTD120		10135340	
R34	256754	RES CMF 100K OHM 5% 1/16W	MAIN BOARD	RTD120		10135340	
R35	256754	RES CMF 100K OHM 5% 1/16W	MAIN BOARD	RTD120		10135340	
R36	260305	RES CHIP 1K 5% 1/16W	MAIN BOARD	RTD120		10135770	
R37	260305	RES CHIP 1K 5% 1/16W	MAIN BOARD	RTD120		10135770	
R38	260305	RES CHIP 1K 5% 1/16W	MAIN BOARD	RTD120		10135770	
R39	260305	RES CHIP 1K 5% 1/16W	MAIN BOARD	RTD120		10135770	
R4	226489	RES CMF 1/10W 5% 30K	MAIN BOARD	RTD120		60444410	
R40	260305	RES CHIP 1K 5% 1/16W	MAIN BOARD	RTD120		10135770	
R41	243375	RES CMF 4.7K 5% 1/10W	MAIN BOARD	RTD120		10135940	
R42	243375	RES CMF 4.7K 5% 1/10W	MAIN BOARD	RTD120		10135940	
R43	243375	RES CMF 4.7K 5% 1/10W	MAIN BOARD	RTD120		10135940	
R44	243375	RES CMF 4.7K 5% 1/10W	MAIN BOARD	RTD120		10135940	
R45	243375	RES CMF 4.7K 5% 1/10W	MAIN BOARD	RTD120		10135940	
R46	243375	RES CMF 4.7K 5% 1/10W	MAIN BOARD	RTD120		10135940	
R47	175044	RES CF 1/4W 5% 100K	MAIN BOARD	RTD120		30939510	
R48	175044	RES CF 1/4W 5% 100K	MAIN BOARD	RTD120		30939510	
R49	175044	RES CF 1/4W 5% 100K	MAIN BOARD	RTD120		30939510	
R5	266142	RMOF 1K5 OHM +5% 1.0W	MAIN BOARD	RTD120		10225720	
R50	175044	RES CF 1/4W 5% 100K	MAIN BOARD	RTD120		30939510	
R51	175044	RES CF 1/4W 5% 100K	MAIN BOARD	RTD120		30939510	
R52	175044	RES CF 1/4W 5% 100K	MAIN BOARD	RTD120		30939510	
R53	202069	RES CF 1/4W 5% 1K	MAIN BOARD	RTD120		11059640	
R54	202069	RES CF 1/4W 5% 1K	MAIN BOARD	RTD120		11059640	
R55	202069	RES CF 1/4W 5% 1K	MAIN BOARD	RTD120		11059640	
R56	202069	RES CF 1/4W 5% 1K	MAIN BOARD	RTD120		11059640	
R57	202069	RES CF 1/4W 5% 1K	MAIN BOARD	RTD120		11059640	
R58	202069	RES CF 1/4W 5% 1K	MAIN BOARD	RTD120		11059640	
R59	260648	RES CMF 750 OHMS 5% 1/10W	MAIN BOARD	RTD120		10134960	
R6	256761	RES CMF 2.2K OHM 5% 1/16W	MAIN BOARD	RTD120		10135860	
R60	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R61	256742	RES CMF 12K OHM 5% 1/16W	MAIN BOARD	RTD120		10135030	
R62	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R63	175042	RES CF 1/4W 5% 2200R	MAIN BOARD	RTD120		20469460	
R64	256742	RES CMF 12K OHM 5% 1/16W	MAIN BOARD	RTD120		10135030	
R65	175045	RES CF 1/4W 5% 330R	MAIN BOARD	RTD120		60441550	
R66	175042	RES CF 1/4W 5% 2200R	MAIN BOARD	RTD120		20469460	
R67	256742	RES CMF 12K OHM 5% 1/16W	MAIN BOARD	RTD120		10135030	
R68	261152	RES CMF 1/10W 5% 150R	MAIN BOARD	RTD120		10134780	
R69	192100	RES CMF 1/10W 5% 1K	MAIN BOARD	RTD120		20471950	
R7	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R70	192100	RES CMF 1/10W 5% 1K	MAIN BOARD	RTD120		20471950	
R71	192100	RES CMF 1/10W 5% 1K	MAIN BOARD	RTD120		20471950	
R72	192100	RES CMF 1/10W 5% 1K	MAIN BOARD	RTD120		20471950	
R73	175042	RES CF 1/4W 5% 2200R	MAIN BOARD	RTD120		20469460	
R74	226489	RES CMF 1/10W 5% 30K	MAIN BOARD	RTD120		60444410	
R75	226489	RES CMF 1/10W 5% 30K	MAIN BOARD	RTD120		60444410	
R76	226489	RES CMF 1/10W 5% 30K	MAIN BOARD	RTD120		60444410	
R77	226489	RES CMF 1/10W 5% 30K	MAIN BOARD	RTD120		60444410	
R78	256743	RES CMF 15K OHM 5% 1/16W	MAIN BOARD	RTD120		10135050	
R79	256743	RES CMF 15K OHM 5% 1/16W	MAIN BOARD	RTD120		10135050	
R80	223673	RES CF 1/4W 5% 4.7 OHM	MAIN BOARD	RTD120		20472530	
R81	223673	RES CF 1/4W 5% 4.7 OHM	MAIN BOARD	RTD120		20472530	
R82	223673	RES CF 1/4W 5% 4.7 OHM	MAIN BOARD	RTD120		20472530	
R83	223673	RES CF 1/4W 5% 4.7 OHM	MAIN BOARD	RTD120		20472530	
R84	223673	RES CF 1/4W 5% 4.7 OHM	MAIN BOARD	RTD120		20472530	
R85	175042	RES CF 1/4W 5% 2200R	MAIN BOARD	RTD120		20469460	
R86	223673	RES CF 1/4W 5% 4.7 OHM	MAIN BOARD	RTD120		20472530	
R87	261152	RES CMF 1/10W 5% 150R	MAIN BOARD	RTD120		10134780	
R88	256743	RES CMF 15K OHM 5% 1/16W	MAIN BOARD	RTD120		10135050	
R89	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R9	256738	RES CMF 560 OHM 5% 1/16W	MAIN BOARD	RTD120		10134930	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
R90	256730	RES CMF 100 OHM 5% 1/16W	MAIN BOARD	RTD120		10134740	
R91	256727	RES CMF 68 OHM +5% 1/16W	MAIN BOARD	RTD120		10134700	
R93	256730	RES CMF 100 OHM 5% 1/16W	MAIN BOARD	RTD120		10134740	
R94	256730	RES CMF 100 OHM 5% 1/16W	MAIN BOARD	RTD120		10134740	
R95	256730	RES CMF 100 OHM 5% 1/16W	MAIN BOARD	RTD120		10134740	
R96	256730	RES CMF 100 OHM 5% 1/16W	MAIN BOARD	RTD120		10134740	
R97	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R98	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
R99	256741	RES CMF 10K OHM 5% 1/16W	MAIN BOARD	RTD120		10135010	
SW1	266160	SWITCH SLIDE-SWITCH SK1304	MAIN BOARD	RTD120		55765630	
SW101	245481	SWITCH	KEYBOARD	RTD120		20404730	
SW102	245481	SWITCH	KEYBOARD	RTD120		20404730	
SW103	245481	SWITCH	KEYBOARD	RTD120		20404730	
SW104	245481	SWITCH	KEYBOARD	RTD120		20404730	
SW105	245481	SWITCH	KEYBOARD	RTD120		20404730	
SW106	245481	SWITCH	KEYBOARD	RTD120		20404730	
SW107	245481	SWITCH	KEYBOARD	RTD120		20404730	
U1	266161	IC-REGULATOR KIA378R05PI	MAIN BOARD	RTD120		55878450	
U2	251567	KIA7912PI	MAIN BOARD	RTD120		55094440	
U3	251567	IC KIA7812API	MAIN BOARD	RTD120		55094390	
ZD1	266143	DIODE ZENER 9.1V 1/2W 1N5239B	MAIN BOARD	RTD120		20527000	
ZD2	248145	DIODE ZENER 7.5V 1/2W BZX55C7V	MAIN BOARD	RTD120		80444150	
ZD3	248145	DIODE ZENER 7.5V 1/2W BZX55C7V	MAIN BOARD	RTD120		80444150	

CD MECHANISM PIN FUNCTIONS

JJ3:

Pin NO.	1	2	3	4	5	6	7	8	9	10	11	12
Signal	TRACK-	TRACK+	FOCUS-	FOCUS+	DVDM	DI NC	VR_DVD	GND	DVDLD	OCDLDO	VR_CD	GND
Pin NO.	13	14	15	16	17	18	19	20	21	22	23	24
Signal	CDMD	NC	RF	C	B	A	D	F	E	RF50V	PVC	GND

CN403:

Pin NO.	1	2	3	4	5	6	7	8	9	10	11	12
Signal	AN_L	GNDA	AN_R	VDAC	GNDV	CDAC	GNDV	UDAC	GNDV	YDAC	4052_A	4052_B
Pin NO.	13	14	15									
Signal	COMPONENT_DET	PROGRESSIVE_DET	QUIET									

CN401:

Pin NO.	1	2	3	4	5	6	7	8	9	10	11	12
Signal	I2C_DAT	I2C_CLK	GNDA	FL	AMP_MUTE1	FR	AMP_MUTE2	CC	AMP_MUTE3	SUB	AMP_MUTE4	LS
Pin NO.	13	14	15									
Signal	FAULT	RS	POWER_ON/OFF									

J11:

Pin NO.	1	2	3	4	5	6						
Signal	SLED-	SLED+	HOMESW	WGND	SP+	SP-						

CN3:

Pin NO.	1	2	3	4	5							
Signal	LOAD+	LOAD-	OUTSW	GND	INSW							

CN302:

Pin NO.	1	2	3	4	5	6	7	8	9	10		
Signal	GND	VCC	VCC	GND	VCC_IN	GND	+12V	GNDA	-12V	VCCA		

CN101:

Pin NO.	1	2	3	4	5	6	7	8	9	10	11	12
Signal	LED1	LED2	LED3	LED4	LED5	LED6	LED7	LED8	LED9	LED10	LED11	LED12
Pin NO.	13											
Signal	LED13											

CN102:

Pin NO.	1	2	3	4	5	6	7	8	9	10	11	
Signal	VCC	IR	GND	EN_A	EN_B	KEY1	KEY2	KEY3	KEY4	KEY5	KEY6	

Voltage Charts

Device	Pin	Voltage
Q1	E	1.0
Q1	B	1.6
Q1	C	1.0
Q2	E	0.0
Q2	B	0.3
Q2	C	0.0
Q3	E	1.0
Q3	B	1.6
Q3	C	1.0
Q4	E	4.6
Q4	B	5.1
Q4	C	22.1
Q5	E	4.6
Q5	B	5.1
Q5	C	21.9
Q6	E	0.0
Q6	B	4.9
Q6	C	0.0
Q7	E	0.0
Q7	B	0.0
Q7	C	-0.9
Q8	E	0.0
Q8	B	-0.9
Q8	C	0.0
Q9	E	20.1
Q9	B	30.8
Q9	C	0.0
Q10	E	31.3
Q10	B	31.7
Q10	C	30.8
Q11	E	0.0
Q11	B	-0.5
Q11	C	-6.3
Q12	E	0.0
Q12	B	0.0
Q12	C	5.9
Q13	E	8.8
Q13	B	9.5
Q13	C	10.9
Q14	E	8.8
Q14	B	9.5
Q14	C	10.9
Q15	E	8.8
Q15	B	9.5
Q15	C	10.9
Q16	E	8.8
Q16	B	9.5
Q16	C	10.9
Q17	E	8.8
Q17	B	9.5
Q17	C	10.9

Device	Pin	Voltage
Q18	E	8.8
Q18	B	9.5
Q18	C	10.9
Q19	E	0.0
Q19	B	0.0
Q19	C	1.7
Q20	E	0.0
Q20	B	0.0
Q20	C	1.7
Q21	E	0.0
Q21	B	0.0
Q21	C	5.1
Q22	E	0.0
Q22	B	0.0
Q22	C	5.1
Q23	E	31.3
Q23	B	30.7
Q23	C	24.0
Q24	E	0.0
Q24	B	0.6
Q24	C	0.0
Q25	E	0.0
Q25	B	0.6
Q25	C	0.6
Q26	E	0.0
Q26	B	7.5
Q26	C	0.0
Q27	E	0.0
Q27	B	7.5
Q27	C	0.0
Q28	E	0.0
Q28	B	7.5
Q28	C	0.0
Q29	E	0.0
Q29	B	7.5
Q29	C	0.0
Q30	E	0.0
Q30	B	7.5
Q30	C	0.0
Q31	E	0.0
Q31	B	7.5
Q31	C	0.0
Q101	E	4.9
Q101	B	4.1
Q101	C	0.0
Q102	E	0.7
Q102	B	0.0
Q102	C	0.0
Q103	E	3.5
Q103	B	4.9
Q103	C	0.0

Device	Pin	Voltage
Q104	E	3.5
Q104	B	4.9
Q104	C	0.0
Q105	E	3.5
Q105	B	4.9
Q105	C	0.0
Q106	E	3.5
Q106	B	4.9
Q106	C	0.0
Q107	E	3.5
Q107	B	4.9
Q107	C	0.0
Q108	E	3.5
Q108	B	4.9
Q108	C	0.0
Q109	E	0.7
Q109	B	0.0
Q109	C	0.0
Q110	E	0.7
Q110	B	0.0
Q110	C	0.0
Q111	E	0.7
Q111	B	0.0
Q111	C	0.0
Device	Pin#	Voltage
IC1	1	0.0
IC1	2	0.0
IC1	3	0.0
IC1	4	-11.4
IC1	5	0.0
IC1	6	0.0
IC1	7	0.0
IC1	8	12.5
Device	Pin#	Voltage
IC2	1	0.0
IC2	2	0.0
IC2	3	0.0
IC2	4	-11.4
IC2	5	0.0
IC2	6	0.0
IC2	7	0.0
IC2	8	12.5
Device	Pin#	Voltage
IC3	1	0.0
IC3	2	0.0
IC3	3	0.0
IC3	4	-11.4
IC3	5	0.0
IC3	6	0.0
IC3	7	0.0
IC3	8	12.5

Note: All DC voltages taken in DVD play mode. Many of the pins have an AC waveform on them. The dc voltages shown in those cases are a rough average.

Device	Pin#	Voltage
IC4	1	8.8
IC4	2	4.4
IC4	3	4.4
IC4	4	4.4
IC4	5	4.4
IC4	6	4.4
IC4	7	4.4
IC4	8	0.0
IC4	9	4.8
IC4	10	4.8
IC4	11	0.0
IC4	12	0.0
IC4	13	0.0
IC4	14	4.4
IC4	15	4.4
IC4	16	4.4
IC4	17	4.4
IC4	18	4.4
IC4	19	4.4
IC4	20	4.4
Device	Pin#	Voltage
IC5	1	15.5
IC5	2	31.0
IC5	3	15.5
IC5	4	0.0
IC5	5	15.5
IC5	6	15.5
IC5	7	15.5
IC5	8	0.0
IC5	9	1.0
IC5	10	1.0
IC5	11	0.0
IC5	12	15.3
IC5	13	31.0
IC5	14	15.3
IC5	15	0.0
Device	Pin#	Voltage
IC6	1	0.0
IC6	2	15.1
IC6	3	31.0
IC6	4	15.1
IC6	5	22.0
IC6	6	0.0
IC6	7	15.1
IC6	8	15.1
IC6	9	15.1
IC6	10	15.1
IC6	11	15.1
Device	Pin#	Voltage

IC7	1	0.0
IC7	2	14.4
IC7	3	31.1
IC7	4	14.4
IC7	5	22.0
IC7	6	0.0
IC7	7	14.4
IC7	8	14.4
IC7	9	14.4
IC7	10	14.4
IC7	11	14.4
Device	Pin#	Voltage
IC11	1	0.0
IC11	2	0.0
IC11	3	0.0
IC11	4	0.0
IC11	5	0.0
IC11	6	0.0
IC11	7	-7.5
IC11	8	0.0
IC11	9	0.0
IC11	10	0.0
IC11	11	0.0
IC11	12	0.0
IC11	13	0.0
IC11	14	0.0
IC11	15	0.0
IC11	16	7.5
Device	Pin#	Voltage
IC12	1	0.0
IC12	2	0.0
IC12	3	0.0
IC12	4	-11.9
IC12	5	0.0
IC12	6	0.0
IC12	7	0.0
IC12	8	11.5
Device	Pin#	Voltage
U1	1	6.7
U1	2	5.0
U1	3	0.0
U1	4	6.7
Device	Pin#	Voltage
U2	1	0.0
U2	2	-17.0
U2	3	-12.2
Device	Pin#	Voltage
U3	1	16.0

[illegible]

Note: All DC voltages taken in DVD play mode. Many of the pins have an AC waveform on them. The dc voltages shown in those cases are a rough average.

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
0040	266162	CABINET FRONT RT120	INSTRUMENT	RTD120B		55689700	
0050	266163	DOOR CD RTD120	INSTRUMENT	RTD120B		55925840	
0060	266164	BUTTON TREE RTD120	INSTRUMENT	RTD120B		55925850	
0080	266165	KNOB VOLUME RTD120	INSTRUMENT	RTD120B		55925860	
0090	266179	CABLE 5 PIN	INSTRUMENT	RTD120B		55832920	
0090	266166	CRYSTAL VOLUME RING RTD120	INSTRUMENT	RTD120B		55729820	
0100	266180	CABLE 6P 150MM UL1	INSTRUMENT	RTD120B		55913990	
0100	266167	LIGHTPIPE POWER RTD120	INSTRUMENT	RTD120B		55729830	
0110	267684	COVER PC FILTER RTD120	INSTRUMENT	RTD120B		55925750	
0120	266168	METAL SUPPORT A RTD120	INSTRUMENT	RTD120B		55799520	
0130	266169	METAL SUPPORT B RTD120	INSTRUMENT	RTD120B		55799530	
0140	266184	CABINET BOTTOM RTD120B	INSTRUMENT	RTD120B		55937280	
0150	266171	CABINET TOP RTD120	INSTRUMENT	RTD120B		55771420	
0170	267277	METAL SUPPORT RTD120	INSTRUMENT	RTD120B		55771620	
0180	266172	FOOT RUBBER SQUAREV 7.0MM	INSTRUMENT	RTD120B		55027990	
0440	266173	POWER-TRANSFORMER 120V	INSTRUMENT	RTD120B		55782720	
6Q1	DISCON_STK	TRANSISTOR DTC114TUA	FRONT PANEL CBA	RTD120B		55100110	
6Q2	267682	TR-M LBSS138LT1	FRONT PANEL CBA	RTD120B		55930750	
6Q3	267682	TR-M LBSS138LT1	FRONT PANEL CBA	RTD120B		55930750	
B1	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
B10	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B11	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B12	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B13	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
B14	194254	CAP LYTC 100UF M 6.3V	FRONT PANEL CBA	RTD120B		13039370	
B15	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B16	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B17	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B18	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B19	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
B2	260632	CAP LYTC 100UF +20% 16.0V 85C	FRONT PANEL CBA	RTD120B		20269020	
B20	261768	CAP LYTC 220UF 20% 10V 85C	FRONT PANEL CBA	RTD120B		20269080	
B21	260682	CAP CC 10NF +80% -20% 50V	FRONT PANEL CBA	RTD120B		10138780	
B22	194254	CAP LYTC 100UF M 6.3V	FRONT PANEL CBA	RTD120B		13039370	
B23	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B24	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B25	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B26	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B27	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B28	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B29	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B3	260632	CAP LYTC 100UF +20% 16.0V 85C	FRONT PANEL CBA	RTD120B		20269020	
B30	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B31	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B32	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B33	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B34	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
B35	260682	CAP CC 10NF +80% -20% 50V	FRONT PANEL CBA	RTD120B		10138780	
B36	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B37	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B38	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B39	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B4	194254	CAP LYTC 100UF M 6.3V	FRONT PANEL CBA	RTD120B		13039370	
B40	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B41	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B42	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B43	194254	CAP LYTC 100UF M 6.3V	FRONT PANEL CBA	RTD120B		13039370	
B44	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B49	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B5	261768	CAP LYTC 220UF 20% 10V 85C	FRONT PANEL CBA	RTD120B		20269080	
B50	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B51	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
B52	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B53	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B54	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
B55	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B56	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B57	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B58	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B59	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B6	261768	CAP LYTC 220UF 20% 10V 85C	FRONT PANEL CBA	RTD120B		20269080	
B60	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
B61	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
B62	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B63	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B64	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B65	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B66	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B7	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
B8	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
B9	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
BC19	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C1	256772	CAP CC 470PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138370	
C1	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C10	256772	CAP CC 470PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138370	
C10	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN CBA	RTD120B		20718370	
C100	260627	CAPCD .1UF Z Z5V 50V	MAIN CBA	RTD120B		20246460	
C101	249336	CAPCC 1NF 10% 50V X7R	KEY BOARD ASY	RTD120B		10138550	
C101	260627	CAPCD .1UF Z Z5V 50V	MAIN CBA	RTD120B		20246460	
C102	249336	CAPCC 1NF 10% 50V X7R	KEY BOARD ASY	RTD120B		10138550	
C102	260627	CAPCD .1UF Z Z5V 50V	MAIN CBA	RTD120B		20246460	
C103	189981	CAP LYTC 10UF M 50V	KEY BOARD ASY	RTD120B		20268880	
C103	260627	CAPCD .1UF Z Z5V 50V	MAIN CBA	RTD120B		20246460	
C104	260638	CAP LYTC 470UF +20% 35V 85C	MAIN CBA	RTD120B		13070730	
C104	253796	CAPCC .1UF 10% 16V	KEY BOARD ASY	RTD120B		20947390	
C105	260638	CAP LYTC 470UF +20% 35V 85C	MAIN CBA	RTD120B		13070730	
C106	262526	CAP LYTC 470UF 20% 25V 85C	MAIN CBA	RTD120B		20269190	
C11	253796	CAPCC .1UF 10% 16V	MAIN CBA	RTD120B		20947390	
C110	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN CBA	RTD120B		20718370	
C111	260627	CAPCD .1UF Z Z5V 50V	MAIN CBA	RTD120B		20246460	
C115	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C116	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C117	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C118	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C119	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN CBA	RTD120B		20718370	
C120	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN CBA	RTD120B		20718370	
C121	261176	CAP LYTC 470UF +20% 6.3V 85C	MAIN CBA	RTD120B		20268620	
C122	261176	CAP LYTC 470UF +20% 6.3V 85C	MAIN CBA	RTD120B		20268620	
C123	261176	CAP LYTC 470UF +20% 6.3V 85C	MAIN CBA	RTD120B		20268620	
C124	261176	CAP LYTC 470UF +20% 6.3V 85C	MAIN CBA	RTD120B		20268620	
C125	261176	CAP LYTC 470UF +20% 6.3V 85C	MAIN CBA	RTD120B		20268620	
C13	260932	CAPCC 15PF 20% 50V	FRONT PANEL CBA	RTD120B		10137180	
C13	254542	CAP LYTC 6800UF 20% 16V 85C	MAIN CBA	RTD120B		55126160	
C131	256770	CAP CC 100PF +10% -10% 50V NPO	MAIN CBA	RTD120B		10137380	
C132	256770	CAP CC 100PF +10% -10% 50V NPO	MAIN CBA	RTD120B		10137380	
C133	256770	CAP CC 100PF +10% -10% 50V NPO	MAIN CBA	RTD120B		10137380	
C134	256770	CAP CC 100PF +10% -10% 50V NPO	MAIN CBA	RTD120B		10137380	
C135	260632	CAP LYTC 100UF +20% 16.0V 85C	MAIN CBA	RTD120B		20269020	
C136	266144	CAP 47U0F +20% 16.0V 85C	MAIN CBA	RTD120B		10142030	
C137	266144	CAP 47U0F +20% 16.0V 85C	MAIN CBA	RTD120B		10142030	
C138	266144	CAP 47U0F +20% 16.0V 85C	MAIN CBA	RTD120B		10142030	
C139	266144	CAP 47U0F +20% 16.0V 85C	MAIN CBA	RTD120B		10142030	
C14	260932	CAPCC 15PF 20% 50V	FRONT PANEL CBA	RTD120B		10137180	
C14	263024	CAP CD 100NF +80% -20% 25V Z5V	MAIN CBA	RTD120B		20246470	
C140	266144	CAP 47U0F +20% 16.0V 85C	MAIN CBA	RTD120B		10142030	
C141	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C142	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C143	261768	CAP LYTC 220UF 20% 10V 85C	MAIN CBA	RTD120B		20269080	
C144	266144	CAP 47U0F +20% 16.0V 85C	MAIN CBA	RTD120B		10142030	
C145	261768	CAP LYTC 220UF 20% 10V 85C	MAIN CBA	RTD120B		20269080	
C146	266144	CAP 47U0F +20% 16.0V 85C	MAIN CBA	RTD120B		10142030	
C147	261768	CAP LYTC 220UF 20% 10V 85C	MAIN CBA	RTD120B		20269080	
C148	261768	CAP LYTC 220UF 20% 10V 85C	MAIN CBA	RTD120B		20269080	
C149	256770	CAP CC 100PF +10% -10% 50V NPO	MAIN CBA	RTD120B		10137380	
C15	253796	CAPCC .1UF 10% 16V	MAIN CBA	RTD120B		20947390	
C16	260632	CAP LYTC 100UF +20% 16.0V 85C	MAIN CBA	RTD120B		20269020	
C16	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C17	260632	CAP LYTC 100UF +20% 16.0V 85C	MAIN CBA	RTD120B		20269020	
C17	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C170	194673	CAP LYTC 1UF M 50V	MAIN CBA	RTD120B		20268840	
C18	261171	CAP LYTC 47UF +20% 16V 85C	FRONT PANEL CBA	RTD120B		55198950	
C19	256817	CAP CC 47PF 50V NPO	FRONT PANEL CBA	RTD120B		20506570	
C19	253796	CAPCC .1UF 10% 16V	MAIN CBA	RTD120B		20947390	
C2	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C2	256772	CAP CC 470PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138370	
C20	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C20	253796	CAPCC .1UF 10% 16V	MAIN CBA	RTD120B		20947390	
C201	262526	CAP LYTC 470UF 20% 25V 85C	MAIN CBA	RTD120B		20269190	
C21	253796	CAPCC .1UF 10% 16V	MAIN CBA	RTD120B		20947390	
C21	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C22	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C22	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C23	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C23	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C24	260638	CAP LYTC 470UF +20% 35V 85C	MAIN CBA	RTD120B		13070730	
C24	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C25	232348	CAP LYTC 1000UF M 25V	MAIN CBA	RTD120B		10122860	
C25	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C26	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C26	232348	CAP LYTC 1000UF M 25V	MAIN CBA	RTD120B		10122860	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
C27	232348	CAP LYTC 1000UF M 25V	MAIN CBA	RTD120B		10122860	
C27	256817	CAP CC 47PF 50V NPO	FRONT PANEL CBA	RTD120B		20506570	
C28	232348	CAP LYTC 1000UF M 25V	MAIN CBA	RTD120B		10122860	
C28	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C29	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C29	232348	CAP LYTC 1000UF M 25V	MAIN CBA	RTD120B		10122860	
C3	249228	CAP LYTC 3300 UF 50V 85C	MAIN CBA	RTD120B		20851980	
C3	256772	CAP CC 470PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138370	
C30	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C30	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C301	194673	CAP LYTC 1UF M 50V	MAIN CBA	RTD120B		20268840	
C302	253796	CAPCC .1UF 10% 16V	MAIN CBA	RTD120B		20947390	
C303	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN CBA	RTD120B		20718370	
C31	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C32	260668	CAP POLY 100NF +10% 50V	MAIN CBA	RTD120B		20266460	
C32	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C33	266146	CAP 10U0F +20% 16.0V 85C	MAIN CBA	RTD120B		55884360	
C34	266146	CAP 10U0F +20% 16.0V 85C	MAIN CBA	RTD120B		55884360	
C34	267292	CAP 220U0F +20% 16.0V 85C	FRONT PANEL CBA	RTD120B		55576060	
C35	266146	CAP 10U0F +20% 16.0V 85C	MAIN CBA	RTD120B		55884360	
C35	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C36	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C37	256814	CAPCC 22PF +5% -5% 50V NPO	FRONT PANEL CBA	RTD120B		20506520	
C37	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C38	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C39	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
C39	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C4	256772	CAP CC 470PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138370	
C4	232348	CAP LYTC 1000UF M 25V	MAIN CBA	RTD120B		10122860	
C40	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C40	266494	CAPCC 150PF 5% 50V	FRONT PANEL CBA	RTD120B		20548350	
C41	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C42	260645	CAPCC 33PF +10% -10% 50.0V	MAIN CBA	RTD120B		10137280	
C42	261171	CAP LYTC 47UF +20% 16V 85C	FRONT PANEL CBA	RTD120B		55198950	
C43	260645	CAPCC 33PF +10% -10% 50.0V	MAIN CBA	RTD120B		10137280	
C43	249336	CAPCC 1NF 10% 50V X7R	FRONT PANEL CBA	RTD120B		10138550	
C44	260645	CAPCC 33PF +10% -10% 50.0V	MAIN CBA	RTD120B		10137280	
C45	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C45	260645	CAPCC 33PF +10% -10% 50.0V	MAIN CBA	RTD120B		10137280	
C46	260645	CAPCC 33PF +10% -10% 50.0V	MAIN CBA	RTD120B		10137280	
C47	256814	CAPCC 22PF +5% -5% 50V NPO	FRONT PANEL CBA	RTD120B		20506520	
C47	260645	CAPCC 33PF +10% -10% 50.0V	MAIN CBA	RTD120B		10137280	
C48	261030	CAPCC 220PF 10% 50V X7R	MAIN CBA	RTD120B		10138310	
C49	261030	CAPCC 220PF 10% 50V X7R	MAIN CBA	RTD120B		10138310	
C49	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
C5	256817	CAP CC 47PF 50V NPO	FRONT PANEL CBA	RTD120B		20506570	
C5	232348	CAP LYTC 1000UF M 25V	MAIN CBA	RTD120B		10122860	
C50	261030	CAPCC 220PF 10% 50V X7R	MAIN CBA	RTD120B		10138310	
C50	266494	CAPCC 150PF 5% 50V	FRONT PANEL CBA	RTD120B		20548350	
C51	261030	CAPCC 220PF 10% 50V X7R	MAIN CBA	RTD120B		10138310	
C52	249336	CAPCC 1NF 10% 50V X7R	FRONT PANEL CBA	RTD120B		10138550	
C52	261030	CAPCC 220PF 10% 50V X7R	MAIN CBA	RTD120B		10138310	
C53	261030	CAPCC 220PF 10% 50V X7R	MAIN CBA	RTD120B		10138310	
C54	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C55	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C55	261171	CAP LYTC 47UF +20% 16V 85C	FRONT PANEL CBA	RTD120B		55198950	
C555	256934	CAP CC 820PF 10% 50V	FRONT PANEL CBA	RTD120B		10138420	
C557	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C558	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C56	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C56	253797	CAPCC .22UF 10% 10V	FRONT PANEL CBA	RTD120B		20947540	
C57	266494	CAPCC 150PF 5% 50V	FRONT PANEL CBA	RTD120B		20548350	
C57	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C58	249336	CAPCC 1NF 10% 50V X7R	FRONT PANEL CBA	RTD120B		10138550	
C58	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C59	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C59	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C6	256817	CAP CC 47PF 50V NPO	FRONT PANEL CBA	RTD120B		20506570	
C6	260632	CAP LYTC 100UF +20% 16.0V 85C	MAIN CBA	RTD120B		20269020	
C60	260627	CAPCD .1UF Z Z5V 50V	MAIN CBA	RTD120B		20246460	
C60	256814	CAPCC 22PF +5% -5% 50V NPO	FRONT PANEL CBA	RTD120B		20506520	
C61	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
C61	260627	CAPCD .1UF Z Z5V 50V	MAIN CBA	RTD120B		20246460	
C62	260645	CAPCC 33PF +10% -10% 50.0V	MAIN CBA	RTD120B		10137280	
C63	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C63	266494	CAPCC 150PF 5% 50V	FRONT PANEL CBA	RTD120B		20548350	
C64	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C64	249336	CAPCC 1NF 10% 50V X7R	FRONT PANEL CBA	RTD120B		10138550	
C65	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C65	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
C66	262526	CAP LYTC 470UF 20% 25V 85C	MAIN CBA	RTD120B		20269190	
C67	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C67	256814	CAPCC 22PF +5% -5% 50V NPO	FRONT PANEL CBA	RTD120B		20506520	
C68	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C69	266494	CAPCC 150PF 5% 50V	FRONT PANEL CBA	RTD120B		20548350	
C69	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C7	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C7	260632	CAP LYTC 100UF +20% 16.0V 85C	MAIN CBA	RTD120B		20269020	
C70	189981	CAP LYTC 10UF M 50V	MAIN CBA	RTD120B		20268880	
C70	249336	CAPCC 1NF 10% 50V X7R	FRONT PANEL CBA	RTD120B		10138550	
C71	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C72	194673	CAP LYTC 1UF M 50V	MAIN CBA	RTD120B		20268840	
C72	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C73	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C74	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C74	260668	CAP POLY 100NF +10% 50V	MAIN CBA	RTD120B		20266460	
C75	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C75	260668	CAP POLY 100NF +10% 50V	MAIN CBA	RTD120B		20266460	
C76	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C76	260668	CAP POLY 100NF +10% 50V	MAIN CBA	RTD120B		20266460	
C77	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C77	260668	CAP POLY 100NF +10% 50V	MAIN CBA	RTD120B		20266460	
C78	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C78	260668	CAP POLY 100NF +10% 50V	MAIN CBA	RTD120B		20266460	
C79	260668	CAP POLY 100NF +10% 50V	MAIN CBA	RTD120B		20266460	
C79	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C8	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C8	263024	CAP CD 100NF +80% -20% 25V Z5V	MAIN CBA	RTD120B		20246470	
C80	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN CBA	RTD120B		20718370	
C81	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN CBA	RTD120B		20718370	
C81	256814	CAPCC 22PF +5% -5% 50V NPO	FRONT PANEL CBA	RTD120B		20506520	
C82	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN CBA	RTD120B		20718370	
C83	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN CBA	RTD120B		20718370	
C83	266494	CAPCC 150PF 5% 50V	FRONT PANEL CBA	RTD120B		20548350	
C84	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN CBA	RTD120B		20718370	
C84	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C85	260634	CAP LYTC 470UF +20% 16.0V 85C	MAIN CBA	RTD120B		20718370	
C85	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C86	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
C87	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C88	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C88	265962	CAP 470UF +20% 6.3V 85C	MAIN CBA	RTD120B		13051580	
C89	267287	CE 10U0F +20% N 16.0V N 85C	FRONT PANEL CBA	RTD120B		55246790	
C9	263024	CAP CD 100NF +80% -20% 25V Z5V	MAIN CBA	RTD120B		20246470	
C9	256772	CAP CC 470PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138370	
C90	253796	CAPCC .1UF 10% 16V	MAIN CBA	RTD120B		20947390	
C90	249336	CAPCC 1NF 10% 50V X7R	FRONT PANEL CBA	RTD120B		10138550	
C93	256817	CAPCC 47PF K NPO 50V	MAIN CBA	RTD120B		10137310	
C95	256817	CAPCC 47PF K NPO 50V	MAIN CBA	RTD120B		10137310	
C96	256817	CAPCC 47PF K NPO 50V	MAIN CBA	RTD120B		10137310	
C97	256817	CAPCC 47PF K NPO 50V	MAIN CBA	RTD120B		10137310	
C98	256817	CAPCC 47PF K NPO 50V	MAIN CBA	RTD120B		10137310	
C99	260627	CAPCD .1UF Z Z5V 50V	MAIN CBA	RTD120B		20246460	
CC1	249336	CAPCC 1NF 10% 50V X7R	FRONT PANEL CBA	RTD120B		10138550	
CC10	260615	CAPCC 1UF +80% -20% 10V	FRONT PANEL CBA	RTD120B		20811460	
CC11	244072	CAPCC 4.7NF +/-10% 50V	FRONT PANEL CBA	RTD120B		10138710	
CC12	260615	CAPCC 1UF +80% -20% 10V	FRONT PANEL CBA	RTD120B		20811460	
CC13	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC14	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC15	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC17	262222	CAP CC 6.8NF 10% 50V	FRONT PANEL CBA	RTD120B		10138740	
CC2	249336	CAPCC 1NF 10% 50V X7R	FRONT PANEL CBA	RTD120B		10138550	
CC20	260615	CAPCC 1UF +80% -20% 10V	FRONT PANEL CBA	RTD120B		20811460	
CC21	256811	CAPCC .047UF 50V Y5V	FRONT PANEL CBA	RTD120B		20288010	
CC22	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC23	256773	CAP CC 560PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138390	
CC24	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC25	256817	CAP CC 47PF 50V NPO	FRONT PANEL CBA	RTD120B		20506570	
CC26	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC27	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC28	253635	CAPCC .015UF 10% 50V	FRONT PANEL CBA	RTD120B		10138980	
CC29	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
CC3	249336	CAPCC 1NF 10% 50V X7R	FRONT PANEL CBA	RTD120B		10138550	
CC30	256773	CAP CC 560PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138390	
CC31	253635	CAPCC .015UF 10% 50V	FRONT PANEL CBA	RTD120B		10138980	
CC32	253635	CAPCC .015UF 10% 50V	FRONT PANEL CBA	RTD120B		10138980	
CC33	256773	CAP CC 560PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138390	
CC35	256816	CAP CC 33PF 50V NPO	FRONT PANEL CBA	RTD120B		20506560	
CC36	256816	CAP CC 33PF 50V NPO	FRONT PANEL CBA	RTD120B		20506560	
CC37	256816	CAP CC 33PF 50V NPO	FRONT PANEL CBA	RTD120B		20506560	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
CC38	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC39	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC4	249336	CAPCC 1NF 10% 50V X7R	FRONT PANEL CBA	RTD120B		10138550	
CC40	260682	CAP CC 10NF +80% -20% 50V	FRONT PANEL CBA	RTD120B		10138780	
CC41	256772	CAP CC 470PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138370	
CC42	260682	CAP CC 10NF +80% -20% 50V	FRONT PANEL CBA	RTD120B		10138780	
CC43	256772	CAP CC 470PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138370	
CC44	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC45	260682	CAP CC 10NF +80% -20% 50V	FRONT PANEL CBA	RTD120B		10138780	
CC5	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC50	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC51	244062	CAPCC 2.2NF +/-10% 50V	FRONT PANEL CBA	RTD120B		10138620	
CC52	244062	CAPCC 2.2NF +/-10% 50V	FRONT PANEL CBA	RTD120B		10138620	
CC53	244062	CAPCC 2.2NF +/-10% 50V	FRONT PANEL CBA	RTD120B		10138620	
CC54	256811	CAPCC .047UF 50V Y5V	FRONT PANEL CBA	RTD120B		20288010	
CC56	244062	CAPCC 2.2NF +/-10% 50V	FRONT PANEL CBA	RTD120B		10138620	
CC57	266048	CAPCC 120PF 5% 50V	FRONT PANEL CBA	RTD120B		10405250	
CC6	244072	CAPCC 4.7NF +/-10% 50V	FRONT PANEL CBA	RTD120B		10138710	
CC60	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC63	262223	CAP CC 220NF +80% -20% 16V	FRONT PANEL CBA	RTD120B		20288060	
CC64	249336	CAPCC 1NF 10% 50V X7R	FRONT PANEL CBA	RTD120B		10138550	
CC65	267320	CCCFMIC 160P0F +5% -5% 50.0V N	FRONT PANEL CBA	RTD120B		10375220	
CC66	263035	CAP CC 33NF +80% -20% 50V	FRONT PANEL CBA	RTD120B		10138990	
CC67	260682	CAP CC 10NF +80% -20% 50V	FRONT PANEL CBA	RTD120B		10138780	
CC68	260632	CAP LYTC 100UF +20% 16.0V 85C	FRONT PANEL CBA	RTD120B		20269020	
CC69	260632	CAP LYTC 100UF +20% 16.0V 85C	FRONT PANEL CBA	RTD120B		20269020	
CC70	256818	CAP CC 100PF 50V NPO	FRONT PANEL CBA	RTD120B		20506590	
CC71	262996	CAP CC 1NF +80% -20% 50V	FRONT PANEL CBA	RTD120B		10138750	
CC72	256818	CAP CC 100PF 50V NPO	FRONT PANEL CBA	RTD120B		20506590	
CC73	244072	CAPCC 4.7NF +/-10% 50V	FRONT PANEL CBA	RTD120B		10138710	
CC75	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC77	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC78	194254	CAP LYTC 100UF M 6.3V	FRONT PANEL CBA	RTD120B		13039370	
CC8	233441	CAP LYTC 4.7UF M 16VC	FRONT PANEL CBA	RTD120B		13070470	
CC80	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC81	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CC83	260615	CAPCC 1UF +80% -20% 10V	FRONT PANEL CBA	RTD120B		20811460	
CC84	261768	CAP LYTC 220UF 20% 10V 85C	FRONT PANEL CBA	RTD120B		20269080	
CC85	194254	CAP LYTC 100UF M 6.3V	FRONT PANEL CBA	RTD120B		13039370	
CC86	256772	CAP CC 470PF +10% -10% 50V	FRONT PANEL CBA	RTD120B		10138370	
CC87	194254	CAP LYTC 100UF M 6.3V	FRONT PANEL CBA	RTD120B		13039370	
CC88	260615	CAPCC 1UF +80% -20% 10V	FRONT PANEL CBA	RTD120B		20811460	
CC89	194254	CAP LYTC 100UF M 6.3V	FRONT PANEL CBA	RTD120B		13039370	
CC91	194254	CAP LYTC 100UF M 6.3V	FRONT PANEL CBA	RTD120B		13039370	
CC92	260615	CAPCC 1UF +80% -20% 10V	FRONT PANEL CBA	RTD120B		20811460	
CC93	261768	CAP LYTC 220UF 20% 10V 85C	FRONT PANEL CBA	RTD120B		20269080	
CC94	260642	CAPCC 100NF +80% -20% 16V Y5V	FRONT PANEL CBA	RTD120B		20288040	
CIRCUIT	267681	CIRCUIT KEYBOARD RTD120B	KEY BOARD ASY	RTD120B		55927070	
CIRCUIT	267302	CIRCUIT DSP BD GTD120B	FRONT PANEL CBA	RTD120B		55856930	
CIRCUIT	267680	CIRCUIT MAIN BD RTD120B	MAIN CBA	RTD120B		55926690	
CN1	249354	CONNECTOR HEADER 2 POS	MAIN CBA	RTD120B		5504884A	
CN101	267293	CONN 2.0MM 11 PIN LW2002	FRONT PANEL CBA	RTD120B		55123360	
CN102	267293	CONN 2.0MM 11 PIN LW2002	FRONT PANEL CBA	RTD120B		55123360	
CN2	265130	CONNECTOR, 5 PIN	MAIN CBA	RTD120B		55123640	
CN3	265254	CONNECTOR, 2MM 5PIN	FRONT PANEL CBA	RTD120B		55123320	
CN302	257050	CONNECTOR 10 PIN	FRONT PANEL CBA	RTD120B		55090050	
CN401	267294	CONN 2.0MM 15 PIN LW2003P	FRONT PANEL CBA	RTD120B		55884280	
CN403	267294	CONN 2.0MM 15 PIN LW2003P	FRONT PANEL CBA	RTD120B		55884280	
CP302	266151	CONNECTOR 10 PIN 260MM	MAIN CBA	RTD120B		20365780	
CP401	261194	CABLE 15P 60MM	MAIN CBA	RTD120B		5530283A	
CP403	257112	CABLE 15P 50MM	MAIN CBA	RTD120B		55177060	
CS2	244072	CAPCC 4.7NF +/-10% 50V	FRONT PANEL CBA	RTD120B		10138710	
D1	249217	DIODE 1N5402 200.0V 3.0A	MAIN CBA	RTD120B		55041640	
D10	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
D10	267288	DIODE 1N5391 50.0V 1.5A N N	FRONT PANEL CBA	RTD120B		55930030	
D101	254521	DIODE, LTL-1CHE	KEY BOARD ASY	RTD120B		55125510	
D102	265965	LED, CT-3SGTA	KEY BOARD ASY	RTD120B		55199400	
D103	265965	LED, CT-3SGTA	KEY BOARD ASY	RTD120B		55199400	
D104	265965	LED, CT-3SGTA	KEY BOARD ASY	RTD120B		55199400	
D105	266175	LED GRN RND	KEY BOARD ASY	RTD120B		55859410	
D106	266175	LED GRN RND	KEY BOARD ASY	RTD120B		55859410	
D107	266175	LED GRN RND	KEY BOARD ASY	RTD120B		55859410	
D108	266175	LED GRN RND	KEY BOARD ASY	RTD120B		55859410	
D109	266175	LED GRN RND	KEY BOARD ASY	RTD120B		55859410	
D11	206077	DIODE	FRONT PANEL CBA	RTD120B		16012450	
D11	244835	DIODE ZENER 27V .5W	MAIN CBA	RTD120B		20475330	
D110	266175	LED GRN RND	KEY BOARD ASY	RTD120B		55859410	
D111	266175	LED GRN RND	KEY BOARD ASY	RTD120B		55859410	
D12	198589	DIODE 1N4148	MAIN CBA	RTD120B		70436540	
D12	206077	DIODE	FRONT PANEL CBA	RTD120B		16012450	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
D13	249217	DIODE 1N5402 200.0V 3.0A	MAIN CBA	RTD120B		55041640	
D13	206077	DIODE	FRONT PANEL CBA	RTD120B		16012450	
D14	249217	DIODE 1N5402 200.0V 3.0A	MAIN CBA	RTD120B		55041640	
D14	206077	DIODE	FRONT PANEL CBA	RTD120B		16012450	
D15	249217	DIODE 1N5402 200.0V 3.0A	MAIN CBA	RTD120B		55041640	
D16	249217	DIODE 1N5402 200.0V 3.0A	MAIN CBA	RTD120B		55041640	
D18	219249	DIODE ZENER 5.1V .5W	FRONT PANEL CBA	RTD120B		16030290	
D2	249217	DIODE 1N5402 200.0V 3.0A	MAIN CBA	RTD120B		55041640	
D3	249217	DIODE 1N5402 200.0V 3.0A	MAIN CBA	RTD120B		55041640	
D32	198602	DIODE ZENER 5.1V .5W	MAIN CBA	RTD120B		80444140	
D33	198602	DIODE ZENER 5.1V .5W	MAIN CBA	RTD120B		80444140	
D34	198602	DIODE ZENER 5.1V .5W	MAIN CBA	RTD120B		80444140	
D4	249217	DIODE 1N5402 200.0V 3.0A	MAIN CBA	RTD120B		55041640	
D5	257370	DIODE 1N4002 100.0V 1A	MAIN CBA	RTD120B		20415050	
D55	206077	DIODE	FRONT PANEL CBA	RTD120B		16012450	
D56	206077	DIODE	FRONT PANEL CBA	RTD120B		16012450	
D6	257370	DIODE 1N4002 100.0V 1A	MAIN CBA	RTD120B		20415050	
D7	257370	DIODE 1N4002 100.0V 1A	MAIN CBA	RTD120B		20415050	
D8	257370	DIODE 1N4002 100.0V 1A	MAIN CBA	RTD120B		20415050	
D9	267288	DIODE 1N5391 50.0V 1.5A N N	FRONT PANEL CBA	RTD120B		55930030	
D9	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
DD1	206077	DIODE	FRONT PANEL CBA	RTD120B		16012450	
DD2	206077	DIODE	FRONT PANEL CBA	RTD120B		16012450	
DD3	206077	DIODE	FRONT PANEL CBA	RTD120B		16012450	
EN101	266176	ENCODER ROTARY 5V 1MI0A	KEY BOARD ASY	RTD120B		55780920	
F1	249401	FUSE SB 1A/125V	INSTRUMENT	RTD120B		55127130	
F2	261445	FUSE 3A 250	INSTRUMENT	RTD120B		20870650	
F3	252837	FUSE 4A/125V	INSTRUMENT	RTD120B		20828770	
F4	249401	FUSE SB 1A/125V	INSTRUMENT	RTD120B		55127130	
FB1	261109	FBEAD BEAD 95OHM FERRITE BEAD	MAIN CBA	RTD120B		55128610	
FB1	267289	FBEAD SURFACE MT 120OHM CHIP	FRONT PANEL CBA	RTD120B		55126520	
FB10	267289	FBEAD SURFACE MT 120OHM CHIP	FRONT PANEL CBA	RTD120B		55126520	
FB2	267289	FBEAD SURFACE MT 120OHM CHIP	FRONT PANEL CBA	RTD120B		55126520	
FB4	267289	FBEAD SURFACE MT 120OHM CHIP	FRONT PANEL CBA	RTD120B		55126520	
FB5	267306	FBEAD SURFACE MT 600OHM CHIP	FRONT PANEL CBA	RTD120B		55690620	
FB6	267306	FBEAD SURFACE MT 600OHM CHIP	FRONT PANEL CBA	RTD120B		55690620	
FB7	267306	FBEAD SURFACE MT 600OHM CHIP	FRONT PANEL CBA	RTD120B		55690620	
FB8	267306	FBEAD SURFACE MT 600OHM CHIP	FRONT PANEL CBA	RTD120B		55690620	
FB9	267305	FBEAD SURFACE MT 470OHM	FRONT PANEL CBA	RTD120B		25654590	
FH1	252836	HOLDER FUSE	MAIN CBA	RTD120B		55017140	
FH2	252836	HOLDER FUSE	MAIN CBA	RTD120B		55017140	
FH3	252836	HOLDER FUSE	MAIN CBA	RTD120B		55017140	
FH4	252836	HOLDER FUSE	MAIN CBA	RTD120B		55017140	
IC1	238708	IC BA4558F	MAIN CBA	RTD120B		20976940	
IC11	266147	IC-LOGIC CD4053BM	MAIN CBA	RTD120B		55668960	
IC12	238708	IC BA4558F	MAIN CBA	RTD120B		20976940	
IC2	238708	IC BA4558F	MAIN CBA	RTD120B		20976940	
IC3	238708	IC BA4558F	MAIN CBA	RTD120B		20976940	
IC4	265187	LOWFREQ TDA7448 VOLUME CONT	MAIN CBA	RTD120B		55784750	
IC5	266152	IC-POWAMP TDA7497	INSTRUMENT	RTD120B		55784740	
IC6	248142	IC POWER AMP TDA7269	INSTRUMENT	RTD120B		55057540	
IC7	248142	IC POWER AMP TDA7269	INSTRUMENT	RTD120B		55057540	
IR101	265123	IC, REMOTE RECEIVER	KEY BOARD ASY	RTD120B		55488350	
J101	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J102	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J103	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J104	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J105	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J106	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J107	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J108	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J11	267295	CONN 2.1MM 6 PIN LW2003P6	FRONT PANEL CBA	RTD120B		55123330	
J110	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J111	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J112	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J113	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
J201	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20329200	
J201	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329200	
J202	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329200	
J202	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20329200	
J203	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329200	
J203	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20329200	
J204	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329200	
J204	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20329200	
J205	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329200	
J206	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329200	
J207	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329200	
J208	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329200	
J209	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329200	
J210	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329200	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
J301	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J301	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J302	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J302	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J303	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J303	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J304	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J304	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J305	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J305	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J306	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J306	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J307	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J307	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J308	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J308	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J309	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J309	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J310	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J310	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J311	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J311	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J312	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J312	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J313	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J313	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J314	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J315	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J315	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J316	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181860	
J401	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20329290	
J401	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329290	
J402	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329290	
J402	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20329290	
J403	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
J403	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20329290	
J404	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20329290	
J501	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J501	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181870	
J502	NONSTK	WIRE JUMPER	KEY BOARD ASY	RTD120B		20181870	
J502	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J503	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J504	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J505	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J506	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J507	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J508	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J509	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J510	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J511	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J512	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181870	
J601	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J602	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J603	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J604	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J605	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J606	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J607	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J608	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J609	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J610	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J611	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J613	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J614	266153	RES 220MΩ 0 OHM +5% 1.0W	MAIN CBA	RTD120B		55928240	
J615	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
J616	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20637320	
JACK1	266154	SPEAKER JACK	MAIN CBA	RTD120B		55842180	
JACK2	266155	S-VIDEO/INPUT JACK	MAIN CBA	RTD120B		55785120	
JACK3	266156	VIDEO/AUDIO INPUT JACKS	MAIN CBA	RTD120B		55843080	
JACK4	266157	AUDIO IN/OUT JACKS	MAIN CBA	RTD120B		55176330	
JJ3	DISCON_STK	CONN 0.5MM	FRONT PANEL CBA	RTD120B		55009830	
JP101	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
JP102	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		20181860	
JW1	267269	CABLE HOOK-UP	MAIN CBA	RTD120B		55863210	
L1	267318	LF-SMD 2U4H +10% N N	FRONT PANEL CBA	RTD120B		55883660	
L1	256783	RES CMF 0 OHM 0% 1/16W	MAIN CBA	RTD120B		10328750	
L102	256783	RES CMF 0 OHM 0% 1/16W	MAIN CBA	RTD120B		10328750	
L2	266148	FBEAD SURFACE MT 300ΩHM GZ2012	MAIN CBA	RTD120B		55700360	
L2	267318	LF-SMD 2U4H +10% N N	FRONT PANEL CBA	RTD120B		55883660	
L3	266148	FBEAD SURFACE MT 300ΩHM GZ2012	MAIN CBA	RTD120B		55700360	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
L3	267318	LF-SMD 2U4H +10% N N	FRONT PANEL CBA	RTD120B		55883660	
L4	266148	FBEAD SURFACE MT 300OHM GZ2012	MAIN CBA	RTD120B		55700360	
L4	267318	LF-SMD 2U4H +10% N N	FRONT PANEL CBA	RTD120B		55883660	
L5	266148	FBEAD SURFACE MT 300OHM GZ2012	MAIN CBA	RTD120B		55700360	
L6	266148	FBEAD SURFACE MT 300OHM GZ2012	MAIN CBA	RTD120B		55700360	
L7	266148	FBEAD SURFACE MT 300OHM GZ2012	MAIN CBA	RTD120B		55700360	
L8	250600	COIL AIR 1MM 10MM 7 TURNS	MAIN CBA	RTD120B		21070690	
LL1	267319	LF-SMD 3U9H +10% N N	FRONT PANEL CBA	RTD120B		55957640	
LL2	267319	LF-SMD 3U9H +10% N N	FRONT PANEL CBA	RTD120B		55957640	
LL4	267289	FBEAD SURFACE MT 120OHM CHIP	FRONT PANEL CBA	RTD120B		55126520	
LL5	267289	FBEAD SURFACE MT 120OHM CHIP	FRONT PANEL CBA	RTD120B		55126520	
LL6	267289	FBEAD SURFACE MT 120OHM CHIP	FRONT PANEL CBA	RTD120B		55126520	
MECH	267281	DVD MECHANISM	INSTRUMENT	RTD120B		55929860	
P CORD	246416	CORD AC POWER	INSTRUMENT	RTD120B		2093646A	
P101	257109	CABLE 11P 200MM	KEY BOARD ASY	RTD120B		55177140	
P102	257109	CABLE 11P 200MM	KEY BOARD ASY	RTD120B		55177140	
P103	266177	CABLE 26 RIBBON 220MM	KEY BOARD ASY	RTD120B		55808580	
Q1	267301	TRST MMBT8550HT P 500MIOA	FRONT PANEL CBA	RTD120B		55884560	
Q1	266149	TR-KTC2875 N 300MIOA	MAIN CBA	RTD120B		55884260	
Q101	248089	TRANSISTOR KTA1504GR	KEY BOARD ASY	RTD120B		20779750	
Q102	248089	TRANSISTOR KTA1504GR	KEY BOARD ASY	RTD120B		20779750	
Q103	248089	TRANSISTOR KTA1504GR	KEY BOARD ASY	RTD120B		20779750	
Q104	248089	TRANSISTOR KTA1504GR	KEY BOARD ASY	RTD120B		20779750	
Q105	248089	TRANSISTOR KTA1504GR	KEY BOARD ASY	RTD120B		20779750	
Q106	248089	TRANSISTOR KTA1504GR	KEY BOARD ASY	RTD120B		20779750	
Q107	248089	TRANSISTOR KTA1504GR	KEY BOARD ASY	RTD120B		20779750	
Q108	248089	TRANSISTOR KTA1504GR	KEY BOARD ASY	RTD120B		20779750	
Q109	248089	TRANSISTOR KTA1504GR	KEY BOARD ASY	RTD120B		20779750	
Q110	248089	TRANSISTOR KTA1504GR	KEY BOARD ASY	RTD120B		20779750	
Q111	248089	TRANSISTOR KTA1504GR	KEY BOARD ASY	RTD120B		20779750	
Q13	266150	TR- 2SC2412K 150MIO	MAIN CBA	RTD120B		55812680	
Q14	266150	TR- 2SC2412K 150MIO	MAIN CBA	RTD120B		55812680	
Q15	266150	TR- 2SC2412K 150MIO	MAIN CBA	RTD120B		55812680	
Q16	266150	TR- 2SC2412K 150MIO	MAIN CBA	RTD120B		55812680	
Q17	266150	TR- 2SC2412K 150MIO	MAIN CBA	RTD120B		55812680	
Q18	266150	TR- 2SC2412K 150MIO	MAIN CBA	RTD120B		55812680	
Q19	248092	TRANSISTOR KRC107S	MAIN CBA	RTD120B		55051240	
Q2	178650	TRANSISTOR	MAIN CBA	RTD120B		20678120	
Q20	248092	TRANSISTOR KRC107S	MAIN CBA	RTD120B		55051240	
Q21	248092	TRANSISTOR KRC107S	MAIN CBA	RTD120B		55051240	
Q22	248092	TRANSISTOR KRC107S	MAIN CBA	RTD120B		55051240	
Q23	266158	TR-KTB1370 -7.0A -80V	INSTRUMENT	RTD120B		55858590	
Q24	220229	TRANSISTOR	MAIN CBA	RTD120B		20508040	
Q25	220229	TRANSISTOR	MAIN CBA	RTD120B		20508040	
Q26	246536	TRANSISTOR DTC3223TK	MAIN CBA	RTD120B		55039430	
Q27	246536	TRANSISTOR DTC3223TK	MAIN CBA	RTD120B		55039430	
Q28	246536	TRANSISTOR DTC3223TK	MAIN CBA	RTD120B		55039430	
Q29	246536	TRANSISTOR DTC3223TK	MAIN CBA	RTD120B		55039430	
Q3	266149	TR-KTC2875 N 300MIOA	MAIN CBA	RTD120B		55884260	
Q3	267315	IC-REGULADJ PJ1117CW-ADJ	FRONT PANEL CBA	RTD120B		55906980	
Q30	246536	TRANSISTOR DTC3223TK	MAIN CBA	RTD120B		55039430	
Q31	246536	TRANSISTOR DTC3223TK	MAIN CBA	RTD120B		55039430	
Q4	267315	IC-REGULADJ PJ1117CW-ADJ	FRONT PANEL CBA	RTD120B		55906980	
Q4	266149	TR-KTC2875 N 300MIOA	MAIN CBA	RTD120B		55884260	
Q5	266149	TR-KTC2875 N 300MIOA	MAIN CBA	RTD120B		55884260	
QQ1	267300	TRST 2SB1132 P 2.0A N N 32	FRONT PANEL CBA	RTD120B		55201820	
QQ2	267300	TRST 2SB1132 P 2.0A N N 32	FRONT PANEL CBA	RTD120B		55201820	
QQ4	267315	IC-REGULADJ PJ1117CW-ADJ	FRONT PANEL CBA	RTD120B		55906980	
QS1	DISCON_STK	TRANSISTOR DTC114TUA	FRONT PANEL CBA	RTD120B		55100110	
R1	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
R10	260305	RES CHIP 1K 5% 1/16W	MAIN CBA	RTD120B		10135770	
R100	256754	RES CMF 100K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135340	
R100	256741	RES CMF 10K OHM 5% 1/16W	MAIN CBA	RTD120B		10135010	
R101	256735	RES CMF 330 OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10134870	
R101	267297	RMGCFMIC 220R0 OHM +1% 100MW	FRONT PANEL CBA	RTD120B		55933410	
R101	256741	RES CMF 10K OHM 5% 1/16W	MAIN CBA	RTD120B		10135010	
R102	256735	RES CMF 330 OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10134870	
R102	256741	RES CMF 10K OHM 5% 1/16W	MAIN CBA	RTD120B		10135010	
R103	220663	RES CF 1/4W 5% 22K	MAIN CBA	RTD120B		15007290	
R103	256735	RES CMF 330 OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10134870	
R104	243649	RES CMF 5.1K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135950	
R104	256735	RES CMF 330 OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10134870	
R105	256735	RES CMF 330 OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10134870	
R105	256746	RES CMF 22K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135120	
R106	DISCON_STK	RMGCFMIC 11K0 OHM +5% 62MI5W	FRONT PANEL CBA	RTD120B		10135020	
R106	256735	RES CMF 330 OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10134870	
R107	256764	RES CMF 3.3K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135900	
R107	256735	RES CMF 330 OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10134870	
R108	256735	RES CMF 330 OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10134870	
R109	256735	RES CMF 330 OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10134870	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
R109	267297	RMGCFMIC 220R0 OHM +1% 100MW	FRONT PANEL CBA	RTD120B		55933410	
R11	256729	RES CMF 82 OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10134720	
R11	223673	RES CF 1/4W 5% 4.7 OHM	MAIN CBA	RTD120B		20472530	
R110	256735	RES CMF 330 OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10134870	
R110	267291	RMGCFMIC 365 OHM +1% 100MW	FRONT PANEL CBA	RTD120B		15799380	
R111	256735	RES CMF 330 OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10134870	
R111	DISCON_STK	RMGCFMIC 11K0 OHM +5% 62MI5W	FRONT PANEL CBA	RTD120B		10135020	
R112	261192	RES CMF 91 OHM +5% 1/10MW	FRONT PANEL CBA	RTD120B		10134730	
R112C	256783	RES CMF 0 OHM 0% 1/16W	KEY BOARD ASY	RTD120B		10328750	
R113	260305	RES CHIP 1K 5% 1/16W	FRONT PANEL CBA	RTD120B		10135770	
R114	261192	RES CMF 91 OHM +5% 1/10MW	FRONT PANEL CBA	RTD120B		10134730	
R115	260305	RES CHIP 1K 5% 1/16W	MAIN CBA	RTD120B		10135770	
R115	260677	RES CMF 10 OHM +5% 1/16W	FRONT PANEL CBA	RTD120B		10134410	
R116	260305	RES CHIP 1K 5% 1/16W	MAIN CBA	RTD120B		10135770	
R116	256746	RES CMF 22K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135120	
R117	256744	RES CMF 18K OHM 5% 1/16W	MAIN CBA	RTD120B		10135080	
R117	256754	RES CMF 100K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135340	
R118	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R119	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R12	256729	RES CMF 82 OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10134720	
R12	266141	RCF 120R0 OHM +5% 250MI0W	MAIN CBA	RTD120B		55198810	
R120	256744	RES CMF 18K OHM 5% 1/16W	MAIN CBA	RTD120B		10135080	
R121	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R122	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R122	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
R123	256737	RES CMF 470 OHM 5% 1/16W	MAIN CBA	RTD120B		10134910	
R123	256764	RES CMF 3.3K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135900	
R124	256737	RES CMF 470 OHM 5% 1/16W	MAIN CBA	RTD120B		10134910	
R125	256737	RES CMF 470 OHM 5% 1/16W	MAIN CBA	RTD120B		10134910	
R125	256741	RES CMF 10K OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10135010	
R126	256737	RES CMF 470 OHM 5% 1/16W	MAIN CBA	RTD120B		10134910	
R126	256748	RES CMF 33K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135170	
R127	256737	RES CMF 470 OHM 5% 1/16W	MAIN CBA	RTD120B		10134910	
R127	260677	RES CMF 10 OHM +5% 1/16W	FRONT PANEL CBA	RTD120B		10134410	
R128	260940	RES CMF 39R OHM +5% 1/10W	MAIN CBA	RTD120B		10134630	
R128	256741	RES CMF 10K OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10135010	
R128	256754	RES CMF 100K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135340	
R129	256741	RES CMF 10K OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10135010	
R129	DISCON_STK	RMGCFMIC 11K0 OHM +5% 62MI5W	FRONT PANEL CBA	RTD120B		10135020	
R129	256727	RES CMF 68 OHM +5% 1/16W	MAIN CBA	RTD120B		10134700	
R13	243486	RES CMF 390 OHMS 5% 1/10W	FRONT PANEL CBA	RTD120B		10134890	
R13	256738	RES CMF 560 OHM 5% 1/16W	MAIN CBA	RTD120B		10134930	
R130	256727	RES CMF 68 OHM +5% 1/16W	MAIN CBA	RTD120B		10134700	
R130	256764	RES CMF 3.3K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135900	
R130	256741	RES CMF 10K OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10135010	
R131	256727	RES CMF 68 OHM +5% 1/16W	MAIN CBA	RTD120B		10134700	
R131	256741	RES CMF 10K OHM 5% 1/16W	KEY BOARD ASY	RTD120B		10135010	
R132	260685	RES CMF 56R +5% 1/16W	MAIN CBA	RTD120B		10134680	
R132	DISCON_STK	RMGCFMIC 11K0 OHM +5% 62MI5W	FRONT PANEL CBA	RTD120B		10135020	
R133	260677	RES CMF 10 OHM +5% 1/16W	FRONT PANEL CBA	RTD120B		10134410	
R134	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R135	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R136	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R136	256754	RES CMF 100K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135340	
R137	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R138	DISCON_STK	RMGCFMIC 11K0 OHM +5% 62MI5W	FRONT PANEL CBA	RTD120B		10135020	
R138	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R139	256764	RES CMF 3.3K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135900	
R139	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R14	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R14	256738	RES CMF 560 OHM 5% 1/16W	MAIN CBA	RTD120B		10134930	
R141	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN CBA	RTD120B		10135880	
R141	DISCON_STK	RMGCFMIC 11K0 OHM +5% 62MI5W	FRONT PANEL CBA	RTD120B		10135020	
R142	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN CBA	RTD120B		10135880	
R143	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN CBA	RTD120B		10135880	
R144	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN CBA	RTD120B		10135880	
R145	260677	RES CMF 10 OHM +5% 1/16W	FRONT PANEL CBA	RTD120B		10134410	
R145	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN CBA	RTD120B		10135880	
R146	256746	RES CMF 22K OHM 5% 1/16W	MAIN CBA	RTD120B		10135120	
R147	256746	RES CMF 22K OHM 5% 1/16W	MAIN CBA	RTD120B		10135120	
R148	256754	RES CMF 100K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135340	
R148	256746	RES CMF 22K OHM 5% 1/16W	MAIN CBA	RTD120B		10135120	
R149	256746	RES CMF 22K OHM 5% 1/16W	MAIN CBA	RTD120B		10135120	
R15	256738	RES CMF 560 OHM 5% 1/16W	MAIN CBA	RTD120B		10134930	
R15	256729	RES CMF 82 OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10134720	
R150	256746	RES CMF 22K OHM 5% 1/16W	MAIN CBA	RTD120B		10135120	
R150	DISCON_STK	RMGCFMIC 11K0 OHM +5% 62MI5W	FRONT PANEL CBA	RTD120B		10135020	
R151	256764	RES CMF 3.3K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135900	
R151	256730	RES CMF 100 OHM 5% 1/16W	MAIN CBA	RTD120B		10134740	
R152	256762	RES CMF 2.7K OHM 5% 1/16W	MAIN CBA	RTD120B		10135880	


Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
R153	256746	RES CMF 22K OHM 5% 1/16W	MAIN CBA	RTD120B		10135120	
R153	DISCON_STK	RMGCFMIC 11K0 OHM +5% 62MI5W	FRONT PANEL CBA	RTD120B		10135020	
R154	256737	RES CMF 470 OHM 5% 1/16W	MAIN CBA	RTD120B		10134910	
R155	192100	RES CMF 1/10W 5% 1K	MAIN CBA	RTD120B		20471950	
R156	256730	RES CMF 100 OHM 5% 1/16W	MAIN CBA	RTD120B		10134740	
R157	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R157	256765	RES CMF 5.6K OHM 5% 1/16W	MAIN CBA	RTD120B		10135960	
R158	256730	RES CMF 100 OHM 5% 1/16W	MAIN CBA	RTD120B		10134740	
R159	256765	RES CMF 5.6K OHM 5% 1/16W	MAIN CBA	RTD120B		10135960	
R16	256738	RES CMF 560 OHM 5% 1/16W	MAIN CBA	RTD120B		10134930	
R160	260305	RES CHIP 1K 5% 1/16W	MAIN CBA	RTD120B		10135770	
R161	243375	RES CMF 4.7K 5% 1/10W	MAIN CBA	RTD120B		10135940	
R162	256730	RES CMF 100 OHM 5% 1/16W	MAIN CBA	RTD120B		10134740	
R163	243375	RES CMF 4.7K 5% 1/10W	MAIN CBA	RTD120B		10135940	
R164	256730	RES CMF 100 OHM 5% 1/16W	MAIN CBA	RTD120B		10134740	
R165	244090	RES CMF 7.5K 5% 1/10W	MAIN CBA	RTD120B		10135990	
R166	244090	RES CMF 7.5K 5% 1/10W	MAIN CBA	RTD120B		10135990	
R166	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R167	244090	RES CMF 7.5K 5% 1/10W	MAIN CBA	RTD120B		10135990	
R168	256760	RES CMF 2K OHM 5% 1/16W	MAIN CBA	RTD120B		10135850	
R169	256760	RES CMF 2K OHM 5% 1/16W	MAIN CBA	RTD120B		10135850	
R17	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R17	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R170	256760	RES CMF 2K OHM 5% 1/16W	MAIN CBA	RTD120B		10135850	
R171	244090	RES CMF 7.5K 5% 1/10W	MAIN CBA	RTD120B		10135990	
R172	244090	RES CMF 7.5K 5% 1/10W	MAIN CBA	RTD120B		10135990	
R173	256760	RES CMF 2K OHM 5% 1/16W	MAIN CBA	RTD120B		10135850	
R174	256760	RES CMF 2K OHM 5% 1/16W	MAIN CBA	RTD120B		10135850	
R175	244090	RES CMF 7.5K 5% 1/10W	MAIN CBA	RTD120B		10135990	
R176	256760	RES CMF 2K OHM 5% 1/16W	MAIN CBA	RTD120B		10135850	
R177	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
R177	256737	RES CMF 470 OHM 5% 1/16W	MAIN CBA	RTD120B		10134910	
R178	256737	RES CMF 470 OHM 5% 1/16W	MAIN CBA	RTD120B		10134910	
R178	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
R179	256737	RES CMF 470 OHM 5% 1/16W	MAIN CBA	RTD120B		10134910	
R18	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R180	256737	RES CMF 470 OHM 5% 1/16W	MAIN CBA	RTD120B		10134910	
R181	176629	RES CF 1/4W 5% 560R	MAIN CBA	RTD120B		60441560	
R182	249338	RESMF 47K OHM +5% 62.5MW	MAIN CBA	RTD120B		10135220	
R19	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R19	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R190	261152	RES CMF 1/10W 5% 150R	MAIN CBA	RTD120B		10134780	
R191	261152	RES CMF 1/10W 5% 150R	MAIN CBA	RTD120B		10134780	
R192	261152	RES CMF 1/10W 5% 150R	MAIN CBA	RTD120B		10134780	
R193	261152	RES CMF 1/10W 5% 150R	MAIN CBA	RTD120B		10134780	
R194	261152	RES CMF 1/10W 5% 150R	MAIN CBA	RTD120B		10134780	
R195	261152	RES CMF 1/10W 5% 150R	MAIN CBA	RTD120B		10134780	
R2	NONSTK	WIRE JUMPER	MAIN CBA	RTD120B		55210010	
R20	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R20	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R201	256743	RES CMF 15K OHM 5% 1/16W	MAIN CBA	RTD120B		10135050	
R21	260305	RES CHIP 1K 5% 1/16W	FRONT PANEL CBA	RTD120B		10135770	
R21	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R22	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R22	260305	RES CHIP 1K 5% 1/16W	FRONT PANEL CBA	RTD120B		10135770	
R23	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R24	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R24	176629	RES CF 1/4W 5% 560R	MAIN CBA	RTD120B		60441560	
R25	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R25	176629	RES CF 1/4W 5% 560R	MAIN CBA	RTD120B		60441560	
R26	176629	RES CF 1/4W 5% 560R	MAIN CBA	RTD120B		60441560	
R26	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R27	243375	RES CMF 4.7K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135940	
R27	176629	RES CF 1/4W 5% 560R	MAIN CBA	RTD120B		60441560	
R28	176629	RES CF 1/4W 5% 560R	MAIN CBA	RTD120B		60441560	
R28	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R29	176629	RES CF 1/4W 5% 560R	MAIN CBA	RTD120B		60441560	
R29	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R3	256738	RES CMF 560 OHM 5% 1/16W	MAIN CBA	RTD120B		10134930	
R30	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R30	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R301	175317	RES CF 1/4W 5% 10K	MAIN CBA	RTD120B		30939480	
R302	175317	RES CF 1/4W 5% 10K	MAIN CBA	RTD120B		30939480	
R303	175045	RES CF 1/4W 5% 330R	MAIN CBA	RTD120B		60441550	
R31	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R31	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R32	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R32	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R321	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R33	267303	FBEAD SURFACE MT 150OHM CHIP F	FRONT PANEL CBA	RTD120B		55926040	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
R33	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R34	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R35	256754	RES CMF 100K OHM 5% 1/16W	MAIN CBA	RTD120B		10135340	
R35	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R36	267304	FBEAD SURFACE MT 220OHM CHIP	FRONT PANEL CBA	RTD120B		55926060	
R36	260305	RES CHIP 1K 5% 1/16W	MAIN CBA	RTD120B		10135770	
R37	260305	RES CHIP 1K 5% 1/16W	MAIN CBA	RTD120B		10135770	
R38	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R38	260305	RES CHIP 1K 5% 1/16W	MAIN CBA	RTD120B		10135770	
R39	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R39	260305	RES CHIP 1K 5% 1/16W	MAIN CBA	RTD120B		10135770	
R4	226489	RES CMF 1/10W 5% 30K	MAIN CBA	RTD120B		60444410	
R40	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R40	260305	RES CHIP 1K 5% 1/16W	MAIN CBA	RTD120B		10135770	
R41	243375	RES CMF 4.7K 5% 1/10W	MAIN CBA	RTD120B		10135940	
R41	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R42	256754	RES CMF 100K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135340	
R42	243375	RES CMF 4.7K 5% 1/10W	MAIN CBA	RTD120B		10135940	
R43	243375	RES CMF 4.7K 5% 1/10W	MAIN CBA	RTD120B		10135940	
R43	267303	FBEAD SURFACE MT 150OHM CHIP F	FRONT PANEL CBA	RTD120B		55926040	
R44	243375	RES CMF 4.7K 5% 1/10W	MAIN CBA	RTD120B		10135940	
R44	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R45	243375	RES CMF 4.7K 5% 1/10W	MAIN CBA	RTD120B		10135940	
R46	243375	RES CMF 4.7K 5% 1/10W	MAIN CBA	RTD120B		10135940	
R46	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R47	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R47	175044	RES CF 1/4W 5% 100K	MAIN CBA	RTD120B		30939510	
R48	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R48	175044	RES CF 1/4W 5% 100K	MAIN CBA	RTD120B		30939510	
R49	175044	RES CF 1/4W 5% 100K	MAIN CBA	RTD120B		30939510	
R49	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R5	266142	RMOF 1K5 OHM +5% 1.0W	MAIN CBA	RTD120B		10225720	
R50	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R50	175044	RES CF 1/4W 5% 100K	MAIN CBA	RTD120B		30939510	
R508	256735	RES CMF 330 OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10134870	
R51	175044	RES CF 1/4W 5% 100K	MAIN CBA	RTD120B		30939510	
R51	243649	RES CMF 5.1K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135950	
R510	256754	RES CMF 100K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135340	
R511	256745	RES CMF 20K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135090	
R52	175044	RES CF 1/4W 5% 100K	MAIN CBA	RTD120B		30939510	
R52	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R53	202069	RES CF 1/4W 5% 1K	MAIN CBA	RTD120B		11059640	
R53	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R536	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
R54	202069	RES CF 1/4W 5% 1K	MAIN CBA	RTD120B		11059640	
R54	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R540	256754	RES CMF 100K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135340	
R541	256754	RES CMF 100K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135340	
R55	202069	RES CF 1/4W 5% 1K	MAIN CBA	RTD120B		11059640	
R56	202069	RES CF 1/4W 5% 1K	MAIN CBA	RTD120B		11059640	
R56	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R566	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
R57	246960	RES CMF 3.9K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135920	
R57	202069	RES CF 1/4W 5% 1K	MAIN CBA	RTD120B		11059640	
R58	202069	RES CF 1/4W 5% 1K	MAIN CBA	RTD120B		11059640	
R58	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R59	260648	RES CMF 750 OHMS 5% 1/10W	MAIN CBA	RTD120B		10134960	
R59	246960	RES CMF 3.9K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135920	
R6	256729	RES CMF 82 OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10134720	
R6	256761	RES CMF 2.2K OHM 5% 1/16W	MAIN CBA	RTD120B		10135860	
R60	265199	FERRITE BEAD SMD 300OHM	FRONT PANEL CBA	RTD120B		55830290	
R60	256741	RES CMF 10K OHM 5% 1/16W	MAIN CBA	RTD120B		10135010	
R61	256742	RES CMF 12K OHM 5% 1/16W	MAIN CBA	RTD120B		10135030	
R61	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R62	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
R62	256741	RES CMF 10K OHM 5% 1/16W	MAIN CBA	RTD120B		10135010	
R63	175042	RES CF 1/4W 5% 2200R	MAIN CBA	RTD120B		20469460	
R63	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R64	256742	RES CMF 12K OHM 5% 1/16W	MAIN CBA	RTD120B		10135030	
R64	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R65	175045	RES CF 1/4W 5% 330R	MAIN CBA	RTD120B		60441550	
R65	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R66	175042	RES CF 1/4W 5% 2200R	MAIN CBA	RTD120B		20469460	
R66	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R67	256742	RES CMF 12K OHM 5% 1/16W	MAIN CBA	RTD120B		10135030	
R68	261152	RES CMF 1/10W 5% 150R	MAIN CBA	RTD120B		10134780	
R68	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
R69	192100	RES CMF 1/10W 5% 1K	MAIN CBA	RTD120B		20471950	
R69	243649	RES CMF 5.1K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135950	
R7	256741	RES CMF 10K OHM 5% 1/16W	MAIN CBA	RTD120B		10135010	


Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
R7	243375	RES CMF 4.7K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135940	
R70	192100	RES CMF 1/10W 5% 1K	MAIN CBA	RTD120B		20471950	
R71	192100	RES CMF 1/10W 5% 1K	MAIN CBA	RTD120B		20471950	
R71	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R72	192100	RES CMF 1/10W 5% 1K	MAIN CBA	RTD120B		20471950	
R72	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R73	243375	RES CMF 4.7K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135940	
R73	175042	RES CF 1/4W 5% 2200R	MAIN CBA	RTD120B		20469460	
R74	226489	RES CMF 1/10W 5% 30K	MAIN CBA	RTD120B		60444410	
R74	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R75	267298	RMGCFMIC 422 OHM +1% 100MW	FRONT PANEL CBA	RTD120B		15929120	
R75	226489	RES CMF 1/10W 5% 30K	MAIN CBA	RTD120B		60444410	
R76	226489	RES CMF 1/10W 5% 30K	MAIN CBA	RTD120B		60444410	
R77	226489	RES CMF 1/10W 5% 30K	MAIN CBA	RTD120B		60444410	
R77	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R78	256743	RES CMF 15K OHM 5% 1/16W	MAIN CBA	RTD120B		10135050	
R78	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
R79	267291	RMGCFMIC 365 OHM +1% 100MW	FRONT PANEL CBA	RTD120B		15799380	
R79	256743	RES CMF 15K OHM 5% 1/16W	MAIN CBA	RTD120B		10135050	
R8	243375	RES CMF 4.7K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135940	
R80	259839	RMGCFMIC 324R0 OHM +1% 62MI5W	FRONT PANEL CBA	RTD120B		25491410	
R80	223673	RES CF 1/4W 5% 4.7 OHM	MAIN CBA	RTD120B		20472530	
R81	223673	RES CF 1/4W 5% 4.7 OHM	MAIN CBA	RTD120B		20472530	
R82	260677	RES CMF 10 OHM +5% 1/16W	FRONT PANEL CBA	RTD120B		10134410	
R82	223673	RES CF 1/4W 5% 4.7 OHM	MAIN CBA	RTD120B		20472530	
R83	223673	RES CF 1/4W 5% 4.7 OHM	MAIN CBA	RTD120B		20472530	
R84	256754	RES CMF 100K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135340	
R84	223673	RES CF 1/4W 5% 4.7 OHM	MAIN CBA	RTD120B		20472530	
R85	175042	RES CF 1/4W 5% 2200R	MAIN CBA	RTD120B		20469460	
R86	223673	RES CF 1/4W 5% 4.7 OHM	MAIN CBA	RTD120B		20472530	
R86	DISCON_STK	RMGCFMIC 11K0 OHM +5% 62MI5W	FRONT PANEL CBA	RTD120B		10135020	
R87	261152	RES CMF 1/10W 5% 150R	MAIN CBA	RTD120B		10134780	
R87	256764	RES CMF 3.3K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135900	
R88	256743	RES CMF 15K OHM 5% 1/16W	MAIN CBA	RTD120B		10135050	
R89	256741	RES CMF 10K OHM 5% 1/16W	MAIN CBA	RTD120B		10135010	
R9	243375	RES CMF 4.7K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135940	
R9	256738	RES CMF 560 OHM 5% 1/16W	MAIN CBA	RTD120B		10134930	
R90	256730	RES CMF 100 OHM 5% 1/16W	MAIN CBA	RTD120B		10134740	
R91	256727	RES CMF 68 OHM +5% 1/16W	MAIN CBA	RTD120B		10134700	
R93	256730	RES CMF 100 OHM 5% 1/16W	MAIN CBA	RTD120B		10134740	
R94	DISCON_STK	RMGCFMIC 11K0 OHM +5% 62MI5W	FRONT PANEL CBA	RTD120B		10135020	
R94	256730	RES CMF 100 OHM 5% 1/16W	MAIN CBA	RTD120B		10134740	
R95	256730	RES CMF 100 OHM 5% 1/16W	MAIN CBA	RTD120B		10134740	
R96	256730	RES CMF 100 OHM 5% 1/16W	MAIN CBA	RTD120B		10134740	
R97	256741	RES CMF 10K OHM 5% 1/16W	MAIN CBA	RTD120B		10135010	
R98	260677	RES CMF 10 OHM +5% 1/16W	FRONT PANEL CBA	RTD120B		10134410	
R98	256741	RES CMF 10K OHM 5% 1/16W	MAIN CBA	RTD120B		10135010	
R99	256741	RES CMF 10K OHM 5% 1/16W	MAIN CBA	RTD120B		10135010	
REMOTE	266185	REMOTE RCR311AA1 RTD120	INSTRUMENT	RTD120B		21299050	
RN1	263234	RCA 10R0 OHM +5% 62MI5W 4	FRONT PANEL CBA	RTD120B		15271870	
RN2	263234	RCA 10R0 OHM +5% 62MI5W 4	FRONT PANEL CBA	RTD120B		15271870	
RN3	263234	RCA 10R0 OHM +5% 62MI5W 4	FRONT PANEL CBA	RTD120B		15271870	
RN4	266506	RES CHIP ARRAY 10K 5% 1/6W	FRONT PANEL CBA	RTD120B		15338010	
RN5	266506	RES CHIP ARRAY 10K 5% 1/6W	FRONT PANEL CBA	RTD120B		15338010	
RR1	243375	RES CMF 4.7K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135940	
RR10	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
RR11	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
RR15	256748	RES CMF 33K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135170	
RR16	249041	RES CMF 1.2K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135790	
RR17	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
RR18	243649	RES CMF 5.1K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135950	
RR19	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
RR2	243375	RES CMF 4.7K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135940	
RR20	256767	RES CMF 6.8K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135980	
RR21	256767	RES CMF 6.8K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135980	
RR22	256767	RES CMF 6.8K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135980	
RR24	243649	RES CMF 5.1K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135950	
RR25	256767	RES CMF 6.8K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135980	
RR26	256767	RES CMF 6.8K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135980	
RR27	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
RR28	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
RR29	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
RR3	256764	RES CMF 3.3K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135900	
RR34	267296	RMGCFMIC 12K OHM +1% N 63MI0W	FRONT PANEL CBA	RTD120B		55955020	
RR37	249041	RES CMF 1.2K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135790	
RR39	249041	RES CMF 1.2K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135790	
RR4	256764	RES CMF 3.3K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135900	
RR41	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
RR43	260305	RES CHIP 1K 5% 1/16W	FRONT PANEL CBA	RTD120B		10135770	
RR44	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	

Symbol	Stock	Description	Circuit	Model	TypeCode	Drawing	Notes
RR45	260677	RES CMF 10 OHM +5% 1/16W	FRONT PANEL CBA	RTD120B		10134410	
RR46	260677	RES CMF 10 OHM +5% 1/16W	FRONT PANEL CBA	RTD120B		10134410	
RR47	256748	RES CMF 33K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135170	
RR48	256746	RES CMF 22K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135120	
RR49	249338	RESMF 47K OHM +5% 62.5MW	FRONT PANEL CBA	RTD120B		10135220	
RR5	256764	RES CMF 3.3K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135900	
RR50	243649	RES CMF 5.1K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135950	
RR51	256748	RES CMF 33K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135170	
RR52	261151	RES CMF 33R 5% 1/16W	FRONT PANEL CBA	RTD120B		10134590	
RR53	256742	RES CMF 12K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135030	
RR54	249338	RESMF 47K OHM +5% 62.5MW	FRONT PANEL CBA	RTD120B		10135220	
RR55	256764	RES CMF 3.3K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135900	
RR56	260305	RES CHIP 1K 5% 1/16W	FRONT PANEL CBA	RTD120B		10135770	
RR58	256767	RES CMF 6.8K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135980	
RR6	256764	RES CMF 3.3K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135900	
RR66	267290	RMGCFMIN 1.0 OHM +5% 100MI0W	FRONT PANEL CBA	RTD120B		15268430	
RR67	267290	RMGCFMIN 1.0 OHM +5% 100MI0W	FRONT PANEL CBA	RTD120B		15268430	
RR68	267290	RMGCFMIN 1.0 OHM +5% 100MI0W	FRONT PANEL CBA	RTD120B		15268430	
RR69	267290	RMGCFMIN 1.0 OHM +5% 100MI0W	FRONT PANEL CBA	RTD120B		15268430	
RR7	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
RR70	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
RR71	256759	RES CMF 1.5K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135820	
RR73	266095	RES CMF 1/10W 5% 1M	FRONT PANEL CBA	RTD120B		20506750	
RR74	256746	RES CMF 22K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135120	
RR76	243375	RES CMF 4.7K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135940	
RR77	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
RR79	256759	RES CMF 1.5K 5% 1/10W	FRONT PANEL CBA	RTD120B		10135820	
RR8	256751	RES CMF 68K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135290	
RR82	256746	RES CMF 22K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135120	
RR83	259568	RES CMF 3.3 OHNS 5% 1/16W	FRONT PANEL CBA	RTD120B		20740280	
RR87	256783	RES CMF 0 OHM 0% 1/16W	FRONT PANEL CBA	RTD120B		10328750	
RR88	260305	RES CHIP 1K 5% 1/16W	FRONT PANEL CBA	RTD120B		10135770	
RR9	256745	RES CMF 20K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135090	
RS1	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
RS2	256754	RES CMF 100K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135340	
RS3	256741	RES CMF 10K OHM 5% 1/16W	FRONT PANEL CBA	RTD120B		10135010	
SPEAKER	266183	SPEAKER BOX RTD120	INSTRUMENT	RTD120B		55784420	
SW1	266160	SWITCH SLIDE-SWITCH SK1304	MAIN CBA	RTD120B		55765630	
SW101	245481	SWITCH	KEY BOARD ASY	RTD120B		20404730	
SW102	245481	SWITCH	KEY BOARD ASY	RTD120B		20404730	
SW103	245481	SWITCH	KEY BOARD ASY	RTD120B		20404730	
SW104	245481	SWITCH	KEY BOARD ASY	RTD120B		20404730	
SW105	245481	SWITCH	KEY BOARD ASY	RTD120B		20404730	
SW106	245481	SWITCH	KEY BOARD ASY	RTD120B		20404730	
SW107	245481	SWITCH	KEY BOARD ASY	RTD120B		20404730	
TC112	261768	CAP LYTC 220UF 20% 10V 85C	FRONT PANEL CBA	RTD120B		20269080	
U1	267317	IC-VIDEOPROC ES6629F VID PROC	FRONT PANEL CBA	RTD120B		5590388A	
U1	266161	IC-REGULATOR KIA378R05PI	INSTRUMENT	RTD120B		55878450	
U11	267324	IC-CONV WM8739EDS SSOP A/D N N	FRONT PANEL CBA	RTD120B		55883880	
U12	238708	IC BA4558F	FRONT PANEL CBA	RTD120B		20976940	
U14	238708	IC BA4558F	FRONT PANEL CBA	RTD120B		20976940	
U15	238708	IC BA4558F	FRONT PANEL CBA	RTD120B		20976940	
U16	267307	IC-LOGIC 74HCT374 BUFFER	FRONT PANEL CBA	RTD120B		15048690	
U17	267307	IC-LOGIC 74HCT374 BUFFER	FRONT PANEL CBA	RTD120B		15048690	
U18	267307	IC-LOGIC 74HCT374 BUFFER	FRONT PANEL CBA	RTD120B		15048690	
U19	267307	IC-LOGIC 74HCT374 BUFFER	FRONT PANEL CBA	RTD120B		15048690	
U2	251567	KIA7912PI	MAIN CBA	RTD120B		55094440	
U2	267683	IC-MEMFLASH M29W800DT-70N6	FRONT PANEL CBA	RTD120B		55248560	
U20	267308	IC-LOGIC 74 DEMULTIPLEXER	FRONT PANEL CBA	RTD120B		10511600	
U3	251567	IC KIA7812API	MAIN CBA	RTD120B		55094390	
U3	258071	IC-EEPROM M24C02WMN6	FRONT PANEL CBA	RTD120B		20940740	
U5	267325	IC-DRAM 133M0 HZ 7N5 N N 64M	FRONT PANEL CBA	RTD120B		55925440	
U8	267316	IC-SPECFUNC V6309MSP3B 4.38V	FRONT PANEL CBA	RTD120B		55884160	
U9	267310	IC-LOWFREQ WM8746EDS VOL CONT	FRONT PANEL CBA	RTD120B		55883960	
UU2	267309	IC-LOWFREQ ES6603SF DSP	FRONT PANEL CBA	RTD120B		55884390	
UU3	267313	IC-MOTORCIR FAN8024BD MTR DRV	FRONT PANEL CBA	RTD120B		55930010	
UU4	267314	IC-OPERAMP TL3472CDR,	FRONT PANEL CBA	RTD120B		55884380	
UU5	267312	IC-MOTORCIR BA6289F MTR DRIVE	FRONT PANEL CBA	RTD120B		55930020	
Y1	267323	CRYS 27M0 HZ +15 PPM 50 OHM	FRONT PANEL CBA	RTD120B		55439460	
ZD1	266143	DIODE ZENER 9.1V 1/2W 1N5239B	MAIN CBA	RTD120B		20527000	
ZD2	248145	DIODE ZENER 7.5V 1/2W BZX55C7V	MAIN CBA	RTD120B		80444150	
ZD3	248145	DIODE ZENER 7.5V 1/2W BZX55C7V	MAIN CBA	RTD120B		80444150	


AMPLIFIER SCHEMATIC

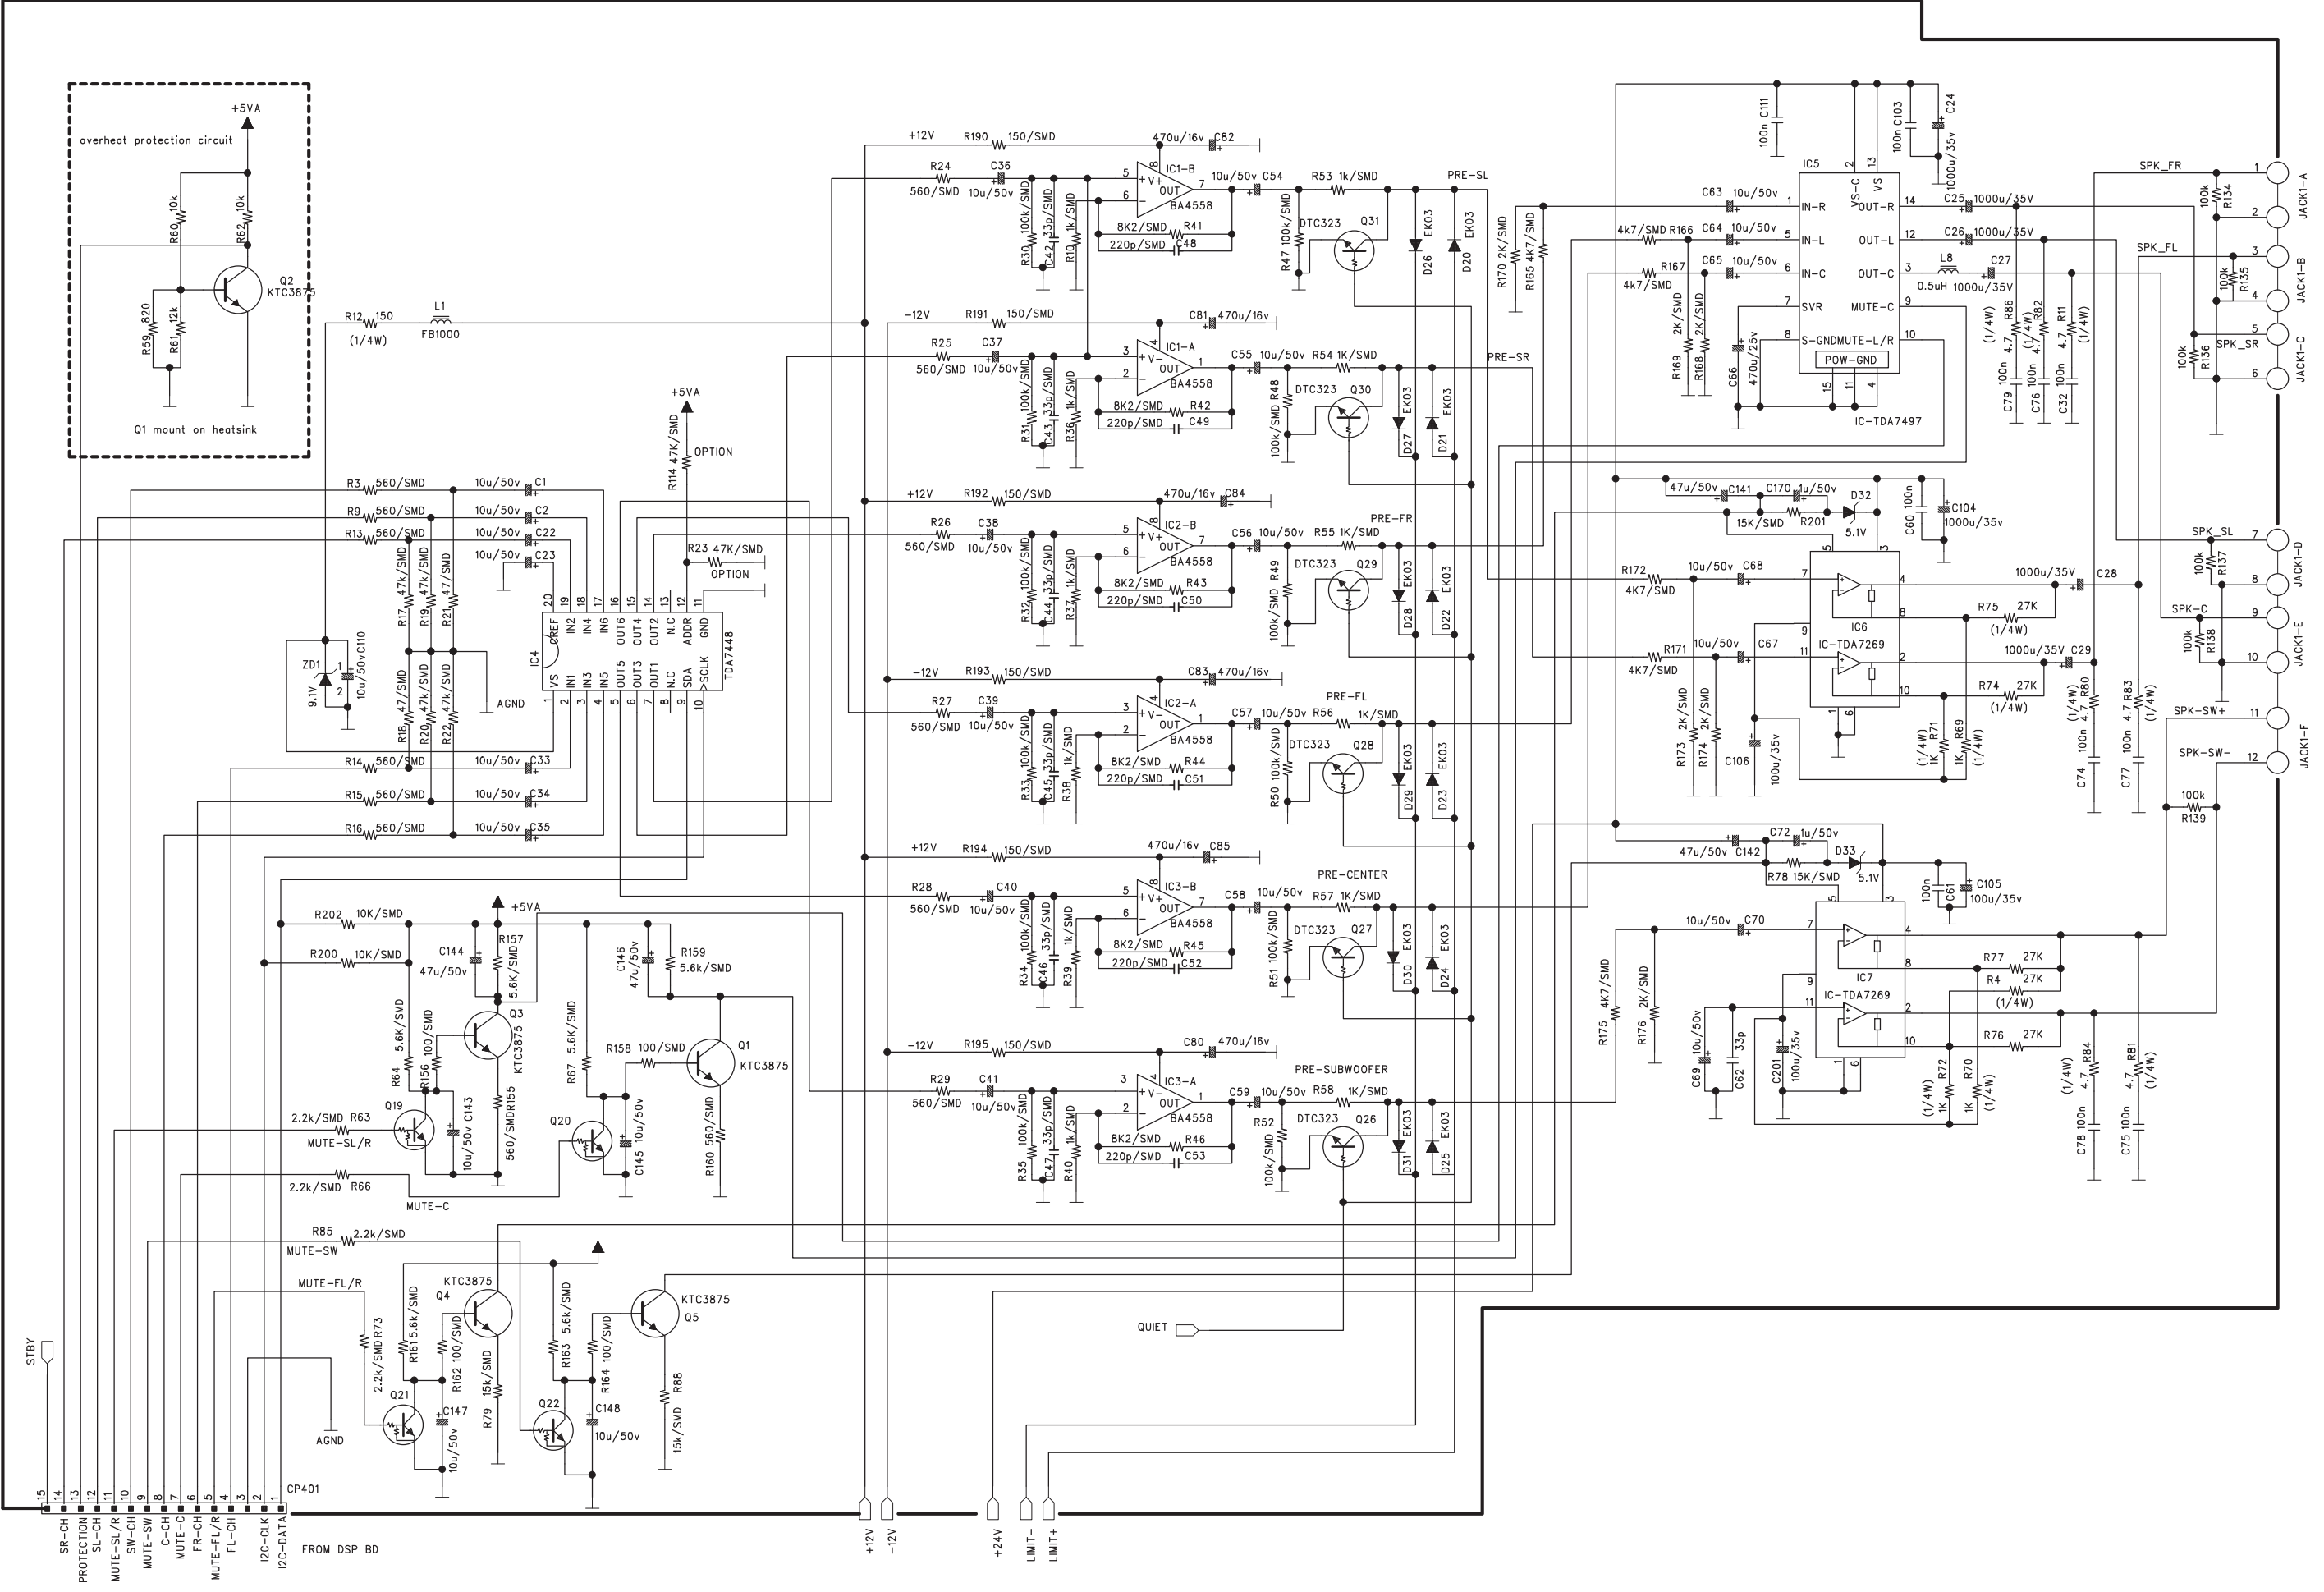


CD MECHANISM EXPLODED VIEW

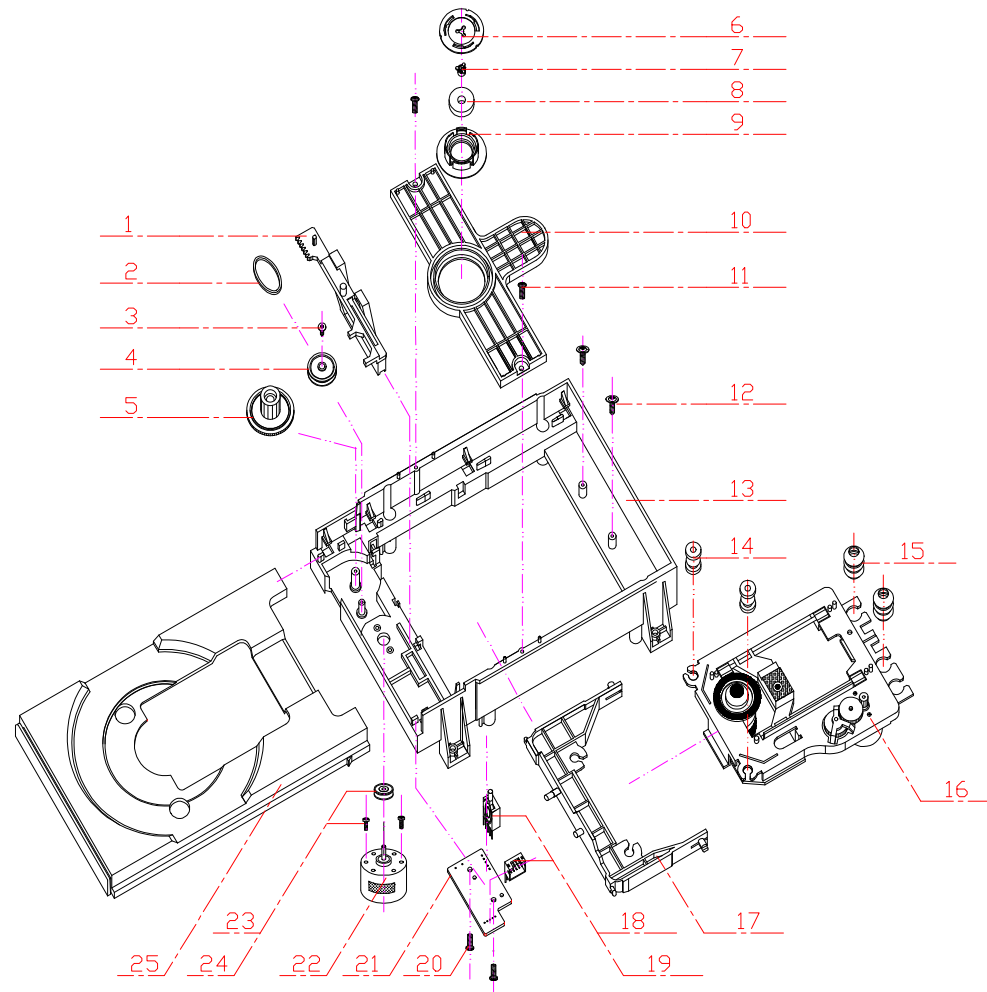


EXPLODED VIEW

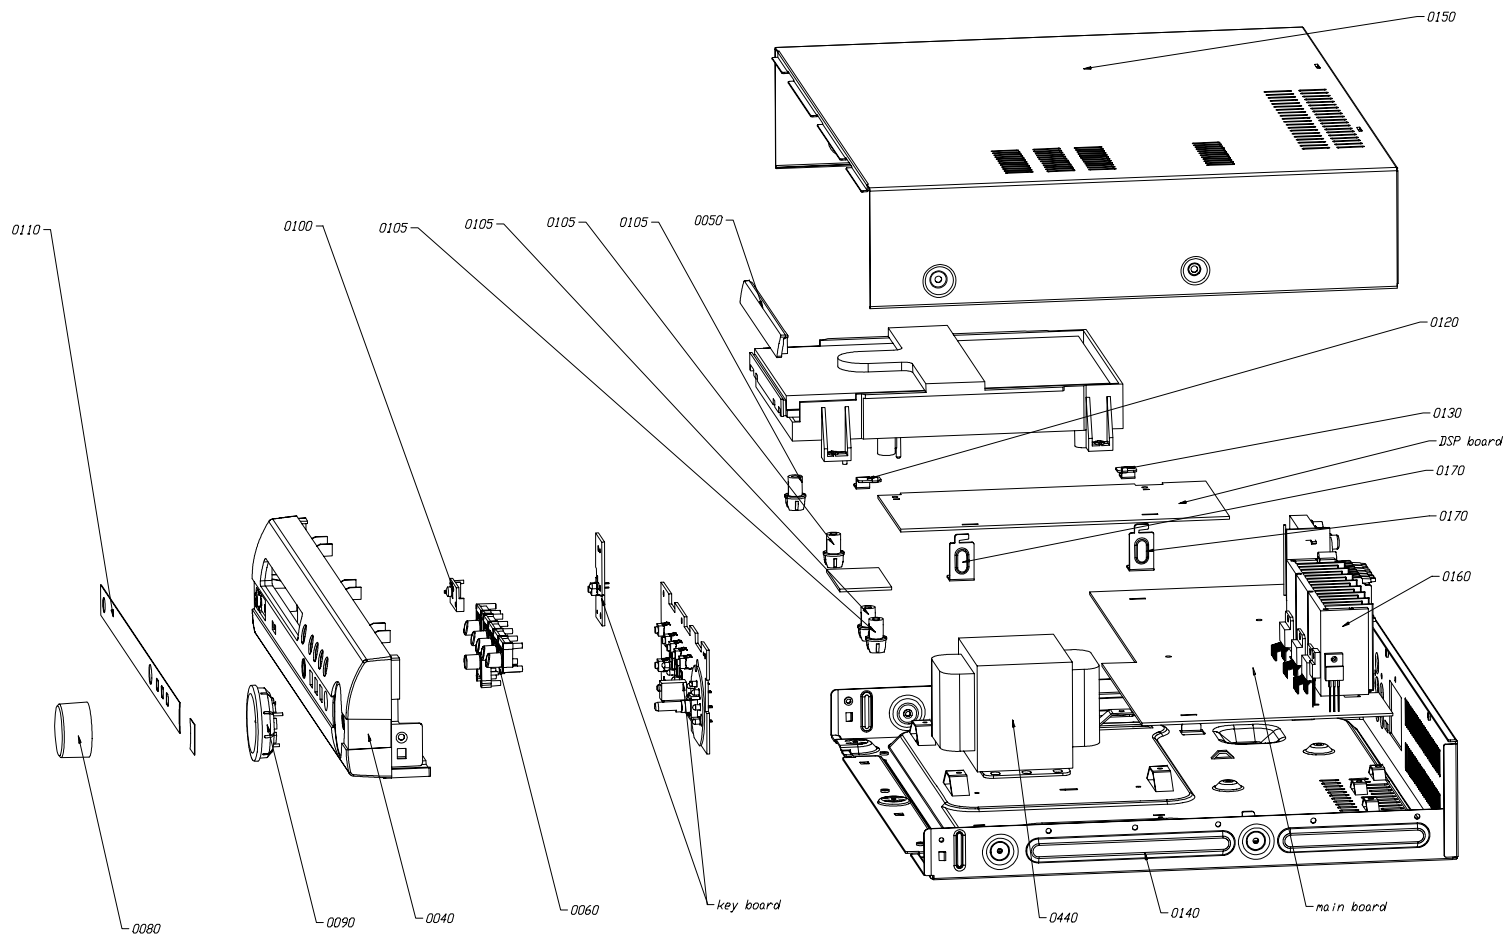



I/O SCHEMATIC

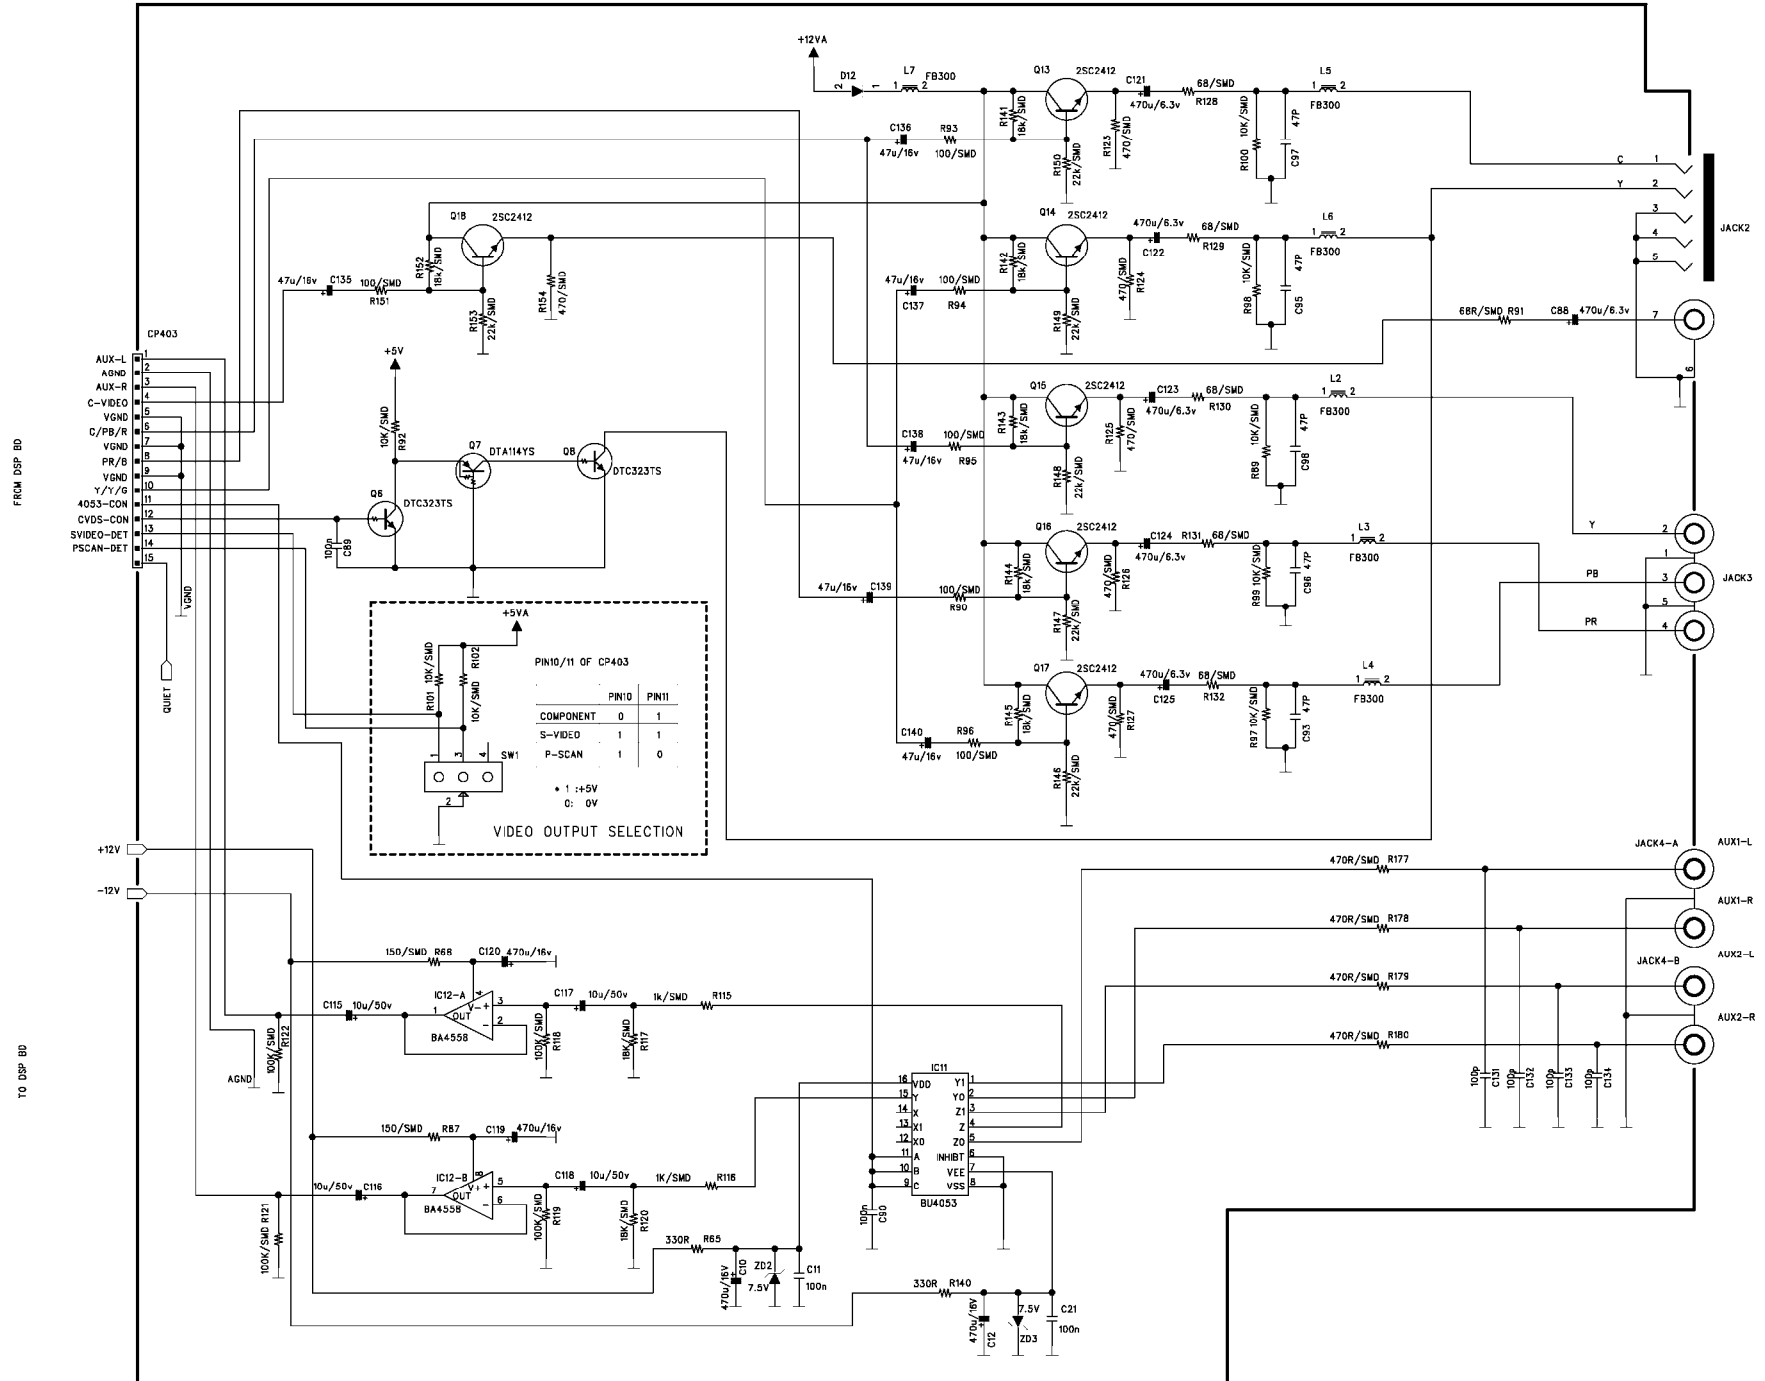


KEYBOARD SCHEMATIC

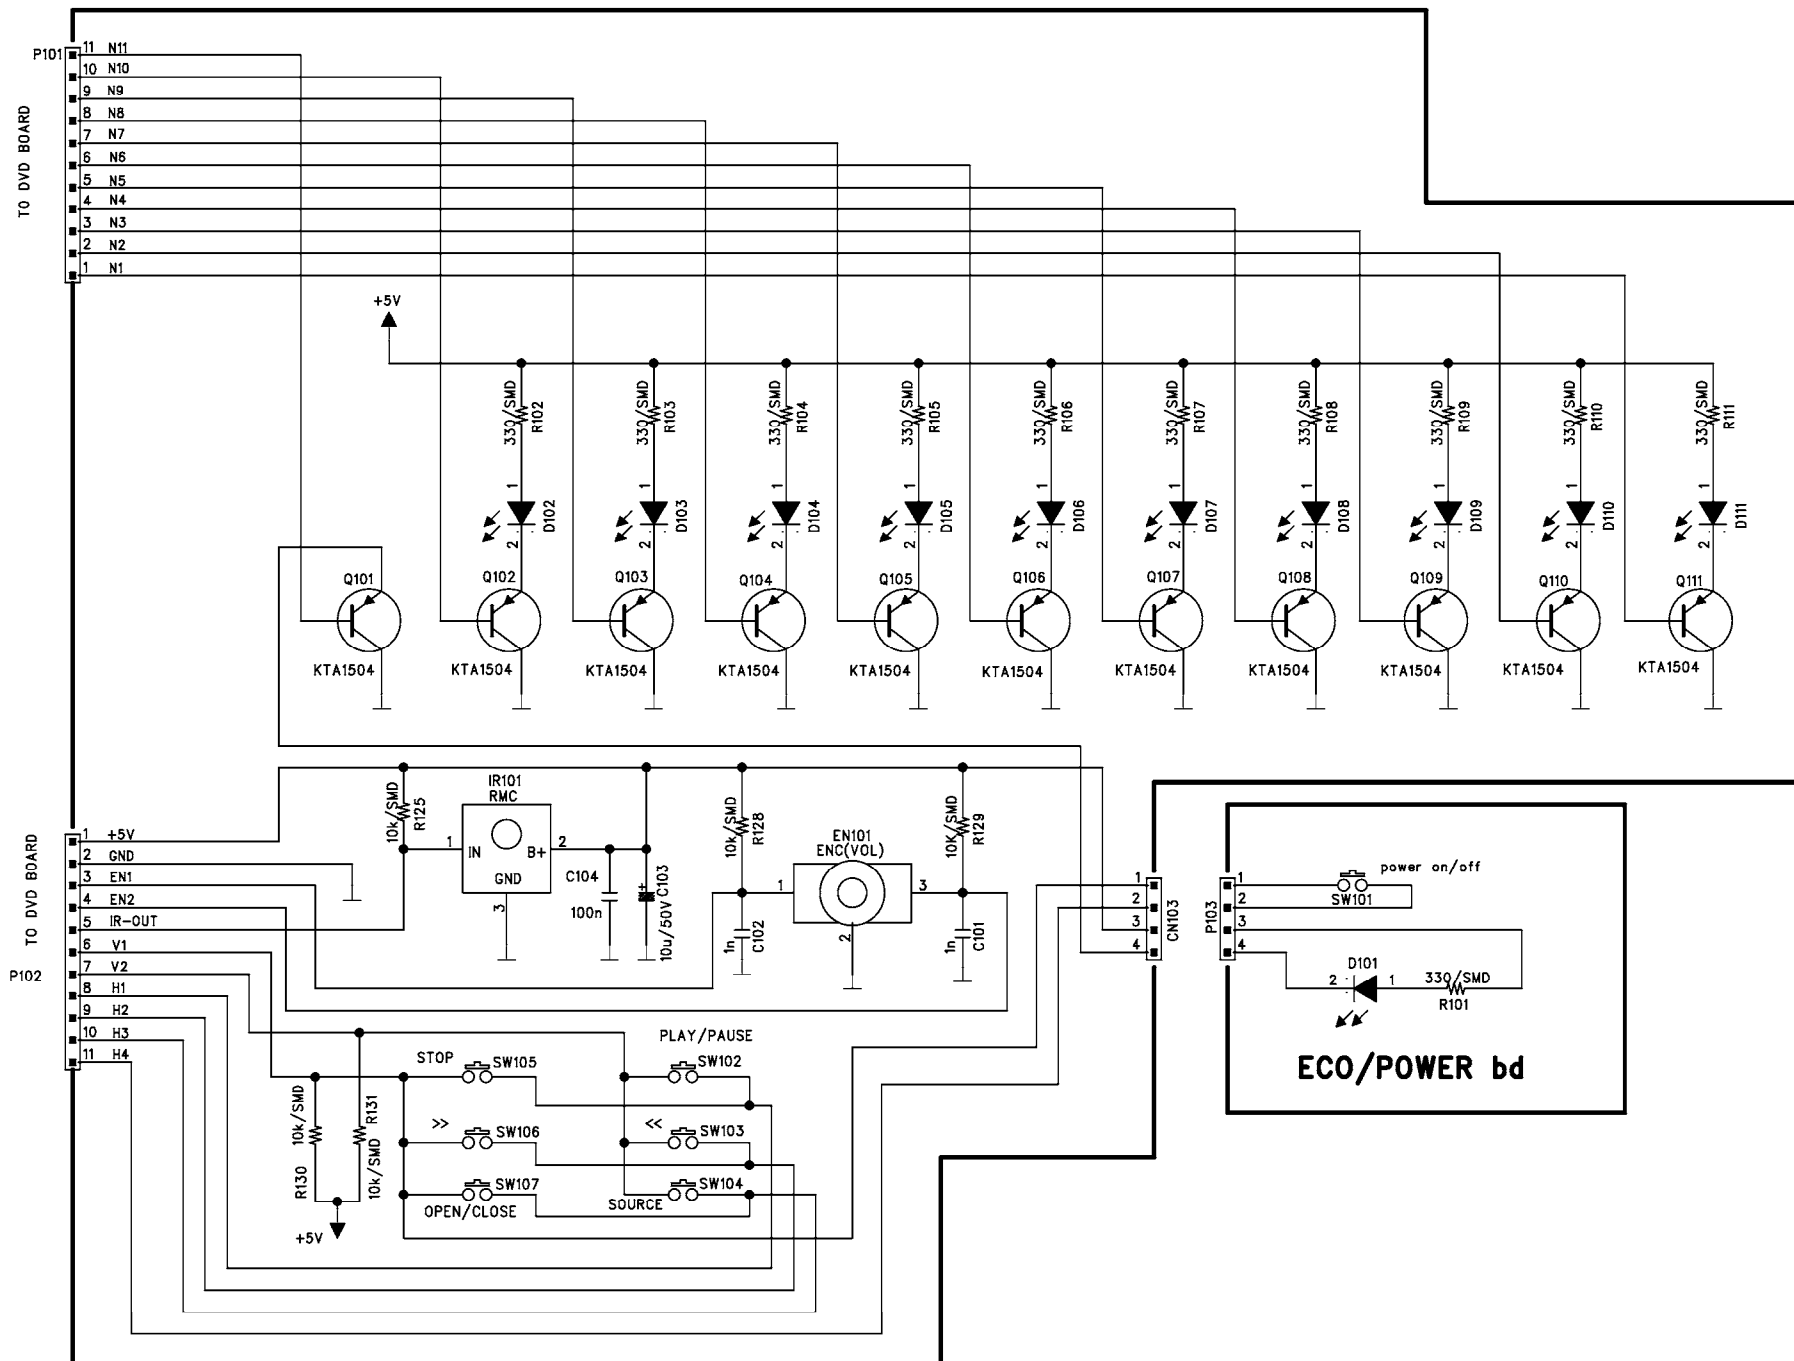


POWER SUPPLY SCHEMATIC

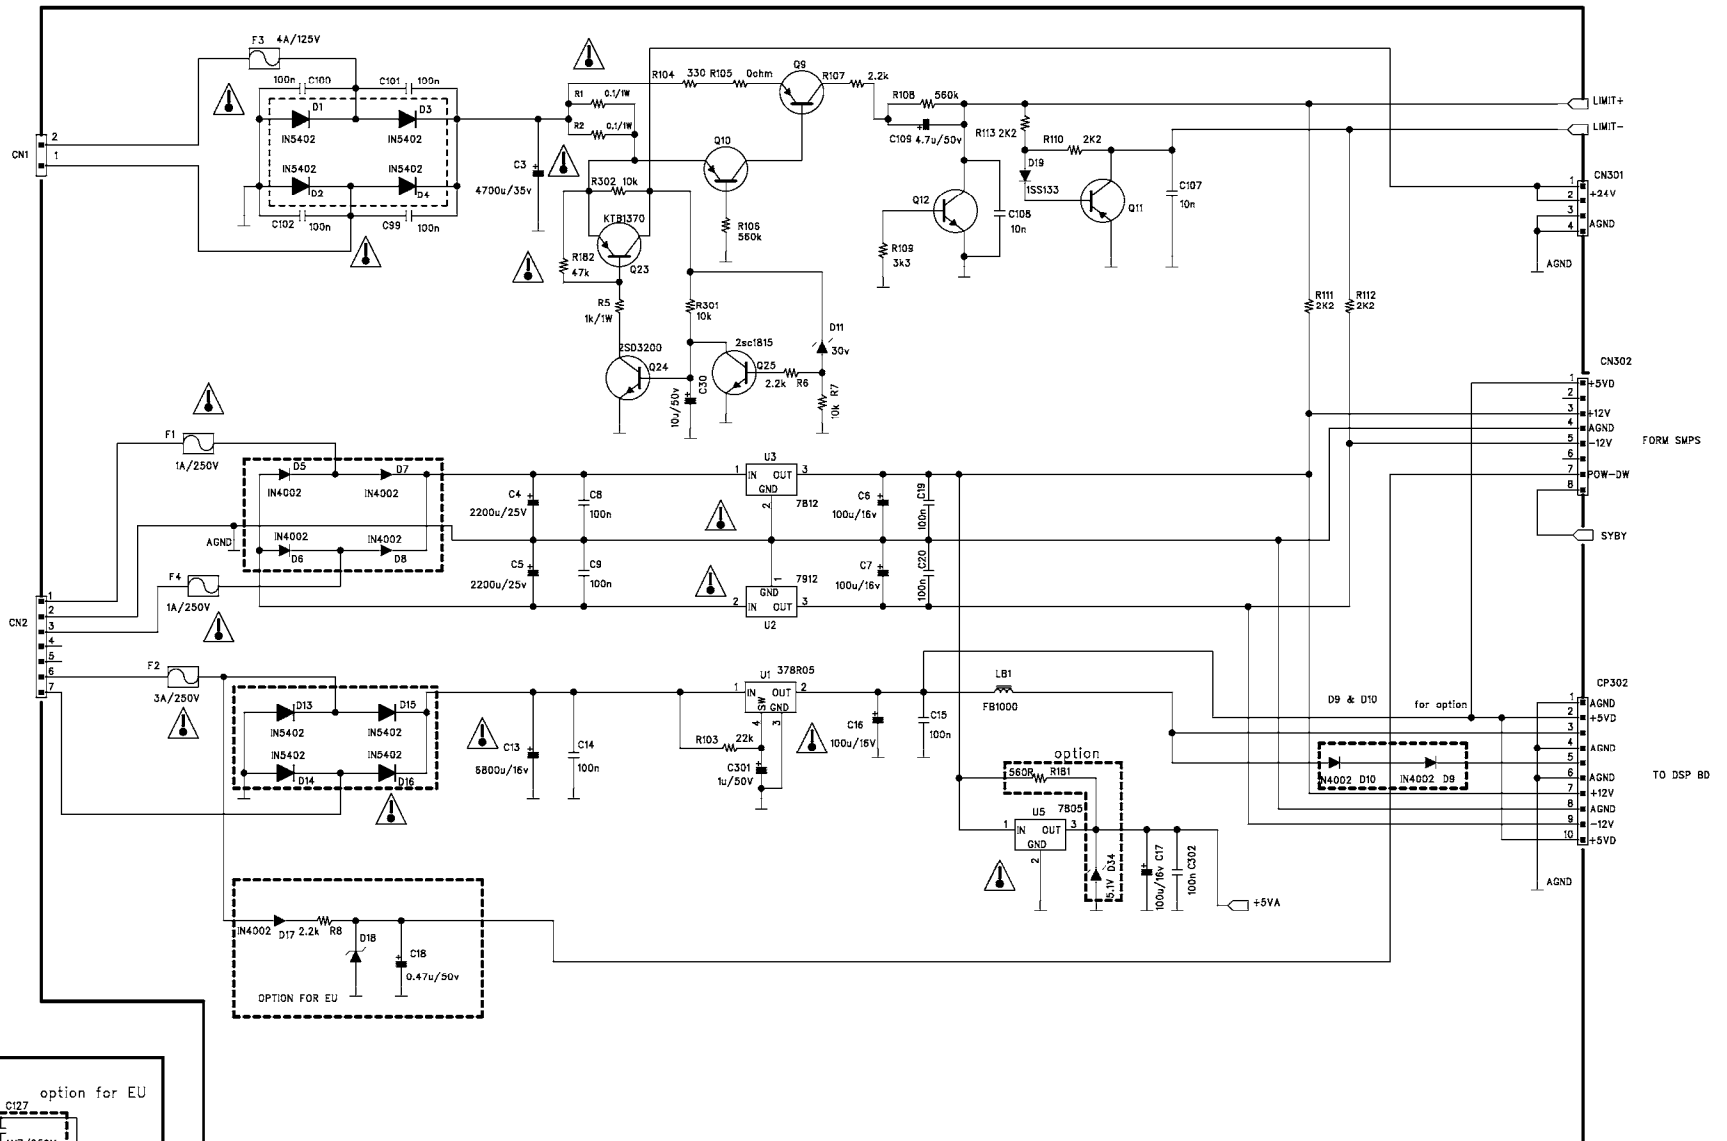


RTD120 AUDIO PROCESSING SCHEMATIC

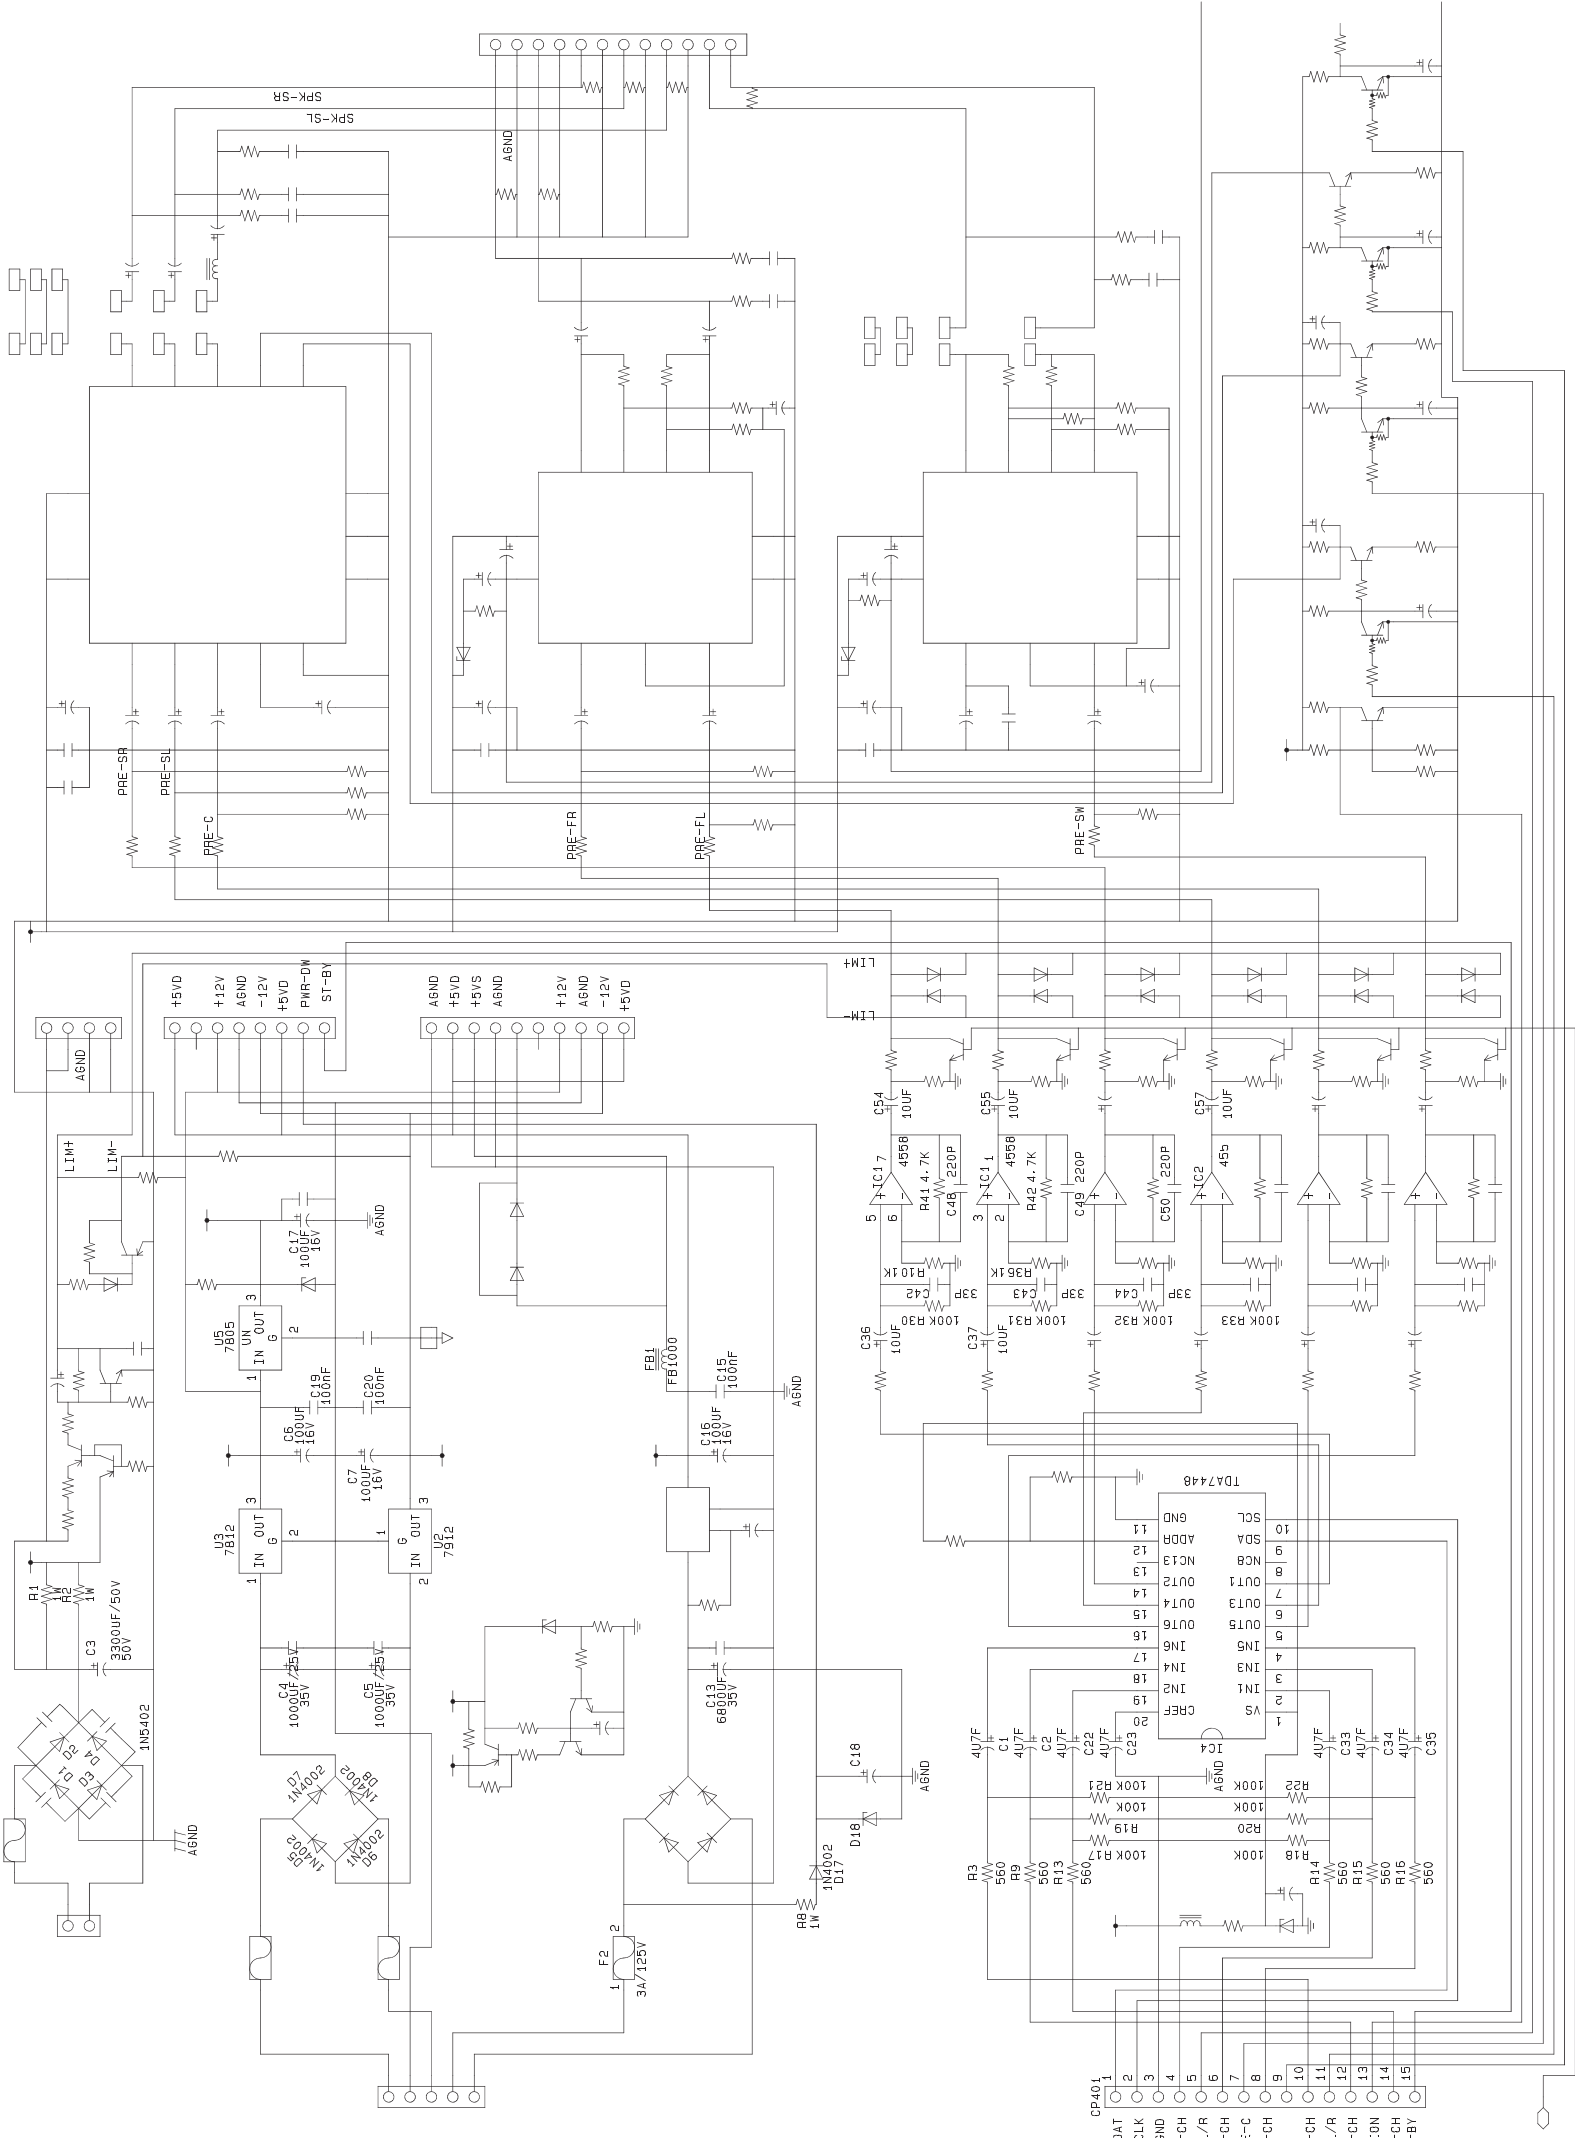










RTD120 MAIN SCHEMATIC PT 1

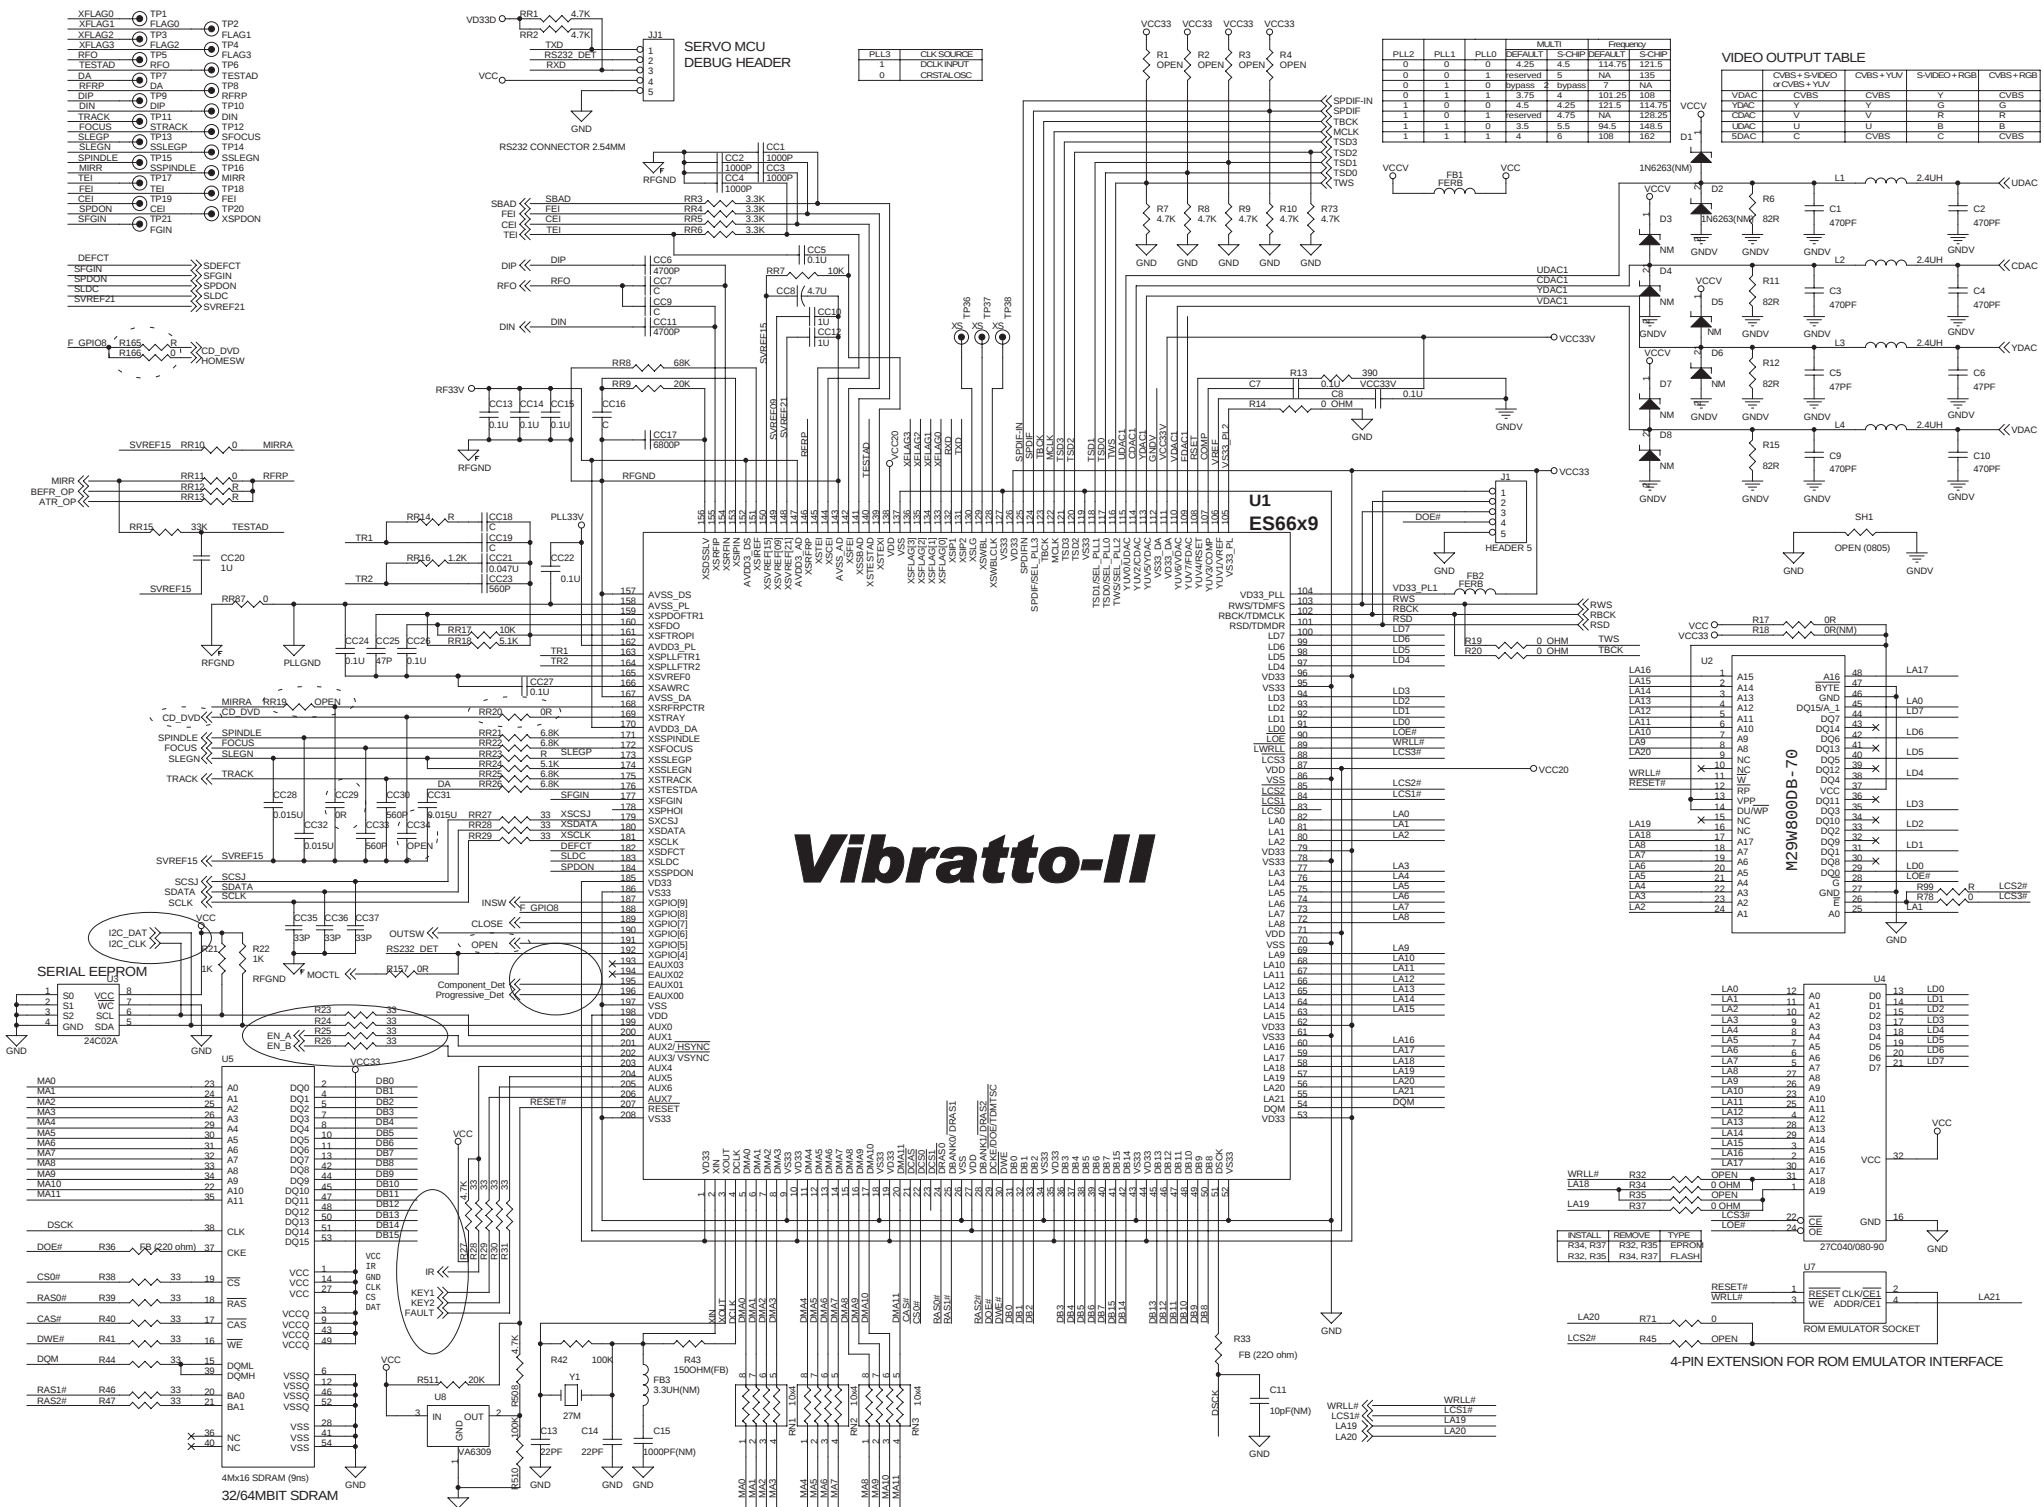






RTD120 MAIN SCHEMATIC PT 2

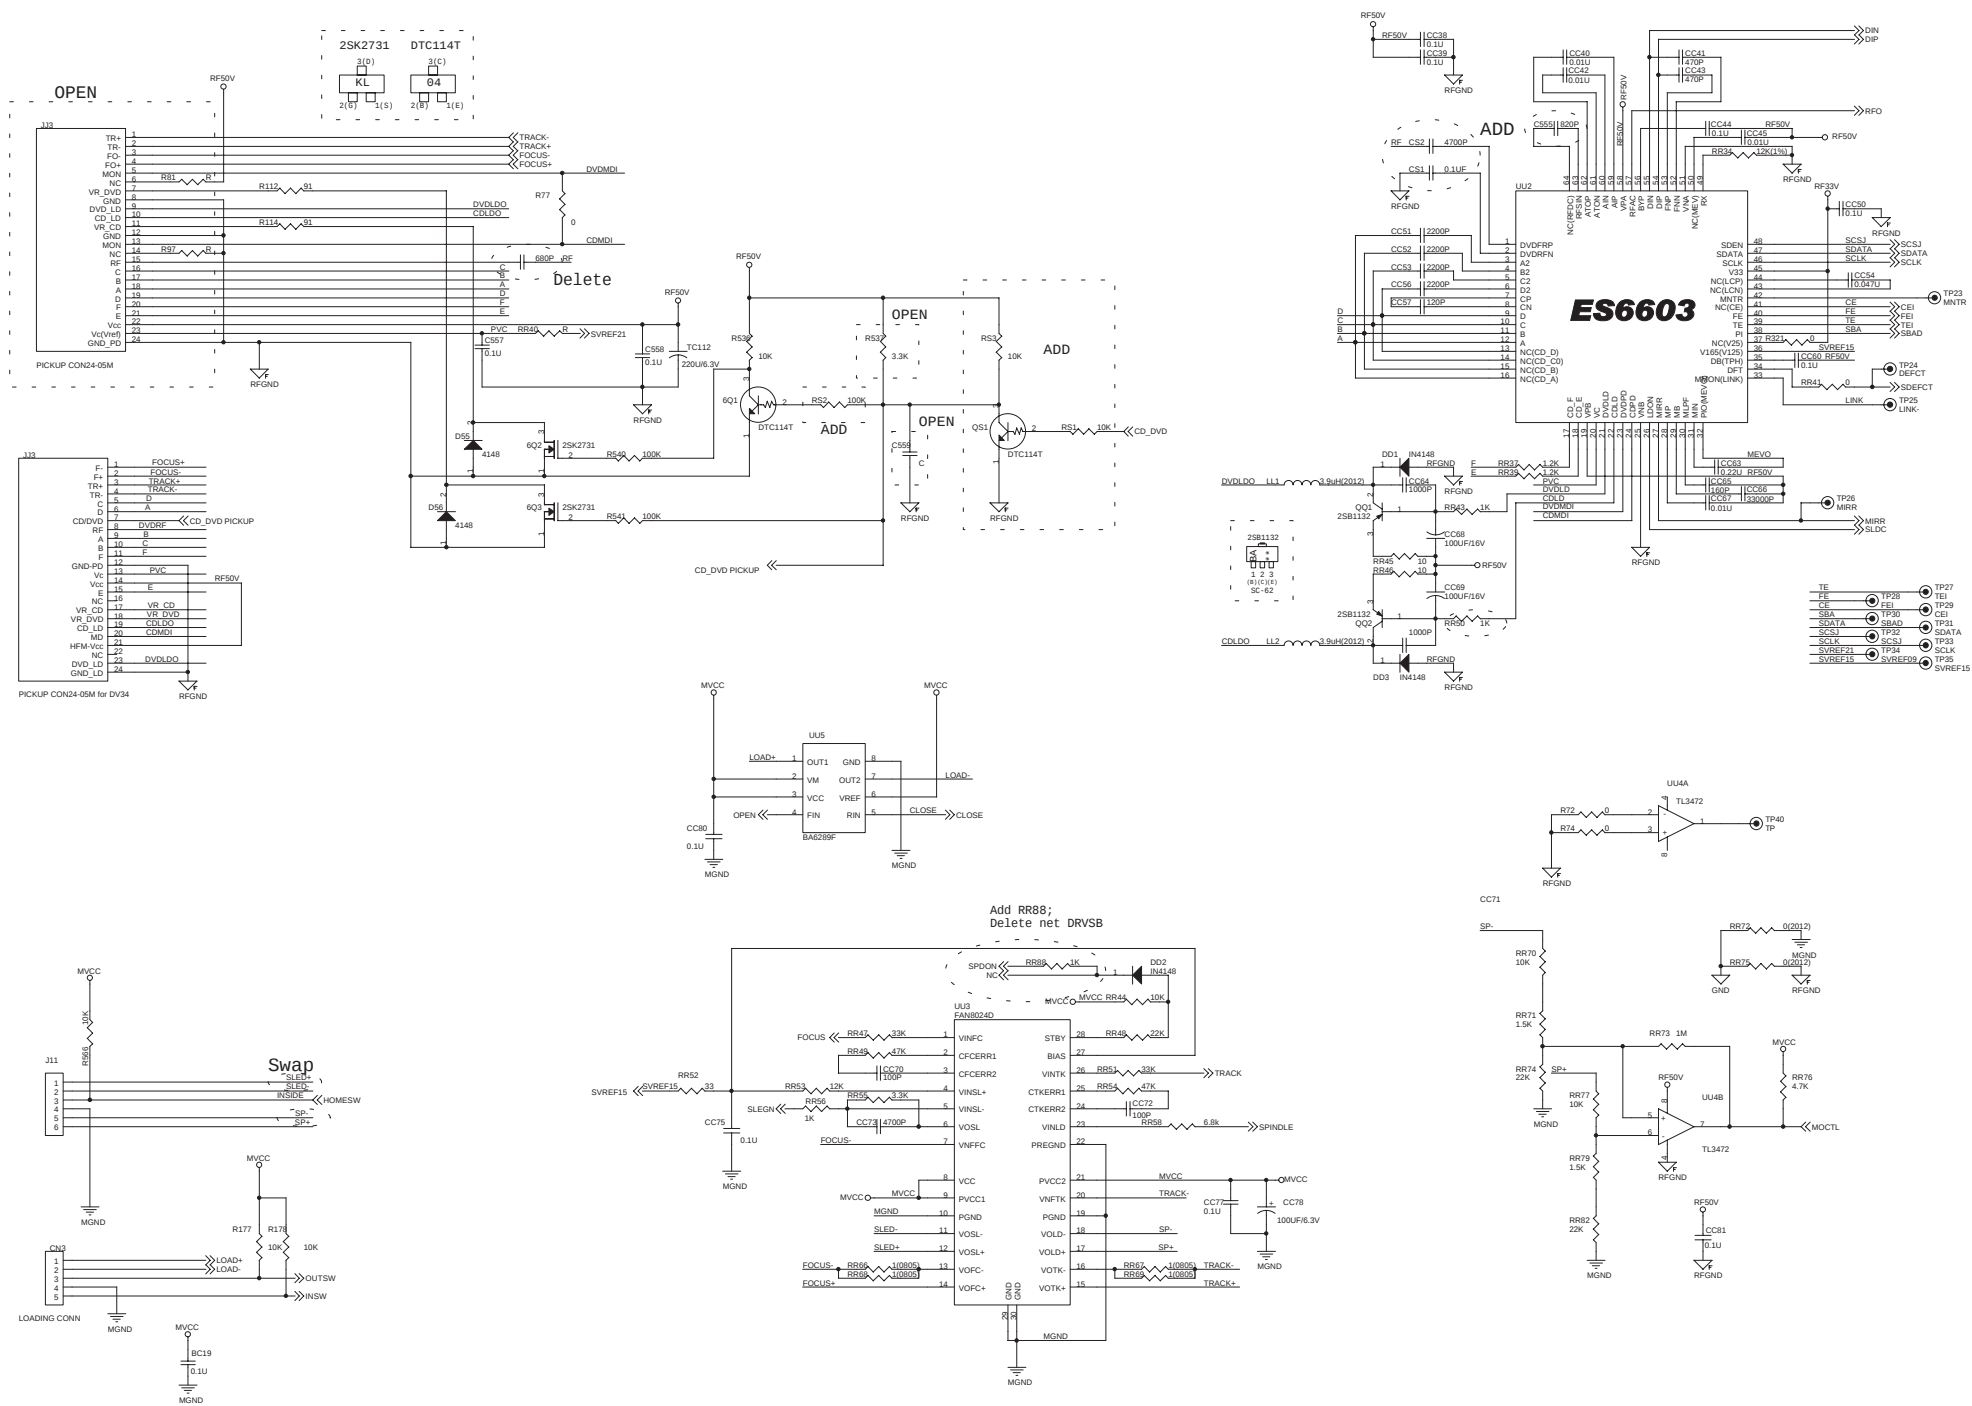


RTD120 MAIN SCHEMATIC PT 3

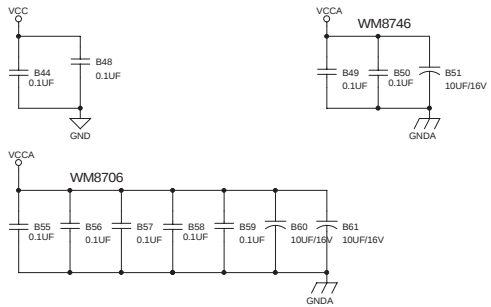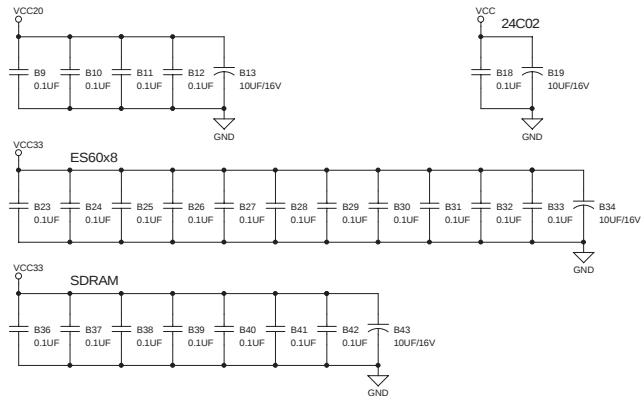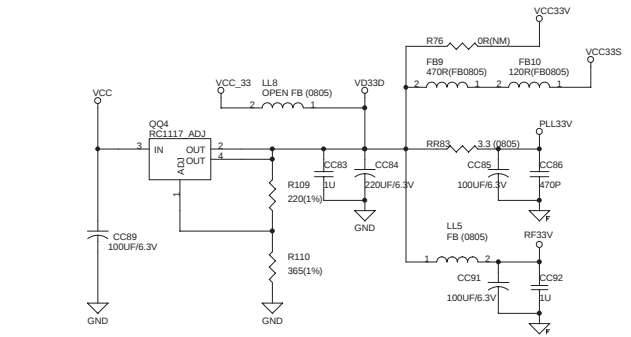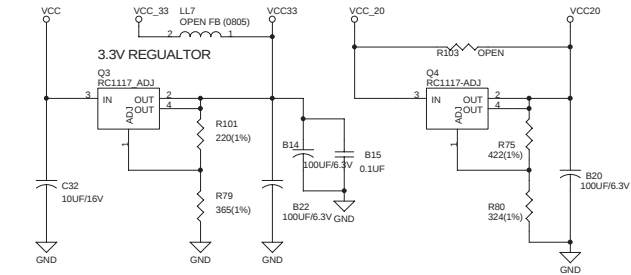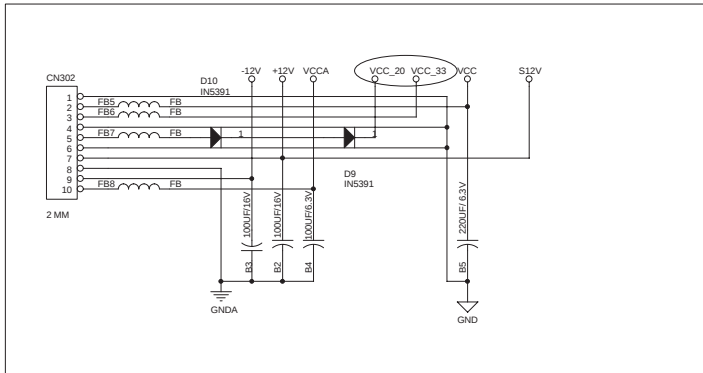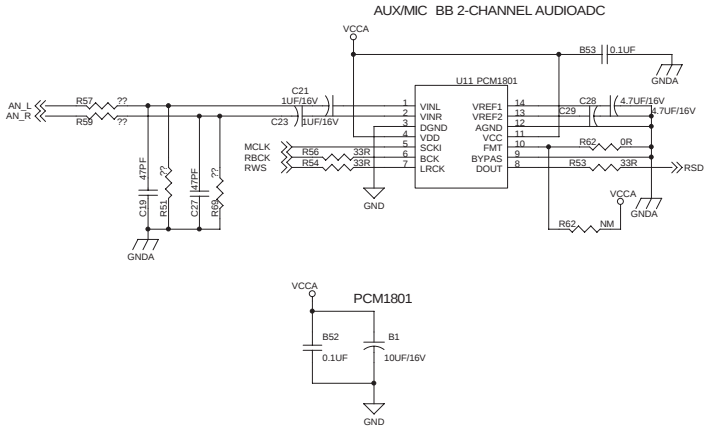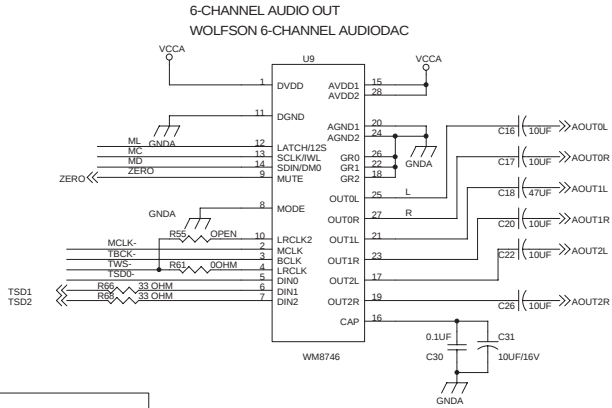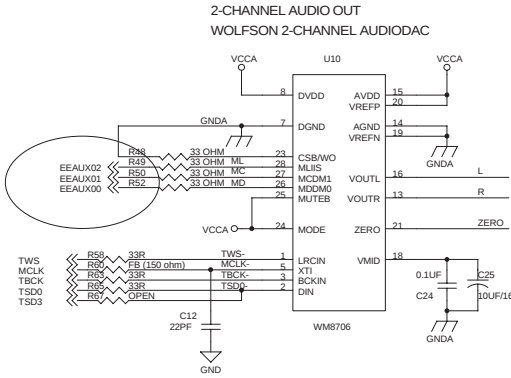


RTD120 MAIN SCHEMATIC PT 4

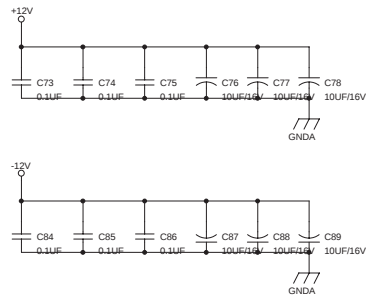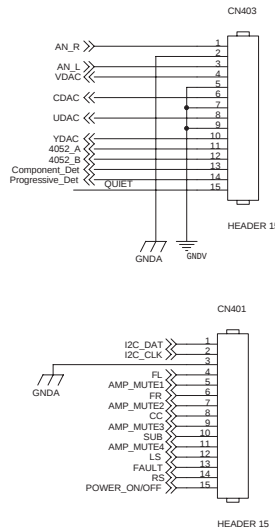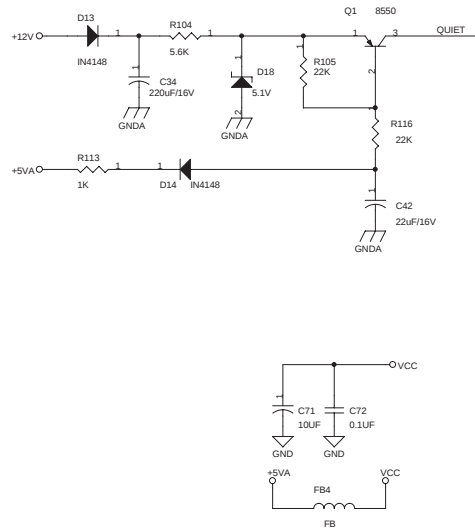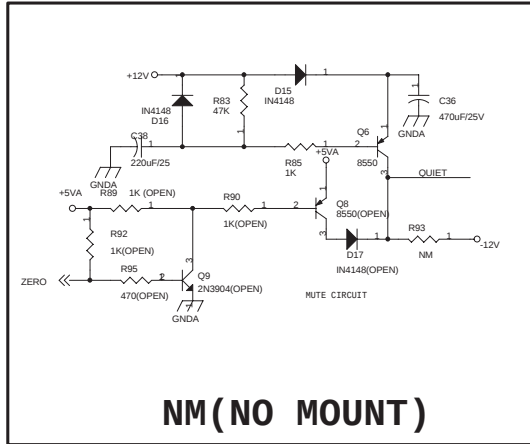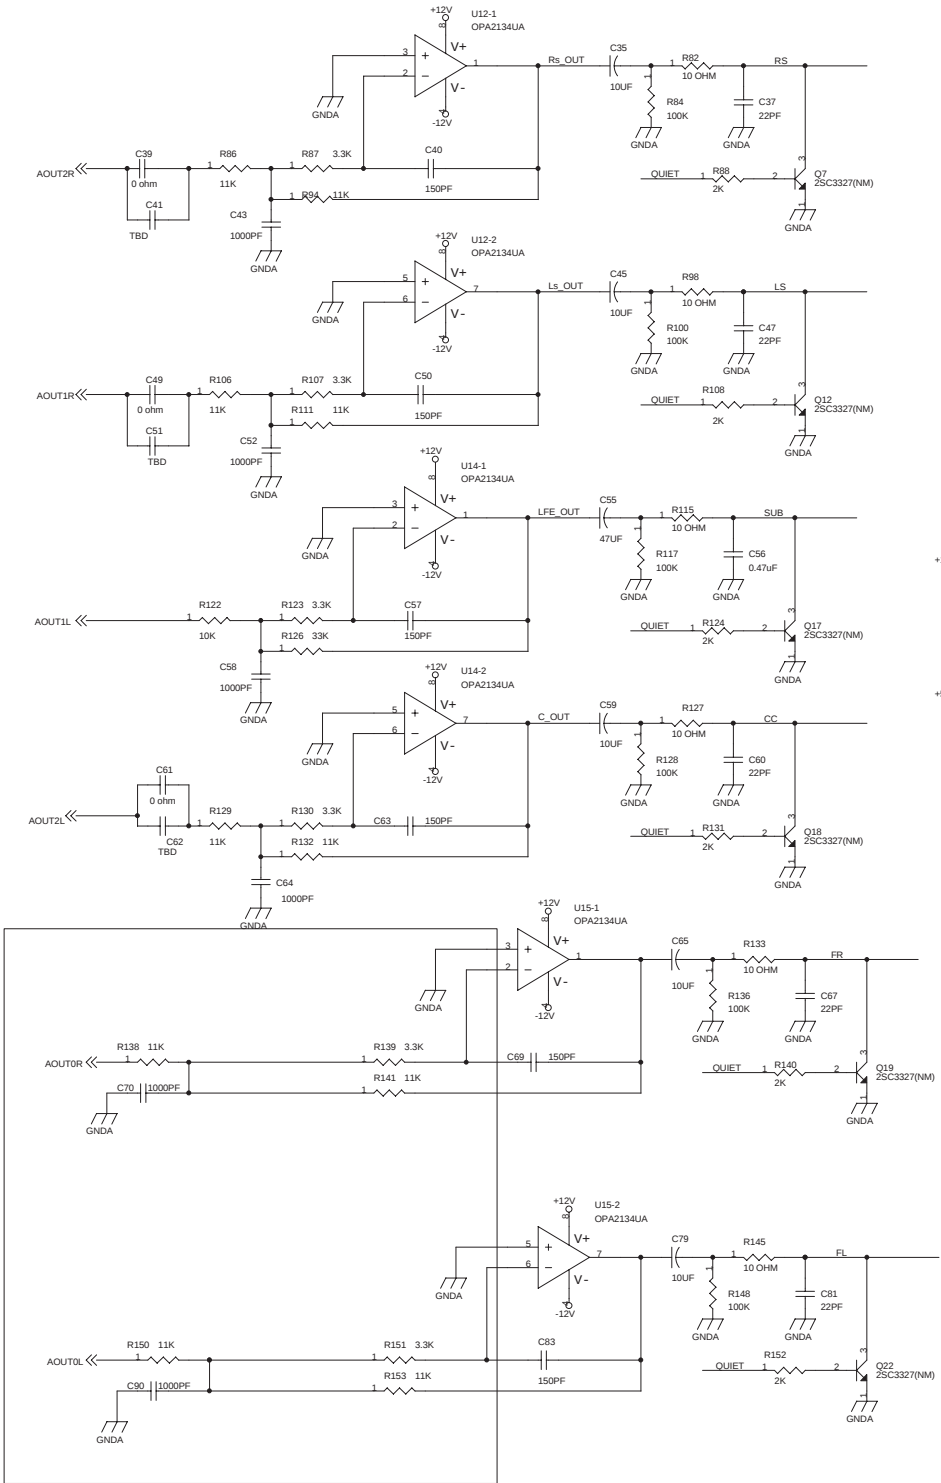


RTD120 MAIN SCHEMATIC PT 5

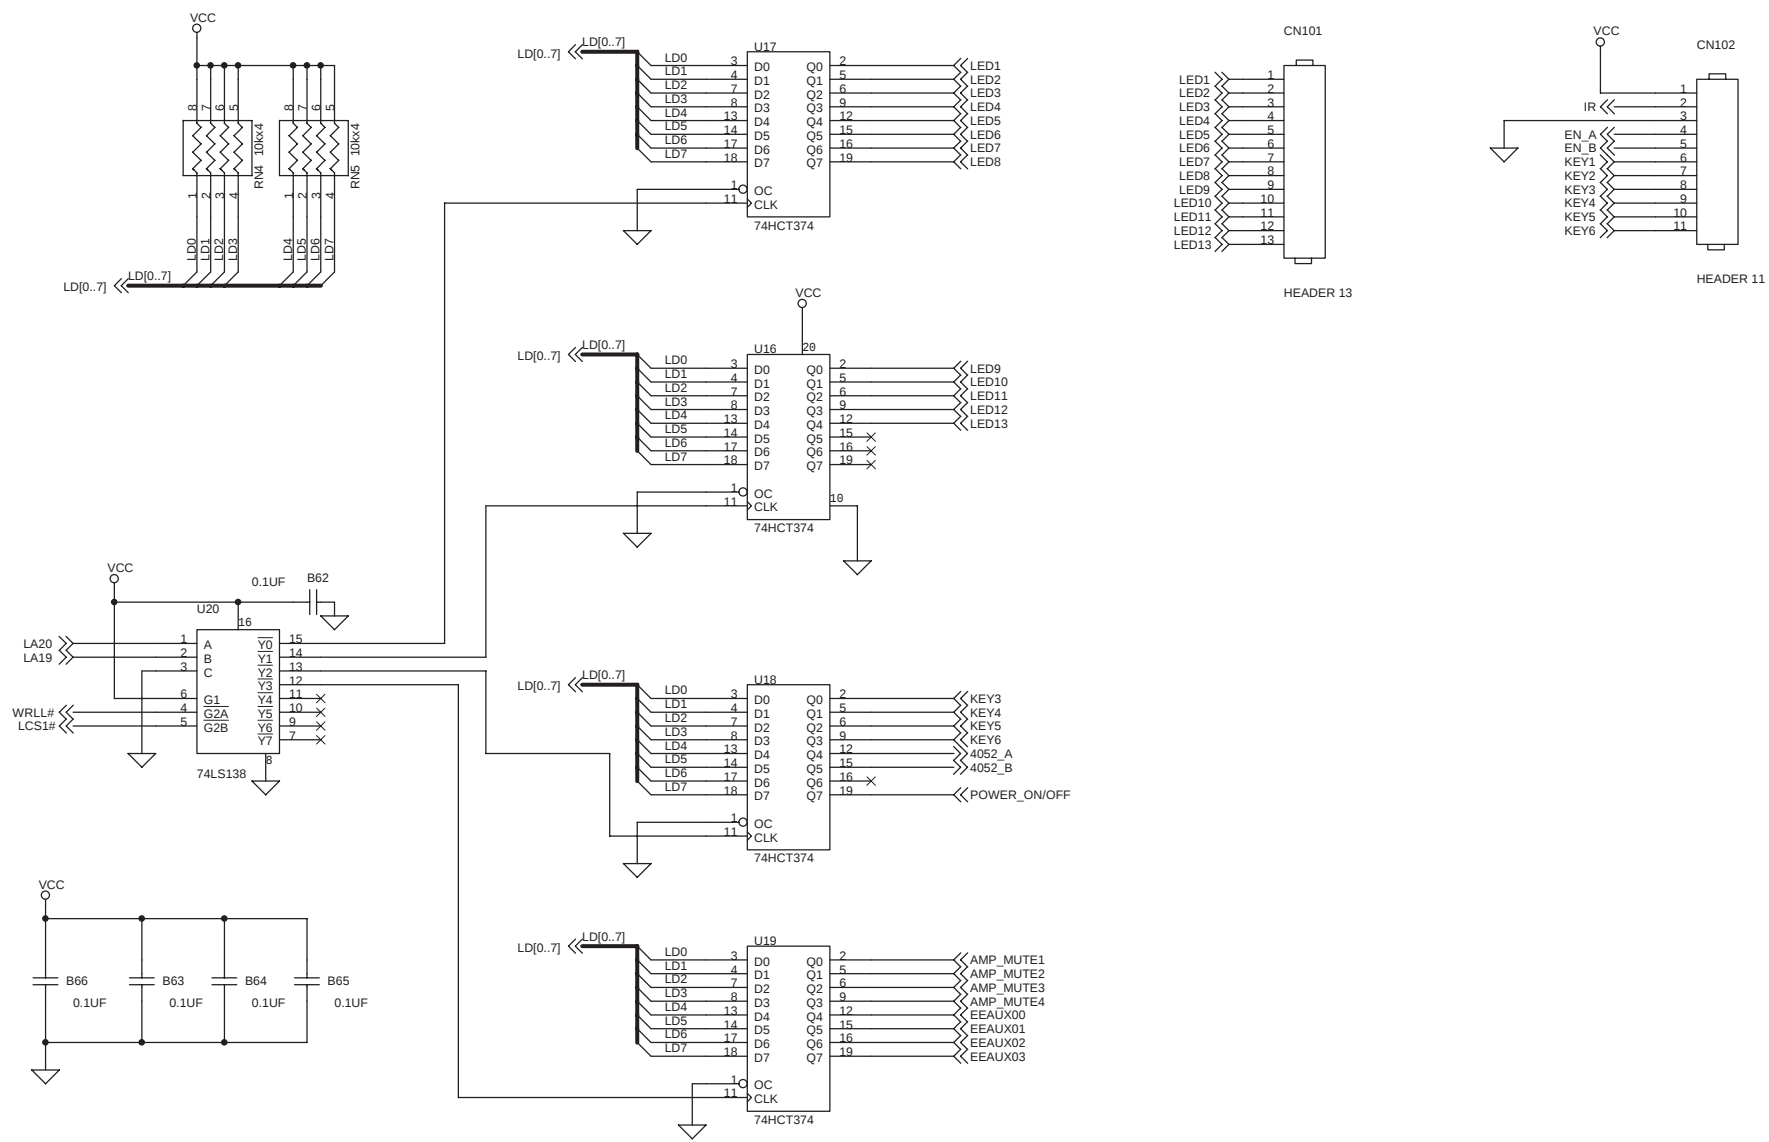

WAVEFORMS

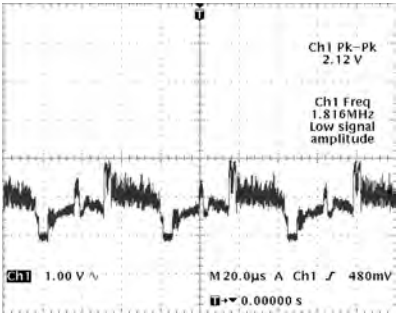


CP403 PIN 4

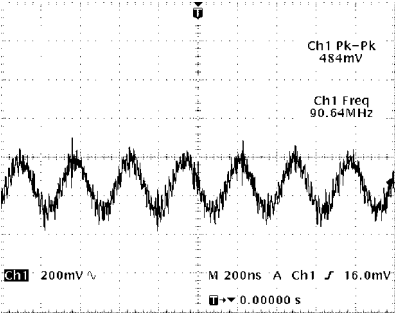


CP403 PIN 6


WAVEFORMS

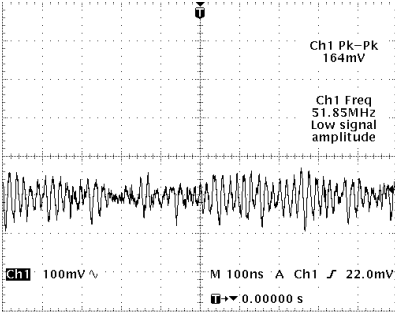


CP403 PIN 14

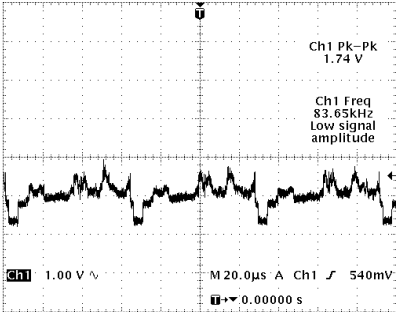


CP403 PIN 10

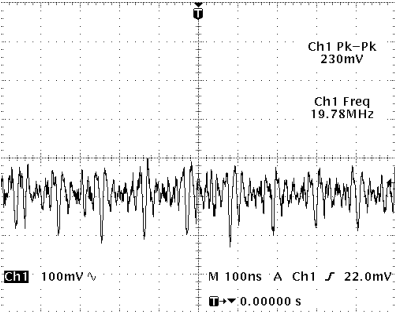

CP403 PIN 11

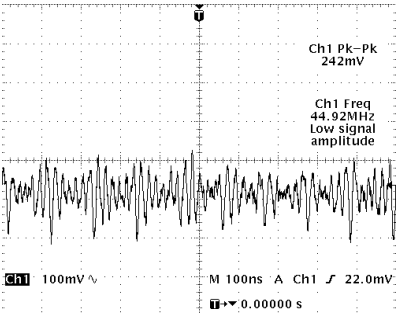

CP403 PIN 12

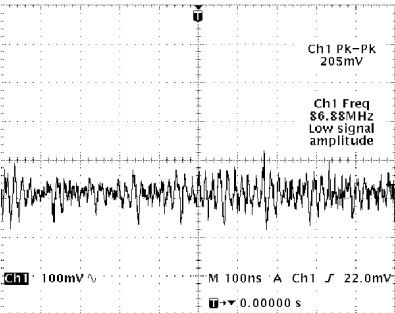

CP403 PIN 13

All waveforms taken in DVD Play mode

All waveforms taken in DVD Play mode