

Table Of Contents

[COVER](#)

[1 Accessories](#)

[2 Before Repair and Adjustment](#)

[3 About the Protection Circuitry](#)

[4 Caution for AC Main Lead](#)

[5 Operating Instructions](#)

[6 Operation Checks and Component Replacement Procedures](#)

[6.1 Checking for the AC IN P.C.B.](#)

[6.2 Checking for the operation P.C.B.](#)

[6.3 Checking for the main P.C.B.](#)

[6.4 Replacement for the regulator transistor](#)

[6.5 Replacement for the power IC](#)

[7 Self-Diagnostic Function](#)

[7.1 To display the malfunction code](#)

[7.2 To return to the normal display](#)

[7.3 Display contents](#)

[7.3.1 U70 DVD, U70 DECK\(displayed automatically\)](#)

[7.3.2 F61](#)

[8 To Supply Power Source](#)

9 Schematic Diagram Notes

9.1 Type Illustration of IC's, Transistors and Diodes

9.2 Schematic Diagram Notes

10 Schematic Diagram

11 Printed Circuit Board Diagram

12 Block Diagram

13 Wiring Connection Diagram

14 Terminal Function of ICs

14.1 IC901 (C2BBFD000317): System Control/FL Drive

15 Replacement Parts List

16 Cabinet Parts Location

17 Packaging

Service Manual

[TOP](#) [NEXT](#)

ORDER NO. AD0103076C2

Service Manual

Stereo tuner/ amplifier

- SA-DV250

Colour

(S).....Silver Type


Areas

EB.....Great Britain.

EG.....Europe.

System: SC-DV250

Because of unique interconnecting cables, when a compact requires service, send or bring in the entire system.

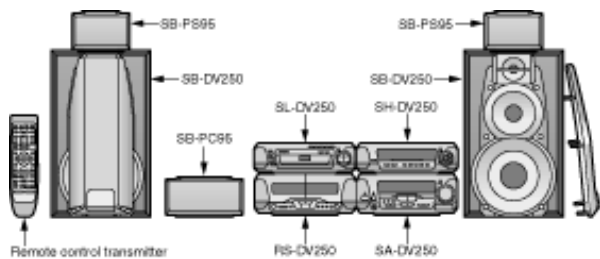

Specification

•Amplifier Section (Low frequency side)

Power output

DIN 100Hz, THD 1%, 8Ω both channels driven: 2x45W

RMS 100Hz, THD 10%, 8Ω both channels driven: 2x65W

•Amplifier Section (High frequency side)

Power output

DIN 1kHz, THD 1%, 6Ω both channels driven: 2x25W

RMS 1kHz, THD 10%, 6Ω both channels driven:	2x35W
Power output (prologic mode)	
DIN (front: high frequency) 1kHz, THD 1%, 6Ω both channels driven:	2x25W
(front: low frequency) 100Hz, THD 1%, 8Ω both channels driven:	2x45W
(surround) 1kHz, THD 1%, 8Ω both channels driven:	2x30W
(center) 1kHz, THD 1%, 8Ω:	60W
RMS (front: high frequency) 1kHz, THD 10%, 6Ω both channels driven:	2x35W
(front: low frequency) 100Hz, THD 10%, 8Ω both channels driven:	2x65W
(surround) 1kHz, THD 10%, 8Ω both channels driven:	2x40W
(center) 1kHz, THD 10%, 8Ω:	80W
• Total harmonic distortion	
Rated power at 1kHz/ 6Ω:	1%
Half power at 1kHz/ 6Ω:	0.1%
• Load impedace	
Front (high frequency):	6Ω
(low frequency):	8Ω
Surround:	8Ω
Center:	8Ω
• FM tuner section	
Frequency range:	87.50-108.00MHz (0.05MHz steps)
Sensitivity (S/N 26dB):	1.5 μ V
S/N:	MONO 70dB (75dB, IHF)
Antenna terminals:	75Ω (unbalance)
• AM tuner section	
Frequency range:	552-1629kHz (9kHz steps) 520-1630kHz (10kHz steps)
Sensitivity (S/N 20dB):	500 μ V/m
• Timer section	
Clock:	Quartz-lock type
Function:	Play timer (1 time, daily) Rec timer (1 time, daily) Sleep (120 min., 30min., intervals)
Setting intervals (PLAY/REC)	1 min., -23hours 59 min., (1 min. intervals)
• General	
Power consumption	230W
STANDBY condition	0.5W
Power supply	
[For (EG) area]:	AC230V,50Hz
[For (EB) area]:	AC230-240V,50Hz
Dimensions (WxHxD):	293x118.5x343mm
Weight:	5.3kg
Notes:	

- 1.Design and specifications are subject to change without notice.
- 2.Dimensions and weight are approximate.
- 3.Total harmonic distortion is measured by the digital spectrum analyzer.

•[System/SC-DV250](#):

Sound processor: SH-DV250, DVD/ Video CD/ CD changer: SL-DV250, [Stereo tuner/ amplifier: SE-DV250](#) , Cassette Deck: RS-DV250, Speakers: Front (SB-DV250), Center(SB-PC95), Surround (SB-PS95) (Made in MAES.)

© 2001 Matsushita Electric Industrial Co., Ltd. //All rights reserved. Unauthorized copying and distribution is a violation of law.

 WARNING

This service information is designed for experienced repair technicians only and is not designed for use by the general public. It does not contain warnings or cautions to advise non-technical individuals of potential dangers in attempting to service a product. Products powered by electricity should be serviced or repaired only by experienced professional technicians. Any attempt to service or repair the product or products dealt with in this service information by anyone else could result in serious injury or death.

Technics®

•[@](#)

[TOP](#) [NEXT](#)

1 Accessories

[TOP](#) [PREVIOUS](#) [NEXT](#)

- FM indoor antenna-----1pc.
(RSA0007)



- AM loop antenna set-----1pc.
(RSA0022-L)



- Remote control transmitter-----1pc.
(EUR7702140)



- Speaker cord
(REE0853)-----2pcs.
(REE1057)-----2pcs.



- AC power supply cord-----1pc.
For (EB) area: (RJA0053-2X)
For (EG) area: (RJA0019-1X)



- Antenna plug adaptor-----1pc.
For (EB) area only
(SJP9009)



- Remote control batteries-----2pcs.
Note: These are available
on sales root.



- Pin cord...1pc.
(RJL1P019B15)



- RCAJ adaptor-----1pc.
(VFA0151-2)



•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

2 Before Repair and Adjustment

[TOP](#) [PREVIOUS](#) [NEXT](#)

1. Turn off the power supply. Using a 10Ω , 10W resistor, connect both ends of power supply capacitors (C701-704) in order to discharge the voltage.
2. Before turning the power supply on, after completion of repair, slowly apply the primary voltage by using a power supply voltage controller to make sure that the consumed current at 50 Hz in NO SIGNAL mode should be shown below with respectto supply voltage 230 V/240 V.

Areas	(EG)		(EB)	
Power supply voltage	AC 230V		AC 230-240V	
Consumed current	50 Hz	130-380 mA	50 Hz	130-380 mA

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

3 About the Protection Circuitry

[TOP](#) [PREVIOUS](#) [NEXT](#)

The protection circuitry may have operated if either of the following conditions is noticed:

*No sound is heard when the power is supplied.

*Sound stops during a performance.

The functions of this circuitry is to prevent circuitry damage, for example, the positive and negative speaker connection wires are “shorted”, or if speaker systems with an impedande less than the indicated rated impedance of thisunit are used.

If this occurs, follow the procedure outlined below:

1. Press the STANDBY

/ON button, switch to STANDBY mode.

2. Determine the cause of the problem and correct it.

3. Press the STANDBY

/ON button once again, supply the power.

Note:

When the protection circuitry functions, the unit will not operate unless the STANDBY

/ON button is first switched STANDBY and then ON again.

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

4 Caution for AC Main Lead

[TOP](#) [PREVIOUS](#) [NEXT](#)



•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

5 Operating Instructions

[TOP](#) [PREVIOUS](#) [NEXT](#)



•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

6 Operation Checks and Component Replacement Procedures

[TOP](#) [PREVIOUS](#) [NEXT](#)

- This section describes procedures for checking the operation of the major printed circuit boards and replacing the main components.
- For reassembly after operation checks or replacement, reverse the respective procedures. Special reassembly procedures are described only when required.

[6.1 Checking for the AC IN P.C.B.](#)

[6.2 Checking for the operation P.C.B.](#)

[6.3 Checking for the main P.C.B.](#)

[6.4 Replacement for the regulator transistor](#)


[6.5 Replacement for the power IC](#)

•@


[TOP](#) [PREVIOUS](#) [NEXT](#)

6.1 Checking for the AC IN P.C.B.

[TOP](#) [PREVIOUS](#) [NEXT](#)

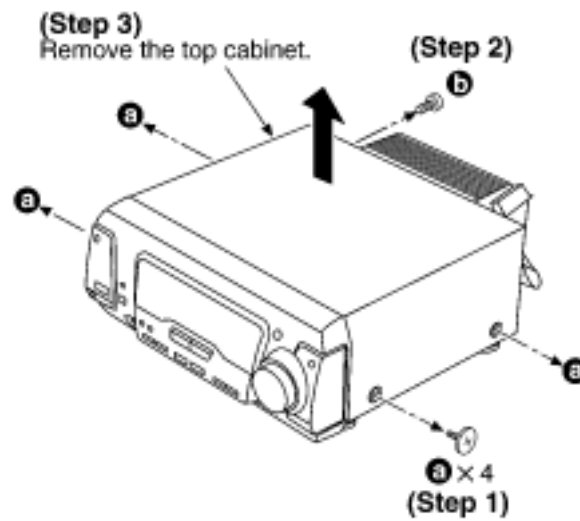

- Check the AC IN P.C.B. as shown below.

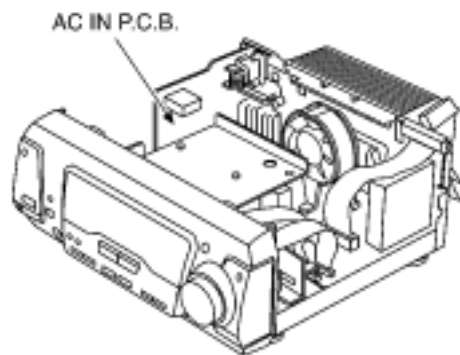


•@

[TOP](#) [PREVIOUS](#) [NEXT](#)


6.2 Checking for the operation P.C.B.

[TOP](#) [PREVIOUS](#) [NEXT](#)

- Follow the (Step 1) - (Step 3) of item 6.1.

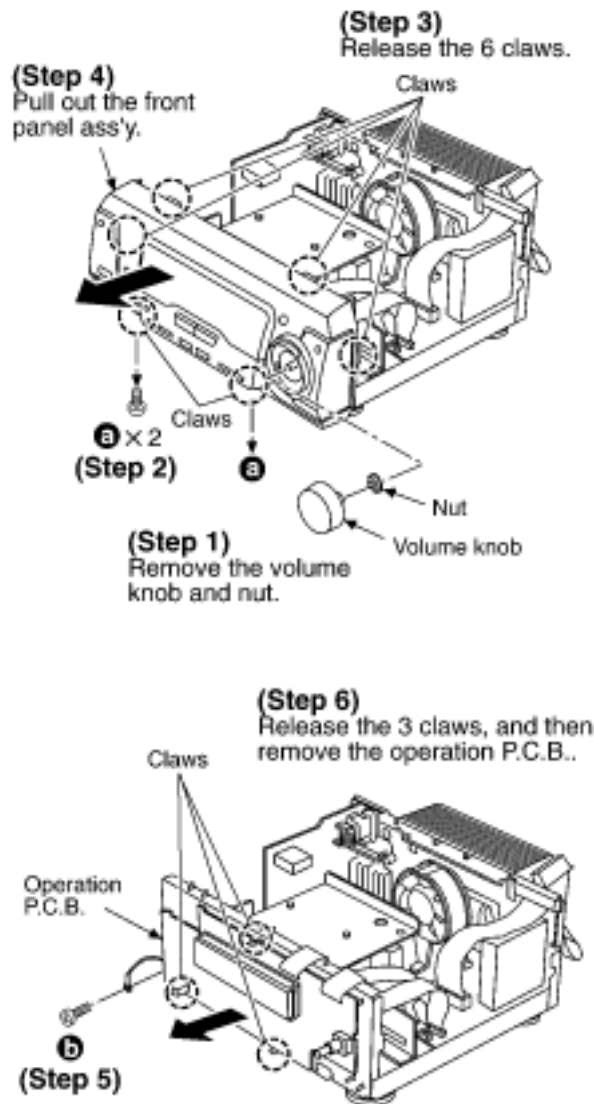


- Check the operation P.C.B. as shown below.



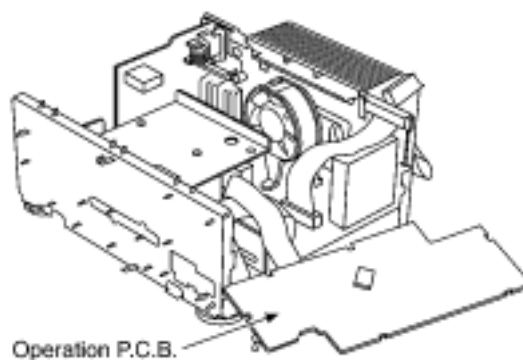


6.3 Checking for the main P.C.B.

[TOP](#) [PREVIOUS](#) [NEXT](#)


- Follow the (Step 1) - (Step 3) of item 6.1.
- Follow the (Step 1) - (Step 6) of item 6.2.

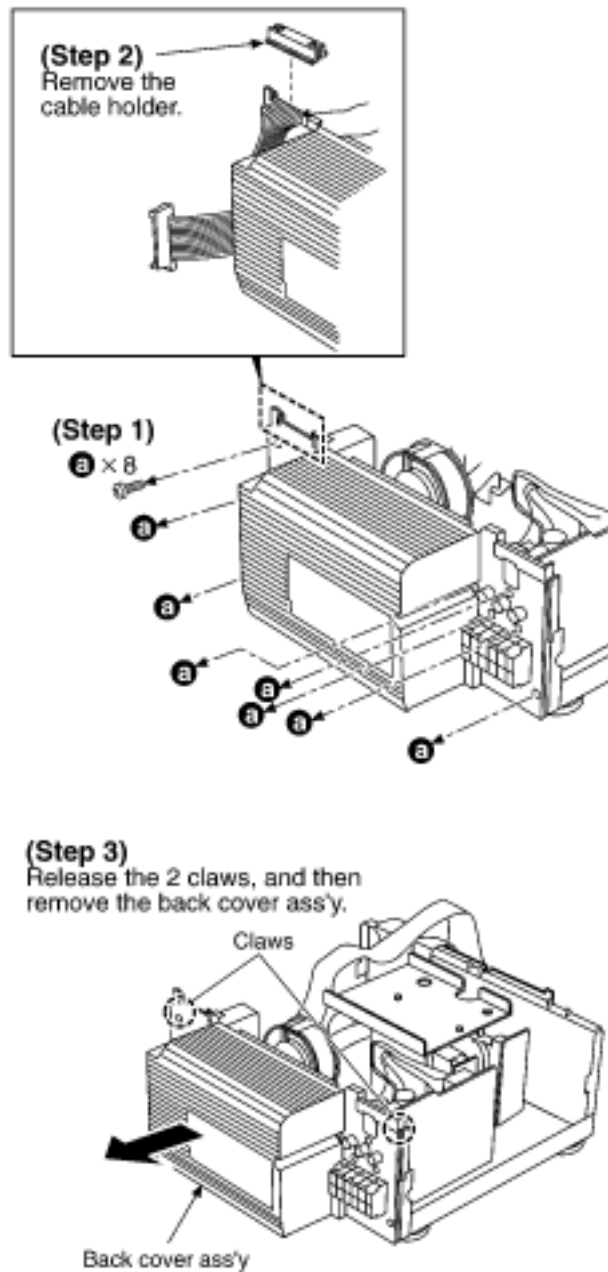

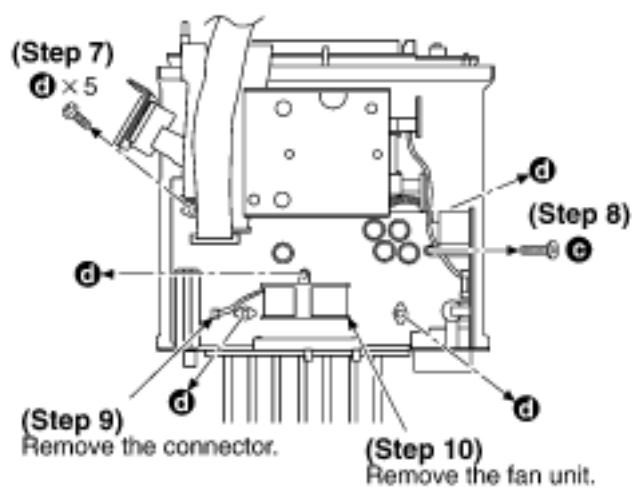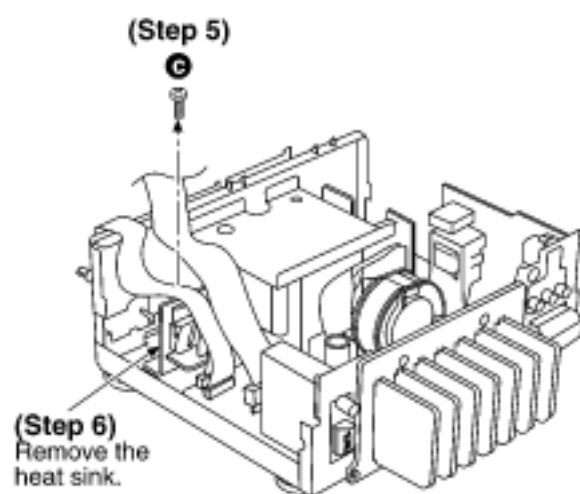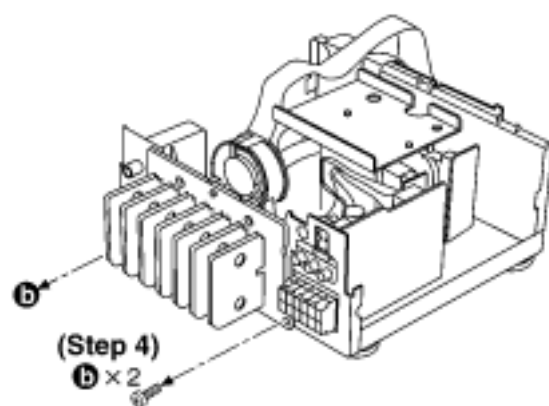


(Step 11)

Release the 2 claws, and then lift up the main P.C.B..

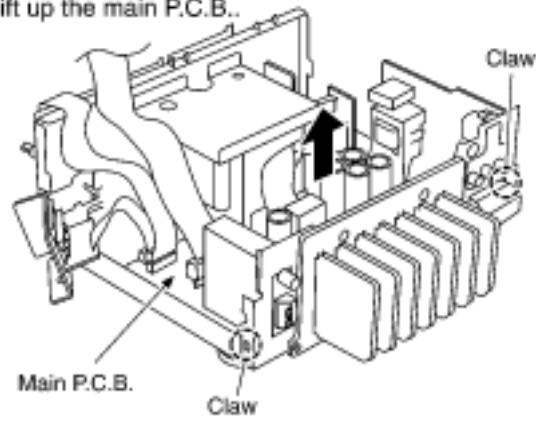

- Check the main P.C.B. as shown below.

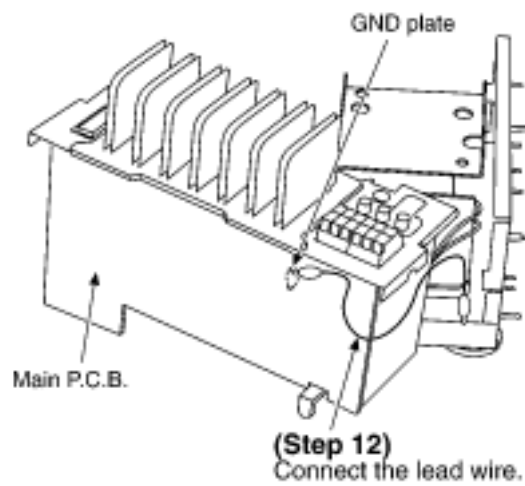




•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

6.4 Replacement for the regulator transistor

[TOP](#) [PREVIOUS](#) [NEXT](#)


- Follow the (Step 1) - (Step 3) of item 6.1.

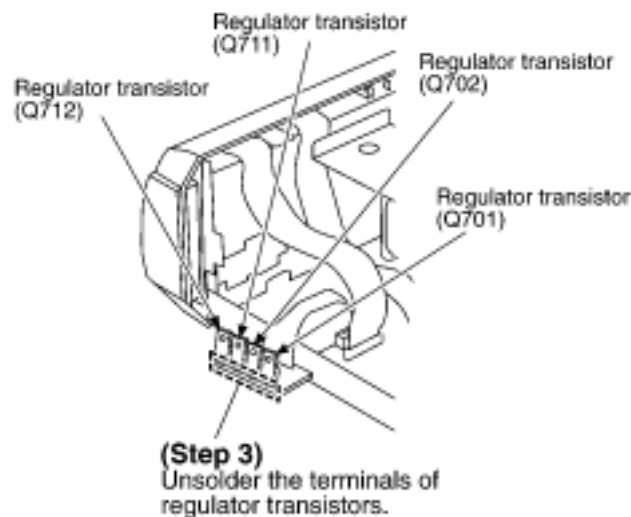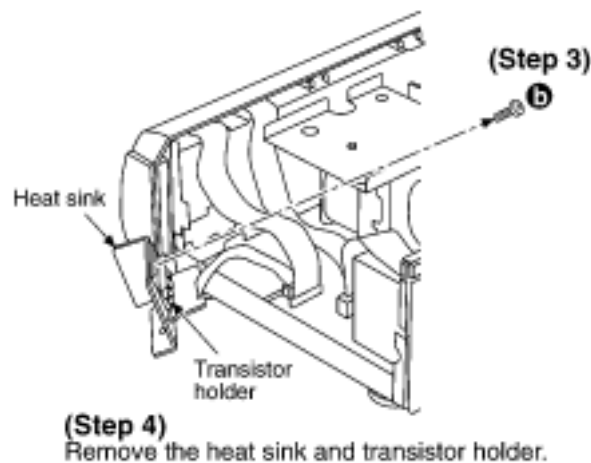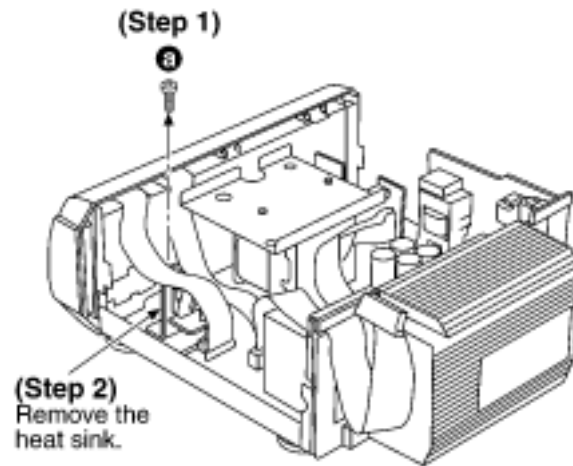

6.5 Replacement for the power IC

[TOP](#) [PREVIOUS](#) [NEXT](#)

- Follow the (Step 1) - (Step 3) of item 6.1.
- Follow the (Step 1) - (Step 6) of item 6.2.
- Follow the (Step 1) - (Step 12) of item 6.3.

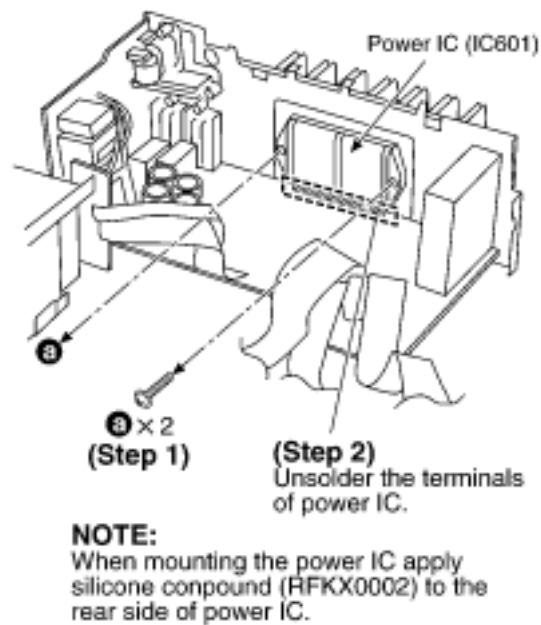

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

7 Self-Diagnostic Function

[TOP](#) [PREVIOUS](#) [NEXT](#)

This unit equipped with a self-diagnostic function which, in the event of a malfunction, automatically displays a code indicating the nature of the malfunction.

Use this self-diagnostic function when servicing the unit.

[7.1 To display the malfunction code](#)

[7.2 To return to the normal display](#)

[7.3 Display contents](#)

[7.3.1 U70 DVD, U70 DECK\(displayed automatically\)](#)

[7.3.2 F61](#)

•@


[TOP](#) [PREVIOUS](#) [NEXT](#)

7.1 To display the malfunction code

[TOP](#) [PREVIOUS](#) [NEXT](#)

- U70 DVD:** Automatically displays on the tuner/amplifier when a malfunction occurs. Refer to Fig. 7-1.
- U70 DECK:**
- F61:** Automatically displays on the tuner/amplifier when a malfunction occurs. Refer to Fig. 7-1.

Fig. 7-1

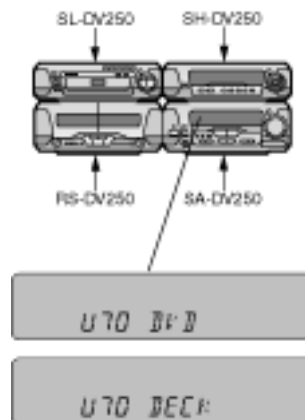

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

7.2 To return to the normal display

[TOP](#) [PREVIOUS](#) [NEXT](#)

1. [For U70 DVD/U70 DECK](#)

- Press an any operation button on the tuner/amplifier.
- To re-display the code, switch the power off (POWER STANDBY button), and then switch power back on again.

2. [For F61](#)

- If F61 is displayed, the power will automatically be switched off and the standby indicator will light up.
- F61 will be displayed for 3 seconds, and then the clock will be displayed.
- To re-display the code, switch the power on. F61 will be re-displayed, and then after 3 seconds the clock will be displayed and the power will automatically switch off.

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

7.3 Display contents

[TOP](#) [PREVIOUS](#) [NEXT](#)

[7.3.1 U70 DVD, U70 DECK\(displayed automatically\)](#)

[7.3.2 F61](#)

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

7.3.1 U70 DVD, U70 DECK/(displayed automatically)

[TOP](#) [PREVIOUS](#) [NEXT](#)

- **Problem or condition**

A bus-line communications error has occurred as a result of the flat cables being inserted incorrectly, thus preventing the system from operating.

- If U70 is displayed on the tuner/amplifier, the Cassette deck or DVD Changer cannot be operated by remote control.

- **Correction Procedure**

1. To check for correct insertion of the flat cables.

- Insert each connectors until you hear a click.
- Insert the flat cables at the back of the unit in the order indicated. Refer to Fig. 8-2.

Make sure the white side of the cables is on your right side. Refer to Fig. 8-3.

Fig. 7-2.


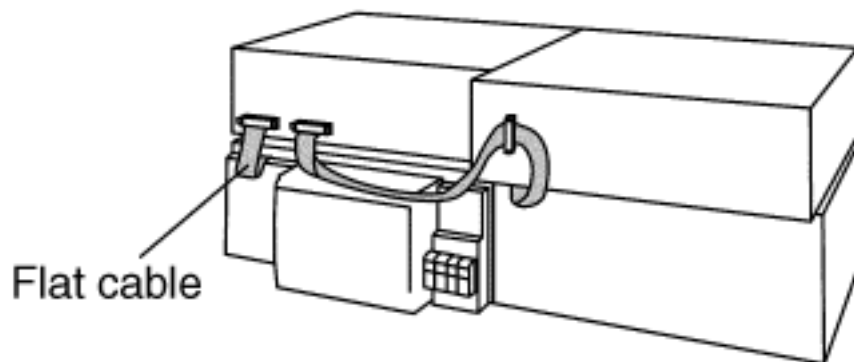


Fig. 7-3.

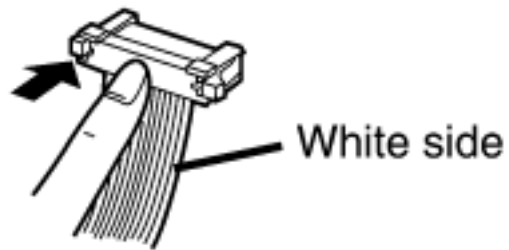

- Breakage of the flat cables. (Check and replace.)
- If the problem is not corrected by items 1 and 2 above, this indicates a faulty IC.

SA-DV250:

IC901 (C2BBFD000317)

SL-DV250:

IC401 (M38504E6227F)

RS-DV250:

IC701 (M38503M2406F)

Check these ICs and replace.

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

7.3.2 F61

[TOP](#) [PREVIOUS](#) [NEXT](#)

- [Problem or condition](#)

When the power switch is switched on, it automatically switches back off, making it impossible to switch power on.

- [Correction procedure](#)

Faulty Tuner/Amplifier (SA-DV250) output IC (IC601).

(When a DC voltage is applied to speaker terminals.)

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)


8 To Supply Power Source

[TOP](#) [PREVIOUS](#) [NEXT](#)

This unit SA-DV170 is designed to operate on power supplied form system connected.

For system connection, refer to Fig. 8-1.

Fig. 8-1.

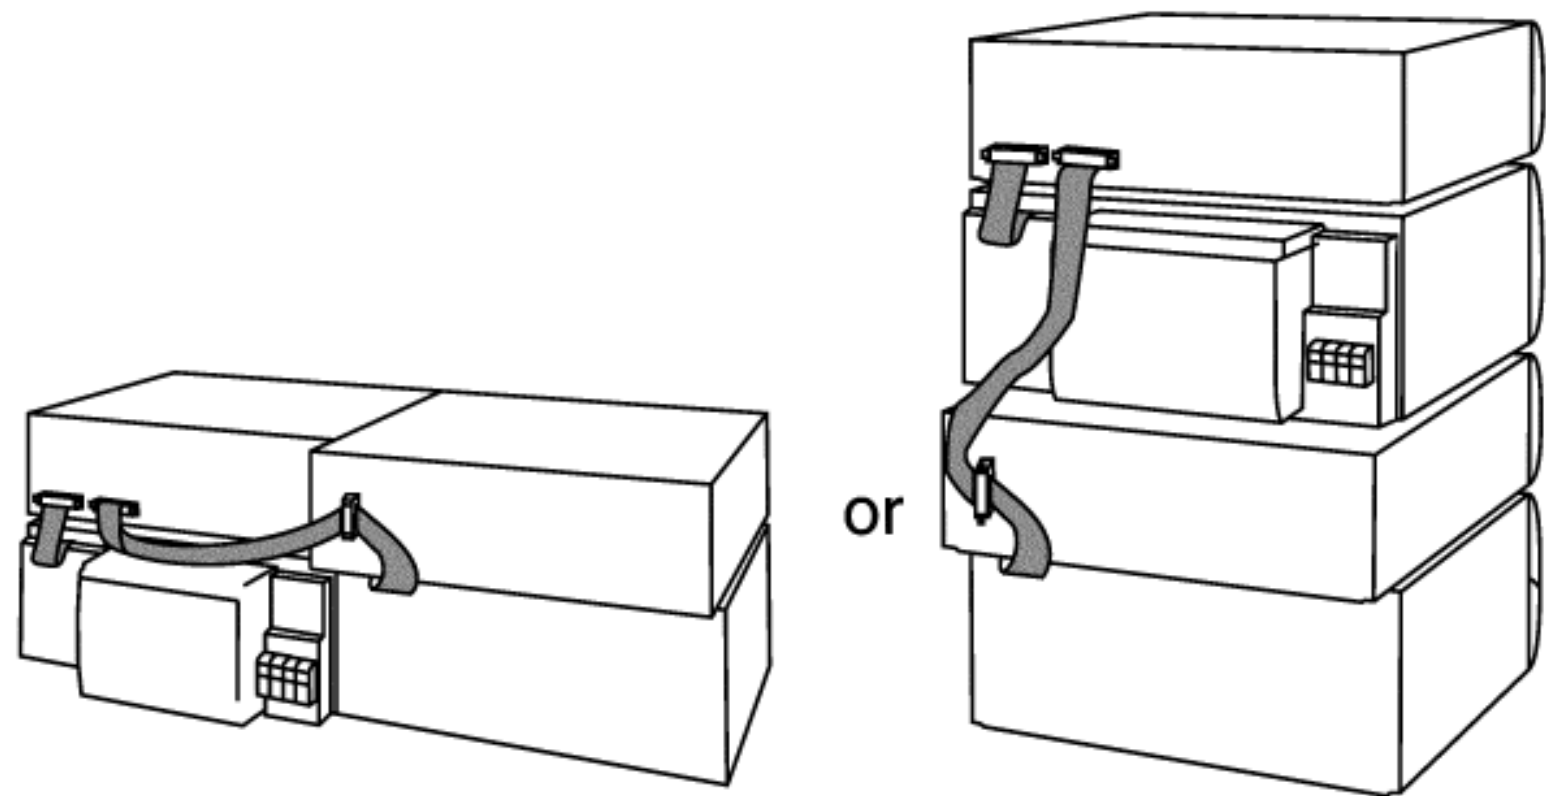

When the unit SA-DV170 has to test and service alone, use the following method to supply power source.


1. Short the section between [W902A Pin 3](#) and [C740 \(-\)](#) (GND). (Refer to Fig. 8-2.)

2. Connect this unit to an AC power supply cord.

(This unit come to stand-by mode.)

3. Turn the unit ON.

Fig. 8-2.

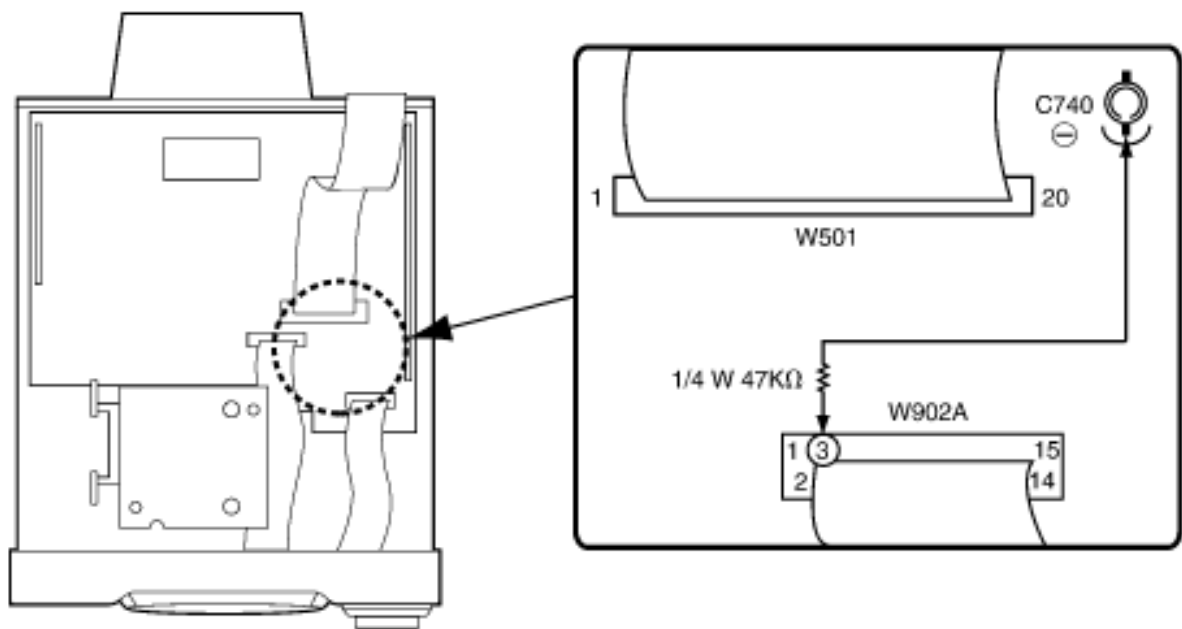

Notes:

Use only this method when checking the voltage etc..

In case of checking operations, use the system connections to supply power source.

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

9 Schematic Diagram Notes

[TOP](#) [PREVIOUS](#) [NEXT](#)

[9.1 Type Illustration of IC's, Transistors and Diodes](#)

[9.2 Schematic Diagram Notes](#)

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

9.1 Type Illustration of IC's, Transistors and Diodes

[TOP](#) [PREVIOUS](#) [NEXT](#)



•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

9.2 Schematic Diagram Notes

[TOP](#) [PREVIOUS](#) [NEXT](#)

- This schematic diagram may be modified at any time with the development of new technology.

Notes:

- [S901](#): Power Standby/on () switch.
- [S902](#): Echo (ECHO) switch.
- [S903](#): Clock/timer (CLOCK/TIMER) switch.
- [S904](#): Play timer/record timer (PLAY/
REC) switch.
- [S905](#): FM mode (FM AUTO/MONO) switch.
- [S906](#): Tuning mode (TUNING MODE) switch.
- [S907](#): Set (SET) switch.
- [S908](#): Source input (INPUT SELECTOR) switch.
- [S910](#): Tuning (,TUNING) switch.
- [S911](#): Tuning (,TUNING) switch.
- [S912](#): Tuner/band (TUNER/BAND) switch.
- [S913](#): Digital super woofer (DIGITAL S. WOOFER) switch.

- [S914, 915](#): RDS display mode (RDS, PS-DISP, MODE-PTY) switches.
- [VR901](#): Main volume V.R..
- Indicated voltage values are the standard values for the unit measured by the DC electronic circuit tester (high-impedance) with the chassis taken as standard. Therefore, there may exist some errors in the voltage values, depending on the internal impedance of the DC circuit tester.

No mark: Power ON

- Important safety notice:

Components identified by  mark have special characteristics important for safety.

Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used.

When replacing any of components, be sure to use only manufacture's specified parts shown in the parts list.

Caution!

- Secondary trouble can be prevented by taking care during repair.
- IC and LSI are sensitive to static electricity.
- Cover the parts boxes made of plastics with aluminum foil.
- Ground the soldering iron.
- Put a conductive mat on the work table.
- Do not touch the legs of IC or LSI with the fingers directly.

- [Voltage and signal lines](#)

==: Positive voltage line

---: Negative voltage line

==>: FM signal line

==>: AM signal line

—: Mic signal line

—: Audio signal line

—: FM OSC signal line

—: AM OSC signal line

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

10 Schematic Diagram

[TOP](#) [PREVIOUS](#) [NEXT](#)



•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

11 Printed Circuit Board Diagram

[TOP](#) [PREVIOUS](#) [NEXT](#)



•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

12 Block Diagram

[TOP](#) [PREVIOUS](#) [NEXT](#)



•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

13 Wiring Connection Diagram

[TOP](#) [PREVIOUS](#) [NEXT](#)



•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

14 Terminal Function of ICs

[TOP](#) [PREVIOUS](#) [NEXT](#)

[14.1 IC901 \(C2BBFD000317\): System Control/FL Drive](#)

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

14.1 IC901 (C2BBFD000317): System Control/FL Drive

[TOP](#) [PREVIOUS](#) [NEXT](#)

Pin No.	Terminal Name	I/O	Function
1	CHECK	I	Clock check signal input
2	LC72 DI	O	PLL data signal output for tuner unit (Z101)
3	LC72 CE	O	Chip enable signal output for tuner unit (Z101)
4	LC72 DI/ST	I	IF count data/stereo detect signal input from tuner unit (Z101)
5	LC72 CK	O	Clock signal output for tuner unit (Z101)
6	ST/AV.6CH	O	Signal select output
7	NC	-	Not used, open
8			
9	SEL TUNER	-	Not used, open
10	SEL/ TUNER	-	Not used, connected to GND
11	AC IN	I	Power failure detect signal input
12	RESET	I	Reset signal input
13	X IN	I	Oscillator connected terminal (32.7kHz)
14	X OUT	O	
15	VSS	-	GND terminal
16	XC IN	I	Oscillator connected terminal (6 MHz)
17	XC OUT	O	
18	VDD 1	I	Power supply terminal
19	KEY TU	I	Operation key signal input
20	KEY KARAOKE	I	Operation key signal input
21	SH REQ	I	Request signal input from Sound Processor
22	NC(GND)	-	Not used, connected to GND
23	VR JOGB	I	Volume control signal input
24	VR JOGA		
25	MIC DET	I	Microphone connecting detect signal input (Not used, connected to VDD)
26	HP SW	I	Headphone connecting detect signal input
27	RDS CLK	I	RDS clock signal input
28	RDS DATA	I	RDS data signal input
29	REMOCON	I	Remote control signal input

30-37	8G-1G	O	Grid signal output
38-45	P1-P8	O	Segment signal output
46	VDD 3	I	Power supply terminal
47-50	P9-P12	O	Segment signal output
51	-VP	I	Power supply terminal (Negative)
52-71	P13-P32	O	Segment signal output
72	VDD 4	I	Power supply terminal
73-78	P33-P38	O	Segment signal output
79	REGIN0	-	Not used, connected to GND
80	REGIN1		
81	STANDBY	O	LED (STANDBY) drive signal output
82	TIMER	O	LED (TIMER) drive signal output
83	S.W.LED	O	LED (DIGITAL S.WOOFER) drive signal output
84	LOUNGE	-	LED (LOUNGE) drive signal output (Not used, connected to GND)
85	CHORUS	-	LED (CHORUS) drive signal output (Not used, connected to VDD)
86	MUTE	O	Muting signal output
87	NC	-	Not used, oppen
88	POWER	O	Power control signal output
89	VSS 2	-	GND terminal
90	VDD 2	I	Power supply terminal
91	MUTE2	O	Muting signal output
92	NC	-	Not used, open
93	MUTE3	O	Muting signal output
94	SH CS	O	Chip select signal output for Sound Processor
95	SH DO	O	Serial communication signal to Sound Processor (Data signal output)
96	SH DI	I	Serial communication signal to Sound Proccessor (Data signal input)
97	SH CK	I	Serial communication signal to Sound Processor (Clock signal input)
98	E DET	I	Unusual condition detect signal input
99	CR TIMER	-	Not used, open
100	SD	I	Station detector signal input from tuner unit (Z101)

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

15 Replacement Parts List

[TOP](#) [PREVIOUS](#) [NEXT](#)

Notes:

- * Important safety notice:

Components identified by  mark have special characteristics important for safety./Furthermore, special parts which have purposes of fire-retardant (resistors), high-quality sound (capacitors), low-noise (resistors), etc. are used./Whenreplacing any of components, be sure to use only manufacture´s specified parts shown in the parts list.
- * The parenthesized indications in the Remarks columns specify the areas./Parts without these indications can be used for all areas.
- * Remote Control Ass´y: Supply period for three years from terminal of production.
- * Capacity values are in microfarads (uF) unless specified otherwise, P=Pico-farads(pF), F=Farads (F)
- * Resistance values are in ohms, unless specified otherwise, 1K=1,000 (OHM), 1M=1,000K (OHM)
- * "<IA>, <IB>, <IC>, <ID>" marks in Remarks indicate languages of instruction manuals.

[<IA> : English, <IB> : German/Italian/French/Netherlands, <IC> : Spanish/Swedish/Polish/Danish, <ID> : English]
- *The markings (RTL) indicate that the Retention Time is limited for these items. After the discontinuation of these assemblies in production, the items will continue to be available for a specific period of time. The retention period of availabilityis dependant on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.
- *All parts are supplied by MESA.

Ref. No.	Part No.	Part Name & Description	Pcs	Remarks
<u>1</u>	RGN2110-K	NAME PLATE	1	(EG)
1	RGN2111-K	NAME PLATE	1	(EB)
<u>2</u>	RMQ1018	GASKET	1	

<u>3</u>	REM0057	FAN UNIT	1	L6FAKKDG0001
<u>4</u>	REX0967	SYSTEM CONNECT.ASS'Y(20P)	1	
<u>5</u>	RLBT4001-N	FERRITE CORE	1	
<u>6</u>	RGW0317-S	KNOB,VOLUME	1	
<u>7</u>	RHN90001	NUT	1	
<u>8</u>	RKA0106-N	FOOT RING	4	
<u>9</u>	RKF0606N-K	BACK COVER	1	
<u>10</u>	RKW0581-1V	FL WINDOW	1	
<u>11</u>	RMF0284	CUSHION	1	
<u>12</u>	RMN0427A	CABLE HOLDER	1	
<u>13</u>	RYP1037-S	FRONT PANEL	1	
<u>13-1</u>	RGB0025-A	TECHNICS BADGE	1	
<u>14</u>	SHG1654	RUBBER	4	
<u>15</u>	XTB3+10JFZ	SCREW	11	
<u>16</u>	XTB3+20JFZ	SCREW	1	
<u>17</u>	XTB3+8JFZ	SCREW	12	
<u>18</u>	XTW3+15T	SCREW	2	
<u>19</u>	XTB3+12FFZ	SCREW	1	
<u>20</u>	XTBS3+8JFZ1	SCREW	2	
<u>21</u>	RHD30007-1S	SCREW	4	
<u>22</u>	RKM0395G-S	TOP CABINET	1	
<u>23</u>	XTBS3+10JFZ1	SCREW	1	
<u>A1</u>	EUR7702140	REMOTE CONT.TRANSMITTER	1	
<u>A1-1</u>	UR64EC2337E	BATTERY COVER	1	
<u>A2</u>	RJL1P019B15	PIN CORD	1	K2JA2A000018
<u>A3</u>	REE0853	SPEAKER CORD	2	
<u>A4</u>	REE1057	SPEAKER CORD	2	
<u>A5</u>	RJA0019-1X	AC POWER SUPPLY CORD	1	(EG) ⚠
A5	RJA0053-2X	AC POWER SUPPLY CORD	1	(EB) ⚠
<u>A6</u>	RQA0117	WARRANTY CARD	1	
A7	RQCA0801	QUICK SET-UP GUIDE	1	
A8	RQCB0169	SERVICENTER LIST	1	
<u>A9</u>	RQT5945-Q	INSTRUCTION MANUAL	1	<IA>

A9	RQT5946-D	INSTRUCTION MANUAL	1	(EG)<IB>
A9	RQT5947-E	INSTRUCTION MANUAL	1	(EG)<IC>
A9	RQT5948-B	INSTRUCTION MANUAL	1	<ID>
A10	RSA0007	FM INDOOR ANTENNA	1	
A11	RSA0022-L	AM LOOP ANTENNA	1	
A12	SJP9009	AC PLUG ADAPTOR	1	(EB) ⚠
A13	VFA0151-2	RCAJ ADAPTOR	1	K1JZ24D00001 ⚠
C151	ECA1CAK100XB	16V 10U	1	
C152	ECBT1H331KB5	50V 330P	1	F1D1H331A012
C153	ECBT1H102KB5	50V 1000P	1	F1D1H102A012
C154	ECBT1H561KB5	50V 560P	1	F1D1H561A012
C155	ECBT1H102KB5	50V 1000P	1	F1D1H102A012
C156,57	ECBT1H470J5	50V 47P	2	F1D1H470A006
C158,59	RCE0JKA470BG	6.3V 47U	2	F2A0J470A014
C160	ECBT1H102KB5	50V 1000P	1	F1D1H102A012
C201,02	ECBT1H104KB5	50V 0.1U	2	F1D1H1040002
C371	ECA0JAK101XB	6.3V 100U	1	
C395,96	ECBT1H473KB5	50V 0.047U	2	
C509,10	ECBT1H103KB5	50V 0.01U	2	
C550	ECBT1H103KB5	50V 0.01U	1	
C551	ECA1HAK2R2XB	50V 2.2U	1	
C552	ECBT1H103KB5	50V 0.01U	1	
C554	ECA1AAK221XH	10V 220U	1	
C555,56	ECEA1CKN100B	16V 10U	2	
C559	ECBT1H103KB5	50V 0.01U	1	
C601,02	ECA1CAK100XB	16V 10U	2	
C603,04	ECBT1H471KB5	50V 470P	2	F1D1H471A012
C605,06	ECBT1H102KB5	50V 1000P	2	F1D1H102A012
C607,08	ECBT1H471KB5	50V 470P	2	F1D1H471A012
C609,10	ECBT1H560J5	50V 56P	2	ECBT1H560J3
C611	ECBT1H390J5	50V 39P	1	F1D1H390A006
C612	ECBT1H150JC5	50V 15P	1	
C613,14	ECBT1H470J5	50V 47P	2	F1D1H470A006
C616	ECEA1HKNR47B	50V 0.47U	1	
C617,18	ECKR2H103ZU	500V 0.01U	2	

C619-21	ECBT1H104KB5	50V 0.1U	3	F1D1H1040002
C622	RCE1AKA101BG	10V 100U	1	F2A1A1010020
C624-31	ECBT1H104KB5	50V 0.1U	8	F1D1H1040002
C632	ECBT1H473KB5	50V 0.047U	1	
C633,34	ECBT1H104KB5	50V 0.1U	2	F1D1H1040002
C635-37	ECBT1H473KB5	50V 0.047U	3	
C639-44	ECBT1H102KB5	50V 1000P	6	F1D1H102A012
C645,46	ECBT1H473KB5	50V 0.047U	2	
C647-50	ECBT1H102KB5	50V 1000P	4	F1D1H102A012
C651	ECBT1H473KB5	50V 0.047U	1	
C652	ECBT1H102KB5	50V 1000P	1	F1D1H102A012
C655,56	ECA1CAK100XB	16V 10U	2	
C659,60	ECA1CAK100XB	16V 10U	2	
C664	ECEA1CKS100	16V 10U	1	
C701-04	F2B1V4720004	4700U	4	
C705	ECBT1H103KB5	50V 0.01U	1	
C706	RCE1VKA100BG	35V 10U	1	F2A1V1000011
C707,08	ECBT1H473KB5	50V 0.047U	2	
C709	ECQV1H104JM3	50V 0.1U	1	
C710	ECBT1H473KB5	50V 0.047U	1	
C714	ECBT1H102KB5	50V 1000P	1	F1D1H102A012
C715	ECA1EAM682XE	6800U	1	
C717	ECA1CAK330XB	16V 33U	1	
C718	ECA1CAK101XB	16V 100U	1	
C719,20	ECBT1H473KB5	50V 0.047U	2	
C721	RCE1AKA101BG	10V 100U	1	F2A1A1010020
C722	ECA1CAK101XB	16V 100U	1	
C723,24	ECBT1H473KB5	50V 0.047U	2	
C725	ECA1CAK470XB	16V 47U	1	
C731	ECBT1H102KB5	50V 1000P	1	F1D1H102A012
C732	ECBT1H223KB5	50V 0.022U	1	F1D1H223A012
C733	ECBT1H473KB5	50V 0.047U	1	
C734	RCE1HKA3R3BG	50V 3.3U	1	F2A1H3R3A015
C735	ECBT1H473KB5	50V 0.047U	1	
C737	ECA1HM101	100U	1	
C740	ECA1CAK100XB	16V 10U	1	
C741	ECQE1104KF3	100V 0.1U	1	

C753	ECKR1H103ZF5	50V 0.01U	1	F1B1H1030001
C754	ECBT1H103KB5	50V 0.01U	1	
C755	ECA1CAM102XB	1000U	1	
C758	ECBT1H103KB5	50V 0.01U	1	
C759	RCE1AKA470BG	10V 47U	1	F2A1A470A011
C761	ECQE1104KF3	100V 0.1U	1	
C791	ECKWRS102MBC	1000P	1	
C901	EEAFC0J101B	6.3V 100U	1	
C902	RCE1AM102BV	10V 1000U	1	
C903,04	ECBT1H103KB5	50V 0.01U	2	
C905	ECBT1H102KB5	50V 1000P	1	F1D1H102A012
C907,08	ECBT1H471KB5	50V 470P	2	F1D1H471A012
C909	ECBT1H102KB5	50V 1000P	1	F1D1H102A012
C910	ECBT1H200JC5	50V 20P	1	F1D1H200A015
C911	ECBT1H180J5	50V 18P	1	F1D1H180A006
C912	ECBT1H104KB5	50V 0.1U	1	F1D1H1040002
C914	ECA1HAK2R2XB	50V 2.2U	1	
C915	ECBT1H103KB5	50V 0.01U	1	
C916	EEAFC0J101B	6.3V 100U	1	
C917	ECBT1H103KB5	50V 0.01U	1	
C918	ECA0JAK101XB	6.3V 100U	1	
C919,20	ECA1EAK220XB	25V 22U	2	
C921	ECBT1H102KB5	50V 1000P	1	F1D1H102A012
C922	ECA1VAK330XB	35V 33U	1	
C923,24	ECBT1H104KB5	50V 0.1U	2	F1D1H1040002
C925,26	ECBT1H102KB5	50V 1000P	2	F1D1H102A012
C927,28	ECA1EAK220XB	25V 22U	2	
C931	ECEA1CKN100B	16V 10U	1	
CN601	RJU057W012	CONNECTOR(12P)	1	K1KB12B00033
CN602	RJU057W008	CONNECTOR(8P)	1	K1KB08B00034
CN701-13	RJS1A1101T1	CONNECTOR(1P)	13	
CN781	RJS10T5ZA	CONNECTOR(10P)	1	K1MP10A00007
CP101	RJT100W11	CONNECTOR(11P)	1	
CP601	RJT057W012-1	CONNECTOR(12P)	1	K1KA12A00160
CP602	RJT057W008-1	CONNECTOR(8P)	1	K1KA08A00187

D151	MA4051M	DIODE	1	MAZ40510M
D201	MA4056M	DIODE	1	MAZ40560M
D306	SELS5223C	LED	1	B3AAA0000486
D500	MA165	DIODE	1	MA2C165
D551,52	MA165	DIODE	2	MA2C165
D553	MA700	DIODE	1	MA2C700
D554	MA165	DIODE	1	MA2C165
D555	MA4100M	DIODE	1	MAZ41000M
D558	MA165	DIODE	1	MA2C165
D581-83	RL1N4003N02	DIODE	3	
D601,02	SB360L6508	DIODE	2	B0JAPG000014
D607	1SS291TA	DIODE	1	
D611	MA4051M	DIODE	1	MAZ40510M
D657-59	MA165	DIODE	3	MA2C165
D701-04	1N5402BF	DIODE	4	⚠
D705	RL1N4003N02	DIODE	1	⚠
D711	RL1N4003N02	DIODE	1	
D717-20	RL1N4003N02	DIODE	4	⚠
D721	MA4300M	DIODE	1	MAZ43000M ⚠
D723	MA4150M	DIODE	1	MAZ41500M ⚠
D725	MA4082LTA	DIODE	1	MAZ40820LF ⚠
D730	MA4091H	DIODE	1	MAZ40910HF ⚠
D737	MA4082LTA	DIODE	1	MAZ40820LF ⚠
D738-40	MA165	DIODE	3	MA2C165
D741-44	RL1N4003N02	DIODE	4	⚠
D745	MA4051M	DIODE	1	MAZ40510M
D746	RL1N4003N02	DIODE	1	
D747	MA4068L	DIODE	1	MAZ40680L ⚠
D751,52	1N5402BF	DIODE	2	⚠
D753-55	RL1N4003N02	DIODE	3	⚠
D756,57	MA700	DIODE	2	MA2C700
D758	MA165	DIODE	1	MA2C165
D761	RL1N4003N02	DIODE	1	⚠
D901,02	1SS291TA	DIODE	2	
D904	MA165	DIODE	1	MA2C165

D905	1SS291TA	DIODE	1	
D906,07	MA165	DIODE	2	MA2C165
D931	MA165	DIODE	1	MA2C165
D933	MA165	DIODE	1	MA2C165
D951	LNJ301MPUJAD	LED	1	
D954	SELS5923C	LED	1	B3ADA0000083
D961	MA4075M	DIODE	1	MAZ40750M
D973	MA4030M	DIODE	1	MAZ40300M
D974	MA165	DIODE	1	MA2C165
F1	XBA2C20TB0	FUSE,T2A	1	K5D202BL0001 
FL901	A2BB00000084	FL	1	
IC151	C1BB00000527	IC	1	
IC201	BU4053BCFE2	IC	1	
IC601	RSN311W64B	IC	1	
IC901	C2BBFD000317	IC	1	
JK551	SJT3213	CONNECTOR,FAN MOTOR	1	K1KA02A00008
JK601,02	K4BC04B00028	JACK,SP	2	
JK603	K2HA103B0015	JACK,SP	1	
JK701	SJS9236-1	JACK,AC INLET	1	K2AA2B000002 
JK903	RJJ37TN02-C	JACK,PHONES	1	K2HC103A0009
L151,52	ELEXT101KA9	COIL	2	
L153	RLQA1R0JT1-Y	COIL	1	G0C1R0JA0019
L601-06	RLQYR73MW1-0	COIL	6	G0ZZ00001606
L701	RLQZ371	COIL	1	ELF15N035AN 
L901	RLQA100JT1-Y	COIL	1	G0C100JA0019
L902	RLQA1R0JT1-Y	COIL	1	G0C1R0JA0019
<u>P1</u>	RPG4396	PACKING CASE(SA)	1	
<u>P1</u>	RPG4397	PACKING CASE(RS)	1	
<u>P1</u>	RPG4398	PACKING CASE(SH)	1	
<u>P1</u>	RPG4399	PACKING CASE(SL)	1	

<u>P2</u>	RPN1194	PAD	1	
<u>P2</u>	RPN1195-2	PAD(RS)	1	
<u>P2</u>	RPN1196	PAD(SH)	1	
<u>P2</u>	RPN1197	PAD(SL)	1	
<u>P3</u>	SPP740-1	PROTECTION BAG(UNIT)	1	
<u>P4</u>	RPF0139-1	PROTECTION BAG(F.B.)	1	
<u>P5</u>	RPG5463	PACKING CASE	1	(EG)
P5	RPG5464	PACKING CASE	1	(EB)
<u>P6</u>	RPQ0951	PAD	1	
Q503	2SC5398RSTA	TRANSISTOR	1	B1AACF000059
Q551	2SA1995RSTA	TRANSISTOR	1	B1ACDF000006
Q553	2SC3327A	TRANSISTOR	1	
Q554	2SA1995RSTA	TRANSISTOR	1	B1ACDF000006
Q555	2SC3327A	TRANSISTOR	1	
Q556	2SC5398RSTA	TRANSISTOR	1	B1AACF000059
Q557	2SA1995RSTA	TRANSISTOR	1	B1ACDF000006
Q601,02	2SC5398RSTA	TRANSISTOR	2	B1AACF000059
Q605-10	2SC3327A	TRANSISTOR	6	
Q612	UN411FTA	TRANSISTOR	1	UNR411F00A
Q701	2SD2374PQAU	TRANSISTOR	1	2SD23740J1AU ⚠
Q702	2SB1548PQAU	TRANSISTOR	1	2SB15480J1AU ⚠
Q703,04	2SD2137PQTA	TRANSISTOR	2	2SD21370PA ⚠
Q705	2SA1995RSTA	TRANSISTOR	1	B1ACDF000006
Q707	2SB1417PQTA	TRANSISTOR	1	2SB14170JA ⚠
Q708	UN4211	TRANSISTOR	1	UNR4211
Q709	2SC3327A	TRANSISTOR	1	
Q711,12	2SB1548PQAU	TRANSISTOR	2	2SB15480J1AU ⚠
Q723	2SC3940AQSTA	TRANSISTOR	1	2SC3940ARA ⚠
Q725	2SC5398RSTA	TRANSISTOR	1	B1AACF000059
Q726	2SC3940AQSTA	TRANSISTOR	1	2SC3940ARA ⚠
Q791	2SC3327A	TRANSISTOR	1	
Q901	UN4212TA	TRANSISTOR	1	UNR421200A
Q902	UN411FTA	TRANSISTOR	1	UNR411F00A

R151,52	ERDS2FJ102	1/4W 1K	2	
R153,54	ERDS2FJ104	1/4W 100K	2	
R155	ERDS2FJ121	1/4W 120	1	
R157,58	ERDS2FJ102	1/4W 1K	2	
R202-05	ERDS2FJ104	1/4W 100K	4	
R211	ERDS2FJ271	1/4W 270	1	
R229,30	ERDS2FJ102	1/4W 1K	2	
R509-12	ERDS2FJ470	1/4W 47	4	
R544	ERDS2FJ103	1/4W 10K	1	
R546,47	ERDS2FJ183	1/4W 18K	2	
R551	ERDS2FJ183	1/4W 18K	1	
R552	ERDS2FJ473	1/4W 47K	1	
R555	ERDS2FJ223	1/4W 22K	1	
R556	ERDS2FJ104	1/4W 100K	1	
R557	ERDS2FJ103	1/4W 10K	1	
R558	ERDS2FJ222	1/4W 2.2K	1	
R559	ERDS2FJ472	1/4W 4.7K	1	
R560,61	ERDS2FJ104	1/4W 100K	2	
R563,64	ERDS2FJ272	1/4W 2.7K	2	
R566	ERDS2FJ683	1/4W 68K	1	
R567	ERG1SJ220	22	1	
R568	ERDS2FJ101	1/4W 100	1	
R569	ERDS2FJ103	1/4W 10K	1	
R570	ERDS2TJ225	1/4W 2.2M	1	ERDS2TJ225T
R572	ERDS2FJ153	1/4W 15K	1	
R591	ERDS2FJ472	1/4W 4.7K	1	
R597,98	ERDS2FJ222	1/4W 2.2K	2	
R601-04	ERDS2FJ332	1/4W 3.3K	4	
R605,06	ERDS2FJ472	1/4W 4.7K	2	
R607-09	ERDS2FJ563	1/4W 56K	3	
R610	ERDS2FJ154	1/4W 150K	1	
R611,12	ERDS2FJ563	1/4W 56K	2	
R614,15	ERDS2FJ472	1/4W 4.7K	2	
R617,18	ERDS2FJ472	1/4W 4.7K	2	
R619,20	ERDS2FJ124	1/4W 120K	2	
R621	ERDS2FJ154	1/4W 150K	1	
R622,23	ERDS2FJ124	1/4W 120K	2	

R624	ERDS2FJ154	1/4W 150K	1	
R627	ERDS2FJ474	1/4W 470K	1	
R628	ERDS2FJ223	1/4W 22K	1	
R631,32	ERDS2FJ392	1/4W 3.9K	2	
R635	ERDS2FJ222	1/4W 2.2K	1	
R637	ERDS2FJ153	1/4W 15K	1	
R638	ERDS2FJ683	1/4W 68K	1	
R639,40	ERDS1FJ100	10	2	
R641,42	ERDS2FJ100	1/4W 10	2	
R643,44	ERDS1FJ100	10	2	
R645,46	ERDS2FJ100	1/4W 10	2	
R647	ERDS2FJ271	270	1	
R648	ERD2FCG121	120	1	
R649-52	ERDS1FJ100	10	4	
R683-86	ERDS2FJ102	1/4W 1K	4	
R687,88	ERDS2FJ152	1/4W 1.5K	2	
R691	ERDS1FJ680	68	1	
R692,93	ERDS2FJ102	1/4W 1K	2	
R694	ERDS2FJ223	1/4W 22K	1	
R695	ERDS2FJ471	1/4W 470	1	
R696	ERDS2FJ473	1/4W 47K	1	
R708	ERDS2FJ472	1/4W 4.7K	1	
R712	ERDS2FJ222	1/4W 2.2K	1	
R719	ERDS2FJ332	1/4W 3.3K	1	
R720	ERDS2FJ392	1/4W 3.9K	1	
R721	ERD2FCJ4R7	4.7	1	
R722	ERQ16NKGW2R2E	2.2	1	
R723	ERDS2FJ562	1/4W 5.6K	1	
R724	ERDS2FJ392	1/4W 3.9K	1	
R725	ERDS2FJ100	1/4W 10	1	
R727	ERDS2FJ392	1/4W 3.9K	1	
R729	ERDS2FJ221	1/4W 220	1	
R738	ERDS2FJ392	1/4W 3.9K	1	
R739	ERDS2FJ473	1/4W 47K	1	
R749	ERDS2FJ102	1/4W 1K	1	
R753,54	ERX1SJR47	0.47	2	

R761	ERG1SJ221	220	1	
R763	ERDS2FJ472	1/4W 4.7K	1	
R764	ERDS2FJ331	1/4W 330	1	
R765	ERDS1FJ221	220	1	
R767	ERG1SJ270	27	1	
R768	ERDS2FJ101	1/4W 100	1	
R769	ERG1SJ270	27	1	
R771	ERDS2FJ222	1/4W 2.2K	1	
R772	ERDS2FJ223	1/4W 22K	1	
R773,74	ERDS1FJ180	18	2	ERDS1FVJ180T 
R776	ERDS2FJ103	1/4W 10K	1	
R777	ERDS2FJ102	1/4W 1K	1	
R791,92	RSFMB50KT-L	FUSE PROTECTOR	2	K5G502A00022 
R793	ERDS2FJ1R0	1/4W 1	1	
R794	ERDS2FJ473	1/4W 47K	1	
R795	ERDS2FJ392	1/4W 3.9K	1	
R796,97	ERDS2FJ2R2	1/4W 2.2	2	
R798	ERQ16NkW2R2E	2.2	1	
R901	ERDS2FJ821	1/4W 820	1	
R902	ERDS2FJ102	1/4W 1K	1	
R903	ERDS2FJ122	1/4W 1.2K	1	
R904	ERDS2FJ152	1/4W 1.5K	1	
R905	ERDS2FJ182	1/4W 1.8K	1	
R906	ERDS2FJ222	1/4W 2.2K	1	
R907	ERDS2FJ332	1/4W 3.3K	1	
R909	ERDS2FJ182	1/4W 1.8K	1	
R910	ERDS2FJ222	1/4W 2.2K	1	
R911	ERDS2FJ332	1/4W 3.3K	1	
R912	ERDS2FJ472	1/4W 4.7K	1	
R913	ERDS2FJ821	1/4W 820	1	
R914	ERDS2FJ102	1/4W 1K	1	
R915	ERDS2FJ122	1/4W 1.2K	1	
R916	ERDS2FJ152	1/4W 1.5K	1	
R918	ERDS2FJ103	1/4W 10K	1	
R919	ERDS2FJ153	1/4W 15K	1	

R921,22	ERDS2FJ103	1/4W 10K	2	
R924,25	ERDS2FJ102	1/4W 1K	2	
R926	ERDS2FJ222	1/4W 2.2K	1	
R928	ERDS2FJ473	1/4W 47K	1	
R929-32	ERDS2FJ102	1/4W 1K	4	
R934-36	ERDS2FJ101	1/4W 100	3	
R937	ERDS2FJ103	1/4W 10K	1	
R939	ERDS2FJ152	1/4W 1.5K	1	
R940,41	ERDS2FJ102	1/4W 1K	2	
R942	ERDS2FJ222	1/4W 2.2K	1	
R943	ERDS2FJ101	1/4W 100	1	
R944	ERDS2FJ222	1/4W 2.2K	1	
R945	ERDS2FJ101	1/4W 100	1	
R946	ERDS2FJ102	1/4W 1K	1	
R949	ERDS2FJ472	1/4W 4.7K	1	
R950	ERDS2FJ101	1/4W 100	1	
R951	ERDS2FJ334	1/4W 330K	1	
R952	ERDS2TJ106T	1/4W 10M	1	
R953	ERDS2FJ101	1/4W 100	1	
R954	ERDS2FJ104	1/4W 100K	1	
R956-58	ERDS2FJ102	1/4W 1K	3	
R959	ERDS2FJ470	1/4W 47	1	
R960	ERDS2FJ152	1/4W 1.5K	1	
R961,62	ERDS2FJ223	1/4W 22K	2	
R965,66	ERDS2FJ392	1/4W 3.9K	2	
R969	ERDS2FJ272	1/4W 2.7K	1	
R974	ERDS2FJ102	1/4W 1K	1	
R975	ERDS2FJ223	1/4W 22K	1	
R976	ERDS2FJ104	1/4W 100K	1	
R986	ERDS2FJ152	1/4W 1.5K	1	
R987,88	ERDS2FJ102	1/4W 1K	2	
R990	ERDS2FJ104	1/4W 100K	1	
R991	ERDS2FJ473	1/4W 47K	1	
R993,94	ERDS2FJ104	1/4W 100K	2	
R995	ERDS2FJ221	1/4W 220	1	
R996,97	ERDS2FJ151	1/4W 150	2	
R999	ERDS2FJ104	1/4W 100K	1	

RL702	RSY0040M-0	RELAY	1	
S901-08	EVQ11G05R	SW,PUSH	8	
S910-15	EVQ11G05R	SW,PUSH	6	
T701	ETP76VST617A	POWER TRANSFORMER	1	
T702	RTP1H3E001	POWER TRANSFORMER	1	
VR901	EVQVBXFK124B	V.R.,VOLUME	1	
X151	RSXC4M33S02T	OSCILLATOR	1	H0H433400001
X901	EF0EC6004T4	OSCILLATOR	1	EFOEC6004T4
X902	RSXD32K7S02	OSCILLATOR	1	H0A327200027
Z101	RAN0005EM-2	TUNER UNIT	1	
Z701	ENC471D5ATRB	ZNR	1	J0LG00000006 
Z901	B3RAD0000028	REMOTE SENSOR	1	

•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

16 Cabinet Parts Location

[TOP](#) [PREVIOUS](#) [NEXT](#)



•@

[TOP](#) [PREVIOUS](#) [NEXT](#)

17 Packaging


[TOP](#) [PREVIOUS](#)




•@

[TOP](#) [PREVIOUS](#)


Sound Processor : SH-DV250

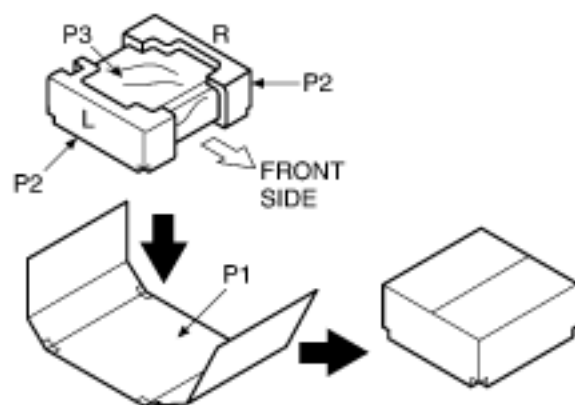




DVD Player : SL-DV250

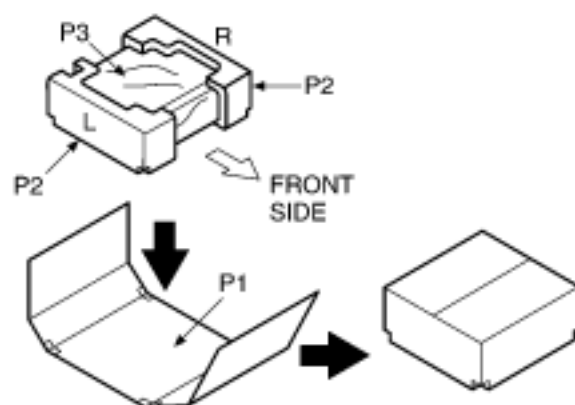


Cassette Deck : RS-DV250

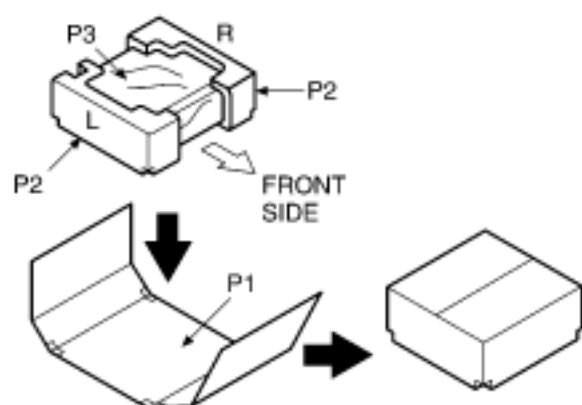


Tuner/Amplifier : SA-DV250

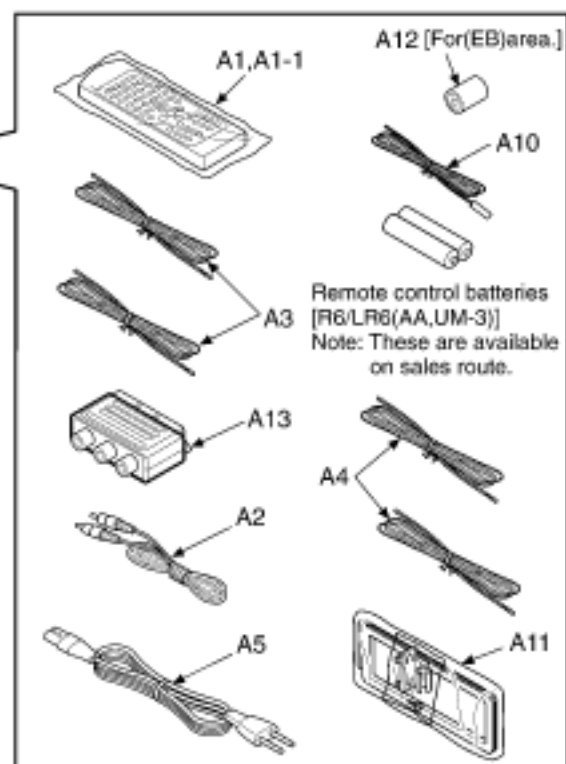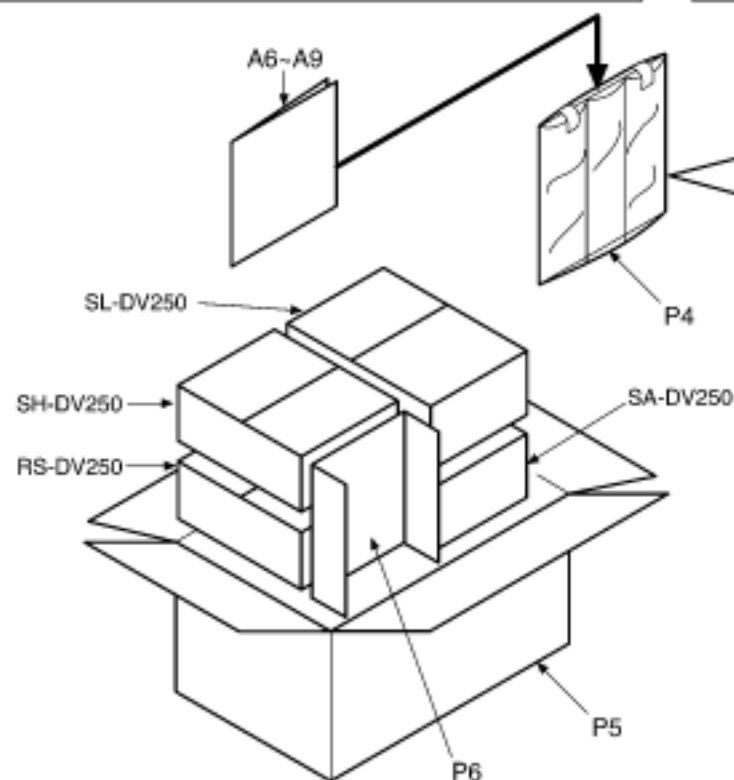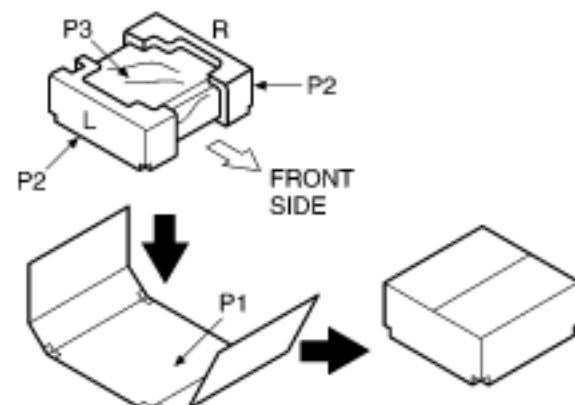


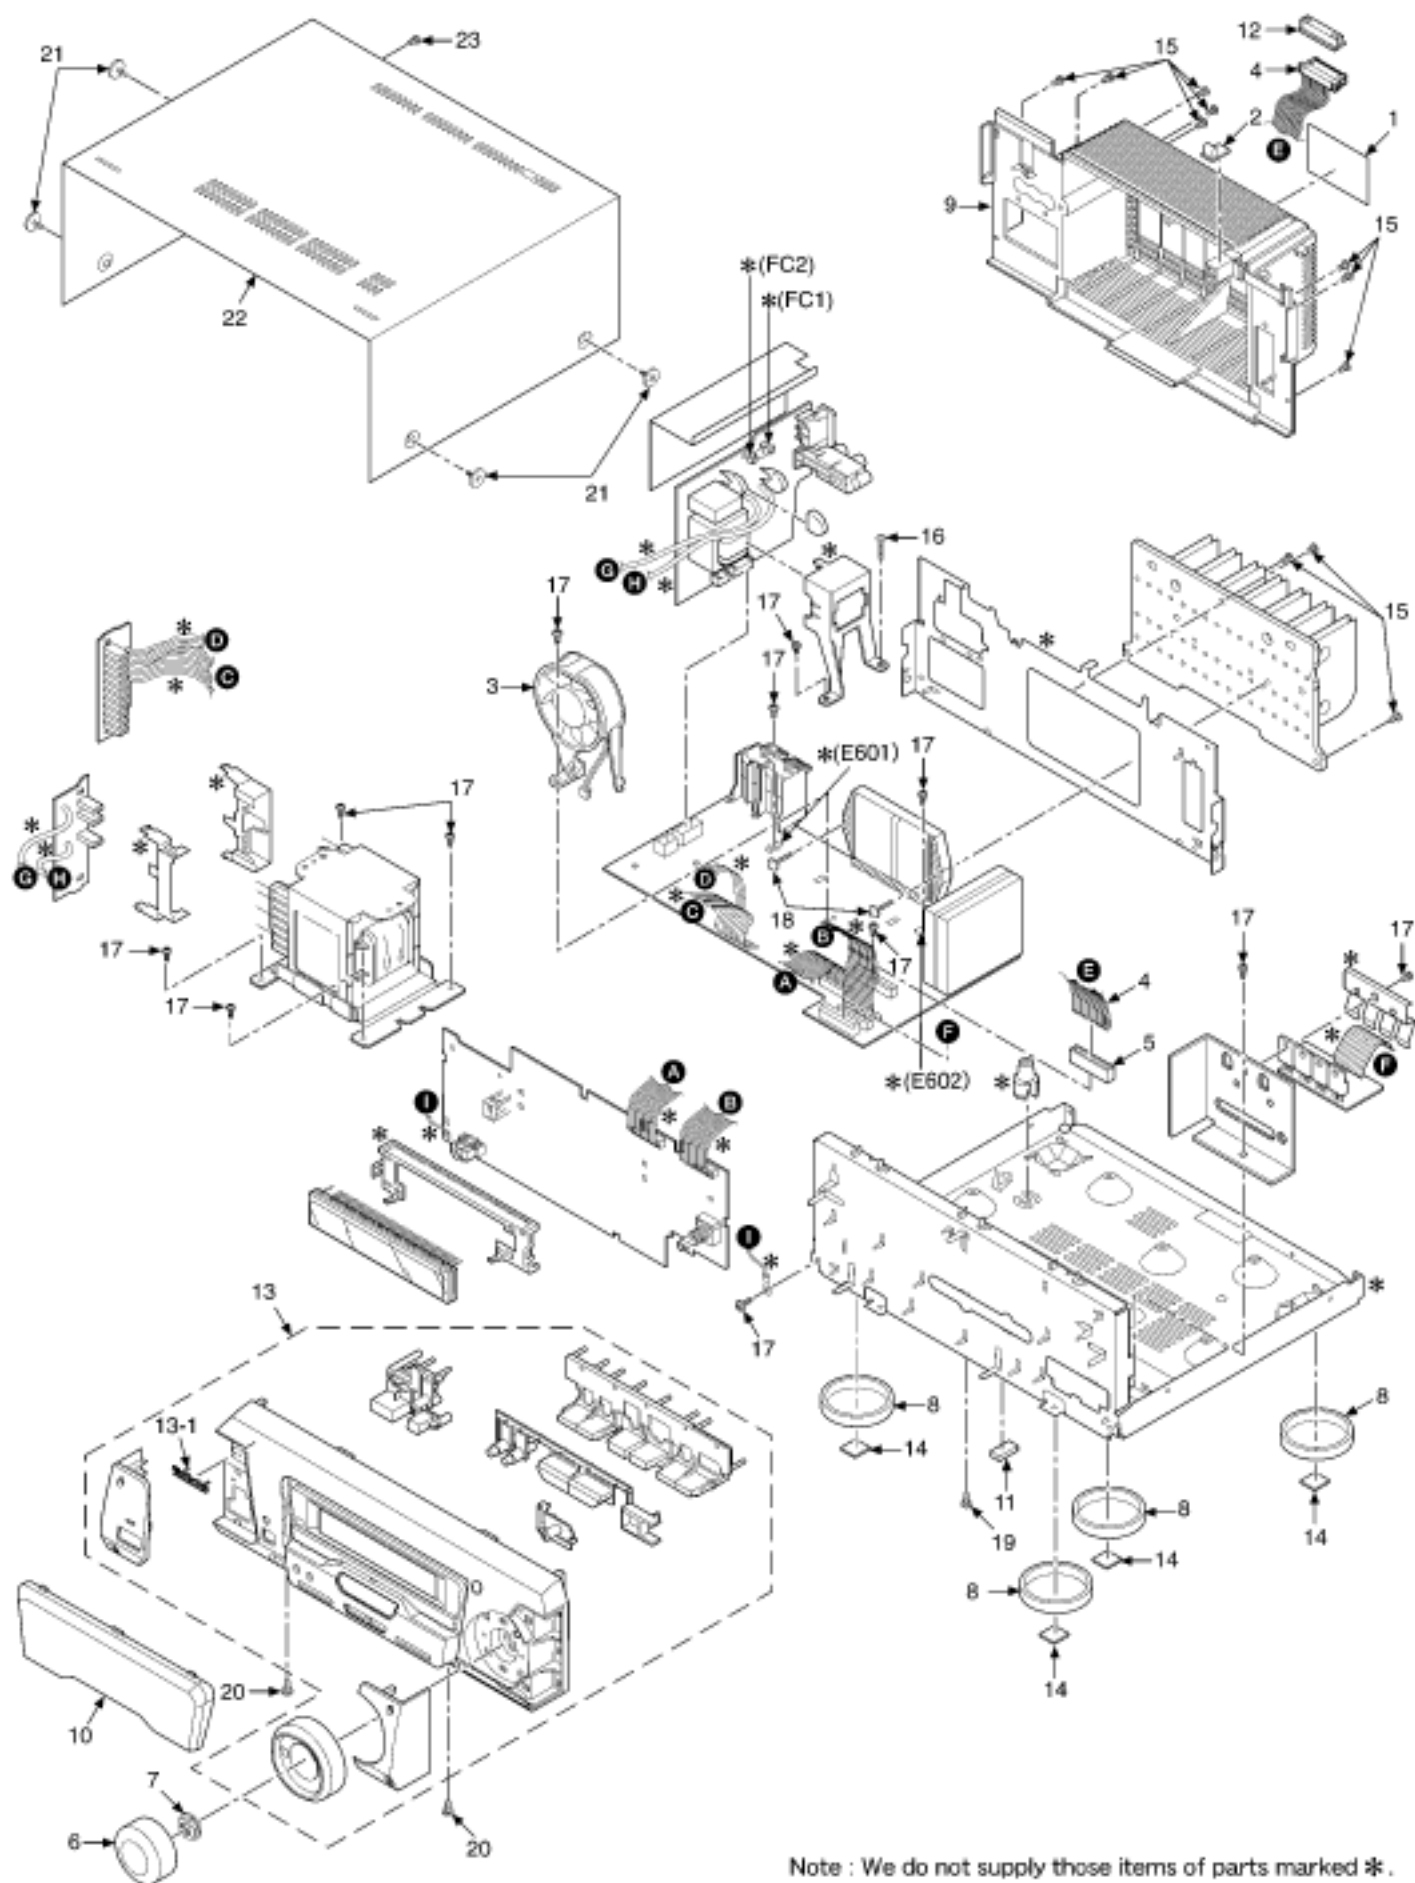


Note : We do not supply those items of parts marked *.

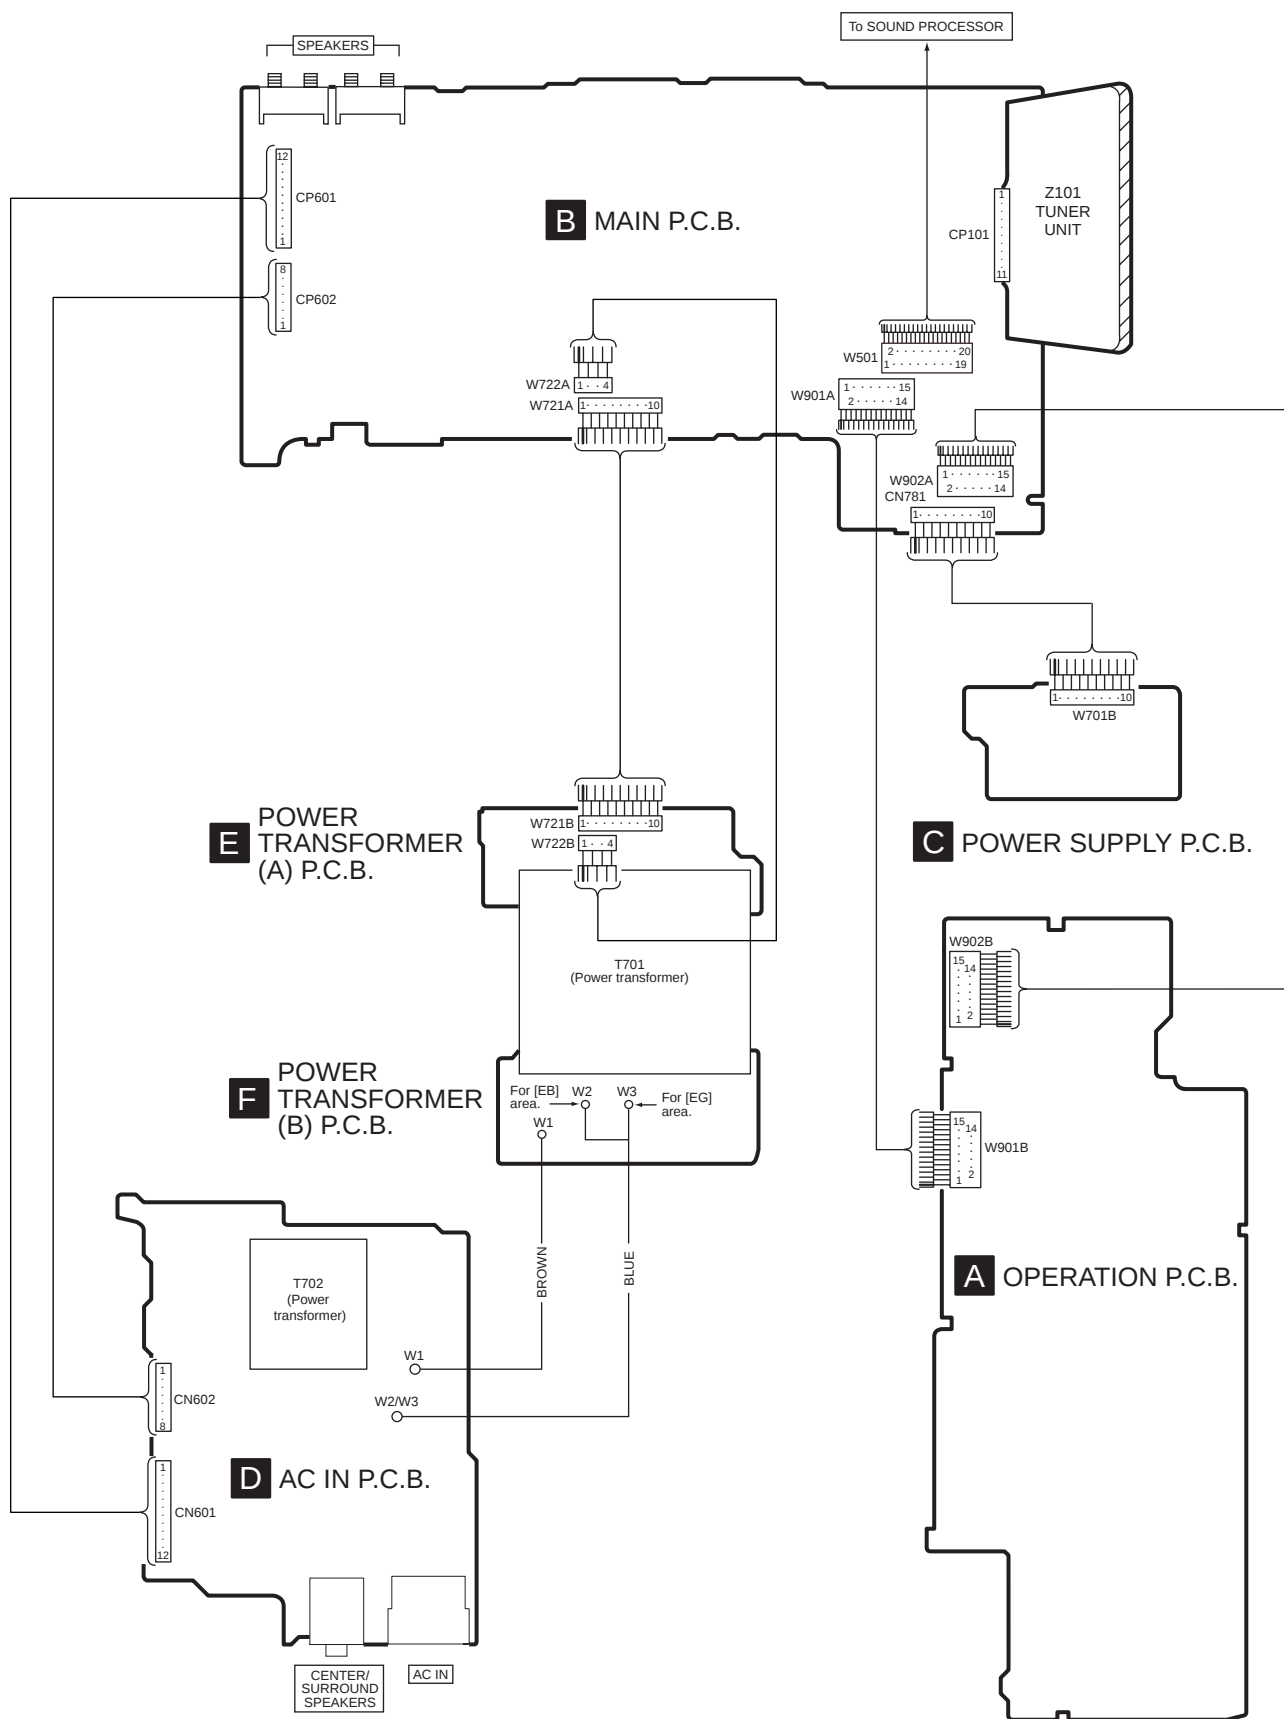

To SOUND PROCESSOR
(SH-DV250)
BLOCK DIAGRAM

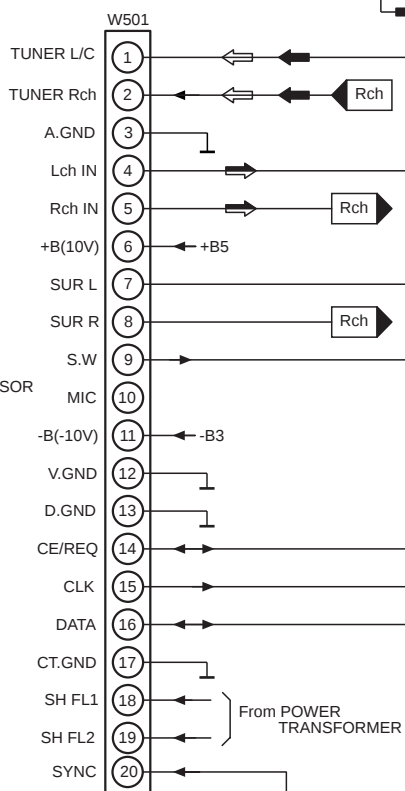

BU4053BCFE2
IC201
SIGNAL SELECTOR



MUTING

Q607
(Q608)

MUTING

Q605


MUTING CONT.


Q902


-VP
+B4


C2BBFD000317
IC901

SYSTEM CONTROL / FL DRIVE

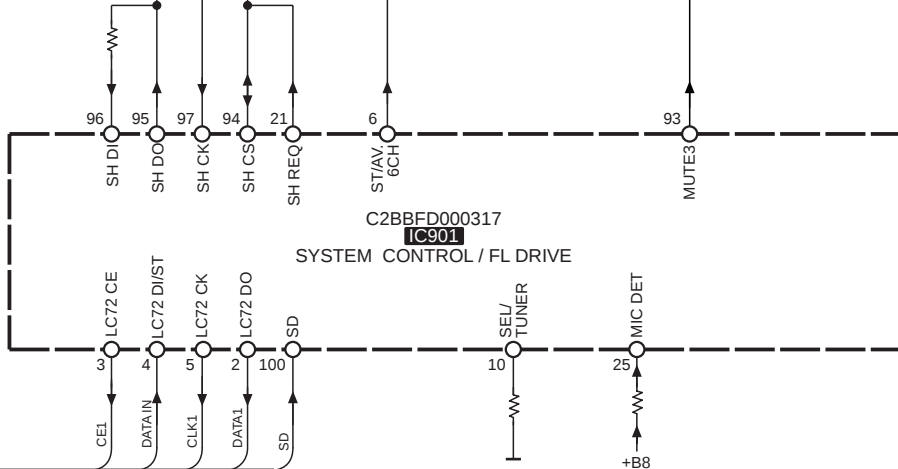

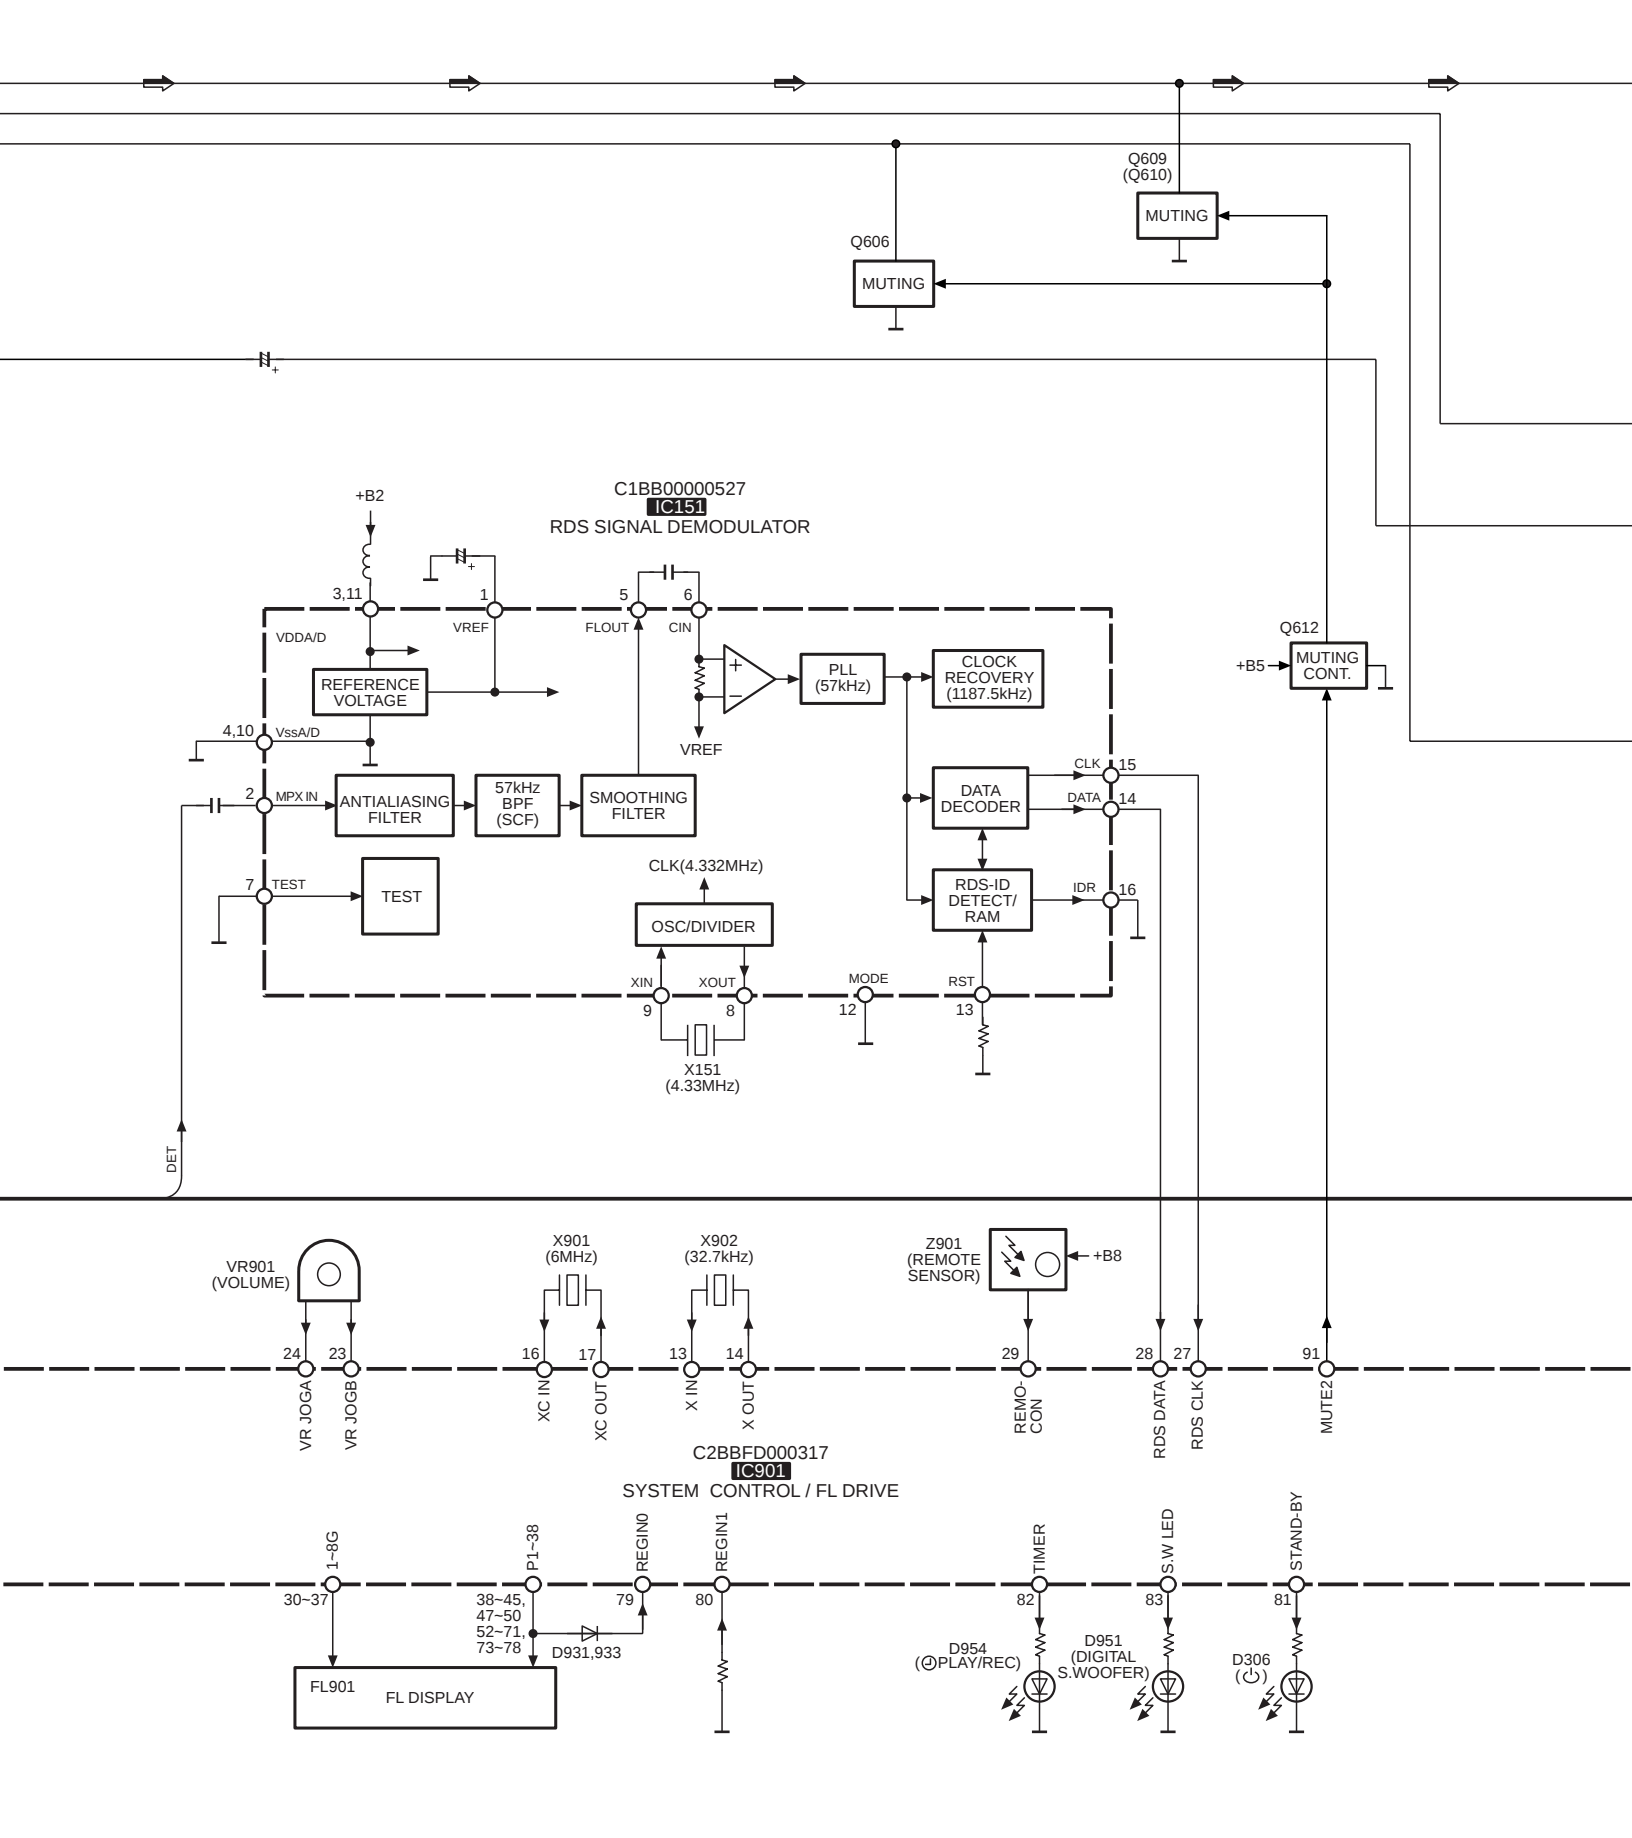

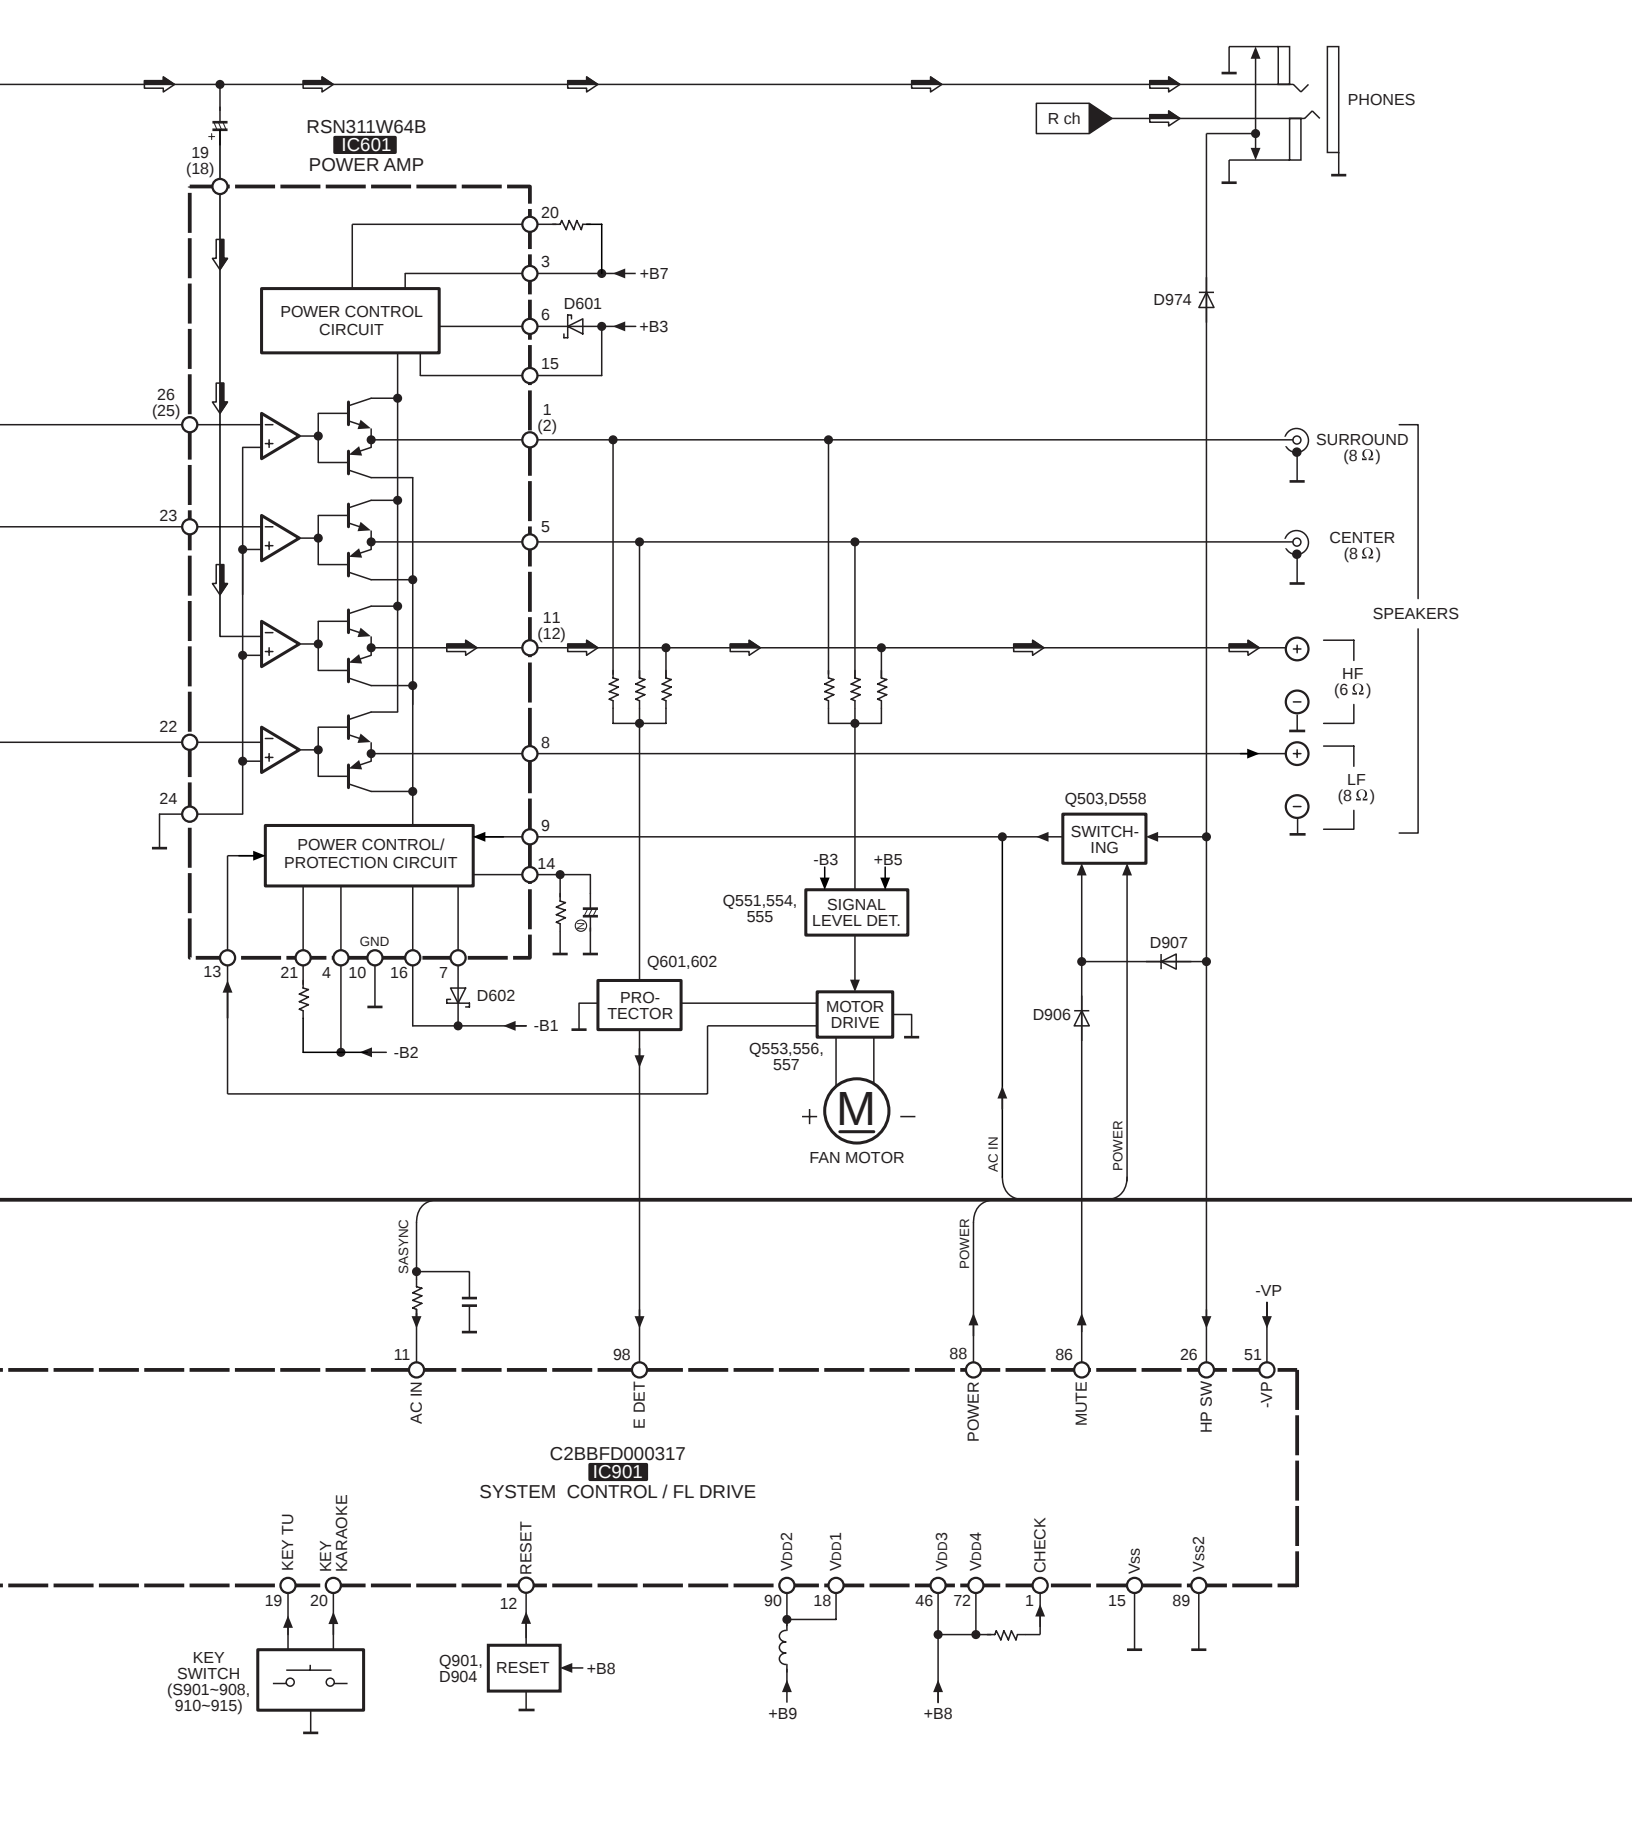

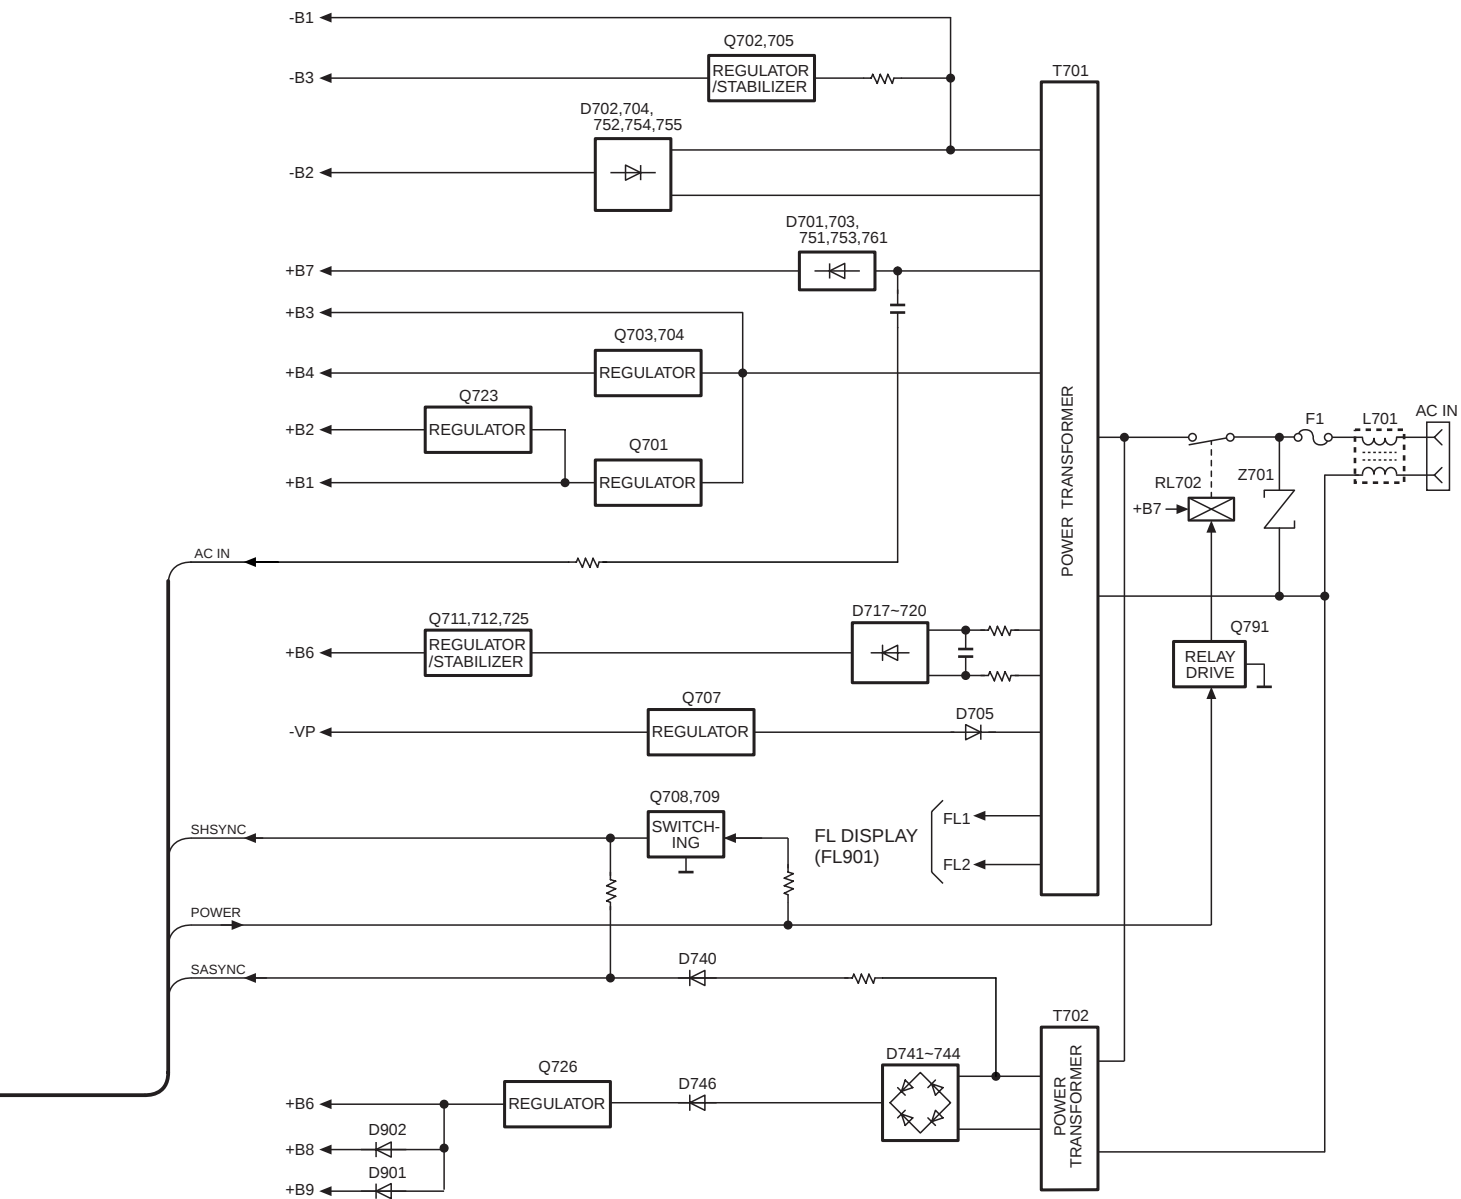

NOTES :


- SIGNAL LINE
- : FM SIGNAL
- : AM SIGNAL
- : FM OSC SIGNAL
- ■ : AM OSC SIGNAL
- ■ : AUDIO SIGNAL
- () indicates pin No. Right channel.

SCHEMATIC DIAGRAM-1

A OPERATION CIRCUIT


NOTE:
The number which noted at the connectors on the schematic diagram as
"SCHEMATIC DIAGRAM-1" or "SCHEMATIC DIAGRAM-2"
indicates the schematic diagram serial number located on the left corner in the schematic diagram.

⇒ :AUDIO SIGNAL LINE

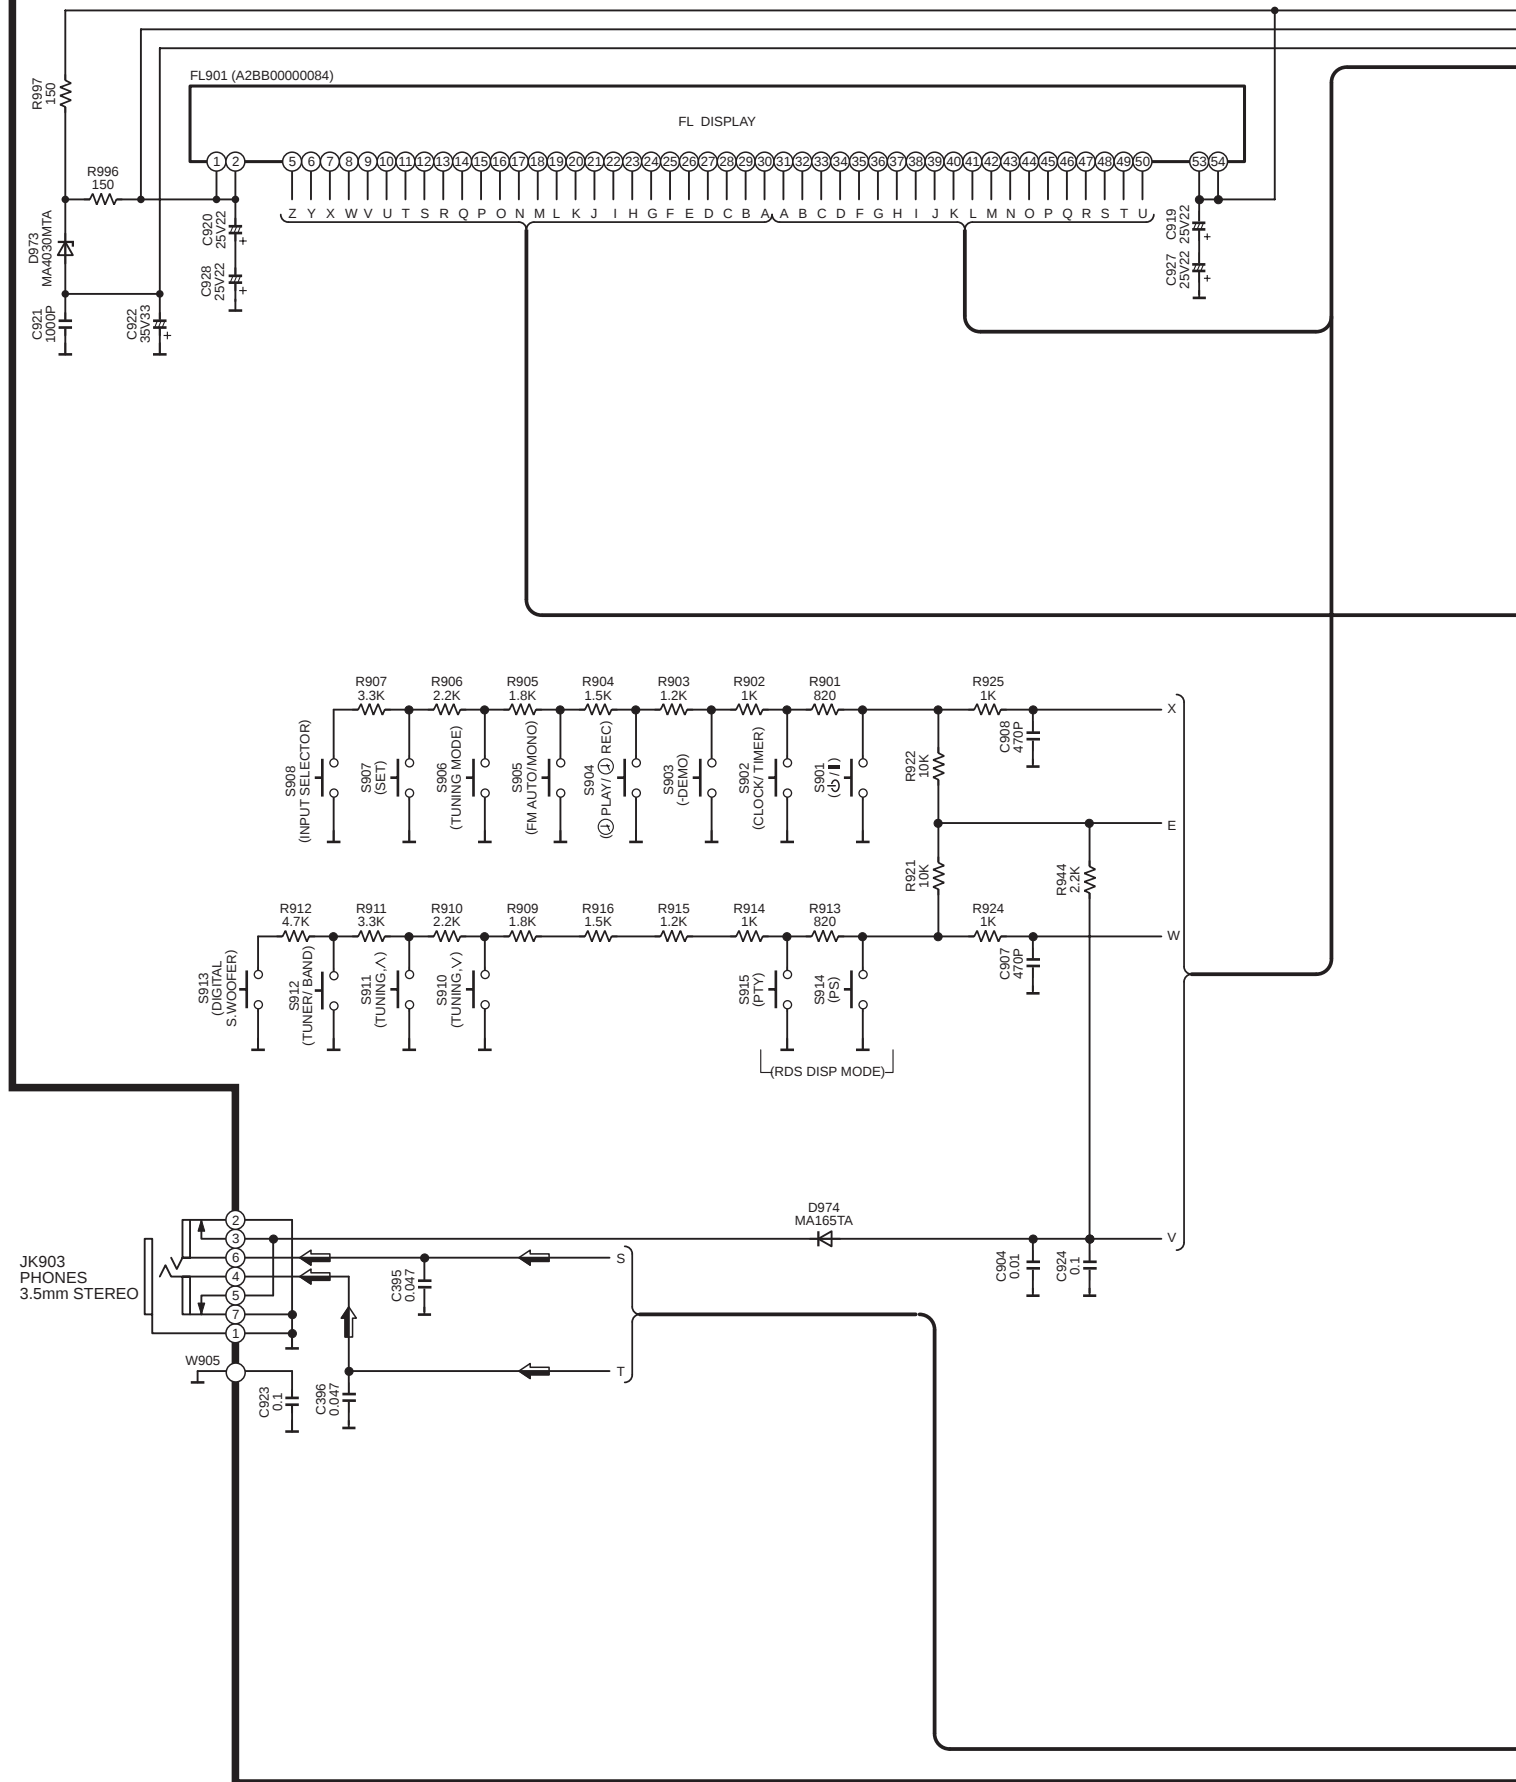

SCHEMATIC DIAGRAM-2


 : POSITIVE VOLTAGE LINE
 : NEGATIVE VOLTAGE LINE

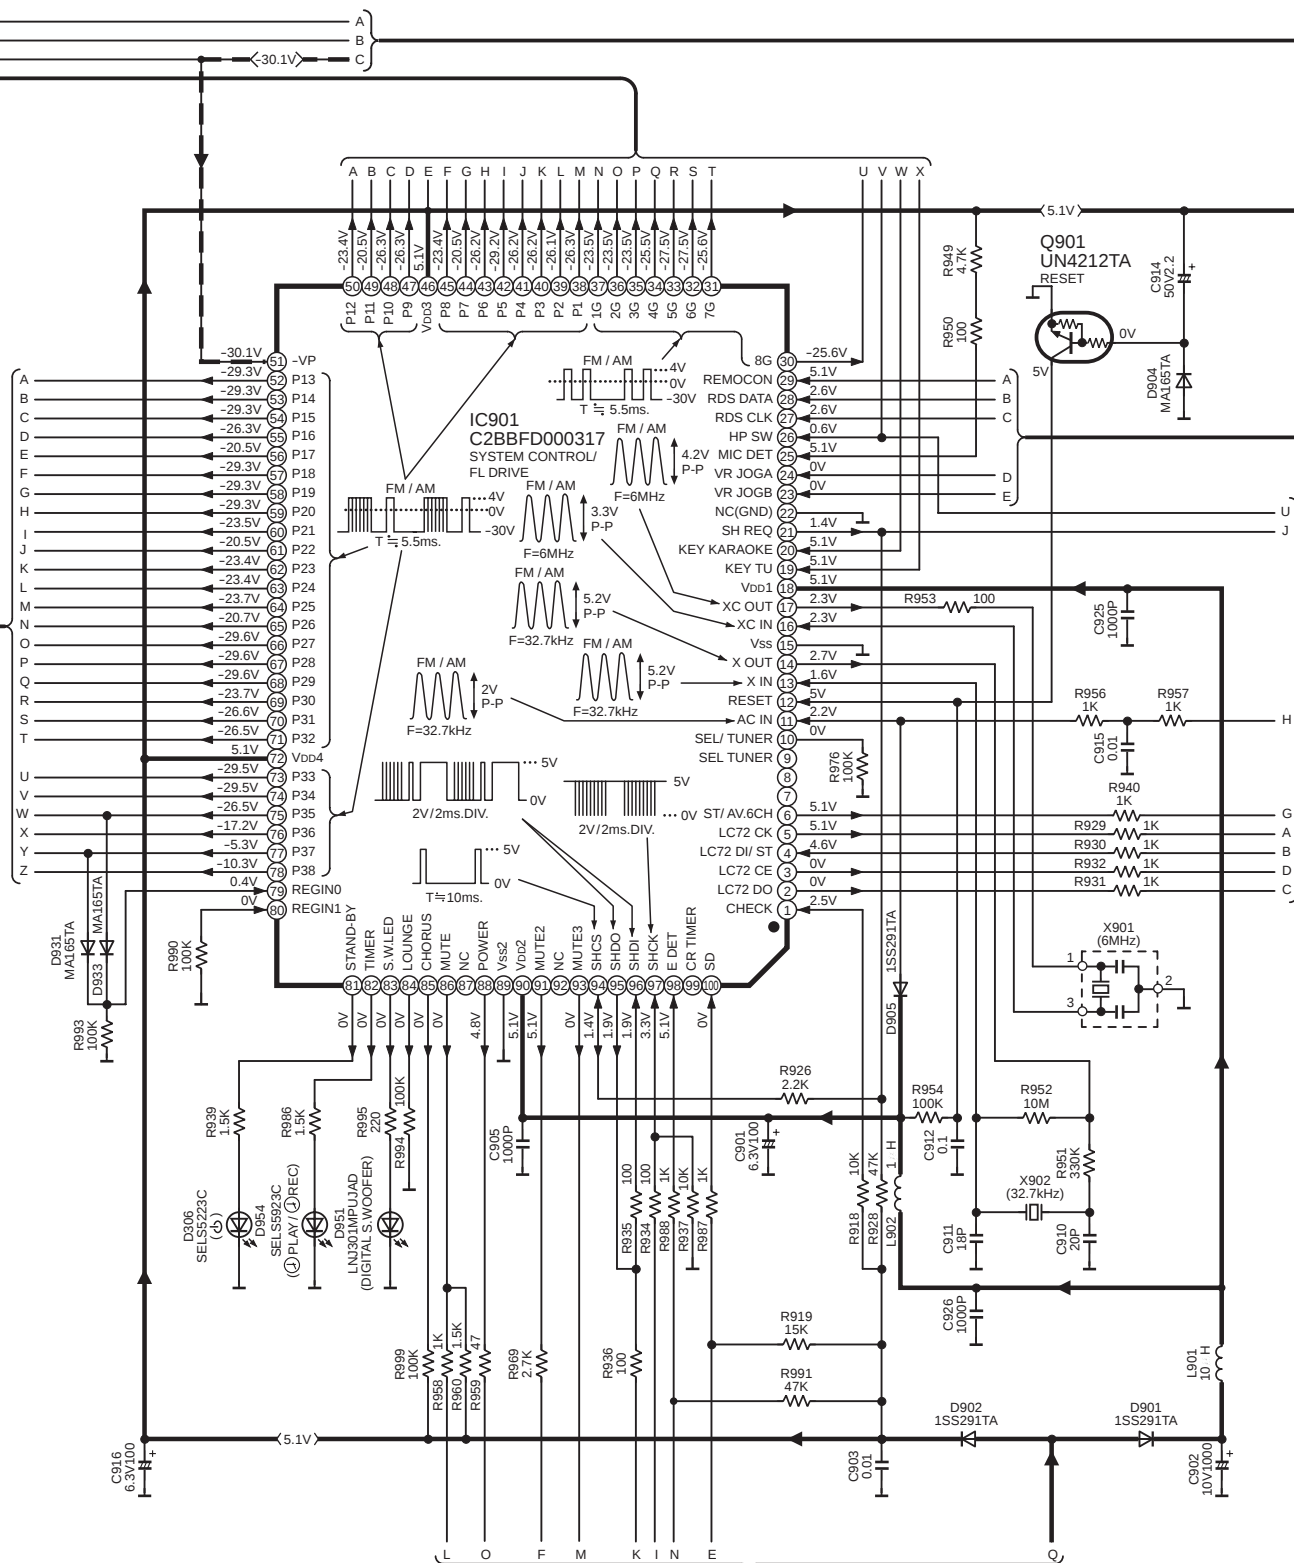


SCHEMATIC DIAGRAM-3

A OPERATION CIRCUIT

→ : POSITIVE VOLTAGE LINE → : NEGATIVE VOLTAGE LINE → : AUDIO SIGNAL LINE

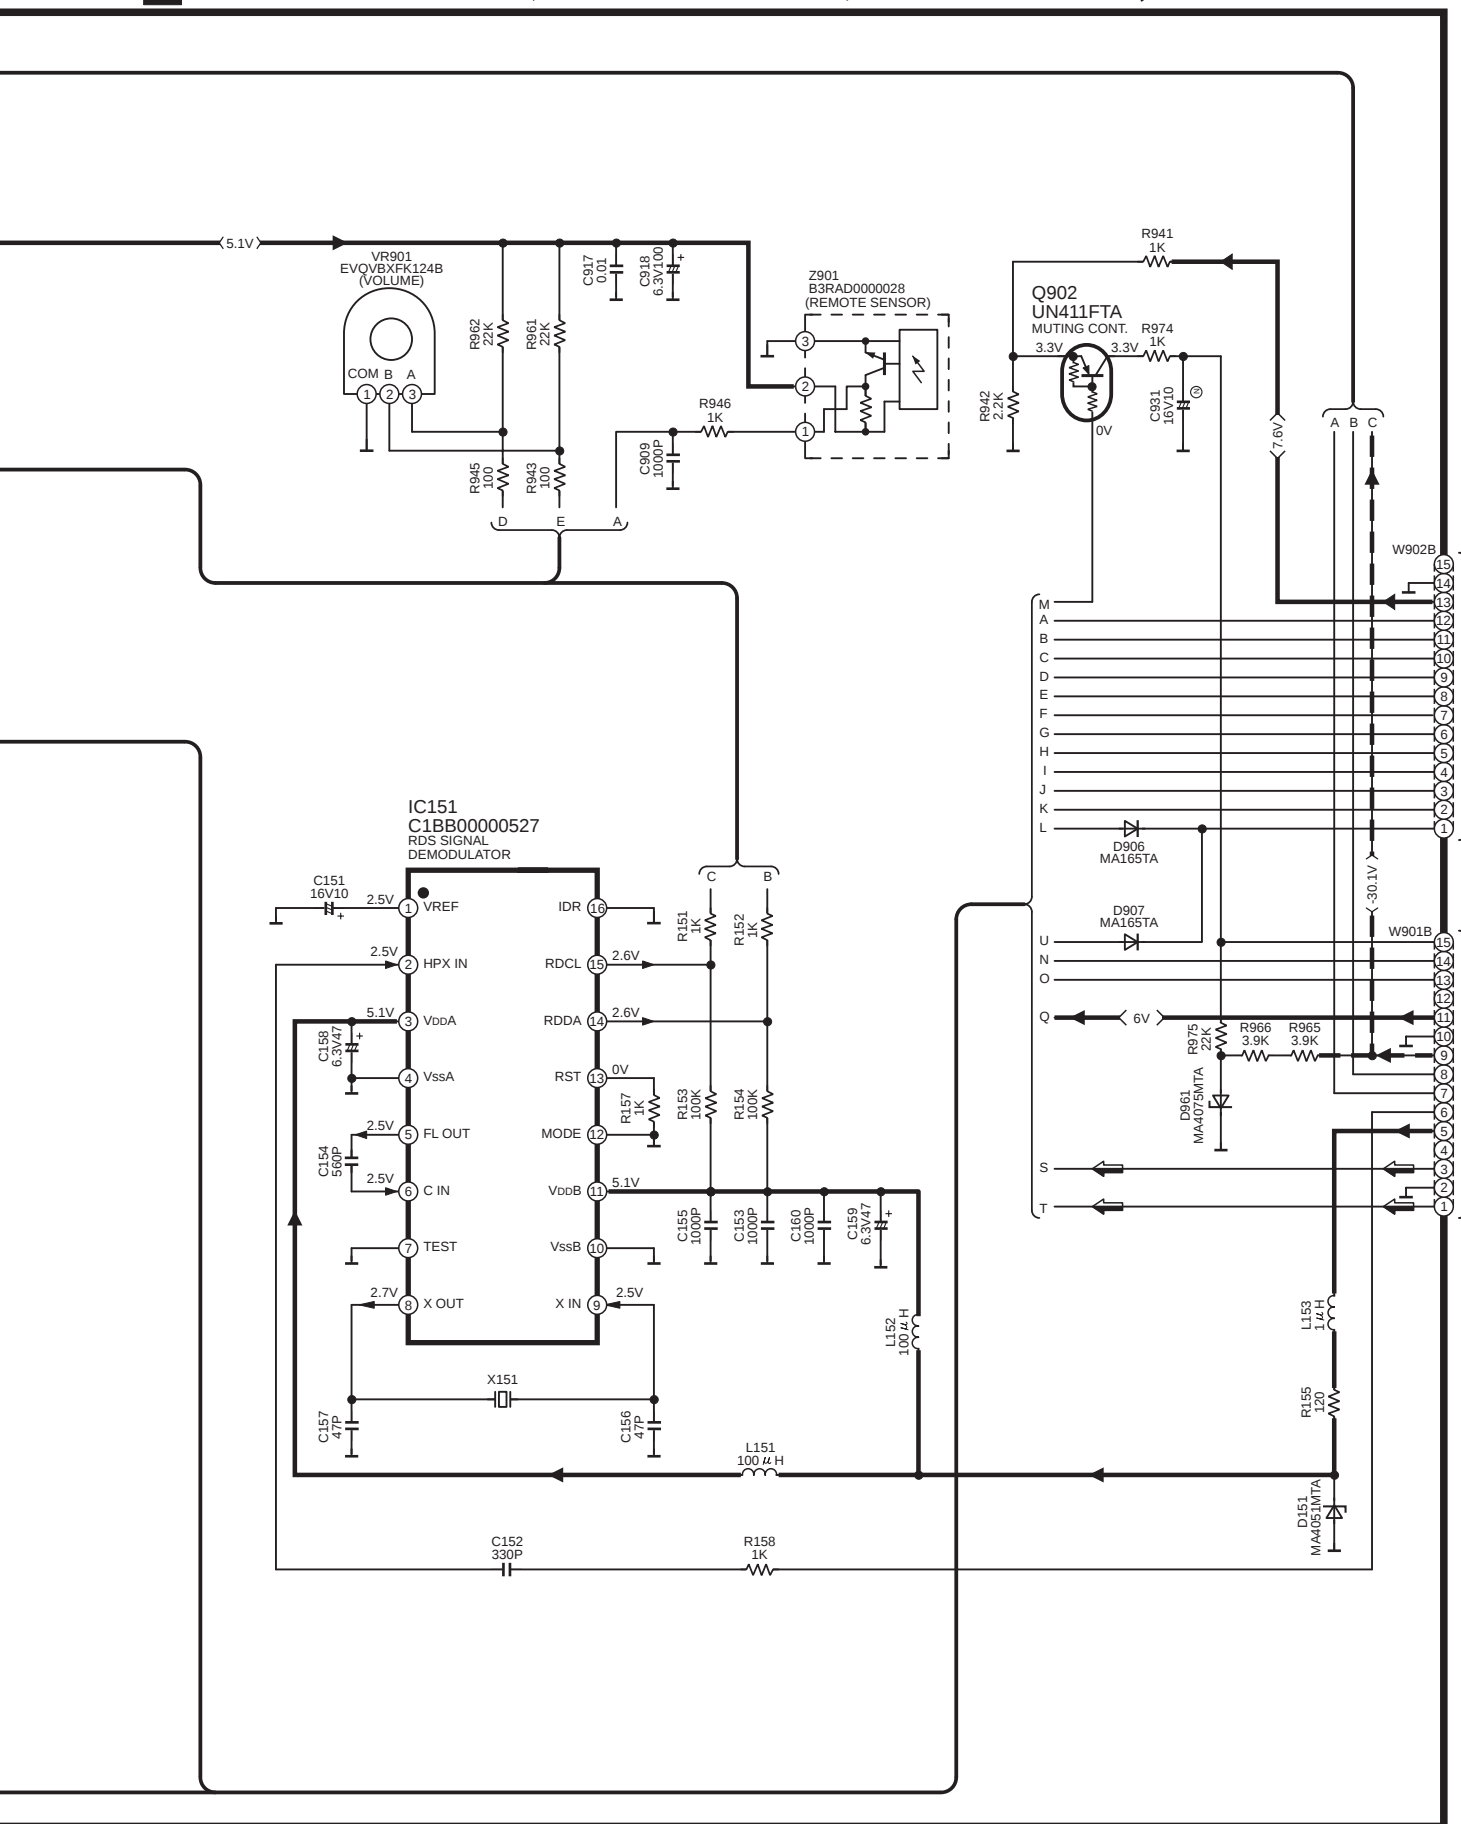


B MAIN CIRCUIT



SCHEMATIC DIAGRAM-5


→ : POSITIVE VOLTAGE LINE
 - - - - - : NEGATIVE VOLTAGE LINE ➡ : AUDIO SIGNAL LINE

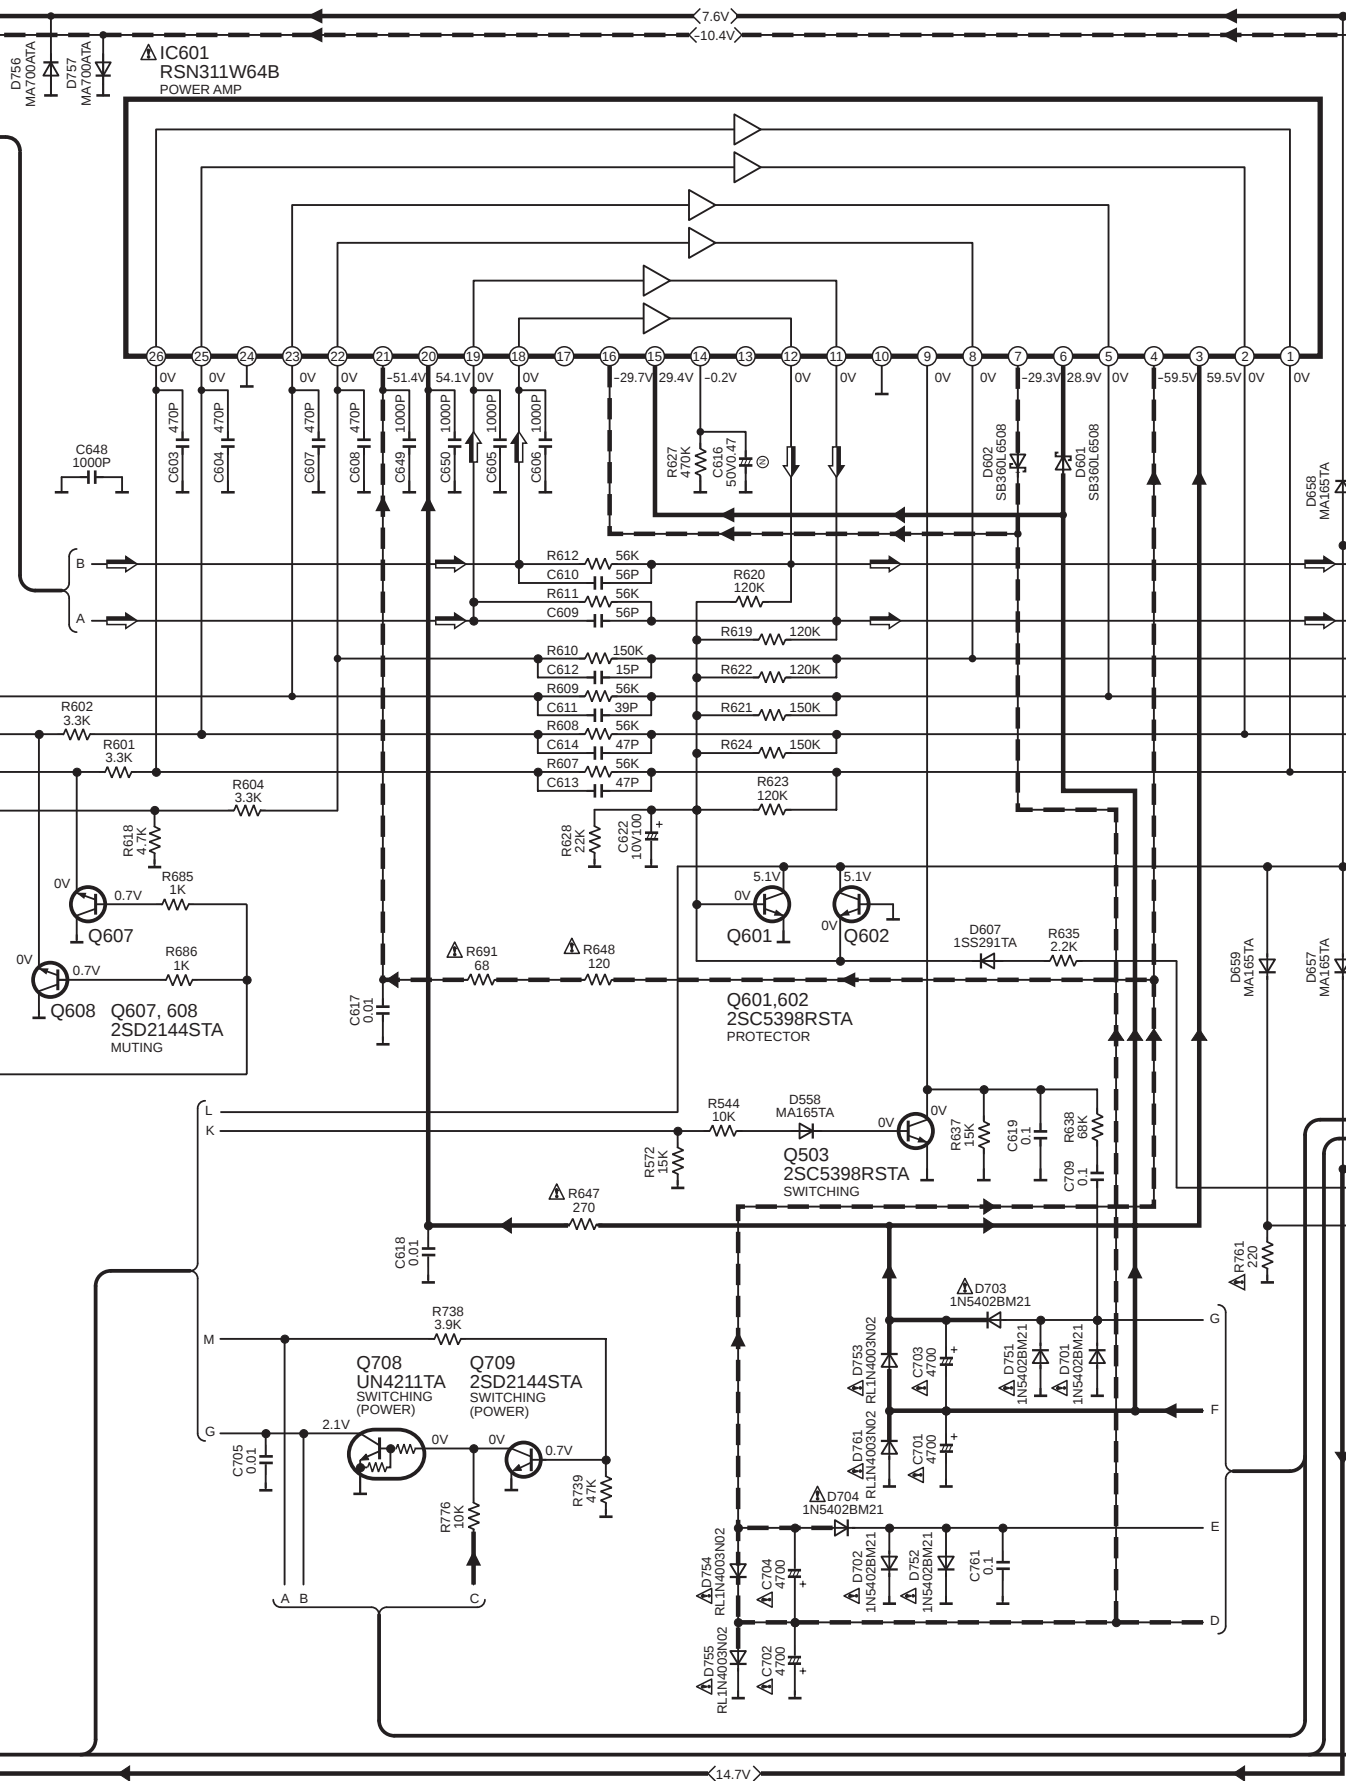

SCHEMATIC DIAGRAM-6


B MAIN CIRCUIT



— : POSITIVE VOLTAGE LINE
 - - - : NEGATIVE VOLTAGE LINE → : AUDIO SIGNAL LINE

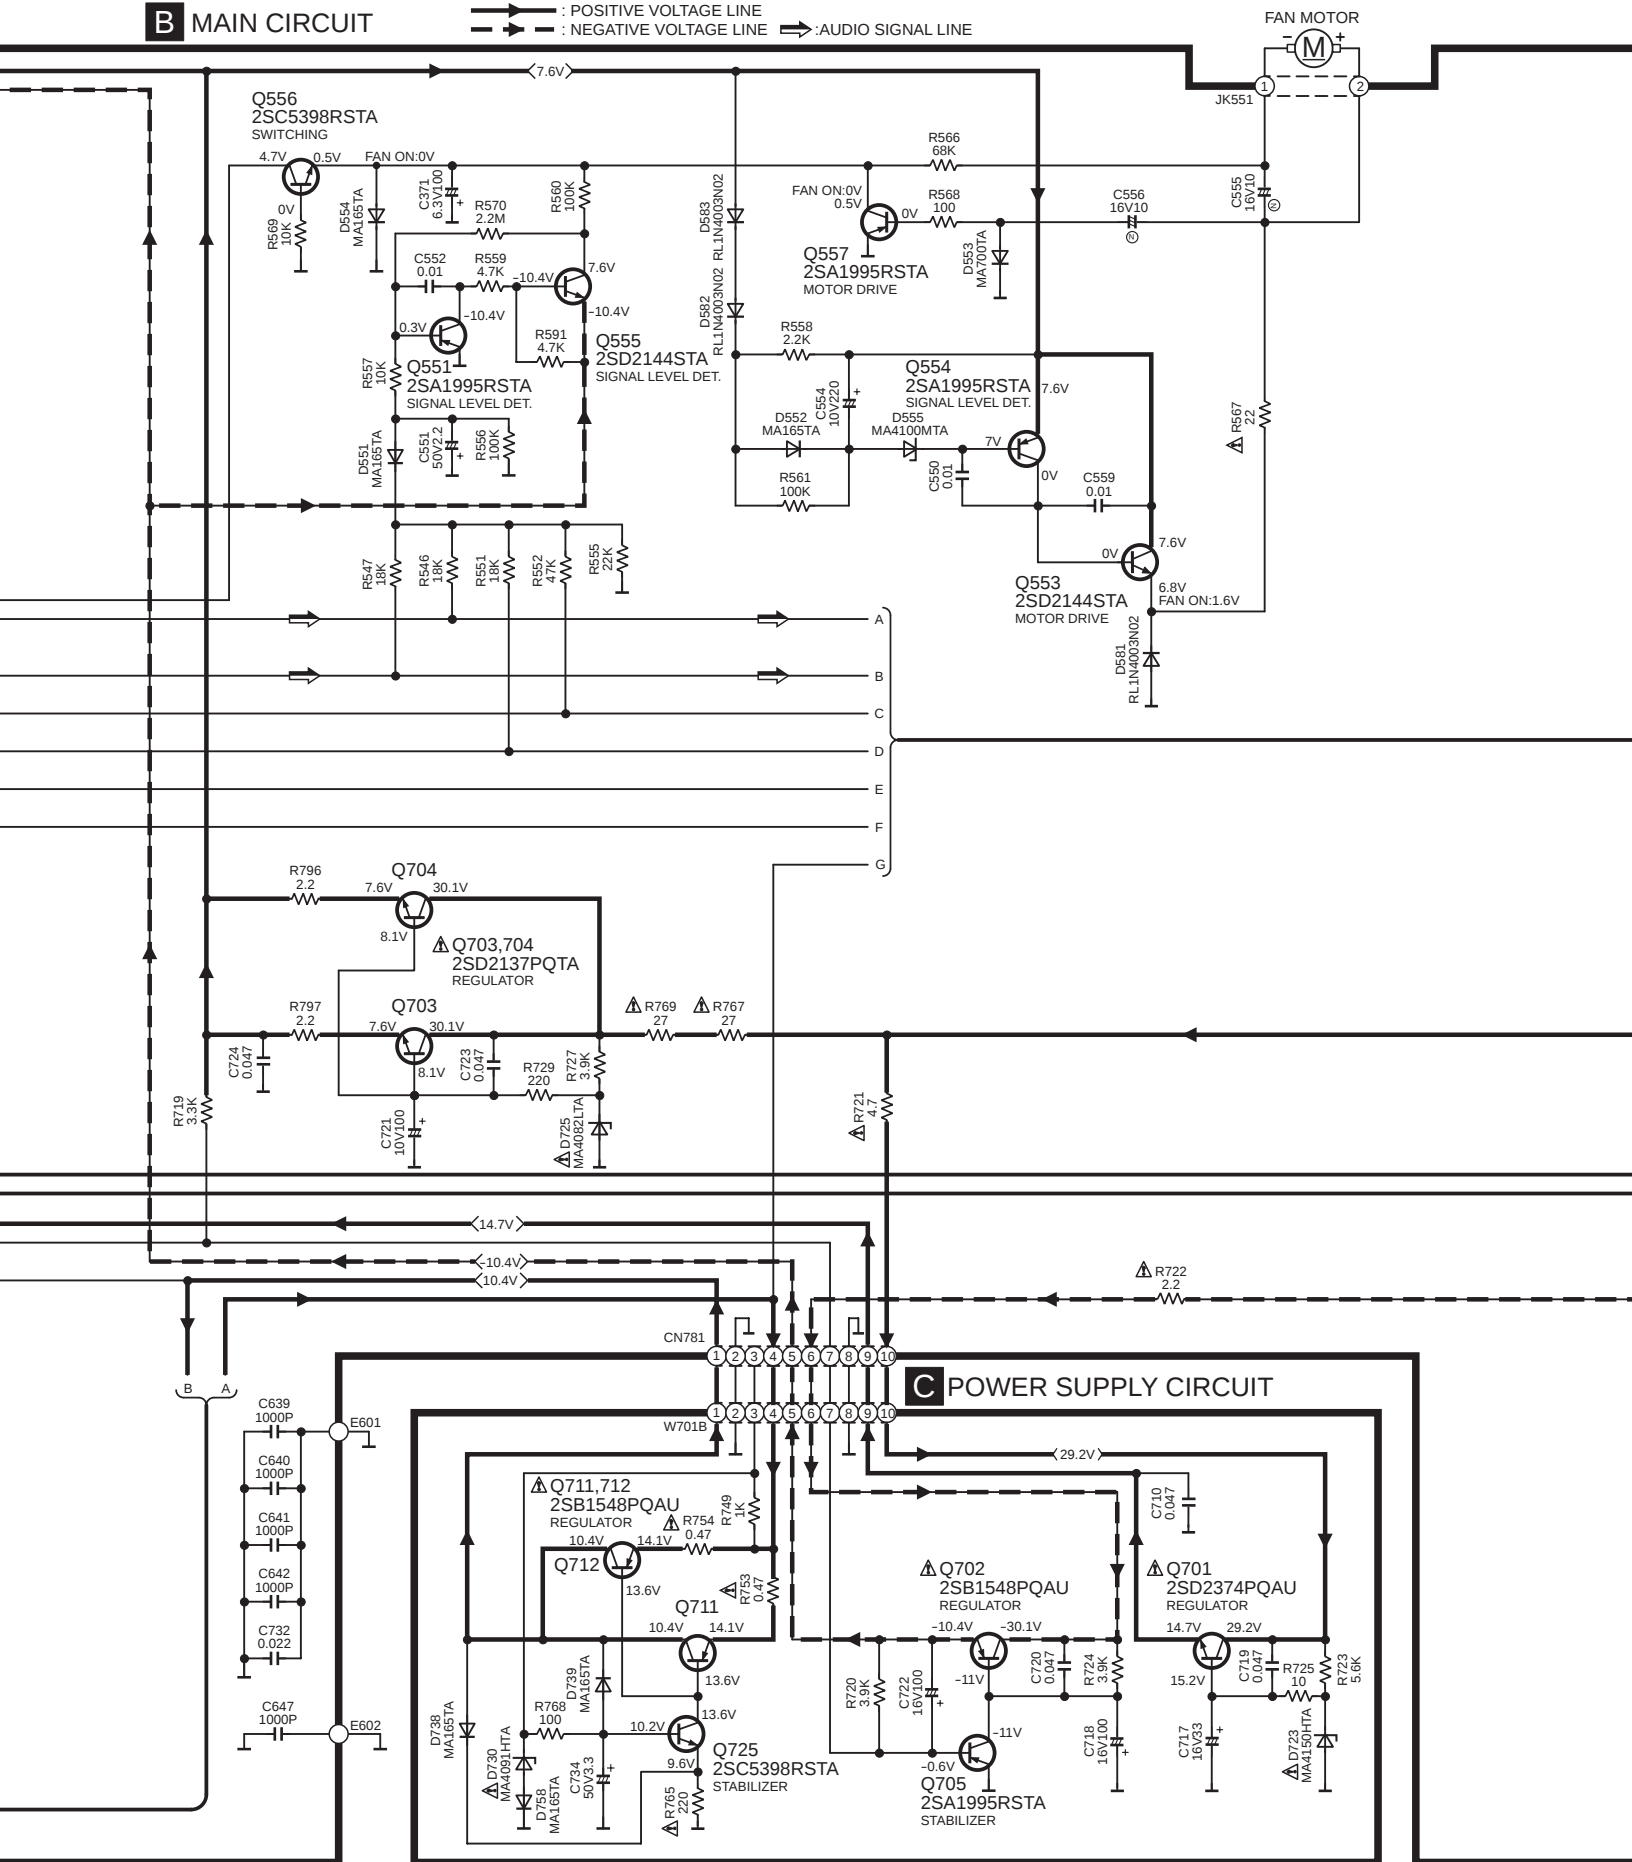


SCHEMATIC DIAGRAM-7

 : POSITIVE VOLTAGE LINE
 : NEGATIVE VOLTAGE LINE  : AUDIO SIGNAL LINE

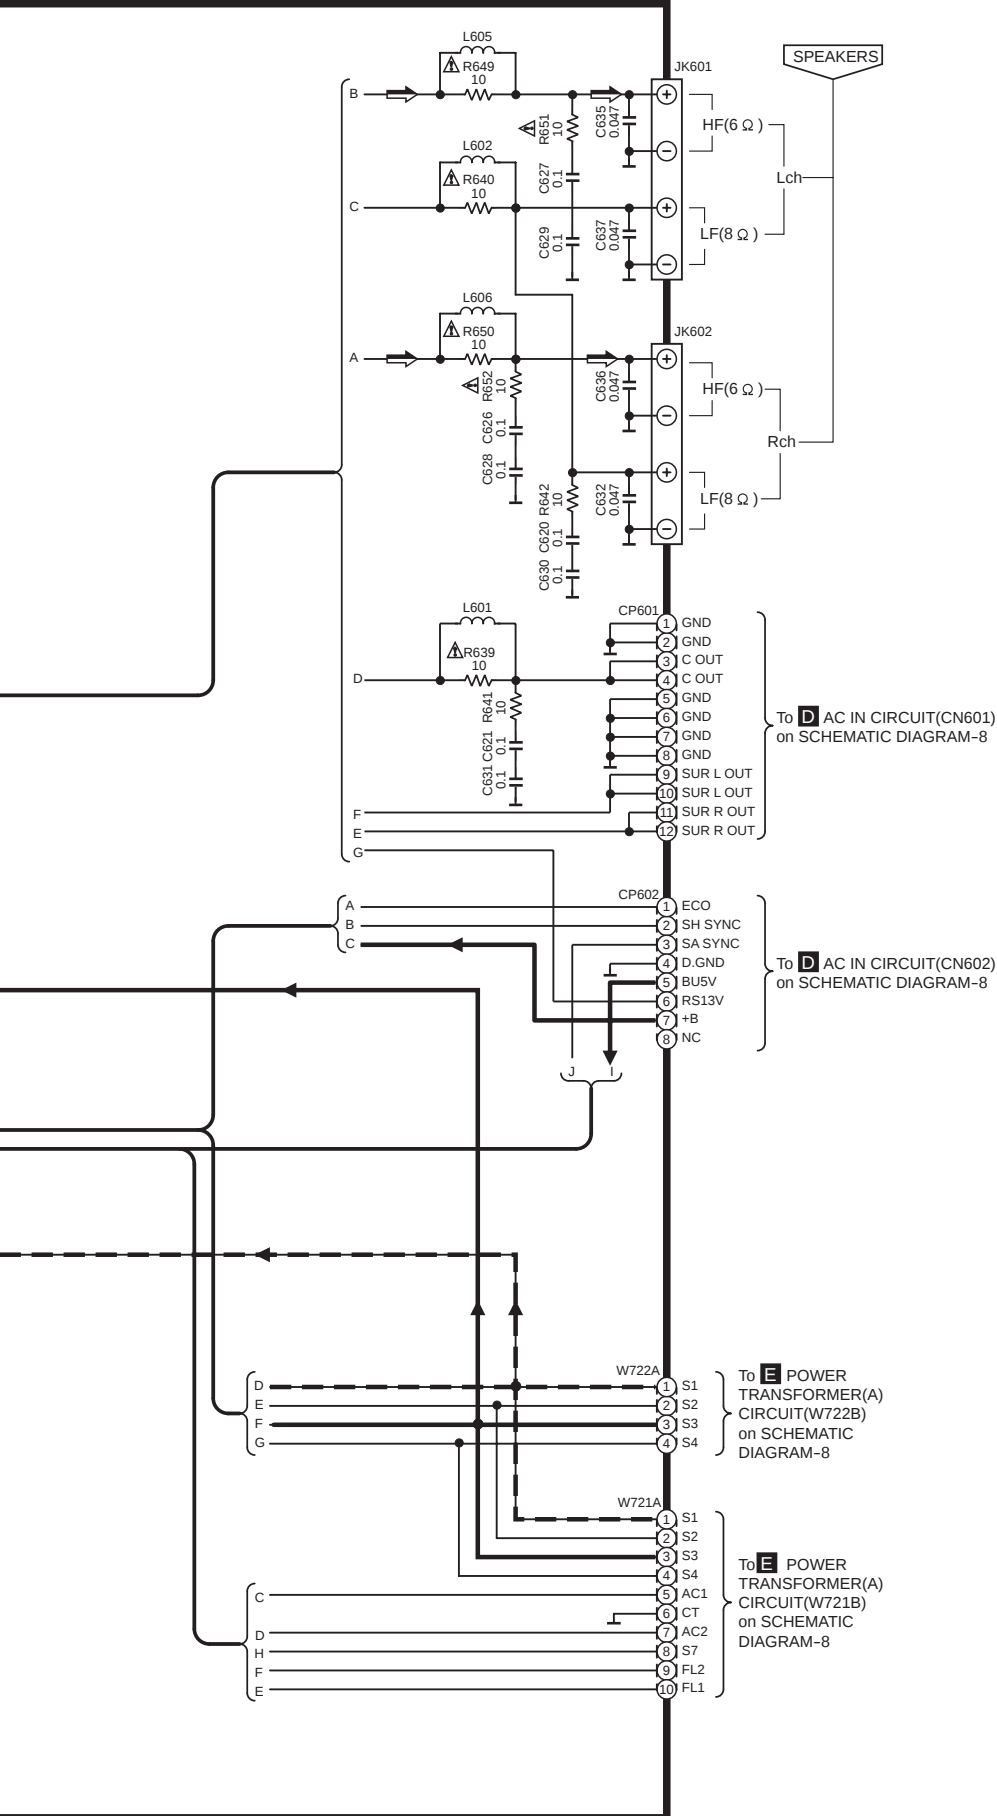


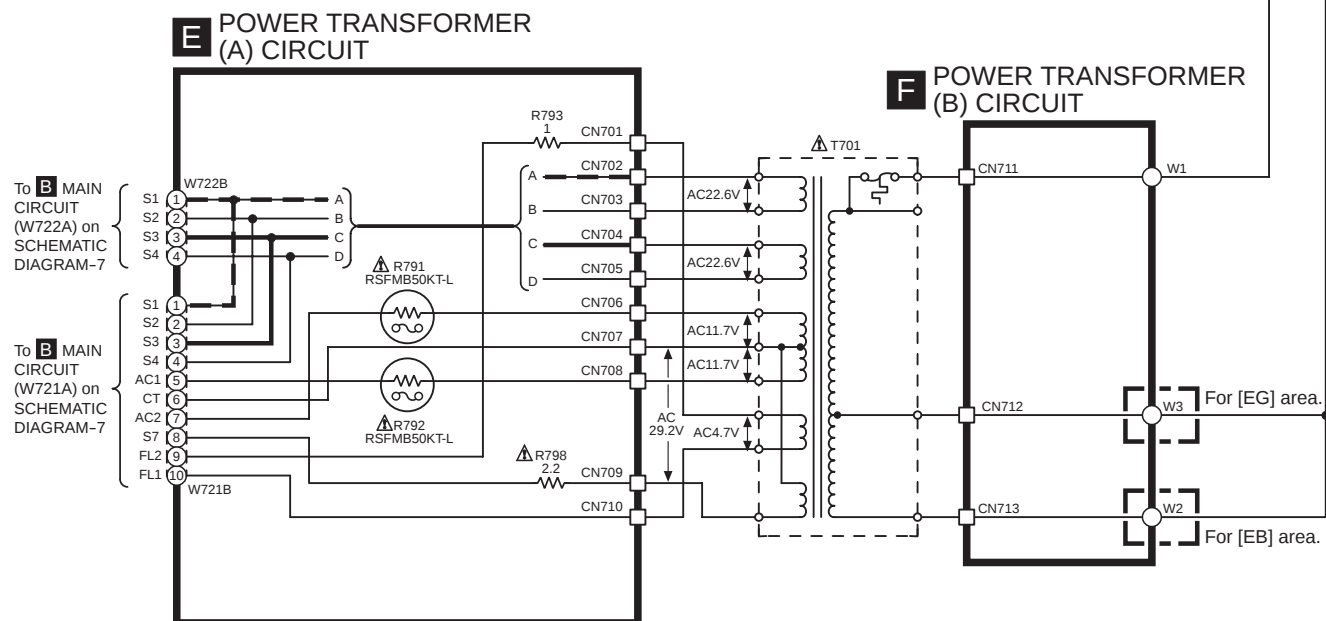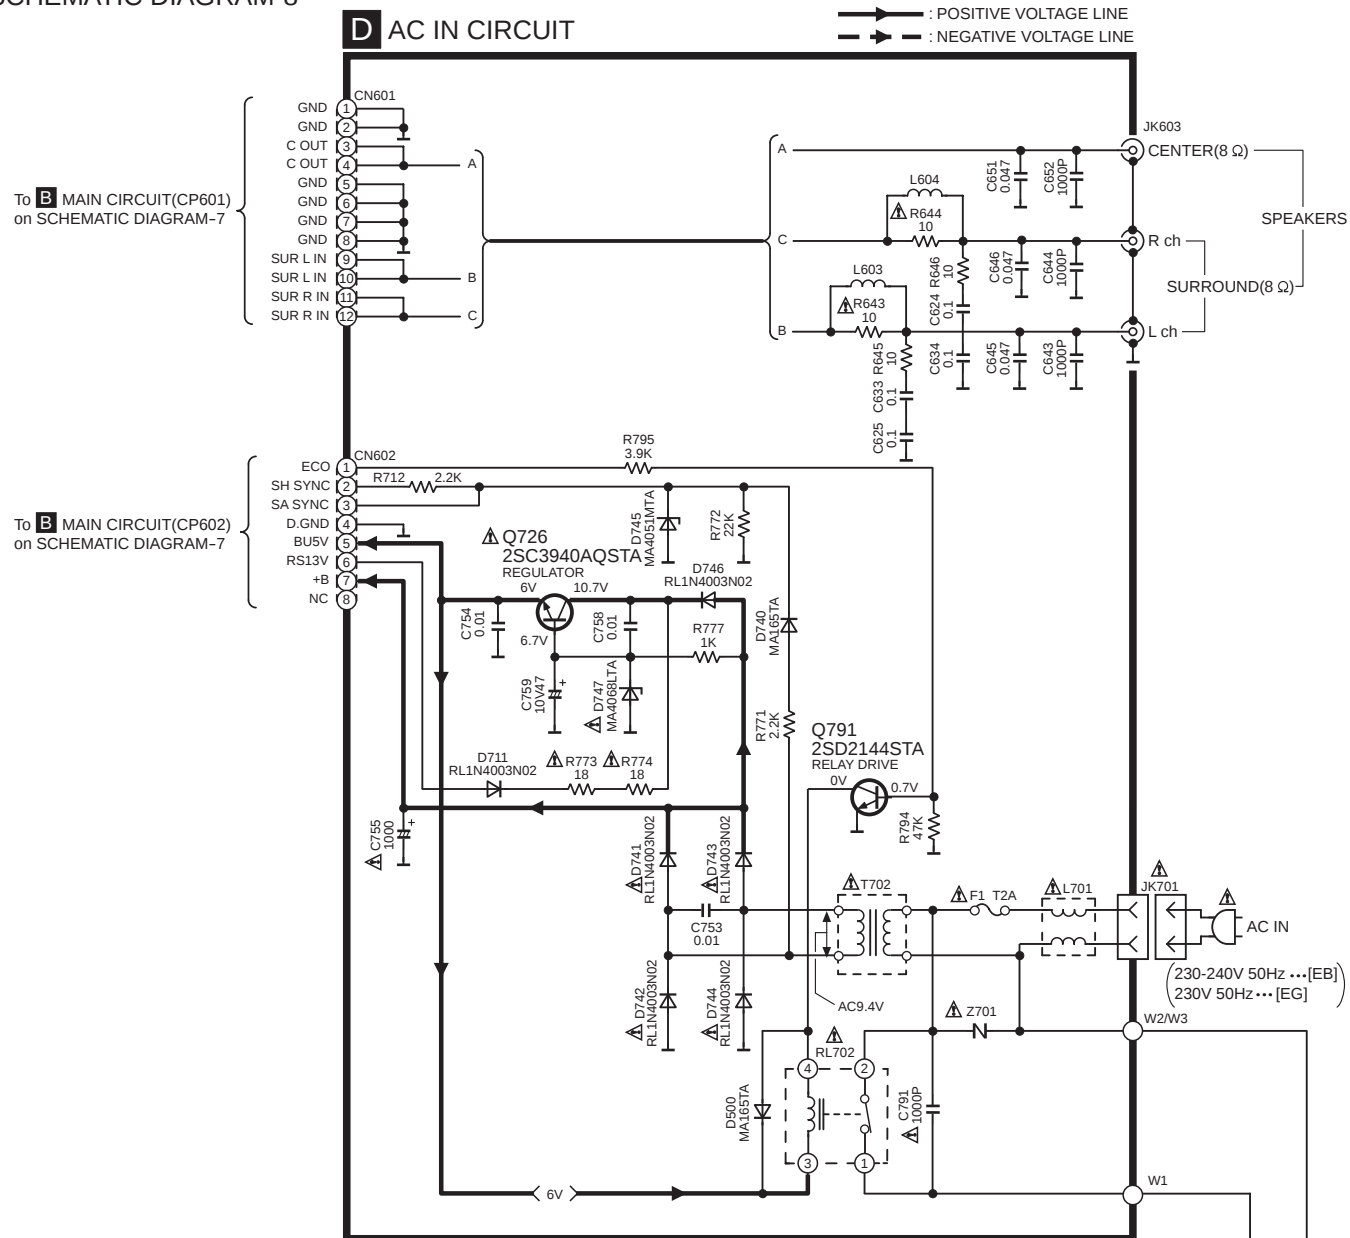

SCHEMATIC DIAGRAM-10

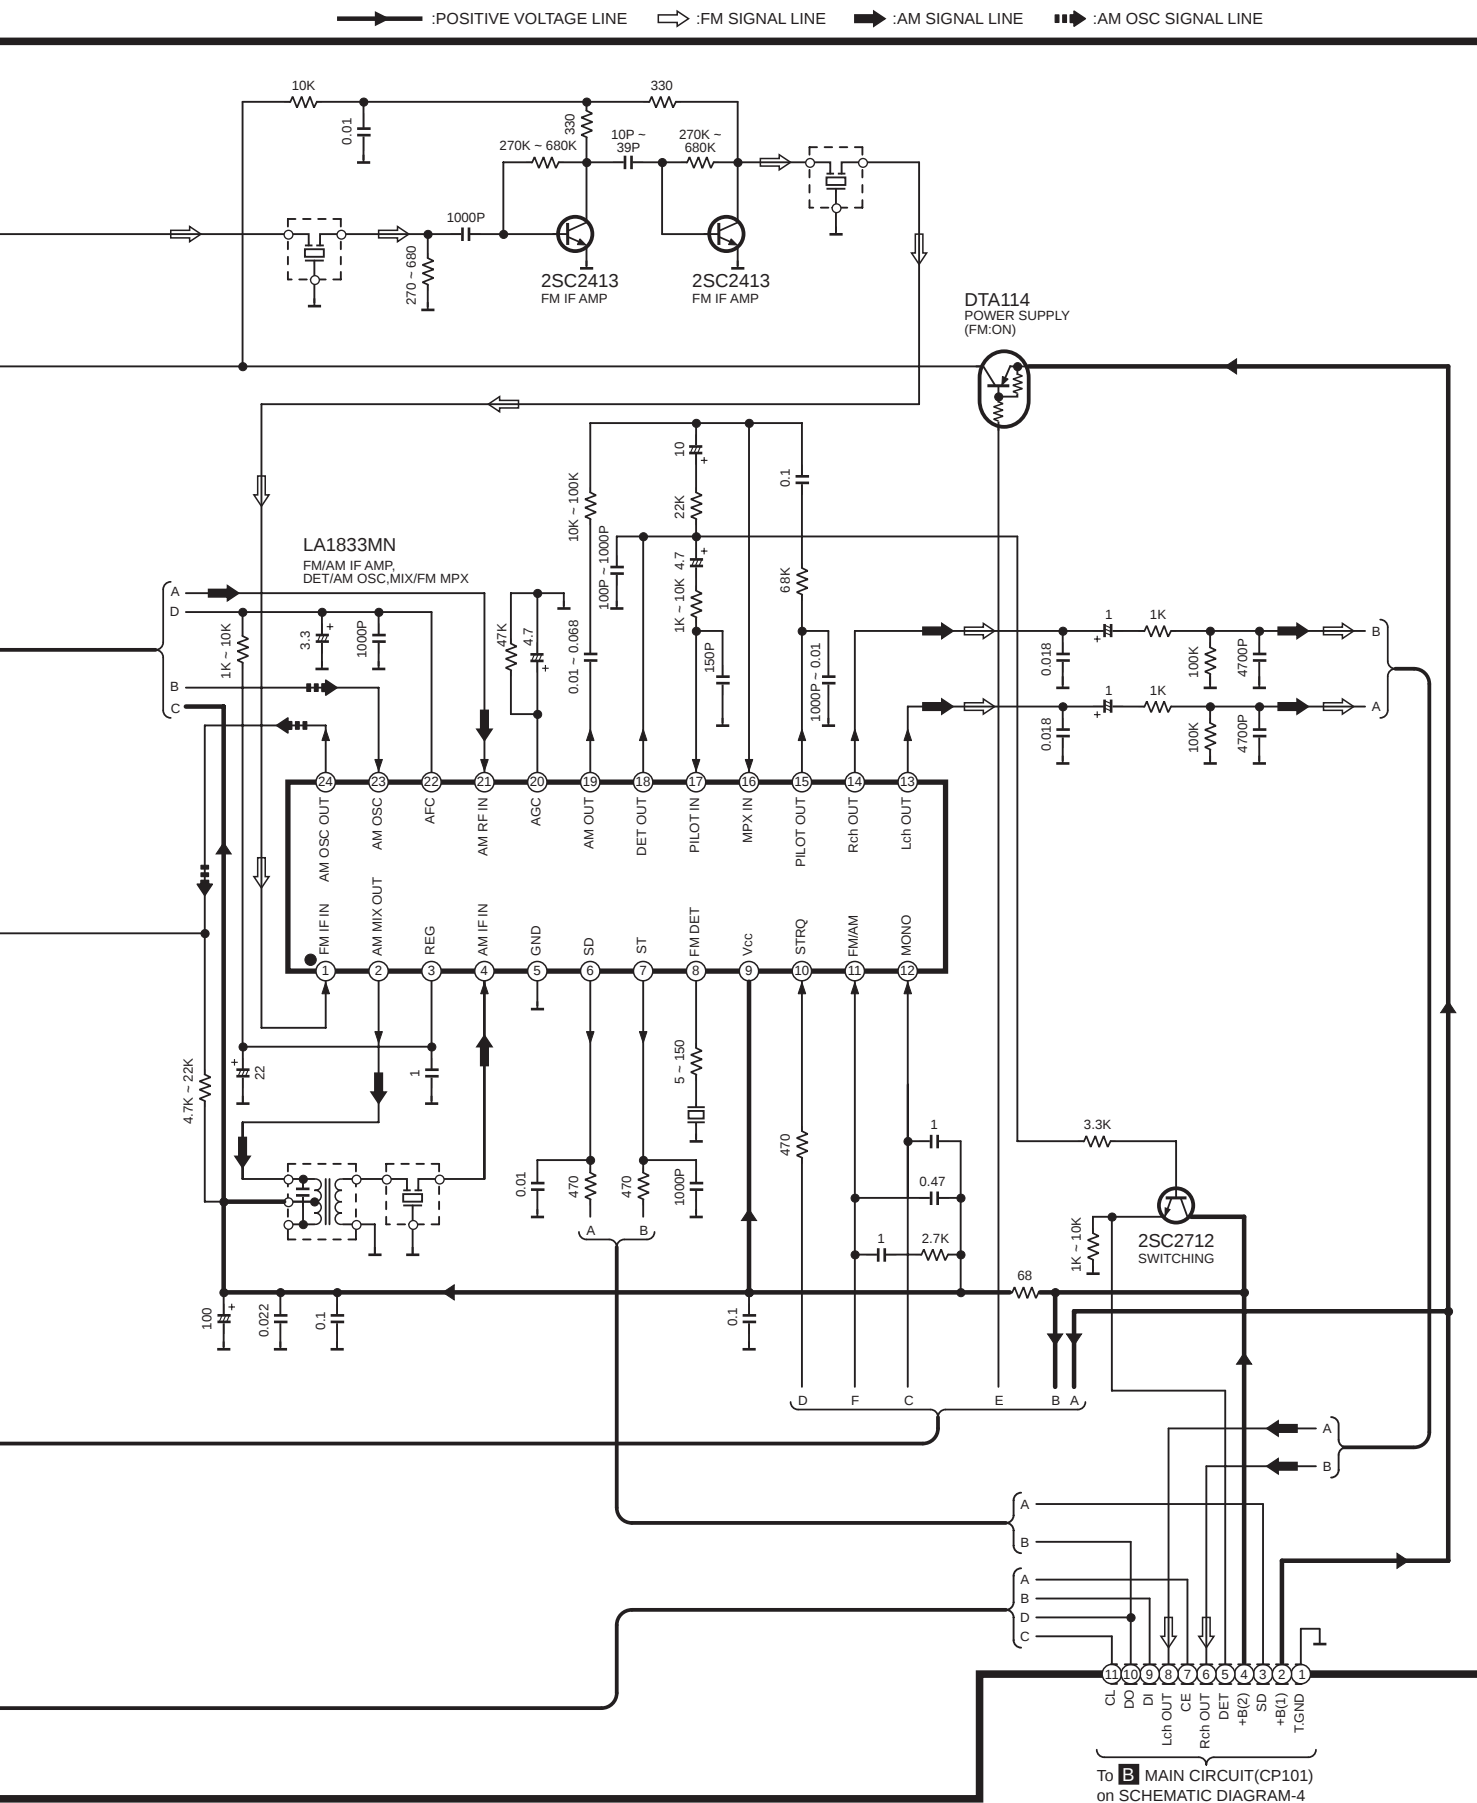


A OPERATION P.C.B.

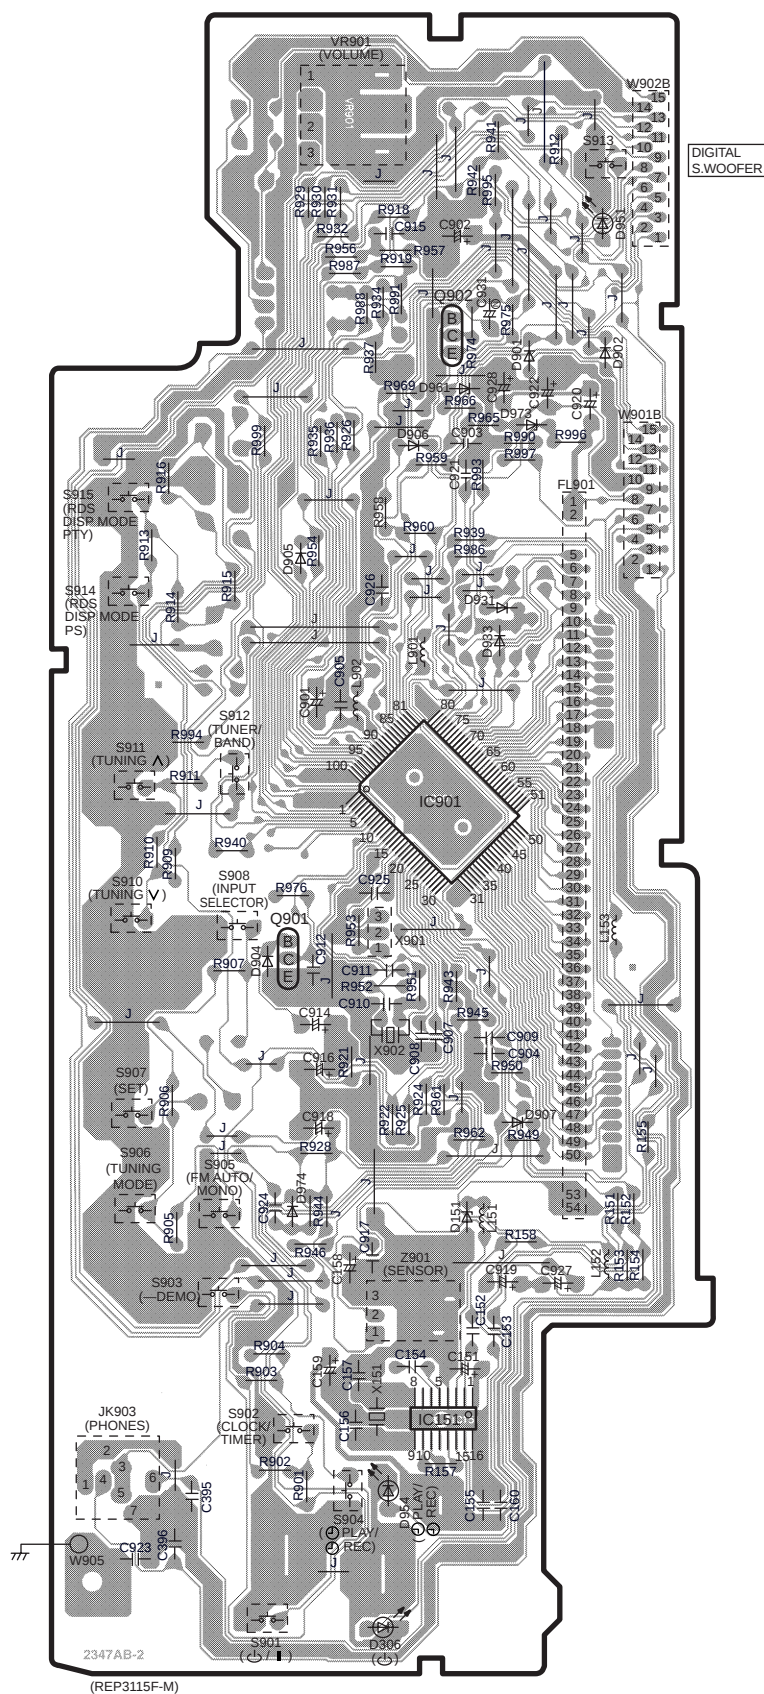


DIGITAL S.WOOFER

C POWER SUPPLY P.C.B.

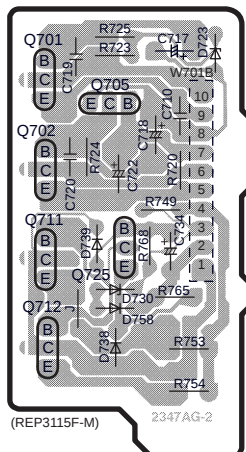


A B C D E F


B MAIN P.C.B.

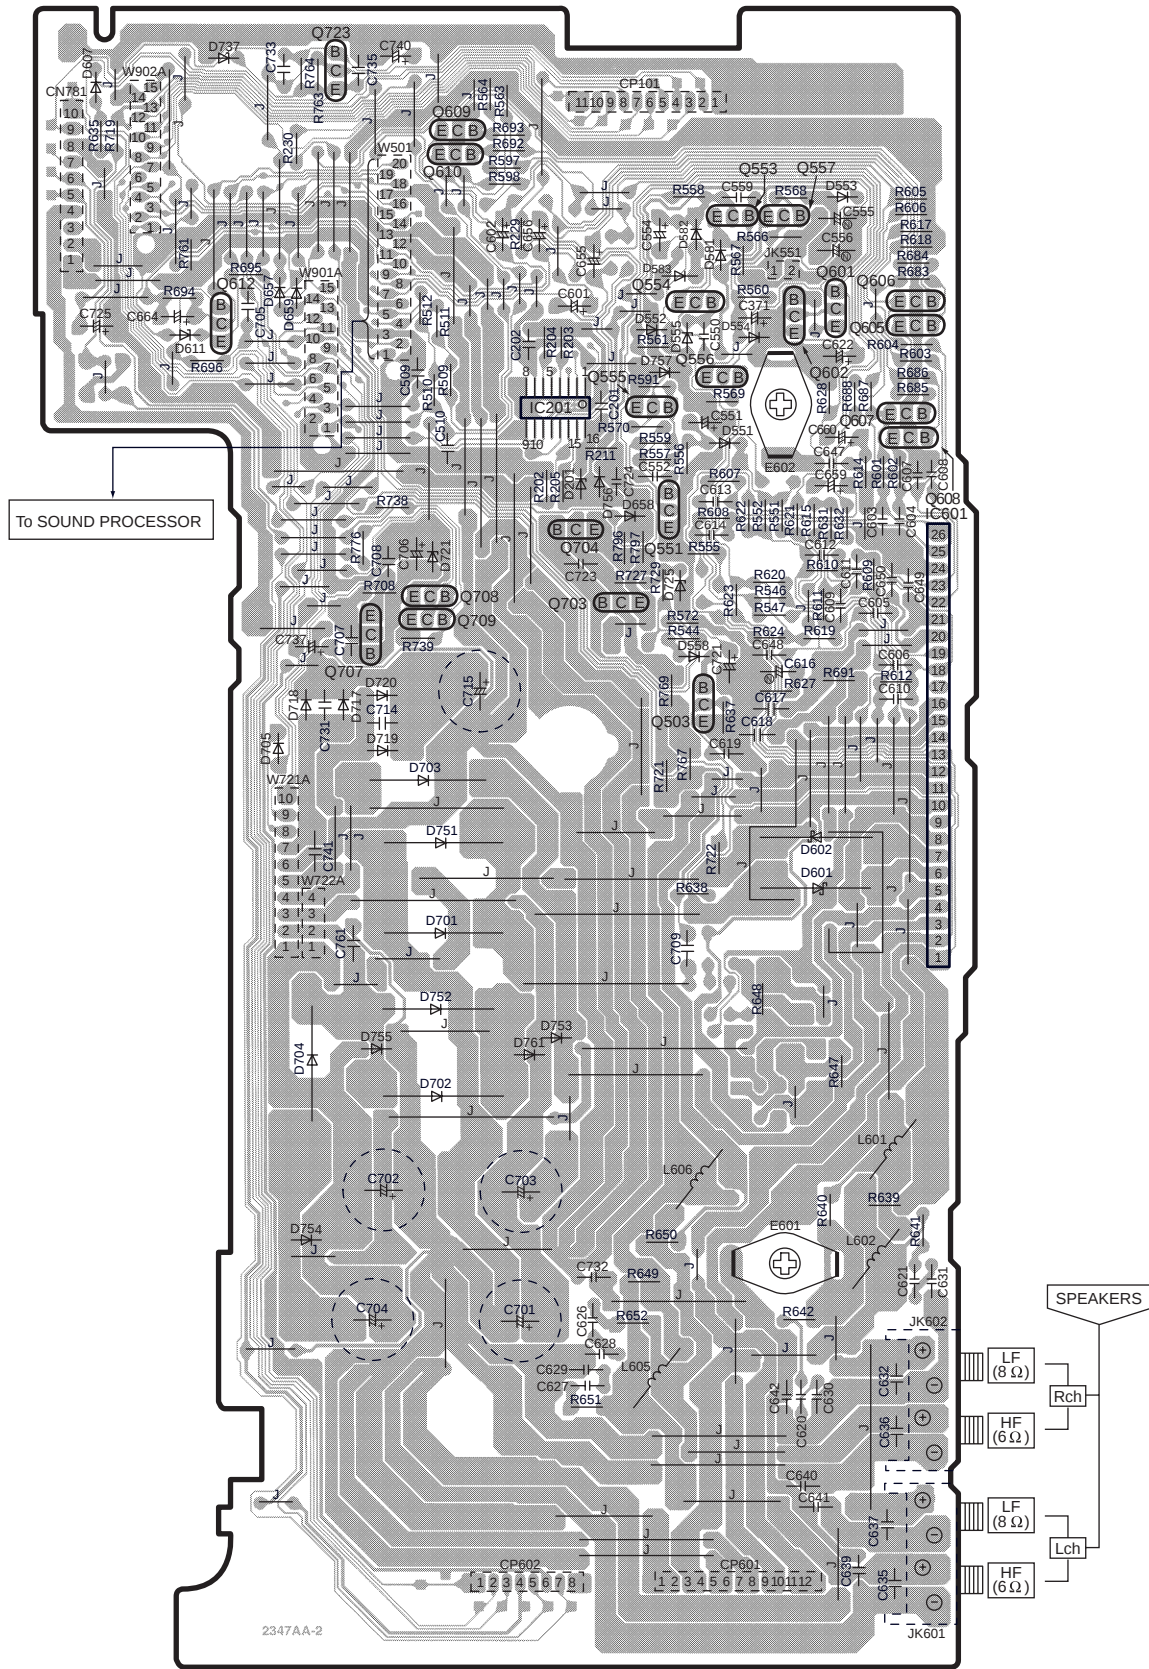


D AC IN P.C.B.

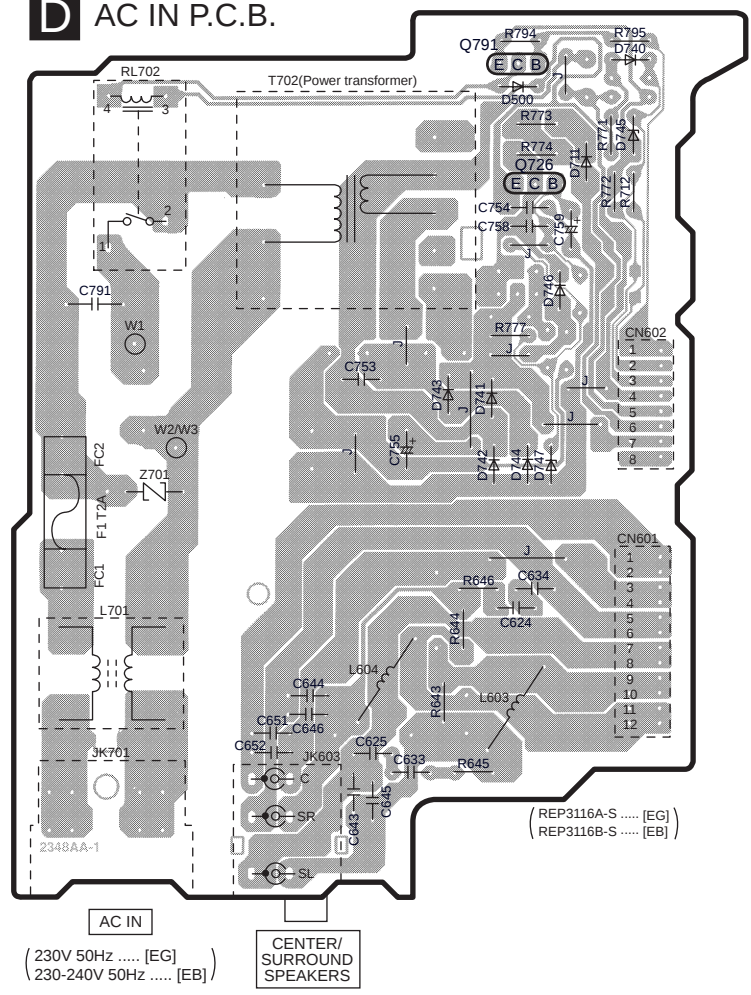


E POWER TRANSFORMER (A) P.C.B.

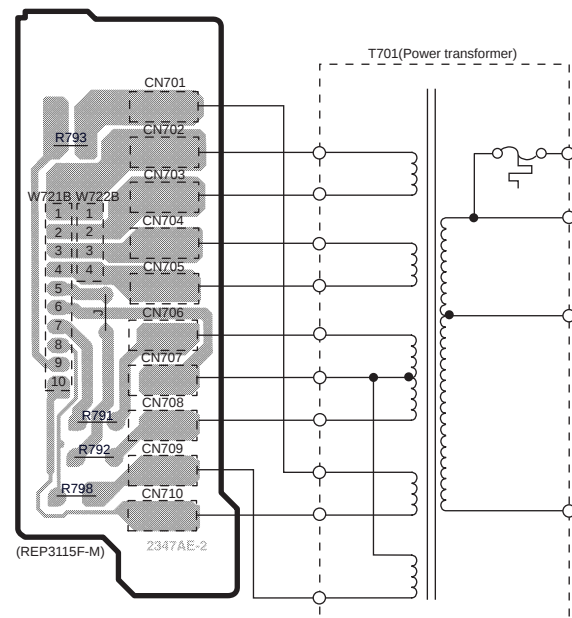


F POWER TRANSFORMER (B) P.C.B.

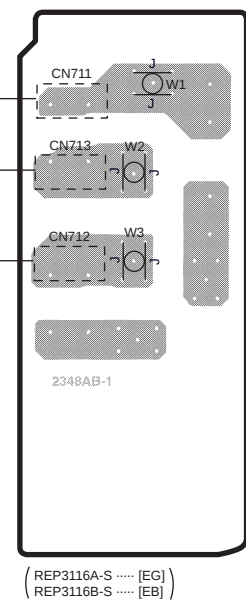


BU4053BCFE2
C1BB00000527




C2BBFD000317




RSN311W64B




UN411FTA
UN4211TA
UN4212TA




2SB1417PQTA
2SD2137PQTA




2SD2144STA




2SA1995RSTA
2SC5398RSTA




2SC3940AQSTA




2SB1548PQAU
2SD2374PQAU




1SS291TA
MA700ATA




MA4100MTA
MA4150HTA
MA4300MTA





MA165TA



SB360L6508




1N5402BM21
RL1N4003N02





MA4030MTA
MA4051MTA
MA4056MTA
MA4068LTA
MA4075MTA
MA4082LTA
MA4091HTA

LNJ301MPUJAD



SELS5223C
SELS5923C



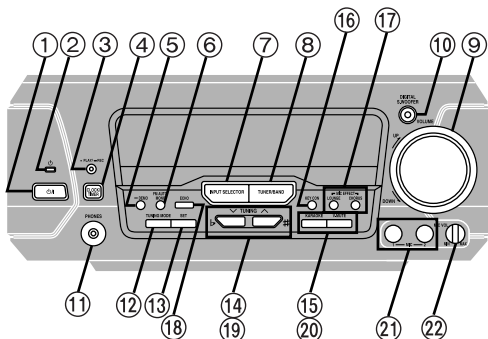


- ① **Standby/on switch (⏻/⏻)**
Press to switch the unit from on to standby mode or vice versa. In standby mode, the unit is still consuming a small amount of power.
- ② **Standby indicator (⏻)**
When the unit is connected to the AC mains supply, this indicator lights up in standby mode and goes out when the unit is turned on.
- ③ **Play timer/record timer button and indicator (⏻PLAY/⏻REC)**
- ④ **Clock/timer button (CLOCK/TIMER)**
- ⑤ **Demo button (–DEMO)**
- ⑥ **FM mode button (FM AUTO/MONO)**
- ⑦ **Source input button (INPUT SELECTOR)**
- ⑧ **Tuner/band button (TUNER/BAND)**
- ⑨ **Digital super woofer button and indicator (DIGITAL S.WOOFER)**
- ⑩ **Volume control (VOLUME)**
- ⑪ **Headphone jack (PHONES)**
- ⑫ **Tuning mode button (TUNING MODE)**
- ⑬ **Set button (SET)**

For the United Kingdom, Continental Europe and Russia

- ⑭ **Tuning buttons (v, ^ TUNING)**
- ⑮ **RDS display mode button (RDS, PS–DISP MODE–PTY)**

For areas except the United Kingdom, Continental Europe and Russia

- ⑯ **Key control button (KEY CON)**
- ⑰ **MIC effect buttons (MIC EFFECT, LOUNGE, CHORUS)**
- ⑱ **Echo button (ECHO)**
- ⑲ **Tuning, Key up/down buttons (v, ^ TUNING, b, #)**
- ⑳ **KARAOKE, Voice mute buttons (KARAOKE, V.MUTE)**
- ㉑ **Microphone jacks (1–MIC–2)**
- ㉒ **Microphone volume control (MIC VOL)**

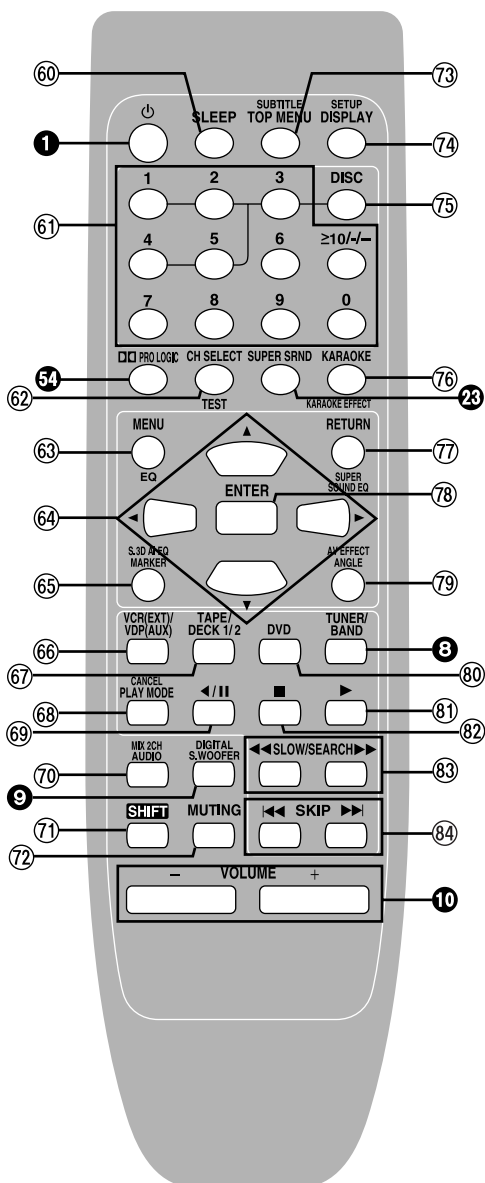

Buttons ①, ③, ⑨, ⑩, ⑤④ and ⑤⑤ function in the same way as the controls on the main unit.

- ⑥① **Sleep timer button (SLEEP)**
- ⑥② **Numbered buttons (1–9, 0, ≥10/–/–)**
- ⑥③ **Channel select, Test signal button (CH SELECT, TEST)**
- ⑥④ **Menu, EQ button (MENU, EQ)**
- ⑥⑤ **Cursor buttons (◀, ▶, ▲, ▼)**
- ⑥⑥ **Marker, Super 3D AI EQ button (MARKER, S.3D AI EQ)**
- ⑥⑦ **Input select button [VCR (EXT)/VDP (AUX)]**
- ⑥⑧ **Tape select, deck 1/deck 2 select button (TAPE/DECK 1/2)**
- ⑥⑨ **Play mode, Cancel button (PLAY MODE, CANCEL)**
- ⑦① **Disc pause, Tape reverse play button (◀/II)**
- ⑦② **Audio select, 2 channel down mixing button (AUDIO, MIX 2CH)**
- ⑦③ **Shift button (SHIFT)**
To operate functions labeled in orange, press [SHIFT] and then the corresponding button at the same time.
- ⑦④ **Muting button (MUTING)**
- ⑦⑤ **Top menu, Subtitle select button (TOP MENU, SUBTITLE)**
- ⑦⑥ **GUI display, Initial setting button (DISPLAY, SETUP)**
- ⑦⑦ **Disc button (DISC)**
- ⑦⑧ **Except for the United Kingdom, Continental Europe and Russia**
Karaoke, Karaoke effect button (KARAOKE, KARAOKE EFFECT)
- ⑦⑨ **Return, Super sound EQ button (RETURN, SUPER SOUND EQ)**
- ⑦⑩ **Enter button (ENTER)**
- ⑦⑪ **Angle select, AV effect button (ANGLE, AV EFFECT)**
- ⑦⑫ **DVD button (DVD)**
- ⑦⑬ **Disc play, Tape forward play button (▶)**
- ⑦⑭ **Disc stop, Tape stop button (■)**
- ⑦⑮ **Disc slow/search buttons (◀◀, ▶▶ SLOW/SEARCH)**
- ⑦⑯ **Disc skip buttons (◀◀◀, ▶▶▶ SKIP)**

(For United Kingdom)

("EB" area code model only)

For your safety, please read the following text carefully.

This appliance is supplied with a moulded three pin mains plug for your safety and convenience.

A 5-ampere fuse is fitted in this plug.

Should the fuse need to be replaced please ensure that the replacement fuse has a rating of 5-ampere and that it is approved by ASTA or BSI to BS1362. Check for the ASTA mark  or the BSI mark  on the body of the fuse.

If the plug contains a removable fuse cover you must ensure that it is refitted when the fuse is replaced.

If you lose the fuse cover the plug must not be used until a replacement cover is obtained.

A replacement fuse cover can be purchased from your local dealer.

CAUTION!

IF THE FITTED MOULDED PLUG IS UNSUITABLE FOR THE SOCKET OUTLET IN YOUR HOME THEN THE FUSE SHOULD BE REMOVED AND THE PLUG CUT OFF AND DISPOSED OF SAFELY.

THERE IS A DANGER OF SEVERE ELECTRICAL SHOCK IF THE CUT OFF PLUG IS INSERTED INTO ANY 13-AMPERE SOCKET.

If a new plug is to be fitted please observe the wiring code as shown below.

If in any doubt please consult a qualified electrician.

IMPORTANT

The wires in this mains lead are coloured in accordance with the following code:

Blue: Neutral, Brown: Live.

As these colours may not correspond with the coloured markings identifying the terminals in your plug, proceed as follows:

The wire which is coloured Blue must be connected to the terminal which is marked with the letter N or coloured Black or Blue.

The wire which is coloured Brown must be connected to the terminal which is marked with the letter L or coloured Brown or Red.

WARNING: DO NOT CONNECT EITHER WIRE TO THE EARTH TERMINAL WHICH IS MARKED WITH THE LETTER E, BY THE EARTH SYMBOL  OR COLOURED GREEN OR GREEN/YELLOW.

THIS PLUG IS NOT WATERPROOF - KEEP DRY.

Before use

Remove the connector cover.

How to replace the fuse

The location of the fuse differ according to the type of AC mains plug (figures A and B). Confirm the AC mains plug fitted and follow the instructions below. Illustrations may differ from actual AC mains plug.

1. Open the fuse cover with a screwdriver.

Figure A


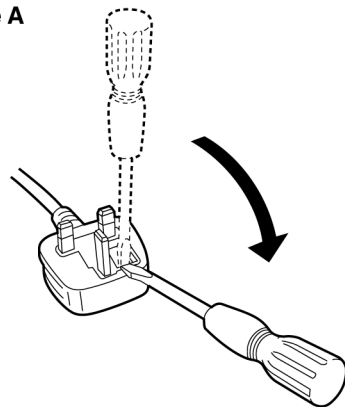


Figure B

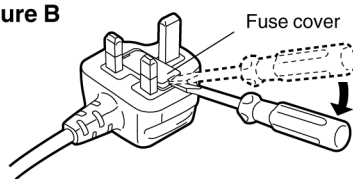

2. Replace the fuse and close or attach the fuse cover.

Figure A




Figure B

